-90

C837

14K733

F10008

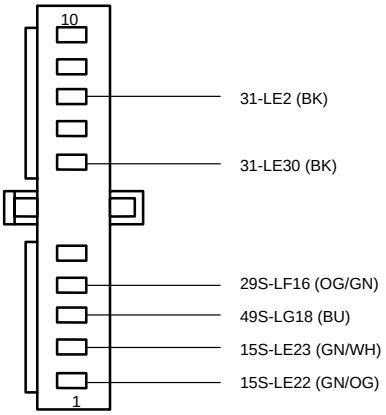

E182
Xenon headlamp, right

with xenon headlamps

Pin	Circuit	Circuit Function
1	15S-LE22 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected), switched
2	15S-LE23 (GN/WH)	Voltage, ignition switch in Start or Run (not overload protected), switched
3	49S-LG18 (BU)	Pulsed power feed (overload protected), switched
4	29S-LF16 (OG/GN)	Voltage supplied at all times (overload protected), switched
5	–	not used
6	31-LE30 (BK)	Ground
7	–	not used
8	31-LE2 (BK)	Ground
9	–	not used
10	–	not used

14K733



F03099

without xenon headlamps

Pin	Circuit	Circuit Function
1	31-LG11 (BK)	Ground
2	29S-LF7 (OG/BU)	Voltage supplied at all times (overload protected), switched
3	49S-LG11 (BU/OG)	Pulsed power feed (overload protected), switched

E176
Park/turn lamp, LH side front

C838 (BK)

14K733

E44
Side turn signal lamp, right



F02108

Pin	Circuit	Circuit Function
1	49S-LG20 (BU/WH)	Pulsed power feed (overload protected), switched
2	29S-LF17 (OG/WH)	Voltage supplied at all times (overload protected), switched

C839 (BK)

14K733

E45
Side turn signal lamp, left



F02108

Pin	Circuit	Circuit Function
1	49S-LG13 (BU/RD)	Pulsed power feed (overload protected), switched
2	29S-LF8 (OG)	Voltage supplied at all times (overload protected), switched