## C274b

### 14A005

A262
Central security module

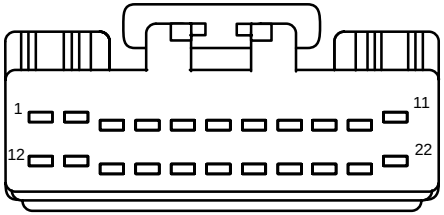


F22017

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | – | not used |
| 2 | – | not used |
| 3 | 7 (LG/YE) | autolamps, control |
| 4 | – | not used |
| 5 | – | not used |
| 6 | – | not used |
| 7 | – | not used |
| 8 | – | not used |
| 9 | 120 (PK/LG) | Door lock switch, Unlock, control |
| 10 | 1013 (BN/LG) | GEM/Central security module illumination |
| 11 | 118 (PK/OG) | Door unlock, output |
| 12 | 517 (BK/WH) | Voltage supplied at all times (overload protected) |
| 13 | 875 (BK/LB) | Ground |
| 14 | – | not used |
| 15 | 66 (LB) | Key pad illumination |
| 16 | – | not used |
| 17 | 119 (PK/YE) | Door lock relay, Door lock switch, Lock |
| 18 | – | not used |
| 19 | – | not used |
| 20 | – | not used |
| 21 | – | not used |
| 22 | 117 (PK/BK) | Door lock, output |

## C275

### 14401




F12056

### 19B113




F12054

(1) 690 (GY)
(2) 798 (LG/RD)
(3) 799 (OG/BK)
(4) 856 (VT)
(5) –
(6) 832 (LB/PK)
(7) –
(8) 833 (TN)
(9) 694 (BK/LG)
(10) 48
(11) 1068 (LG/BK)
(12) 797 (LG/VT)