Video

User's Manual





■ GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

■ Features :

- Charger for lead-acid batteries (flooded, Gel and AGM) and Li-ion batteries (lithium iron and lithium manganese) (Note.1)
- 2 stage charging characteristic
- Universal AC input / Full range
- Built-in active PFC function, PF>0.94
- No load power consumption<1W
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Fully enclosed plastic case
- 2 color LED indicator for charging status
- Approvals: UL / TUV / EAC / CB / FCC / CE / UKCA
- 2 years warranty










ORDER NO.	OUTPUT CONNECTOR	SAFETY
GC160Axx-R7B (standard model)	4pin power din	TUV/CB/FCC/CE/UKCA/EAC
GC160Axx-AD1 (standard model)	Anderson connector	UL/TUV/CB/FCC/CE/UKCA/EAC
GC160Axx-□ xx=12,24,48 ; □=R7B,AD1		

SPECIFICATION

ORDER NO.		GC160A12-	GC160A24-	GC160A48-		
	SAFETY MODEL NO.	GC160A12	GC160A24	GC160A48		
OUTPUT	DC VOLTAGE (Typ.)	13.6V	27.2V	54.4V		
	RECOMMENDED BATTERY CAPACITY Note.3	60 ~160Ah	30 ~ 90Ah	15 ~ 45Ah		
	CONTINUOS OUTPUT CURRENT (Typ.)	10A	5.89A	2.95A		
	RATED POWER	136W	160.2W	160.5W		
	LED INDICATOR	Charging(CC) : RED Floating charging(CV) : GREEN				
	VOLTAGE RANGE Note.4	85 ~ 264VAC 120 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 63Hz				
	POWER FACTOR (Typ.)	PF>0.94 / 230VAC PF>0.98 / 115VAC at full load				
INPUT	EFFICIENCY (Typ.)	89%	92.5%	94%		
	AC CURRENT	1.85A / 115VAC 1A / 230VAC				
	INRUSH CURRENT (max.)	120A / 230VAC				
	LEAKAGE CURRENT(max.)	0.75mA / 240VAC				
	OVERLOAD Note 5	90 ~ 110% rated output power				
	OVERLOAD Note.5	Protection type: Constant current limiting recovers automatically after fault condition is removed				
	SHORT CIRCUIT	Protection type: Hiccup mode, recovers automatically after fault condition is removed				
PROTECTION	OVERVOLTACE	105 ~ 135% rated output voltage				
	OVER VOLTAGE	Protection type: Shut down o/p voltage, re-power on to recover				
	OVED TEMPERATURE	$90^{\circ}\text{C} \pm 10^{\circ}\text{C}$ (RTH2) detect on inside ambient temperature				
	OVER TEMPERATURE	Protection type: Shut down o/p voltage, re-power on to recover				
	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")				
	WORKING HUMIDITY	20% ~ 90% RH non-condensing				
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH				
	TEMP. COEFFICIENT	±0.03% / °C (0~50°C)				
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes				
	SAFETY STANDARDS	UL1012 (for GC160Axx-AD1 only), TUV BS EN/EN62368-1, EAC TP TC 004 approved				
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC				
EMC	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH				
(Note. 6)	EMC EMISSION	Compliance to BS EN/EN55032 class B, BS EN/EN61000-3-2,3, FCC PART 15 / CISPR22 class B, CAN ICES-3(B)-NMB-(B), EAC TP TC 020				
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55035, light industry level, EAC TP TC 020				
	MTBF	2197.9K hrs min. Telcordia SR-332 (Bellcore) ; 274.1K hrs min. MIL-HDBK-217F (25°C)				
OTHERS	DIMENSION	175*72*35mm (L*W*H)				
	PACKING	0.7Kg; 20pcs/15Kg/0.95CUFT(GC160Axx-R7B) 0.77Kg; 20pcs/16.4Kg/1.15CUFT(GC160Axx-AD1)				
CONNECTOR	PLUG	See page 2; Other type available by customer requested				
SOUTH	CABLE	See page 2; Other type available by custo	•			
NOTE	All parameters NOT specially m. This is MeanWell's suggested ra Derating may be needed under Constant current operation regic The power supply is considered (as available on https://www.me.	for charger specification may be required for different battery specification. Please contact battery vendor and MEAN WELL for details. rs NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Well's suggested range, please consult your battery manufacturer for their suggestions about maximum charging current limitation. y be needed under low input voltage. Please check the derating curve for more details. rent operation region is within 50–100% rated output voltage. upply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf) temperative derating of 3.5°C/1/000m with fanguage and of 5°C/1/000m with fanguage and				


7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). ※ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx



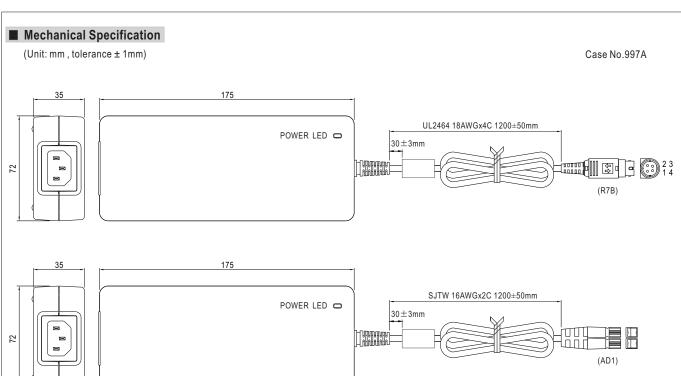

■ Plug Assignment


DC output connector



-V connected to AC FG

AD1	
[housing: Anderson 1327FP(red), 1327G6FP(black)	
contacts: Anderson 261G2 (45A) or equivalent]	
Red(+V) Black(-V)	

■ Charging Curve

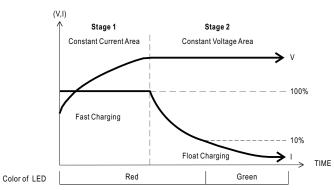

Model	Suggested Battery capacity	
GC160A12	60-160Ah	
GC160A24	30-90Ah	
GC160A48	15-45Ah	

Suitable for lead-acid batteries (flooded, Gel and AGM) and Li-ion batteries (lithium iron and lithium manganese)



