
- Anaphoric Encapsulation - Outlier information & Description

IN COOPERATION WITH
ÓSCAR LOUREDA AND RESEARCH GROUP
DPKOG

STATISTICAL CONSULTING UNIT STABLAB

DEPARTMENT OF STATISTICS

LUDWIG-MAXIMILIANS-UNIVERSITÄT MÜNCHEN



February 19, 2026

Marie Scherzer
Lona Koers

Dimension of the data

Encapsulation_Raw_data_2024_ON_ueberarbeitet.xlsx: 2808 x 28

Distribution of AOIs

AOI	h_file1
1	312
2	312
3	312
4	312
5	312
6	312
7	312
8	312
9	312

Consistency checks

No inconsistencies found.

Distribution of AOI.conditions

AOI.condition	h
RC_1	78
RC_2	78
RC_3	78
RC_4	78
RC_5	78
RC_6	78
RC_7	78
RC_8	78
RC_9	78
RE_1	78
RE_2	78
RE_3	78
RE_4	78
RE_5	78
RE_6	78
RE_7	78
RE_8	78
RE_9	78
SC_1	78
SC_2	78

AOI.condition	h
SC_3	78
SC_4	78
SC_5	78
SC_6	78
SC_7	78
SC_8	78
SC_9	78
SE_1	78
SE_2	78
SE_3	78
SE_4	78
SE_5	78
SE_6	78
SE_7	78
SE_8	78
SE_9	78

Outlier handling

Project specific definition of outliers:

1. `Any.first.skip`: First Pass Reading Time in AOI 1 (OT) = 0ms
2. `Any.fast.reader` (extremely low values): First Pass Reading Time in AOI 1 (OT) <80ms and Re-Reading Time in AOI 1 <80ms
3. `Any.slow.reader` (extremely high values): Total Reading Time in AOI 1 (OT) >800ms

1. `Any.first.skip`

0 outliers in AOI '1'. 0 (0%) of all observations are affected.

2. `Any.fast.reader`

0 outliers in AOI '1'. 0 (0%) of all observations are affected.

3. `Any.slow.reader`

1 outliers in AOI '1'. 1 (0.3%) of all observations are affected.

Detailed information on outliers


Outliers were detected in 1 of 78 participants.

Overall, 1 (i.e. 0.3%) of 312 observations were excluded.

Negative values after outlier exclusion

No negative reading times found.

Distribution after exclusion of outliers

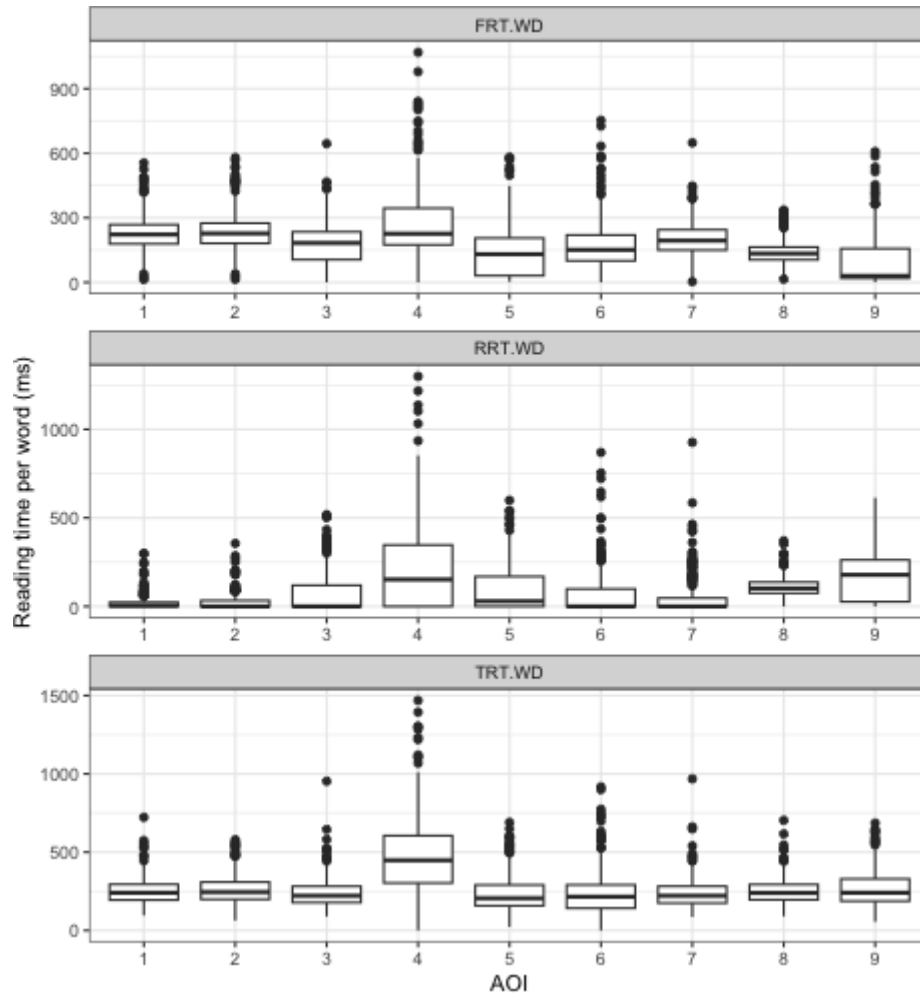

Export data

The prepared data were successfully saved as '0_data/2_preparedData/data_prepared_new.csv'.