



# Base Conversion

## Base 10 to Base 2

- The whole portion is divided by the new base, repeatedly
  - $\text{Dividend} / \text{Divisor} = (\text{Quotient}, \text{Remainder})$
  - The concatenation of the Remainders provide you with the final digits
- The fraction portion is multiplied by the new base, repeatedly
  - $\text{Multiplier} * \text{Multiplicand} = (\text{Overflow}, \text{Product})$
  - The concatenation of the Overflows provide you with the final digits
- Consider the examples via the spreadsheet: [Base Conversion](#)

## Base: 2, 8, 16

1. Convert each digit to binary
  2. Merge the bits
  3. Rechunk
  4. Convert each chunk to the appropriate digit
- Consider the examples via the spreadsheet: [Rechunk](#)

# Decimal Real to Binary Real

1. Split the number at the radix point: *whole . fractional*

2. With the whole part,

```
number = whole
while (number != 0 ){
    number = number / 2
    push ( number % 2 )
}
pop_all();
```

3. With the fractional part

```
max = 10 ** stringlength(fractional)
number = fractional
while (number != 0 ) {
    number = number * 2
    if ( number > max ) {
        emit 1
        number = number - max
    } else {
        emit 0
    }
}
```


4. Put the two pieces together

# Whole Part: Decimal Real to Binary Real


1. Example 39.234

2. With the whole part,

```
number = whole
while (number != 0 ){
    number = number / 2
    push ( number % 2 )
}
pop_all();
```



number: 39	
number = 39 / 2	→ 19
push ( 39 % 2 )	→ 1
number = 19 / 2	→ 9
push( 19 % 2)	→ 1
number = 9 / 2	→ 4
push( 9 % 2)	→ 1
number = 4 / 2	→ 2
push( 4 % 2)	→ 0
number = 2 / 2	→ 1
push ( 2 % 2 )	→ 0
number = 1 / 2	→ 0
push ( 1 % 2 )	→ 1

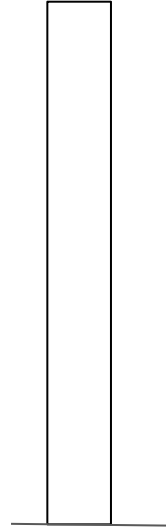

# Fractional Part: Decimal Real to Binary Real

1. Example 39.234

3. With the fractional part

```
max = 10 ** numdigits(fractional)
number = fractional
while (number != 0) {
    number = number * 2
    if ( number > max ) {
        emit 1
        number = number - max
    } else {
        emit 0
    }
}
```

max = 10 \*\* |234| == 1000

number = 234

number = number \* 2 = 468

number = 468 \* 2 = 936

number = 936 \* 2 = 1872 - 1000 = 872

number = 872 \* 2 = 1744 - 1000 = 744

number = 744 \* 2 = 1488 - 1000 = 488

number = 488 \* 2 = 976

number = 976 \* 2 = 1952 - 1000 = 952

0011101

# Decimal Real to Binary Real

1. Split the number at the radix point: *whole . fractional*

2. With the whole part,

```
whole = number
while (number != 0 ){
    number = number / 2
    push ( number % 2 )
}
pop_all();
```

3. With the fractional part

```
max = 10 ** ( | fractional | )
fractional = number
while (number != 0 ) {
    number = number * 2
    if ( number > max ) {
        emit 1
        number = number - max
    } else {
        emit 0
    }
}
```

4. Put the two pieces together

100111	.	0011101
--------	---	---------

# Whole Part: Decimal Real to Binary Real

1. Example 45.45

2. With the whole part,

```
whole = number
while (number != 0 ){
    number = number / 2
    push ( number % 2 )
}
pop_all();
```

number: 45

```
number = 45 / 2 → 22
push ( 45 % 2 ) → 1
number = 22 / 2 → 11
push ( 22 % 2 ) → 0
number = 11 / 2 → 5
push ( 11 % 2 ) → 1
number = 5 / 2 → 2
push ( 5 % 2 ) → 1
number = 2 / 2 → 1
push ( 2 % 2 ) → 0
number = 1 / 2 → 0
push ( 1 % 2 ) → 1
number = 0 / 0
```

101101

1  
0  
1  
1  
0  
1

# Fractional Part: Decimal Real to Binary Real

1. Example 45.45

3. With the fractional part

```
max = 10 ** ( | fractional | )
fractional = number
while (number != 0 ) {
    number = number * 2
    if ( number > max ) {
        emit 1
        number = number - max
    } else {
        emit 0
    }
}
```

max = 10 \*\* |45| == 100

number = 45

number = number \* 2 = 90

number = number \* 2 = 180 - 100 = 80

number = 80 \* 2 = 160 - 100 = 60

number = 60 \* 2 = 120 - 100 = 20

number = 20 \* 2 = 40

number = 40 \* 2 = 80

number = 80 \* 2 = 160 = 100 = 60

0111001 111001



# Decimal Real to Binary Real

1. Split the number at the radix point: *whole . fractional*

2. With the whole part,

```
whole = number
while (number != 0 ){
    number = number / 2
    push ( number % 2 )
}
pop_all();
```

3. With the fractional part



```
max = 10 ** ( | fractional | )
fractional = number
while (number != 0 ) {
    number = number * 2
    if ( number > max ) {
        emit 1
        number = number - max
    } else {
        emit 0
    }
}
```

4. Put the two pieces together

101101	.	0111001 111001
--------	---	----------------

# Real: Decimal to Binary (Confusing?)

input: 21.12

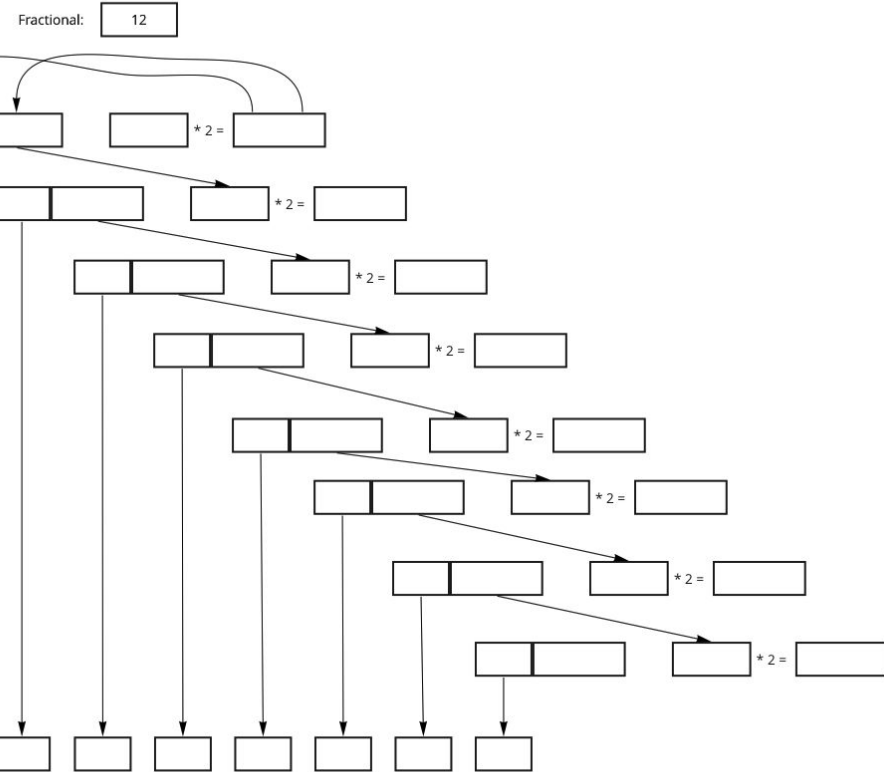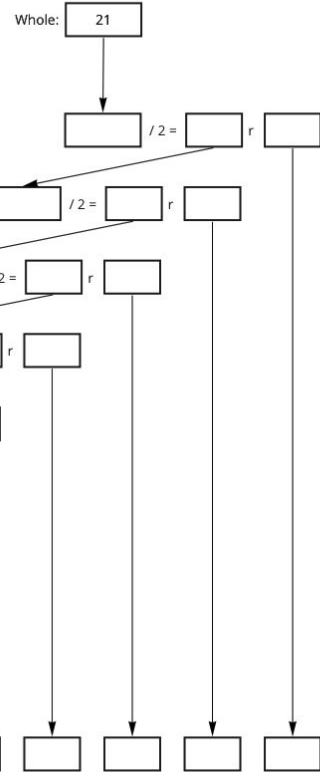

24567865438 --9's → 75432134561

# Method of Complements

- A technique to encode both positive and negative numbers
  - uses the same algorithm to perform addition
  - subtraction perform my addition of complements
- Complement: *a thing that completes or brings to perfection*
- Radix 10: *(the radix or base is the number of unique digits to represent a number)*
  - 10's complement
    - $7 + x = 10$  : x is the 10s complements of 7  $x = 3$
    - $46 + y = 100$  : y is the 10s complements of 46  $y = 54$
  - 9's complement
    - $7 + a = 9$  : a is the 9s complements of 7  $a = 2$
    - $46 + b = 99$  : b is the 9s complements of 46  $b = 53$

- The math:

2nd Grade

$$\begin{array}{r} 45 \\ - 11 \\ \hline 34 \end{array}$$

10's complement


$$\begin{array}{r} 45 \\ + 89 \\ \hline -134 \end{array}$$

9's complement

$$\begin{array}{r} 45 \\ + 88 \\ \hline -133 + 1 = 34 \end{array}$$



# Algorithm: Subtraction via Complements

- Example:  $873 - 218$
1. Take the nines complement of the subtrahend (218)
  2. Add the complement to the minuend (873)
  3. Drop the leading "1" is dropped.
  4. Add 1

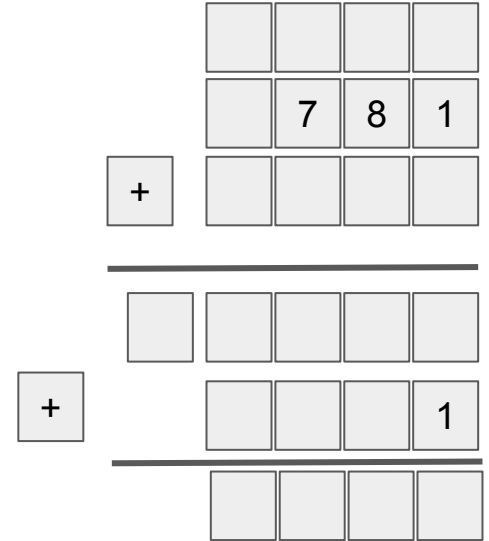

# Algorithm: Subtraction via Complements

- Example:  $873 - 218$ 
  1. Take the nines complement of the subtrahend (218)
  2. Add the complement to the minuend (873)
  3. Drop the leading "1" is dropped.
  4. Add 1

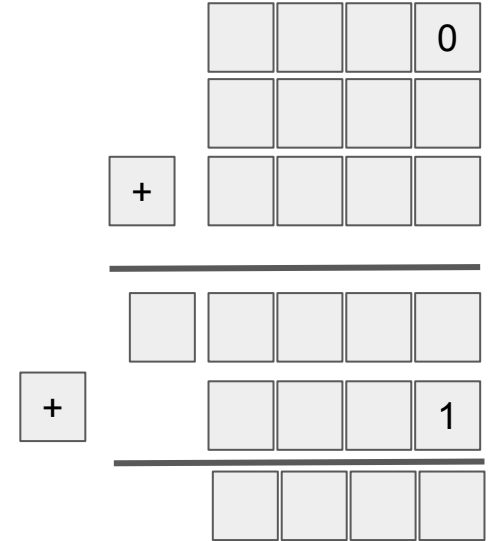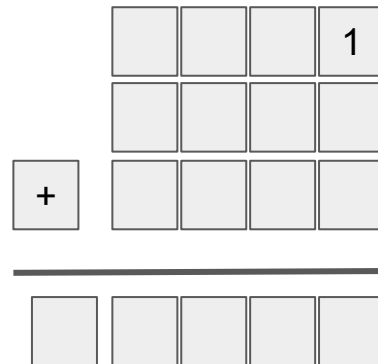



# Method of Complements

- A technique to encode both positive and negative numbers
  - uses the same algorithm to perform addition
  - subtraction perform my addition of complements
- Recall: 10s complement = 9's complement + 1 (*Radix 10*)
  - *9's complement can be performed on each individual digit*
- Hence: 2's complement = 1's complement + 1 (*Radix 2*)
- Radix 2: (*A special case*)
  - 2's Complement: take the 1's complement and add 1
    - $0101 + 1001 = 1000$
    - $10111 + 01001 = 10000$
  - 1's Complement: take each bit and take its complement
    - $0101 + 1010 = 1111 + 1 = 4\ 0000$
    - $10111 + 01000 = 11111 + 1 = 4\ 00000$

# Method of Complements

A technique to encode both positive and negative numbers

- MSB used to denote the sign bit (0 positive, 1 negative)
- Table assumes a 4-bit represent

Use 1's complement to represent negative numbers

- Divide the number range in half
- Encode a positive and a negative value for each number
- Pros/cons:
  - ease to compute
  - positive and negative representations of zero

1's Complement

	Positive	Negative
0	0000	1111
1	0001	1110
2	0010	1101
3	0011	1100
4	0100	1011
5	0101	1010
6	0110	1001
7	0111	1000



# Method of Complements

A technique to encode both positive and negative numbers

- MSB used to denote the sign bit (0 positive, 1 negative)
- Table assumes a 4-bit represent

Use 1's complement to represent negative numbers

- Divide the number range in half
- Encode a positive and a negative value for each number
- Pros/cons:
  - ease to compute
  - positive and negative representations of zero

Use 2's complete to represent negative numbers

- Hold Zero as special
- Fold the resulting range to assign the result
- Pros/cons:
  - Not symmetric: extra negative number
  - Need to add one to each negative number
  - Consider  $-7 - 1 == 1001 - 1 = 1000$

## 2's Complement

	Positive	Negative
0	0000	
1	0001	$1110 + 1 = 1111$
2	0010	$1101 + 1 = 1110$
3	0011	$1100 + 1 = 1101$
4	0100	$1011 + 1 = 1100$
5	0101	$1010 + 1 = 1011$
6	0110	$1001 + 1 = 1010$
7	0111	$1000 + 1 = 1001$
8		1000

# Comparison of 1's and 2's Complement

## 1's Complement

	Positive	Negative
0	0000	1111
1	0001	1110
2	0010	1101
3	0011	1100
4	0100	1011
5	0101	1010
6	0110	1001
7	0111	1000

## 2's Complement

	Positive	Negative
0	0000	
1	0001	$1110 + 1 = 1111$
2	0010	$1101 + 1 = 1110$
3	0011	$1100 + 1 = 1101$
4	0100	$1011 + 1 = 1100$
5	0101	$1010 + 1 = 1011$
6	0110	$1001 + 1 = 1010$
7	0111	$1000 + 1 = 1001$
8		1000

# Algorithm: Subtraction via Complements

- Example:  $13 - 9 == 13 + -9$
  - 1. Convert 13 and 9 into binary (01101 & 01001)
  - 2. Take the 2's complement of the subtrahend (9)
    - $01001 \rightarrow 10110 + 1 = 10111$
  - 3. Add the complement to the minuend
  - 4. Drop the leading "1" is dropped.
- 
- ~~Optimization~~: Addition of adding one is baked in!



	1	1	1	1	0
	0	1	1	0	1
+	1	0	1	1	1
<hr/>					
4	0	0	1	0	0

# Method of Complements

- A technique to encode both positive and negative numbers
  - uses the same algorithm to perform addition
  - subtraction perform my addition of complements
- Recall: 10s complement = 9's complement + 1 (*Radix 10*)
- Hence: 2's complement = 1's complement + 1 (*Radix 2*)
- Radix 2:
  - 2's Complement: take the 1's complement and add 1
    - $0101 + 1001 = 1000$
    - $10111 + 01001 = 10000$
  - 1's Complement: take each bit and take its complement
    - $0101 + 1010 = 1000$
    - $10111 + 01000 = 10000$
- Negative numbers are stored as 2's complement numbers (Assume 8 bit quantity)
  - Example: -28
  - Convert 28 to binary :
  - Flip all of its bits :
  - Add 1 :


# Algorithm: Subtraction via Complements

- Example:  $13 - 9$ 
  1. Convert 13 and 9 into binary
  2. Take the 1s complement of the subtrahend (9)
  3. Add the complement to the minuend
  4. Drop the leading "1" is dropped
  5. Add 1

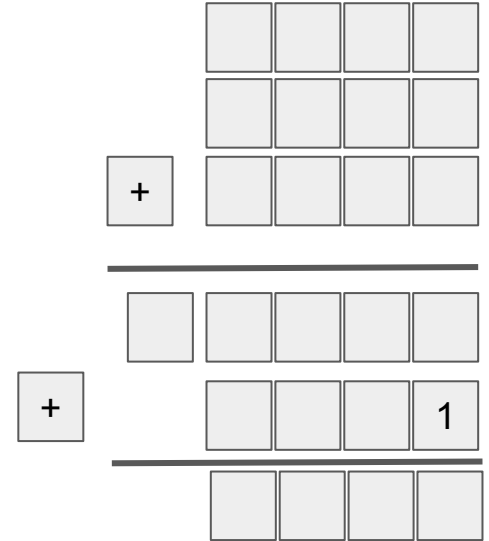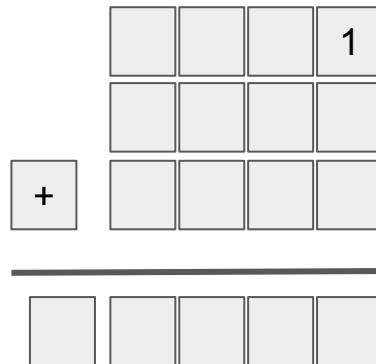

# Algorithm: Subtraction via Complements

- Example:  $13 - 9$ 
  1. Convert 13 and 9 into binary
  2. Take the 2s complement of the subtrahend (9)
  3. Add the complement to the minuend
  4. Drop the leading "1" is dropped.
- ~~Optimization:~~ Addition of adding one is baked in!

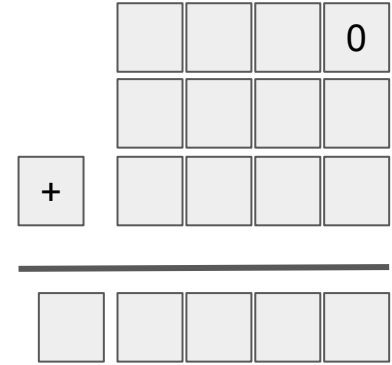










# Review of Mathematical Operations:



- First, introduce some status values:
  - Zero, Sign, Overflow, Carry
- Assume a register of size 4:

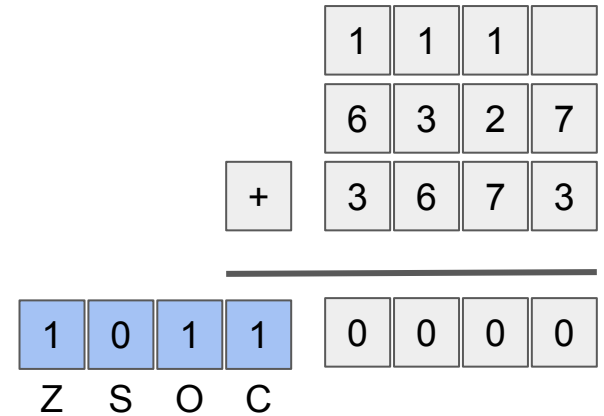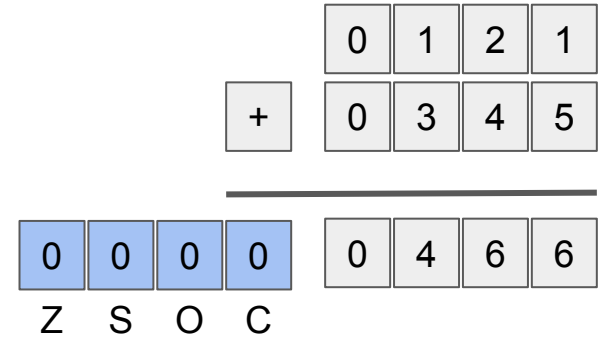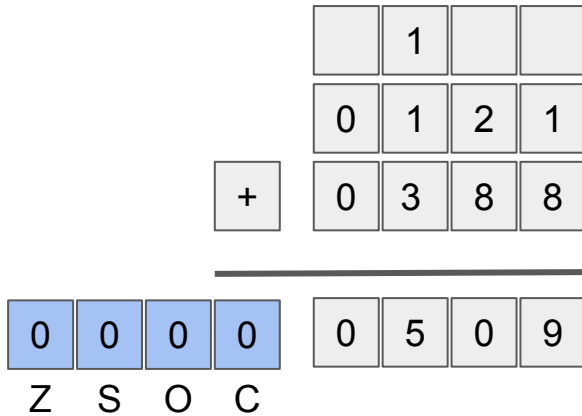

# In Binary

$$A + B = C \text{ S}$$

A	B	C	S
0	0	0	0
0	1	0	1
1	0	0	1
1	1	1	0

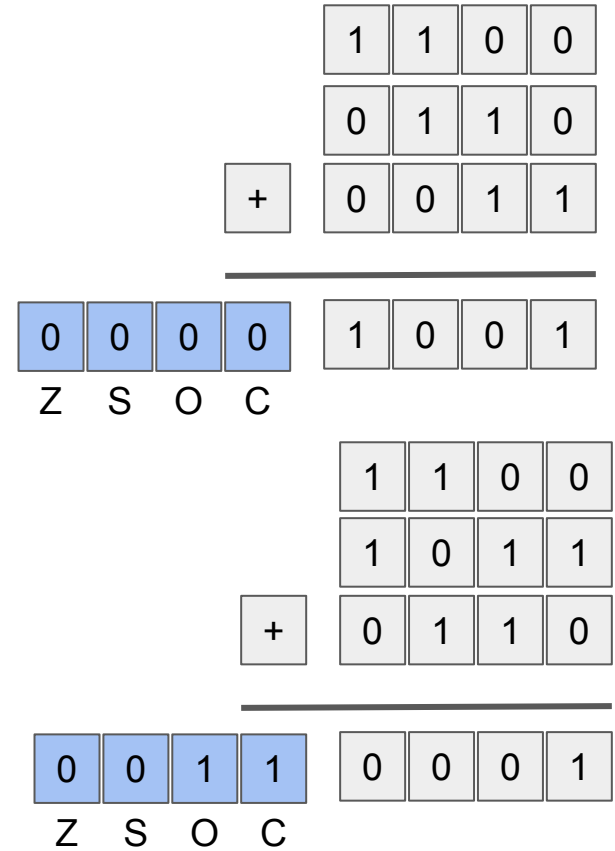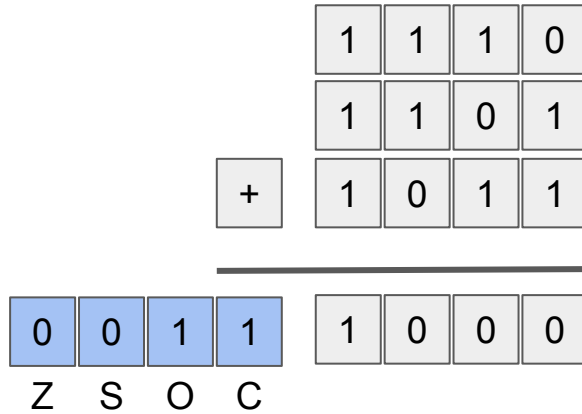

# Practice: Addition and Subtraction


Steps:

1. transform the operation to addition
2. convert  $\text{abs}(X)$  to binary
3. compute 2's complement for negative numbers
4. perform binary addition
5. convert result to decimal
  - if negative result: compute 2's complement first

➤ 4 + 5:

- 7 + - 6:
- -3 + 5:
- -18 - 4:

2. 000100, 000101  
5. 9 (check)

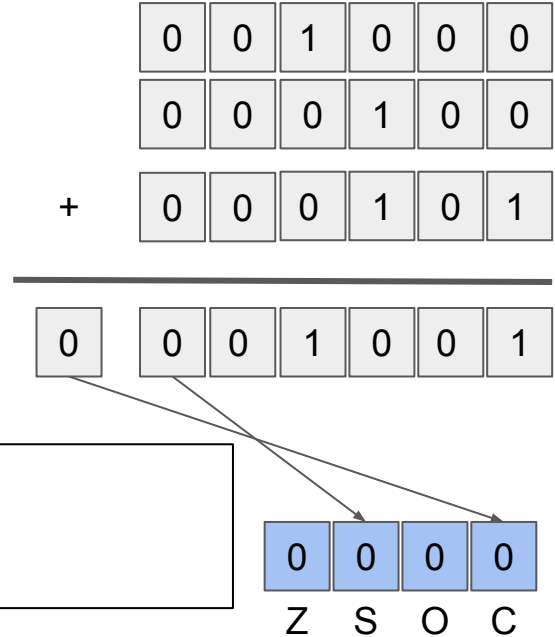

# Practice: Addition and Subtraction

Steps:


1. transform the operation to addition
2. convert  $\text{abs}(X)$  to binary
3. compute 2's complement for negative numbers
4. perform binary addition
5. convert result to decimal
  - if negative result: compute 2's complement first

- 4 + 5:
- 7 + - 6:
- -3 + 5:
- -18 - 4:

2. 000111, - 000110

3. -000110 = 111001+1 = 111010

5. 1 (check)

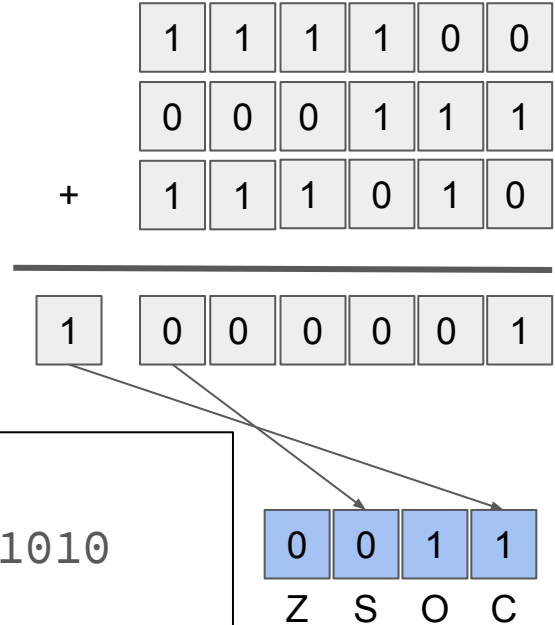

# Practice: Addition and Subtraction

Steps:


1. transform the operation to addition
2. convert  $\text{abs}(X)$  to binary
3. compute 2's complement for negative numbers
4. perform binary addition
5. convert result to decimal
  - if negative result: compute 2's complement first

- 4 + 5:
- 7 - 6:
- (-3) + 5:
- -18 - 4:

2. -000011, 000101

3. -000011 = 111100+1 = 111101

5.2 (check)

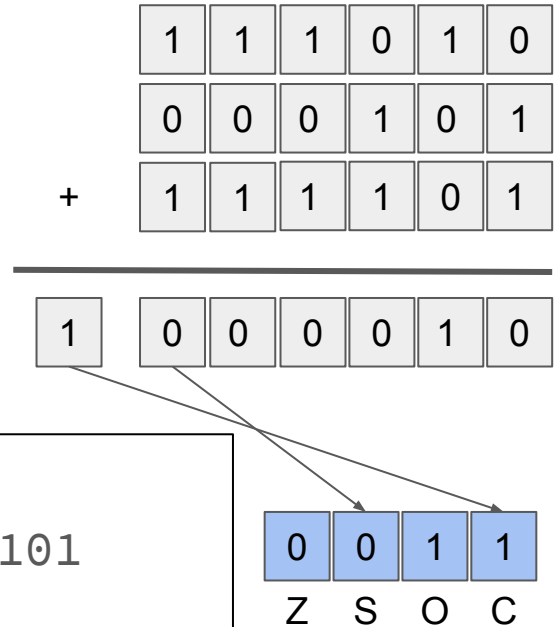

# Practice: Addition and Subtraction

Steps:

1. transform the operation to addition
2. convert  $\text{abs}(X)$  to binary
3. compute 2's complement for negative numbers
4. perform binary addition
5. convert result to decimal
  - if negative result: compute 2's complement first

- 4 + 5:
- 7 - 6:
- -3 + 5:
- (-18) + (-4):


2. -010010, - 000100

3. -010010 = 101101+1= 101110

-000100 = 111011+1= 111100

5. 101010 = -010101+1= -010110

-22 (check)

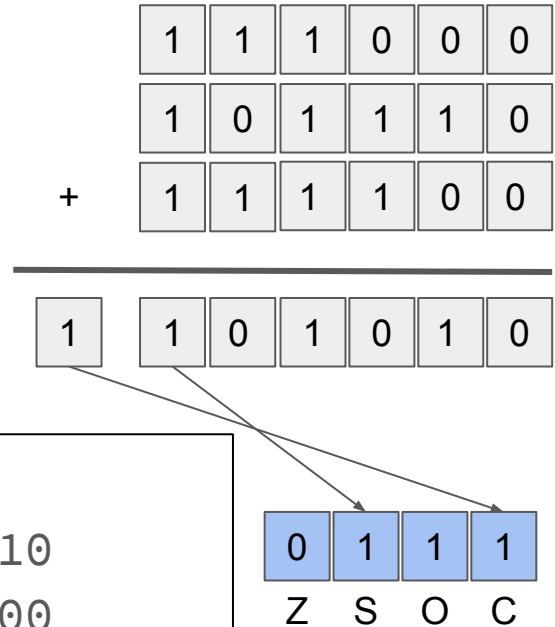

# Practice: Addition and Subtraction


Steps:

1. transform the operation to addition
2. convert  $\text{abs}(X)$  to binary
3. compute 2's complement for negative numbers
4. perform binary addition
5. convert result to decimal
  - if negative result: compute 2's complement first

➤ 8 + 9:

- 7 - 4
- -5 + 2
- -16 - 3:

2. 1000 + 1001  
5. 17 (check!)

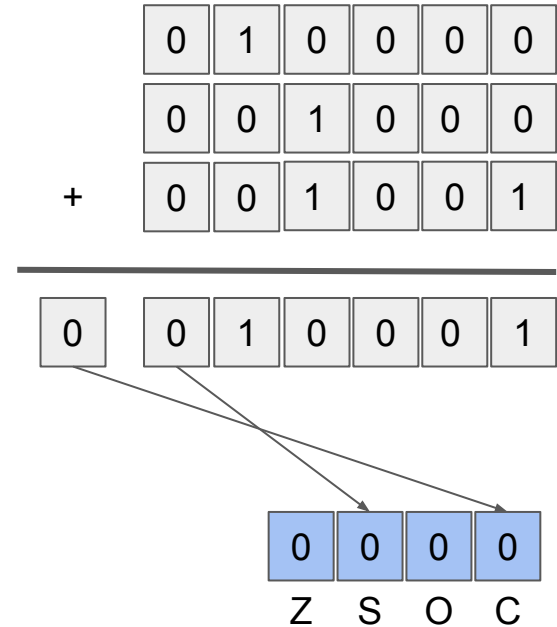


# Practice: Addition and Subtraction

Steps:

1. transform the operation to addition
2. convert  $\text{abs}(X)$  to binary
3. compute 2's complement for negative numbers
4. perform binary addition
5. convert result to decimal
  - if negative result: compute 2's complement first

- 8 + 9
- 7 + (-4):
- -5 + 2
- (-16) + (-3)

2. 000111 + -000100  
3. -000100 = 111011+1 = 111100  
5. 3 (check!)

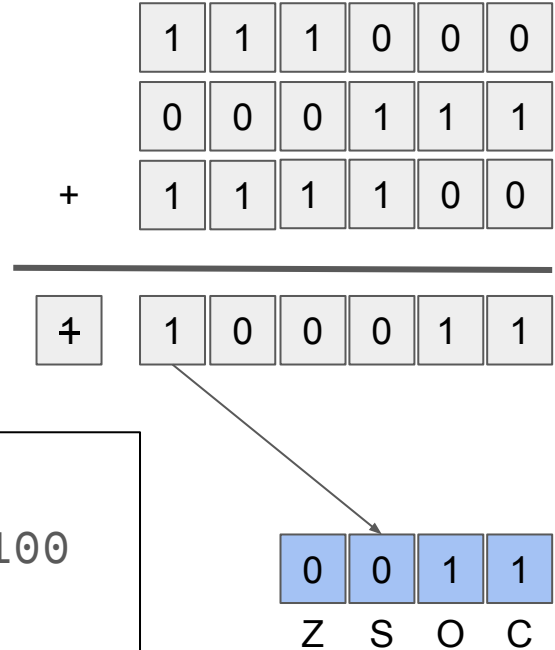



# Practice: Addition and Subtraction

Steps:

1. transform the operation to addition
2. convert  $\text{abs}(X)$  to binary
3. compute 2's complement for negative numbers
4. perform binary addition
5. convert result to decimal
  - if negative result: compute 2's complement first

- $8 + 9$
- $7 - 4$
- $(-5) + 2$ :
- $-16 - 3$

2.  $-000101 + 000010$   
3.  $-000101 = 111010 + 1 = 111011$   
5.  $1111101 = -000010 + 1 = 000011$   
 $= -3 \quad (\text{check!})$

	0	0	0	1	0	0
	1	1	1	0	1	1
+	0	0	0	0	1	0
<hr/>						
0	1	1	1	1	0	1

0	1	0	0
Z	S	O	C

# Practice: Addition and Subtraction

Steps:

1. transform the operation to addition
2. convert  $\text{abs}(X)$  to binary
3. compute 2's complement for negative numbers
4. perform binary addition
5. Validate step: convert result to decimal
  - if negative result: compute 2's complement first

	1	0	0	0	0	0
	1	1	0	0	0	0
+	1	1	1	1	0	1
<hr/>						
4	1	0	1	1	0	1

- $8 + 9$
- $7 - 4$
- $-5 + 2$
- $(-16) + (-3)$

2.  $-010000 + -000011$   
3.  $-010000 = 101111+1 = 110000$   
 $-000011 = 111100+1 = 111101$   
5.  $101101 = -010010+1 = -010011$   
 $= -19$  (check)

0	1	1	1
Z	S	O	C



# BCD: Addition

- Addition performed on the nibble level: 6+7

$$\begin{array}{r} \begin{array}{|c|c|c|c|} \hline 1 & 1 & 0 & 0 \\ \hline \end{array} \\ \begin{array}{|c|c|c|c|} \hline 0 & 1 & 1 & 0 \\ \hline \end{array} \\ + \begin{array}{|c|c|c|c|} \hline 0 & 1 & 1 & 1 \\ \hline \end{array} \\ \hline \begin{array}{|c|c|c|c|c|} \hline 0 & 1 & 1 & 0 & 1 \\ \hline \end{array} \end{array}$$

if (overflow or invalid code ) then

$$\begin{array}{r} + \begin{array}{|c|c|c|c|} \hline 0 & 1 & 1 & 0 \\ \hline \end{array} \\ \hline \begin{array}{|c|c|c|c|c|} \hline 1 & 0 & 0 & 1 & 1 \\ \hline \end{array} \end{array}$$

N	Code	N	Code
0	0000	8	1000
1	0001	9	1001
2	0010		1010
3	0011		1011
4	0100		1100
5	0101		1101
6	0110		1110
7	0111		1111

# BCD: Binary Coded Decimal

- Another encoding for numbers, where precision is required
- Four bits are used to encode each digit
- Perform addition per nibble
- Example:  $246 + 127$

			0				1							
	0	0	1	0		0	1	0	0		0	1	1	0
	0	0	0	1		0	0	1	0		0	1	1	1
+														
0	0	0	1	1		0	1	1	1		0	0	1	1

N	Code	N	Code
0	0000	8	1000
1	0001	9	1001
2	0010		1010
3	0011		1011
4	0100		1100
5	0101		1101
6	0110		1110
7	0111		1111

# BCD: Addition

- Addition performed on the nibble level: 7+9

$$\begin{array}{r} \begin{array}{|c|c|c|c|} \hline 1 & 1 & 1 & 0 \\ \hline \end{array} \\ \begin{array}{|c|c|c|c|} \hline 0 & 1 & 1 & 1 \\ \hline \end{array} \\ + \begin{array}{|c|c|c|c|} \hline 1 & 0 & 0 & 1 \\ \hline \end{array} \\ \hline \begin{array}{|c|c|c|c|c|} \hline 1 & 0 & 0 & 0 & 0 \\ \hline \end{array} \end{array}$$


if (overflow or invalid code ) then

$$\begin{array}{r} + \begin{array}{|c|c|c|c|} \hline 0 & 1 & 1 & 0 \\ \hline \end{array} \\ \hline \begin{array}{|c|c|c|c|c|} \hline 1 & 0 & 1 & 1 & 0 \\ \hline \end{array} \end{array}$$

N	Code	N	Code
0	0000	8	1000
1	0001	9	1001
2	0010		1010
3	0011		1011
4	0100		1100
5	0101		1101
6	0110		1110
7	0111		1111

# Comments on Multiplication

- Consider:  $9 \times 13 = ? 117$
- What is carry value for the 10's column?

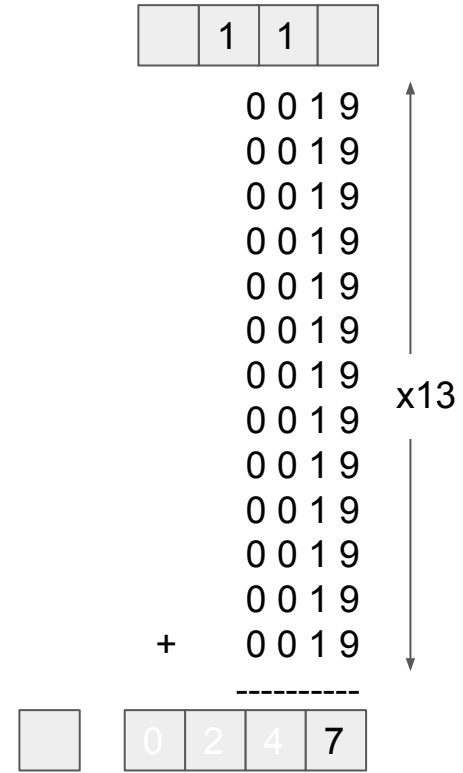

# Algorithm for Multiplication

```
product = 0;
for (d = 0 ; d < 4 ; d ++ ) {
    if (B[d] == 1) {
        product += A;
    }
    A = A << 1;
}
```

