COMPASS_TEMPEST_SGW_2024: November

Stephanie J. Wilson

2025-02-11

##Set Up

Read in first data file and assess standard curves

```
## Standard curve run with this run had standards that were not prepared properly (over pressurized)
## We have brought in the curve run most recently to this run that was prepared correctly for analysis
```

```
##     Machine    User Run_Date Sample_Type Sample1 Sample_Year Sample_Month
## 1 Varian GC Stearns 20241203       Blank   Blank          NA         <NA>
## 2 Varian GC Stearns 20241203     STD_CH4 STD_CH4          NA         <NA>
## 3 Varian GC Stearns 20241203     STD_CO2 STD_CO2          NA         <NA>
## 4 Varian GC Stearns 20241203     STD_CH4 STD_CH4          NA         <NA>
## 5 Varian GC Stearns 20241203     STD_CH4 STD_CH4          NA         <NA>
## 6 Varian GC Stearns 20241203     STD_CH4 STD_CH4          NA         <NA>
##   Sample_Day Sample_Time Time_Zone G_W Sample_Plot Sample_Grid Sample_Depth
## 1         NA          NA      <NA>   G        <NA>        <NA>         <NA>
## 2         NA          NA      <NA>   G        <NA>        <NA>         <NA>
## 3         NA          NA      <NA>   G        <NA>        <NA>         <NA>
## 4         NA          NA      <NA>   G        <NA>        <NA>         <NA>
## 5         NA          NA      <NA>   G        <NA>        <NA>         <NA>
## 6         NA          NA      <NA>   G        <NA>        <NA>         <NA>
##              Sample_ID Dilution_Factor STD_Conc CO2_Area CH4_Area Field_Notes
## 1              Blank_0               1      0.0        0        0          NA
## 2 Blank_0_repeatforCH4               1      0.0        0        0          NA
## 3 Blank_0_repeatforCO2               1      0.0        0        0          NA
## 4         STD_1ppm_CH4               1      1.0    26263      518          NA
## 5       STD_2.5ppm_CH4               1      2.5    69096     1282          NA
## 6         STD_5ppm_CH4               1      5.0   136318     2534          NA
##   Lab_Notes
## 1
## 2
## 3
## 4
## 5
## 6
```

```
## `geom_smooth()` using formula = 'y ~ x'
```

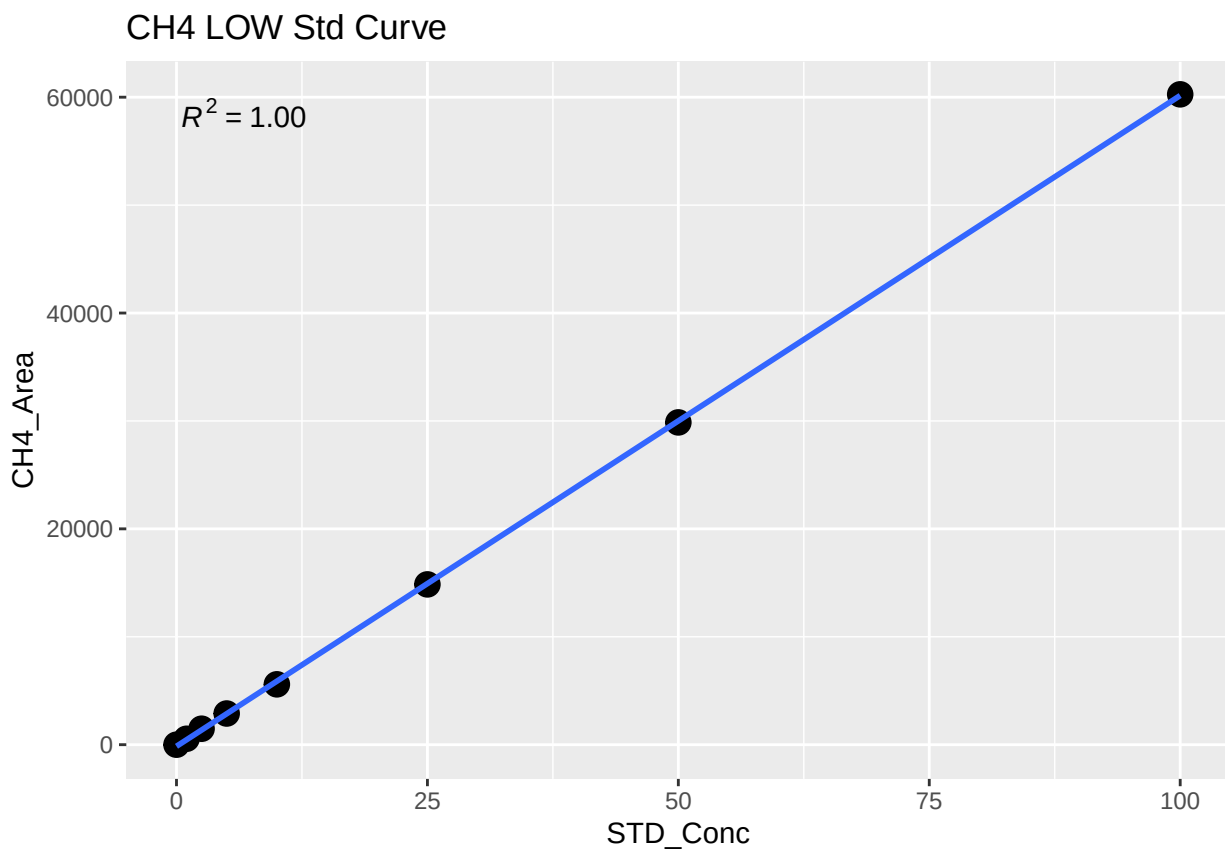


```
##
## Call:
## lm(formula = stds_ch4_low$CH4_Area ~ stds_ch4_low$STD_Conc)
##
## Residuals:
##     Min      1Q  Median      3Q     Max
## -287.87  -88.91   58.47  113.31  149.61
##
## Coefficients:
##                        Estimate Std. Error t value Pr(>|t|)
## (Intercept)            -149.612     73.084  -2.047   0.0866 .
## stds_ch4_low$STD_Conc  603.049      1.795 335.903  4.7e-14 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 166.3 on 6 degrees of freedom
## Multiple R-squared:  0.9999, Adjusted R-squared:  0.9999
## F-statistic: 1.128e+05 on 1 and 6 DF,  p-value: 4.698e-14
```

```
## `geom_smooth()` using formula = 'y ~ x'
```

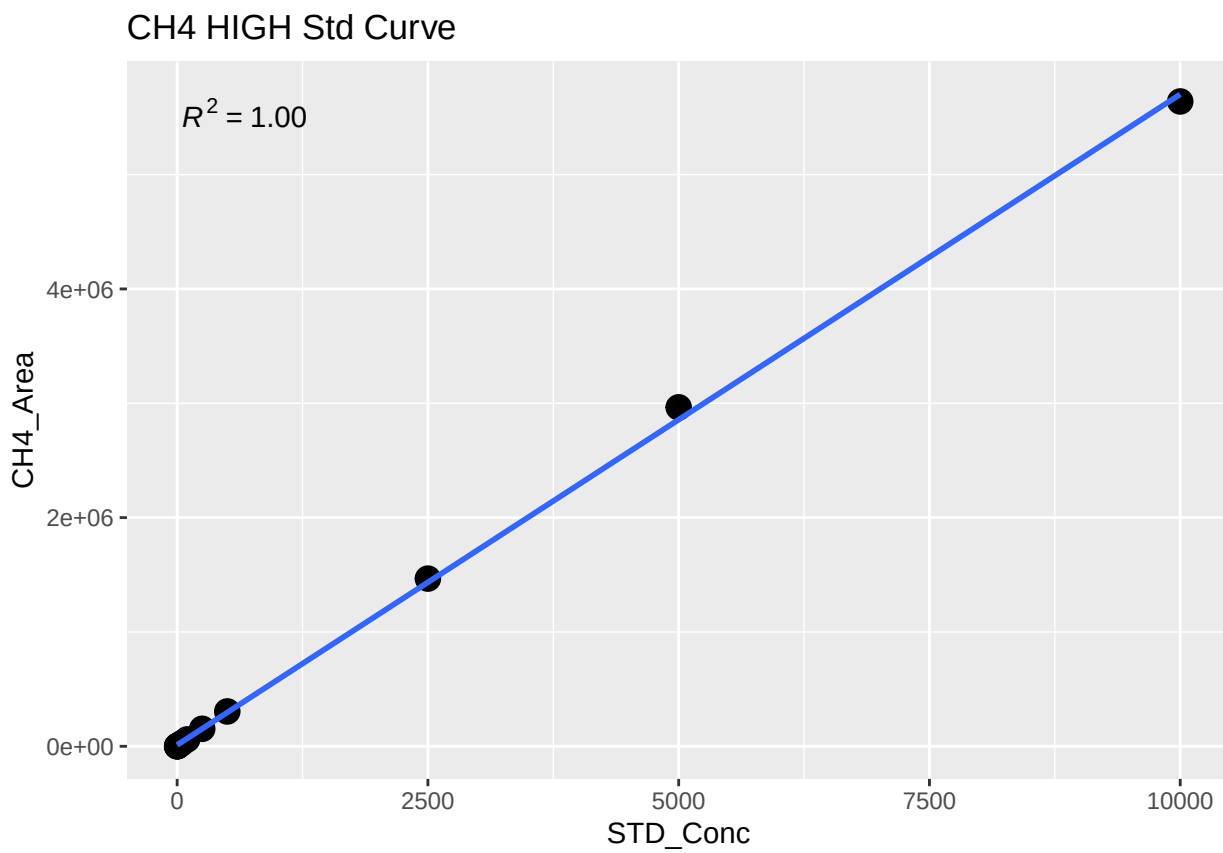


```
##
## Call:
## lm(formula = stds_ch4$CH4_Area ~ stds_ch4$STD_Conc)
##
## Residuals:
##    Min     1Q Median     3Q    Max
## -62253 -11454 -10826   -545 107768
##
## Coefficients:
##                     Estimate Std. Error t value Pr(>|t|)
## (Intercept)       11453.611  12381.474   0.925    0.375
## stds_ch4$STD_Conc   569.068      3.892 146.220   <2e-16 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 39960 on 11 degrees of freedom
## Multiple R-squared:  0.9995, Adjusted R-squared:  0.9994
## F-statistic: 2.138e+04 on 1 and 11 DF,  p-value: < 2.2e-16

## `geom_smooth()` using formula = 'y ~ x'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'
```

```
## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'
```

```
## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): full precision may
## not have been achieved in 'pnbeta'

## Warning in stats::pf(stat, df1 = df1, df2 = df2, ncp = ncp): convergence failed
## in 'pnbeta'
```

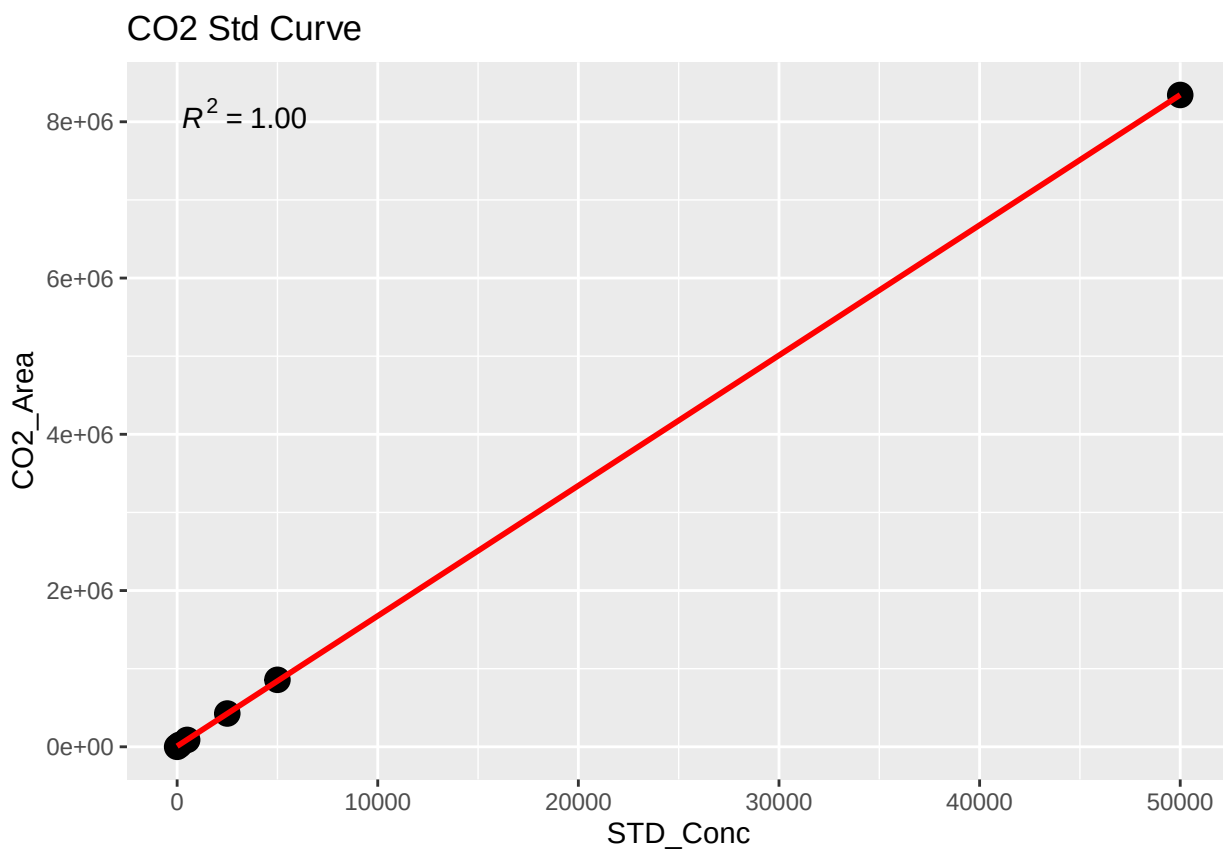


```
##
## Call:
## lm(formula = stds_co2$CO2_Area ~ stds_co2$STD_Conc)
```

```
##
## Residuals:
##     1     2     3     4     5     6
## -8074 -3977 -3101  1148 15579 -1574
##
## Coefficients:
##                     Estimate Std. Error t value Pr(>|t|)
## (Intercept)       8074.2030  4250.3070     1.9     0.13
## stds_co2$STD_Conc  166.7378     0.2069   805.8 1.42e-11 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 9180 on 4 degrees of freedom
## Multiple R-squared:      1,  Adjusted R-squared:      1
## F-statistic: 6.493e+05 on 1 and 4 DF,  p-value: 1.423e-11
```

```
##   X          Curve        R2    Slope  Intercept Run_Date
## 1 1  Slope_CH4_low 0.9996407 633.0314  -320.6965   202404
## 2 2 Slope_CH4_high 0.9993443 601.5512 14817.1191   202404
## 3 3      Slope_CO2 0.9999907 168.3200 10075.2183   202404
## 4 4  Slope_CH4_low 0.9996407 633.0314  -320.6965   202404
## 5 5 Slope_CH4_high 0.9993443 601.5512 14817.1191   202404
## 6 6      Slope_CO2 0.9999907 168.3200 10075.2183   202404
```

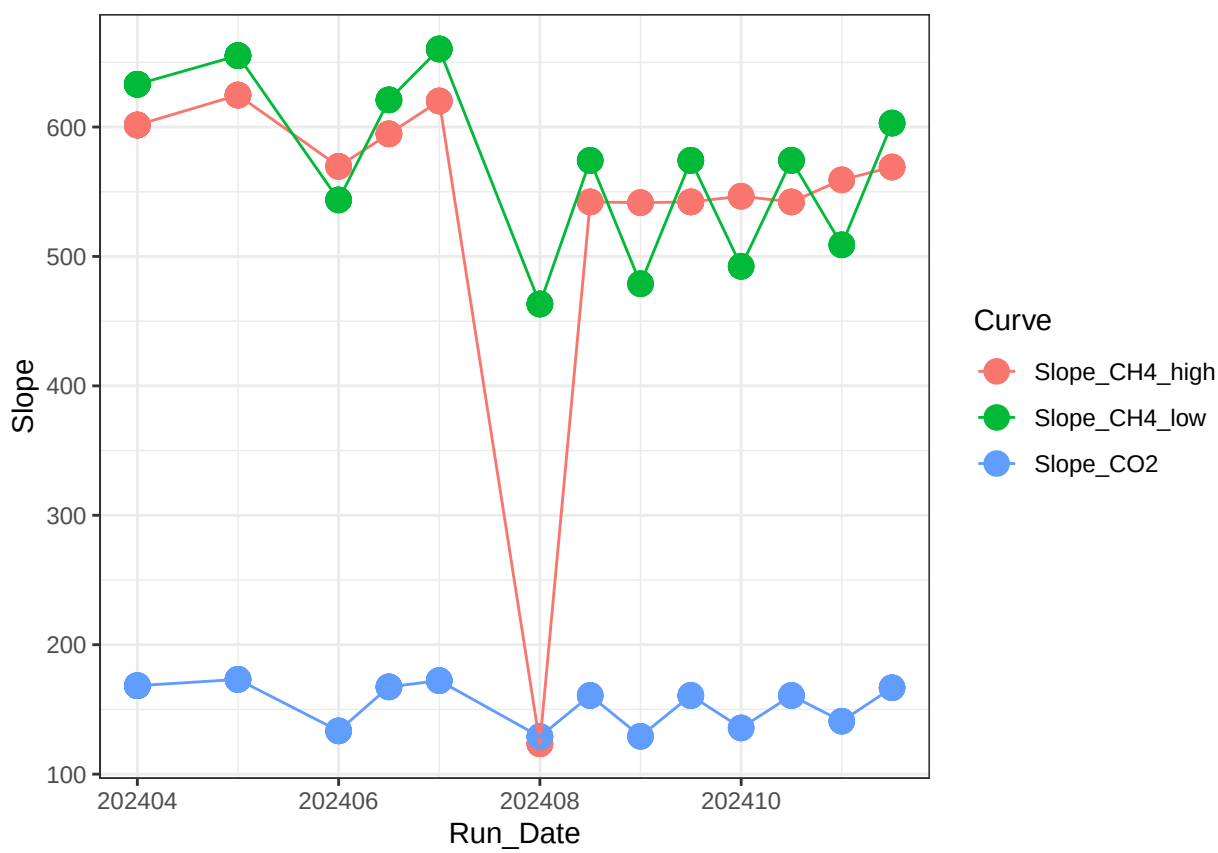

Now calculate the CH4 & CO2 concentrations in ppm

```
#head(raw)

#pull out methane standards
Samples <-  raw %>%
  filter(!str_detect(Sample_Type, "STD_CH4")) %>%
  filter(!str_detect(Sample_Type, "STD_CO2")) %>%
  filter(!str_detect(Sample_Type, "Blank")) %>%
  filter(!str_detect(Sample_Type, "Chk_STD")) %>%
   filter(!str_detect(Sample_Type, "CHKSTD")) %>%
  filter(!str_detect(Sample_Type, "NA"))
#head(Samples)

#Now flag any areas that are above the 100ppm area for CH4
Samples$CH4_Curve <- ifelse(Samples$CH4_Area >71000, "High", "Low")
#head(Samples)

#Calculate CH4 concentrations in ppm
Samples$CH4_Conc_ppm <- ifelse(Samples$CH4_Area >71000, (Samples$CH4_Area-Slope_CH4_high$Intercept)/Slo

#Calculate CO2 concentrations in ppm
Samples$CO2_Conc_ppm <- ((Samples$CO2_Area-Slope_CO2$Intercept)/Slope_CO2$Slope)

#head(Samples)

##########make flags for any dilutions needed
#highest CH4 standard = 10000
#highest CO2 standard = 50000

Samples$CH4_Flag <- ifelse(Samples$CH4_Conc_ppm >10000, "Needs Dilution", "Within Range")
Samples$CO2_Flag <- ifelse(Samples$CO2_Conc_ppm >50000, "Needs Dilution", "Within Range")
#head(Samples)
```

Check the Check Standards

```
## Warning: Using ‘size‘ aesthetic for lines was deprecated in ggplot2 3.4.0.
## i Please use ‘linewidth‘ instead.
## This warning is displayed once every 8 hours.
## Call ‘lifecycle::last_lifecycle_warnings()‘ to see where this warning was
## generated.
```

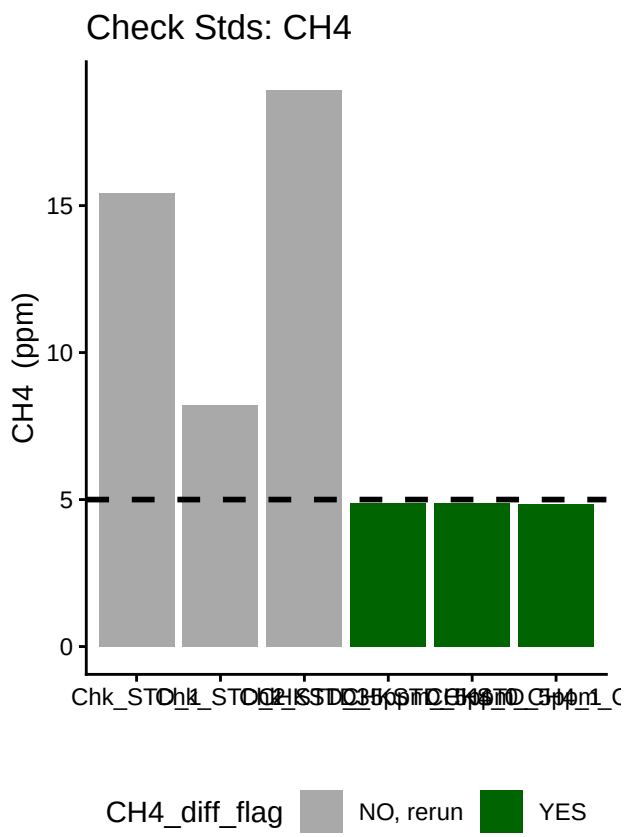

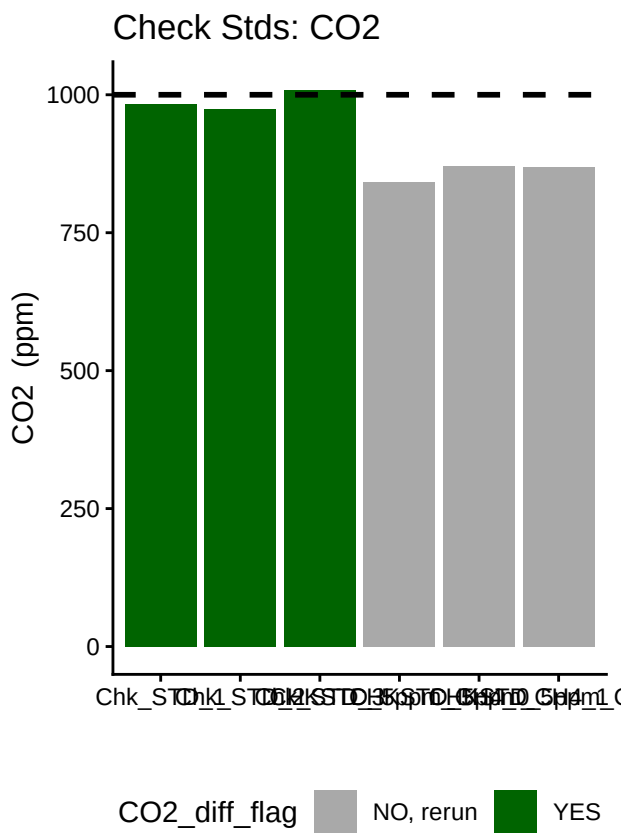

Dilution correct samples

```
#multiply the concentration by the dilution factor
Samples$CH4_Conc_ppm_dilcorr <- (Samples$CH4_Conc_ppm * Samples$Dilution_Factor)

Samples$CO2_Conc_ppm_dilcorr <- (Samples$CO2_Conc_ppm * Samples$Dilution_Factor)

#check results
#head(Samples)

#quick first look at the samples
ch4_samples <-  ggplot(data = Samples, aes(x = Sample_ID, y = CH4_Conc_ppm, fill=CH4_Flag)) +
       geom_bar(stat = 'identity') +
        scale_fill_manual(values=c("darkgreen","red"))+
        theme_classic() + labs(x= " ", y="CH4 (ppm)", title="CH4: Green = Within Range") +
        theme(legend.position="none")


co2_samples <-  ggplot(data = Samples, aes(x = Sample_ID, y = CO2_Conc_ppm, fill=CO2_Flag)) +
       geom_bar(stat = 'identity') +
        scale_fill_manual(values=c( "darkgreen", "red"))+
        theme_classic() + labs(x= " ", y="CO2 (ppm)", title="CO2: Green = Within Range") +
        theme(legend.position="none")
```

```r
ggarrange(ch4_samples, co2_samples, nrow=1, ncol=2)
```

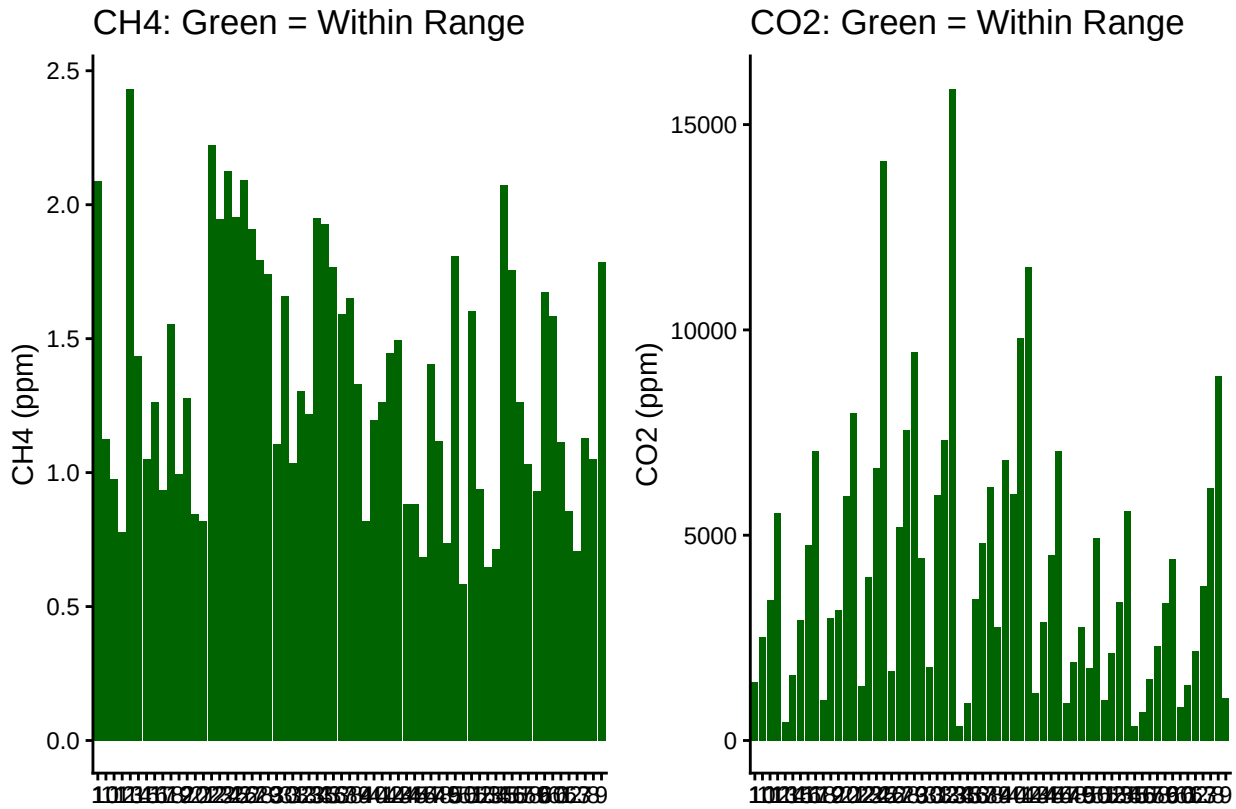

If samples are water calculate gas in water

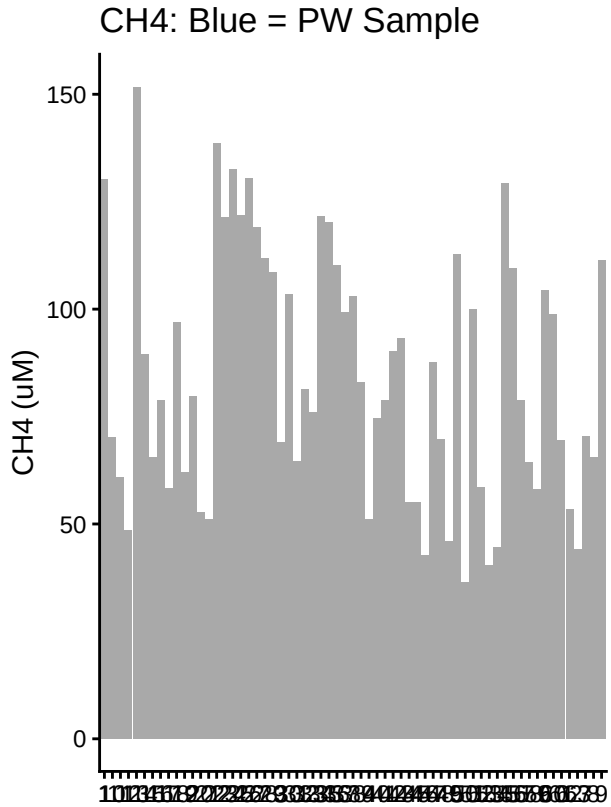

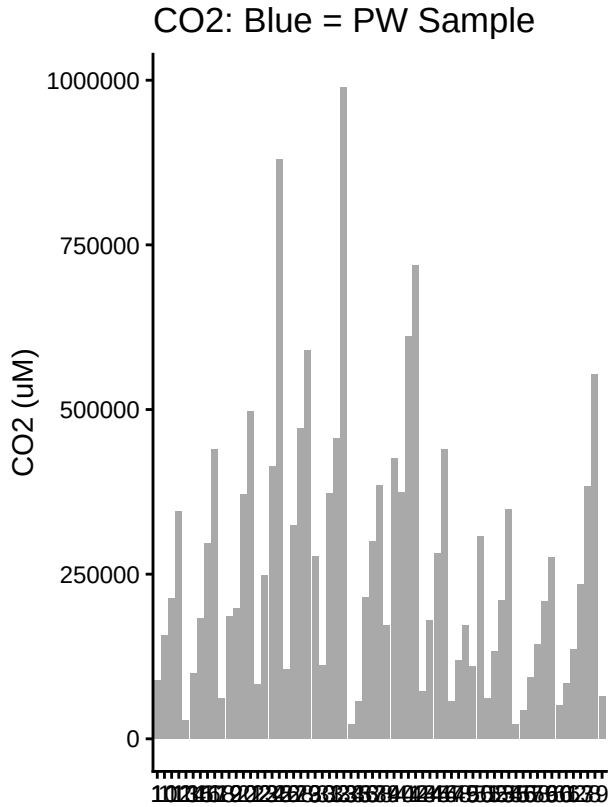

Write out processed data & slopes

```
#check results
#head(Samples)

#pull out what we need
Samples1 <- Samples[ ,c(1:3,6:16,20, 24:30)]
#head(Samples1)

write.csv(Samples1, "2024 Processed Data/COMPASS_TEMPEST_SGW_202411_Processed.csv")
```

#end