

# Lecture Notes 1: Git, Programming, and MATLAB Tutorial

Ivan Rudik

ECON 509: Computational Methods

January 10, 2016

Programming boils down to writing a set of instructions. Unfortunately this set of instructions is not written in plain English, but one of many computing languages. Much like English, computing languages have hard and fast rules that can't be violated, or else the instructions will not make sense and the computer will throw out an error that it cannot continue. Similarly, there are also elements of style in programming as in conventional writing (think Strunk and White) that make for clearer and more efficient code. You want your code to be as simple, clear and efficient as possible while getting the job done. This will make it easier when you come back to your code in six months or if someone else pokes around your replication files in the *American Economic Review*. This lecture note will briefly go over how to use a great version control and team coding tool called "Git". We will also take a 30,000 foot view of programming, and key MATLAB features and style suggestions (rules) for novice programmers.

## 1 Git

When coding up numerics for (or just writing) a paper, ideally you would be able to work on the project at the same time as your collaborators. Using standard cloud storage actually doesn't allow for this very well, only one person can alter files at a time. Moreover, you may want to keep track of all of the versions of your code as you progress from the early stages where you might just be simulating a dynamic two firm model of cournot competition, to future versions where you add in stochastic research developments and entry of new firms. Traditionally you would save the older versions with different file names like `model_old_datehere.jl`, but that clutters your directories and does not necessarily make it easy to take a few steps back if there's a bug you can't find in

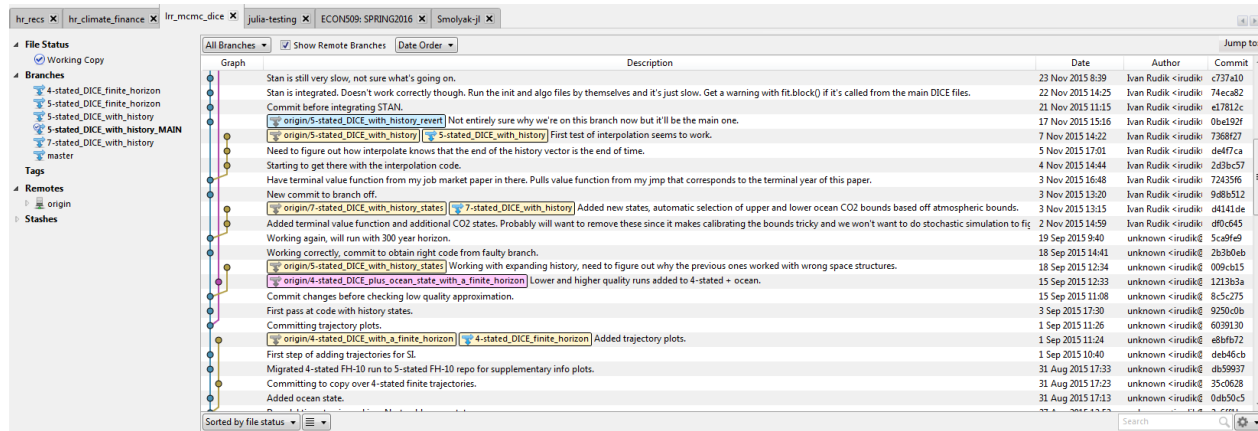


Figure 1: Repository in SourceTree.

your new version.

Enter git:<sup>1</sup> *Git is a free and open source distributed version control system designed to handle everything from small to very large projects with speed and efficiency.* What Git allows you to do is have only one set of files on your local machine while keeping track of all the different versions, or branches, of your code that you have worked through. Git also allows for your code to be hosted remotely (GitHub, Bitbucket, etc) so that it is effectively backed up, and so that two people on a project can work on their code at the same time. How does this work? When two people make independent changes to their local versions of some file, they must eventually “sync” the remote version with their own local version. Upon “syncing”, each person can select which changes of the other persons to keep. We will not go over the full functionality of Git, but only the basics and what you will need to effectively version control your own code. You will also need to be able to use Git to submit homework assignments. Figure 1 displays a graphic of what Git “looks like”. As we move up the graphic we are moving forward in time, with each dot denoted an updated copy of the code with comments on what changed in that version and who made the changes. Moreover, there may be different “branches” of the code which signify different parts of your development environment. In this example, there’s a branch for the climate-economy model DICE with 4 states, but also branches for different versions with 5 states, 7 states, and others that capture history states as well. We can switch between these different branches or move back in time along any given branch. We can do all of this while having only one folder on your computer and one set of files, no matter how many updates you might have on a given branch.

<sup>1</sup>Fun fact: Git was developed by the creator of Linux, Linus Torvalds.

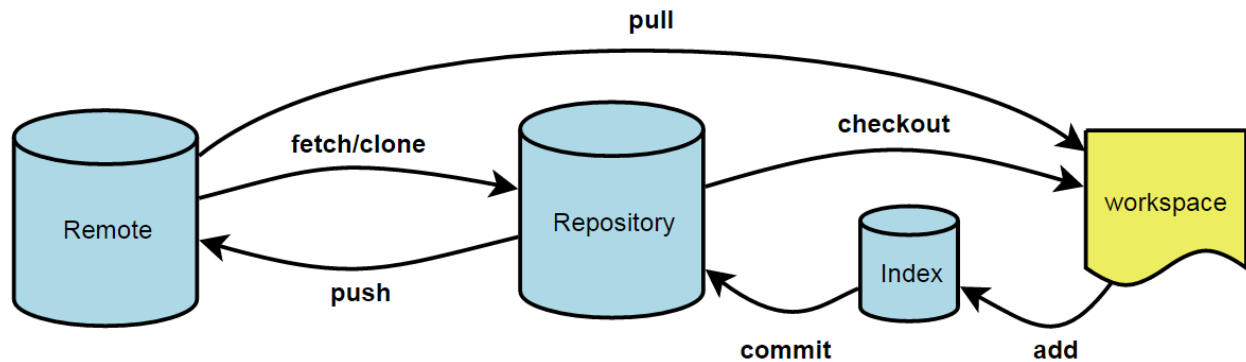


Figure 2: The flow of git: <https://illustrated-git.readthedocs.org/en/latest/>

## 1.1 Installing Git

First, go to <http://github.com> and start an account using your Iowa State e-mail. Next, go to <https://git-scm.com/downloads> to download Git. From there, you can also download the SourceTree GUI client which we will be using in this course. In the future you may wish to switch to the GitHub client or just use terminal, or use an alternative to GitHub for your own work. Once you have installed Git and SourceTree you will want to go into SourceTree and link your remote GitHub account to your local SourceTree client by going to the Clone/New window and then browsing hosted projects.

## 1.2 Git Basics

You've installed Git and linked it up to your GitHub account. Now what *is* Git? Git is software that allows you to host a *local repository*, or local repo, while also having your code on a *remote repo*, which by default is called *origin*. In Git, each new update is called a *commit*, and they are represented by the big dots in Figure 1. The current commit your local repo is pointed at is designated *HEAD*. Within a repo, you can also be on different *branches* for when you are adding new large scale features that are in some sense their own project. Your main/initial branch is given the name *master*. If you are solving a big non-linear dynamic program using one scheme, and you wish to test out another to see if it's faster or gets you more accuracy, you might want to create a new branch for it. This allows you to have several versions of the same project where you are doing completely different things or just testing some things out. You can keep it on a totally separate branch if you want to have two different versions of your project, or you can *merge* it back into the master branch if it'll be your main code going forward.

So how do we do all of this? Figure 2 displays the flow of Git. The first step is to *clone* the

remote repo for this class. What this does is it takes the files on our class's remote GitHub repo and puts them in a particular folder on your own machine. Once you've cloned **SPRING2016** into a folder, you can take a look at the syllabus and lecture notes that are now all conveniently on your machine. This is how you can take publicly available repos that exist online and move them onto your own computer and also into your local repo. Alternatively, you can always create a new repo on Github, then you can go into your Git client or command line and clone it onto your machine. Call this repo "Test".

We can then go ahead and put a file into our Test repo. For example, you may wish to create a text file containing "Hello world!" and save it in your repo folder on your machine. Note that this file is now saved on your machine, but not in your local repo. You can then *commit* this change to your local repo along with a note containing information on what you have changed. Once you have committed the change, it has effectively been saved in your local repository. Next you can *push* your changes to your remote repo. If you look at your Github repo using a browser, you will see the text file is now there!

What if you want to make changes? Just edit the file on your machine and add "Edit for changing!" Once you have made this change and saved it, GUI clients like SourceTree will tell you that there are uncommitted changes in your repo. If you want to save these changes to your local repo, you *stage* the changes you want to commit. Then you commit them. Once they are committed, the staged changes can be pushed to your remote repo. If you check Github from your browser again, you will see your changes are there.

This is the basics of using Git. Since Git saves all these changes to files in your repo, you can always move back to alternative versions of your files.

## 2 MATLAB Basics

MATLAB stands for MATrix LABoratory. That's because it's built to do work with matrices and is *very* efficient in doing so. What does this mean for you and how you should code?

The default operations in MATLAB are *matrix operations*. If you have a 2x2 matrix A, and a 2x2 matrix B,  $A * B$  will perform matrix multiplication, not element-by-element multiplication. Knowing this, we can perform all the basic operations:

- Addition:  $A+B$ ;
- Subtraction:  $A-B$ ;
- Division:  $A \setminus B$ ; (left division) or  $A/B$ ; (right division)
- Inversion:  $\text{inv}(A)$ ;

- Transposition: `A'`;
- Determinants: `det(A)`;
- Exponentiation: `A^2`;

Other basic functions exist and are easy to use such as `exp` and `log`. You can also perform basic mathematical operations on an element by element basis by preceding the operator with a period: `[1 2 9].^2 = [1 4 81]`.

Three other key notes:

1. Rows are the first dimension, columns are the second, slices (for 3D arrays) are the third dimension. Arrays of arbitrary dimension are possible but not visualizable.
2. Semi-colons within a matrix indicate the end of a row.
3. Each line of code is usually ended with a semi-colon. Omitting the semi-colon at the end of a line of code will display the result of the operations.

## 2.1 Other Useful Functions

- Creating an evenly spaced vector: `index = start value:increment:end value`, or `index = start value:end value` to have it spaced by 1
- Return the size of a matrix along all dimensions as a vector: `size(A)`, or along a specific dimension `size(A,1)`
- Slicing a matrix: `A(:,1)` returns the elements in the first column of A
  - `end` allows you to slice elements in relation to the last element without specifying the index: `A(5:end-2,1)` slices the fifth to the third to last element in the first column
  - You can slice multiple rows or columns at once by using a vector to index: `A(:,[1 4 5])` slices the first, fourth and fifth rows into a new Nx3 matrix
- Creating simple matrices: `A = ones(num rows, num cols)`, `B = zeros(num rows, num cols)`
- You can make matrices of arbitrary dimension: `A = ones(5,3,6,6,3)`
- There are many logical/boolean expressions and functions that return true or false values:
  - `A > B`, `A <= B`, `A == B`, `A ~=B`

- \* These create a matrix of ones and zeros depending on whether the boolean statement is true for that location in the two matrices
- To check whether any or all locations in A and B satisfy the boolean statement you can use `any(A > B)` and `all(A > B)`

Keep in mind there are many, many more functions that are useful (e.g. `repmat`, `switch`, anonymous functions) that you should look up on your own.

### 3 A Broad View of Programming

A program is the end product of programming, an e-mail client or a dynamic stochastic model of the economy with non-convexities. A program is made up of different components and these components are also made of their own subcomponents. The most basic component (for our intents and purposes) is a *statement*. A statement is analogous to a sentence in a book. It has its own structure and intent, but it doesn't mean that much without the other statements that go with it. A statement is more commonly called a *line of code* because statements are written on individual lines. Here's a program:

```
deck = { '4 of Hearts ', 'King of Clubs ', 'Ace of Spades ' };  
shuffled_deck = shuffle(deck);  
first_card = shuffled_deck{1};  
display(first_card);
```

This program is really simple and short: it creates a deck of cards, shuffles them, and displays the top one. But, there's a lot going on underneath the surface you don't see. What are the curly brackets? How does `shuffle` work? Why do we need semi-colons? We don't need to answer these questions but it's important to know that a good program has code, like the above, which is understandable to other programmers while performing efficiently.

#### 3.1 Data Types

The next step up from statements is *data types*. Data types differentiate between numbers, strings of letters or other characters, and logical values. Handling different data types is usually easy. Strings are in quotes "like this". Numbers are just numbers: 3.14159. And logical values are often just TRUE or FALSE or sometimes 1 or 0.

### 3.2 Variables

We need a way to label our data. Having a symbol for pi out to 100 digits is much easier to handle than continually re-typing the actual number. Moreover, we won't know what values our data or parameters will take ahead of time. This allows the value of a quantity to change as we work through the program. This is very important for recursive modeling in economics but is often taken for granted.

### 3.3 Control Flow

Programs are read from top to bottom and left to right like the English language. But sometimes in programming we don't know ahead of time if we want to execute a line of code or not. Sometimes we want to execute line of code millions of times with slight differences (indexing, parameter value, etc) but writing out a million lines of code is clearly not ideal. There are several basic tools of control flow. The first is the if statement:

```
if marginal_benefit > marginal_cost
    quantity_produced = quantity_produced + 1;
end
```

If the logical argument in the if statement is true (marginal benefit > marginal cost), then the program will execute the code within the if statement. However we may want to execute some other code when the logical statement is false,

```
if marginal_benefit > marginal_cost
    quantity_produced = quantity_produced + 1;
else
    quantity_produced = quantity_produced - 1;
end
```

But that isn't exactly what we want to do since we may actually reduce the quantity produced when we're at the optimality condition of marginal benefit = marginal cost. This is where we need elseif statements,

```
if marginal_benefit > marginal_cost
    quantity_produced = quantity_produced + 1;
elseif marginal_benefit < marginal_cost
    quantity_produced = quantity_produced - 1;
else
```

```
        display('We are at the optimum. ');  
end
```

This allows us to test a sequence of logical statements, only progressing to the next logical statement if the current logical statement is false.

The second control flow tool is a *loop*. Loops allow you to execute the same lines of code an arbitrary number of times:

```
quantity_produced = 0;  
while marginal_benefit > marginal_cost  
    quantity_produced = quantity_produced + 1;  
    [marginal_benefit, marginal_cost] = FOCs(quantity_produced);  
end
```

Instead of having an unknown number of if statements to try to find the optimum quantity, we can use a while loop to iterate as many times as we need. A while loop executes the code inside the loop until the logical statement (marginal benefit > marginal cost) is no longer true. So what we can do to find the optimum in this example is to increase the quantity produced by 1, plug the quantity into a function that calculates the first order conditions and then see if marginal benefit is still greater than marginal cost. If it is, continue the process. If not, stop and we have our optimal quantity produced.<sup>2</sup>

The more widely used loop is the *for loop*. A for loop differs from a while loop in that it introduces an new index variable, and moves through a vector of values<sup>3</sup> of arbitrary length. Consider this example where we have a constant marginal cost, and we know the intercept term and a set of slope coefficients of our linear marginal revenue curve. We want to see how the optimal quantity changes in the slope of the marginal revenue curve.

```
slope_set = [0 1 4 9 13];  
intercept = 6;  
marginal_cost = 5;  
output=zeros(size(slope_set));  
  
for slope = 1:length(slope_set)  
    output(slope) = (marginal_cost - intercept)/slope_set(slope);  
end
```

<sup>2</sup>This is ignoring the fact that the optimal quantity might not be an integer.

<sup>3</sup>In languages like Python or Julia you can directly loop through collections of strings or arrays of arbitrary contents. In MATLAB you have to do some more involved coding to get the same result.



The for loop allows us to loop through all of the elements in the slope set, plug each element into the optimal quantity formula, and then store the answer.

### 3.4 Functions

Programming functions are just like mathematical functions: they take inputs and give you outputs after applying operations to the inputs you used. Functions are what allow us to organize our code, every time we want to perform a certain action, like maximizing a Bellman equation, we can call a function that does the maximization instead of continually re-writing the maximization problem. It also gives the maximization procedure a meaningful label if you name your functions well.

```
function optimum = solver(mc,inter ,slope)
    optimum = (mc-inter)/slope;
end
```

This function named “solver” takes in three arguments: marginal cost, the intercept, and the slope, and then calculates the optimum quantity as the output. This function is written for MATLAB where “function” is the first word on the first line, followed by a vector of the outputs. After the equals sign is the function name that you will use when you call the function and then the inputs in parentheses.

### 3.5 Data Structures (kind of MATLAB specific)

Different from data types, there are also data structures. Data structures are just ways of grouping values together. The key ones that are of use to us are:

1. Matrices/arrays: these allow us to store numbers in matrix form
2. Structures: these are arrays with *named* fields (human-readable!) that contain data of different types:
  - Fields are denoted by name after a period
  - `student.gpa = 3.8;`
  - `student.name = 'Kelly';`
3. Cell arrays: arrays that can contain any type of data in each *numbered* field (easier to loop through)
  - Fields are indexed inside of curly brackets

- `student{1} = 3.8;`
- `student{2} = 'Kelly';`

All data types can be nested within structures or cells, only numbers can go in matrices.

### 3.6 Commenting

Code should be commented and the comments should be informative. If you come back to code you wrote one year ago and there are no comments, it will take you much longer to understand. It will also be nearly impossible for others (me) to know what you're doing. In MATLAB lines are commented by beginning with a `%`.

## 4 MATLAB Specifics

### 4.1 Vectorize

Code handling array-structured data can often be run in parallel using the default MATLAB commands. This will make your code much faster. In a very simple example, if we want to take the log of every number in a matrix, we should not loop through all the elements of the matrix, take a log, and then plug the logged value into a new matrix. We can just apply `logA = log(A);` to any matrix and it will do the work for us. Here's a more complex example. Suppose we want all the value of a 200x200 matrix `A` below some threshold. One way to do it is to loop through all the elements, check if they are above the threshold, and then pull them out:

```
A = rand(200);
tic
B1 = [];
counter = 1;
% Loop over columns
for j=1:size(A,2)
    % Loop over rows
    for i=1:size(A,1)
        % Store if below threshold
        if(A(i,j) < 0.2)
            B1(counter,1) = A(i,j);
            counter = counter + 1;
        end
    end
end
```

```
        end
    end
    nonvec = toc;
```

Alternatively, we can use vectorized logical indexing:

```
tic
B2 = A(A < 0.2);
vec = toc;
ratio = nonvec / vec
assert(isequal(B1,B2));
```

The vectorized code is *three* times faster.<sup>4</sup>

Another extremely useful, but black-boxy tool is `bsxfun`. `bsxfun` is possibly the most useful tool for speeding up code. `bsxfun` allows you to perform operations, like subtracting a row vector from each row of a matrix, much more efficiently than your other options (loops, `repmat`). I highly recommend getting familiar with this tool.

## 4.2 Optimize

Your code is working, but you want to make it faster. How can you do so? Use the MATLAB Profiler. The profiler tells you precisely how much time your code spends in each one of your functions, and how many times each of your functions are called. Functions that are called many times, and/or appear to be taking up a large fraction of the overall compute time are prime areas to trying to shore up inefficiencies in your code with preallocation and vectorization.

## 5 Style Considerations

See: <http://spiff.rit.edu/classes/phys317/lectures/style.html>

## References

---

<sup>4</sup>This is only true for MATLAB 2015a and newer versions with just in time compilation. With older versions the vectorized code would be *two hundred* times faster, although the older JIT scheme in the 2010s is faster for some naive loops like this example.