
Software Requirements Specification

for

Traffic Light Optimization Imagine Interactive Systems (Iminsys)

Prepared by Team Alpha:

1. [TK Lebelo](#) u15209190 (team leader)
2. [RW van Graan](#) u16040865
3. [R Rammbuda](#) u16207948
4. [OM Mogoathle](#) u14254922
5. [TR Sithole](#) u15360441

Submitted to : Stacey Baror
Avinash Singh
Eunice Hammond

May - November 2020

Contents

1	Introduction	4
1.1	Purpose	4
1.2	Project Scope	4
1.2.1	Project Name	4
1.2.2	Objectives, Goals and Benefits	4
1.3	Definitions, Abbreviations and Acronyms	4
2	User Characteristics	5
2.1	Education Level	5
2.2	Experience	5
2.3	Technical Skills	5
3	Functional Requirements	6
3.1	Use Case Description and Priority	6
3.2	Requirements	6
3.3	Subsystems	7
3.3.1	Data Processor	7
3.3.2	Road Network	7
3.3.3	Moving Objects	7
3.3.4	Traffic Controller	7
3.3.5	GUI Simulator	7
3.4	Use Case Diagram	8
4	Traceability Matrix	9
4.0.1	Functional Requirements	9
4.0.2	Use Cases	9
5	Domain Model	10
5.1	User Class	10
5.2	Web App Class	10
5.3	Time Series Database Class	11
5.4	Artificial Intelligence Class	11
5.5	Simulation Software Class	11
6	Quality Requirements	12
6.1	High Priority	12
6.1.1	Auditability/Monitorability	12
6.1.2	Cost	12

6.1.3	Flexibility	12
6.1.4	Reliability	12
6.1.5	Scalability	12
6.2	Low Priority	12
6.2.1	Performance	12
6.2.2	Security	13
6.2.3	Usability	13
References		14

1 Introduction

1.1 Purpose

The purpose of this system is to receive time series data of an arbitrary road intersection, and use artificial intelligence to generate (and simulate) an optimal schedule for the traffic lights. This result will be able to be viewed on the system's accompanying web application. The web application would also be used to upload time series data to the system's database, and adjust the AI's parameters.

1.2 Project Scope

1.2.1 Project Name

This system is referred to as "Traffic Light Optimization". The name was decided on by our clients - Imagine Interactive Systems (Iminsys).

1.2.2 Objectives, Goals and Benefits

Our goal with this project is to create a working web app that allows a user to upload real-world or artificial traffic light schedules (time series data), and have an AI generate an optimal schedule based on that data. They would also be able to watch a simulation of the generated data.

This system would be highly beneficial for real-life road intersections. The data could be used to mitigate traffic during rush hours, such as when people are going to/coming home from work or school. The optimal schedules would ensure that as many vehicles as possible are allowed to safely pass through an intersection at a time.

1.3 Definitions, Abbreviations and Acronyms

- InfluxDB: An online database managed by InfluxData, which was specifically built to handle time series data.[2]
- TraCI SUMO: TraCI stands for "**T**raffic **C**ontrol **I**nterface" and SUMO stands for "**S**imulation of **U**rban **M**Obility". SUMO is open source software that allows for simulation of traffic, created by Eclipse Foundation. TraCI is its online interface for adjusting simulations and retrieving data.[1]

2 User Characteristics

This system would, ideally, only have one user, which would be the person or company operating the simulations. This system is not intended for general or public use, and would primarily be used to generate ideal intersection schedules, which could then be given to, for example, the South African Department of Transport to implement in actual intersections.

2.1 Education Level

The user does not need to be an expert in how intersections work, but they must be able to collect time series data that can be used.

2.2 Experience

Experience with formatting time series data in a way that can be understood by the system is necessary. Being able to adjust the AI's parameters is also important, but not crucial.

2.3 Technical Skills

The user of this system must be able to:

1. Navigate a web page to upload time series data.
2. Adjust the AI's simulation parameters via the web page.
3. View a graphical representation of the simulation's outcome.
4. Download the results via the web page in a time series format.

3 Functional Requirements

3.1 Use Case Description and Priority

The following use cases are ranked from most important to least important. Their relationships with the requirements are detailed in the use case diagram and traceability matrix below.

1. Upload/Store Time Series Data: The user will be able to upload and store time series data in the system's database, via the web app. The data will be stored in an InfluxDB database.
2. Enable Artificial Intelligence: Once time series data has been uploaded, the user can turn on the AI so that it can produce a result.
3. Retrieve Time Series Data: The user will be able to retrieve the optimal time series data generated by the AI, for use in real traffic lights.
4. Upload Configuration Files: The user will be able to upload text files that will configure the AI and the TraCI SUMO simulation.
5. View Simulated Result: Using TraCI SUMO, the result generated by the AI will be displayed in a visual simulation.

3.2 Requirements

The following requirements are ranked from most important to least important.

1. The user must be able to access, view and interact with the system via a website interface (web app).
2. The system must be able to take time series data and analyse it with artificial intelligence for optimal traffic light schedules.
3. The system must be able to store and retrieve time series data from a database.
4. The AI's parameters must be able to be altered via a configuration file provided by the user.
5. A simulation should be generated and displayed from the results given by the AI.

3.3 Subsystems

3.3.1 Data Processor

- Provides CRUD (Create, Read, Update, Delete) function to the database through API call. Data:
 - Time Series Data from traffic network
 - Configuration files and simulation results
- The time series data should be stored in InfluxDB
- Performs analysis on time series data
- Provides statistics of simulation results

3.3.2 Road Network

- Maps out the road network architecture using data structures and algorithm
 - Edges: Streets
 - Nodes: Intersections/Junction
- The network can be created by input file (configuration file)

3.3.3 Moving Objects

- Models the behaviour of moving objects within a traffic network
 - Vehicle [Truck, Bus, Taxi, Car]
 - Train
 - Bicycle
 - Pedestrian
- The objects can be initiated by input file (configuration file)

3.3.4 Traffic Controller

- Controls the traffic flow by manipulating the traffic lights
- Uses K53 road rules to simulate the flow allowing the right of way amongst the different objects.
- Uses threads to simulate the traffic light behaviour

3.3.5 GUI Simulator

- Maps the traffic flow simulation onto a GUI for real time rendering
- Implemented using TraCI SUMO

3.4 Use Case Diagram

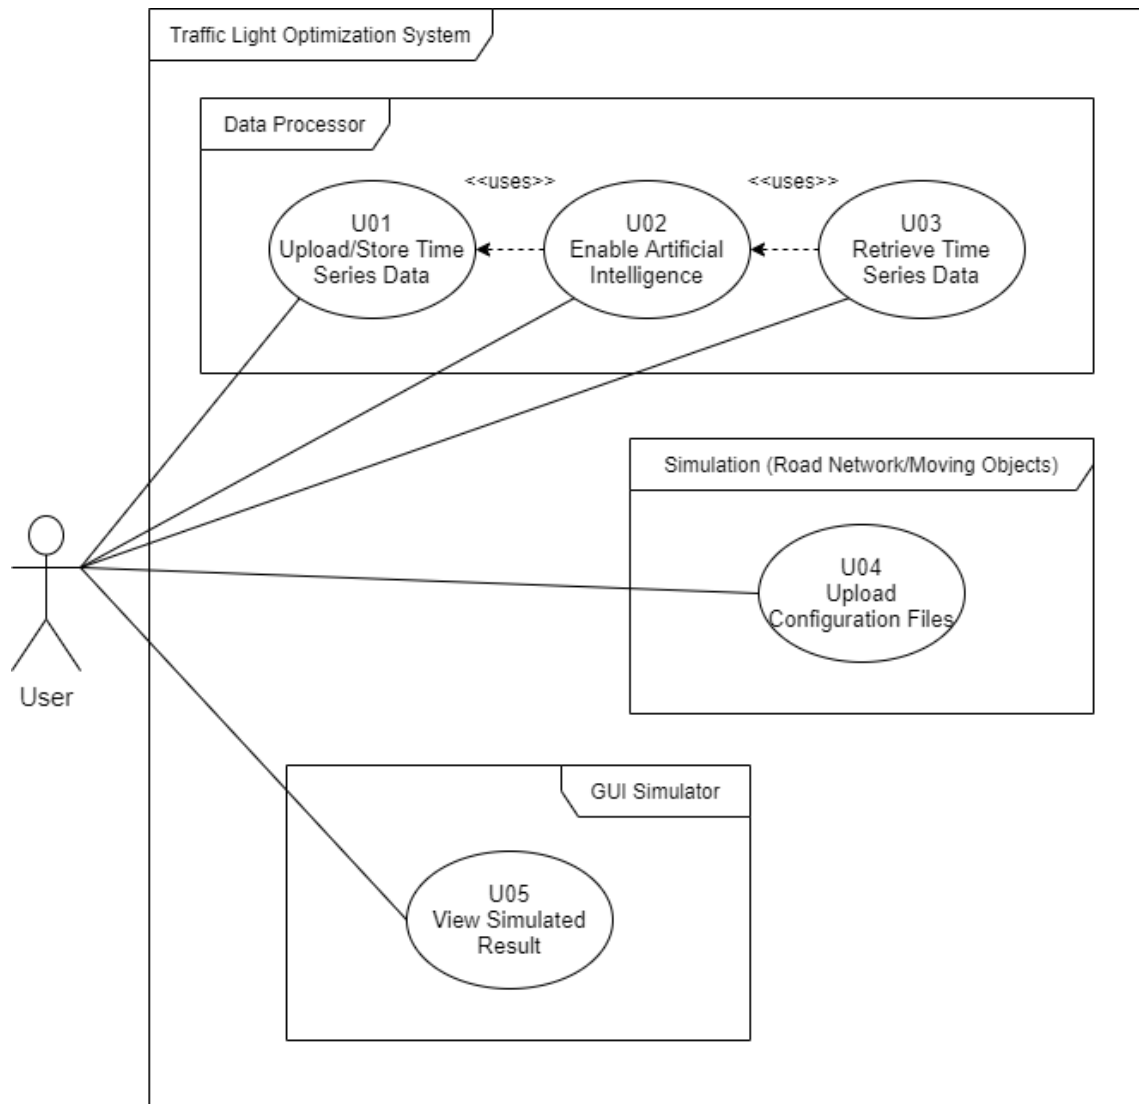


Figure 3.1: Use case diagram

4 Traceability Matrix

	Priority	U01	U02	U03	U04	U05
R01	1	x	x	x	x	x
R02	2		x	x		
R03	3	x		x	x	
R04	4				x	
R05	5					x
Priority		1	2	3	4	5

Table 4.1: Traceability matrix

4.0.1 Functional Requirements

- R01: User access and interaction with the web app.
- R02: Analysis and optimization of time series data by the system.
- R03: Storage and retrieval of time series data in database.
- R04: Upload and usage of configuration files.
- R05: Visual simulation generation based on results provided by AI.

4.0.2 Use Cases

- U01: Upload/Store Time Series Data
- U02: Enable Artificial Intelligence
- U03: Retrieve Time Series Data
- U04: Upload Configuration Files
- U05: View Simulated Result

5 Domain Model

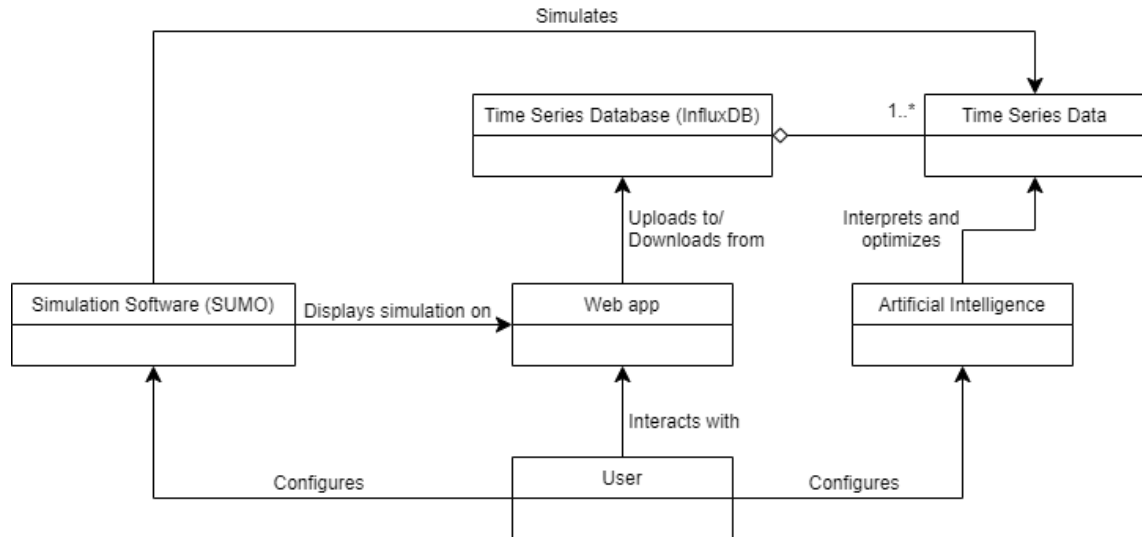


Figure 5.1: Domain model

The above domain model consists of five main classes which interact with each other as follows:

5.1 User Class

The user does most of their interacting through the web app. Via the web app, they can upload and download time series data from the database, as well as configure both the artificial intelligence and the simulation software.

5.2 Web App Class

The web application is the core of the system. Here, time series and configuration data is received from the user, which it then sends to the time series database, simulation software and artificial intelligence classes. The final result of the simulation is also displayed here.

5.3 Time Series Database Class

The database (InfluxDB) stores time series data given by the user. It then sends this data to the artificial intelligence for optimization, and stores the result the AI class returns. This data is then sent to the simulation software class so it can be simulated and displayed on the web app.

5.4 Artificial Intelligence Class

The artificial intelligence class takes in time series data from the database, and uses it to create an optimal traffic light schedule, which it then sends back for simulation. The AI class also receives configuration files sent from the user, to adjust its parameters, such as how many iterations it goes through to find a result.

5.5 Simulation Software Class

The simulation software (TraCI SUMO) takes in optimized time series data from the database (after the AI has gone through it) and displays it in a visual simulation on the web app. The simulation class also receives configuration files sent from the user, to adjust its parameters.

6 Quality Requirements

The quality requirements for this system can be divided into two categories, high priority and low priority. Note that even though more focus is given on high priority requirements, the low priority ones should still be taken into account and not ignored.

6.1 High Priority

6.1.1 Auditability/Monitorability

The user will have some idea of the inner workings of the system, as they will be able to configure the various parts with configuration files.

6.1.2 Cost

It is emphasized in the specification from the clients that we should use open source and free software for the system.

6.1.3 Flexibility

The user should be able to fine-tune the parameters of the artificial intelligence and the simulation, if they choose to, and see the change in results.

6.1.4 Reliability

As this system could potentially be used to schedule real-life traffic lights, it is important that the result the artificial intelligence produces is always efficient and safe.

6.1.5 Scalability

One of the optional requirements given by the clients is that the system could potentially be expanded to manage a whole network of intersections, instead of just one.

6.2 Low Priority

6.2.1 Performance

It is not very important that a result is produced instantaneously. It is only important that a correct result is produced in a reasonable time. However, if we can get the system to work faster while still being correct, that would be preferable.

6.2.2 Security

No sensitive personal information is stored in this system. It only stores time series data.

6.2.3 Usability

This system is not for everyone to use, and it requires basic knowledge of time series data, artificial intelligence and simulation to use properly.

References

- [1] Eclipse Foundation. *TraCI SUMO*. URL: <https://sumo.dlr.de/docs/index.html>. (accessed: 06.06.2020).
- [2] InfluxData. *InfluxDB*. URL: <https://www.influxdata.com/>. (accessed: 06.06.2020).