

Business Exchange Services (BES)

Boomi MFT Services

New Interface Between DXC MFT and Boomi

Boomi's iPaaS can be combined now with DXC's MFTaaS (Managed File Transfer as a Service) to communicate with all trading partners via only one single connection - Boomi MFT connection.

Boomi MFT connection eliminates complexities and costs associated with establishing, maintaining and managing multiple connections using different connectors and file transfer protocols.

Benefits of Boomi MFT connection:

High Availability – Two MFTaaS geographically dispersed regions configured as failover regions for each other.

Fault Tolerance – Each MFTaaS region equipped with a Fault Tolerance configuration to withstand hardware or connectivity failures.

Data security – All communication with Boomi and trading partners utilize the latest state-of-the-art high data transfer security standards (TLSv1.3, TLSv1.2, SSH) with optional additional encryption of payloads using PGP.


Backups – All data transfers over Boomi MFT connection are encrypted, stored and can be instantaneously requested for failed processes.

File Tracking – All data transfers in MFTaaS are tracked and can be easily verified or analyzed using MFT File Tracking Web application.


Service Pricing – DXC's MFTaaS cost is usage based, no additional costs for software, hardware or support.

Managed Service - 24x7x365 monitoring, problem escalation and help desk support

New Interface Between DXC MFT and Boomi

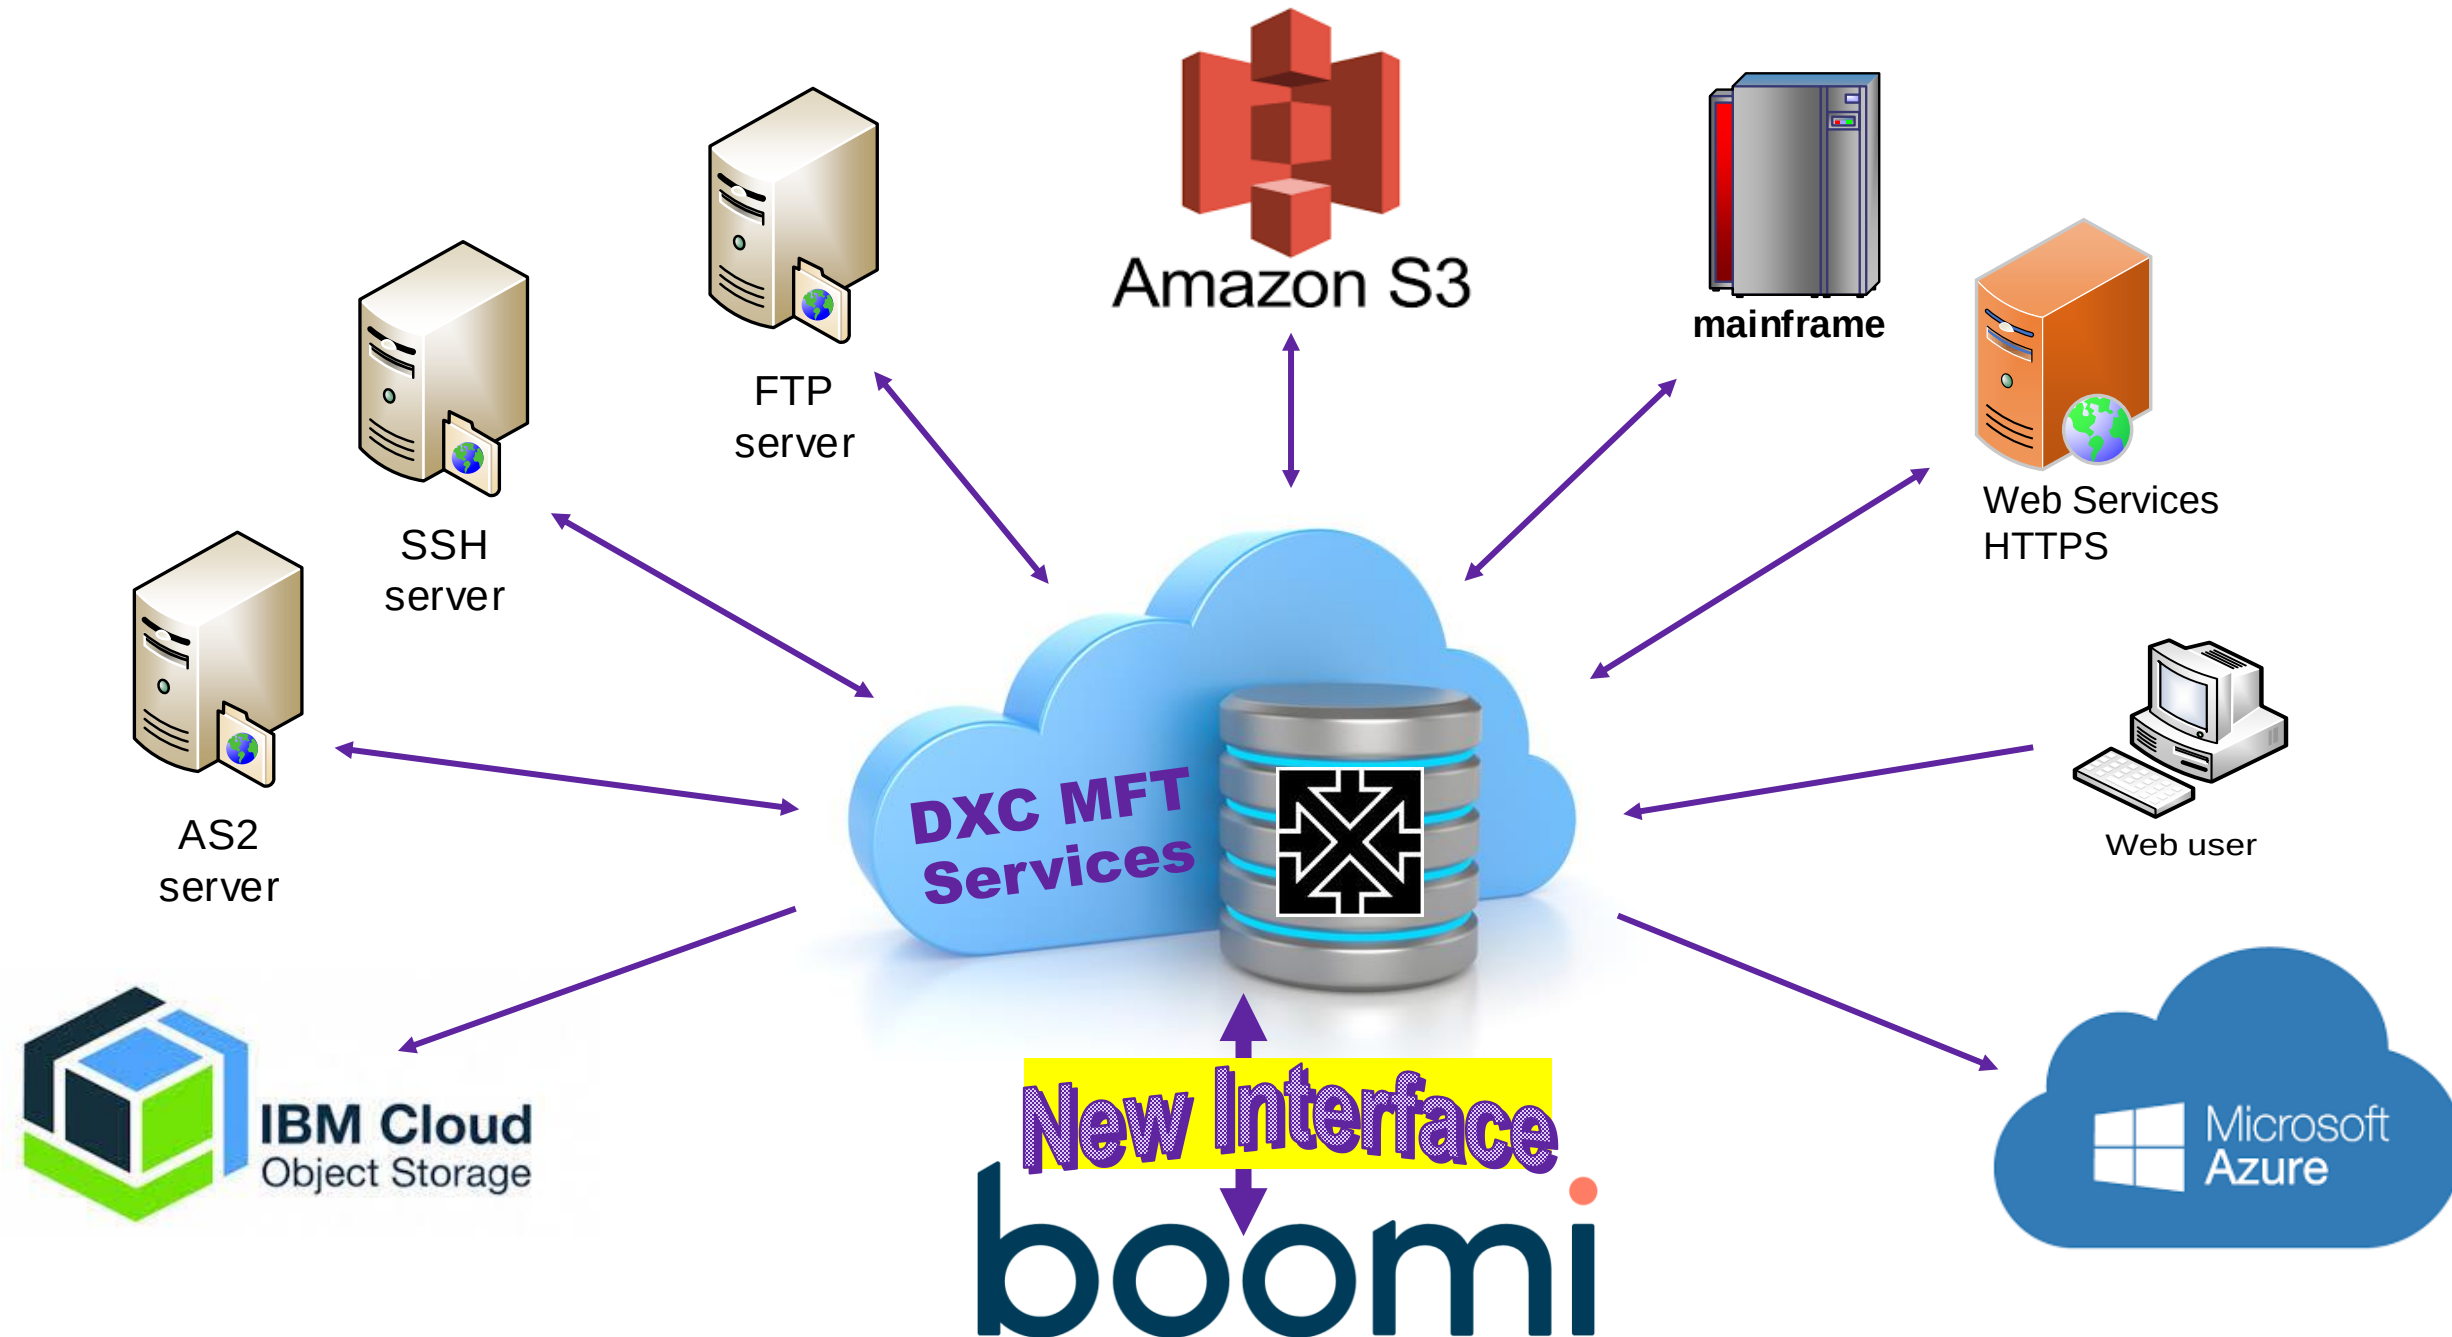

Boomi MFT2Boomi2MFT process

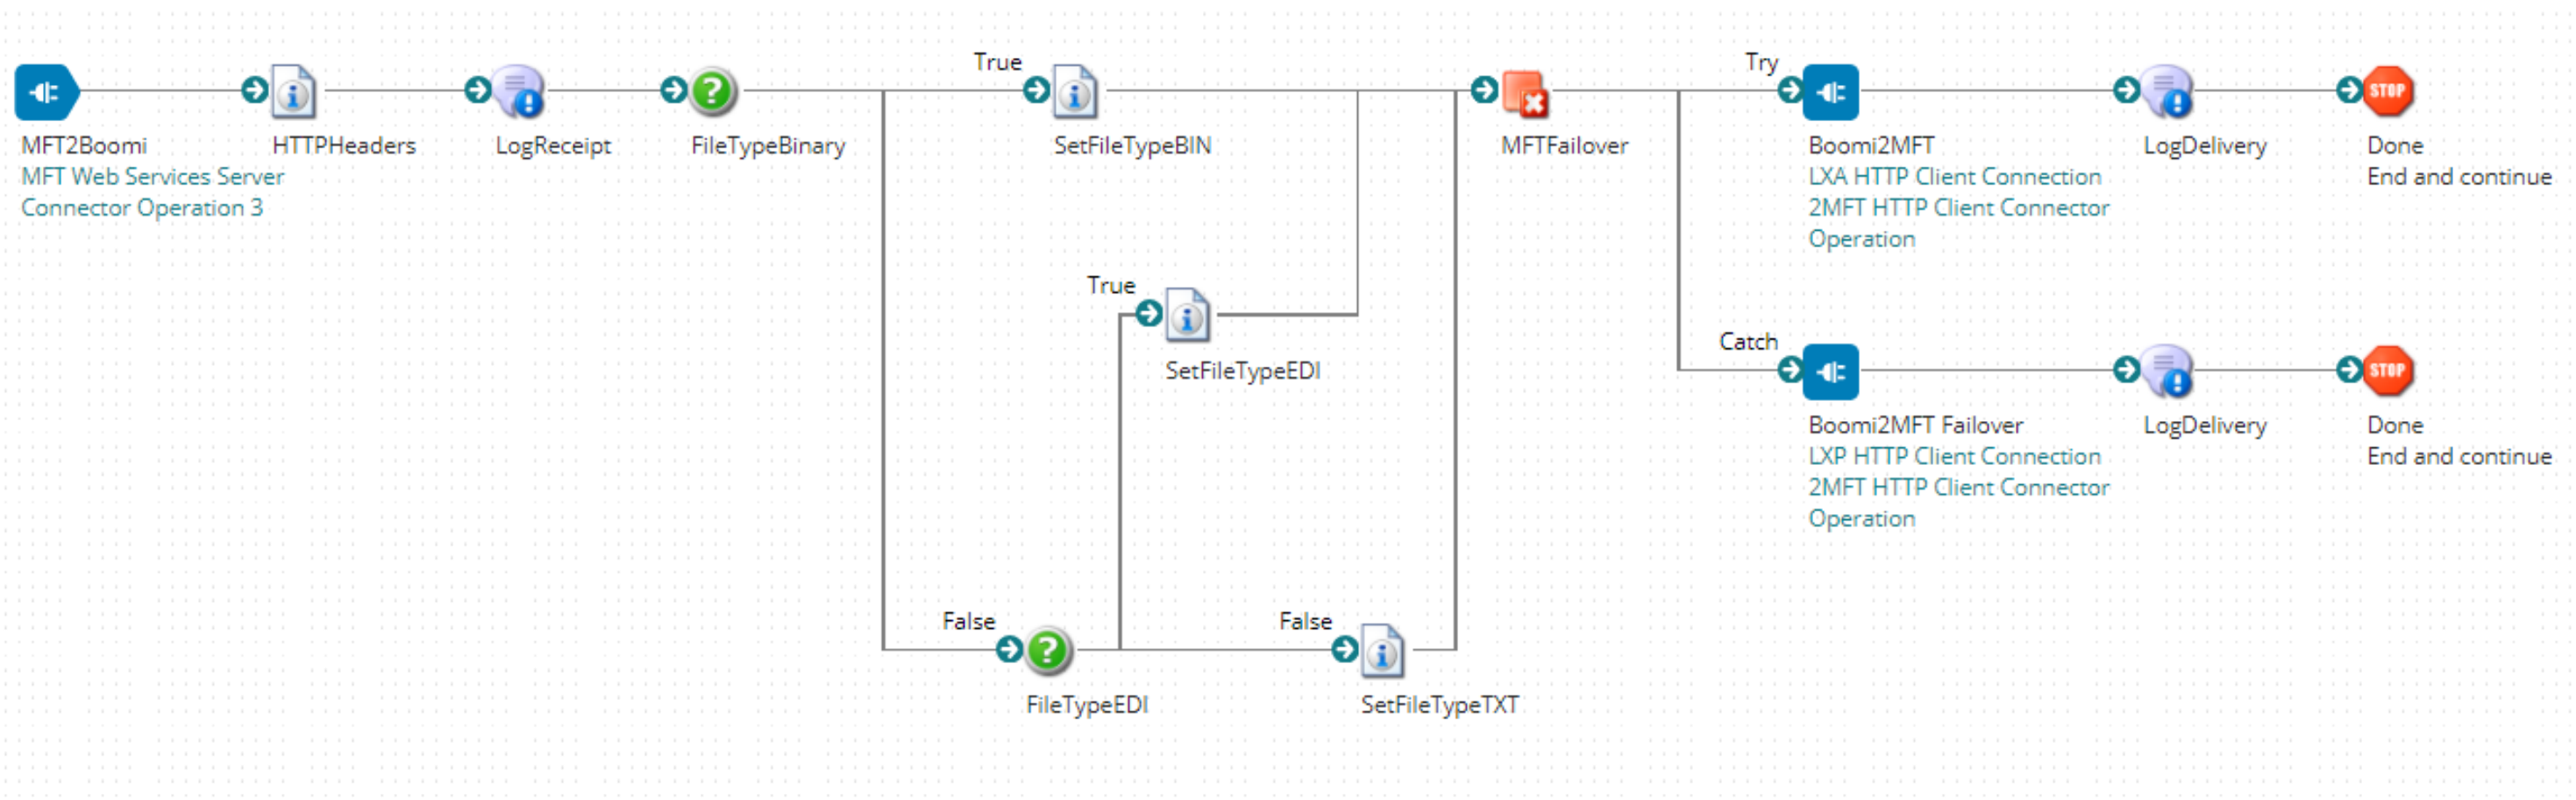

MFT2Boomi side

MFT2Boomi Web Service Server Connector

Start Shape

The Start shape is the main shape that begins the process flow. It is automatically added to each new process and it cannot be removed.

Process Mode General

Type ☒ Connector ☐ Trading Partner ☐ Data Passthrough ☐ No Data

General Parameters

Display Name	MFT2Boomi
Connector 	Web Services Server
Action	Listen
Connection	The Atom Web Server will manage connection settings.
Operation 	MFT Web Services Server Connector Operation 3  

MFT Web Services Server Connector Opera... - Web Services Server Operation

Options Archiving Tracking

Connector Action	Listen
Simple URL Path 	/ws/simple/upsertPutObject
SOAP URL Path 	/ws/soap- Unavailable
Operation Type 	UPSERT
Object 	PutObject
Expected Input Type 	Single Data
Response Output Type 	None
Attachment Cache 	Choose... 

MFT2Boomi metadata

Set Properties Shape

The Set Properties shape allows you to set values for various document and process properties. These properties can be used to set outbound connector attributes such as file name or email subject, or store certain values in memory to facilitate the integration. The property values can be comprised of static and/or dynamic values.

Display Name

Properties to Set



- Dynamic Document Property - MFTRID
- Dynamic Document Property - MFTSID
- Dynamic Document Property - MFTApplicationID
- Dynamic Document Property - MFTFileControlNumber
- Dynamic Document Property - MFTFileType

Parameters



Document Property - Dynamic Document Property - inheader_X-WSS-RID

HTTP request method PUT is used to transmit files.

MFT to Boomi transmissions use the following HTTP headers for metadata:

MFTRID	HTTP header: X-WSS-RID
MFTSID	HTTP header: X-WSS-SID
MFTApplicationID	HTTP header: X-WSS-FNM
MFTFileControlNumber	HTTP header: X-WSS-FCN
MFTFileType	HTTP header: Content-Type

MFT Boomi switcher configuration

[Location Table Administration](#) ---> Base Record

Found Midrange Owner Record for LXA

Location Code:	BOOMIHUB01	Company Name:	BOOMI SWITCHER POC
Location Owner:		Contact Name:	PAUL SZAFRANSKI
Switcher Location Code:	LXP	Contact Phone:	248-310-7159
Record Status:	☒ Active ☐ Deleted		
Location Code Type:	☐ N/A ☐ Alternate Home ☐ IPC ☒ Switcher ☐ VAN		
Connection Type:	☐ N/A ☐ Mailbox ☒ Push		

Protocol:	TCP/IP
Protocol Server URL:	inethost:28443/SSL
Remote Server URL:	HTTPS://server.polonum.com:9090/ws/simple/upsertPutObject
Remote Server Login ID:	mftuser@dxctpp-QXJDWX
Server Parms:	,put,h=X-WSS-SID=\$sid,h=X-WSS-RID=\$rid,h=X-WSS-FNM=\$fnm,h=X-WSS-FCN=\$fcn
Network Access:	INTERNET
Outbound Delimiter:	CR/LF
Remote OS Platform:	PC
Inbound PW Expire:	999
Outbound PW Expire:	999
Inbound Protocol:	FTPS
Required Inbound Server:	
Outbound Encoding:	
Dual Site Support:	Blank - Customer not contacted

Boomi2MFT side

Boomi2MFT HTTP Client Connector

Connector Shape

Connector shapes are used to get data into and send data out of a process. Most processes have one "get" connector and one or more "send" connectors. The Connector shape uses a combination of predefined connection and operation components to establish where and how to get or send data.

General

Parameters

Display Name	Boomi2MFT
Connector 	HTTP Client
Action	Send
Connection 	LXA HTTP Client Connection
Operation 	2MFT HTTP Client Connector Operation

LXA HTTP Client Connection - HTTP Client [Folder](#) [Add Description](#)

Settings

SSL Options

Advanced

URL	https://mft.svcs.entsvcs.com:6443
Authentication Type	Basic
User Name	BOOMIHUB01
Password	<Encrypted>

2MFT HTTP Client Connector Operation - HTTP Client Operation [Folder](#) [Add Description](#)

Options

Archiving

Tracking

Caching

Connector Action	Send
Select Request Profile Type:	NONE
Select Response Profile Type:	NONE
Content Type	application/binary
HTTP Method	PUT
Return HTTP Errors	☐
Follow Redirects	☐
Return HTTP Responses	☐

Boomi2MFT metadata

2MFT HTTP Client Connector Operation - HTTP Client Operation ⓘ Folder Add Description

Options Archiving Tracking Caching

Connector Action

Select Request Profile Type:

Select Response Profile Type:

Content Type

HTTP Method

Return HTTP Errors ☐

Follow Redirects ☐

Return HTTP Responses ☐

Request Headers

Name	Value
MFTReceiverID	MFTReceiverID
MFTApplicationID	
MFTReferenceID	
MFTFileType	
MFTSenderID	

Resource Path

PutObject

Response Headers Mapping

MFTAcknowledgmentID

Boomi to MFT uses

<https://mft.svcs.entsvcs.com:6443/PutObject>

for primary MFT service and

<https://mft2.svcs.entsvcs.com:6443/PutObject>

for failover.

Boomi to MFT transmissions use the following HTTP headers for metadata:

MFTSenderID
MFTReceiverID
MFTApplicationID
MFTReferenceID
MFTFileType

The following HTTP response header can be used to track MFT acknowledgment ID:

MFTAcknowledgmentID

Questions and answers

bes-sales-support@dxc.com

