

Product Accessories List

●Voice presenter	1PCS
●Type-C charging cable	1PCS
●User manual	1PCS
●Warranty card	1PCS

Product Specifications

Name: Baseus Orange Dot AI Wireless Presenter (Red Laser) (Charging)

Model No.: BS-OH085

Material: Aluminum alloy+(PC+ABS)

Operation frequency: 2400-2490Mhz

Red laser range: 100m

Laser type:Class 2

Laser Power:<1mW

Laser wavelength: 650nm

Mic pickup radius: 1m


Physical laser color: Red

Battery rated capacity: 300mAh/3.7V

Type-C input: 5V=0.3A

Operating system: Windows, Apple OS

Function Descriptions

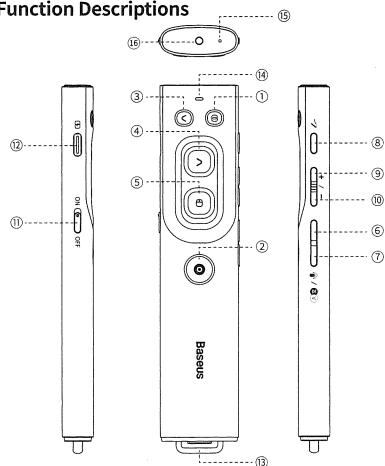

No.	Name	Function
①	OK Button	When using software like Office or WPS, move the cursor to the hyperlink or the video with the mouse control button; And then double-click the OK button to open the hyperlink or the video.
②	Physical Laser Button	Long-press to use.
③	Page Up	Press to go to the last page; long-press to enter/exit full-screen mode.
④	Page Down	Press to go to the next page; long-press to enter/exit black-screen code.
⑤	Mouse Control Button	Long-press to activate mouse control/digital laser/spotlight/magnifying glass functions (double-press to switch), mouse control function by default. Note: Need to install the software and link the presenter to it.
⑥	Record Button	Mode 1: Press and hold to record continuously, release to stop recording. Mode 2: Press to start recording, and press again to stop recording. When the PowerPoint presentation is over, it will create a QR code automatically, including recording and speech-to-text.
⑦	Translation Button	Mode 1: Press and hold to translate continuously, release to stop translating. Mode 2: Press to start translating, and press again to stop translating. Note: Need to install a software and link the presenter to it, and it supports only Chinese-English translation.
⑧	Highlight Button	Long-press to highlight, press to erase highlight. Note: Need to install the software and link the presenter to it.
⑨	Volume +	Press/Long-press to increase volume.
⑩	Volume -	Press/Long-press to lower volume.
⑪	Toggle Switch	Toggle the switch up to turn on and down to turn off.
⑫	Type-C Charging Port	Fully charges in about 1.5 hours, recommending to use the original charging cable.
⑬	USB-A& Type-C Receiver	Connect to a laptop, plug and play, pair the presenter with your laptop to use.
⑭	Charging Indicator& Operation Indicator	During charging: Indicator lights up red. Fully charged: Red indicator goes out. Low battery: Indicator flashes red. When pressing buttons: Orange.
⑮	Sound Pickup Port	To receive speech content for recording or translation.
⑯	Laser window	Avoid direct eye exposure

Other Shortcut Button	Page Up+ Page Down	For Windows systems, press the Page Up and Page Down button at the same time, and the software download interface will pop up; For Mac OS systems, press the Page Up and Page Down button at the same time to open the APPStore and search for "Baseus Office" to download; You can also go to www.aioffice.ltd to download the software.
-----------------------	--------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

User Instructions

Plug in the receiver to use.

Plug the receiver at the bottom of the presenter into a laptop, turn on the presenter to use.

Need to download the bundled software when using the presenter for the very first time.

You need to turn on the bundled software on your computer to use functions like voice recording, voice translation, digital laser, spotlight, magnifying glass, highlighting, etc.

Download Method 1: For Windows systems, plug in the receiver, and long-press the Page Up and Page Down buttons at the same time for 5s to enter the download page.

Download Method 2: For Mac OS systems, open the APP Store and search for "Baseus Office" to download.

Download Method 3: Go to www.aioffice.ltd to download the software.

Voice Function Instructions

Speech-to-text Transfer

- Press or long-press the Record button, speak to the pickup port, and what you say will get recorded as text.
- The recorded speech will automatically be transcribed into text, both speech and text copy will be saved.
- You can scan a QR code in the app to check the speech recording and the subtitle text copy.

Real-time Chinese-English Subtitle Display

- You need to turn on the subtitle function in the software;
- Press or long-press the Translation button, speak to the pickup port, what you say will be transcribed as text both in Chinese and English and then displayed on the screen.
- Press or release the Translation button to stop displaying the subtitle.

Cautions

- DO NOT place it in high temperature environment!
- Do not deliberately (intentionally) irradiate the laser beam.
- The laser pointer can only be activated by turn on the power key and press the laser button on the control panel.
- Battery containing product, do not short circuit.
- Do not overcharge the battery (if applicable).
- Use charging equipment that is only compatible with the device (if applicable).
- Stop using your device if the battery shows signs of damage, such as an unusual odor, excessive heat, popping sounds, swelling, or change in color.
- Have all repairs performed by a qualified professional.

Troubleshooting

Unable to use the functions as described

- Please check if the bundled software has been installed;
- Please check if the bundled software is turned on and in running;
- Please check if the computer is connected to a network.

If the presenter hasn't been operated for a long time

The presenter will go to sleep if you haven't use it for more than 5 minutes, and you don't have to turn it on again if you want to use it again, just use it directly.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Shenzhen Baseus Technology Co., Ltd. declares that the product is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://eu.baseus.com/pages/euro-compliance>

This symbol indicates that this product shall not be treated as household waste. Instead, it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. Follow local rules and never dispose of the product with normal household waste.



警告 请遵守安全说明否则会导致
起火、触电、损坏或其他伤害

Warning Please follow the above safety instructions otherwise it will cause fire, electric shock, damage or other injuries.

Gancio	Manuale
PP 5	PAP 22
Raccolta plastica	Raccolta carta

Adesivo di chiusura	Manuale
PET 1	PAP 22
Raccolta plastica	Raccolta carta

Film protettivo del prodotto	Manuale
PP 5	PAP 22
Raccolta plastica	Raccolta carta

Contact Us

care@baseus.com
<https://www.baseus.com>
+1 800 220 8056 (US)

EN

Customer Service
1. 24-Month Warranty
2. Lifetime Tech Support

AR

خدمة العملاء
1. ضمان لمدة 24 شهرا
2. دعم فني مدى الحياة

制造商：深圳市倍思科技有限公司
地址：深圳市龙岗区坂田街道岗头社区雪岗路2008号倍思智能园B栋2层
执行标准：GB 4943.1
热线：4000-712-711 网址：<https://www.baseus.cn>
官方售后服务邮箱地址：service@baseus.com
Manufacturer: Shenzhen Baseus Technology Co., Ltd.
Add: 2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen
Executive Standard: GB 4943.1
Hotline: +1 800 220 8056 Website: <https://www.baseus.com>
Official After-sales E-mail Address: care@baseus.com

倍思设计 Designed by Baseus
中国制造/Made in China
PB37632-P1A2
1100019601

