

SHELFLYNE**Shelflyne Installation Guide****Light Profile Installation****1**


Route a 10mm (W) x 10mm (D) channel across each shelf
Placement **MUST** be identical for each shelf

2

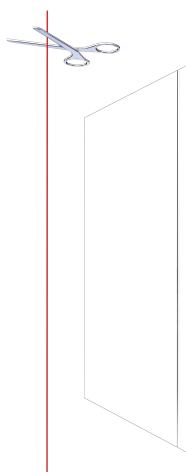
You can choose which side to power the Light Profile. Powered Rail must match and be on same side

3

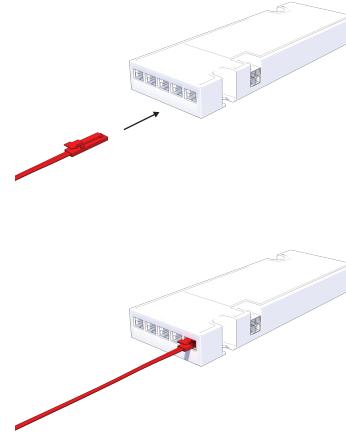
Push Light Profile into channel

Powered Rail Installation**1**


Route a 14mm (W) x 3mm (D) channel across selected sideboard
Placement **MUST** be aligned to terminals of Light Profile

2

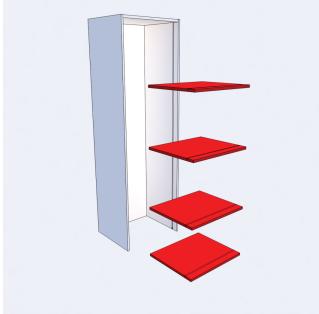
Cut power rail to size and push into the channel

3

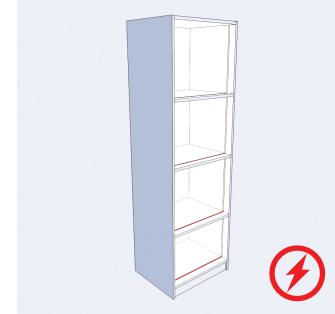
Push green connector into Hafele power supply

4

Push other end onto Powered Rail (best hidden in kicker)

5

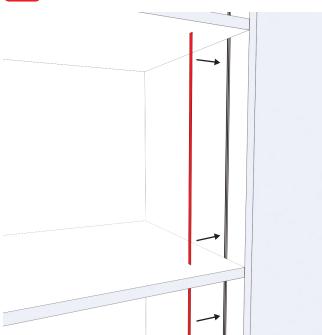
Install shelves with profiles

6

Test connection

7

Install kicker cover to hide driver and connection point

8

Cut Fast Edge to size to cover exposed power rail segments

Mouting Options

- Shelflyne's FLIP technology eliminates polarity issues, allowing the Light Profile to be mounted in many ways. These include:



Uplighting



Downlighting



Sidelighting