



2026 Software Requirements Specifications Uni Textbook Marketplace

For **Demo 2**
Presented by:



NEXUSDEV

Software Requirements Specifications (SRS)

Project: Uni Textbook Marketplace
Team: NexusDev
Client: Agile Bridge
University: University of Pretoria - COS 301 Software Engineering
2026
Document version: 3.0 - Demo 2
Last updated: 30 July 2026

The Team

Team Member	Student number
1. Tiego Mokwena*	22496336
2. Gift Mohuba	23545527
3. Neo Bosoga	23591732
4. Josh Kretschmer	22883925

Contents

1	Introduction	4
1.1	Business Need	4
1.2	Platform Overview	4
1.3	Scope	5
1.4	Constraints	6
1.5	Definitions and Abbreviations	7
2	User Stories / User Characteristics	9
2.1	Actors	9
2.2	User Stories - Verified Student (Buyer)	9
2.3	User Stories - Verified Student (Seller)	10
2.4	User Stories - Admin	10
3	Use Cases + Use Case Diagrams	12
3.1	Actor Hierarchy	12
3.2	Use Case Overview	12
3.3	UC0 - Authentication (Base Feature)	13
3.4	UC1 - Create a Textbook Listing	15
3.5	UC2 - View Listing Details	17
3.6	UC3 - Review Listings (Admin)	19
3.7	UC4 - In-App Messaging	20
3.8	UC5 - Edit a Listing	22
3.9	UC6 - Smart Filters and Saved Searches	24
3.10	UC7 - Wishlist	26
3.11	UC8 - Audit Log Query	27
4	Functional Requirements	29
4.1	AuthService (UC0)	29
4.2	ListingService (UC1)	30
4.3	ModulesService (UC2)	31
4.4	ModerationService (UC3)	31
4.5	MessagingService (UC4)	32
4.6	ListingService Extension (UC5)	32
4.7	SmartFilterService and SavedSearchService (UC6)	32
4.8	WishlistService (UC7)	33
4.9	AuditLogService Extension (UC8)	33
5	Non-Functional Requirements	34

6	Domain Model	35
6.1	UML Diagram (Currently, as of Demo 2)	35
6.2	Entity Descriptions	35
7	Appendix	38
7.1	Previous Versions	38

1. Introduction

1.1 Business Need

University students in South Africa struggle to get affordable textbooks every semester. Right now the way people actually buy and sell used textbooks is pretty scattered, most students end up relying on WhatsApp groups, Facebook Marketplace, or just word of mouth. None of these were ever built for trading academic textbooks specifically, so they run into three main problems.

First, it's hard to actually find what you need. Listings don't include structured details like edition, condition, or module code. So if a student is looking for the fifth edition of a specific textbook for a specific module, there's no real way to filter for that. They have to scroll through a lot of irrelevant posts and message multiple sellers, only to find out the edition is wrong after all that.

Second, there's basically no trust built in. There's no way to check that a seller is actually a real university student. Privacy is also an issue, buyers and sellers end up swapping personal contact details with total strangers before they've even agreed on anything, which isn't great for either side.

Third, none of these platforms are built around how university actually works. Nothing understands the academic calendar, module codes, or faculty structure. Students can't browse by module, filter by semester, or find listings that are actually relevant to the course they're taking.

The Uni Textbook Marketplace is our attempt at solving all three of these problems directly, by building something purpose-made, verified, and module-aware for university students.

1.2 Platform Overview

The Uni Textbook Marketplace is a responsive web platform that lets verified university students buy, sell, and swap second-hand textbooks in a way that's safer and more structured than what's currently out there, and actually organised around modules. Students register with their university email, which gets verified with a one-time password (OTP). Once they're verified, students can create structured textbook listings with details like ISBN, edition, condition, annotation level, module code, price, and any extra notes. Buyers can then browse listings filtered by faculty, module code, semester, edition, price range, and condition. There's also an admin moderation layer to keep listing quality reasonable, every listing starts out pending and has to be reviewed by an admin before other students can see it. The platform is being built for Agile Bridge and hosted on Microsoft Azure.

1.3 Scope

Delivered for Demo 1 (22 May 2026)

- Student registration with university email domain verification (OTP)
- Student login with JWT-based authentication
- Role-based access control (Student vs Admin)
- Structured textbook listing creation (UC1): ISBN, title, author, edition, condition, annotation level, module code, price, has notes
- Listing detail view for students (UC2): view own listings (approved + pending) and browse others' approved listings
- Admin listing review dashboard (UC3): approve or reject pending listings with soft delete and audit trail
- Module code search-as-you-type lookup, filterable by university
- Basic themes and form validation
- Responsive web interface (mobile + desktop)
- GitHub Actions CI/CD pipeline
- PostgreSQL database with full schema and seed data

Delivered for Demo 2 (31 July 2026)

- Privacy-first in-app messaging (UC4, Firebase Firestore microservice)
- Edit an existing listing while its status is PENDING or REJECTED (UC5)
- Smart search filters (UC6): price range, edition, condition, annotation level, module, faculty
- Saved searches (UC6 extension): a student can save a filter combination and revisit it later
- Wishlist (UC7): a student can save individual listings for later
- Admin audit log (UC8): a queryable, immutable record of every moderation action
- Staging environment with its own database, alongside production, with both auto-deployed from separate branches

Pushed to Demo 3

- **Notification system:** a cross-cutting event bus, notifications table, and bell-icon UI. This was originally meant for Demo 2 but got moved to Demo 3 after we re-scoped the sprint.
- **Wanted board per module**
- **Pickup preferences** (on-campus spots, residences with location sharing)
- **Admin ban and report management tools**
- Meetup ratings (successful, no-show, cancelled)
- Swap mode (book-for-book or swap plus cash)
- Trust signals (verified badge, account age, listing history)
- Bundle deals per module

Not in scope

- **Payment processing:** the platform only sets up meetup-based exchanges. No payment gateway will be built in any sprint.
- **Mobile application:** a React Native (Expo) app is more of a stretch goal, something we'd only look at once all the core web stuff is actually done.
- **ISBN metadata API lookup:** entries are manual only for now. Hooking up an external ISBN API is not happening yet.
- **Online textbook renting system:** something we flagged as a possible future feature, but it has legal implications we haven't looked into, so it's just stubbed out for now.
- **Multiple university support beyond the current three:** the allowlist covers @tuks.co.za, @uct.ac.za, and @wits.ac.za, with @tuks.co.za being the one actually in active use. Adding more institutions is left for later.

1.4 Constraints

Constraint	Detail
Hosting	Provided by Agile Bridge on Microsoft Azure. We don't control the actual infrastructure provider ourselves.

Constraint	Detail
Authentication	OTP email verification is required. Students have to verify their university email before they can access seller and messaging features.
Email allowlist	Three domains are supported right now: <code>@tuks.co.za</code> (University of Pretoria, the one actually being used), <code>@uct.ac.za</code> (University of Cape Town), and <code>@wits.ac.za</code> (University of the Witwatersrand). This list can be changed in the backend environment without touching the code.
No payment processing	For now, the whole thing is built around meetup-based exchanges. No payment gateway, escrow, or anything financial is included anywhere.
ISBN metadata	We're not hooking up an external ISBN lookup API for Demo 1. Sellers just type the book details in themselves.
No mobile app in MVP	The platform is a responsive web app only for now. React Native is a stretch goal for later, not part of the MVP.
Firebase credentials	Firebase Firestore credentials are set up and working. The messaging microservice (UC4) is live on both production and staging.
Azure environment access	Both a production and staging environment are live on Azure Container Apps, and both deploy automatically from <code>main</code> and <code>develop</code> respectively. See the SAS document for the full deployment setup.

1.5 Definitions and Abbreviations

Term	Definition
OTP	One-Time Password. A 6-digit code sent to a student's university email to verify their identity during registration.
JWT	JSON Web Token. A signed, stateless token issued by the backend after successful login. It carries the user's ID and role claim.

Term	Definition
UC	Use Case. A numbered interaction between an actor and the system.
UC1	Create a textbook listing (Student).
UC2	View listing details (Student).
UC3	Review listings (Admin).
UC4	Send and receive in-app messages about a listing (Student).
UC5	Edit an existing listing while its status is PENDING or REJECTED (Student).
UC6	Filter listings with additional criteria, and save a filter as a saved search (Student).
UC7	Add or remove a listing from a personal wishlist (Student).
UC8	Query the audit log of moderation actions (Admin).
PENDING	The initial status of every new listing. It is not visible to other students until an admin approves it.
APPROVED	A listing that has been reviewed and approved by an admin. It is visible to all verified students.
REJECTED	A listing that has been rejected by an admin. It is soft-deleted and retained in the database with an audit log entry.
SOFT_DELETED	A listing that has been marked as deleted but is retained in the database. The deleted_at column is set.
FR	Functional Requirement.
SRS	Software Requirements Specification.
API	Application Programming Interface.
DTO	Data Transfer Object. A class used to define and validate the shape of request and response payloads.
RBAC	Role-Based Access Control. The system grants permissions based on a user's role (Student or Admin).
WCAG AA	Web Content Accessibility Guidelines Level AA. The accessibility standard the UI must meet.
UP	University of Pretoria.
CI/CD	Continuous Integration and Continuous Deployment. Automated pipelines triggered on every pull request.

2. User Stories / User Characteristics

2.1 Actors

There are three types of actors in the system:

Verified Student (Buyer)

A registered, OTP-verified student who mainly uses the platform to find and buy or swap textbooks. They have a university email from an allowlisted domain. They browse approved listings, filter by module code, faculty, edition, and condition, and reach out to sellers through the in-app messaging system.

Verified Student (Seller)

A registered, OTP-verified student who creates structured textbook listings. They fill in all the required listing details, ISBN, edition, condition, annotation level, module code, and price. They keep an eye on the status of their listings and get notified once an admin approves or rejects what they submitted.

Admin

A platform moderator who checks every pending listing before it becomes visible to students. The admin can approve or reject listings, and a rejection triggers a soft delete plus an audit log entry. The admin can also browse all approved listings the same way a student can.

2.2 User Stories - Verified Student (Buyer)

US-B01

As a verified student buyer, I want to browse all approved textbook listings so that I can find a textbook I need without contacting sellers who do not have what I am looking for.

US-B02

As a verified student buyer, I want to filter listings by module code, faculty, edition, and condition so that I can quickly narrow down the results to exactly what I need for my specific course.

US-B03

As a verified student buyer, I want to view the full details of a listing including ISBN, edition, condition, annotation level, price, and whether notes are included so that I can make an informed decision before contacting the seller.

US-B04

As a verified student buyer, I want to see that every seller is a verified university student so that I can trust that the person I am dealing with is a genuine member of the university

community.

US-B05

As a verified student buyer, I want the platform to only show me listings relevant to my university so that I am not exposed to textbooks from institutions using different editions or curricula.

2.3 User Stories - Verified Student (Seller)

US-S01

As a verified student seller, I want to create a structured textbook listing with fields for ISBN, title, author, edition, condition, annotation level, module code, price, and whether notes are included so that buyers can find exactly what they need without having to ask clarifying questions.

US-S02

As a verified student seller, I want to see my listings that are pending admin review, which are clearly marked with a “Pending Review” badge so that I know my listing has been submitted successfully and understand why it is not yet visible to other students.

US-S03

As a verified student seller, I want to indicate whether my listing includes supplementary study notes so that buyers who need additional study materials can identify and prioritise my listing.

US-S04

As a verified student seller, I want to view all my active approved listings in one place so that I can track what I currently have listed and manage my inventory.

2.4 User Stories - Admin

US-A01

As an admin, I want to see a dashboard of all listings currently in PENDING status so that I can review new submissions and ensure they meet platform standards before they become visible to students.

US-A02

As an admin, I want to approve a pending listing with a single action so that verified, accurate listings become available to buyers as quickly as possible without unnecessary delays.

US-A03

As an admin, I want to reject a pending listing with an optional note explaining the

reason so that the seller understands why their listing was not approved and can correct the issue and resubmit.

US-A04

As an admin, I want rejected listings to be soft-deleted and retained in the database with a `deleted_at` timestamp and audit log entry so that there is a complete and recoverable record of all moderation actions for accountability purposes.


US-A05

As an admin, I want to browse all approved listings the same way a student can so that I can monitor listing quality and identify any listings that should be removed after approval.

3. Use Cases + Use Case Diagrams

3.1 Actor Hierarchy

The diagrams below use this actor hierarchy: the base actor is **User**, which specialises into **Verified Student** and **Admin**.

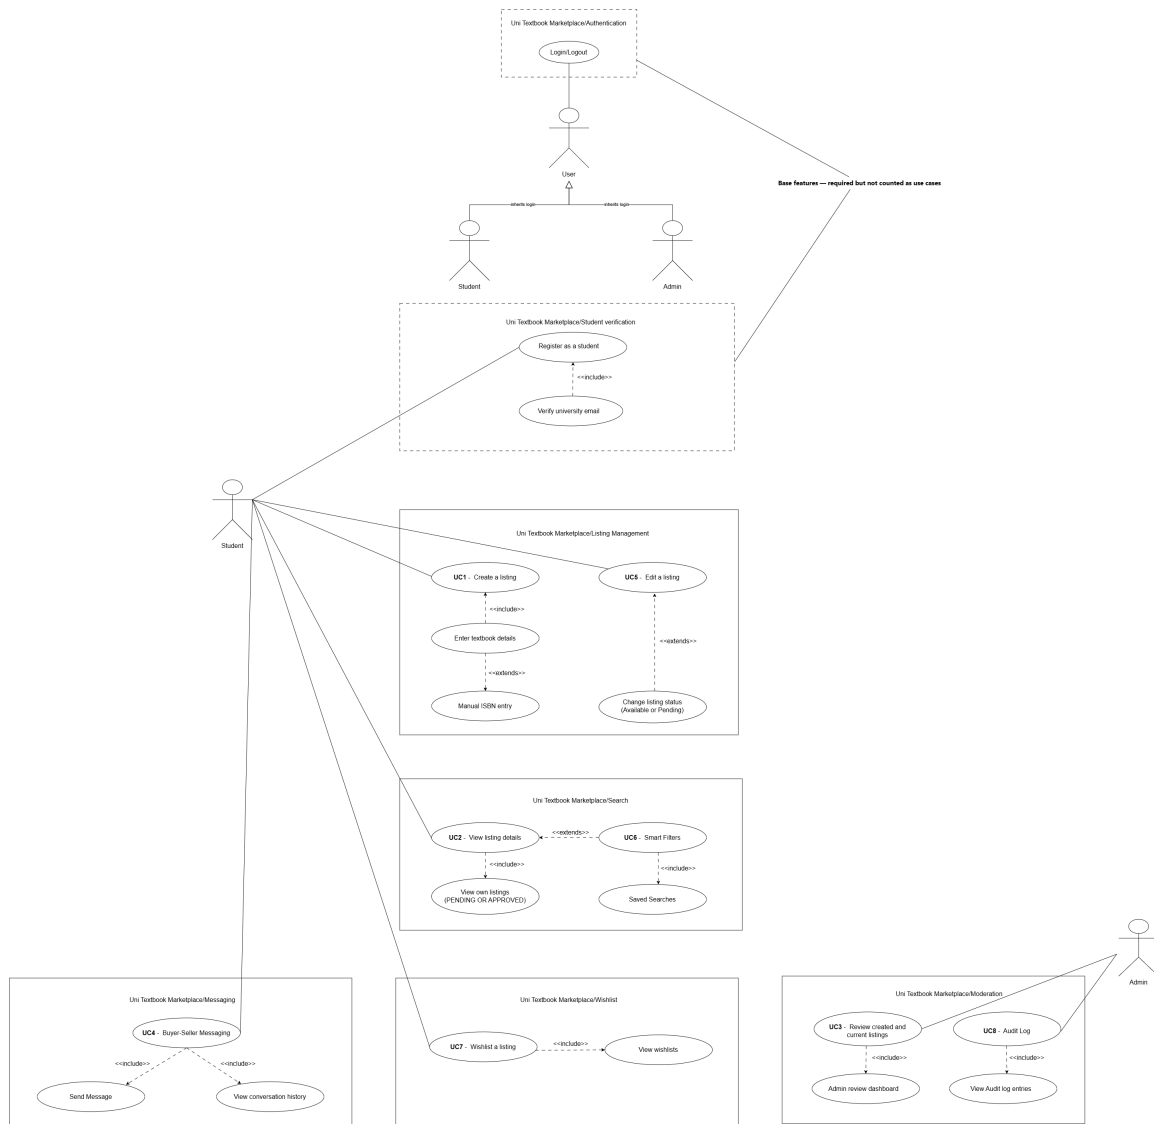

3.2 Use Case Overview


Registration and Login are base features and don't count toward the required number of use cases. UC1 to UC3 were signed off for Demo 1. UC4 to UC8 are new for Demo 2.

ID	Name	Primary Actor
UC0	Authentication (Register + Login + OTP)	Unverified Student (Base feature)

ID	Name	Primary Actor
UC1	Create a Textbook Listing	Verified Student (Seller)
UC2	View Listing Details	Verified Student
UC3	Review Listings	Admin
UC4	In-App Messaging	Verified Student
UC5	Edit or Withdraw a Listing	Verified Student (Seller)
UC6	Smart Filters and Saved Searches	Verified Student (Buyer)
UC7	Wishlist	Verified Student (Buyer)
UC8	Audit Log Query	Admin

3.3 UC0 - Authentication (Base Feature)

High-Level Description (TUCBW / TUCEW)

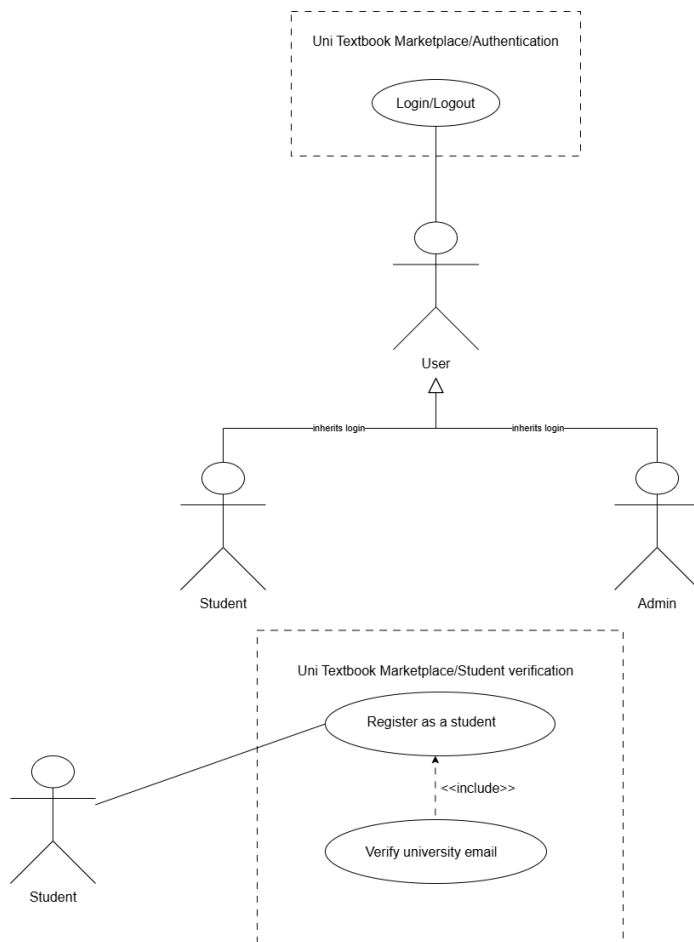

This use case begins when an unverified student goes to the registration page and starts the multi-step registration process.

This use case ends when the student has set a password, got a JWT back, and lands on the listings page as an authenticated, verified user.

Expanded Use Case Table

Step	Actor Action	System Response
1	Student navigates to Registration page.	System renders Step 1 (personal details: full name, surname).
2	Student enters full name and surname, clicks Next.	System validates non-empty fields and advances to Step 2.
3	Student enters university name and university email on Step 2.	System validates email domain against the allowlist (@tuks.co.za, @uct.ac.za, @wits.ac.za).
4	Student submits Step 2.	System generates a 6-digit OTP, stores it in the otps table with a 10-minute expiry, and sends it to the student's university email. System advances to Step 3.
5	Student enters the 6-digit OTP received by email.	System checks the OTP value and expiry again.
6	Student clicks Verify.	System marks the OTP as used, marks the user as verified (<code>is_verified = true</code>), and advances to Step 4.
7	Student enters a password and confirms it, then checks the Terms of Service checkbox.	System validates password length (minimum 8 characters) and that both passwords match.
8	Student clicks Register.	System hashes the password, saves the user record to the users table, issues a signed JWT with the student role claim, and redirects to the listings page.

Alternative Flows


A1 - Invalid email domain: At step 3, if the email domain isn't in the allowlist, the system shows an error saying the email has to end in one of the supported domains (@tuks.co.za, @uct.ac.za, or @wits.ac.za) and doesn't move on to Step 3.

A2 - Incorrect OTP: At step 6, if the OTP doesn't match or has expired, the system shows "Invalid or expired OTP" and lets the student ask for a new code.

A3 - Passwords do not match: At step 7, if the two password fields don't match, the system shows "Passwords do not match" and won't submit.

3.4 UC1 - Create a Textbook Listing

High-Level Description (TUCBW / TUCEW)

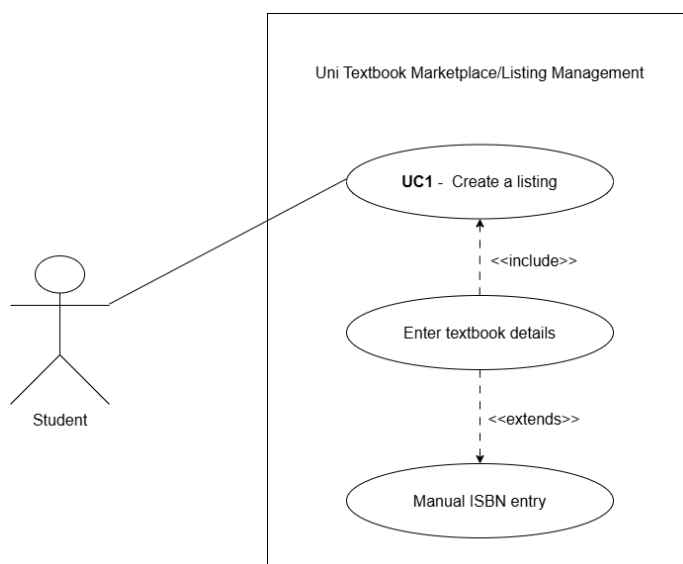

This use case begins when a verified, logged-in student goes to the Create Listing page and starts filling in the listing form.

This use case ends when the student submits the form and the system creates a new listing with PENDING status, showing a confirmation with a "Pending Review" badge.

Expanded Use Case Table

Step	Actor Action	System Response
1	Authenticated student navigates to Create Listing.	System renders the listing form. The JWT is validated by the JwtAuthGuard.

Step	Actor Action	System Response
2	Student enters ISBN.	System accepts the value. ISBN lookup is manual for Demo 1.
3	Student enters title, author, and edition.	System validates that title and edition are non-empty.
4	Student selects condition from dropdown (new, good, fair, poor).	System stores the selected value.
5	Student selects annotation level (none, light, heavy).	System stores the selected value.
6	Student begins typing a module code in the module search field.	System queries GET /modules?search=[query]&university=UP and displays matching module codes as a dropdown.
7	Student selects a module from the dropdown.	System stores the module_id foreign key.
8	Student enters price in Rands.	System validates that price is a positive decimal value.
9	Student optionally toggles has_notes.	System stores the boolean value.
10	Student optionally uploads one or more photos.	System stores the photo URLs in the photo_url as array.
11	Student clicks Submit.	System sends POST /listings with the JWT in the Authorization header. Backend validates the DTO, creates the listing record with status = PENDING, and returns the new listing ID.
12		System displays a success message: “Your listing has been submitted and is awaiting admin review.” The listing is visible on the student’s My Listings page with a PENDING badge.

Alternative Flows


A1 - Not authenticated: At step 1, if there’s no JWT or it’s expired, the JwtAuthGuard returns 401 and the frontend sends the student to the login page.

A2 - Missing required fields: At step 11, if any required field (title, edition, condition, module, price) is empty, the system returns a 400 Bad Request with field-level validation errors, and the form highlights whichever fields are wrong.

A3 - Invalid price: At step 8, if the price is zero or negative, the system shows “Price must be greater than zero.”

3.5 UC2 - View Listing Details

High-Level Description (TUCBW / TUCEW)

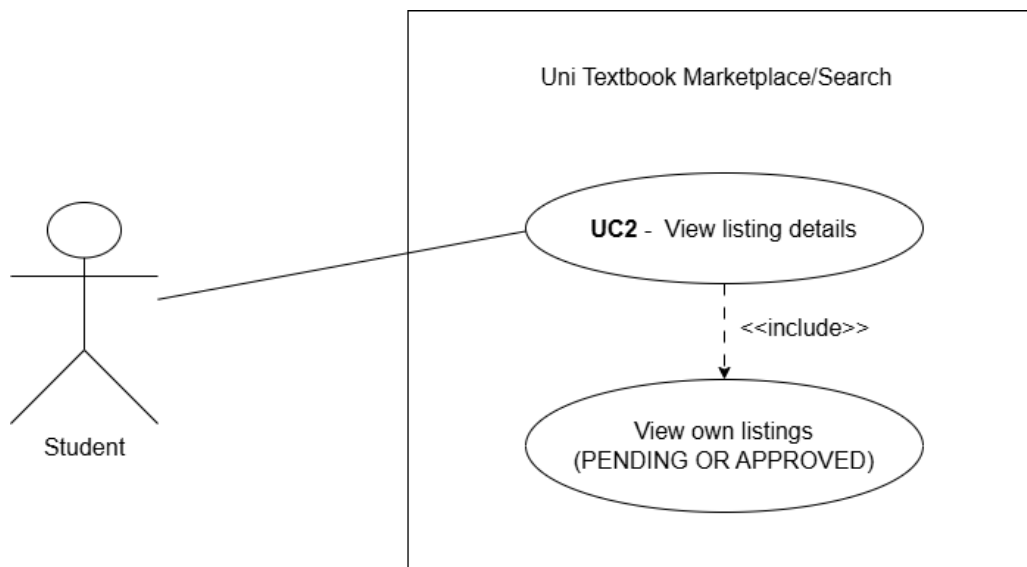

This use case begins when a verified, logged-in student goes to the listings page or their own My Listings page.

This use case ends when the student has looked at the full detail page of a specific listing, including all the book metadata, price, condition, annotation level, and listing status.

Expanded Use Case Table

Step	Actor Action	System Response
1	Student navigates to Browse Listings.	System calls GET /listings, which returns all APPROVED listings. Each listing card shows title, edition, price, condition, and module code.

Step	Actor Action	System Response
2	Student optionally applies filters (module code, faculty, price range, condition).	System re-queries with filter parameters and updates the listing grid.
3	Student clicks a listing card.	System calls GET /listings/:id. The backend returns the full listing object including all fields.
4		System renders the listing detail page showing: title, author, ISBN, edition, condition, annotation level, has__notes, module code, price, photo carousel, and seller's verified badge.
5	Student navigates to My Listings.	System calls GET /listings/mine. The backend uses the JWT to identify the seller and returns both APPROVED and PENDING listings belonging to that student.
6		System renders the My Listings page. PENDING listings display a "Pending Review" badge. APPROVED listings display an "Approved" badge.


Alternative Flows

A1 - Listing not found: At step 3, if the listing ID doesn't exist, or belongs to a REJECTED or SOFT_DELETED listing, the system returns 404 and shows "Listing not found."

A2 - Unauthenticated access: At step 1, if there's no JWT, the frontend redirects to login. Browsing requires being logged in.

3.6 UC3 - Review Listings (Admin)

High-Level Description (TUCBW / TUCEW)

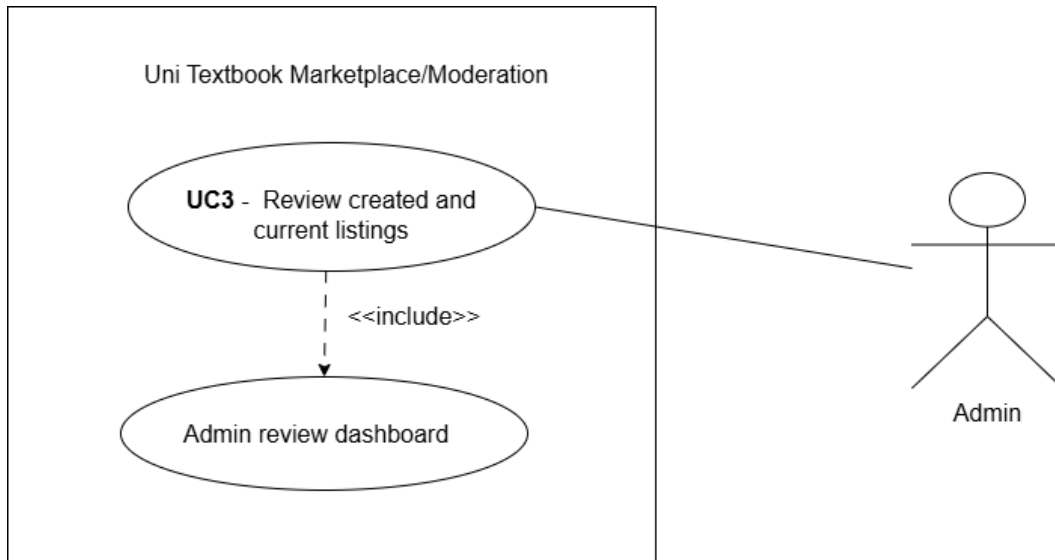


This use case begins when a logged-in admin goes to the Admin Review Dashboard and sees the list of all PENDING listings.

This use case ends when the admin has either approved a listing (status becomes APPROVED and it's now visible to students) or rejected a listing (soft-deleted, with an audit log entry recorded).

3.7 UC4 - In-App Messaging

High-Level Description (TUCBW / TUCEW)

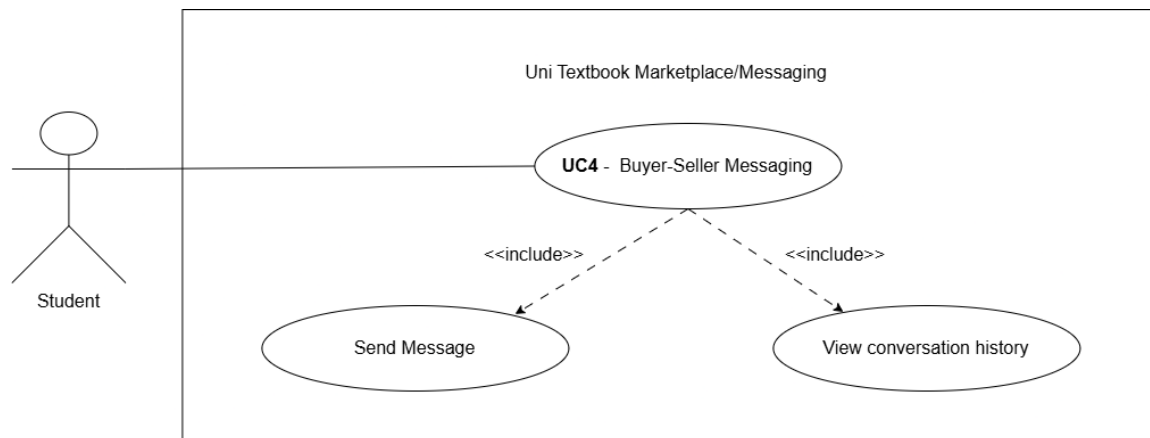

This use case begins when a verified student, looking at a listing, opens a conversation with the seller.

This use case ends when the two students have exchanged messages about the listing, without either side's personal contact details ever being shared outside the platform.

Messaging runs through a separate Firebase Firestore microservice instead of the core NestJS backend, so that if Firestore ever goes down, it doesn't take listing browsing, creation, or moderation down with it. See the SAS document for the reasoning behind this.

Expanded Use Case Table

Step	Actor Action	System Response
1	Student views a listing detail page and clicks "Message Seller."	System validates the JWT (verified student) and renders the conversation panel.
2		Frontend authenticates directly against Firebase Firestore using the client SDK, scoped to conversations the student is a participant in, independent of the core NestJS backend.
3		If no conversation document already exists between this student and the seller for this listing, Firestore creates a new conversation document.

Step	Actor Action	System Response
4	Student types a message and clicks Send.	Frontend writes the message document directly to the conversation's Firestore collection, storing sender_id, listing_id, message text, and a timestamp.
5		Firestore's real-time listener pushes the new message to the seller's client if they have the conversation open.
6	Seller reads the message and replies.	The reply is written to the same Firestore collection and pushed back to the student in real time.
7	Student or seller reopens the conversation later.	Frontend queries Firestore for all messages tied to the conversation ID, ordered by timestamp, and renders the full history.


Alternative Flows

A1 - Firestore unavailable: If the client SDK can't connect to Firestore, the system shows "Messaging is temporarily unavailable." Because messaging is kept in its own microservice, listing browsing, creation, and moderation still work fine.

A2 - Not authenticated: If the student's JWT is missing or expired at step 1, the frontend sends them to the login page before the conversation panel even loads.

3.8 UC5 - Edit a Listing

High-Level Description (TUCBW / TUCEW)

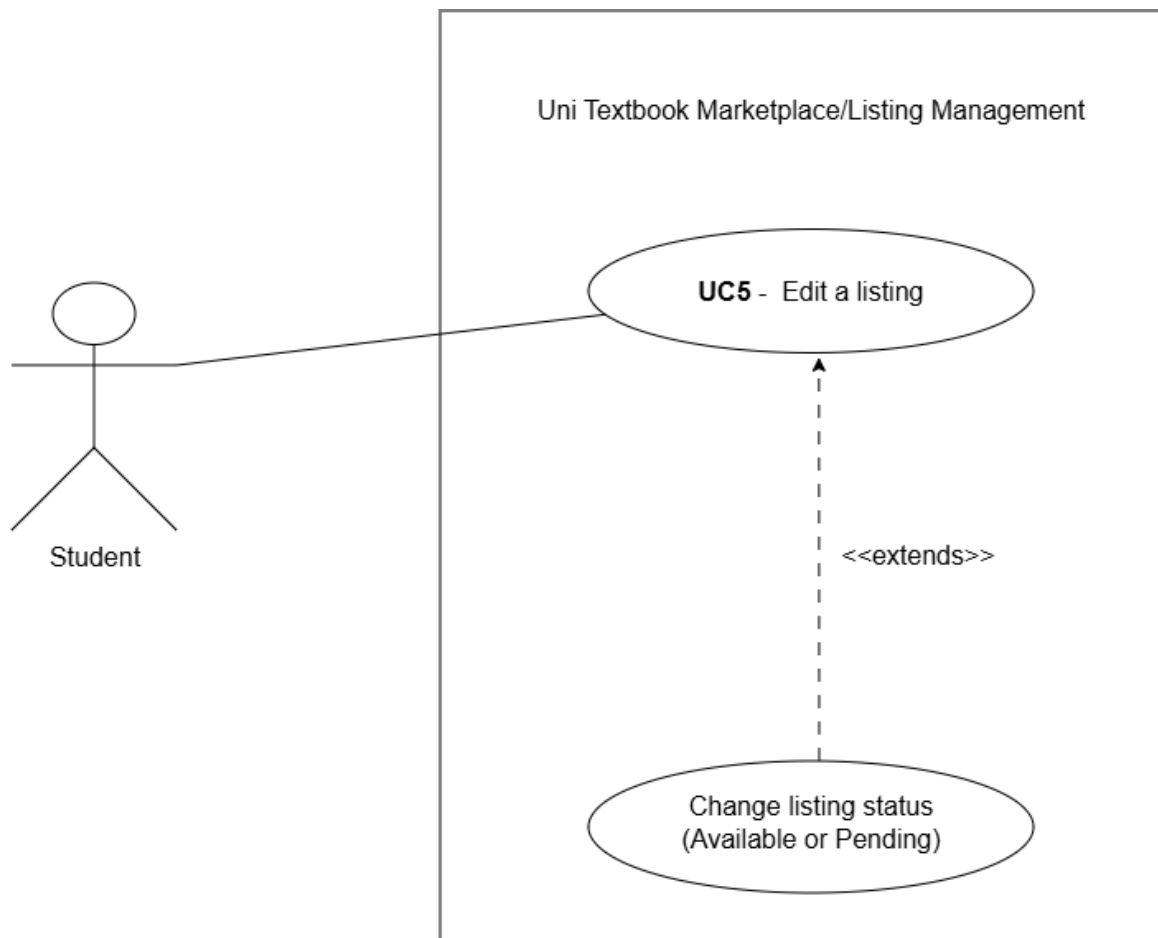

This use case begins when a verified student, looking at one of their own listings on the My Listings page, decides to edit its details.

This use case ends when the listing's details are updated and saved, and the listing's `listing_status` is set back to `PENDING` so an admin reviews it again.

Expanded Use Case Table

Step	Actor Action	System Response
1	Student navigates to My Listings.	System calls <code>GET /listings/mine</code> and renders each listing with Edit and Withdraw actions.
2	Student clicks Edit on a listing.	System checks the listing's status. Editing is only permitted while status is <code>PENDING</code> or <code>REJECTED</code> ; the Edit action is disabled for <code>APPROVED</code> listings.

Step	Actor Action	System Response
3		System renders the edit form pre-filled with the listing's current details.
4	Student updates one or more fields (price, condition, annotation level, module, description, photos).	System validates the updated fields using the same rules as listing creation.
5	Student clicks Save.	System sends the update to the backend. If the listing's prior status was REJECTED , the system resets it to PENDING for re-review. If it was PENDING , it remains PENDING .
6		System confirms the update and displays the listing's current status badge.


Alternative Flows

A1 - Attempt to edit an APPROVED listing: At step 2, the Edit option isn't available for APPROVED listings. If someone tries this directly against the API anyway, the backend returns 403 Forbidden.

A2 - Student cancels edit: At step 4, if the student navigates away without hitting Save, nothing gets saved.

3.9 UC6 - Smart Filters and Saved Searches

High-Level Description (TUCBW / TUCEW)

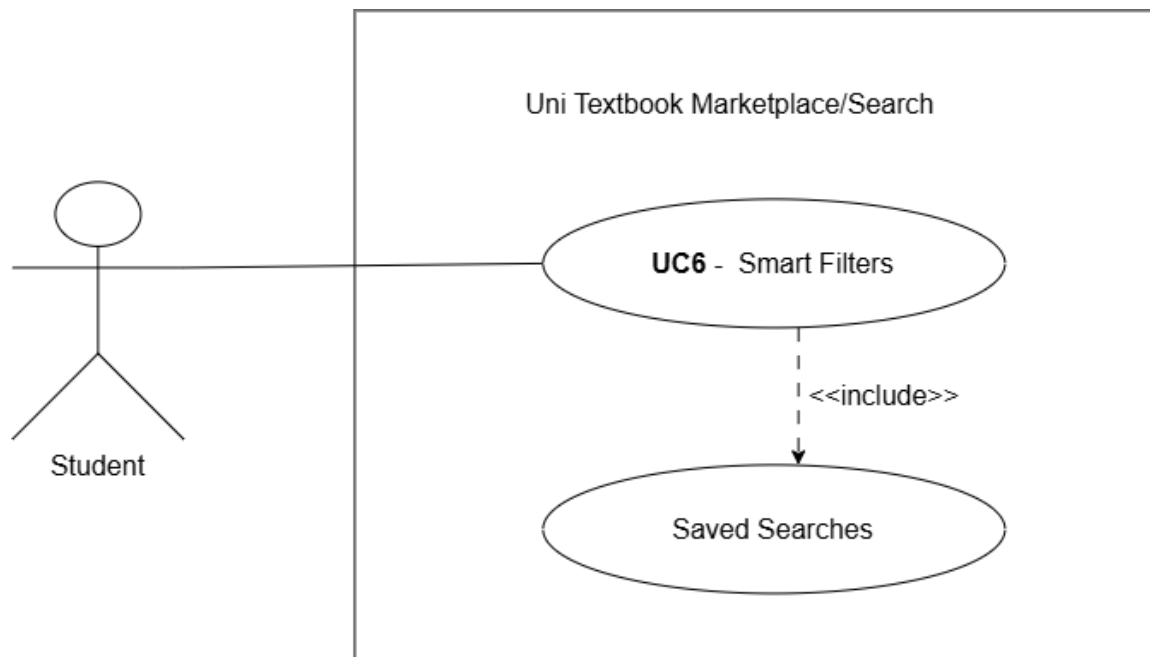

This use case begins when a verified student, browsing listings, applies one or more extra filters on top of the Demo 1 module/faculty filter (price range, edition, condition, annotation level).

This use case ends when either the filtered results show up, or if the student chooses to save the current filter combination, a saved search record gets created that they can come back to later without re-typing the same filters.

Expanded Use Case Table

Step	Actor Action	System Response
1	Student on the Browse Listings page opens the extended filter panel.	System renders additional filter controls for price range, edition, condition, and annotation level, alongside the existing module/faculty filters.
2	Student sets a minimum and maximum price.	System stores the selected range as pending filter parameters.
3	Student selects an edition, condition, and/or annotation level.	System stores the selected values as pending filter parameters.

Step	Actor Action	System Response
4	Student clicks Apply Filters.	System calls GET /listings with the combined filter parameters and updates the listing grid with matching results.
5	Student clicks Save Search on the current filter combination.	System prompts for an optional label for the saved search.
6	Student confirms.	System stores the filter combination as a <code>filter_json</code> object tied to the student's user ID in the <code>saved_searches</code> table.
7	Student later navigates to Saved Searches.	System calls GET /saved-searches and returns the student's list of saved filter combinations.
8	Student selects a saved search.	System re-applies the stored filter parameters and re-queries GET /listings, updating the grid accordingly.


Alternative Flows

A1 - No listings match the filters: At step 4, if nothing matches the combined filters, the system shows “No listings match your filters” and suggests clearing one or more of them.

A2 - Save attempted with no filters applied: At step 5, if no filters have actually been set, the Save Search button is disabled.

3.10 UC7 - Wishlist

High-Level Description (TUCBW / TUCEW)

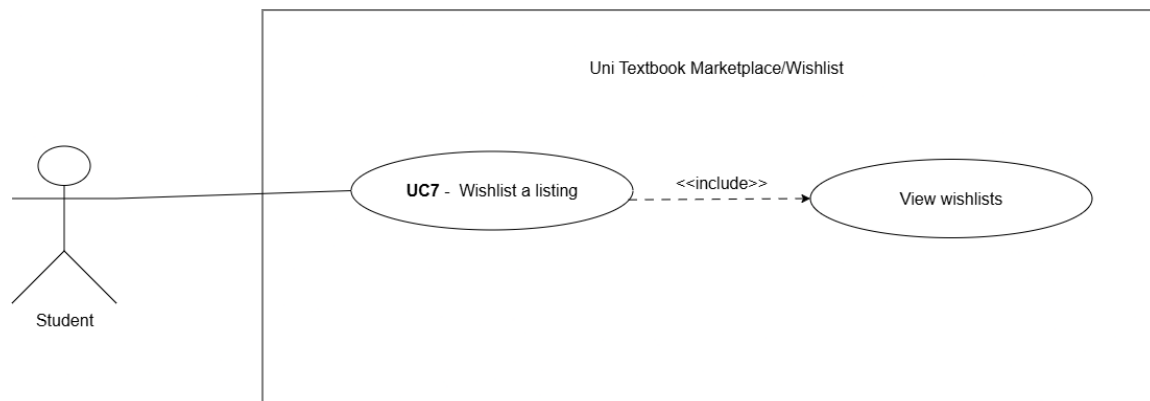

This use case begins when a verified student, looking at a listing they’re interested in but not ready to message the seller about yet, saves it to their wishlist instead.

This use case ends when the listing shows up on the student’s personal wishlist page, where it can also be removed again.

Expanded Use Case Table

Step	Actor Action	System Response
1	Student views a listing detail page and clicks the wishlist (bookmark) icon.	System sends POST /wishlist with the listing ID and the JWT in the Authorization header.
2		Backend creates a wishlist entry using a composite primary key of user_id and listing_id.
3		System updates the icon to a “saved” state on the listing card and detail page.
4	Student navigates to their Wishlist page.	System calls GET /wishlist/mine, which returns the student’s wishlist entries joined with their listing details.
5		System renders the wishlist page showing each saved listing’s title, price, condition, and status.
6	Student clicks the remove icon on a wishlisted listing.	System sends DELETE /wishlist/:listingId.

Step	Actor Action	System Response
7		Backend removes the wishlist entry and the listing disappears from the page.


Alternative Flows

A1 - Listing already wishlisted: At step 1, if the listing is already on the student's wishlist, the icon already shows the "saved" state, and clicking it removes the entry instead.

A2 - Wishlisted listing is later deleted: If the listing itself gets deleted, the wishlist entry disappears automatically through ON DELETE CASCADE on the listing foreign key, so it no longer shows up on the student's wishlist page.

3.11 UC8 - Audit Log Query

High-Level Description (TUCBW / TUCEW)

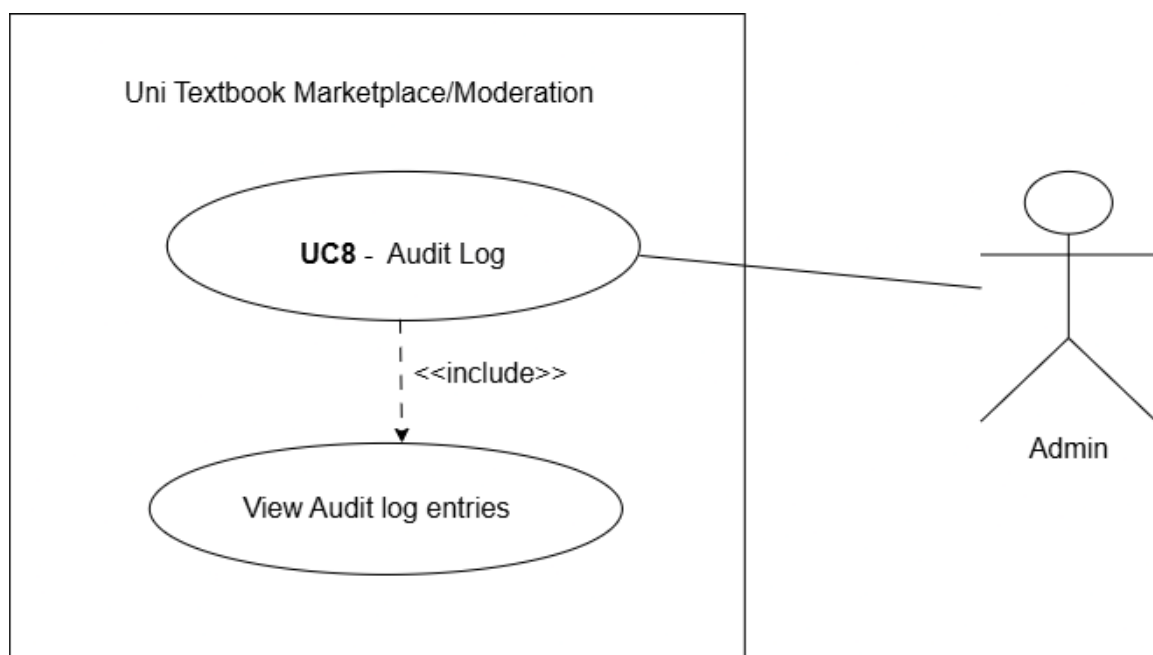

This use case begins when a logged-in admin navigates to the audit log view to check past moderation actions.

This use case ends when the admin has pulled up either the full list of audit entries, summary statistics, or the audit history for one specific listing.

Expanded Use Case Table

Step	Actor Action	System Response
1	Admin navigates to the Audit Log page.	System calls GET /audit-log. The JwtAuthGuard validates the JWT and confirms the admin role claim.
2		System renders the full list of audit entries, showing entity_type, entity_id, action (APPROVED or REJECTED), performed_by, performed_at, and notes.
3	Admin switches to the Summary Statistics view.	System calls GET /audit-log/summary and returns aggregate counts of actions taken.
4		System renders the summary statistics (e.g. total approvals vs. rejections) as a table or chart.
5	Admin enters an entity type and entity ID to look up a specific listing's history.	System calls GET /audit-log/entity/:type/:id.
6		System returns and renders the full chronological audit history for that specific entity.

Alternative Flows

A1 - Non-admin access attempt: At step 1, if the logged-in user isn't an admin, the backend returns 403 Forbidden and the frontend doesn't render the audit log view at all.

A2 - No history for entity: At step 5, if there's no audit history for the given entity type and ID, the system shows "No audit history found for this listing."

4. Functional Requirements

4.1 AuthService (UC0)

R1: Authentication

R1.1: Student Registration

R1.1.1 The system shall allow a student with a valid university email address to register by providing their full name, surname, university name, and email.

R1.1.2 The system shall reject any email address whose domain is not in the configured allowlist.

R1.2: OTP Generation and Verification

R1.2.1 The system shall generate a cryptographically random 6-digit OTP upon registration and send it to the student's university email address.

R1.2.2 The OTP shall expire after 10 minutes.

R1.2.3 The system shall mark the OTP as used after successful verification to prevent reuse.

R1.3: Login and JWT Issuance

R1.3.1 The system shall authenticate a registered, verified student by validating their email and hashed password.

R1.3.2 On success, the system shall issue a signed JWT containing the user's UUID and role claim (student or admin), to be used on all subsequent authenticated requests.

R1.4: Email Domain Allowlist

R1.4.1 The system shall enforce an email domain allowlist. Three domains are currently permitted: `@tuks.co.za` (University of Pretoria, the primary domain in active use), `@uct.ac.za` (University of Cape Town), and `@wits.ac.za` (University of the Witwatersrand).

R1.4.2 The allowlist shall be configurable in the backend environment variables without requiring a code change.

R1.5: Role-Based Access Control

- R1.5.1 The system shall enforce role-based access control on all protected endpoints using a JWT guard and a role guard.
- R1.5.2 Endpoints designated for Admin only shall return 403 Forbidden if accessed with a Student JWT.

4.2 ListingService (UC1)

R2: Listing Management

R2.1: Create Listing

- R2.1.1 The system shall allow a verified, authenticated student to create a textbook listing by submitting a DTO containing: ISBN, title, author, edition (integer), condition (new/good/fair/poor), annotation_level (none/light/heavy), module_id (foreign key), price (positive decimal), has_notes (boolean), and photo_urls (array of strings).
- R2.1.2 The listing shall be created with status = PENDING.

R2.2: Module Code Search

- R2.2.1 The system shall provide a search-as-you-type module code endpoint accepting a search string and an optional university filter.
- R2.2.2 The response shall include module code, module name, and faculty.

R2.3: Browse Approved Listings

- R2.3.1 The system shall return all listings with status = APPROVED when a verified student calls the browse endpoint.
- R2.3.2 Soft-deleted, rejected, and pending listings shall not be returned.

R2.4: View My Listings

- R2.4.1 The system shall return all listings belonging to the authenticated student, including both APPROVED and PENDING listings.
- R2.4.2 The response shall include the listing status so the frontend can render appropriate badges.

R2.5: View Listing Detail

R2.5.1 The system shall return the full listing detail object for a given listing ID.

R2.5.2 If the listing is REJECTED or SOFT_DELETED, the system shall return 404 Not Found. If the listing is PENDING, it shall only be accessible to its owner or an admin.

4.3 ModulesService (UC2)

R3: Module Management

R3.1: Module Search Endpoint

R3.1.1 The system shall expose a GET /modules endpoint that accepts a search query parameter and an optional university parameter.

R3.1.2 The endpoint shall perform a case-insensitive prefix search on module code and module name.

R3.2: Module Seed Data

R3.2.1 The system shall seed the database with a representative set of University of Pretoria module codes across all faculties. This is fully working now through an idempotent seed script, which we've confirmed runs correctly against both a fresh and an already-populated database.

R3.2.2 The seed data shall include module code, module name, faculty, and semester.

4.4 ModerationService (UC3)

R4: Listing Moderation

R4.1: View Pending Listings

R4.1.1 The system shall return all listings with status = PENDING when an authenticated admin calls the pending listings endpoint.

R4.1.2 The response shall include full listing detail plus the seller's display name.

R4.2: Approve Listing

R4.2.1 The system shall allow an authenticated admin to approve a pending listing. On approval, the system shall set status = APPROVED, reviewed_by = admin

UUID, and reviewed_at = current timestamp.

R4.2.2 An audit log entry shall be written with action = APPROVED.

R4.3: Reject Listing with Soft Delete

R4.3.1 The system shall allow an authenticated admin to reject a pending listing with an optional rejection reason.

R4.3.2 On rejection, the system shall set status = REJECTED, deleted_at = current timestamp, reviewed_by = admin UUID, and reviewed_at = current timestamp, and create an audit log entry with action = REJECTED and the optional notes.

R4.3.3 The listing record shall be retained in the database (soft delete, not hard delete).

4.5 MessagingService (UC4)

R5: In-App Messaging

R5.1: Send and Receive Messages

R5.1.1 The system shall allow a verified student to open a conversation with the seller of a listing.

R5.1.2 Messages shall be delivered and stored through the Firebase Firestore microservice, independent of the core backend.

R5.1.3 The frontend shall connect to Firestore directly through the client SDK, rather than through the NestJS backend.

4.6 ListingService Extension (UC5)

R6: Edit and Withdraw Listing

R6.1: Edit Listing

R6.1.1 The system shall allow the owning student to edit the details of their own listing while their listing status is in PENDING or REJECTED

R6.1.2 Editing an REJECTED listing resets its status to PENDING.

4.7 SmartFilterService and SavedSearchService (UC6)

R7: Smart Filters and Saved Searches

R7.1: Extended Filtering

R7.1.1 The system shall allow a student to filter listings by price range, edition, condition, and annotation level, in addition to the module and faculty filters delivered for Demo 1.

R7.2: Save a Search

R7.2.1 The system shall allow a student to save their current filter combination as a saved search, stored as a JSON filter object tied to the student's user ID.

R7.2.2 The system shall allow a student to retrieve their saved searches.

4.8 WishlistService (UC7)

R8: Wishlist**R8.1: Add and Remove Wishlist Entries**

R8.1.1 The system shall allow a student to add a listing to their personal wishlist.

R8.1.2 The system shall allow a student to remove a listing from their wishlist.

R8.1.3 A listing shall be removed from a student's wishlist automatically if the listing itself is deleted, since the wishlist entry references the listing by foreign key with ON DELETE CASCADE.

R8.2: View Wishlist

R8.2.1 The system shall allow a student to retrieve their full wishlist.

4.9 AuditLogService Extension (UC8)

R9: Audit Log Query**R9.1: Query Audit Log**

R9.1.1 The system shall allow an authenticated admin to retrieve the full audit log.

R9.1.2 The system shall allow an authenticated admin to retrieve summary statistics over the audit log.


R9.1.3 The system shall allow an authenticated admin to retrieve the audit history for a specific entity, given its entity type and entity ID.

5. Non-Functional Requirements

Quality Attribute	Requirement and Quantification
Performance	Listing search and browse requests shall return within 2 seconds for at least 95% of requests under normal load.
Scalability	The stateless API layer shall support horizontal scaling without code changes, since no session state is held on the server.
Security	All protected endpoints shall enforce JWT-based authentication and role-based access control. Only OTP-verified students may create listings; only admins may moderate them.
Reliability	Core features (authentication, listings, moderation) shall remain fully available if the external messaging microservice (Firestore) is unavailable.
Maintainability	Backend test coverage shall be measured on every push and pull request via an automated CI pipeline running against a real ephemeral database, with results tracked through Codecov.
Accessibility	The UI shall meet WCAG AA compliance at 90% or above, measured through automated Lighthouse audits.

6. Domain Model

6.1 UML Diagram (Currently, as of Demo 2)

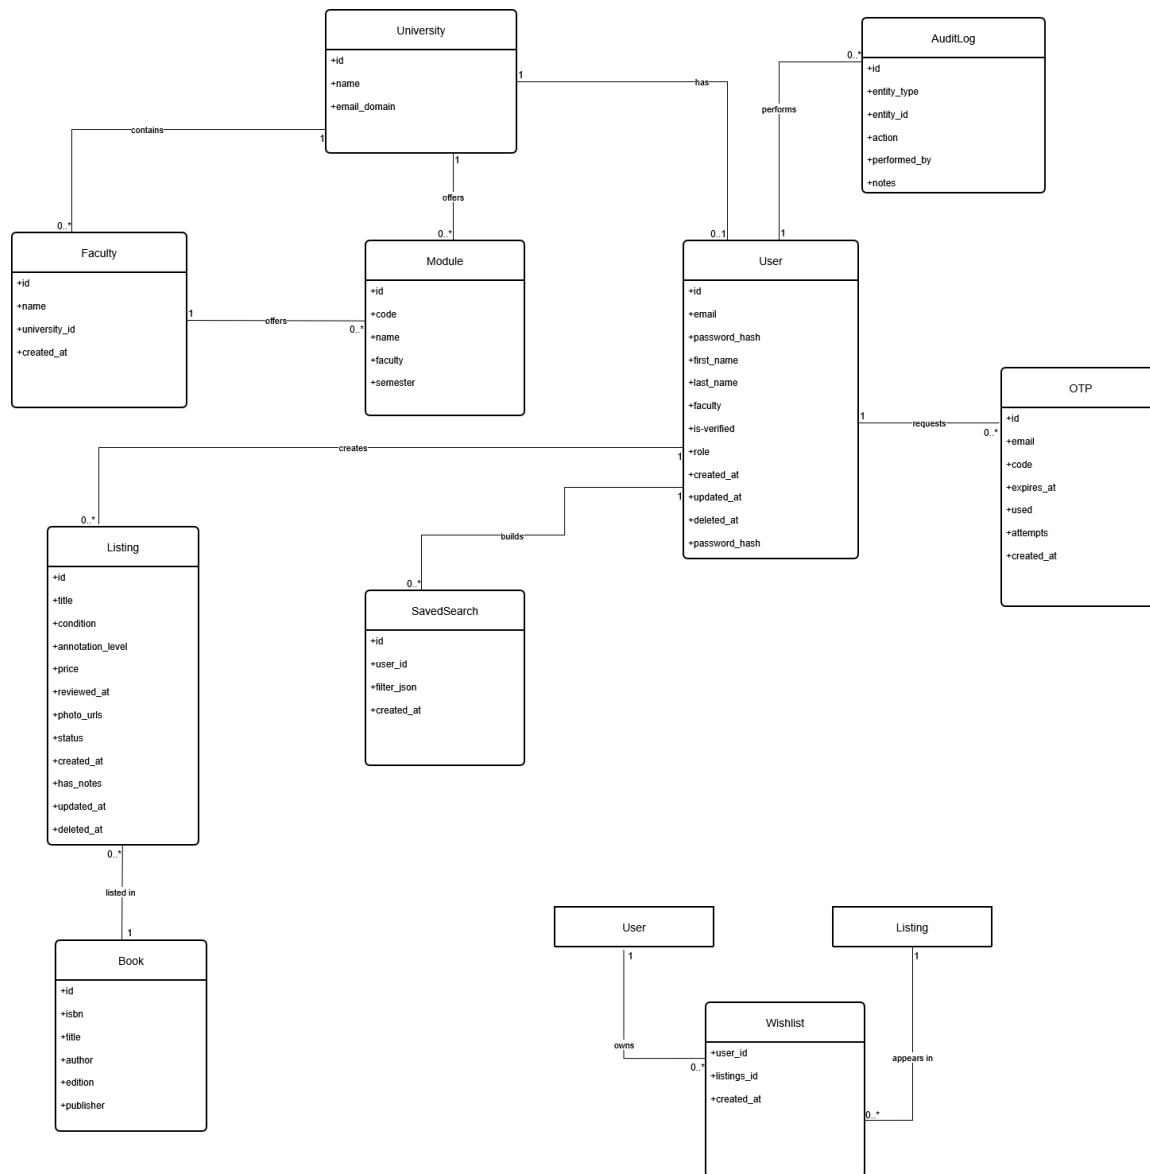

6.2 Entity Descriptions

University

Represents a university registered on the platform. Stores the institution's name and the email domain used to verify students. A university has many faculties, and every user belongs to one university.

Faculty

Represents a faculty inside a university (e.g. Engineering, Built Environment and IT). Stores the faculty name plus a foreign key back to the university it belongs to. A faculty

offers many modules, sitting between University and Module in the hierarchy.

User

Represents a registered user of the platform. Stores identity info (name, email, password hash), verification status, role (student or admin), and faculty. A user can have many listings (as a seller) and many audit log entries (as an admin who performed moderation actions). A user's `university_id` gets set to NULL if the university record is deleted (ON DELETE SET NULL), so the account itself isn't lost.

OTP

Represents a one-time password record created during registration. Stores the target email, the 6-digit code, the expiry timestamp, a used flag, and when it was created. Each OTP can only be used once.

Module

Represents a university module (course). Stores the module code (e.g. COS301), module name, and semester, plus a foreign key to the faculty that offers it. A module can be linked to many listings.

Book

Represents the actual physical book being listed. Stores ISBN, title, author, edition, and publisher. The same book can appear in multiple listings (e.g. the same textbook listed by different sellers).

Listing

The central entity of the whole platform. Represents one student's offer to sell a specific book. A listing links a seller (User), a book (Book), and a module (Module). It stores price, condition, annotation level, `photo_urls`, and a status (PENDING, APPROVED, REJECTED, SOFT_DELETED). It also stores `reviewed_by` (admin UUID), `reviewed_at`, `deleted_at`, and `created_at`, so there's a full record of its lifecycle.

AuditLog

Records every moderation action an admin performs. Stores `entity_type`, `entity_id` (the listing UUID), `action` (APPROVED or REJECTED), `performed_by` (admin UUID), `performed_at`, and optional notes. Basically gives us an immutable accountability trail.

SavedSearch

Represents a filter combination a student has chosen to save for later. Stores a foreign key to the owning User, a `filter_json` field holding the saved filter parameters, and a creation timestamp. A user can have many saved searches.

Wishlist

A join entity linking a User to a Listing they've saved. Uses a composite primary key of `user_id` and `listings_id`, both with ON DELETE CASCADE, so a wishlist entry gets

removed automatically if either the user or the listing gets deleted.

7. Appendix

This section keeps earlier versions of SRS sections that have since changed. Sections get moved here once they're substantially updated, rather than just deleted, so there's still a record of how our requirements evolved.

7.1 Previous Versions

Version 1.0 (Sprint 1)

The very first version of this document, with just the Introduction and User Stories. Moved here after Sprint 2, once we added use cases, functional requirements, API contracts, the domain model, and architectural requirements.

Version 2.0 Functional Requirements (pre-realignment)

The original Sprint 2 draft numbered functional requirements with flat, service-prefixed IDs (e.g. FR-AUTH-01, FR-LIST-02, FR-MOD-03, FR-MOD-S01). We've since replaced this with the hierarchical FR1 / FR1.1 / FR1.1.1 numbering shown in Section 4, which matches the requirement breakdown format from the Systems Engineering lectures (Ch. 3–4).

Sprint 2 Closure Notes (18 May 2026)

- Three use cases signed off: UC1 (Create listing), UC2 (View listing), UC3 (Review listings).
- Registration and login are base features and don't count toward the three use cases.
- Authentication method: OTP sent to university email.
- Email allowlist: @tuks.co.za and @up.ac.za only.
- Module code search-as-you-type lookup, filterable by university.
- Listing lifecycle uses soft delete with an audit log.
- Branding: follows the Agile Bridge website (www2.agilebridge.co.za).
- Renting feature: stubbed out for now, there are legal considerations we haven't figured out.

Demo 2 Closure Notes (30 July 2026)

- Five new use cases delivered: UC4 (Messaging), UC5 (Edit/Withdraw Listing), UC6 (Smart Filters and Saved Searches), UC7 (Wishlist), UC8 (Audit Log Query).

- Architectural requirements, technology requirements, and API contracts have been moved out of this document into the separate SAS document, as required for Demo 2.
- Added Non-Functional Requirements as its own section, with five quantified quality attributes.
- Fixed the email allowlist throughout this document. There are actually three supported domains, `@tuks.co.za` (the main one), `@uct.ac.za`, and `@wits.ac.za`. `@up.ac.za` was never actually a real supported domain and has been removed everywhere it used to appear.
- The notification-core system (event bus, notifications table, bell icon UI), which was originally scoped for Demo 2, has been moved to Demo 3.

Uni Textbook Marketplace

In collaboration **with:**



2026 NexusDev - University of Pretoria - COS 301 Capstone Project
This document is version-controlled in the GitHub repository under `/docs/Demo`
`2/Software Requirements Specifications.pdf`