## THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 5 of 9)

| BUS-5V - DT06-12 plug (ECU splice point)<br>DT06-12SA | | |
|---|---|---|
| **2** | +5 V throttle sensor | w_rail_sp_5v_c |
| **3** | +5 V MAP sensor | w_5v_a_c39 |
| **4** | +5 V turbo speed | w_5v_a_c40 |
| **5** | +5 V oil pressure | w_5v_brail_c45 |
| **6** | +5 V fuel pressure | w_5v_brail_c46 |
| **7** | +5 V coolant press | w_5v_brail_c47 |




| DRB102-CABIN - DRB102 receptacle (RH firewall)<br>DRB12-102PAE-L018 | | |
|---|---|---|
| **13** | +5 V fuel pressure | w_5v_brail_c46 |
| **16** | +5 V MAP sensor | w_5v_a_c39 |
| **25** | +5 V coolant press | w_5v_brail_c47 |
| **27** | +5 V oil pressure | w_5v_brail_c45 |
| **41** | +5 V throttle sensor | w_rail_sp_5v_c |
| **52** | +5 V turbo speed | w_5v_a_c40 |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 1 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 1 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 5 of 9)

**BUS-GNDOUT-A - DT06-12 plug (ECU splice point)**
DT06-12SA

| | | |
|---|---|---|
| **2** | Gnd IAT/TPS/coolant | w_rail_sp_gndout_c |
| **3** | Gnd crank sensor | w_gnd_a_c41 |
| **4** | Gnd cam sensor | w_gnd_a_c42 |
| **5** | Gnd turbo speed | w_gnd_a_c43 |
| **6** | Gnd flex + MAP | w_gnd_a_c44 |

**BUS-GNDOUT-B - DT06-12 plug (ECU splice point)**
DT06-12SA

| | | |
|---|---|---|
| **7** | Gnd oil/clnt/temps | w_gnd_b_c19 |

w_rail_sp_gndout_c_20_BLU
w_gnd_a_c41_20_BLU
w_gnd_a_c42_20_BLU
w_gnd_a_c43_20_BLU
w_gnd_a_c44_20_BLU
w_gnd_b_c19_20_BLU

w_gnd_a_c44_20_BLU
w_gnd_b_c19_20_BLU
w_rail_sp_gndout_c_20_BLU
w_gnd_a_c43_20_BLU
w_gnd_a_c42_20_BLU
w_gnd_a_c41_20_BLU

**DRB102-CABIN - DRB102 receptacle (RH firewall)**
DRB12-102PAE-L018

| | | |
|---|---|---|
| **18** | Gnd flex + MAP | w_gnd_a_c44 |
| **29** | Gnd oil/clnt/temps | w_gnd_b_c19 |
| **34** | Gnd IAT/TPS/coolant | w_rail_sp_gndout_c |
| **56** | Gnd turbo speed | w_gnd_a_c43 |
| **65** | Gnd cam sensor | w_gnd_a_c42 |
| **75** | Gnd crank sensor | w_gnd_a_c41 |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 2 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 2 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 5 of 9)


| ECU-A - Link G4X plug A (centre dash) | | |
|---|---|---|
| 4-1437290-1 | | |
| 1 | Injector 4 drive (-) | w111_c |

| ECU-B (Link G4X plug B, centre dash) | | |
|---|---|---|
| 4-1437290-0 | | |
| 29 | Gearbox speed signal | w_vss_sig_c |

| BUS-GNDOUT-B - DT06-12 plug (ECU splice point) | | |
|---|---|---|
| DT06-12SA | | |
| 6 | Knock sensor (-) | w12_c |
| 8 | Gnd fuel press + VSS | w_gnd_b_c21 |

| SP-REV - reverse switch out to CSB3 opto IN2 and IG2-13 la... | | |
|---|---|---|
| solder splice (node) | | |
| - | Reverse sw +12 V out | w_rev_sw_c |

| POWER-NEG-BAR - POWER box NEG bar M8 stud (glove box) | | |
|---|---|---|
| end | | |
| - | CAN-Lambda ground | w_lamg_ac |

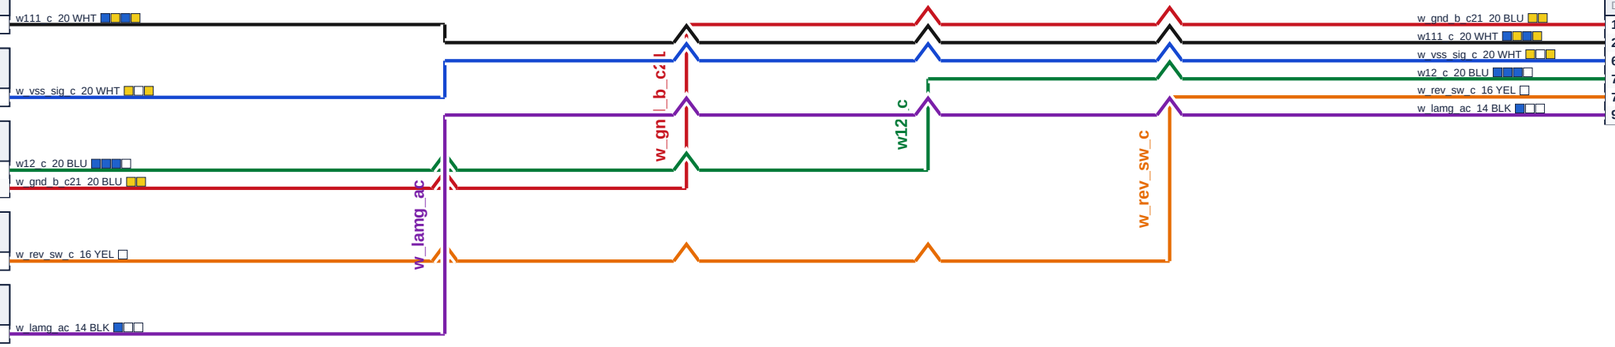


| DRB102-CABIN - DRB102 receptacle (RH firewall) | | |
|---|---|---|
| DRB12-102PAE-L018 | | |
| 15 | Gnd fuel press + VSS | w_gnd_b_c21 |
| 24 | Injector 4 drive (-) | w111_c |
| 68 | Gearbox speed signal | w_vss_sig_c |
| 72 | Knock sensor (-) | w12_c |
| 78 | Reverse sw +12 V out | w_rev_sw_c |
| 96 | CAN-Lambda ground | w_lamg_ac |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 3 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 3 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 5 of 9)

| ECU-A - Link G4X plug A (centre dash)<br>4-1437290-1 | | |
|---|---|---|
| **2** | Injector 3 drive (-) | w110_c |
| **3** | Injector 2 drive (-) | w109_c |
| **4** | Injector 1 drive (-) | w108_c |
| **8** | Crank sensor signal | w200_c |
| **10** | Coil 4 trigger (IGT) | w123_c |
| **11** | Coil 3 trigger (IGT) | w122_c |




| DRB102-CABIN - DRB102 receptacle (RH firewall)<br>DRB12-102PAE-L018 | | |
|---|---|---|
| **11** | Coil 3 trigger (IGT) | w122_c |
| **12** | Coil 4 trigger (IGT) | w123_c |
| **21** | Injector 1 drive (-) | w108_c |
| **22** | Injector 2 drive (-) | w109_c |
| **23** | Injector 3 drive (-) | w110_c |
| **74** | Crank sensor signal | w200_c |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**


THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 4 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 4 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 5 of 9)

| ECU-A - Link G4X plug A (centre dash)<br>4-1437290-1 | | |
|---|---|---|
| **12** | Coil 2 trigger (IGT) | w121_c |
| **13** | Coil 1 trigger (IGT) | w120_c |
| **15** | Coolant temp signal | w201_c |
| **16** | Intake temp signal | w202_c |
| **17** | MAP sensor signal | w26_c |
| **21** | Boost solenoid (-) | w103_c |




| DRB102-CABIN - DRB102 receptacle (RH firewall)<br>DRB12-102PAE-L018 | | |
|---|---|---|
| **9** | Coil 1 trigger (IGT) | w120_c |
| **10** | Coil 2 trigger (IGT) | w121_c |
| **17** | MAP sensor signal | w26_c |
| **33** | Intake temp signal | w202_c |
| **58** | Boost solenoid (-) | w103_c |
| **70** | Coolant temp signal | w201_c |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 5 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 5 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 5 of 9)

**ECU-A - Link G4X plug A (centre dash)**
4-1437290-1

| | | |
|---|---|---|
| **22** | Throttle pos 1 main | w128_c |
| **27** | EHPS pump speed | w_mrs_c |
| **30** | Turbo speed signal | w16_c |
| **31** | Flex fuel signal | w48_c |
| **33** | Throttle pos 2 sub | w129_c |

**ECU-B (Link G4X plug B, centre dash)**
4-1437290-0

| | | |
|---|---|---|
| **6** | Oil temp signal | w203_c |




**DRB102-CABIN - DRB102 receptacle (RH firewall)**
DRB12-102PAE-L018

| | | |
|---|---|---|
| **31** | Flex fuel signal | w48_c |
| **42** | Throttle pos 1 main | w128_c |
| **44** | Throttle pos 2 sub | w129_c |
| **53** | Turbo speed signal | w16_c |
| **61** | Oil temp signal | w203_c |
| **84** | EHPS pump speed | w_mrs_c |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 6 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 6 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 5 of 9)

| ECU-B (Link G4X plug B, centre dash)<br>4-1437290-0 | | |
|---|---|---|
| **7** | Charge temp signal | w204_c |
| **9** | Knock sensor signal | w205_c |
| **15** | Oil pressure signal | w29_c |
| **16** | Fuel pressure signal | w32_c |
| **18** | ETB motor + | w124_c |
| **23** | Coolant press signal | w35_c |




| DRB102-CABIN - DRB102 receptacle (RH firewall)<br>DRB12-102PAE-L018 | | |
|---|---|---|
| **14** | Fuel pressure signal | w32_c |
| **26** | Coolant press signal | w35_c |
| **28** | Oil pressure signal | w29_c |
| **45** | ETB motor + | w124_c |
| **59** | Charge temp signal | w204_c |
| **71** | Knock sensor signal | w205_c |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 7 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 7 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 5 of 9)

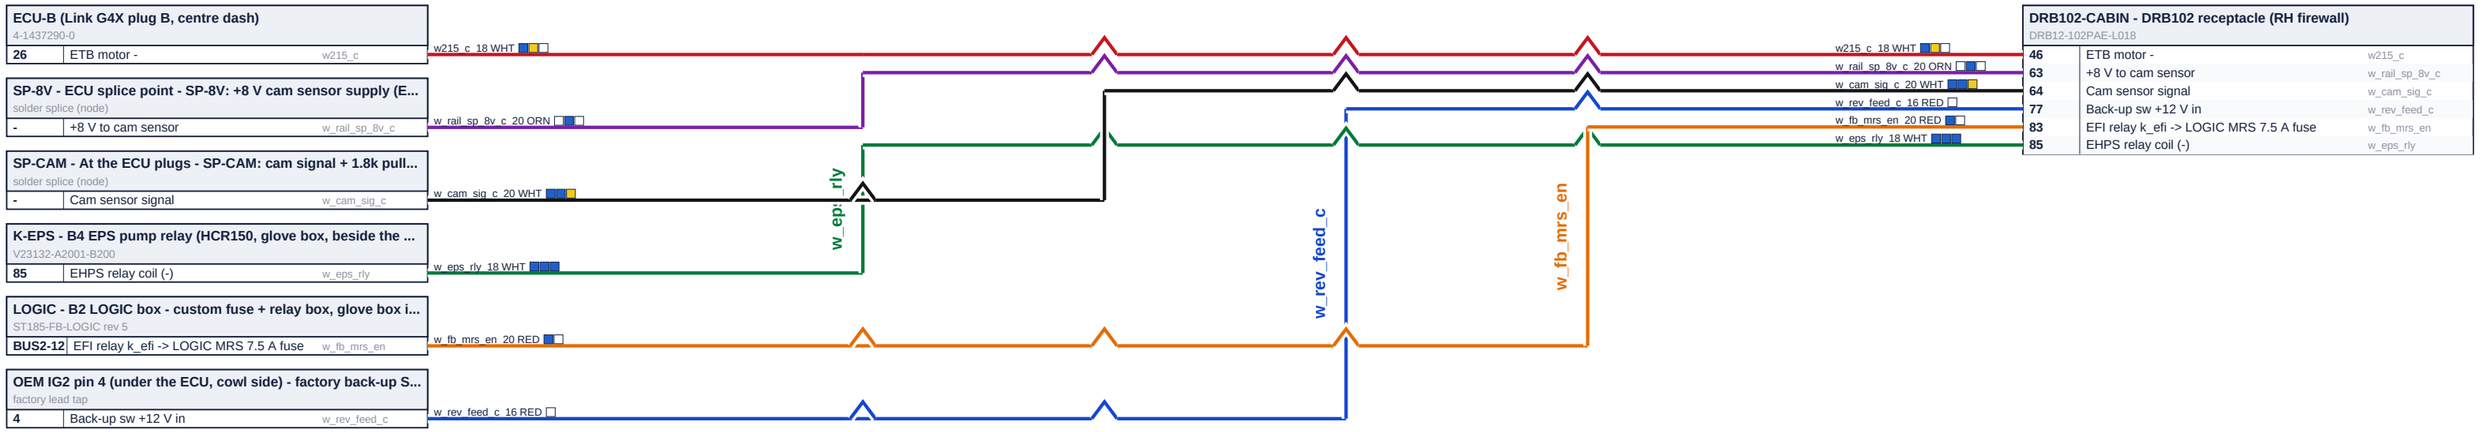


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

### REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 8 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 8 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 3 of 9)

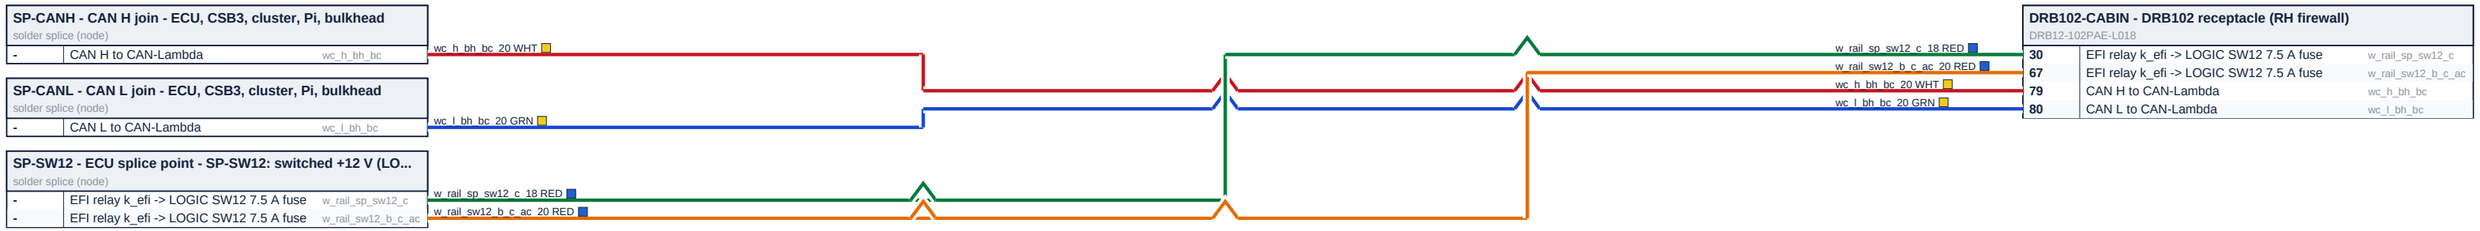


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds)  (part 9 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 9 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar)  (part 5 of 5)

**BUS-5V - DT06-12 plug (ECU splice point)**
DT06-12SA


| | | |
|---|---|---|
| **8** | +5 V pedal sensor 1 | w_aps_vc1 |
| **9** | +5 V pedal sensor 2 | w210 |
| **12** | +5 V to BUS-5V-2 | w_5v_bus_link |

**BUS-GNDOUT-A - DT06-12 plug (ECU splice point)**
DT06-12SA

| | | |
|---|---|---|
| **7** | Pedal 1 ground | w40 |
| **8** | Pedal 2 ground | w_aps_gnd2 |

**POWER-NEG-BAR - POWER box NEG bar M8 stud (glove box)**
end

| | | |
|---|---|---|
| **-** | A/C coolant-OK ground | w_ac_cool_gnd |

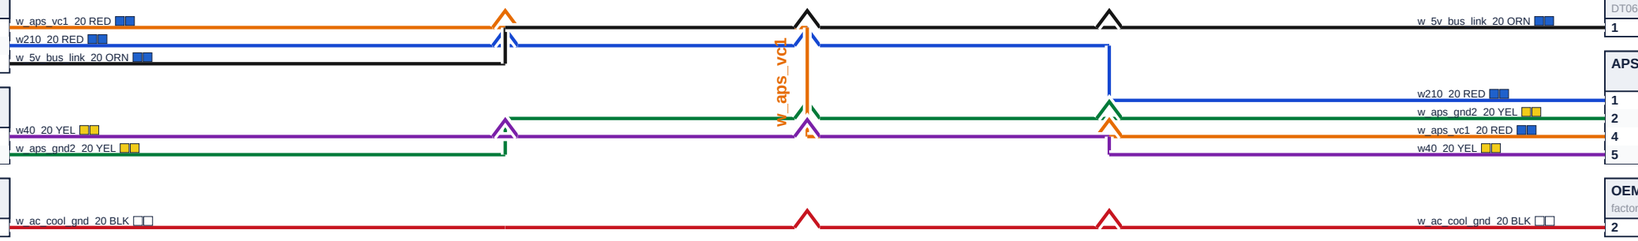


**BUS-5V-2 - DT06-8 plug (ECU splice point)**
DT06-08SA

| | | |
|---|---|---|
| **1** | +5 V from BUS-5V | w_5v_bus_link |

**APS-PEDAL - accelerator pedal sensor**

| | | |
|---|---|---|
| **1** | +5 V pedal sensor 2 | w210 |
| **2** | Pedal 2 ground | w_aps_gnd2 |
| **4** | +5 V pedal sensor 1 | w_aps_vc1 |
| **5** | Pedal 1 ground | w40 |

**OEM A/C amplifier A18 (1993 book: A15)**
factory lead tap

| | | |
|---|---|---|
| **2** | A/C coolant-OK ground | w_ac_cool_gnd |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**


| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar)  (part 1 of 5)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 10 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar)  (part 5 of 5)

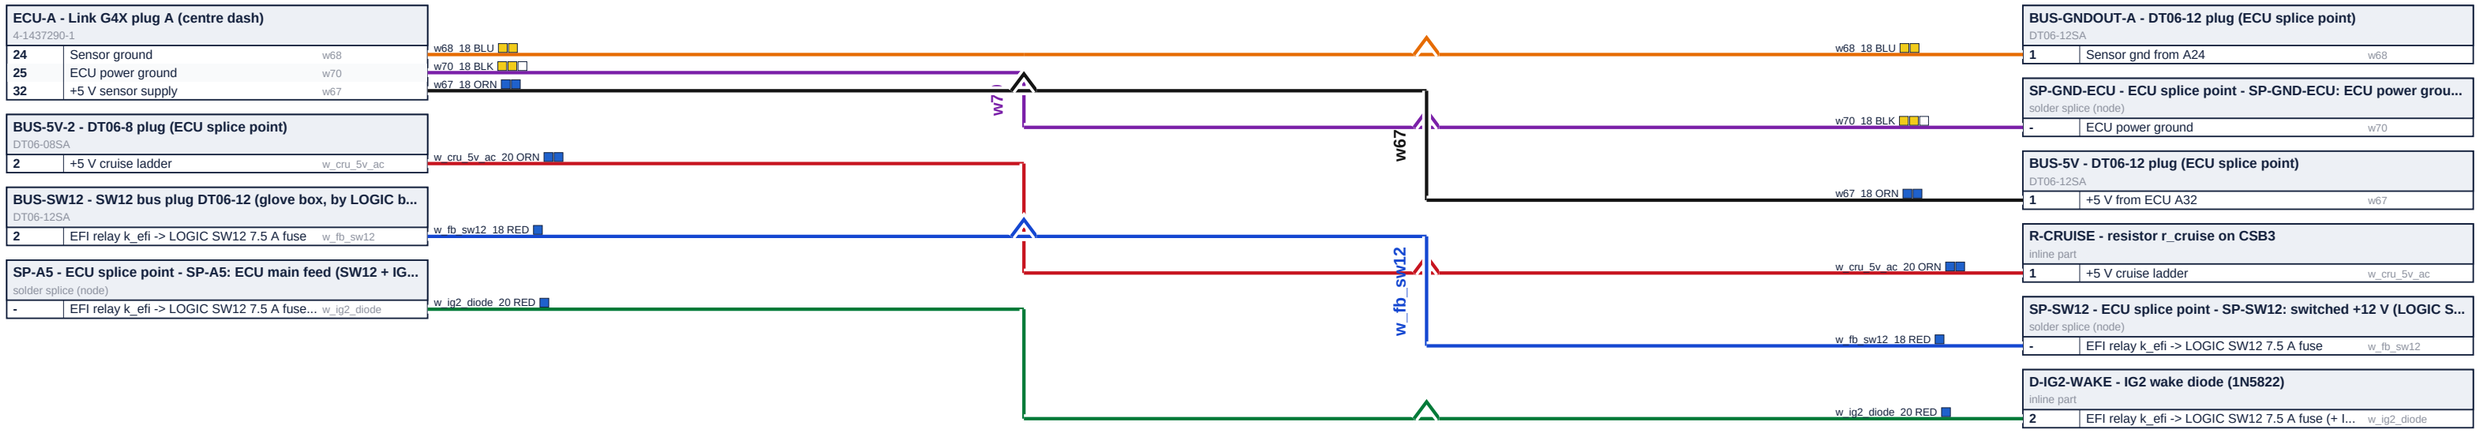


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar)  (part 2 of 5)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 11 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar)  (part 5 of 5)

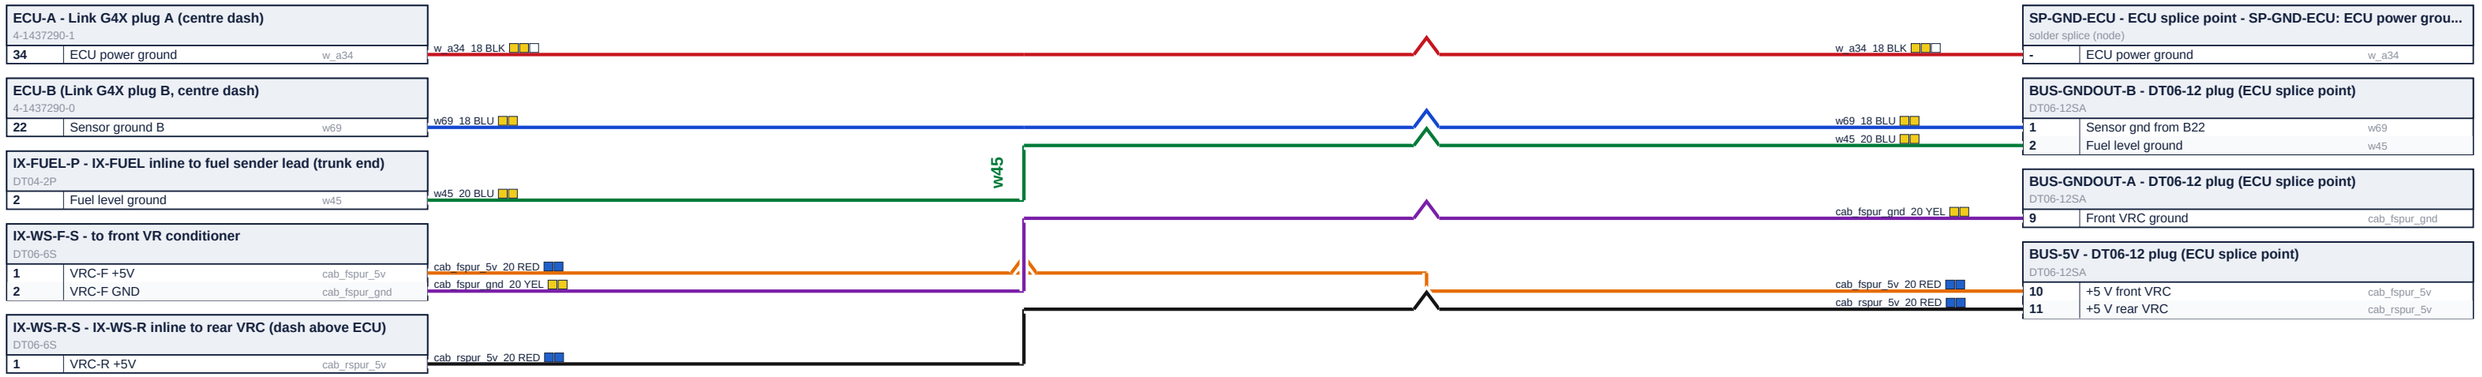


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar)  (part 3 of 5)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 12 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar)  (part 5 of 5)

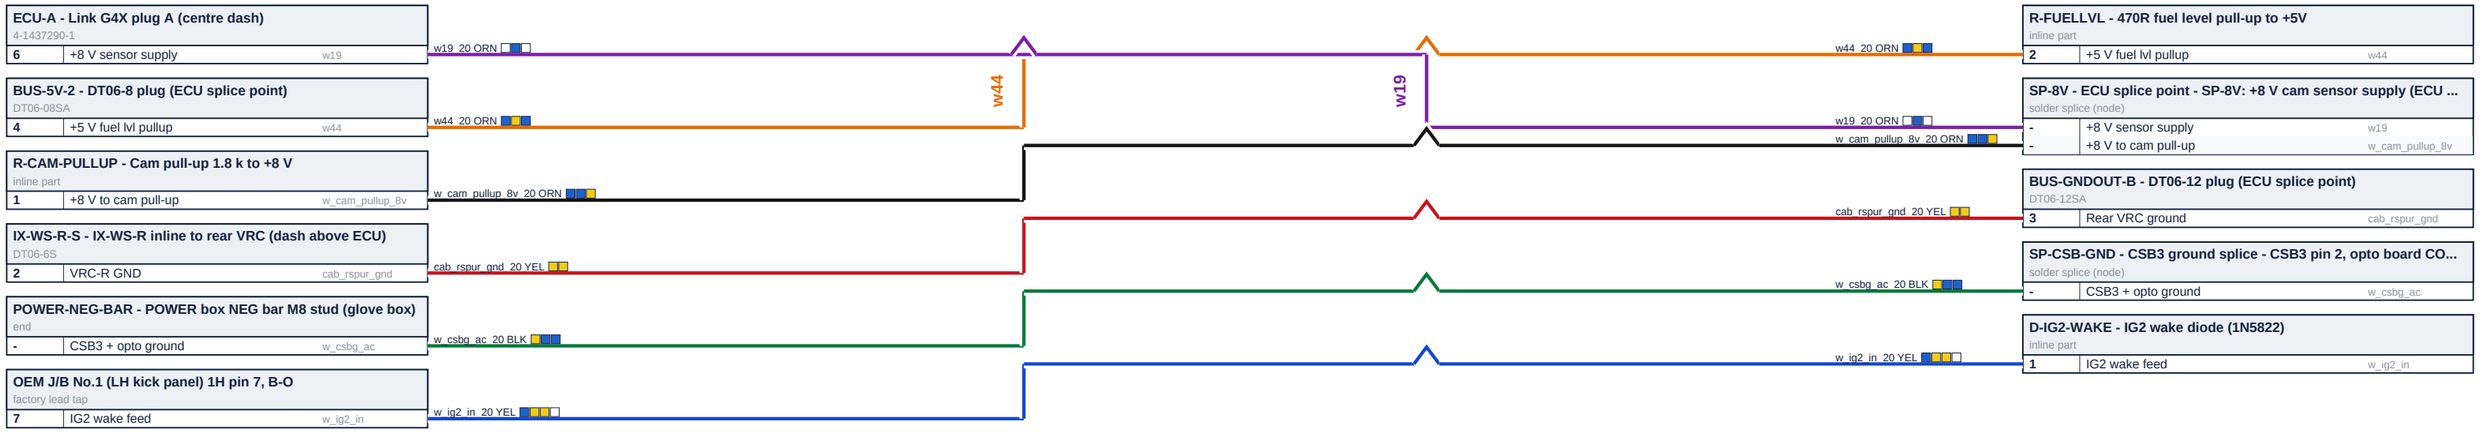


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar)  (part 4 of 5)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 13 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar)  (part 4 of 5)

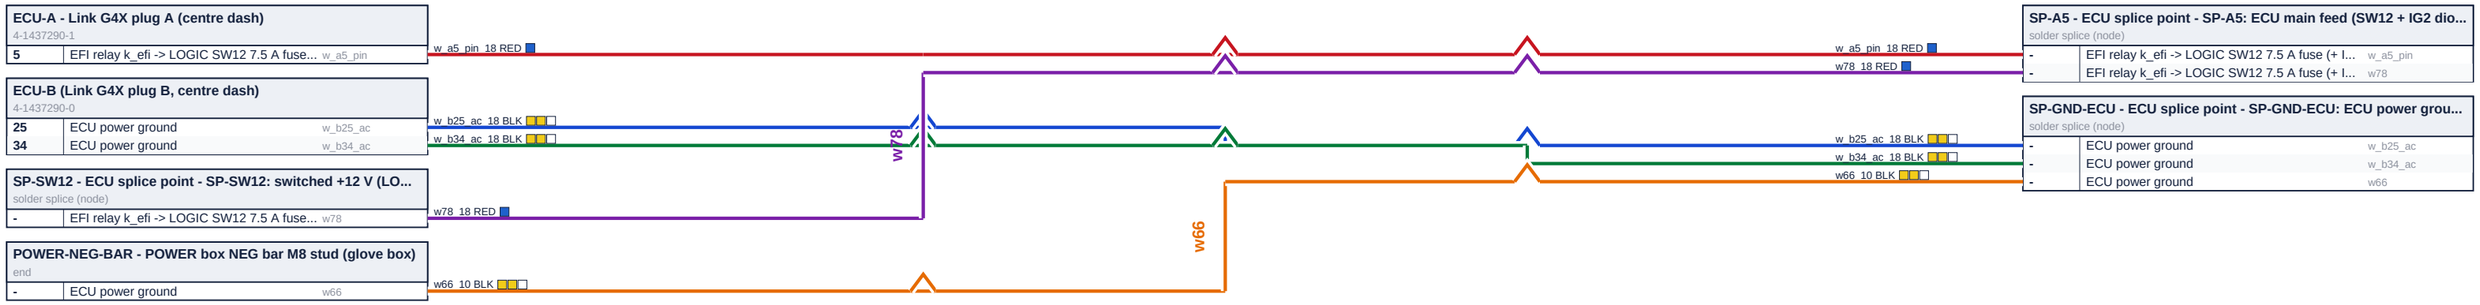


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar)  (part 5 of 5)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 14 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 5 of 6)

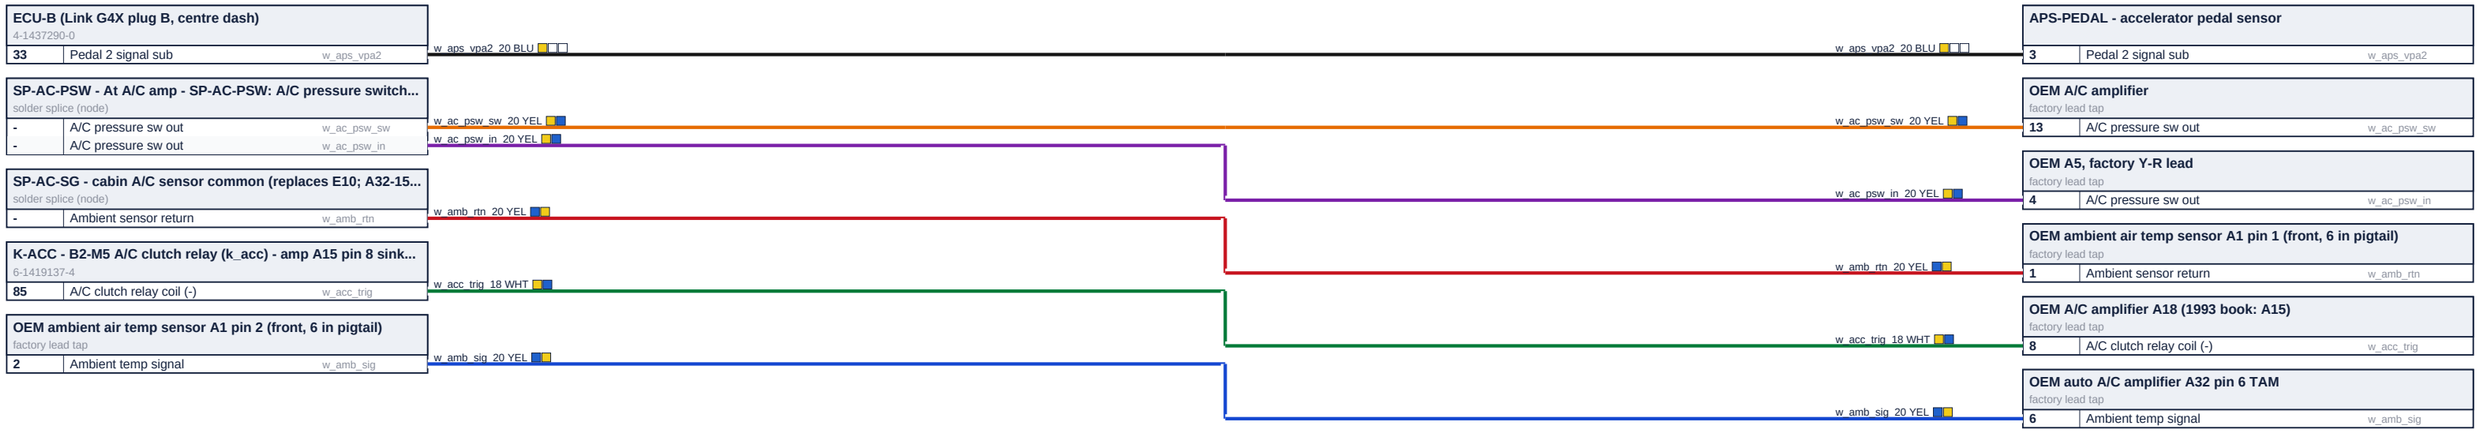


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 1 of 6)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 15 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 5 of 6)

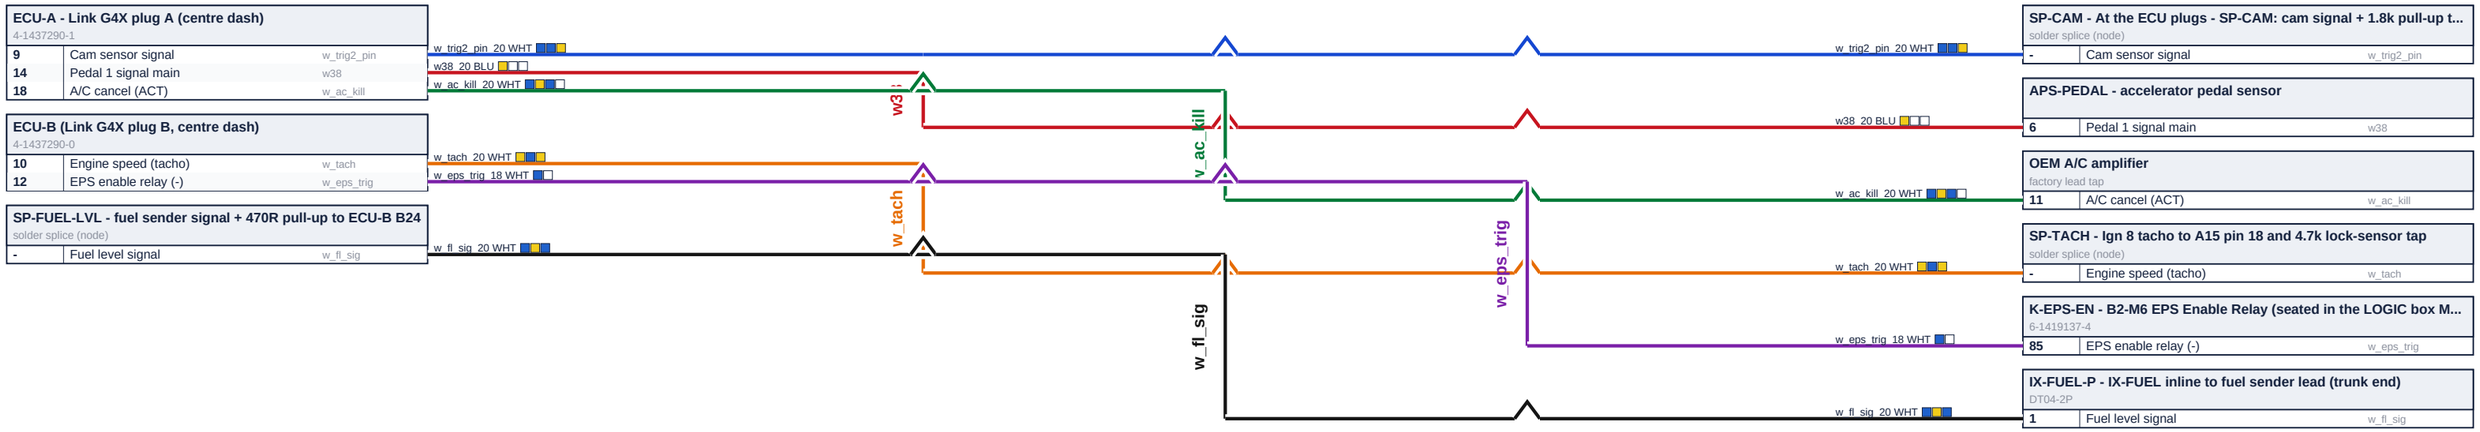


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

### REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 2 of 6)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 16 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 5 of 6)

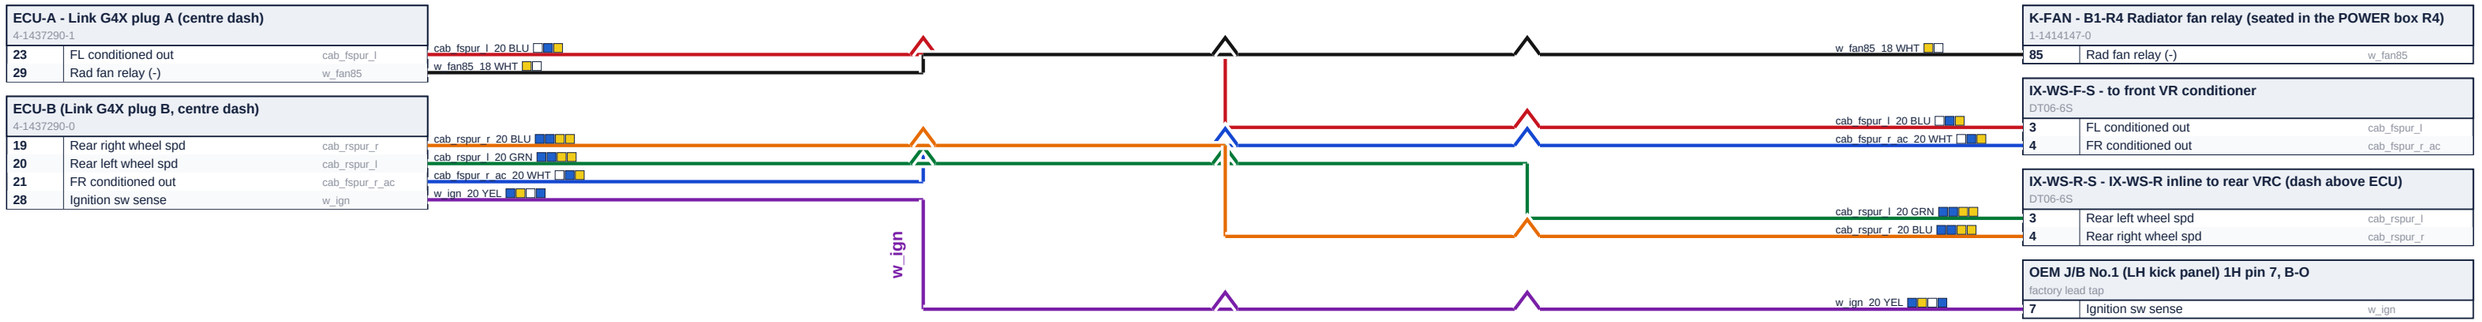


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 3 of 6)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 17 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 5 of 6)

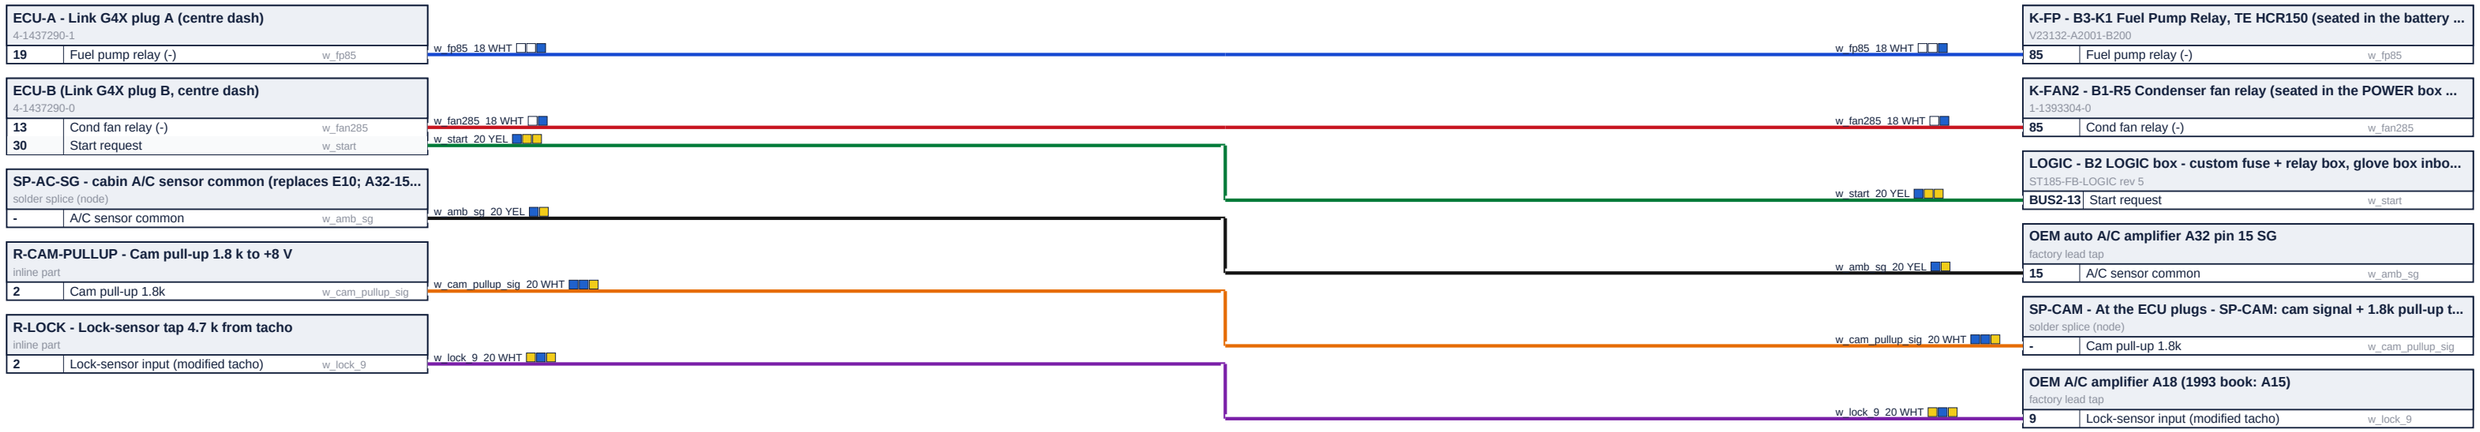


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

### REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 4 of 6)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 18 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 5 of 6)

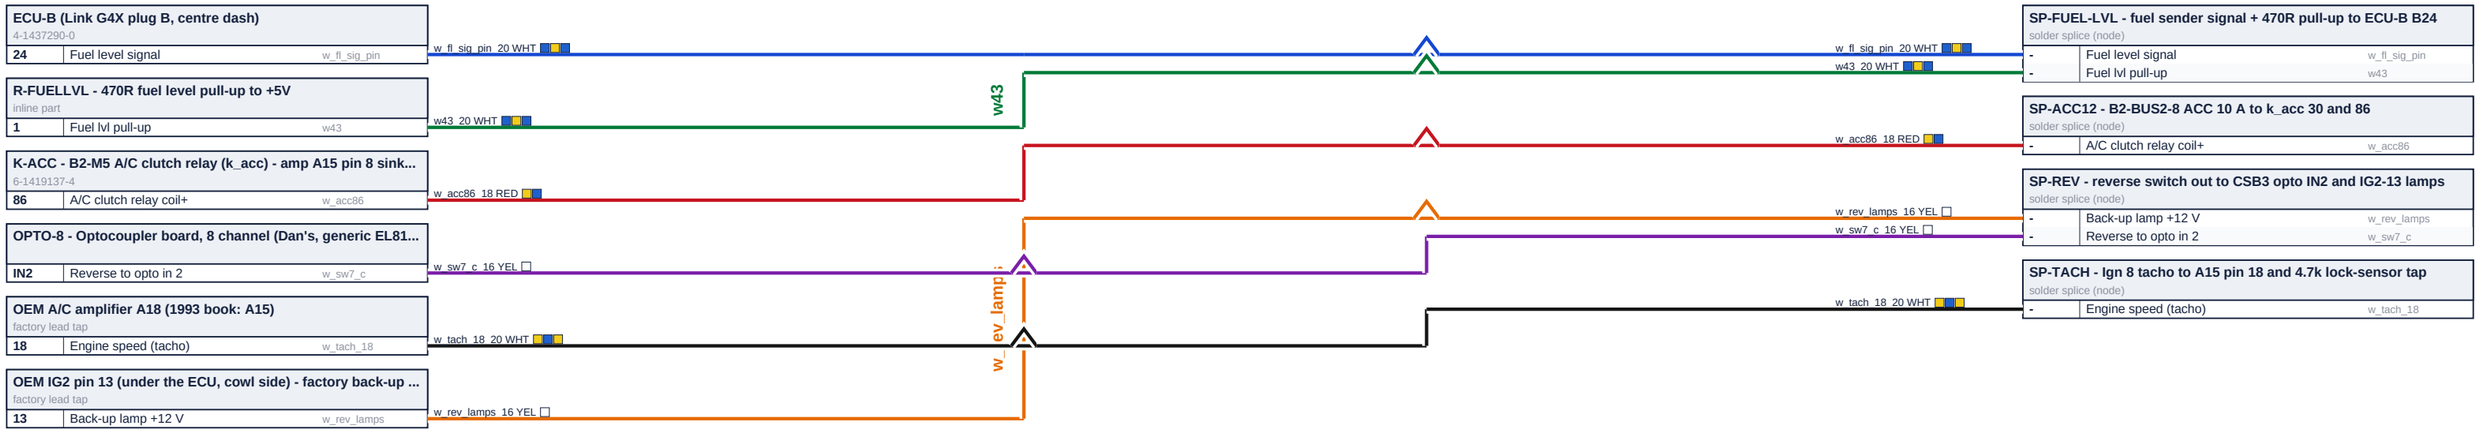


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

### REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 5 of 6)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 19 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 0 of 6)

| R-LOCK - Lock-sensor tap 4.7 k from tacho<br>inline part | | |
|---|---|---|
| 1 | Tacho to lock-sensor 4.7k | w_tach_r |

w_tach_r  20 WHT

w_tach_r  20 WHT

| SP-TACH - Ign 8 tacho to A15 pin 18 and 4.7k lock-sensor tap<br>solder splice (node) | | |
|---|---|---|
| - | Tacho to lock-sensor 4.7k | w_tach_r |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses  (part 6 of 6)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 20 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk  (part 5 of 4)

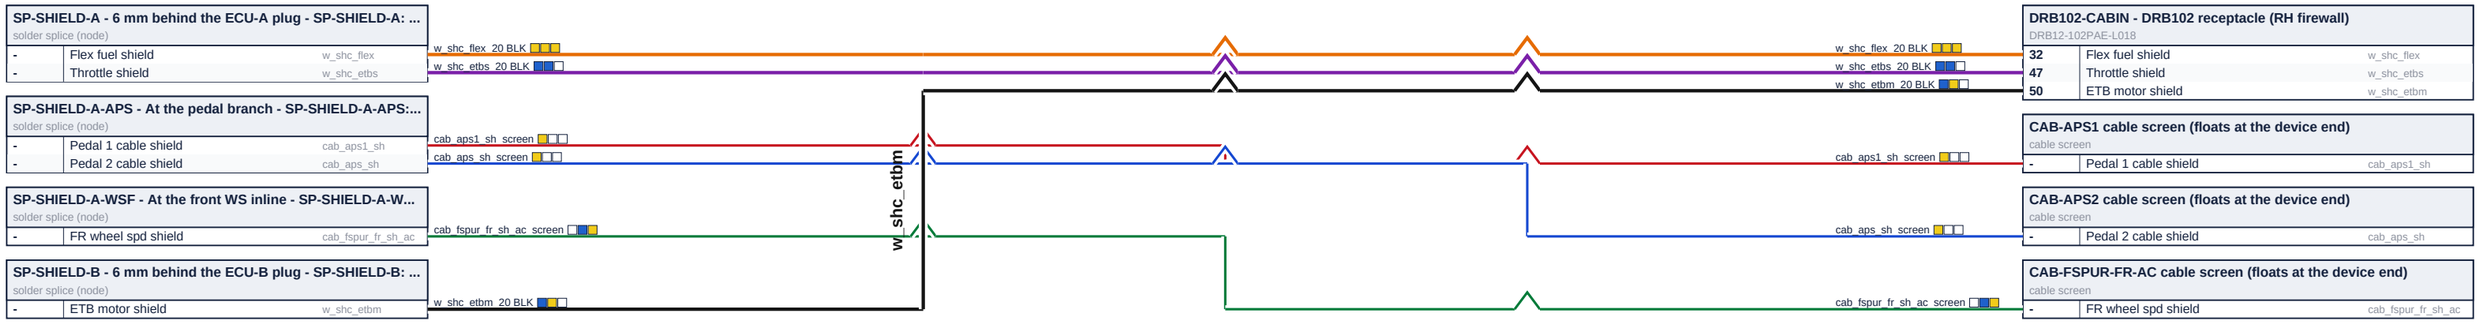


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk  (part 1 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 21 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk  (part 5 of 4)

**SP-SHIELD-A - 6 mm behind the ECU-A plug - SP-SHIELD-A: ...**
solder splice (node)

| | | |
|---|---|---|
| - | Turbo speed shield | w_shc_turbo |
| - | Cam sensor shield | w_shc_cam |
| - | Crank sensor shield | w_shc_crank |

**SP-SHIELD-A-WSF - At the front WS inline - SP-SHIELD-A-W...**
solder splice (node)

| | | |
|---|---|---|
| - | WS-F screen drain | cab_fspur_sh |

**SP-SHIELD-B - 6 mm behind the ECU-B plug - SP-SHIELD-B: ...**
solder splice (node)

| | | |
|---|---|---|
| - | Gearbox speed shield | w_shc_vss |
| - | Knock sensor shield | w_shc_knock1 |

w_shc_turbo_20 BLK
w_shc_cam_20 BLK
w_shc_crank_20 BLK
cab_fspur_sh_screen
w_shc_vss_20 BLK
w_shc_knock1_20 BLK
w_shc_vss
w_shc_knock
w_shc_turbo_20 BLK
w_shc_cam_20 BLK
w_shc_vss_20 BLK
w_shc_knock1_20 BLK
w_shc_crank_20 BLK
cab_fspur_sh_screen

**DRB102-CABIN - DRB102 receptacle (RH firewall)**
DRB12-102PAE-L018

| | | |
|---|---|---|
| 57 | Turbo speed shield | w_shc_turbo |
| 66 | Cam sensor shield | w_shc_cam |
| 69 | Gearbox speed shield | w_shc_vss |
| 73 | Knock sensor shield | w_shc_knock1 |
| 76 | Crank sensor shield | w_shc_crank |

**IX-WS-F-S - to front VR conditioner**
DT06-6S

| | | |
|---|---|---|
| 5 | WS-F screen drain | cab_fspur_sh |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**


| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk  (part 2 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 22 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk  (part 5 of 4)

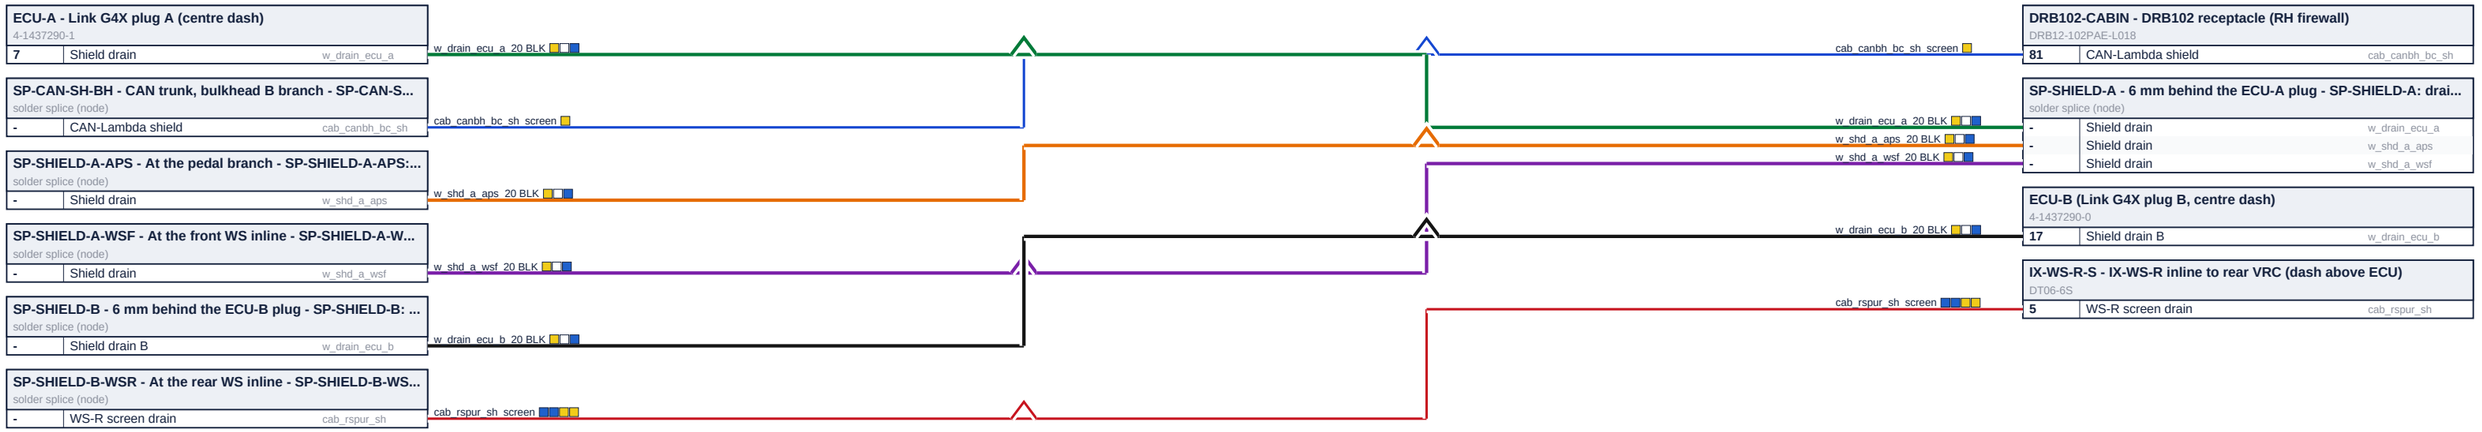


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk  (part 3 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 23 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk  (part 0 of 4)




**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk  (part 4 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 24 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

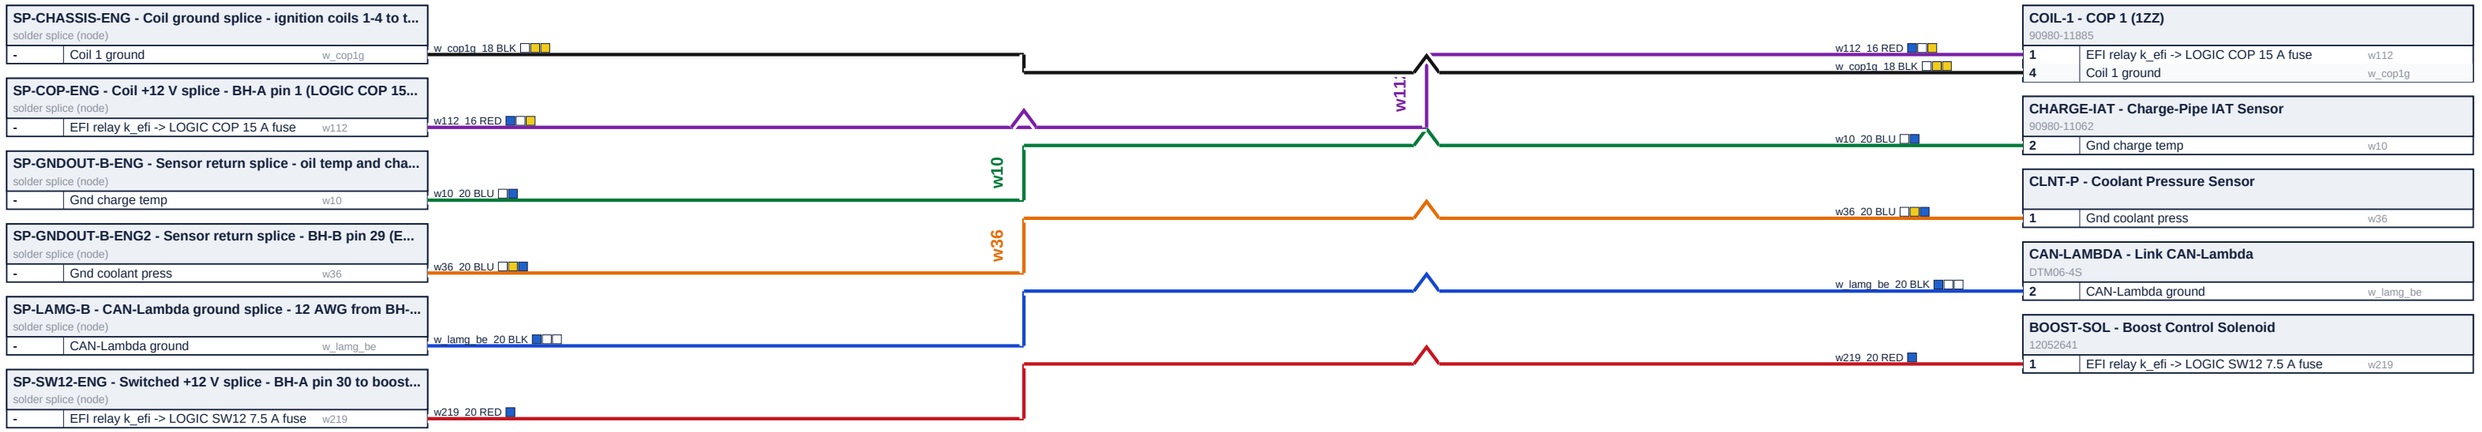


**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL **IDENT BANDS (R87):** Blue Yellow White built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 1 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 25 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

**SP-CHASSIS-ENG - Coil ground splice - ignition coils 1-4 to t...**
solder splice (node)

| | | |
|---|---|---|
| - | Coil 2 ground | w_cop2g |
| - | Coil 3 ground | w_cop3g |
| - | Coil 4 ground | w_cop4g |

**SP-COP-ENG - Coil +12 V splice - BH-A pin 1 (LOGIC COP 15...**
solder splice (node)

| | | |
|---|---|---|
| - | EFI relay k_efi -> LOGIC COP 15 A fuse | w113 |
| - | EFI relay k_efi -> LOGIC COP 15 A fuse | w114 |
| - | EFI relay k_efi -> LOGIC COP 15 A fuse | w115 |

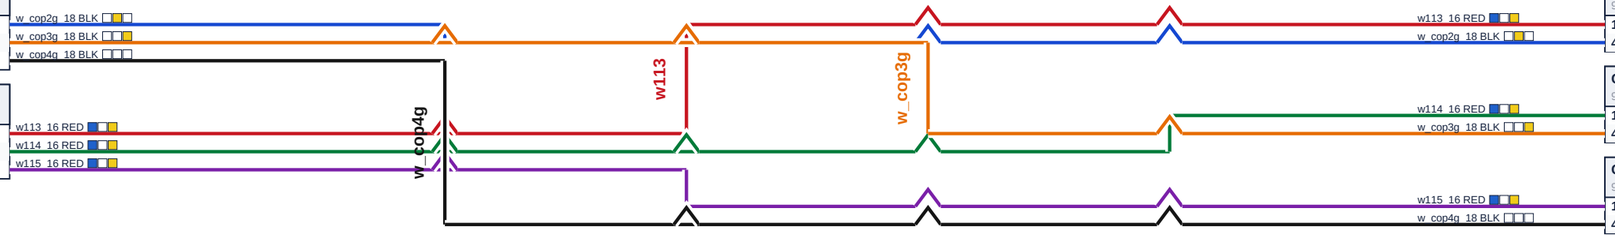


**COIL-2 - COP 2 (1ZZ)**
90980-11885

| | | |
|---|---|---|
| 1 | EFI relay k_efi -> LOGIC COP 15 A fuse | w113 |
| 4 | Coil 2 ground | w_cop2g |

**COIL-3 - COP 3 (1ZZ)**
90980-11885

| | | |
|---|---|---|
| 1 | EFI relay k_efi -> LOGIC COP 15 A fuse | w114 |
| 4 | Coil 3 ground | w_cop3g |

**COIL-4 - COP 4 (1ZZ)**
90980-11885

| | | |
|---|---|---|
| 1 | EFI relay k_efi -> LOGIC COP 15 A fuse | w115 |
| 4 | Coil 4 ground | w_cop4g |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 2 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 26 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

| DRB102-ENGINE - BULKHEAD | | |
|---|---|---|
| DRB16-102SAE-L018 | | |
| 1 | EFI relay k_efi -> LOGIC COP 15 A fuse | w_cop_pwr_e_ae |
| 2 | EFI relay k_efi -> LOGIC INJ 15 A fuse | w_inj_pwr_e_ae |
| 3 | Starter solenoid S | w_strl_e |
| 9 | Coil 1 trigger (IGT) | w120_e |
| 10 | Coil 2 trigger (IGT) | w121_e |
| 11 | Coil 3 trigger (IGT) | w122_e |

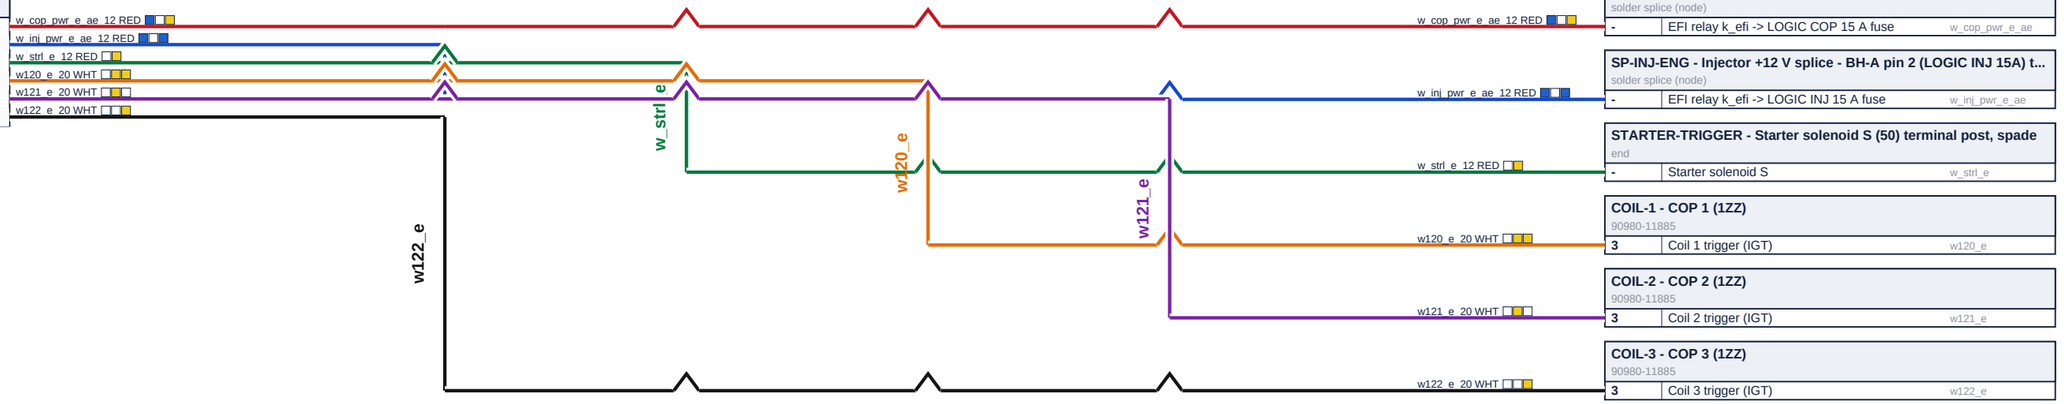


| SP-COP-ENG - Coil +12 V splice - BH-A pin 1 (LOGIC COP 15A) to... | | |
|---|---|---|
| solder splice (node) | | |
| - | EFI relay k_efi -> LOGIC COP 15 A fuse | w_cop_pwr_e_ae |

| SP-INJ-ENG - Injector +12 V splice - BH-A pin 2 (LOGIC INJ 15A) t... | | |
|---|---|---|
| solder splice (node) | | |
| - | EFI relay k_efi -> LOGIC INJ 15 A fuse | w_inj_pwr_e_ae |

| STARTER-TRIGGER - Starter solenoid S (50) terminal post, spade | | |
|---|---|---|
| end | | |
| - | Starter solenoid S | w_strl_e |

| COIL-1 - COP 1 (1ZZ) | | |
|---|---|---|
| 90980-11885 | | |
| 3 | Coil 1 trigger (IGT) | w120_e |

| COIL-2 - COP 2 (1ZZ) | | |
|---|---|---|
| 90980-11885 | | |
| 3 | Coil 2 trigger (IGT) | w121_e |

| COIL-3 - COP 3 (1ZZ) | | |
|---|---|---|
| 90980-11885 | | |
| 3 | Coil 3 trigger (IGT) | w122_e |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 3 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 27 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

| DRB102-ENGINE - BULKHEAD | | |
|---|---|---|
| DRB16-102SAE-L018 | | |
| 12 | Coil 4 trigger (IGT) | w123_e |
| 13 | +5 V fuel pressure | w_5v_brail_e_c46 |
| 14 | Fuel pressure signal | w32_e |
| 15 | Gnd fuel press + VSS | w_gnd_b_e_c21 |
| 16 | +5 V MAP sensor | w206 |
| 17 | MAP sensor signal | w26_e |

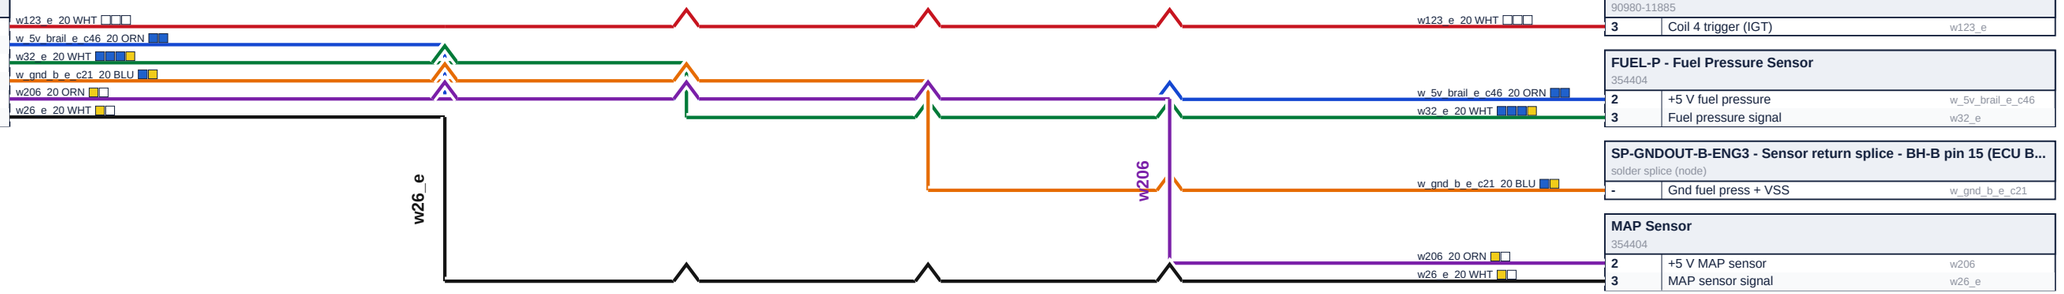


| COIL-4 - COP 4 (1ZZ) | | |
|---|---|---|
| 90980-11885 | | |
| 3 | Coil 4 trigger (IGT) | w123_e |

| FUEL-P - Fuel Pressure Sensor | | |
|---|---|---|
| 354404 | | |
| 2 | +5 V fuel pressure | w_5v_brail_e_c46 |
| 3 | Fuel pressure signal | w32_e |

| SP-GNDOUT-B-ENG3 - Sensor return splice - BH-B pin 15 (ECU B... | | |
|---|---|---|
| solder splice (node) | | |
| - | Gnd fuel press + VSS | w_gnd_b_e_c21 |

| MAP Sensor | | |
|---|---|---|
| 354404 | | |
| 2 | +5 V MAP sensor | w206 |
| 3 | MAP sensor signal | w26_e |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 4 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 28 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

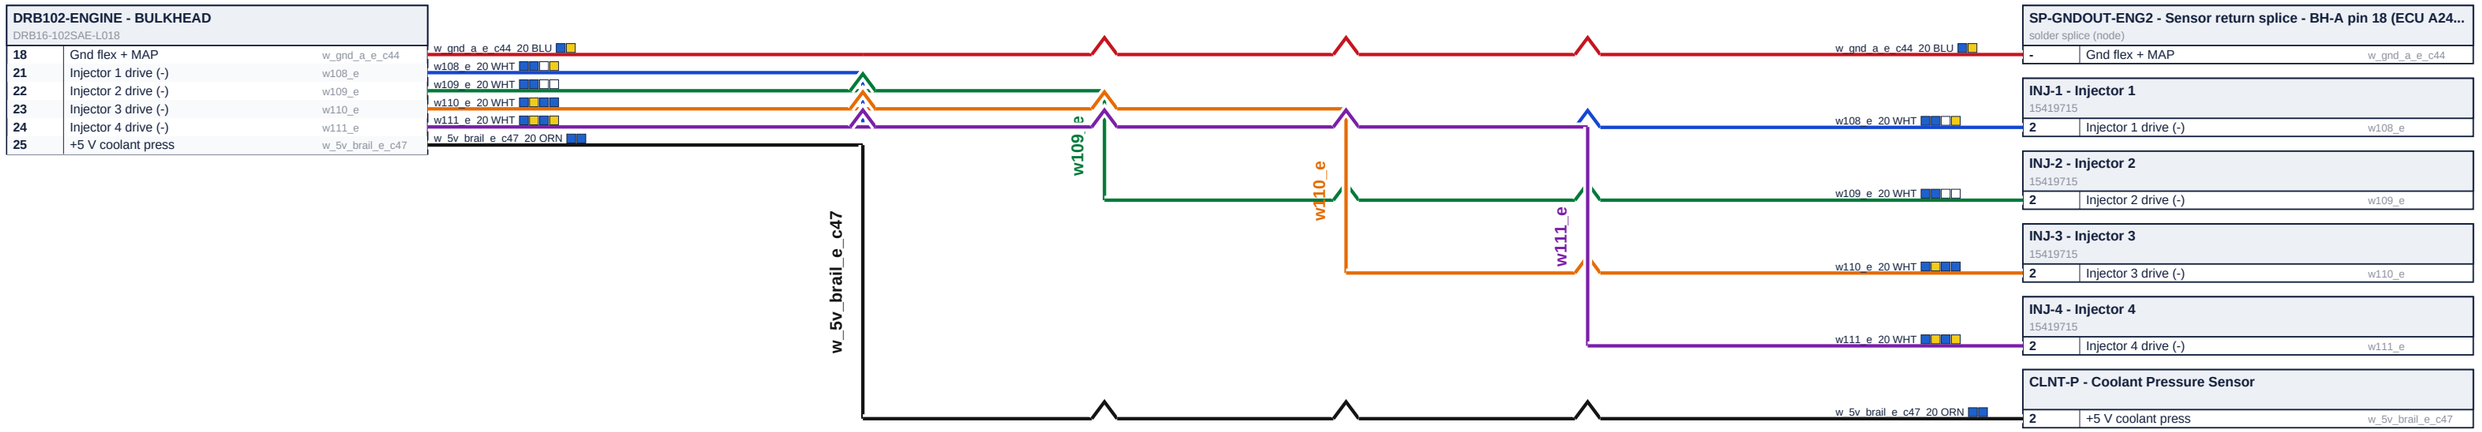


**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 29 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

| DRB102-ENGINE - BULKHEAD | | |
|---|---|---|
| DRB16-102SAE-L018 | | |
| 26 | Coolant press signal | w35_e |
| 27 | +5 V oil pressure | w_5v_brail_e_c45 |
| 28 | Oil pressure signal | w29_e |
| 29 | Gnd oil/clnt/temps | w_gnd_b_e_c19 |
| 30 | EFI relay k_efi -> LOGIC SW12 7.5 A fuse | w_rail_sp_sw12_e |
| 31 | Flex fuel signal | w48_e |

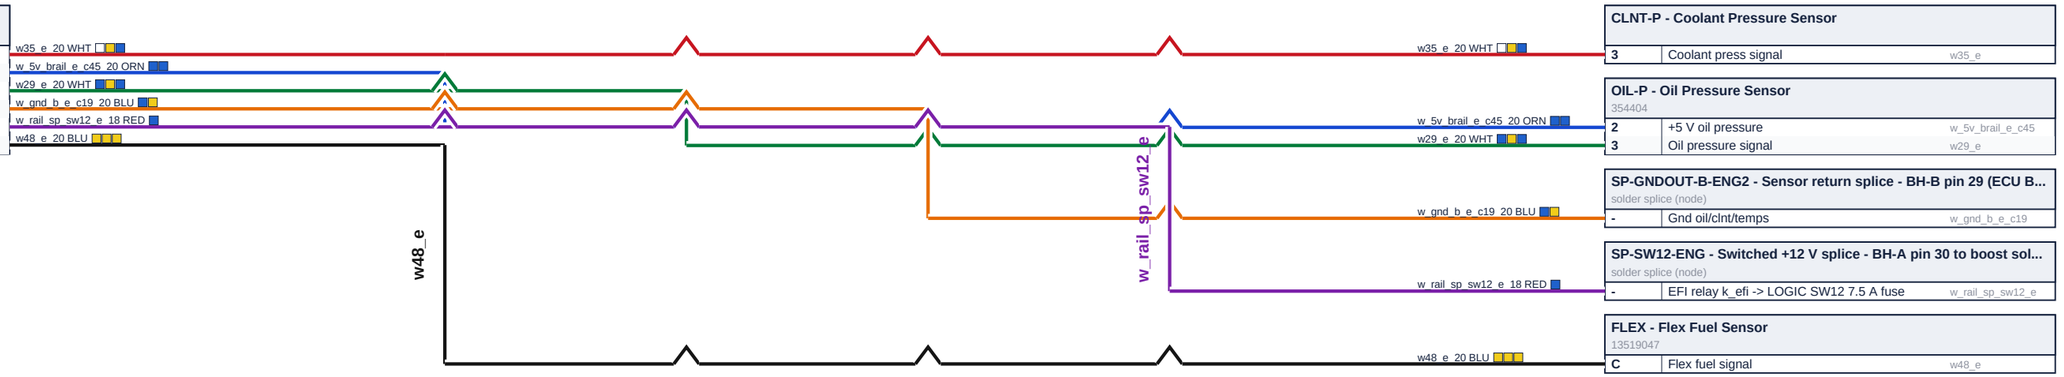


| CLNT-P - Coolant Pressure Sensor | | |
|---|---|---|
| 3 | Coolant press signal | w35_e |

| OIL-P - Oil Pressure Sensor | | |
|---|---|---|
| 354404 | | |
| 2 | +5 V oil pressure | w_5v_brail_e_c45 |
| 3 | Oil pressure signal | w29_e |

| SP-GNDOUT-B-ENG2 - Sensor return splice - BH-B pin 29 (ECU B... | | |
|---|---|---|
| solder splice (node) | | |
| - | Gnd oil/clnt/temps | w_gnd_b_e_c19 |

| SP-SW12-ENG - Switched +12 V splice - BH-A pin 30 to boost sol... | | |
|---|---|---|
| solder splice (node) | | |
| - | EFI relay k_efi -> LOGIC SW12 7.5 A fuse | w_rail_sp_sw12_e |

| FLEX - Flex Fuel Sensor | | |
|---|---|---|
| 13519047 | | |
| C | Flex fuel signal | w48_e |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 6 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 30 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

| DRB102-ENGINE - BULKHEAD | | |
|---|---|---|
| DRB16-102SAE-L018 | | |
| 32 | Flex fuel shield | cab_flex_sh |
| 33 | Intake temp signal | w202_e |
| 34 | Gnd IAT/TPS/coolant | w_rail_sp_gndout_e |
| 41 | +5 V throttle sensor | w126 |
| 42 | Throttle pos 1 main | w128_e |
| 44 | Throttle pos 2 sub | w129_e |

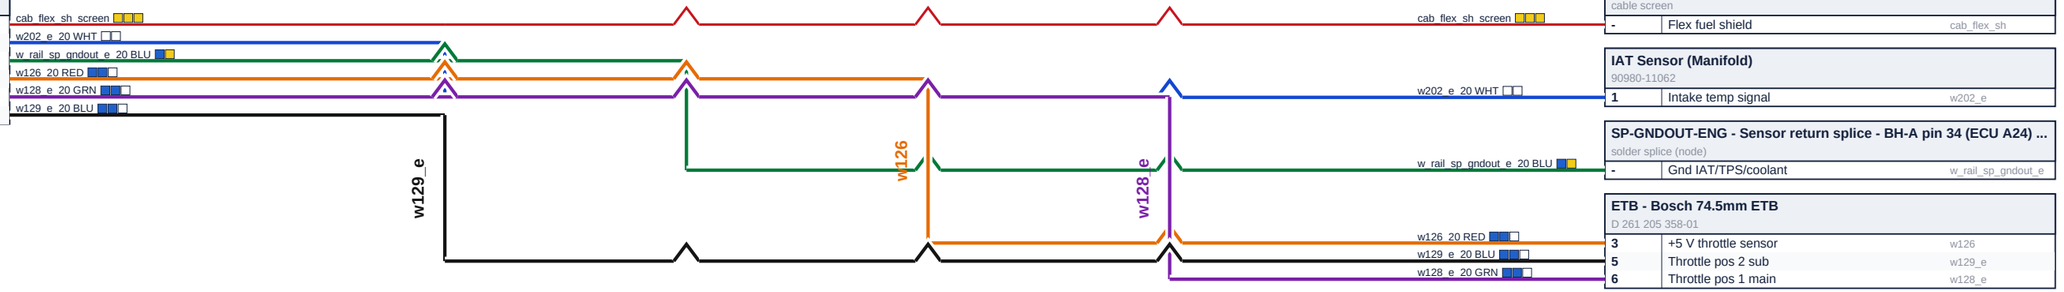


| CAB-FLEX cable screen (floats at the device end) | | |
|---|---|---|
| cable screen | | |
| - | Flex fuel shield | cab_flex_sh |

| IAT Sensor (Manifold) | | |
|---|---|---|
| 90980-11062 | | |
| 1 | Intake temp signal | w202_e |

| SP-GNDOUT-ENG - Sensor return splice - BH-A pin 34 (ECU A24) ... | | |
|---|---|---|
| solder splice (node) | | |
| - | Gnd IAT/TPS/coolant | w_rail_sp_gndout_e |

| ETB - Bosch 74.5mm ETB | | |
|---|---|---|
| D 261 205 358-01 | | |
| 3 | +5 V throttle sensor | w126 |
| 5 | Throttle pos 2 sub | w129_e |
| 6 | Throttle pos 1 main | w128_e |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 7 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 31 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

| DRB102-ENGINE - BULKHEAD | | |
|---|---|---|
| DRB16-102SAE-L018 | | |
| 45 | ETB motor + | w124_e_ae |
| 46 | ETB motor - | w215_e_ae |
| 47 | Throttle shield | cab_etbs_sh |
| 50 | ETB motor shield | cab_etbm_ae_sh |
| 52 | +5 V turbo speed | w218 |
| 53 | Turbo speed signal | w16_e |

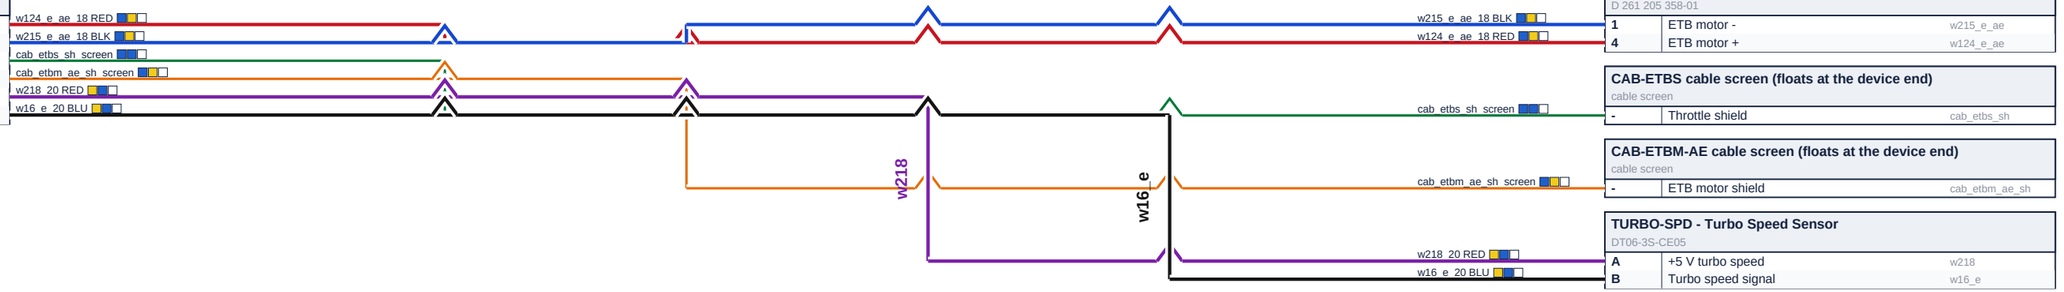


| ETB - Bosch 74.5mm ETB | | |
|---|---|---|
| D 261 205 358-01 | | |
| 1 | ETB motor - | w215_e_ae |
| 4 | ETB motor + | w124_e_ae |

| CAB-ETBS cable screen (floats at the device end) | | |
|---|---|---|
| cable screen | | |
| - | Throttle shield | cab_etbs_sh |

| CAB-ETBM-AE cable screen (floats at the device end) | | |
|---|---|---|
| cable screen | | |
| - | ETB motor shield | cab_etbm_ae_sh |

| TURBO-SPD - Turbo Speed Sensor | | |
|---|---|---|
| DT06-3S-CE05 | | |
| A | +5 V turbo speed | w218 |
| B | Turbo speed signal | w16_e |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 8 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 32 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

| DRB102-ENGINE - BULKHEAD | | |
|---|---|---|
| DRB16-102SAE-L018 | | |
| 56 | Gnd turbo speed | w17 |
| 57 | Turbo speed shield | cab_turbo_sh |
| 58 | Boost solenoid (-) | w103_e |
| 59 | Charge temp signal | w204_e |
| 61 | Oil temp signal | w203_e |
| 63 | +8 V to cam sensor | w_rail_sp_8v_e |

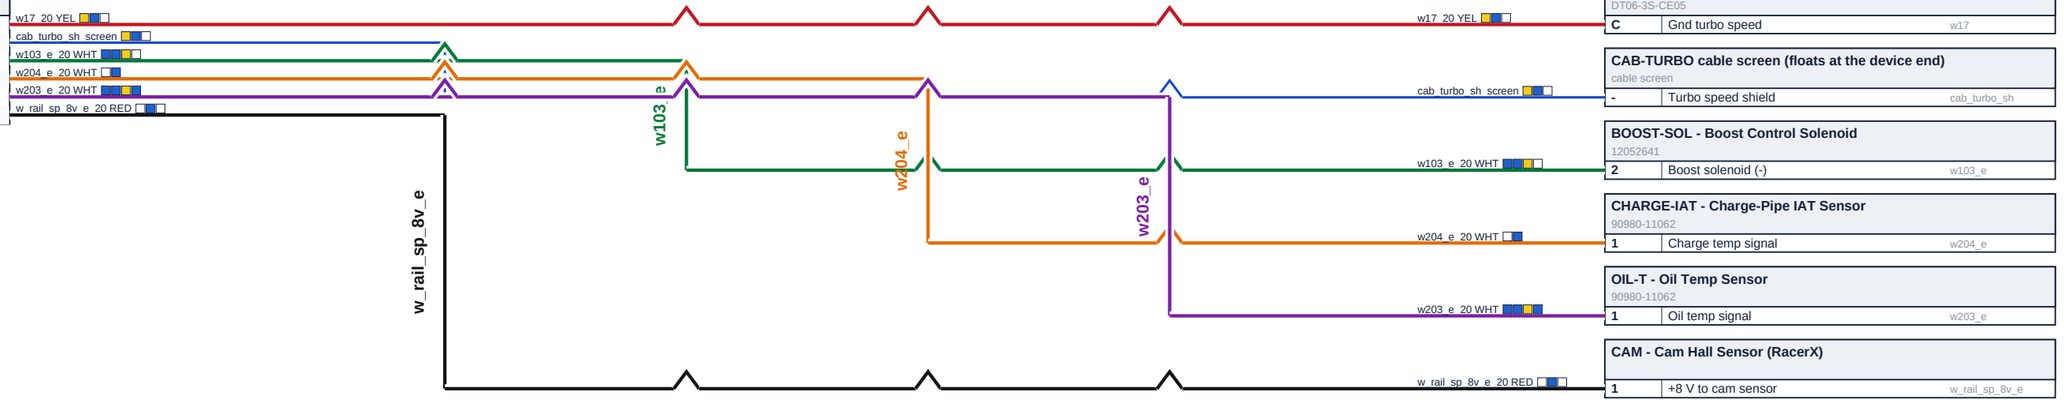


| TURBO-SPD - Turbo Speed Sensor | | |
|---|---|---|
| DT06-3S-CE05 | | |
| C | Gnd turbo speed | w17 |

| CAB-TURBO cable screen (floats at the device end) | | |
|---|---|---|
| cable screen | | |
| - | Turbo speed shield | cab_turbo_sh |

| BOOST-SOL - Boost Control Solenoid | | |
|---|---|---|
| 12052641 | | |
| 2 | Boost solenoid (-) | w103_e |

| CHARGE-IAT - Charge-Pipe IAT Sensor | | |
|---|---|---|
| 90980-11062 | | |
| 1 | Charge temp signal | w204_e |

| OIL-T - Oil Temp Sensor | | |
|---|---|---|
| 90980-11062 | | |
| 1 | Oil temp signal | w203_e |

| CAM - Cam Hall Sensor (RacerX) | | |
|---|---|---|
| 1 | +8 V to cam sensor | w_rail_sp_8v_e |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 9 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 33 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

| DRB102-ENGINE - BULKHEAD | | |
|---|---|---|
| DRB16-102SAE-L018 | | |
| 64 | Cam sensor signal | cab_cam_c2 |
| 65 | Gnd cam sensor | w24 |
| 66 | Cam sensor shield | cab_cam_sh |
| 67 | EFI relay k_efi -> LOGIC SW12 7.5 A fuse | w_vss_12v |
| 69 | Gearbox speed shield | cab_vss_sh |
| 70 | Coolant temp signal | w201_e |

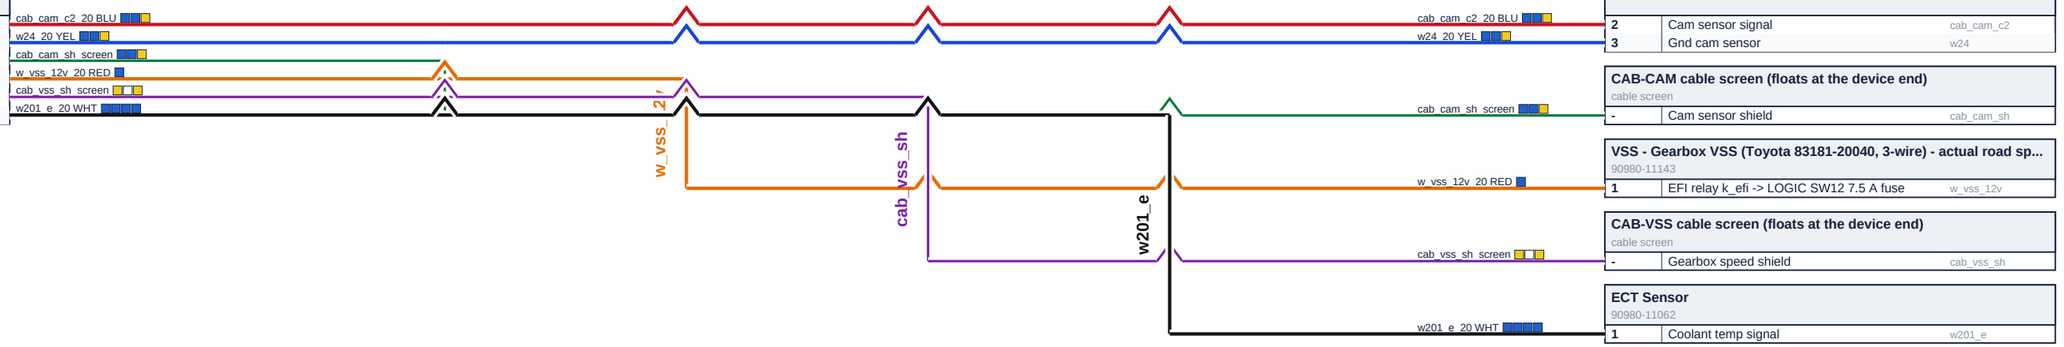


| CAM - Cam Hall Sensor (RacerX) | | |
|---|---|---|
| 2 | Cam sensor signal | cab_cam_c2 |
| 3 | Gnd cam sensor | w24 |

| CAB-CAM cable screen (floats at the device end) | | |
|---|---|---|
| cable screen | | |
| - | Cam sensor shield | cab_cam_sh |

| VSS - Gearbox VSS (Toyota 83181-20040, 3-wire) - actual road sp... | | |
|---|---|---|
| 90980-11143 | | |
| 1 | EFI relay k_efi -> LOGIC SW12 7.5 A fuse | w_vss_12v |

| CAB-VSS cable screen (floats at the device end) | | |
|---|---|---|
| cable screen | | |
| - | Gearbox speed shield | cab_vss_sh |

| ECT Sensor | | |
|---|---|---|
| 90980-11062 | | |
| 1 | Coolant temp signal | w201_e |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 10 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 34 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

| DRB102-ENGINE - BULKHEAD | | |
|---|---|---|
| DRB16-102SAE-L018 | | |
| 71 | Knock sensor signal | cab_knock1_c1 |
| 72 | Knock sensor (-) | cab_knock1_c2 |
| 73 | Knock sensor shield | cab_knock1_sh |
| 74 | Crank sensor signal | cab_crank_c1 |
| 75 | Gnd crank sensor | w2 |
| 76 | Crank sensor shield | cab_crank_sh |

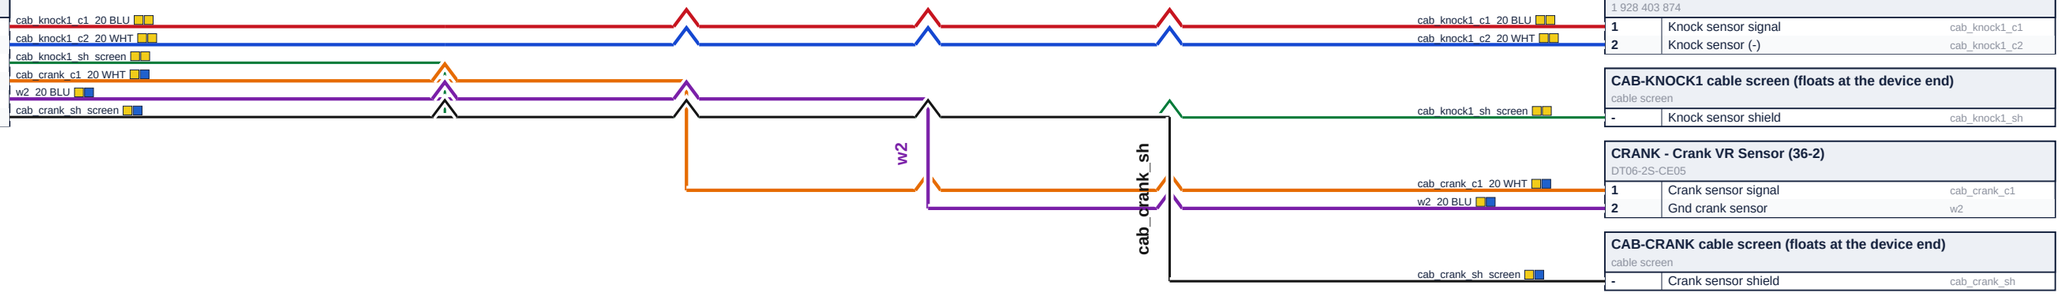


| KNOCK-1 - Knock Sensor 1 | | |
|---|---|---|
| 1 928 403 874 | | |
| 1 | Knock sensor signal | cab_knock1_c1 |
| 2 | Knock sensor (-) | cab_knock1_c2 |

| CAB-KNOCK1 cable screen (floats at the device end) | | |
|---|---|---|
| cable screen | | |
| - | Knock sensor shield | cab_knock1_sh |

| CRANK - Crank VR Sensor (36-2) | | |
|---|---|---|
| DT06-2S-CE05 | | |
| 1 | Crank sensor signal | cab_crank_c1 |
| 2 | Gnd crank sensor | w2 |

| CAB-CRANK cable screen (floats at the device end) | | |
|---|---|---|
| cable screen | | |
| - | Crank sensor shield | cab_crank_sh |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 11 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 35 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

# ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

**SP-CANH-LAM - CAN H join - bulkhead, Lambda, 120 ohm end**
solder splice (node)

| | | |
|---|---|---|
| - | CAN H to CAN-Lambda | wc_h_lam_be |

**SP-CANL-LAM - CAN L join - bulkhead, Lambda, 120 ohm end**
solder splice (node)

| | | |
|---|---|---|
| - | CAN L to CAN-Lambda | wc_l_lam_be |

**SP-LAM12-B - CAN-Lambda +12 V splice - 12 AWG from BH-...**
solder splice (node)

| | | |
|---|---|---|
| - | EFI relay k_efi -> LOGIC LAM 7.5 A fuse | w_lam12_be14 |

**REV-SW - Back-up SW B1**
90980-11250

| | | |
|---|---|---|
| 1 | Reverse sw +12 V out | w_sw7_e |
| 2 | Back-up sw +12 V in | w_rev_feed_e |

**CAB-CAN-LAM cable screen (floats at the device end)**
cable screen

| | | |
|---|---|---|
| - | CAN-Lambda shield | cab_lamcan_be_sh |

wc_h_lam_be_20 WHT
wc_l_lam_be_20 GRN
w_lam12_be14_12 RED
w_sw7_e_16 YEL
w_rev_feed_e_16 RED
cab_lamcan_be_sh_screen

w_rev_feed_e
w_sw7_e
cab_lamcan_be_sh

w_rev_feed_e_16 RED
w_sw7_e_16 YEL
wc_h_lam_be_20 WHT
wc_l_lam_be_20 GRN
cab_lamcan_be_sh_screen
w_lam12_be14_12 RED

**DRB102-ENGINE - BULKHEAD**
DRB16-102SAE-L018

| | | |
|---|---|---|
| 77 | Back-up sw +12 V in | w_rev_feed_e |
| 78 | Reverse sw +12 V out | w_sw7_e |
| 79 | CAN H to CAN-Lambda | wc_h_lam_be |
| 80 | CAN L to CAN-Lambda | wc_l_lam_be |
| 81 | CAN-Lambda shield | cab_lamcan_be_sh |
| 95 | EFI relay k_efi -> LOGIC LAM 7.5 A fuse | w_lam12_be14 |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**


| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 12 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 36 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

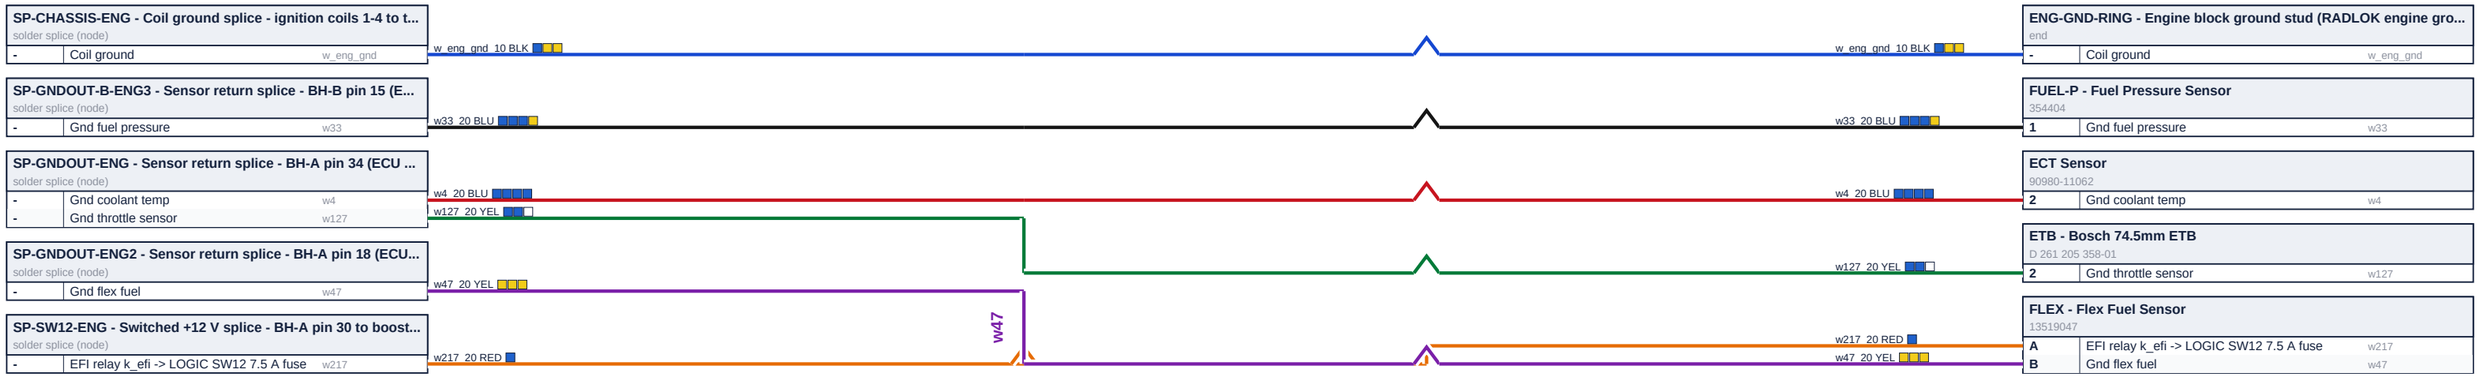


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

## REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 13 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 37 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

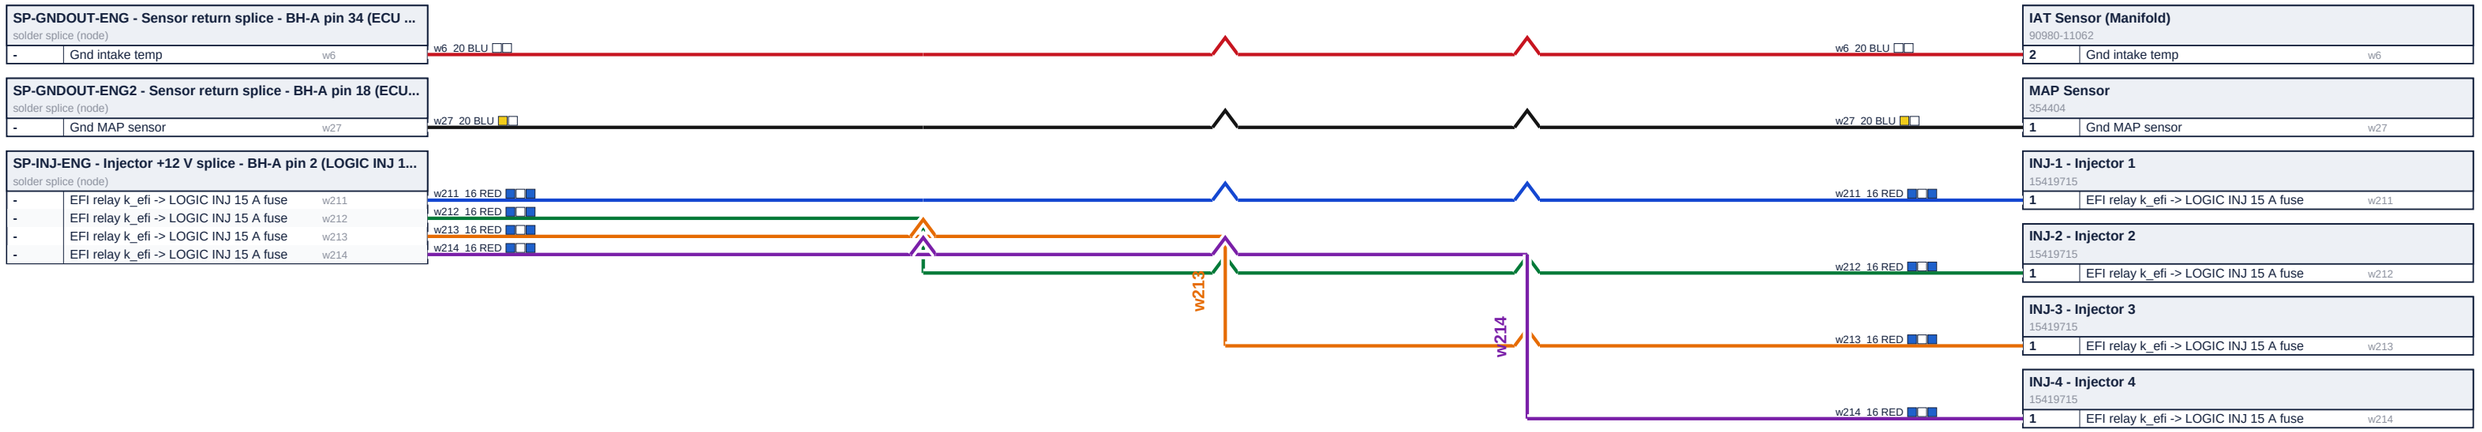


**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL **IDENT BANDS (R87):** Blue Yellow White built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 14 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 38 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 5 of 16)

**SP-CANH-LAM - CAN H join - bulkhead, Lambda, 120 ohm end**
solder splice (node)

| | | |
|---|---|---|
| - | Lambda 120R CAN H | wc_term3 |
| - | CAN H to CAN-Lambda | wc_h_lam_pin |

**SP-CANL-LAM - CAN L join - bulkhead, Lambda, 120 ohm end**
solder splice (node)

| | | |
|---|---|---|
| - | Lambda 120R CAN L | wc_term4 |
| - | CAN L to CAN-Lambda | wc_l_lam_pin |

**SP-GNDOUT-B-ENG - Sensor return splice - oil temp and cha...**
solder splice (node)

| | | |
|---|---|---|
| - | Gnd oil temp | w8 |

**SP-GNDOUT-B-ENG2 - Sensor return splice - BH-B pin 29 (E...**
solder splice (node)

| | | |
|---|---|---|
| - | Gnd oil pressure | w30 |

wc_term3_20 GRN
wc_h_lam_pin_20 WHT
wc_term4_20 GRN
wc_l_lam_pin_20 GRN
w8_20 BLU
w30_20 BLU

wc_term3_20 GRN
wc_term4_20 GRN
wc_l_lam_pin_20 GRN
wc_h_lam_pin_20 WHT
w8_20 BLU
w30_20 BLU

**R-TERM-END - r_term_end**
inline part

| | | |
|---|---|---|
| 1 | Lambda 120R CAN H | wc_term3 |
| 2 | Lambda 120R CAN L | wc_term4 |

**CAN-LAMBDA - Link CAN-Lambda**
DTM06-4S

| | | |
|---|---|---|
| 3 | CAN L to CAN-Lambda | wc_l_lam_pin |
| 4 | CAN H to CAN-Lambda | wc_h_lam_pin |

**OIL-T - Oil Temp Sensor**
90980-11062

| | | |
|---|---|---|
| 2 | Gnd oil temp | w8 |

**OIL-P - Oil Pressure Sensor**
354404

| | | |
|---|---|---|
| 1 | Gnd oil pressure | w30 |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**


| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 15 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 39 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 4 of 16)

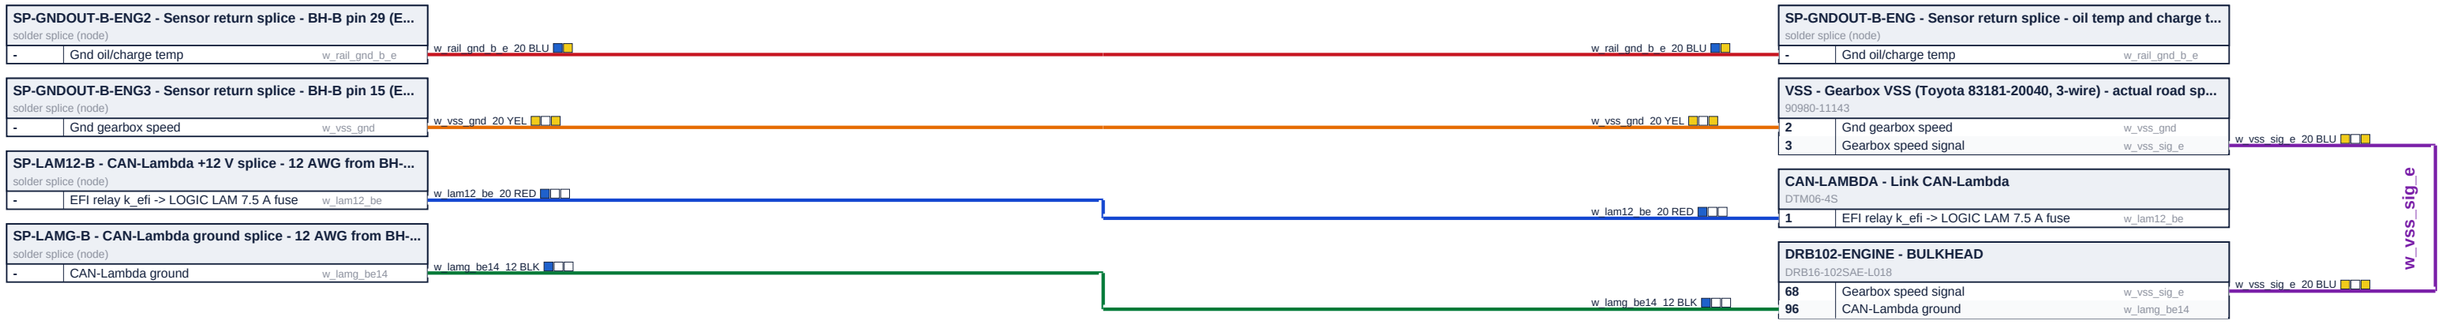


**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS)  (part 16 of 16)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 40 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED  (part 5 of 4)

| ECU-B (Link G4X plug B, centre dash) | | |
|---|---|---|
| 4-1437290-0 | | |
| 27 | Anti-theft input | w_at_immob2 |


| SP-PARK - Park flash splice - alarm pin 5 to the park lamp rel... | | |
|---|---|---|
| solder splice (node) | | |
| - | Park lamp flash | w_at_park |

| SIREN - Siren (engine bay, center firewall behind the engine) ... | | |
|---|---|---|
| DT06-2S-CE05 | | |
| 1 | Siren + | w_at_siren |

| STATUS-LED - Status LED (dash) | | |
|---|---|---|
| DT06-2S | | |
| 1 | Status LED + | w_at_led |

| VALET-SW - Valet / program switch (hidden) | | |
|---|---|---|
| DT06-2S | | |
| 1 | Valet switch | w_at_valet |

| T-AT-GND - Cabin ground stud near the alarm (spot and EW... | | |
|---|---|---|
| end | | |
| - | Alarm ground | w_at_gnd_a1 |

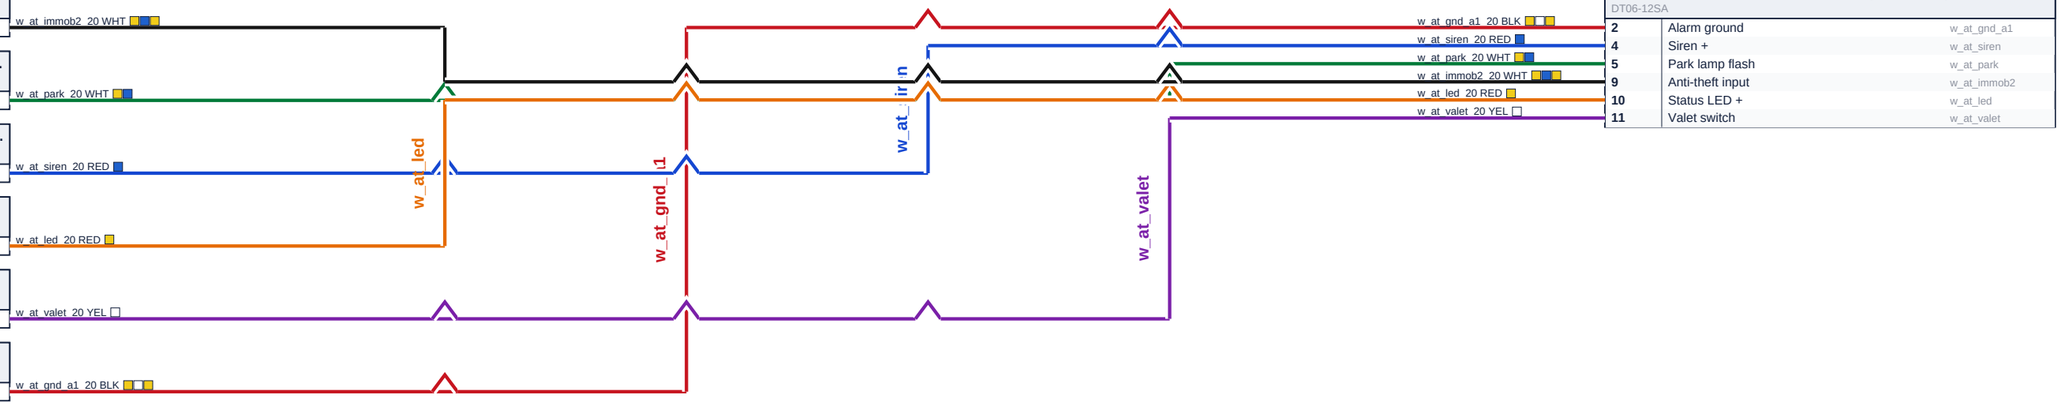


| ALARM - Alarm module - main harness (DT06-12SA) | | |
|---|---|---|
| DT06-12SA | | |
| 2 | Alarm ground | w_at_gnd_a1 |
| 4 | Siren + | w_at_siren |
| 5 | Park lamp flash | w_at_park |
| 9 | Anti-theft input | w_at_immob2 |
| 10 | Status LED + | w_at_led |
| 11 | Valet switch | w_at_valet |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED  (part 1 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 41 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED  (part 5 of 4)

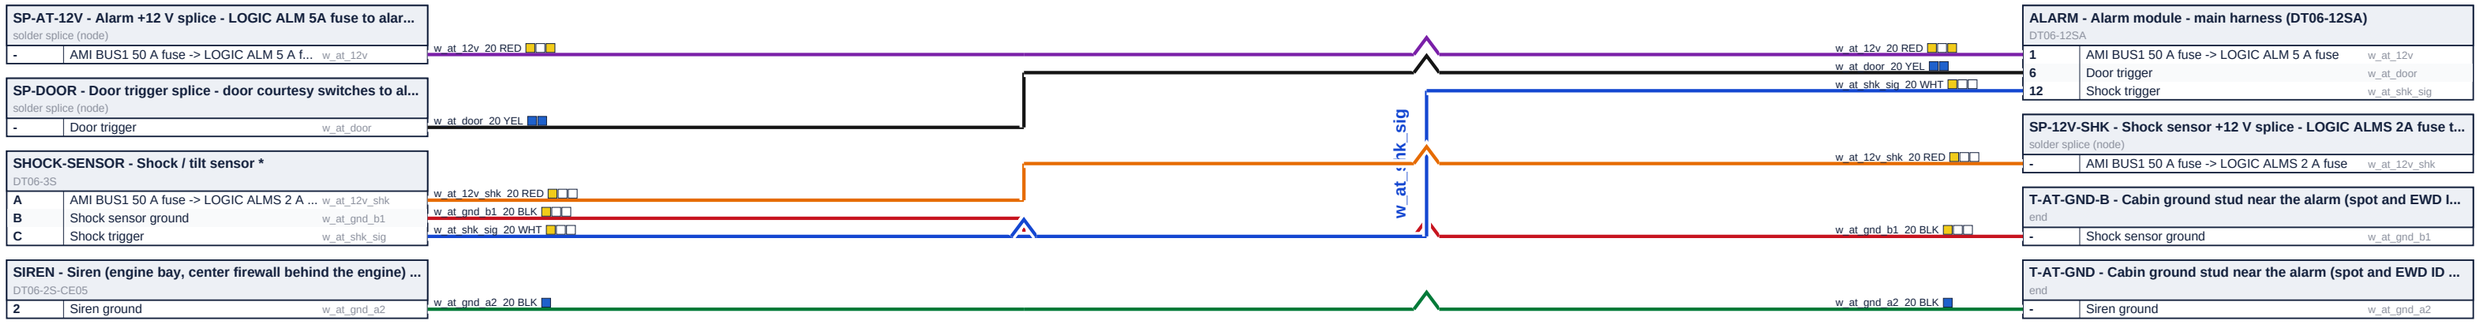


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED  (part 2 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 42 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED  (part 5 of 4)

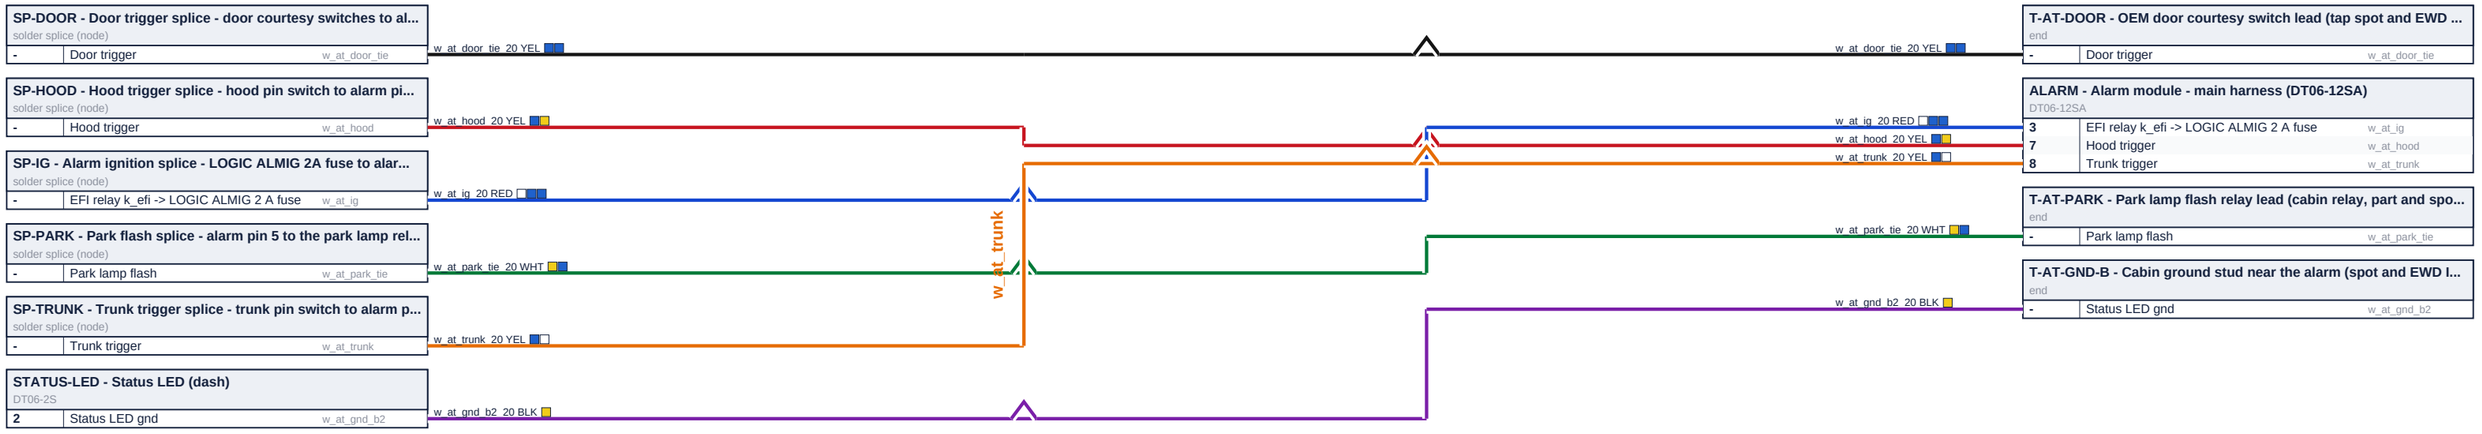


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED  (part 3 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 43 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED  (part 2 of 4)

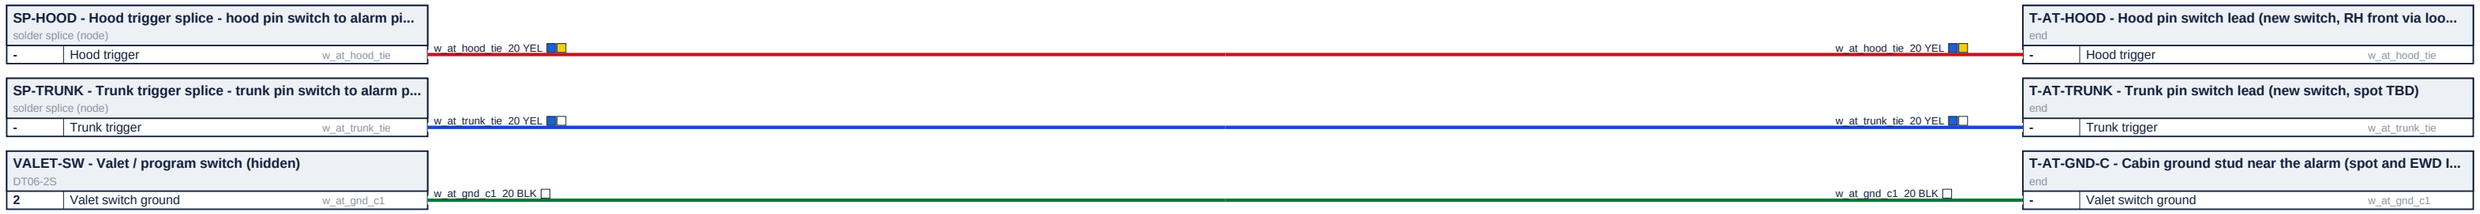


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

### REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED  (part 4 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 44 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA  (part 5 of 4)

**ECU-C - ECU Comms/Tuning Port**
DTM06-6S

| | | |
|---|---|---|
| 1 | CAN screen trunk | w_shd_can_trunk |
| 3 | CAN 1 high | wc_h_ecu |
| 4 | CAN 1 low | wc_l_ecu |

**R-TERM-ECU - r_term_ecu**
inline part

| | | |
|---|---|---|
| 1 | ECU 120R CAN H | wc_term1 |
| 2 | ECU 120R CAN L | wc_term2 |

**CAB-CAN-CLU cable screen (floats at the device end)**
cable screen

| | | |
|---|---|---|
| - | Cluster CAN shield | cab_can_clu_sh |

w_shd_can_trunk_20 BLK
wc_h_ecu_20 WHT
wc_l_ecu_20 GRN
wc_term1_20 GRN
wc_term2_20 GRN
cab_can_clu_sh_screen
w_shd_can_trunk
wc_h_ecu_20 WHT
wc_term1_20 GRN
wc_l_ecu_20 GRN
wc_term2_20 GRN
w_shd_can_trunk_20 BLK
cab_can_clu_sh_screen

**SP-CANH - CAN H join - ECU, CSB3, cluster, Pi, bulkhead**
solder splice (node)

| | | |
|---|---|---|
| - | CAN 1 high | wc_h_ecu |
| - | ECU 120R CAN H | wc_term1 |

**SP-CANL - CAN L join - ECU, CSB3, cluster, Pi, bulkhead**
solder splice (node)

| | | |
|---|---|---|
| - | CAN 1 low | wc_l_ecu |
| - | ECU 120R CAN L | wc_term2 |

**SP-CAN-SH-CLU - CAN trunk, cluster branch - SP-CAN-SH-CLU: ...**
solder splice (node)

| | | |
|---|---|---|
| - | CAN screen trunk | w_shd_can_trunk |
| - | Cluster CAN shield | cab_can_clu_sh |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**


| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA  (part 1 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 45 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA  (part 5 of 4)

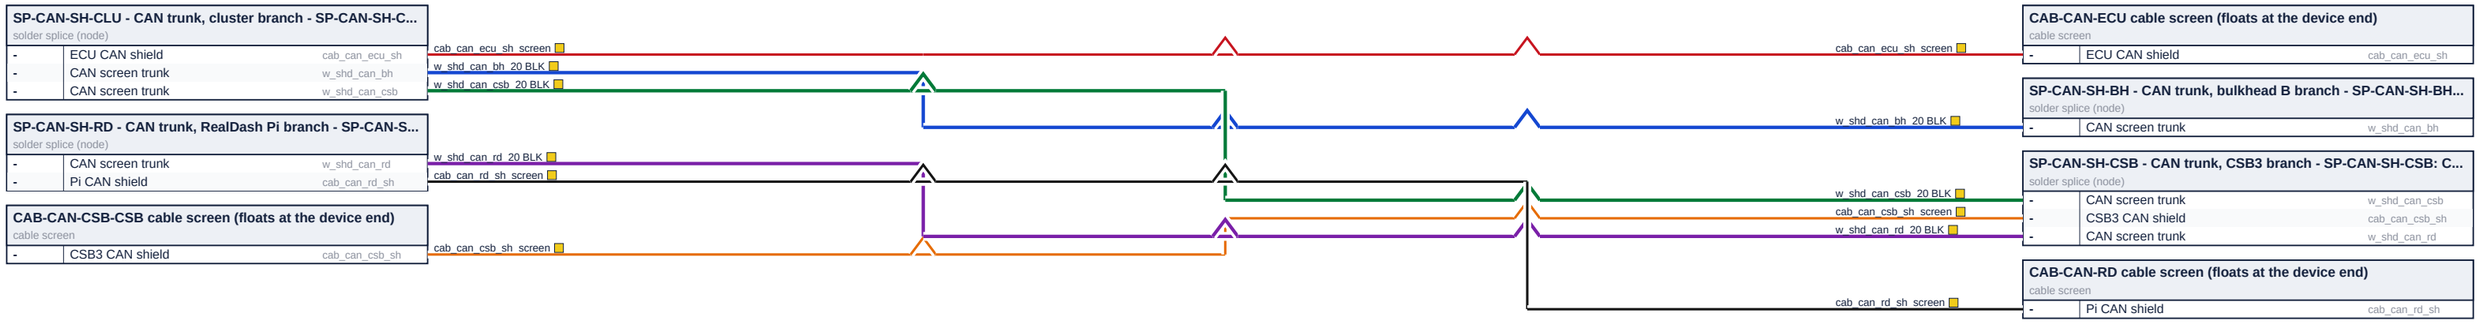


**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA  (part 2 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 46 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


## CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA  (part 5 of 4)

**SP-CANH - CAN H join - ECU, CSB3, cluster, Pi, bulkhead**
solder splice (node)

| | | |
|---|---|---|
| - | CAN H to CSB3 | wc_h_csb |
| - | CAN H to cluster | wc_h_clu |
| - | CAN H to RealDash Pi | wc_h_rd |

**SP-CANL - CAN L join - ECU, CSB3, cluster, Pi, bulkhead**
solder splice (node)

| | | |
|---|---|---|
| - | CAN L to CSB3 | wc_l_csb |
| - | CAN L to cluster | wc_l_clu |
| - | CAN L to RealDash Pi | wc_l_rd |

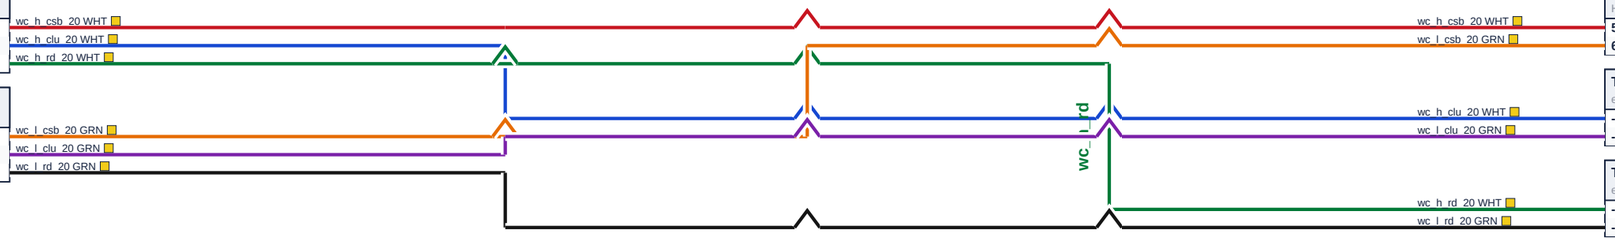


**CSB3 - ECUMaster CSB3 - Power/CAN/Switch I/O**
HD36-24-33SE

| | | |
|---|---|---|
| 5 | CAN H to CSB3 | wc_h_csb |
| 6 | CAN L to CSB3 | wc_l_csb |

**T-CLUSTER-CAN - Cluster CAN board CANH + CANL pins (old m...**
end

| | | |
|---|---|---|
| - | CAN H to cluster | wc_h_clu |
| - | CAN L to cluster | wc_l_clu |

**T-REALDASH-CAN - Pi USB-CAN adapter CANH + CANL pins (ce...**
end

| | | |
|---|---|---|
| - | CAN H to RealDash Pi | wc_h_rd |
| - | CAN L to RealDash Pi | wc_l_rd |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**


| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA  (part 3 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 47 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA  (part 3 of 4)

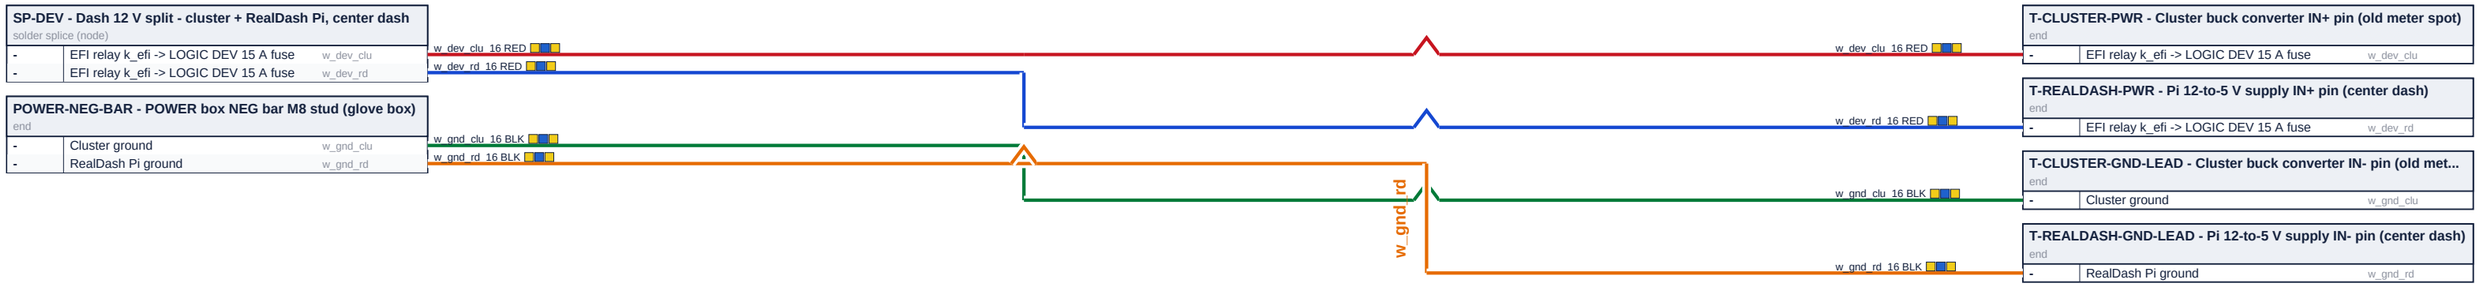


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA  (part 4 of 4)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 48 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD  (part 5 of 3)

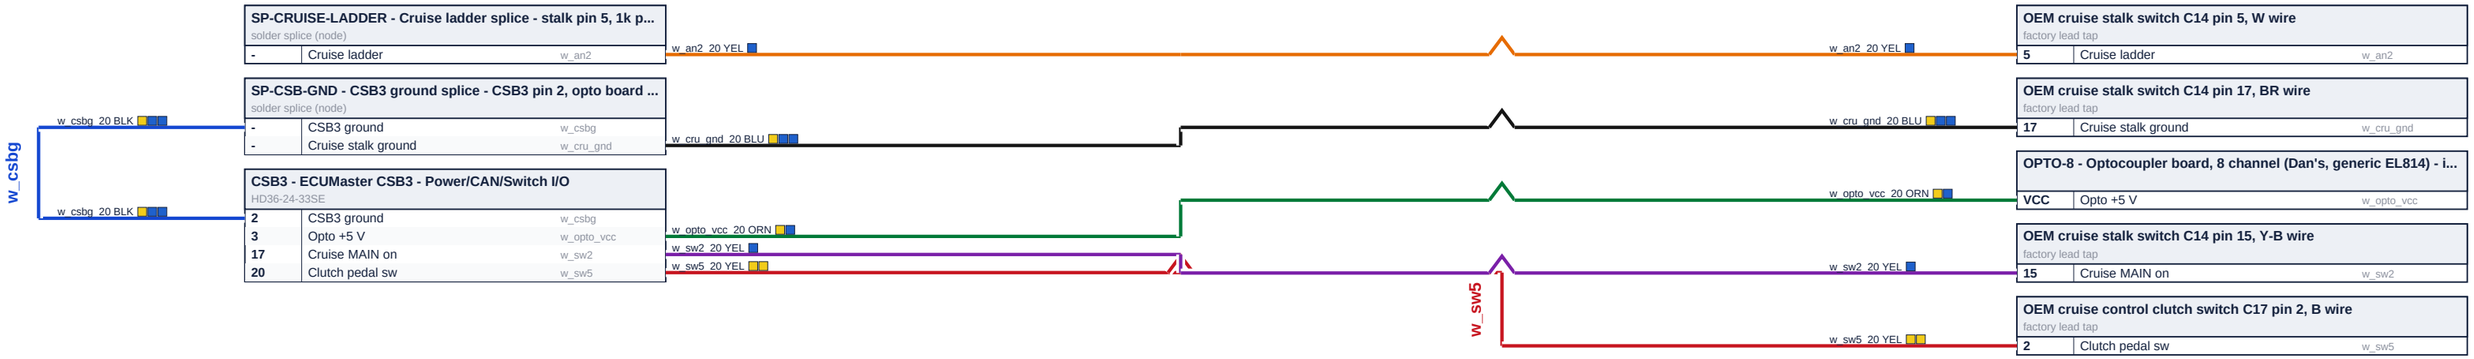


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

## REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD  (part 1 of 3)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 49 OF 82 | 432 x 279 mm | DG | 2026-10-28 |


ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD  (part 5 of 3)

| R-CRUISE - r_cruise | | |
|---|---|---|
| inline part | | |
| **2** | Cruise ladder | w_cru_sig |

| CSB3 - ECUMaster CSB3 - Power/CAN/Switch I/O | | |
|---|---|---|
| HD36-24-33SE | | |
| **1** | EFI relay k_efi -> LOGIC CSB 5 A fuse | w_csb12 |
| **4** | Opto out ground | w_opto_outc |
| **21** | Brake to CSB3 S7 | w_opto_out1 |
| **22** | Reverse to CSB3 S8 | w_opto_out2 |

| T-CLUSTER-HL - Centre cluster headlight-sense input (J8 pi... | | |
|---|---|---|
| end | | |
| **15** | Headlight sense to cluster | w_hl_sense_out |

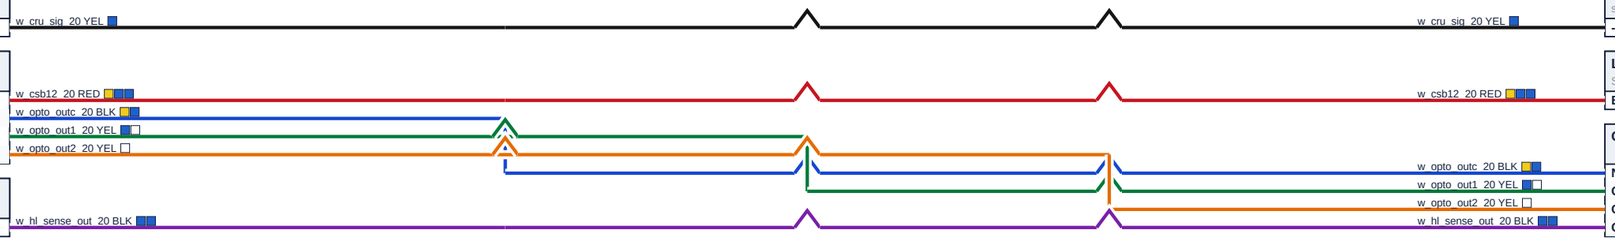


| SP-CRUISE-LADDER - Cruise ladder splice - stalk pin 5, 1k pull-u... | | |
|---|---|---|
| solder splice (node) | | |
| - | Cruise ladder | w_cru_sig |

| LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo... | | |
|---|---|---|
| ST185-FB-LOGIC rev 5 | | |
| **BUS2-5** | EFI relay k_efi -> LOGIC CSB 5 A fuse | w_csb12 |

| OPTO-8 - Optocoupler board, 8 channel (Dan's, generic EL814) - i... | | |
|---|---|---|
| **NEG** | Opto out ground | w_opto_outc |
| **OUT1** | Brake to CSB3 S7 | w_opto_out1 |
| **OUT2** | Reverse to CSB3 S8 | w_opto_out2 |
| **OUT3** | Headlight sense to cluster | w_hl_sense_out |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD  (part 2 of 3)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 50 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD  (part 3 of 3)

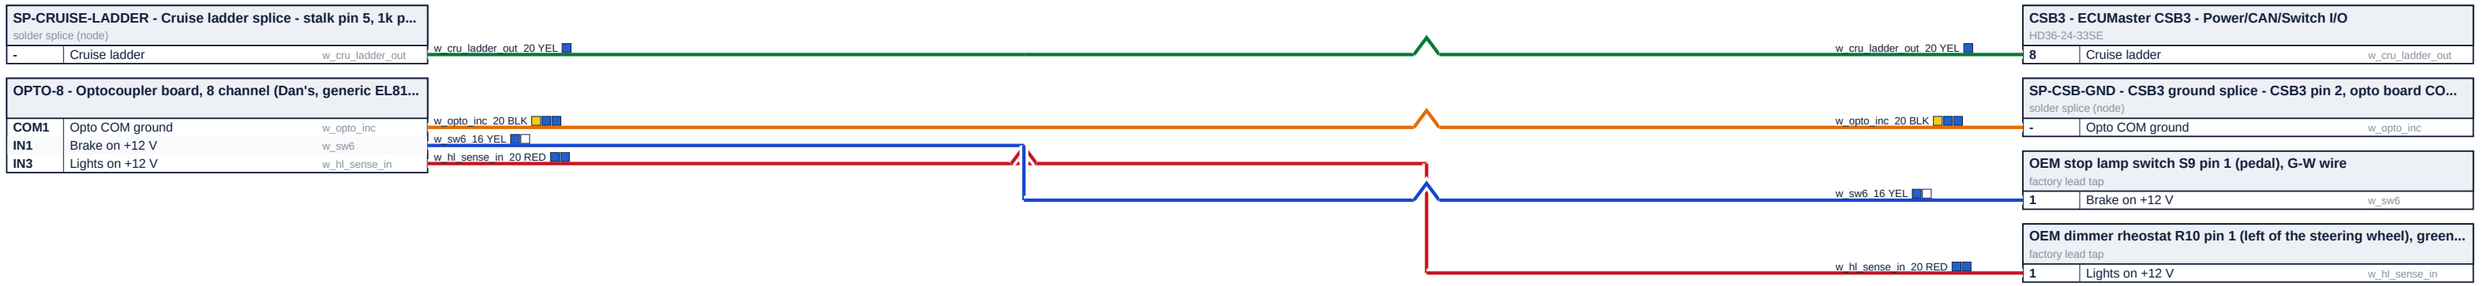


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

### REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD  (part 3 of 3)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 51 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

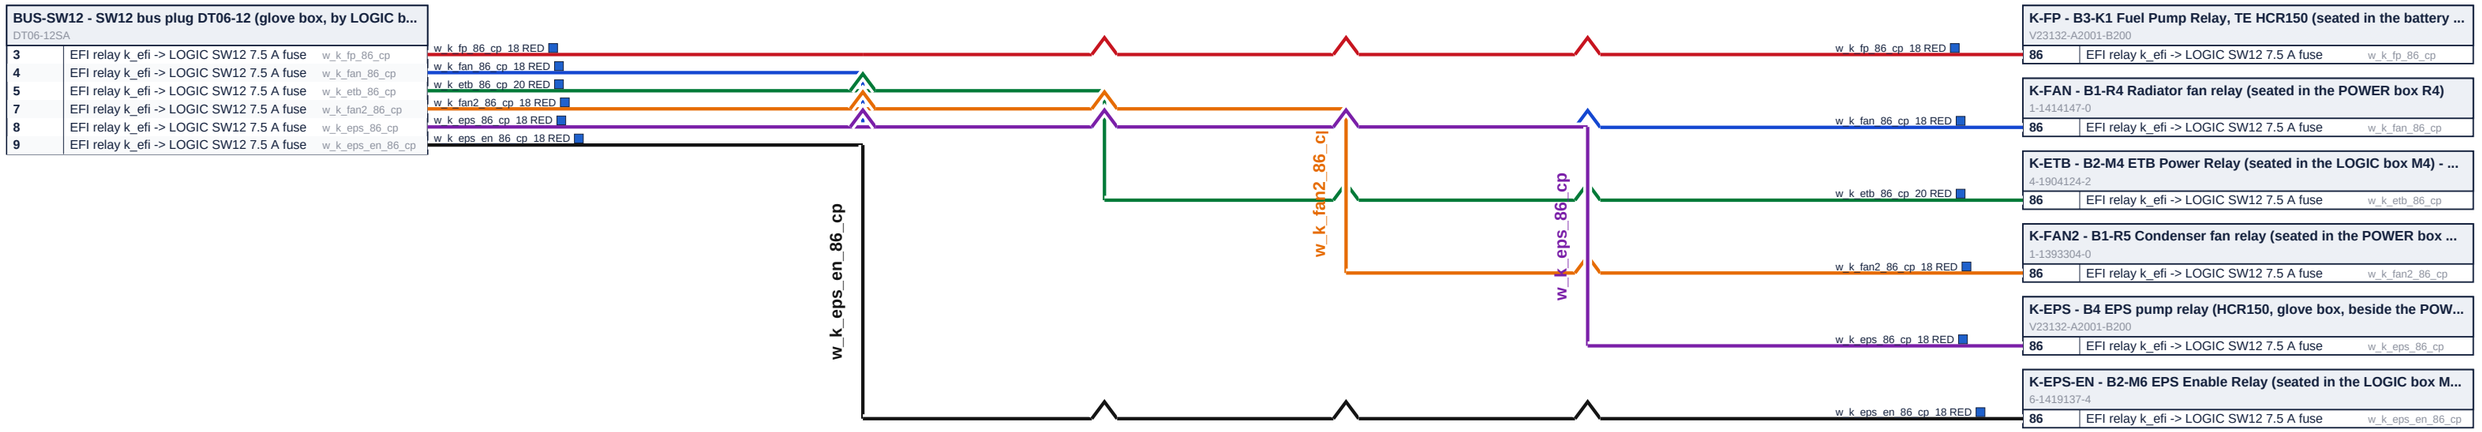


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

### REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 1 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 52 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

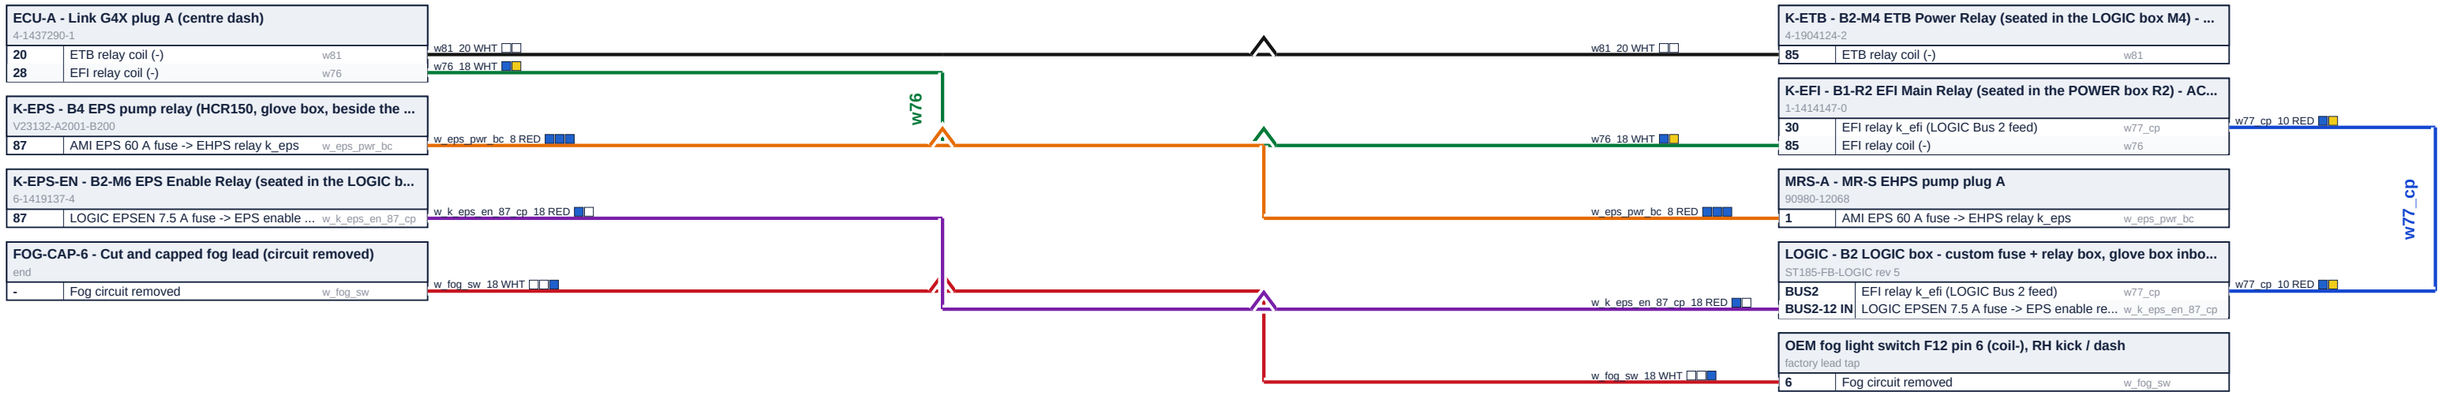


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

## REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 2 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 53 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP  (part 5 of 9)

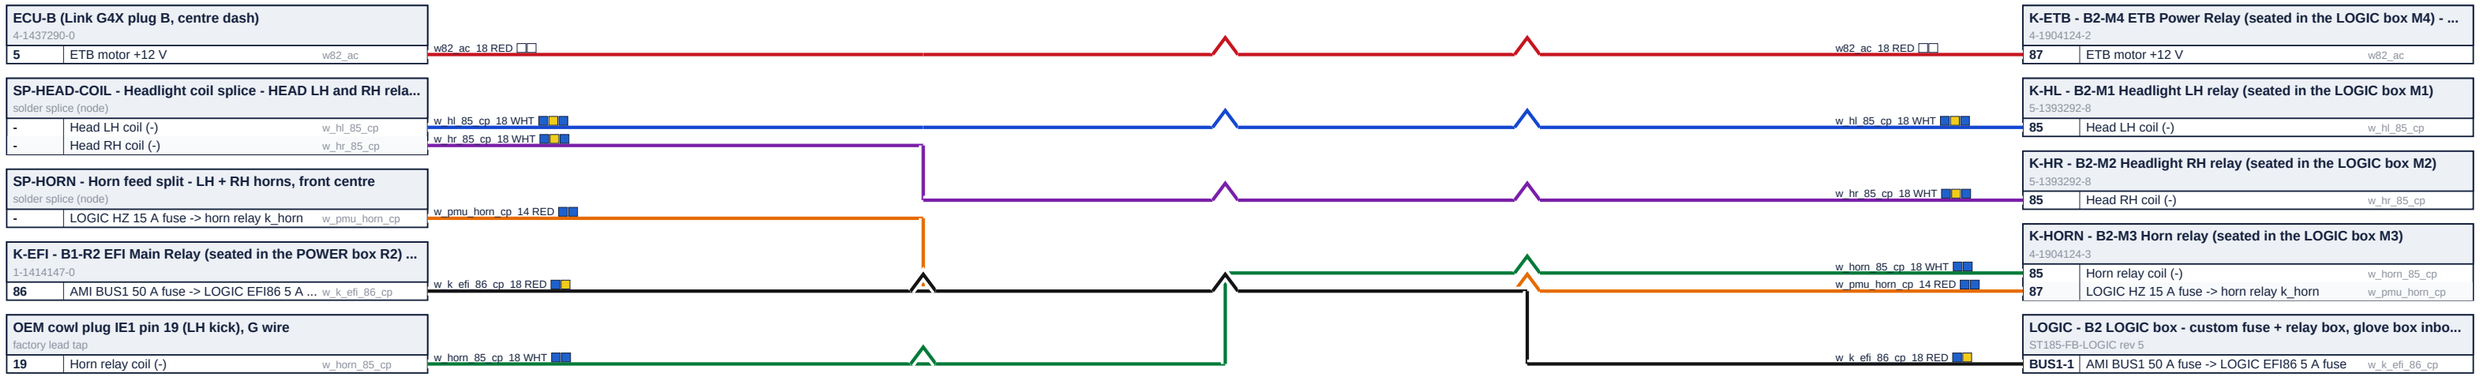


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

– – – – built with another harness

line colour = one wire on this page; the label has the wire colour

## REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP  (part 3 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 54 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

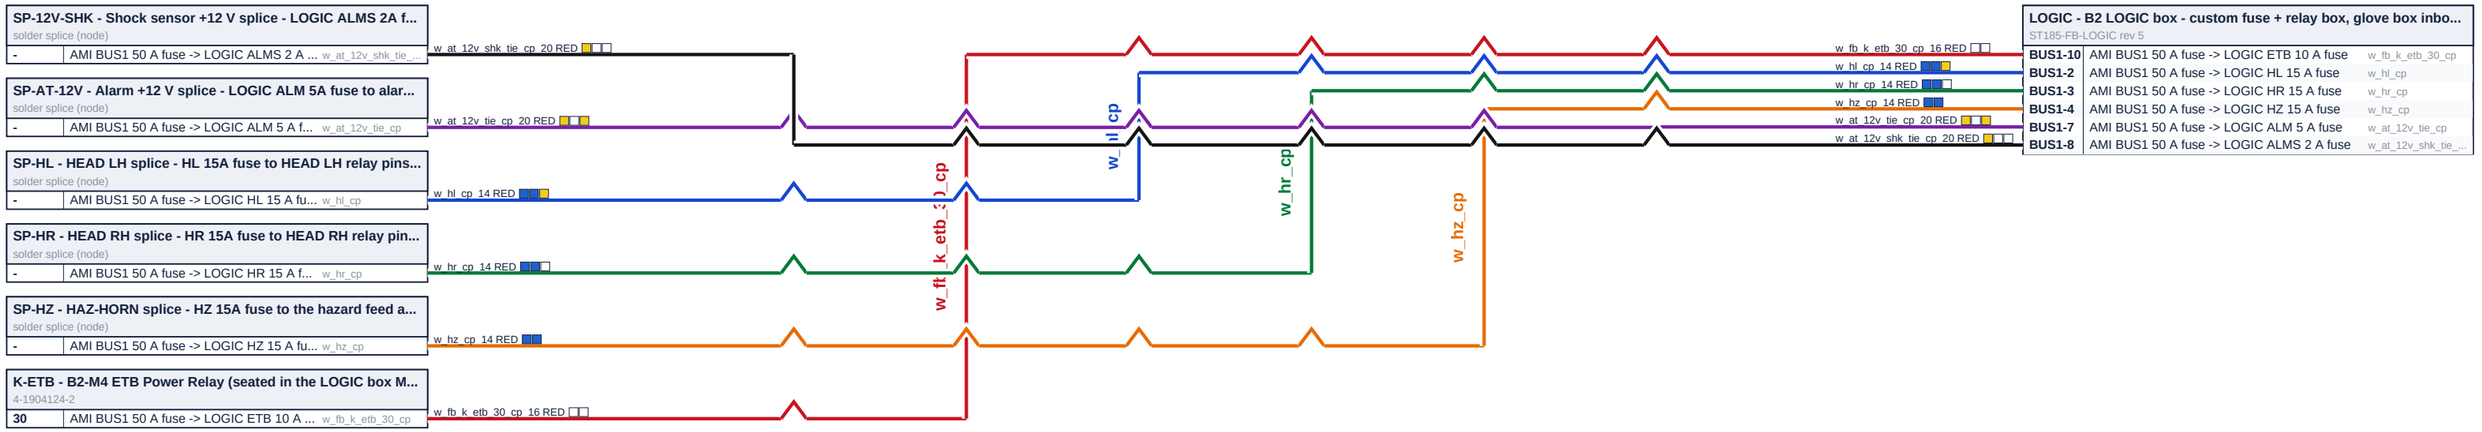


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 4 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 55 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP  (part 5 of 9)

**BUS-SW12 - SW12 bus plug DT06-12 (glove box, by LOGIC b...**
DT06-12SA

| | | |
|---|---|---|
| **1** | EFI relay k_efi -> LOGIC SW12 7.5 A fuse | w_cp_sw12_in |

**SP-DEV - Dash 12 V split - cluster + RealDash Pi, center dash**
solder splice (node)


| | | |
|---|---|---|
| **-** | EFI relay k_efi -> LOGIC DEV 15 A fuse | w_dev_cp |

**DRB102-CABIN - DRB102 receptacle (RH firewall)**
DRB12-102PAE-L018

| | | |
|---|---|---|
| **1** | EFI relay k_efi -> LOGIC COP 15 A fuse | w_cop_pwr_ac |
| **2** | EFI relay k_efi -> LOGIC INJ 15 A fuse | w_inj_pwr_ac |
| **95** | EFI relay k_efi -> LOGIC LAM 7.5 A fuse | w_lam12_cp |

**K-EPS-EN - B2-M6 EPS Enable Relay (seated in the LOGIC b...**
6-1419137-4

| | | |
|---|---|---|
| **30** | EFI relay k_efi -> LOGIC EPSEN 7.5 A fuse | w_fb_k_eps_en_30... |

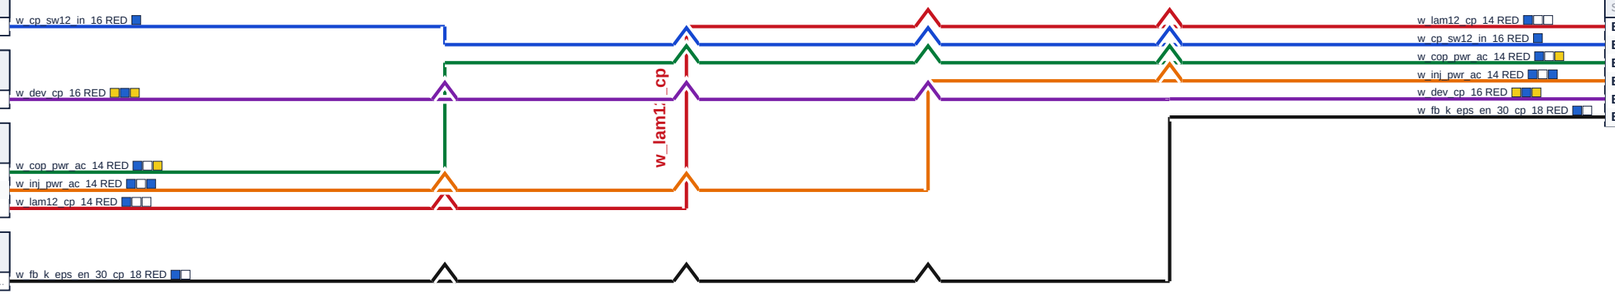


**LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...**
ST185-FB-LOGIC rev 5

| | | |
|---|---|---|
| **BUS2-1** | EFI relay k_efi -> LOGIC LAM 7.5 A fuse | w_lam12_cp |
| **BUS2-2** | EFI relay k_efi -> LOGIC SW12 7.5 A fuse | w_cp_sw12_in |
| **BUS2-3** | EFI relay k_efi -> LOGIC COP 15 A fuse | w_cop_pwr_ac |
| **BUS2-4** | EFI relay k_efi -> LOGIC INJ 15 A fuse | w_inj_pwr_ac |
| **BUS2-6** | EFI relay k_efi -> LOGIC DEV 15 A fuse | w_dev_cp |
| **BUS2-7** | EFI relay k_efi -> LOGIC EPSEN 7.5 A fuse | w_fb_k_eps_en_30... |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP  (part 5 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 56 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP  (part 5 of 9)

**SP-ACC12 - B2-BUS2-8 ACC 10 A to k_acc 30 and 86**
solder splice (node)

| | | |
|---|---|---|
| - | ACC 10 A out | w_acc_fuse |

**SP-IG - Alarm ignition splice - LOGIC ALMIG 2A fuse to alar...**
solder splice (node)

| | | |
|---|---|---|
| - | EFI relay k_efi -> LOGIC ALMIG 2 A fuse | w_at_ig_tie_cp |

**K-EFI - B1-R2 EFI Main Relay (seated in the POWER box R2) ...**
1-1414147-0

| | | |
|---|---|---|
| 87 | AMI EFI 30 A fuse | w_fb_k_efi_87_cp |

**K-FAN - B1-R4 Radiator fan relay (seated in the POWER box ...**
1-1414147-0

| | | |
|---|---|---|
| 87 | AMI FAN 40 A fuse | w_fb_k_fan_87_cp |

**K-FAN2 - B1-R5 Condenser fan relay (seated in the POWER b...**
1-1393304-0

| | | |
|---|---|---|
| 87 | AMI FAN2 30 A fuse | w_fb_k_fan2_87_ac |

**OEM R/B No.4 40 A HEATER fuse pin 1 (RH kick)**
factory lead tap

| | | |
|---|---|---|
| 1 | Heater fuse feed | w_rb4_feed |

w_acc_fuse_16 RED
w_at_ig_tie_cp_20 RED
w_fb_k_efi_87_cp_12 RED
w_fb_k_fan_87_cp_8 RED
w_fb_k_fan2_87_ac_8 RED
w_rb4_feed_8 RED
w_rb4_feed

**LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...**
ST185-FB-LOGIC rev 5

| | | |
|---|---|---|
| BUS2-8 | EFI relay k_efi -> LOGIC ACC 10 A fuse | w_acc_fuse |
| BUS2-9 | EFI relay k_efi -> LOGIC ALMIG 2 A fuse | w_at_ig_tie_cp |

**POWER - B1 POWER box with the bus bar in it - custom fuse + re...**
ST185-FB-POWER rev 7

| | | |
|---|---|---|
| AMI IN-1 | AMI HTR 40 A fuse | w_rb4_feed |
| AMI IN-2 | AMI EFI 30 A fuse | w_fb_k_efi_87_cp |
| AMI IN-4 | AMI FAN 40 A fuse | w_fb_k_fan_87_cp |
| AMI IN-5 | AMI FAN2 30 A fuse | w_fb_k_fan2_87_ac |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

## ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP  (part 6 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 57 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

**K-EPS - B4 EPS pump relay (HCR150, glove box, beside the ...**
V23132-A2001-B200

| | | |
|---|---|---|
| **30** | AMI EPS 60 A fuse | w_fb_k_eps_30_ac |

**LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i...**
ST185-FB-LOGIC rev 5

| | | |
|---|---|---|
| **BUS1** | AMI BUS1 50 A fuse | w_hc_fb |

**FOG-CAP-1 - Cut and capped fog lead (circuit removed)**
end

| | | |
|---|---|---|
| **-** | Fog circuit removed | w_fog_rb3_1 |

**FOG-CAP-4 - Cut and capped fog lead (circuit removed)**
end

| | | |
|---|---|---|
| **-** | Fog circuit removed | w_fog_rb3_4 |

**OEM J/B No.1 1I pin 1 (left kick)**
factory lead tap

| | | |
|---|---|---|
| **1** | AMI JB1 60 A fuse | w_pdb_jb1 |

**OEM R/B No.2 30 A POWER fuse pin 1 (LH kick)**
factory lead tap

| | | |
|---|---|---|
| **1** | POWER fuse feed | w_rb2_feed |

w_fb_k_eps_30_ac_8 RED
w_hc_fb_8 RED
w_fog_rb3_1_18 WHT
w_fog_rb3_4_18 WHT
w_pdb_jb1_6 RED
w_rb2_feed_10 RED

w_fog_rb3_1
w_pdb_jb1
w_rb2_feed

w_fog_rb3_1_18 WHT
w_rb2_feed_10 RED
w_hc_fb_8 RED
w_pdb_jb1_6 RED
w_fb_k_eps_30_ac_8 RED
w_fog_rb3_4_18 WHT

**OEM R/B No.3 fog relay pin 1 (fog lamp feed), RH kick / dash**
factory lead tap

| | | |
|---|---|---|
| **1** | Fog circuit removed | w_fog_rb3_1 |

**POWER - B1 POWER box with the bus bar in it - custom fuse + re...**
ST185-FB-POWER rev 7

| | | |
|---|---|---|
| **AMI IN-6** | AMI PWR 30 A fuse | w_rb2_feed |
| **AMI OUT-1** | AMI BUS1 50 A fuse | w_hc_fb |
| **AMI OUT-5** | AMI JB1 60 A fuse | w_pdb_jb1 |
| **AMI OUT-6** | AMI EPS 60 A fuse | w_fb_k_eps_30_ac |

**OEM R/B No.3 fog relay pin 4 (20 A FR FOG in), RH kick / dash**
factory lead tap

| | | |
|---|---|---|
| **4** | Fog circuit removed | w_fog_rb3_4 |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 7 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 58 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP  (part 5 of 9)




**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP  (part 8 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 59 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP  (part 4 of 9)

| SP-HR - HEAD RH splice - HR 15A fuse to HEAD RH relay pin... | | |
|---|---|---|
| solder splice (node) | | |
| - | AMI BUS1 50 A fuse -> LOGIC HR 15 A f... | w_hr_30_cp |
| - | AMI BUS1 50 A fuse -> LOGIC HR 15 A f... | w_hr_86_cp |

| SP-HZ - HAZ-HORN splice - HZ 15A fuse to the hazard feed a... | | |
|---|---|---|
| solder splice (node) | | |
| - | AMI BUS1 50 A fuse -> LOGIC HZ 15 A fu... | w_haz_cp |
| - | AMI BUS1 50 A fuse -> LOGIC HZ 15 A fu... | w_horn_30_cp |
| - | AMI BUS1 50 A fuse -> LOGIC HZ 15 A fu... | w_horn_86_cp |

w_hr_30_cp_14 RED

w_hr_86_cp_16 RED

w_haz_cp_14 RED

w_horn_30_cp_16 RED

w_horn_86_cp_16 RED

| K-HR - B2-M2 Headlight RH relay (seated in the LOGIC box M2) | | |
|---|---|---|
| 5-1393292-8 | | |
| 30 | AMI BUS1 50 A fuse -> LOGIC HR 15 A fuse | w_hr_30_cp |
| 86 | AMI BUS1 50 A fuse -> LOGIC HR 15 A fuse | w_hr_86_cp |

| OEM IE1 pin 12 (left kick, cowl side) | | |
|---|---|---|
| factory lead tap | | |
| 12 | AMI BUS1 50 A fuse -> LOGIC HZ 15 A fuse | w_haz_cp |

| K-HORN - B2-M3 Horn relay (seated in the LOGIC box M3) | | |
|---|---|---|
| 4-1904124-3 | | |
| 30 | AMI BUS1 50 A fuse -> LOGIC HZ 15 A fuse | w_horn_30_cp |
| 86 | AMI BUS1 50 A fuse -> LOGIC HZ 15 A fuse | w_horn_86_cp |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP  (part 9 of 9)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 60 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12  (part 5 of 3)

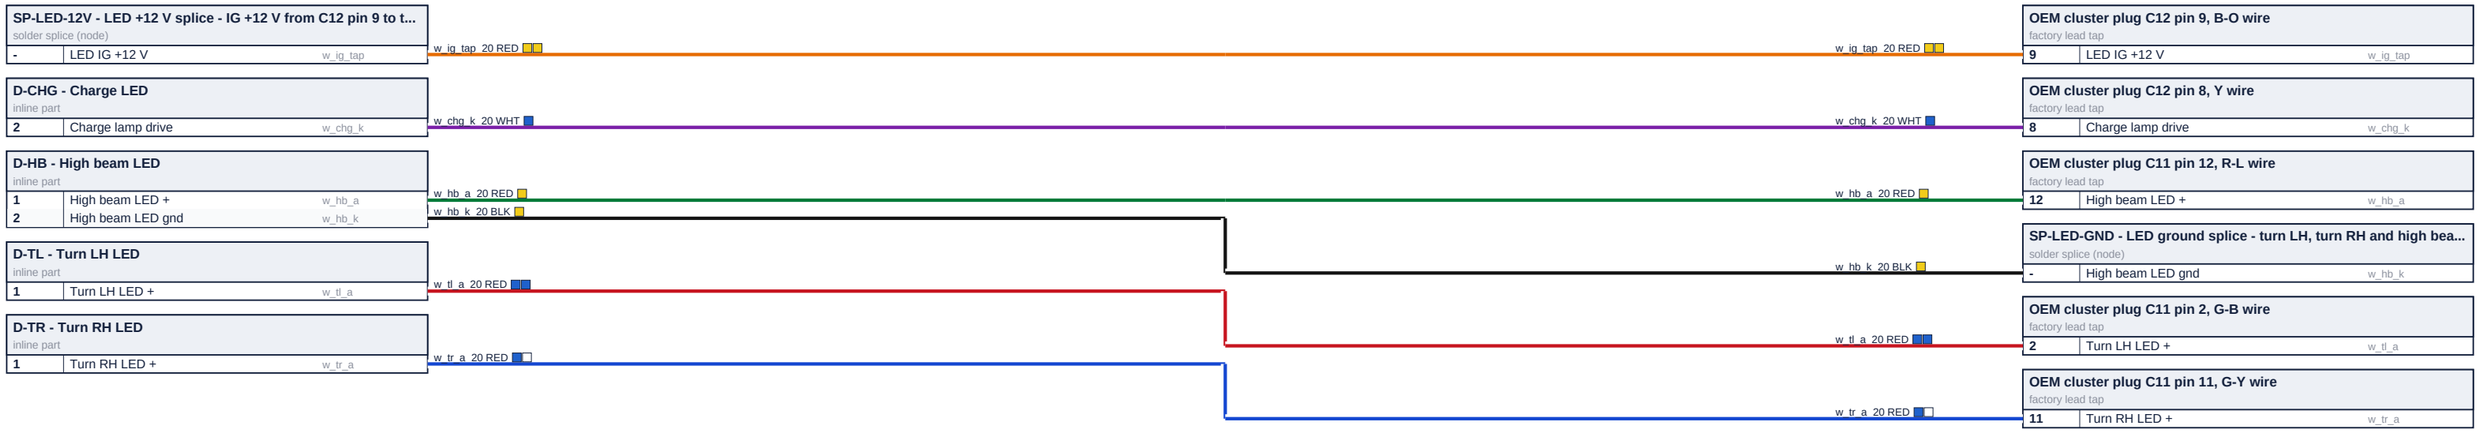


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12  (part 1 of 3)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 61 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12  (part 5 of 3)

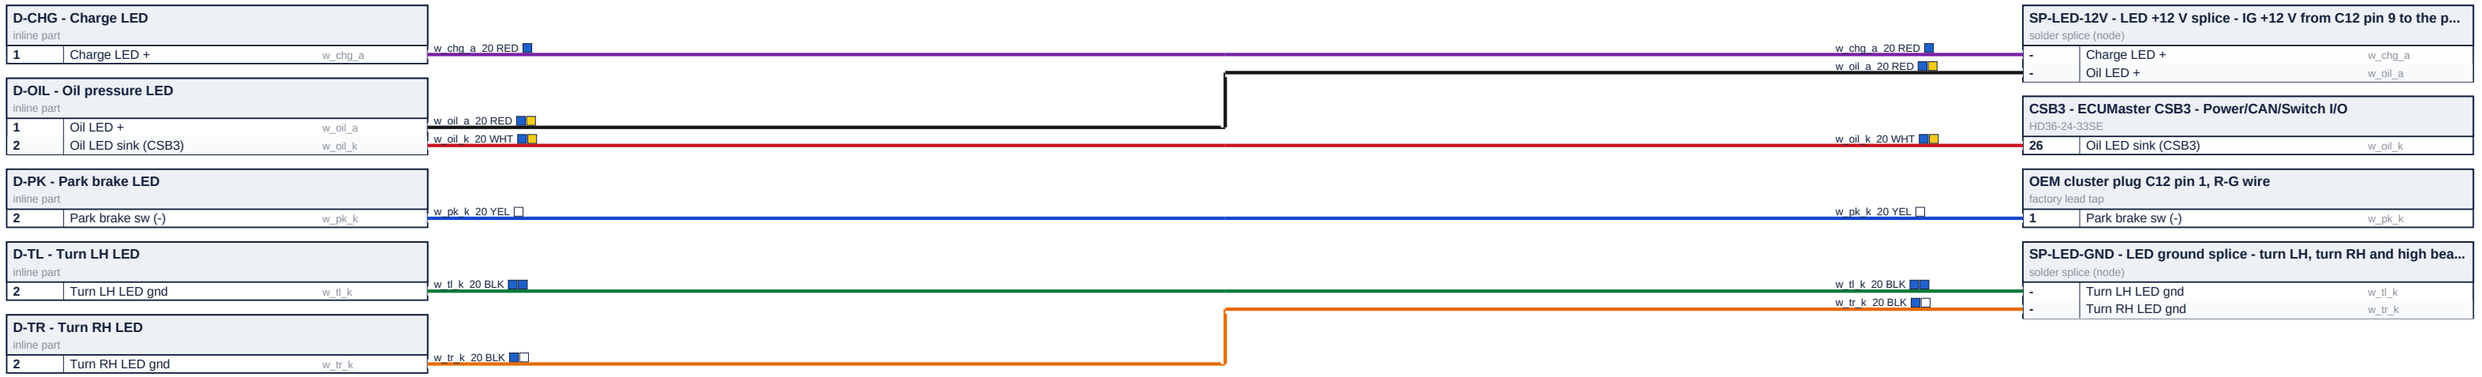


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12  (part 2 of 3)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 62 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

## CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12  (part 1 of 3)




**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12  (part 3 of 3)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 63 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 of 11)

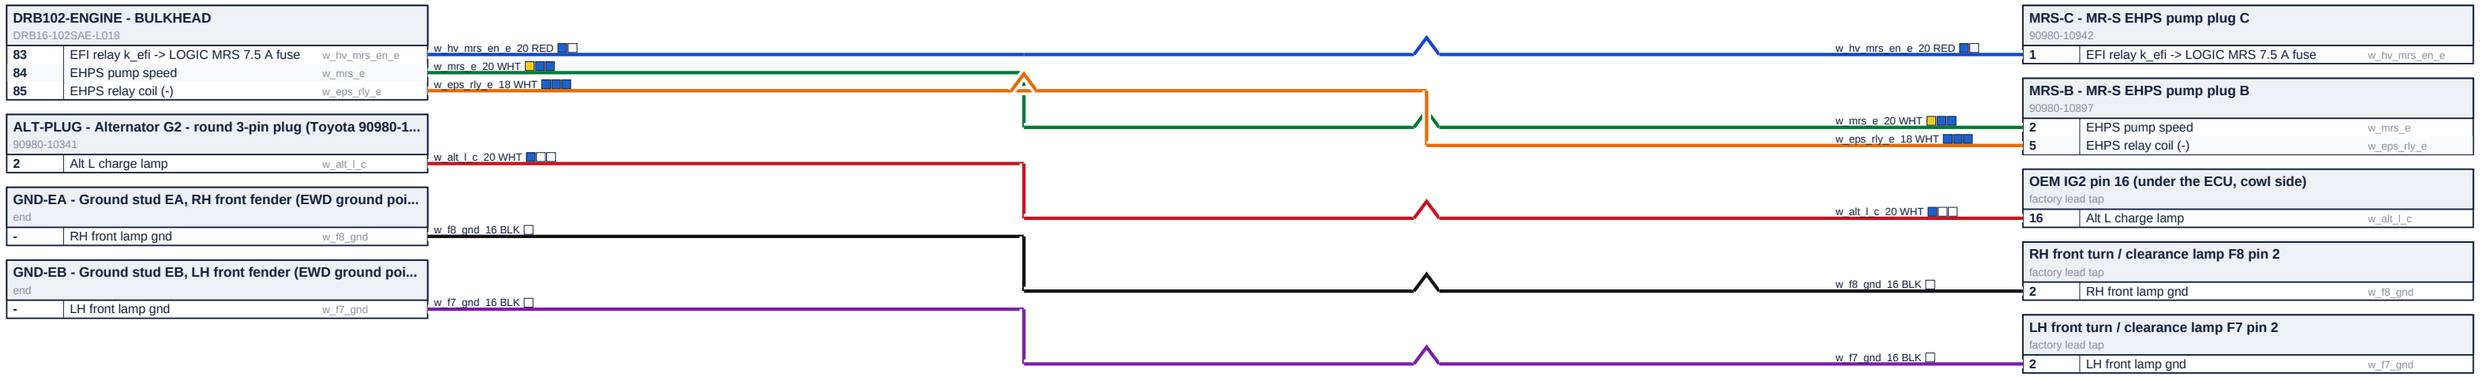


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 1 ...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 64 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 of 11)

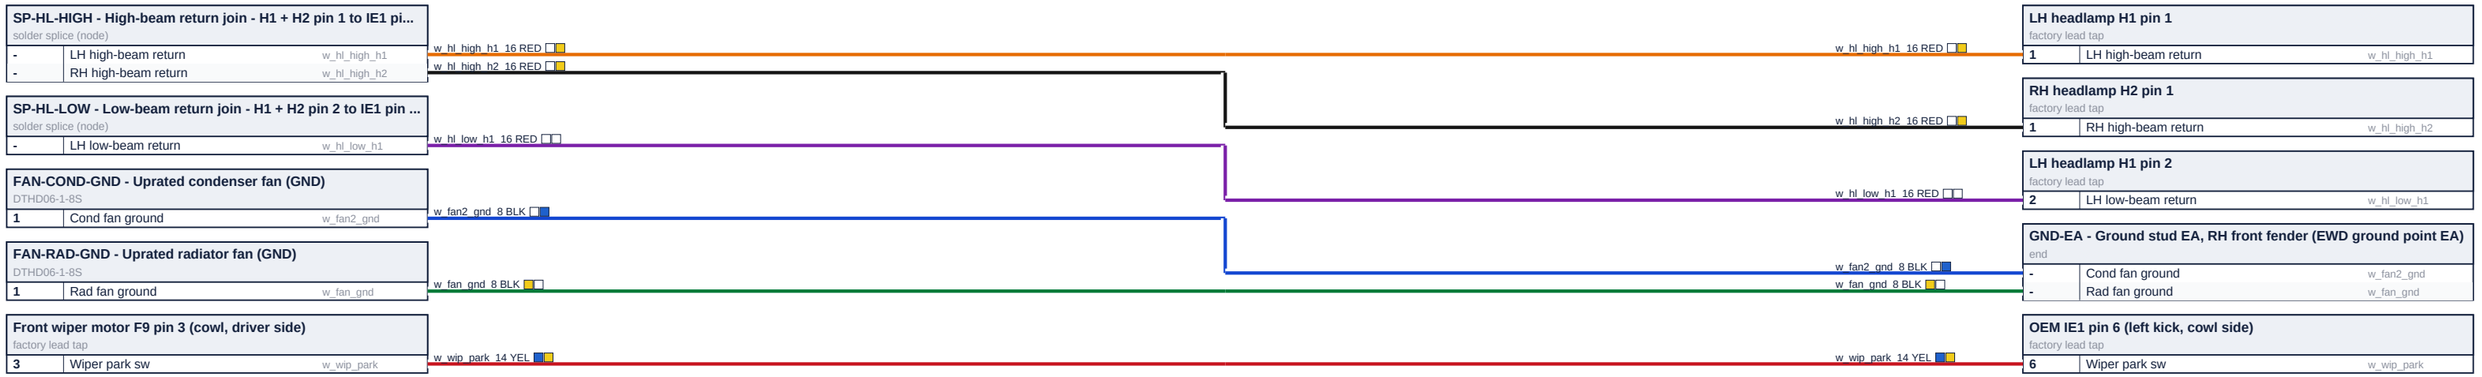


**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

### REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 2 ...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 65 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 of 11)

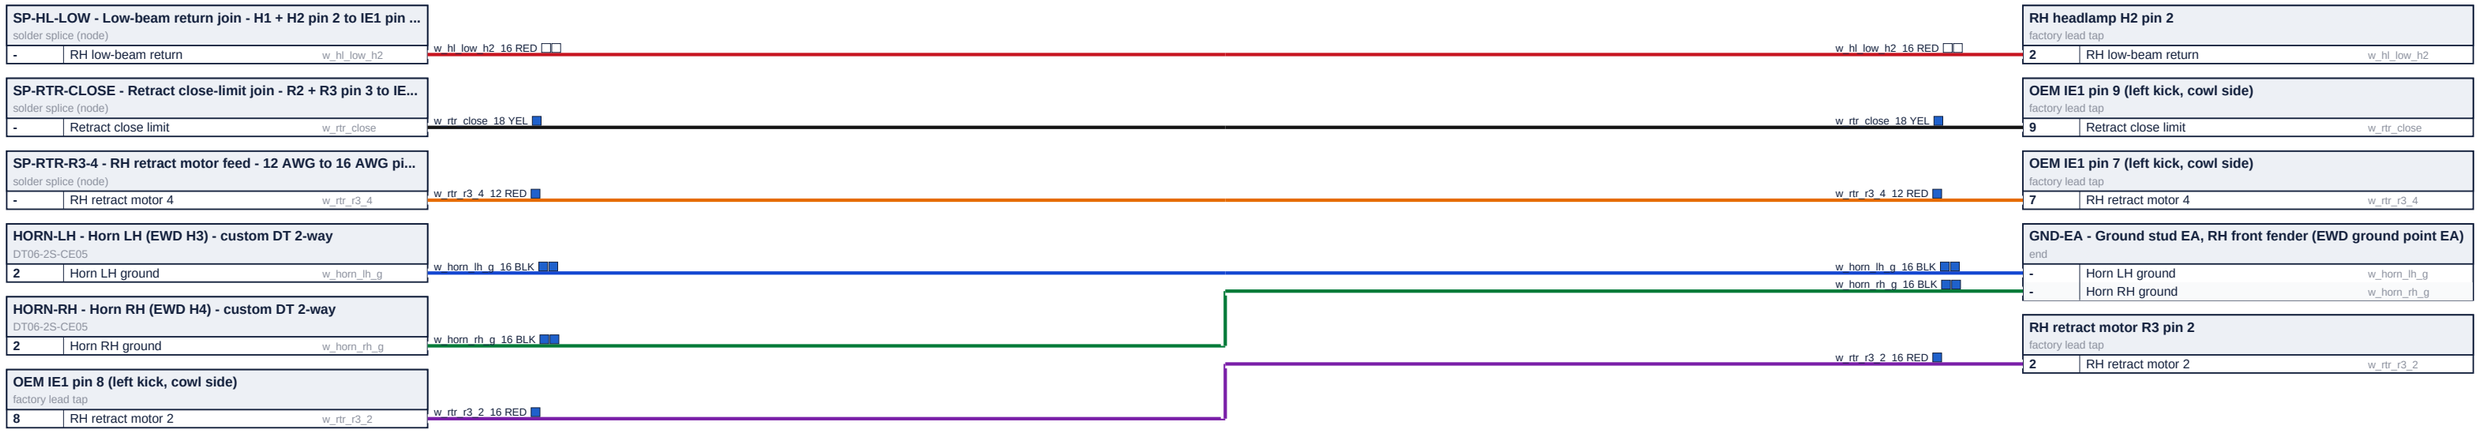


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

### REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 3 ...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 66 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 of 11)

| | | | | | |
|---|---|---|---|---|---|
| **SP-RTR-OPEN - Retract open-limit join - R2 + R3 pin 1 to IE1 ...**<br>solder splice (node) | | | w_rtr_open_18 YEL | w_rtr_open_18 YEL | **OEM IE1 pin 16 (left kick, cowl side)**<br>factory lead tap |
| - | Retract open limit | w_rtr_open | | | 16 Retract open limit w_rtr_open |
| **SP-RTR-R2-4 - LH retract motor feed - 12 AWG to 16 AWG pi...**<br>solder splice (node) | | | w_rtr_r2_4_12 RED | w_rtr_r2_4_12 RED | **OEM IE1 pin 14 (left kick, cowl side)**<br>factory lead tap |
| - | LH retract motor 4 | w_rtr_r2_4 | | | 14 LH retract motor 4 w_rtr_r2_4 |
| **LH front turn / clearance lamp F7 pin 3**<br>factory lead tap | | | w_turn_f7_18 RED | w_turn_f7_18 RED | **OEM J/B No.1 1H pin 4 (left kick)**<br>factory lead tap |
| 3 | LH front turn + | w_turn_f7 | | | 1H-4 LH front turn + w_turn_f7 |
| **Front wiper motor F9 pin 1 (cowl, driver side)**<br>factory lead tap | | | w_wip_hi_14 RED | w_wip_hi_14 RED | **OEM IE1 pin 20 (left kick, cowl side)**<br>factory lead tap |
| 1 | Wiper HIGH | w_wip_hi | | | 20 Wiper HIGH w_wip_hi |
| **Front wiper motor F9 pin 2 (cowl, driver side)**<br>factory lead tap | | | w_wip_lo_14 RED | w_wip_lo_14 RED | **OEM IE1 pin 13 (left kick, cowl side)**<br>factory lead tap |
| 2 | Wiper LOW | w_wip_lo | | | 13 Wiper LOW w_wip_lo |
| **OEM IE1 pin 15 (left kick, cowl side)**<br>factory lead tap | | | w_rtr_r2_2_16 RED | w_rtr_r2_2_16 RED | **LH retract motor R2 pin 2**<br>factory lead tap |
| 15 | LH retract motor 2 | w_rtr_r2_2 | | | 2 LH retract motor 2 w_rtr_r2_2 |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 4 ...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 67 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 of 11)

| | | | | | |
|---|---|---|---|---|---|
| **SP-CLR - Clearance feed split - F7 LH + F8 RH**<br>solder splice (node) | | | | **OEM J/B No.1 1H pin 6 (left kick)**<br>factory lead tap | |
| - | Clearance lamp feed | w_clr | w_clr_16 RED | 1H-6 | Clearance lamp feed |
| **FAN-COND - Uprated condenser fan (+)**<br>DTHD06-1-8S | | | | **K-FAN2 - B1-R5 Condenser fan relay (seated in the POWER box ...**<br>1-1393304-0 | |
| 1 | Cond fan +12 V | w_fan2_pwr | w_fan2_pwr_8 RED | 30 | Cond fan +12 V |
| **FAN-RAD - Uprated radiator fan (+)**<br>DTHD06-1-8S | | | | **K-FAN - B1-R4 Radiator fan relay (seated in the POWER box R4)**<br>1-1414147-0 | |
| 1 | AMI FAN 40 A fuse -> rad fan relay k_fan | w_fan_pwr | w_fan_pwr_8 RED | 30 | AMI FAN 40 A fuse -> rad fan relay k_fan |
| **K-ACC - B2-M5 A/C clutch relay (k_acc) - amp A15 pin 8 sink...**<br>6-1419137-4 | | | | **A/C compressor A4 pin 4**<br>factory lead tap | |
| 87 | A/C clutch +12 V | w_acc_clutch | w_acc_clutch_16 RED | 4 | LOGIC ACC 10 A fuse -> A/C clutch relay k_acc |
| **RH front turn / clearance lamp F8 pin 3**<br>factory lead tap | | | | **OEM J/B No.1 1H pin 8 (left kick)**<br>factory lead tap | |
| 3 | RH front turn + | w_turn_f8 | w_turn_f8_18 RED | 1H-8 | RH front turn + |
| **Front wiper motor F9 pin 4 (cowl, driver side)**<br>factory lead tap | | | | **OEM J/B No.1 1H pin 5 (left kick)**<br>factory lead tap | |
| 4 | Wiper +B | w_wip_b | w_wip_b_14 RED | 1H-5 | Wiper +B |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 ...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 68 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 of 11)

**K-HL - B2-M1 Headlight LH relay (seated in the LOGIC box M1)**
5-1393292-8

| | | |
|---|---|---|
| **87** | LOGIC HL 15 A fuse -> HEAD LH relay k_hl | w_pmu_hl |

**K-HR - B2-M2 Headlight RH relay (seated in the LOGIC box M2)**
5-1393292-8

| | | |
|---|---|---|
| **87** | LOGIC HR 15 A fuse -> HEAD RH relay k... | w_pmu_hr |

**LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i...**
ST185-FB-LOGIC rev 5

| | | |
|---|---|---|
| **BUS1-5** | AMI BUS1 50 A fuse -> LOGIC DM 20 A f... | w_pmu_dome |
| **BUS1-6** | AMI BUS1 50 A fuse -> LOGIC WL 15 A f... | w_rb2_wl |
| **BUS1-9** | Alt S battery sense | w_alt_s_c |

**MRS-A - MR-S EHPS pump plug A**
90980-12068

| | | |
|---|---|---|
| **2** | EHPS pump ground | w_eps_gnd |

w_pmu_hl_14 RED

w_pmu_hr_14 RED

w_pmu_dome_14 RED

w_rb2_wl_14 RED

w_alt_s_c_20 WHT

w_eps_gnd_8 BLK

w_eps_gnd

w_alt_s_c

w_pmu_hl_14 RED

w_pmu_hr_14 RED

w_pmu_dome_14 RED

w_rb2_wl_14 RED

w_alt_s_c_20 WHT

w_eps_gnd_8 BLK

**LH headlamp H1 pin 3**
factory lead tap

| | | |
|---|---|---|
| **3** | LOGIC HL 15 A fuse -> HEAD LH relay k_hl | w_pmu_hl |

**RH headlamp H2 pin 3**
factory lead tap

| | | |
|---|---|---|
| **3** | LOGIC HR 15 A fuse -> HEAD RH relay k_hr | w_pmu_hr |

**OEM J/B No.1 1H pin 2 (left kick)**
factory lead tap

| | | |
|---|---|---|
| **2** | AMI BUS1 50 A fuse -> LOGIC DM 20 A fuse | w_pmu_dome |

**OEM W-L lead at old R/B2 pin 2 (left kick)**
factory lead tap

| | | |
|---|---|---|
| **2** | AMI BUS1 50 A fuse -> LOGIC WL 15 A fuse | w_rb2_wl |

**ALT-PLUG - Alternator G2 - round 3-pin plug (Toyota 90980-1034...**
90980-10341

| | | |
|---|---|---|
| **1** | Alt S battery sense | w_alt_s_c |

**T-ENG-BLOCK-3 - Engine block ground stud, lug 3 (Route 1 point...**
end

| | | |
|---|---|---|
| **-** | EHPS pump ground | w_eps_gnd |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 6 ...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 69 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 of 11)

**SP-RTR-GND-R2 - LH retract motor ground - 16 AWG pigtail t...**
solder splice (node)

| | | |
|---|---|---|
| - | LH retract ground | w_rtr_gnd_r2 |

**POWER - B1 POWER box with the bus bar in it - custom fuse...**
ST185-FB-POWER rev 7

| | | |
|---|---|---|
| **AMI OUT-2** | AMI RTR 30 A fuse | w_pmu_rtr |
| **AMI OUT-3** | AMI AM1 40 A fuse | w_pdb_am1 |
| **AMI OUT-4** | AMI AM2 30 A fuse | w_pdb_am2 |

**POWER-STUDS - POWER box bus zone (rev 7, glove box)**
ST185-FB-POWER rev 7 BUS ZONE

| | | |
|---|---|---|
| **NEG** | POWER box gnd to ID | w_gnd_id |
| **NEG** | POWER box gnd to IG | w_gnd_ig |

w_rtr_gnd_r2_16 BLK
w_pmu_rtr_10 RED
w_pdb_am1_8 RED
w_pdb_am2_10 RED
w_gnd_id_1/0 BLK
w_gnd_ig_1/0 BLK
w_gnd_id
w_gnd_ig
w_rtr_gnd_r2_16 BLK
w_pmu_rtr_10 RED
w_pdb_am1_8 RED
w_pdb_am2_10 RED
w_gnd_id_1/0 BLK
w_gnd_ig_1/0 BLK

**LH retract motor R2 pin 5**
factory lead tap

| | | |
|---|---|---|
| 5 | LH retract ground | w_rtr_gnd_r2 |

**OEM IE1 pin 3 (left kick, cowl side)**
factory lead tap

| | | |
|---|---|---|
| 3 | AMI RTR 30 A fuse | w_pmu_rtr |

**OEM IE1 pin 10 (left kick, cowl side)**
factory lead tap

| | | |
|---|---|---|
| 10 | AMI AM1 40 A fuse | w_pdb_am1 |

**OEM IE1 pin 17 (left kick, cowl side)**
factory lead tap

| | | |
|---|---|---|
| 17 | AMI AM2 30 A fuse | w_pdb_am2 |

**GND-ID - Ground stud ID, left kick panel (EWD ground point ID)**
end

| | | |
|---|---|---|
| - | POWER box gnd to ID | w_gnd_id |

**GND-IG - Ground bolt IG, right kick (EWD ground point IG)**
end

| | | |
|---|---|---|
| - | POWER box gnd to IG | w_gnd_ig |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**


| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 7 ...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 70 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 of 11)

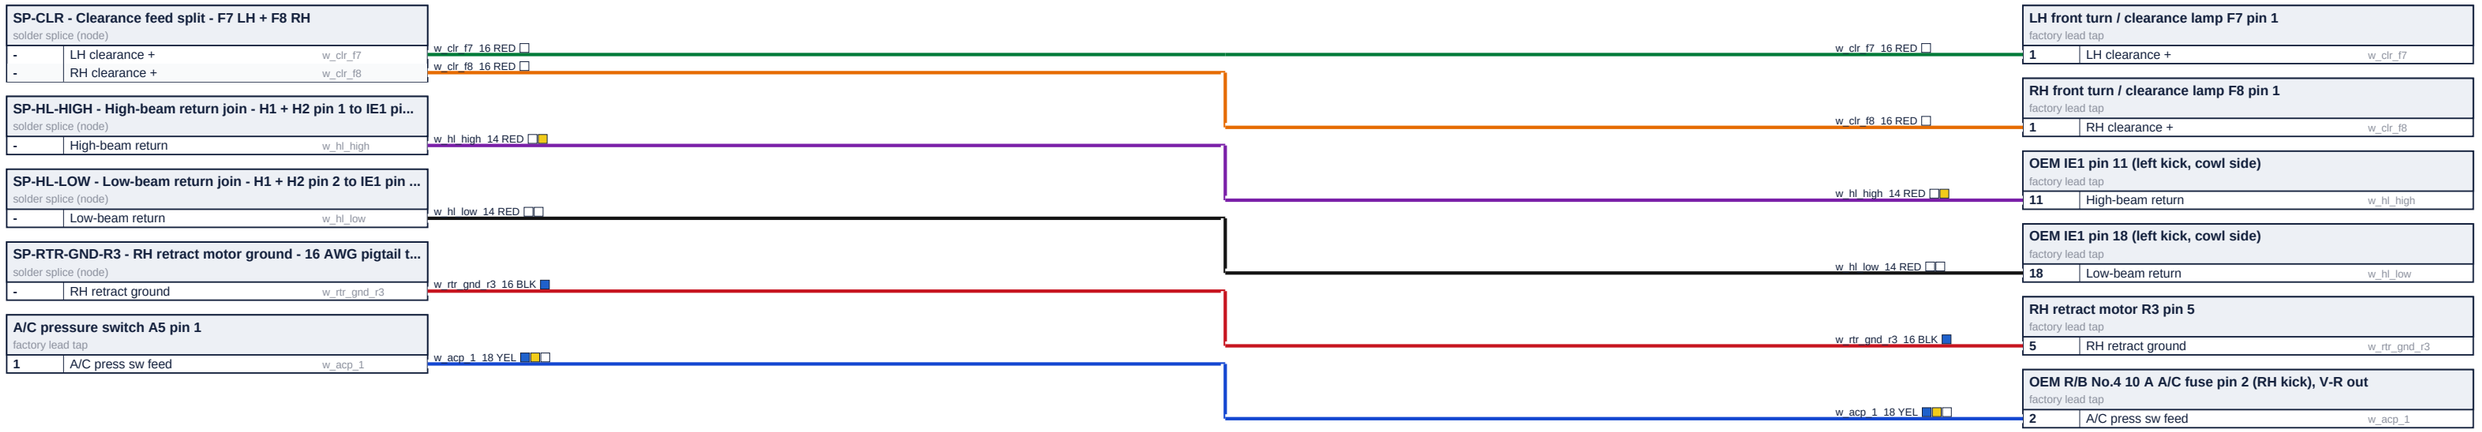


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

## REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 8 ...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 71 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 of 11)

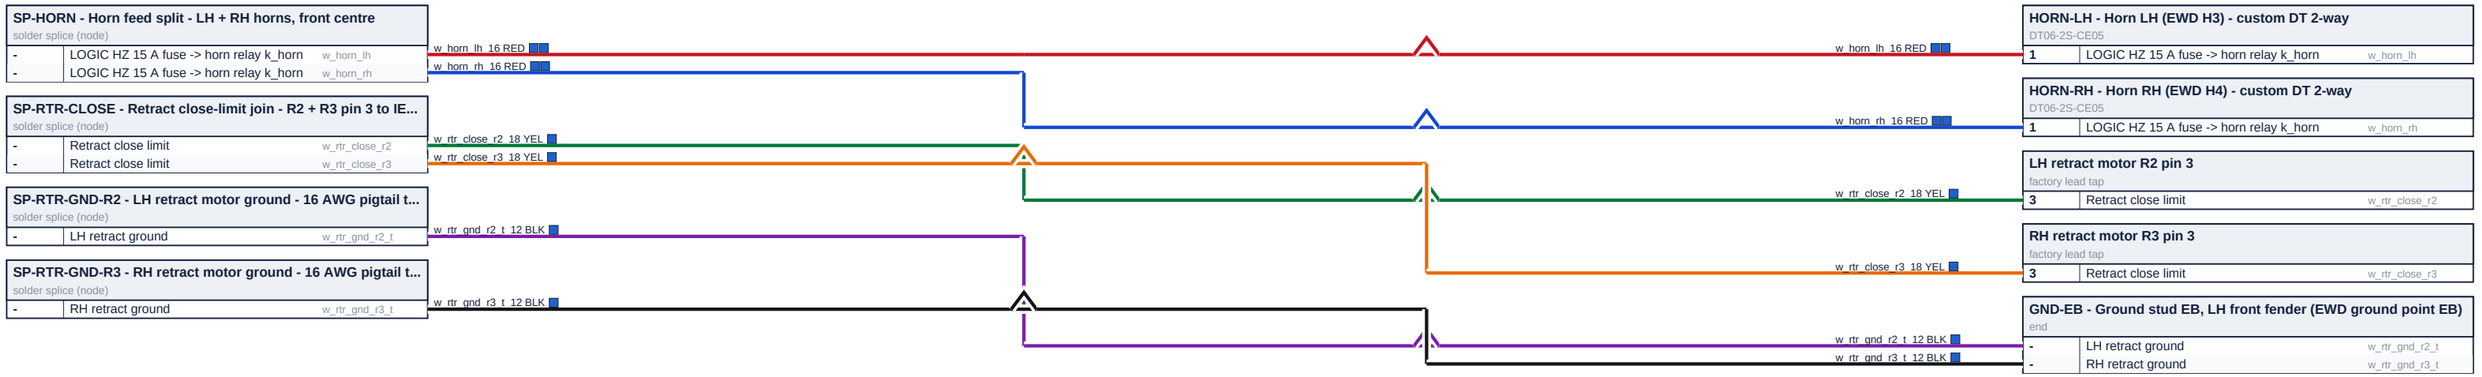


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

## REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 9 ...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 72 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 5 of 11)

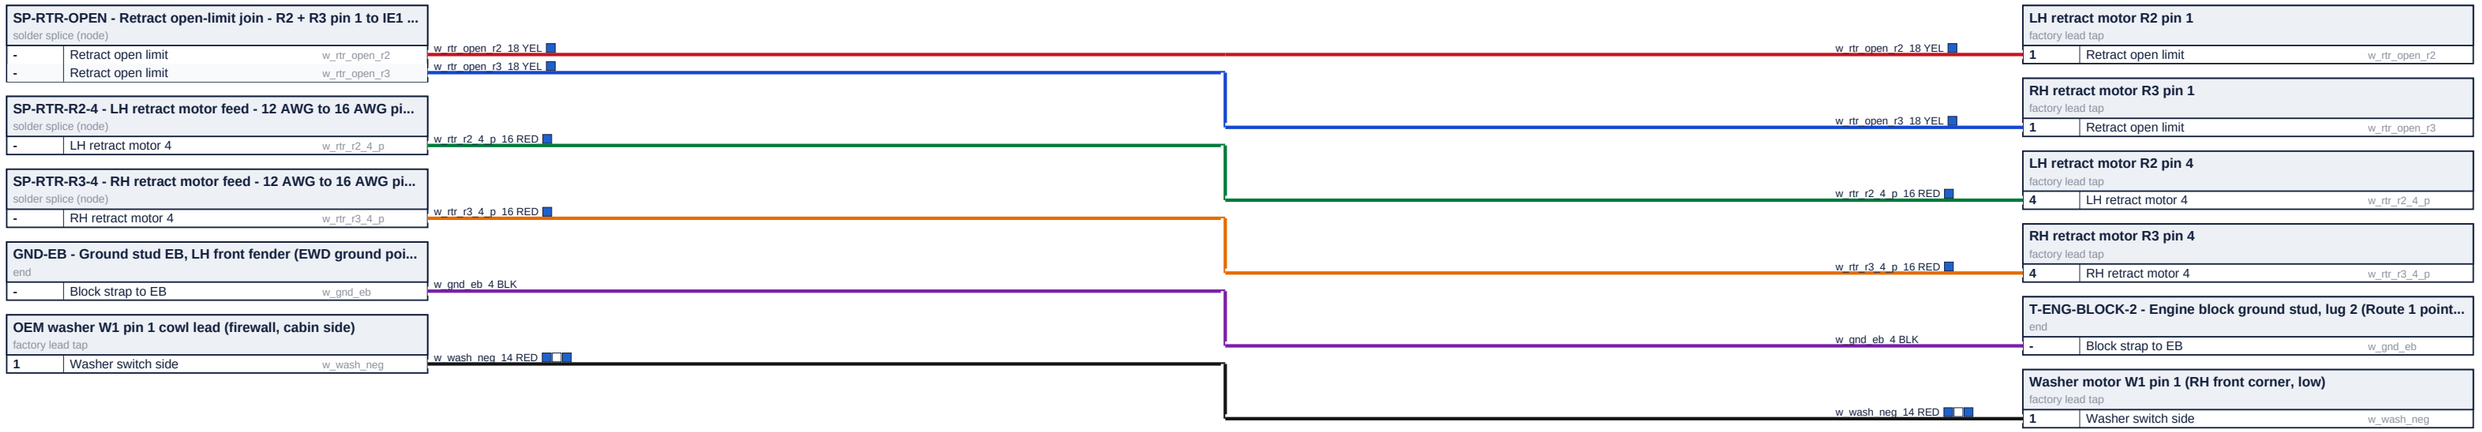


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

## REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 10...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 73 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 0 of 11)

| OEM washer W1 pin 2 cowl lead (firewall, cabin side) | | |
|---|---|---|
| factory lead tap | | |
| **2** | Washer motor +12 V | w_wash_pos |

w_wash_pos_14 RED

w_wash_pos_14 RED

| Washer motor W1 pin 2 (RH front corner, low) | | |
|---|---|---|
| factory lead tap | | |
| **2** | Washer motor +12 V | w_wash_pos |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS  (part 11...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 74 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 5 of 3)

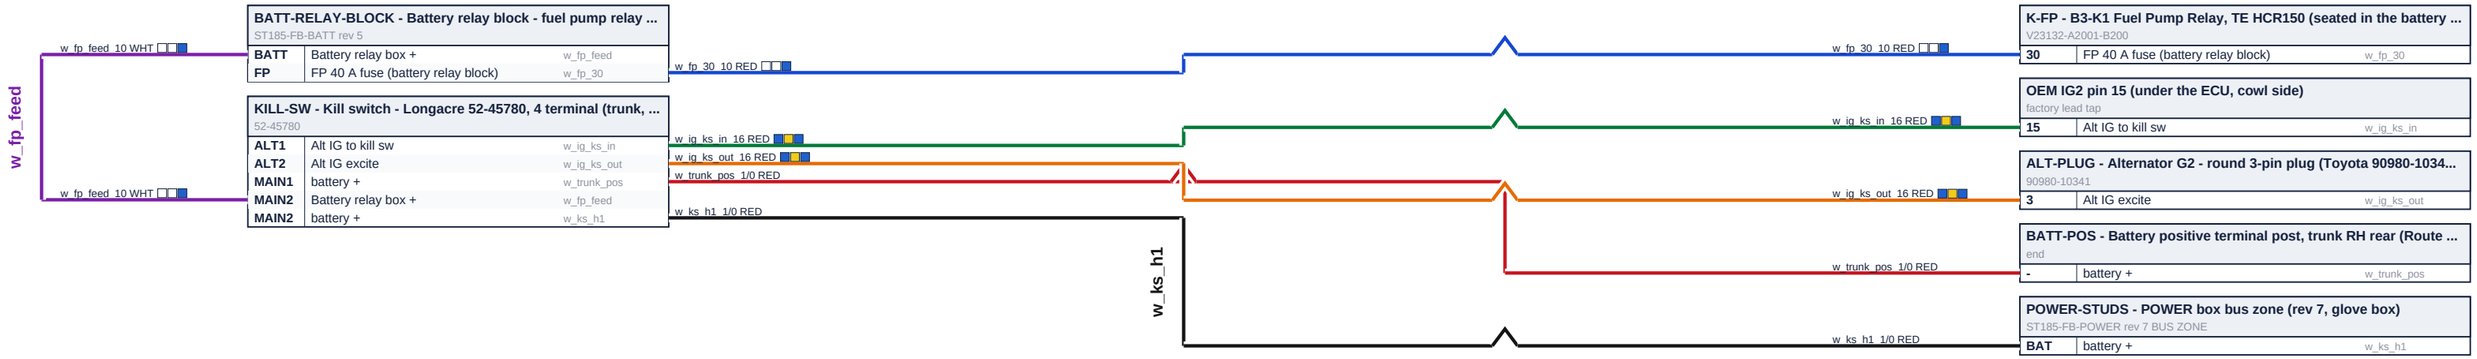


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

### REVISIONS

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 1 o...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 75 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 5 of 3)

**POWER-STUDS - POWER box bus zone (rev 7, glove box)**
ST185-FB-POWER rev 7 BUS ZONE


| | | |
|---|---|---|
| **ALT** | Starter feed (H3) | w_h3_radlok_pos |
| **NEG** | Engine ground (H6a) | w_h6a_radlok_neg |

**RADLOK-NEG-ENG - RADLOK - engine**
RL00801-50BK

| | | |
|---|---|---|
| **1** | Engine ground (H6a) | w_rln |
| **1** | Engine ground (H6a) | w_rln_blk |

**RADLOK-POS-ENG - RADLOK + engine**
RL00801-50RE

| | | |
|---|---|---|
| **1** | Starter feed (H3) | w_rl_pos |
| **1** | Starter feed (H3) | w_rlp_str |

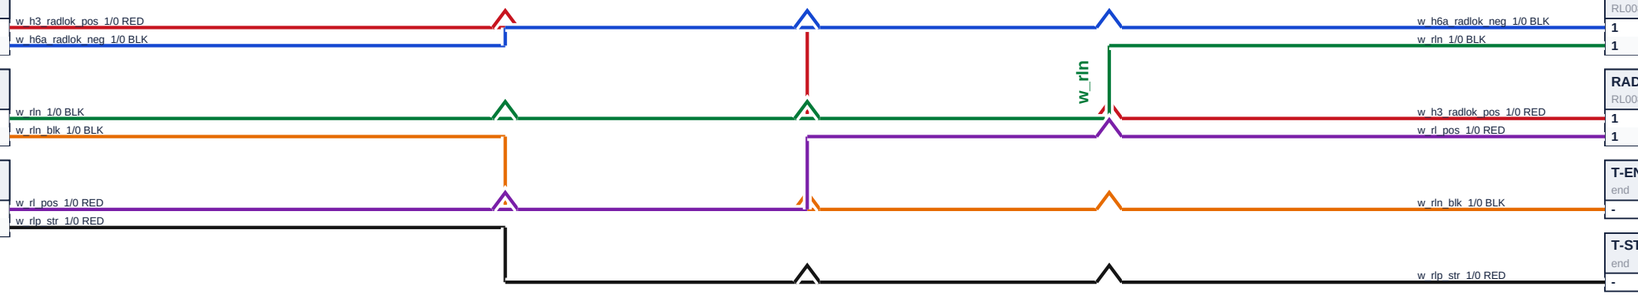


**RADLOK-NEG-CAB - RADLOK - firewall**
RL00801-50BK

| | | |
|---|---|---|
| **1** | Engine ground (H6a) | w_h6a_radlok_neg |
| **1** | Engine ground (H6a) | w_rln |

**RADLOK-POS-CAB - RADLOK + firewall**
RL00801-50RE

| | | |
|---|---|---|
| **1** | Starter feed (H3) | w_h3_radlok_pos |
| **1** | Starter feed (H3) | w_rl_pos |

**T-ENG-BLOCK - Engine block ground stud, lug 1 (Route 1 point 5)**
end

| | | |
|---|---|---|
| **-** | Engine ground (H6a) | w_rln_blk |

**T-STARTER-B - Starter B+ stud, lug 1 (Route 1 point 2)**
end

| | | |
|---|---|---|
| **-** | Starter feed (H3) | w_rlp_str |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 2 o...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 76 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK  (part 2 of 3)

| JUMP-POST - Engine-bay jump post | | |
|---|---|---|
| 1 | Jump post feed | w_jump |

w_jump_2 RED — w_jump_2 RED

| T-STARTER-B-3 - Starter B+ stud, lug 3 (Route 1 point 2) | | |
|---|---|---|
| end | | |
| - | Jump post feed | w_jump |

| POWER-STUDS - POWER box bus zone (rev 7, glove box) | | |
|---|---|---|
| ST185-FB-POWER rev 7 BUS ZONE | | |
| NEG | Battery - main | w_trunk_neg |

w_trunk_neg_1/0 BLK — w_trunk_neg_1/0 BLK

| T-TRUNK-NEG - Battery negative terminal post, trunk RH rear (Ro... | | |
|---|---|---|
| end | | |
| - | Battery - main | w_trunk_neg |

| T-ALT-B - Alternator B+ stud, rear RH of engine (Route 1 poi... | | |
|---|---|---|
| end | | |
| - | Alternator B+ | w_alt |

w_alt_2 RED — w_alt_2 RED

| T-STARTER-B-2 - Starter B+ stud, lug 2 (Route 1 point 2) | | |
|---|---|---|
| end | | |
| - | Alternator B+ | w_alt |

**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |


**ST185-harness - every wiring harness of the car, one drawing set**

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK  (part 3 o...

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 77 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## REAR FUEL - FUEL PUMP AND LEVEL SENDER

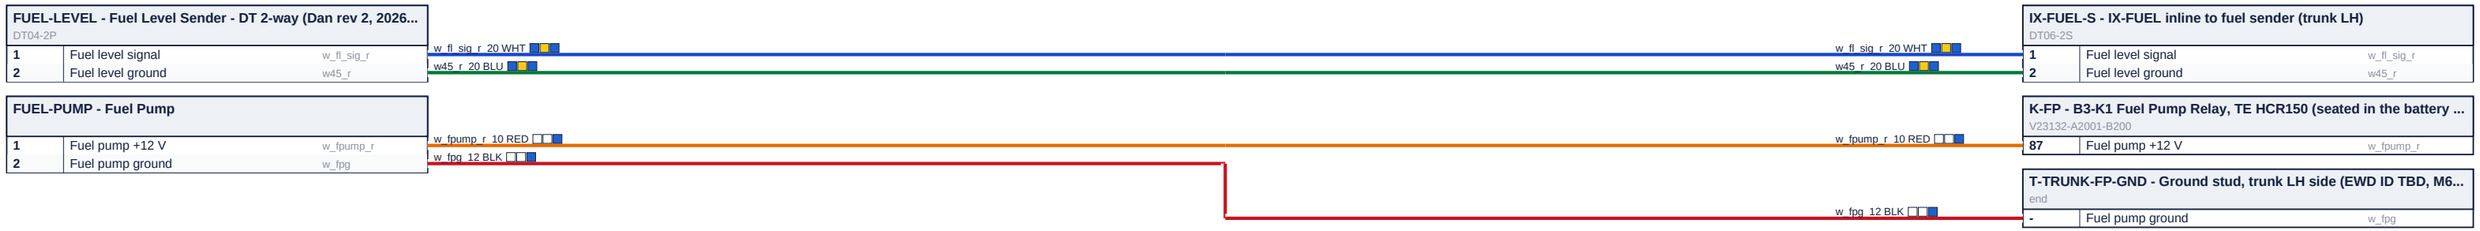


**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

REAR FUEL - FUEL PUMP AND LEVEL SENDER

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 78 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

# FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC  (part 5 of 2)

| SP-WS-F-SHIELD - Sensor screen join - FL + FR screens to t... | | |
|---|---|---|
| solder splice (node) | | |
| - | FL sensor shield | cab_fl_sh |
| - | FR sensor shield | cab_fr_sh |
| - | Front sensor shields | w_ws_f_shield |

| IX-WS-F-P - IX-WS-F | | |
|---|---|---|
| DT04-6P | | |
| 1 | VRC-F +5V | cab_fout_5v |
| 2 | VRC-F GND | cab_fout_gnd |
| 5 | WS-F screen drain | cab_fout_sh |

cab_fl_sh_screen
cab_fr_sh_screen
w_ws_f_shield_20 BLK
cab_fout_5v_20 RED
cab_fout_gnd_20 YEL
cab_fout_sh_screen

cab_fl_sh_screen
cab_fr_sh_screen
w_ws_f_shield_20 BLK
cab_fout_5v_20 RED
cab_fout_gnd_20 YEL
cab_fout_sh_screen

| CAB-FL cable screen (floats at the device end) | | |
|---|---|---|
| cable screen | | |
| - | FL sensor shield | cab_fl_sh |

| CAB-FR cable screen (floats at the device end) | | |
|---|---|---|
| cable screen | | |
| - | FR sensor shield | cab_fr_sh |

| VRC-F-IN - VRC front IN plug | | |
|---|---|---|
| LP-16-J05PE-02-001 | | |
| 3 | Front sensor shields | w_ws_f_shield |

| VRC-F-OUT - VRC front OUT plug | | |
|---|---|---|
| LP-16-J05PE-02-001 | | |
| 1 | VRC-F +5V | cab_fout_5v |
| 2 | VRC-F GND | cab_fout_gnd |
| 3 | WS-F screen drain | cab_fout_sh |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC  (part 1 of 2)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 79 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

## FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC  (part 5 of 2)

**IX-WS-F-P - IX-WS-F**
DT04-6P

| | | |
|---|---|---|
| 3 | FL conditioned out | cab_fout_l |
| 4 | FR conditioned out | cab_fout_r |

**VRC-F-IN - VRC front IN plug**
LP-16-J05PE-02-001

| | | |
|---|---|---|
| 1 | FL wheel speed + | cab_fl_p |
| 2 | FL wheel speed - | cab_fl_n |
| 4 | FR wheel speed + | cab_fr_p |
| 5 | FR wheel speed - | cab_fr_n |

cab_fout_l 20 GRN
cab_fout_r 20 BLU
cab_fl_p 20 BLU
cab_fl_n 20 WHT
cab_fr_p 20 BLU
cab_fr_n 20 WHT

cab_fout_l 20 GRN
cab_fout_r 20 BLU
cab_fl_p 20 BLU
cab_fl_n 20 WHT
cab_fr_p 20 BLU
cab_fr_n 20 WHT

**VRC-F-OUT - VRC front OUT plug**
LP-16-J05PE-02-001

| | | |
|---|---|---|
| 4 | FL conditioned out | cab_fout_l |
| 5 | FR conditioned out | cab_fout_r |

**WSS-FL - ABS Wheel Speed FL**
DT06-2S-CE05

| | | |
|---|---|---|
| 1 | FL wheel speed + | cab_fl_p |
| 2 | FL wheel speed - | cab_fl_n |

**WSS-FR - ABS Wheel Speed FR**
DT06-2S-CE05

| | | |
|---|---|---|
| 1 | FR wheel speed + | cab_fr_p |
| 2 | FR wheel speed - | cab_fr_n |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC  (part 2 of 2)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 80 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC  (part 5 of 2)

**SP-WS-R-SHIELD - Sensor screen join - RL + RR screens to t...**
solder splice (node)

| | | |
|---|---|---|
| - | RL sensor shield | cab_rl_sh |
| - | RR sensor shield | cab_rr_sh |
| - | Rear sensor shields | w_ws_r_shield |

**IX-WS-R-P - IX-WS-R**
DT04-6P

| | | |
|---|---|---|
| 1 | VRC-R +5V | cab_rout_5v |
| 2 | VRC-R GND | cab_rout_gnd |
| 5 | WS-R screen drain | cab_rout_sh |

cab_rl_sh_screen
cab_rr_sh_screen
w_ws_r_shield_20 BLK
cab_rout_5v_20 RED
cab_rout_gnd_20 YEL
cab_rout_sh_screen

cab_rl_sh_screen
cab_rr_sh_screen
w_ws_r_shield_20 BLK
cab_rout_5v_20 RED
cab_rout_gnd_20 YEL
cab_rout_sh_screen

**CAB-RL cable screen (floats at the device end)**
cable screen

| | | |
|---|---|---|
| - | RL sensor shield | cab_rl_sh |

**CAB-RR cable screen (floats at the device end)**
cable screen

| | | |
|---|---|---|
| - | RR sensor shield | cab_rr_sh |

**VRC-R-IN - VRC rear IN plug**
LP-16-J05PE-02-001

| | | |
|---|---|---|
| 3 | Rear sensor shields | w_ws_r_shield |

**VRC-R-OUT - VRC rear OUT plug**
LP-16-J05PE-02-001

| | | |
|---|---|---|
| 1 | VRC-R +5V | cab_rout_5v |
| 2 | VRC-R GND | cab_rout_gnd |
| 3 | WS-R screen drain | cab_rout_sh |

**WIRE COLOURS (R209):** RED BLK ORN BLU WHT GRN YEL

**IDENT BANDS (R87):** Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**
REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC  (part 1 of 2)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 81 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

## REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC  (part 5 of 2)




**WIRE COLOURS (R209):** RED · BLK · ORN · BLU · WHT · GRN · YEL

**IDENT BANDS (R87):** Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

**REVISIONS**

| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| G | 2026-10-26 | DG | Layout: the old Routes 2-7 (harness C, A / B engine, A / B cabin, cabin power) were wrong and ar... |
| H | 2026-10-26 | DG | Spare ECU pins A26 (Aux 8), B31 / B32 (An Volt 10 / 11) listed with sealing plugs. First per-harne... |
| I | 2026-10-27 | DG | Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra... |
| J | 2026-10-28 | DG | ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO... |

**ST185-harness - every wiring harness of the car, one drawing set**

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC  (part 2 of 2)

| DRAWING NO. | REV | SHEET | SIZE | DRAWN | DATE |
|---|---|---|---|---|---|
| ST185-harness-SCH | J | 82 OF 82 | 432 x 279 mm | DG | 2026-10-28 |

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale