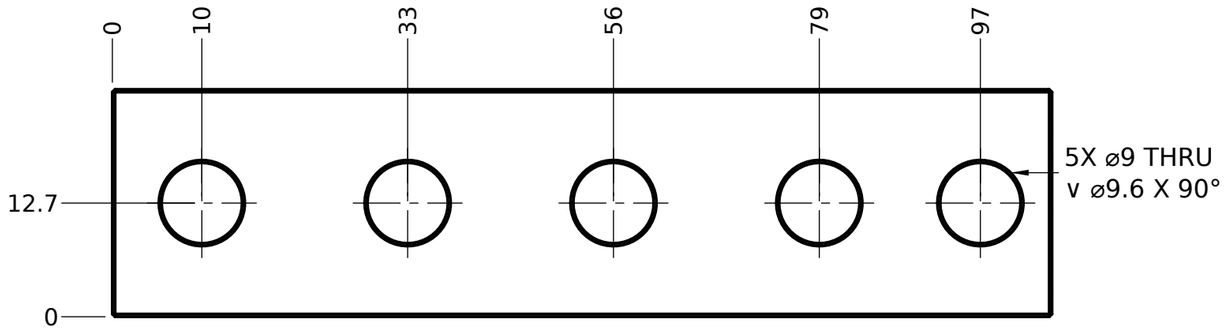


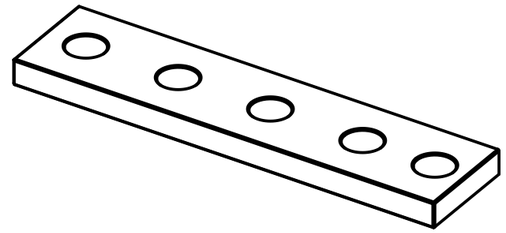

**TRIMETRIC VIEW (SCALE 1:1.25)**

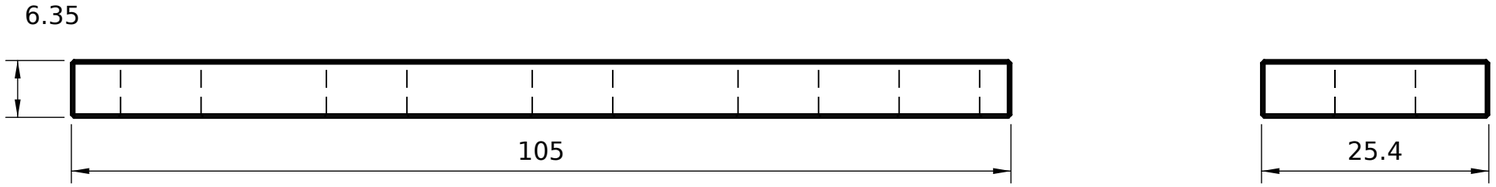





**NOTES:**

1. MATERIAL: C110 COPPER, TINNED. CUT FROM 1" x 1/4" TINNED C110 FLAT BAR (MECCANIXITY B0CGJBRNJX).
2. SAW CUT, DRILL; DEBURR ALL HOLES AND EDGES. DO NOT REMOVE TIN ON CONTACT FACES.

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| G | FIRST ISSUE. MODEL REV 7 = G | 2026-10-17 | SC |

**UNLESS OTHERWISE SPECIFIED:**
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
**ST185 CELICA GT-FOUR - LINK ECU CONVERSION**

TITLE
# POWER NEG BAR 25.4 x 6.35 x 105

| PART / DWG NO. | REV | MATERIAL |
|---|---|---|
| **ST185-FB-113** | **G** | C110 COPPER, TINNED |

| SCALE | UNITS | SIZE | SHEET | DATE | DRAWN |
|---|---|---|---|---|---|
| 1.5:1 | mm | B (11x17) | 1 OF 1 | 2026-10-17 | SteveCAD |

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev7\\Power_BarNeg_CuC110_25x6p35_L105.step

3RD ANGLE