THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

BUS-5V - DT06-12 plug (ECU splice point) DT06-12SA		
2	+5 V throttle sensor	w_rail_sp_5v_c
3	+5 V MAP sensor	w_5v_a_c39
4	+5 V turbo speed	w_5v_a_c40
5	+5 V oil pressure	w_5v_brail_c45
6	+5 V fuel pressure	w_5v_brail_c46
7	+5 V coolant press	w_5v_brail_c47



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
13	+5 V fuel pressure	w_5v_brail_c46
16	+5 V MAP sensor	w_5v_a_c39
25	+5 V coolant press	w_5v_brail_c47
27	+5 V oil pressure	w_5v_brail_c45
41	+5 V throttle sensor	w_rail_sp_5v_c
52	+5 V turbo speed	w_5v_a_c40

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 1 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	1 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

BUS-GNDOUT-A - DT06-12 plug (ECU splice point)
DT06-12SA

2	Gnd IAT/TPS/coolant	w_rail_sp_gndout_c
3	Gnd crank sensor	w_gnd_a_c41
4	Gnd cam sensor	w_gnd_a_c42
5	Gnd turbo speed	w_gnd_a_c43
6	Gnd flex + MAP	w_gnd_a_c44

BUS-GNDOUT-B - DT06-12 plug (ECU splice point)
DT06-12SA

7	Gnd oil/clnt/temps	w_gnd_b_c19

w_rail_sp_gndout_c_20_BLU
w_gnd_a_c41_20_BLU
w_gnd_a_c42_20_BLU
w_gnd_a_c43_20_BLU
w_gnd_a_c44_20_BLU
w_gnd_b_c19_20_BLU

w_gnd_a_c44_20_BLU
w_gnd_b_c19_20_BLU
w_rail_sp_gndout_c_20_BLU
w_gnd_a_c43_20_BLU
w_gnd_a_c42_20_BLU
w_gnd_a_c41_20_BLU

DRB102-CABIN - DRB102 receptacle (RH firewall)
DRB12-102PAE-L018

18	Gnd flex + MAP	w_gnd_a_c44
29	Gnd oil/clnt/temps	w_gnd_b_c19
34	Gnd IAT/TPS/coolant	w_rail_sp_gndout_c
56	Gnd turbo speed	w_gnd_a_c43
65	Gnd cam sensor	w_gnd_a_c42
75	Gnd crank sensor	w_gnd_a_c41

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 2 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	2 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-B (Link G4X plug B, centre dash) 4-1437290-0		
29	Gearbox speed signal	w_vss_sig_c

BUS-GNDOUT-B - DT06-12 plug (ECU splice point) DT06-12SA		
6	Knock sensor (-)	w12_c
8	Gnd fuel press + VSS	w_gnd_b_c21

SP-REV - reverse switch out to CSB3 opto IN2 and IG2-13 la... solder splice (node)		
-	Reverse sw +12 V out	w_rev_sw_c

POWER-NEG-BAR - POWER box NEG bar M8 stud (glove box) end		
-	Coil ground	w_cop_gnd_ac
-	CAN-Lambda ground	w_lamg_ac

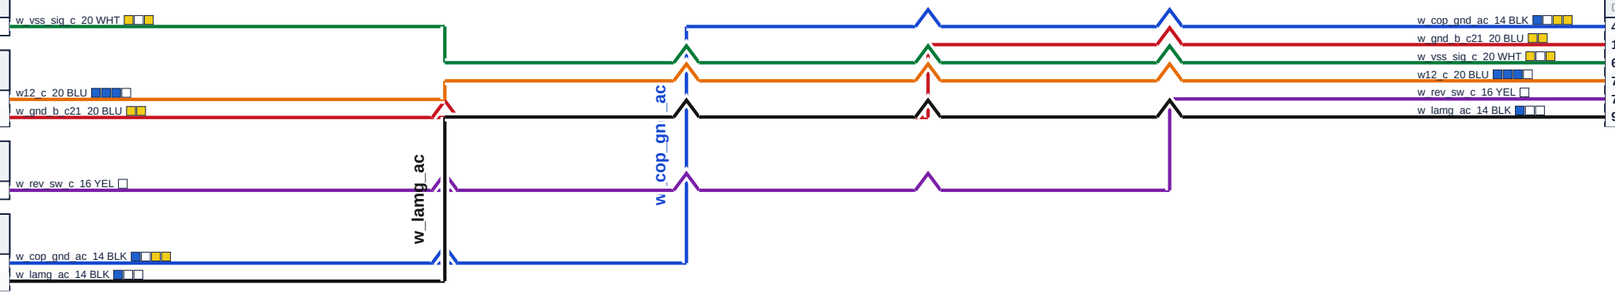

DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
4	Coil ground to the POWER box NEG bar	w_cop_gnd_ac
15	Gnd fuel press + VSS	w_gnd_b_c21
68	Gearbox speed signal	w_vss_sig_c
72	Knock sensor (-)	w12_c
78	Reverse sw +12 V out	w_rev_sw_c
96	CAN-Lambda ground	w_lamg_ac

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 3 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	3 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-A - Link G4X plug A (centre dash)		
4-1437290-1		
1	Injector 4 drive (-)	w111_c
2	Injector 3 drive (-)	w110_c
3	Injector 2 drive (-)	w109_c
4	Injector 1 drive (-)	w108_c
8	Crank sensor signal	w200_c
10	Coil 4 trigger (IGT)	w123_c



DRB102-CABIN - DRB102 receptacle (RH firewall)		
DRB12-102PAE-L018		
12	Coil 4 trigger (IGT)	w123_c
21	Injector 1 drive (-)	w108_c
22	Injector 2 drive (-)	w109_c
23	Injector 3 drive (-)	w110_c
24	Injector 4 drive (-)	w111_c
74	Crank sensor signal	w200_c

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 4 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	4 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-A - Link G4X plug A (centre dash) 4-1437290-1		
11	Coil 3 trigger (IGT)	w122_c
12	Coil 2 trigger (IGT)	w121_c
13	Coil 1 trigger (IGT)	w120_c
15	Coolant temp signal	w201_c
16	Intake temp signal	w202_c
17	MAP sensor signal	w26_c



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
9	Coil 1 trigger (IGT)	w120_c
10	Coil 2 trigger (IGT)	w121_c
11	Coil 3 trigger (IGT)	w122_c
17	MAP sensor signal	w26_c
33	Intake temp signal	w202_c
70	Coolant temp signal	w201_c

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	5 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-A - Link G4X plug A (centre dash) 4-1437290-1		
21	Boost solenoid (-)	w103_c
22	Throttle pos 1 main	w128_c
27	EHPS pump speed	w_mrs_c
30	Turbo speed signal	w16_c
31	Flex fuel signal	w48_c
33	Throttle pos 2 sub	w129_c



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
31	Flex fuel signal	w48_c
42	Throttle pos 1 main	w128_c
44	Throttle pos 2 sub	w129_c
53	Turbo speed signal	w16_c
58	Boost solenoid (-)	w103_c
84	EHPS pump speed	w_mrs_c

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 6 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	6 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-B (Link G4X plug B, centre dash) 4-1437290-0		
6	Oil temp signal	w203_c
7	Charge temp signal	w204_c
9	Knock sensor signal	w205_c
15	Oil pressure signal	w29_c
16	Fuel pressure signal	w32_c
18	ETB motor +	w124_c



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
14	Fuel pressure signal	w32_c
28	Oil pressure signal	w29_c
45	ETB motor +	w124_c
59	Charge temp signal	w204_c
61	Oil temp signal	w203_c
71	Knock sensor signal	w205_c

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 7 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	7 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-B (Link G4X plug B, centre dash) 4-1437290-0		
23	Coolant press signal	w35_c
26	ETB motor -	w215_c

SP-8V - ECU splice point - SP-8V: +8 V cam sensor supply (E... solder splice (node)		
-	+8 V to cam sensor	w_rail_sp_8v_c

K-EPS - B4 EPS pump relay (HCR150, glove box, beside the ... V23132-A2001-B200		
85	EHPS relay coil (-)	w_eps_rly

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i... ST185-FB-LOGIC rev 5		
BUS2-12	EFI relay k_efi -> LOGIC MRS 7.5 A fuse	w_fb_mrs_en

OEM IG2 pin 4 (under the ECU, cowl side) - factory back-up S... factory lead tap		
4	Back-up sw +12 V in	w_rev_feed_c

w35_c_20 WHT
w215_c_18 WHT
w_rail_sp_8v_c_20 ORN
w_eps_rly_18 WHT
w_fb_mrs_en_20 RED
w_rev_feed_c_16 RED
w_rev_feed_c
w_fb_mrs_en
w35_c_20 WHT
w215_c_18 WHT
w_rail_sp_8v_c_20 ORN
w_rev_feed_c_16 RED
w_fb_mrs_en_20 RED
w_eps_rly_18 WHT

DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
26	Coolant press signal	w35_c
46	ETB motor -	w215_c
63	+8 V to cam sensor	w_rail_sp_8v_c
77	Back-up sw +12 V in	w_rev_feed_c
83	EFI relay k_efi -> LOGIC MRS 7.5 A fuse	w_fb_mrs_en
85	EHPS relay coil (-)	w_eps_rly

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 8 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	8 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 4 of 9)

SP-CAM - At the ECU plugs - SP-CAM: cam signal + 1.8k pull...		
solder splice (node)		
-	Cam sensor signal	w_cam_sig_c

SP-CANH - CAN H join - ECU, CSB3, cluster, Pi, bulkhead		
solder splice (node)		
-	CAN H to CAN-Lambda	wc_h_bh_bc

SP-CANL - CAN L join - ECU, CSB3, cluster, Pi, bulkhead		
solder splice (node)		
-	CAN L to CAN-Lambda	wc_l_bh_bc

SP-SW12 - ECU splice point - SP-SW12: switched +12 V (LO...		
solder splice (node)		
-	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sp_sw12_c
-	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sw12_b_c_ac

w_cam_sig_c 20 WHT
wc_h_bh_bc 20 WHT
wc_l_bh_bc 20 GRN
w_rail_sp_sw12_c 18 RED
w_rail_sw12_b_c_ac 20 RED

w_rail_sw12_b_c_ac

w_rail_sp_sw12_c

w_rail_sp_sw12_c 18 RED
w_cam_sig_c 20 WHT
w_rail_sw12_b_c_ac 20 RED
wc_h_bh_bc 20 WHT
wc_l_bh_bc 20 GRN

DRB102-CABIN - DRB102 receptacle (RH firewall)		
DRB12-102PAE-L018		
30	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sp_sw12_c
64	Cam sensor signal	w_cam_sig_c
67	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sw12_b_c_ac
79	CAN H to CAN-Lambda	wc_h_bh_bc
80	CAN L to CAN-Lambda	wc_l_bh_bc

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 9 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	9 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

BUS-5V - DT06-12 plug (ECU splice point)
DT06-12SA


8	+5 V pedal sensor 1	w_aps_vc1
9	+5 V pedal sensor 2	w210
12	+5 V to BUS-5V-2	w_5v_bus_link

BUS-GNDOUT-A - DT06-12 plug (ECU splice point)
DT06-12SA

7	Pedal 1 ground	w40
8	Pedal 2 ground	w_aps_gnd2

POWER-NEG-BAR - POWER box NEG bar M8 stud (glove box)
end

-	A/C coolant-OK ground	w_ac_cool_gnd

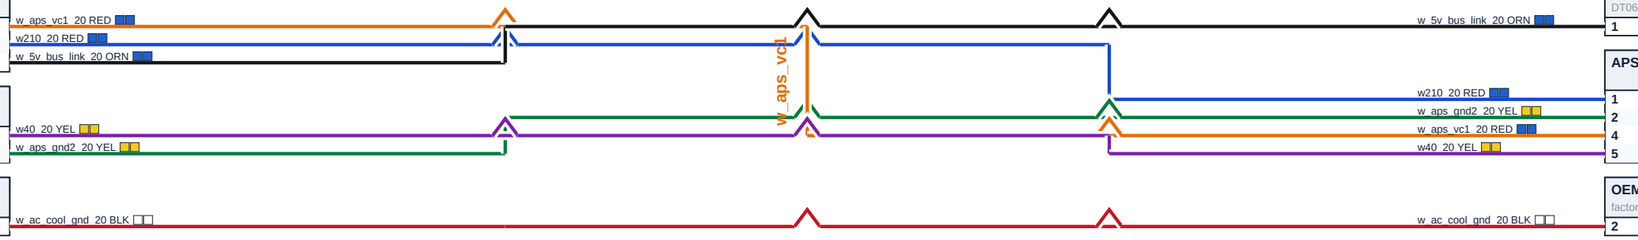

BUS-5V-2 - DT06-8 plug (ECU splice point)
DT06-08SA

1	+5 V from BUS-5V	w_5v_bus_link

APS-PEDAL - accelerator pedal sensor

1	+5 V pedal sensor 2	w210
2	Pedal 2 ground	w_aps_gnd2
4	+5 V pedal sensor 1	w_aps_vc1
5	Pedal 1 ground	w40

OEM A/C amplifier A18 (1993 book: A15)
factory lead tap

2	A/C coolant-OK ground	w_ac_cool_gnd

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 1 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	10 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

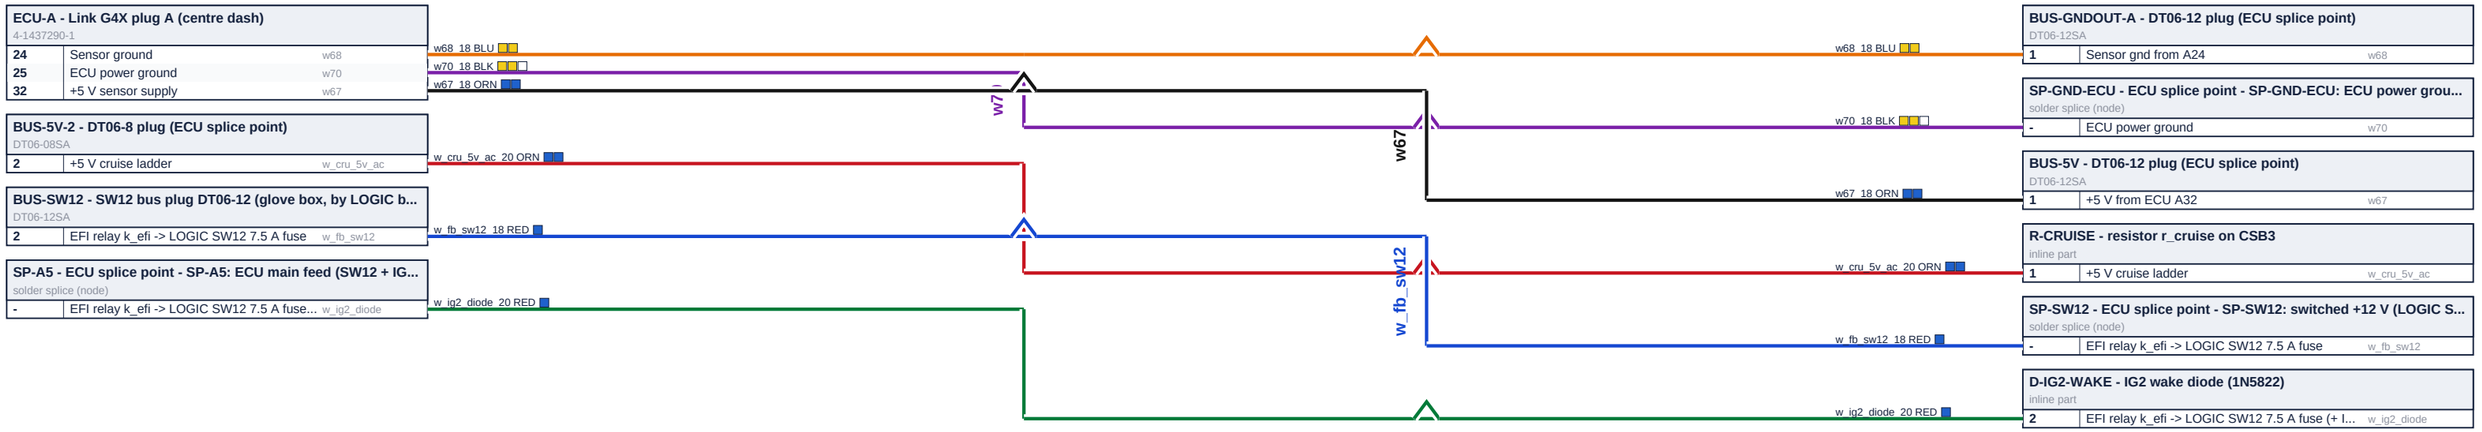

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 2 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	11 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

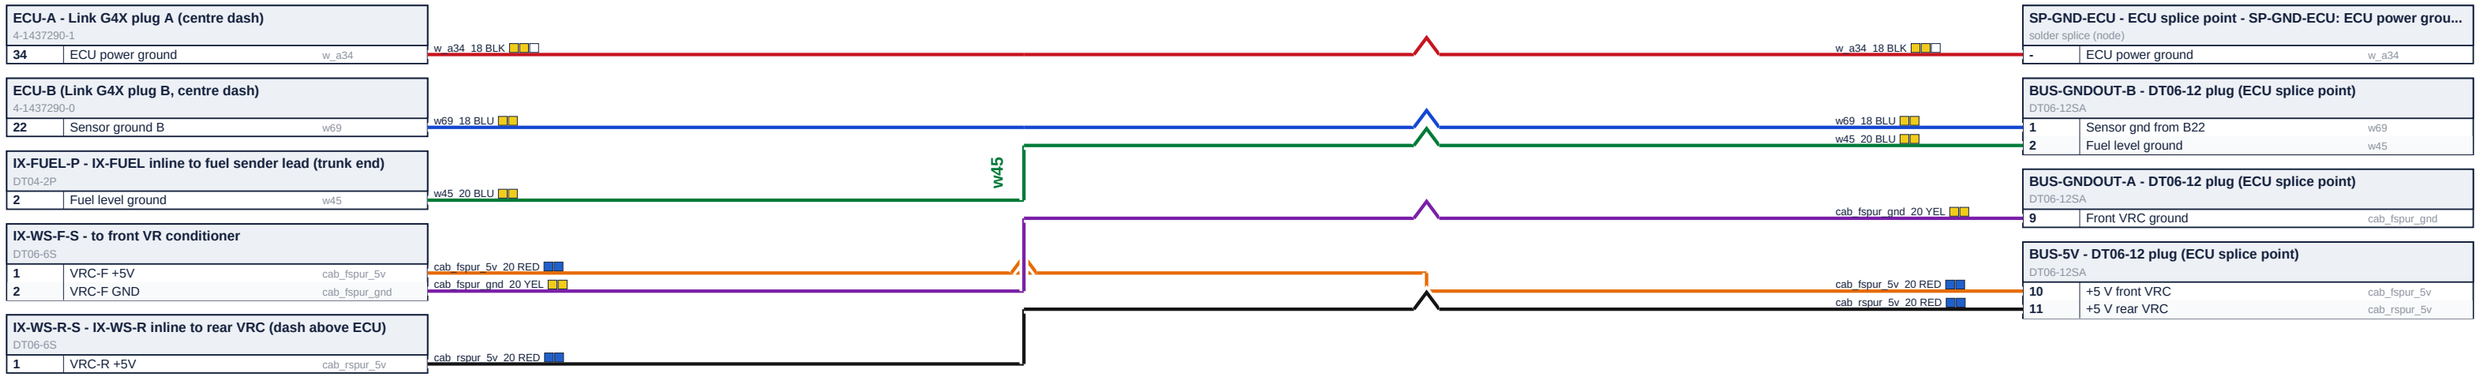

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 3 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	12 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

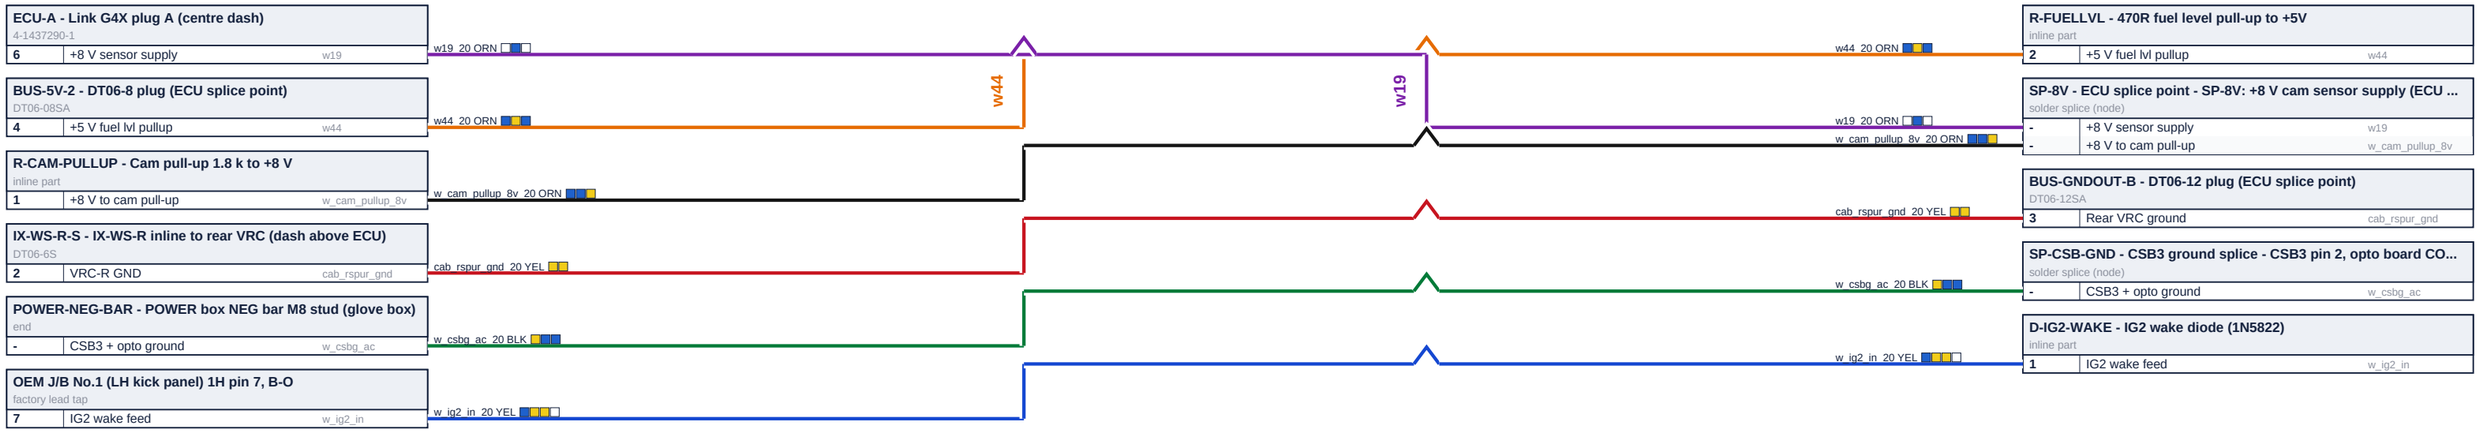

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 4 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	13 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 4 of 5)

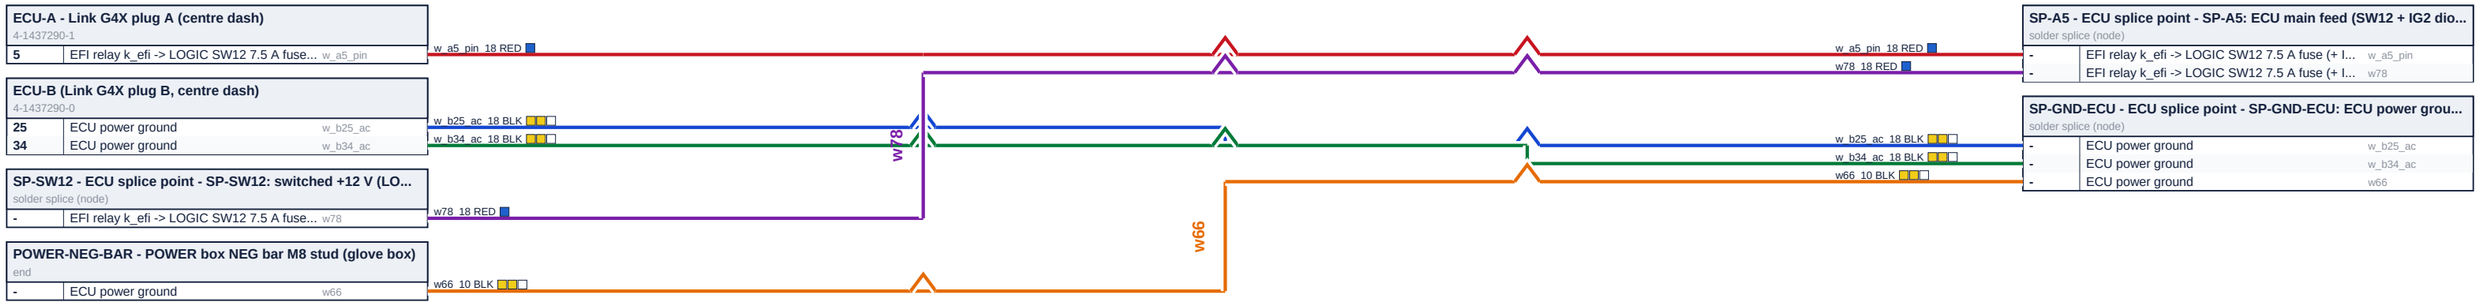

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	14 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

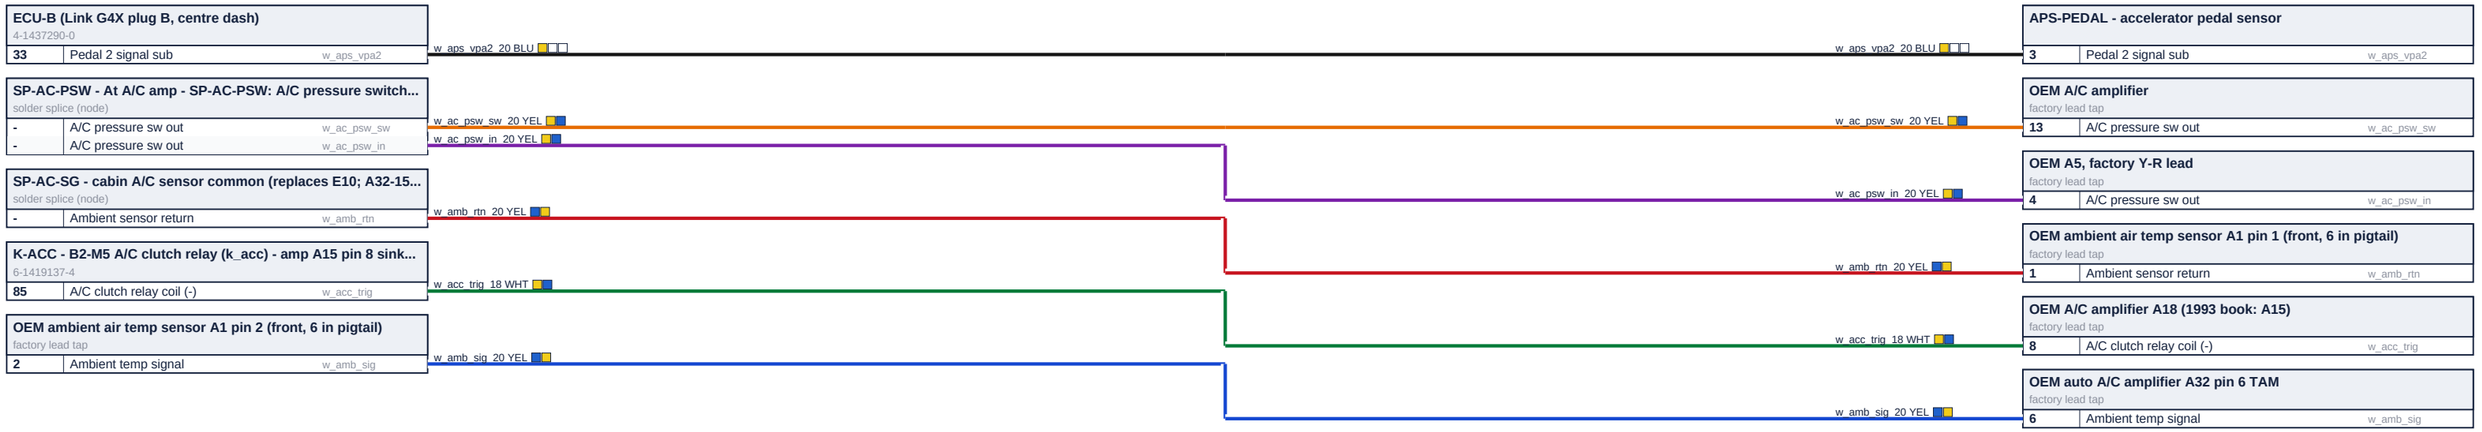

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 1 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	15 OF 82	432 x 279 mm	DG	2026-10-29


ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

ECU-A - Link G4X plug A (centre dash)		
4-1437290-1		
9	Cam sensor signal	w_trig2_pin
14	Pedal 1 signal main	w38
18	A/C cancel (ACT)	w_ac_kill

ECU-B (Link G4X plug B, centre dash)		
4-1437290-0		
10	Engine speed (tacho)	w_tach
12	EPS enable relay (-)	w_eps_trig

SP-FUEL-LVL - fuel sender signal + 470R pull-up to ECU-B B24		
solder splice (node)		
-	Fuel level signal	w_fl_sig

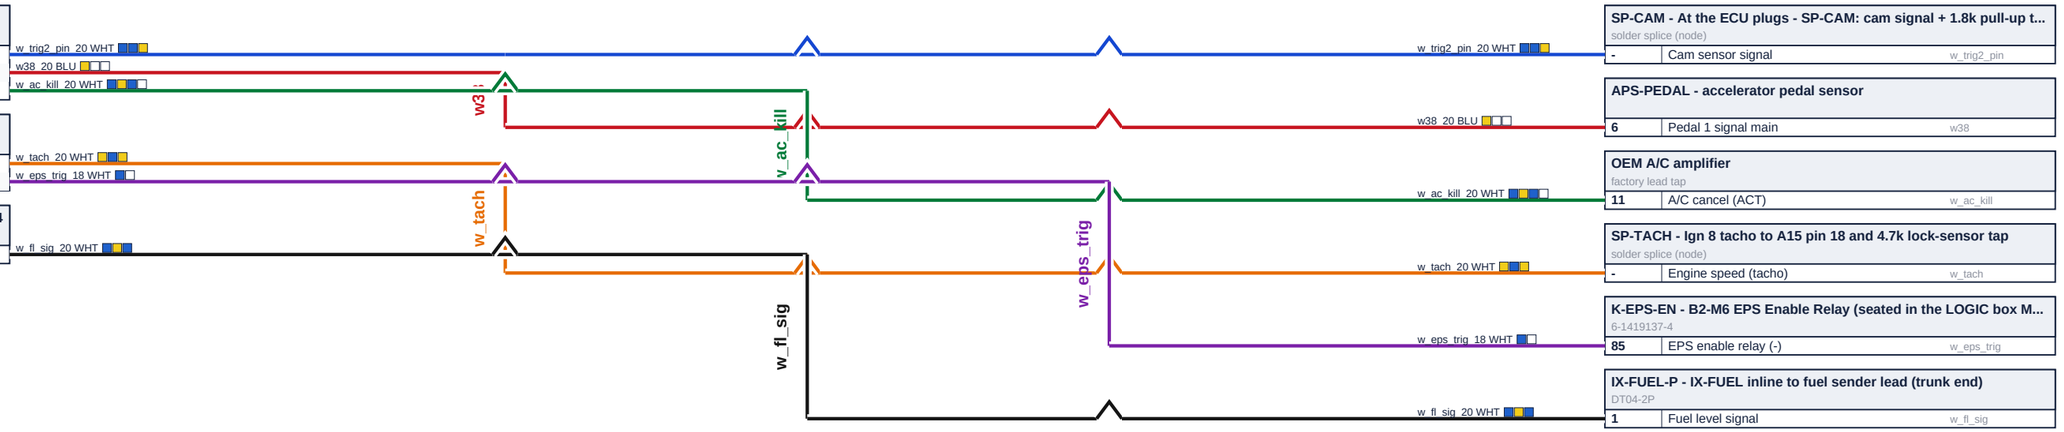

SP-CAM - At the ECU plugs - SP-CAM: cam signal + 1.8k pull-up t...		
solder splice (node)		
-	Cam sensor signal	w_trig2_pin

APS-PEDAL - accelerator pedal sensor		
6	Pedal 1 signal main	w38

OEM A/C amplifier		
factory lead tap		
11	A/C cancel (ACT)	w_ac_kill

SP-TACH - Ign 8 tacho to A15 pin 18 and 4.7k lock-sensor tap		
solder splice (node)		
-	Engine speed (tacho)	w_tach

K-EPS-EN - B2-M6 EPS Enable Relay (seated in the LOGIC box M...		
6-1419137-4		
85	EPS enable relay (-)	w_eps_trig

IX-FUEL-P - IX-FUEL inline to fuel sender lead (trunk end)		
DT04-2P		
1	Fuel level signal	w_fl_sig

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 2 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	16 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

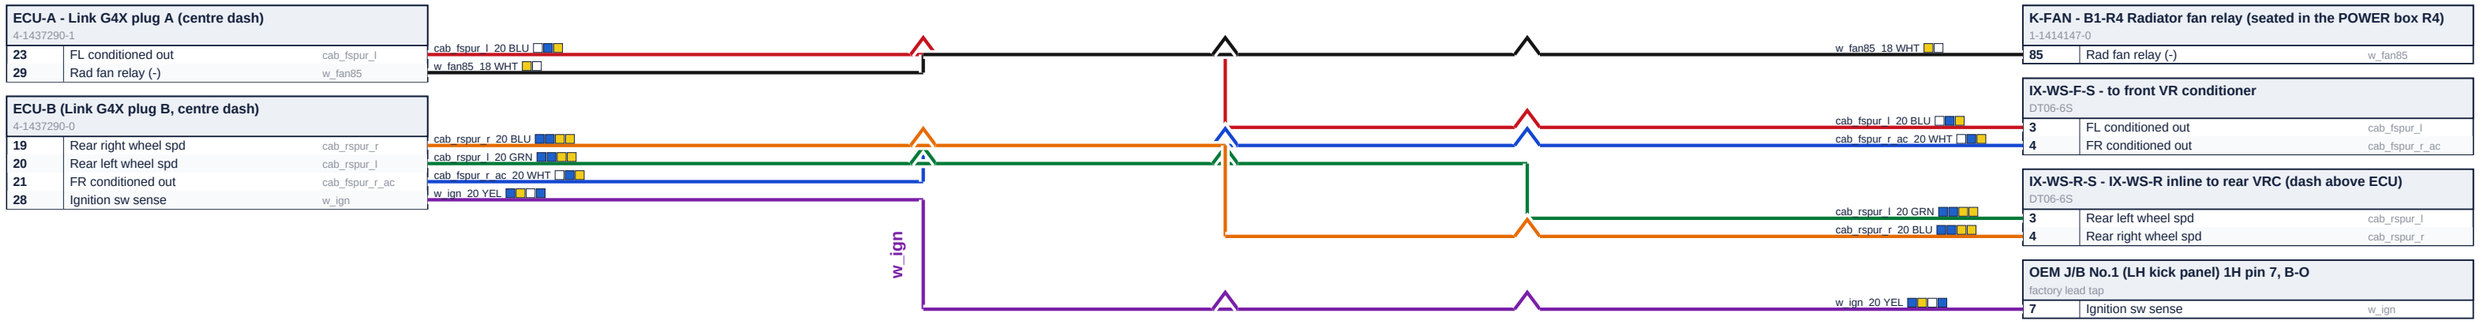

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 3 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	17 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

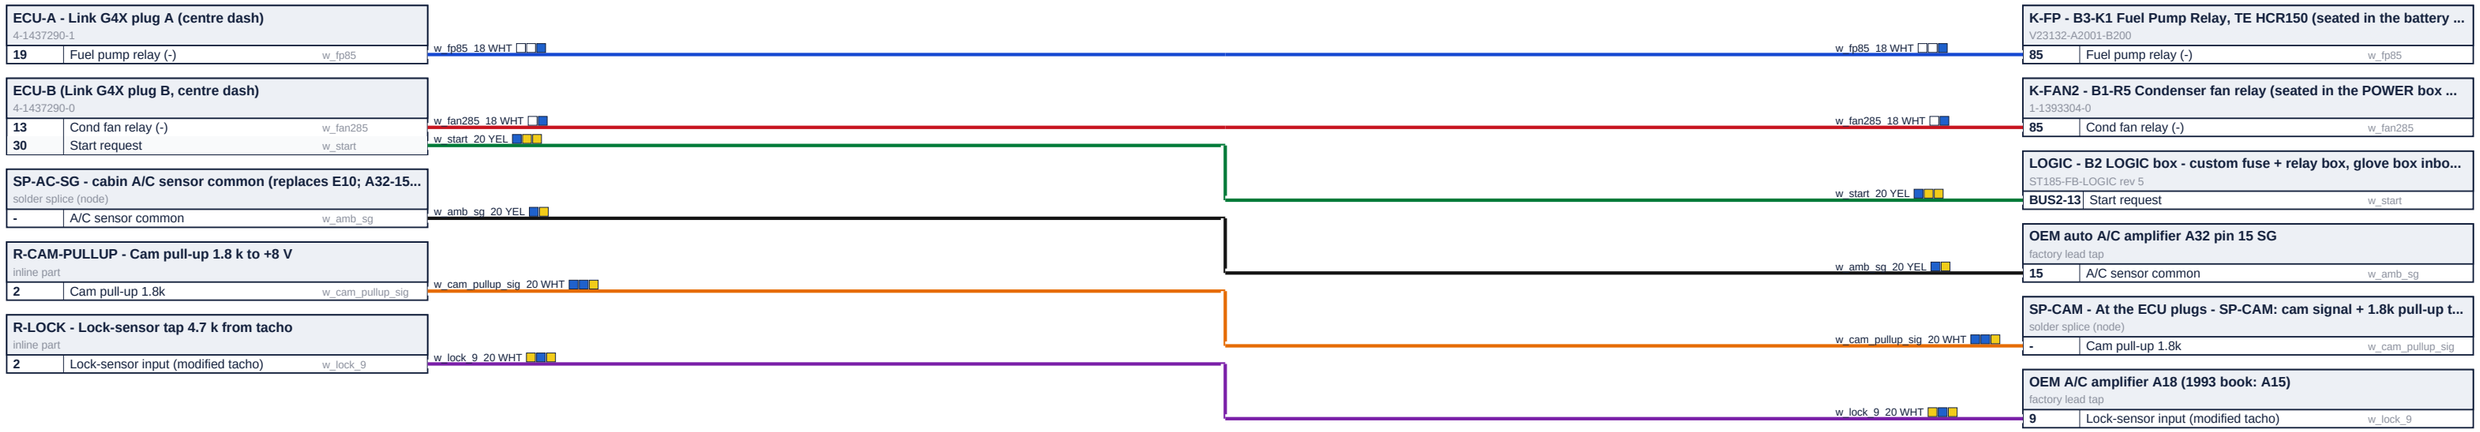

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 4 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	18 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

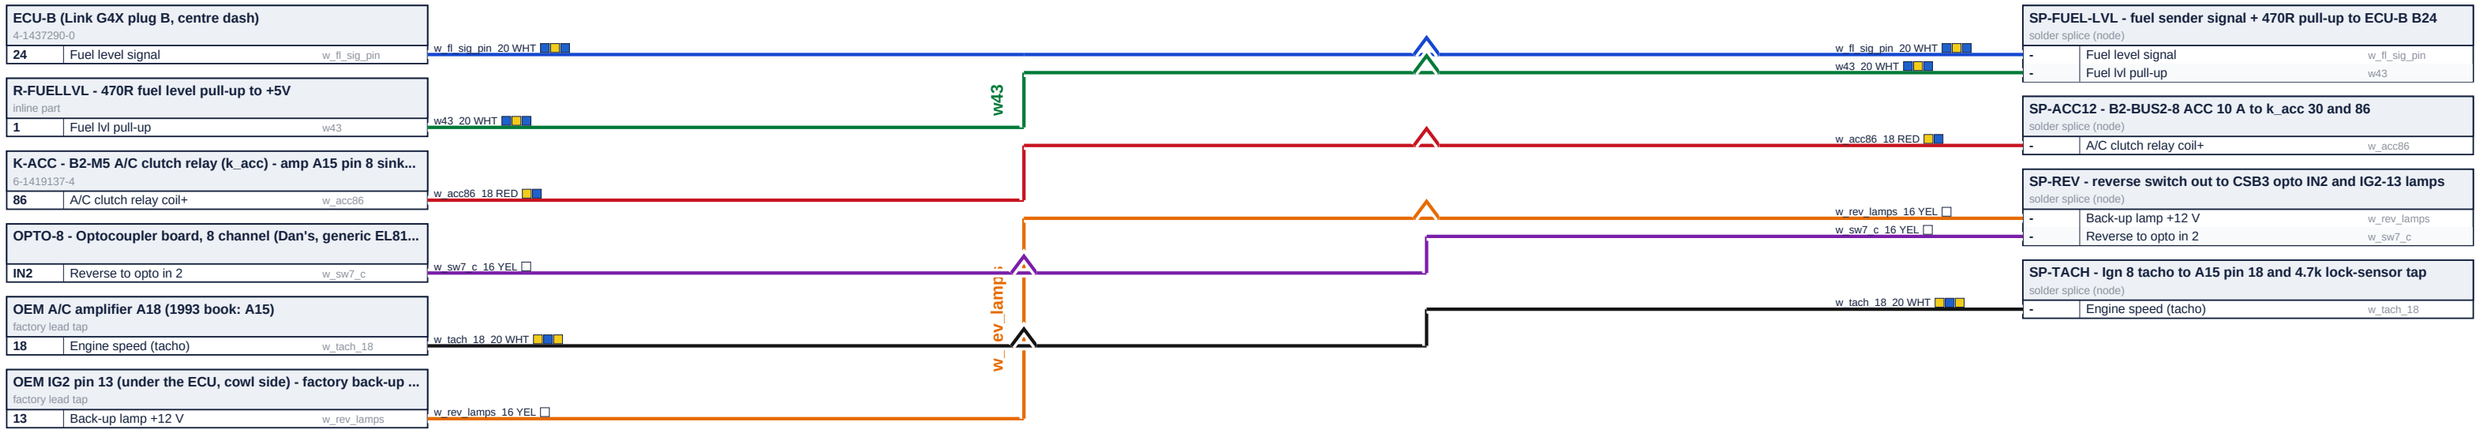

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	19 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 0 of 6)

R-LOCK - Lock-sensor tap 4.7 k from tacho inline part		
1	Tacho to lock-sensor 4.7k	w_tach_r

w_tach_r 20 WHT

w_tach_r 20 WHT

SP-TACH - Ign 8 tacho to A15 pin 18 and 4.7k lock-sensor tap solder splice (node)		
-	Tacho to lock-sensor 4.7k	w_tach_r

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 6 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	20 OF 82	432 x 279 mm	DG	2026-10-29

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 5 of 4)

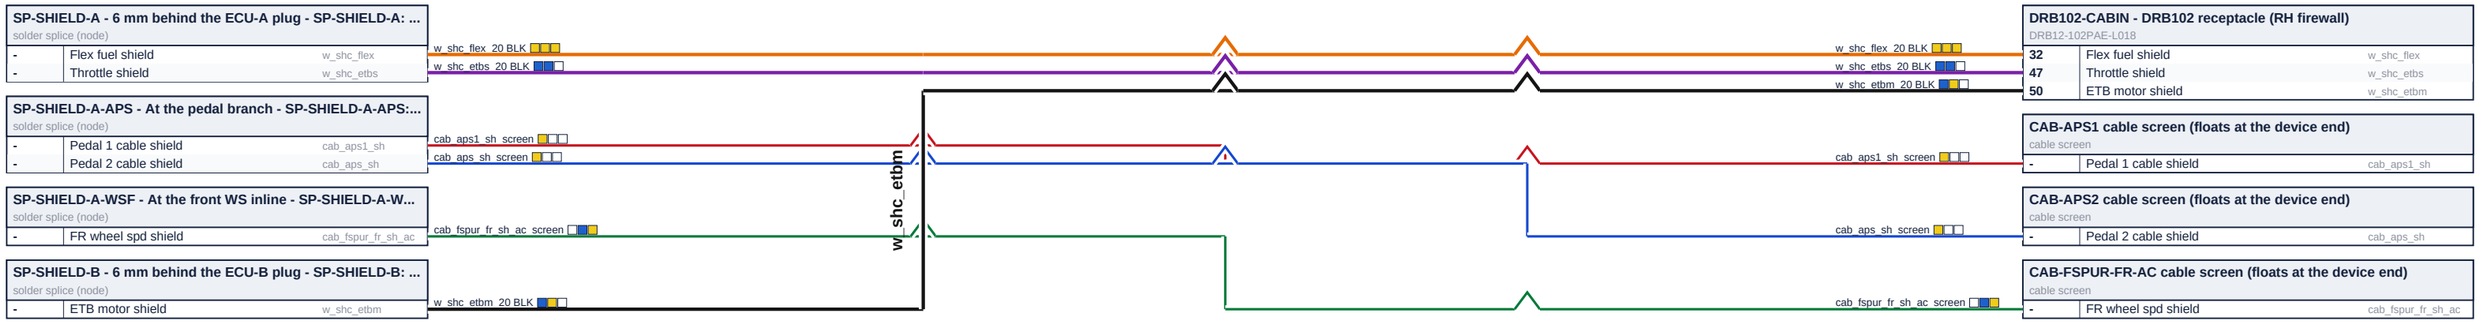

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 1 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	21 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 5 of 4)

SP-SHIELD-A - 6 mm behind the ECU-A plug - SP-SHIELD-A: ...
solder splice (node)

-	Turbo speed shield	w_shc_turbo
-	Cam sensor shield	w_shc_cam
-	Crank sensor shield	w_shc_crank

SP-SHIELD-A-WSF - At the front WS inline - SP-SHIELD-A-W...
solder splice (node)

-	WS-F screen drain	cab_fspur_sh

SP-SHIELD-B - 6 mm behind the ECU-B plug - SP-SHIELD-B: ...
solder splice (node)

-	Gearbox speed shield	w_shc_vss
-	Knock sensor shield	w_shc_knock1

w_shc_turbo_20 BLK
w_shc_cam_20 BLK
w_shc_crank_20 BLK
cab_fspur_sh_screen
w_shc_vss_20 BLK
w_shc_knock1_20 BLK
w_shc_vss
w_shc_knock
w_shc_turbo_20 BLK
w_shc_cam_20 BLK
w_shc_vss_20 BLK
w_shc_knock1_20 BLK
w_shc_crank_20 BLK
cab_fspur_sh_screen

DRB102-CABIN - DRB102 receptacle (RH firewall)
DRB12-102PAE-L018

57	Turbo speed shield	w_shc_turbo
66	Cam sensor shield	w_shc_cam
69	Gearbox speed shield	w_shc_vss
73	Knock sensor shield	w_shc_knock1
76	Crank sensor shield	w_shc_crank

IX-WS-F-S - to front VR conditioner
DT06-6S

5	WS-F screen drain	cab_fspur_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 2 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	22 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 5 of 4)

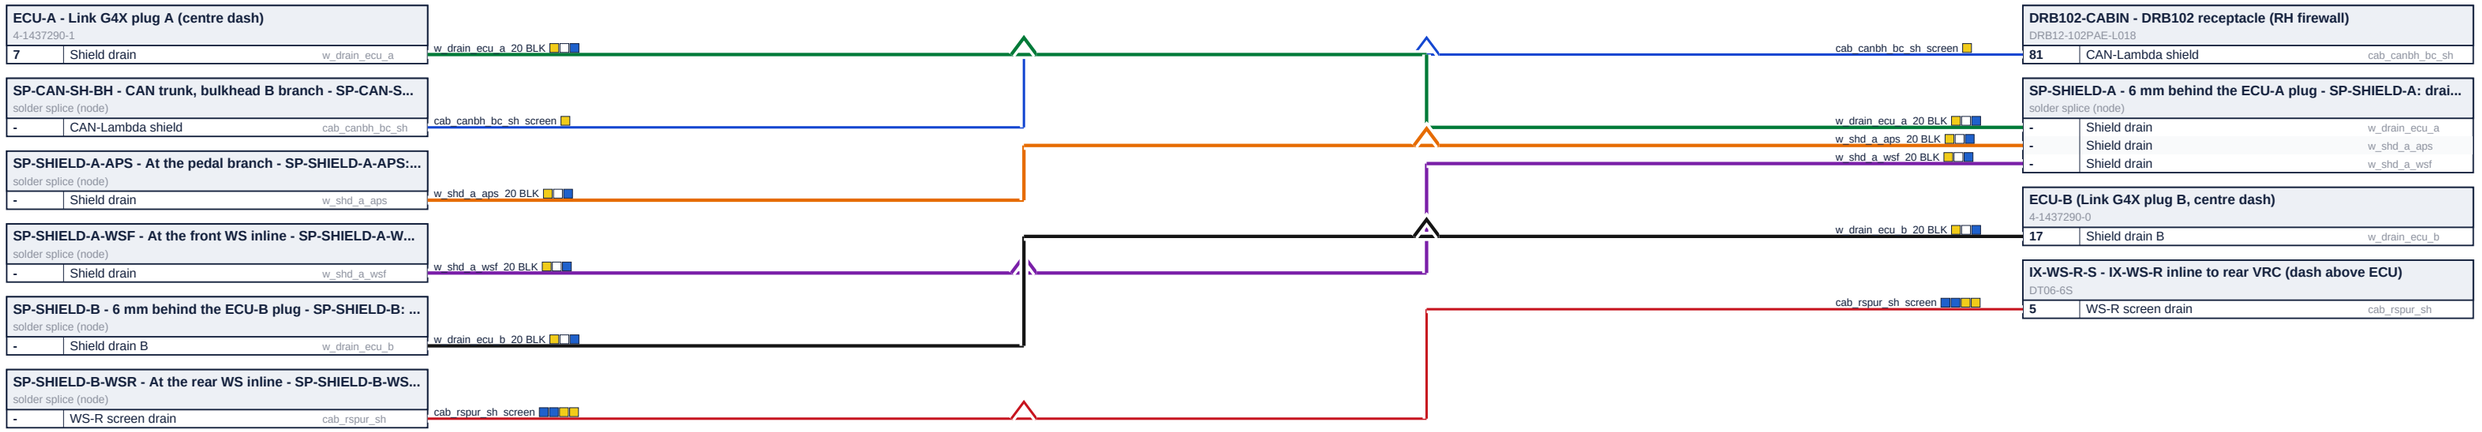

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 3 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	23 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 0 of 4)



WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 4 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	24 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

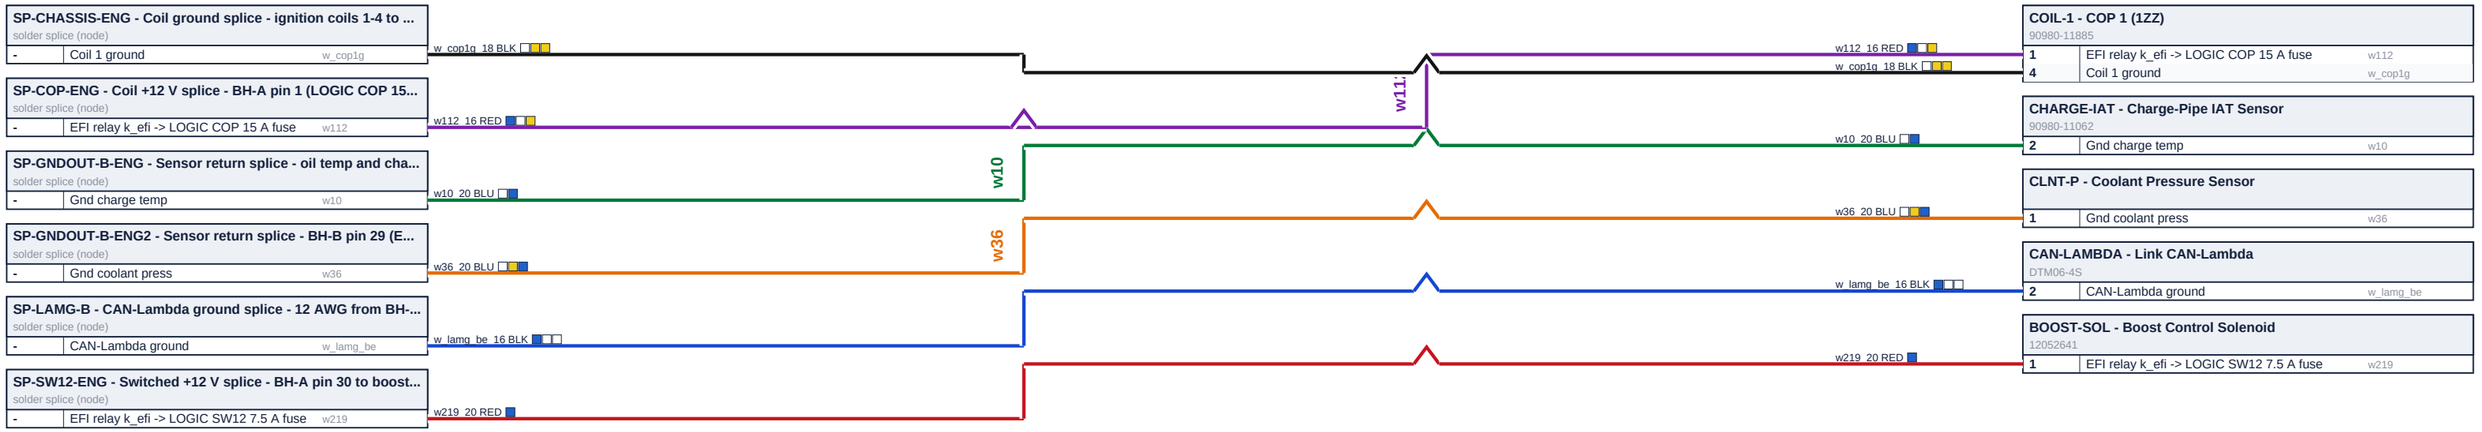

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 1 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	25 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

SP-CHASSIS-ENG - Coil ground splice - ignition coils 1-4 to ...
solder splice (node)

-	Coil 2 ground	w_cop2g
-	Coil 3 ground	w_cop3g
-	Coil 4 ground	w_cop4g

SP-COP-ENG - Coil +12 V splice - BH-A pin 1 (LOGIC COP 15...
solder splice (node)

-	EFI relay k_efi -> LOGIC COP 15 A fuse	w113
-	EFI relay k_efi -> LOGIC COP 15 A fuse	w114
-	EFI relay k_efi -> LOGIC COP 15 A fuse	w115

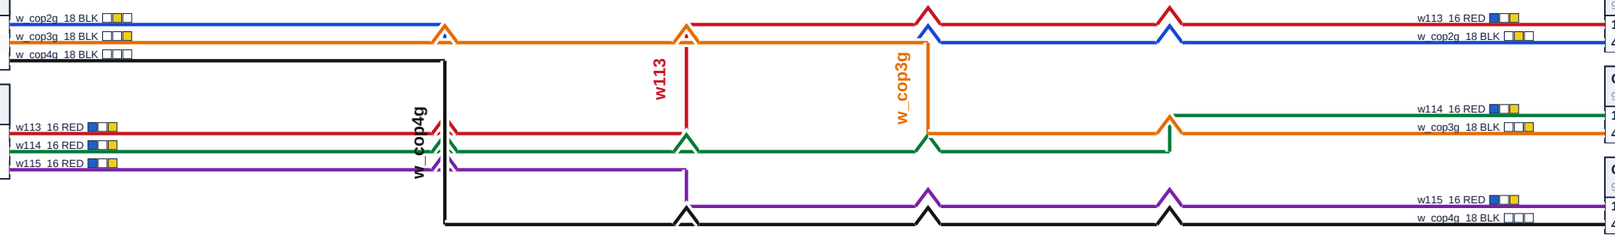

COIL-2 - COP 2 (1ZZ)
90980-11885

1	EFI relay k_efi -> LOGIC COP 15 A fuse	w113
4	Coil 2 ground	w_cop2g

COIL-3 - COP 3 (1ZZ)
90980-11885

1	EFI relay k_efi -> LOGIC COP 15 A fuse	w114
4	Coil 3 ground	w_cop3g

COIL-4 - COP 4 (1ZZ)
90980-11885

1	EFI relay k_efi -> LOGIC COP 15 A fuse	w115
4	Coil 4 ground	w_cop4g

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 2 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	26 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

SP-CHASSIS-ENG - Coil ground splice - ignition coils 1-4 to ...
solder splice (node)

-	Coil ground	w_cop_gnd_e_ae

SP-COP-ENG - Coil +12 V splice - BH-A pin 1 (LOGIC COP 15...
solder splice (node)

-	EFI relay k_efi -> LOGIC COP 15 A fuse	w_cop_pwr_e_ae

SP-INJ-ENG - Injector +12 V splice - BH-A pin 2 (LOGIC INJ 1...
solder splice (node)

-	EFI relay k_efi -> LOGIC INJ 15 A fuse	w_inj_pwr_e_ae

COIL-1 - COP 1 (1ZZ)
90980-11885

3	Coil 1 trigger (IGT)	w120_e

COIL-2 - COP 2 (1ZZ)
90980-11885

3	Coil 2 trigger (IGT)	w121_e

STARTER-TRIGGER - Starter solenoid S (50) terminal post, s...
end

-	Starter solenoid S	w_strl_e

w_cop_gnd_e_ae 12 BLK

w_cop_pwr_e_ae 12 RED

w_inj_pwr_e_ae 12 RED

w120_e 20 WHT

w121_e 20 WHT

w_strl_e 12 RED

w120_e

w121_e

w_strl_e

w_cop_pwr_e_ae 12 RED

w_inj_pwr_e_ae 12 RED

w_strl_e 12 RED

w_cop_gnd_e_ae 12 BLK

w120_e 20 WHT

w121_e 20 WHT

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

1	EFI relay k_efi -> LOGIC COP 15 A fuse	w_cop_pwr_e_ae
2	EFI relay k_efi -> LOGIC INJ 15 A fuse	w_inj_pwr_e_ae
3	Starter solenoid S	w_strl_e
4	Coil ground to the POWER box NEG bar	w_cop_gnd_e_ae
9	Coil 1 trigger (IGT)	w120_e
10	Coil 2 trigger (IGT)	w121_e

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 3 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	27 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
11	Coil 3 trigger (IGT)	w122_e
12	Coil 4 trigger (IGT)	w123_e
13	+5 V fuel pressure	w_5v_brail_e_c46
14	Fuel pressure signal	w32_e
15	Gnd fuel press + VSS	w_gnd_b_e_c21
16	+5 V MAP sensor	w206

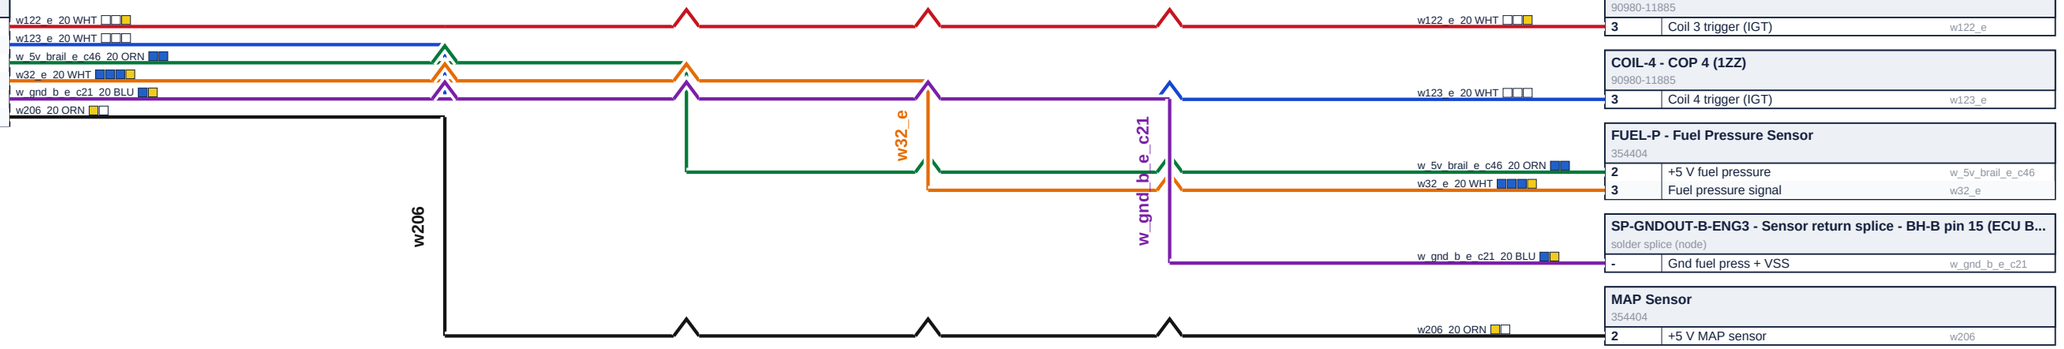

COIL-3 - COP 3 (1ZZ)		
90980-11885		
3	Coil 3 trigger (IGT)	w122_e

COIL-4 - COP 4 (1ZZ)		
90980-11885		
3	Coil 4 trigger (IGT)	w123_e

FUEL-P - Fuel Pressure Sensor		
354404		
2	+5 V fuel pressure	w_5v_brail_e_c46
3	Fuel pressure signal	w32_e

SP-GNDOUT-B-ENG3 - Sensor return splice - BH-B pin 15 (ECU B...		
solder splice (node)		
-	Gnd fuel press + VSS	w_gnd_b_e_c21

MAP Sensor		
354404		
2	+5 V MAP sensor	w206

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 4 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	28 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

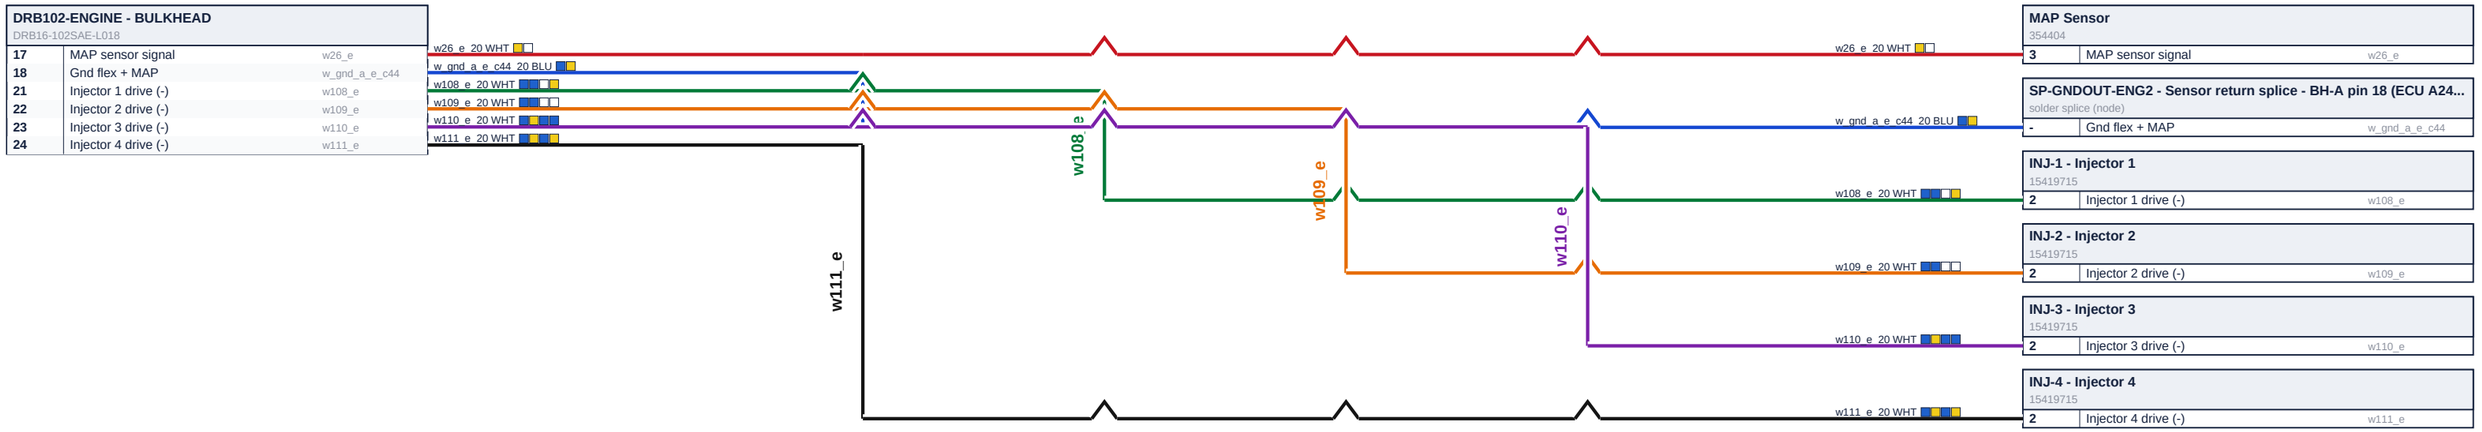

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	29 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
25	+5 V coolant press	w_5v_brail_e_c47
26	Coolant press signal	w35_e
27	+5 V oil pressure	w_5v_brail_e_c45
28	Oil pressure signal	w29_e
29	Gnd oil/clnt/temps	w_gnd_b_e_c19
30	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sp_sw12_e

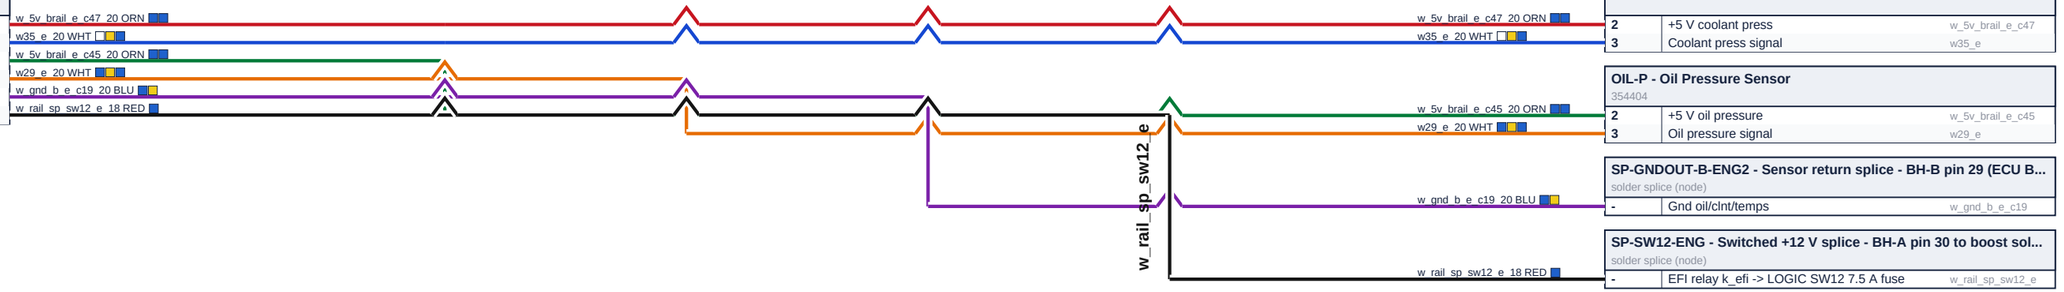

CLNT-P - Coolant Pressure Sensor		
2	+5 V coolant press	w_5v_brail_e_c47
3	Coolant press signal	w35_e

OIL-P - Oil Pressure Sensor		
354404		
2	+5 V oil pressure	w_5v_brail_e_c45
3	Oil pressure signal	w29_e

SP-GNDOUT-B-ENG2 - Sensor return splice - BH-B pin 29 (ECU B...		
solder splice (node)		
-	Gnd oil/clnt/temps	w_gnd_b_e_c19

SP-SW12-ENG - Switched +12 V splice - BH-A pin 30 to boost sol...		
solder splice (node)		
-	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sp_sw12_e

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 6 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	30 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
31	Flex fuel signal	w48_e
32	Flex fuel shield	cab_flex_sh
33	Intake temp signal	w202_e
34	Gnd IAT/TPS/coolant	w_rail_sp_gndout_e
41	+5 V throttle sensor	w126
42	Throttle pos 1 main	w128_e

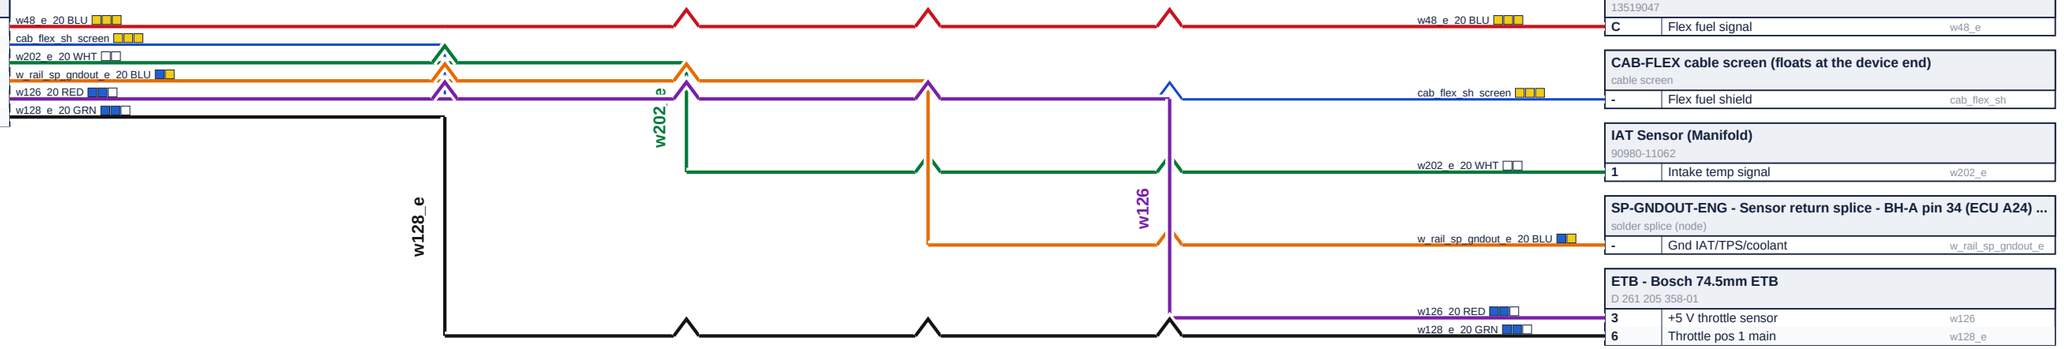

FLEX - Flex Fuel Sensor		
13519047		
C	Flex fuel signal	w48_e

CAB-FLEX cable screen (floats at the device end)		
cable screen		
-	Flex fuel shield	cab_flex_sh

IAT Sensor (Manifold)		
90980-11062		
1	Intake temp signal	w202_e

SP-GNDOUT-ENG - Sensor return splice - BH-A pin 34 (ECU A24) ...		
solder splice (node)		
-	Gnd IAT/TPS/coolant	w_rail_sp_gndout_e

ETB - Bosch 74.5mm ETB		
D 261 205 358-01		
3	+5 V throttle sensor	w126
6	Throttle pos 1 main	w128_e

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 7 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	31 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

44	Throttle pos 2 sub	w129_e
45	ETB motor +	w124_e_ae
46	ETB motor -	w215_e_ae
47	Throttle shield	cab_etbs_sh
50	ETB motor shield	cab_etbm_ae_sh
52	+5 V turbo speed	w218

w129_e_20 BLU
w124_e_ae_18 RED
w215_e_ae_18 BLK
cab_etbs_sh_screen
cab_etbm_ae_sh_screen
w218_20 RED

w218

w215_e_ae_18 BLK
w124_e_ae_18 RED
w129_e_20 BLU
cab_etbs_sh_screen
cab_etbm_ae_sh_screen
w218_20 RED

ETB - Bosch 74.5mm ETB
D 261 205 358-01

1	ETB motor -	w215_e_ae
4	ETB motor +	w124_e_ae
5	Throttle pos 2 sub	w129_e

CAB-ETBS cable screen (floats at the device end)
cable screen

-	Throttle shield	cab_etbs_sh

CAB-ETBM-AE cable screen (floats at the device end)
cable screen

-	ETB motor shield	cab_etbm_ae_sh

TURBO-SPD - Turbo Speed Sensor
DT06-3S-CE05

A	+5 V turbo speed	w218

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 8 of 17)


DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	32 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

53	Turbo speed signal	w16_e
56	Gnd turbo speed	w17
57	Turbo speed shield	cab_turbo_sh
58	Boost solenoid (-)	w103_e
59	Charge temp signal	w204_e
61	Oil temp signal	w203_e

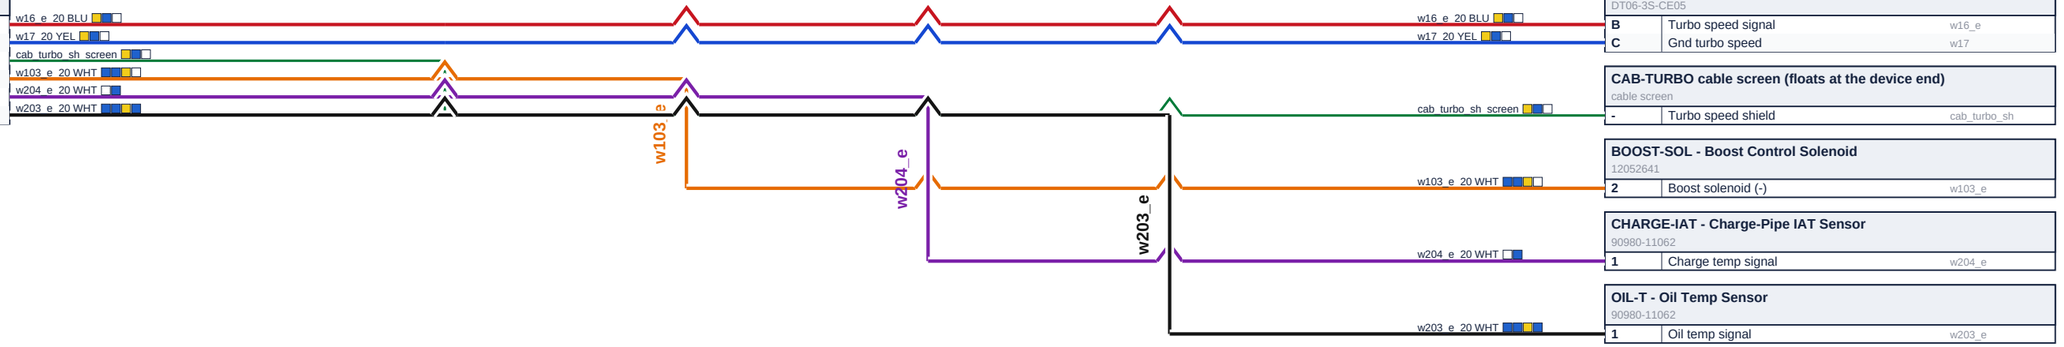

TURBO-SPD - Turbo Speed Sensor
DT06-3S-CE05

B	Turbo speed signal	w16_e
C	Gnd turbo speed	w17

CAB-TURBO cable screen (floats at the device end)
cable screen

-	Turbo speed shield	cab_turbo_sh

BOOST-SOL - Boost Control Solenoid
12052641

2	Boost solenoid (-)	w103_e

CHARGE-IAT - Charge-Pipe IAT Sensor
90980-11062

1	Charge temp signal	w204_e

OIL-T - Oil Temp Sensor
90980-11062

1	Oil temp signal	w203_e

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 9 of 17)


DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	33 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

63	+8 V to cam sensor	w_rail_sp_8v_e
64	Cam sensor signal	cab_cam_c2
65	Gnd cam sensor	w24
66	Cam sensor shield	cab_cam_sh
67	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_vss_12v
69	Gearbox speed shield	cab_vss_sh

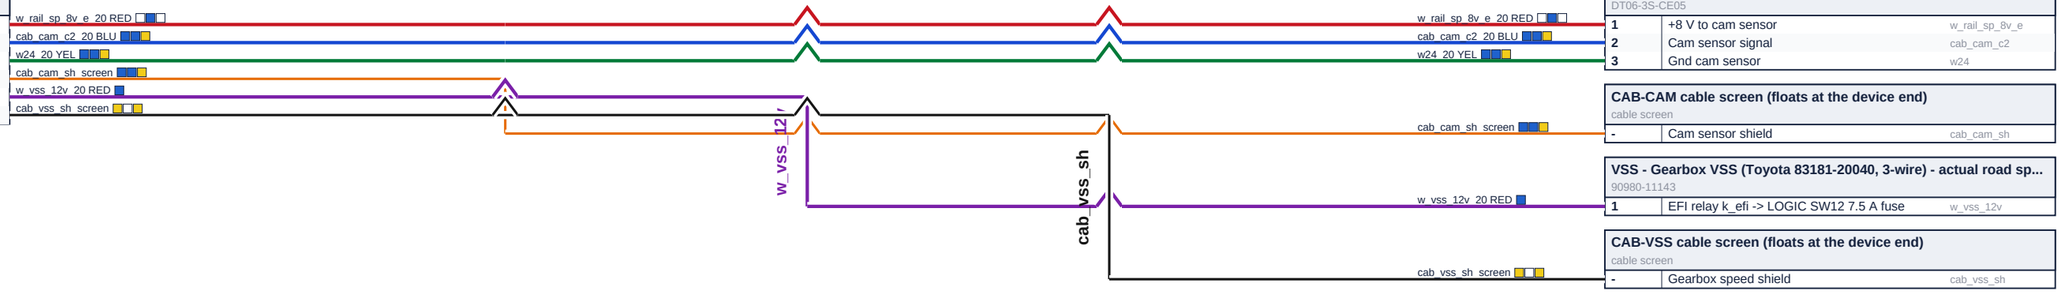

CAM - Cam Hall Sensor (RacerX)
DT06-3S-CE05

1	+8 V to cam sensor	w_rail_sp_8v_e
2	Cam sensor signal	cab_cam_c2
3	Gnd cam sensor	w24

CAB-CAM cable screen (floats at the device end)
cable screen

-	Cam sensor shield	cab_cam_sh

VSS - Gearbox VSS (Toyota 83181-20040, 3-wire) - actual road sp...
90980-11143

1	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_vss_12v

CAB-VSS cable screen (floats at the device end)
cable screen

-	Gearbox speed shield	cab_vss_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL **IDENT BANDS (R87):** Blue Yellow White built with another harness line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 10 of 17)


DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	34 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

70	Coolant temp signal	w201_e
71	Knock sensor signal	cab_knock1_c1
72	Knock sensor (-)	cab_knock1_c2
73	Knock sensor shield	cab_knock1_sh
74	Crank sensor signal	cab_crank_c1
75	Gnd crank sensor	w2

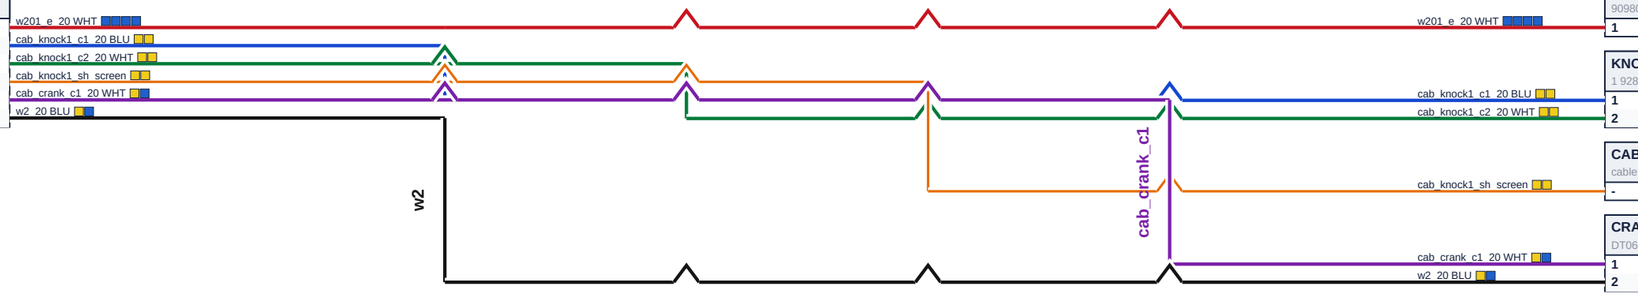

ECT Sensor
90980-11062

1	Coolant temp signal	w201_e

KNOCK-1 - Knock Sensor 1
1 928 403 874

1	Knock sensor signal	cab_knock1_c1
2	Knock sensor (-)	cab_knock1_c2

CAB-KNOCK1 cable screen (floats at the device end)
cable screen

-	Knock sensor shield	cab_knock1_sh

CRANK - Crank VR Sensor (36-2)
DT06-2S-CE05

1	Crank sensor signal	cab_crank_c1
2	Gnd crank sensor	w2

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 11 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	35 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
76	Crank sensor shield	cab_crank_sh
77	Back-up sw +12 V in	w_rev_feed_e
78	Reverse sw +12 V out	w_sw7_e
79	CAN H to CAN-Lambda	wc_h_lam_be
80	CAN L to CAN-Lambda	wc_l_lam_be
81	CAN-Lambda shield	cab_lamcan_be_sh

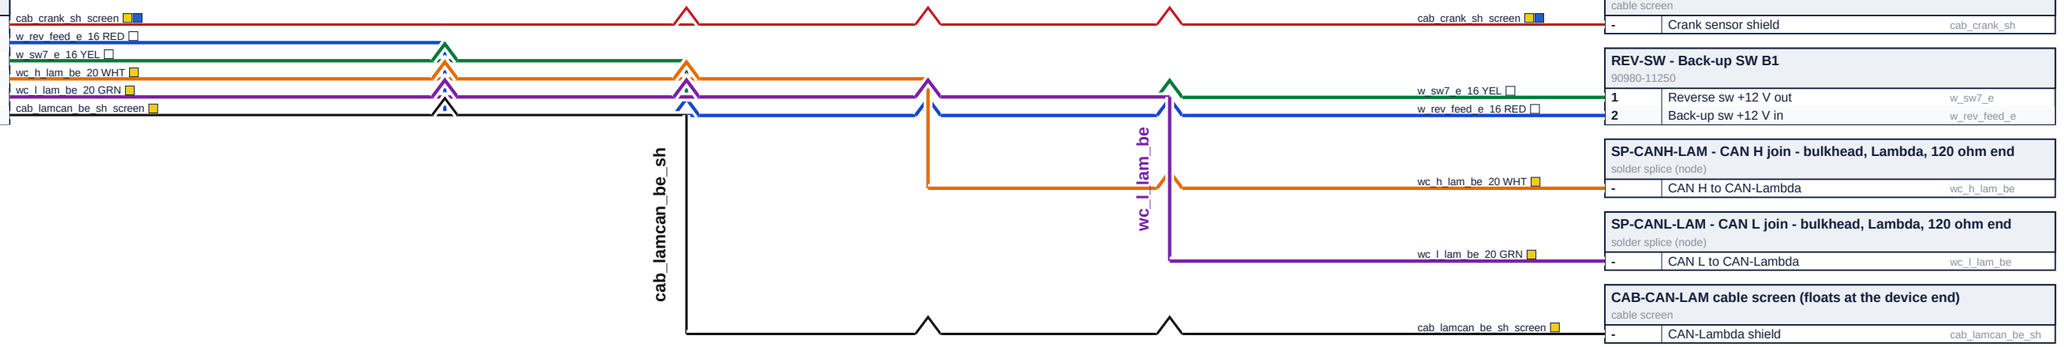

CAB-CRANK cable screen (floats at the device end)		
cable screen		
-	Crank sensor shield	cab_crank_sh

REV-SW - Back-up SW B1		
90980-11250		
1	Reverse sw +12 V out	w_sw7_e
2	Back-up sw +12 V in	w_rev_feed_e

SP-CANH-LAM - CAN H join - bulkhead, Lambda, 120 ohm end		
solder splice (node)		
-	CAN H to CAN-Lambda	wc_h_lam_be

SP-CANL-LAM - CAN L join - bulkhead, Lambda, 120 ohm end		
solder splice (node)		
-	CAN L to CAN-Lambda	wc_l_lam_be

CAB-CAN-LAM cable screen (floats at the device end)		
cable screen		
-	CAN-Lambda shield	cab_lamcan_be_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 12 of 17)


DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	36 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

SP-GNDOUT-ENG - Sensor return splice - BH-A pin 34 (ECU ...		
solder splice (node)		
-	Gnd coolant temp	w4
-	Gnd throttle sensor	w127

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
83	EFI relay k_efi -> LOGIC MRS 7.5 A fuse	w_hv_mrs_en_e
84	EHPS pump speed	w_mrs_e
85	EHPS relay coil (-)	w_eps_rly_e
95	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_be14

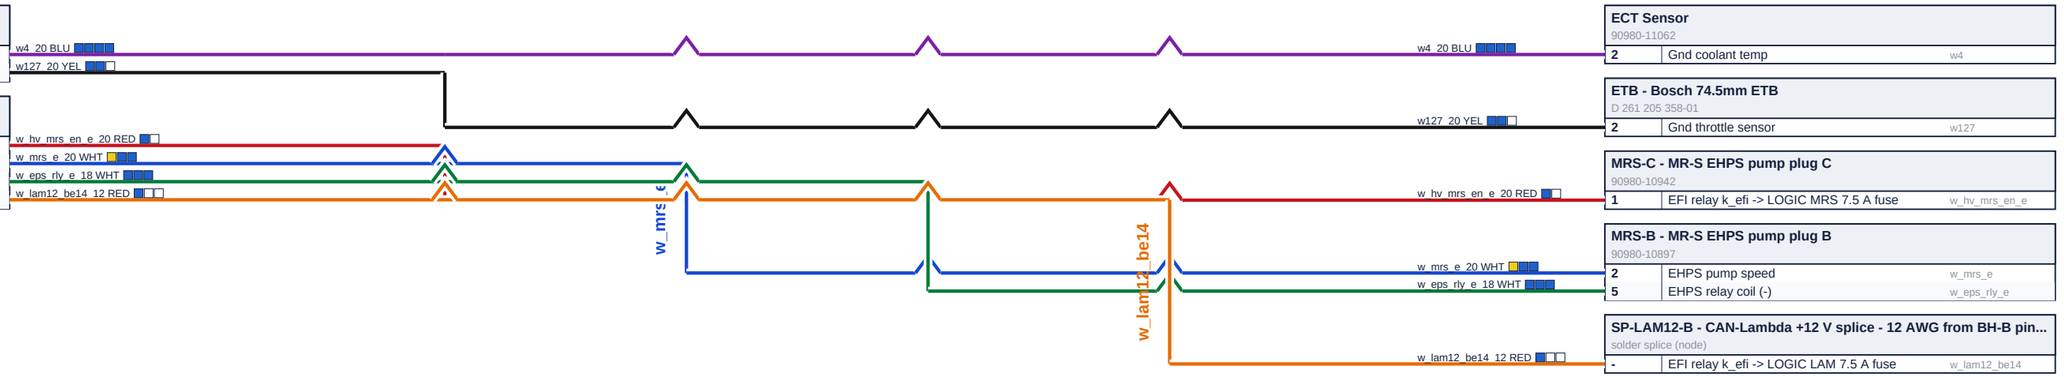

ECT Sensor		
90980-11062		
2	Gnd coolant temp	w4

ETB - Bosch 74.5mm ETB		
D 261 205 358-01		
2	Gnd throttle sensor	w127

MRS-C - MR-S EHPS pump plug C		
90980-10942		
1	EFI relay k_efi -> LOGIC MRS 7.5 A fuse	w_hv_mrs_en_e

MRS-B - MR-S EHPS pump plug B		
90980-10897		
2	EHPS pump speed	w_mrs_e
5	EHPS relay coil (-)	w_eps_rly_e

SP-LAM12-B - CAN-Lambda +12 V splice - 12 AWG from BH-B pin...		
solder splice (node)		
-	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_be14

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 13 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	37 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

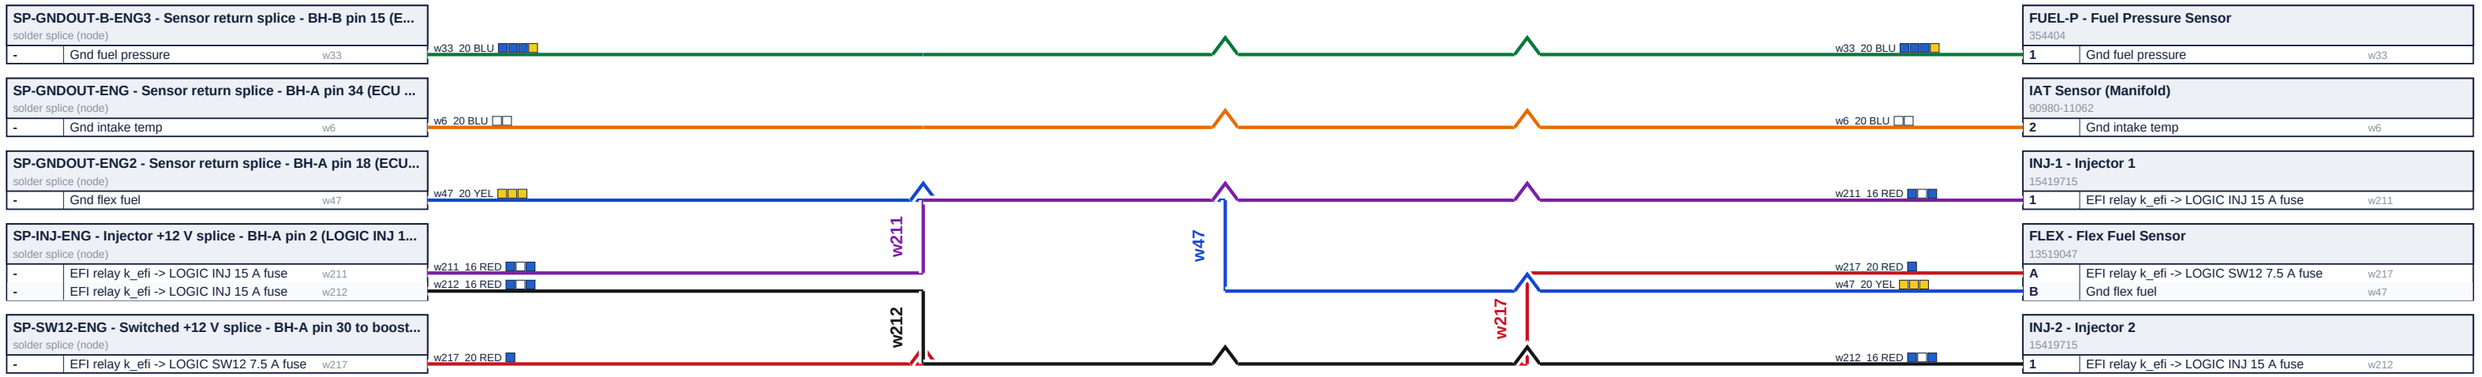

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 14 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	38 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

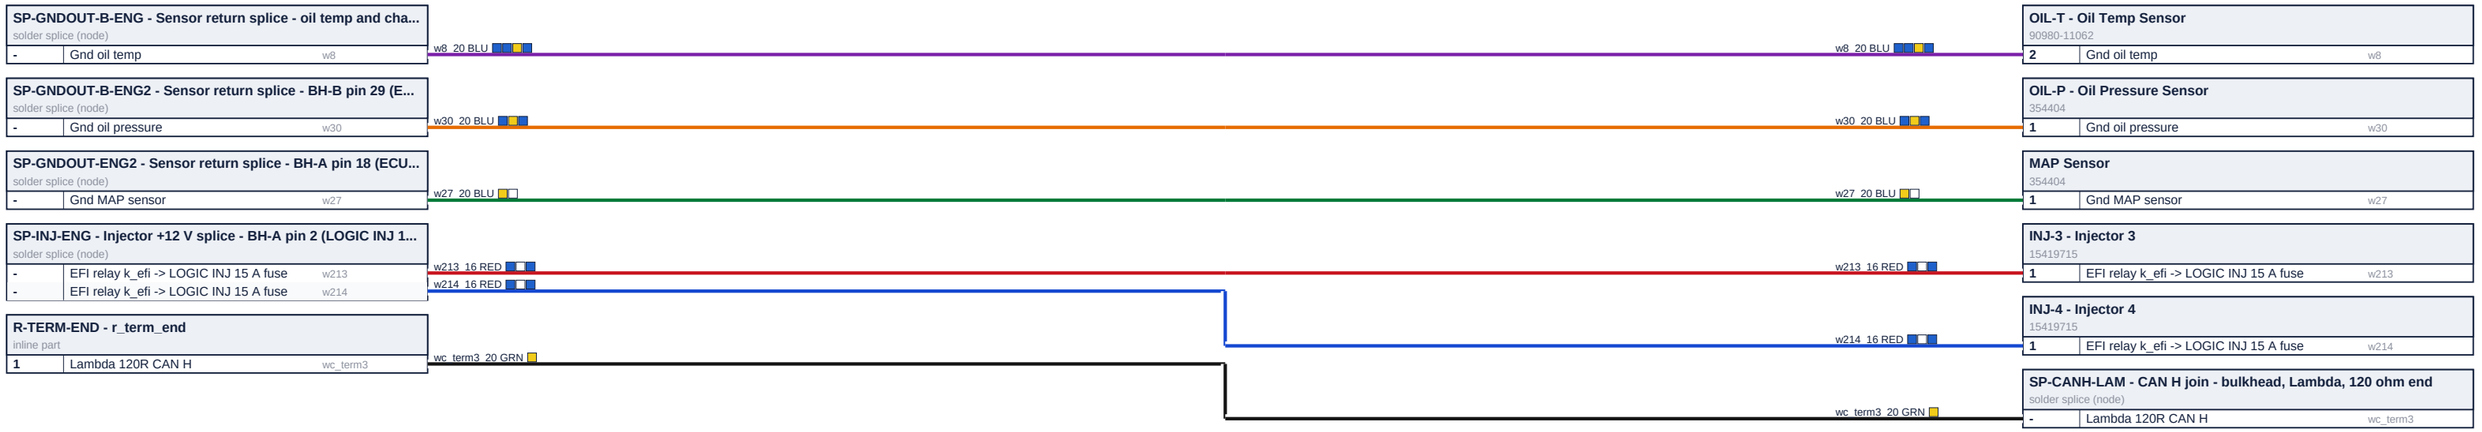

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 15 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	39 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

SP-CANH-LAM - CAN H join - bulkhead, Lambda, 120 ohm end
solder splice (node)

-	CAN H to CAN-Lambda	wc_h_lam_pin

SP-CANL-LAM - CAN L join - bulkhead, Lambda, 120 ohm end
solder splice (node)

-	Lambda 120R CAN L	wc_term4
-	CAN L to CAN-Lambda	wc_l_lam_pin

SP-GNDOUT-B-ENG2 - Sensor return splice - BH-B pin 29 (E...
solder splice (node)

-	Gnd oil/charge temp	w_rail_gnd_b_e

SP-LAM12-B - CAN-Lambda +12 V splice - 12 AWG from BH-...
solder splice (node)

-	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_be

SP-LAMG-B - CAN-Lambda ground splice - 12 AWG from BH-...
solder splice (node)

-	CAN-Lambda ground	w_lamg_be14

wc_h_lam_pin_20 WHT
wc_term4_20 GRN
wc_l_lam_pin_20 GRN
w_rail_gnd_b_e_20 BLU
w_lam12_be_16 RED
w_lamg_be14_12 BLK
w_lam12_be

wc_term4_20 GRN
w_lam12_be_16 RED
wc_l_lam_pin_20 GRN
wc_h_lam_pin_20 WHT
w_rail_gnd_b_e_20 BLU
w_lamg_be14_12 BLK

R-TERM-END - r_term_end
inline part

2	Lambda 120R CAN L	wc_term4

CAN-LAMBDA - Link CAN-Lambda
DTM06-4S

1	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_be
3	CAN L to CAN-Lambda	wc_l_lam_pin
4	CAN H to CAN-Lambda	wc_h_lam_pin

SP-GNDOUT-B-ENG - Sensor return splice - oil temp and charge t...
solder splice (node)

-	Gnd oil/charge temp	w_rail_gnd_b_e

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

96	CAN-Lambda ground	w_lamg_be14

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 16 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	40 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 1 of 17)

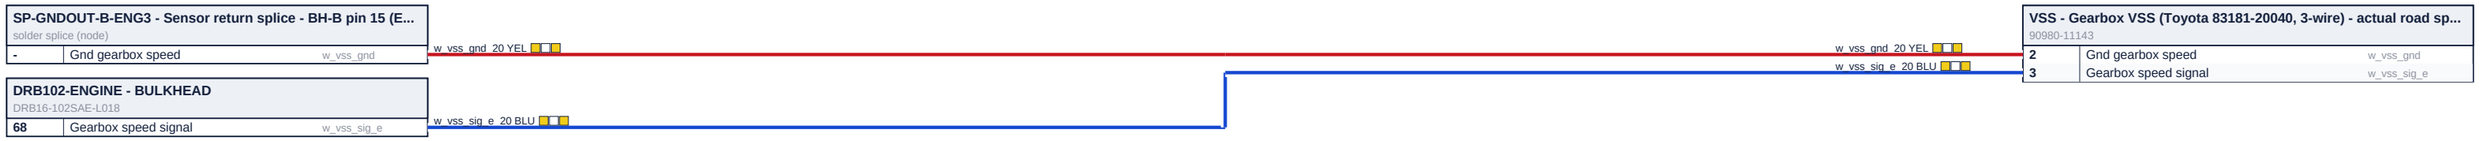

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 17 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	41 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 5 of 4)

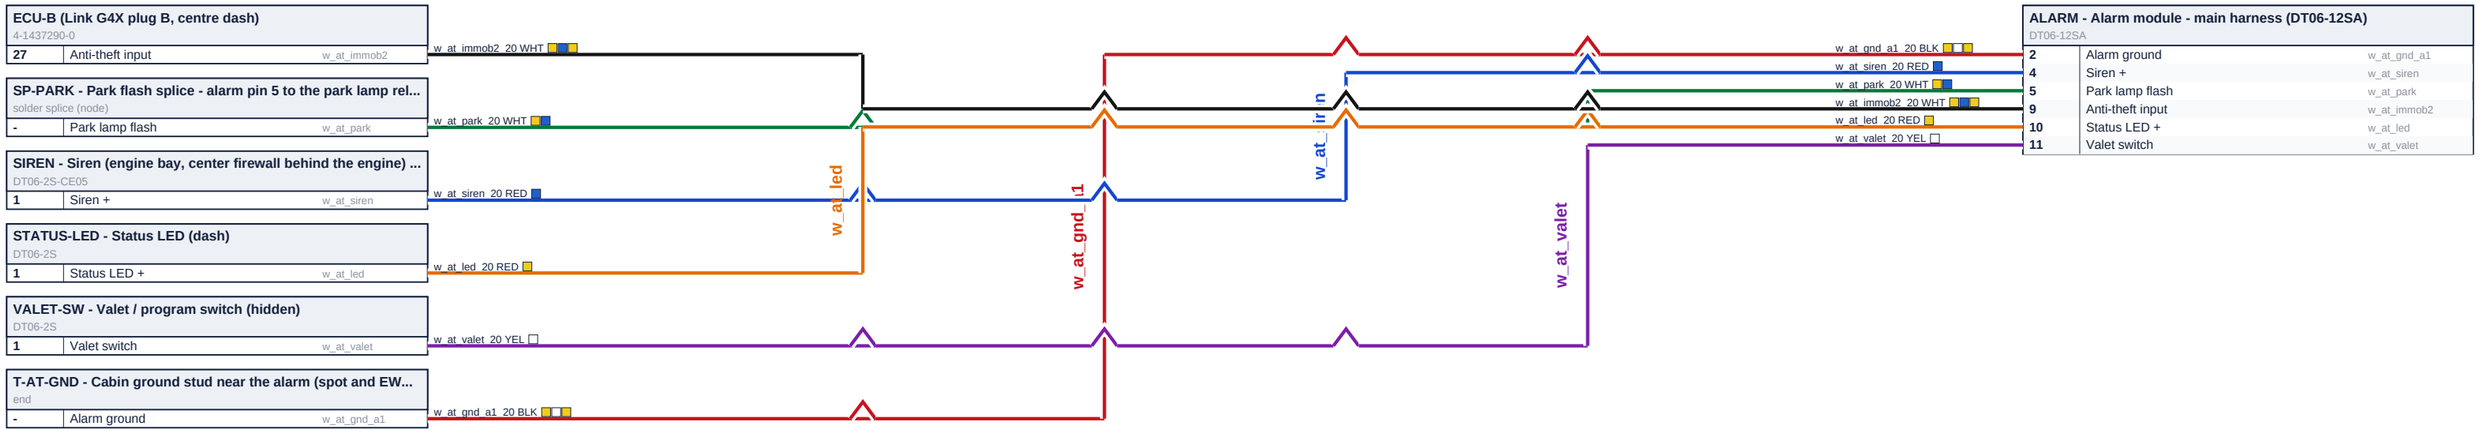

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 1 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	42 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 5 of 4)

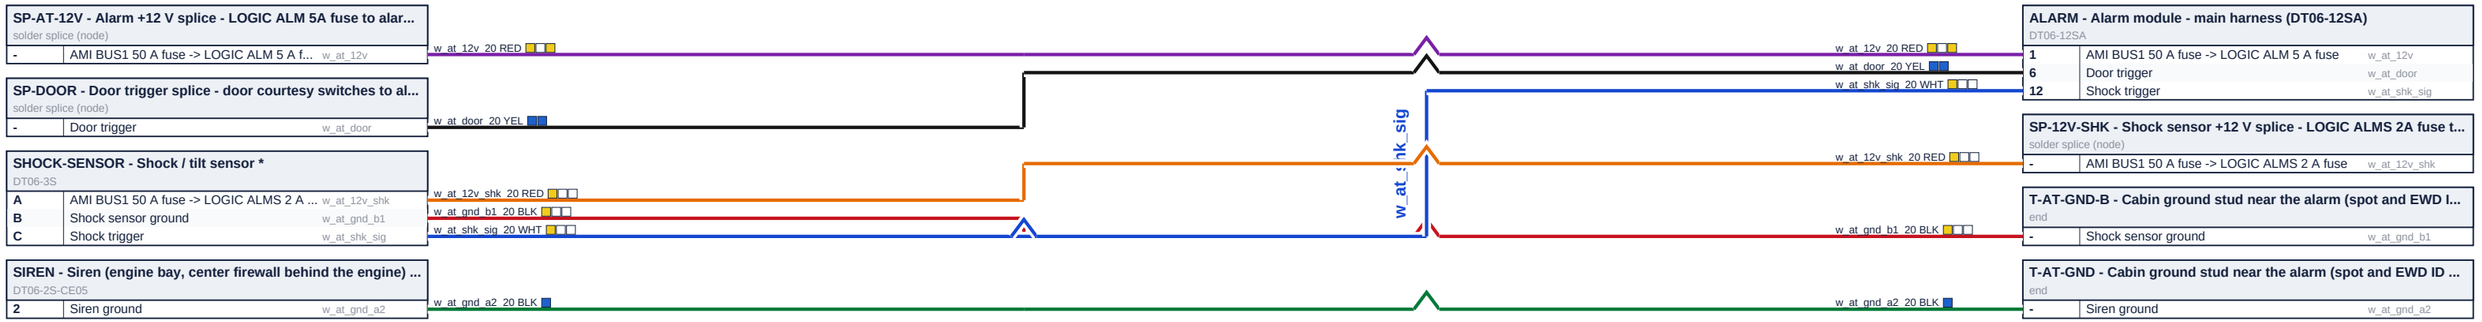

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 2 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	43 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 5 of 4)

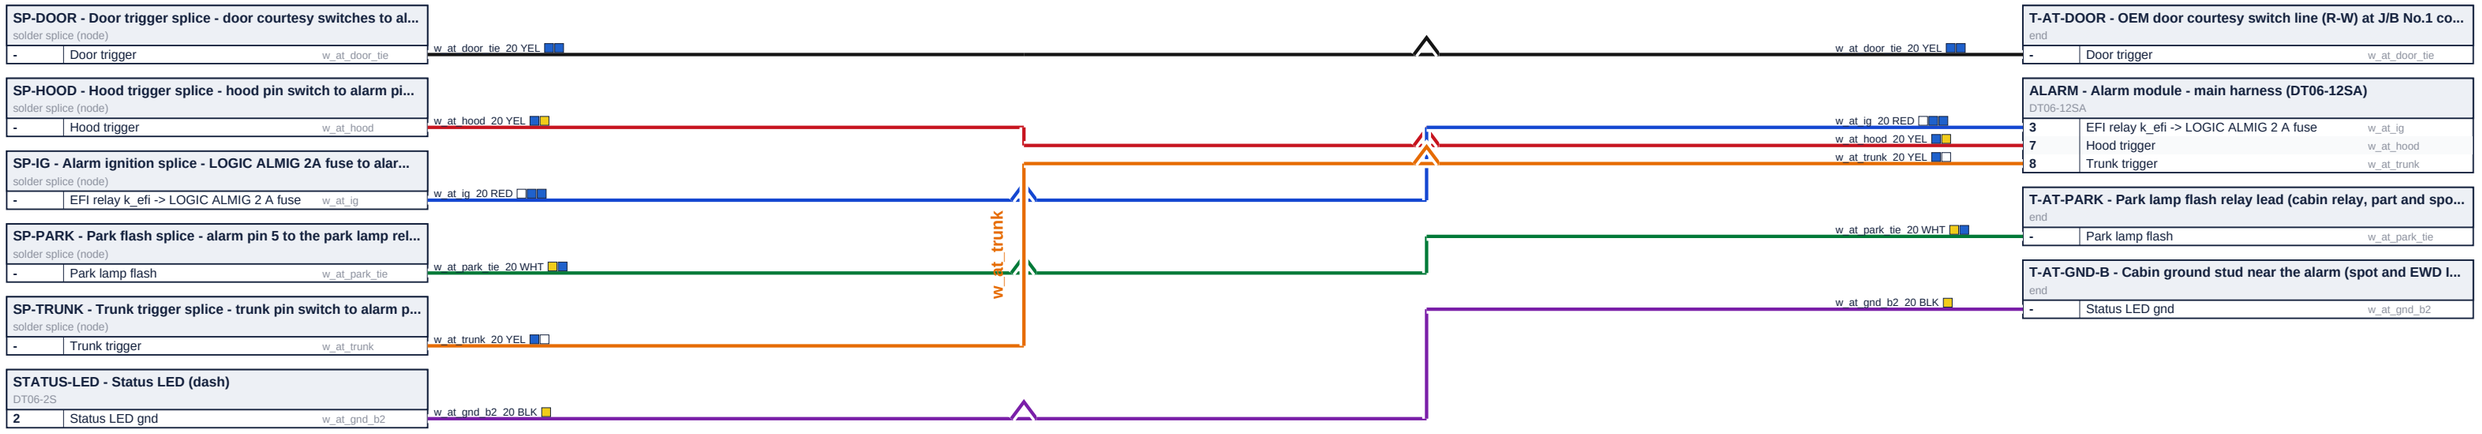

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 3 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	44 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 2 of 4)

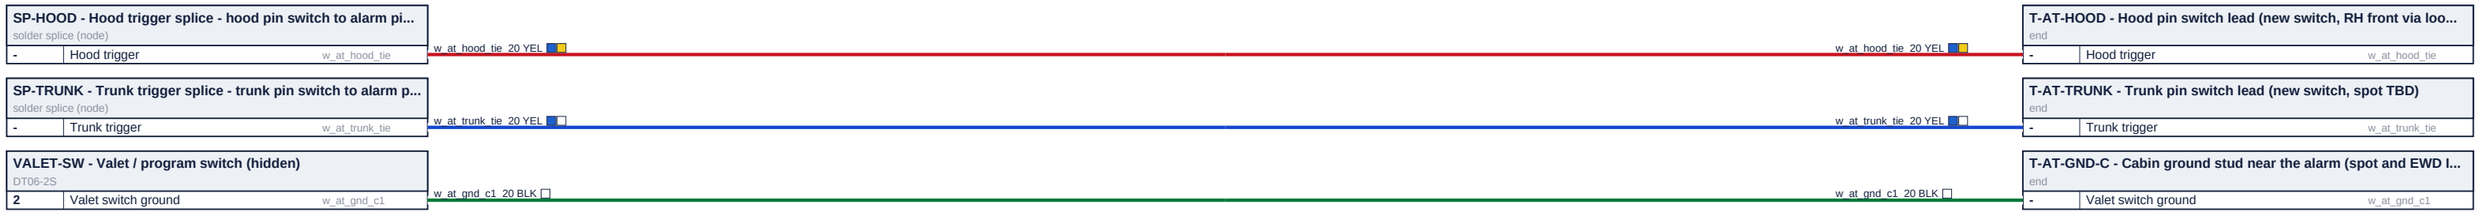

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 4 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	45 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 5 of 4)

ECU-C - ECU Comms/Tuning Port
DTM06-6S


1	CAN screen trunk	w_shd_can_trunk
3	CAN 1 high	wc_h_ecu
4	CAN 1 low	wc_l_ecu

R-TERM-ECU - r_term_ecu
inline part

1	ECU 120R CAN H	wc_term1
2	ECU 120R CAN L	wc_term2

CAB-CAN-CLU cable screen (floats at the device end)
cable screen

-	Cluster CAN shield	cab_can_clu_sh

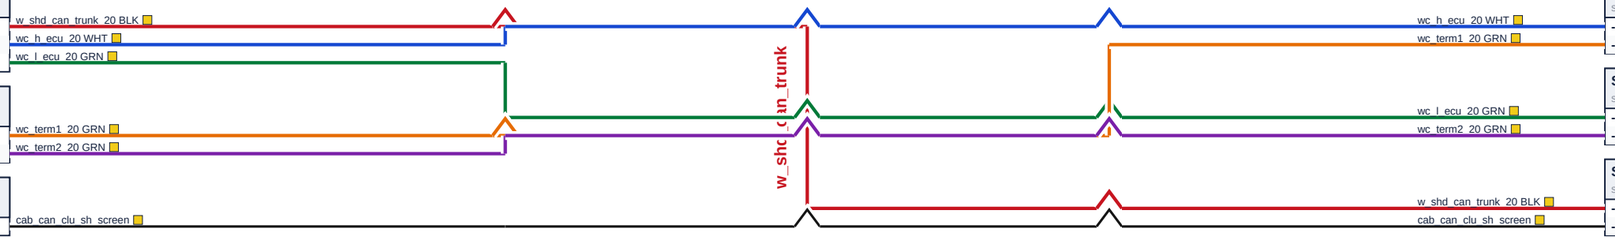

SP-CANH - CAN H join - ECU, CSB3, cluster, Pi, bulkhead
solder splice (node)

-	CAN 1 high	wc_h_ecu
-	ECU 120R CAN H	wc_term1

SP-CANL - CAN L join - ECU, CSB3, cluster, Pi, bulkhead
solder splice (node)

-	CAN 1 low	wc_l_ecu
-	ECU 120R CAN L	wc_term2

SP-CAN-SH-CLU - CAN trunk, cluster branch - SP-CAN-SH-CLU: ...
solder splice (node)

-	CAN screen trunk	w_shd_can_trunk
-	Cluster CAN shield	cab_can_clu_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 1 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	46 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 5 of 4)

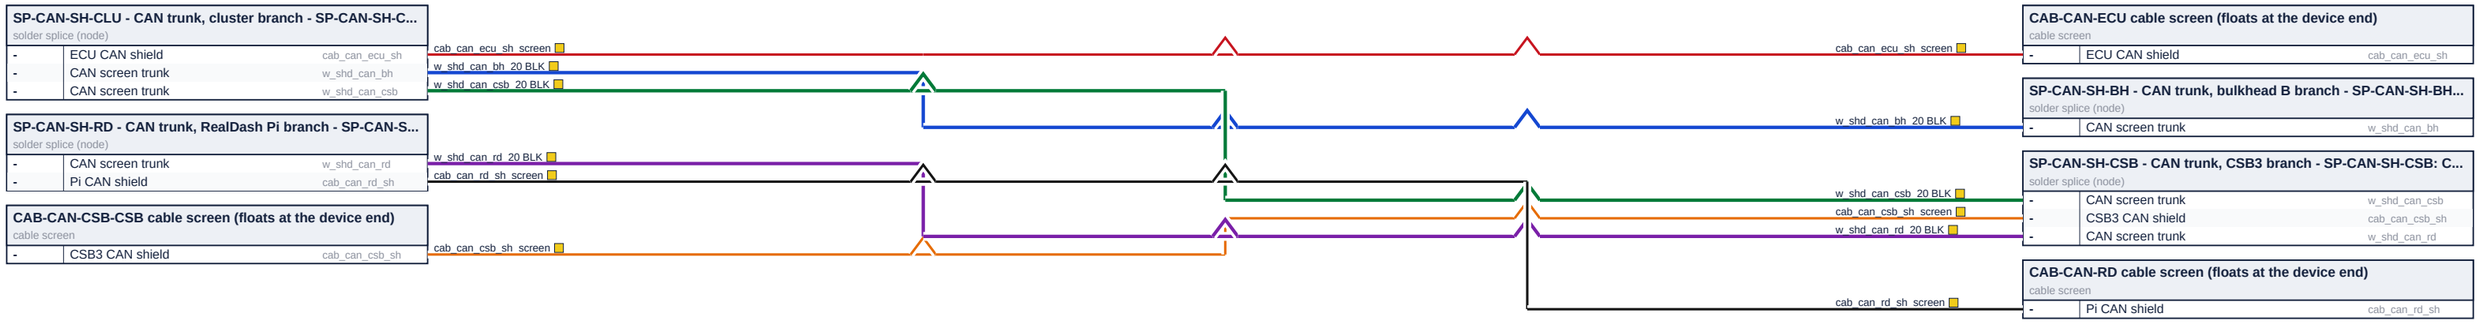

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 2 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	47 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 5 of 4)

SP-CANH - CAN H join - ECU, CSB3, cluster, Pi, bulkhead
solder splice (node)

-	CAN H to CSB3	wc_h_csb
-	CAN H to cluster	wc_h_clu
-	CAN H to RealDash Pi	wc_h_rd

SP-CANL - CAN L join - ECU, CSB3, cluster, Pi, bulkhead
solder splice (node)

-	CAN L to CSB3	wc_l_csb
-	CAN L to cluster	wc_l_clu
-	CAN L to RealDash Pi	wc_l_rd

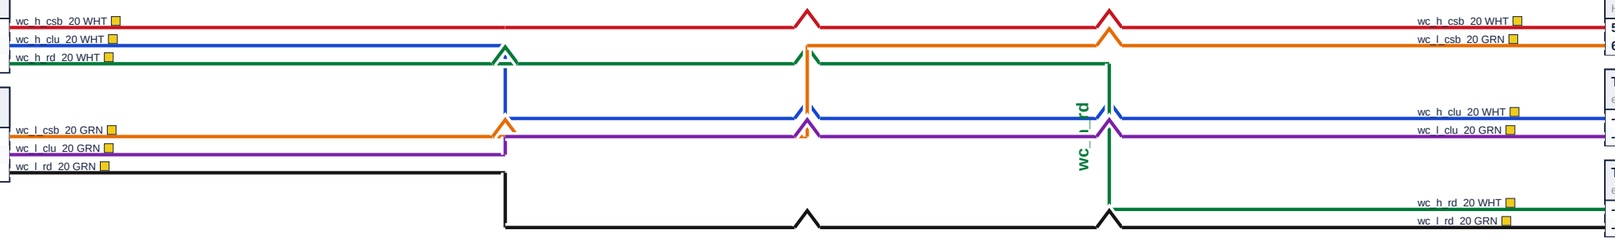

CSB3 - ECUMaster CSB3 - Power/CAN/Switch I/O
HD36-24-33SE

5	CAN H to CSB3	wc_h_csb
6	CAN L to CSB3	wc_l_csb

T-CLUSTER-CAN - Cluster CAN board CANH + CANL pins (old m...
end

-	CAN H to cluster	wc_h_clu
-	CAN L to cluster	wc_l_clu

T-REALDASH-CAN - Pi USB-CAN adapter CANH + CANL pins (ce...
end

-	CAN H to RealDash Pi	wc_h_rd
-	CAN L to RealDash Pi	wc_l_rd

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 3 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	48 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 3 of 4)

SP-DEV - Dash 12 V split - cluster + RealDash Pi, center dash
solder splice (node)

-	EFI relay k_efi -> LOGIC DEV 15 A fuse	w_dev_clu
-	EFI relay k_efi -> LOGIC DEV 15 A fuse	w_dev_rd

POWER-NEG-BAR - POWER box NEG bar M8 stud (glove box)
end

-	Cluster ground	w_gnd_clu
-	RealDash Pi ground	w_gnd_rd

w_dev_clu_16 RED
w_dev_rd_16 RED
w_gnd_clu_16 BLK
w_gnd_rd_16 BLK
w_gnd_rd

w_dev_clu_16 RED
w_dev_rd_16 RED
w_gnd_clu_16 BLK
w_gnd_rd_16 BLK

T-CLUSTER-PWR - Cluster buck converter IN+ pin (old meter spot)
end

-	EFI relay k_efi -> LOGIC DEV 15 A fuse	w_dev_clu

T-REALDASH-PWR - Pi 12-to-5 V supply IN+ pin (center dash)
end

-	EFI relay k_efi -> LOGIC DEV 15 A fuse	w_dev_rd

T-CLUSTER-GND-LEAD - Cluster buck converter IN- pin (old met...
end

-	Cluster ground	w_gnd_clu

T-REALDASH-GND-LEAD - Pi 12-to-5 V supply IN- pin (center dash)
end

-	RealDash Pi ground	w_gnd_rd

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 4 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	49 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 5 of 3)

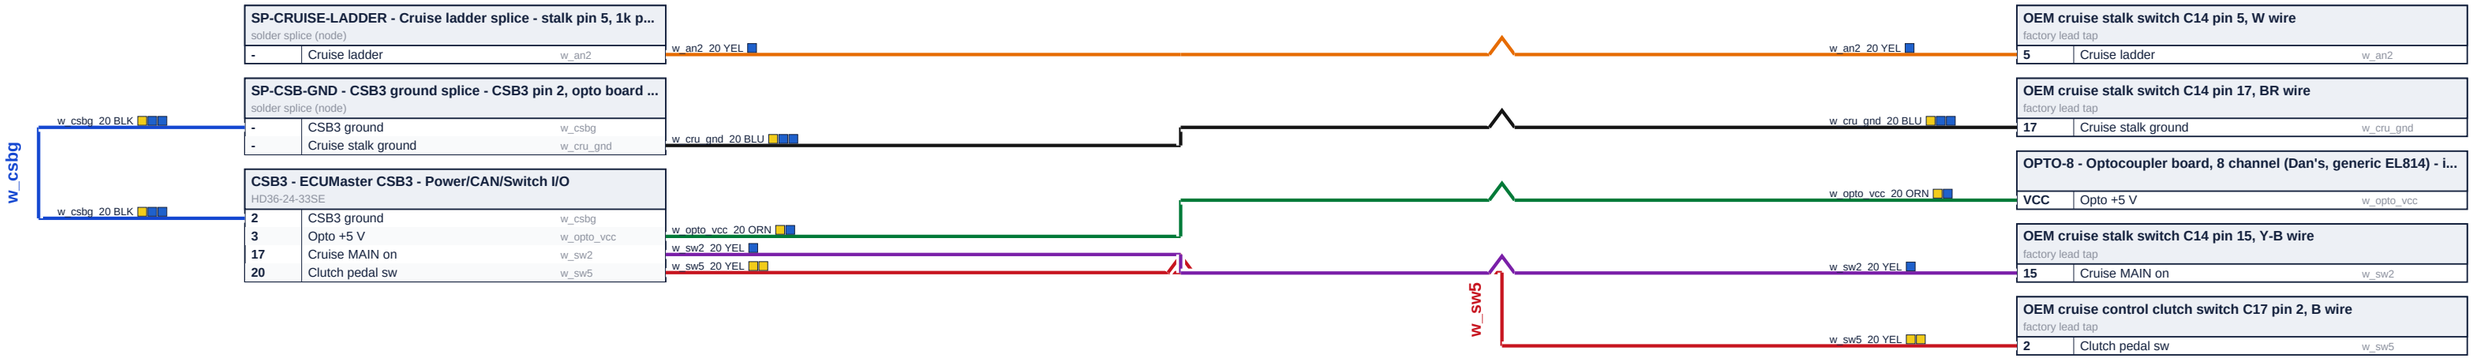

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 1 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	50 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 5 of 3)

R-CRUISE - r_cruise
inline part


2	Cruise ladder	w_cru_sig

CSB3 - ECUMaster CSB3 - Power/CAN/Switch I/O
HD36-24-33SE

1	EFI relay k_efi -> LOGIC CSB 5 A fuse	w_csb12
4	Opto out ground	w_opto_outc
21	Brake to CSB3 S7	w_opto_out1
22	Reverse to CSB3 S8	w_opto_out2

T-CLUSTER-HL - Centre cluster headlight-sense input (J8 pi...
end

15	Headlight sense to cluster	w_hl_sense_out

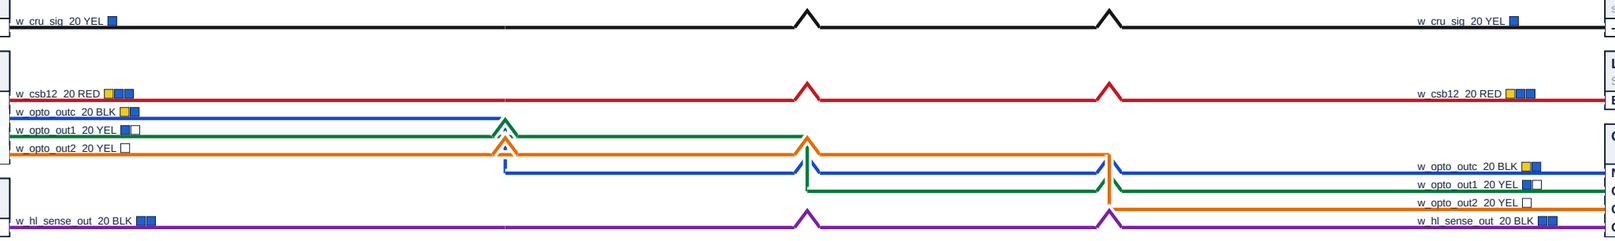

SP-CRUISE-LADDER - Cruise ladder splice - stalk pin 5, 1k pull-u...
solder splice (node)

-	Cruise ladder	w_cru_sig

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...
ST185-FB-LOGIC rev 5

BUS2-5	EFI relay k_efi -> LOGIC CSB 5 A fuse	w_csb12

OPTO-8 - Optocoupler board, 8 channel (Dan's, generic EL814) - i...

NEG	Opto out ground	w_opto_outc
OUT1	Brake to CSB3 S7	w_opto_out1
OUT2	Reverse to CSB3 S8	w_opto_out2
OUT3	Headlight sense to cluster	w_hl_sense_out

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 2 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	51 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 3 of 3)

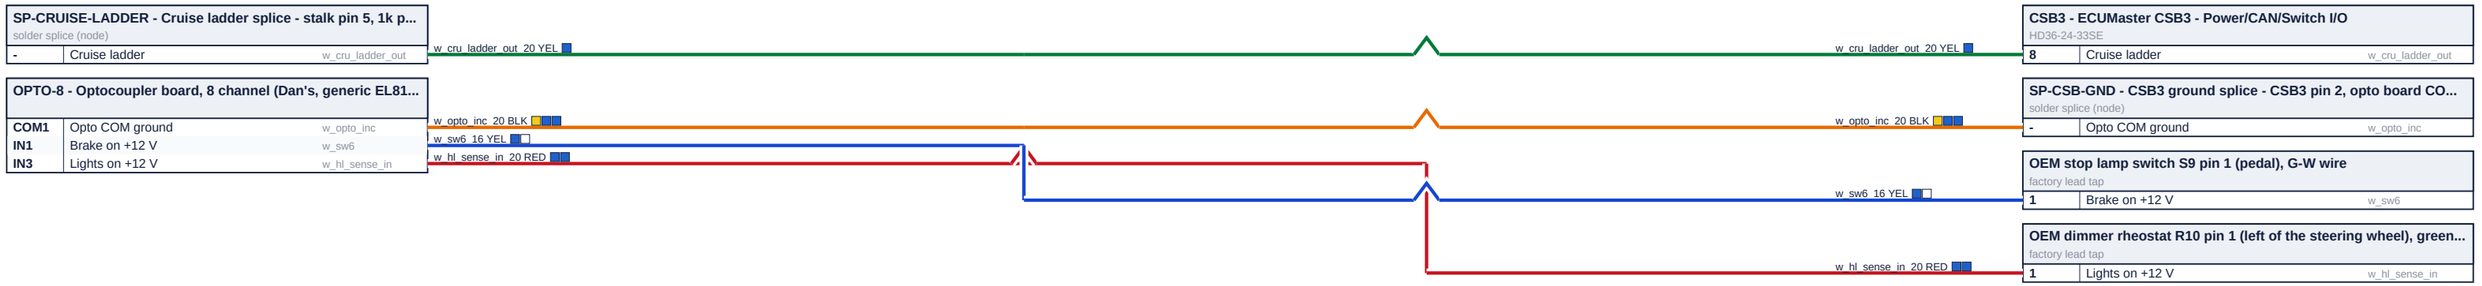

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 3 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	52 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

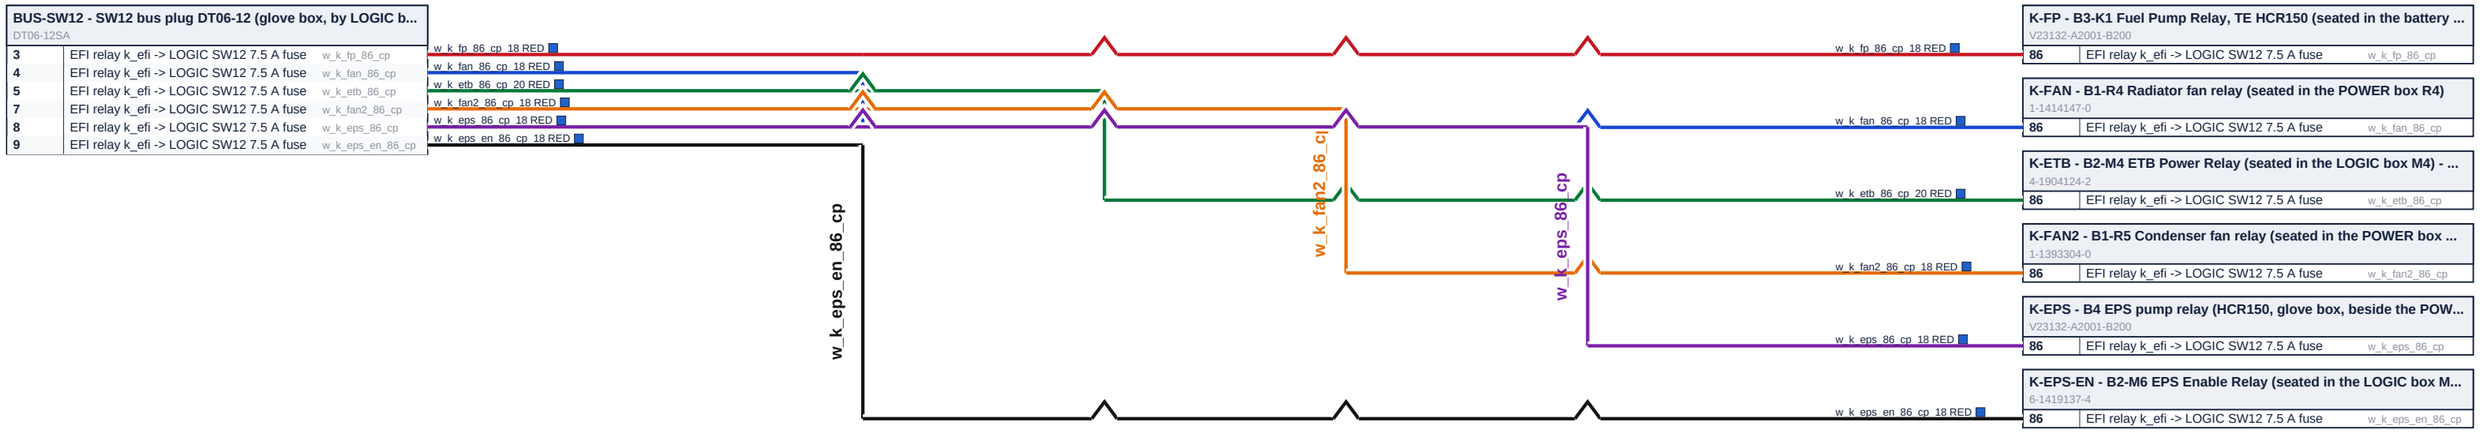

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 1 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	53 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

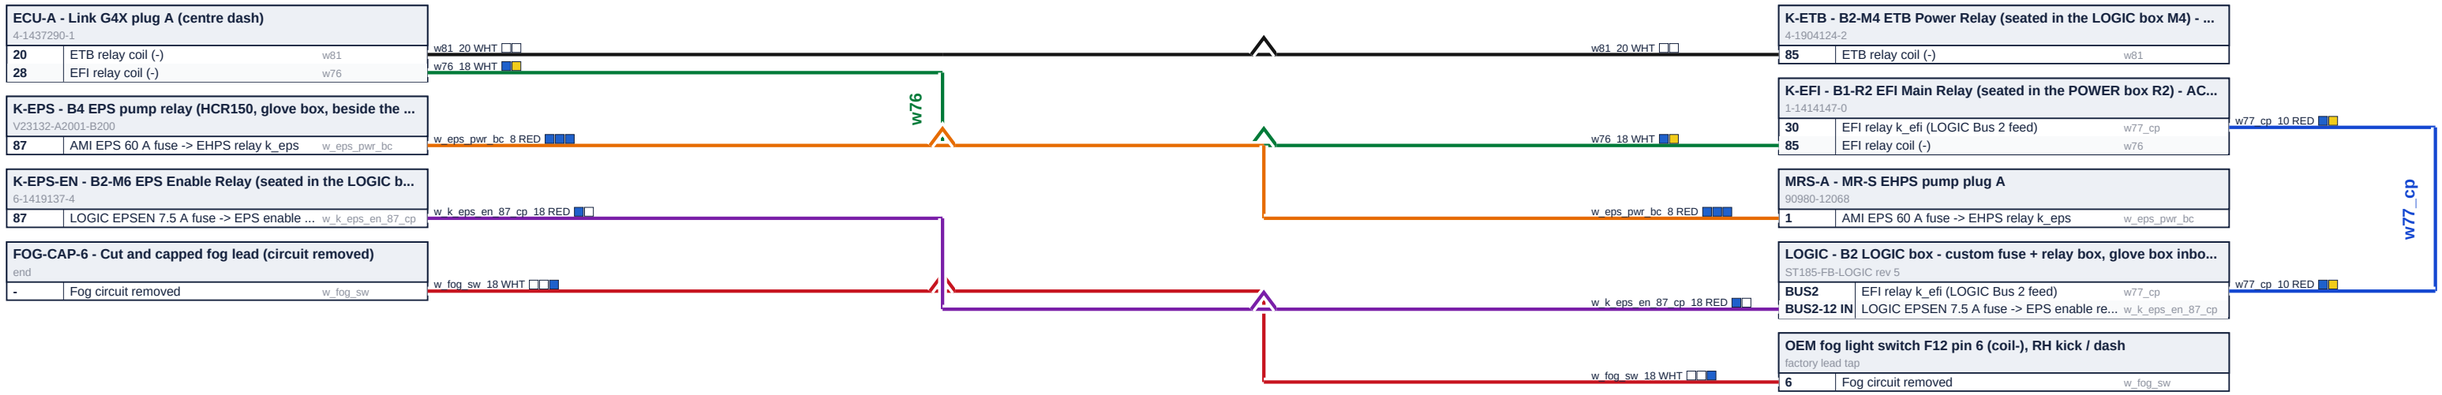

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 2 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	54 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

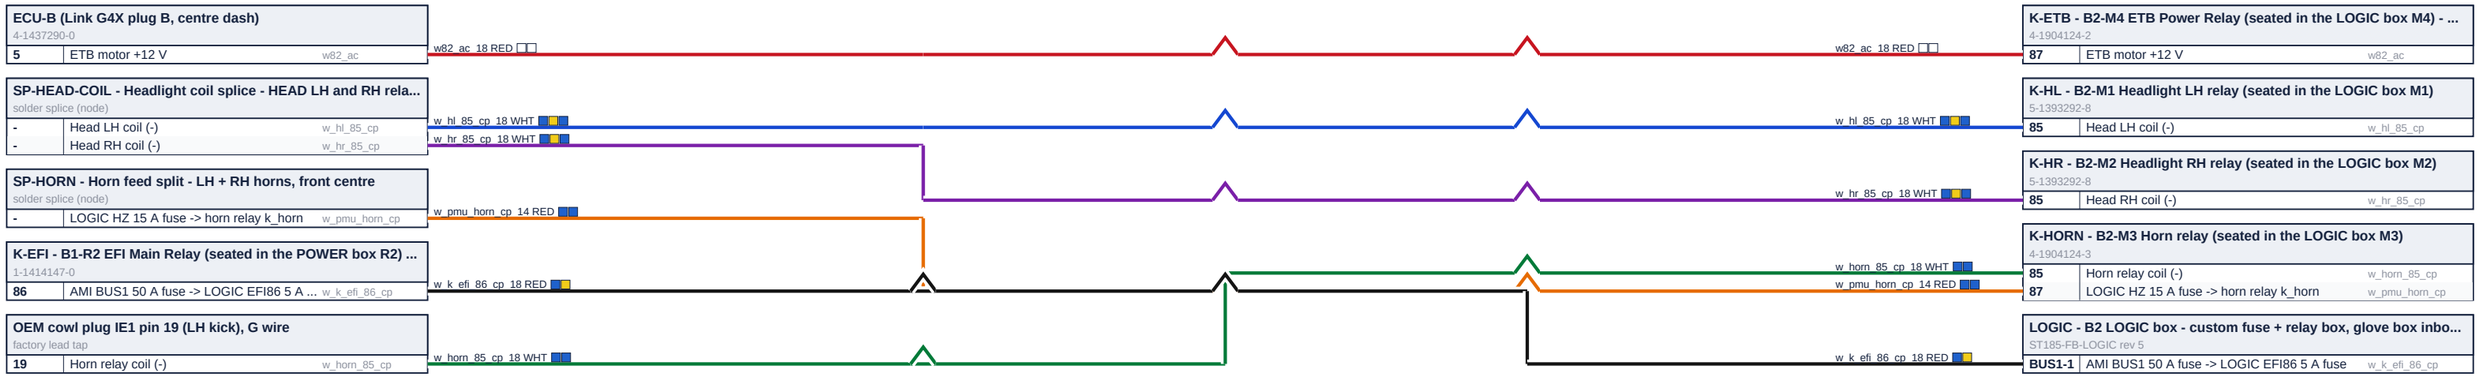

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

– – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 3 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	55 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

SP-12V-SHK - Shock sensor +12 V splice - LOGIC ALMS 2A f...
solder splice (node)

-	AMI BUS1 50 A fuse -> LOGIC ALMS 2 A ... w_at_12v_shk_tie_...

SP-AT-12V - Alarm +12 V splice - LOGIC ALM 5A fuse to alar...
solder splice (node)

-	AMI BUS1 50 A fuse -> LOGIC ALM 5 A f... w_at_12v_tie_cp

SP-HL - HEAD LH splice - HL 15A fuse to HEAD LH relay pins...
solder splice (node)

-	AMI BUS1 50 A fuse -> LOGIC HL 15 A fu... w_hl_cp

SP-HR - HEAD RH splice - HR 15A fuse to HEAD RH relay pin...
solder splice (node)

-	AMI BUS1 50 A fuse -> LOGIC HR 15 A f... w_hr_cp

SP-HZ - HAZ-HORN splice - HZ 15A fuse to the hazard feed a...
solder splice (node)

-	AMI BUS1 50 A fuse -> LOGIC HZ 15 A fu... w_hz_cp

K-ETB - B2-M4 ETB Power Relay (seated in the LOGIC box M...
4-1904124-2

30	AMI BUS1 50 A fuse -> LOGIC ETB 10 A ... w_fb_k_etb_30_cp

w_at_12v_shk_tie_cp_20 RED
w_at_12v_tie_cp_20 RED
w_hl_cp_14 RED
w_hr_cp_14 RED
w_hz_cp_14 RED
w_fb_k_etb_30_cp_16 RED

w_fb_k_etb_30_cp
w_hl_cp
w_hr_cp
w_hz_cp

w_fb_k_etb_30_cp_16 RED
w_hl_cp_14 RED
w_hr_cp_14 RED
w_hz_cp_14 RED
w_at_12v_tie_cp_20 RED
w_at_12v_shk_tie_cp_20 RED

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...
ST185-FB-LOGIC rev 5

BUS1-10	AMI BUS1 50 A fuse -> LOGIC ETB 10 A fuse	w_fb_k_etb_30_cp
BUS1-2	AMI BUS1 50 A fuse -> LOGIC HL 15 A fuse	w_hl_cp
BUS1-3	AMI BUS1 50 A fuse -> LOGIC HR 15 A fuse	w_hr_cp
BUS1-4	AMI BUS1 50 A fuse -> LOGIC HZ 15 A fuse	w_hz_cp
BUS1-7	AMI BUS1 50 A fuse -> LOGIC ALM 5 A fuse	w_at_12v_tie_cp
BUS1-8	AMI BUS1 50 A fuse -> LOGIC ALMS 2 A fuse	w_at_12v_shk_tie_...

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 4 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	56 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

BUS-SW12 - SW12 bus plug DT06-12 (glove box, by LOGIC b...
DT06-12SA

1	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_cp_sw12_in

SP-DEV - Dash 12 V split - cluster + RealDash Pi, center dash
solder splice (node)


-	EFI relay k_efi -> LOGIC DEV 15 A fuse	w_dev_cp

DRB102-CABIN - DRB102 receptacle (RH firewall)
DRB12-102PAE-L018

1	EFI relay k_efi -> LOGIC COP 15 A fuse	w_cop_pwr_ac
2	EFI relay k_efi -> LOGIC INJ 15 A fuse	w_inj_pwr_ac
95	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_cp

K-EPS-EN - B2-M6 EPS Enable Relay (seated in the LOGIC b...
6-1419137-4

30	EFI relay k_efi -> LOGIC EPSEN 7.5 A fuse	w_fb_k_eps_en_30...

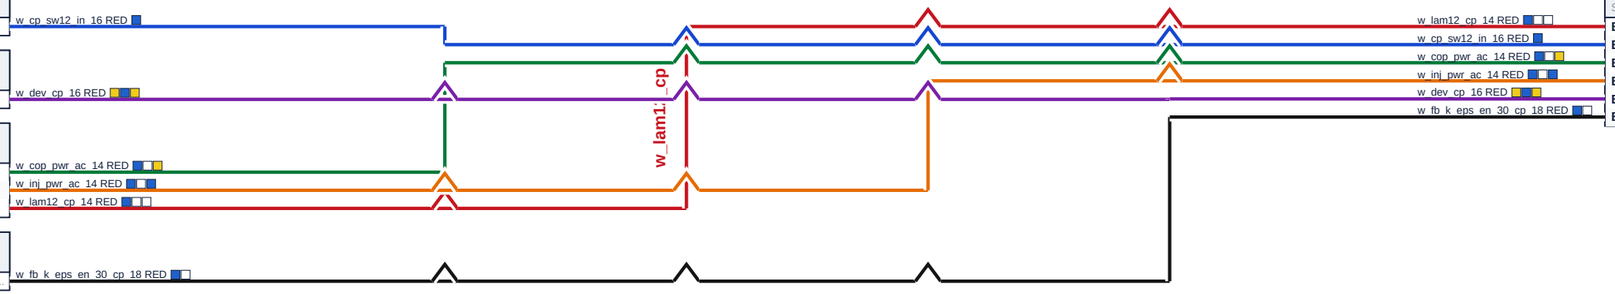

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...
ST185-FB-LOGIC rev 5

BUS2-1	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_cp
BUS2-2	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_cp_sw12_in
BUS2-3	EFI relay k_efi -> LOGIC COP 15 A fuse	w_cop_pwr_ac
BUS2-4	EFI relay k_efi -> LOGIC INJ 15 A fuse	w_inj_pwr_ac
BUS2-6	EFI relay k_efi -> LOGIC DEV 15 A fuse	w_dev_cp
BUS2-7	EFI relay k_efi -> LOGIC EPSEN 7.5 A fuse	w_fb_k_eps_en_30...

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	57 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

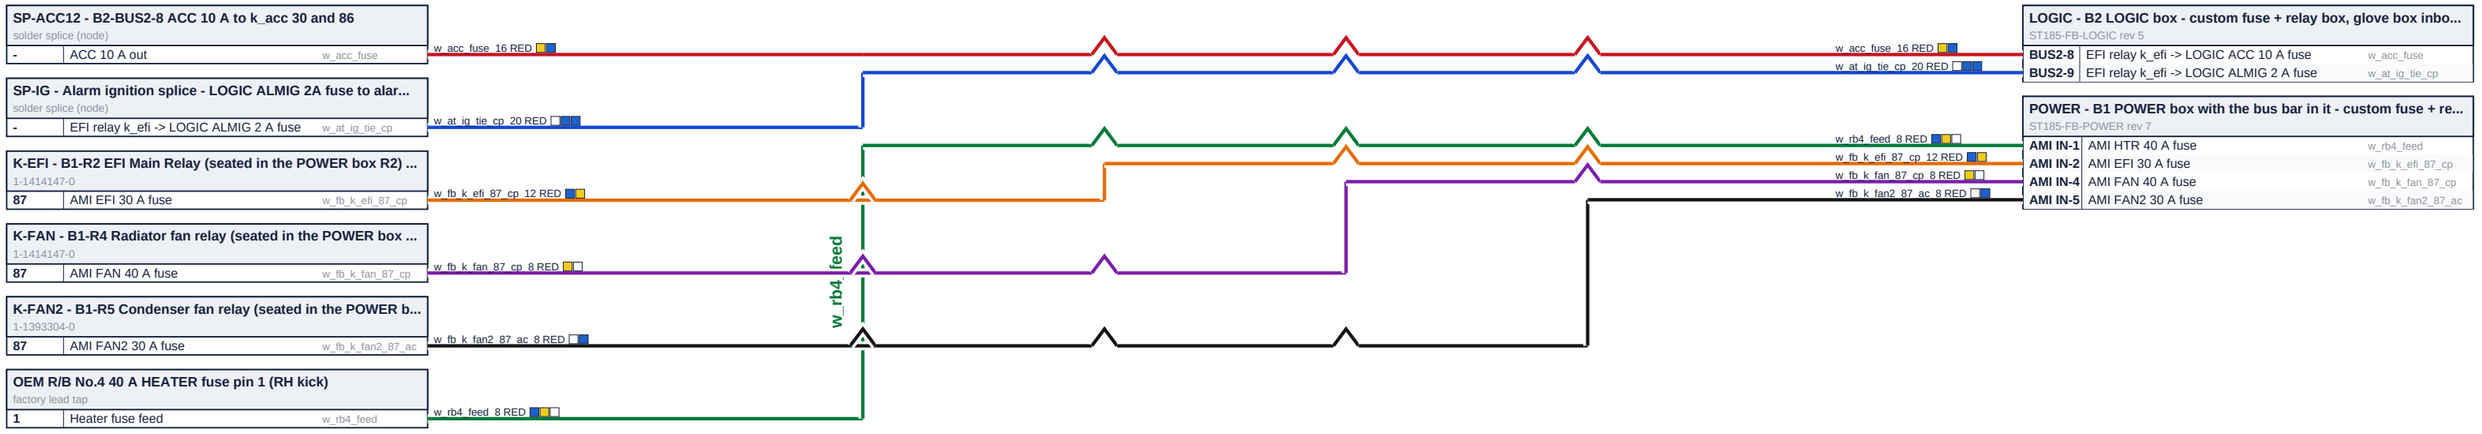

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 6 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	58 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

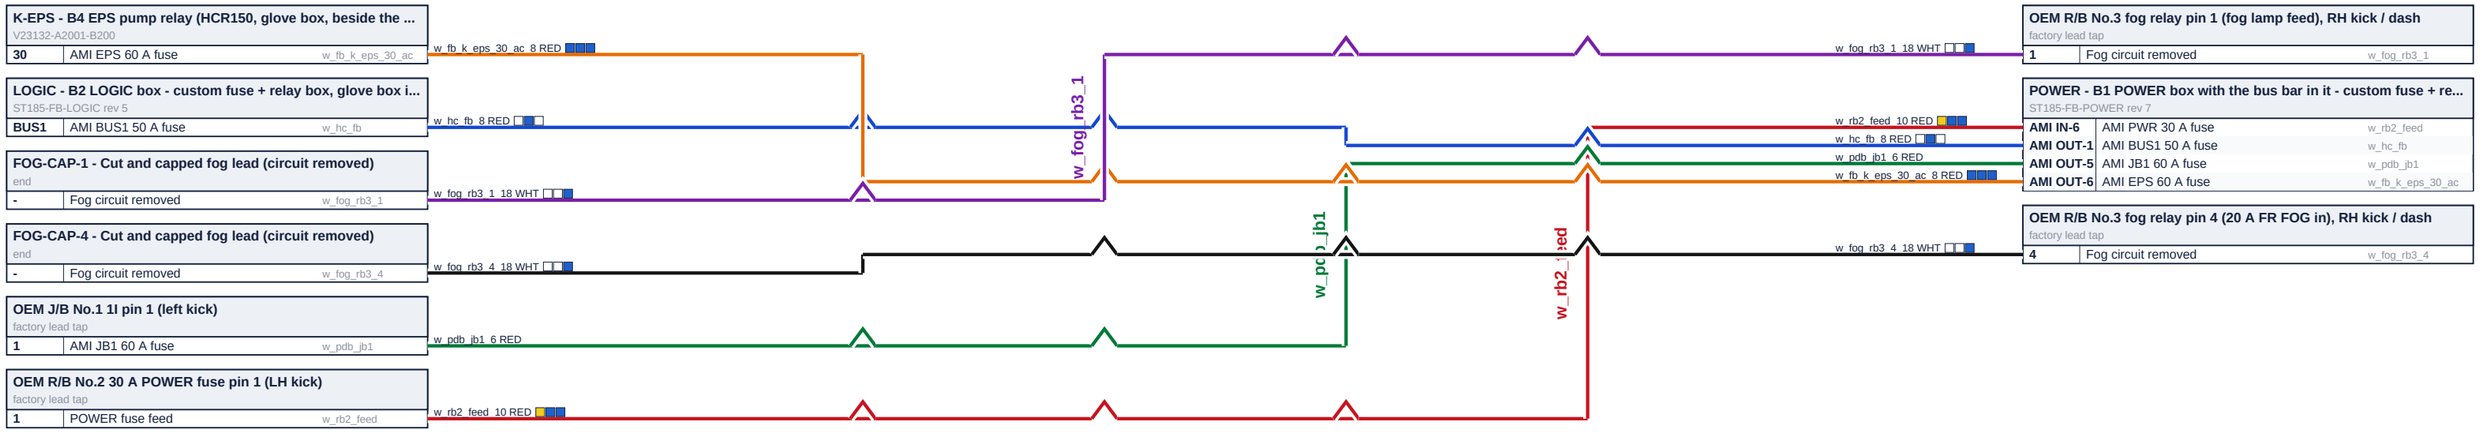

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL **IDENT BANDS (R87):** Blue Yellow White built with another harness line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 7 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	59 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

SP-ACC12 - B2-BUS2-8 ACC 10 A to k_acc 30 and 86 solder splice (node)					K-ACC - B2-M5 A/C clutch relay (k_acc) - amp A15 pin 8 sinks coi... 6-1419137-4		
-	A/C clutch +12 V in	w_fb_k_acc_30_cp	w_fb_k_acc_30_cp_16 RED	w_fb_k_acc_30_cp_16 RED	30	A/C clutch +12 V in	w_fb_k_acc_30_cp
SP-HEAD-COIL - Headlight coil splice - HEAD LH and RH rela... solder splice (node)					**OEM cowl plug IE1 pin 2 (LH kick), R-Y wire** factory lead tap		
-	Headlight coil (-)	w_head_coil_cp	w_head_coil_cp_18 WHT	w_head_coil_cp_18 WHT	2	Headlight coil (-)	w_head_coil_cp
SP-HL - HEAD LH splice - HL 15A fuse to HEAD LH relay pins... solder splice (node)					**K-HL - B2-M1 Headlight LH relay (seated in the LOGIC box M1)** 5-1393292-8		
-	AMI BUS1 50 A fuse -> LOGIC HL 15 A fu...	w_hl_30_cp	w_hl_30_cp_14 RED	w_hl_30_cp_14 RED	30	AMI BUS1 50 A fuse -> LOGIC HL 15 A fuse	w_hl_30_cp
-	AMI BUS1 50 A fuse -> LOGIC HL 15 A fu...	w_hl_86_cp	w_hl_86_cp_16 RED	w_hl_86_cp_16 RED	86	AMI BUS1 50 A fuse -> LOGIC HL 15 A fuse	w_hl_86_cp
DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018					**OEM R/B No.4 starter relay pin 4 (RH kick), starter out** factory lead tap		
3	Starter solenoid S	w_strl_c	w_strl_c_12 RED	w_strl_c_12 RED	4	Starter solenoid S	w_strl_c
LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i... ST185-FB-LOGIC rev 5					**OEM ST1 lead B-W at old R/B No.4 pin 1, RH kick panel** factory lead tap		
BUS2-13 IN	Start sw ST1 feed	w_start_in_cp	w_start_in_cp_20 YEL	w_start_in_cp_20 YEL	1	Start sw ST1 feed	w_start_in_cp

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 8 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	60 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 4 of 9)

SP-HR - HEAD RH splice - HR 15A fuse to HEAD RH relay pin...		
solder splice (node)		
-	AMI BUS1 50 A fuse -> LOGIC HR 15 A f...	w_hr_30_cp
-	AMI BUS1 50 A fuse -> LOGIC HR 15 A f...	w_hr_86_cp

SP-HZ - HAZ-HORN splice - HZ 15A fuse to the hazard feed a...		
solder splice (node)		
-	AMI BUS1 50 A fuse -> LOGIC HZ 15 A fu...	w_haz_cp
-	AMI BUS1 50 A fuse -> LOGIC HZ 15 A fu...	w_horn_30_cp
-	AMI BUS1 50 A fuse -> LOGIC HZ 15 A fu...	w_horn_86_cp

w_hr_30_cp_14 RED

w_hr_86_cp_16 RED

w_haz_cp_14 RED

w_horn_30_cp_16 RED

w_horn_86_cp_16 RED

w_hr_30_cp_14 RED

w_hr_86_cp_16 RED

w_haz_cp_14 RED

w_horn_30_cp_16 RED

w_horn_86_cp_16 RED

K-HR - B2-M2 Headlight RH relay (seated in the LOGIC box M2)		
5-1393292-8		
30	AMI BUS1 50 A fuse -> LOGIC HR 15 A fuse	w_hr_30_cp
86	AMI BUS1 50 A fuse -> LOGIC HR 15 A fuse	w_hr_86_cp

OEM IE1 pin 12 (left kick, cowl side)		
factory lead tap		
12	AMI BUS1 50 A fuse -> LOGIC HZ 15 A fuse	w_haz_cp

K-HORN - B2-M3 Horn relay (seated in the LOGIC box M3)		
4-1904124-3		
30	AMI BUS1 50 A fuse -> LOGIC HZ 15 A fuse	w_horn_30_cp
86	AMI BUS1 50 A fuse -> LOGIC HZ 15 A fuse	w_horn_86_cp

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 9 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	61 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 5 of 3)

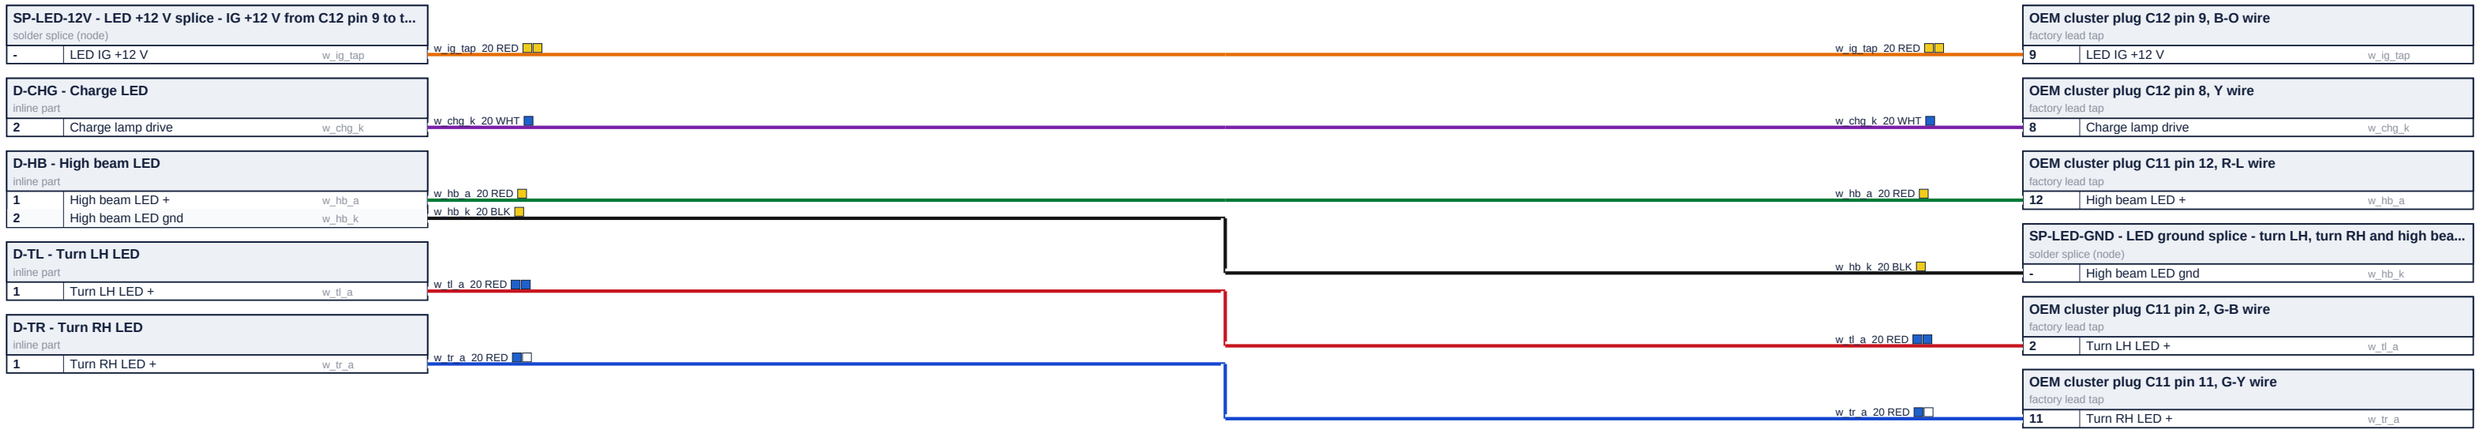

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 1 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	62 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 5 of 3)

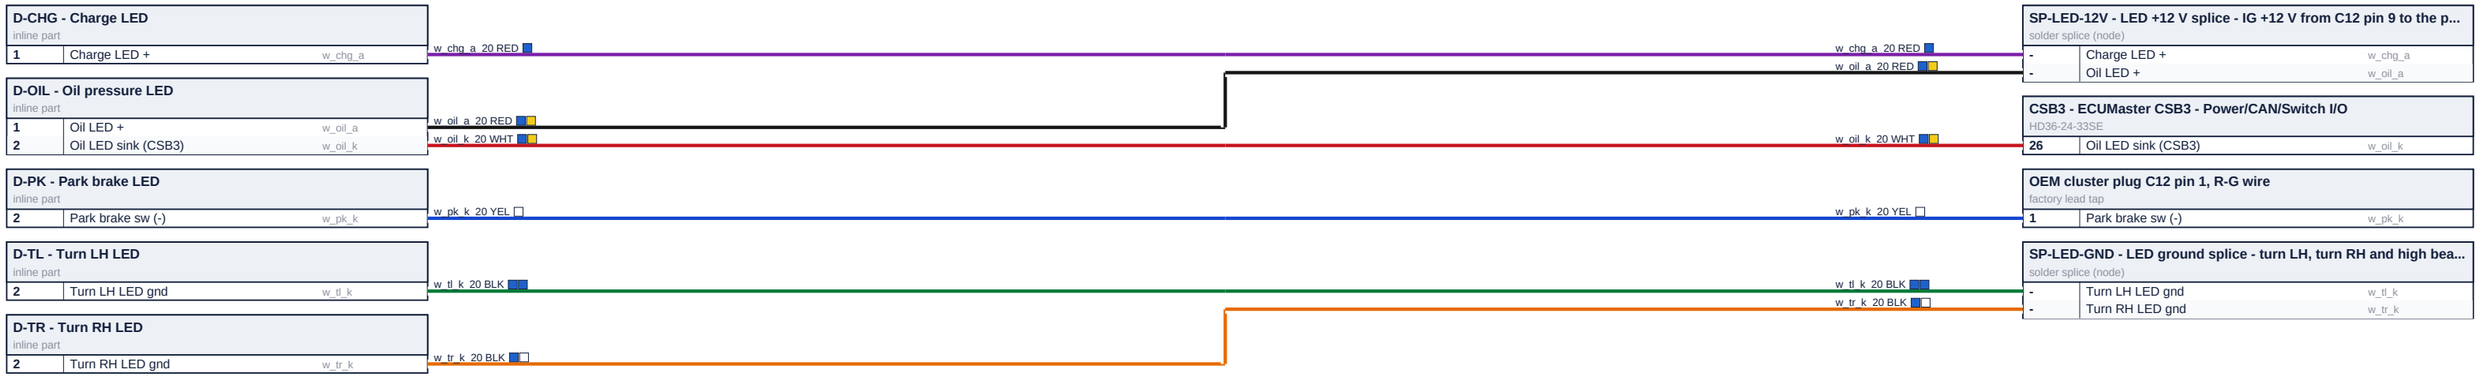

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 2 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	63 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 1 of 3)



WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 3 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	64 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 10)

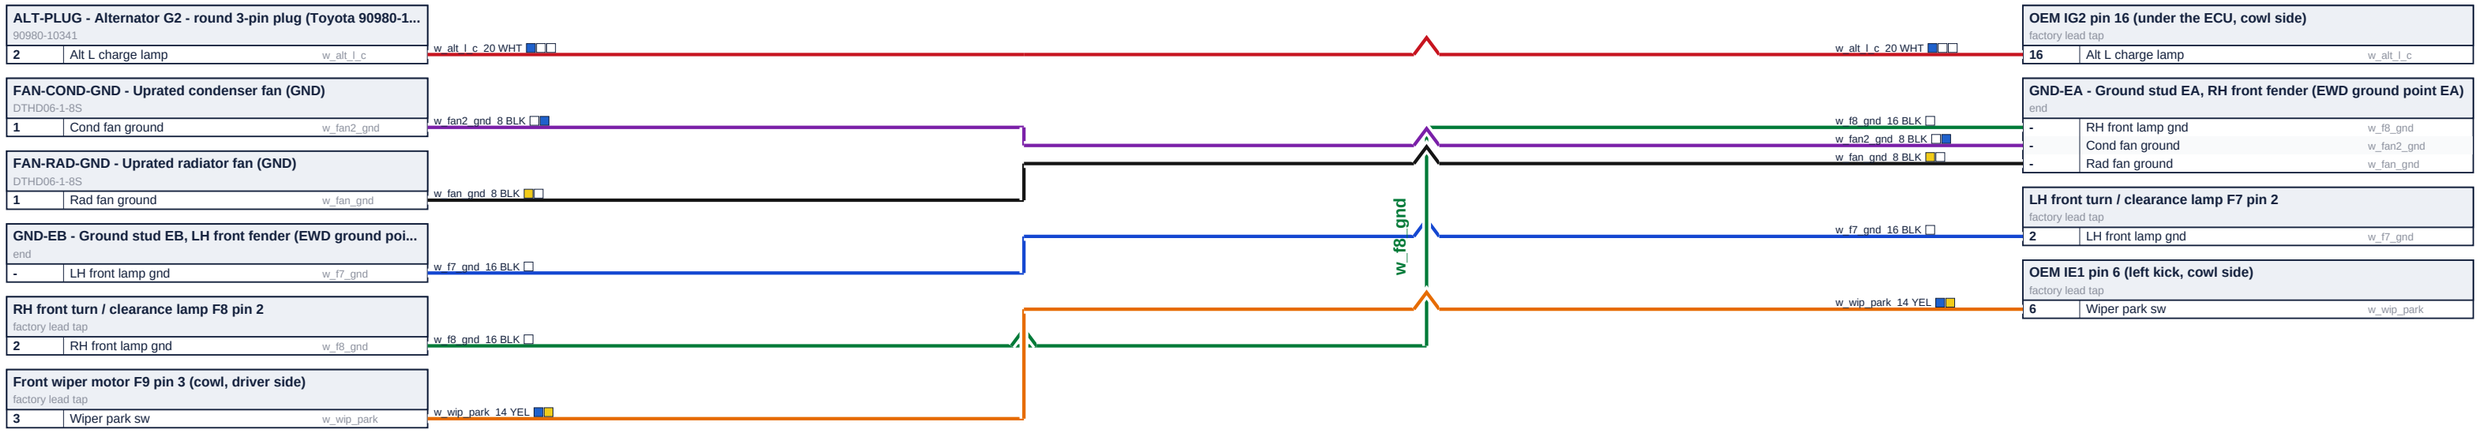

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 1 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	65 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 10)

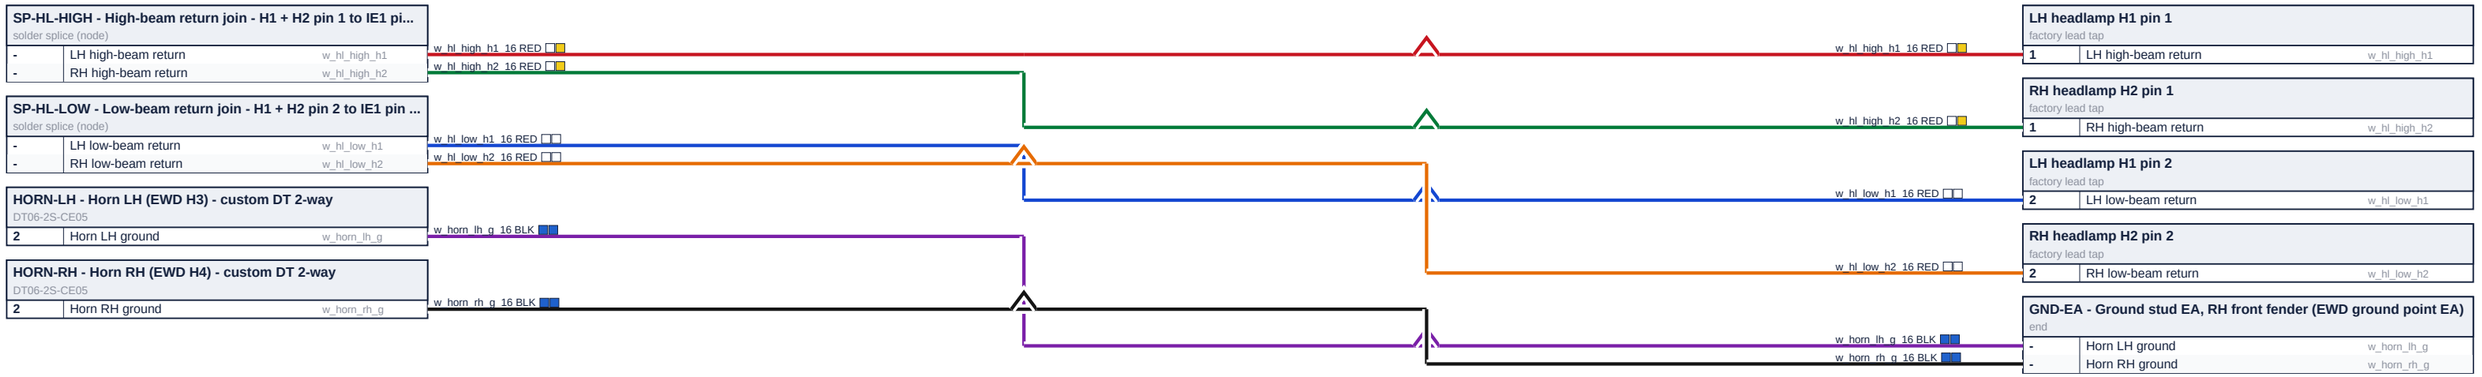

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 2 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	66 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 10)

SP-RTR-CLOSE - Retract close-limit join - R2 + R3 pin 3 to IE... solder splice (node)				**OEM IE1 pin 9 (left kick, cowl side)** factory lead tap	
-	Retract close limit	w_rtr_close	w_rtr_close_18 YEL ⟷ w_rtr_close_18 YEL	9	Retract close limit
SP-RTR-R2-4 - LH retract motor feed - 12 AWG to 16 AWG pi... solder splice (node)				**OEM IE1 pin 14 (left kick, cowl side)** factory lead tap	
-	LH retract motor 4	w_rtr_r2_4	w_rtr_r2_4_12 RED ⟷ w_rtr_r2_4_12 RED	14	LH retract motor 4
SP-RTR-R3-4 - RH retract motor feed - 12 AWG to 16 AWG pi... solder splice (node)				**OEM IE1 pin 7 (left kick, cowl side)** factory lead tap	
-	RH retract motor 4	w_rtr_r3_4	w_rtr_r3_4_12 RED ⟷ w_rtr_r3_4_12 RED	7	RH retract motor 4
Front wiper motor F9 pin 2 (cowl, driver side) factory lead tap				**OEM IE1 pin 13 (left kick, cowl side)** factory lead tap	
2	Wiper LOW	w_wip_lo	w_wip_lo_14 RED ⟷ w_wip_lo_14 RED	13	Wiper LOW
OEM IE1 pin 15 (left kick, cowl side) factory lead tap				**LH retract motor R2 pin 2** factory lead tap	
15	LH retract motor 2	w_rtr_r2_2	w_rtr_r2_2_16 RED ⟷ w_rtr_r2_2_16 RED	2	LH retract motor 2
OEM IE1 pin 8 (left kick, cowl side) factory lead tap				**RH retract motor R3 pin 2** factory lead tap	
8	RH retract motor 2	w_rtr_r3_2	w_rtr_r3_2_16 RED ⟷ w_rtr_r3_2_16 RED	2	RH retract motor 2

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 3 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	67 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 10)

SP-CLR - Clearance feed split - F7 LH + F8 RH solder splice (node)				**OEM J/B No.1 1H pin 6 (left kick)** factory lead tap	
-	Clearance lamp feed	w_clr	w_clr_16 RED □ ——— w_clr_16 RED □	1H-6	Clearance lamp feed
SP-RTR-OPEN - Retract open-limit join - R2 + R3 pin 1 to IE1 ... solder splice (node)				**OEM IE1 pin 16 (left kick, cowl side)** factory lead tap	
-	Retract open limit	w_rtr_open	w_rtr_open_18 YEL ——— w_rtr_open_18 YEL	16	Retract open limit
LH front turn / clearance lamp F7 pin 3 factory lead tap				**OEM J/B No.1 1H pin 4 (left kick)** factory lead tap	
3	LH front turn +	w_turn_f7	w_turn_f7_18 RED ——— w_turn_f7_18 RED	1H-4	LH front turn +
RH front turn / clearance lamp F8 pin 3 factory lead tap				**OEM J/B No.1 1H pin 8 (left kick)** factory lead tap	
3	RH front turn +	w_turn_f8	w_turn_f8_18 RED ——— w_turn_f8_18 RED	1H-8	RH front turn +
Front wiper motor F9 pin 1 (cowl, driver side) factory lead tap				**OEM IE1 pin 20 (left kick, cowl side)** factory lead tap	
1	Wiper HIGH	w_wip_hi	w_wip_hi_14 RED ——— w_wip_hi_14 RED	20	Wiper HIGH
Front wiper motor F9 pin 4 (cowl, driver side) factory lead tap				**OEM J/B No.1 1H pin 5 (left kick)** factory lead tap	
4	Wiper +B	w_wip_b	w_wip_b_14 RED ——— w_wip_b_14 RED	1H-5	Wiper +B

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

– – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 4 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	68 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 10)

FAN-COND - Uprated condenser fan (+) DTHD06-1-8S				**K-FAN2 - B1-R5 Condenser fan relay (seated in the POWER box ...** 1-1393304-0	
1 Cond fan +12 V	w_fan2_pwr	w_fan2_pwr 8 RED	w_fan2_pwr 8 RED	**30** Cond fan +12 V	w_fan2_pwr
FAN-RAD - Uprated radiator fan (+) DTHD06-1-8S				**K-FAN - B1-R4 Radiator fan relay (seated in the POWER box R4)** 1-1414147-0	
1 AMI FAN 40 A fuse -> rad fan relay k_fan	w_fan_pwr	w_fan_pwr 8 RED	w_fan_pwr 8 RED	**30** AMI FAN 40 A fuse -> rad fan relay k_fan	w_fan_pwr
K-ACC - B2-M5 A/C clutch relay (k_acc) - amp A15 pin 8 sink... 6-1419137-4				**A/C compressor A4 pin 4** factory lead tap	
87 A/C clutch +12 V	w_acc_clutch	w_acc_clutch 16 RED	w_acc_clutch 16 RED	**4** LOGIC ACC 10 A fuse -> A/C clutch relay k_acc	w_acc_clutch
K-HL - B2-M1 Headlight LH relay (seated in the LOGIC box M1) 5-1393292-8				**LH headlamp H1 pin 3** factory lead tap	
87 LOGIC HL 15 A fuse -> HEAD LH relay k_hl	w_pmu_hl	w_pmu_hl 14 RED	w_pmu_hl 14 RED	**3** LOGIC HL 15 A fuse -> HEAD LH relay k_hl	w_pmu_hl
K-HR - B2-M2 Headlight RH relay (seated in the LOGIC box M2) 5-1393292-8				**RH headlamp H2 pin 3** factory lead tap	
87 LOGIC HR 15 A fuse -> HEAD RH relay k...	w_pmu_hr	w_pmu_hr 14 RED	w_pmu_hr 14 RED	**3** LOGIC HR 15 A fuse -> HEAD RH relay k_hr	w_pmu_hr
LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i... ST185-FB-LOGIC rev 5				**OEM J/B No.1 1H pin 2 (left kick)** factory lead tap	
BUS1-5 AMI BUS1 50 A fuse -> LOGIC DM 20 A f...	w_pmu_dome	w_pmu_dome 14 RED	w_pmu_dome 14 RED	**2** AMI BUS1 50 A fuse -> LOGIC DM 20 A fuse	w_pmu_dome

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	69 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 10)

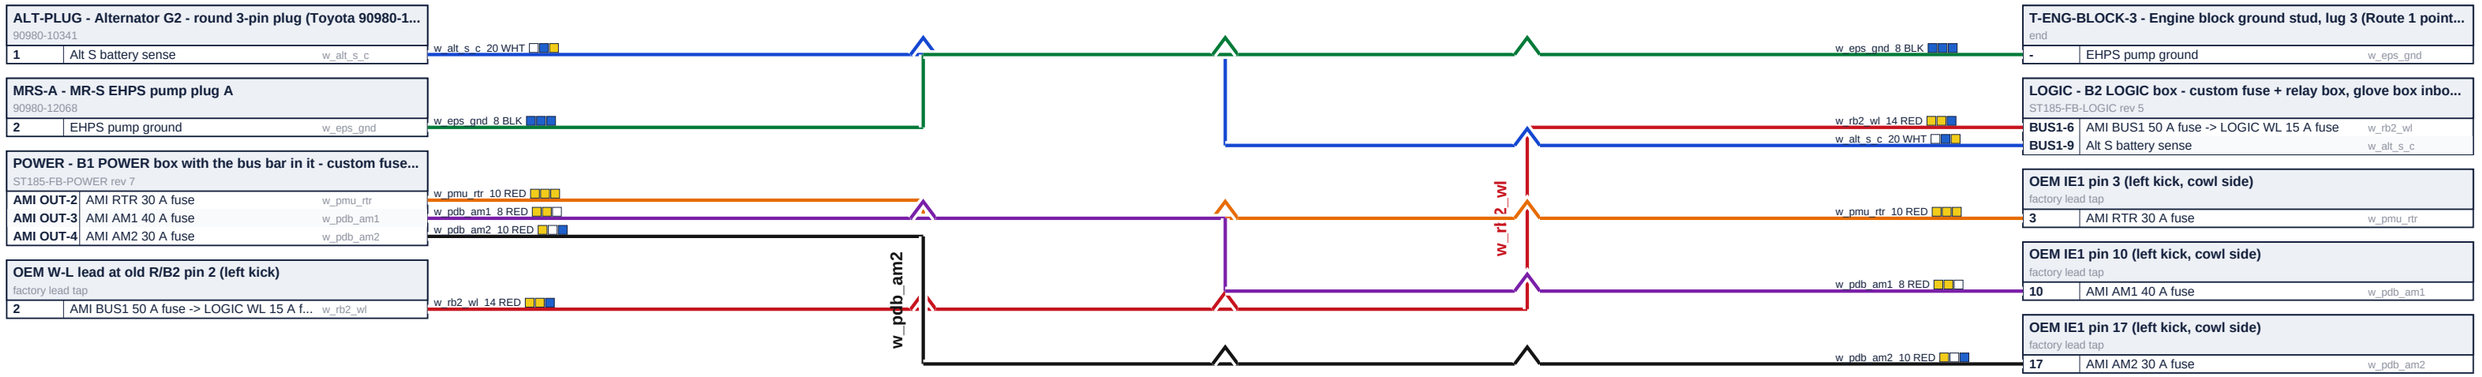

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 6 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	70 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 10)

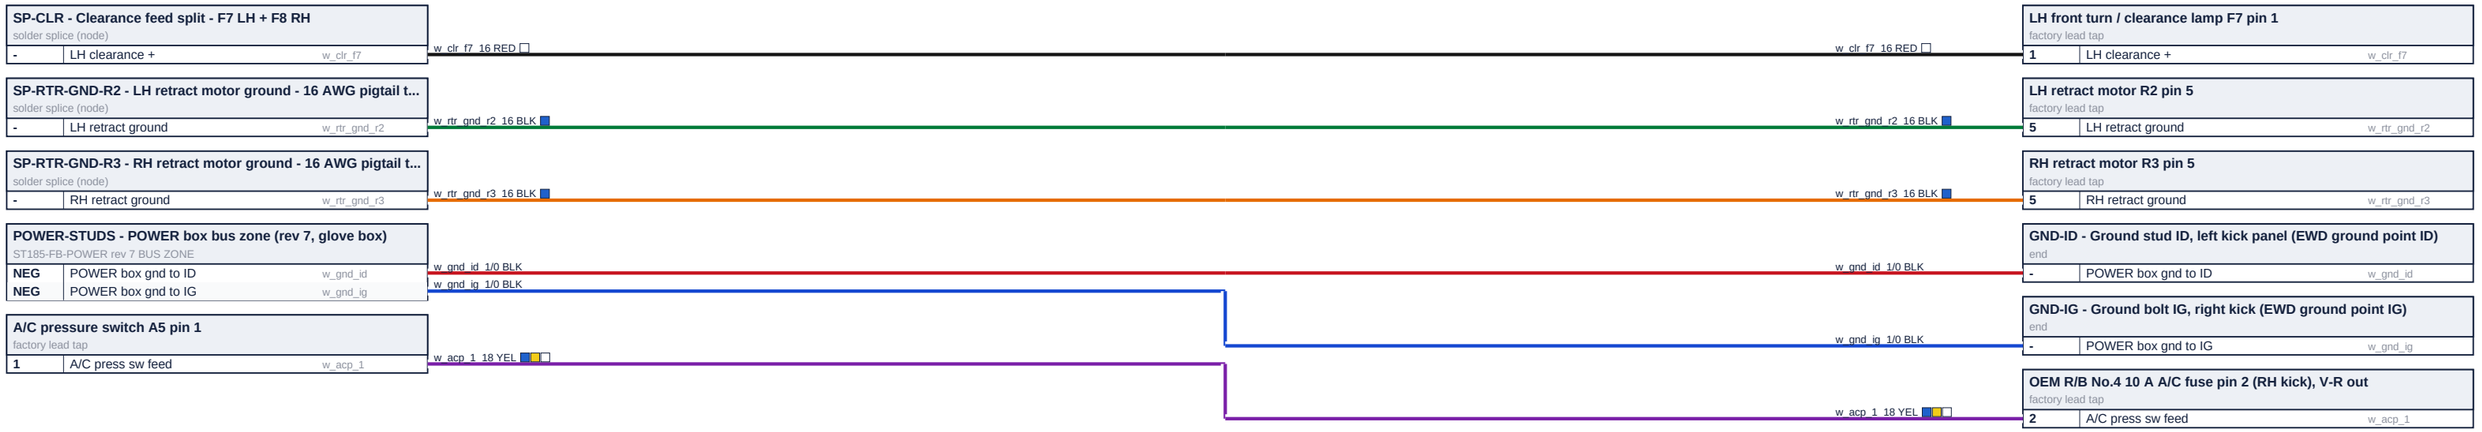

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 7 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	71 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 10)

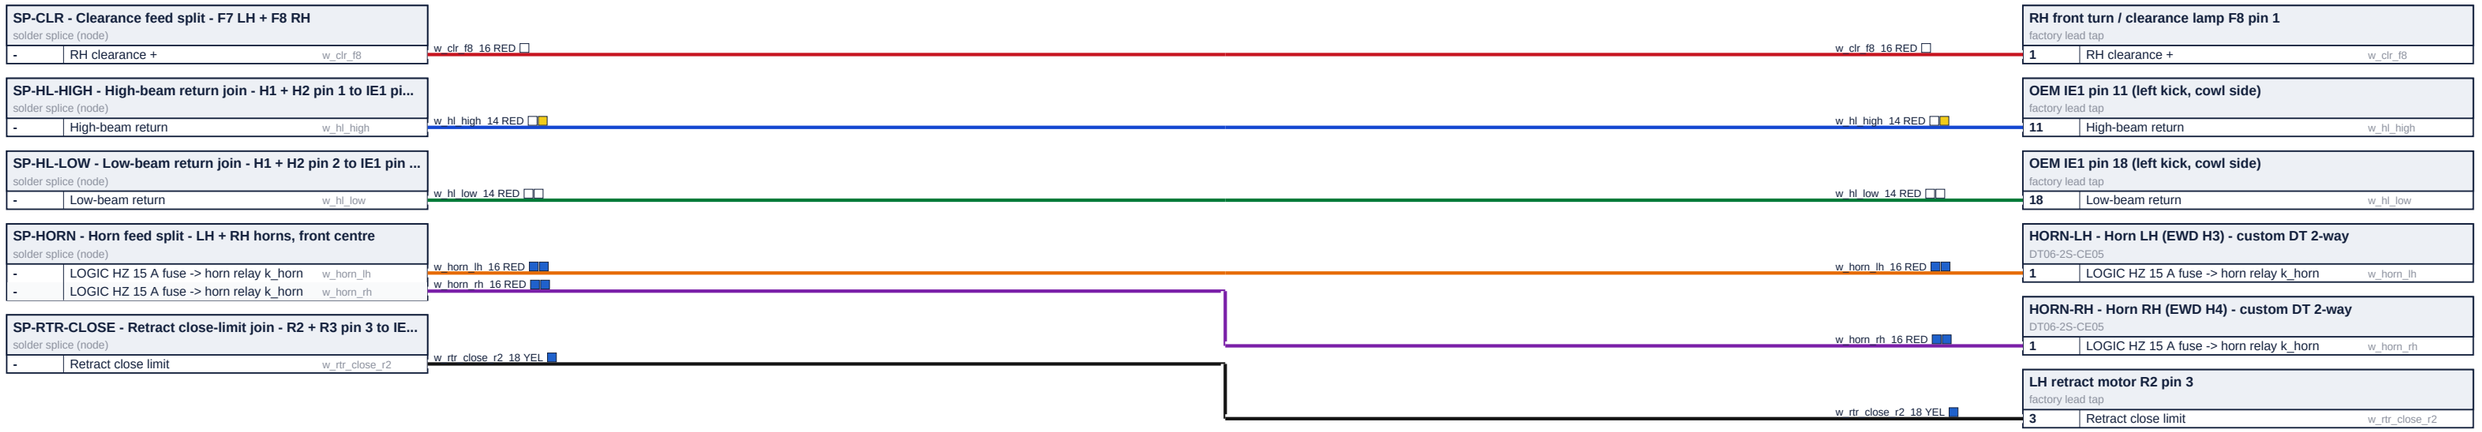

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 8 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	72 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 10)

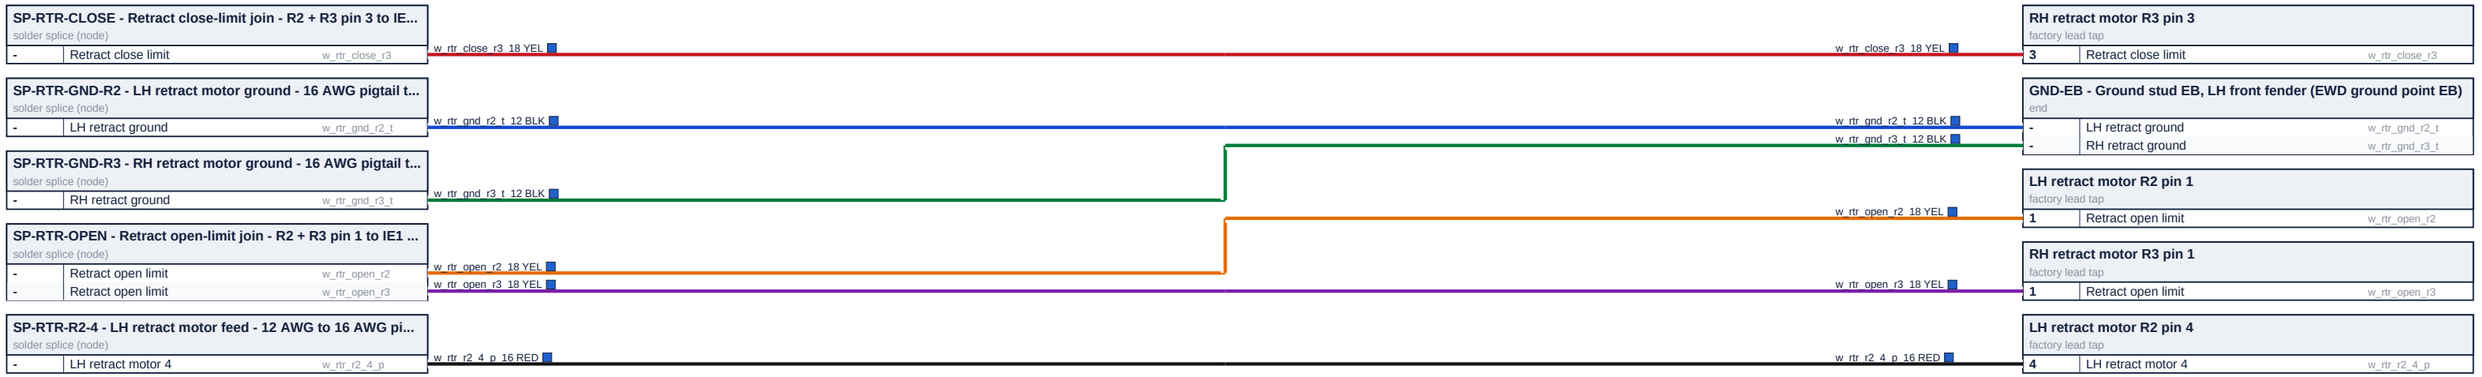

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 9 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	73 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 3 of 10)

SP-RTR-R3-4 - RH retract motor feed - 12 AWG to 16 AWG pi... (solder splice (node))				RH retract motor R3 pin 4 (factory lead tap)		
-	RH retract motor 4	w_rtr_r3_4_p	w_rtr_r3_4_p_16 RED	4	RH retract motor 4	w_rtr_r3_4_p
GND-EB - Ground stud EB, LH front fender (EWD ground poi... (end)				**T-ENG-BLOCK-2 - Engine block ground stud, lug 2 (Route 1 point... (end)**		
-	Block strap to EB	w_gnd_eb	w_gnd_eb_4 BLK	-	Block strap to EB	w_gnd_eb
OEM washer W1 pin 1 cowl lead (firewall, cabin side) (factory lead tap)				**Washer motor W1 pin 1 (RH front corner, low) (factory lead tap)**		
1	Washer switch side	w_wash_neg	w_wash_neg_14 RED	1	Washer switch side	w_wash_neg
OEM washer W1 pin 2 cowl lead (firewall, cabin side) (factory lead tap)				**Washer motor W1 pin 2 (RH front corner, low) (factory lead tap)**		
2	Washer motor +12 V	w_wash_pos	w_wash_pos_14 RED	2	Washer motor +12 V	w_wash_pos

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 10...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	74 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 5 of 3)

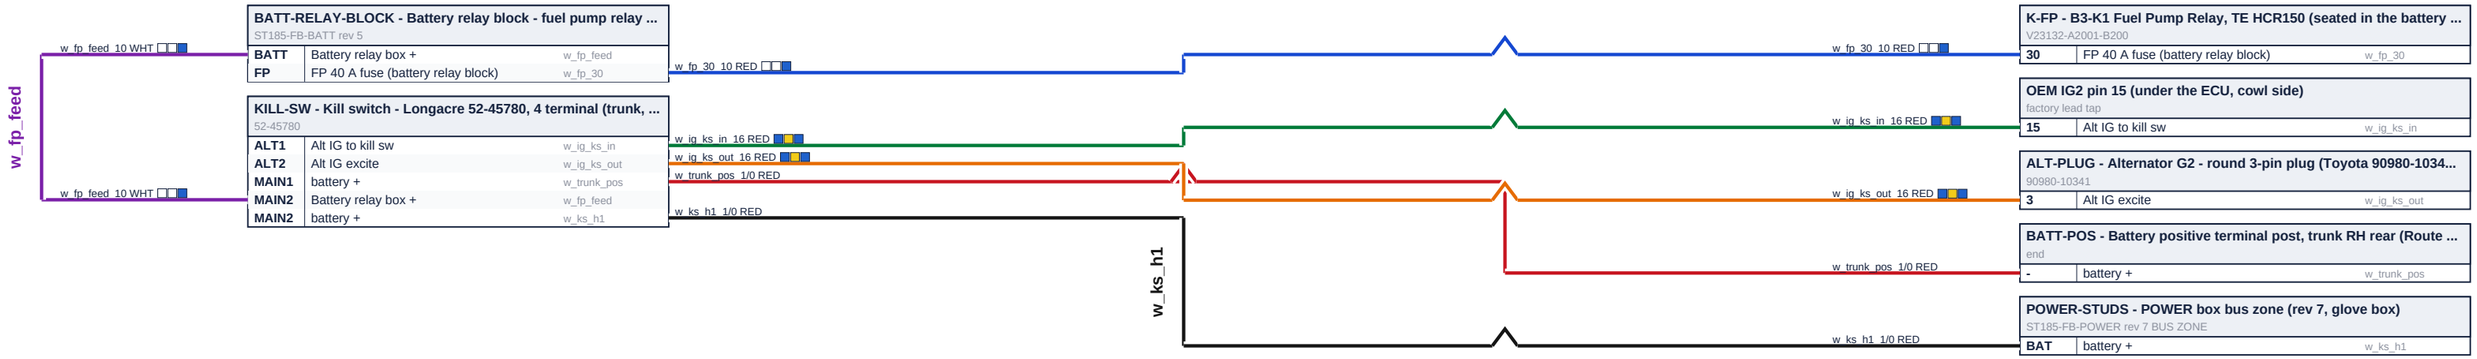

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 1 o...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	75 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 5 of 3)

POWER-STUDS - POWER box bus zone (rev 7, glove box)
ST185-FB-POWER rev 7 BUS ZONE


ALT	Starter feed (H3)	w_h3_radlok_pos
NEG	Engine ground (H6a)	w_h6a_radlok_neg

RADLOK-NEG-ENG - RADLOK - engine
RL00801-50BK

1	Engine ground (H6a)	w_rln
1	Engine ground (H6a)	w_rln_blk

RADLOK-POS-ENG - RADLOK + engine
RL00801-50RE

1	Starter feed (H3)	w_rl_pos
1	Starter feed (H3)	w_rlp_str

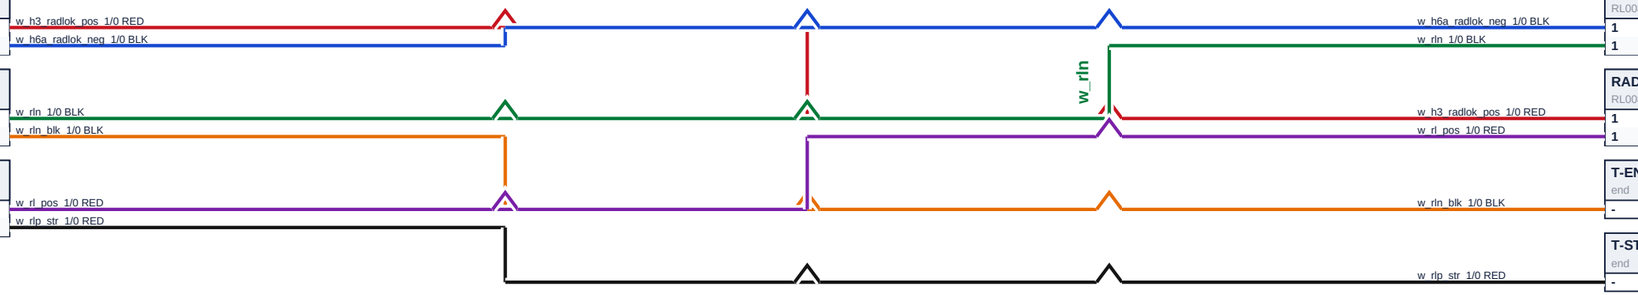

RADLOK-NEG-CAB - RADLOK - firewall
RL00801-50BK

1	Engine ground (H6a)	w_h6a_radlok_neg
1	Engine ground (H6a)	w_rln

RADLOK-POS-CAB - RADLOK + firewall
RL00801-50RE

1	Starter feed (H3)	w_h3_radlok_pos
1	Starter feed (H3)	w_rl_pos

T-ENG-BLOCK - Engine block ground stud, lug 1 (Route 1 point 5)
end

-	Engine ground (H6a)	w_rln_blk

T-STARTER-B - Starter B+ stud, lug 1 (Route 1 point 2)
end

-	Starter feed (H3)	w_rlp_str

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 2 o...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	76 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 2 of 3)

JUMP-POST - Engine-bay jump post		
1	Jump post feed	w_jump

w_jump_2 RED — w_jump_2 RED

T-STARTER-B-3 - Starter B+ stud, lug 3 (Route 1 point 2)		
end		
-	Jump post feed	w_jump

POWER-STUDS - POWER box bus zone (rev 7, glove box)		
ST185-FB-POWER rev 7 BUS ZONE		
NEG	Battery - main	w_trunk_neg

w_trunk_neg_1/0 BLK — w_trunk_neg_1/0 BLK

T-TRUNK-NEG - Battery negative terminal post, trunk RH rear (Ro...		
end		
-	Battery - main	w_trunk_neg

T-ALT-B - Alternator B+ stud, rear RH of engine (Route 1 poi...		
end		
-	Alternator B+	w_alt

w_alt_2 RED — w_alt_2 RED

T-STARTER-B-2 - Starter B+ stud, lug 2 (Route 1 point 2)		
end		
-	Alternator B+	w_alt

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 3 o...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	77 OF 82	432 x 279 mm	DG	2026-10-29

REAR FUEL - FUEL PUMP AND LEVEL SENDER

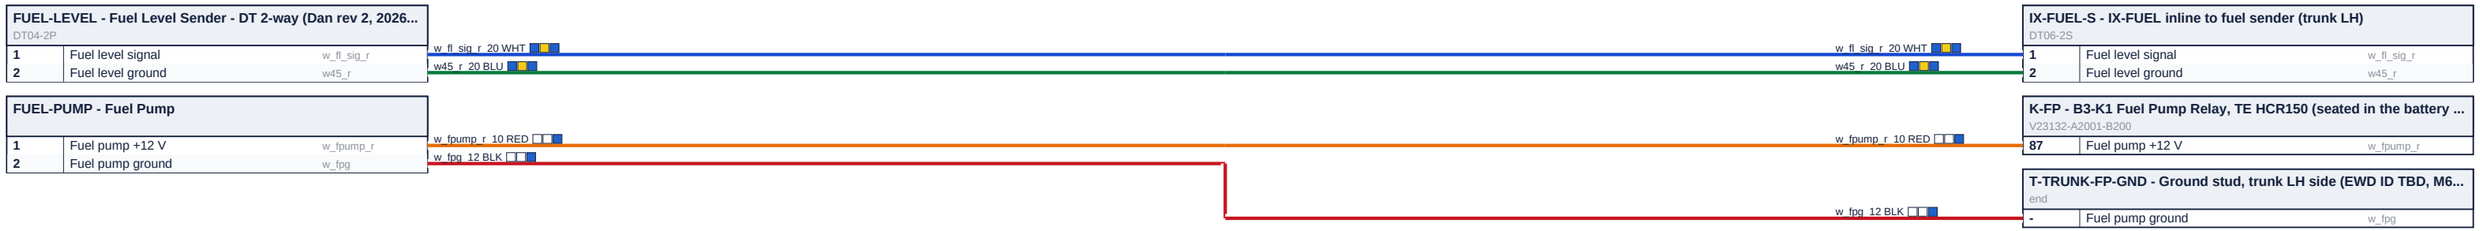

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

REAR FUEL - FUEL PUMP AND LEVEL SENDER

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	78 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 5 of 2)

SP-WS-F-SHIELD - Sensor screen join - FL + FR screens to t...		
solder splice (node)		
-	FL sensor shield	cab_fl_sh
-	FR sensor shield	cab_fr_sh
-	Front sensor shields	w_ws_f_shield

IX-WS-F-P - IX-WS-F		
DT04-6P		
1	VRC-F +5V	cab_fout_5v
2	VRC-F GND	cab_fout_gnd
5	WS-F screen drain	cab_fout_sh

cab_fl_sh_screen
cab_fr_sh_screen
w_ws_f_shield_20 BLK
cab_fout_5v_20 RED
cab_fout_gnd_20 YEL
cab_fout_sh_screen

cab_fl_sh_screen
cab_fr_sh_screen
w_ws_f_shield_20 BLK
cab_fout_5v_20 RED
cab_fout_gnd_20 YEL
cab_fout_sh_screen

CAB-FL cable screen (floats at the device end)		
cable screen		
-	FL sensor shield	cab_fl_sh

CAB-FR cable screen (floats at the device end)		
cable screen		
-	FR sensor shield	cab_fr_sh

VRC-F-IN - VRC front IN plug		
LP-16-J05PE-02-001		
3	Front sensor shields	w_ws_f_shield

VRC-F-OUT - VRC front OUT plug		
LP-16-J05PE-02-001		
1	VRC-F +5V	cab_fout_5v
2	VRC-F GND	cab_fout_gnd
3	WS-F screen drain	cab_fout_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 1 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	79 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 5 of 2)

IX-WS-F-P - IX-WS-F
DT04-6P

3	FL conditioned out	cab_fout_l
4	FR conditioned out	cab_fout_r

VRC-F-IN - VRC front IN plug
LP-16-J05PE-02-001

1	FL wheel speed +	cab_fl_p
2	FL wheel speed -	cab_fl_n
4	FR wheel speed +	cab_fr_p
5	FR wheel speed -	cab_fr_n

cab_fout_l 20 GRN
cab_fout_r 20 BLU
cab_fl_p 20 BLU
cab_fl_n 20 WHT
cab_fr_p 20 BLU
cab_fr_n 20 WHT

cab_fout_l 20 GRN
cab_fout_r 20 BLU
cab_fl_p 20 BLU
cab_fl_n 20 WHT
cab_fr_p 20 BLU
cab_fr_n 20 WHT

VRC-F-OUT - VRC front OUT plug
LP-16-J05PE-02-001

4	FL conditioned out	cab_fout_l
5	FR conditioned out	cab_fout_r

WSS-FL - ABS Wheel Speed FL
DT06-2S-CE05

1	FL wheel speed +	cab_fl_p
2	FL wheel speed -	cab_fl_n

WSS-FR - ABS Wheel Speed FR
DT06-2S-CE05

1	FR wheel speed +	cab_fr_p
2	FR wheel speed -	cab_fr_n

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 2 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	80 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 5 of 2)

SP-WS-R-SHIELD - Sensor screen join - RL + RR screens to t...		
solder splice (node)		
-	RL sensor shield	cab_rl_sh
-	RR sensor shield	cab_rr_sh
-	Rear sensor shields	w_ws_r_shield

IX-WS-R-P - IX-WS-R		
DT04-6P		
1	VRC-R +5V	cab_rout_5v
2	VRC-R GND	cab_rout_gnd
5	WS-R screen drain	cab_rout_sh

cab_rl_sh_screen
cab_rr_sh_screen
w_ws_r_shield_20 BLK
cab_rout_5v_20 RED
cab_rout_gnd_20 YEL
cab_rout_sh_screen

cab_rl_sh_screen
cab_rr_sh_screen
w_ws_r_shield_20 BLK
cab_rout_5v_20 RED
cab_rout_gnd_20 YEL
cab_rout_sh_screen

CAB-RL cable screen (floats at the device end)		
cable screen		
-	RL sensor shield	cab_rl_sh

CAB-RR cable screen (floats at the device end)		
cable screen		
-	RR sensor shield	cab_rr_sh

VRC-R-IN - VRC rear IN plug		
LP-16-J05PE-02-001		
3	Rear sensor shields	w_ws_r_shield

VRC-R-OUT - VRC rear OUT plug		
LP-16-J05PE-02-001		
1	VRC-R +5V	cab_rout_5v
2	VRC-R GND	cab_rout_gnd
3	WS-R screen drain	cab_rout_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 1 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	81 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 5 of 2)



WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 2 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	82 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale