

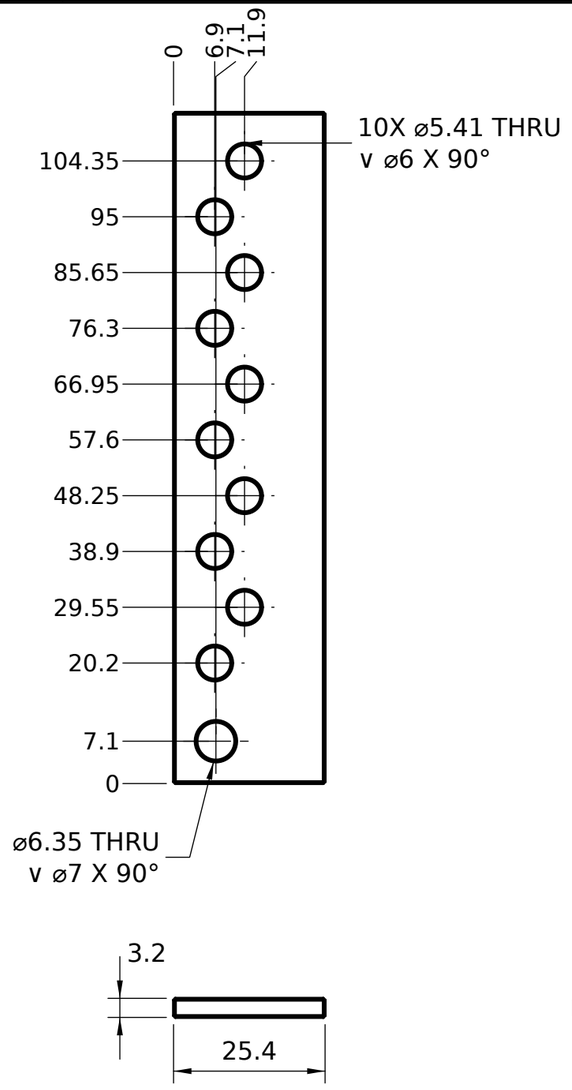




REVISIONS

REV	DESCRIPTION	BY	DATE
A	Initial	Claude	14/10/26
B	J1-J4 answers (R94) (#217)	Claude	15/10/26
C	SteveCAD audit v3 fixes ported into the source (#272)	Claude	16/10/26
D	Dan's N2 / N3 / N4 answers (#273); first drawing issued (#280)	Claude; drawing SteveCAD	16/10/26
E	Dan's markup 17/10/26 (23-21): spare studs deleted, the 10 studs respaced to 9.35 (PEM holes moved)	Claude	18/10/26

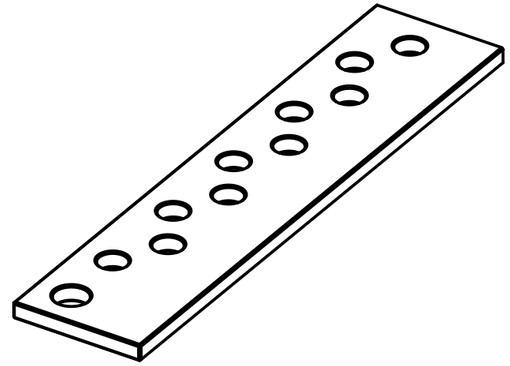

TRIMETRIC VIEW (SCALE 1:1)

NOTES:

1. MATERIAL: C110 COPPER, TINNED. CUT FROM 1" x 1/8" (25.4 x 3.2) TINNED FLAT BAR (MECCANIXITY B0CGJC2S1L); ONE 305 BAR MAKES BUS1 + BUS2.
2. HOLES ARE PEM MOUNTING HOLES, NEVER TAPPED (R129): ⌀5.41 +0.08/-0 FOR PEM S-M4-2ZI AT EACH M4 STUD, ⌀6.35 +0.08/-0 FOR PEM SS-M5-2ZI AT THE M5 FEED. PRESS NUTS IN FROM THE STRIP FACE.
3. 0.3 x 45° EDGE BREAK IS MODELLED (THE ⌀6.01 / ⌀6.95 RIMS) - R138 / R76.
4. MOUNTS ON EDGE IN THE LOGIC BASE. DEBURR ALL HOLES AND EDGES.
5. MARKUP 2026-10-17: SPARE STUD POSITIONS DELETED; STUDS ON A 9.35 PITCH (BUS1 10, BUS2 9).

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
LOGIC BUS STRIP BUS1

PART / DWG NO.	REV	MATERIAL
ST185-FB-115	E	C110 COPPER, TINNED

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1	mm	B (11x17)	1 OF 1	2026-10-18	SteveCAD

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev7\\Logic_Strip_Logic_CuC110_25p4x3p2_on_edge.step

3RD ANGLE