THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

BUS-5V - DT06-12 plug (ECU splice point) DT06-12SA		
2	+5 V throttle sensor	w_rail_sp_5v_c
3	+5 V MAP sensor	w_5v_a_c39
4	+5 V turbo speed	w_5v_a_c40
5	+5 V oil pressure	w_5v_brail_c45
6	+5 V fuel pressure	w_5v_brail_c46
7	+5 V coolant press	w_5v_brail_c47



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
13	+5 V fuel pressure	w_5v_brail_c46
16	+5 V MAP sensor	w_5v_a_c39
25	+5 V coolant press	w_5v_brail_c47
27	+5 V oil pressure	w_5v_brail_c45
41	+5 V throttle sensor	w_rail_sp_5v_c
52	+5 V turbo speed	w_5v_a_c40

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 1 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	1 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

BUS-GNDOUT-A - DT06-12 plug (ECU splice point)
DT06-12SA

2	Gnd IAT/TPS/coolant	w_rail_sp_gndout_c
3	Gnd crank sensor	w_gnd_a_c41
4	Gnd cam sensor	w_gnd_a_c42
5	Gnd turbo speed	w_gnd_a_c43
6	Gnd flex + MAP	w_gnd_a_c44

BUS-GNDOUT-B - DT06-12 plug (ECU splice point)
DT06-12SA

7	Gnd oil/clnt/temps	w_gnd_b_c19

w_rail_sp_gndout_c_20_BLU
w_gnd_a_c41_20_BLU
w_gnd_a_c42_20_BLU
w_gnd_a_c43_20_BLU
w_gnd_a_c44_20_BLU
w_gnd_b_c19_20_BLU

w_gnd_a_c44_20_BLU
w_gnd_b_c19_20_BLU
w_rail_sp_gndout_c_20_BLU
w_gnd_a_c43_20_BLU
w_gnd_a_c42_20_BLU
w_gnd_a_c41_20_BLU

DRB102-CABIN - DRB102 receptacle (RH firewall)
DRB12-102PAE-L018

18	Gnd flex + MAP	w_gnd_a_c44
29	Gnd oil/clnt/temps	w_gnd_b_c19
34	Gnd IAT/TPS/coolant	w_rail_sp_gndout_c
56	Gnd turbo speed	w_gnd_a_c43
65	Gnd cam sensor	w_gnd_a_c42
75	Gnd crank sensor	w_gnd_a_c41

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 2 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	2 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-B (Link G4X plug B, centre dash) 4-1437290-0		
29	Gearbox speed signal	w_vss_sig_c

BUS-GNDOUT-B - DT06-12 plug (ECU splice point) DT06-12SA		
6	Knock sensor (-)	w12_c
8	Gnd fuel press + VSS	w_gnd_b_c21

SP-REV - reverse switch out to CSB3 opto IN2 and IG2-13 la... solder splice (node)		
-	Reverse sw +12 V out	w_rev_sw_c

POWER-NEG-BAR - POWER box NEG bar M8 stud (glove box) end		
-	Coil ground	w_cop_gnd_ac
-	CAN-Lambda ground	w_lamg_ac

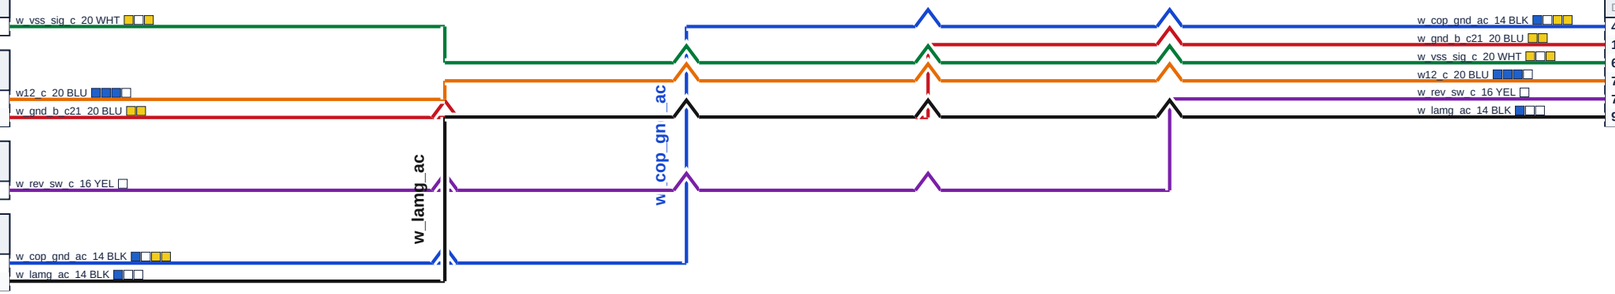

DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
4	Coil ground to the POWER box NEG bar	w_cop_gnd_ac
15	Gnd fuel press + VSS	w_gnd_b_c21
68	Gearbox speed signal	w_vss_sig_c
72	Knock sensor (-)	w12_c
78	Reverse sw +12 V out	w_rev_sw_c
96	CAN-Lambda ground	w_lamg_ac

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 3 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	3 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-A - Link G4X plug A (centre dash)		
4-1437290-1		
1	Injector 4 drive (-)	w111_c
2	Injector 3 drive (-)	w110_c
3	Injector 2 drive (-)	w109_c
4	Injector 1 drive (-)	w108_c
8	Crank sensor signal	w200_c
10	Coil 4 trigger (IGT)	w123_c



DRB102-CABIN - DRB102 receptacle (RH firewall)		
DRB12-102PAE-L018		
12	Coil 4 trigger (IGT)	w123_c
21	Injector 1 drive (-)	w108_c
22	Injector 2 drive (-)	w109_c
23	Injector 3 drive (-)	w110_c
24	Injector 4 drive (-)	w111_c
74	Crank sensor signal	w200_c

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 4 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	4 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-A - Link G4X plug A (centre dash) 4-1437290-1		
11	Coil 3 trigger (IGT)	w122_c
12	Coil 2 trigger (IGT)	w121_c
13	Coil 1 trigger (IGT)	w120_c
15	Coolant temp signal	w201_c
16	Intake temp signal	w202_c
17	MAP sensor signal	w26_c



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
9	Coil 1 trigger (IGT)	w120_c
10	Coil 2 trigger (IGT)	w121_c
11	Coil 3 trigger (IGT)	w122_c
17	MAP sensor signal	w26_c
33	Intake temp signal	w202_c
70	Coolant temp signal	w201_c

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	5 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-A - Link G4X plug A (centre dash) 4-1437290-1		
21	Boost solenoid (-)	w103_c
22	Throttle pos 1 main	w128_c
27	EHPS pump speed	w_mrs_c
30	Turbo speed signal	w16_c
31	Flex fuel signal	w48_c
33	Throttle pos 2 sub	w129_c



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
31	Flex fuel signal	w48_c
42	Throttle pos 1 main	w128_c
44	Throttle pos 2 sub	w129_c
53	Turbo speed signal	w16_c
58	Boost solenoid (-)	w103_c
84	EHPS pump speed	w_mrs_c

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 6 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	6 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-B (Link G4X plug B, centre dash) 4-1437290-0		
6	Oil temp signal	w203_c
7	Charge temp signal	w204_c
9	Knock sensor signal	w205_c
15	Oil pressure signal	w29_c
16	Fuel pressure signal	w32_c
18	ETB motor +	w124_c



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
14	Fuel pressure signal	w32_c
28	Oil pressure signal	w29_c
45	ETB motor +	w124_c
59	Charge temp signal	w204_c
61	Oil temp signal	w203_c
71	Knock sensor signal	w205_c

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 7 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	7 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-B (Link G4X plug B, centre dash) 4-1437290-0		
23	Coolant press signal	w35_c
26	ETB motor -	w215_c

SP-8V - ECU splice point - SP-8V: +8 V cam sensor supply (E... solder splice (node)		
-	+8 V to cam sensor	w_rail_sp_8v_c

K-EPS - B4 EPS pump relay (HCR150, glove box, beside the ... V23132-A2001-B200		
85	EHPS relay coil (-)	w_eps_rly

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i... ST185-FB-LOGIC rev 5		
BUS2-12	EFI relay k_efi -> LOGIC MRS 7.5 A fuse	w_fb_mrs_en

OEM IG2 pin 4 (under the ECU, cowl side) - factory back-up S... factory lead tap		
4	Back-up sw +12 V in	w_rev_feed_c

w35_c_20 WHT
w215_c_18 WHT
w_rail_sp_8v_c_20 ORN
w_eps_rly_18 WHT
w_fb_mrs_en_20 RED
w_rev_feed_c_16 RED
w_rev_feed_c
w_fb_mrs_en
w35_c_20 WHT
w215_c_18 WHT
w_rail_sp_8v_c_20 ORN
w_rev_feed_c_16 RED
w_fb_mrs_en_20 RED
w_eps_rly_18 WHT

DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
26	Coolant press signal	w35_c
46	ETB motor -	w215_c
63	+8 V to cam sensor	w_rail_sp_8v_c
77	Back-up sw +12 V in	w_rev_feed_c
83	EFI relay k_efi -> LOGIC MRS 7.5 A fuse	w_fb_mrs_en
85	EHPS relay coil (-)	w_eps_rly

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 8 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	8 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 4 of 9)

SP-CAM - At the ECU plugs - SP-CAM: cam signal + 1.8k pull...		
solder splice (node)		
-	Cam sensor signal	w_cam_sig_c

SP-CANH - CAN H join - ECU, CSB3, cluster, Pi, bulkhead		
solder splice (node)		
-	CAN H to CAN-Lambda	wc_h_bh_bc

SP-CANL - CAN L join - ECU, CSB3, cluster, Pi, bulkhead		
solder splice (node)		
-	CAN L to CAN-Lambda	wc_l_bh_bc

SP-SW12 - ECU splice point - SP-SW12: switched +12 V (LO...		
solder splice (node)		
-	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sp_sw12_c
-	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sw12_b_c_ac

w_cam_sig_c 20 WHT
wc_h_bh_bc 20 WHT
wc_l_bh_bc 20 GRN
w_rail_sp_sw12_c 18 RED
w_rail_sw12_b_c_ac 20 RED

w_rail_sw12_b_c_ac

w_rail_sp_sw12_c

w_rail_sp_sw12_c 18 RED
w_cam_sig_c 20 WHT
w_rail_sw12_b_c_ac 20 RED
wc_h_bh_bc 20 WHT
wc_l_bh_bc 20 GRN

DRB102-CABIN - DRB102 receptacle (RH firewall)		
DRB12-102PAE-L018		
30	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sp_sw12_c
64	Cam sensor signal	w_cam_sig_c
67	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sw12_b_c_ac
79	CAN H to CAN-Lambda	wc_h_bh_bc
80	CAN L to CAN-Lambda	wc_l_bh_bc

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 9 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	9 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

BUS-5V - DT06-12 plug (ECU splice point)
DT06-12SA


8	+5 V pedal sensor 1	w_aps_vc1
9	+5 V pedal sensor 2	w210
12	+5 V to BUS-5V-2	w_5v_bus_link

BUS-GNDOUT-A - DT06-12 plug (ECU splice point)
DT06-12SA

7	Pedal 1 ground	w40
8	Pedal 2 ground	w_aps_gnd2

POWER-NEG-BAR - POWER box NEG bar M8 stud (glove box)
end

-	A/C coolant-OK ground	w_ac_cool_gnd

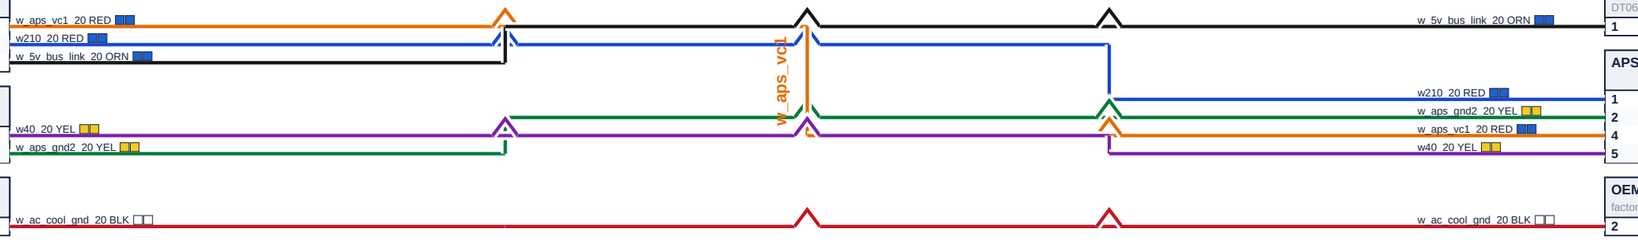

BUS-5V-2 - DT06-8 plug (ECU splice point)
DT06-08SA

1	+5 V from BUS-5V	w_5v_bus_link

APS-PEDAL - accelerator pedal sensor

1	+5 V pedal sensor 2	w210
2	Pedal 2 ground	w_aps_gnd2
4	+5 V pedal sensor 1	w_aps_vc1
5	Pedal 1 ground	w40

OEM A/C amplifier A18 (1993 book: A15)
factory lead tap

2	A/C coolant-OK ground	w_ac_cool_gnd

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 1 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	10 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

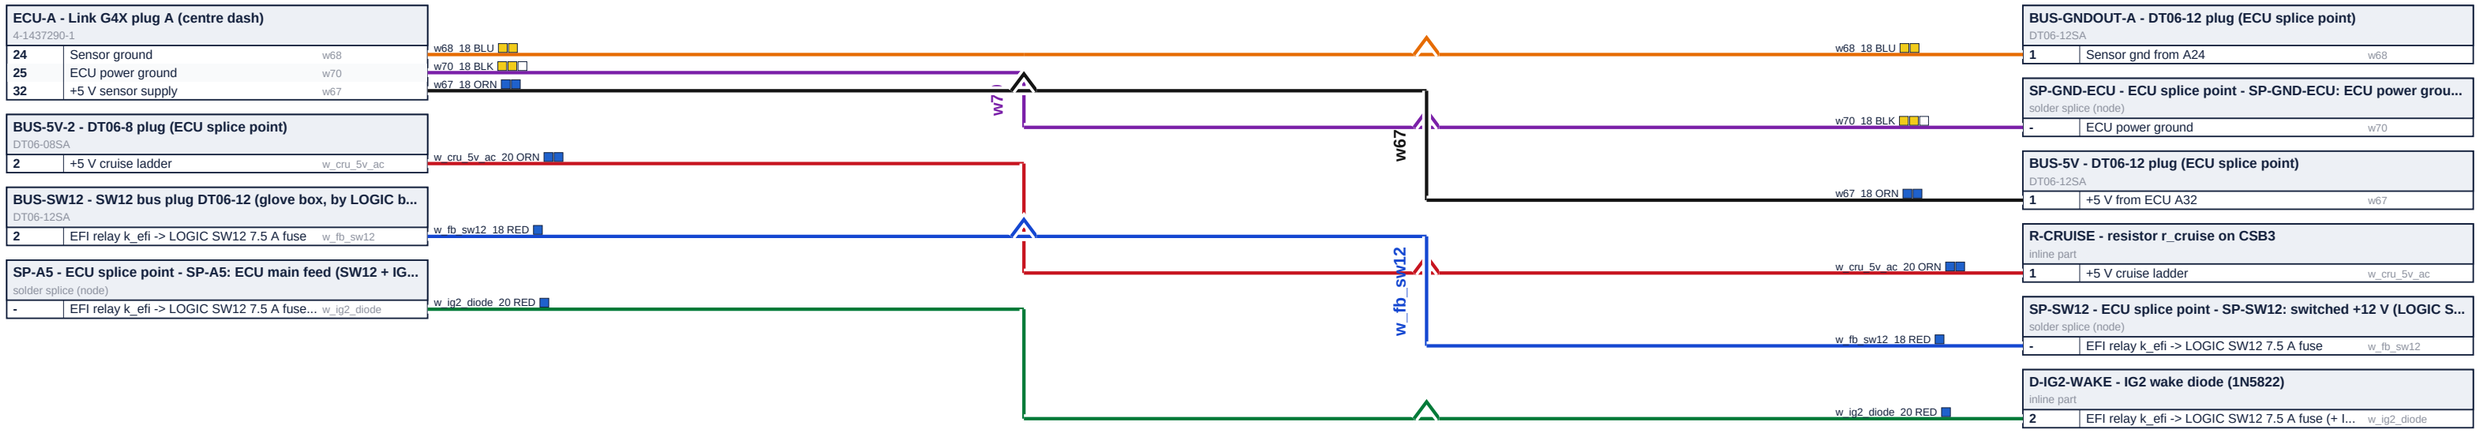

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 2 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	11 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

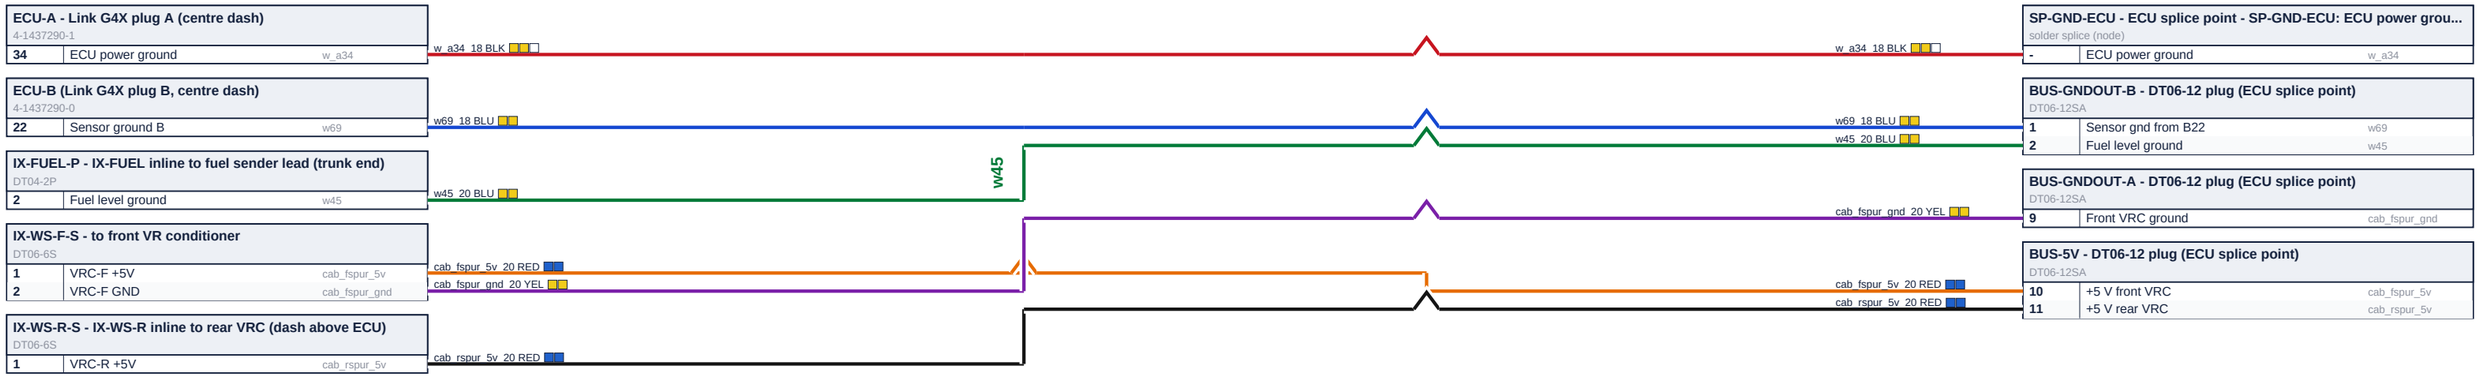

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 3 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	12 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

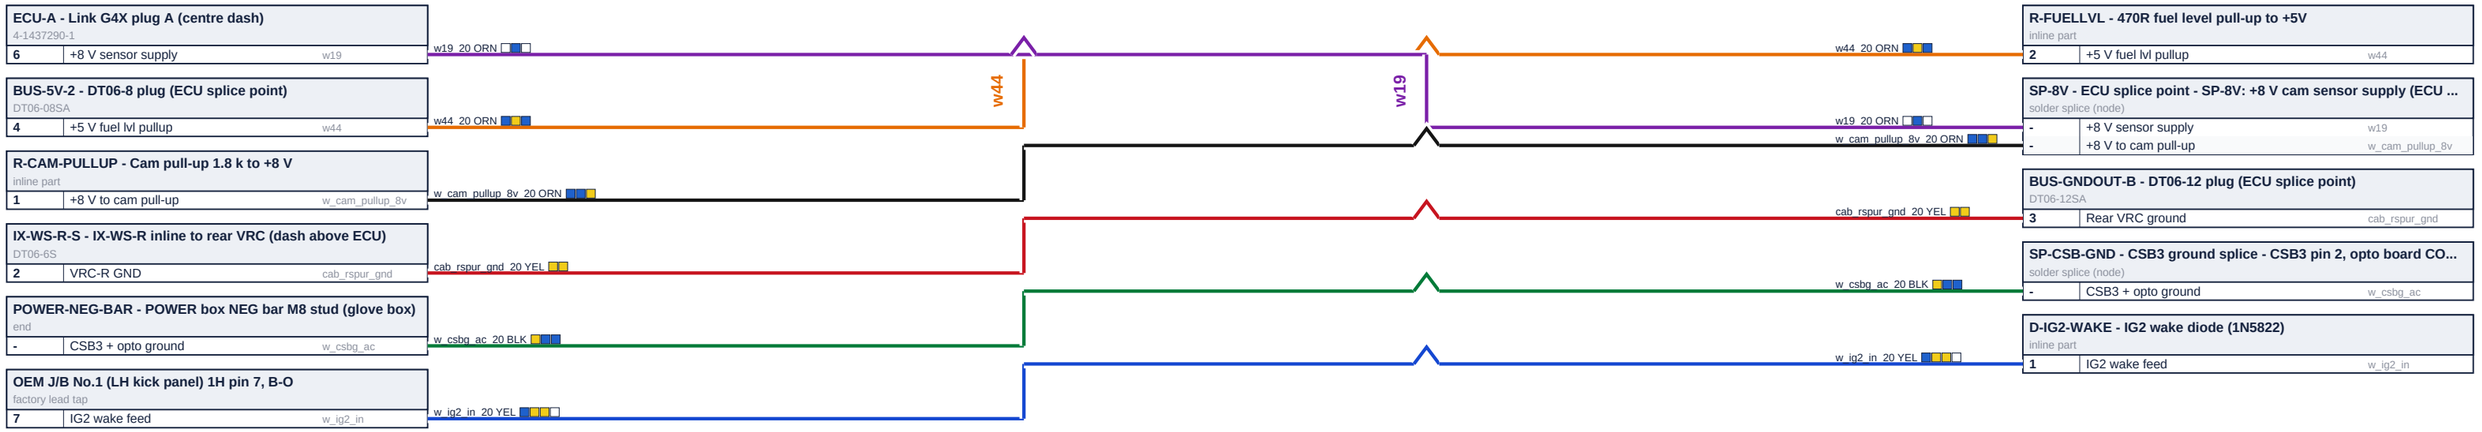

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 4 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	13 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 4 of 5)

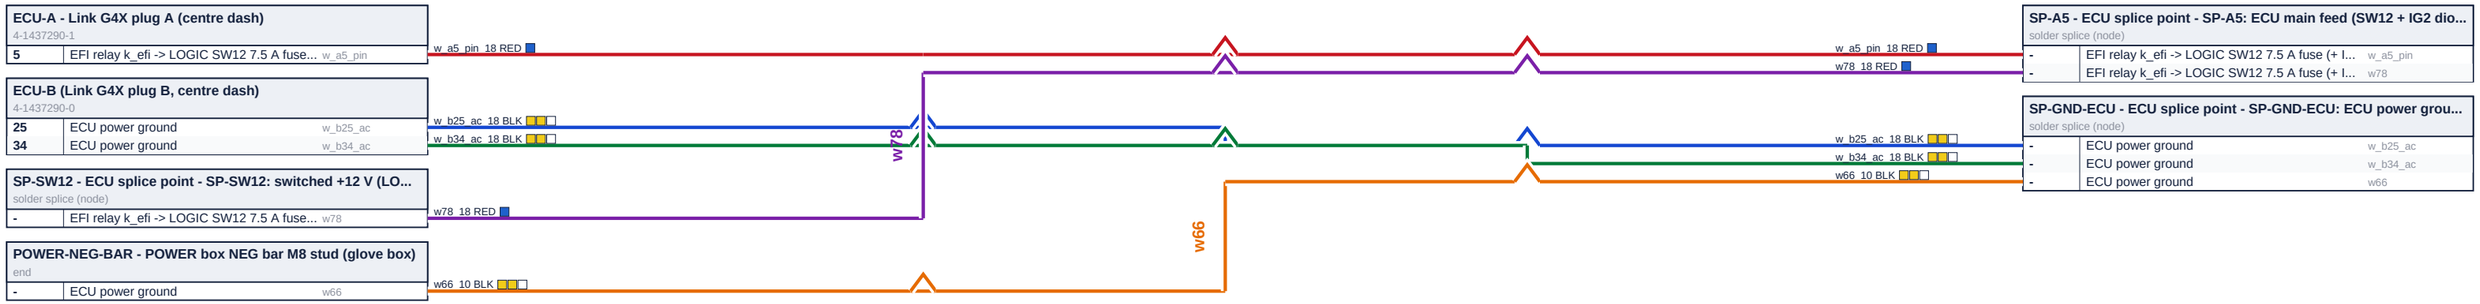

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	14 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

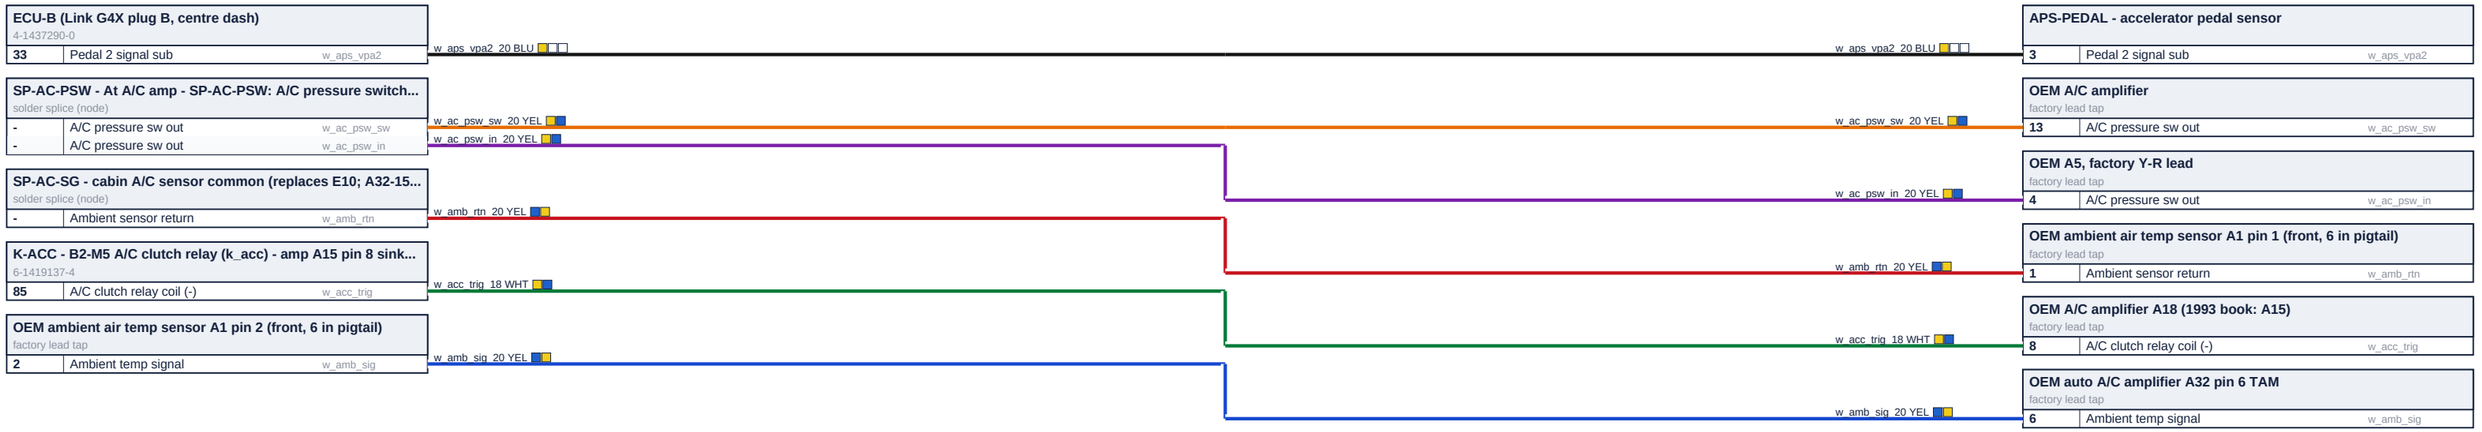

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 1 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	15 OF 82	432 x 279 mm	DG	2026-10-29


ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

ECU-A - Link G4X plug A (centre dash)		
4-1437290-1		
9	Cam sensor signal	w_trig2_pin
14	Pedal 1 signal main	w38
18	A/C cancel (ACT)	w_ac_kill

ECU-B (Link G4X plug B, centre dash)		
4-1437290-0		
10	Engine speed (tacho)	w_tach
12	EPS enable relay (-)	w_eps_trig

SP-FUEL-LVL - fuel sender signal + 470R pull-up to ECU-B B24		
solder splice (node)		
-	Fuel level signal	w_fl_sig

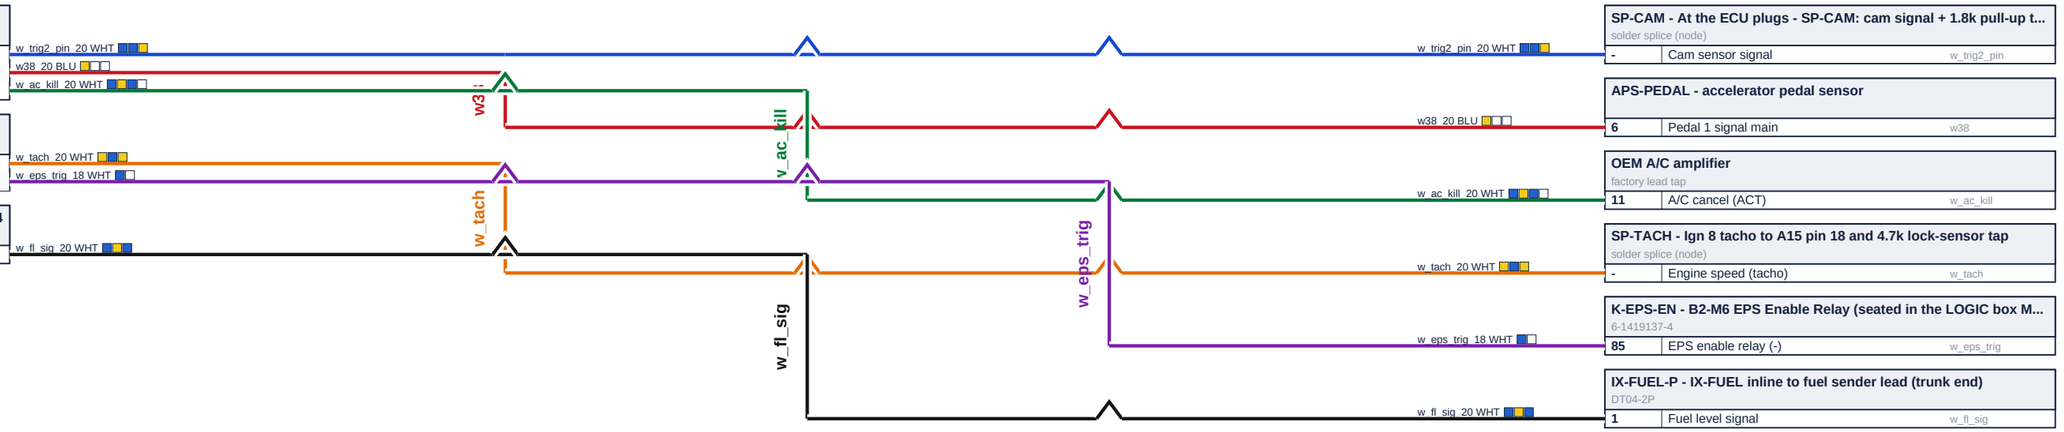

SP-CAM - At the ECU plugs - SP-CAM: cam signal + 1.8k pull-up t...		
solder splice (node)		
-	Cam sensor signal	w_trig2_pin

APS-PEDAL - accelerator pedal sensor		
6	Pedal 1 signal main	w38

OEM A/C amplifier		
factory lead tap		
11	A/C cancel (ACT)	w_ac_kill

SP-TACH - Ign 8 tacho to A15 pin 18 and 4.7k lock-sensor tap		
solder splice (node)		
-	Engine speed (tacho)	w_tach

K-EPS-EN - B2-M6 EPS Enable Relay (seated in the LOGIC box M...		
6-1419137-4		
85	EPS enable relay (-)	w_eps_trig

IX-FUEL-P - IX-FUEL inline to fuel sender lead (trunk end)		
DT04-2P		
1	Fuel level signal	w_fl_sig

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 2 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	16 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

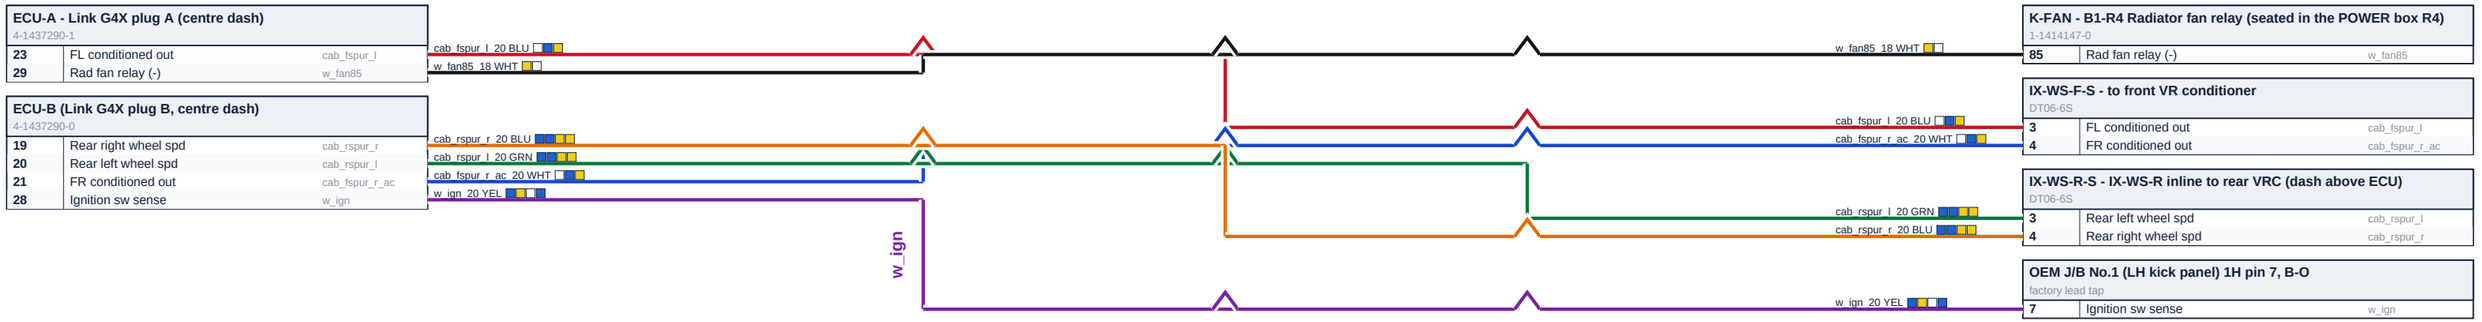

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 3 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	17 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

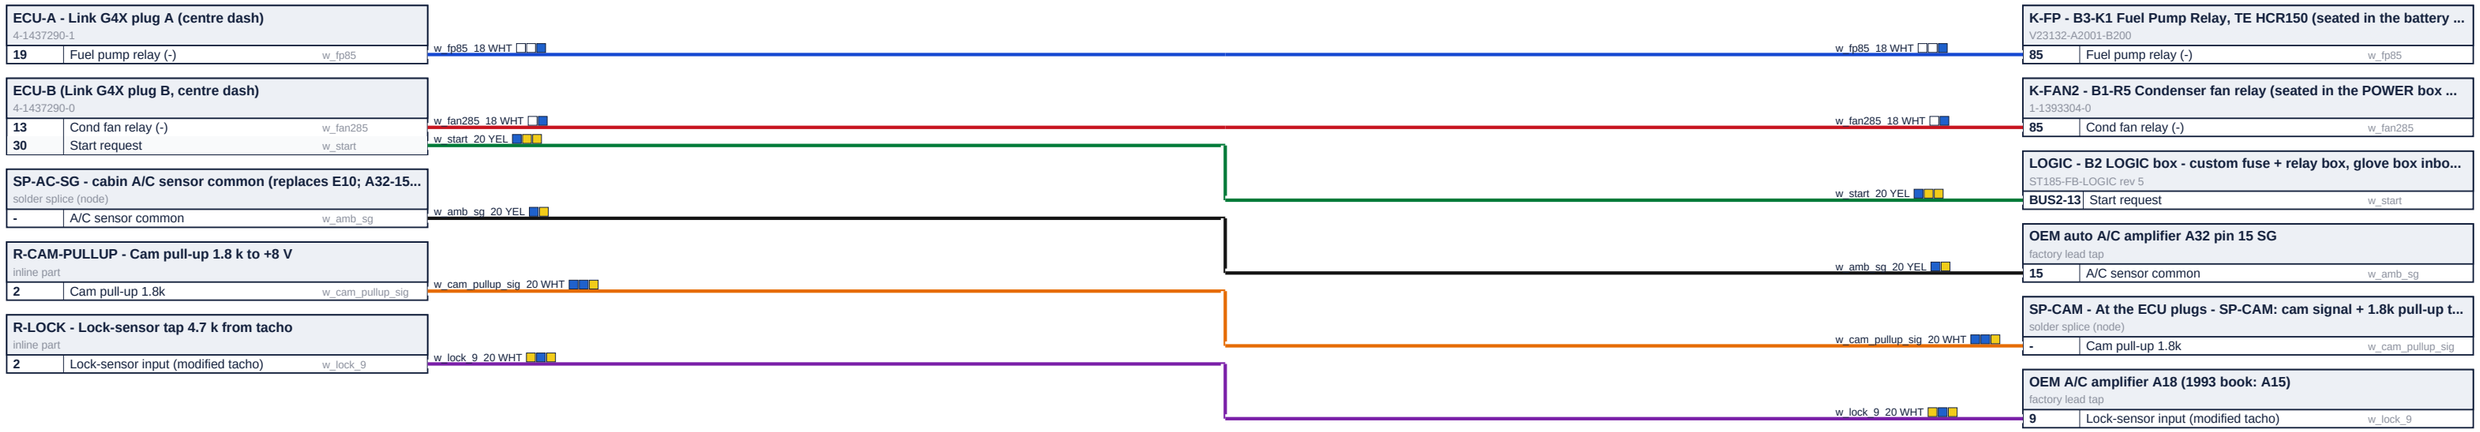

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 4 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	18 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

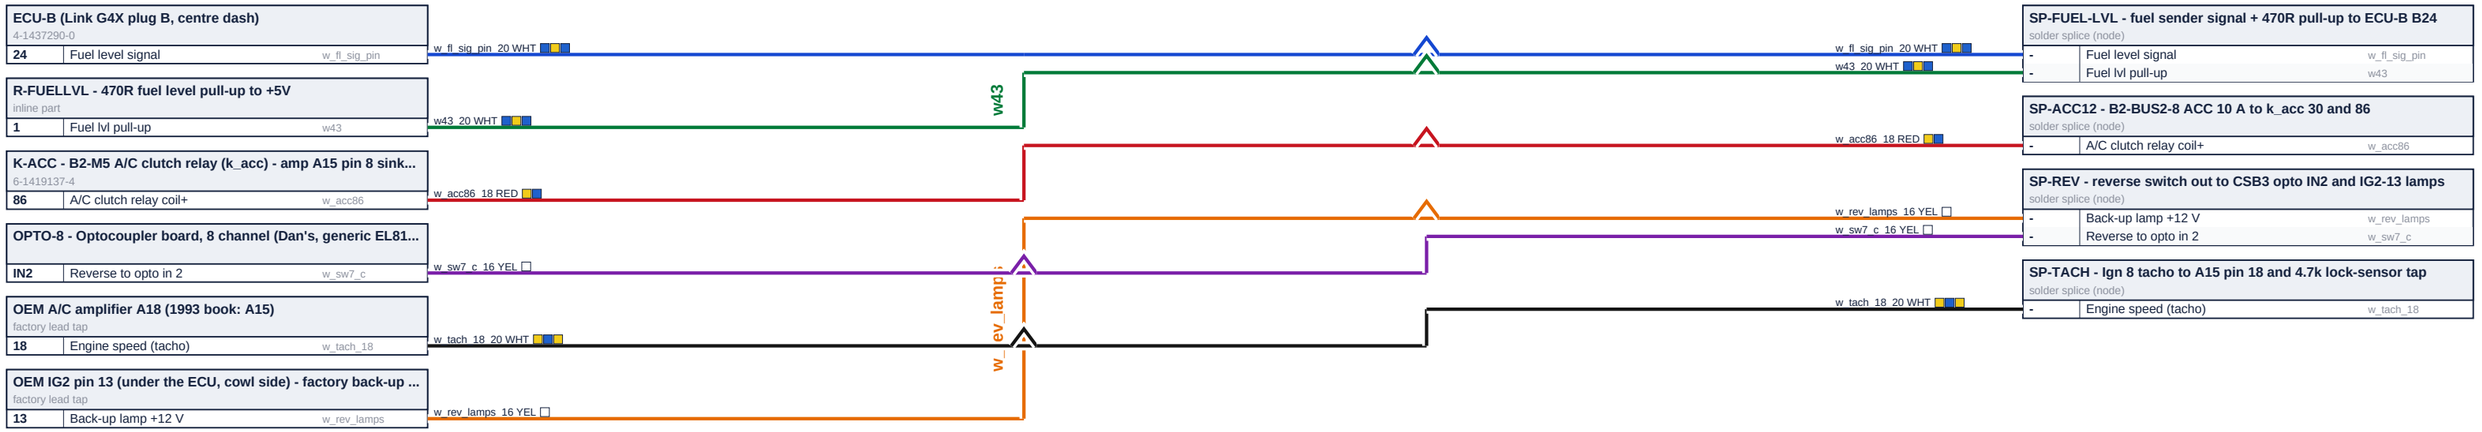

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	19 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 0 of 6)

R-LOCK - Lock-sensor tap 4.7 k from tacho inline part		
1	Tacho to lock-sensor 4.7k	w_tach_r

w_tach_r 20 WHT

w_tach_r 20 WHT

SP-TACH - Ign 8 tacho to A15 pin 18 and 4.7k lock-sensor tap solder splice (node)		
-	Tacho to lock-sensor 4.7k	w_tach_r

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 6 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	20 OF 82	432 x 279 mm	DG	2026-10-29

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 5 of 4)

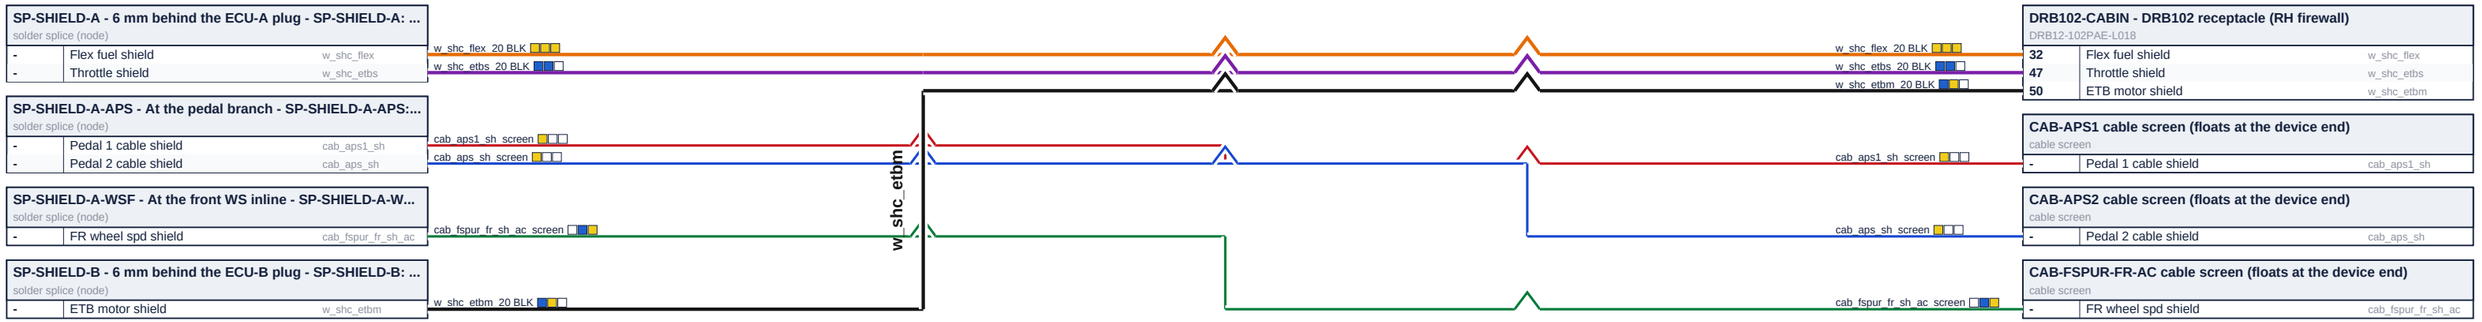

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 1 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	21 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 5 of 4)

SP-SHIELD-A - 6 mm behind the ECU-A plug - SP-SHIELD-A: ...
solder splice (node)

-	Turbo speed shield	w_shc_turbo
-	Cam sensor shield	w_shc_cam
-	Crank sensor shield	w_shc_crank

SP-SHIELD-A-WSF - At the front WS inline - SP-SHIELD-A-W...
solder splice (node)

-	WS-F screen drain	cab_fspur_sh

SP-SHIELD-B - 6 mm behind the ECU-B plug - SP-SHIELD-B: ...
solder splice (node)

-	Gearbox speed shield	w_shc_vss
-	Knock sensor shield	w_shc_knock1

w_shc_turbo_20 BLK
w_shc_cam_20 BLK
w_shc_crank_20 BLK
cab_fspur_sh_screen
w_shc_vss_20 BLK
w_shc_knock1_20 BLK
w_shc_vss
w_shc_knock
w_shc_turbo_20 BLK
w_shc_cam_20 BLK
w_shc_vss_20 BLK
w_shc_knock1_20 BLK
w_shc_crank_20 BLK
cab_fspur_sh_screen

DRB102-CABIN - DRB102 receptacle (RH firewall)
DRB12-102PAE-L018

57	Turbo speed shield	w_shc_turbo
66	Cam sensor shield	w_shc_cam
69	Gearbox speed shield	w_shc_vss
73	Knock sensor shield	w_shc_knock1
76	Crank sensor shield	w_shc_crank

IX-WS-F-S - to front VR conditioner
DT06-6S

5	WS-F screen drain	cab_fspur_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 2 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	22 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 5 of 4)

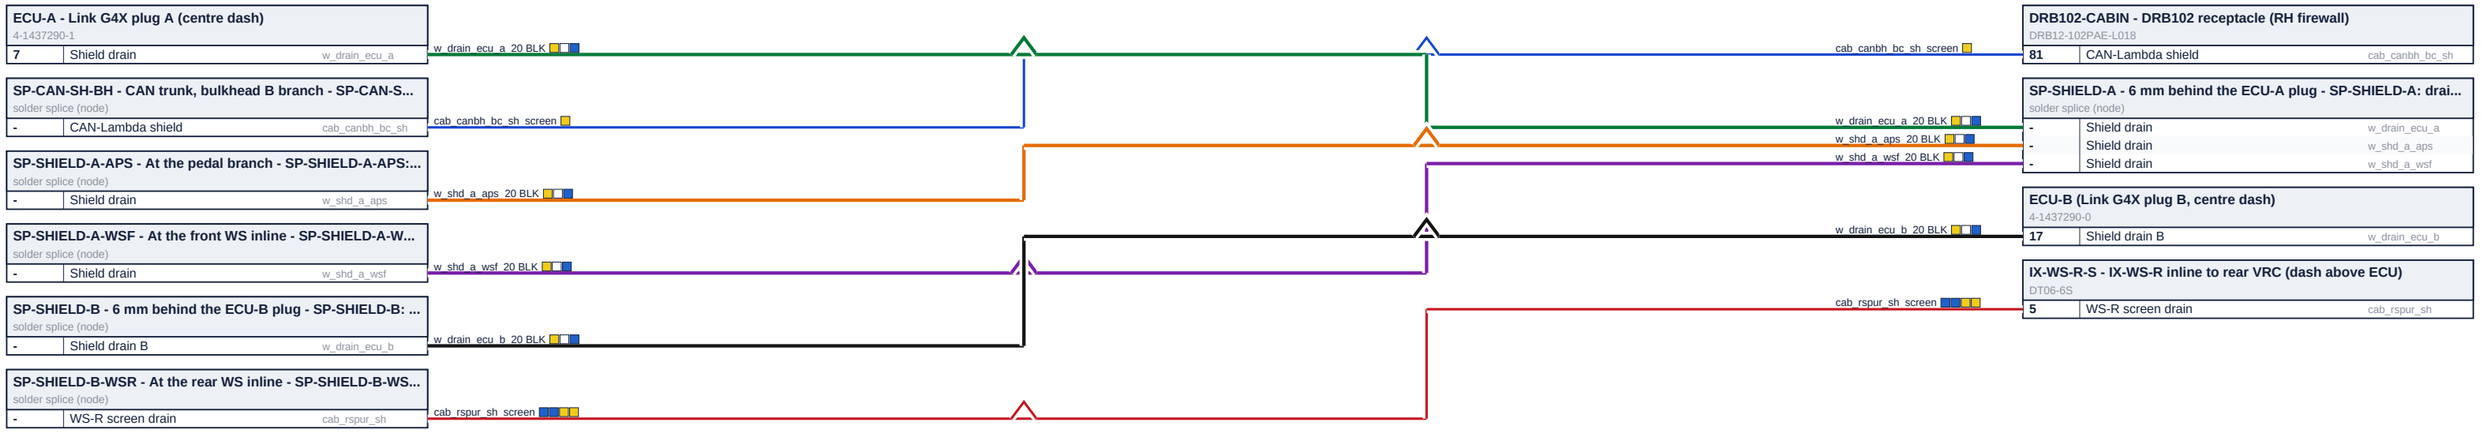

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 3 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	23 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 0 of 4)



WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 4 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	24 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

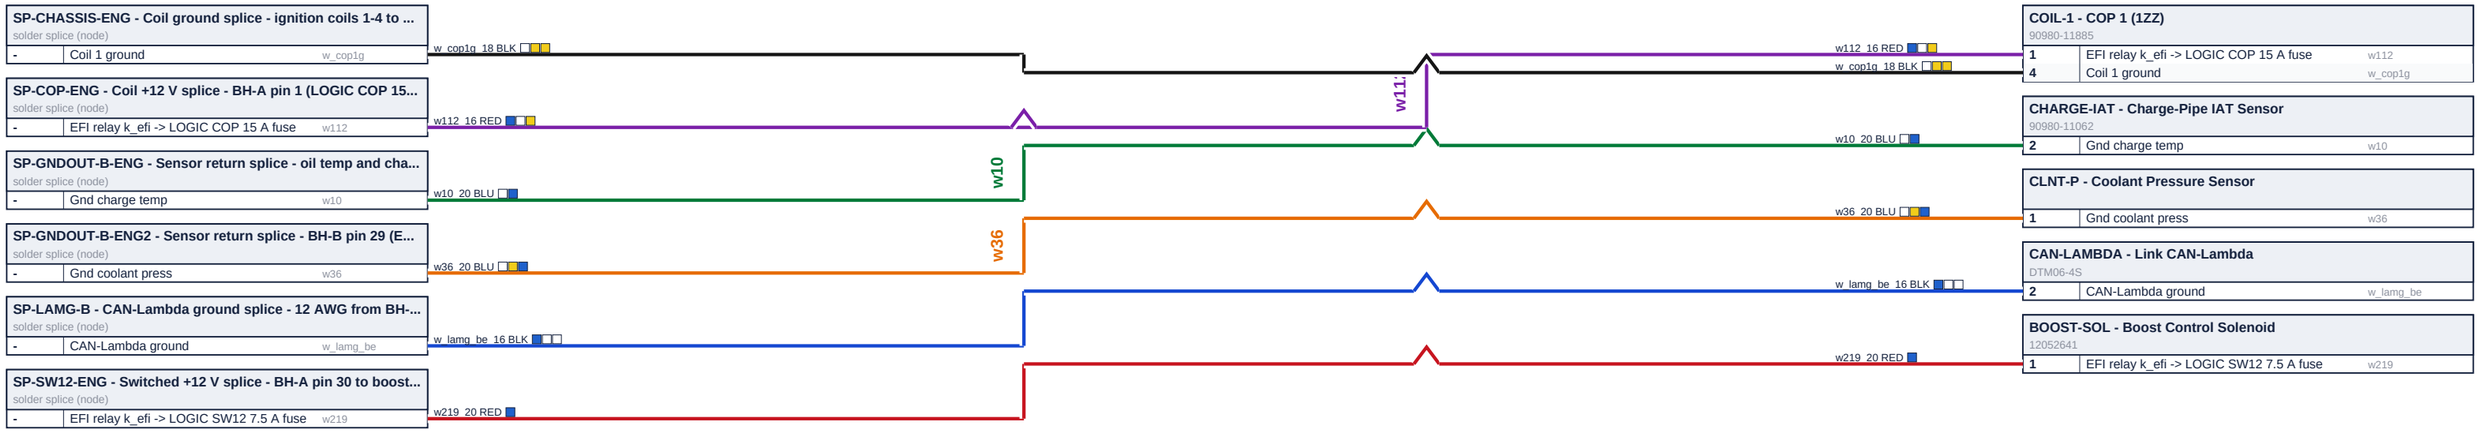

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 1 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	25 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

SP-CHASSIS-ENG - Coil ground splice - ignition coils 1-4 to ...
solder splice (node)

-	Coil 2 ground	w_cop2g
-	Coil 3 ground	w_cop3g
-	Coil 4 ground	w_cop4g

SP-COP-ENG - Coil +12 V splice - BH-A pin 1 (LOGIC COP 15...
solder splice (node)

-	EFI relay k_efi -> LOGIC COP 15 A fuse	w113
-	EFI relay k_efi -> LOGIC COP 15 A fuse	w114
-	EFI relay k_efi -> LOGIC COP 15 A fuse	w115

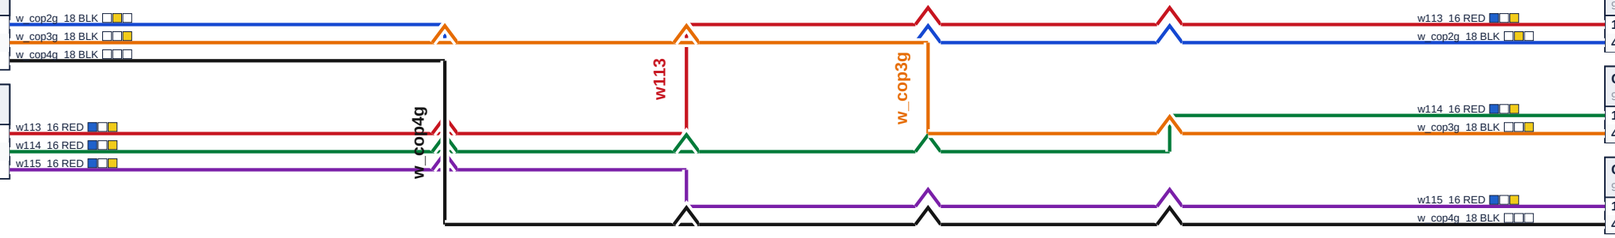

COIL-2 - COP 2 (1ZZ)
90980-11885

1	EFI relay k_efi -> LOGIC COP 15 A fuse	w113
4	Coil 2 ground	w_cop2g

COIL-3 - COP 3 (1ZZ)
90980-11885

1	EFI relay k_efi -> LOGIC COP 15 A fuse	w114
4	Coil 3 ground	w_cop3g

COIL-4 - COP 4 (1ZZ)
90980-11885

1	EFI relay k_efi -> LOGIC COP 15 A fuse	w115
4	Coil 4 ground	w_cop4g

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 2 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	26 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

SP-CHASSIS-ENG - Coil ground splice - ignition coils 1-4 to ...
solder splice (node)

-	Coil ground	w_cop_gnd_e_ae

SP-COP-ENG - Coil +12 V splice - BH-A pin 1 (LOGIC COP 15...
solder splice (node)

-	EFI relay k_efi -> LOGIC COP 15 A fuse	w_cop_pwr_e_ae

SP-INJ-ENG - Injector +12 V splice - BH-A pin 2 (LOGIC INJ 1...
solder splice (node)

-	EFI relay k_efi -> LOGIC INJ 15 A fuse	w_inj_pwr_e_ae

COIL-1 - COP 1 (1ZZ)
90980-11885

3	Coil 1 trigger (IGT)	w120_e

COIL-2 - COP 2 (1ZZ)
90980-11885

3	Coil 2 trigger (IGT)	w121_e

STARTER-TRIGGER - Starter solenoid S (50) terminal post, s...
end

-	Starter solenoid S	w_strl_e

w_cop_gnd_e_ae 12 BLK
w_cop_pwr_e_ae 12 RED
w_inj_pwr_e_ae 12 RED
w120_e 20 WHT
w121_e 20 WHT
w_strl_e 12 RED

w120_e
w121_e
w_strl_e

w_cop_pwr_e_ae 12 RED
w_inj_pwr_e_ae 12 RED
w_strl_e 12 RED
w_cop_gnd_e_ae 12 BLK
w120_e 20 WHT
w121_e 20 WHT

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

1	EFI relay k_efi -> LOGIC COP 15 A fuse	w_cop_pwr_e_ae
2	EFI relay k_efi -> LOGIC INJ 15 A fuse	w_inj_pwr_e_ae
3	Starter solenoid S	w_strl_e
4	Coil ground to the POWER box NEG bar	w_cop_gnd_e_ae
9	Coil 1 trigger (IGT)	w120_e
10	Coil 2 trigger (IGT)	w121_e

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 3 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	27 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
11	Coil 3 trigger (IGT)	w122_e
12	Coil 4 trigger (IGT)	w123_e
13	+5 V fuel pressure	w_5v_brail_e_c46
14	Fuel pressure signal	w32_e
15	Gnd fuel press + VSS	w_gnd_b_e_c21
16	+5 V MAP sensor	w206

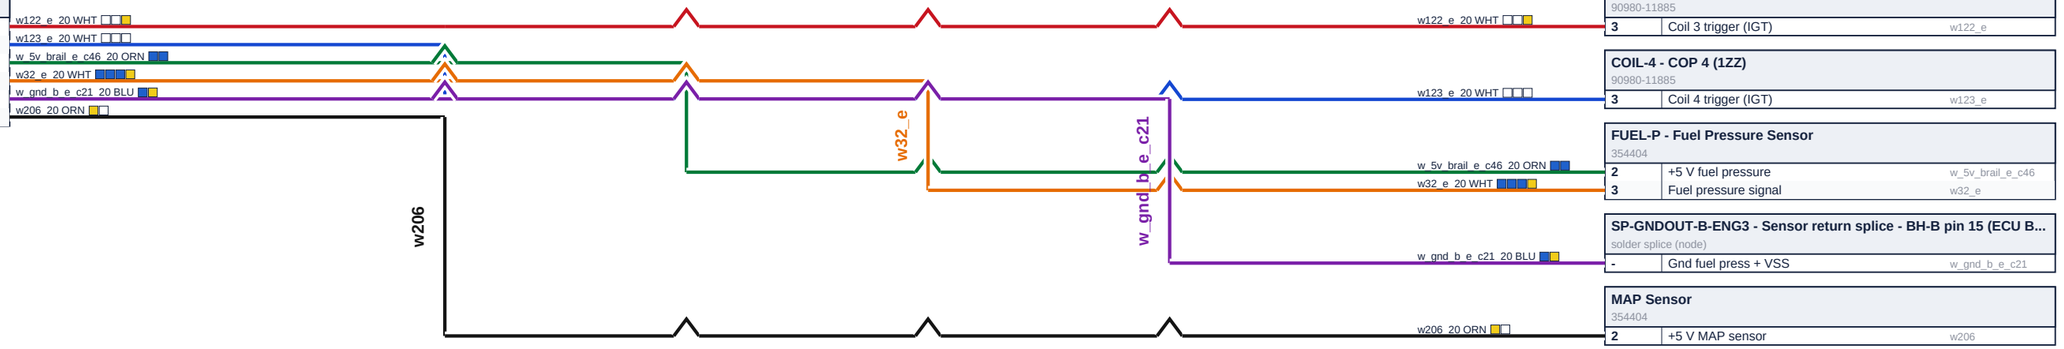

COIL-3 - COP 3 (1ZZ)		
90980-11885		
3	Coil 3 trigger (IGT)	w122_e

COIL-4 - COP 4 (1ZZ)		
90980-11885		
3	Coil 4 trigger (IGT)	w123_e

FUEL-P - Fuel Pressure Sensor		
354404		
2	+5 V fuel pressure	w_5v_brail_e_c46
3	Fuel pressure signal	w32_e

SP-GNDOUT-B-ENG3 - Sensor return splice - BH-B pin 15 (ECU B...		
solder splice (node)		
-	Gnd fuel press + VSS	w_gnd_b_e_c21

MAP Sensor		
354404		
2	+5 V MAP sensor	w206

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 4 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	28 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

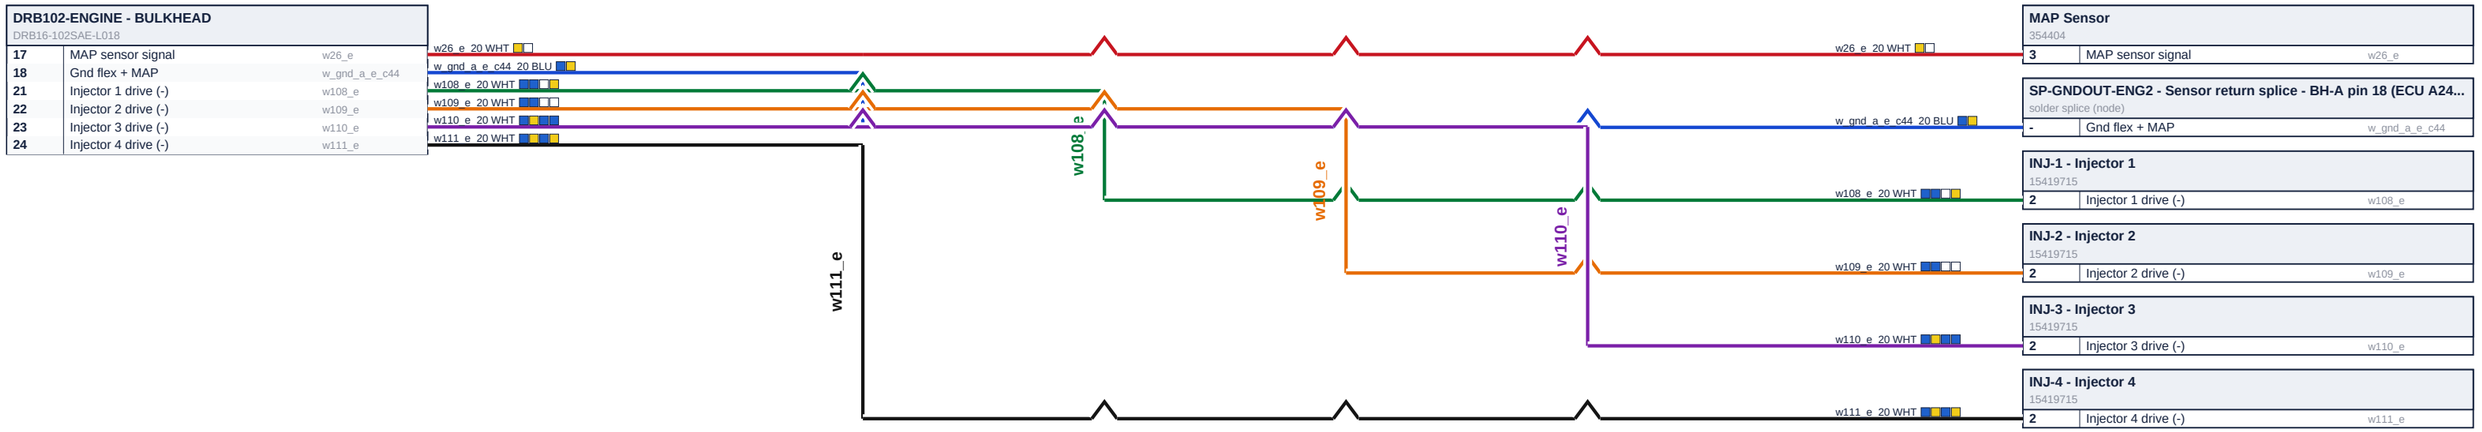

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	29 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
25	+5 V coolant press	w_5v_brail_e_c47
26	Coolant press signal	w35_e
27	+5 V oil pressure	w_5v_brail_e_c45
28	Oil pressure signal	w29_e
29	Gnd oil/clnt/temps	w_gnd_b_e_c19
30	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sp_sw12_e

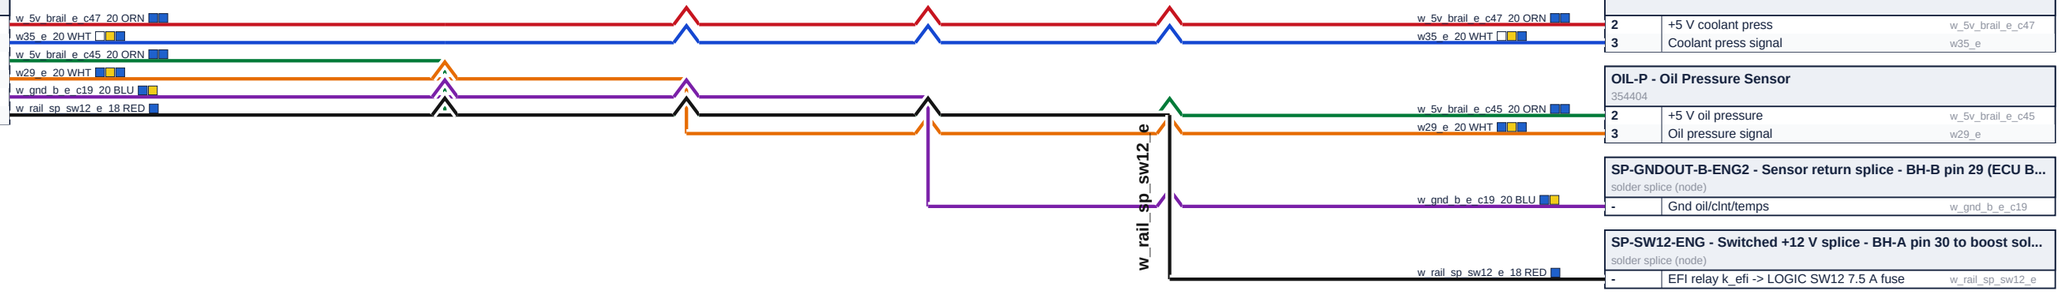

CLNT-P - Coolant Pressure Sensor		
2	+5 V coolant press	w_5v_brail_e_c47
3	Coolant press signal	w35_e

OIL-P - Oil Pressure Sensor		
354404		
2	+5 V oil pressure	w_5v_brail_e_c45
3	Oil pressure signal	w29_e

SP-GNDOUT-B-ENG2 - Sensor return splice - BH-B pin 29 (ECU B...		
solder splice (node)		
-	Gnd oil/clnt/temps	w_gnd_b_e_c19

SP-SW12-ENG - Switched +12 V splice - BH-A pin 30 to boost sol...		
solder splice (node)		
-	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_rail_sp_sw12_e

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 6 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	30 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
31	Flex fuel signal	w48_e
32	Flex fuel shield	cab_flex_sh
33	Intake temp signal	w202_e
34	Gnd IAT/TPS/coolant	w_rail_sp_gndout_e
41	+5 V throttle sensor	w126
42	Throttle pos 1 main	w128_e

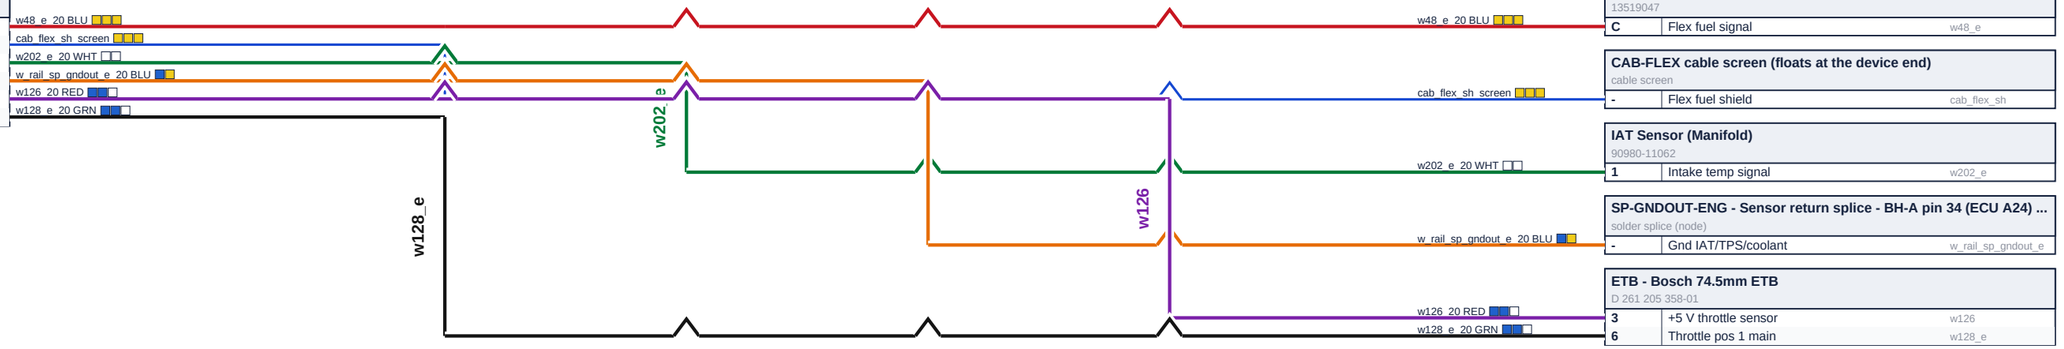

FLEX - Flex Fuel Sensor		
13519047		
C	Flex fuel signal	w48_e

CAB-FLEX cable screen (floats at the device end)		
cable screen		
-	Flex fuel shield	cab_flex_sh

IAT Sensor (Manifold)		
90980-11062		
1	Intake temp signal	w202_e

SP-GNDOUT-ENG - Sensor return splice - BH-A pin 34 (ECU A24) ...		
solder splice (node)		
-	Gnd IAT/TPS/coolant	w_rail_sp_gndout_e

ETB - Bosch 74.5mm ETB		
D 261 205 358-01		
3	+5 V throttle sensor	w126
6	Throttle pos 1 main	w128_e

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 7 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	31 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
44	Throttle pos 2 sub	w129_e
45	ETB motor +	w124_e_ae
46	ETB motor -	w215_e_ae
47	Throttle shield	cab_etbs_sh
50	ETB motor shield	cab_etbm_ae_sh
52	+5 V turbo speed	w218

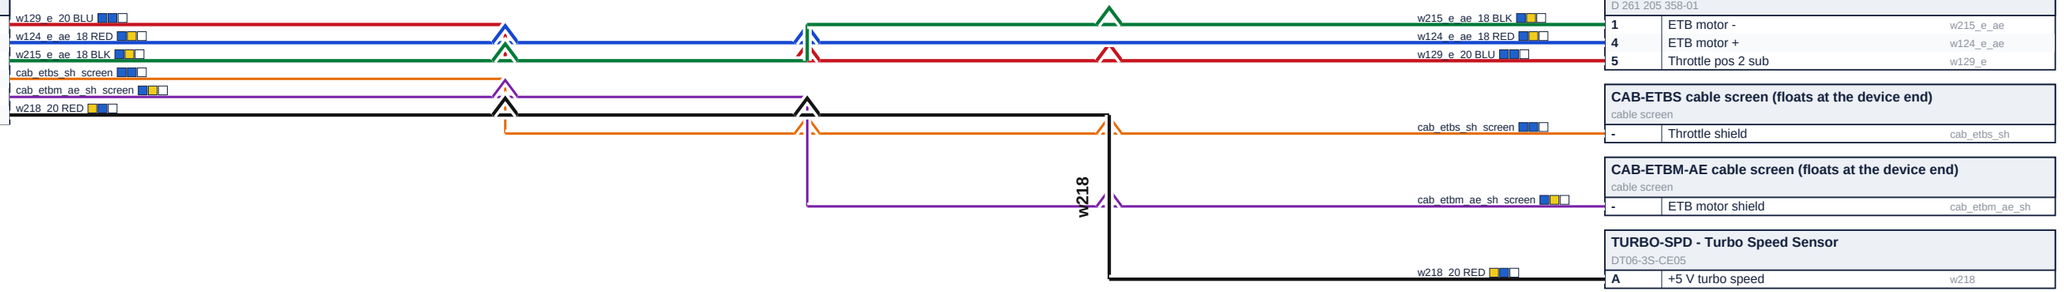

ETB - Bosch 74.5mm ETB		
D 261 205 358-01		
1	ETB motor -	w215_e_ae
4	ETB motor +	w124_e_ae
5	Throttle pos 2 sub	w129_e

CAB-ETBS cable screen (floats at the device end)		
cable screen		
-	Throttle shield	cab_etbs_sh

CAB-ETBM-AE cable screen (floats at the device end)		
cable screen		
-	ETB motor shield	cab_etbm_ae_sh

TURBO-SPD - Turbo Speed Sensor		
DT06-3S-CE05		
A	+5 V turbo speed	w218

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 8 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	32 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
53	Turbo speed signal	w16_e
56	Gnd turbo speed	w17
57	Turbo speed shield	cab_turbo_sh
58	Boost solenoid (-)	w103_e
59	Charge temp signal	w204_e
61	Oil temp signal	w203_e

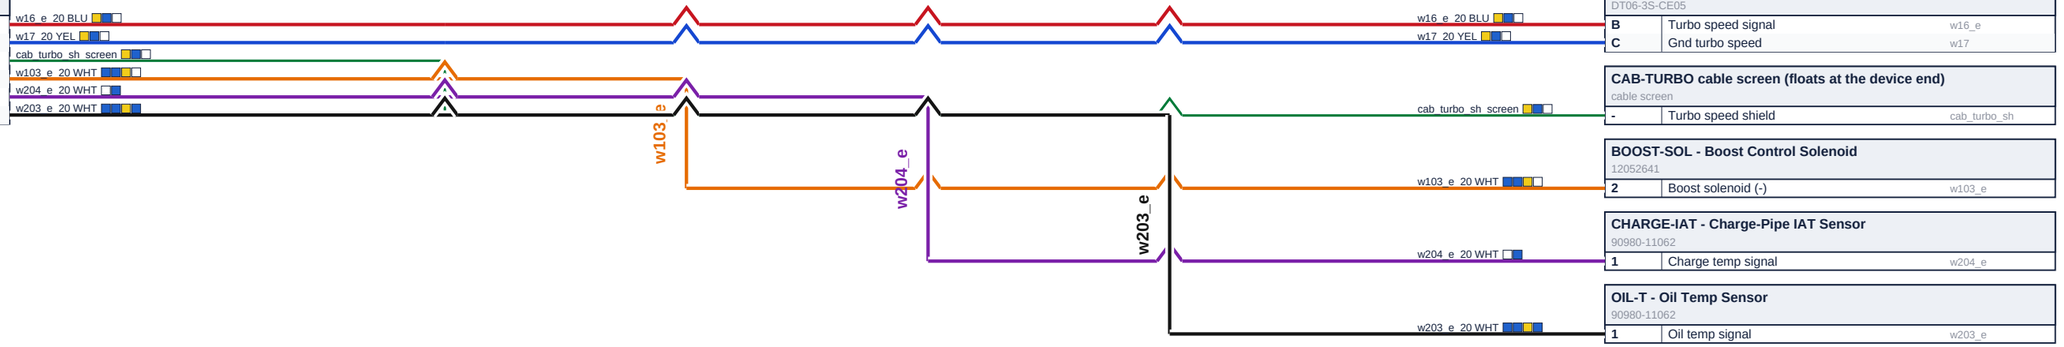

TURBO-SPD - Turbo Speed Sensor		
DT06-3S-CE05		
B	Turbo speed signal	w16_e
C	Gnd turbo speed	w17

CAB-TURBO cable screen (floats at the device end)		
cable screen		
-	Turbo speed shield	cab_turbo_sh

BOOST-SOL - Boost Control Solenoid		
12052641		
2	Boost solenoid (-)	w103_e

CHARGE-IAT - Charge-Pipe IAT Sensor		
90980-11062		
1	Charge temp signal	w204_e

OIL-T - Oil Temp Sensor		
90980-11062		
1	Oil temp signal	w203_e

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 9 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	33 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
63	+8 V to cam sensor	w_rail_sp_8v_e
64	Cam sensor signal	cab_cam_c2
65	Gnd cam sensor	w24
66	Cam sensor shield	cab_cam_sh
67	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_vss_12v
69	Gearbox speed shield	cab_vss_sh

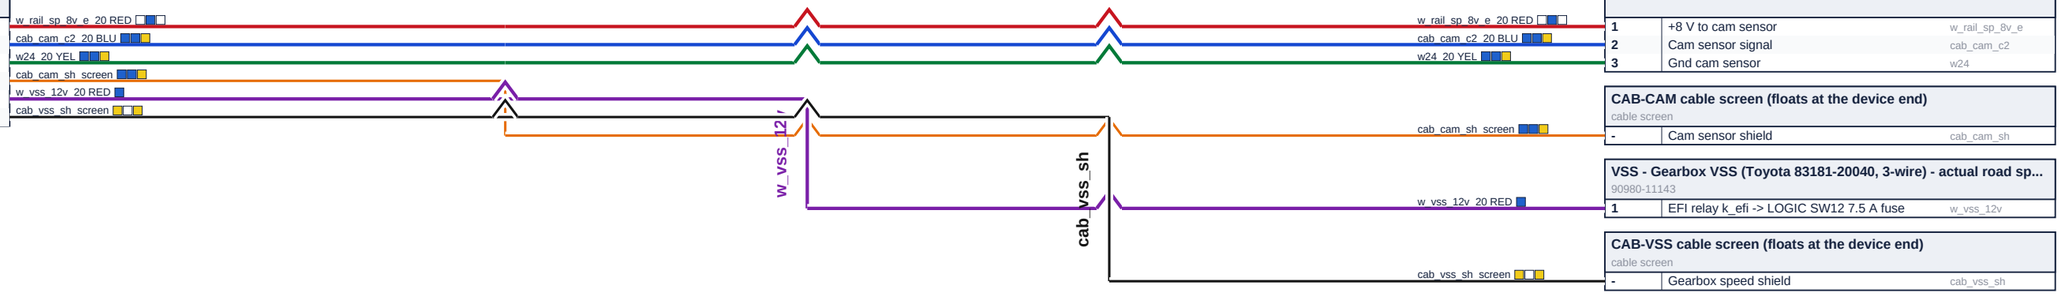

CAM - Cam Hall Sensor (RacerX)		
1	+8 V to cam sensor	w_rail_sp_8v_e
2	Cam sensor signal	cab_cam_c2
3	Gnd cam sensor	w24

CAB-CAM cable screen (floats at the device end)		
cable screen		
-	Cam sensor shield	cab_cam_sh

VSS - Gearbox VSS (Toyota 83181-20040, 3-wire) - actual road sp...		
90980-11143		
1	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_vss_12v

CAB-VSS cable screen (floats at the device end)		
cable screen		
-	Gearbox speed shield	cab_vss_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 10 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	34 OF 82	432 x 279 mm	DG	2026-10-29

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

70	Coolant temp signal	w201_e
71	Knock sensor signal	cab_knock1_c1
72	Knock sensor (-)	cab_knock1_c2
73	Knock sensor shield	cab_knock1_sh
74	Crank sensor signal	cab_crank_c1
75	Gnd crank sensor	w2

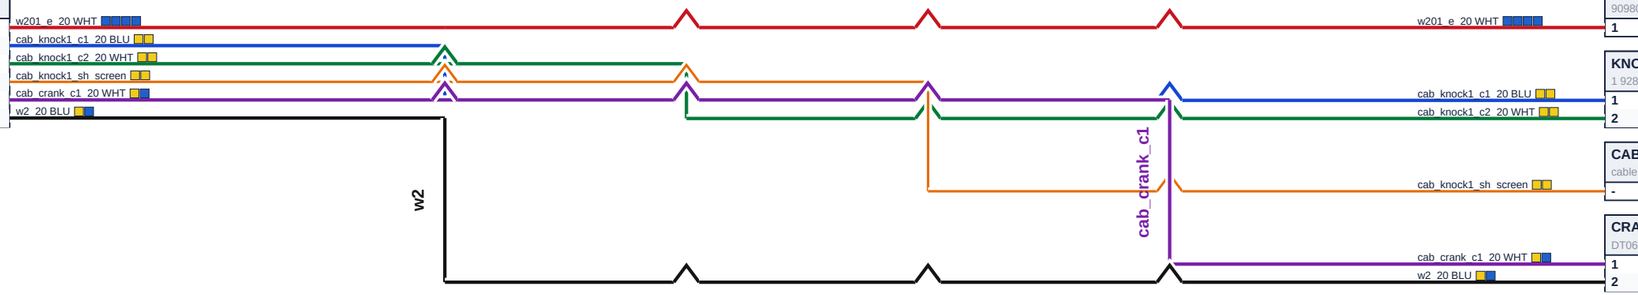

ECT Sensor
90980-11062

1	Coolant temp signal	w201_e

KNOCK-1 - Knock Sensor 1
1 928 403 874

1	Knock sensor signal	cab_knock1_c1
2	Knock sensor (-)	cab_knock1_c2

CAB-KNOCK1 cable screen (floats at the device end)
cable screen

-	Knock sensor shield	cab_knock1_sh

CRANK - Crank VR Sensor (36-2)
DT06-2S-CE05

1	Crank sensor signal	cab_crank_c1
2	Gnd crank sensor	w2

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 11 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	35 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
76	Crank sensor shield	cab_crank_sh
77	Back-up sw +12 V in	w_rev_feed_e
78	Reverse sw +12 V out	w_sw7_e
79	CAN H to CAN-Lambda	wc_h_lam_be
80	CAN L to CAN-Lambda	wc_l_lam_be
81	CAN-Lambda shield	cab_lamcan_be_sh

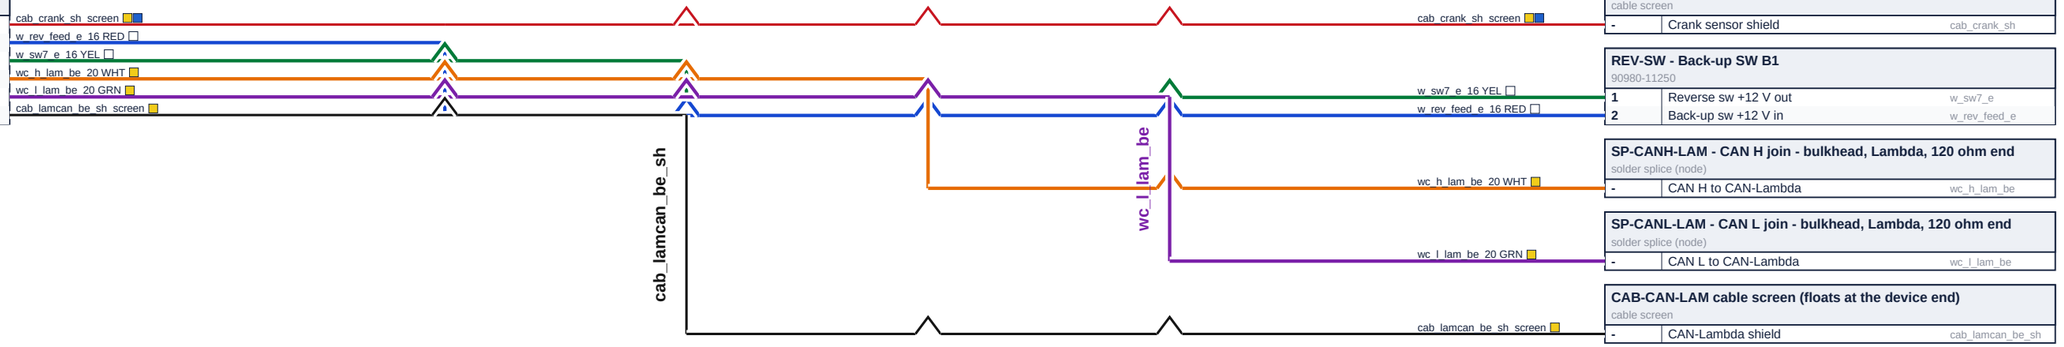

CAB-CRANK cable screen (floats at the device end)		
cable screen		
-	Crank sensor shield	cab_crank_sh

REV-SW - Back-up SW B1		
90980-11250		
1	Reverse sw +12 V out	w_sw7_e
2	Back-up sw +12 V in	w_rev_feed_e

SP-CANH-LAM - CAN H join - bulkhead, Lambda, 120 ohm end		
solder splice (node)		
-	CAN H to CAN-Lambda	wc_h_lam_be

SP-CANL-LAM - CAN L join - bulkhead, Lambda, 120 ohm end		
solder splice (node)		
-	CAN L to CAN-Lambda	wc_l_lam_be

CAB-CAN-LAM cable screen (floats at the device end)		
cable screen		
-	CAN-Lambda shield	cab_lamcan_be_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 12 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	36 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

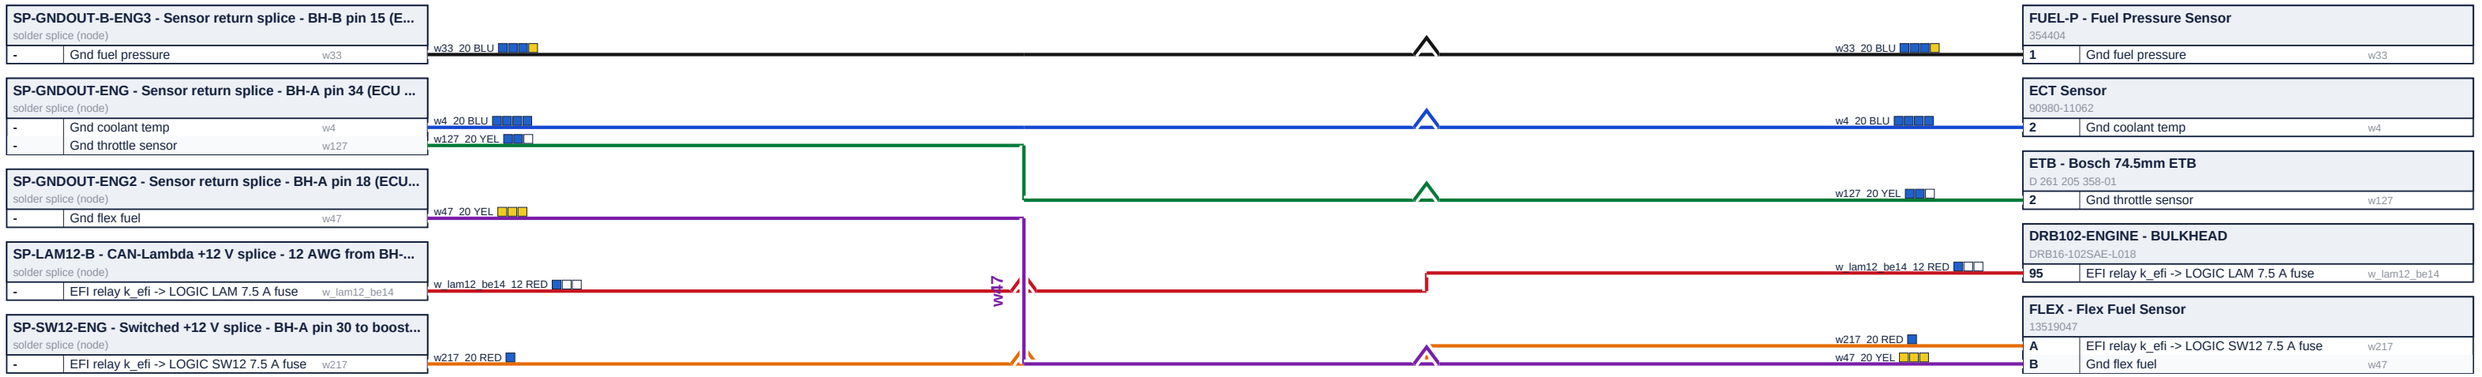

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 13 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	37 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

SP-GNDOUT-ENG - Sensor return splice - BH-A pin 34 (ECU ...
solder splice (node)

-	Gnd intake temp	w6

SP-GNDOUT-ENG2 - Sensor return splice - BH-A pin 18 (ECU...
solder splice (node)

-	Gnd MAP sensor	w27

SP-INJ-ENG - Injector +12 V splice - BH-A pin 2 (LOGIC INJ 1...
solder splice (node)

-	EFI relay k_efi -> LOGIC INJ 15 A fuse	w211
-	EFI relay k_efi -> LOGIC INJ 15 A fuse	w212
-	EFI relay k_efi -> LOGIC INJ 15 A fuse	w213
-	EFI relay k_efi -> LOGIC INJ 15 A fuse	w214

w6 20 BLU
w27 20 BLU
w211 16 RED
w212 16 RED
w213 16 RED
w214 16 RED
w213
w214
w6 20 BLU
w27 20 BLU
w211 16 RED
w212 16 RED
w213 16 RED
w214 16 RED

IAT Sensor (Manifold)
90980-11062

2	Gnd intake temp	w6

MAP Sensor
354404

1	Gnd MAP sensor	w27

INJ-1 - Injector 1
15419715

1	EFI relay k_efi -> LOGIC INJ 15 A fuse	w211

INJ-2 - Injector 2
15419715

1	EFI relay k_efi -> LOGIC INJ 15 A fuse	w212

INJ-3 - Injector 3
15419715

1	EFI relay k_efi -> LOGIC INJ 15 A fuse	w213

INJ-4 - Injector 4
15419715

1	EFI relay k_efi -> LOGIC INJ 15 A fuse	w214

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 14 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	38 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 16)

SP-CANH-LAM - CAN H join - bulkhead, Lambda, 120 ohm end
solder splice (node)

-	Lambda 120R CAN H	wc_term3
-	CAN H to CAN-Lambda	wc_h_lam_pin

SP-CANL-LAM - CAN L join - bulkhead, Lambda, 120 ohm end
solder splice (node)

-	Lambda 120R CAN L	wc_term4
-	CAN L to CAN-Lambda	wc_l_lam_pin

SP-GNDOUT-B-ENG - Sensor return splice - oil temp and cha...
solder splice (node)

-	Gnd oil temp	w8

SP-GNDOUT-B-ENG2 - Sensor return splice - BH-B pin 29 (E...
solder splice (node)

-	Gnd oil pressure	w30

wc_term3_20 GRN
wc_h_lam_pin_20 WHT
wc_term4_20 GRN
wc_l_lam_pin_20 GRN
w8_20 BLU
w30_20 BLU

wc_term3_20 GRN
wc_term4_20 GRN
wc_l_lam_pin_20 GRN
wc_h_lam_pin_20 WHT
w8_20 BLU
w30_20 BLU

R-TERM-END - r_term_end
inline part

1	Lambda 120R CAN H	wc_term3
2	Lambda 120R CAN L	wc_term4

CAN-LAMBDA - Link CAN-Lambda
DTM06-4S

3	CAN L to CAN-Lambda	wc_l_lam_pin
4	CAN H to CAN-Lambda	wc_h_lam_pin

OIL-T - Oil Temp Sensor
90980-11062

2	Gnd oil temp	w8

OIL-P - Oil Pressure Sensor
354404

1	Gnd oil pressure	w30

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 15 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	39 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 4 of 16)

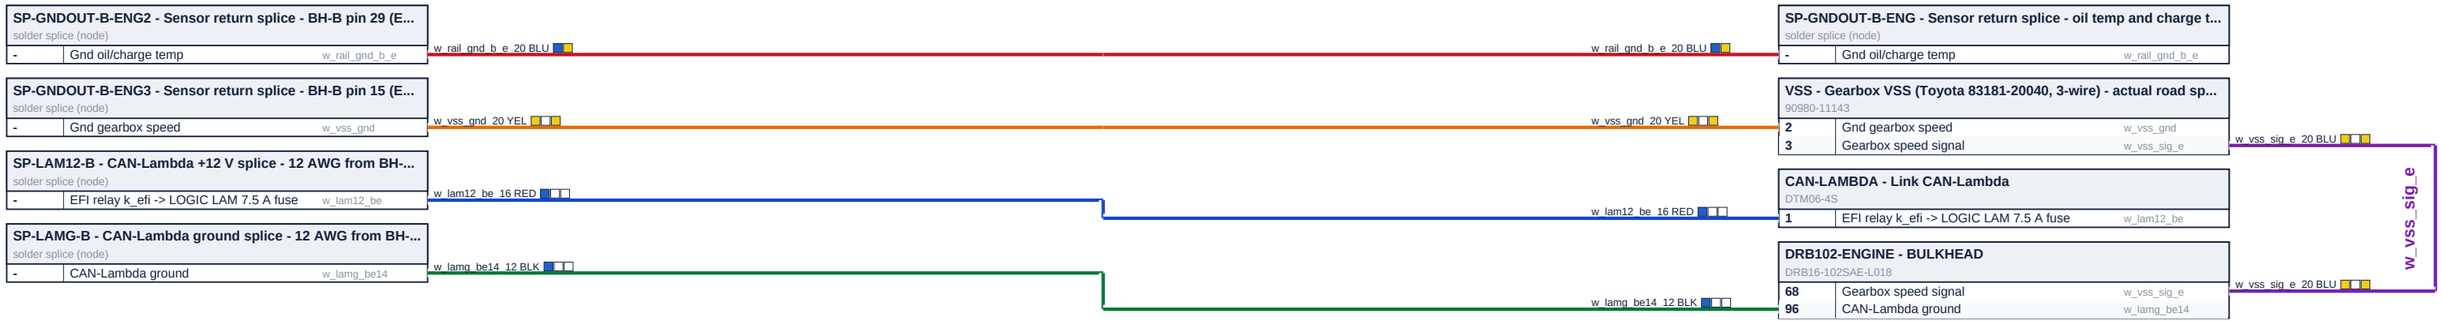

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 16 of 16)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	40 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 5 of 4)

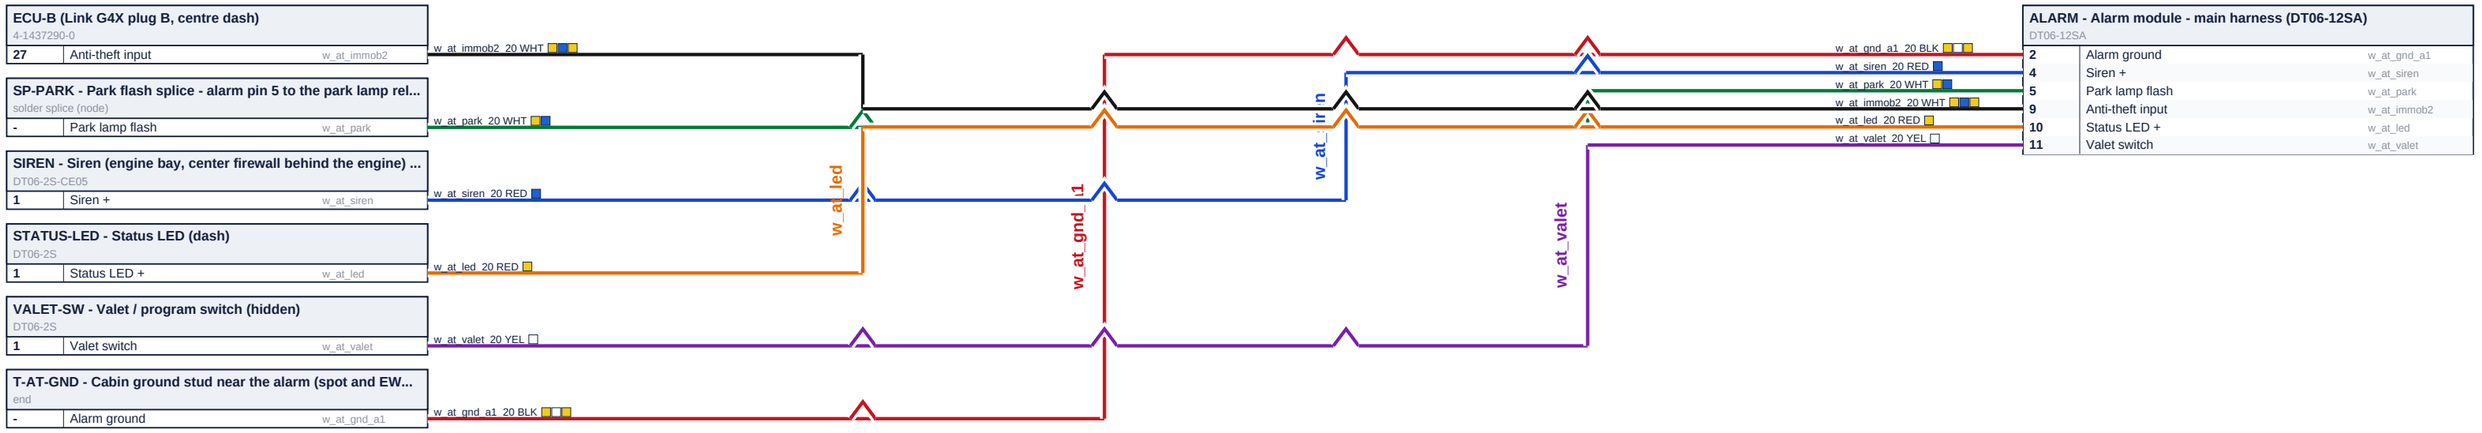

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 1 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	41 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 5 of 4)

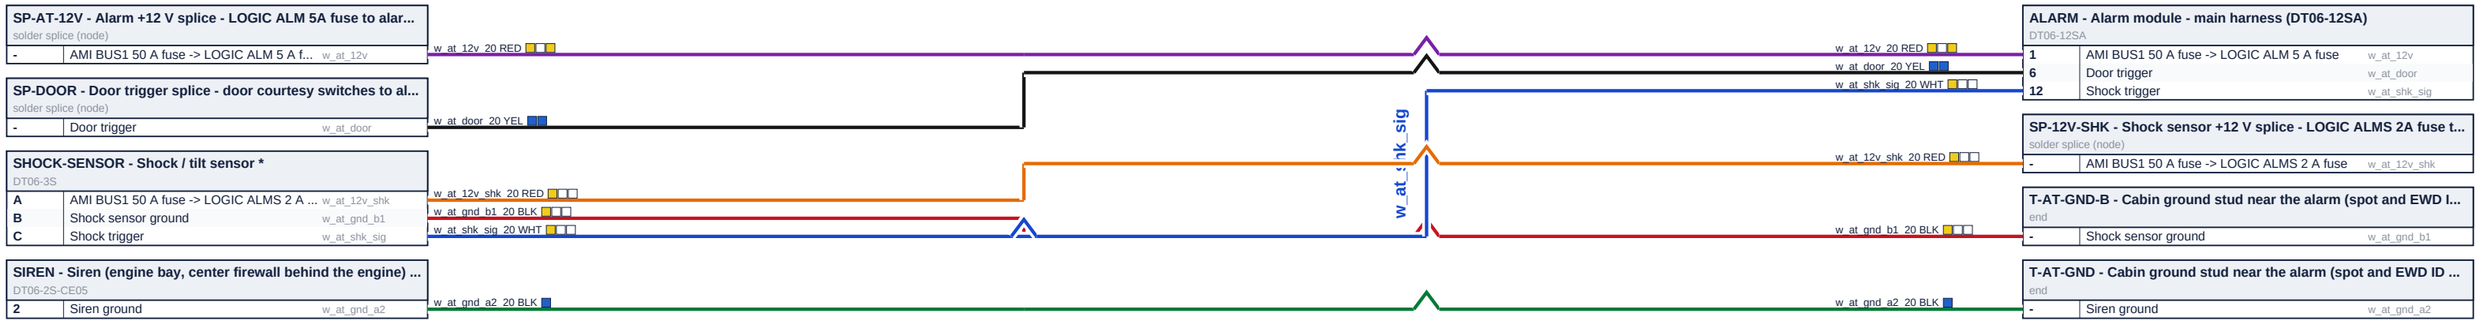

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 2 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	42 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 5 of 4)

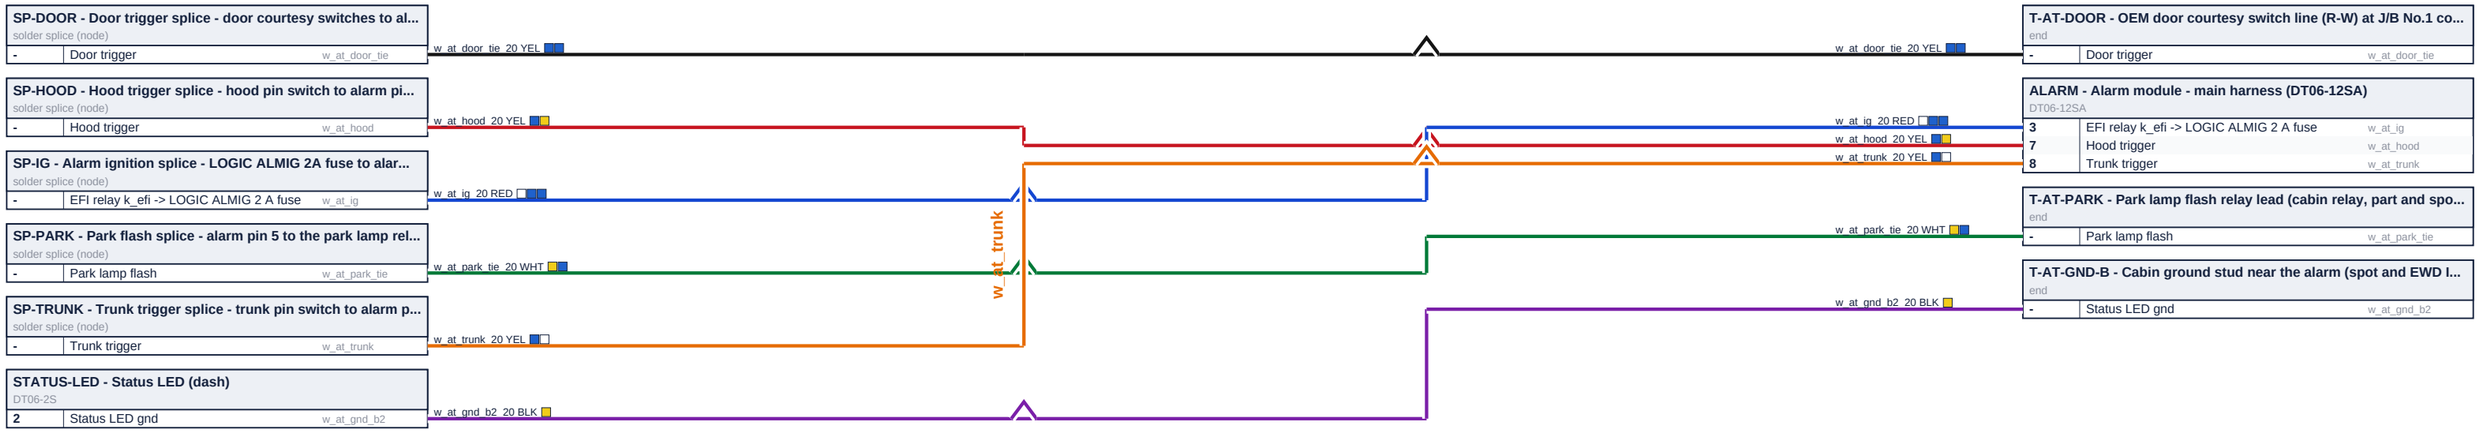

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 3 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	43 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 2 of 4)

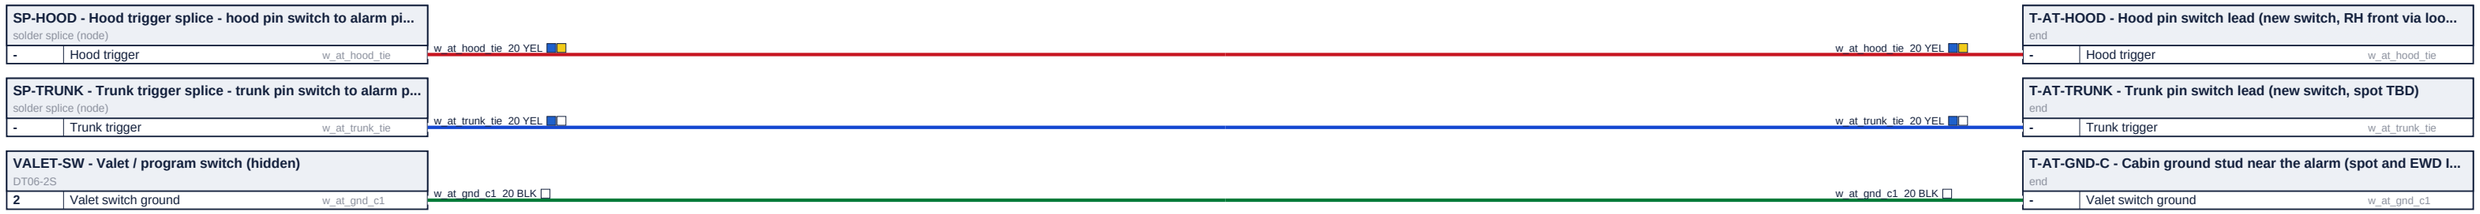

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 4 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	44 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 5 of 4)

ECU-C - ECU Comms/Tuning Port
DTM06-6S


1	CAN screen trunk	w_shd_can_trunk
3	CAN 1 high	wc_h_ecu
4	CAN 1 low	wc_l_ecu

R-TERM-ECU - r_term_ecu
inline part

1	ECU 120R CAN H	wc_term1
2	ECU 120R CAN L	wc_term2

CAB-CAN-CLU cable screen (floats at the device end)
cable screen

-	Cluster CAN shield	cab_can_clu_sh

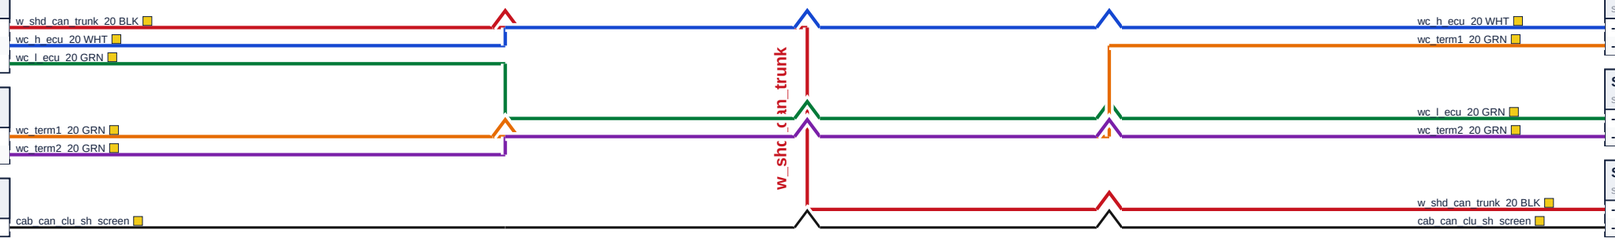

SP-CANH - CAN H join - ECU, CSB3, cluster, Pi, bulkhead
solder splice (node)

-	CAN 1 high	wc_h_ecu
-	ECU 120R CAN H	wc_term1

SP-CANL - CAN L join - ECU, CSB3, cluster, Pi, bulkhead
solder splice (node)

-	CAN 1 low	wc_l_ecu
-	ECU 120R CAN L	wc_term2

SP-CAN-SH-CLU - CAN trunk, cluster branch - SP-CAN-SH-CLU: ...
solder splice (node)

-	CAN screen trunk	w_shd_can_trunk
-	Cluster CAN shield	cab_can_clu_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 1 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	45 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 5 of 4)

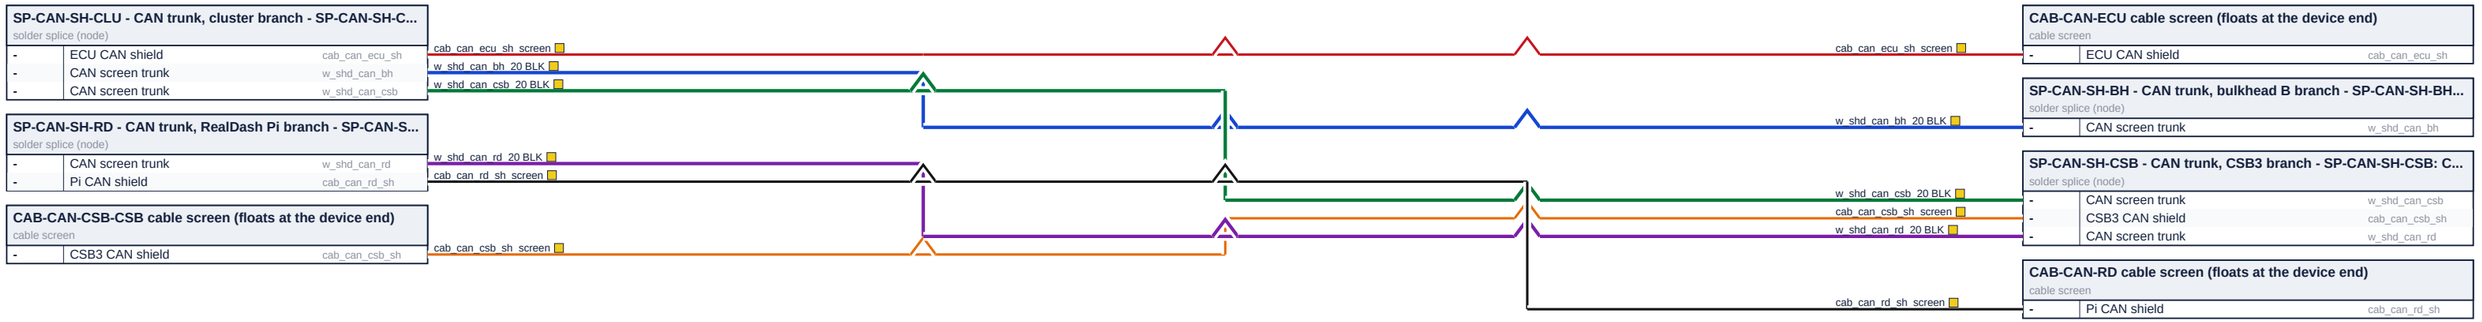

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 2 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	46 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 5 of 4)

SP-CANH - CAN H join - ECU, CSB3, cluster, Pi, bulkhead
solder splice (node)

-	CAN H to CSB3	wc_h_csb
-	CAN H to cluster	wc_h_clu
-	CAN H to RealDash Pi	wc_h_rd

SP-CANL - CAN L join - ECU, CSB3, cluster, Pi, bulkhead
solder splice (node)

-	CAN L to CSB3	wc_l_csb
-	CAN L to cluster	wc_l_clu
-	CAN L to RealDash Pi	wc_l_rd

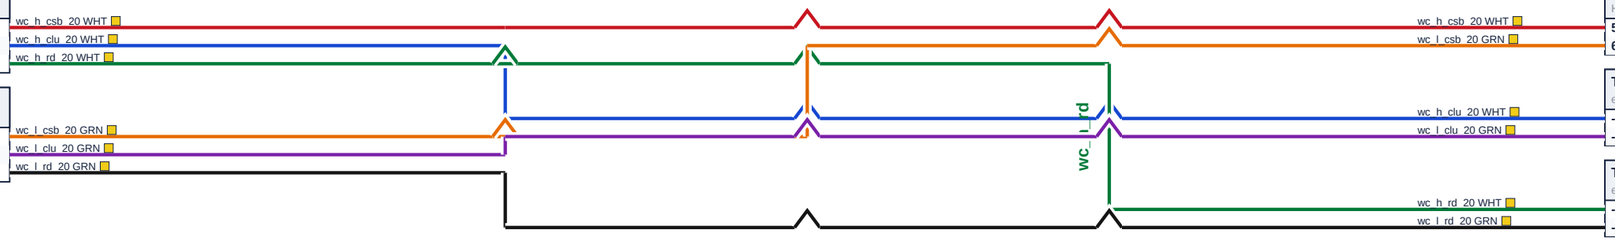

CSB3 - ECUMaster CSB3 - Power/CAN/Switch I/O
HD36-24-33SE

5	CAN H to CSB3	wc_h_csb
6	CAN L to CSB3	wc_l_csb

T-CLUSTER-CAN - Cluster CAN board CANH + CANL pins (old m...
end

-	CAN H to cluster	wc_h_clu
-	CAN L to cluster	wc_l_clu

T-REALDASH-CAN - Pi USB-CAN adapter CANH + CANL pins (ce...
end

-	CAN H to RealDash Pi	wc_h_rd
-	CAN L to RealDash Pi	wc_l_rd

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 3 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	47 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 3 of 4)

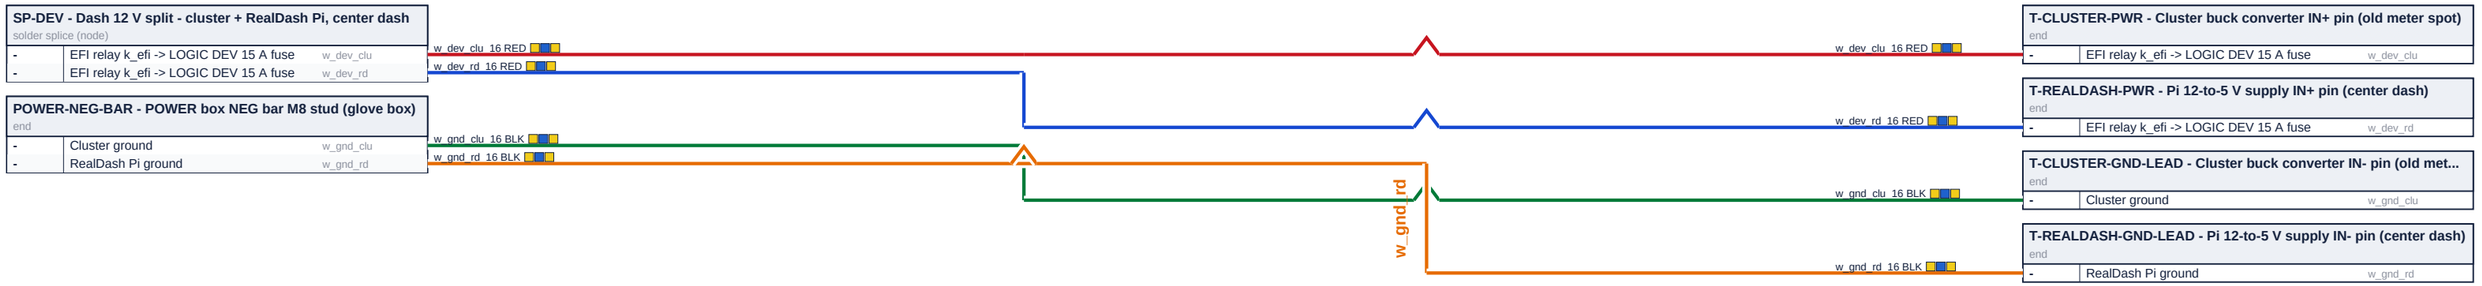

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 4 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	48 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 5 of 3)

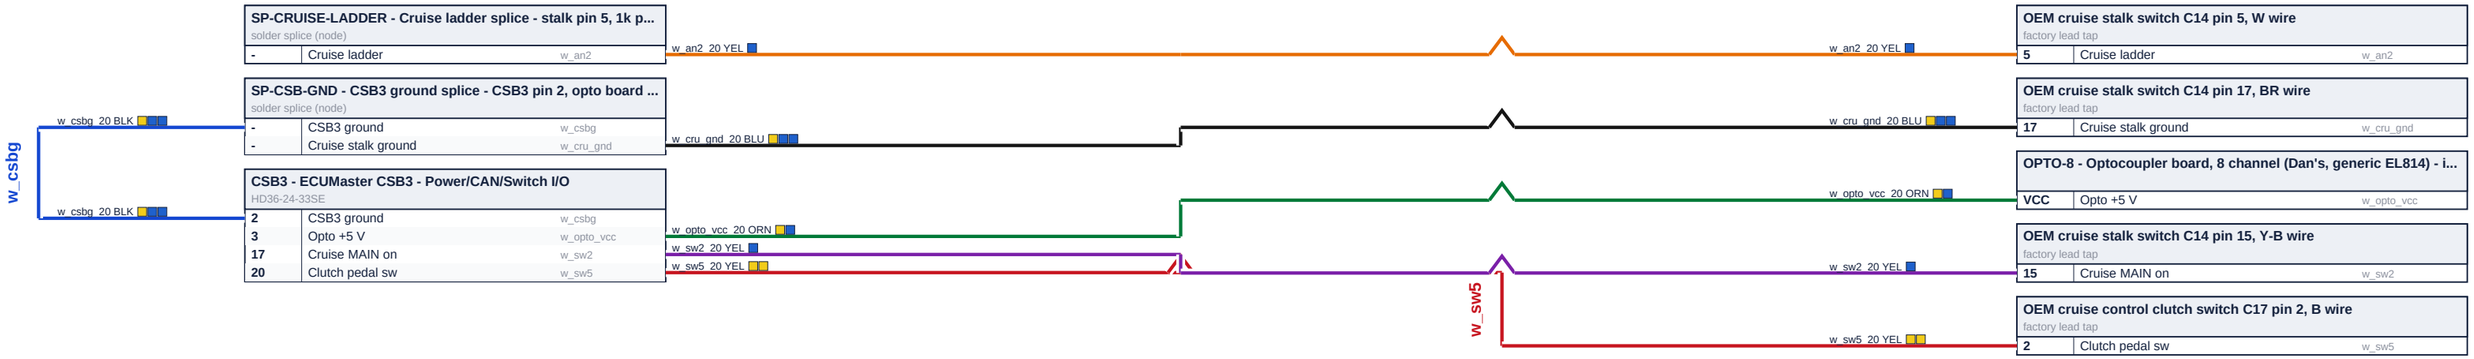

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 1 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	49 OF 82	432 x 279 mm	DG	2026-10-29


ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 5 of 3)

R-CRUISE - r_cruise		
inline part		
2	Cruise ladder	w_cru_sig

CSB3 - ECUMaster CSB3 - Power/CAN/Switch I/O		
HD36-24-33SE		
1	EFI relay k_efi -> LOGIC CSB 5 A fuse	w_csb12
4	Opto out ground	w_opto_outc
21	Brake to CSB3 S7	w_opto_out1
22	Reverse to CSB3 S8	w_opto_out2

T-CLUSTER-HL - Centre cluster headlight-sense input (J8 pi...		
end		
15	Headlight sense to cluster	w_hl_sense_out

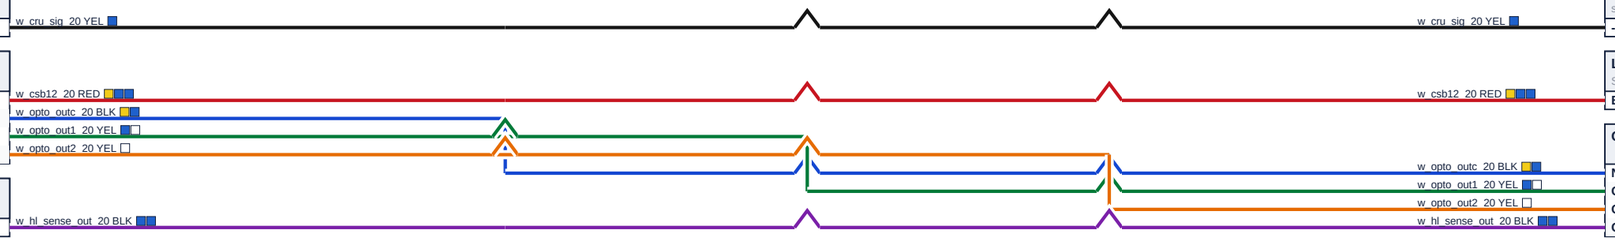

SP-CRUISE-LADDER - Cruise ladder splice - stalk pin 5, 1k pull-u...		
solder splice (node)		
-	Cruise ladder	w_cru_sig

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...		
ST185-FB-LOGIC rev 5		
BUS2-5	EFI relay k_efi -> LOGIC CSB 5 A fuse	w_csb12

OPTO-8 - Optocoupler board, 8 channel (Dan's, generic EL814) - i...		
NEG	Opto out ground	w_opto_outc
OUT1	Brake to CSB3 S7	w_opto_out1
OUT2	Reverse to CSB3 S8	w_opto_out2
OUT3	Headlight sense to cluster	w_hl_sense_out

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 2 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	50 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 3 of 3)

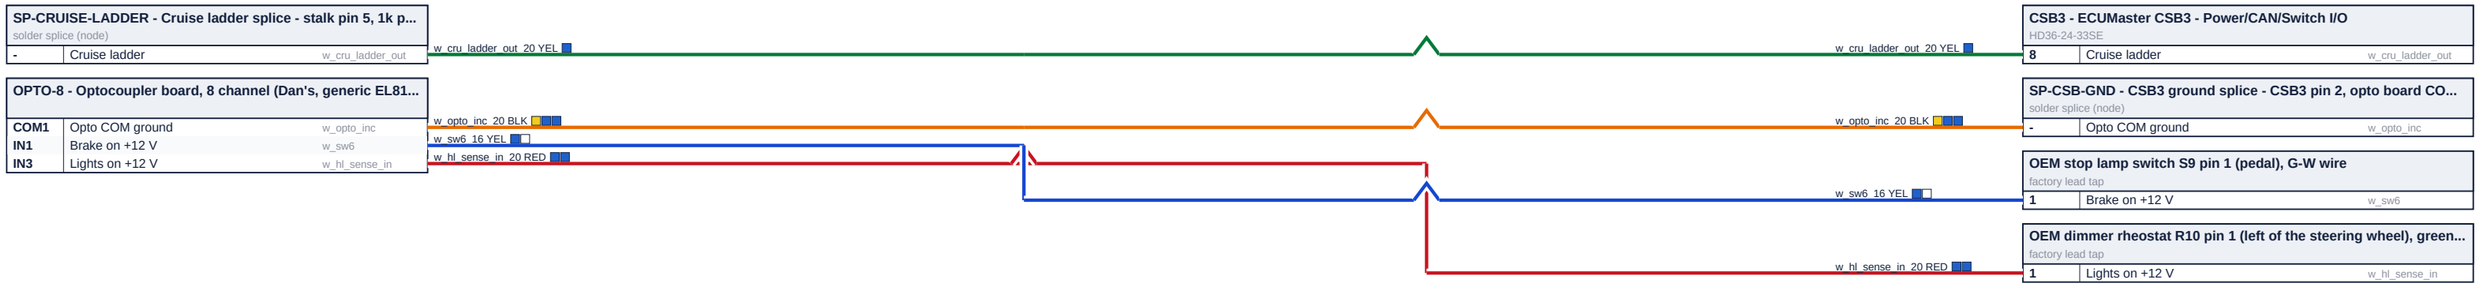

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 3 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	51 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

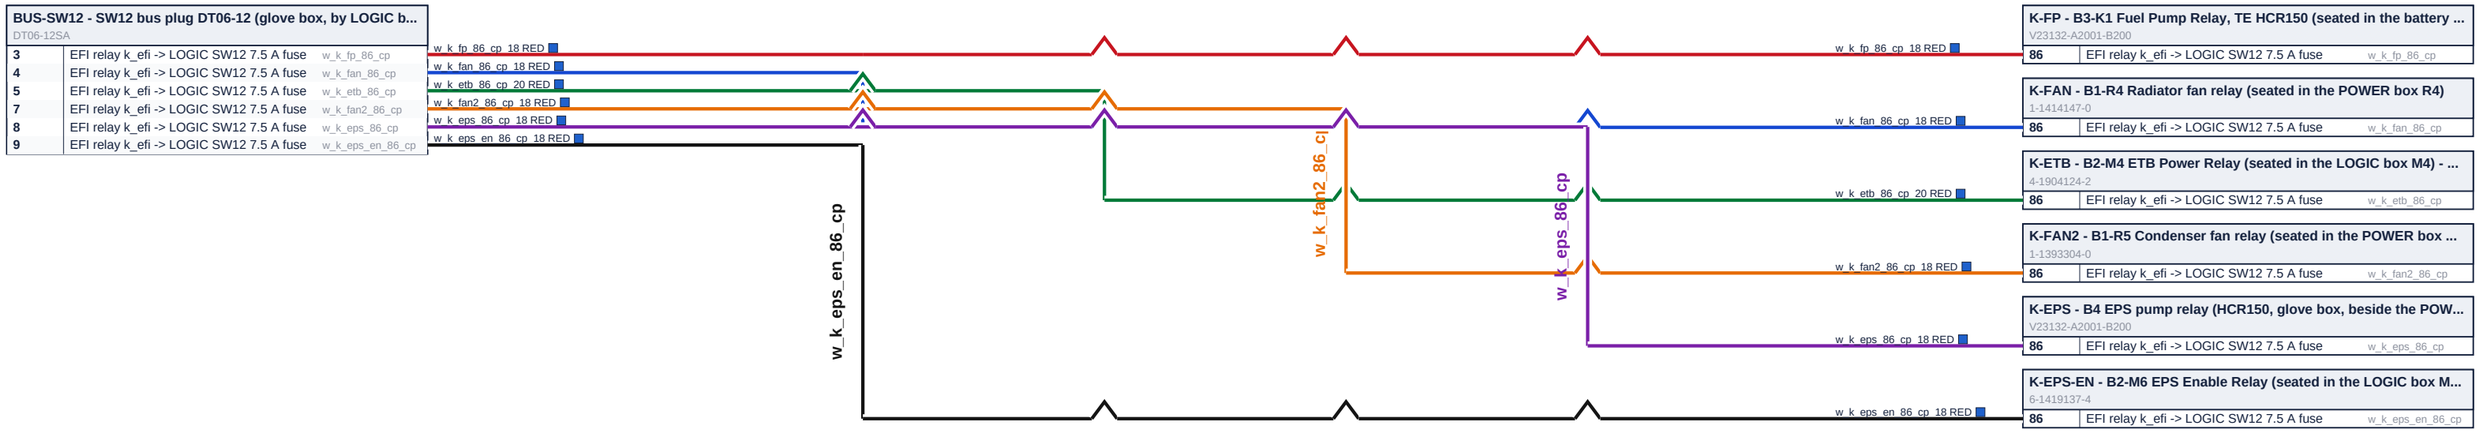

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 1 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	52 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

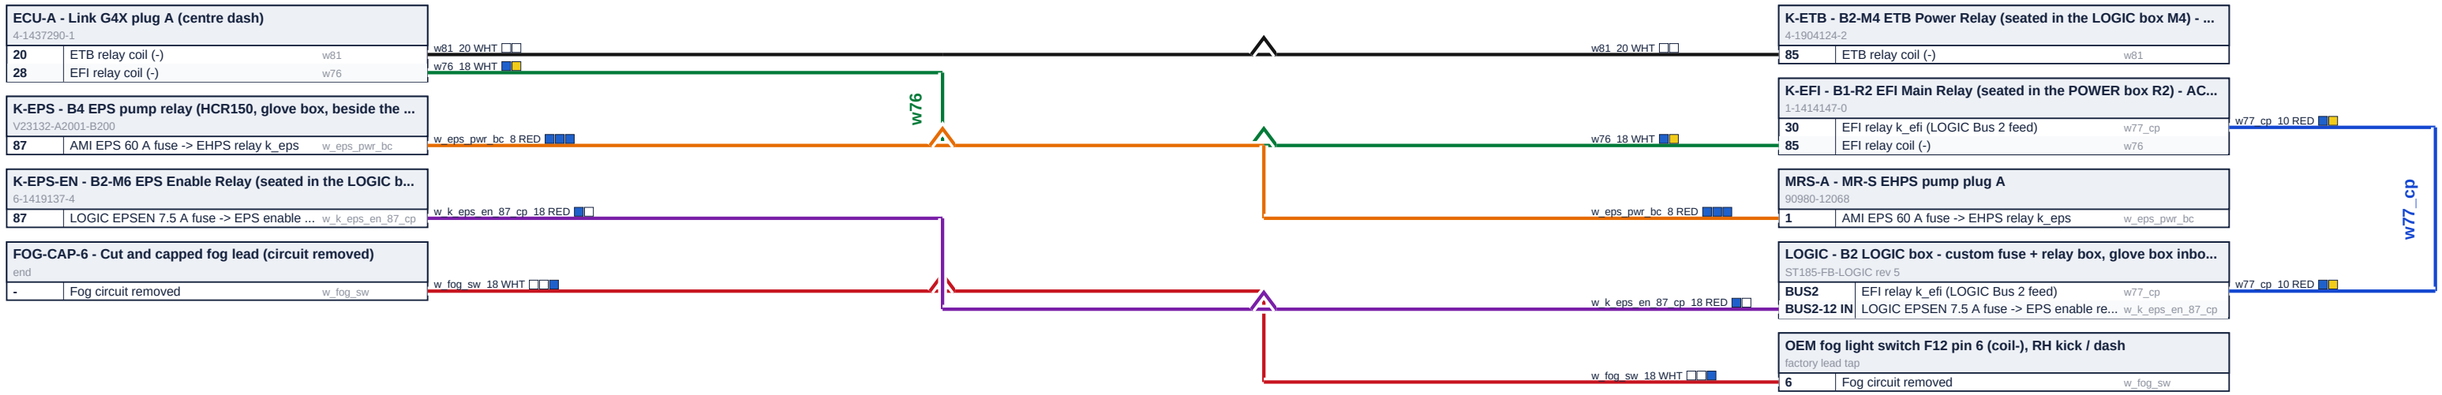

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 2 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	53 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

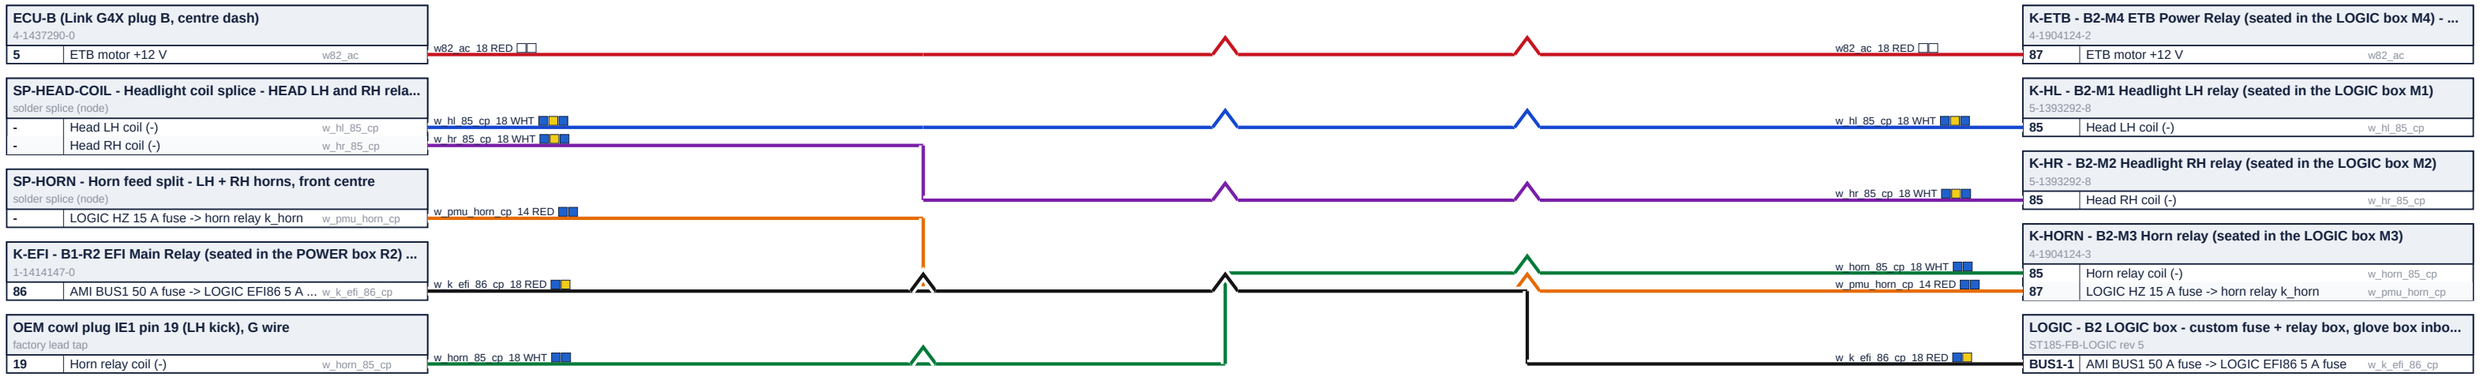

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 3 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	54 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

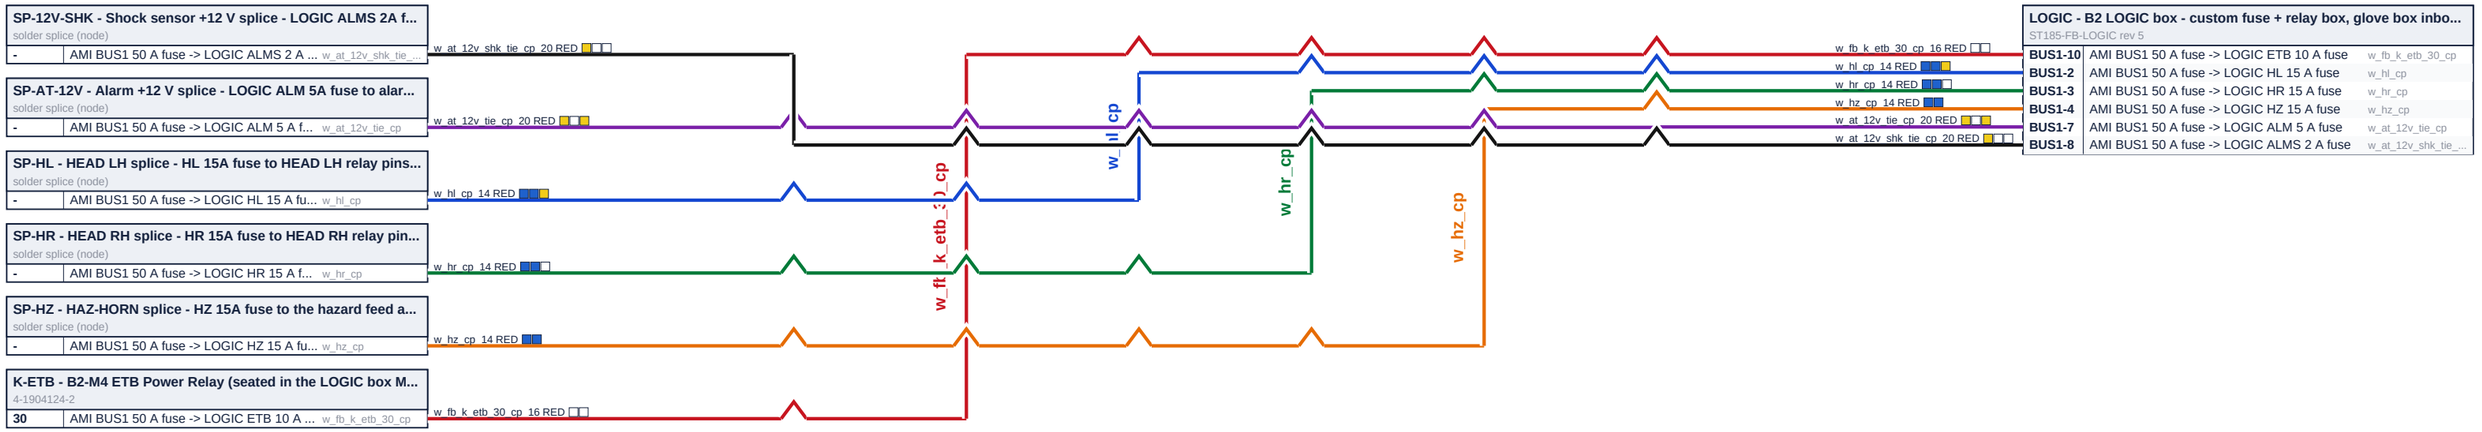

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 4 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	55 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

BUS-SW12 - SW12 bus plug DT06-12 (glove box, by LOGIC b...
DT06-12SA

1	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_cp_sw12_in

SP-DEV - Dash 12 V split - cluster + RealDash Pi, center dash
solder splice (node)

-	EFI relay k_efi -> LOGIC DEV 15 A fuse	w_dev_cp

DRB102-CABIN - DRB102 receptacle (RH firewall)
DRB12-102PAE-L018

1	EFI relay k_efi -> LOGIC COP 15 A fuse	w_cop_pwr_ac
2	EFI relay k_efi -> LOGIC INJ 15 A fuse	w_inj_pwr_ac
95	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_cp

K-EPS-EN - B2-M6 EPS Enable Relay (seated in the LOGIC b...
6-1419137-4

30	EFI relay k_efi -> LOGIC EPSEN 7.5 A fuse	w_fb_k_eps_en_30...

w_cp_sw12_in_16 RED
w_dev_cp_16 RED
w_cop_pwr_ac_14 RED
w_inj_pwr_ac_14 RED
w_lam12_cp_14 RED
w_fb_k_eps_en_30_cp_18 RED
w_lam12_cp

w_lam12_cp_14 RED
w_cp_sw12_in_16 RED
w_cop_pwr_ac_14 RED
w_inj_pwr_ac_14 RED
w_dev_cp_16 RED
w_fb_k_eps_en_30_cp_18 RED

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...
ST185-FB-LOGIC rev 5

BUS2-1	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_cp
BUS2-2	EFI relay k_efi -> LOGIC SW12 7.5 A fuse	w_cp_sw12_in
BUS2-3	EFI relay k_efi -> LOGIC COP 15 A fuse	w_cop_pwr_ac
BUS2-4	EFI relay k_efi -> LOGIC INJ 15 A fuse	w_inj_pwr_ac
BUS2-6	EFI relay k_efi -> LOGIC DEV 15 A fuse	w_dev_cp
BUS2-7	EFI relay k_efi -> LOGIC EPSEN 7.5 A fuse	w_fb_k_eps_en_30...

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	56 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

SP-ACC12 - B2-BUS2-8 ACC 10 A to k_acc 30 and 86
solder splice (node)

-	ACC 10 A out	w_acc_fuse

SP-IG - Alarm ignition splice - LOGIC ALMIG 2A fuse to alar...
solder splice (node)

-	EFI relay k_efi -> LOGIC ALMIG 2 A fuse	w_at_ig_tie_cp

K-EFI - B1-R2 EFI Main Relay (seated in the POWER box R2) ...
1-1414147-0

87	AMI EFI 30 A fuse	w_fb_k_efi_87_cp

K-FAN - B1-R4 Radiator fan relay (seated in the POWER box ...
1-1414147-0

87	AMI FAN 40 A fuse	w_fb_k_fan_87_cp

K-FAN2 - B1-R5 Condenser fan relay (seated in the POWER b...
1-1393304-0

87	AMI FAN2 30 A fuse	w_fb_k_fan2_87_ac

OEM R/B No.4 40 A HEATER fuse pin 1 (RH kick)
factory lead tap

1	Heater fuse feed	w_rb4_feed

w_acc_fuse_16 RED
w_at_ig_tie_cp_20 RED
w_fb_k_efi_87_cp_12 RED
w_fb_k_fan_87_cp_8 RED
w_fb_k_fan2_87_ac_8 RED
w_rb4_feed_8 RED

w_rb4_feed

w_acc_fuse_16 RED
w_at_ig_tie_cp_20 RED
w_rb4_feed_8 RED
w_fb_k_efi_87_cp_12 RED
w_fb_k_fan_87_cp_8 RED
w_fb_k_fan2_87_ac_8 RED

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...
ST185-FB-LOGIC rev 5

BUS2-8	EFI relay k_efi -> LOGIC ACC 10 A fuse	w_acc_fuse
BUS2-9	EFI relay k_efi -> LOGIC ALMIG 2 A fuse	w_at_ig_tie_cp

POWER - B1 POWER box with the bus bar in it - custom fuse + re...
ST185-FB-POWER rev 7

AMI IN-1	AMI HTR 40 A fuse	w_rb4_feed
AMI IN-2	AMI EFI 30 A fuse	w_fb_k_efi_87_cp
AMI IN-4	AMI FAN 40 A fuse	w_fb_k_fan_87_cp
AMI IN-5	AMI FAN2 30 A fuse	w_fb_k_fan2_87_ac

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 6 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	57 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

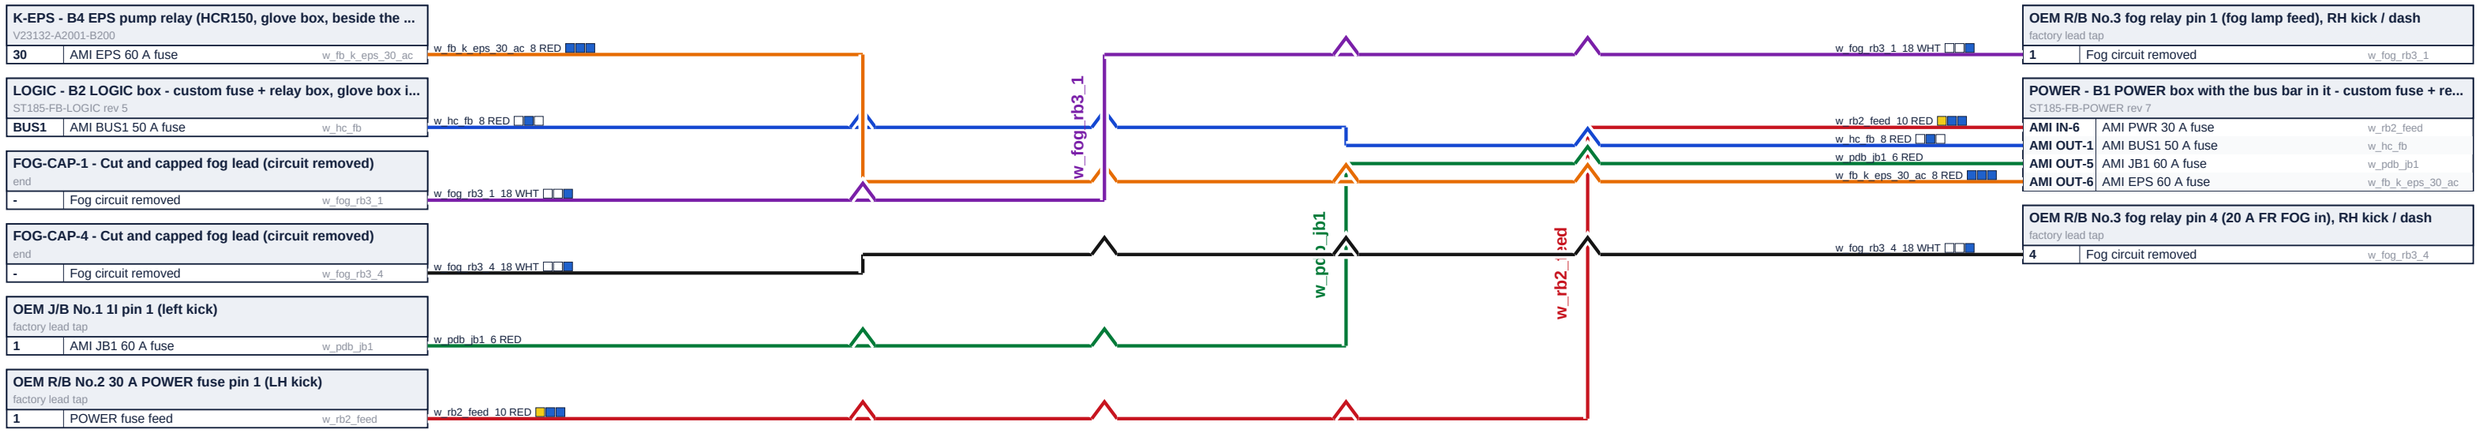

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 7 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	58 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

SP-ACC12 - B2-BUS2-8 ACC 10 A to k_acc 30 and 86 solder splice (node)					K-ACC - B2-M5 A/C clutch relay (k_acc) - amp A15 pin 8 sinks coi... 6-1419137-4		
-	A/C clutch +12 V in	w_fb_k_acc_30_cp	w_fb_k_acc_30_cp_16 RED	w_fb_k_acc_30_cp_16 RED	30	A/C clutch +12 V in	w_fb_k_acc_30_cp
SP-HEAD-COIL - Headlight coil splice - HEAD LH and RH rela... solder splice (node)					**OEM cowl plug IE1 pin 2 (LH kick), R-Y wire** factory lead tap		
-	Headlight coil (-)	w_head_coil_cp	w_head_coil_cp_18 WHT	w_head_coil_cp_18 WHT	2	Headlight coil (-)	w_head_coil_cp
SP-HL - HEAD LH splice - HL 15A fuse to HEAD LH relay pins... solder splice (node)					**K-HL - B2-M1 Headlight LH relay (seated in the LOGIC box M1)** 5-1393292-8		
-	AMI BUS1 50 A fuse -> LOGIC HL 15 A fu...	w_hl_30_cp	w_hl_30_cp_14 RED	w_hl_30_cp_14 RED	30	AMI BUS1 50 A fuse -> LOGIC HL 15 A fuse	w_hl_30_cp
-	AMI BUS1 50 A fuse -> LOGIC HL 15 A fu...	w_hl_86_cp	w_hl_86_cp_16 RED	w_hl_86_cp_16 RED	86	AMI BUS1 50 A fuse -> LOGIC HL 15 A fuse	w_hl_86_cp
DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018					**OEM R/B No.4 starter relay pin 4 (RH kick), starter out** factory lead tap		
3	Starter solenoid S	w_strl_c	w_strl_c_12 RED	w_strl_c_12 RED	4	Starter solenoid S	w_strl_c
LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i... ST185-FB-LOGIC rev 5					**OEM ST1 lead B-W at old R/B No.4 pin 1, RH kick panel** factory lead tap		
BUS2-13 IN	Start sw ST1 feed	w_start_in_cp	w_start_in_cp_20 YEL	w_start_in_cp_20 YEL	1	Start sw ST1 feed	w_start_in_cp

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 8 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	59 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 4 of 9)

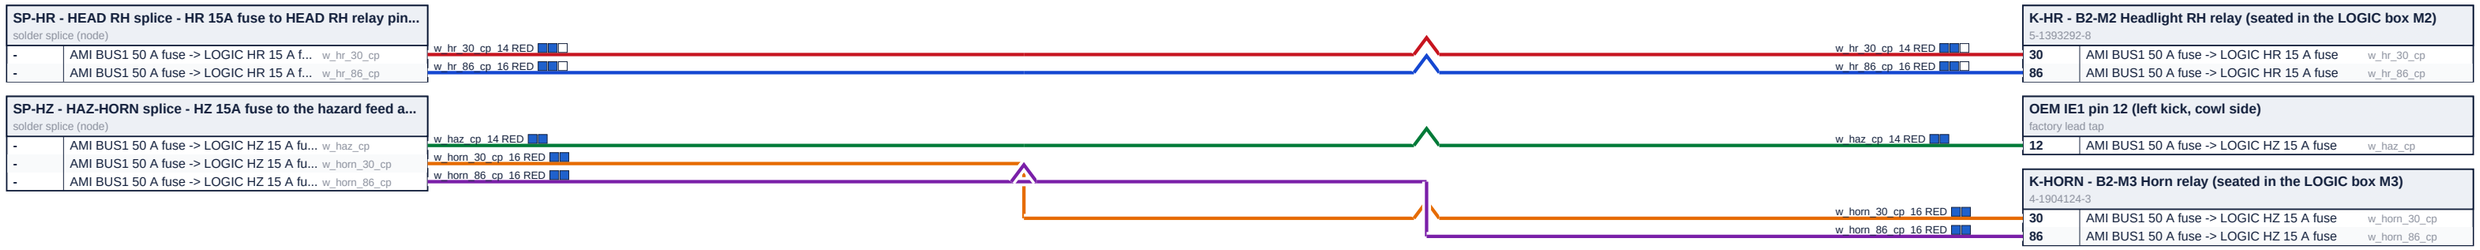

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 9 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	60 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 5 of 3)

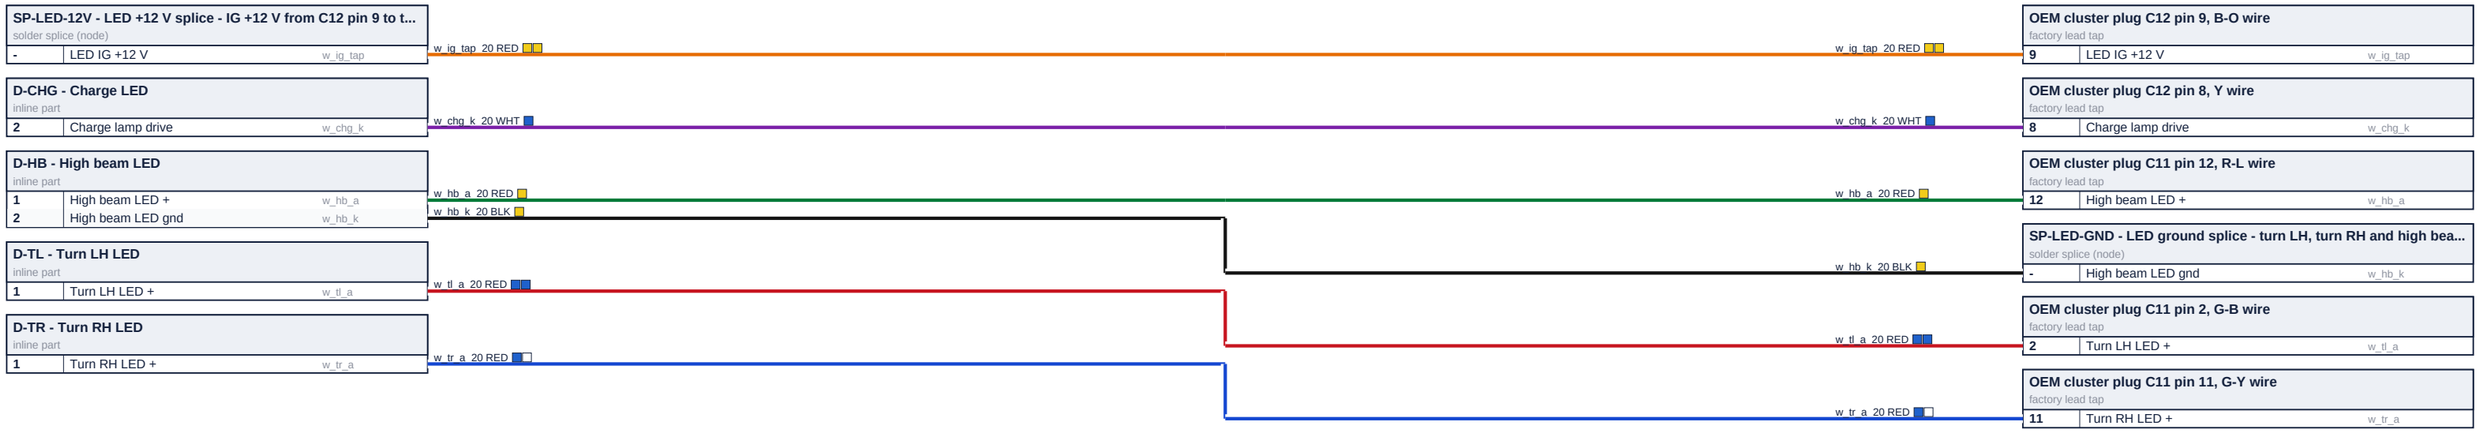

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

– – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 1 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	61 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 5 of 3)

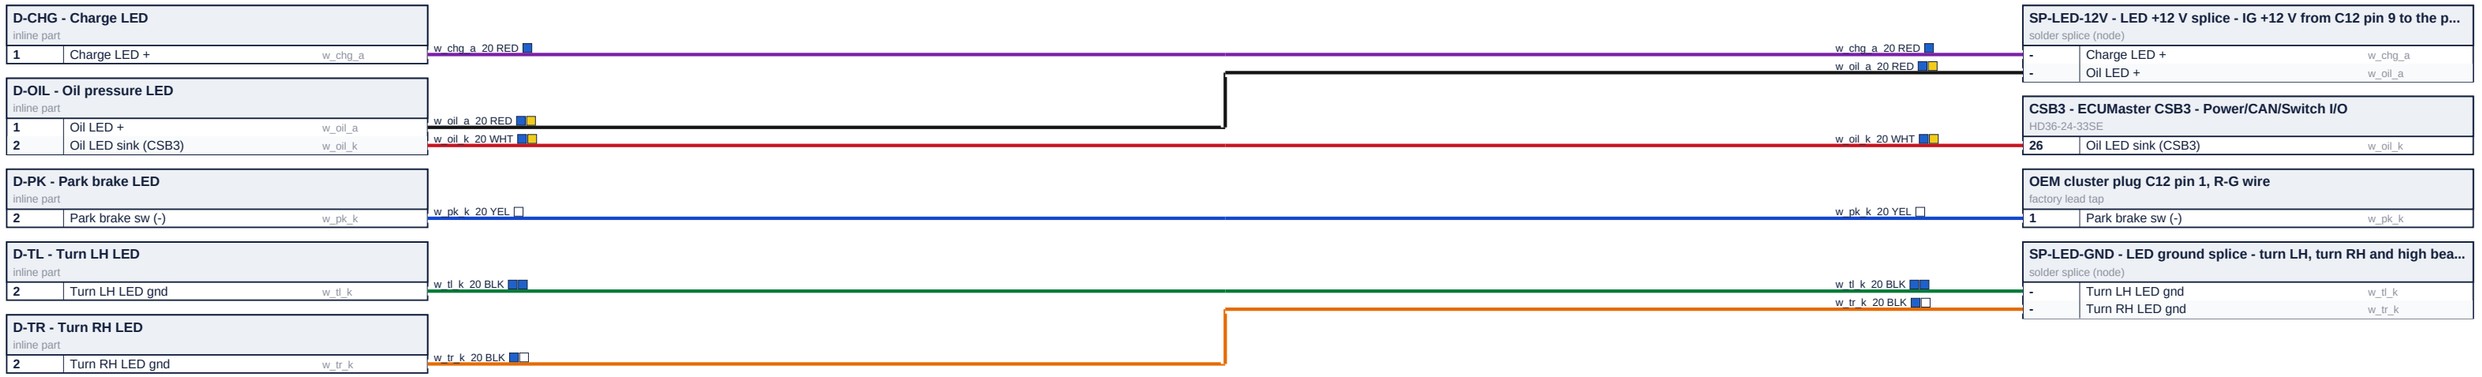

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 2 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	62 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 1 of 3)



WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 3 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	63 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 11)

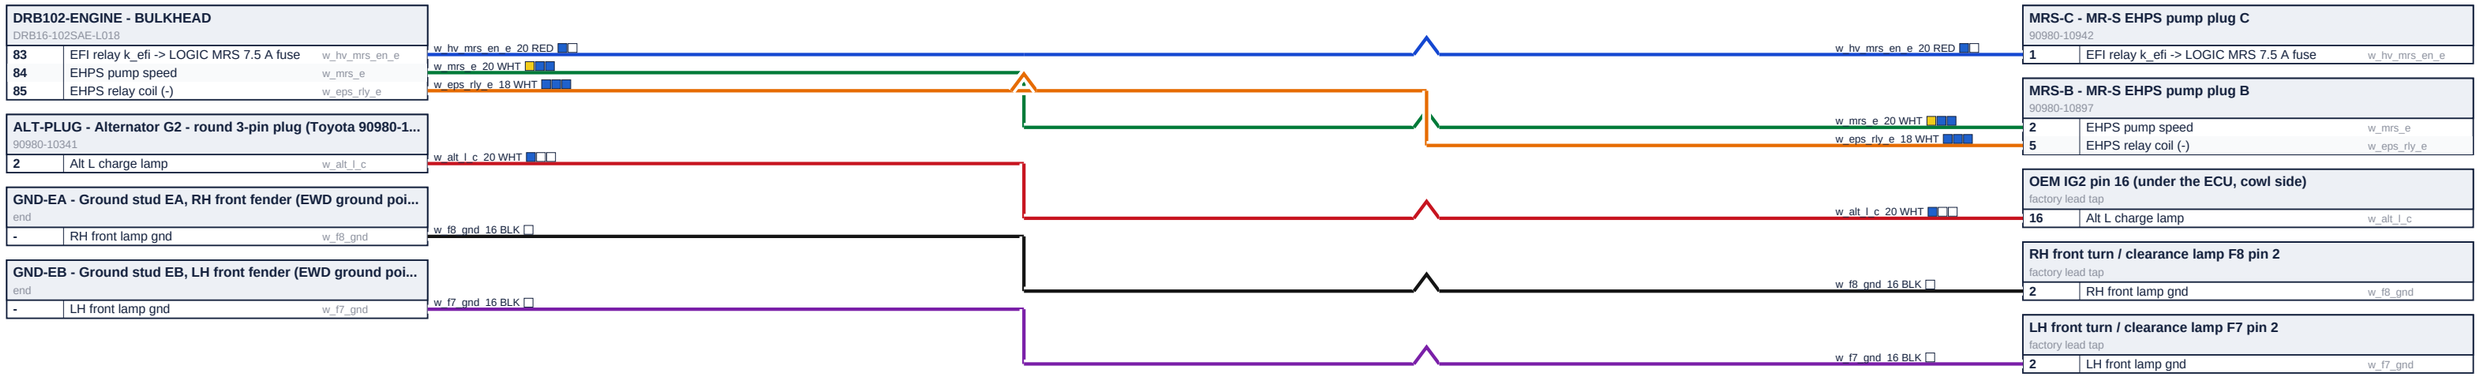

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 1 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	64 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 11)

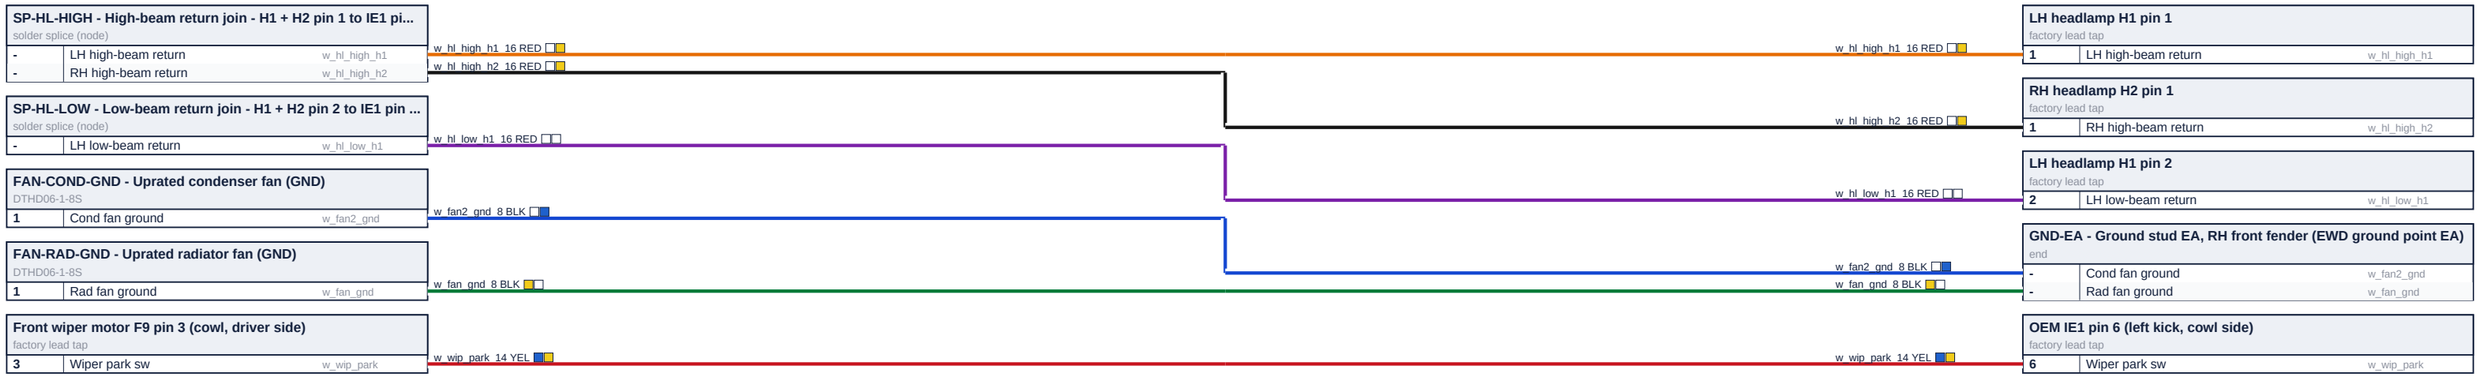

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 2 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	65 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 11)

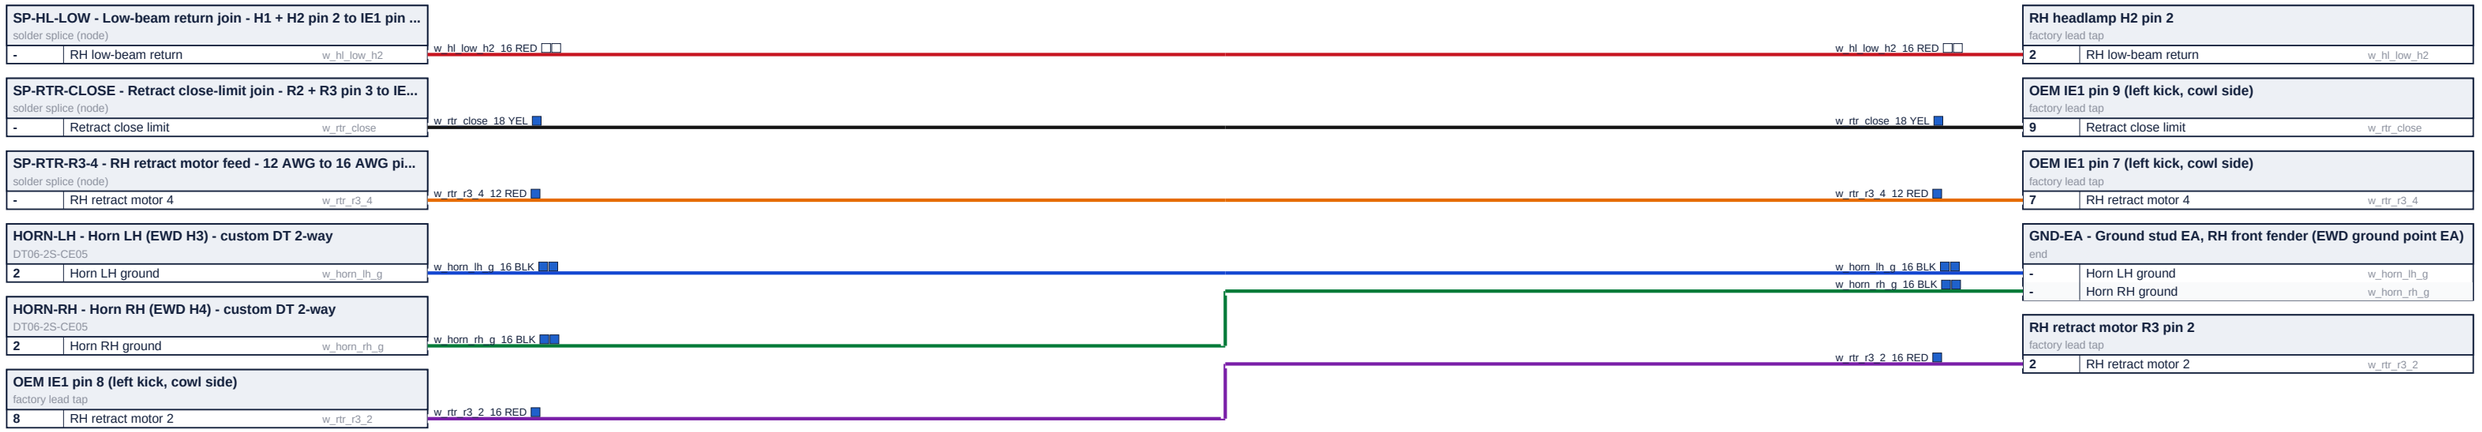

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 3 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	66 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 11)

SP-RTR-OPEN - Retract open-limit join - R2 + R3 pin 1 to IE1 ... solder splice (node)			w_rtr_open_18 YEL	**OEM IE1 pin 16 (left kick, cowl side)** factory lead tap	
-	Retract open limit	w_rtr_open	w_rtr_open_18 YEL	16	Retract open limit	w_rtr_open
SP-RTR-R2-4 - LH retract motor feed - 12 AWG to 16 AWG pi... solder splice (node)			w_rtr_r2_4_12 RED	**OEM IE1 pin 14 (left kick, cowl side)** factory lead tap	
-	LH retract motor 4	w_rtr_r2_4	w_rtr_r2_4_12 RED	14	LH retract motor 4	w_rtr_r2_4
LH front turn / clearance lamp F7 pin 3 factory lead tap			w_turn_f7_18 RED	**OEM J/B No.1 1H pin 4 (left kick)** factory lead tap	
3	LH front turn +	w_turn_f7	w_turn_f7_18 RED	1H-4	LH front turn +	w_turn_f7
Front wiper motor F9 pin 1 (cowl, driver side) factory lead tap			w_wip_hi_14 RED	**OEM IE1 pin 20 (left kick, cowl side)** factory lead tap	
1	Wiper HIGH	w_wip_hi	w_wip_hi_14 RED	20	Wiper HIGH	w_wip_hi
Front wiper motor F9 pin 2 (cowl, driver side) factory lead tap			w_wip_lo_14 RED	**OEM IE1 pin 13 (left kick, cowl side)** factory lead tap	
2	Wiper LOW	w_wip_lo	w_wip_lo_14 RED	13	Wiper LOW	w_wip_lo
OEM IE1 pin 15 (left kick, cowl side) factory lead tap			w_rtr_r2_2_16 RED	**LH retract motor R2 pin 2** factory lead tap	
15	LH retract motor 2	w_rtr_r2_2	w_rtr_r2_2_16 RED	2	LH retract motor 2	w_rtr_r2_2

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 4 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	67 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 11)



WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	68 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 11)

K-HL - B2-M1 Headlight LH relay (seated in the LOGIC box M1)
5-1393292-8

87	LOGIC HL 15 A fuse -> HEAD LH relay k_hl	w_pmu_hl

K-HR - B2-M2 Headlight RH relay (seated in the LOGIC box M2)
5-1393292-8

87	LOGIC HR 15 A fuse -> HEAD RH relay k...	w_pmu_hr

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i...
ST185-FB-LOGIC rev 5

BUS1-5	AMI BUS1 50 A fuse -> LOGIC DM 20 A f...	w_pmu_dome
BUS1-6	AMI BUS1 50 A fuse -> LOGIC WL 15 A f...	w_rb2_wl
BUS1-9	Alt S battery sense	w_alt_s_c

MRS-A - MR-S EHPS pump plug A
90980-12068

2	EHPS pump ground	w_eps_gnd

w_pmu_hl_14 RED

w_pmu_hr_14 RED

w_pmu_dome_14 RED

w_rb2_wl_14 RED

w_alt_s_c_20 WHT

w_eps_gnd_8 BLK

w_eps_gnd

w_alt_s_c

w_pmu_hl_14 RED

w_pmu_hr_14 RED

w_pmu_dome_14 RED

w_rb2_wl_14 RED

w_alt_s_c_20 WHT

w_eps_gnd_8 BLK

LH headlamp H1 pin 3
factory lead tap

3	LOGIC HL 15 A fuse -> HEAD LH relay k_hl	w_pmu_hl

RH headlamp H2 pin 3
factory lead tap

3	LOGIC HR 15 A fuse -> HEAD RH relay k_hr	w_pmu_hr

OEM J/B No.1 1H pin 2 (left kick)
factory lead tap

2	AMI BUS1 50 A fuse -> LOGIC DM 20 A fuse	w_pmu_dome

OEM W-L lead at old R/B2 pin 2 (left kick)
factory lead tap

2	AMI BUS1 50 A fuse -> LOGIC WL 15 A fuse	w_rb2_wl

ALT-PLUG - Alternator G2 - round 3-pin plug (Toyota 90980-1034...
90980-10341

1	Alt S battery sense	w_alt_s_c

T-ENG-BLOCK-3 - Engine block ground stud, lug 3 (Route 1 point...
end

-	EHPS pump ground	w_eps_gnd

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 6 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	69 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 11)

SP-RTR-GND-R2 - LH retract motor ground - 16 AWG pigtail t...
solder splice (node)

-	LH retract ground	w_rtr_gnd_r2

POWER - B1 POWER box with the bus bar in it - custom fuse...
ST185-FB-POWER rev 7

AMI OUT-2	AMI RTR 30 A fuse	w_pmu_rtr
AMI OUT-3	AMI AM1 40 A fuse	w_pdb_am1
AMI OUT-4	AMI AM2 30 A fuse	w_pdb_am2

POWER-STUDS - POWER box bus zone (rev 7, glove box)
ST185-FB-POWER rev 7 BUS ZONE

NEG	POWER box gnd to ID	w_gnd_id
NEG	POWER box gnd to IG	w_gnd_ig

w_rtr_gnd_r2_16 BLK
w_pmu_rtr_10 RED
w_pdb_am1_8 RED
w_pdb_am2_10 RED
w_gnd_id_1/0 BLK
w_gnd_ig_1/0 BLK
w_gnd_id
w_gnd_ig
w_rtr_gnd_r2_16 BLK
w_pmu_rtr_10 RED
w_pdb_am1_8 RED
w_pdb_am2_10 RED
w_gnd_id_1/0 BLK
w_gnd_ig_1/0 BLK

LH retract motor R2 pin 5
factory lead tap

5	LH retract ground	w_rtr_gnd_r2

OEM IE1 pin 3 (left kick, cowl side)
factory lead tap

3	AMI RTR 30 A fuse	w_pmu_rtr

OEM IE1 pin 10 (left kick, cowl side)
factory lead tap

10	AMI AM1 40 A fuse	w_pdb_am1

OEM IE1 pin 17 (left kick, cowl side)
factory lead tap

17	AMI AM2 30 A fuse	w_pdb_am2

GND-ID - Ground stud ID, left kick panel (EWD ground point ID)
end

-	POWER box gnd to ID	w_gnd_id

GND-IG - Ground bolt IG, right kick (EWD ground point IG)
end

-	POWER box gnd to IG	w_gnd_ig

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 7 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	70 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 11)

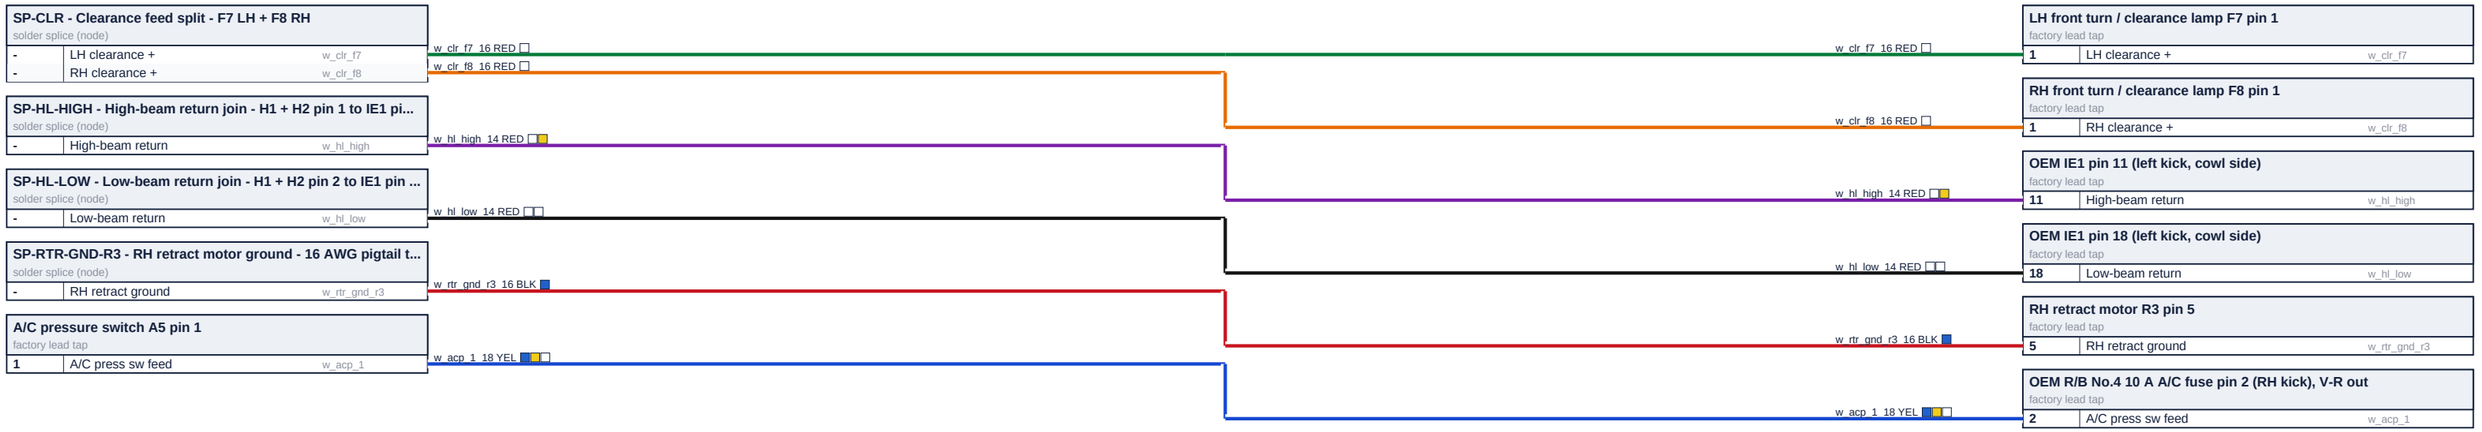

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 8 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	71 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 11)

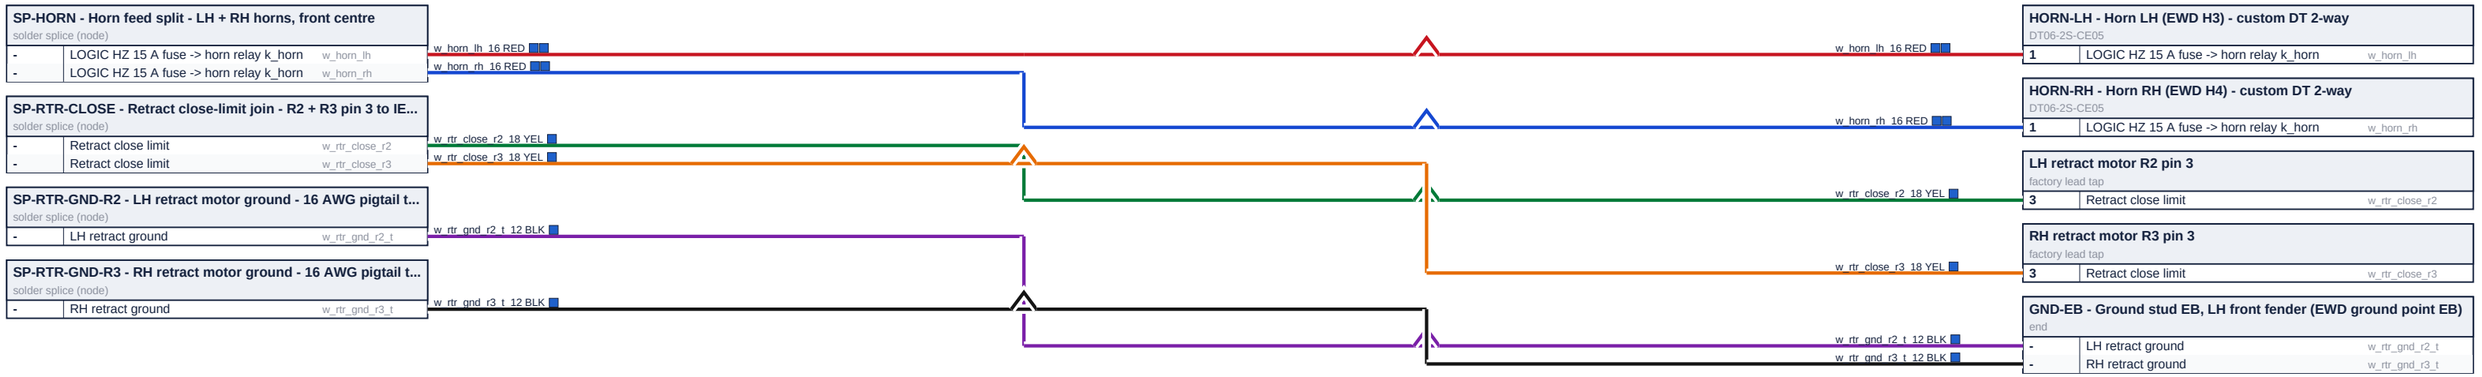

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 9 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	72 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 11)

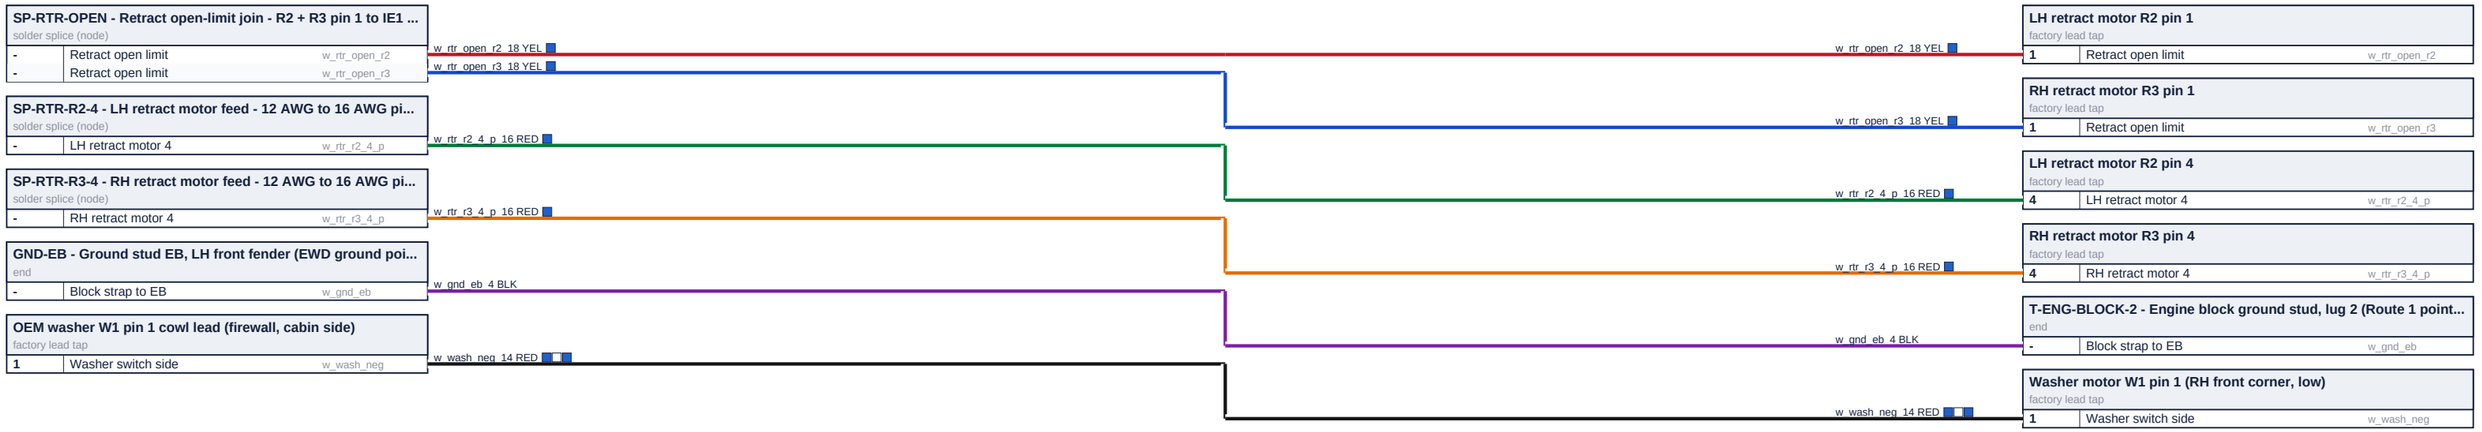

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 10...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	73 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 0 of 11)

OEM washer W1 pin 2 cowl lead (firewall, cabin side)		
factory lead tap		
2	Washer motor +12 V	w_wash_pos

w_wash_pos_14 RED

w_wash_pos_14 RED

Washer motor W1 pin 2 (RH front corner, low)		
factory lead tap		
2	Washer motor +12 V	w_wash_pos

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 11...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	74 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 5 of 3)

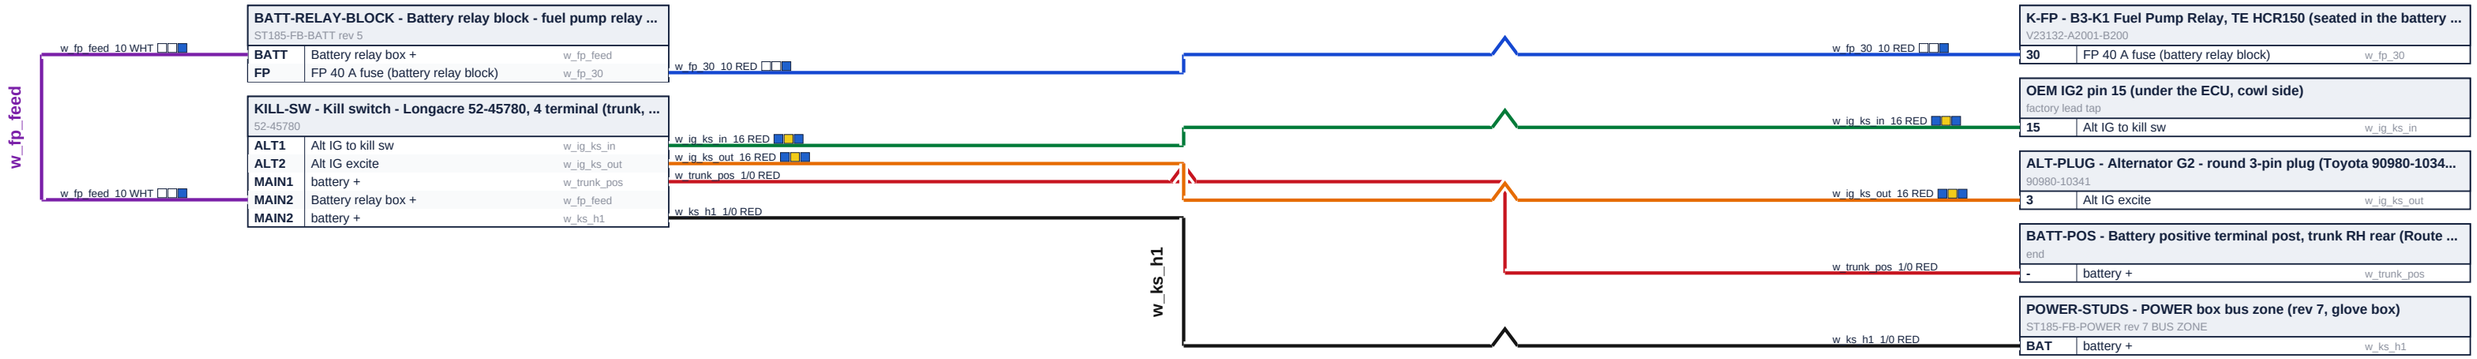

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 1 o...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	75 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 5 of 3)

POWER-STUDS - POWER box bus zone (rev 7, glove box)
ST185-FB-POWER rev 7 BUS ZONE


ALT	Starter feed (H3)	w_h3_radlok_pos
NEG	Engine ground (H6a)	w_h6a_radlok_neg

RADLOK-NEG-ENG - RADLOK - engine
RL00801-50BK

1	Engine ground (H6a)	w_rln
1	Engine ground (H6a)	w_rln_blk

RADLOK-POS-ENG - RADLOK + engine
RL00801-50RE

1	Starter feed (H3)	w_rl_pos
1	Starter feed (H3)	w_rlp_str

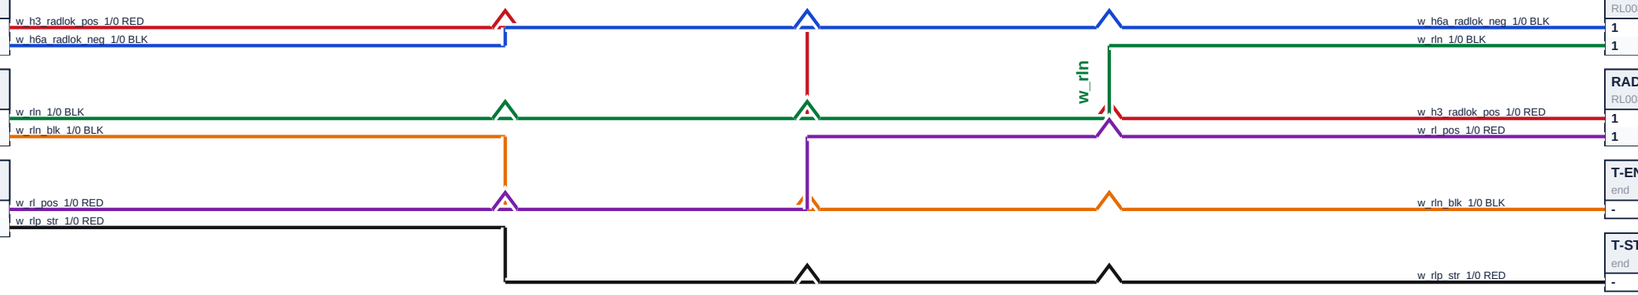

RADLOK-NEG-CAB - RADLOK - firewall
RL00801-50BK

1	Engine ground (H6a)	w_h6a_radlok_neg
1	Engine ground (H6a)	w_rln

RADLOK-POS-CAB - RADLOK + firewall
RL00801-50RE

1	Starter feed (H3)	w_h3_radlok_pos
1	Starter feed (H3)	w_rl_pos

T-ENG-BLOCK - Engine block ground stud, lug 1 (Route 1 point 5)
end

-	Engine ground (H6a)	w_rln_blk

T-STARTER-B - Starter B+ stud, lug 1 (Route 1 point 2)
end

-	Starter feed (H3)	w_rlp_str

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 2 o...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	76 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 2 of 3)

JUMP-POST - Engine-bay jump post		
1	Jump post feed	w_jump

w_jump_2 RED — w_jump_2 RED

T-STARTER-B-3 - Starter B+ stud, lug 3 (Route 1 point 2)		
end		
-	Jump post feed	w_jump

POWER-STUDS - POWER box bus zone (rev 7, glove box)		
ST185-FB-POWER rev 7 BUS ZONE		
NEG	Battery - main	w_trunk_neg

w_trunk_neg_1/0 BLK — w_trunk_neg_1/0 BLK

T-TRUNK-NEG - Battery negative terminal post, trunk RH rear (Ro...		
end		
-	Battery - main	w_trunk_neg

T-ALT-B - Alternator B+ stud, rear RH of engine (Route 1 poi...		
end		
-	Alternator B+	w_alt

w_alt_2 RED — w_alt_2 RED

T-STARTER-B-2 - Starter B+ stud, lug 2 (Route 1 point 2)		
end		
-	Alternator B+	w_alt

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 3 o...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	77 OF 82	432 x 279 mm	DG	2026-10-29

REAR FUEL - FUEL PUMP AND LEVEL SENDER

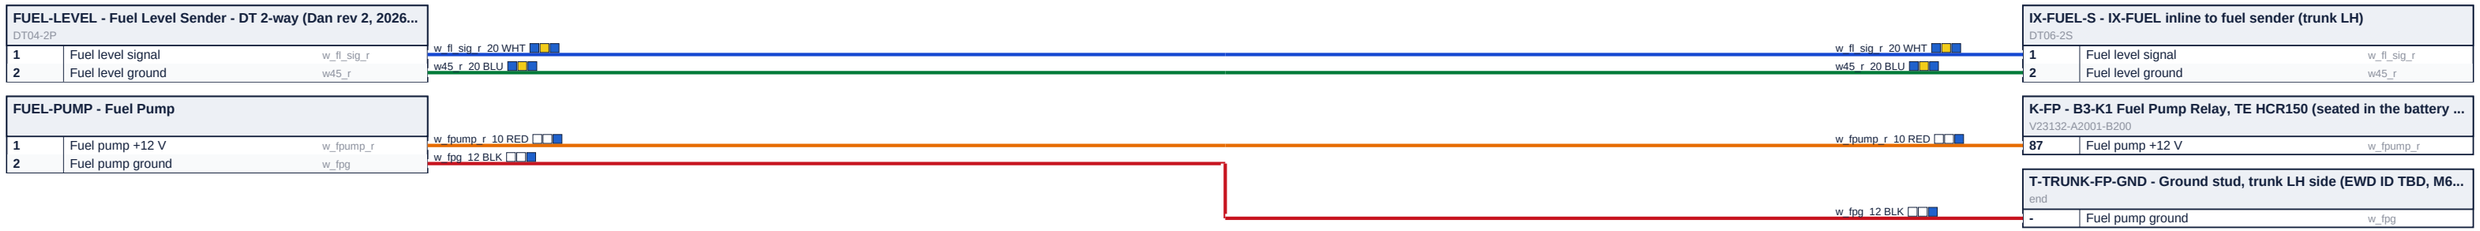

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

REAR FUEL - FUEL PUMP AND LEVEL SENDER

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	78 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 5 of 2)

SP-WS-F-SHIELD - Sensor screen join - FL + FR screens to t...		
solder splice (node)		
-	FL sensor shield	cab_fl_sh
-	FR sensor shield	cab_fr_sh
-	Front sensor shields	w_ws_f_shield

IX-WS-F-P - IX-WS-F		
DT04-6P		
1	VRC-F +5V	cab_fout_5v
2	VRC-F GND	cab_fout_gnd
5	WS-F screen drain	cab_fout_sh

cab_fl_sh_screen
cab_fr_sh_screen
w_ws_f_shield_20 BLK
cab_fout_5v_20 RED
cab_fout_gnd_20 YEL
cab_fout_sh_screen

cab_fl_sh_screen
cab_fr_sh_screen
w_ws_f_shield_20 BLK
cab_fout_5v_20 RED
cab_fout_gnd_20 YEL
cab_fout_sh_screen

CAB-FL cable screen (floats at the device end)		
cable screen		
-	FL sensor shield	cab_fl_sh

CAB-FR cable screen (floats at the device end)		
cable screen		
-	FR sensor shield	cab_fr_sh

VRC-F-IN - VRC front IN plug		
LP-16-J05PE-02-001		
3	Front sensor shields	w_ws_f_shield

VRC-F-OUT - VRC front OUT plug		
LP-16-J05PE-02-001		
1	VRC-F +5V	cab_fout_5v
2	VRC-F GND	cab_fout_gnd
3	WS-F screen drain	cab_fout_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 1 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	79 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 5 of 2)

IX-WS-F-P - IX-WS-F
DT04-6P

3	FL conditioned out	cab_fout_l
4	FR conditioned out	cab_fout_r

VRC-F-IN - VRC front IN plug
LP-16-J05PE-02-001

1	FL wheel speed +	cab_fl_p
2	FL wheel speed -	cab_fl_n
4	FR wheel speed +	cab_fr_p
5	FR wheel speed -	cab_fr_n

cab_fout_l 20 GRN
cab_fout_r 20 BLU
cab_fl_p 20 BLU
cab_fl_n 20 WHT
cab_fr_p 20 BLU
cab_fr_n 20 WHT

cab_fout_l 20 GRN
cab_fout_r 20 BLU
cab_fl_p 20 BLU
cab_fl_n 20 WHT
cab_fr_p 20 BLU
cab_fr_n 20 WHT

VRC-F-OUT - VRC front OUT plug
LP-16-J05PE-02-001

4	FL conditioned out	cab_fout_l
5	FR conditioned out	cab_fout_r

WSS-FL - ABS Wheel Speed FL
DT06-2S-CE05

1	FL wheel speed +	cab_fl_p
2	FL wheel speed -	cab_fl_n

WSS-FR - ABS Wheel Speed FR
DT06-2S-CE05

1	FR wheel speed +	cab_fr_p
2	FR wheel speed -	cab_fr_n

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 2 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	80 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 5 of 2)

SP-WS-R-SHIELD - Sensor screen join - RL + RR screens to t...		
solder splice (node)		
-	RL sensor shield	cab_rl_sh
-	RR sensor shield	cab_rr_sh
-	Rear sensor shields	w_ws_r_shield

IX-WS-R-P - IX-WS-R		
DT04-6P		
1	VRC-R +5V	cab_rout_5v
2	VRC-R GND	cab_rout_gnd
5	WS-R screen drain	cab_rout_sh

cab_rl_sh_screen
cab_rr_sh_screen
w_ws_r_shield_20 BLK
cab_rout_5v_20 RED
cab_rout_gnd_20 YEL
cab_rout_sh_screen

cab_rl_sh_screen
cab_rr_sh_screen
w_ws_r_shield_20 BLK
cab_rout_5v_20 RED
cab_rout_gnd_20 YEL
cab_rout_sh_screen

CAB-RL cable screen (floats at the device end)		
cable screen		
-	RL sensor shield	cab_rl_sh

CAB-RR cable screen (floats at the device end)		
cable screen		
-	RR sensor shield	cab_rr_sh

VRC-R-IN - VRC rear IN plug		
LP-16-J05PE-02-001		
3	Rear sensor shields	w_ws_r_shield

VRC-R-OUT - VRC rear OUT plug		
LP-16-J05PE-02-001		
1	VRC-R +5V	cab_rout_5v
2	VRC-R GND	cab_rout_gnd
3	WS-R screen drain	cab_rout_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL

IDENT BANDS (R87): Blue Yellow White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 1 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	81 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 5 of 2)



WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL

IDENT BANDS (R87): Blue · Yellow · White

built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 2 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	82 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale