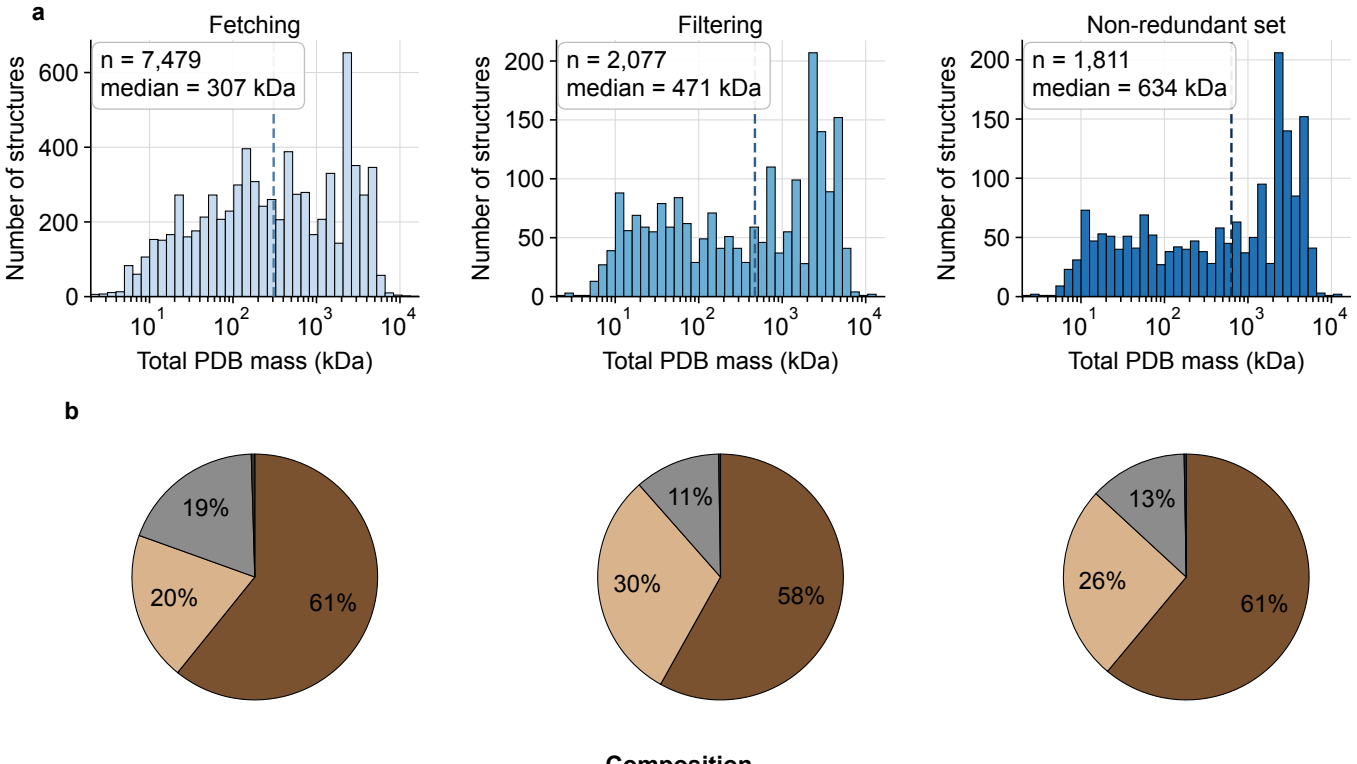

Clustering is performed per pocket (4,834 pockets → 4,060 non-redundant representatives); the non-redundant stage counts the 1,811 structures contributing ≥ 1 representative pocket.