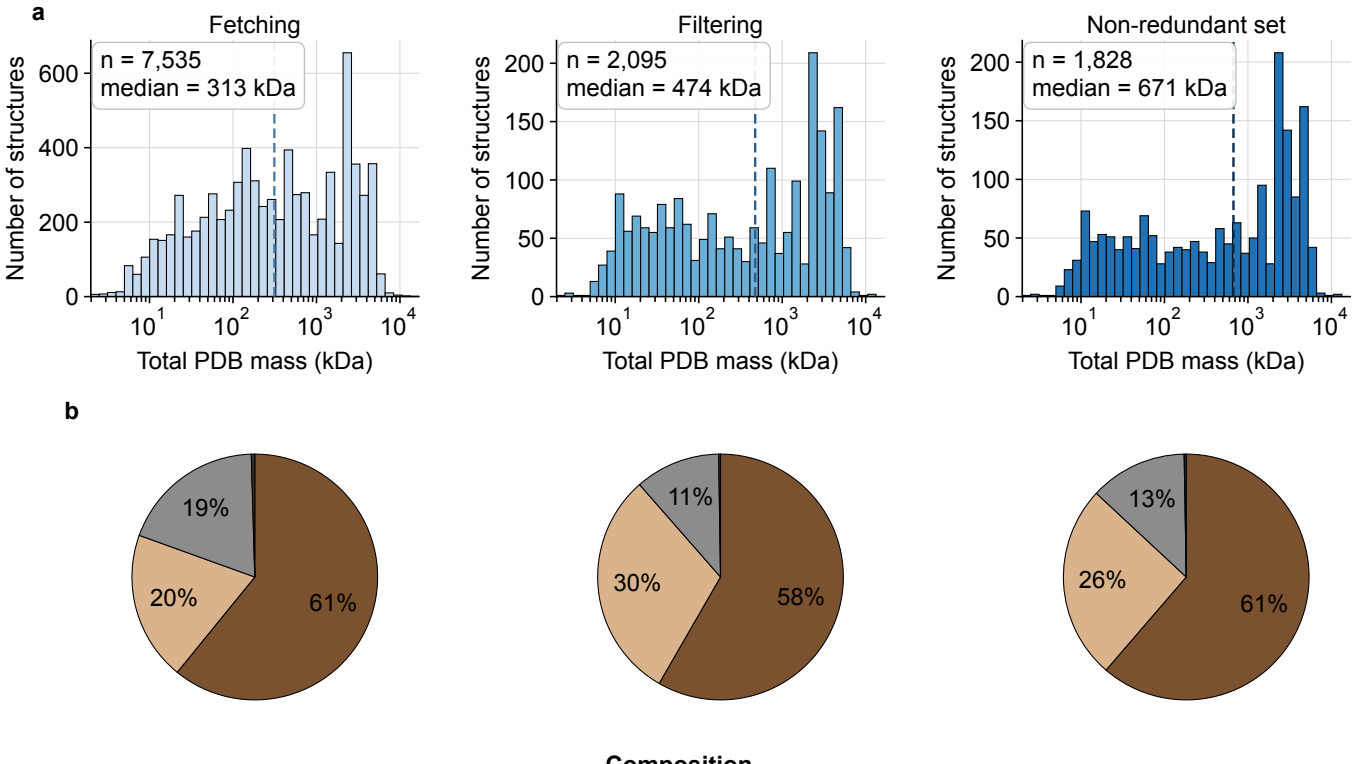

Clustering is performed per pocket (4,930 pockets → 4,155 non-redundant representatives); the non-redundant stage counts the 1,828 structures contributing ≥ 1 representative pocket.