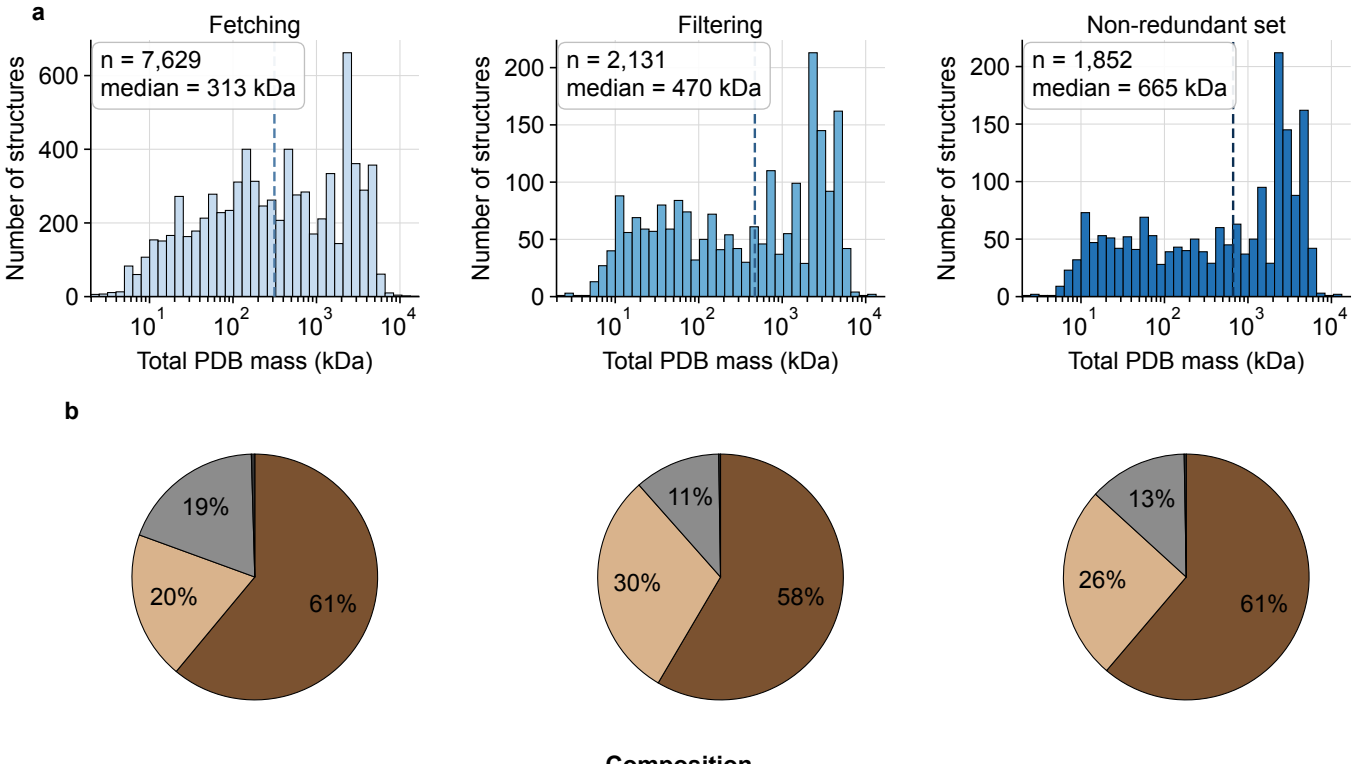

Clustering is performed per pocket (5,006 pockets → 4,199 non-redundant representatives); the non-redundant stage counts the 1,852 structures contributing ≥ 1 representative pocket.