REVISIONS			
REV	DESCRIPTION	BY	DATE
A	Initial	Claude	14/10/26
B	J1-J4 answers (R94) (#217)	Claude	15/10/26
C	SteveCAD audit v3 fixes ported into the source (#272)	Claude	16/10/26
D	Dan's N2 / N3 / N4 answers (#273); first drawing issued (#280)	Claude; drawing SteveCAD	16/10/26
E	Dan's markup 17/10/26 (23-21): spare studs deleted, the 9 studs respaced to 9.35 (PEM holes moved)	Claude	18/10/26

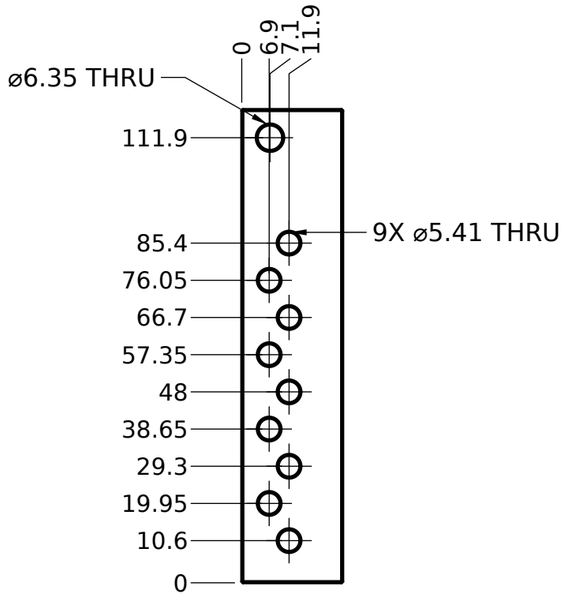

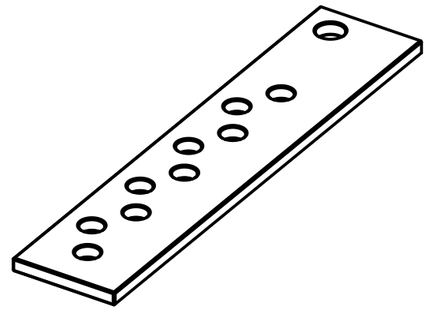

TRIMETRIC VIEW (SCALE 1:1.25)





NOTES:

1. C110 COPPER, TINNED. CUT FROM 1" x 1/8" (25.4 x 3.2) TINNED FLAT BAR (MECCANIXITY B0CGJC2S1L). ONE 305 BAR MAKES BUS1 AND BUS2.
2. THE HOLES TAKE PRESS-IN PEM NUTS - DO NOT TAP THEM. ø5.41 +0.08/-0 FOR A PEM S-M4-2ZI AT EACH M4 STUD; ø6.35 +0.08/-0 FOR A PEM SS-M5-2ZI AT THE M5 FEED. PRESS EACH NUT IN FROM THE STRIP FACE.
3. THE 0.3 x 45° CHAMFERS ON THE HOLE RIMS ARE IN THE MODEL: CUT THEM AS SHOWN.
4. THE STRIP STANDS ON ITS EDGE IN THE LOGIC BASE. SAW TO LENGTH, DRILL. DEBURR EVERY HOLE AND EDGE. DO NOT REMOVE THE TIN FROM THE CONTACT FACES.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
LOGIC BUS STRIP BUS2

PART / DWG NO.	REV	MATERIAL
ST185-FB-116	**E.01**	C110 COPPER, TINNED

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1.5	mm	B (11x17)	1 OF 1	2026-10-18	SteveCAD

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev7\\Logic_Strip_Logic_CuC110_25p4x3p2_on_edge.step

3RD ANGLE