THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 1 of 9)

BUS-5V - DT06-12 plug (ECU splice point) DT06-12SA		
2	+5 V throttle sensor	w_rail_sp_5v_c
3	+5 V MAP sensor	w_5v_a_c39
4	+5 V turbo speed	w_5v_a_c40
5	+5 V oil pressure	w_5v_brail_c45
6	+5 V fuel pressure	w_5v_brail_c46
7	+5 V coolant press	w_5v_brail_c47



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
13	+5 V fuel pressure	w_5v_brail_c46
16	+5 V MAP sensor	w_5v_a_c39
25	+5 V coolant press	w_5v_brail_c47
27	+5 V oil pressure	w_5v_brail_c45
41	+5 V throttle sensor	w_rail_sp_5v_c
52	+5 V turbo speed	w_5v_a_c40

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 1 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	1 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 2 of 9)

BUS-GNDOUT-A - DT06-12 plug (ECU splice point)
DT06-12SA

2	Gnd IAT/TPS/coolant	w_rail_sp_gndout_c
3	Gnd crank sensor	w_gnd_a_c41
4	Gnd cam sensor	w_gnd_a_c42
5	Gnd turbo speed	w_gnd_a_c43
6	Gnd flex + MAP	w_gnd_a_c44

BUS-GNDOUT-B - DT06-12 plug (ECU splice point)
DT06-12SA

7	Gnd oil/clnt/temps	w_gnd_b_c19

w_rail_sp_gndout_c_20 BLU
w_gnd_a_c41_20 BLU
w_gnd_a_c42_20 BLU
w_gnd_a_c43_20 BLU
w_gnd_a_c44_20 BLU
w_gnd_b_c19_20 BLU

w_gnd_a_c44_20 BLU
w_gnd_b_c19_20 BLU
w_rail_sp_gndout_c_20 BLU
w_gnd_a_c43_20 BLU
w_gnd_a_c42_20 BLU
w_gnd_a_c41_20 BLU

DRB102-CABIN - DRB102 receptacle (RH firewall)
DRB12-102PAE-L018

18	Gnd flex + MAP	w_gnd_a_c44
29	Gnd oil/clnt/temps	w_gnd_b_c19
34	Gnd IAT/TPS/coolant	w_rail_sp_gndout_c
56	Gnd turbo speed	w_gnd_a_c43
65	Gnd cam sensor	w_gnd_a_c42
75	Gnd crank sensor	w_gnd_a_c41

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL — built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 2 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	2 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 3 of 9)

ECU-B (Link G4X plug B, centre dash) 4-1437290-0		
29	Gearbox speed signal	w_vss_sig_c

BUS-GNDOUT-B - DT06-12 plug (ECU splice point) DT06-12SA		
6	Knock sensor (-)	w12_c
8	Gnd fuel press + VSS	w_gnd_b_c21

SP-REV - reverse switch out to CSB3 opto IN2 and IG2-13 la... solder splice (node)		
-	Reverse sw +12 V out	w_rev_sw_c

POWER-NEG-BAR - POWER box NEG bar M8 stud (glove box) end		
-	Coil ground	w_cop_gnd_ac
-	CAN-Lambda ground	w_lamg_ac

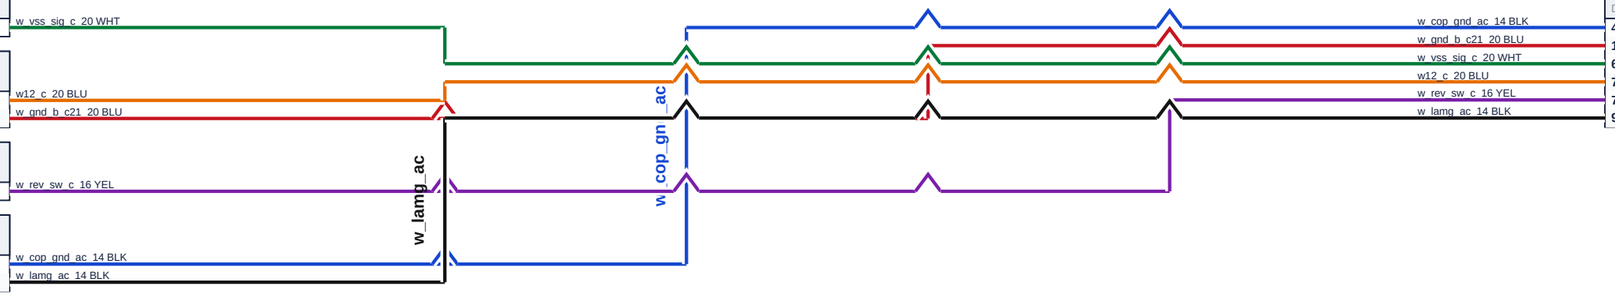

DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
4	Coil ground to the POWER box NEG bar	w_cop_gnd_ac
15	Gnd fuel press + VSS	w_gnd_b_c21
68	Gearbox speed signal	w_vss_sig_c
72	Knock sensor (-)	w12_c
78	Reverse sw +12 V out	w_rev_sw_c
96	CAN-Lambda ground	w_lamg_ac

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL — built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 3 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	3 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 4 of 9)

ECU-A - Link G4X plug A (centre dash) 4-1437290-1		
1	Injector 4 drive (-)	w111_c
2	Injector 3 drive (-)	w110_c
3	Injector 2 drive (-)	w109_c
4	Injector 1 drive (-)	w108_c
8	Crank sensor signal	w200_c
10	Coil 4 trigger (IGT)	w123_c



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
12	Coil 4 trigger (IGT)	w123_c
21	Injector 1 drive (-)	w108_c
22	Injector 2 drive (-)	w109_c
23	Injector 3 drive (-)	w110_c
24	Injector 4 drive (-)	w111_c
74	Crank sensor signal	w200_c

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 4 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	4 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

ECU-A - Link G4X plug A (centre dash) 4-1437290-1		
11	Coil 3 trigger (IGT)	w122_c
12	Coil 2 trigger (IGT)	w121_c
13	Coil 1 trigger (IGT)	w120_c
15	Coolant temp signal	w201_c
16	Intake temp signal	w202_c
17	MAP sensor signal	w26_c



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
9	Coil 1 trigger (IGT)	w120_c
10	Coil 2 trigger (IGT)	w121_c
11	Coil 3 trigger (IGT)	w122_c
17	MAP sensor signal	w26_c
33	Intake temp signal	w202_c
70	Coolant temp signal	w201_c

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 5 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	5 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 6 of 9)

ECU-A - Link G4X plug A (centre dash) 4-1437290-1		
21	Boost solenoid (-)	w103_c
22	Throttle pos 1 main	w128_c
27	EHPS pump speed	w_mrs_c
30	Turbo speed signal	w16_c
31	Flex fuel signal	w48_c
33	Throttle pos 2 sub	w129_c



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
31	Flex fuel signal	w48_c
42	Throttle pos 1 main	w128_c
44	Throttle pos 2 sub	w129_c
53	Turbo speed signal	w16_c
58	Boost solenoid (-)	w103_c
84	EHPS pump speed	w_mrs_c

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL — – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 6 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	6 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 7 of 9)

ECU-B (Link G4X plug B, centre dash) 4-1437290-0		
6	Oil temp signal	w203_c
7	Charge temp signal	w204_c
9	Knock sensor signal	w205_c
15	Oil pressure signal	w29_c
16	Fuel pressure signal	w32_c
18	ETB motor +	w124_c



DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018		
14	Fuel pressure signal	w32_c
28	Oil pressure signal	w29_c
45	ETB motor +	w124_c
59	Charge temp signal	w204_c
61	Oil temp signal	w203_c
71	Knock sensor signal	w205_c

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 7 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	7 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 8 of 9)

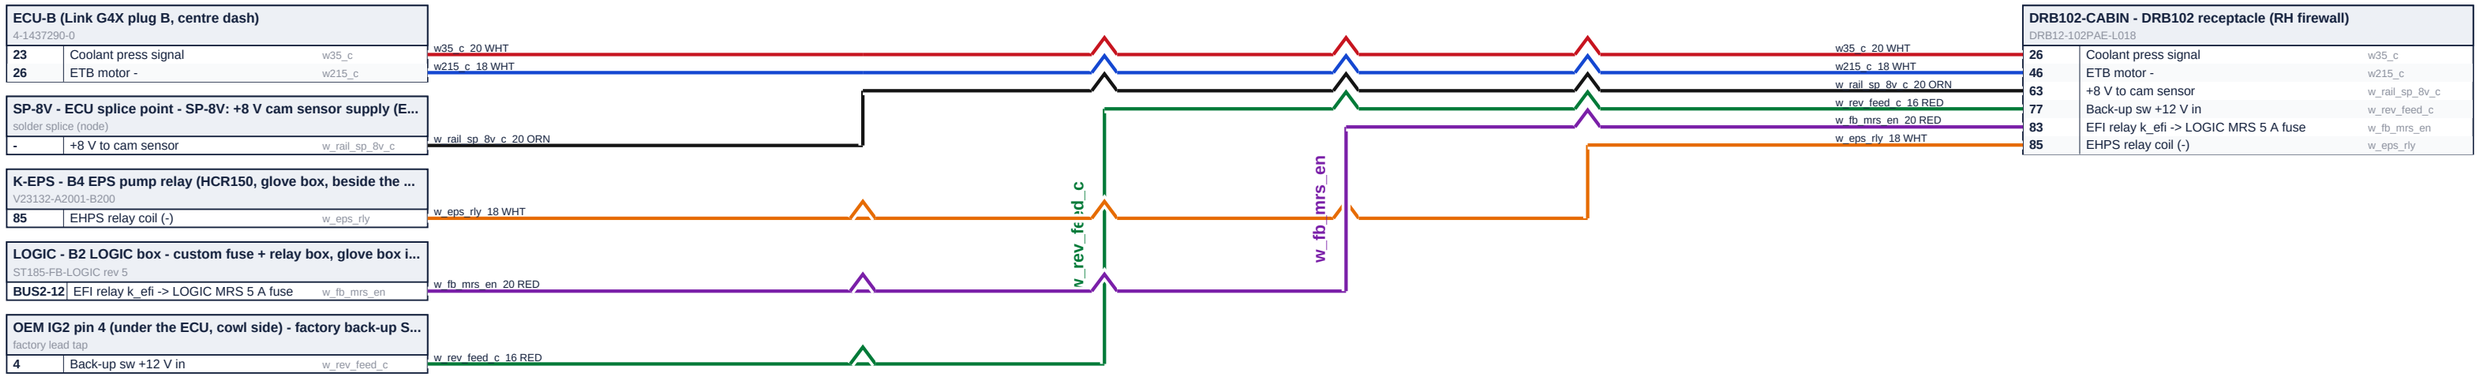

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 8 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	8 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 9 of 9)

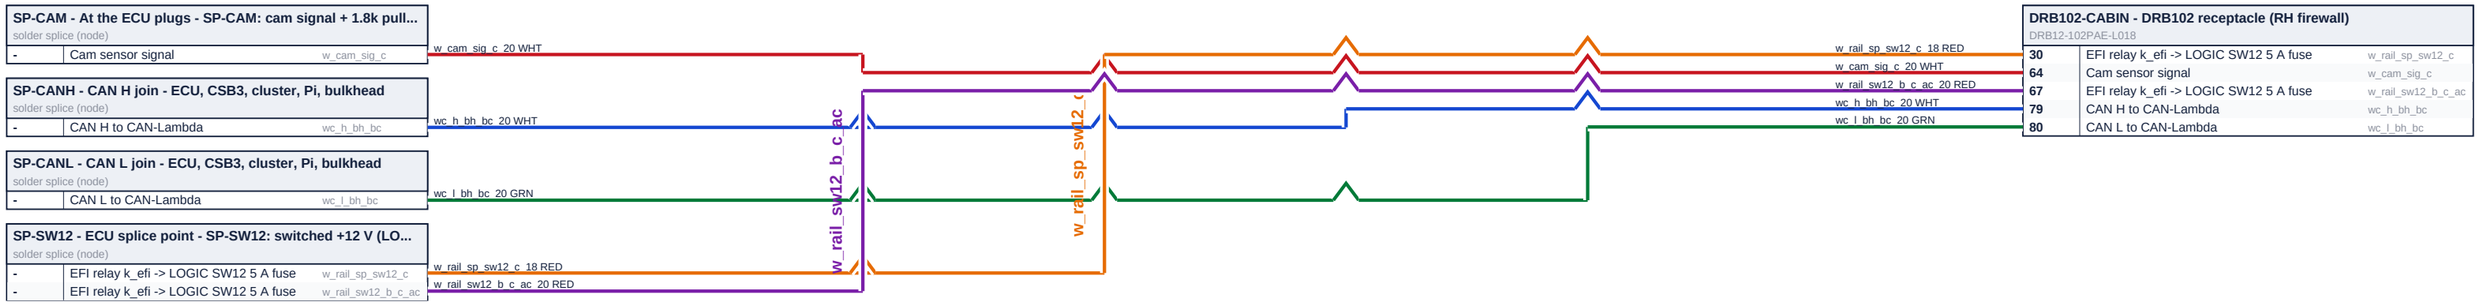

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

THROUGH THE BULKHEAD - every wire that lands on the DRB102 (signals, sensor rails, feeds) (part 9 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	9 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 1 of 5)

BUS-5V - DT06-12 plug (ECU splice point)
DT06-12SA


8	+5 V pedal sensor 1	w_aps_vc1
9	+5 V pedal sensor 2	w210
12	+5 V to BUS-5V-2	w_5v_bus_link

BUS-GNDOUT-A - DT06-12 plug (ECU splice point)
DT06-12SA

7	Pedal 1 ground	w40
8	Pedal 2 ground	w_aps_gnd2

POWER-NEG-BAR - POWER box NEG bar M8 stud (glove box)
end

-	A/C coolant-OK ground	w_ac_cool_gnd

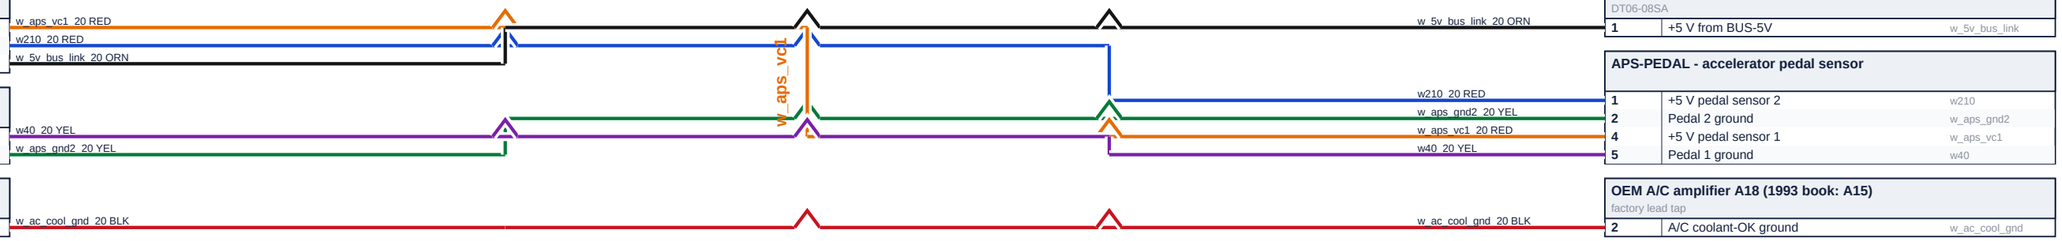

BUS-5V-2 - DT06-8 plug (ECU splice point)
DT06-08SA

1	+5 V from BUS-5V	w_5v_bus_link

APS-PEDAL - accelerator pedal sensor

1	+5 V pedal sensor 2	w210
2	Pedal 2 ground	w_aps_gnd2
4	+5 V pedal sensor 1	w_aps_vc1
5	Pedal 1 ground	w40

OEM A/C amplifier A18 (1993 book: A15)
factory lead tap

2	A/C coolant-OK ground	w_ac_cool_gnd

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 1 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	10 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 2 of 5)

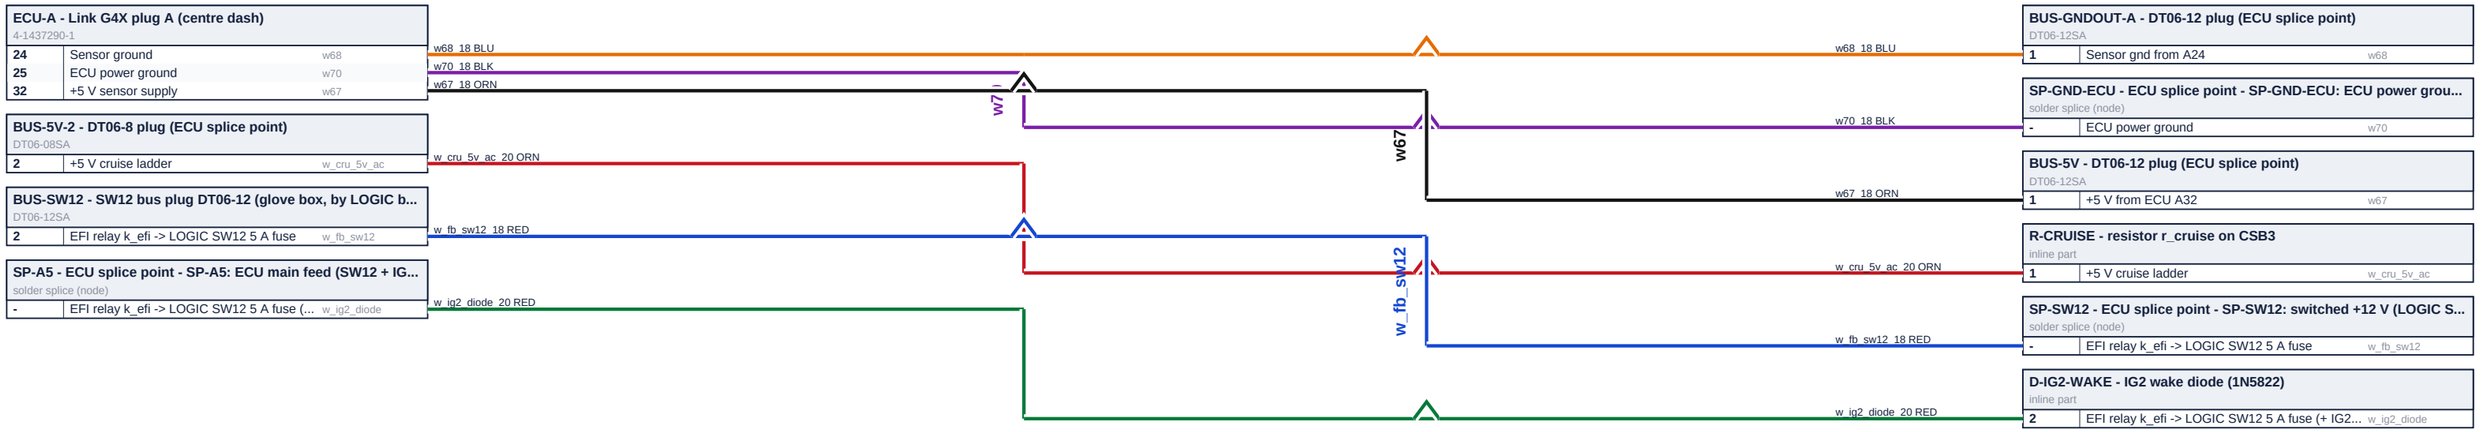

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 2 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	11 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 3 of 5)

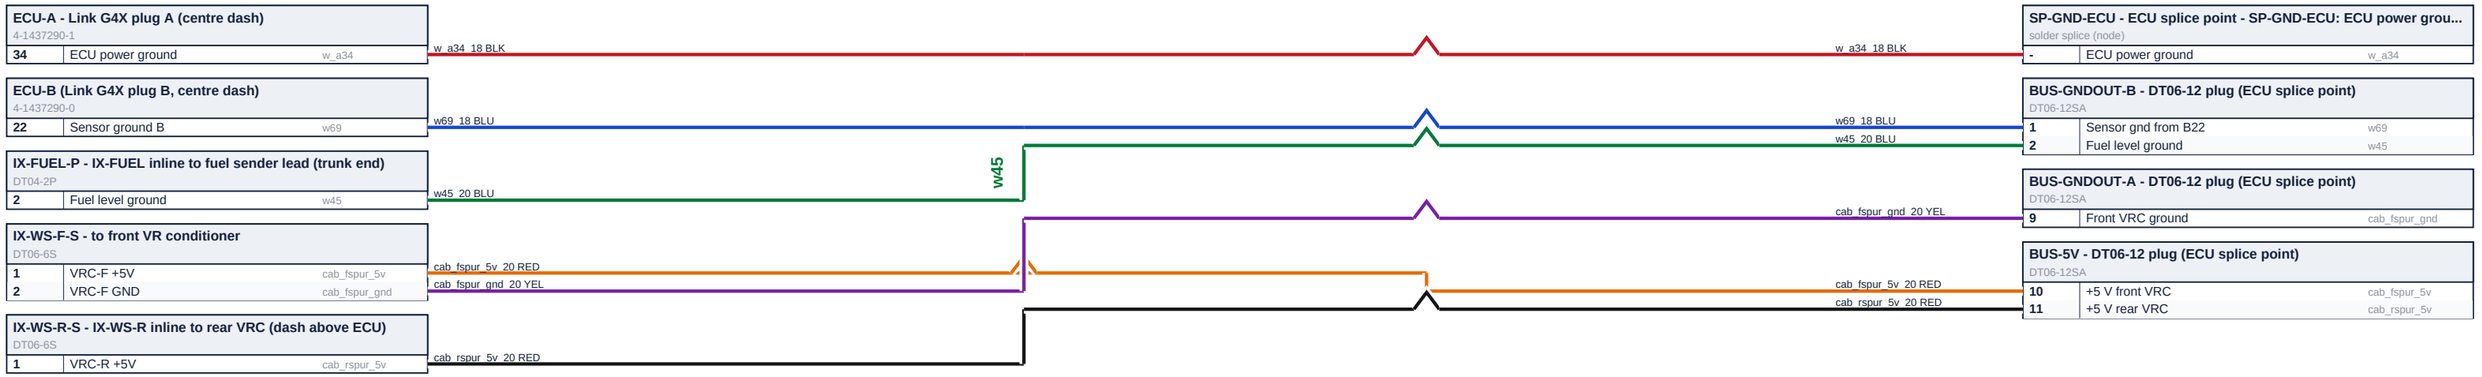

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 3 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	12 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 4 of 5)

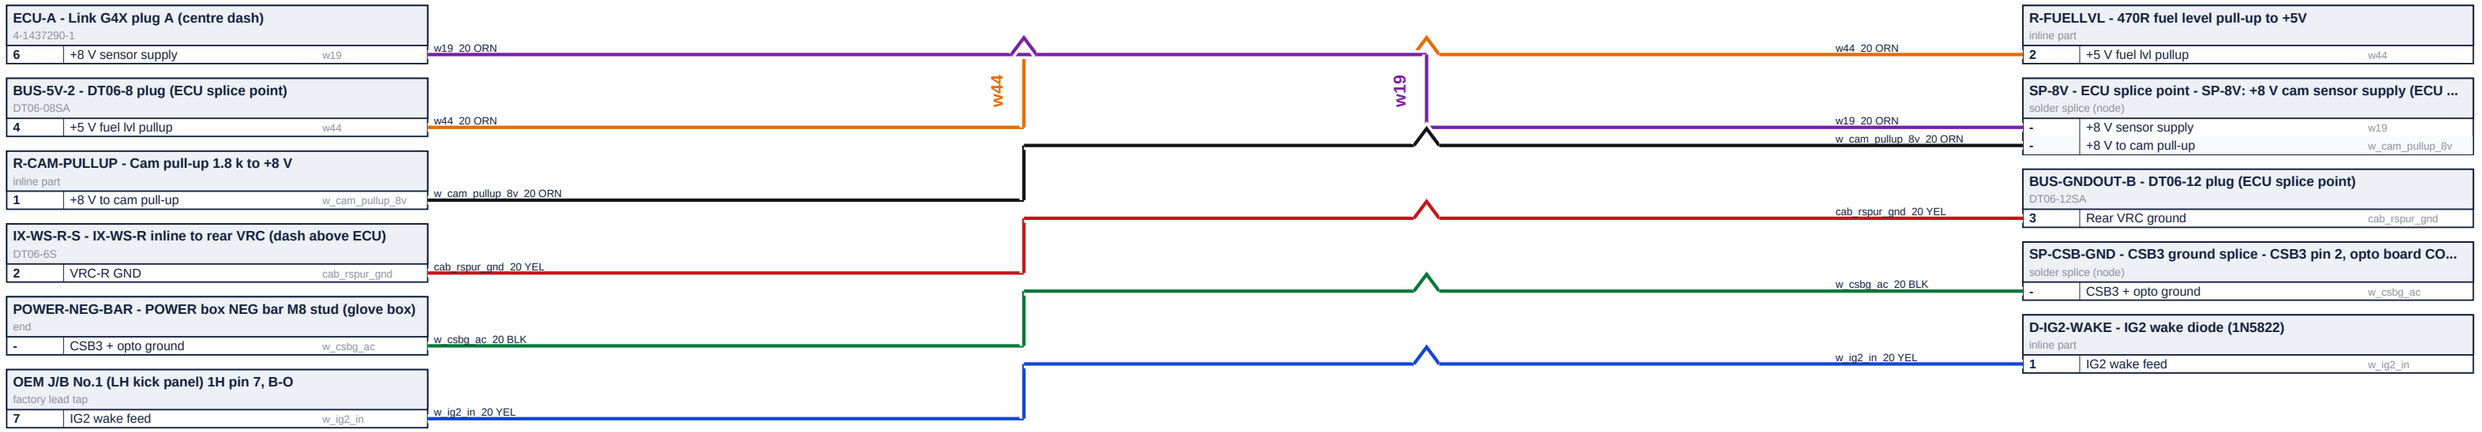

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 4 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	13 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

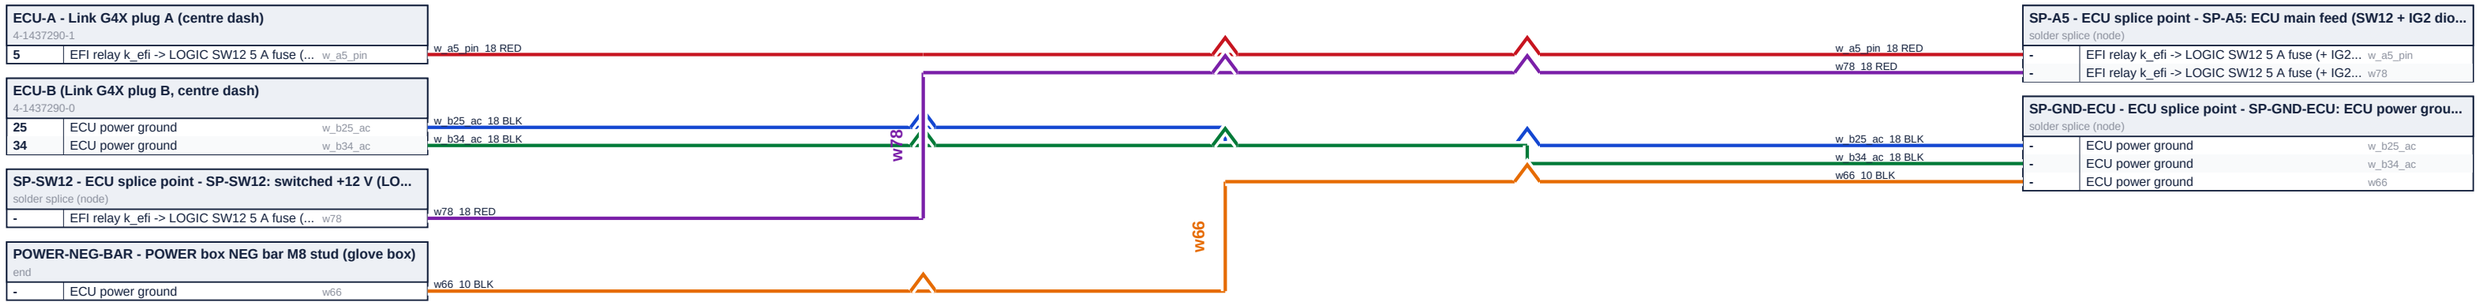

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ECU SPLICE POINT - power, grounds and sensor rails (bussed DT plugs, soldered splices, NEG bar) (part 5 of 5)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	14 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 1 of 6)

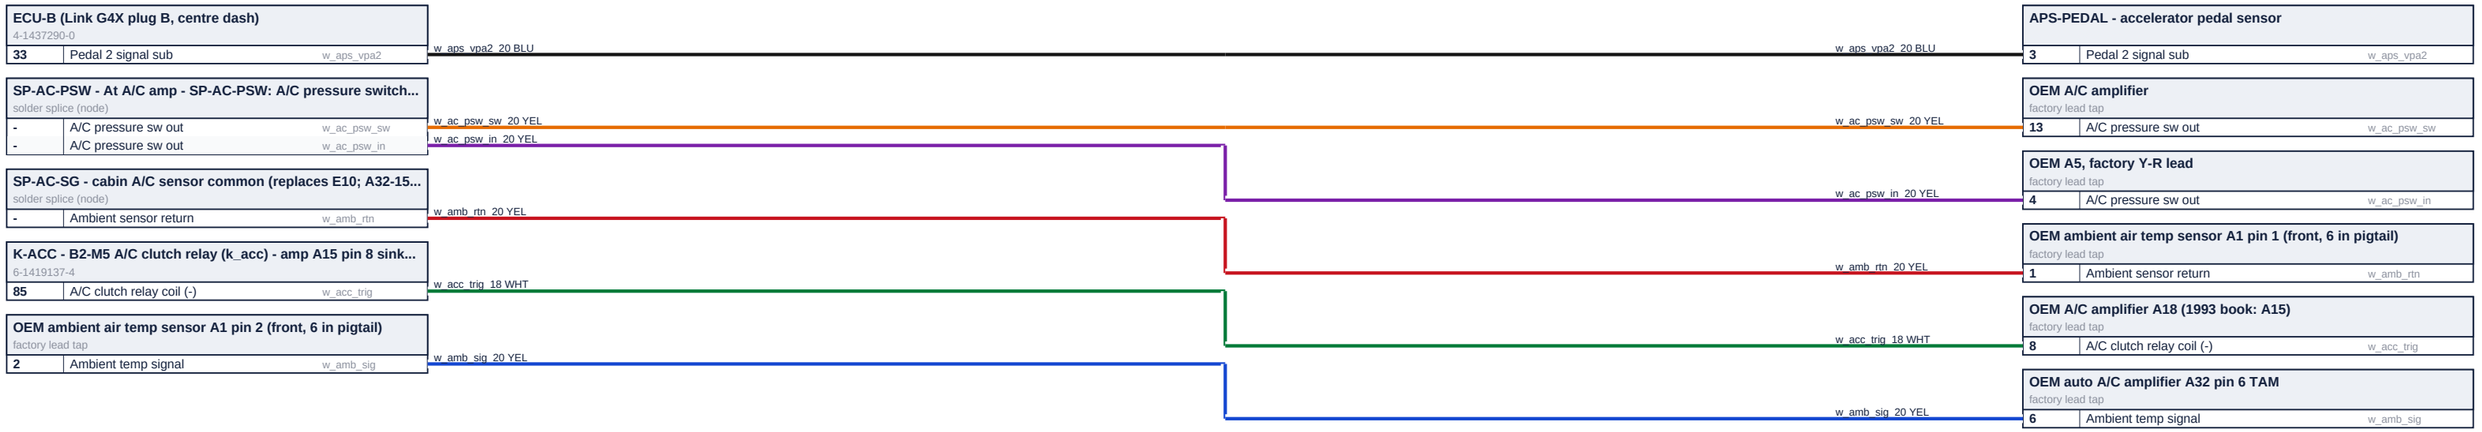

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 1 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	15 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 2 of 6)

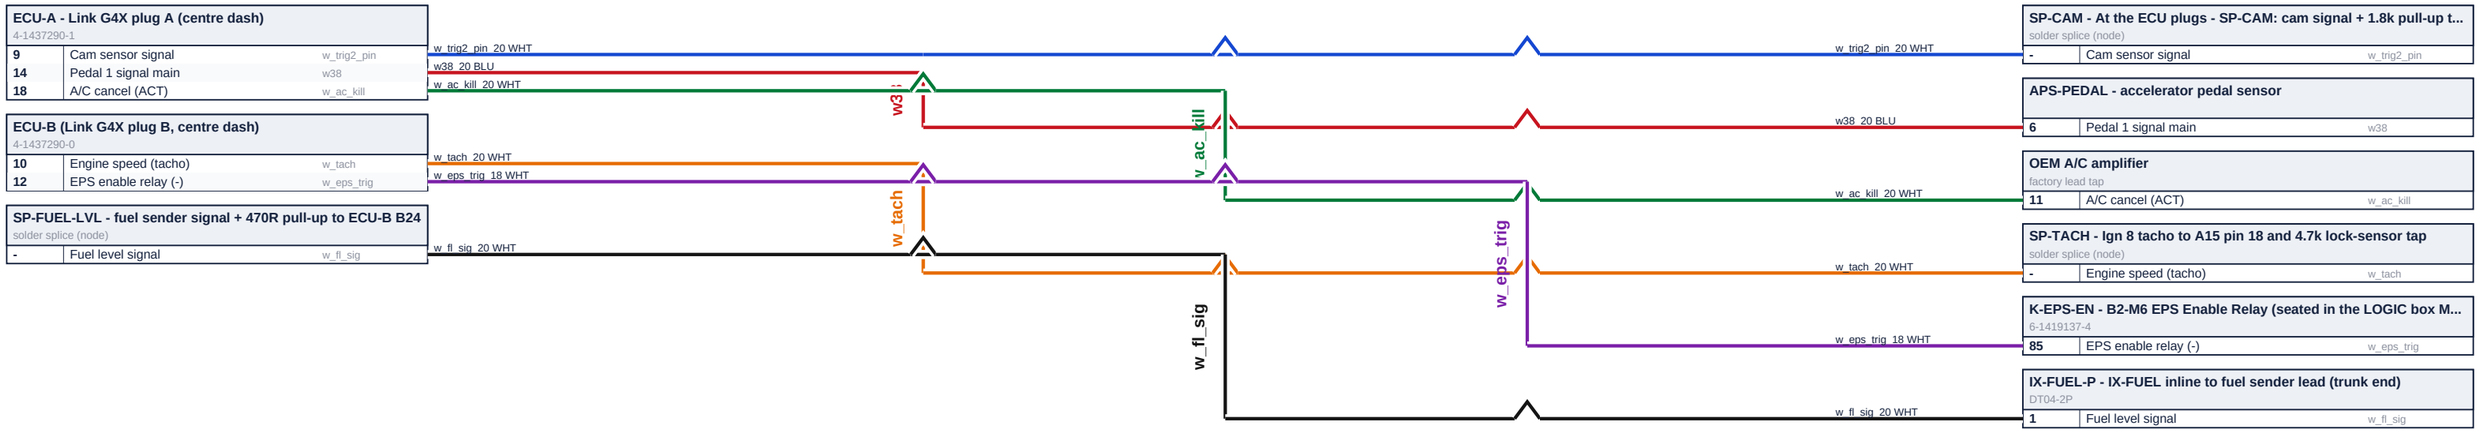

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · – – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 2 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	16 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 3 of 6)

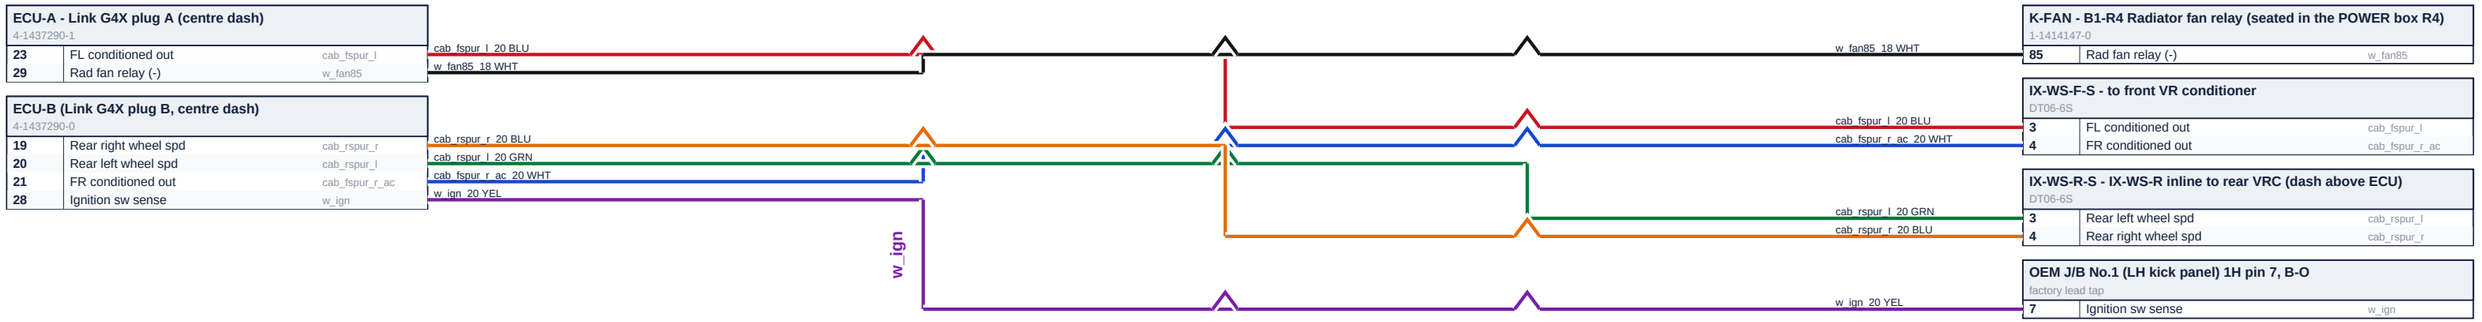

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 3 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	17 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 4 of 6)

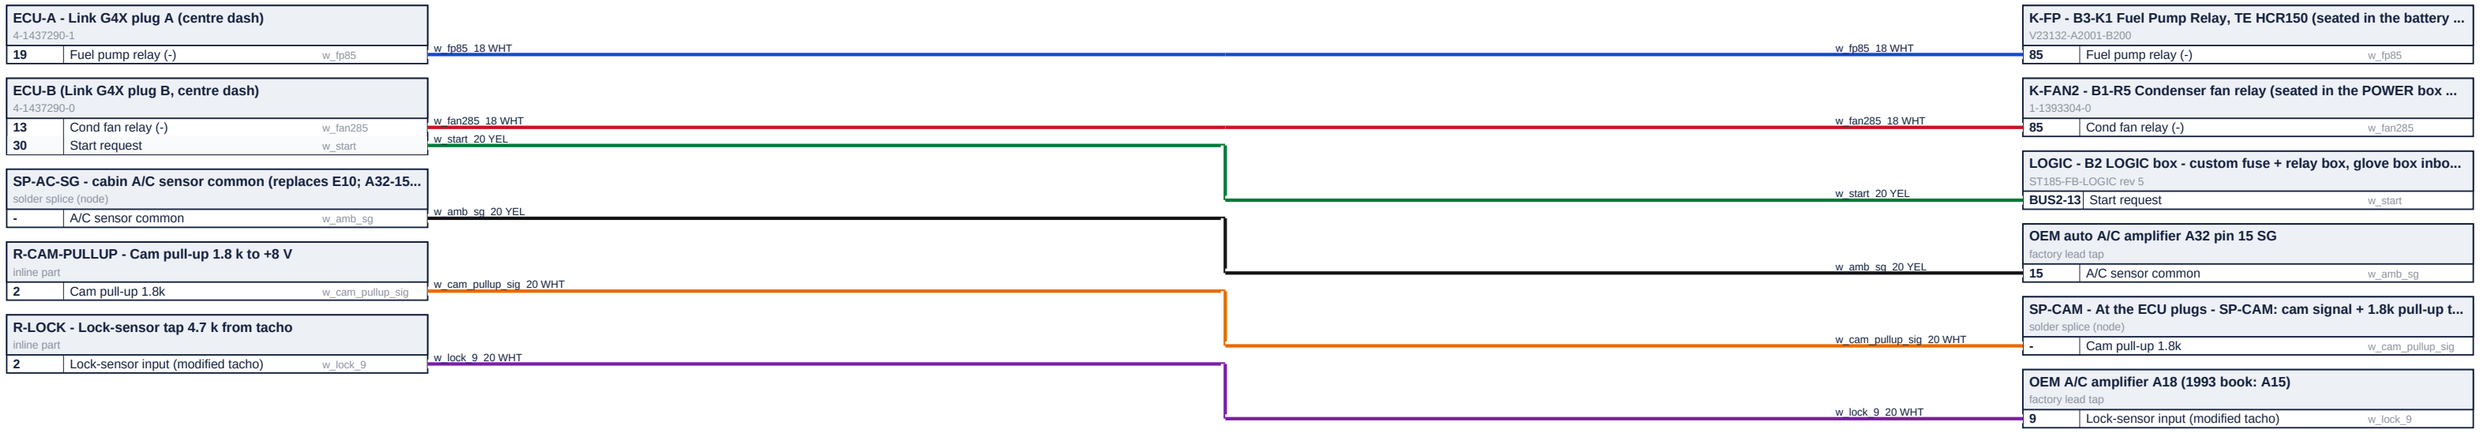

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · – – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 4 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	18 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

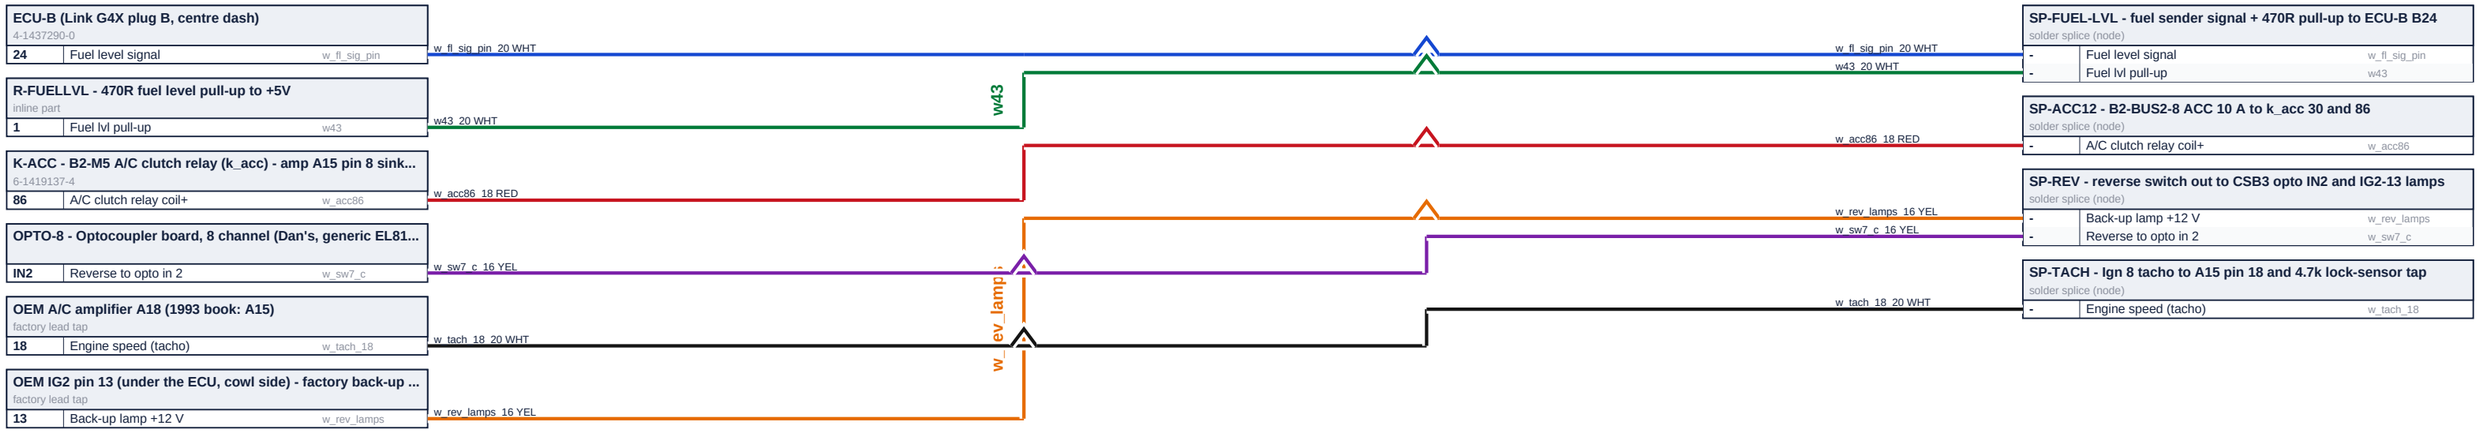

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 5 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	19 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 6 of 6)

R-LOCK - Lock-sensor tap 4.7 k from tacho		
inline part		
1	Tacho to lock-sensor 4.7k	w_tach_r

w_tach_r 20 WHT

w_tach_r 20 WHT

SP-TACH - Ign 8 tacho to A15 pin 18 and 4.7k lock-sensor tap		
solder splice (node)		
-	Tacho to lock-sensor 4.7k	w_tach_r

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN BRANCHES - pedal, wheel-speed inlines, fuel level, A/C, IG2 / start taps, relay coils, other harnesses (part 6 of 6)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	20 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 1 of 4)

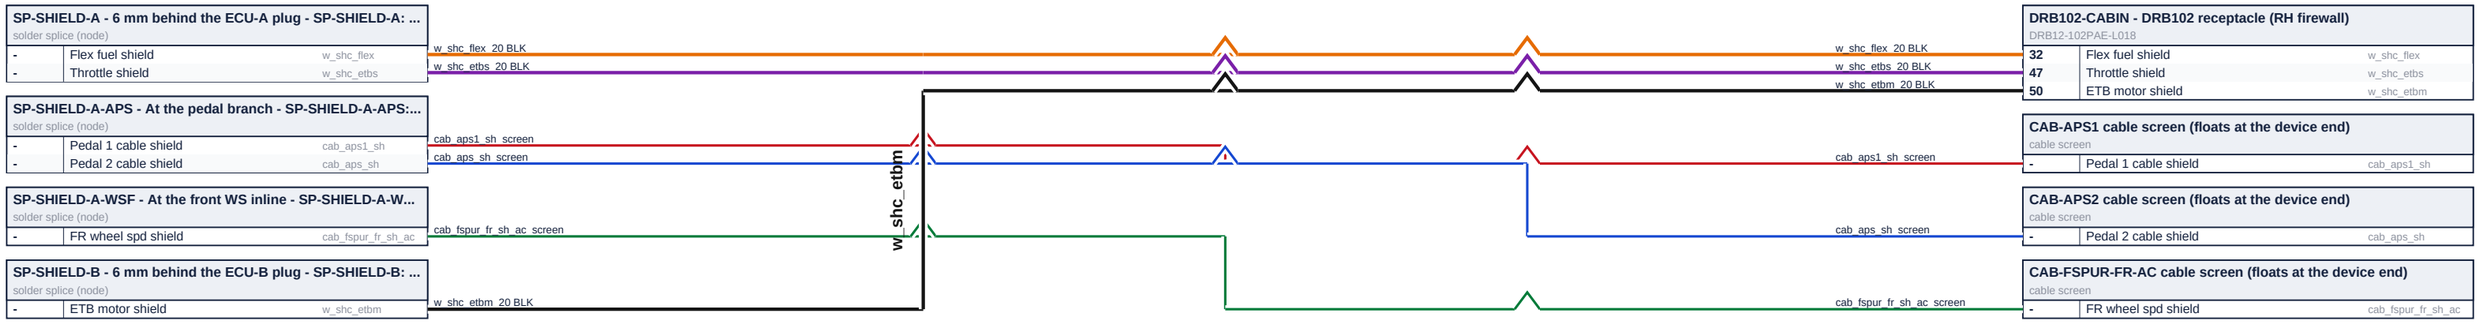

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 1 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	21 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 2 of 4)

SP-SHIELD-A - 6 mm behind the ECU-A plug - SP-SHIELD-A: ...
solder splice (node)

-	Turbo speed shield	w_shc_turbo
-	Cam sensor shield	w_shc_cam
-	Crank sensor shield	w_shc_crank

SP-SHIELD-A-WSF - At the front WS inline - SP-SHIELD-A-W...
solder splice (node)

-	WS-F screen drain	cab_fspur_sh

SP-SHIELD-B - 6 mm behind the ECU-B plug - SP-SHIELD-B: ...
solder splice (node)

-	Gearbox speed shield	w_shc_vss
-	Knock sensor shield	w_shc_knock1

w_shc_turbo_20 BLK
w_shc_cam_20 BLK
w_shc_crank_20 BLK
cab_fspur_sh_screen
w_shc_vss_20 BLK
w_shc_knock1_20 BLK
w_shc_vss
w_shc_knock
w_shc_turbo_20 BLK
w_shc_cam_20 BLK
w_shc_vss_20 BLK
w_shc_knock1_20 BLK
w_shc_crank_20 BLK
cab_fspur_sh_screen

DRB102-CABIN - DRB102 receptacle (RH firewall)
DRB12-102PAE-L018

57	Turbo speed shield	w_shc_turbo
66	Cam sensor shield	w_shc_cam
69	Gearbox speed shield	w_shc_vss
73	Knock sensor shield	w_shc_knock1
76	Crank sensor shield	w_shc_crank

IX-WS-F-S - to front VR conditioner
DT06-6S

5	WS-F screen drain	cab_fspur_sh

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 2 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	22 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 3 of 4)

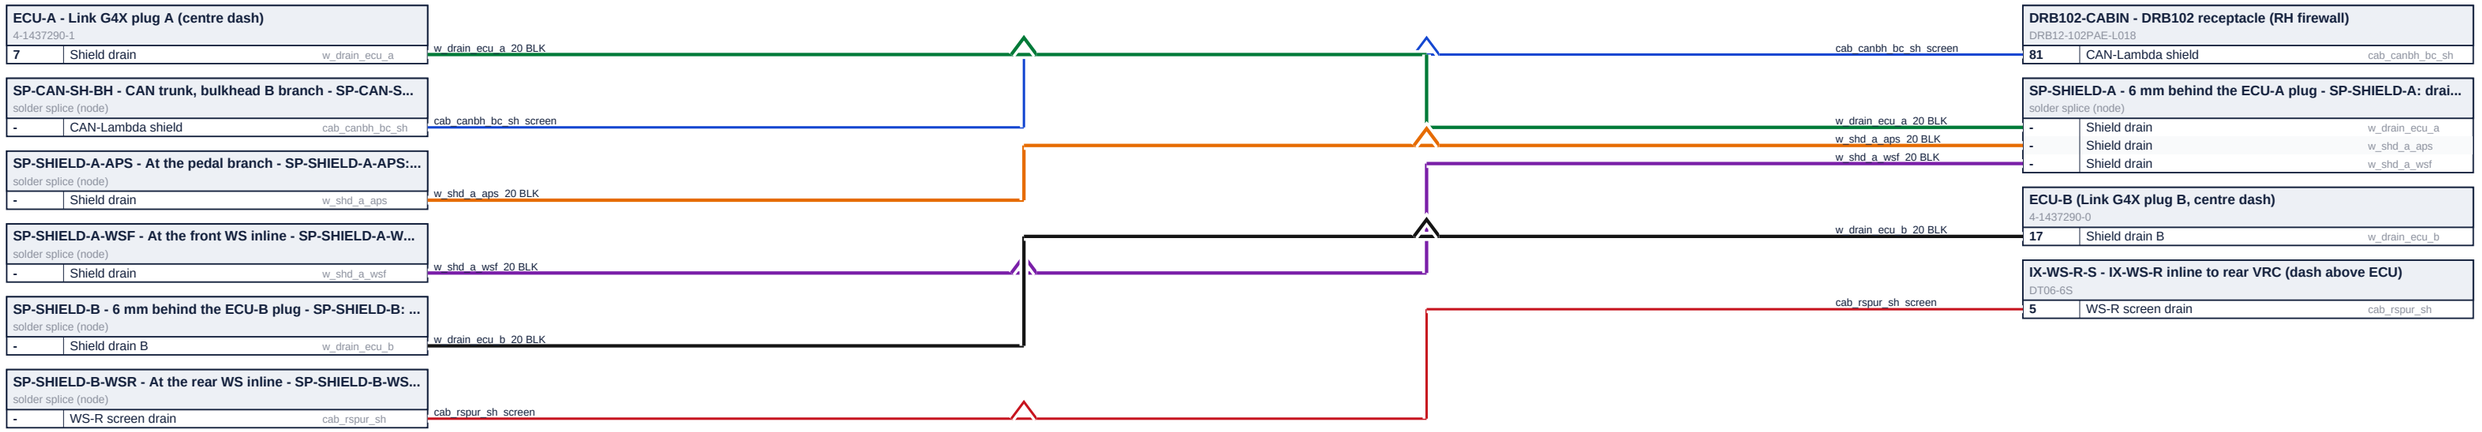

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 3 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	23 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 4 of 4)

SP-SHIELD-B-WSR - At the rear WS inline - SP-SHIELD-B-WS...		
solder splice (node)		
-	Shield drain B	w_shd_b_wsr

w_shd_b_wsr_20 BLK

w_shd_b_wsr_20 BLK

SP-SHIELD-B - 6 mm behind the ECU-B plug - SP-SHIELD-B: drai...		
solder splice (node)		
-	Shield drain B	w_shd_b_wsr

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

SHIELD DRAINS - screens to A7 / B17 (R207), CAN screen to the CAN trunk (part 4 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	24 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 1 of 17)

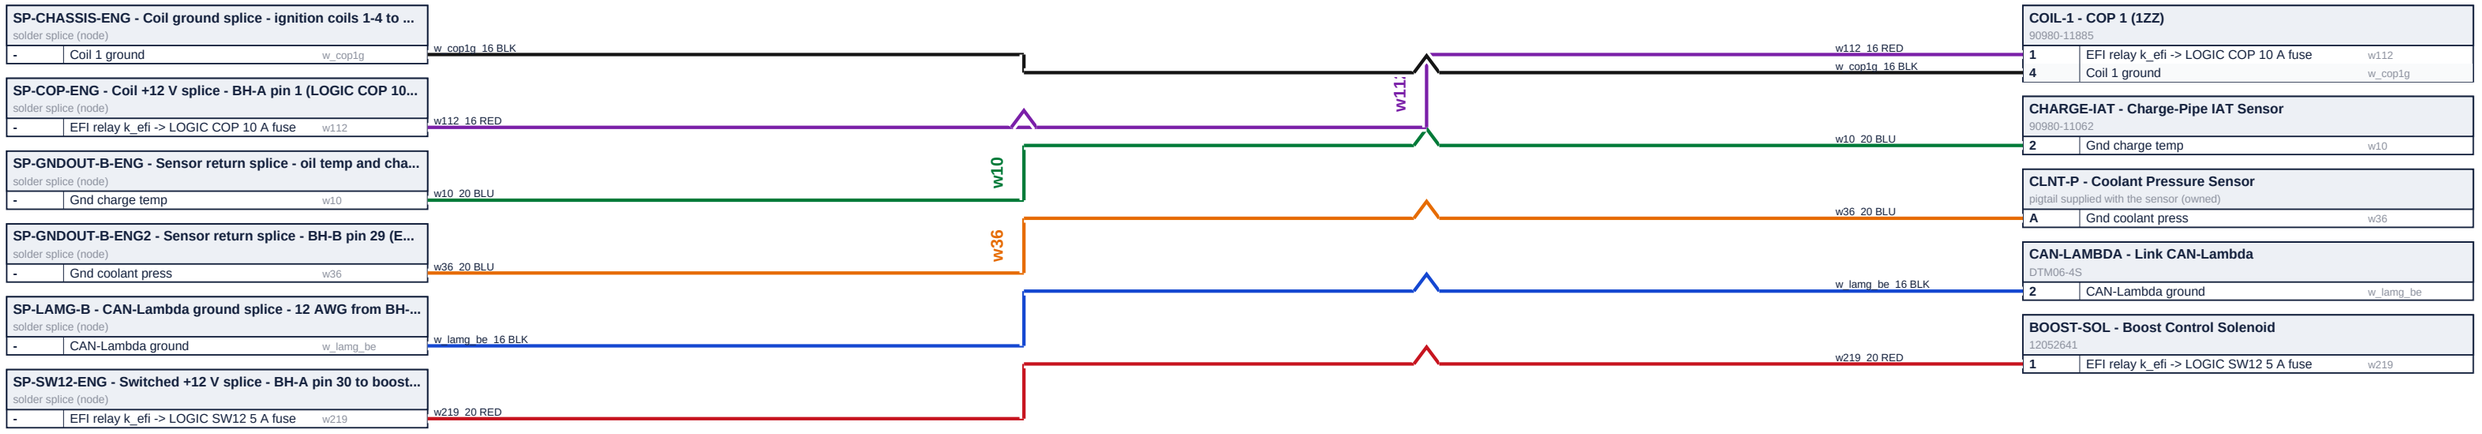

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 1 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	25 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 2 of 17)

SP-CHASSIS-ENG - Coil ground splice - ignition coils 1-4 to ...
solder splice (node)

-	Coil 2 ground	w_cop2g
-	Coil 3 ground	w_cop3g
-	Coil 4 ground	w_cop4g

SP-COP-ENG - Coil +12 V splice - BH-A pin 1 (LOGIC COP 10...
solder splice (node)

-	EFI relay k_efi -> LOGIC COP 10 A fuse	w113
-	EFI relay k_efi -> LOGIC COP 10 A fuse	w114
-	EFI relay k_efi -> LOGIC COP 10 A fuse	w115

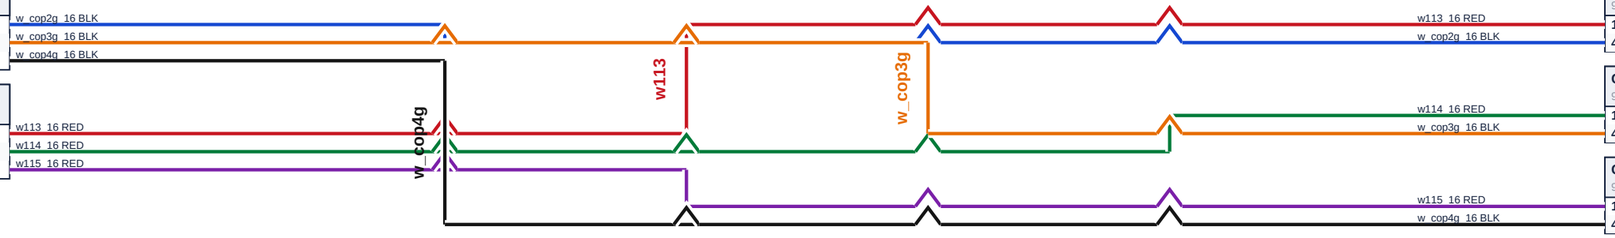

COIL-2 - COP 2 (1ZZ)
90980-11885

1	EFI relay k_efi -> LOGIC COP 10 A fuse	w113
4	Coil 2 ground	w_cop2g

COIL-3 - COP 3 (1ZZ)
90980-11885

1	EFI relay k_efi -> LOGIC COP 10 A fuse	w114
4	Coil 3 ground	w_cop3g

COIL-4 - COP 4 (1ZZ)
90980-11885

1	EFI relay k_efi -> LOGIC COP 10 A fuse	w115
4	Coil 4 ground	w_cop4g

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL – – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 2 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	26 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 3 of 17)

SP-CHASSIS-ENG - Coil ground splice - ignition coils 1-4 to ...		
solder splice (node)		
-	Coil ground	w_cop_gnd_e_ae

SP-COP-ENG - Coil +12 V splice - BH-A pin 1 (LOGIC COP 10...		
solder splice (node)		
-	EFI relay k_efi -> LOGIC COP 10 A fuse	w_cop_pwr_e_ae

SP-INJ-ENG - Injector +12 V splice - BH-A pin 2 (LOGIC INJ 7....		
solder splice (node)		
-	EFI relay k_efi -> LOGIC INJ 7.5 A fuse	w_inj_pwr_e_ae

COIL-1 - COP 1 (1ZZ)		
90980-11885		
3	Coil 1 trigger (IGT)	w120_e

COIL-2 - COP 2 (1ZZ)		
90980-11885		
3	Coil 2 trigger (IGT)	w121_e

STARTER-TRIGGER - Starter solenoid S (50) terminal, 1-way ...		
90980-11400		
1	Starter solenoid S	w_strl_e

w_cop_gnd_e_ae_14 BLK

w_cop_pwr_e_ae_14 RED

w_inj_pwr_e_ae_14 RED

w120_e_20 WHT

w121_e_20 WHT

w_strl_e_12 RED

w120_e

w121_e

w_strl_e

w_cop_pwr_e_ae_14 RED

w_inj_pwr_e_ae_14 RED

w_strl_e_12 RED

w_cop_gnd_e_ae_14 BLK

w120_e_20 WHT

w121_e_20 WHT

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
1	EFI relay k_efi -> LOGIC COP 10 A fuse	w_cop_pwr_e_ae
2	EFI relay k_efi -> LOGIC INJ 7.5 A fuse	w_inj_pwr_e_ae
3	Starter solenoid S	w_strl_e
4	Coil ground to the POWER box NEG bar	w_cop_gnd_e_ae
9	Coil 1 trigger (IGT)	w120_e
10	Coil 2 trigger (IGT)	w121_e

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 3 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	27 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 4 of 17)

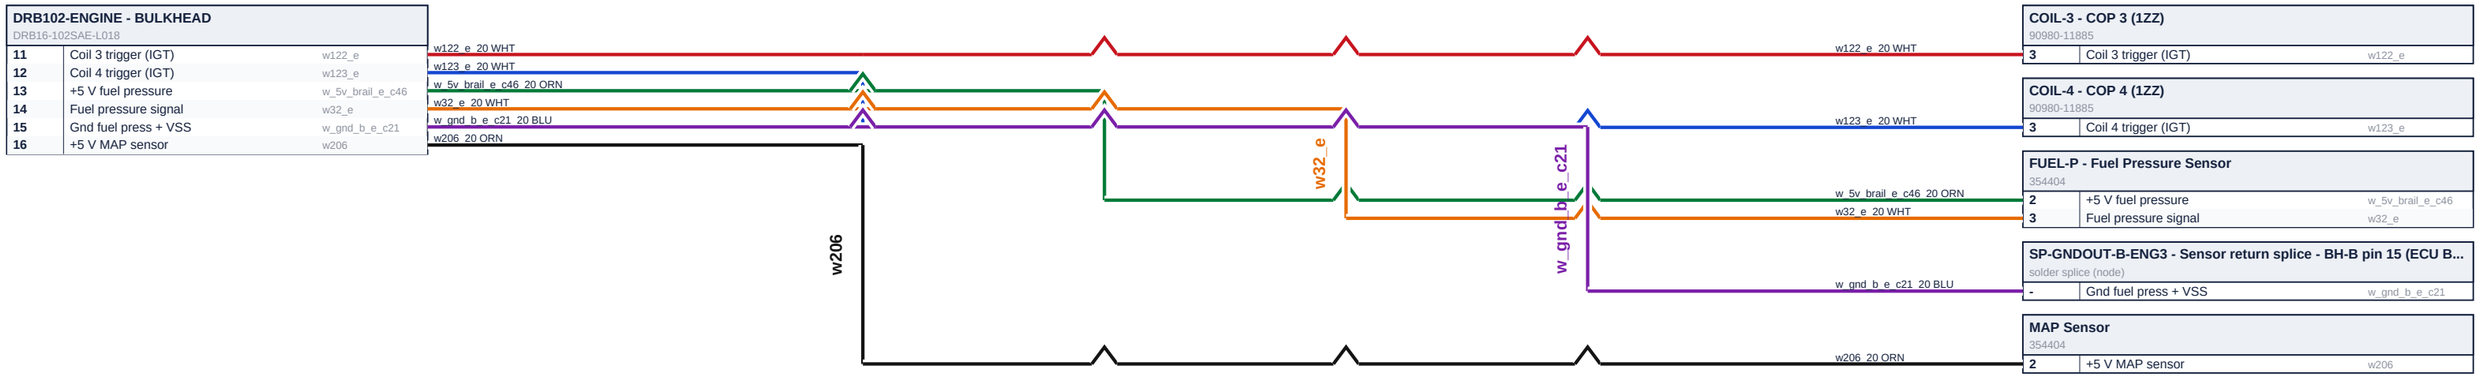

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 4 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	28 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)

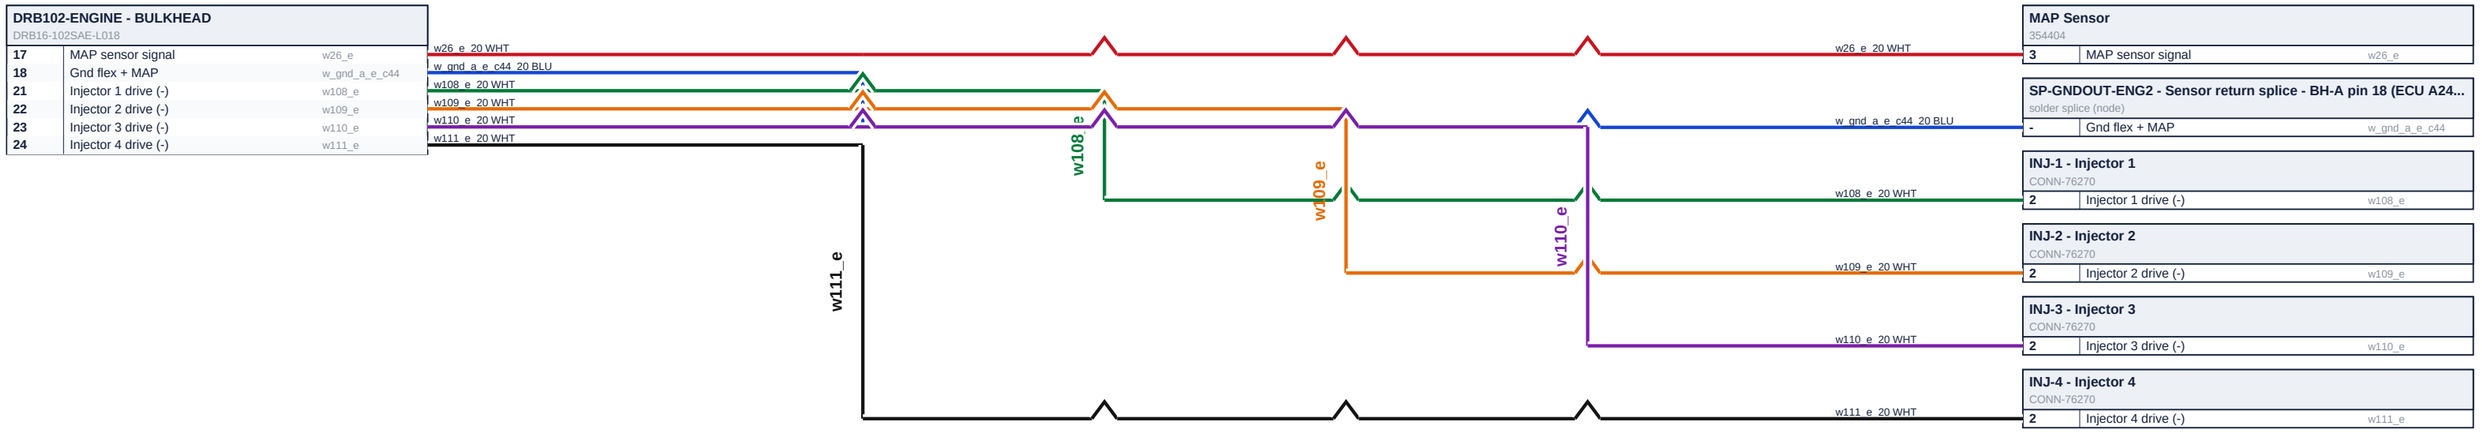

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 5 of 17)


DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	29 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 6 of 17)

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

25	+5 V coolant press	w_5v_brail_e_c47
26	Coolant press signal	w35_e
27	+5 V oil pressure	w_5v_brail_e_c45
28	Oil pressure signal	w29_e
29	Gnd oil/clnt/temps	w_gnd_b_e_c19
30	EFI relay k_efi -> LOGIC SW12 5 A fuse	w_rail_sp_sw12_e

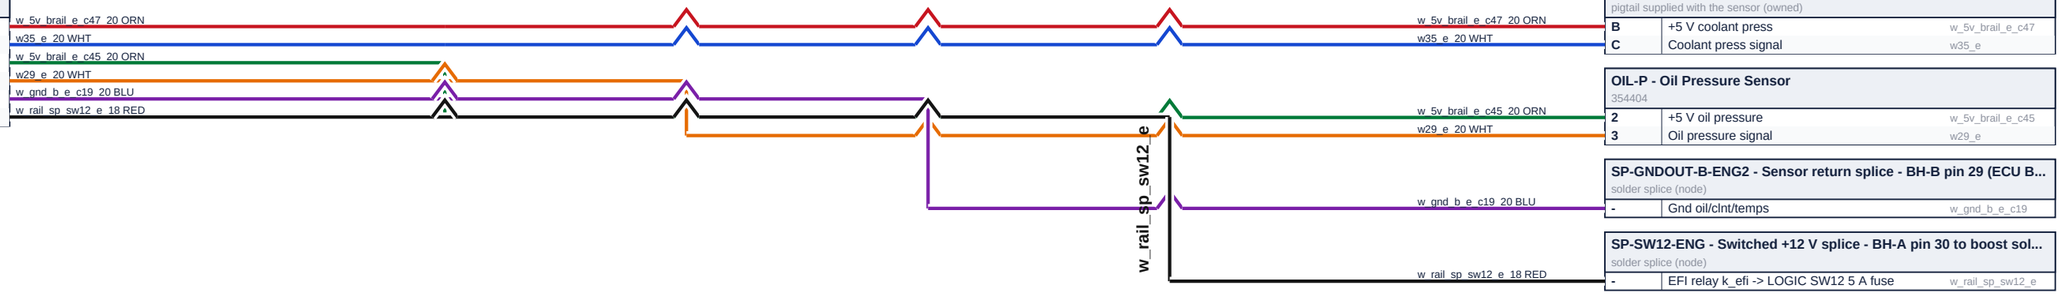

CLNT-P - Coolant Pressure Sensor
pigtail supplied with the sensor (owned)

B	+5 V coolant press	w_5v_brail_e_c47
C	Coolant press signal	w35_e

OIL-P - Oil Pressure Sensor
354404

2	+5 V oil pressure	w_5v_brail_e_c45
3	Oil pressure signal	w29_e

SP-GNDOUT-B-ENG2 - Sensor return splice - BH-B pin 29 (ECU B...
solder splice (node)

-	Gnd oil/clnt/temps	w_gnd_b_e_c19

SP-SW12-ENG - Switched +12 V splice - BH-A pin 30 to boost sol...
solder splice (node)

-	EFI relay k_efi -> LOGIC SW12 5 A fuse	w_rail_sp_sw12_e

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 6 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	30 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 7 of 17)

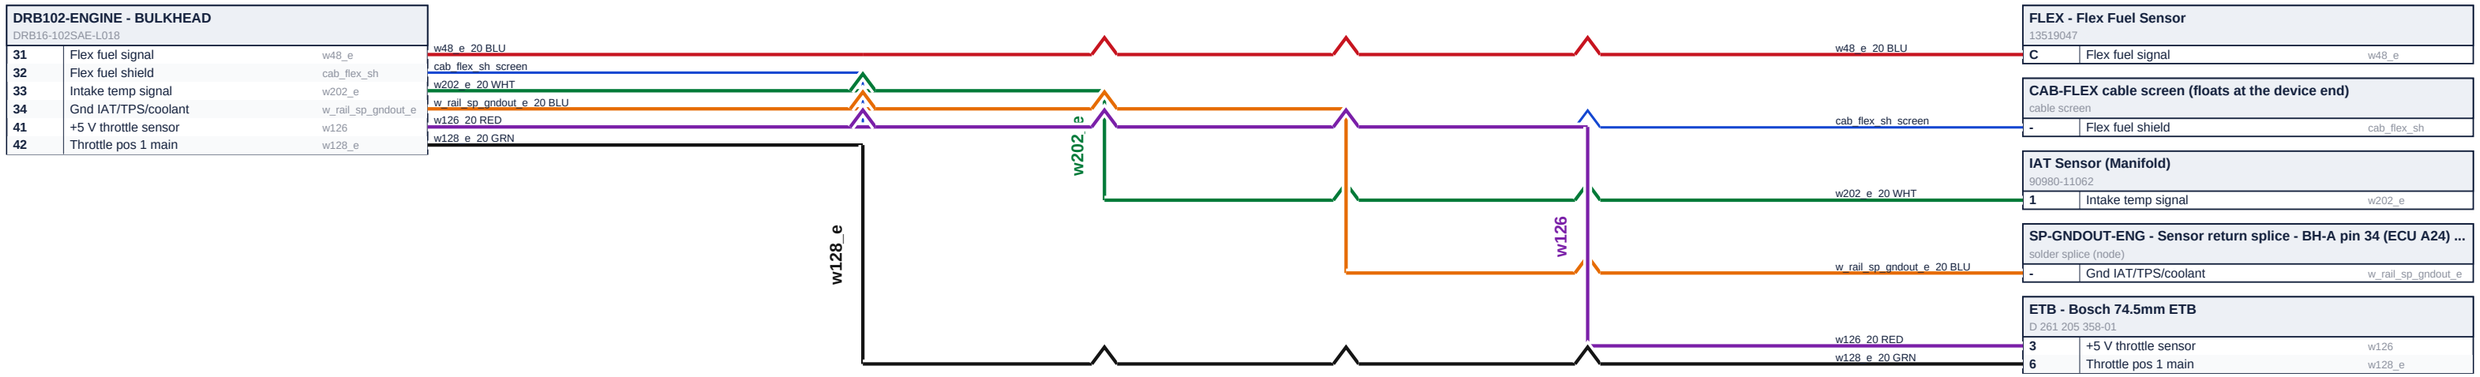

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 7 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	31 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 8 of 17)

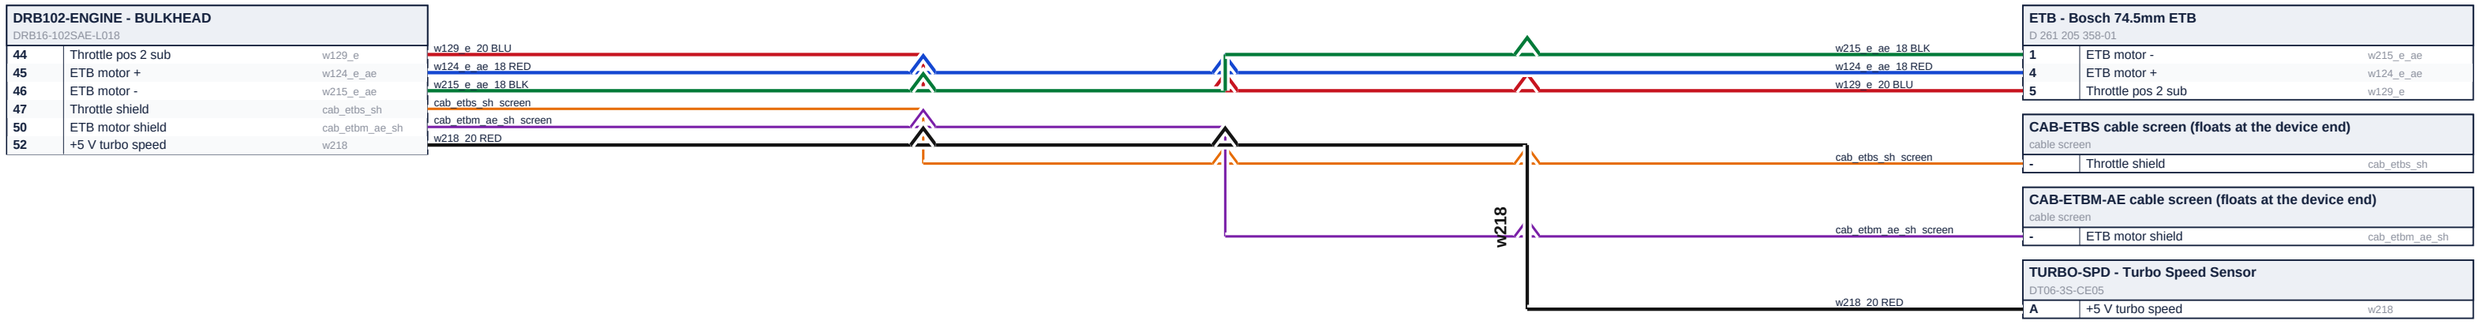

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 8 of 17)


DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	32 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 9 of 17)

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

53	Turbo speed signal	w16_e
56	Gnd turbo speed	w17
57	Turbo speed shield	cab_turbo_sh
58	Boost solenoid (-)	w103_e
59	Charge temp signal	w204_e
61	Oil temp signal	w203_e

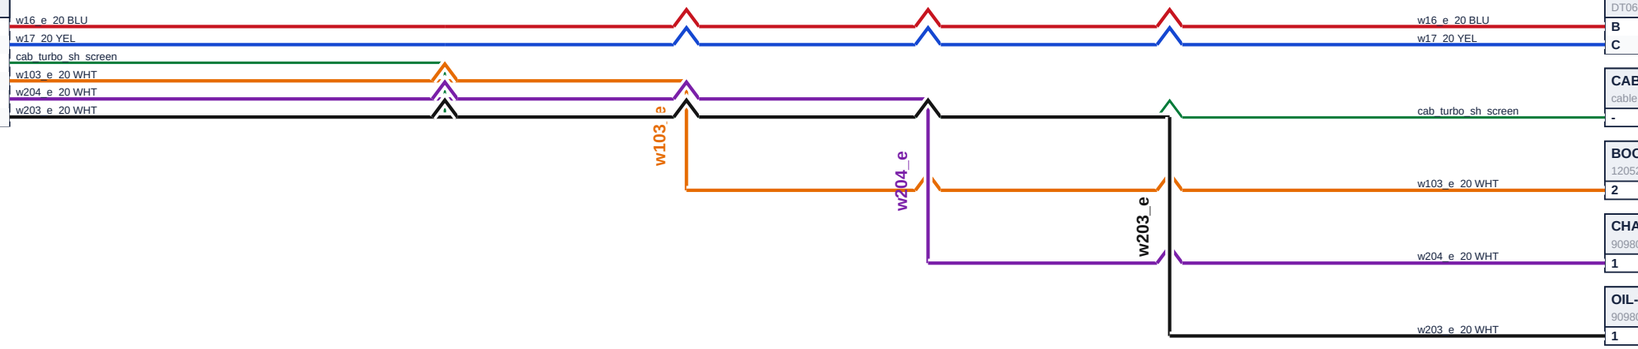

TURBO-SPD - Turbo Speed Sensor
DT06-3S-CE05

B	Turbo speed signal	w16_e
C	Gnd turbo speed	w17

CAB-TURBO cable screen (floats at the device end)
cable screen

-	Turbo speed shield	cab_turbo_sh

BOOST-SOL - Boost Control Solenoid
12052641

2	Boost solenoid (-)	w103_e

CHARGE-IAT - Charge-Pipe IAT Sensor
90980-11062

1	Charge temp signal	w204_e

OIL-T - Oil Temp Sensor
90980-11062

1	Oil temp signal	w203_e

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL — — — — built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 9 of 17)


DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	33 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 10 of 17)

DRB102-ENGINE - BULKHEAD
DRB16-102SAE-L018

63	+8 V to cam sensor	w_rail_sp_8v_e
64	Cam sensor signal	cab_cam_c2
65	Gnd cam sensor	w24
66	Cam sensor shield	cab_cam_sh
67	EFI relay k_efi -> LOGIC SW12 5 A fuse	w_vss_12v
69	Gearbox speed shield	cab_vss_sh

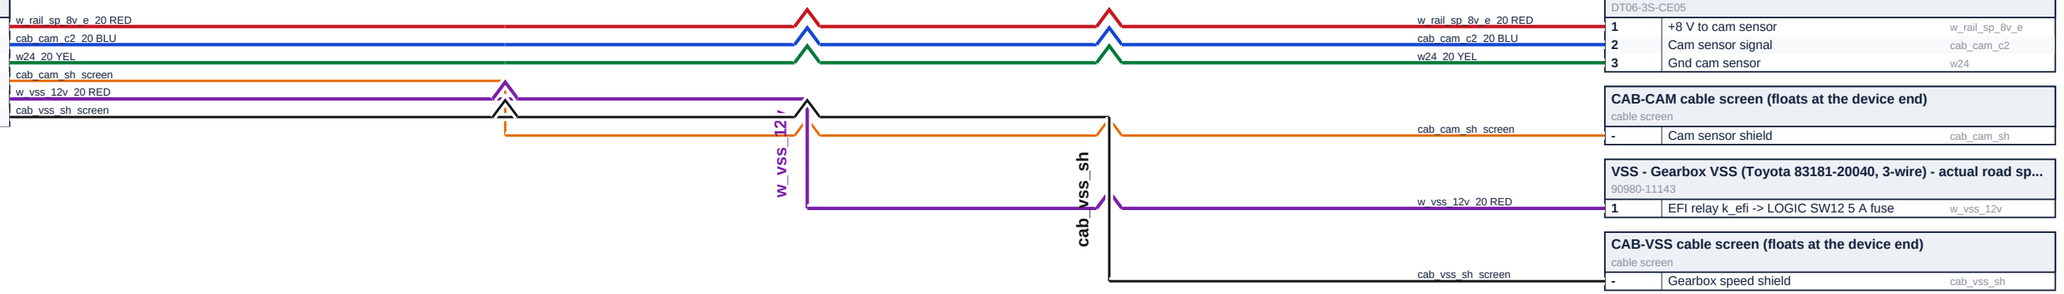

CAM - Cam Hall Sensor (RacerX)
DT06-3S-CE05

1	+8 V to cam sensor	w_rail_sp_8v_e
2	Cam sensor signal	cab_cam_c2
3	Gnd cam sensor	w24

CAB-CAM cable screen (floats at the device end)
cable screen

-	Cam sensor shield	cab_cam_sh

VSS - Gearbox VSS (Toyota 83181-20040, 3-wire) - actual road sp...
90980-11143

1	EFI relay k_efi -> LOGIC SW12 5 A fuse	w_vss_12v

CAB-VSS cable screen (floats at the device end)
cable screen

-	Gearbox speed shield	cab_vss_sh

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour


REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 10 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	34 OF 82	432 x 279 mm	DG	2026-10-29

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 11 of 17)

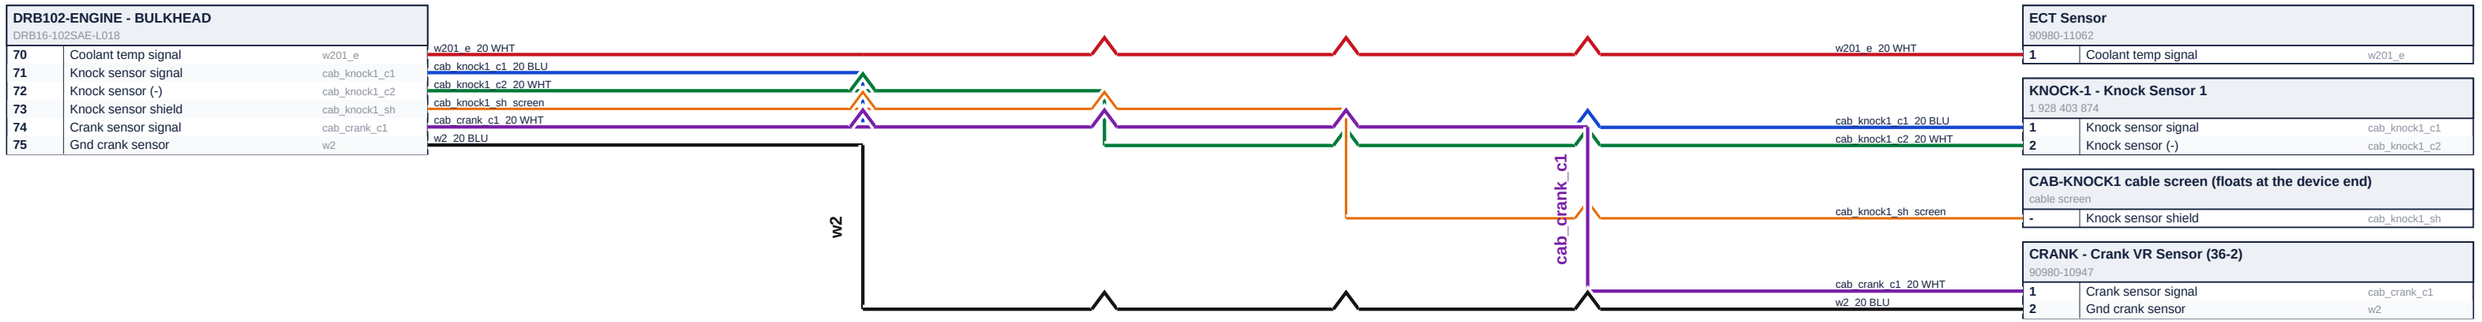

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set


ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 11 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	35 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 12 of 17)

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
76	Crank sensor shield	cab_crank_sh
77	Back-up sw +12 V in	w_rev_feed_e
78	Reverse sw +12 V out	w_sw7_e
79	CAN H to CAN-Lambda	wc_h_lam_be
80	CAN L to CAN-Lambda	wc_l_lam_be
81	CAN-Lambda shield	cab_lamcan_be_sh

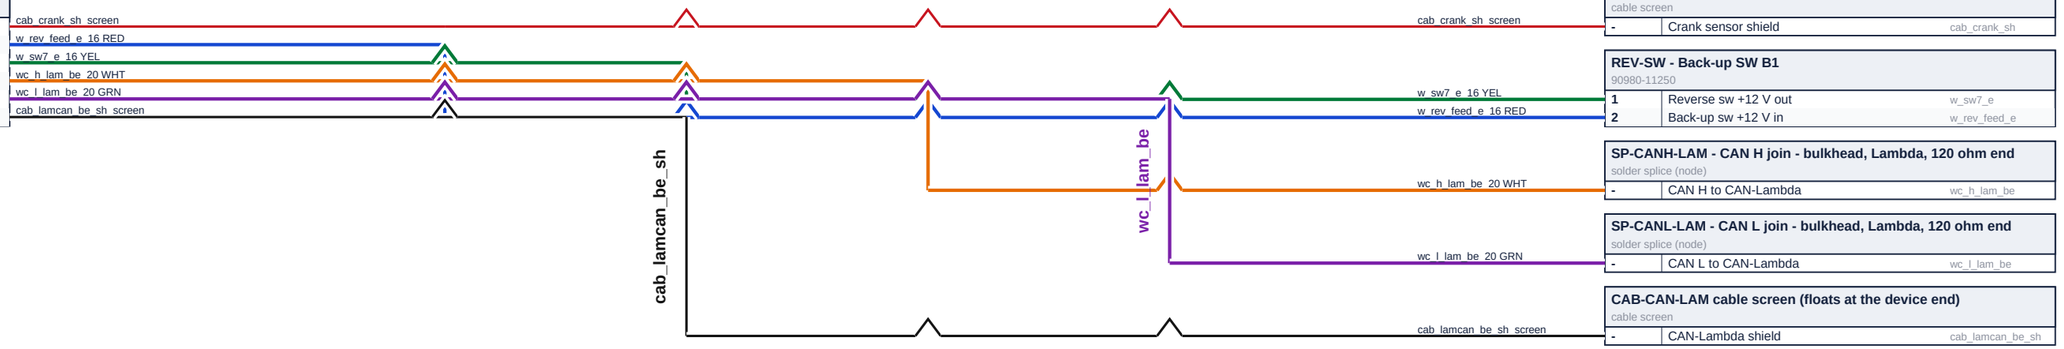

CAB-CRANK cable screen (floats at the device end)		
cable screen		
-	Crank sensor shield	cab_crank_sh

REV-SW - Back-up SW B1		
90980-11250		
1	Reverse sw +12 V out	w_sw7_e
2	Back-up sw +12 V in	w_rev_feed_e

SP-CANH-LAM - CAN H join - bulkhead, Lambda, 120 ohm end		
solder splice (node)		
-	CAN H to CAN-Lambda	wc_h_lam_be

SP-CANL-LAM - CAN L join - bulkhead, Lambda, 120 ohm end		
solder splice (node)		
-	CAN L to CAN-Lambda	wc_l_lam_be

CAB-CAN-LAM cable screen (floats at the device end)		
cable screen		
-	CAN-Lambda shield	cab_lamcan_be_sh

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 12 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	36 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 13 of 17)

SP-GNDOUT-ENG - Sensor return splice - BH-A pin 34 (ECU ...		
solder splice (node)		
-	Gnd coolant temp	w4
-	Gnd throttle sensor	w127

DRB102-ENGINE - BULKHEAD		
DRB16-102SAE-L018		
83	EFI relay k_efi -> LOGIC MRS 5 A fuse	w_hv_mrs_en_e
84	EHPS pump speed	w_mrs_e
85	EHPS relay coil (-)	w_eps_rly_e
95	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_be14

w4_20 BLU

w127_20 YEL

w_hv_mrs_en_e_20 RED

w_mrs_e_20 WHT

w_eps_rly_e_18 WHT

w_lam12_be14_12 RED

w_mrs_e

w_lam12_be14

w4_20 BLU

w127_20 YEL

w_hv_mrs_en_e_20 RED

w_mrs_e_20 WHT

w_eps_rly_e_18 WHT

w_lam12_be14_12 RED

ECT Sensor		
90980-11062		
2	Gnd coolant temp	w4

ETB - Bosch 74.5mm ETB		
D 261 205 358-01		
2	Gnd throttle sensor	w127

MRS-C - MR-S EHPS pump plug C		
90980-10942		
1	EFI relay k_efi -> LOGIC MRS 5 A fuse	w_hv_mrs_en_e

MRS-B - MR-S EHPS pump plug B		
90980-10897		
2	EHPS pump speed	w_mrs_e
5	EHPS relay coil (-)	w_eps_rly_e

SP-LAM12-B - CAN-Lambda +12 V splice - 12 AWG from BH-B pin...		
solder splice (node)		
-	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_be14

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL — built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 13 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	37 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 14 of 17)

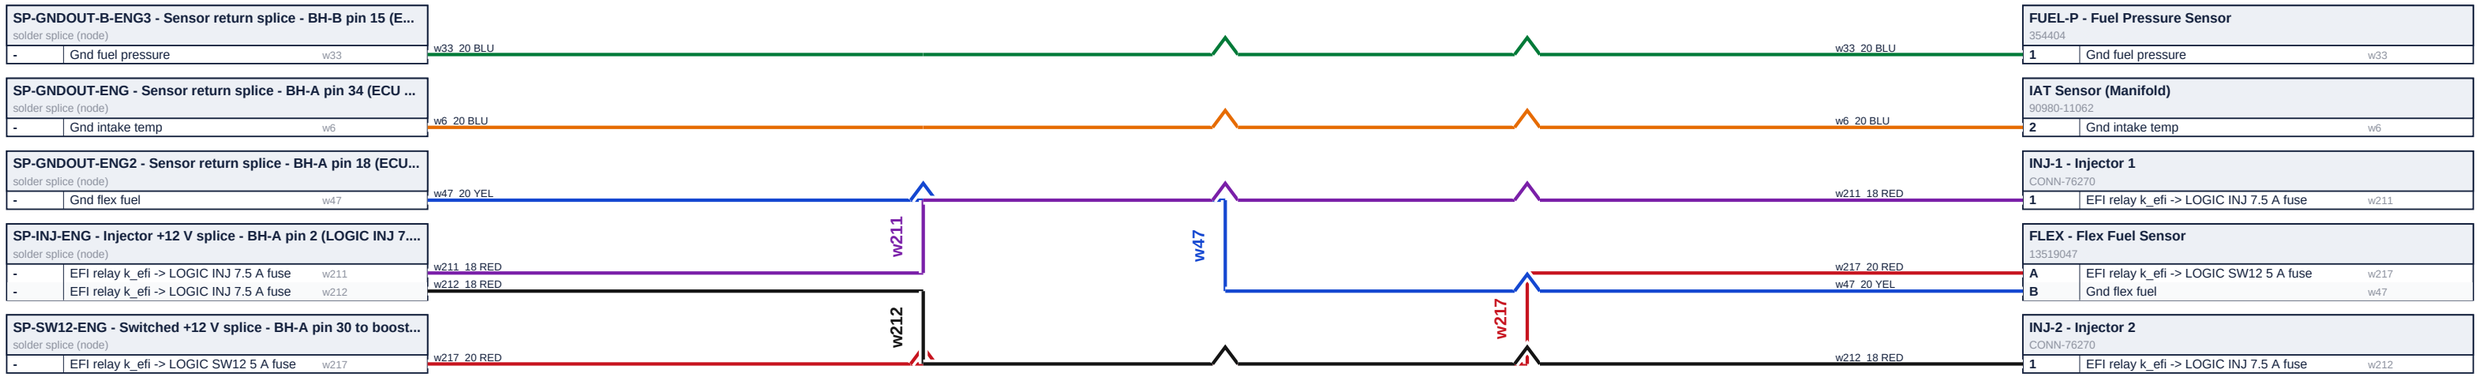

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 14 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	38 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 15 of 17)

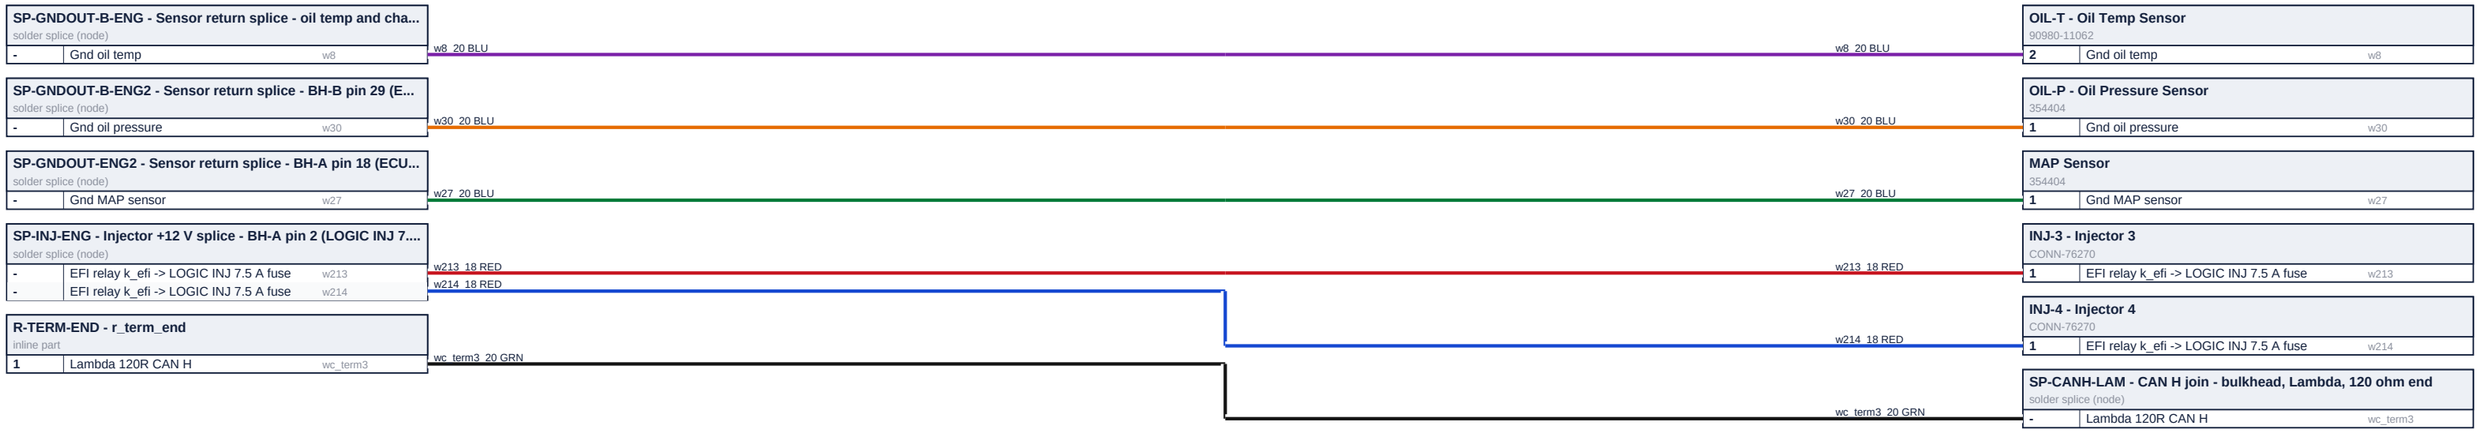

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 15 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	39 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 16 of 17)

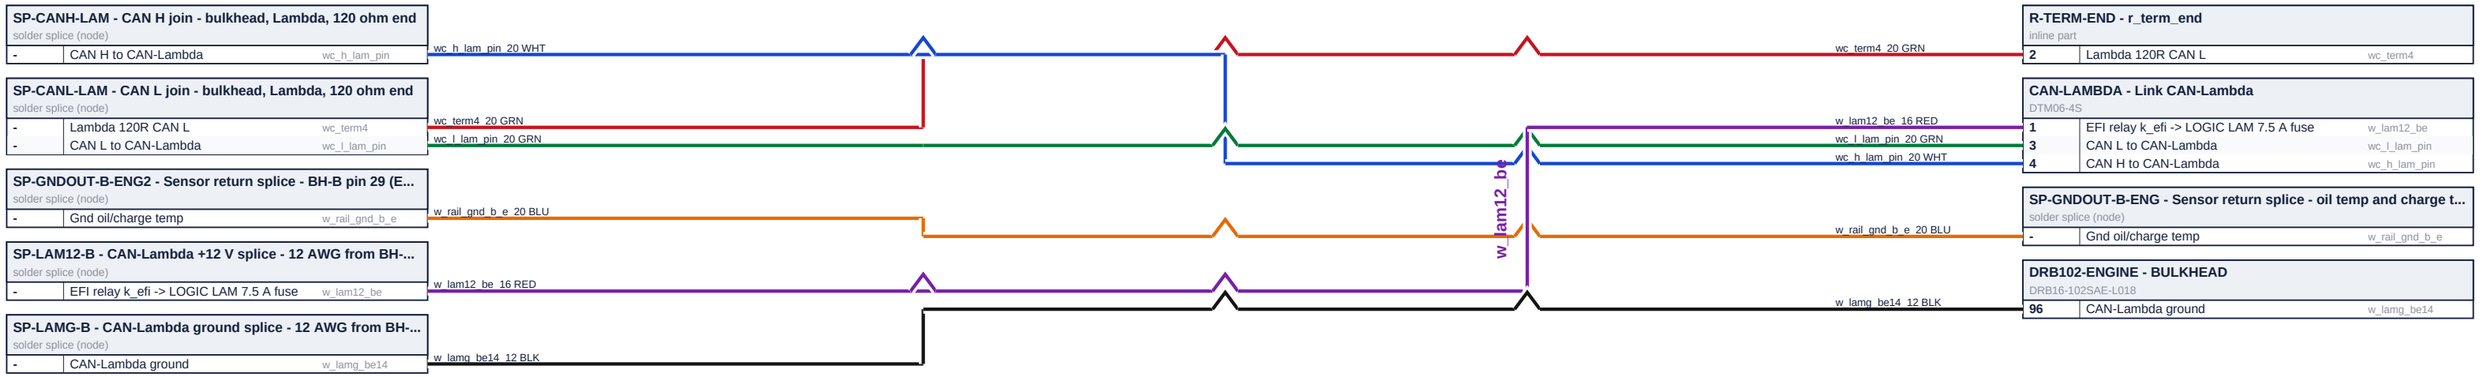

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 16 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	40 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 17 of 17)

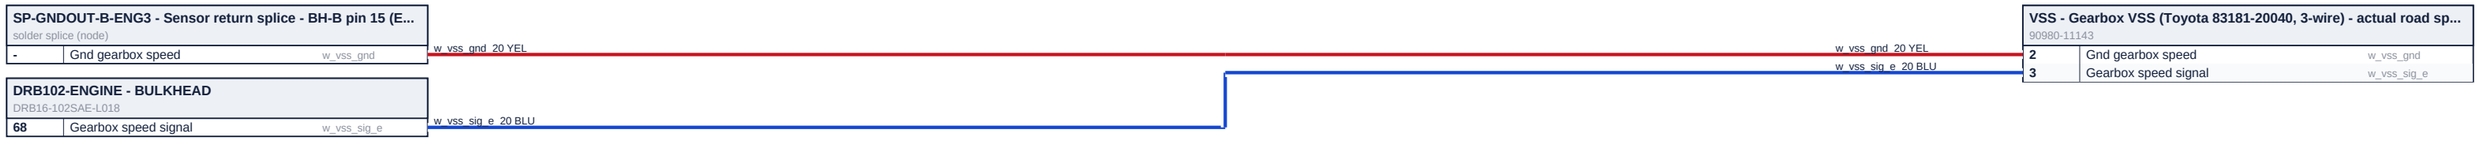

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ENGINE BAY - DRB102 ENGINE HALF TO EVERY ENGINE DEVICE (ECU HARNESS) (part 17 of 17)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	41 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 1 of 4)

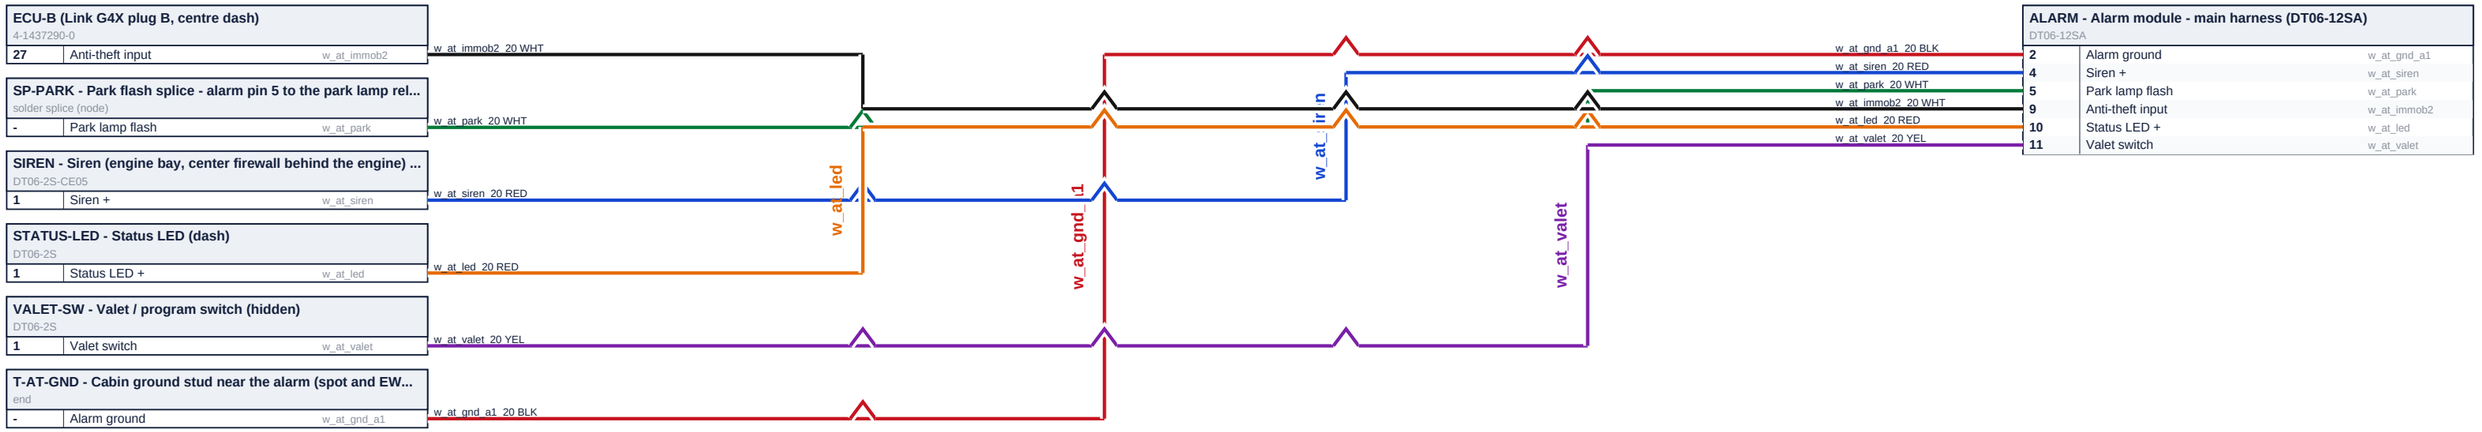

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 1 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	42 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 2 of 4)

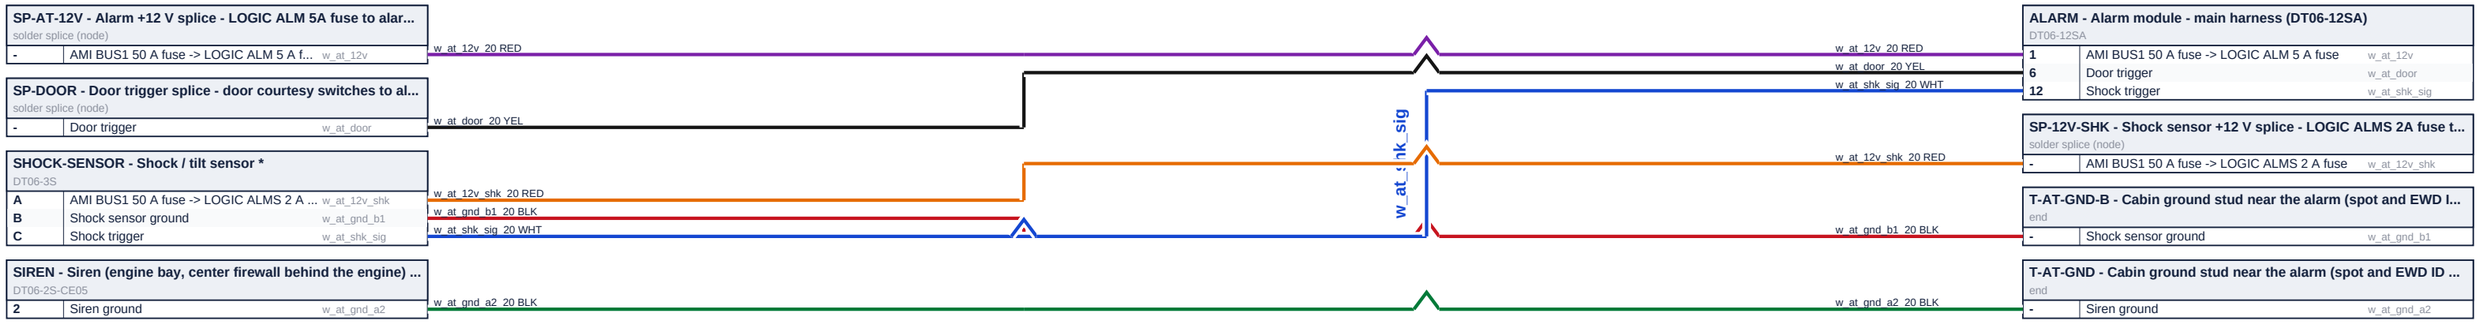

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · – – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 2 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	43 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 3 of 4)

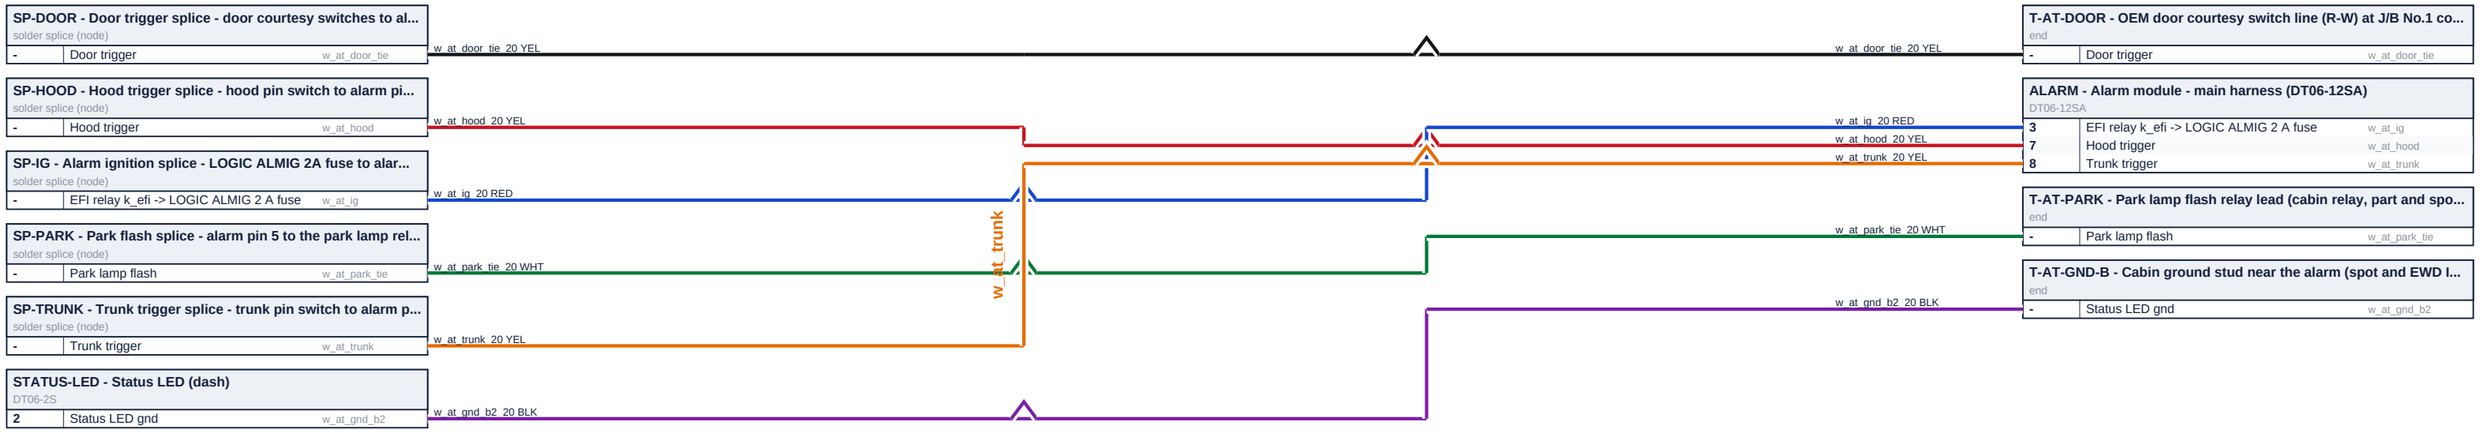

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 3 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	44 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 4 of 4)

SP-HOOD - Hood trigger splice - hood pin switch to alarm pi...		
solder splice (node)		
-	Hood trigger	w_at_hood_tie

w_at_hood_tie_20 YEL

w_at_hood_tie_20 YEL

T-AT-HOOD - Hood pin switch lead (new switch, RH front via loo...		
end		
-	Hood trigger	w_at_hood_tie

SP-TRUNK - Trunk trigger splice - trunk pin switch to alarm p...		
solder splice (node)		
-	Trunk trigger	w_at_trunk_tie

w_at_trunk_tie_20 YEL

w_at_trunk_tie_20 YEL

T-AT-TRUNK - Trunk pin switch lead (new switch, spot TBD)		
end		
-	Trunk trigger	w_at_trunk_tie

VALET-SW - Valet / program switch (hidden)		
DT06-2S		
2	Valet switch ground	w_at_gnd_c1

w_at_gnd_c1_20 BLK

w_at_gnd_c1_20 BLK

T-AT-GND-C - Cabin ground stud near the alarm (spot and EWD l...		
end		
-	Valet switch ground	w_at_gnd_c1

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

ANTI-THEFT - ALARM MODULE, SIREN, TRIGGERS, STATUS LED (part 4 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	45 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 1 of 4)

ECU-C - ECU Comms/Tuning Port		
DTM06-6S		
1	CAN screen trunk	w_shd_can_trunk
3	CAN 1 high	wc_h_ecu
4	CAN 1 low	wc_l_ecu

R-TERM-ECU - r_term_ecu		
inline part		
1	ECU 120R CAN H	wc_term1
2	ECU 120R CAN L	wc_term2

CAB-CAN-CLU cable screen (floats at the device end)		
cable screen		
-	Cluster CAN shield	cab_can_clu_sh

w_shd_can_trunk_20 BLK
wc_h_ecu_20 WHT
wc_l_ecu_20 GRN
wc_term1_20 GRN
wc_term2_20 GRN
cab_can_clu_sh_screen

w_shd_can_trunk

wc_h_ecu_20 WHT
wc_term1_20 GRN
wc_l_ecu_20 GRN
wc_term2_20 GRN
w_shd_can_trunk_20 BLK
cab_can_clu_sh_screen

SP-CANH - CAN H join - ECU, CSB3, cluster, Pi, bulkhead		
solder splice (node)		
-	CAN 1 high	wc_h_ecu
-	ECU 120R CAN H	wc_term1

SP-CANL - CAN L join - ECU, CSB3, cluster, Pi, bulkhead		
solder splice (node)		
-	CAN 1 low	wc_l_ecu
-	ECU 120R CAN L	wc_term2

SP-CAN-SH-CLU - CAN trunk, cluster branch - SP-CAN-SH-CLU: ...		
solder splice (node)		
-	CAN screen trunk	w_shd_can_trunk
-	Cluster CAN shield	cab_can_clu_sh

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 1 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	46 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 2 of 4)

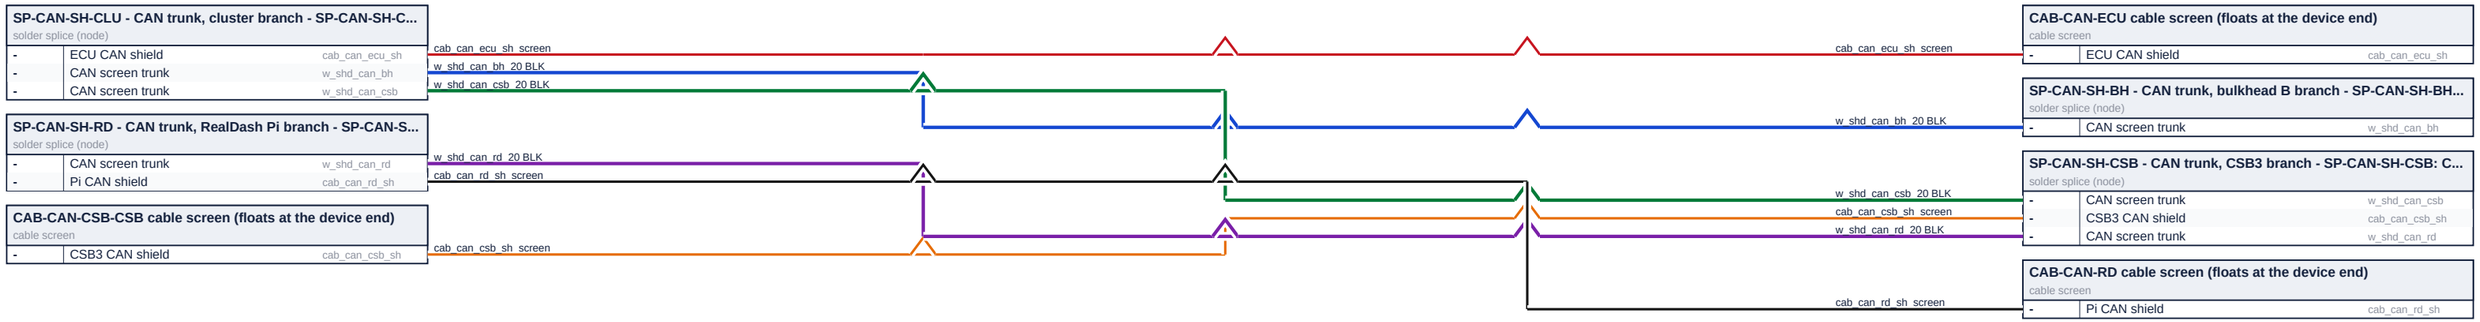

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 2 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	47 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale


CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 3 of 4)

SP-CANH - CAN H join - ECU, CSB3, cluster, Pi, bulkhead
solder splice (node)

-	CAN H to CSB3	wc_h_csb
-	CAN H to cluster	wc_h_clu
-	CAN H to RealDash Pi	wc_h_rd

SP-CANL - CAN L join - ECU, CSB3, cluster, Pi, bulkhead
solder splice (node)

-	CAN L to CSB3	wc_l_csb
-	CAN L to cluster	wc_l_clu
-	CAN L to RealDash Pi	wc_l_rd

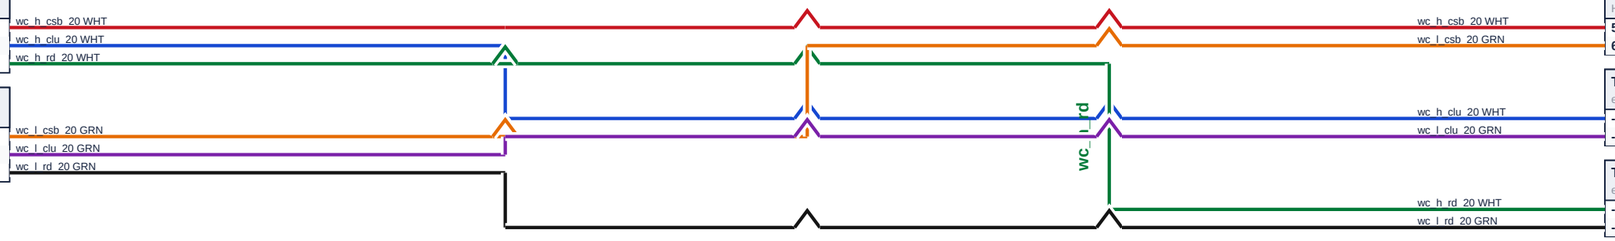

CSB3 - ECUMaster CSB3 - Power/CAN/Switch I/O
HD36-24-33SE

5	CAN H to CSB3	wc_h_csb
6	CAN L to CSB3	wc_l_csb

T-CLUSTER-CAN - Cluster CAN board CANH + CANL pins (old m...
end

-	CAN H to cluster	wc_h_clu
-	CAN L to cluster	wc_l_clu

T-REALDASH-CAN - Pi USB-CAN adapter CANH + CANL pins (ce...
end

-	CAN H to RealDash Pi	wc_h_rd
-	CAN L to RealDash Pi	wc_l_rd

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 3 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	48 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 4 of 4)

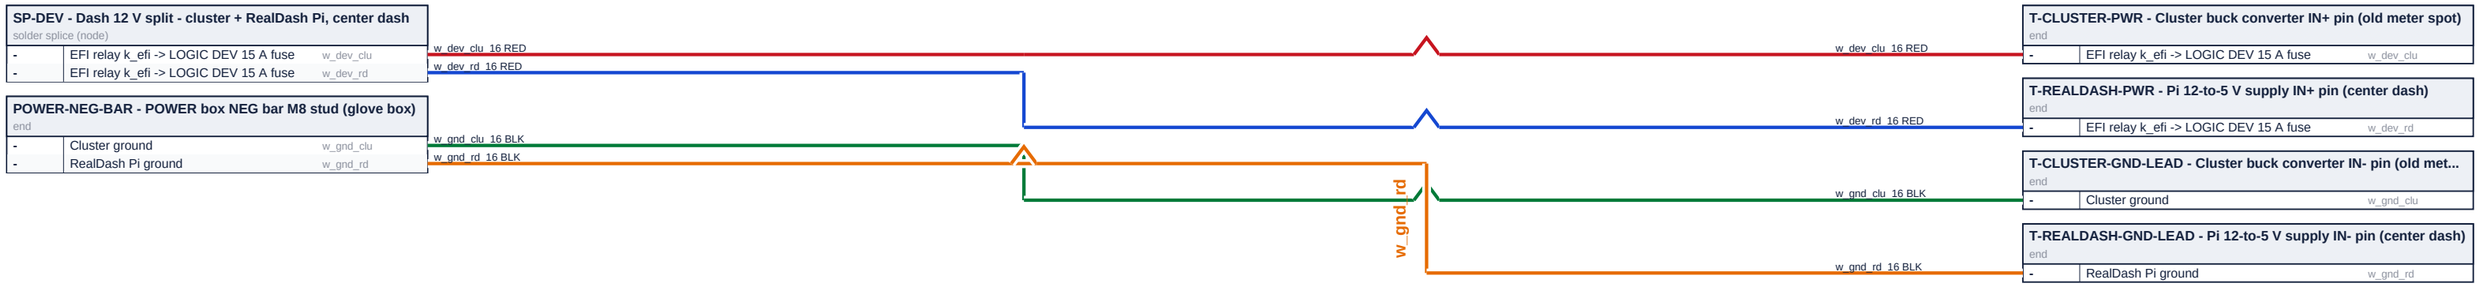

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CAN TRUNK - ECU, CSB3, CLUSTER, REALDASH PI, BULKHEAD, CAN-LAMBDA (part 4 of 4)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	49 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 1 of 3)

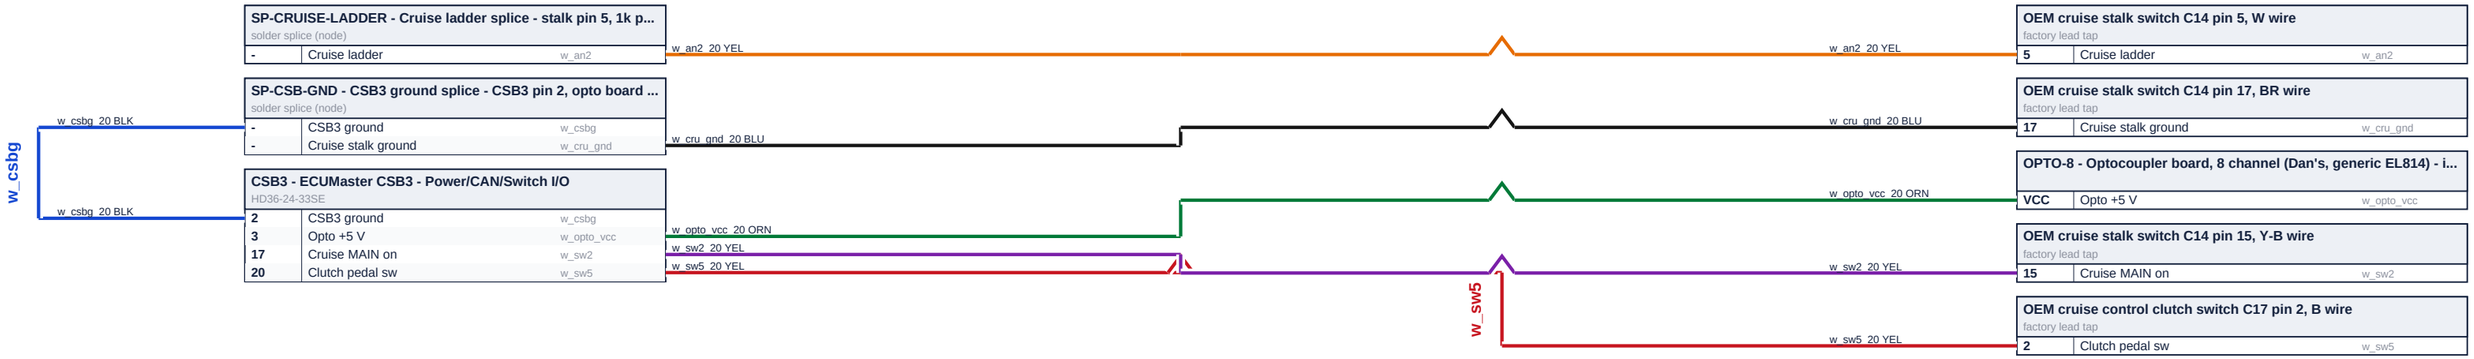

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 1 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	50 OF 82	432 x 279 mm	DG	2026-10-29


ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 2 of 3)

R-CRUISE - r_cruise		
inline part		
2	Cruise ladder	w_cru_sig

CSB3 - ECUMaster CSB3 - Power/CAN/Switch I/O		
HD36-24-33SE		
1	EFI relay k_efi -> LOGIC CSB 5 A fuse	w_csb12
4	Opto out ground	w_opto_outc
21	Brake to CSB3 S7	w_opto_out1
22	Reverse to CSB3 S8	w_opto_out2

T-CLUSTER-HL - Centre cluster headlight-sense input (J8 pi...		
end		
15	Headlight sense to cluster	w_hl_sense_out

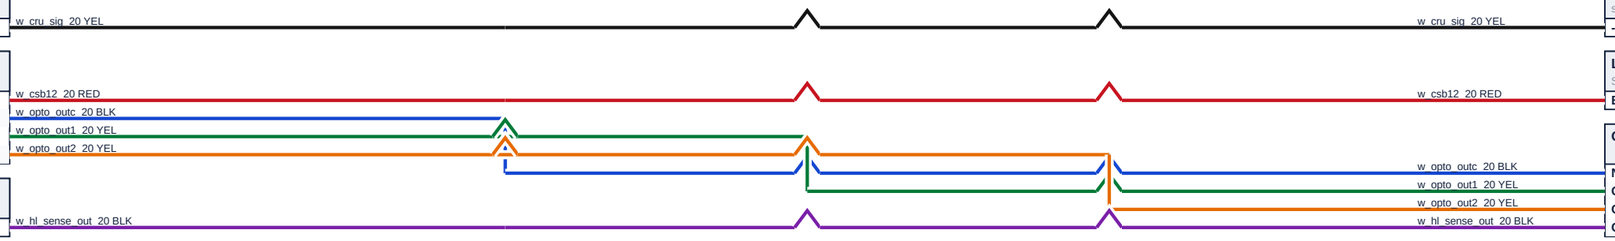

SP-CRUISE-LADDER - Cruise ladder splice - stalk pin 5, 1k pull-u...		
solder splice (node)		
-	Cruise ladder	w_cru_sig

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...		
ST185-FB-LOGIC rev 5		
BUS2-5	EFI relay k_efi -> LOGIC CSB 5 A fuse	w_csb12

OPTO-8 - Optocoupler board, 8 channel (Dan's, generic EL814) - i...		
NEG	Opto out ground	w_opto_outc
OUT1	Brake to CSB3 S7	w_opto_out1
OUT2	Reverse to CSB3 S8	w_opto_out2
OUT3	Headlight sense to cluster	w_hl_sense_out

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · – – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 2 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	51 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 3 of 3)

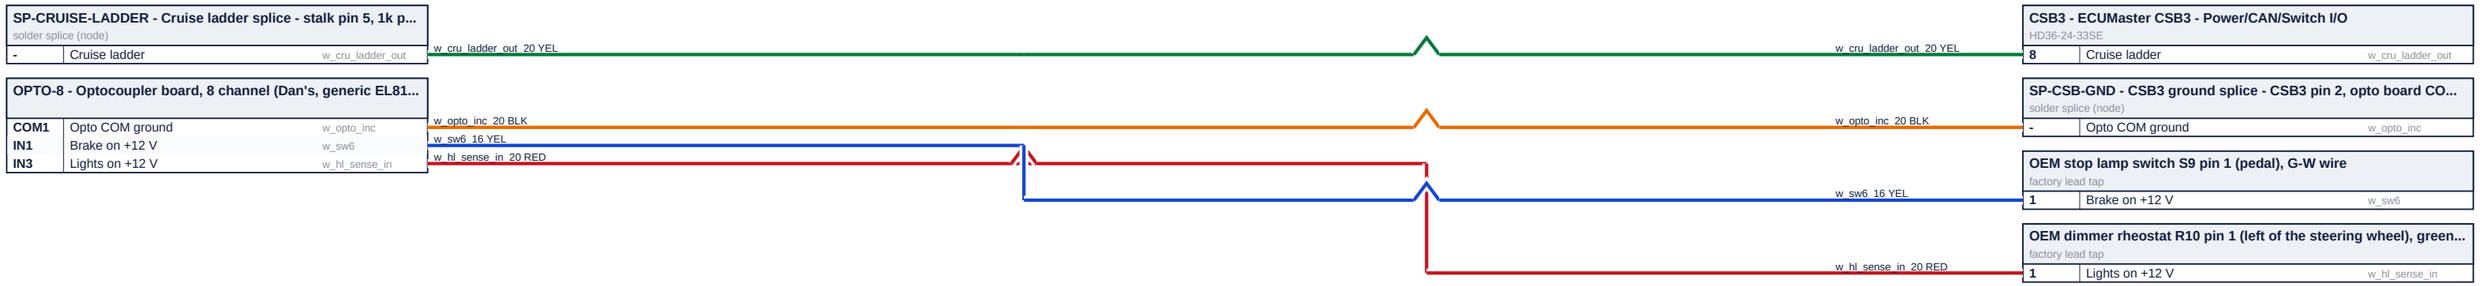

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CSB3 - SWITCH INPUTS, CRUISE LADDER, OPTO BOARD (part 3 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	52 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 1 of 9)

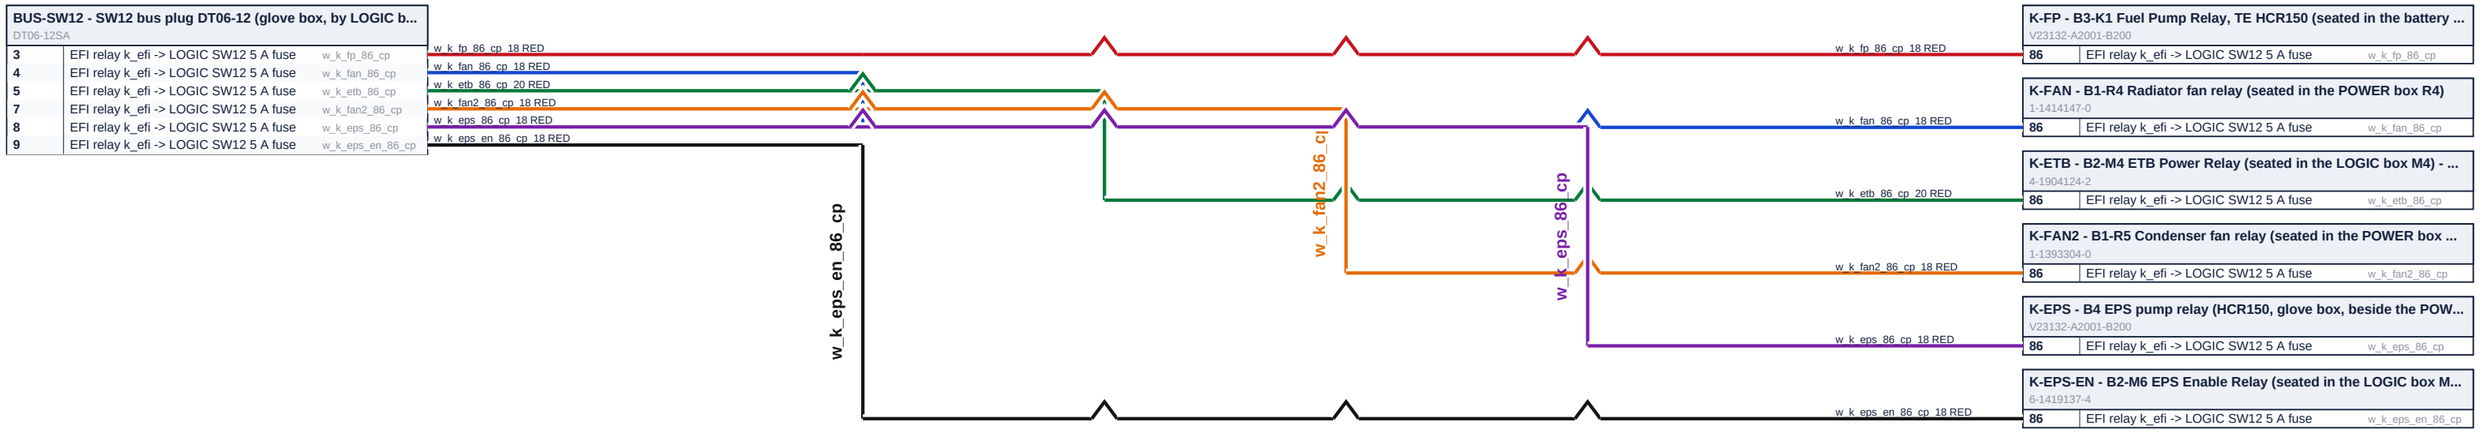

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 1 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	53 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 2 of 9)

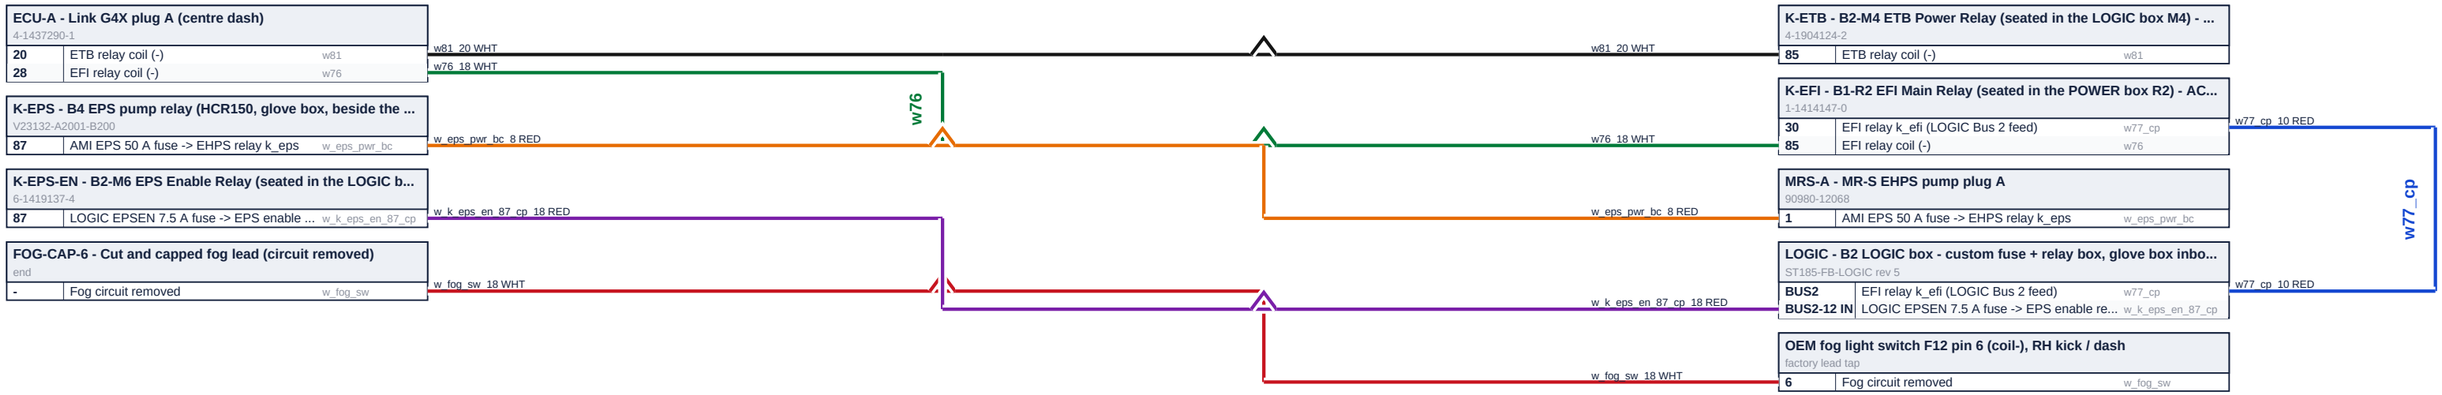

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 2 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	54 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 3 of 9)

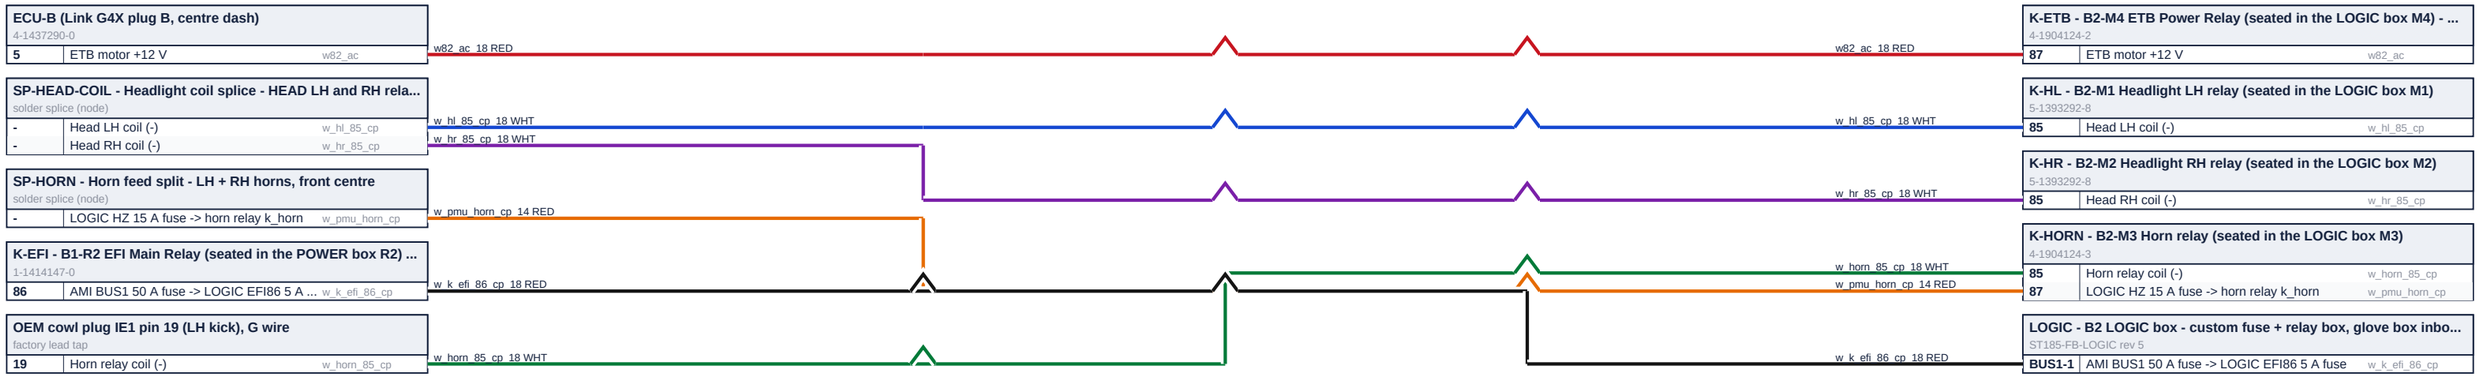

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · – – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 3 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	55 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 4 of 9)

SP-12V-SHK - Shock sensor +12 V splice - LOGIC ALMS 2A f...
solder splice (node)

-	AMI BUS1 50 A fuse -> LOGIC ALMS 2 A ... w_at_12v_shk_tie_...

SP-AT-12V - Alarm +12 V splice - LOGIC ALM 5A fuse to alar...
solder splice (node)

-	AMI BUS1 50 A fuse -> LOGIC ALM 5 A f... w_at_12v_tie_cp

SP-HL - HEAD LH splice - HL 15A fuse to HEAD LH relay pins...
solder splice (node)

-	AMI BUS1 50 A fuse -> LOGIC HL 15 A fu... w_hl_cp

SP-HR - HEAD RH splice - HR 15A fuse to HEAD RH relay pin...
solder splice (node)

-	AMI BUS1 50 A fuse -> LOGIC HR 15 A f... w_hr_cp

SP-HZ - HAZ-HORN splice - HZ 15A fuse to the hazard feed a...
solder splice (node)

-	AMI BUS1 50 A fuse -> LOGIC HZ 15 A fu... w_hz_cp

K-ETB - B2-M4 ETB Power Relay (seated in the LOGIC box M...
4-1904124-2

30	AMI BUS1 50 A fuse -> LOGIC ETB 7.5 A... w_fb_k_etb_30_cp

w_at_12v_shk_tie_cp_20 RED
w_at_12v_tie_cp_20 RED
w_hl_cp_14 RED
w_hr_cp_14 RED
w_hz_cp_14 RED
w_fb_k_etb_30_cp_16 RED
w_hl_cp
w_hr_cp
w_hz_cp

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...
ST185-FB-LOGIC rev 5

BUS1-10	AMI BUS1 50 A fuse -> LOGIC ETB 7.5 A fuse	w_fb_k_etb_30_cp
BUS1-2	AMI BUS1 50 A fuse -> LOGIC HL 15 A fuse	w_hl_cp
BUS1-3	AMI BUS1 50 A fuse -> LOGIC HR 15 A fuse	w_hr_cp
BUS1-4	AMI BUS1 50 A fuse -> LOGIC HZ 15 A fuse	w_hz_cp
BUS1-7	AMI BUS1 50 A fuse -> LOGIC ALM 5 A fuse	w_at_12v_tie_cp
BUS1-8	AMI BUS1 50 A fuse -> LOGIC ALMS 2 A fuse	w_at_12v_shk_tie_...

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 4 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	56 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

BUS-SW12 - SW12 bus plug DT06-12 (glove box, by LOGIC b...
DT06-12SA

1	EFI relay k_efi -> LOGIC SW12 5 A fuse	w_cp_sw12_in

SP-DEV - Dash 12 V split - cluster + RealDash Pi, center dash
solder splice (node)


-	EFI relay k_efi -> LOGIC DEV 15 A fuse	w_dev_cp

DRB102-CABIN - DRB102 receptacle (RH firewall)
DRB12-102PAE-L018

1	EFI relay k_efi -> LOGIC COP 10 A fuse	w_cop_pwr_ac
2	EFI relay k_efi -> LOGIC INJ 7.5 A fuse	w_inj_pwr_ac
95	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_cp

K-EPS-EN - B2-M6 EPS Enable Relay (seated in the LOGIC b...
6-1419137-4

30	EFI relay k_efi -> LOGIC EPSEN 7.5 A fuse	w_fb_k_eps_en_30...

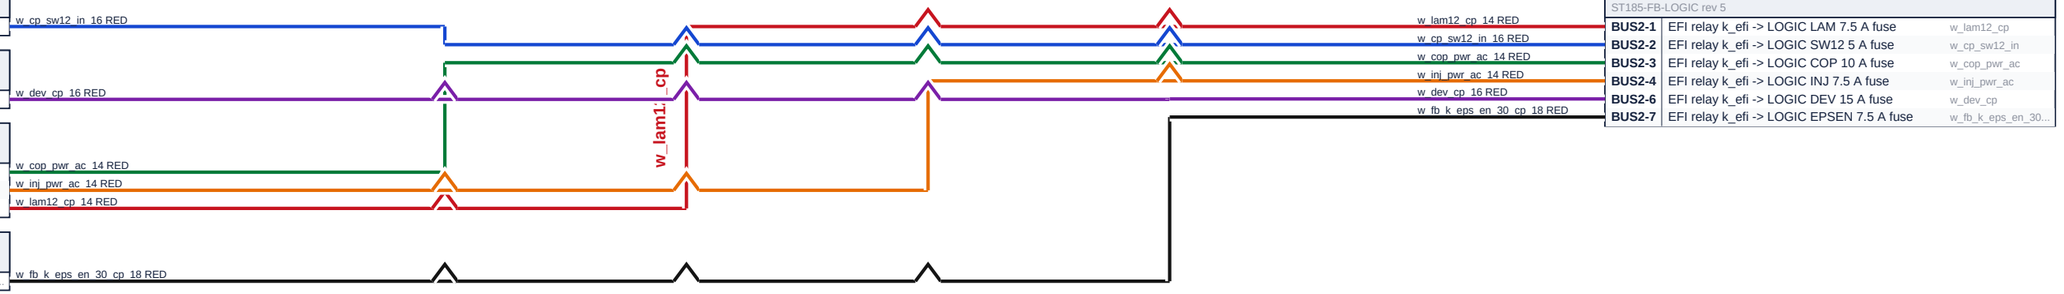

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...
ST185-FB-LOGIC rev 5

BUS2-1	EFI relay k_efi -> LOGIC LAM 7.5 A fuse	w_lam12_cp
BUS2-2	EFI relay k_efi -> LOGIC SW12 5 A fuse	w_cp_sw12_in
BUS2-3	EFI relay k_efi -> LOGIC COP 10 A fuse	w_cop_pwr_ac
BUS2-4	EFI relay k_efi -> LOGIC INJ 7.5 A fuse	w_inj_pwr_ac
BUS2-6	EFI relay k_efi -> LOGIC DEV 15 A fuse	w_dev_cp
BUS2-7	EFI relay k_efi -> LOGIC EPSEN 7.5 A fuse	w_fb_k_eps_en_30...

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 5 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	57 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 6 of 9)

SP-ACC12 - B2-BUS2-8 ACC 10 A to k_acc 30 and 86
solder splice (node)

-	ACC 10 A out	w_acc_fuse

SP-IG - Alarm ignition splice - LOGIC ALMIG 2A fuse to alar...
solder splice (node)

-	EFI relay k_efi -> LOGIC ALMIG 2 A fuse	w_at_ig_tie_cp

K-EFI - B1-R2 EFI Main Relay (seated in the POWER box R2) ...
1-1414147-0

87	AMI EFI 30 A fuse	w_fb_k_efi_87_cp

K-FAN - B1-R4 Radiator fan relay (seated in the POWER box ...
1-1414147-0

87	AMI FAN 30 A fuse	w_fb_k_fan_87_cp

K-FAN2 - B1-R5 Condenser fan relay (seated in the POWER b...
1-1393304-0

87	AMI FAN2 30 A fuse	w_fb_k_fan2_87_ac

OEM R/B No.4 40 A HEATER fuse pin 1 (RH kick)
factory lead tap

1	Heater fuse feed	w_rb4_feed

w_acc_fuse_16 RED
w_at_ig_tie_cp_20 RED
w_fb_k_efi_87_cp_12 RED
w_fb_k_fan_87_cp_10 RED
w_fb_k_fan2_87_ac_10 RED
w_rb4_feed_8 RED
w_rb4_feed

w_acc_fuse_16 RED
w_at_ig_tie_cp_20 RED
w_rb4_feed_8 RED
w_fb_k_efi_87_cp_12 RED
w_fb_k_fan_87_cp_10 RED
w_fb_k_fan2_87_ac_10 RED

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box inbo...
ST185-FB-LOGIC rev 5

BUS2-8	EFI relay k_efi -> LOGIC ACC 10 A fuse	w_acc_fuse
BUS2-9	EFI relay k_efi -> LOGIC ALMIG 2 A fuse	w_at_ig_tie_cp

POWER - B1 POWER box with the bus bar in it - custom fuse + re...
ST185-FB-POWER rev 7

AMI IN-1	AMI HTR 40 A fuse	w_rb4_feed
AMI IN-2	AMI EFI 30 A fuse	w_fb_k_efi_87_cp
AMI IN-4	AMI FAN 30 A fuse	w_fb_k_fan_87_cp
AMI IN-5	AMI FAN2 30 A fuse	w_fb_k_fan2_87_ac

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL — built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 6 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	58 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 7 of 9)

K-EPS - B4 EPS pump relay (HCR150, glove box, beside the ...
V23132-A2001-B200

30	AMI EPS 50 A fuse	w_fb_k_eps_30_ac

LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i...
ST185-FB-LOGIC rev 5

BUS1	AMI BUS1 50 A fuse	w_hc_fb

FOG-CAP-1 - Cut and capped fog lead (circuit removed)
end

-	Fog circuit removed	w_fog_rb3_1

FOG-CAP-4 - Cut and capped fog lead (circuit removed)
end

-	Fog circuit removed	w_fog_rb3_4

OEM J/B No.1 1I pin 1 (left kick)
factory lead tap

1	AMI JB1 60 A fuse	w_pdb_jb1

OEM R/B No.2 30 A POWER fuse pin 1 (LH kick)
factory lead tap

1	POWER fuse feed	w_rb2_feed

w_fb_k_eps_30_ac_8 RED
w_hc_fb_8 RED
w_fog_rb3_1_18 WHT
w_fog_rb3_4_18 WHT
w_pdb_jb1_6 RED
w_rb2_feed_10 RED

w_fog_rb3_1
w_pdb_jb1
w_rb2_feed

w_fog_rb3_1_18 WHT
w_rb2_feed_10 RED
w_hc_fb_8 RED
w_pdb_jb1_6 RED
w_fb_k_eps_30_ac_8 RED
w_fog_rb3_4_18 WHT

OEM R/B No.3 fog relay pin 1 (fog lamp feed), RH kick / dash
factory lead tap

1	Fog circuit removed	w_fog_rb3_1

POWER - B1 POWER box with the bus bar in it - custom fuse + re...
ST185-FB-POWER rev 7

AMI IN-6	AMI PWR 30 A fuse	w_rb2_feed
AMI OUT-1	AMI BUS1 50 A fuse	w_hc_fb
AMI OUT-5	AMI JB1 60 A fuse	w_pdb_jb1
AMI OUT-6	AMI EPS 50 A fuse	w_fb_k_eps_30_ac

OEM R/B No.3 fog relay pin 4 (20 A FR FOG in), RH kick / dash
factory lead tap

4	Fog circuit removed	w_fog_rb3_4

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 7 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	59 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 8 of 9)

SP-ACC12 - B2-BUS2-8 ACC 10 A to k_acc 30 and 86 solder splice (node)				**K-ACC - B2-M5 A/C clutch relay (k_acc) - amp A15 pin 8 sinks coi...** 6-1419137-4	
-	A/C clutch +12 V in	w_fb_k_acc_30_cp	w_fb_k_acc_30_cp_16 RED	**30**	A/C clutch +12 V in
SP-HEAD-COIL - Headlight coil splice - HEAD LH and RH rela... solder splice (node)				**OEM cowl plug IE1 pin 2 (LH kick), R-Y wire** factory lead tap	
-	Headlight coil (-)	w_head_coil_cp	w_head_coil_cp_18 WHT	**2**	Headlight coil (-)
SP-HL - HEAD LH splice - HL 15A fuse to HEAD LH relay pins... solder splice (node)				**K-HL - B2-M1 Headlight LH relay (seated in the LOGIC box M1)** 5-1393292-8	
-	AMI BUS1 50 A fuse -> LOGIC HL 15 A fu...	w_hl_30_cp	w_hl_30_cp_14 RED	**30**	AMI BUS1 50 A fuse -> LOGIC HL 15 A fuse
-	AMI BUS1 50 A fuse -> LOGIC HL 15 A fu...	w_hl_86_cp	w_hl_86_cp_16 RED	**86**	AMI BUS1 50 A fuse -> LOGIC HL 15 A fuse
DRB102-CABIN - DRB102 receptacle (RH firewall) DRB12-102PAE-L018				**OEM R/B No.4 starter relay pin 4 (RH kick), starter out** factory lead tap	
3	Starter solenoid S	w_strl_c	w_strl_c_12 RED	**4**	Starter solenoid S
LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i... ST185-FB-LOGIC rev 5				**OEM ST1 lead B-W at old R/B No.4 pin 1, RH kick panel** factory lead tap	
BUS2-13 IN	Start sw ST1 feed	w_start_in_cp	w_start_in_cp_20 YEL	**1**	Start sw ST1 feed

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · – – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 8 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	60 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 9 of 9)

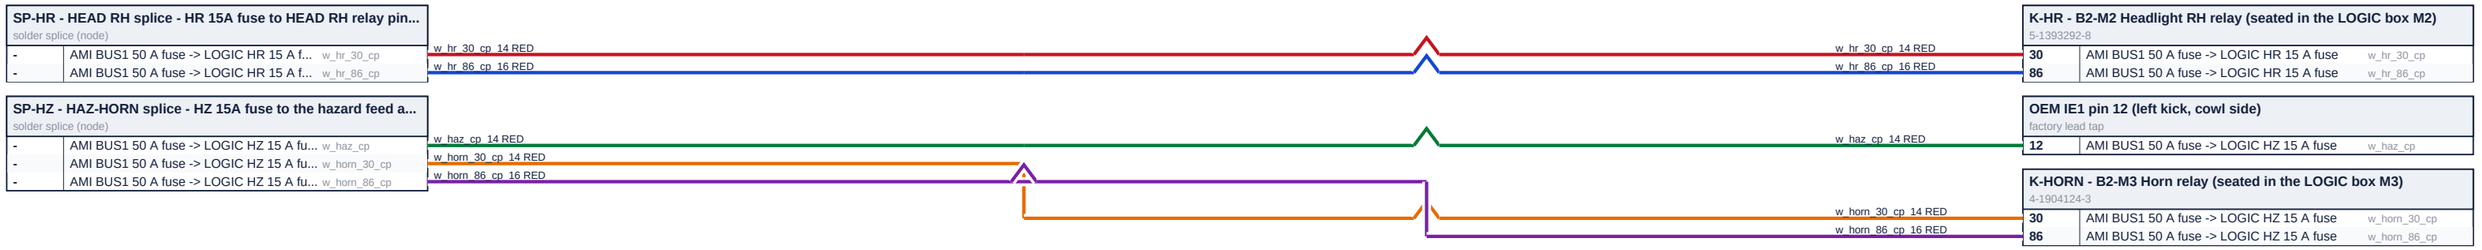

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CABIN POWER - POWER + LOGIC BOXES TO EVERY CABIN FEED, RELAY COIL AND OEM TAP (part 9 of 9)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	61 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 1 of 3)

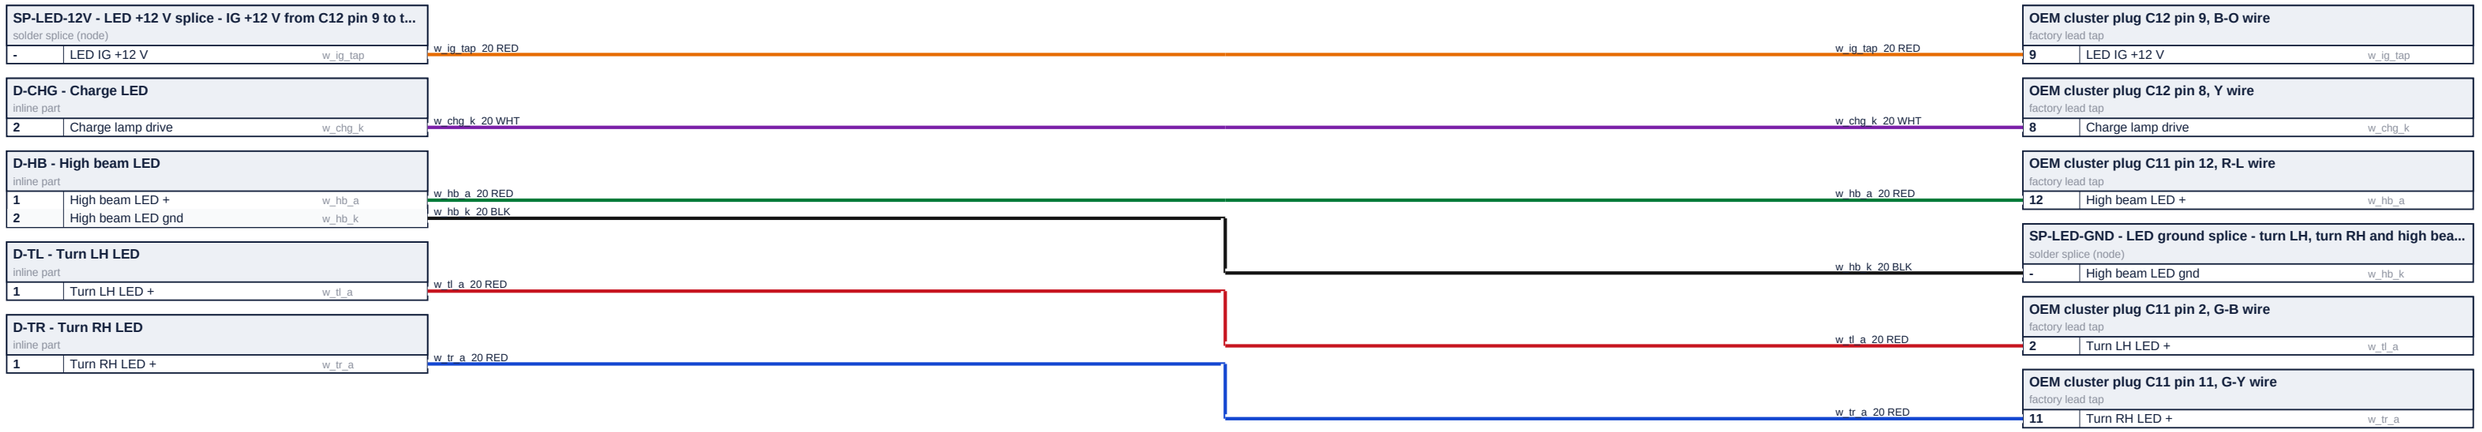

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 1 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	62 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 2 of 3)

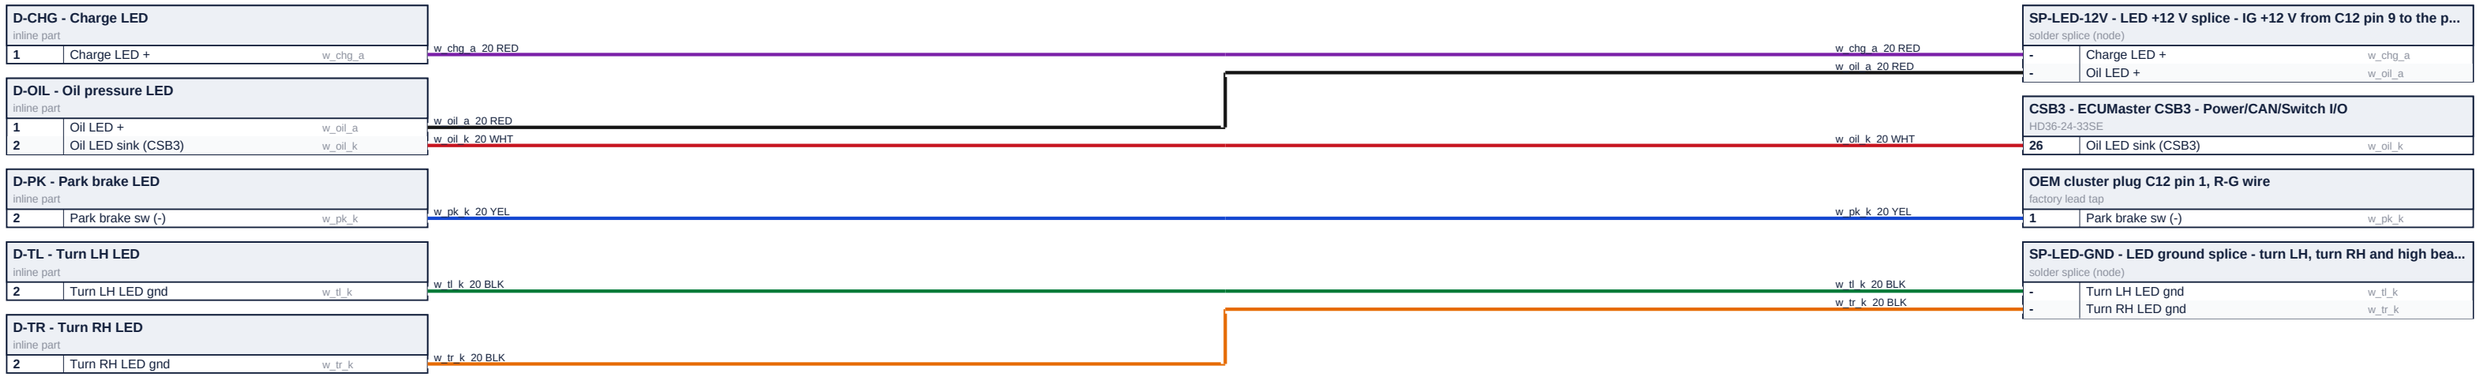

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 2 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	63 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 3 of 3)

SP-LED-GND - LED ground splice - turn LH, turn RH and hig... (solder splice (node))					GND-ID - Ground stud, LH kick panel (EWD ground point ID) (end)		
-	LED common ground	w_led_gnd_out	w_led_gnd_out_20 BLK	w_led_gnd_out_20 BLK	-	LED common ground	w_led_gnd_out

D-PK - Park brake LED (inline part)					SP-LED-12V - LED +12 V splice - IG +12 V from C12 pin 9 to the p... (solder splice (node))		
1	Park brake LED +	w_pk_a	w_pk_a_20 RED	w_pk_a_20 RED	-	Park brake LED +	w_pk_a

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

CLUSTER LEDS - LED BOARD ON THE METER PLUGS C11 / C12 (part 3 of 3)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	64 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 1 of 10)

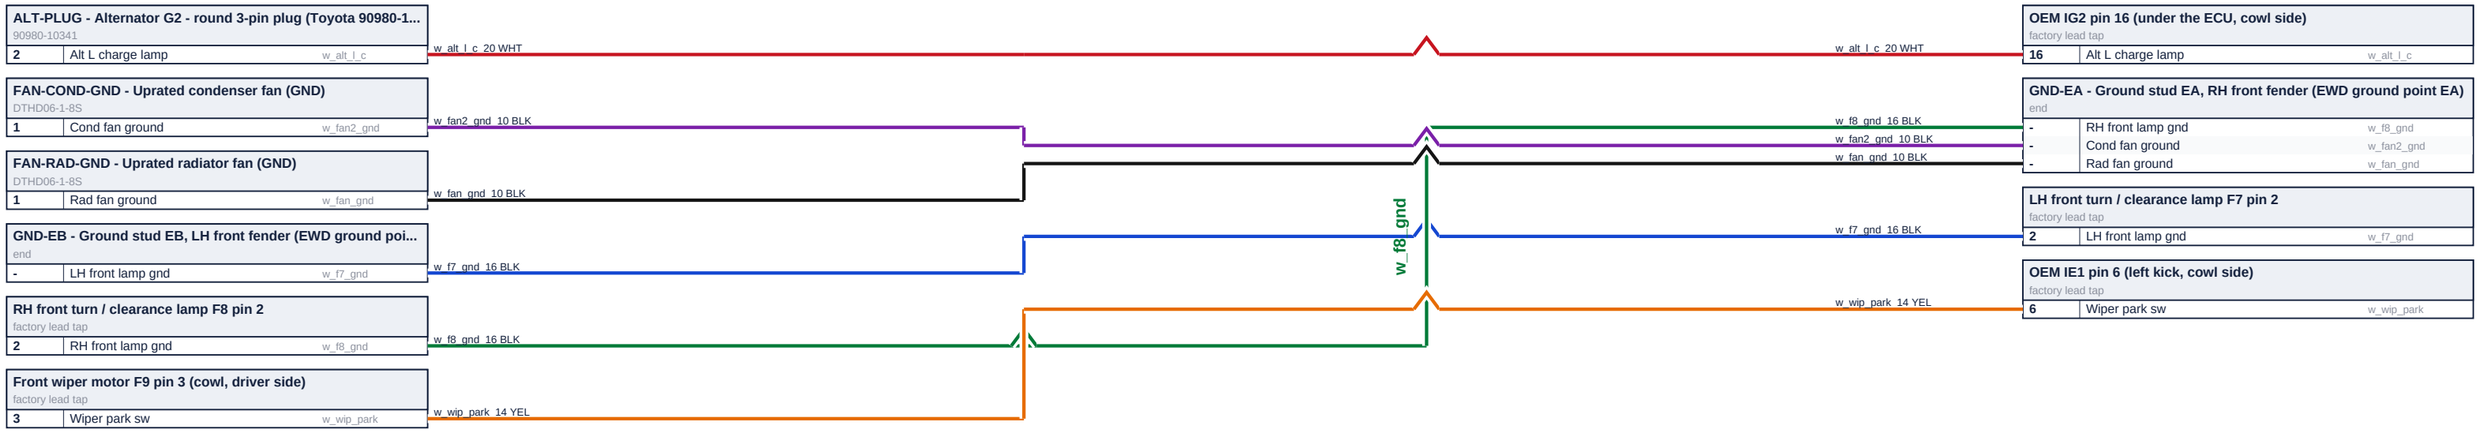

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS


REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 1 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	65 OF 82	432 x 279 mm	DG	2026-10-29

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 2 of 10)

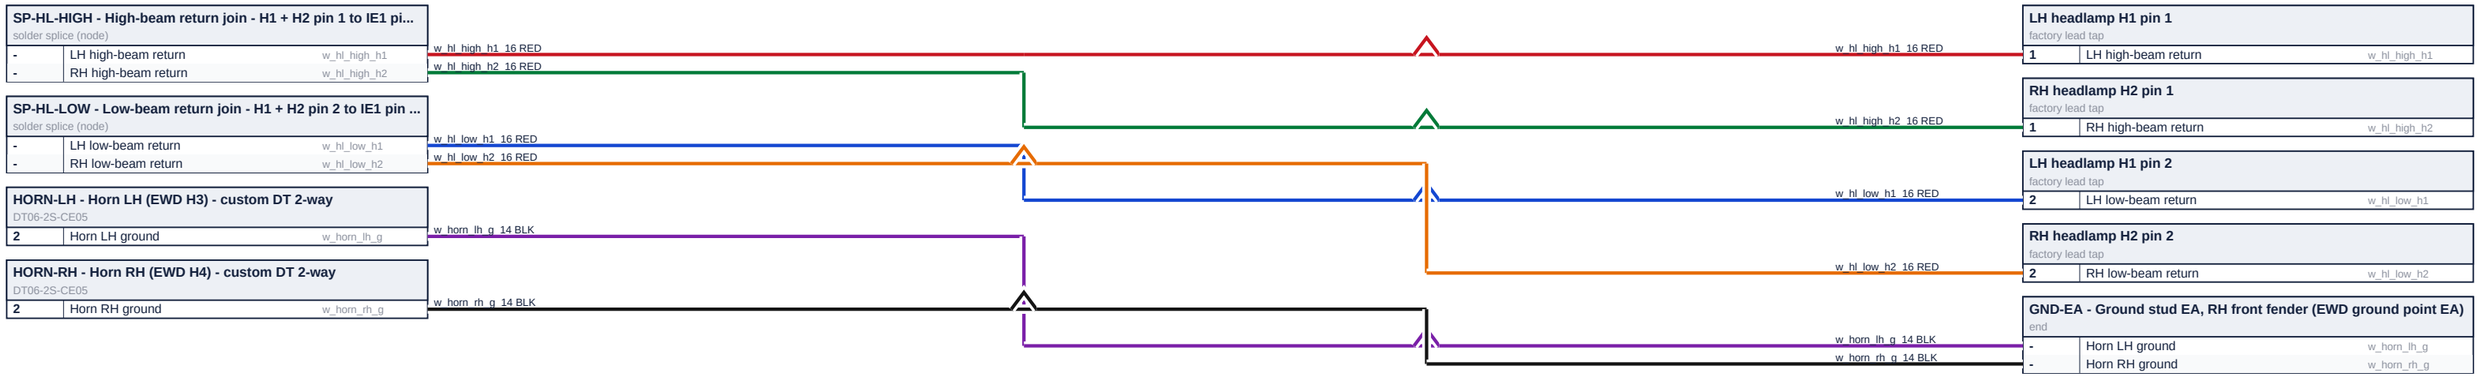

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 2 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	66 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 3 of 10)

SP-RTR-CLOSE - Retract close-limit join - R2 + R3 pin 3 to IE... solder splice (node)			w_rtr_close_18 YEL	w_rtr_close_18 YEL	**OEM IE1 pin 9 (left kick, cowl side)** factory lead tap		
-	Retract close limit	w_rtr_close			9	Retract close limit	w_rtr_close
SP-RTR-R2-4 - LH retract motor feed - 12 AWG to 16 AWG pi... solder splice (node)			w_rtr_r2_4_12 RED	w_rtr_r2_4_12 RED	**OEM IE1 pin 14 (left kick, cowl side)** factory lead tap		
-	LH retract motor 4	w_rtr_r2_4			14	LH retract motor 4	w_rtr_r2_4
SP-RTR-R3-4 - RH retract motor feed - 12 AWG to 16 AWG pi... solder splice (node)			w_rtr_r3_4_12 RED	w_rtr_r3_4_12 RED	**OEM IE1 pin 7 (left kick, cowl side)** factory lead tap		
-	RH retract motor 4	w_rtr_r3_4			7	RH retract motor 4	w_rtr_r3_4
Front wiper motor F9 pin 2 (cowl, driver side) factory lead tap			w_wip_lo_14 RED	w_wip_lo_14 RED	**OEM IE1 pin 13 (left kick, cowl side)** factory lead tap		
2	Wiper LOW	w_wip_lo			13	Wiper LOW	w_wip_lo
OEM IE1 pin 15 (left kick, cowl side) factory lead tap			w_rtr_r2_2_16 RED	w_rtr_r2_2_16 RED	**LH retract motor R2 pin 2** factory lead tap		
15	LH retract motor 2	w_rtr_r2_2			2	LH retract motor 2	w_rtr_r2_2
OEM IE1 pin 8 (left kick, cowl side) factory lead tap			w_rtr_r3_2_16 RED	w_rtr_r3_2_16 RED	**RH retract motor R3 pin 2** factory lead tap		
8	RH retract motor 2	w_rtr_r3_2			2	RH retract motor 2	w_rtr_r3_2

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 3 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	67 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 4 of 10)

SP-CLR - Clearance feed split - F7 LH + F8 RH solder splice (node)				**OEM J/B No.1 1H pin 6 (left kick)** factory lead tap	
-	Clearance lamp feed	w_clr	w_clr_16 RED	1H-6	Clearance lamp feed
SP-RTR-OPEN - Retract open-limit join - R2 + R3 pin 1 to IE1 ... solder splice (node)				**OEM IE1 pin 16 (left kick, cowl side)** factory lead tap	
-	Retract open limit	w_rtr_open	w_rtr_open_18 YEL	16	Retract open limit
LH front turn / clearance lamp F7 pin 3 factory lead tap				**OEM J/B No.1 1H pin 4 (left kick)** factory lead tap	
3	LH front turn +	w_turn_f7	w_turn_f7_18 RED	1H-4	LH front turn +
RH front turn / clearance lamp F8 pin 3 factory lead tap				**OEM J/B No.1 1H pin 8 (left kick)** factory lead tap	
3	RH front turn +	w_turn_f8	w_turn_f8_18 RED	1H-8	RH front turn +
Front wiper motor F9 pin 1 (cowl, driver side) factory lead tap				**OEM IE1 pin 20 (left kick, cowl side)** factory lead tap	
1	Wiper HIGH	w_wip_hi	w_wip_hi_14 RED	20	Wiper HIGH
Front wiper motor F9 pin 4 (cowl, driver side) factory lead tap				**OEM J/B No.1 1H pin 5 (left kick)** factory lead tap	
4	Wiper +B	w_wip_b	w_wip_b_14 RED	1H-5	Wiper +B

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 4 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	68 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 of 10)

FAN-COND - Uprated condenser fan (+) DTHD06-1-8S				**K-FAN2 - B1-R5 Condenser fan relay (seated in the POWER box ...** 1-1393304-0	
1	Cond fan +12 V	w_fan2_pwr	w_fan2_pwr 10 RED	**30**	Cond fan +12 V w_fan2_pwr
FAN-RAD - Uprated radiator fan (+) DTHD06-1-8S				**K-FAN - B1-R4 Radiator fan relay (seated in the POWER box R4)** 1-1414147-0	
1	AMI FAN 30 A fuse -> rad fan relay k_fan	w_fan_pwr	w_fan_pwr 10 RED	**30**	AMI FAN 30 A fuse -> rad fan relay k_fan w_fan_pwr
K-ACC - B2-M5 A/C clutch relay (k_acc) - amp A15 pin 8 sink... 6-1419137-4				**A/C compressor A4 pin 4** factory lead tap	
87	A/C clutch +12 V	w_acc_clutch	w_acc_clutch 16 RED	**4**	LOGIC ACC 10 A fuse -> A/C clutch relay k_acc w_acc_clutch
K-HL - B2-M1 Headlight LH relay (seated in the LOGIC box M1) 5-1393292-8				**LH headlamp H1 pin 3** factory lead tap	
87	LOGIC HL 15 A fuse -> HEAD LH relay k_hl	w_pmu_hl	w_pmu_hl 14 RED	**3**	LOGIC HL 15 A fuse -> HEAD LH relay k_hl w_pmu_hl
K-HR - B2-M2 Headlight RH relay (seated in the LOGIC box M2) 5-1393292-8				**RH headlamp H2 pin 3** factory lead tap	
87	LOGIC HR 15 A fuse -> HEAD RH relay k...	w_pmu_hr	w_pmu_hr 14 RED	**3**	LOGIC HR 15 A fuse -> HEAD RH relay k_hr w_pmu_hr
LOGIC - B2 LOGIC box - custom fuse + relay box, glove box i... ST185-FB-LOGIC rev 5				**OEM J/B No.1 1H pin 2 (left kick)** factory lead tap	
BUS1-5	AMI BUS1 50 A fuse -> LOGIC DM 20 A f...	w_pmu_dome	w_pmu_dome 14 RED	**2**	AMI BUS1 50 A fuse -> LOGIC DM 20 A fuse w_pmu_dome

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · – – – – built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 5 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	69 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 6 of 10)

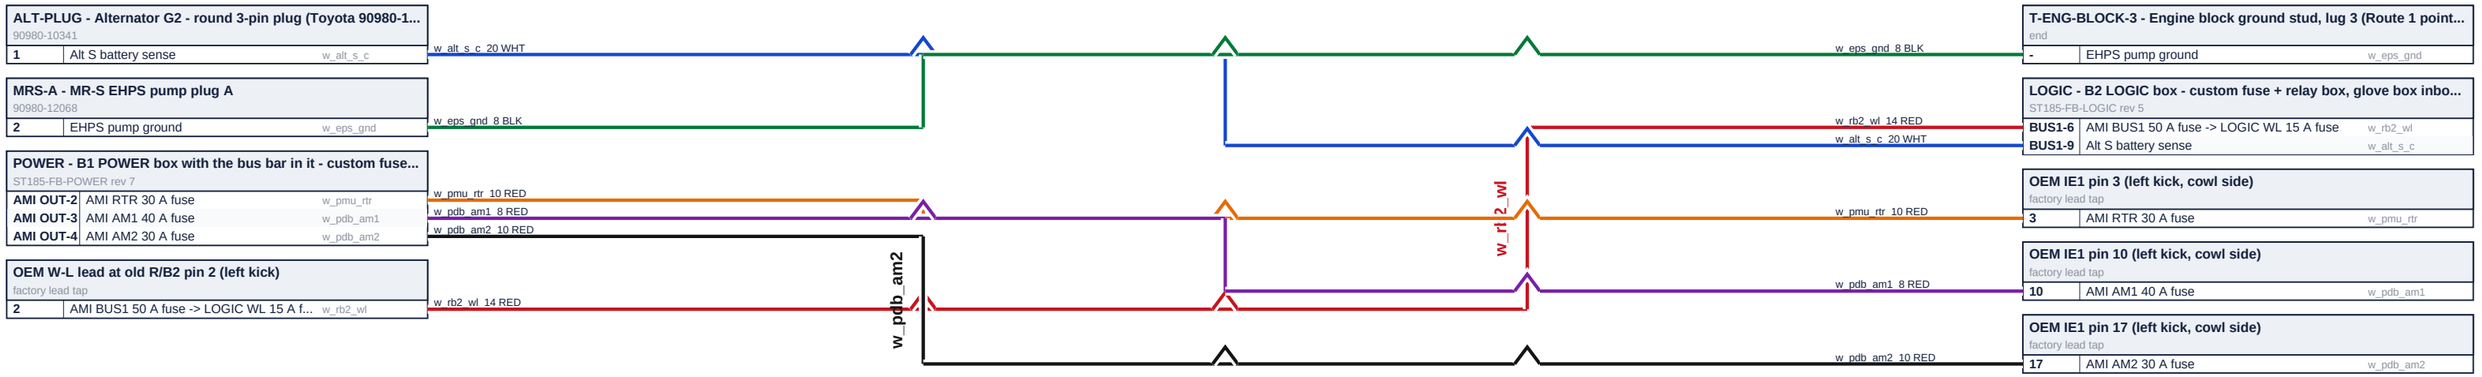

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 6 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	70 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 7 of 10)

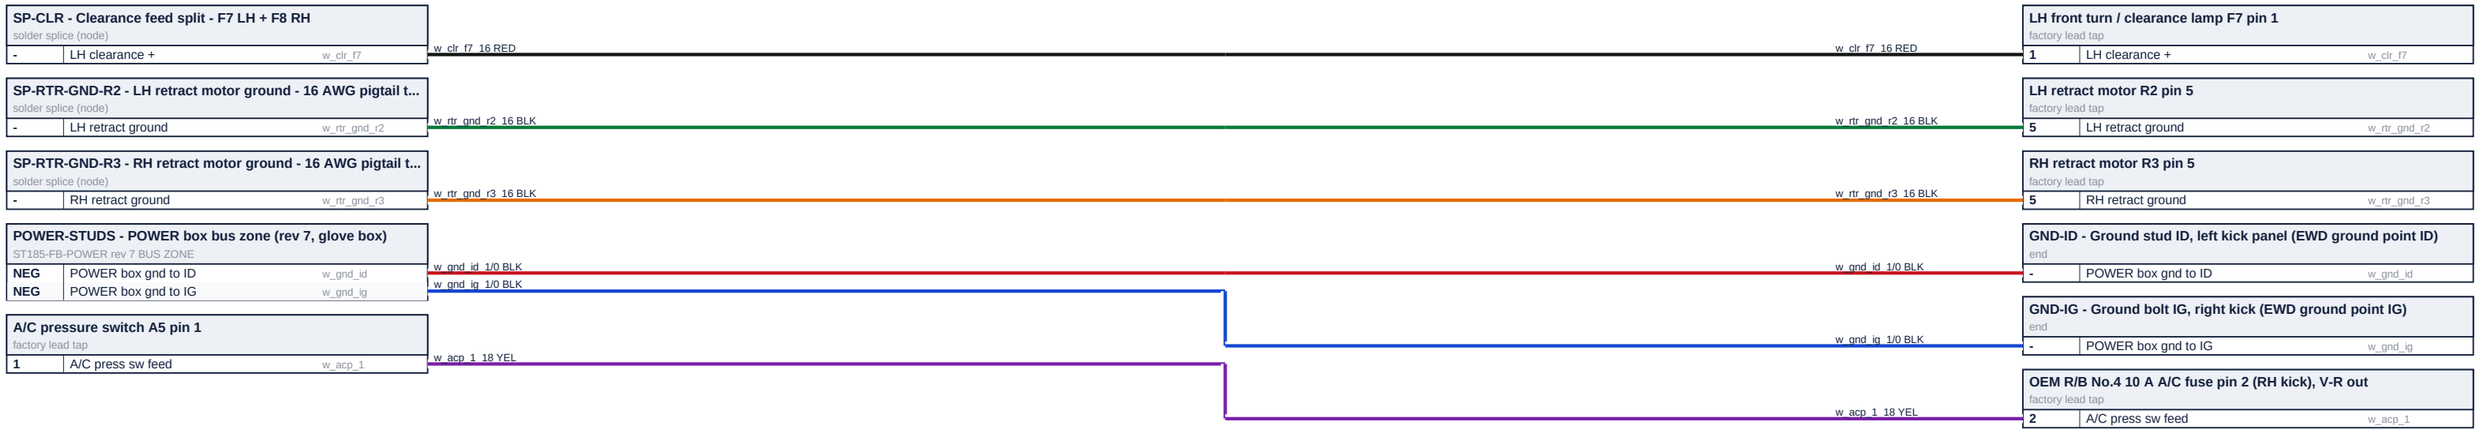

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 7 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	71 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 8 of 10)

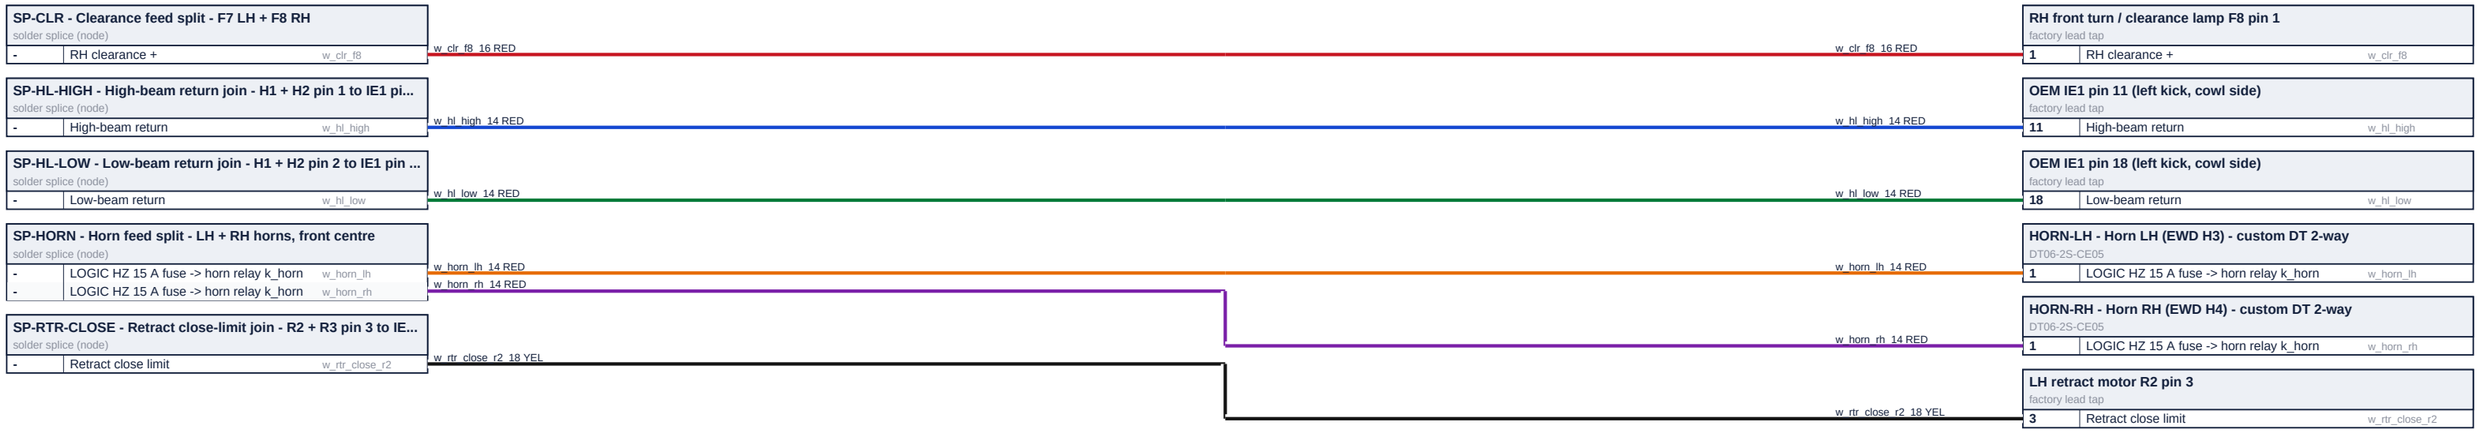

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 8 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	72 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 9 of 10)

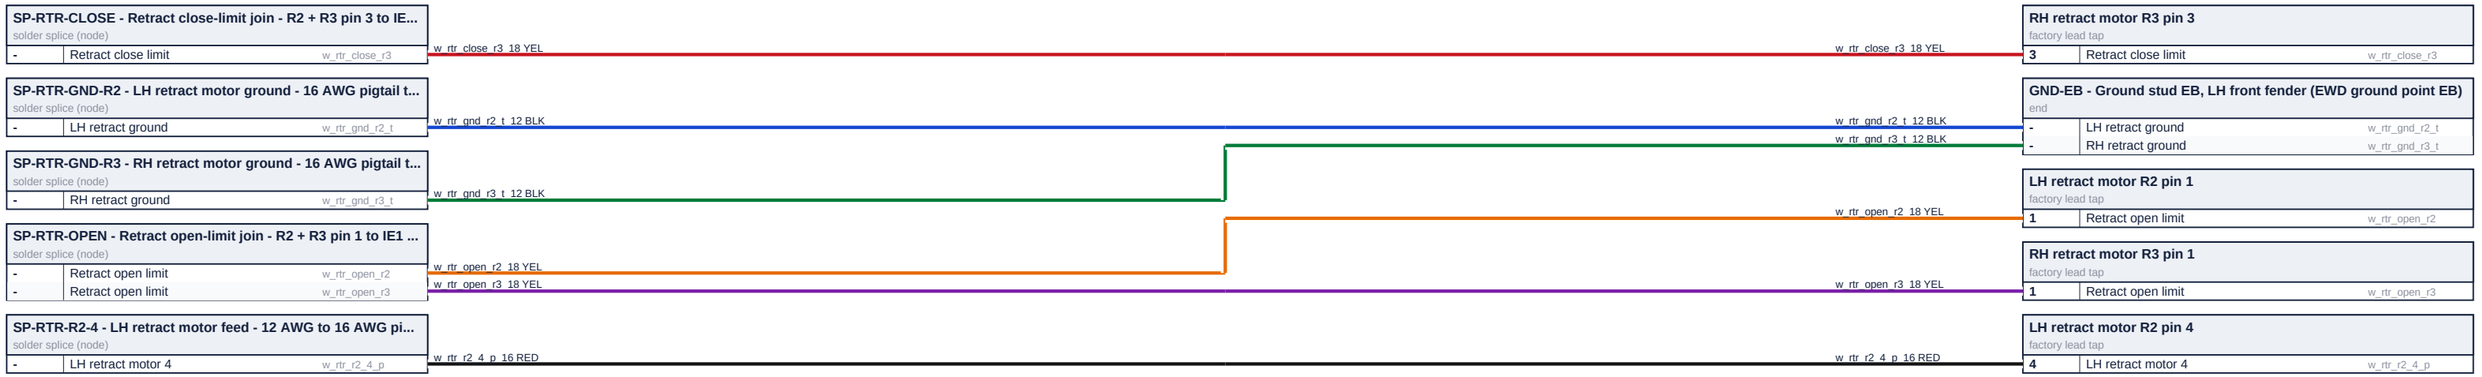

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 9 ...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	73 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 10 of 10)

SP-RTR-R3-4 - RH retract motor feed - 12 AWG to 16 AWG pi... solder splice (node)				**RH retract motor R3 pin 4** factory lead tap	
-	RH retract motor 4	w_rtr_r3_4_p	w_rtr_r3_4_p_16 RED	4	RH retract motor 4
GND-EB - Ground stud EB, LH front fender (EWD ground poi... end				**T-ENG-BLOCK-2 - Engine block ground stud, lug 2 (Route 1 point...** end	
-	Block strap to EB	w_gnd_eb	w_gnd_eb_4 BLK	-	Block strap to EB
OEM washer W1 pin 1 cowl lead (firewall, cabin side) factory lead tap				**Washer motor W1 pin 1 (RH front corner, low)** factory lead tap	
1	Washer switch side	w_wash_neg	w_wash_neg_14 RED	1	Washer switch side
OEM washer W1 pin 2 cowl lead (firewall, cabin side) factory lead tap				**Washer motor W1 pin 2 (RH front corner, low)** factory lead tap	
2	Washer motor +12 V	w_wash_pos	w_wash_pos_14 RED	2	Washer motor +12 V

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HARNESS C - GLOVE BOX OUT THROUGH THE RH FENDER: FANS, HORNS, LIGHTS, RETRACTS, A/C, EPS (part 10...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	74 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 1 of 3)

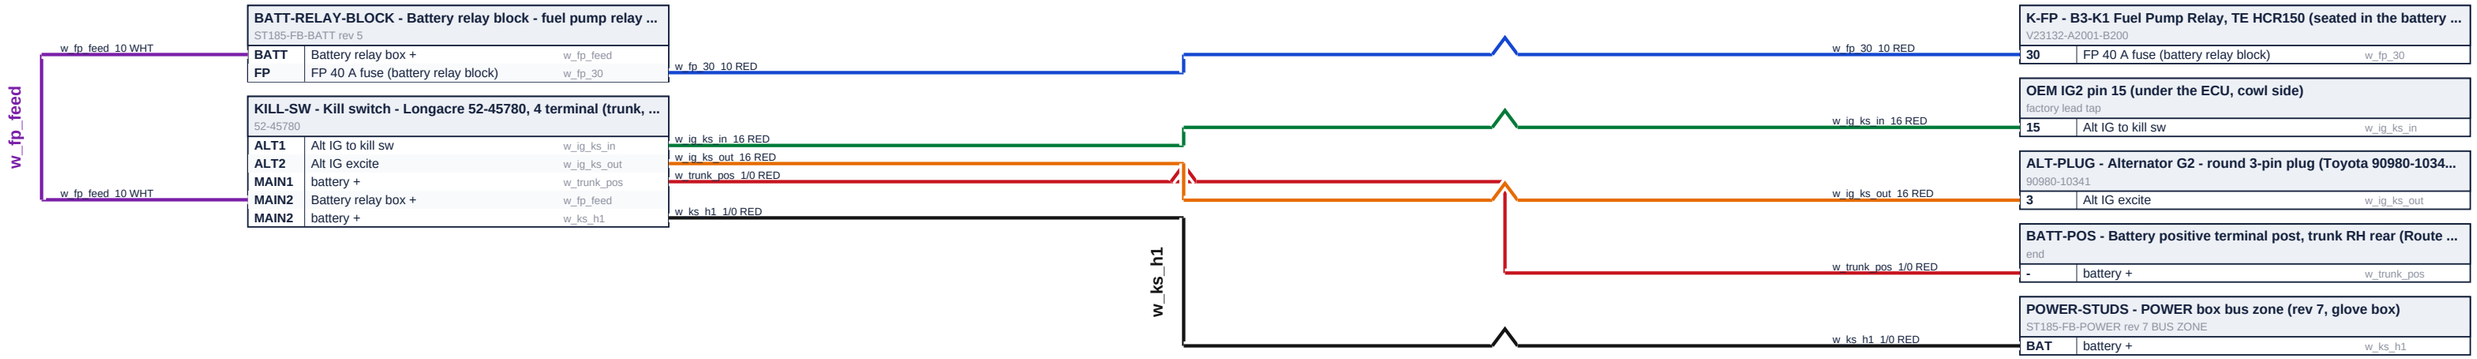

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...


ST185-harness - every wiring harness of the car, one drawing set

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 1 o...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	75 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 2 of 3)

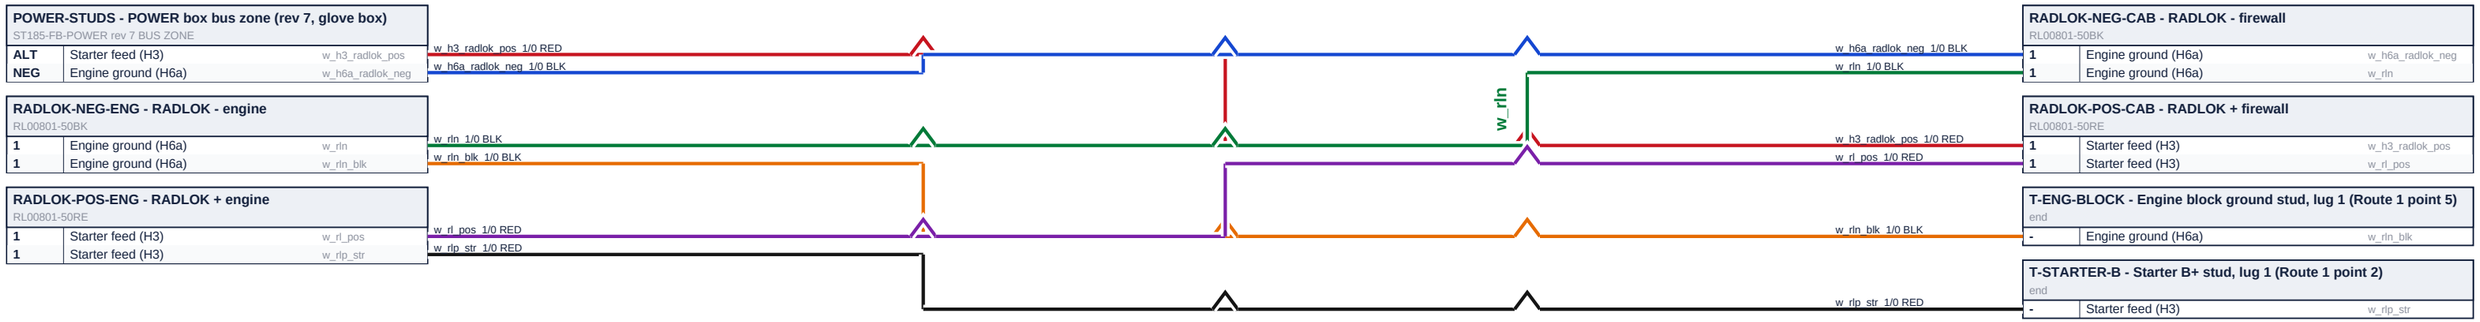

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 2 o...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	76 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 3 of 3)

JUMP-POST - Engine-bay jump post		
1	Jump post feed	w_jump

w_jump_2 RED

w_jump_2 RED

T-STARTER-B-3 - Starter B+ stud, lug 3 (Route 1 point 2)		
end		
-	Jump post feed	w_jump

POWER-STUDS - POWER box bus zone (rev 7, glove box)		
ST185-FB-POWER rev 7 BUS ZONE		
NEG	Battery - main	w_trunk_neg

w_trunk_neg_1/0 BLK

w_trunk_neg_1/0 BLK

T-TRUNK-NEG - Battery negative terminal post, trunk RH rear (Ro...		
end		
-	Battery - main	w_trunk_neg

T-ALT-B - Alternator B+ stud, rear RH of engine (Route 1 poi...		
end		
-	Alternator B+	w_alt

w_alt_2 RED

w_alt_2 RED

T-STARTER-B-2 - Starter B+ stud, lug 2 (Route 1 point 2)		
end		
-	Alternator B+	w_alt

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

HEAVY DC - BATTERY, KILL SWITCH, RADLOK PAIR, STARTER, ALTERNATOR, FUEL PUMP RELAY BLOCK (part 3 o...

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	77 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

REAR FUEL - FUEL PUMP AND LEVEL SENDER

FUEL-LEVEL - Fuel Level Sender - DT 2-way (Dan rev 2, 2026...		
DT04-2P		
1	Fuel level signal	w_fl_sig_r
2	Fuel level ground	w45_r

FUEL-PUMP - Fuel Pump		
1	Fuel pump +12 V	w_fpump_r
2	Fuel pump ground	w_fpg

w_fl_sig_r_20 WHT

w45_r_20 BLU

w_fpump_r_10 RED

w_fpg_10 BLK

w_fl_sig_r_20 WHT

w45_r_20 BLU

w_fpump_r_10 RED

w_fpg_10 BLK

IX-FUEL-S - IX-FUEL inline to fuel sender (trunk LH)		
DT06-2S		
1	Fuel level signal	w_fl_sig_r
2	Fuel level ground	w45_r

K-FP - B3-K1 Fuel Pump Relay, TE HCR150 (seated in the battery ...		
V23132-A2001-B200		
87	Fuel pump +12 V	w_fpump_r

T-TRUNK-FP-GND - Ground stud, trunk LH side (EWD ID TBD, M6...		
end		
-	Fuel pump ground	w_fpg

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

REAR FUEL - FUEL PUMP AND LEVEL SENDER

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	78 OF 82	432 x 279 mm	DG	2026-10-29

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 1 of 2)

SP-WS-F-SHIELD - Sensor screen join - FL + FR screens to t...		
solder splice (node)		
-	FL sensor shield	cab_fl_sh
-	FR sensor shield	cab_fr_sh
-	Front sensor shields	w_ws_f_shield

IX-WS-F-P - IX-WS-F		
DT04-6P		
1	VRC-F +5V	cab_fout_5v
2	VRC-F GND	cab_fout_gnd
5	WS-F screen drain	cab_fout_sh

cab_fl_sh_screen

cab_fr_sh_screen

w_ws_f_shield_20 BLK

cab_fout_5v_20 RED

cab_fout_gnd_20 YEL

cab_fout_sh_screen

cab_fl_sh_screen

cab_fr_sh_screen

w_ws_f_shield_20 BLK

cab_fout_5v_20 RED

cab_fout_gnd_20 YEL

cab_fout_sh_screen

CAB-FL cable screen (floats at the device end)		
cable screen		
-	FL sensor shield	cab_fl_sh

CAB-FR cable screen (floats at the device end)		
cable screen		
-	FR sensor shield	cab_fr_sh

VRC-F-IN - VRC front IN plug		
LP-16-J05PE-02-001		
3	Front sensor shields	w_ws_f_shield

VRC-F-OUT - VRC front OUT plug		
LP-16-J05PE-02-001		
1	VRC-F +5V	cab_fout_5v
2	VRC-F GND	cab_fout_gnd
3	WS-F screen drain	cab_fout_sh

WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 1 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	79 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 2 of 2)



WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

FRONT WHEEL SPEED - FL / FR SENSORS TO THE FRONT VRC (part 2 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	80 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 1 of 2)

SP-WS-R-SHIELD - Sensor screen join - RL + RR screens to t...
solder splice (node)

-	RL sensor shield	cab_rl_sh
-	RR sensor shield	cab_rr_sh
-	Rear sensor shields	w_ws_r_shield

IX-WS-R-P - IX-WS-R
DT04-6P

1	VRC-R +5V	cab_rout_5v
2	VRC-R GND	cab_rout_gnd
5	WS-R screen drain	cab_rout_sh

cab_rl_sh_screen
cab_rr_sh_screen
w_ws_r_shield_20 BLK
cab_rout_5v_20 RED
cab_rout_gnd_20 YEL
cab_rout_sh_screen

cab_rl_sh_screen
cab_rr_sh_screen
w_ws_r_shield_20 BLK
cab_rout_5v_20 RED
cab_rout_gnd_20 YEL
cab_rout_sh_screen

CAB-RL cable screen (floats at the device end)
cable screen

-	RL sensor shield	cab_rl_sh

CAB-RR cable screen (floats at the device end)
cable screen

-	RR sensor shield	cab_rr_sh

VRC-R-IN - VRC rear IN plug
LP-16-J05PE-02-001

3	Rear sensor shields	w_ws_r_shield

VRC-R-OUT - VRC rear OUT plug
LP-16-J05PE-02-001

1	VRC-R +5V	cab_rout_5v
2	VRC-R GND	cab_rout_gnd
3	WS-R screen drain	cab_rout_sh

WIRE COLOURS (R209): RED BLK ORN BLU WHT GRN YEL — built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set
REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 1 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	81 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 2 of 2)



WIRE COLOURS (R209): RED · BLK · ORN · BLU · WHT · GRN · YEL · built with another harness

line colour = one wire on this page; the label has the wire colour

REVISIONS

REV	DATE	BY	DESCRIPTION
I	2026-10-27	DG	Crank and cam each run in one shielded Raychem cable (2-core / 3-core). The CAN-Lambda bra...
J	2026-10-28	DG	ECU engine harness layout tree built from Route 16 (Dan's device spots and branches, DECISIO...
K	2026-10-29	DG	Ignition coil ground goes straight to the glove-box POWER box NEG bar through bulkhead cavity ...
L	2026-10-29	DG	Every connector part-way along a line or run breaks out at least 6 in (152 mm) off it; the last conn...

ST185-harness - every wiring harness of the car, one drawing set

REAR WHEEL SPEED - RL / RR SENSORS TO THE REAR VRC (part 2 of 2)

DRAWING NO.	REV	SHEET	SIZE	DRAWN	DATE
ST185-harness-SCH	L	82 OF 82	432 x 279 mm	DG	2026-10-29

ST185 Celica (living-relation) - generated by docs/harness/tools/build_drawings.py from docs/harness/MASTER-wirelist.csv; not to scale