

regional_mom6: A Python package for automatic generation of regional configurations for the Modular Ocean Model 6

Ashley J. Barnes^{1,2*}, Author Without ORCID^{2*}, Author with no affiliation^{3¶}, and Ludwig van Beethoven³

¹ Australian National University, Australia ² ARC Centre of Excellence in Climate Extremes, Australia ³ Independent Researcher, Country ¶ Corresponding author * These authors contributed equally.

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Editor: [Open Journals](#) ↗

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

Modular Ocean Model 6 (MOM6) is a widely used general circulation ocean model developed at the Geophysical Fluid Dynamics Laboratory (GFDL) at Princeton. Among other improvements on its predecessor MOM5, this iteration permits open boundary conditions, and MOM6 is subsequently growing in popularity for high resolution regional modelling. However, setting up a regional domain can be challenging and time consuming for new users even for the simplest rectangular domains. The `regional_mom6` python package automates much of the regridding, metadata encoding, grid generation and other miscellaneous steps, allowing models to be up and running more quickly.

The `regional_mom6` package takes raw files containing the initial condition, forcing and bathymetry. These inputs can be on the Arakawa A, B or C grids, and the package performs the appropriate interpolation using `xESMF` @zhang:2020 onto the C grid required by MOM6. This base grid can either be constructed based on the user's desired resolution and choice of pre-configured options, or the user can provide their own horizontal or vertical grids. In either case, the package then handles the coordinates, dimensions, metadata and encoding to ensure that the final input files are in formats expected by MOM6. Additionally, the tricky case of a 'seam' in the longitude of the raw input data (for instance at -180 and 180) is handled automatically, removing the need for any preprocessing of the data. The package also comes with pre-configured run directories, which can be automatically copied and modified to match the user's experiment. Subsequently, a user need only copy a demo notebook, modify the longitude, latitude and resolution, and simply by running the notebook from start to finish will generate all they need for running a MOM6 experiment in their domain of interest.

This package is targeted at users with basic Python skills, and contains a documented tutorial based on publicly available forcing and bathymetry datasets. After completion of the example notebook, a complete set of input and configuration files will be generated for the example domain, requiring the user only to compile and run the MOM6 code on their computer. Having the entire process run in a single, well documented Jupyter notebook dramatically reduces the barrier to entry for first time users, or those without a strong background reading FORTRAN source code of large models and manipulating NETCDF files. Besides making regional modelling with MOM6 more accessible, this package also serves to automate the generation of multiple experiments, saving time and improving reproducibility.

Although `regional_mom6` was designed to automate the set-up as much as possible to aid first time users, it can also be used for more advanced configurations. The modular design of the code means that users can use their own custom grids and set up boundaries one-by-one to accommodate more complex domain shapes. As more advanced use cases emerge, users can

43 contribute their grid generation functions as well as example configuration files and notebooks.


44 Statement of need

45 The learning curve for setting up a regional ocean model can be quite steep. In the case
46 of MOM6, there are several tools scattered around github like those collected in ESMG's
47 grid tools @gridtools, as well as examples hardcoded for particular domains, input files and
48 hardware. However, there is no one-stop-shop to learn how to get a regional MOM6 model
49 up and running, meaning that a newcomer must collect many disparate pieces of information
50 from around the internet unless they are able to get help. Other models have packages to aid
51 in domain setup like Pyroms @pyroms for ROMS and MITGCM_python @mitgcmpy for MITGCM.
52 With MOM6's growing user base for regional applications, there is a need for a platform that
53 walks users through regional domain setup from from start to finish, and ideally helps with
54 some of the time consuming parts of the process that ought to be automated.

55 A package also provides a standardised way of setting up regional models, allowing for more
56 efficient troubleshooting. This is particularly as the MOM6 boundary code is still under active
57 development, meaning that an old example found Github may not work as intended with a
58 newer executable. Currently, it is difficult to discern what the best model settings are for a
59 particular experiment with a given MOM6 executable. However, having different releases of
60 a python package tied to releases of the MOM6 executable will help users avoid difficult to
61 diagnose compatibility errors between the MOM6 codebase, input file formats and parameter
62 files.

63 By having a shared set of tools that the community can work with and contribute to, this
64 package also facilitates collaboration and knowledge sharing between different modelling groups.
65 For instance, the Australian ocean modelling community built a set of tools known as the
66 COSIMA Cookbook (cite github repo). Alongside the tools grew a set of contributed examples
67 for postprocessing and analysis of model outputs. In using a shared framework for setting up
68 regional models, it will be easier to compare and contrast examples of different experiments as
69 users seek techniques for generating their chosen domain.

70 A further advantage of such a package is for use in education. With the challenging - but
71 unimportant from an oceanographical point of view - aspects of setting up a regional model
72 handled by a Python package, simple MOM6 configurations could be set up and run in
73 Geophysical fluid dynamics courses, with students altering things like resolution or forcing,
74 quickly re-running, and interpreting the changes.

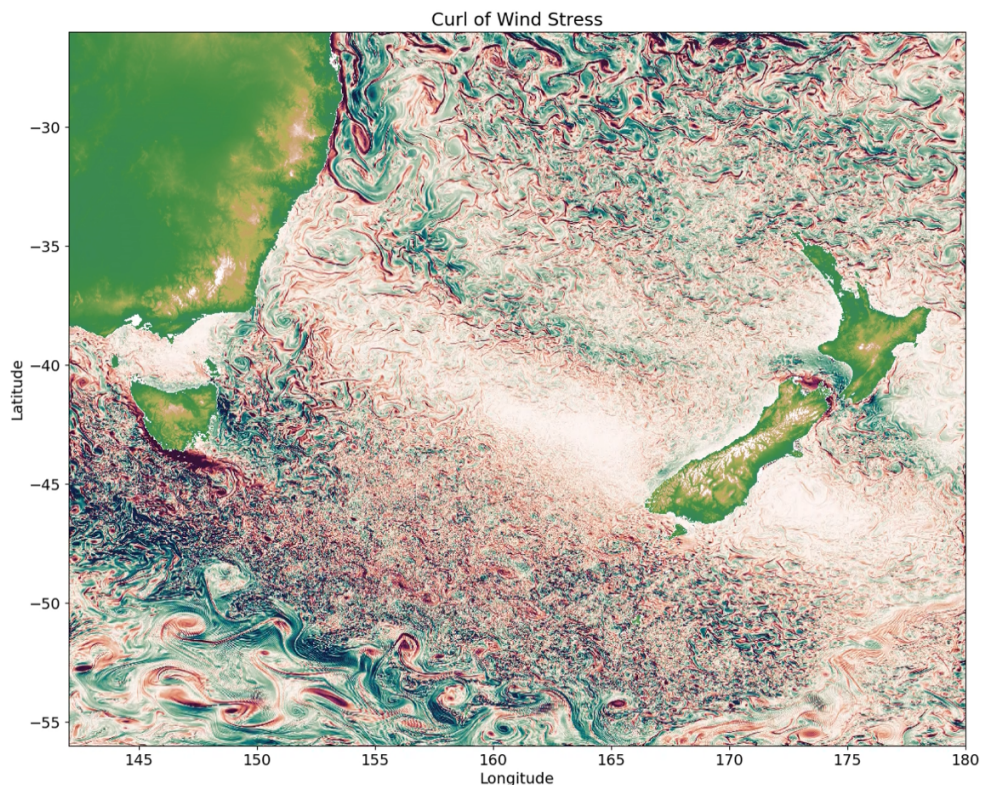

Citations

Citations to entries in paper.bib should be in [rMarkdown](#) format.

If you want to cite a software repository URL (e.g. something on GitHub without a preferred citation) then you can do it with the example BibTeX entry below for ([fidgit?](#)).

For a quick reference, the following citation commands can be used: - @author:2001 -> "Author et al. (2001)" - [@author:2001] -> "(Author et al., 2001)" - [@author1:2001; @author2:2001] -> "(Author1 et al., 2001; Author2 et al., 2002)"

Figures

Figures can be included like this: Caption for example figure. and referenced from text using [section](#) .

Figure sizes can be customized by adding an optional second parameter: Caption for example figure.

Acknowledgements

We thank the Consortium for Ocean–Sea Ice Modeling in Australia (cosima.org.au) for useful discussions during the development of this package. N.C.C. acknowledges funding from the Australian Research Council under DECRA Fellowship DE210100749.

References