

### **Features**

- Push switch option
- Compact, rugged design
- High reliability
- Metal bushing/shaft



# PEC11R Series - 12 mm Incremental Encoder

Electrical Characteristics	
	2-bit quadrature code
Dielectric Withstanding Voltage	100 megonins @ 250 vbc
	2.0 ms maximum*
RPM (Operating)	
Environmental Characteristics	
	30 °C to +70 °C (-22 °F to +158 °F)
	40 °C to +85 °C (-40 °F to +185 °F
	MIL-STD-202, Method 103B, Condition E
	10~55~10 Hz / 1 min. / Amplitude 1.5 mm
	30,000 cycles minimum
	20,000 cycles minimum
	IP 40
Mechanical Characteristics	
	360 ° continuous
Torque	00 to 00 of any /0 44 to 4 05 oo in
	30 to 90 gf-cm (0.41 to 1.25 oz-in 10 to 70 gf-cm (0.14 to 0.97 oz-in
Weight	5 gm (0.17 oz.) maximun
	Printed circuit board terminals
Soldering Condition	0.077/1.00/0.07 11 11 11 11 10 00000 1.00 1
Wave Soldering	
Hardware	
i iai uwai e	
Switch Characteristics	
How To Order	Quadrature Output Table
PEC11R -	4 0 20 F - S 0012
Model	
Terminal Configuration —	
4 = PC Pin Horizontal/Rear Facing	
Detent Option —	A Signal — ON ON CONTRACTOR ON
0 = No Detents (12, 18, 24 pulses)	A Signal —
1 = 18 Detents (18 pulses)	
2 = 24 Detents (12, 24 pulses)	B Signal — L L L
2 = 24 Detents (12, 24 pulses) 3 = 12 Detents (12, 24 pulses)	
Standard Shaft Length	B Signal D
Standard Shaft Length ————————————————————————————————————	
Standard Shaft Length ————————————————————————————————————	
Standard Shaft Length  15 = 15.0 mm  20 = 20.0 mm  25 = 25.0 mm  30 = 30.0 mm  Shaft Style	
Standard Shaft Length  15 = 15.0 mm  20 = 20.0 mm  25 = 25.0 mm  30 = 30.0 mm  Shaft Style  F = Metal Flatted Shaft	
Standard Shaft Length  15 = 15.0 mm  20 = 20.0 mm  25 = 25.0 mm  30 = 30.0 mm  Standard Style  F = Metal Flatted Shaft K = Metal Knurled Shaft	
Standard Shaft Length  15 = 15.0 mm  20 = 20.0 mm  25 = 25.0 mm  30 = 30.0 mm  Shaft Style  F = Metal Flatted Shaft K = Metal Knurled Shaft Switch Configuration	
Standard Shaft Length  15 = 15.0 mm  20 = 20.0 mm  25 = 25.0 mm  30 = 30.0 mm  Standard Style  F = Metal Flatted Shaft K = Metal Knurled Shaft	
Standard Shaft Length  15 = 15.0 mm  20 = 20.0 mm  25 = 25.0 mm  30 = 30.0 mm  Shaft Style  F = Metal Flatted Shaft  K = Metal Knurled Shaft 1  Switch Configuration  S = Push Momentary Switch  N = No Switch	
Standard Shaft Length  15 = 15.0 mm  20 = 20.0 mm  25 = 25.0 mm  30 = 30.0 mm  Shaft Style  F = Metal Flatted Shaft  K = Metal Knurled Shaft  Switch Configuration  S = Push Momentary Switch  N = No Switch	
Standard Shaft Length  15 = 15.0 mm  20 = 20.0 mm  25 = 25.0 mm  30 = 30.0 mm  Shaft Style  F = Metal Flatted Shaft  K = Metal Knurled Shaft <sup>1</sup> Switch Configuration  S = Push Momentary Switch  N = No Switch  Resolution	
Standard Shaft Length  15 = 15.0 mm 20 = 20.0 mm 25 = 25.0 mm 30 = 30.0 mm  Shaft Style  F = Metal Flatted Shaft K = Metal Knurled Shaft <sup>1</sup> Switch Configuration S = Push Momentary Switch N = No Switch  Resolution  0012 = 12 Pulses per 360 ° Rotation	
Standard Shaft Length  15 = 15.0 mm 20 = 20.0 mm 25 = 25.0 mm 30 = 30.0 mm  Shaft Style  F = Metal Flatted Shaft K = Metal Knurled Shaft <sup>1</sup> Switch Configuration S = Push Momentary Switch N = No Switch  Resolution  0012 = 12 Pulses per 360 ° Rotation 0018 = 18 Pulses per 360 ° Rotation 0024 = 24 Pulses per 360 ° Rotation	CCW
Standard Shaft Length  15 = 15.0 mm 20 = 20.0 mm 25 = 25.0 mm 30 = 30.0 mm  Shaft Style  F = Metal Flatted Shaft K = Metal Knurled Shaft <sup>1</sup> Switch Configuration S = Push Momentary Switch N = No Switch  Resolution  0012 = 12 Pulses per 360 ° Rotation 0018 = 18 Pulses per 360 ° Rotation	gths.

<sup>\*</sup>RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

\*\*Devices are tested using standard noise reduction filters. For optimum performance, designers should use noise reduction filters in their circuits.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

### **Applications**

Level control, tuning and timer settings in:


- Audio-visual equipment
- Consumer electric appliances
- Radios
- Musical instrumentation
- Communications equipment

## PEC11R Series - 12 mm Incremental Encoder


## **POURNS**®

#### **Product Dimensions**

#### PEC11R-4xxxF-Nxxxx

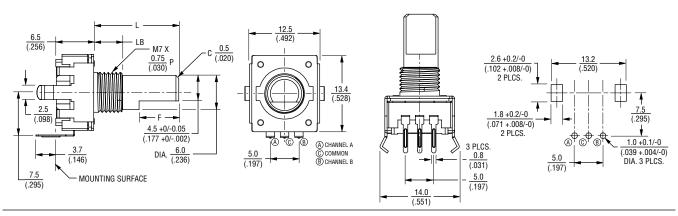

#### PEC11R-4xxxF-Sxxxx

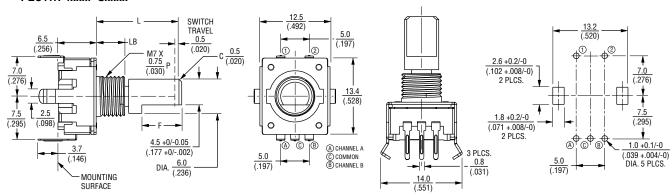

L	LB	F
15	<u>5.0</u>	7.0
(.591)	(.197)	(.276)
<u>20</u>	7.0	10.0
(.787)	(.276)	(.394)
25	7.0	12.0
(.984)	(.276)	(.472)
30	7.0	12.0
(1.181)	(.276)	(.472)


DIMENSIONS: 
$$\frac{\text{MM}}{(\text{INCHES})}$$

TOLERANCES:  $<\frac{10}{(.394)} = \pm \frac{0.3}{(.012)}$ 
 $\geq \frac{10}{(.394)} = \pm \frac{0.5}{(.020)}$ 

#### **Switch Circuit**



#### **Suggested Filter Circuit**





# PEC11R Series - 12 mm Incremental Encoder

## **BOURNS**®

#### **Product Dimensions**


### PEC11R-4xxxK-Nxxxx






L	LB	Р	Α
<u>15</u> (.591)	<u>5.0</u> (.197)	7.0 (.276)	6.0 (.236)
<u>20</u> (.787)	7.0 (.276)	7.0 (.276)	6.0 (.236)
30 (1.181)	7.0 (.276)	<u>16.0</u> (.630)	<u>12.0</u> (.472)

#### PEC11R-4xxxK-Sxxxx





L	LB	Р	Α
15 (.591)	<u>5.0</u> (.197)	7.0 (.276)	6.0 (.236)
20 (.787)	7.0 (.276)	7.0 (.276)	6.0 (.236)

TOLERANCES: 
$$<\frac{10}{(.394)} = \pm \frac{0.3}{(.012)}$$
  
 $\geq \frac{10}{(.394)} = \pm \frac{0.5}{(.020)}$