https://127.0.0.1:8000/

Performance	Accessibility	Best Practices	SEO
69	62	88	45

69

Performance

Values are estimated and may vary. The performance score is calculated directly from these metrics. See calculator.

▲ 0–49 50–89 90–100

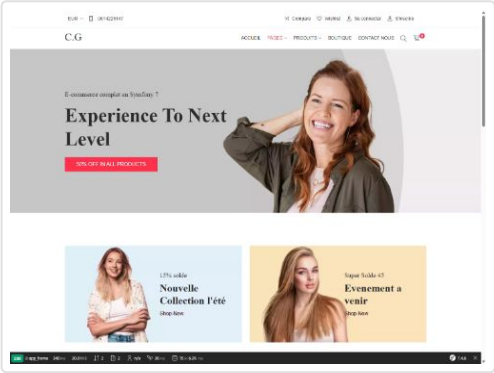

METRICS Expand view

First Contentful Paint 1.0 s	▲ Largest Contentful Paint 3.8 s
Total Blocking Time 0 ms	Cumulative Layout Shift 0.133

Speed Index

2.2 s

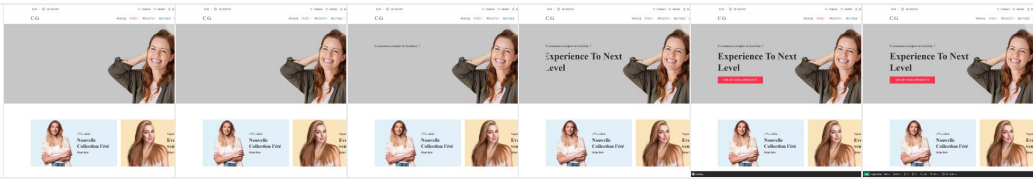

Show audits relevant to: All FCP LCP TBT CLS

INSIGHTS

▲ Use efficient cache lifetimes — Est savings of 4,458 KiB

A long cache lifetime can speed up repeat visits to your page. Learn more about caching. FCP LCP Unscored

Request	Cache TTL	Transfer Size
127.0.0.1 1st Party		**4,570 KiB**
...products/dcc7781....webp (127.0.0.1)	None	444 KiB
...products/71d0b30....webp (127.0.0.1)	None	409 KiB
...fonts/Linearicons.woff (127.0.0.1)	None	395 KiB
...products/c59c5e0....webp (127.0.0.1)	None	259 KiB
...products/8253802....webp (127.0.0.1)	None	258 KiB
...products/9ce2445....webp (127.0.0.1)	None	213 KiB
...fonts/ionicons.ttf?v=2.0.0 (127.0.0.1)	None	184 KiB
...products/712f8a8....webp (127.0.0.1)	None	174 KiB
...products/e0f1ee9....webp (127.0.0.1)	None	165 KiB
...css/bootstrap.min.css (127.0.0.1)	None	160 KiB
...css/style.css (127.0.0.1)	None	150 KiB
...products/497d6c9....webp (127.0.0.1)	None	138 KiB
...products/b93dff2....webp (127.0.0.1)	None	136 KiB
...products/e10269f....webp (127.0.0.1)	None	131 KiB
...products/5f2c270....webp (127.0.0.1)	None	120 KiB
...js/jquery-3.6.0.min.js (127.0.0.1)	None	87 KiB
...fonts/fa-solid-900.woff2 (127.0.0.1)	None	73 KiB
...css/animate.css (127.0.0.1)	None	71 KiB
...js/jquery.elevatezoom.js (127.0.0.1)	None	59 KiB

Request	Cache TTL	Transfer Size
...products/72366d3....webp (127.0.0.1)	None	58 KiB
...js/bootstrap.min.js (127.0.0.1)	None	58 KiB
...css/linearicons.css (127.0.0.1)	None	57 KiB
...fonts/themify.woff?-fvbane (127.0.0.1)	None	55 KiB
...products/4a31a6c....webp (127.0.0.1)	None	54 KiB
...css/all.min.css (127.0.0.1)	None	53 KiB
...css/ionicons.min.css (127.0.0.1)	None	50 KiB
...js/owl.carousel.min.js (127.0.0.1)	None	43 KiB
...css/responsive.css (127.0.0.1)	None	42 KiB
...js/slick.min.js (127.0.0.1)	None	40 KiB
...js/isotope.min.js (127.0.0.1)	None	35 KiB
...sliders/edf758d....webp (127.0.0.1)	None	33 KiB
...js/scripts.js (127.0.0.1)	None	25 KiB
...js/popper.min.js (127.0.0.1)	None	21 KiB
...js/jquery.dd.min.js (127.0.0.1)	None	21 KiB
...js/magnific-popup.min.js (127.0.0.1)	None	20 KiB
...js/library.js (127.0.0.1)	None	18 KiB
...css/themify-icons.css (127.0.0.1)	None	17 KiB
...fonts/Simple-Line-Icons.woff2 (127.0.0.1)	None	17 KiB
...fonts/fa-regular-400.woff2 (127.0.0.1)	None	13 KiB
...css/simple-line-icons.css (127.0.0.1)	None	12 KiB
...js/waypoints.min.js (127.0.0.1)	None	9 KiB
...turbo/turbo.index-pT15T6h.js (127.0.0.1)	7d	75 KiB
...css/magnific-popup.css (127.0.0.1)	None	7 KiB
...js/parallax.js (127.0.0.1)	None	6 KiB
...collections/6e6b91d....webp (127.0.0.1)	None	6 KiB
...js/imagesloaded.pkgd.min.js (127.0.0.1)	None	6 KiB
...js/jquery.countdown.min.js (127.0.0.1)	None	5 KiB
...collections/76cf827....webp (127.0.0.1)	None	5 KiB
...collections/a912d13....webp (127.0.0.1)	None	5 KiB

Request	Cache TTL	Transfer Size
...stimulus/stimulus.index-S4zNcea.js (127.0.0.1)	7d	45 KiB
...collections/7b96182....webp (127.0.0.1)	None	4 KiB
...collections/f0acf30....webp (127.0.0.1)	None	4 KiB
...css/owl.carousel.min.css (127.0.0.1)	None	3 KiB
...css/slick-theme.css (127.0.0.1)	None	3 KiB
...css/flaticon.css (127.0.0.1)	None	2 KiB
...js/main.js (127.0.0.1)	None	2 KiB
...css/slick.css (127.0.0.1)	None	2 KiB
...js/cart.js (127.0.0.1)	None	2 KiB
...css/owl.theme.css (127.0.0.1)	None	2 KiB
...css/owl.theme.default.min.css (127.0.0.1)	None	1 KiB
...images/amarican_express.png (127.0.0.1)	None	1 KiB
...images/master_card.png (127.0.0.1)	None	1 KiB
...images/visa.png (127.0.0.1)	None	1 KiB
...js/compare.js (127.0.0.1)	None	1 KiB
...images/paypal.png (127.0.0.1)	None	1 KiB
...images/discover.png (127.0.0.1)	None	0 KiB
...stimulus-bundle/loader-V1GtHuK.js (127.0.0.1)	7d	3 KiB
...controllers/hello_controller-VYgvytJ.js (127.0.0.1)	7d	1 KiB
...stimulus-bundle/controlle....js (127.0.0.1)	7d	0 KiB
...ux-turbo/turbo_con....js (127.0.0.1)	7d	0 KiB
/assets/stimulus_....js (127.0.0.1)	7d	0 KiB
/assets/app-TYvGPvh.js (127.0.0.1)	7d	0 KiB
...styles/app-6Xbc7_I.css (127.0.0.1)	7d	0 KiB

▲ Improve image delivery — Est savings of 1,652 KiB

Reducing the download time of images can improve the perceived load time of the page and LCP. Learn more about optimizing image size FCP LCP Unscored

	URL	Resource Size	Est Savings
127.0.0.1 1st Party		**1,760.7 KiB**	**1,652.2 KiB**
 img	...products/dcc7781....webp (127.0.0.1)	443.9 KiB	429.2 KiB
	Increasing the image compression factor could improve this image's download size.		268.4 KiB
	This image file is larger than it needs to be (900x1198) for its displayed dimensions (261x347). Use responsive images to reduce the image download size.		406.6 KiB
 img	...products/c59c5e0....webp (127.0.0.1)	258.7 KiB	244.0 KiB
	Increasing the image compression factor could improve this image's download size.		83.2 KiB
	This image file is larger than it needs to be (900x1198) for its displayed dimensions (261x347). Use responsive images to reduce the image download size.		237.0 KiB
 img	...products/8253802....webp (127.0.0.1)	257.6 KiB	242.8 KiB
	Increasing the image compression factor could improve this image's download size.		82.1 KiB
	This image file is larger than it needs to be (900x1198) for its displayed dimensions (261x347). Use responsive images to reduce the image download size.		235.9 KiB
 img	...products/9ce2445....webp (127.0.0.1)	212.7 KiB	197.9 KiB
	Increasing the image compression factor could improve this image's download size.		37.2 KiB

	URL	Resource Size	Est Savings
	This image file is larger than it needs to be (900x1198) for its displayed dimensions (261x347). Use responsive images to reduce the image download size.		194.8 KiB
img	...products/712f8a8....webp (127.0.0.1)	173.4 KiB	158.8 KiB
	This image file is larger than it needs to be (900x1198) for its displayed dimensions (261x347). Use responsive images to reduce the image download size.		158.8 KiB
img	...products/e0f1ee9....webp (127.0.0.1)	164.5 KiB	150.6 KiB
	This image file is larger than it needs to be (900x1198) for its displayed dimensions (261x347). Use responsive images to reduce the image download size.		150.6 KiB
img	...products/497d6c9....webp (127.0.0.1)	137.9 KiB	126.3 KiB
	This image file is larger than it needs to be (900x1198) for its displayed dimensions (261x347). Use responsive images to reduce the image download size.		126.3 KiB
img	...products/72366d3....webp (127.0.0.1)	57.9 KiB	53.1 KiB
	This image file is larger than it needs to be (900x1198) for its displayed dimensions (261x347). Use responsive images to reduce the image download size.		53.1 KiB
	...products/4a31a6c....webp (127.0.0.1)	54.1 KiB	49.5 KiB

	URL	Resource Size	Est Savings
img	This image file is larger than it needs to be (900x1198) for its displayed dimensions (261x347). Use responsive images to reduce the image download size.		49.5 KiB

Render-blocking requests — Est savings of 450 ms

Requests are blocking the page's initial render, which may delay LCP. Deferring or inlining can move these network requests out of the critical path. FCP LCP Unscored

URL	Transfer Size	Duration
127.0.0.1 1st Party	**633.6 KiB**	**320 ms**
...css/style.css (127.0.0.1)	149.8 KiB	120 ms
...css/slick.css (127.0.0.1)	1.9 KiB	
...css/responsive.css (127.0.0.1)	41.9 KiB	
...css/slick-theme.css (127.0.0.1)	3.3 KiB	
...css/magnific-popup.css (127.0.0.1)	7.2 KiB	
...css/owl.theme.css (127.0.0.1)	1.8 KiB	
...css/owl.theme.default.min.css (127.0.0.1)	1.0 KiB	
...css/owl.carousel.min.css (127.0.0.1)	3.3 KiB	
...css/simple-line-icons.css (127.0.0.1)	11.6 KiB	
...css/bootstrap.min.css (127.0.0.1)	160.2 KiB	120 ms
...css/themify-icons.css (127.0.0.1)	17.2 KiB	
...css/linearicons.css (127.0.0.1)	57.0 KiB	
...css/flaticon.css (127.0.0.1)	2.4 KiB	
...css/animate.css (127.0.0.1)	71.4 KiB	80 ms
...css/ionicons.min.css (127.0.0.1)	50.2 KiB	
...css/all.min.css (127.0.0.1)	53.4 KiB	

Layout shift culprits

Layout shifts occur when elements move absent any user interaction. Investigate the causes of layout shifts, such as elements being added, removed, or their fonts changing as the page loads. CLS Unscored

Element	Layout shift score
Total	0.133
 div.section.small_pt.pb_70	0.133
img	Unsized image element
...fonts/ionicons.ttf?v=2.0.0 (127.0.0.1)	Web font
...fonts/themify.woff?-fvbane (127.0.0.1)	Web font
...fonts/Linearicons.woff (127.0.0.1)	Web font
...fonts/Simple-Line-Icons.woff2 (127.0.0.1)	Web font
...fonts/fa-regular-400.woff2 (127.0.0.1)	Web font
...fonts/fa-solid-900.woff2 (127.0.0.1)	Web font

LCP request discovery

Optimize LCP by making the LCP image discoverable from the HTML immediately, and avoiding lazy-loading LCP Unscored

fetchpriority=high should be applied

Request is discoverable in initial document

lazy load not applied

div.carousel-item.background_bg

Network dependency tree

Avoid chaining critical requests by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. LCP Unscored

Maximum critical path latency: **5,452 ms**

Initial Navigation

https://127.0.0.1:8000 - **566 ms,** 178.82 KiB

...js/cart.js (127.0.0.1) - **701 ms,** 1.84 KiB

...js/library.js (127.0.0.1) - **1,776 ms,** 17.98 KiB

/cart/get (127.0.0.1) - **5,452 ms,** 0.30 KiB

/cart/get (127.0.0.1) - **4,955 ms,** 0.39 KiB

/_wdt/37eb5b?XDEBUG_IGNORE=1 (127.0.0.1) **- 4,551 ms,** 19.60 KiB

/_wdt/styles (127.0.0.1) **- 3,971 ms,** 17.10 KiB

...js/scripts.js (127.0.0.1) **- 1,701 ms,** 24.92 KiB

...js/jquery.elevatezoom.js (127.0.0.1) **- 1,692 ms,** 59.30 KiB

...js/slick.min.js (127.0.0.1) **- 1,686 ms,** 39.57 KiB

...js/jquery.dd.min.js (127.0.0.1) **- 1,671 ms,** 20.73 KiB

...js/isotope.min.js (127.0.0.1) **- 1,664 ms,** 34.67 KiB

...js/imagesloaded.pkgd.min.js (127.0.0.1) **- 1,658 ms,** 5.50 KiB

...js/jquery.countdown.min.js (127.0.0.1) **- 1,654 ms,** 5.27 KiB

...js/parallax.js (127.0.0.1) **- 1,650 ms,** 5.91 KiB

...js/waypoints.min.js (127.0.0.1) **- 1,646 ms,** 8.86 KiB

...js/magnific-popup.min.js (127.0.0.1) **- 1,640 ms,** 19.80 KiB

...js/owl.carousel.min.js (127.0.0.1) **- 1,633 ms,** 43.36 KiB

...js/bootstrap.min.js (127.0.0.1) **- 1,625 ms,** 57.92 KiB

...js/popper.min.js (127.0.0.1) **- 1,612 ms,** 20.81 KiB

...css/themify-icons.css (127.0.0.1) **- 624 ms,** 17.17 KiB

...fonts/themify.woff?-fvbane (127.0.0.1) **- 1,600 ms,** 54.87 KiB

...css/ionicons.min.css (127.0.0.1) **- 615 ms,** 50.16 KiB

...fonts/ionicons.ttf?v=2.0.0 (127.0.0.1) **- 1,600 ms,** 184.25 KiB

...css/all.min.css (127.0.0.1) **- 612 ms,** 53.42 KiB

...fonts/fa-solid-900.woff2 (127.0.0.1) **- 1,599 ms,** 72.65 KiB

...fonts/fa-regular-400.woff2 (127.0.0.1) **- 1,598 ms,** 13.29 KiB

...css/simple-line-icons.css (127.0.0.1) **- 632 ms,** 11.65 KiB

...fonts/Simple-Line-Icons.woff2 (127.0.0.1) **- 1,597 ms,** 16.86 KiB

...css/linearicons.css (127.0.0.1) **- 623 ms,** 56.96 KiB

...fonts/Linearicons.woff (127.0.0.1) **- 1,597 ms,** 395.29 KiB

...js/jquery-3.6.0.min.js (127.0.0.1) **- 1,538 ms,** 87.48 KiB

...js/main.js (127.0.0.1) **- 702 ms,** 2.39 KiB

...js/compare.js (127.0.0.1) **- 701 ms,** 0.54 KiB

...css/style.css (127.0.0.1) **- 642 ms,** 149.83 KiB

...css/slick.css (127.0.0.1) **- 639 ms,** 1.88 KiB

...css/responsive.css (127.0.0.1) **- 638 ms,** 41.93 KiB

...css/slick-theme.css (127.0.0.1) **- 636 ms,** 3.31 KiB

...css/magnific-popup.css (127.0.0.1) **- 636 ms,** 7.17 KiB

...css/owl.theme.css (127.0.0.1) **- 635 ms,** 1.77 KiB

...css/owl.theme.default.min.css (127.0.0.1) **- 634 ms,** 1.02 KiB

...css/owl.carousel.min.css (127.0.0.1) **- 633 ms,** 3.33 KiB

...css/bootstrap.min.css (127.0.0.1) **- 631 ms,** 160.17 KiB

...css/flaticon.css (127.0.0.1) **- 618 ms,** 2.42 KiB

...css/animate.css (127.0.0.1) **- 617 ms,** 71.39 KiB

Preconnected origins

preconnect hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

no origins were preconnected

Preconnect candidates

Add preconnect hints to your most important origins, but try to use no more than 4.

No additional origins are good candidates for preconnecting

Document request latency — Est savings of 120 KiB

Your first network request is the most important. Reduce its latency by avoiding redirects, ensuring a fast server response, and enabling text compression. FCP LCP Unscored

Avoids redirects

Server responds quickly (observed 486 ms)

No compression applied

Font display — Est savings of 20 ms

Consider setting `font-display` to `swap` or `optional` to ensure text is consistently visible. `swap` can be further optimized to mitigate layout shifts with font metric overrides. FCP Unscored

URL	Est Savings
127.0.0.1 1st Party	
...fonts/Linearicons.woff (127.0.0.1)	20 ms
...fonts/ionicons.ttf?v=2.0.0 (127.0.0.1)	20 ms
...fonts/fa-solid-900.woff2 (127.0.0.1)	20 ms
...fonts/themify.woff?-fvbane (127.0.0.1)	10 ms
...fonts/Simple-Line-Icons.woff2 (127.0.0.1)	10 ms
...fonts/fa-regular-400.woff2 (127.0.0.1)	10 ms

Legacy JavaScript — Est savings of 29 KiB

Polyfills and transforms enable older browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile Baseline features, unless you know you must support older browsers. Learn why most sites can deploy ES6+ code without transpiling FCP LCP Unscored

URL	Wasted bytes
127.0.0.1 1st Party	**28.6 KiB**
...js/jquery.elevatezoom.js (127.0.0.1)	28.6 KiB
jquery.elevatezoom.js:57 `Object.create`	

Optimize DOM size

A large DOM can increase the duration of style calculations and layout reflows, impacting page responsiveness. A large DOM will also increase memory usage. Learn how to avoid an excessive DOM size. Unscored

Statistic	Element	Value
Total elements		2,039
DOM depth	 i.icon-basket-loaded	17
Most children	 li	28

LCP breakdown

Each subpart has specific improvement strategies. Ideally, most of the LCP time should be spent on loading the resources, not within delays. LCP Unscored

Subpart	Duration
Time to first byte	490 ms
Resource load delay	970 ms
Resource load duration	80 ms
Element render delay	100 ms

div.carousel-item.background_bg

These insights are also available in the Chrome DevTools Performance Panel - record a trace to view more detailed information.

DIAGNOSTICS

▲ Reduce unused CSS — Est savings of 548 KiB

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. Learn how to reduce unused CSS. FCP LCP Unscored

URL	Transfer Size	Est Savings
127.0.0.1 1st Party	**600.4 KiB**	**548.2 KiB**
...css/bootstrap.min.css (127.0.0.1)	160.0 KiB	149.6 KiB
...css/style.css (127.0.0.1)	149.7 KiB	129.0 KiB
...css/animate.css (127.0.0.1)	71.3 KiB	71.1 KiB
...css/linearicons.css (127.0.0.1)	56.9 KiB	56.4 KiB
...css/all.min.css (127.0.0.1)	53.3 KiB	53.3 KiB
...css/responsive.css (127.0.0.1)	41.9 KiB	41.5 KiB
...css/ionicons.min.css (127.0.0.1)	50.1 KiB	30.7 KiB
...css/themify-icons.css (127.0.0.1)	17.1 KiB	16.6 KiB

▲ Minify CSS — Est savings of 58 KiB

Minifying CSS files can reduce network payload sizes. Learn how to minify CSS. FCP LCP Unscored

URL	Transfer Size	Est Savings
127.0.0.1 1st Party	**354.4 KiB**	**58.3 KiB**
...css/style.css (127.0.0.1)	149.8 KiB	25.2 KiB
...css/animate.css (127.0.0.1)	71.4 KiB	13.7 KiB
...css/linearicons.css (127.0.0.1)	57.0 KiB	7.1 KiB
...css/responsive.css (127.0.0.1)	41.9 KiB	6.9 KiB

URL	Transfer Size	Est Savings
/_wdt/styles (127.0.0.1)	17.1 KiB	3.2 KiB
...css/themify-icons.css (127.0.0.1)	17.2 KiB	2.2 KiB

Reduce unused JavaScript — Est savings of 353 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. Learn how to reduce unused JavaScript. FCP LCP Unscored

URL	Transfer Size	Est Savings
127.0.0.1 1st Party	**441.4 KiB**	**352.9 KiB**
...turbo/turbo.index-pT15T6h.js (127.0.0.1)	74.7 KiB	72.4 KiB
...js/jquery.elevatezoom.js (127.0.0.1)	59.2 KiB	56.0 KiB
...js/bootstrap.min.js (127.0.0.1)	57.8 KiB	43.8 KiB
...stimulus/stimulus.index-S4zNcea.js (127.0.0.1)	44.7 KiB	43.0 KiB
...js/jquery-3.6.0.min.js (127.0.0.1)	87.4 KiB	40.5 KiB
...js/owl.carousel.min.js (127.0.0.1)	43.3 KiB	37.1 KiB
...js/slick.min.js (127.0.0.1)	39.5 KiB	36.7 KiB
...js/isotope.min.js (127.0.0.1)	34.6 KiB	23.3 KiB

Image elements do not have explicit `width` and `height`

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. Learn how to set image dimensions CLS Unscored

URL		
127.0.0.1 1st Party		
	img	...products/8253802....webp (127.0.0.1)

		URL
	img	...products/497d6c9....webp (127.0.0.1)
	img	...products/4a31a6c....webp (127.0.0.1)
	img	...products/c59c5e0....webp (127.0.0.1)
	img	...products/dcc7781....webp (127.0.0.1)
	img	...products/9ce2445....webp (127.0.0.1)
	img	...products/e0f1ee9....webp (127.0.0.1)
	img	...products/712f8a8....webp (127.0.0.1)
	img	...products/72366d3....webp (127.0.0.1)

URL



img

...collections/f0acf30....webp (127.0.0.1)

img

...collections/7b96182....webp (127.0.0.1)



img

...collections/6e6b91d....webp (127.0.0.1)

img

...collections/76cf827....webp (127.0.0.1)

img

...collections/a912d13....webp (127.0.0.1)



img

...images/visa.png (127.0.0.1)



img

...images/discover.png (127.0.0.1)

	URL
 img	...images/master_card.png (127.0.0.1)
 img	...images/paypal.png (127.0.0.1)
 img	...images/amarican_express.png (127.0.0.1)

Minify JavaScript — Est savings of 50 KiB

Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript. FCP LCP Unscored

URL	Transfer Size	Est Savings
127.0.0.1 1st Party	**102.0 KiB**	**34.6 KiB**
...js/jquery.elevatezoom.js (127.0.0.1)	59.2 KiB	20.7 KiB
...js/scripts.js (127.0.0.1)	24.9 KiB	7.7 KiB
...js/library.js (127.0.0.1)	17.9 KiB	6.2 KiB
Unattributable	**32.3 KiB**	**15.8 KiB**
`inline: /*<![CDATA[*/ if (typeof Sfjs ==…`	32.3 KiB	15.8 KiB

Avoid enormous network payloads — Total size was 4,786 KiB

Large network payloads cost users real money and are highly correlated with long load times. Learn how to reduce payload sizes. Unscored

URL	Transfer Size
127.0.0.1 1st Party	**2,679.2 KiB**
...products/dcc7781....webp (127.0.0.1)	444.2 KiB
...products/71d0b30....webp (127.0.0.1)	408.9 KiB
...fonts/Linearicons.woff (127.0.0.1)	395.3 KiB
...products/c59c5e0....webp (127.0.0.1)	258.9 KiB
...products/8253802....webp (127.0.0.1)	257.8 KiB
...products/9ce2445....webp (127.0.0.1)	212.8 KiB
...fonts/ionicons.ttf?v=2.0.0 (127.0.0.1)	184.3 KiB
https://127.0.0.1:8000	178.8 KiB
...products/712f8a8....webp (127.0.0.1)	173.6 KiB
...products/e0f1ee9....webp (127.0.0.1)	164.6 KiB

Avoid non-composited animations — 2 animated elements found

Animations which are not composited can be janky and increase CLS. Learn how to avoid non-composited animations CLS Unscored

Element	Name
Loading... `<a href="https://127.0.0.1:8000/_profiler/37eb5b?panel=request">`	
Unsupported CSS Property: color	color
Unsupported CSS Property: font-size	font-size
`<button class="sf-toolbar-toggle-button" type="button" id="sfToolbarToggleButton-37eb5b" accesskey="D" aria-expanded="true" aria-controls="sfToolbarMainContent-37eb5b">`	
Unsupported CSS Property: padding-top	padding-top
Unsupported CSS Property: border-left-color	border-left-color
Unsupported CSS Property: border-left-width	border-left-width

Element	Name
Unsupported CSS Property: border-right-color	border-right-color
Unsupported CSS Property: border-right-width	border-right-width
Unsupported CSS Property: color	color
Unsupported CSS Property: border-top-color	border-top-color
Unsupported CSS Property: border-bottom-color	border-bottom-color
Unsupported CSS Property: border-top-width	border-top-width
Unsupported CSS Property: font-size	font-size
Unsupported CSS Property: border-bottom-width	border-bottom-width
Unsupported CSS Property: padding-bottom	padding-bottom
Unsupported CSS Property: padding-left	padding-left
Unsupported CSS Property: padding-right	padding-right

Avoid long main-thread tasks — 2 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. Learn how to avoid long main-thread tasks TBT Unscored

URL	Start Time	Duration
Unattributable		**84 ms**
`Unattributable`	456 ms	84 ms
127.0.0.1 1st Party		**51 ms**
https://127.0.0.1:8000	580 ms	51 ms

More information about the performance of your application. These numbers don't directly affect the Performance score.

PASSED AUDITS (10) Hide

Duplicated JavaScript

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP Unscored

Forced reflow

A forced reflow occurs when JavaScript queries geometric properties (such as `offsetWidth`) after styles have been invalidated by a change to the DOM state. This can result in poor performance. Learn more about forced reflows and possible mitigations. Unscored

INP breakdown

Start investigating how to improve INP by looking at the longest subpart. Unscored

Modern HTTP

HTTP/2 and HTTP/3 offer many benefits over HTTP/1.1, such as multiplexing. Learn more about using modern HTTP. FCP LCP Unscored

3rd parties

3rd party code can significantly impact load performance. Reduce and defer loading of 3rd party code to prioritize your page's content. Unscored

Optimize viewport for mobile

Tap interactions may be delayed by up to 300 ms if the viewport is not optimized for mobile. Unscored

meta

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. Learn more about User Timing marks. Unscored

JavaScript execution time — 0.1 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to reduce Javascript execution time. TBT Unscored

URL	Total CPU Time	Script Evaluation	Script Parse
127.0.0.1 1st Party	**633 ms**	**55 ms**	**4 ms**

URL	Total CPU Time	Script Evaluation	Script Parse
https://127.0.0.1:8000	567 ms	12 ms	1 ms
...js/jquery-3.6.0.min.js (127.0.0.1)	67 ms	43 ms	3 ms
Unattributable	**346 ms**	**4 ms**	**0 ms**
`Unattributable`	346 ms	4 ms	0 ms

Minimizes main-thread work — 1.1 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to minimize main-thread work TBT Unscored

Category	Time Spent
Other	640 ms
Style & Layout	227 ms
Script Evaluation	96 ms
Rendering	55 ms
Parse HTML & CSS	42 ms
Script Parsing & Compilation	14 ms
Garbage Collection	5 ms

Page didn't prevent back/forward cache restoration

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. Learn more about the bfcache Unscored

Accessibility

These checks highlight opportunities to improve the accessibility of your web app. Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so manual testing is also encouraged.

ARIA

▲ Elements with an ARIA `[role]` that require children to contain a specific `[role]` are missing some or all of those required children.

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more about roles and required children elements.

Failing Elements

ul.nav.nav-tabs.justify-content-center

li.nav-item

li.nav-item

li.nav-item

▲ `[role]`s are not contained by their required parent element

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more about ARIA roles and required parent element.

Failing Elements



a#arrival-tab.nav-link.active

a#sellers-tab.nav-link

Failing Elements

a#featured-tab.nav-link



a#special-tab.nav-link

These are opportunities to improve the usage of ARIA in your application which may enhance the experience for users of assistive technology, like a screen reader.

NAMES AND LABELS

▲ Buttons do not have an accessible name

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. Learn how to make buttons more accessible.

Failing Elements



button#sfToolbarToggleButton-7b5b55.sf-toolbar-toggle-button

▲ Select elements do not have associated label elements.

Form elements without effective labels can create frustrating experiences for screen reader users. Learn more about the `select` element.

Failing Elements

select#msdrpdd20.custome_select

Links do not have a discernible name

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. Learn how to make links accessible.

Failing Elements

a.nav-link.search_trigger



a.carousel-control-prev



a.carousel-control-next

a.add-to-compare

a



a.add-to-wishlist

Failing Elements



a.add-to-compare



a



a.add-to-wishlist



a.add-to-compare



a



a.add-to-wishlist



a.add-to-compare

Failing Elements

a

a.add-to-wishlist



a.add-to-compare

a

a.add-to-wishlist



a.add-to-compare



a

a.add-to-wishlist

Failing Elements

a.add-to-compare

a



a.add-to-wishlist

a.add-to-compare

a

a.add-to-wishlist

a.add-to-compare

a

Failing Elements



a.add-to-wishlist



a



a



a

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

CONTRAST

▲ Background and foreground colors do not have a sufficient contrast ratio.

Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast](#).

Failing Elements



a.dropdown-toggle.nav-link.active



header.header_wrap.fixed-top.header_with_topbar.active



a#arrival-tab.nav-link.active

Failing Elements



span.price

div.product

span

div.product



span.price

div.product

span

div.product



span.price

div.product

Failing Elements



span



div.product



span.price



div.product



span



div.product



span.price

div.product



span

div.product

span.price

Failing Elements



div.product

span

div.product



span.price

div.product

span

div.product



span.price



div.product



span

Failing Elements



div.product



span.price



div.product



span



div.product

span.sf-toolbar-status.sf-toolbar-status-green

These are opportunities to improve the legibility of your content.

INTERNATIONALIZATION AND LOCALIZATION

▲ `<html>` element does not have a `[lang]` attribute

If a page doesn't specify a `lang` attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the `lang` attribute.

Failing Elements



html

These are opportunities to improve the interpretation of your content by users in different locales.

TABLES AND LISTS

▲ List items (`<li>`) are not contained within `<ul>`, `<ol>` or `<menu>` parent elements.

Screen readers require list items (`<li>`) to be contained within a parent `<ul>`, `<ol>` or `<menu>` to be announced properly. Learn more about proper list structure.

Failing Elements

li.nav-item



li.nav-item

li.nav-item

li.nav-item

These are opportunities to improve the experience of reading tabular or list data using assistive technology, like a screen reader.

BEST PRACTICES

▲ Touch targets do not have sufficient size or spacing.

Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. Learn more about touch targets.

Failing Elements

a

a

▲ Document does not have a main landmark.

One main landmark helps screen reader users navigate a web page. Learn more about landmarks.

Failing Elements



html

○ Identical links have the same purpose.

Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. Learn more about identical links. Unscored

Failing Elements



a

a

These items highlight common accessibility best practices.

NAVIGATION

▲ Heading elements are not in a sequentially-descending order

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order.

Failing Elements

h5.mb-3.staggered-animation.font-weight-light.animated.slideInLeft

h5.single_bn_title1

h5.single_bn_title1

h6.product_title

h6.widget_title

These are opportunities to improve keyboard navigation in your application.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

○ Interactive controls are keyboard focusable

Custom interactive controls are keyboard focusable and display a focus indicator. Learn how to make custom controls focusable. Unscored

○ Interactive elements indicate their purpose and state

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints. Unscored

- The page has a logical tab order

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. Learn more about logical tab ordering. Unscored

- Visual order on the page follows DOM order

DOM order matches the visual order, improving navigation for assistive technology. Learn more about DOM and visual ordering. Unscored

- User focus is not accidentally trapped in a region

A user can tab into and out of any control or region without accidentally trapping their focus. Learn how to avoid focus traps. Unscored

- The user's focus is directed to new content added to the page

If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content. Unscored

- HTML5 landmark elements are used to improve navigation

Landmark elements (`<main>`, `<nav>`, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements. Unscored

- Offscreen content is hidden from assistive technology

Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content. Unscored

- Custom controls have associated labels

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels. Unscored

- Custom controls have ARIA roles

Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls. Unscored

These items address areas which an automated testing tool cannot cover. Learn more in our guide on conducting an accessibility review.

PASSED AUDITS (16) Hide

`[aria-*]` attributes match their roles

Each ARIA `role` supports a specific subset of `aria-*` attributes. Mismatching these invalidates the `aria-*` attributes. Learn how to match ARIA attributes to their roles.

`[aria-hidden="true"]` is not present on the document `<body>`

Assistive technologies, like screen readers, work inconsistently when `aria-hidden="true"` is set on the document `<body>`. Learn how `aria-hidden` affects the document body.

`[role]`s have all required `[aria-*]` attributes

Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more about roles and required attributes.

`[role]` values are valid

ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles.

`[aria-*]` attributes have valid values

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes.

`[aria-*]` attributes are valid and not misspelled

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. Learn more about valid ARIA attributes.

Image elements have `[alt]` attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the `alt` attribute.

`[user-scalable="no"]` is not used in the `<meta name="viewport">` element and the `[maximum-scale]` attribute is not less than 5.

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag.

`[accesskey]` values are unique

Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys.

ARIA attributes are used as specified for the element's role

Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes.

Elements use only permitted ARIA attributes

Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles.

Document has a `<title>` element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.

Links are distinguishable without relying on color.

Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. Learn how to make links distinguishable.

Lists contain only `<li>` elements and script supporting elements (`<script>` and `<template>`).

Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure.

No element has a `[tabindex]` value greater than 0

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. Learn more about the `tabindex` attribute.

Deprecated ARIA roles were not used

Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles.

NOT APPLICABLE (32)

Hide

`button`, `link`, and `menuitem` elements have accessible names

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible. Unscored

Elements with `role="dialog"` or `role="alertdialog"` have accessible names.

ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible. Unscored

- `[aria-hidden="true"]` elements do not contain focusable descendents

Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how `aria-hidden` affects focusable elements. Unscored

- ARIA input fields have accessible names

When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels. Unscored

- ARIA `meter` elements have accessible names

When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name `meter` elements. Unscored

- ARIA `progressbar` elements have accessible names

When a `progressbar` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to label `progressbar` elements. Unscored

- Elements with the `role=text` attribute do not have focusable descendents.

Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. Learn more about the `role=text` attribute. Unscored

- ARIA toggle fields have accessible names

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields. Unscored

- ARIA `tooltip` elements have accessible names

When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name `tooltip` elements. Unscored

- ARIA `treeitem` elements have accessible names

When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling `treeitem` elements. Unscored

- The page contains a heading, skip link, or landmark region

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about bypass blocks. Unscored

- `<dl>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements.

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. Learn how to structure definition lists correctly. Unscored

- Definition list items are wrapped in `<dl>` elements

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<dl>` element to ensure that screen readers can properly announce them. Learn how to structure definition lists correctly. Unscored

- ARIA IDs are unique

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. Learn how to fix duplicate ARIA IDs. Unscored

- No form fields have multiple labels

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. Learn how to use form labels. Unscored

- `<frame>` or `<iframe>` elements have a title

Screen reader users rely on frame titles to describe the contents of frames. Learn more about frame titles. Unscored

- `<html>` element has a valid value for its `[lang]` attribute

Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the `lang` attribute. Unscored

- `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute.

If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. Learn more about the `lang` attribute. Unscored

- Input buttons have discernible text.

Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. Learn more about input buttons. Unscored

- `<input type="image">` elements have `[alt]` text

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. Learn about input image alt text. Unscored

- Form elements have associated labels

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. Learn more about form element labels. Unscored

- The document does not use `<meta http-equiv="refresh">`

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. Learn more about the refresh meta tag. Unscored

- `<object>` elements have alternate text

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. Learn more about alt text for `object` elements. Unscored

- Skip links are focusable.

Including a skip link can help users skip to the main content to save time. Learn more about skip links. Unscored

- Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table.

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more about the `headers` attribute. Unscored

- `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe.

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. Learn more about table headers. Unscored

- `[lang]` attributes have a valid value

Specifying a valid BCP 47 language on elements helps ensure that text is pronounced correctly by a screen reader. Learn how to use the `lang` attribute. Unscored

- `<video>` elements contain a `<track>` element with `[kind="captions"]`

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. Learn more about video captions. Unscored

- Tables have different content in the summary attribute and `<caption>`.

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. Learn more about summary and caption. Unscored

All heading elements contain content.

A heading with no content or inaccessible text prevent screen reader users from accessing information on the page's structure. Learn more about headings. Unscored

Uses ARIA roles only on compatible elements

Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. Learn more about ARIA roles. Unscored

Image elements do not have `[alt]` attributes that are redundant text.

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the `alt` attribute. Unscored

88

Best Practices

USER EXPERIENCE

Displays images with incorrect aspect ratio

Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio.

	URL	Aspect Ratio (Displayed)	Aspect Ratio (Actual)
127.0.0.1 1st Party			
 img	...products/e0f1ee9....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)

	URL	Aspect Ratio (Displayed)	Aspect Ratio (Actual)
img	...products/e10269f....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)
img	...products/b93dff2....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)
img	...products/497d6c9....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)
img	...products/712f8a8....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)
img	...products/72366d3....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)
img	...products/4a31a6c....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)

	URL	Aspect Ratio (Displayed)	Aspect Ratio (Actual)
img	...products/c59c5e0....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)
img	...products/5f2c270....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)
img	...products/dcc7781....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)
img	...products/9ce2445....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)
img	...products/71d0b30....webp (127.0.0.1)	30 x 30 (1.00)	900 x 1198 (0.75)

Serves images with low resolution

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. Learn how to provide responsive images.

URL	Displayed size	Actual size	Expected size
127.0.0.1 1st Party			

	URL	Displayed size	Actual size	Expected size
img	...collections/76cf827....webp (127.0.0.1)	546 x 295	370 x 200	546 x 295
img	...collections/a912d13....webp (127.0.0.1)	546 x 295	370 x 200	546 x 295

GENERAL

Browser errors were logged to the console

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more about this errors in console diagnostic audit

Source	Description
127.0.0.1 1st Party	
app-TYvGPvh.js:3	`SyntaxError: The requested module '@hotwired/turbo' does not provide an export named 'Turbo'`

Detected JavaScript libraries

All front-end JavaScript libraries detected on the page. Learn more about this JavaScript library detection diagnostic audit. Unscored

Name	Version
Bootstrap	5.1.2
jQuery	3.6.0
Isotope	

TRUST AND SAFETY

Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. Learn how to use a CSP to prevent XSS Unscored

Description	Directive	Severity
No CSP found in enforcement mode		High

Use a strong HSTS policy

Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. Learn more about using a strong HSTS policy. Unscored

Description	Directive	Severity
No HSTS header found		High

Ensure proper origin isolation with COOP

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. Learn more about deploying the COOP header. Unscored

Description	Directive	Severity
No COOP header found		High

Mitigate clickjacking with XFO or CSP

The `X-Frame-Options` (XFO) header or the `frame-ancestors` directive in the `Content-Security-Policy` (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. Learn more about mitigating clickjacking. Unscored

Description	Severity
No frame control policy found	High

Mitigate DOM-based XSS with Trusted Types

The `require-trusted-types-for` directive in the `Content-Security-Policy` (CSP) header instructs user agents to control the data passed to DOM XSS sink functions. Learn more about mitigating DOM-based XSS with Trusted Types.
Unscored

Description	Severity
No `Content-Security-Policy` header with Trusted Types directive found	High

PASSED AUDITS (10)

Hide

Uses HTTPS

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding mixed content, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. Learn more about HTTPS.

Avoids deprecated APIs

Deprecated APIs will eventually be removed from the browser. Learn more about deprecated APIs.

Avoids third-party cookies

Third-party cookies may be blocked in some contexts. Learn more about preparing for third-party cookie restrictions.

Allows users to paste into input fields

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. Learn more about user-friendly input fields.

Avoids requesting the geolocation permission on page load

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission.

Avoids requesting the notification permission on page load

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more about responsibly getting permission for notifications.

Page has the HTML doctype

Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration.

Properly defines charset

A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more about declaring the character encoding.

No issues in the `Issues` panel in Chrome Devtools

Issues logged to the `Issues` panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Page has valid source maps

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn more about source maps. Unscored

URL	Map URL
127.0.0.1 1st Party	
...js/bootstrap.min.js (127.0.0.1)	...js/bootstrap.min.js.map (127.0.0.1)
`Error: Failed fetching source map (404)`	

NOT APPLICABLE (1) Hide

Redirects HTTP traffic to HTTPS

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. Learn more. Unscored

45

SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on Core Web Vitals. Learn more about Google Search Essentials.

CRAWLING AND INDEXING

Page is blocked from indexing

Search engines are unable to include your pages in search results if they don't have permission to crawl them. Learn more about crawler directives.

Blocking Directive Source
`x-robots-tag: noindex`

Links are not crawlable

Search engines may use `href` attributes on links to crawl websites. Ensure that the `href` attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. Learn how to make links crawlable

Uncrawlable Link	
	a.nav-link.search_trigger
a	
a.sf-toolbar-ajax-clear	
a	

To appear in search results, crawlers need access to your app.

CONTENT BEST PRACTICES

Document does not have a meta description

Meta descriptions may be included in search results to concisely summarize page content. Learn more about the meta description.

Format your HTML in a way that enables crawlers to better understand your app's content.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

Structured data is valid

Run the Structured Data Testing Tool to validate structured data. Learn more about Structured Data. Unscored

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (5)

Hide

Document has a `<title>` element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.

Page has successful HTTP status code

Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more about HTTP status codes.

Links have descriptive text

Descriptive link text helps search engines understand your content. Learn how to make links more accessible.

Image elements have `[alt]` attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the `alt` attribute.

Document has a valid `hreflang`

hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more about `hreflang`.

NOT APPLICABLE (2)

Hide

robots.txt is valid

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more about robots.txt. Unscored

Document has a valid `rel=canonical`

Canonical links suggest which URL to show in search results. Learn more about canonical links. Unscored

Captured at Apr 19, 2026, 11:44 PM GMT+2
Initial page load

Emulated Desktop with Lighthouse 13.0.2
Custom throttling

Single page session

Using Chromium 147.0.0.0 with devtools

Generated by **Lighthouse** 13.0.2 | File an issue