# CUBE BABY
## USER MANUAL




M-VAVE

# 3. English

## Introduction


The Cube Baby is a portable, multifunctional guitar effector with three editable presets. Users can customize the effects chain and save their settings. It features a built-in battery, 9 preamp selections, Chorus, Phaser, Delay, Reverb, 8 IR cabinet slots, and a tuner. The device supports mobile phone recording, Bluetooth, and can function as a computer sound card, making it an excellent companion for your guitar.

### Power Supply


The Cube Baby is powered by a built-in battery that lasts up to 6 hours on a full charge.

> **Charging**: Use a 5V adapter or power bank. Charging with a DC 5V/2A adapter takes about 2 hours for a full charge.

### Effects chain

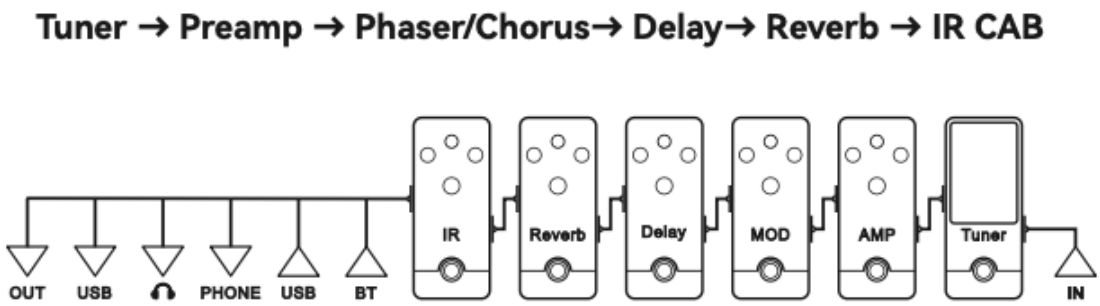



### Rear Panel

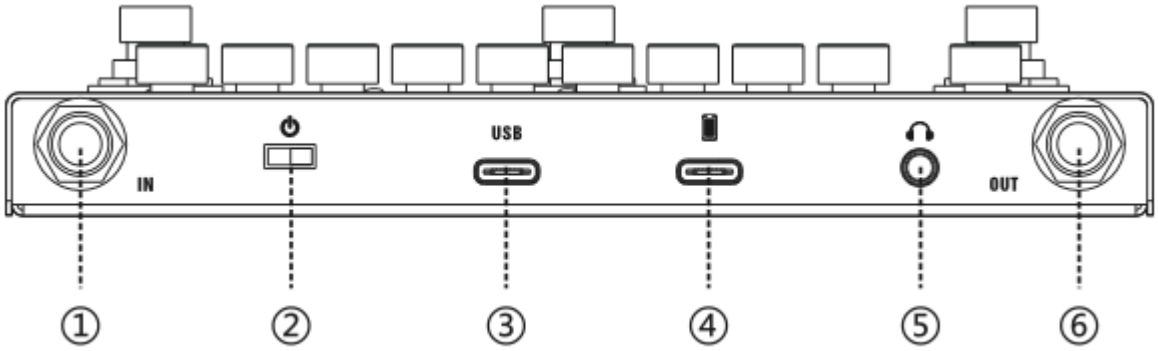


1. **IN**: 1/4” MONO audio input jack.
2. **Power Switch**.
3. **USB Jack**: For charging the battery and connecting to a computer for editing presets and importing IRs.
4. **Audio Output Jack**: Supports mobile phone recording.
5. **Earphone Output**.
6. **OUT**: 1/4” MONO audio output jack.

## Front Panel

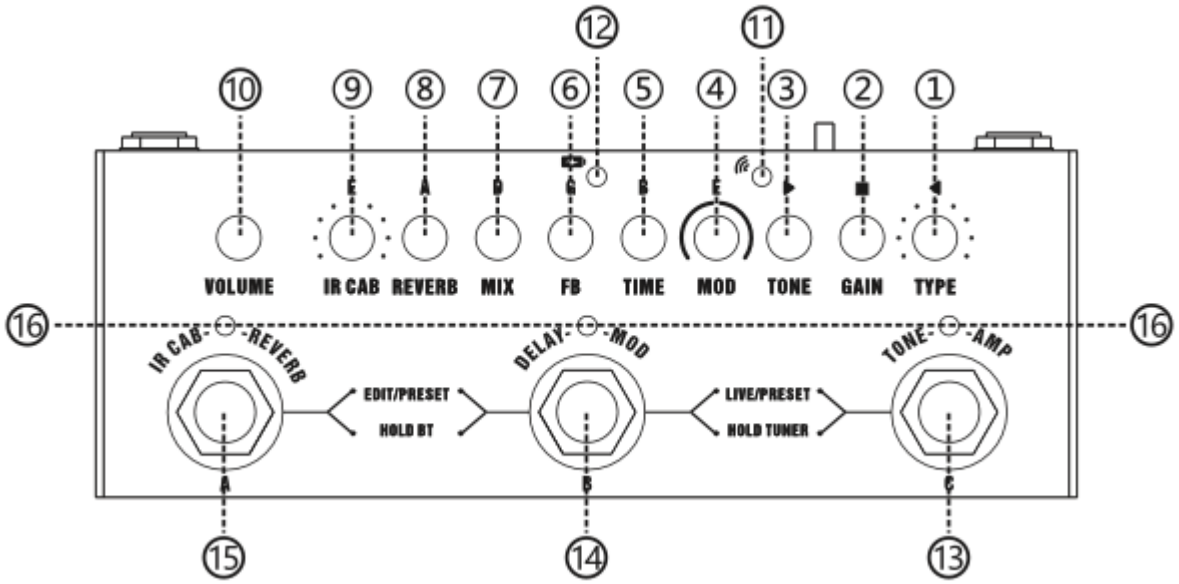


1. **TYPE**: Select from 9 preamp options.
2. **GAIN**: Adjust the gain.
3. **TONE**: Control brightness.
4. **MOD**: For Chorus/Phaser effects.
5. **TIME**: Adjust feedback speed for delay.
6. **FB**: Control the number of delay repeats.
7. **MIX**: Adjust wet/dry ratio for delay.
8. **REVERB**: Adjust wet/dry ratio for reverb.
9. **IR CAB**: Choose from 8 IR cabinet slots.
10. **VOLUME**: Overall volume control.
11. **BT Indicator**.
12. **Charging Indicator**.
13. **C Footswitch**.
14. **B Footswitch**.
15. **A Footswitch**.
16. **3 Effect Indicators**.

## Effects Module

### Preamp

- **TYPE**: Choose from 9 different preamp types.
- **GAIN**: Adjust gain level.
- **TONE**: Adjust brightness.

| Slot | Name | Type |
|---|---|---|
| **1** | Based on Power-Zone Clean | Clean |
| **2** | Based on US Gold 100 Clean | Clean |
| **3** | Based on Two Stone Coral OD | Overdrive |
| **4** | Based on Doctor3 B | Overdrive |
| **5** | Based on Cali JP A | Overdrive |

| | | |
|---|---|---|
| **6** | Based on Day Tripper OD | Distortion |
| **7** | Based on Shittcow Dist | Distortion |
| **8** | Based on Wo Stone Coral OD | Distortion |
| **9** | Based on Mr Smith Dist | Distortion |

**MOD**

- **MOD Knob**: Left half for Chorus, right for Phaser. Middle position turns off MOD.

**DELAY**

- **TIME**: Adjust feedback speed.
- **FB**: Adjust repeat number.
- **MIX**: Control wet/dry ratio. Turning left turns off delay.

**REVERB**

- **REVERB**: Adjust wet/dry ratio. Turning left turns off reverb.

**IR CAB**

- **IR CAB**: Choose from 9 IR slots; the first slot turns off IR.

| Slot | Name | Cab type |
|---|---|---|
| **1** | The IR Cab has been turned off | None |
| **2** | Based on Line 6 Vetta | 2×12 |
| **3** | Based on Marshall 1960AV | 4×12 |
| **4** | Based on Marshall 1960A T75 LA610 | 4×12 |
| **5** | Based on VHT Deliverance | 2×12 |
| **6** | Based on Soldano | 2×12 |
| **7** | Based on Peavey 5150 + Mesa Oversized | 4×12 |
| **8** | Based on JSX KT77 + Mesa Stiletto AKG C1000 | 4×12 |
| **9** | Based on Diezel V30 SM57 (Soldano HR PowerAmp) | 4×12 |

## Tuner

In Tuner mode, the six knobs represent the guitar strings. Adjust the string to light up the corresponding knob indicator.

Indicators:

- **>**: Pitch too low.
- ■: Correct pitch.
- **<**: Pitch too high.

Press and hold B+C footswitches for 2 seconds to enter Tuner mode.

## Bluetooth

To activate Bluetooth, press and hold A+B footswitches for 2 seconds. A blue indicator means it’s connected, allowing music playback from your phone. A flashing blue light indicates Bluetooth is on but not connected.

## Mobile Phone Recording

Connect your phone to the Cube Baby using a recording cable for high-quality recordings.

## Operation Modes

Cube Baby has three modes:

- **LIVE Mode**: For real-time performance.
- **EDIT Mode**: For editing presets.
- **PRESET Mode**: The default mode for performance.

**Switching Modes**:

- Tap B+C for LIVE mode.
- Tap A+B for EDIT mode.

### PRESET Mode

In PRESET mode, you can listen to and use three saved presets with the A/B/C footswitches. If all indicators are off, the device is in Bypass.

| Preset | Effects chain | Type |
|---|---|---|
| Footswitch A | Wo Stone Coral OD + Delay + Reverb + VHT Deliverance 2×12 | Distortion |
| Footswitch B | Cali JP A + Delay + Reverb + Soldano 2×12 V30 | Overdrive |
| Footswitch C | US Gold 100 Clean + MOD: Chorus + Delay + Reverb + Marshall 1960A T75 LA610 | Clean |

### LIVE Mode

In LIVE mode, adjust effects in real-time. The final output volume is set to 80%. The A/B/C footswitches control corresponding effects. Hold A/B/C to save your settings.

### EDIT Mode

In EDIT mode, the previous knob data is retained. Knob indicators show the effect status. After editing, return to PRESET mode to set the output volume.

## Customizing Effects Chain


To customize an effects chain similar to Preset “A”:

1. Enter LIVE mode (B+C).
2. Turn off all effects (except VOLUME).

3. Set the desired VOLUME level.
4. Activate effects using the footswitches and adjust the knobs.
5. Save your settings by holding the A footswitch for 2 seconds.
6. Enter PRESET mode to use your new preset.


## Software Interface

### IR Editor

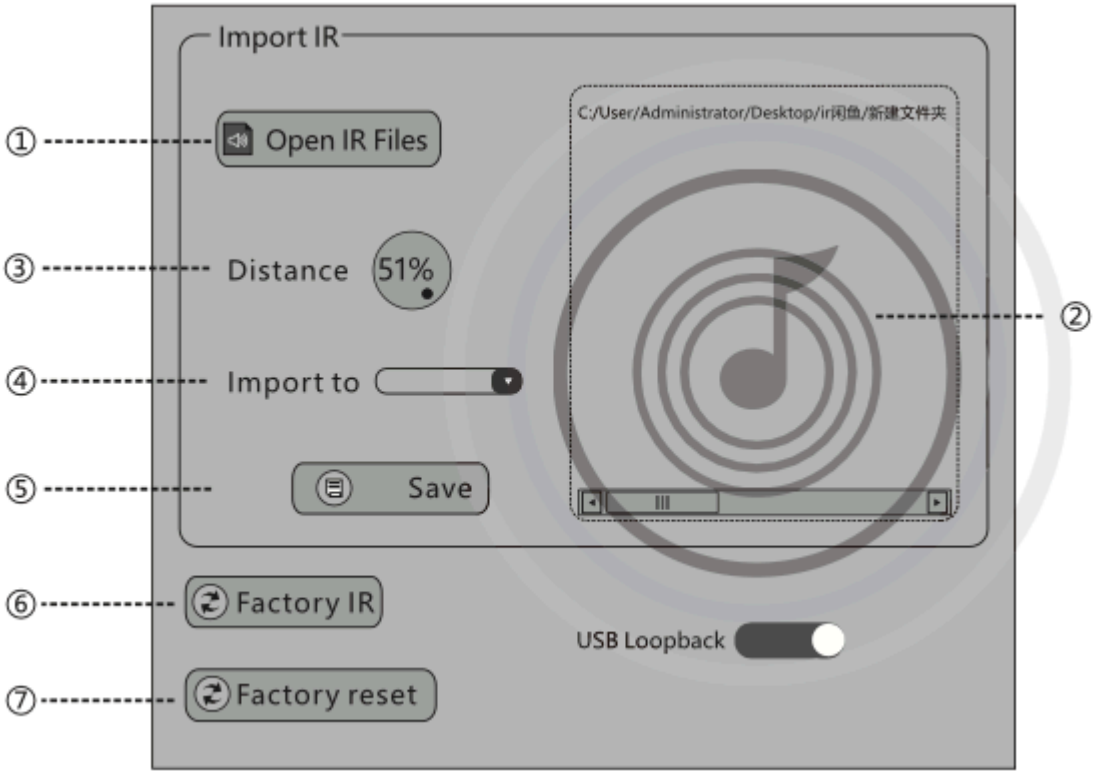


1. **IR Files Searching Button**: Use this to locate IR files on your computer.
2. **IR Files Display Interface**: Displays the selected IR files, allowing you to click and listen to them.
3. **Microphone Distance Simulator**: Adjust the distance between the microphone and the speaker. Closer distances result in louder sound; farther distances lower the sound volume. Note: At 100% distance, no sound will be heard.
4. **IR Saving Location**: Select the slot (1-8) where you want to save the IR files on the Cube Baby.
5. **Save Button**: Click this to save your IR settings.
6. **Factory Reset Option**: Click this button to reset the IR parameters to their factory settings.
7. **PRESETS Factory Reset**: Click to reset the parameters of the three presets to their factory settings.

**PRESETS Parameters Editor**

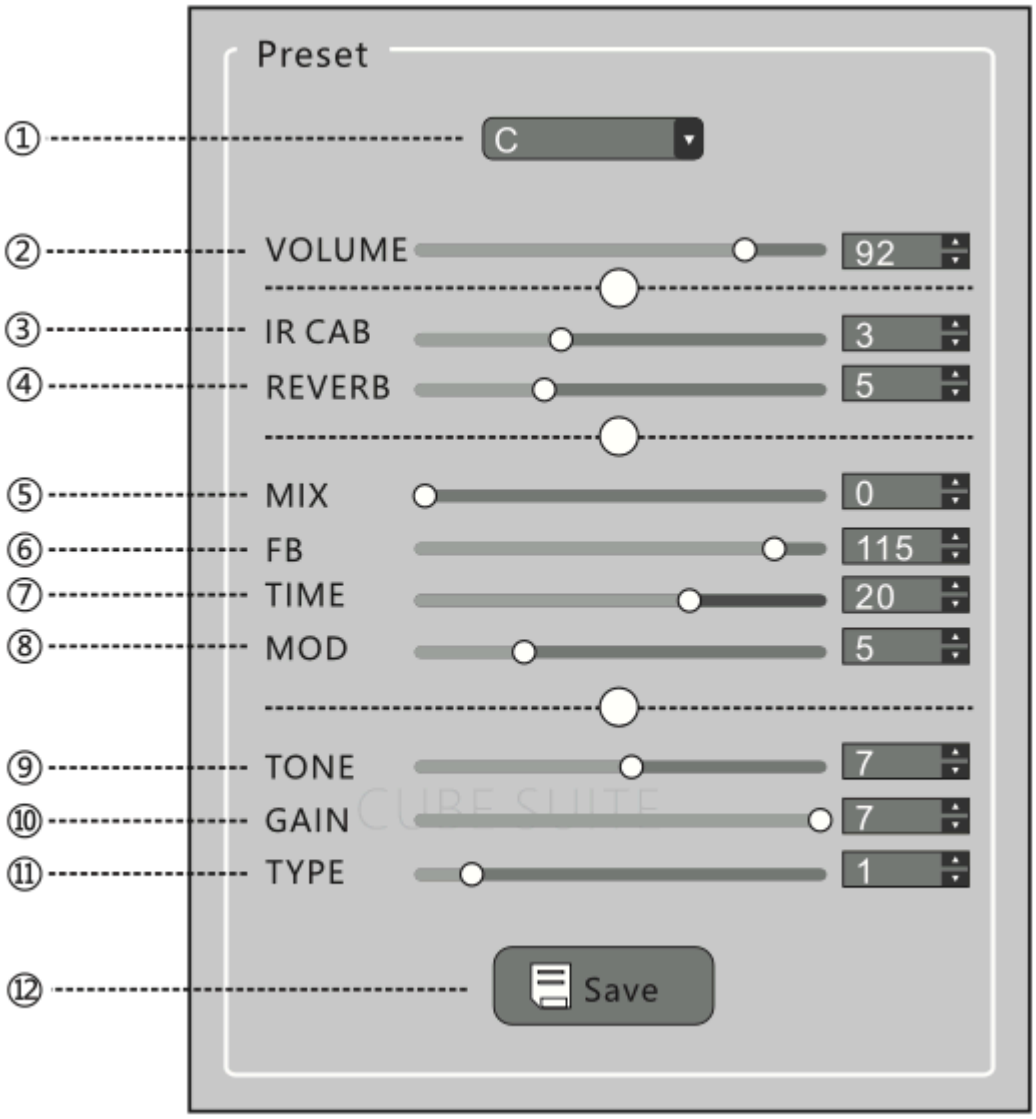


1. **Select Preset**: Choose the preset you wish to edit. If the software and Cube Baby are synced to the same preset, you can hear real-time edits.
2. **Adjust Effects Chain Level**: Control the overall level of the current effects chain.
3. **Adjust IR CAB**: Modify the settings for the IR cabinet.
4. **Adjust Reverb**: Change the reverb settings.
5. **Adjust Delay Wet/Dry Ratio**: Control the ratio of wet to dry signals for delay effects.
6. **Adjust Delay Echo Repeats**: Set the number of echoes for the delay effect.
7. **Adjust Delay Feedback Speed**: Control the feedback speed of the delay repeats.
8. **MOD Effector Editor**: – 0-6: Edit Chorus settings. – 7-8: Turn off MOD effects. – 9-15: Edit Phaser settings.
9. **Adjust Brightness**: Control the brightness of the effect.
10. **Adjust Gain**: Modify the gain level.
11. **Select Preamp Type**: Choose from the available preamp options.
12. **Save Button**: Click this to save the edited preset.

## Technical Parameters

- **Input**: Standard 1/4” jack MONO/TS
- **Output**: Standard 1/4” jack MONO/TS
- **Sample Rate**: 48KHz/24bit
- **Battery Capacity**: 780mAh
- **Size**: 161(L) x 57(W) x 17.5(H) mm
- **Weight**: 260g

- **Attachment**: Charging and recording cables

## Maintenance

- Keep the pedal dry and avoid exposing it to extreme temperatures.
- Clean the pedal with a dry cloth; avoid using liquids or abrasive materials.
- Store the pedal in a cool, dry place when not in use.

## Safety Instructions

- Avoid dropping or subjecting the pedal to strong impacts.
- Do not disassemble the pedal.
- Keep out of reach of children.

## Disposal of Old Equipment



**WEEE Directive** When the pedal is to be definitively put out of operation, take it to a local recycling plant to ensure proper treatment, recovery, and recycling under local legislation and Directive 2002/96/EC. Do not dispose of as municipal waste. Contact your retailer or local authorities for more information.

## Information on Disposal in Non-EU Countries

This symbol is only valid in the EU. Contact your local authority or dealer and ask for the correct disposal method.

