

POWEROL SERVICE – PORTAL

May 13, 2014

OVERVIEW

1. Project Background and Description

Portal “Mahindra powerol suvidha” is design to work as ONLINE – DMS (Dealer Management System).

.Project Scope

Its developed to manage all the service functions including – 1. Installation / Commissioning 2. Warranty 3. AMC / CAMC 4. Fault Management 5. Free service coupon Management 6. Spare Part ordering & Inventory management

2. High-Level Requirements

The new system must include the following:

- Ability to allow both internal and external users to access the application without downloading any software
- Ability to interface with the existing data warehouse application
- Ability to incorporate automated routing and notifications based on business rules

3. Affected Parties

Powerol MAGIECs

Powerol Service Team

4. Affected Business Processes or Systems

1. Complaint Management 2. Spare Part Ordering 3. Warranty 4. AMC / CAMC 5. Free Service Coupon 6. Bulletin

Approved By _____

Date _____

Approved By _____

Date _____

Processes

- 1. Complaint management system**
- 2. SMS based Complaint Registration**
- 3. Spare Part Ordering & Inventory Management**

Complaint Management System

1) How to check Open Complaints on Mahindra Powerol Suvidha?

Log on to Mahindra Powerol Suvidha. Go to **Call Log sub** menu in **Services** Menu & Click on "**Booked Call Status**". Following window will open.



Deselect date criteria by removing click in check box. Select "**Status**" in Search Criteria & "**Open**" in Status field. Enter record size as **999** then click on submission button for listing.



All open complaints will appeared as below.

Call Log Id	Engine Sr No	Customer Type	Call Logged by	Customer Name	Category Type	Call Type	Complaint Date	Service Required on	Status	File Upload	Modify	Cancel	Add Service	Regularize
SRADMIN01000112			ADMINKN		Only Commissioning	Manual	24/04/2012 13:19	24/04/2012 20:26	Open			Cancel		Regularize
SRADMIN01000112	Retail		ADMIN0YOTI		Preventive Maintenance	Manual	23/04/2012 18:18	24/04/2012 18:00	Open			Cancel		Regularize
SRADMIN01000108	Retail		ADMINKN		Other Complaints	Manual	20/04/2012 16:25	20/04/2012 20:22	Open			Cancel		Regularize
SRADMIN01000107	Retail		ADMIN0YOTI		Other Complaints	Manual	18/04/2012 11:08	19/04/2012 13:00	Open			Cancel		Regularize
SRADMIN01000108			ADMINDD		Only Commissioning	Manual	18/04/2012 04:06	18/04/2012 04:19	Open			Cancel		Regularize
SRADMIN01000107	Retail		ADMIN0YOTI		Other Complaints	Manual	17/04/2012 19:28	18/04/2012 14:00	Open			Cancel		Regularize
SRADMIN01000107			ADMIN0YOTI		Only Commissioning	Manual	17/04/2012 15:49	17/04/2012 18:00	Open			Cancel		Regularize
SRADMIN01000106	Retail		ADMINDD		Preventive Maintenance	Manual	17/04/2012 05:30	17/04/2012 05:35	Open			Cancel		Regularize
SRADMIN01000106	Retail		ADMINKN		Other Complaints	Manual	14/04/2012 11:11	14/04/2012 18:03	Open			Cancel		Regularize
SRADMIN01000103	Retail		ADMINDB		Other Complaints	Manual	14/04/2012 10:15	14/04/2012 13:00	Open			Cancel		Regularize

Note –

- 1) When customer unable to tell **Eng Sr No** while logging call, Call Center Executive enter '**Retail**' as Eng SR No & logged call in **Manual Mode**.
- 2) **Call Log ID** start with prefix **ADMIN** is logged by National Call Center.

MAHINDRA POWEROL SUVIDHA										powerol service efficiency	
SRACHIN100176		ADMIN	Installation & Commissioning	Manual	18/01/2012 17:04	18/01/2012 23:00	Open			Cancel	Regularize
SRACHIN100178	retail	ADMIN	Other Complaints	Manual	06/01/2012 06:09	18/01/2012 11:30	Open			Cancel	Regularize
SRACHIN100180	Retail	ADMIN	Preventive Maintenance	Manual	07/01/2012 09:22	07/01/2012 18:00	Open			Cancel	Regularize
SRACHIN100140	retail	ADMIN	Other Complaints	Manual	05/01/2012 17:52	05/01/2012 18:45	Open			Cancel	Regularize
SRACHIN100045	retail	ADMIN	Other Complaints	Manual	26/12/2011 14:43	26/12/2011 20:30	Open			Cancel	Regularize
SRACHIN100046	retails	ADMIN	Other Complaints	Manual	24/12/2011 12:58	24/12/2011 17:00	Open			Cancel	Regularize
SRACHIN100047		ADMIN	Only Commissioning	Manual	23/12/2011 16:01	23/12/2011 18:00	Open			Cancel	Regularize
SRACHIN100048	retail	ADMIN	Other Complaints	Manual	21/12/2011 09:00	21/12/2011 18:32	Open			Cancel	Regularize

Click on **Call Log ID** to get Complaint details.

Following window will open.

CallLogView - Windows Internet Explorer

Call Details			
Call ID	SRACHIN100046	Magie Code	SRU40015
Engine Sr No	retails	DG Sr No	
RII Type		RII ID	
Site Location	opp Pitara college	Customer Type	
Complaint Details			
Customer Name	Mr.Ravi Kumar	Customer Address	K.V.R. Residency, opp Pitara college near Patel quins park, xhnp -500076
Complaint Code	RII	Category	Other Complaints
Complaint Description	DG FAILS TO START	Other Details	
Cluster	Hyderabad Urban	Kilometers	
Owner Name	Mr.Ravi Kumar	Flat No./Apartment No	
Street		Tahsila	
District	Hyd-16d	State	Andhra Pradesh
Complaint received on	24/12/2011 12:58	Service required on	24/12/2011 17:00
Caller Details			
Mode of call	PHONE	Call Type	Manual
Complaint given by	MSRAVI KUMAR	Remarks	
Contact No 1	9948454312	Contact No 2	
Email Id 1	sachin@yahoo.com	Email Id 2	
Status Details			
Status	Open		

Close

2) How to close complaint on portal?

Step I -

MAHINDRA POWEROL SUVIDHA										powerol service efficiency	
SRACHIN100176		ADMIN	Installation & Commissioning	Manual	18/01/2012 17:04	18/01/2012 23:00	Open			Cancel	Regularize
SRACHIN100178	retail	ADMIN	Other Complaints	Manual	06/01/2012 06:09	18/01/2012 11:30	Open			Cancel	Regularize
SRACHIN100180	Retail	ADMIN	Preventive Maintenance	Manual	07/01/2012 09:22	07/01/2012 18:00	Open			Cancel	Regularize
SRACHIN100140	retail	ADMIN	Other Complaints	Manual	05/01/2012 17:52	05/01/2012 18:45	Open			Cancel	Regularize
SRACHIN100045	retail	ADMIN	Other Complaints	Manual	26/12/2011 14:43	26/12/2011 20:30	Open			Cancel	Regularize
SRACHIN100046	retails	ADMIN	Other Complaints	Manual	24/12/2011 12:58	24/12/2011 17:00	Open			Cancel	Regularize
SRACHIN100047		ADMIN	Only Commissioning	Manual	23/12/2011 16:01	23/12/2011 18:00	Open			Cancel	Regularize
SRACHIN100048	retail	ADMIN	Other Complaints	Manual	21/12/2011 09:00	21/12/2011 18:32	Open			Cancel	Regularize
SRACHIN100049	retails	ADMIN	Other Complaints	Manual	20/12/2011 10:30	20/12/2011 17:00	Open			Cancel	Regularize

Every complaint logged in manual mode need to be regularize frist, Hence click on '**regularize**' link & following window will open.

MAHINDRA POWEROL SUVIDHA

Profile Installation Commissioning AMC/CAPC Enrollment Services Spares MOP Literature Change Password Logout

Regularize Details

Call ID: SRADMN100040 Magic Code: EBU40015

Category: Other Complaints Enter New Engine No. Search Previous details

Complaint Details

Engine Sr No: retails DG Sr No: Site Location: opp Fit Jee college
 Site ID: M12 Cluster: Hyderabad Urban
 Complaint Code: M12 Customer Address: K.V.P. Residency, opp Fit Jee college near Patel Gunta Park KHP - 500076
 Customer Name: Mr. Ravi Kumar Other Details:
 Complaint Description: DG fails to start Plot No./Apartment No:
 Owner Name: Mr. Ravi Kumar Taluka:
 Street: State: Andhra Pradesh
 District: Hyderabad
 Distance in KMs from Nearest MAGIEC location:
 Complaint received on: 24 Dec 2011 12:58:00:000 Service required on: 24 Dec 2011 17:00:00:000

Caller Details

Mode of call: PHONE
 Complaint given by: Mr. Ravi Kumar Remarks:
 Contact No 1: 988484012 Contact No 2:
 Email Id 1: ravi@yasho.com Email Id 3:

Submit

MAHINDRA POWEROL SUVIDHA

Profile Installation Commissioning AMC/CAPC Enrollment Services Spares MOP Literature Change Password Logout

Regularize Details

Call ID: SRADMN100040 Magic Code: EBU40015

Category: Other Complaints Enter New Engine No. VAB11710654 Search Previous details

Complaint Details

Engine Sr No: VAB11710654 DG Sr No: ZAHEDABAD
 Site ID: GSRATSRAD001 Site Location: Hyderabad Urban
 Complaint Code: M12 Cluster: K.V.P. Residency, opp Fit Jee college near Patel Gunta Park KHP - 500076
 Customer Name: Mr. Ravi Kumar Customer Address: ROAD NO 9
 Complaint Description: DG fails to start Plot NO 2-1-329
 Owner Name: NO NAME State: Andhra Pradesh
 Street: ZAHEDABAD
 District: MEDAK
 Distance in KMs from Nearest MAGIEC location: 120.00
 Complaint received on: 24 Dec 2011 12:58:00:000 Service required on: 24 Dec 2011 17:00:00:000

Caller Details

Mode of call: PHONE
 Complaint given by: Mr. Ravi Kumar Remarks:
 Contact No 1: 988484012 Contact No 2:
 Email Id 1: ravi@yasho.com Email Id 3:

Submit

Message from webpage: Are you sure want to Regularize this call?

OK Cancel

Enter correct Eng. Sr No & Click on 'Search'

As soon as you click on search button, System search customer details in population master of MAGIEC & update customer details in the form.

On updation of customer details, Click on 'Submit' button.

Verification message will pop up as "Are you sure want to Regularize this call?" Then click on OK Button.

MAHINDRA POWEROL SUVIDHA

Profile Installation Commissioning AMC/CAPC Enrollment Services Spares MOP Literature Change Password Logout

List Of Call Logs

From Date: 19/04/2012 To Date: 25/04/2012 Record Size: 30

Search Criteria: Select Submit Export Excel

Call regularized successfully for service request no. SRADMN100040

Message for successful Regularization of Call will appeared as shown in above screen.

Step II –

Again go for Open complaints as shown below,

Profile Installation Commissioning AMC/CAMC Enrollment Services Spares ROM Literature Change Password Logout

List Of Call Logs

From Date: 19/04/2012 To Date: 26/04/2012 Record Size: 999

Search Criteria: Status

Status: Open

Call registered successfully for service request no. SRADMIN100040

Submit Export Excel

Following window will appeared.

Call ID	Engine No	Site ID	Customer Name	Complaint Code	Complaint Description	Cluster	Owner Name	Street	District	Distance in KMs from Nearest MAGIEC location	Complaint received on	Service required on	Mode of call	Complaint given by	Contact No 1	Email Id 1	Call Cancel	Do you want send mail to Customer?	Do you want to enter service details for this call?
SRADMIN100040	V4B11T10654	GSRAYSRADG01	RECONTECHNOLOGIES(P) LTD, PLOT NO 2-1-329, D.A. KUKATPALLY, HYDERABAD, 500037	MI2	DG FAILS TO START	Hyderabad Urban	NO NAME	ZAHEERABAD	HEDAK	125.00	24/12/2011	24/12/2011	PHONE	MR. RAVI KUMAR	9848454012	sachin@yahoo.com	No	Yes	Yes

Click on **Modify link** & following screen will appeared.

MAHINDRA POWEROL SUVIDHA

Modify Call Details

Call ID: SRADMIN100040

Engine No: V4B11T10654

Site ID: GSRAYSRADG01

Magie Code: EBU40615

DG Sr No: V4B11T10654

Site Location: ZAHEERABAD

Enter Complaint Details

Customer Name: RECONTECHNOLOGIES(P) LTD, PLOT NO 2-1-329, D.A. KUKATPALLY, HYDERABAD, 500037

Complaint Code: MI2

Complaint Description: DG FAILS TO START

Cluster: Hyderabad Urban

Owner Name: NO NAME

Street: ZAHEERABAD

District: HEDAK

Distance in KMs from Nearest MAGIEC location: 125.00

Complaint received on: 24/12/2011

Service required on: 24/12/2011

Enter Caller Details

Mode of call: PHONE

Complaint given by: MR. RAVI KUMAR

Contact No 1: 9848454012

Email Id 1: sachin@yahoo.com

Call Cancel: No

Do you want send mail to Customer?: Yes

Do you want to enter service details for this call?: Yes

Submit

Select **No** option in **Call Cancel** field.

Select **Yes** option in **Do you Want to send mail to customer** field.

Select **Yes** option in **Do you want to enter service details** field as shown below,

Enter Caller Details			
Mode of call *	PHONE		
Complaint given by*	RE.BAYI KUMAR	Remarks	
Contact No 1*	9840454012	Contact No 2	
Email Id 1*	rechi@yahoo.com	Email Id 2	
Call Cancel *	☐ Yes ☒ No		
Do you want send mail to Customer ?*	☐ Yes ☒ No		
Do you want to enter service details for this call? *	☐ Yes ☒ No		
Submit			

Then click on **Submit** button. Verification message will appear as below.



Click on **OK** button.

Below form will open.

MAHINDRA POWEROL SUVIDHA			
powerol			
Profile Installation Commissioning ARC/GMC (Inverter) Services Spares NDR Literature Change Password Logout			
Services			
Note : * Fields are mandatory.			
Engine Serial No*	V4B11T10654	Attended Hours*	
Attended Date*		PUH Hours	Go
Caution: Attended Hours, Date & Time once entered cannot be altered			
DC Information			
Engine Serial No	V4B11T10654	DC Serial No	V4B11T10654
Model Code		Customer Name	
Customer Address	RECONTECHNOLOGY	Manager Name	GENTEC SERVICES
Visit Details			
Service No	1000000		
Service Request No	SRADHINI00040		

Complaint Information			
Add Complaint ☐ Yes ☒ No			
Severity*	Select	FSR Number*	
Failure Date*		Complaint Date*	24/12/2011
Equipment Spared Date*		Quotation Submit Date	
Quotation Approved Date		Resolution Date*	
Complaint Code*	M12-Engine Stopped		
Complaint Reported	Engine Stopped	OG fails to start	
Failure Code1*	Select		
Failure Code2	Select		
Problem Description			
Resolution Code1*	Select		
Resolution Code2	Select		
Resolution Code1 (Additional)	Select		
Resolution Code2 (Additional)	Select		
Problem Resolution			
Problem Status	Open	Maintenance Fault	☐ Yes ☒ No
Refer to Customer	☐ Yes ☒ No		
Visit Parameters			
Visited by Engineer*		Call by Customer	☐ Yes ☒ No
Do you want to raise the service claim ☐ Yes ☒ No			
Save & Continue			

Enter **Attended Date,Time & Hour** & Click on **Go**

Services

Note: * Fields are mandatory.

Engine Serial No* V4811T10654 Attended Hours* 742

Attended Date* 25/04/2012 12:10 P10 Hours

Caution: Attended Hours, Date & Time once entered cannot be altered

DG Information

Engine Serial No V4811T10654 DG Serial No V4811T10654

Model Code Customer Name

Customer Address RECONTECHNOLOGI ES(P) Magic Name GENTEC SERVICES

Visit Details

Service No 1000001

Service Request No SRADMIN100040

Once you click on **GO** Button, System validates the hour. After successfully validation following varification message will appeared.



Click on **OK** Button

Then enter all necessary fields like Type Of Visit, Severity, FSR No, Equipment Date & Time, Resolution date & Time, Complaint status as **Closed**, enter Observation, Root cause analysis, Action Taken, Name of Service Engineer etc.. as shown below.

Note – All fields marked by * are mandatory.

Services

Note: * Fields are mandatory.

Engine Information

Engine Serial No* V4811T10654 Attended Hours* 742

Attended Date* 25/04/2012 12:10 P10 Hours

Caution: Attended Hours, Date & Time once entered cannot be altered

DG Information

Engine Serial No V4811T10654 DG Serial No V4811T10654

Model Code Customer Name RECONTECHNOLOGIES(P) LTD

Customer Address RECONTECHNOLOGI ES(P) Magic Name GENTEC SERVICES

Visit Details

Service No 1001892

Type of Visit* ☐ Paid Service ☐ Warranty-BreakDown

Caution: Selected service once saved cannot be altered

Service Request No SRADMIN100040

Complaint Information

Add Complaint ☐ Yes ☒ No

Severity* 905 FSR Number* 012

Failure Date* 25/04/2012 12:10 Complaint Date* 25/04/2012 12:10

Equipment Spared Date* 25/04/2012 12:10 Quotation Submit Date 25/04/2012 12:10

Quotation Approved Date 25/04/2012 12:10 Resolution Date* 25/04/2012 12:10

Problem Status Closed* Handiness Fault ☐ Yes ☒ No

Fill

Observation* Wiring Burnt Root Cause Analysis* High gauge wire attached

Consequential/Progressive Failure* None Support required from M&M

Action Recommended Action Taken

Refer to Customer ☐ Yes ☒ No

Visit Parameters

Visited by Engineer* Mr. Sachin Call by Customer Yes


Do you want to raise the service claim ☐ Yes ☒ No

Select **Yes** option to raise **Warranty claim** Or Select **No** & Click on **Save & Continue** Button.

Following verification message will appeared. Click on **OK** button.



Click **OK** button. System will give "**Service Added Successfully**" message on closer of complaint as shown below.

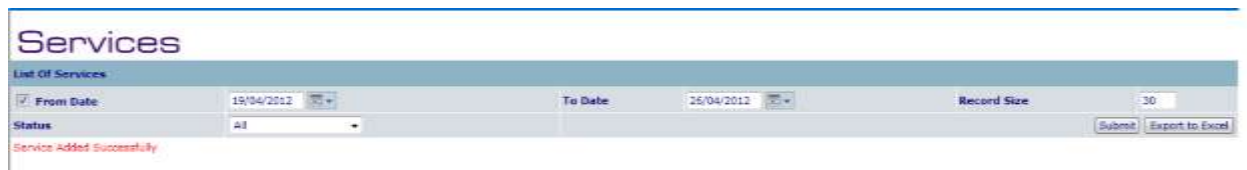

3) Cancellation of Call.

In case of duplicate Or fake complaint, we have to cancell the logged call.

E.g – In below case same complaint is logged with different call log ID. In such case we have to close on complaint properly & another need to cancel as a duplicate complaint.

To cancel a call, follow below procedure..

SREBU408151001666	GJ09H9068163	CORPORATE	EBU40815	Regular	11/04/2011 12:15	11/04/2011 13:30	Open		Modify	Cancel	SREBU408151001666
SREBU408151001665	GJ09H9068163	CORPORATE	EBU40815	Regular	11/04/2011 11:10	11/04/2011 12:20	Open		Modify	Cancel	SREBU408151001665

Click on **Modify** link.

Following page will opened,

Note: * Fields are mandatory

Modify Call Details

Call ID	SREBU408151001666	Magtec Code	EBU40815
Engine Sr No	G208H9080162	DG Sr No	C05A15098323
Site ID	GSTCSLTCDG01	Site Location	SHERLINGAMPALLY

Enter Complaint Details

Customer Name*	MROOffice, A/cTataConsultancyServices, RangaReddy,,000000		
Complaint Code*	FSC1	Category*	---Select---
Complaint Description*	FIAT FREE SERVICE COUPON	Other Details	
Cluster*	Hyderabad Urban	Plot No/ Apartment No	SHERLINGAMPALLY
Owner Name	NO NAME	Taluka	SHERLINGAMPALLY
Street	SHERLINGAMPALLY	State	Andhra Pradesh
District	RANGAREDDY	Customer Type	CORPORATE
Distance in KMs from Nearest MAGTEC location	35.00	Service required on*	11/04/2011 12:13:00
Complaint received on*	11/04/2011 12:13:00		

Enter Caller Details

Mode of call *	PHONE	Remarks	
Complaint given by*	VENKAT SARMA RED	Contact No 2	
Contact No 1*	9899928129	Email Id 2	
Email Id 1*	gntecmcservice@gn		
Call Cancel *	☒ Yes ☐ No		
Do you want send mail to Customer ?*	☒ Yes ☐ No		
Do you want to enter service details for this call? *	☐ Yes ☒ No		

Submit

Select **Yes** in **Call Cancel** field & **Resolved** as Call Cancel Type.
 Select **Yes** in **"Do you want to send mail to Customer"** field.
 Select **No** in **"Do you want to raise service claim for this call"** field as shown below.

MAHINDRA POWEROL SUVIDHA

Cluster: Hyderabad Urban

Owner Name: NO NAME

Plot No/ Apartment No: SHERLINGAMPALLY

Street: SHERLINGAMPALLY

Taluka: SHERLINGAMPALLY

District: RANGAREDDY

State: Andhra Pradesh

Distance in KMs from Nearest MAGTEC location: 35.00

Customer Type: CORPORATE

Complaint received on*: 11/04/2011 12:13:00

Service required on*: 11/04/2011 12:13:00

Enter Caller Details

Mode of call *	PHONE	Remarks	Duplicate Call
Complaint given by*	VENKAT SARMA RED	Contact No 2	
Contact No 1*	9899928129	Email Id 2	
Email Id 1*	gntecmcservice@gn		
Call Cancel *	☒ Yes ☐ No		
Call Cancel Type	RESOLVED		
Do you want send mail to Customer ?*	☒ Yes ☐ No		
Do you want to enter service details for this call? *	☐ Yes ☒ No		

Submit

Click on **Submit** button. A **Verification message** will appeared as below,



Click **OK** button. Message of succesfull modification of call will appeared.

Note – MAGIEC should not cancel a call without strong reason.

2. SMS Based Complaint Registration

- E Connect is our effort to empower customer to connect to us for any issues without searching for whom they should contact.
- In eCONNECT there are two ways to register a complaint,
 1. eCONNECT- Mobile application for Android, BB, Java mobile handset.
 2. Text SMS – Preformatted text SMS

Following Steps need to be follow to register a complaint through eCONNECT application,


1. Mobile application must be installed in handset.
2. Following is the index page of mobile application,



3. As shown above, registration form is available in application itself which need to be submitted once only.
4. To raise a new complaint “Raise Ticket” option is provided.
5. After clicking on “Raise Ticket” option, following page will get open.



6. Complaint registration can be done against “Site Id or Engine Serial number”
7. As shown above screen appropriate option (Site ID/ Engine Serial number) need to be selected from dropdown menu.
8. In 1st entry field, Engine Serial number / Site ID need to be enter.
9. Remark field is provided to enter customer complaint.
10. After Entering Complaint text, “send” button need to be pressed.
11. After clicking on “Send” button, system will automatically sent complaint SMS to Portal from backend. Following screen will be visible after sending SMS.

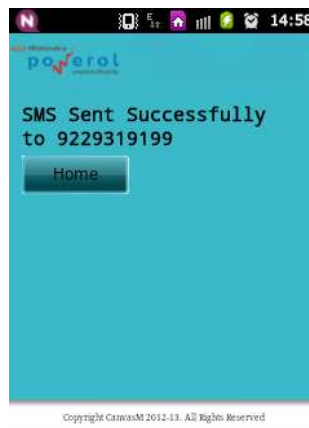


- ✚ Complaint Registration through simple text SMS – This option is available to register a complaint using basic mobile where we cannot install mobile application.

Following steps need to be follow to register breakdown complaint on powerolsuvidha portal\

1. Customer just Need to go to text SMS from any of the mobile.
2. He can log a complaint with the help of Engine Serial number & Site ID Both
3. **IF he Know Site Id he has to enter following text**
Siteid<Space>IN-1234567<Space>My DG is not starting


4. IF Customer Know Engine Serial number he has to enter following text
ESN<Space>P4I8AC1234<Space>My DG is not starting

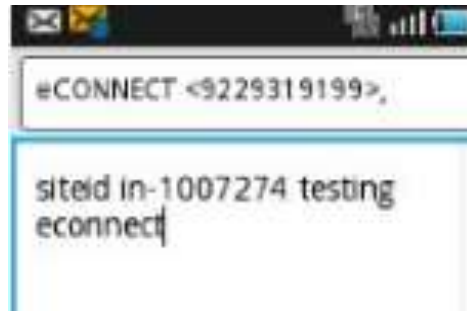

5. After Entering complete SMS same need to be sent at "9229319199" number.
6. As follows, based on complaint SMS system will register a complaint on portal.

Call Details			
Call ID	SREBU11913100154	Magiec Code	EBU11913
Engine Sr No	P4C12M9931	DG Sr No	P40E3/C12/7366
DG Type	STANDARD	Site ID	IN-1007274
Site Location	VILL- KADIPUR, PATAUDI ROAD	Customer Type	CORPORATE
Complaint Details			
Customer Name	INDUS TOWERS LIMITED	Customer Address	IndusTowersLtd.,,C/o 578,Fatehpurber,,11
Complaint Code	SMS	Category	Other Complaints
Complaint Description:	NOT STARTING	Other Details	
Cluster	Gurgaon	Kilometers	50.00
Owner Name	mahesh	Plot No./Apartment No	VILL- KADIPUR
Street	VILL- KADIPUR	Taluka	VILL- KADIPUR
District	gurgaon	State	Delhi
Complaint received on	26/11/2012 17:19	Service required on	26/11/2012 17:19
Caller Details			
Mode of call	PHONE	Call Type	Regular
Complaint given by		Remarks	
Contact No 1	8130698644	Contact No 2	
Email Id 1	manmadharao.baipalli@boone.com	Email Id 2	

7. Within seconds After Sending complaint SMS, Customer is getting acknowledgement SMS with Ticket number for future communication.
8. Same Time MAGIEC is also getting Complaint Alert on His Mobile
9. If Complaint Kept unresolved time bound MAIL & SMS based auto escalations will be started.

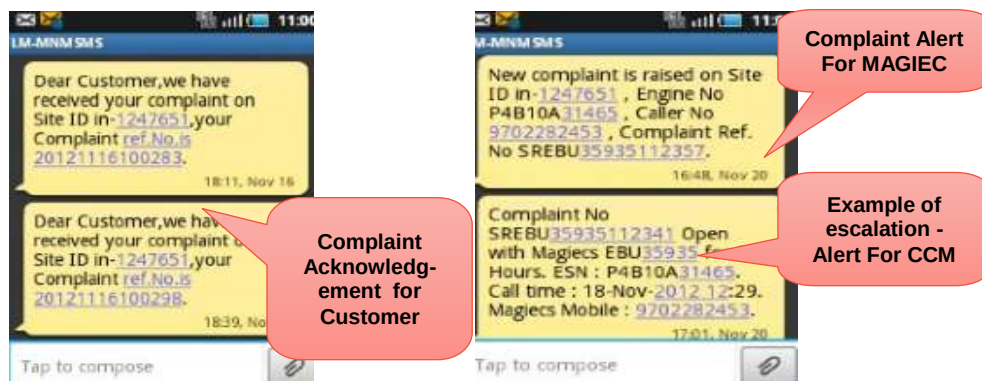

- New Complaint will have status as “Open” & After Closure same will be converted in to “Closed”

3. Spare part Inventory Management

Sr. No

Chapter

1
2

New Spare Part Ordering from Mahindra.
New Spare Part Ordering from Stockiest.



+ New Spare Part Ordering from Mahindra

Start Portal www.mahindrapowerolsuvidha.com



Menu: Spare Part → Spare Part → Place New Order

Click On “Place New Order”, Following Page will be visible

Spares

Note: *Fields are mandatory

Add New Part Order

Download Template List of Orders

Magic Code: 88090815
Part Order No: PEDH408151401289
Part Order To: Select
Consignee Code: Select
Magic Name: GENTEC SERVICES
Date: 03/01/2014
Order Type: Select
Order Category: Select


Upload Excel Browse Upload

SNo	Part No	Part Description	HQ	Ordered Qty	Allowed Qty	Price	Total
Spares account balance				Credit		Total Amount	0
Value of saved orders							
Payment required to clear spares debit & execute spares order				0.0			
Available Bond Permit				11			


Submit

Select Values As follows,

1. Part Order to → M&M
2. Consignee Code → Incase MAGIEC / Stockiest Is having Multiple locations, Select Appropriate
3. Order Type → Select appropriate value From Dropdown Menu



4. Order Category → Select appropriate value from Dropdown Menu.



5. To Enter Spare part there are two Options,
 1. Upload Excel,
 2. One by One Part Entry.

All Other Functionality is same as earlier Version.

Note:

- a. With Respect to Earlier Version we have removed plant Selection – Because Currently portal it plant with respect to part number. (Order will be bifurcate plant wise).
- b. To place new order – Use of Auto Order functionality is advisable, where Portal is calculating desired part requirement & suggesting order qty.
- c. Refer Auto Order Module Guide in this SOP.

2. New Spare Part Ordering from Stockiest.



Menu: Spare Part → Spare Part → Place New Order

Click On “Place New Order”, Following Page will be visible

Spares

Note: *Fields are mandatory.

Add Stockiest New Part Order

Download Template List of Orders Place New Order

Maglec Code EBU47824 Maglec Name UNIVERSAL DIESELS

Part Order No 3750047842000 Date 05/01/2014

Stockiest Select

Part Order To GANVI DISTRIBUTORS-ebu47842 Order Type Select

Consignee Code Select Order Category Select

Upload Excel

SrtNo	Part No	Part Description	Stockiest Qty	MOQ	Ordered Qty	Allowed Qty	Price	Total

Spares account balance Credit


Total Amount (Order value exclusive of local taxes) 0.00

Submit


Select Values As follows,

6. **Part Order to** → Stockiest
After Clicking on Stockiest option, Please wait for while.
Portal will change the order page as above.

7. **Stockiest** → Select Appropriate stockiest from dropdown list.
8. **Consignee Code** → In case MAGIEC / Stockiest is having Multiple locations, Select Appropriate
9. **Order Type** → Select appropriate value From Dropdown Menu



10. **Order Category** → Select appropriate value from Dropdown Menu.



11. To Enter Spare part there are two Options,
 - a. Upload Excel,
 - b. One by One Part Entry.

All Other Functionality is same as earlier Version.

NOTE:

- a. To place new order – Use of Auto Order functionality is advisable, where portal itself calculating desired part requirement & Suggesting Order qty.
- b. Refer Auto Order Module Guide in this SOP.

Sr. No

Chapter

3.

Order Tracking – M&M Orders

The screenshot shows the 'Spares' section of the MAHINDRA POWEROL SUVIDHA application. The 'Stockiest Part Order List' form is displayed with the following fields and values:

- From Date:** 02/01/2014
- Status:** A dropdown menu is open, showing options: ALL, Approved & Forwarded for Processing (highlighted), Awaiting Approval, and Credit Not Available.
- Order Category:** ALL

A red message at the bottom states: 'Part Order Created Successfully.' On the right side, a sidebar menu lists various options under 'Spares', 'MOM', 'Literature', and 'Reports'.

To Track Order raised on MAHINDRA,

Menu: Spares → Spare Part Ordering → Go to “Spare part Orders – M&M”

Following page will get open,

The screenshot shows the 'Spares' section of the MAHINDRA POWEROL SUVIDHA application. The 'Part Order List' form is displayed with the following fields and values:

- From Date:** 02/01/2014
- To Date:** 03/01/2014
- Status:** A dropdown menu is open, showing options: ALL, Approved & Forwarded for Processing (highlighted), Awaiting Approval, and Credit Not Available.
- Order Type:** ALL
- Order Category:** ALL

A red message at the bottom states: 'Select filter criteria and click on submit button for listing.' Below the form, there is a faint, partially visible table with columns for 'Part No', 'Part Name', 'Part Description', 'Part Category', 'Part Status', and 'Part Action'.

1. **Select Date Range**
2. **Status:** Now Multiple Selection is possible (IF multiple Selections need to be Done Hold “Ctrl” key & Select options).
3. **Order Type:** Optional
4. **Order Category:** Optional

After execution following Page will be displayed,

Spares

Part Order List

From Date

02/01/2014

ALL

Approved & Forwarded for Processing

Awaiting Approval

Credit Not Available

To Date

03/01/2014

Record Size: 30

Status

Order Type

ALL

Order Category

ALL

Sr No	Order No	Magiec Code	Magiec Name	Plant Code	Plant Name	Order Date	Order Category	Order Type	Amount	Sales Order No	Sales Order Date	Status	Delete	Modify	Order Details	Purchase Order	Down
1	PERU47824131210	EBU47824	UNIVERSAL DIESELS	FO01	Waghoh	19/12/2013	Telecom	BDT	4776.20	0004642702	19/12/2013	Fully Invoiced			Order Details	PERU47824131210	Down
2	PERU47824131211	EBU47824	UNIVERSAL DIESELS	FO01	Waghoh	19/12/2013	Telecom	Engine Refurbishment	139820.10			Rejected			Order Details	PERU47824131211	Down
3	PERU47824131212	EBU47824	UNIVERSAL DIESELS	FO01	Waghoh	18/12/2013	Telecom	BDT	9984.10			Rejected			Order Details	PERU47824131212	Down
4	PERU47824131213	EBU47824	UNIVERSAL DIESELS	FO01	Waghoh	13/12/2013	Telecom	Engine Refurbishment	55608.00			Rejected			Order Details	PERU47824131213	Down
5	PERU47824131214	EBU47824	UNIVERSAL DIESELS	FO01	Waghoh	28/11/2013	Telecom	Engine Refurbishment	132594.70			Rejected			Order Details	PERU47824131214	Down
6	PERU47824131215	EBU47824	UNIVERSAL DIESELS	FO01	Waghoh	28/11/2013	Telecom	Engine	49676.90			Rejected			Order Details	PERU47824131215	Down

Following new Fields are added,

1. Plant Code, 2. Plant Name, 3. Purchase Order, 4. Export to excel option

Sr. No

Chapter

4.

Order Tracking – For order raised @

Stockiest

If MAGIEC has raise order to Stockiest, Tracking from will be as follows.

Menu: Spares → Spare Part Ordering → Stockiest spare part order List



After Clicking on “Stockiest spare part order list”, following page will get open.

Stockiest Part Order List

From Date: 02/01/2014 To Date: 03/01/2014 Record Size: 30

Status: ALL, Approved & Forwarded for Processing, Awaiting Approval, Credit Not Available Order Type: ALL

Order Category: ALL Plant: ALL Submit Export to Excel

Sr No	Order No	Order Date	Stockiest Code	Stockiest Name	Order Category	Order Type	Amount	Status	Delete
1	SPFBU4782410001	03/01/2014	ebu47842	SANVI DISTRIBUTORS	Telecom	Commercial	533.70	Awaiting Approval	Delete

Current Page No : 1 | Total Page No : 1 | Total Records : 1

Select appropriate values & Execute,


In Status Field Multiple Status Selection is also possible.

Note: Till the time order status is “Awaiting Approval”, same can be cancelled by MAGIEC by using Delete option provided as above.

5. Order Tracking & Processing for STOCKIEST

STOCKIES - to track MAGIEC Orders & Process the same as shown below,

“Spare part Order – MAGIEC” option is provided.

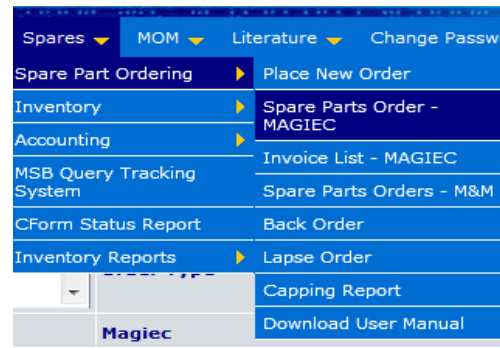

Menu: Spares → Spare part Ordering → Spare part Order - MAGIEC



1. As Shown above MAGIEC Selection is also provided on STOCKIEST screen.
2. To Process the respective order – Click on “Order process”
After Clicking on “Order Process”, following screen will be appearing.

Spares

Stockiest Invoice

Magiec Name:	M/S.UNIVERSAL DIESELS	Order Date:	03/01/2014	Order Category:	
Order Id:	SPEBU4782410001	Order Type:	Commercial		
Invoice No:		Invoice Date:	03/01/2014		

Sr No	Part No	Part Desc	Ordered Qty	Already Executed	Back Order Stock	Available (Telecom) Stock	Total Aval. Stock	Invoice Qty	Remaining Qty	Price	Total
1	006003681B91	RING SET FOR SINGLE PISTON DI	1	0	1	125	125	1	0	533.70	

Generate Invoice Close

STOCKIST has to enter Invoice qty (System Will automatically updated rates (Excluding Local Taxes).

Click On “Generate Invoice” button. Order status will get changed.

Sr. No

Chapter

6.

Spare Part Receipt

Note: From Launching this Module we are disabling excel upload of parts in inventory.

All parts will be updated in inventory by adding GRN against Spare part receipt from MAHINDRA / STOCKIEST.

For Order Raised @ MAHINDRA & MAHINDRA LTD.

1. After receipt of part to update the same on portal, use following steps.
Menu: Spares → Inventory → Stock Inward → List Stock Inward.



2. After Clicking on “List Stock Inward” Select appropriate date range & execute. Following page will get open.

SrNo	Invoice No.	Invoice Date	GRN Number	GRN Date	Net Invoice Value	View Details	Add Details
1	7190809418	02/01/2014			7962.60	View Details	Add Details
2	7190809408	31/12/2013			11063.12	View Details	Add Details
3	7190809351	31/12/2013			15244.50	View Details	Add Details
4	7190809353	31/12/2013			3091.60	View Details	Add Details
5	7190809363	31/12/2013			8138.72	View Details	Add Details
6	7190809367	31/12/2013			3418.65	View Details	Add Details
7	7190809375	31/12/2013			3164.50	View Details	Add Details
8	7190809376	31/12/2013			26492.50	View Details	Add Details
9	7190809333	30/12/2013			29416.92	View Details	Add Details
10	7190809347	30/12/2013			16628.52	View Details	Add Details
11	7190809299	30/12/2013			2196.69	View Details	Add Details

3. @ List Stock Inward page Invoice number & date wise line items will be available, to Update details click on “Add details” against appropriate Invoice No.

Welcome, EAST WEST POWER GENSET PVT LTD

MAHINDRA POWEROL SUVIDHA

Indicates mandatory field

Stock Status

Add Invoice Parts

Invoice No: 7192165629 Invoice Date: 05/06/2013 GRN Date: *

* Invoice Number Details

Note: * To Add the Standard Parts enter Accepted Qty. and click on Submit

Sr.No	Part No	Part Desc	Purchase Price	Invoice Qty	Accepted Qty.	Wrong Part Supply	Wrong Part No.	Qty.
1	001231297R2	O RING 96.60X3.53 NBR	13.30	40	40	☐		
2	006003681B91	RING SET FOR SINGLE PISTON DI	508.20	50	50	☐		
3	000041615C11	OIL PRESSURE TRANSDUCER C40076	297.50	10	10	☐		
4	001099285R91	SET BEARING CON ROD-STD-BIMETL	321.30	4	4	☐		
5	003065125R2	GASKET THERMOSTAT	12.60	25	25	☐		
6	005550812R1	PIN PISTON - ESCORT	107.10	10	10	☐		
7	005554067R1	BEARING CON ROD STD	56.70	40	40	☐		
8	005554153R1	BELT FAN	147.70	5	5	☐		
9	00555531R1	SLEEVE CYLINDER - 432 CYL DI	475.30	16	16	☐		
10	005557797R1	HOSE THERMOSTAT BYPASS KNITTED	37.00	20	20	☐		

Submit

4. Please updated "Qty" & Click On "submit" button. After Clicking on Submit Button respective Spare part qty will be updated automatically in Respective MAGIEC inventory.
(No Need to updated parts through excel sheet)

Sr. No

Chapter

7.

Spare part Receipt For Order Raised @ STOCKIEST

1. Menu: Spares → Spare Part Ordering → Invoice List - MAGIEC

Welcome, BONE POWER SOLUTIONS

MAHINDRA POWEROL SUVIDHA

Profile Installation Commissioning AMC/CAMC Enrollment eFSR Services Spares Rennova MOM Literature Reports Change Password Logout

Spares

Invoice List

From Date: 15/01/2014

Status: ALL

Order Category: ALL

Plants: BONE POWER SOLUTIONS PVT. LTD.-ARG22184

Record Size: 30

Sr No	Invoice No	Invoice Date	GRN Number	GRN Date	GRN Amount	Display Invoice	GRN Status
1	inv20	03/01/2014	GTEST00110001	03/01/2014	813.16	Display Invoice	GRN generated
2	inv20	03/01/2014	GTEST00110002	03/01/2014	997.02	Display Invoice	GRN generated
3	inv2001	03/01/2014			2991.06	Display Invoice	Add GRN

Current Page No : 1 | Total Page No : 1 | Total Records : 3

2. After Clicking on Invoice list – MAGIEC tab, Following Page will get open,

Welcome, BCOME POWER SOLUTIONS

MAHINDRA POWEROL SUVIDHA

Mahindra powerol powered efficiently

Profile Installation Commissioning AMC/CAMC Enrollment eFSR Services Spares Renova MOM Literature Reports Change Password Logout

Spares

Invoice List

From Date: 16/01/2014 To Date: 17/01/2014 Record Size: 30

Status: ALL Order Type: ALL

Order Category: ALL Plants: UNITED GENSET PVT. LTD.-ARG22184

Sr No	Invoice No	Invoice Date	GRN Number	GRN Date	Net Invoice Value	Display Invoice	GRN Status
1	inv20	03/01/2014	GTEST00110001	03/01/2014	813.16	Display Invoice	GRN generated
2	inv20	03/01/2014	GTEST00110002	03/01/2014	997.02	Display Invoice	GRN generated
3	inv2001	03/01/2014			2991.06	Display Invoice	Add GRN

Current Page No : 1 | Total Page No : 1 | Total Records : 3

3. After Submission to see processed order details click on “Display Invoice” link.
4. After receipt of part, Please click on “Add GRN” link, As follows another “pop-up window” will be opened.
5. In this new window please update GRN (Receipt) Qty against Invoice qty.

http://mahindrapowerolsuvidha.com/MahindraPowerolWeb/stockiestInvoice.do?method=addGRN&invoiceId=inv2001&refNo=ITEST00110001

Spares

Add GRN

Stockiest Name: M/S.UNITED GENSET PVT. LTD. Order Date: 03/01/2014 Order Category: Retail

OrderId: SPTEST00110002 Order Type: Commercial

Invoice No: inv2001 Invoice Date: 03/01/2014

GRN Date: 17/01/2014

Sr No	Part No	Part Desc	Ordered Qty	Invoiced Qty	Price	Invoiced Part Amt	GRN Qty
1	000022144RD	SET BEARING CR SFT 0.254 MM U/S-B	4	3	997.02	2991	

Submit

After Doing GRN Respective Part will get added in your inventory - If GRN

Not raised, MAGIEC will not able to raise service against that respective part.

Sr. No

8.

Chapter

Spare part Receipt – Local Inward

1. If we are procuring some parts locally (Standard or OEM), same need to be upload using “Add local Inward”.

Menu: “Spares → Stock Inward → Add Local Inward.”

Inventory

Add Local Inward

MAGEIC Code: EBU35935 MAGEIC Name: EAST WEST POWER GENSET PVT LTD

Date: 03/01/2014 Inward Category: select

Upload Excel: Browse...

SrNo	Part Type	Part No	Part Description	Quantity	Rate
	Select				

2. After Clicking on “Add local inward”, following screen will get open. Add respective part Number (If Part is local then first of all create the same as OEM Part)

Inventory

Add Local Inward

MAGEIC Code: EBU35935 MAGEIC Name: EAST WEST POWER GENSET PVT LTD

Date: 03/01/2014 Inward Category: select

Reference Number: PEBU3593510016

Source: select

Upload Excel: Browse... Upload

SrNo	Part Type	Part No	Part Description	Quantity	Rate
	Select				

3. After updation through “add Local Inwards” respective parts will be added automatically in respective MAGIECs inventory.

Note: Please Raise GRN for all the received Parts In mandatory.

In New Module we are generating reports based on Part inward & outward hence MAGIEC has to ensure 100% part inward & outward,

Sr. No

Chapter

9.

View Inventory

1. In inventory Module now MAGIEC will have separate inventory for Retail, Telecom, and Industrial & Marine & Renovo.
2. For inventory status he can use following process.
Menu: Spares → Inventory → Stock Inward → Stock Status



3. While raising any service portal is checking part in respective inventory (e.g. Retail / Telecom/Renovo/Industrial & Marine etc) Hence MAGIEC has to update his inventory accordingly.
4. IF MAGIEC want to check inventory for any specific part then search Inventory option is provided.
5. To search inventory following please use following steps,
Spares → Inventory → Stock Inward → Search Inventory



Sr. No

Chapter

10.

OEM Part Management

▪ **How To Create OEM Parts**

Menu: Spares → Stock Inward → Add OEM Part



1. After Clicking on “Add ORM Part” following page will get open,

Welcome EAST WEST POWER GENSET PVT LTD

MAHINDRA POWEROL SUVIDHA

Profile Installation Commissioning AMC/CAMC Enrollment eFSR Services Spares MOM Literature Change Password Logout

OEM

Note : * Fields are mandatory

Add OEM Part		List OEM Parts	
MAGIEC Code	EBU35935	MAGIEC Name	EAST WEST POWER GENSET PVT LTD
Part Number*	Volvoline Oil	Part Description*	Volvoline Oil
Price*	328	Sales Price*	350

Submit

2. Select Suitable Part Number & Description, Price & Sale Price.
3. After Submission Part will be get created.

▪ How Check List Of OEM Part

Menu: Spares → Inventory → Stock Inward → List OEM Part

Welcome EAST WEST POWER GENSET PVT LTD

MAHINDRA POWEROL SUVIDHA

Profile Installation Commissioning AMC/CAMC Enrollment eFSR Services Spares MOM Literature Change Password Logout

Spare Part Ordering

Inventory

Stock Inward

Stock status

Accounting

Stock Outward

Search Inventory

MSB Query Tracking System

Sales Return

Add OEM Parts

Inter-Transfer Stock

List OEM Parts

CForm Status Report

Download User Manual

Add Local Inward

Inventory Reports

Local Inward List

List Stock Inward

Sr.No	Part Number	Part Description
1	Volvoline Oil	Volvoline Oil

Current Page No : 1 | Total Page No : 1 | Total Records : 1

Sr. No

Chapter

11.

Add OEM Parts In Inventory

1. After creation of OEM Part same also need to be added in inventory with respect to Segment (Retail, Telecom, and Renovo & Industrial & Marine).
2. To add OEM part in inventory, Please Follow Following steps,

Welcome, EAST WEST POWER GENSET PVT LTD

MAHINDRA POWEROL SUVIDHA

Profile Installation Commissioning AMC/CAMC Enrollment eFSR Services Spares MOM Literature Change Password Logout

Spare Part Ordering

List OEM Parts

☒ From Date 16/12/2013 To Date

Sr.No	Part Number	Part Description
1		Volvoline Oil

Current Page No : 1 | Total Page No : 1 | Total Records : 1

Inventory Stock Inward Stock status
Accounting Stock Outward Search Inventory
MSB Query Tracking System Sales Return Add OEM Parts
CForm Status Report Inter-Transfer Stock List OEM Parts
Inventory Reports Download User Manual Add Local Inward
Local Inward List
List Stock Inward
Search Stock Inward
CRF Details
ExcelUpload for Parts
Download ExcelFormat

3. After Clicking on Add Local Inward Following screen will get open.

Welcome, EAST WEST POWER GENSET PVT LTD

MAHINDRA POWEROL SUVIDHA

Profile Installation Commissioning AMC/CAMC Enrollment eFSR Services Spares MOM Literature Change Password Logout

Inventory

Add Local Inward

MAGEIC Code EBU35935 MAGEIC Name EAST WEST POWER GENSET PVT LTD Reference Number FEBU3593510041

Date 16/01/2014 Inward Category* select Source* select

Upload Excel Browse Upload

SrNo	Part Type	Part No	Part Description	Quantity	Rate
	Select				

Add Sub

select
select
Retail
Telecom
Industrial & Marine
Renovo

4. OEM Part also needs to be inward with respect to Division hence Inward category need to be selected from dropdown option "Retail / Telecom / Industrial & Marine / Renovo."


5. **Source** : Need to be selected from Dropdown – Local / Other MAGIEC
6. **Part Type**: Select Part Type as OEM (If standard part is purchased from Other MAGIEC or Market same also need to be inward via Add local inward).
7. After Submission part will be get added in respective inventory.

Scope: The literature module is made with an objective to intimate MAGIEC, OEM & Our field team with Latest bulletin or Circulars within shortest possible time.

1. After Login following screen will appear,
2. Go to literature TAB,



3. After clicking on Literature, two options will be available in dropdown.
 - a. Bulletin
 - b. Manual/Circular

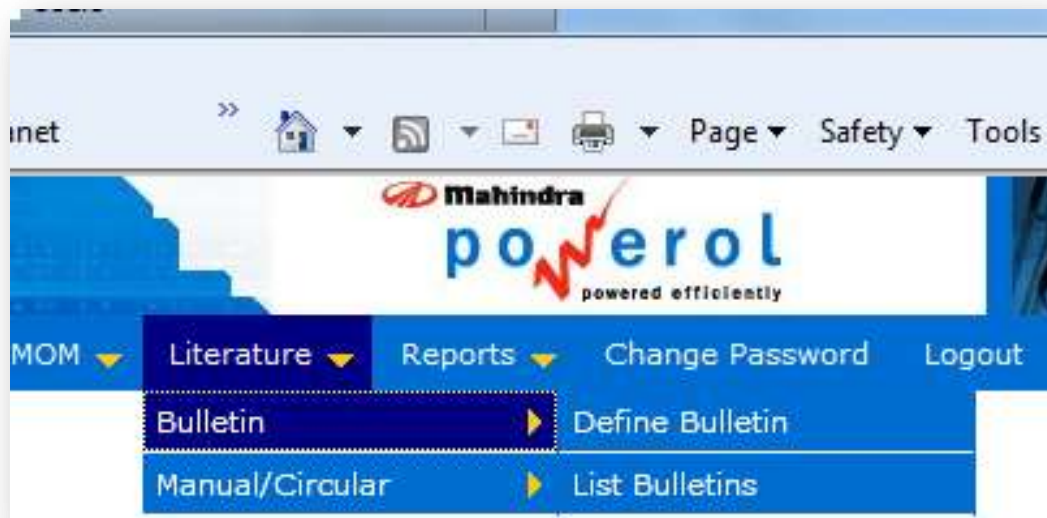

4. After selecting appropriate option from bulletin & manual / Circular Following two options will be appear,
 - a. Define Bulletin
 - b. List Bulletins

Define Option is provide to upload new Bulletin / Circular & List option is provided to check list on all bulletin / Circulars.

For MAGIEC / Field team only List option will be available.

New Bulletin Updating Process:

1. Select Define Bulletin, following screen will be open,

The screenshot shows a web browser window with the URL <http://mahindrapowerolsuvidha/MahindraPowerolWeb/login.do?method=loginSuccess>. The page header includes a welcome message for PRATHAMESH SURVE and a navigation menu with links like Access, Profile, Installation, Commissioning, AMC/CAMC Enrollment, eFSR, Services, Spares, and OEM/Sales. A note states: "Note: *Fields are mandatory". The main form is titled "Upload New Bulletin" and contains the following fields:

Bulletin Number*		Bulletin Name*	
Bulletin Code*	select	Date*	
Access Type*	ALL		
Upload File*	Browse...		

At the bottom right of the form is a button. A button is located at the top right of the form area.

2. All The field on this page are mandatory,
3. After Updating all the pages, Browse your bulletin file from your local PC.
4. Select Submit.
5. Your file will get updated on portal

List Bulletin:

1. Select List Bulletin Option
2. After selecting list Bulletin option following screen will get open,
3. This page is basically list page for all the bulletins,

http://mahindrapowerolsuvidha/MahindraPowerolWeb/login.do?method=loginSuccess

Mahindra Powerol

File Edit View Favorites Tools Help

Home Suggested Sites MODEL_KVA_Master http--www.alibaba.com-... Flat 60% Off Y Yepme eFSR webex Powerol-Intranet

Welcome, PRATHAMESH SURVE

MAHINDRA POWEROL SUVIDHA

Access Profile Installation Commissioning AMC/CAMC Enrollment eFSR Services Spares OEM/Sales Dealer MOM

Note : * Fields are mandatory

List Of Bulletins

Bulletin Description * All Submit

Record Size 30

Sr No	Bulletin No	Bulletin Name	Bulletin Description	Date	Uploaded By	View	Modify	Access Type	Delete
1	MP/CC/12 13/15 NEW	Dual Output MPU	GENSET	29/03/2013	BARUA CHAUDHURY RITWIK	View	Modify	ALL	☐
2	MP/CC/12 13/14 NEW	Direct Drive Starter Motors introduced in 2DI and 3DI engine models	ENGINE	23/03/2013	BARUA CHAUDHURY RITWIK	View	Modify	ALL	☐
3	MP/CC/12 13/13 NEW	Pre Cleaner MNEPL engines	ENGINE	19/03/2013	BARUA CHAUDHURY RITWIK	View	Modify	ALL	☐
4	MP/CC/12 13/12	Generating Set Earthing Recommendation	GENSET	12/02/2013	BARUA CHAUDHURY RITWIK	View	Modify	ALL	☐
5	MP/CC/12 13/11	Product Improvement Lombardini Engine 5 kva	ENGINE	06/02/2013	BARUA CHAUDHURY RITWIK	View	Modify	ALL	☐
6	MP/CC/1213/10	Revised Service Schedule TELECOM	ENGINE	20/12/2012	BARUA CHAUDHURY RITWIK	View	Modify	ALL	☐
7	MP/CC/1213/09	Design Improvement of COMBINATION UNIT	GENSET	20/11/2012	BARUA CHAUDHURY RITWIK	View	Modify	ALL	☐
8	MP/CC/12 13/08	Flanged Bolt for Vibration Damper	ENGINE	07/09/2012	BARUA CHAUDHURY RITWIK	View	Modify	ALL	☐

- To find out specific bulletin, one filter is provided "Bulletin Description".
- After selecting appropriate bulletins will get filtered accordingly.
- Record Size selection is provided to extract data as per requirement.

Sr. No


Chapter

12. Web Monitoring System

- Website require for continuous monitoring with different level of login ID.
- After login there is a provision of adding and removing a sites on website.
- There should be a provision of selection of different genset controller accordingly data register also changed.
- Monitoring of following parameters on line:
 - DG Voltage 3Phae
 - DG AMP 3Phase
 - DG KWH Total
 - DG Running Hours
 - DG PF 3Phase
 - DG RPM
 - Oil Pressure
 - Water Temperature
 - Fuel Level in %
 - Fuel level in liters

- Battery Voltage
 - Charging Voltage
 - Alarms
 - Status Of DG (Manual /Auto/Test/Stop)
 - Other required parameters which can be finalized during development.
5. Control Of the DG
 - Start DG
 - Stop DG
 - Reset the alarm
 - Mode change
 6. Android Application with provision of Remote monitoring and control.
 7. Report Generation of Each DG and can be down load in different formats like xls,PDF,etc.
 8. Examples of sites:

Under the *All Site* system view level, the user will see all the configured *Specific Sites* configured to the user's account and their location on the map.

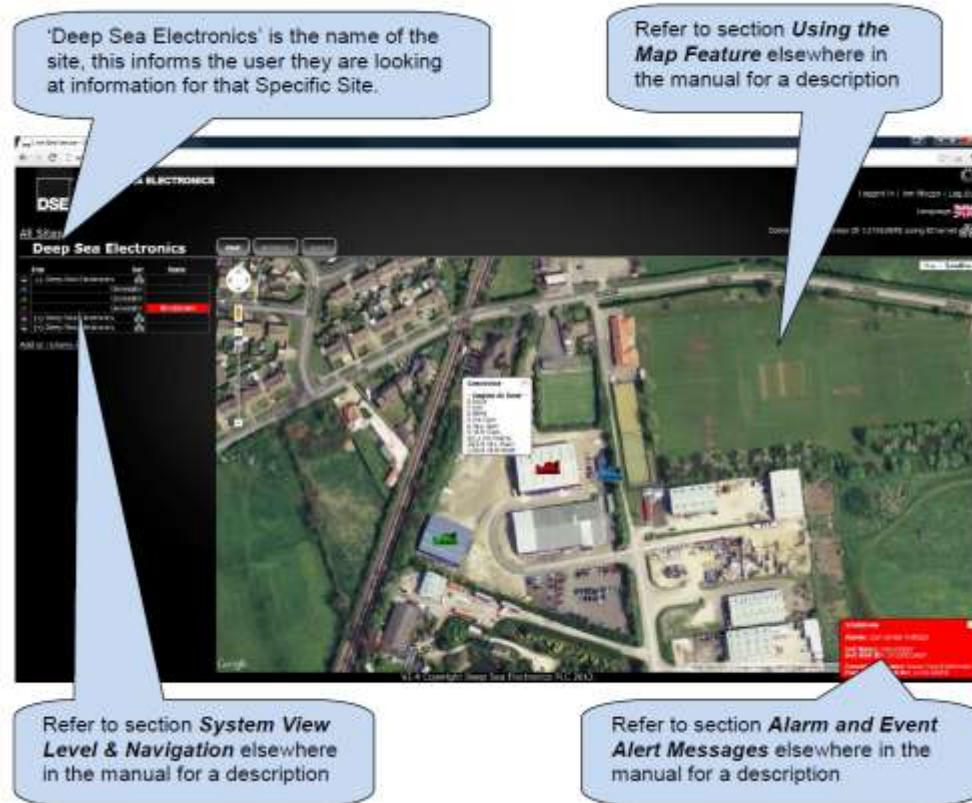

5.4.2 EVENTS

Under the *Specific Site* system view level, the user will see all the logged events from the *DSE Controllers* for that *Specific Site*.

The screenshot shows the 'Deep Sea Electronics' website. The header includes the company name and navigation links like 'All Sites', 'Products', and 'Services'. A sidebar on the left lists various electronic components. The main content area displays a table of events with columns for 'Event Name', 'Event Date', 'Event Time', and 'Event Status'. Callouts provide detailed explanations for specific interface elements:

- Callout 1 (Top Left):** 'Deep Sea Electronics' is the name of the site, this informs the user they are looking at information for that Specific Site.
- Callout 2 (Top Right):** Select the number of record events to be displayed and which page to view.
- Callout 3 (Bottom Left):** Refer to section **System View Level & Navigation** elsewhere in the manual for a description
- Callout 4 (Bottom Center):** Events records on the **DSE Controllers'** event log that are connected to site.
- Callout 5 (Bottom Right):** Click the **DSE Controller** to view the specific **DSE Controller** that recorded the event.

5.4.3 INFO

Under the *Specific Site* system view level, the user has access to specific information for the site.

The screenshot shows the DSE Gateway web interface for a site named 'Deep Sea Electronics'. The interface includes a sidebar with a list of sites, a main content area with site details, and a top navigation bar. Callouts provide additional context:


- 'Deep Sea Electronics' is the name of the site, this informs the user they are looking at information for that Specific Site.** (Points to the site name in the sidebar)
- Shows the ID of the DSE Gateway Device** (Points to the 'Gateway ID' field in the main content area)
- Public Site Notes (These notes are seen by everyone):** (Points to the 'Public Site Notes' section)
- Personal Site Notes (These notes are only seen by you):** (Points to the 'Personal Site Notes' section)
- Refer to section *System View Level & Navigation* elsewhere in the manual for a description** (Points to the sidebar navigation menu)

Public Site Notes: editable and seen by all users that have access to that *Specific Site*. This section can be used to leave important information for others; an example would be 'During next service, replace oil pressure sensor as it is sticking'.

Personal Site Notes: editable and seen only by the specific user's account. This section can be used to leave helpful reminders; an example would be 'The door PIN CODE to enter the site is 9999'.

5.5.1 GENERATOR

Displays the *DSE Controller's* measurement of the Generator supply parameters.

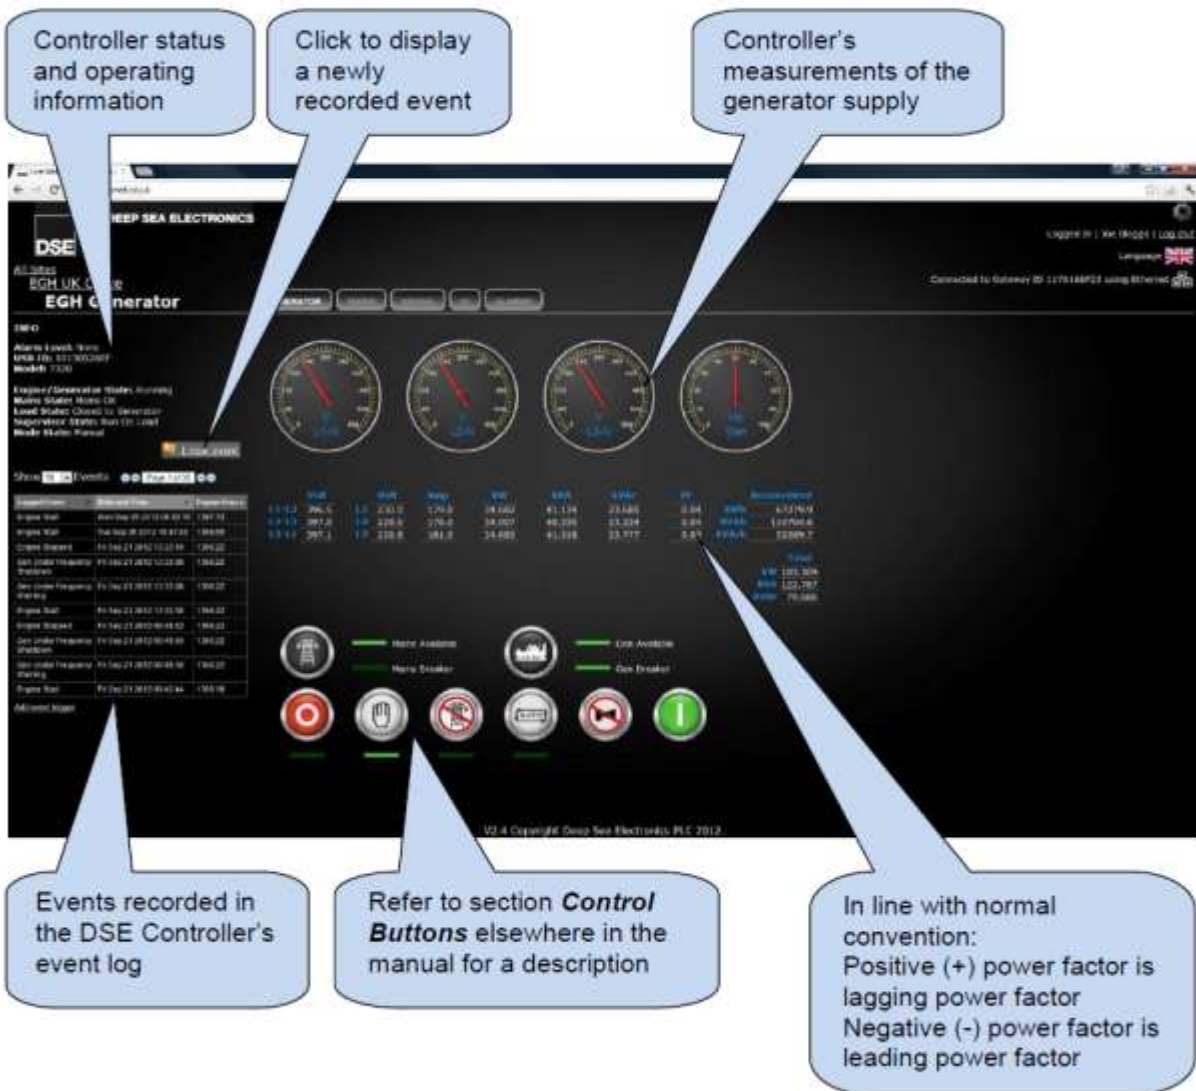

5.5.2 MAINS

Displays the *DSE Controller's* measurement of the Mains supply parameters.

NOTE: The Mains section is only available for modules with mains sensing.

The screenshot shows the 'DSE Controller' interface for 'EGH Generator'. It features a top navigation bar with 'HOME', 'MAINS', 'EVENTS', and 'SETTINGS'. The 'MAINS' section is active, displaying four analog gauges for voltage (V), current (A), power (W), and frequency (Hz). Below these are two tables: 'Events' and 'Mains Parameters'. The 'Events' table lists various system events with timestamps. The 'Mains Parameters' table shows real-time readings for V, A, W, and Hz. At the bottom, there are status indicators for 'Mains Available', 'Mains Switch', 'Event Available', and 'Gas Switch', each with a corresponding icon and a green indicator light.

Controller status and operating information

Click to display a newly recorded event

Controller's measurements of the mains supply

Events recorded in the DSE Controller's event log

Refer to section **Control Buttons** elsewhere in the manual for a description

5.5.3 ENGINE

Displays the *DSE Controller's* measurement of the engine parameters.

The screenshot shows the 'DSE Controller' interface for an 'EGH Generator'. It features a top navigation bar with 'ALARM', 'EGH UK', and 'EGH Generator' tabs. The main display area includes several analog-style gauges for engine parameters: '1503 rpm', 'Oil pressure', 'Coolant temperature', 'Fuel level', 'Battery voltage', and 'Charge oil voltage'. On the left, there is a table of recorded events. At the bottom, there are several status indicators and control buttons.

Callouts point to the following elements:

- Controller status and operating information:** Points to the top left section of the interface.
- Click to display a newly recorded event:** Points to the 'Events' button in the top left.
- Controller's measurements of engine parameters:** Points to the gauges in the center of the interface.
- Events recorded in the DSE Controller's event log:** Points to the 'Events' table on the left.
- Refer to section *Control Buttons* elsewhere in the manual for a description:** Points to the bottom row of control buttons.

Event Time	Event Description	Event Status
Engine Start	Start Stop 01/11/18 08:14	100%
Engine Stop	Stop Stop 01/11/18 08:15	100%
Engine Restart	Start Stop 01/11/18 08:16	100%
Engine Stop	Stop Stop 01/11/18 08:17	100%
Engine Restart	Start Stop 01/11/18 08:18	100%
Engine Stop	Stop Stop 01/11/18 08:19	100%
Engine Restart	Start Stop 01/11/18 08:20	100%
Engine Stop	Stop Stop 01/11/18 08:21	100%
Engine Restart	Start Stop 01/11/18 08:22	100%
Engine Stop	Stop Stop 01/11/18 08:23	100%
Engine Restart	Start Stop 01/11/18 08:24	100%
Engine Stop	Stop Stop 01/11/18 08:25	100%
Engine Restart	Start Stop 01/11/18 08:26	100%
Engine Stop	Stop Stop 01/11/18 08:27	100%
Engine Restart	Start Stop 01/11/18 08:28	100%
Engine Stop	Stop Stop 01/11/18 08:29	100%
Engine Restart	Start Stop 01/11/18 08:30	100%
Engine Stop	Stop Stop 01/11/18 08:31	100%
Engine Restart	Start Stop 01/11/18 08:32	100%
Engine Stop	Stop Stop 01/11/18 08:33	100%
Engine Restart	Start Stop 01/11/18 08:34	100%
Engine Stop	Stop Stop 01/11/18 08:35	100%
Engine Restart	Start Stop 01/11/18 08:36	100%
Engine Stop	Stop Stop 01/11/18 08:37	100%
Engine Restart	Start Stop 01/11/18 08:38	100%
Engine Stop	Stop Stop 01/11/18 08:39	100%
Engine Restart	Start Stop 01/11/18 08:40	100%
Engine Stop	Stop Stop 01/11/18 08:41	100%
Engine Restart	Start Stop 01/11/18 08:42	100%
Engine Stop	Stop Stop 01/11/18 08:43	100%
Engine Restart	Start Stop 01/11/18 08:44	100%
Engine Stop	Stop Stop 01/11/18 08:45	100%
Engine Restart	Start Stop 01/11/18 08:46	100%
Engine Stop	Stop Stop 01/11/18 08:47	100%
Engine Restart	Start Stop 01/11/18 08:48	100%
Engine Stop	Stop Stop 01/11/18 08:49	100%
Engine Restart	Start Stop 01/11/18 08:50	100%
Engine Stop	Stop Stop 01/11/18 08:51	100%
Engine Restart	Start Stop 01/11/18 08:52	100%
Engine Stop	Stop Stop 01/11/18 08:53	100%
Engine Restart	Start Stop 01/11/18 08:54	100%
Engine Stop	Stop Stop 01/11/18 08:55	100%
Engine Restart	Start Stop 01/11/18 08:56	100%
Engine Stop	Stop Stop 01/11/18 08:57	100%
Engine Restart	Start Stop 01/11/18 08:58	100%
Engine Stop	Stop Stop 01/11/18 08:59	100%
Engine Restart	Start Stop 01/11/18 09:00	100%
Engine Stop	Stop Stop 01/11/18 09:01	100%
Engine Restart	Start Stop 01/11/18 09:02	100%
Engine Stop	Stop Stop 01/11/18 09:03	100%
Engine Restart	Start Stop 01/11/18 09:04	100%
Engine Stop	Stop Stop 01/11/18 09:05	100%
Engine Restart	Start Stop 01/11/18 09:06	100%
Engine Stop	Stop Stop 01/11/18 09:07	100%
Engine Restart	Start Stop 01/11/18 09:08	100%
Engine Stop	Stop Stop 01/11/18 09:09	100%
Engine Restart	Start Stop 01/11/18 09:10	100%
Engine Stop	Stop Stop 01/11/18 09:11	100%
Engine Restart	Start Stop 01/11/18 09:12	100%
Engine Stop	Stop Stop 01/11/18 09:13	100%
Engine Restart	Start Stop 01/11/18 09:14	100%
Engine Stop	Stop Stop 01/11/18 09:15	100%
Engine Restart	Start Stop 01/11/18 09:16	100%
Engine Stop	Stop Stop 01/11/18 09:17	100%
Engine Restart	Start Stop 01/11/18 09:18	100%
Engine Stop	Stop Stop 01/11/18 09:19	100%
Engine Restart	Start Stop 01/11/18 09:20	100%
Engine Stop	Stop Stop 01/11/18 09:21	100%
Engine Restart	Start Stop 01/11/18 09:22	100%
Engine Stop	Stop Stop 01/11/18 09:23	100%
Engine Restart	Start Stop 01/11/18 09:24	100%
Engine Stop	Stop Stop 01/11/18 09:25	100%
Engine Restart	Start Stop 01/11/18 09:26	100%
Engine Stop	Stop Stop 01/11/18 09:27	100%
Engine Restart	Start Stop 01/11/18 09:28	100%
Engine Stop	Stop Stop 01/11/18 09:29	100%
Engine Restart	Start Stop 01/11/18 09:30	100%
Engine Stop	Stop Stop 01/11/18 09:31	100%
Engine Restart	Start Stop 01/11/18 09:32	100%
Engine Stop	Stop Stop 01/11/18 09:33	100%
Engine Restart	Start Stop 01/11/18 09:34	100%
Engine Stop	Stop Stop 01/11/18 09:35	100%
Engine Restart	Start Stop 01/11/18 09:36	100%
Engine Stop	Stop Stop 01/11/18 09:37	100%
Engine Restart	Start Stop 01/11/18 09:38	100%
Engine Stop	Stop Stop 01/11/18 09:39	100%
Engine Restart	Start Stop 01/11/18 09:40	100%
Engine Stop	Stop Stop 01/11/18 09:41	100%
Engine Restart	Start Stop 01/11/18 09:42	100%
Engine Stop	Stop Stop 01/11/18 09:43	100%
Engine Restart	Start Stop 01/11/18 09:44	100%
Engine Stop	Stop Stop 01/11/18 09:45	100%
Engine Restart	Start Stop 01/11/18 09:46	100%
Engine Stop	Stop Stop 01/11/18 09:47	100%
Engine Restart	Start Stop 01/11/18 09:48	100%
Engine Stop	Stop Stop 01/11/18 09:49	100%
Engine Restart	Start Stop 01/11/18 09:50	100%
Engine Stop	Stop Stop 01/11/18 09:51	100%
Engine Restart	Start Stop 01/11/18 09:52	100%
Engine Stop	Stop Stop 01/11/18 09:53	100%
Engine Restart	Start Stop 01/11/18 09:54	100%
Engine Stop	Stop Stop 01/11/18 09:55	100%
Engine Restart	Start Stop 01/11/18 09:56	100%
Engine Stop	Stop Stop 01/11/18 09:57	100%
Engine Restart	Start Stop 01/11/18 09:58	100%
Engine Stop	Stop Stop 01/11/18 09:59	100%
Engine Restart	Start Stop 01/11/18 10:00	100%

5.5.5 ALARMS

Displays what alarms are currently active on the *DSE Controller* and their severity. This section can be used as a diagnostic aid.

Controller status and operating information

Click to display a newly recorded event

Alarms displayed are currently active on the *DSE Controller*. Alarms are displayed in the appropriate alarm action columns.

Events recorded in the *DSE Controller's* event log

Below is an example of an alarm notification

Shutdown
Gen Under Voltage

The screenshot shows the DSE Controller web interface. The top navigation bar includes links for Home, Status, Alarms, and Settings. The main content area is titled 'ALARMS' and displays a table of active alarms. The table has columns for 'Alarm Name', 'Severity', and 'Action'. The 'Severity' column shows 'Shutdown' in red. The 'Action' column shows 'Shutdown' in red. The 'Alarm Name' column shows 'Gen Under Voltage'. The table also includes a 'View Log' button. Below the table, there is a section for 'Events recorded in the DSE Controller's event log'. A callout box points to the 'View Log' button, stating 'Click to display a newly recorded event'. Another callout box points to the 'Shutdown' severity, stating 'Alarms displayed are currently active on the DSE Controller. Alarms are displayed in the appropriate alarm action columns.' A third callout box points to the 'Gen Under Voltage' alarm name, stating 'Events recorded in the DSE Controller's event log'. A fourth callout box points to the 'Shutdown' severity, stating 'Below is an example of an alarm notification'. The example notification shows 'Shutdown' in red and 'Gen Under Voltage' in black.