SC12-30

MULTI-CHANNEL AMPLIFIER

12-Channel
Fully Configurable
Power Amplifier

SPEAKERCRAFT

SC12-30

MULTI-CHANNEL
AMPLIFIER

SPEAKERCRAFT™

SHIPPING LABEL

SHIPPING LABEL

SPEAKERCRAFT™

SC12-30

MULTI-CHANNEL
AMPLIFIER

Gross Shipping Weight: 41.75 lbs / 19 kg

Dimensions: 10.4" x 23.5" x 19.2" /
264mm x 597mm x 488mm (HxWxD)

speakercraft.com • Made in China

6 64254 99968 0

SC12-30

Serial #

NORTEK CONTROL

©2022 Nortek Security & Control LLC. SpeakerCraft is a registered trademark of Nortek Security & Control LLC. All rights reserved.

Nortek Security & Control LLC | 5919 Sea Otter Place, Suite 100
Carlsbad, CA 92010 | 800.472.5555
nortekcontrol.com
P/N: 10001871 Rev-E

SpeakerCraft.com

SPEAKERCRAFT™

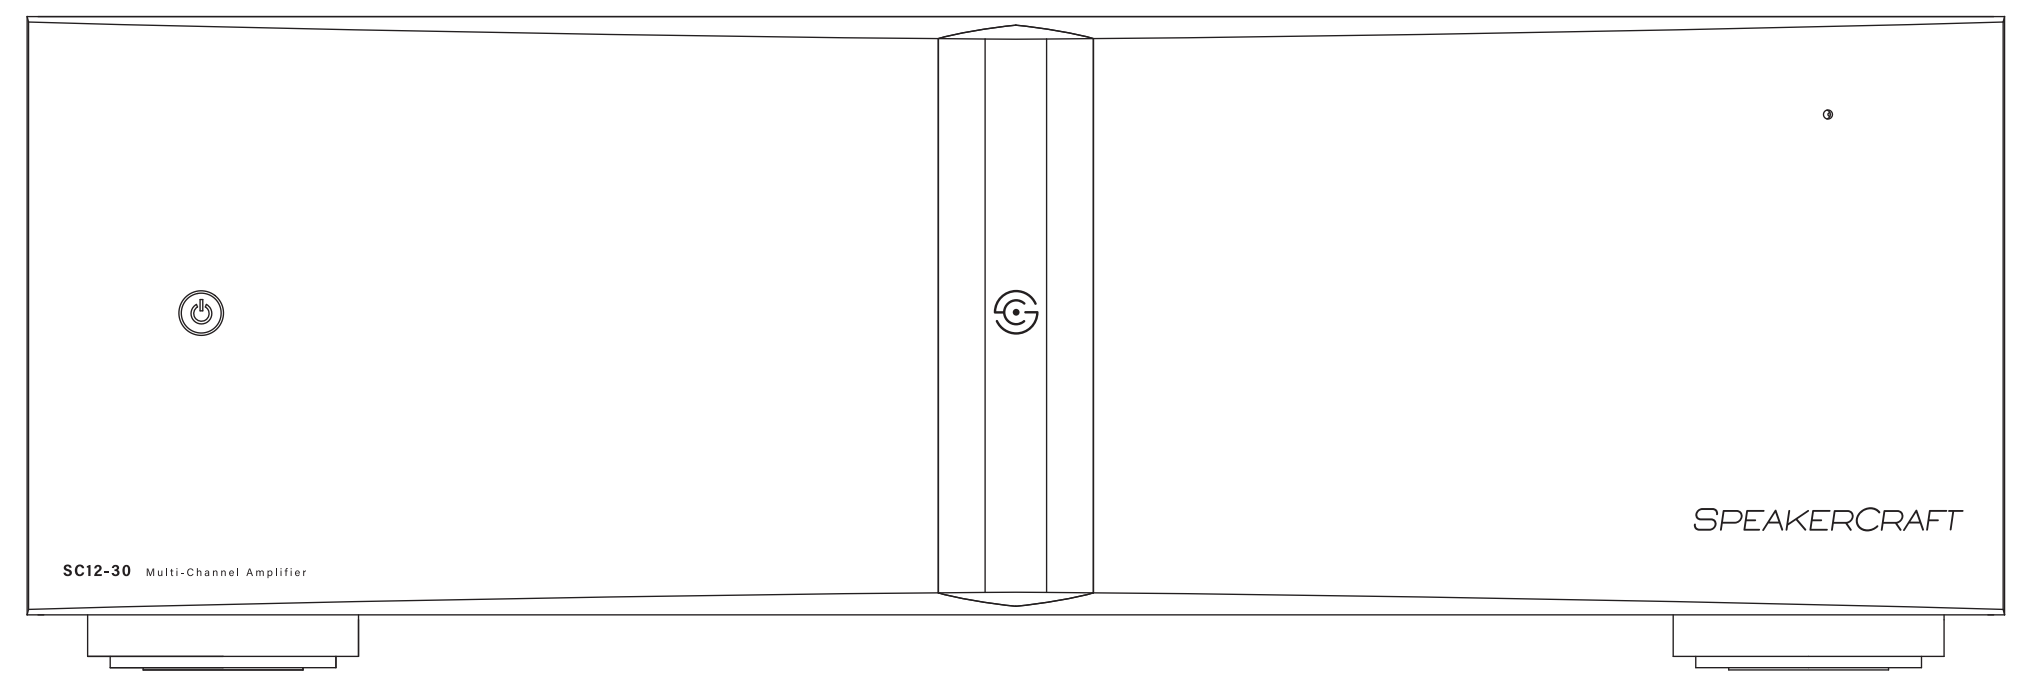
SC12-30 Multi-Channel Amplifier
SPEAKERCRAFT

SC12-30

MULTI-CHANNEL
AMPLIFIER

12-Channel
Fully Configurable
Power Amplifier

SPEAKERCRAFT™

SC12-30

MULTI-CHANNEL
AMPLIFIER

12-Channel
Fully Configurable
Power Amplifier

Fully configurable 16-Channel amplifier

30 watts RMS per channel into 8 Ohms (all channels driven)

40 watts RMS per channel into 4 Ohms (all channels driven)

Adjacent channels are bridgeable to 80 watts RMS into 8 Ohms (all channels driven)

Unique BusMatrix™ selector allows each channel to select from 4 options: left bus, right bus, left + right bus (summed stereo), or the channel's dedicated input

Three turn-on modes: music sense, voltage trigger, and manual

Voltage trigger input accepts 3-24V ∼/⎓

12-volt control out

Removable line cord

Two year limited warranty

Rack mount ears included

Conforms to UL62368, Certified to CAN/CSA IEC62368

CARTON CONTAINS:

(1) Multi-Channel Amplifier
(1) Pair of Rack Mounts
(1) 120V Power Cord

1-800-472-5555
SpeakerCraft.com

SPEAKERCRAFT™

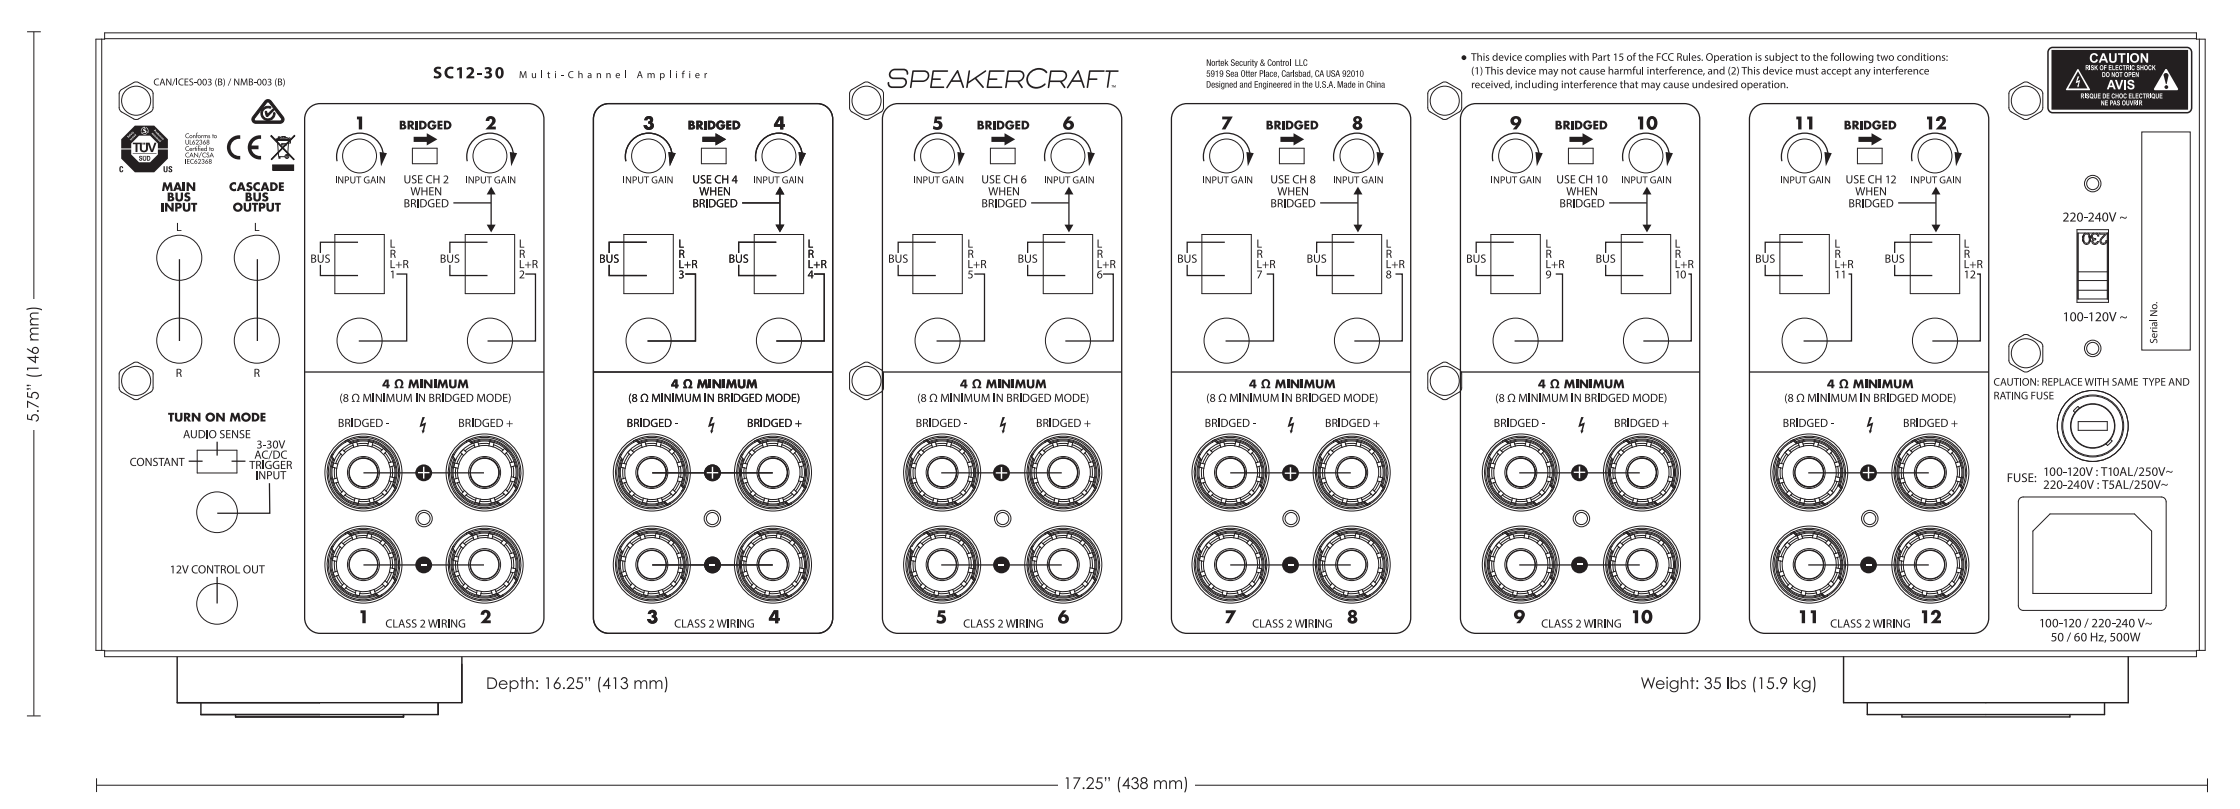
SC12-30 Multi-Channel Amplifier
SPEAKERCRAFT
MAIN BUS INPUT
CASCADE BUS OUTPUT
TURN ON MODE
AUDIO SENSE
CONSTANT
3-30V AC/DC TRIGGER INPUT
12V CONTROL OUT
BRIDGED
INPUT GAIN
4 Ω MINIMUM
(8 Ω MINIMUM IN BRIDGED MODE)
CLASS 2 WIRING
CAUTION
220-240V ∼
100-120V ∼
100-120 / 220-240 V∼ 50 / 60 Hz, 500W
Depth: 16.25" (413 mm)
Weight: 35 lbs (15.9 kg)
17.25" (438 mm)
5.75" (146 mm)

SC12-30

MULTI-CHANNEL
AMPLIFIER

12-Channel
Fully Configurable
Power Amplifier

573

473

223

BRAND: SPEAKERCRAFT

PROJECT: Artwork, Beauty Box, SC12-30

SCALE: 1:1

INSTRUCTIONS:
All Artwork Prints
■ Black

DATE: 04/07/2022

PART #: 10001871

REV: E

NORTEK CONTROL™

CONTACT:
Jon Mongelluzzo
jon.mongelluzzo@nortekcontrol.com