

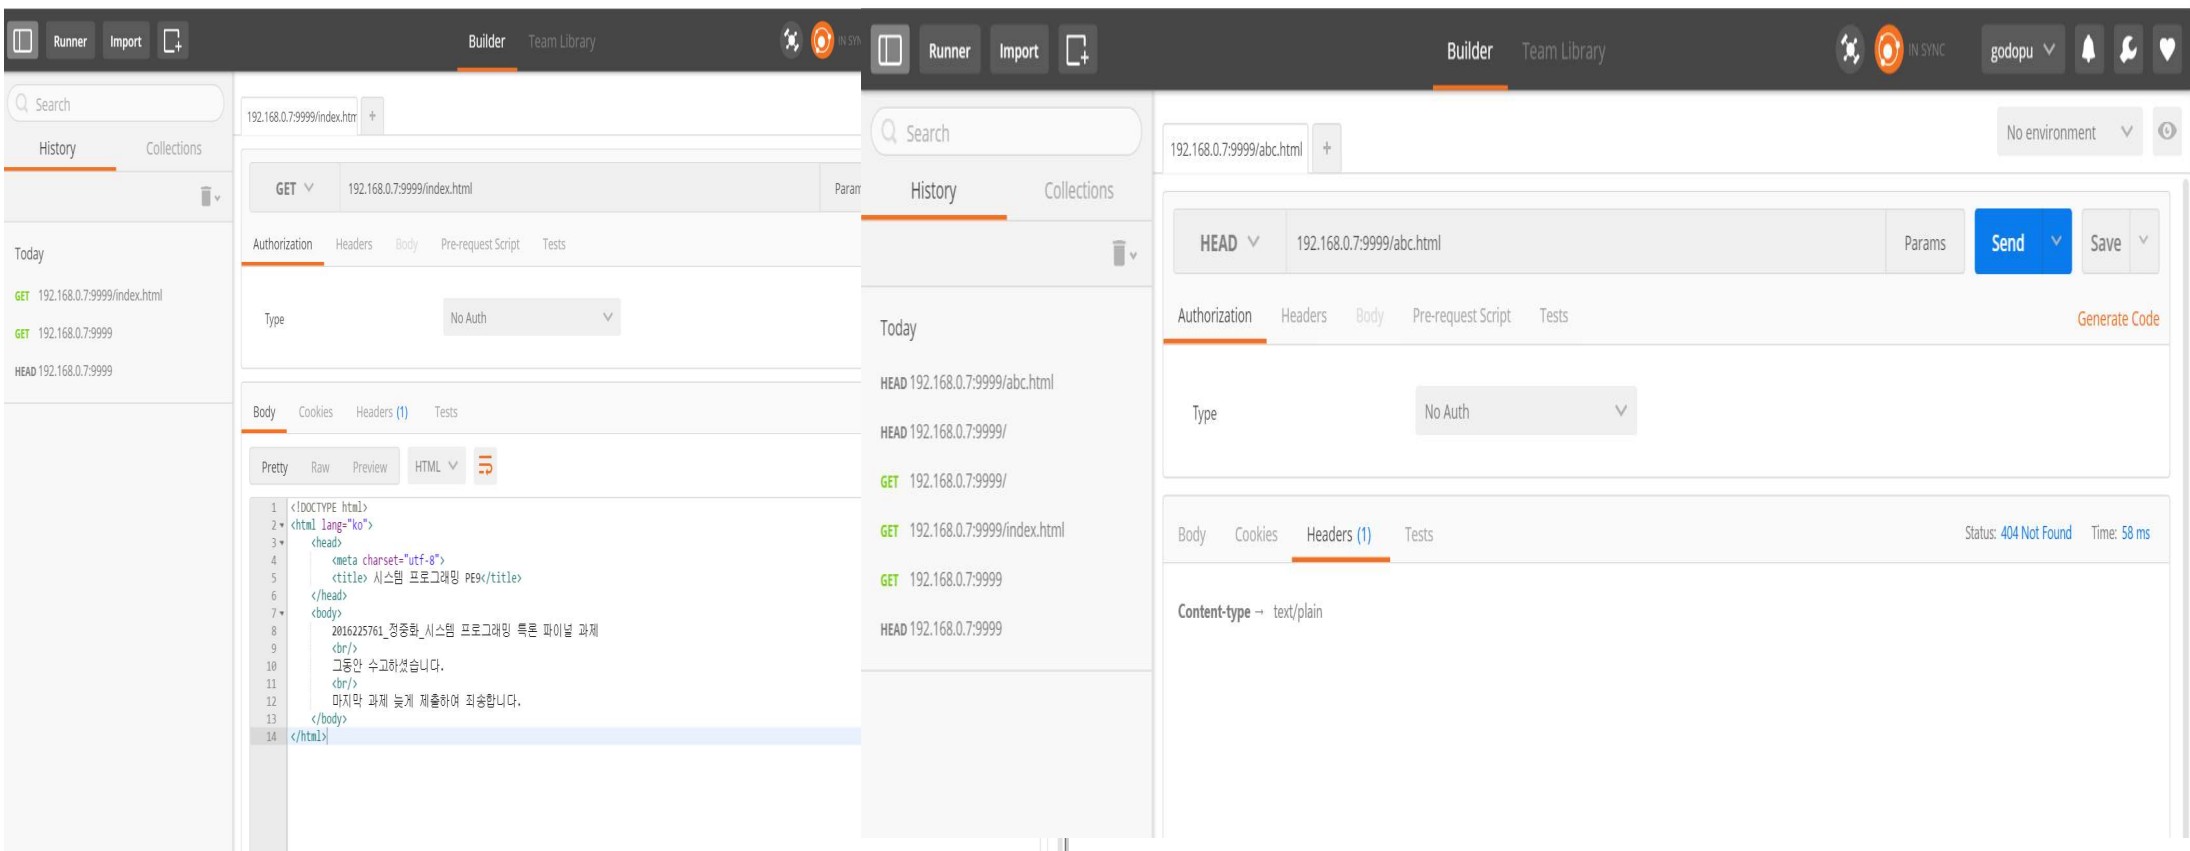



```
터미널
got a call : request = HEAD / HTTP/1.1
cmd : HEAD
arg : ./
modified arg : ./index.html
got a call : request = GET / HTTP/1.1
cmd : GET
arg : ./
got a call : request = GET / HTTP/1.1
got a call : request = GET /index.html HTTP/1.1
cmd : GET
arg : ./
cmd : GET
arg : ./index.html
got a call : request = GET /index.html HTTP/1.1
got a call : request = GET / HTTP/1.1
cmd : GET
arg : ./index.html
cmd : GET
arg : ./
got a call : request = GET /favicon.ico HTTP/1.1
cmd : GET
arg : ./favicon.ico
got a call : request = GET /index.html HTTP/1.1
cmd : GET
arg : ./index.html
got a call : request = GET /favicon.ico HTTP/1.1
cmd : GET
arg : ./favicon.ico
█
```

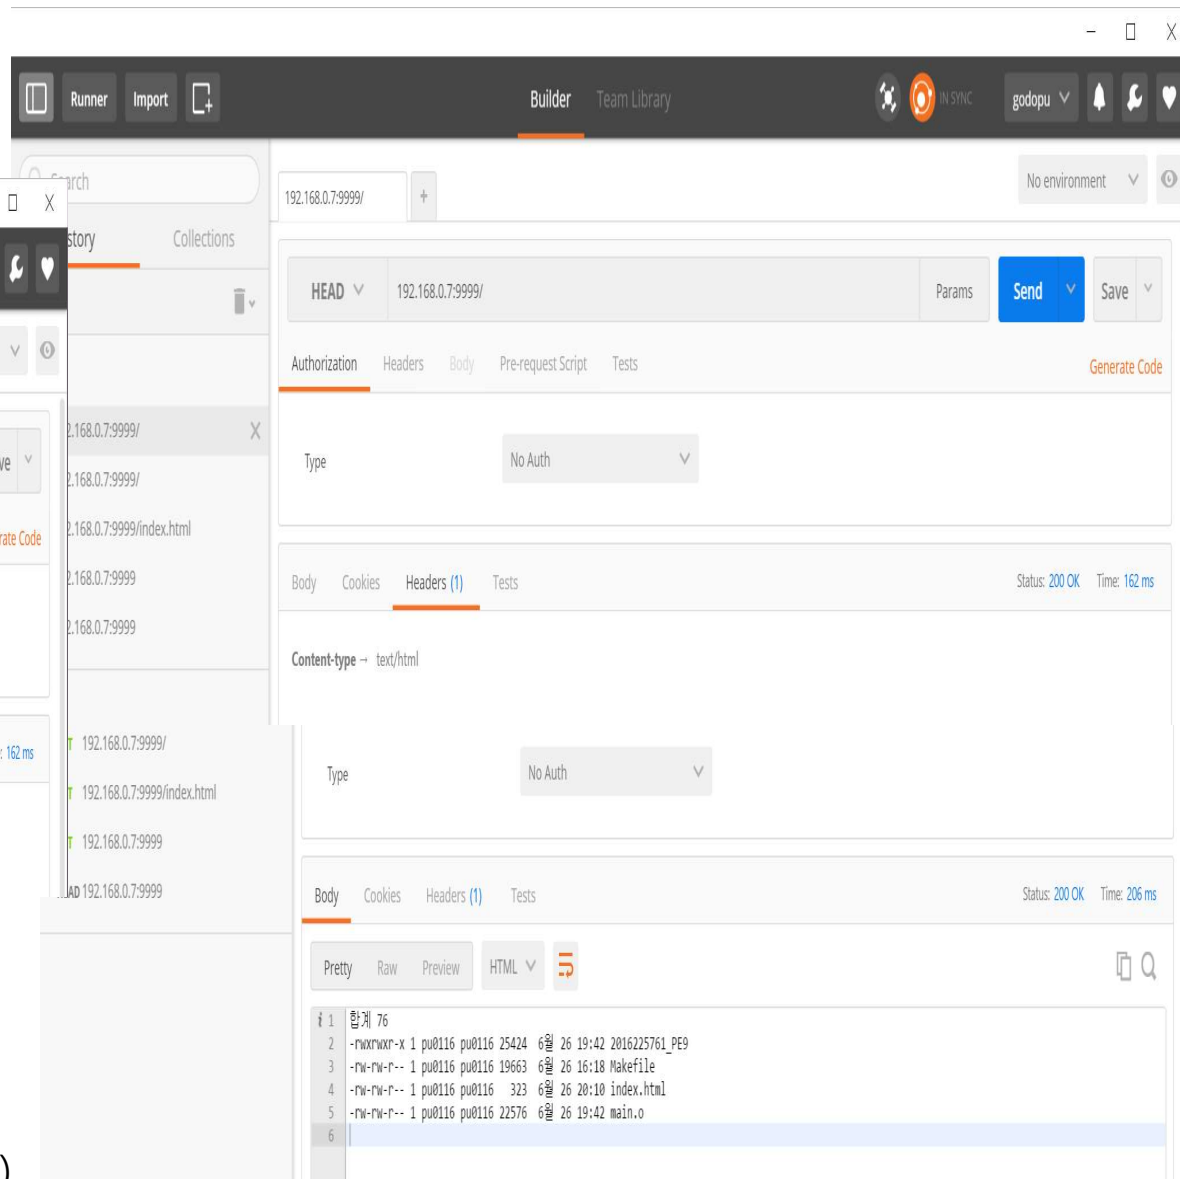

Index.html파일에 대한 GET 과 HEAD 메소드 비교

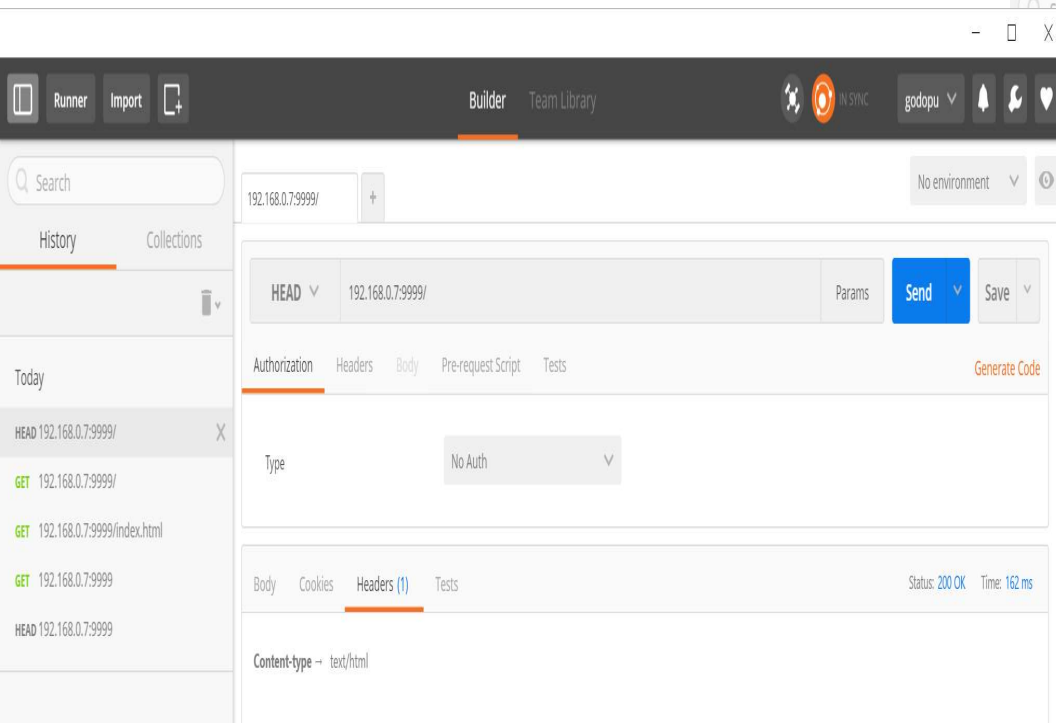

디렉터리에 대한 GET과 HEAD 메소드 비교
(HEAD의 경우 디렉터리가 인자로 들어오면 임의로
Index.html을 찾도록 하여 없으면 404를 전달합니다)

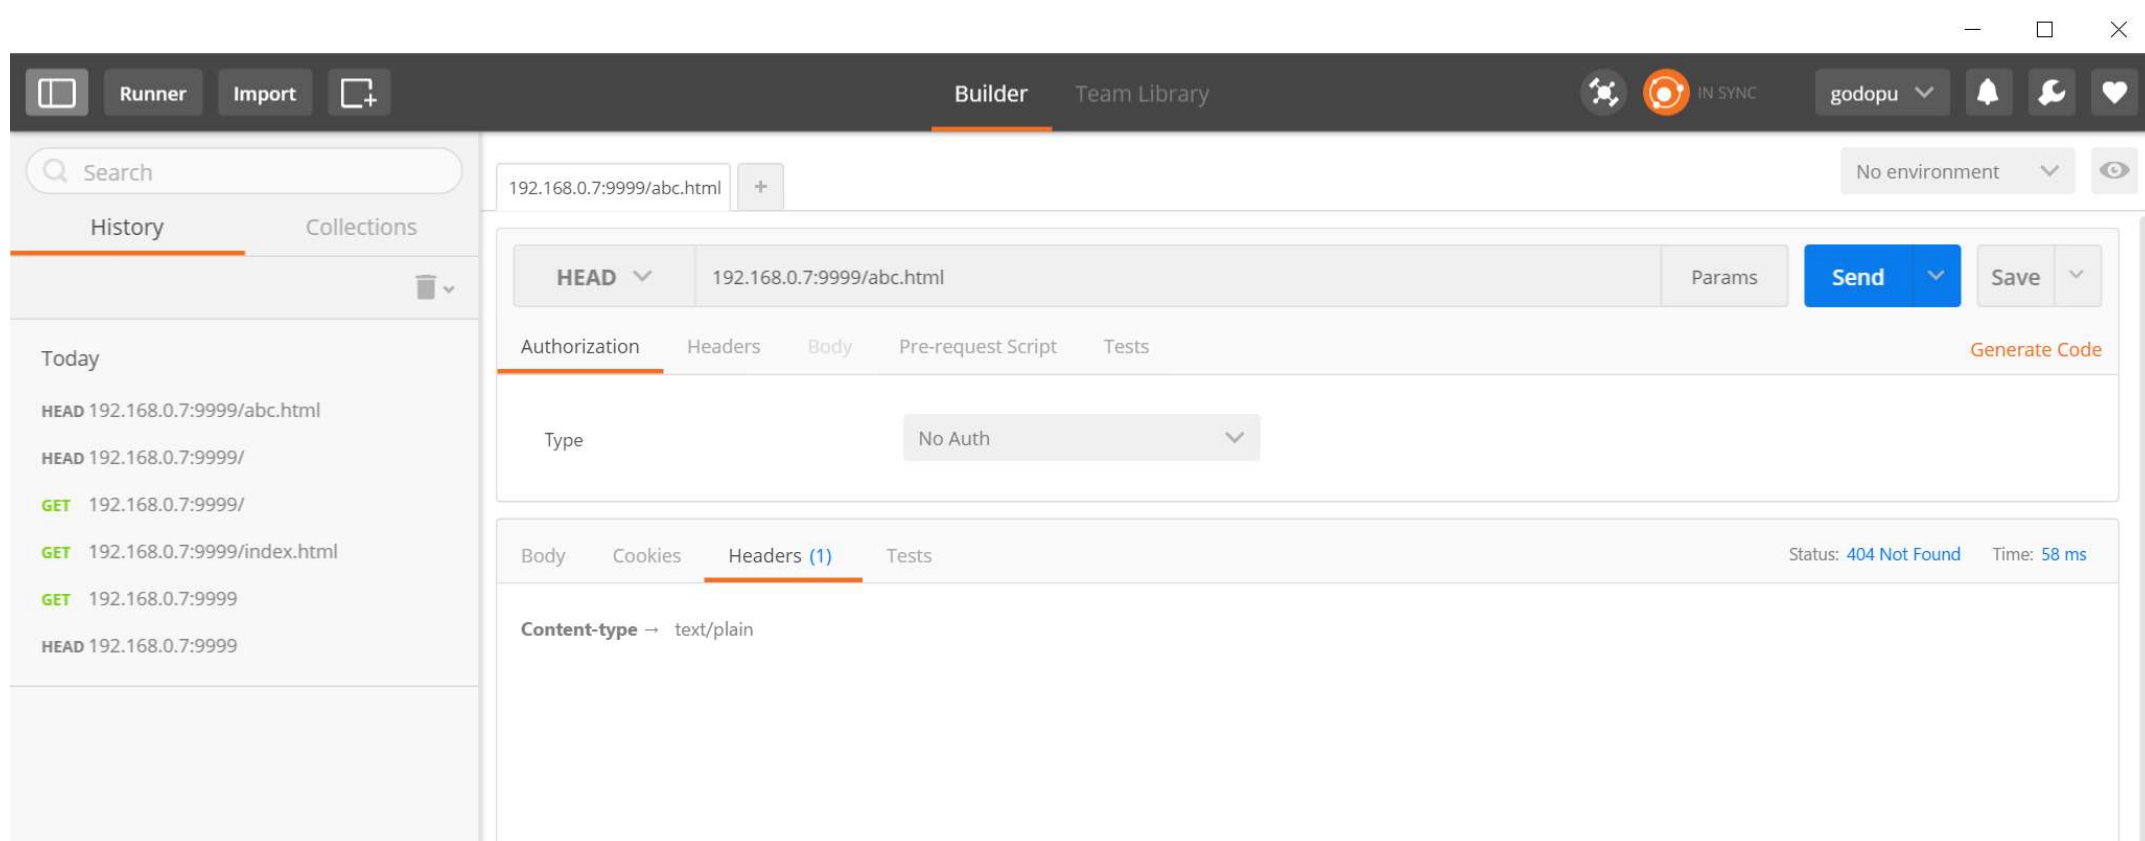

파일이 없으면 GET과 같이 404를 전달합니다.