

INFORMATION ON RISKS AND REGULATIONS **BEHAVIOURAL GUIDELINES FOR EXTERNAL PERSONNEL**

Single Document for the Assessment of Interference Risks Cooperation
and coordination for the implementation of prevention and protection measures
pursuant to art. 26, paragraph 3, of Legislative Decree 30 April 2008 n. 81, as amended by Legislative Decree 106/2009

entrusting of works, services and supplies to contractors or self-
employed workers within the company

Implementation of Article 1 of Law 3 August 2007, n. 123,
regarding the protection of health and safety in the workplace

Companies

METALLURGICA BRESCIANA SpA

Metallurgica Bresciana Spa

OPTOTEC SpA



Production unit

Via Guglielmo Marconi, 31 - 25020 Dello (BS)

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 2 of 17

PREMISE

This information notice, in compliance with the obligations set forth in art. 26 of Legislative Decree 81/2008, contains the information and defines the behavioral rules that all companies or external self-employed workers who, in various capacities, access the production plant of Metallurgica Bresciana SpA and OPTOTEC SpA located in Via Guglielmo Marconi, 31 in the municipality of Dello (BS), must adhere to, for the purpose of carrying out work, services or supplies, in order to guarantee the protection of the environment and the health and safety of people.

SCOPE OF APPLICATION

This information applies to all activities carried out at the plant located in Via Guglielmo Marconi, 31 in the municipality of Dello (BS) by suppliers, contractors, consultants and other personnel not part of Metallurgica Bresciana SpA or Optotec SpA, such as hired or temporary personnel. It also applies to visitors.

With regard to procurement or work contracts, this document also constitutes a part of the joint Risk Assessment Document, in compliance with the provisions of art. 26 of Legislative Decree 81/2008.

METHOD OF DISSEMINATION TO INTERESTED PARTIES

The information herein will be distributed by hand delivery, e-mail, or registered mail to the management of the companies whose employees will be working within the Metallurgica Bresciana SpA and Optotec SpA plants.

The management of the companies involved, in turn, will have to inform their staff in order to ensure understanding, compliance and implementation of these rules of conduct.

COORDINATION MEETING

Where relevant, before entering the plant, companies carrying out contract work must agree on a preliminary meeting in the company in order to provide the necessary information to the management of Metallurgica Bresciana SpA and/or Optotec SpA and at the same time acquire the information to ensure the coordination of the work in safety.

This information may be transmitted using the DUVRI "Joint Interference Risk Assessment Document" form duly completed and signed in the relevant sections.

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 3 of 17

DESCRIPTION OF THE CONTEXT

Metallurgica Bresciana SpA is an industrial company in the rubber-plastic sector that deals with the production of special electrical and fibre optic cables based on the specific requests of its customers.

The processes are carried out through several successive phases using the machinery and production lines present at the production unit in Via Guglielmo Marconi, 31 in the Municipality of Dello, made up of several warehouses/factory buildings built in different eras.

The Metallurgica Bresciana plant also includes the headquarters of the partner company Optotec SpA which has a production department and a shed with a tensile structure used as a warehouse in Dello.

The total surface area occupied by the company is approximately 62,000 m², part of which is not yet built on and intended for future expansion.


Shed 1 includes the office and service building, the cable production department, the irradiation department (Dynamitron), and the production areas granted for use to the partner company Optotec SpA

Shed 2 includes the raw materials warehouse, the cable production department, the laboratories, the service rooms and the changing rooms.

Shed 3 includes the raw materials warehouse, the cable production department, the semi-finished product treatment cells, the raw material storage cells, the logistics and production offices.

Shed 4 includes the fibre optic department with the insulation/sheathing, colouring and stranding lines for mainly fibre optic cables, the fibre optic warehouse, the laboratory, the fibre colouring department, the electrical cabin, the service rooms and the changing rooms.

Shed 5 is a tensile structure used as a warehouse for the exclusive use of the partner company Optotec SpA

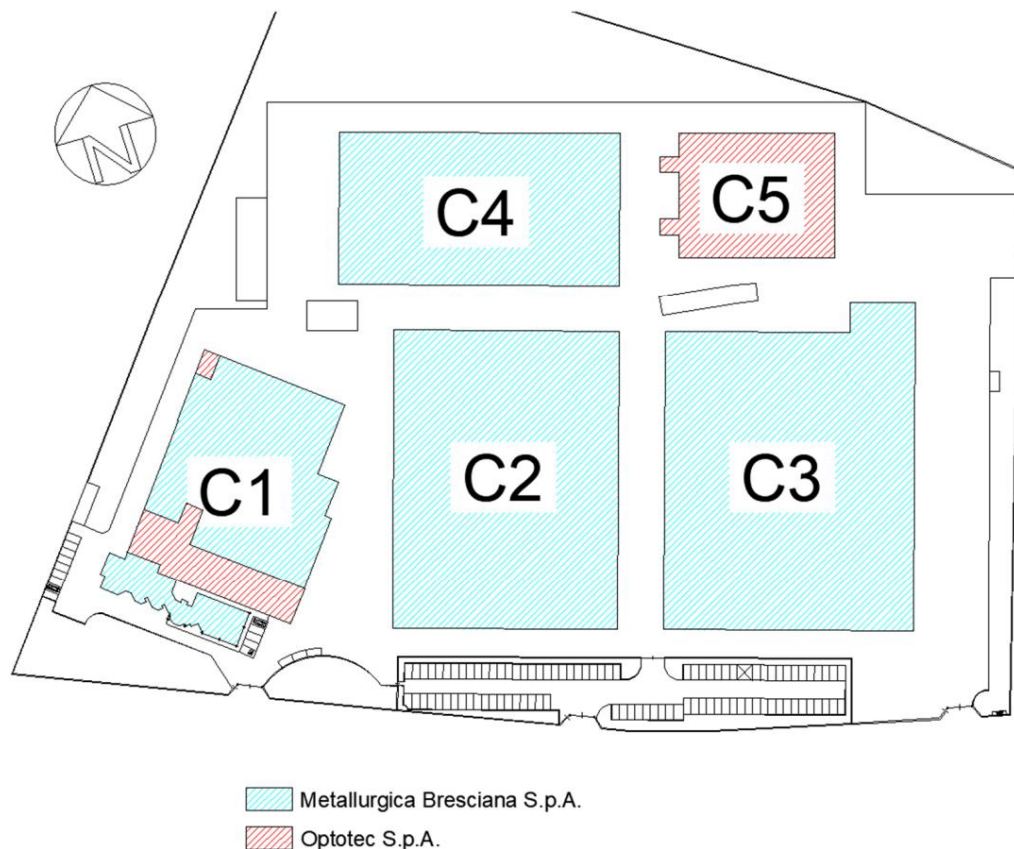

**General plan of the production unit with identification of the 5 different factory buildings and the areas used by the companies
Metallurgica Bresciana and Optotec**


INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 4 of 17

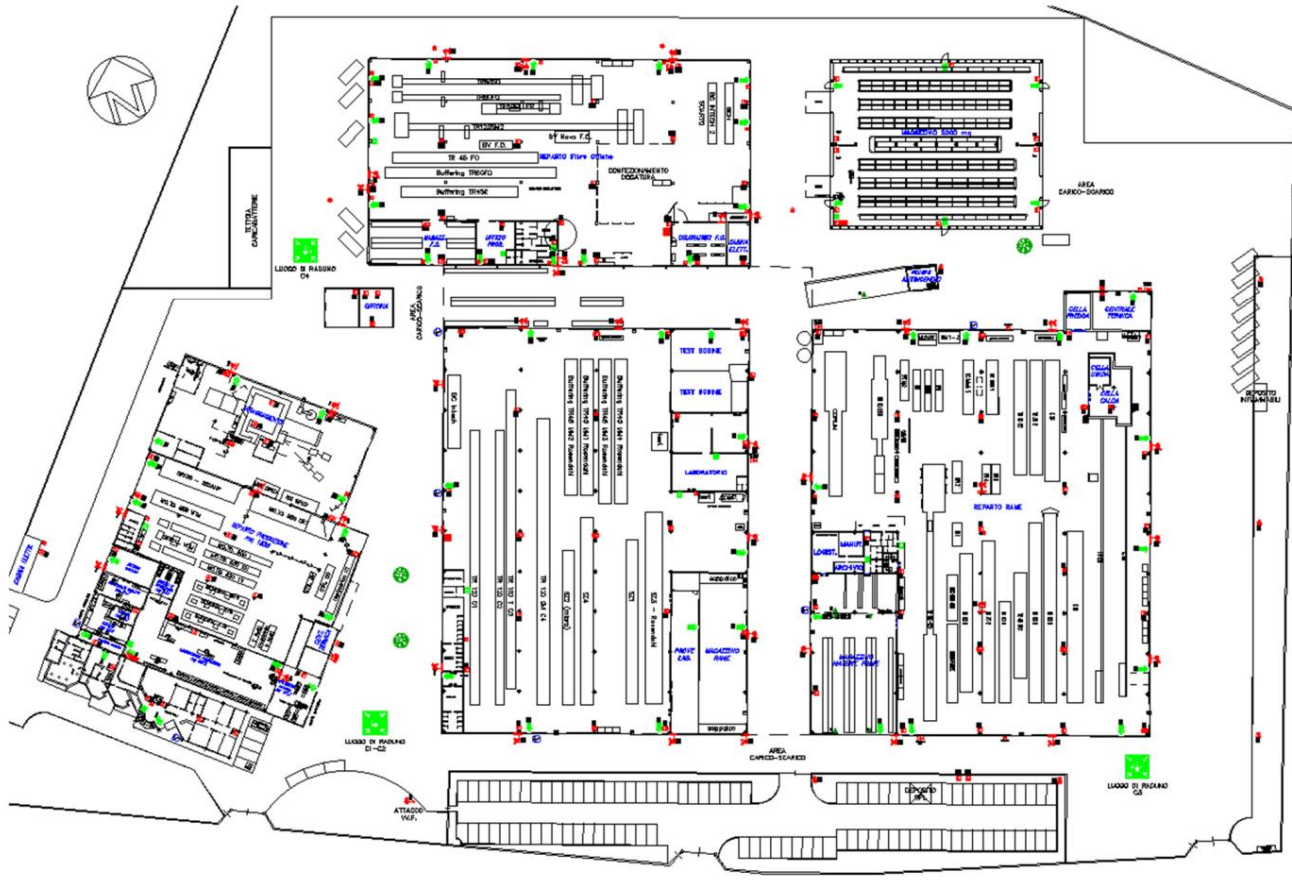

General plan of the production unit with plant layout

MAIN SYSTEMS/MACHINERY PRESENT

- Extrusion lines; • Stranding machines; • Screening machines, winding machines; • Spiraling machines, taping machines; • Tape and/or wire armouring machines; • Re-winding and packaging lines; • Dynamytron cable irradiation system;
- Optical fibre colouring; • Workshop machine tools for maintenance; • Electric forklifts, jib cranes for handling; • Technical-administrative offices; • Technical laboratories; • Electrical cabin, Boiler room, Water system, Refrigerated cell, Air compressors.

WORKING PHASES OF THE TECHNOLOGICAL CYCLE

- Design of electrical cables according to specific requests from the client; • Procurement of raw materials consisting mainly of:
 - o metal conductive wires of various types and thicknesses;
 - o textile fibres;
 - o optical fibre wires;
 - o various types of plastic materials in granules for extrusion;

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 5 of 17

o inks, solvents for markers; o
accessory materials, tapes etc. •

Stranding/coiling/stranding of elementary wires; •

Extrusion for the creation of insulation/sheath/tube of metal and fibre optic conductors; • Colouring of
optical fibres; • Stranding,

Spiralling, Shielding, Taping; • Possible irradiation

treatment of the cable covering with electron beam using a Dynamitron system; • Product quality tests and controls;

• Rewinding; •

Packaging and wrapping of finished product

reels; • Shipping.

RAW MATERIALS AND PRODUCTS USED

• Plastic granules, dyes and additives for insulation and sheathing • Copper and
other conductive wires • Optical fibres •

Metal armouring

wires and tapes • Tapes, textile fibres

and other accessory materials • Inks and solvents

for colouring and printing

SHIFTS, WORKING HOURS

The production lines work on three shifts including the night shift depending on production needs: from 6:00 to 14:00,
from 14:00 to 22:00, from 22:00 to 6:00.

Offices and warehouses work "day shifts" on a single day shift from 8:00 to 12:00 and from 13:00 to 17:00.

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 6 of 17

MAIN RISKS PRESENT IN THE COMPANY AND MEASURES TO ADOPT

TYPES OF EXISTING RISKS	SOURCE OF RISKS IDENTIFIED	PREVENTION AND PROTECTION MEASURES TO BE IMPLEMENTED
Collisions, Investments 	Possible risk arising from the circulation of means of transport, operating machines and vehicles manoeuvring both inside the production departments and outside in the company yards	External personnel must access the intervention sites using the routes established with the Management, wearing high visibility vests of at least "class 2".  The access routes, loading-unloading areas and temporary storage areas for materials and equipment used by the Contractor must be agreed in advance with Management. Report risk areas and limit access to unauthorized personnel. 
Slips and falls on level 	Possible risk arising from possible spillage of liquids such as water or oil on the floor. External personnel must access the intervention sites using the routes established with the Management wearing safety footwear in at least "S1P" version.	 The access routes, loading-unloading areas and temporary storage areas for materials and equipment used by the Contractor must be agreed in advance with Management. All personnel must make every effort to keep corridors, passageways and transit routes clear of objects and materials. Any clutter of materials or accidental spills of liquids on the flooring of passageways and transit routes must be reported to the Management for action. promptly removed.
Falls from a height 	Risk of falling from heights, from ladders and steps, from raised mezzanines	 It is strictly forbidden to tamper with the existing safety devices and protections placed to protect dangerous elements. It is forbidden to climb on parts of the systems reaching dangerous heights in points not protected from falls.  Any work at height and access to roofs must be carried out using adequate safety access systems and adequate protection against falls from heights. 

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 7 of 17

TYPES OF EXISTING RISKS	SOURCE OF RISKS IDENTIFIED	PREVENTION AND PROTECTION MEASURES TO BE IMPLEMENTED
Fallen inside openings, tunnels, pits 	Possible risk of tripping and falling into pits.	External personnel must access the intervention sites using the routes established with the Management, wearing footwear with non-slip soles of at least "S1P" design.  It is forbidden to tamper with or remove existing safety devices and protections placed to protect dangerous elements. 
Burns 	Accidental contact with high temperature elements or parts.	External personnel are not authorized to carry out operations using machinery and equipment present in the plant.  External personnel are also required not to tamper with existing safety devices and protections placed to protect dangerous organs or elements.  Any interventions to be carried out in the vicinity of machinery and/or in the vicinity of risky processes must be carried out in such a way as to guarantee adequate safety conditions (including by suspending or segregating the processes carried out in the affected area), in collaboration with the Company Management. Avoid contact with objects or equipment subject to high operating temperatures. Mark the prone points and limit access to the risk areas to non-authorized persons.

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 8 of 17

TYPES OF EXISTING RISKS	SOURCE OF RISKS IDENTIFIED	PREVENTION AND PROTECTION MEASURES TO BE IMPLEMENTED
Entrapments, amputations, shears, crushings	Possible risk generated by the processes and moving parts of the machinery in operation at the plant.	External personnel are not authorized to carry out operations using machinery and equipment present in the plant without authorization.  Personnel are also required not to tamper with existing safety devices and protections placed to protect dangerous organs or elements.  Any interventions to be carried out in the vicinity of machinery and/or in the vicinity of risky processes must be carried out in such a way as to guarantee adequate safety conditions (including by suspending or segregating the processes carried out in the affected area), in collaboration with the Company Management.   Make sure you have turned off the power sources on the systems and equipment you are working on, especially for installations in progress and for maintenance. Discharge all accumulated power sources and implement a "lock and report" procedure to avoid untimely restarts of the system you are working on.
Projections of materials, fragments or particles	Possible risk generated by the processes and machinery present within the plant.	 External personnel are also required not to tamper with existing safety devices and protections placed to protect dangerous organs or elements.  Any interventions to be carried out in the vicinity of machinery and/or in the vicinity of risky processes must be carried out in such a way as to guarantee adequate safety conditions (including by suspending or segregating the processes carried out in the affected area), in collaboration with the Company Management.

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 9 of 17

TYPES OF EXISTING RISKS	SOURCE OF RISKS IDENTIFIED	PREVENTION AND PROTECTION MEASURES TO BE IMPLEMENTED
Falling objects or Possible falling objects and risk of suspended loads. movements. phases. 	The presence of external personnel is not permitted in the areas affected by materials. Falling during material movements and loading-unloading	 Movements must take place in conditions of maximum safety without interfering with other work in progress. Movements must be adequately signalled and existing personnel must be alerted by means of appropriate acoustic signals.
Fire/explosion Risk of fire 	due to the presence of In the workplace, smoking, the use of open flames, the presence of products that produce sparks, the use of combustible and flammable materials and the presence of ignition sources in the production departments, such as laser welding, is prohibited.	 The introduction of flammable substances or materials into the plant without authorization is prohibited. The company has fire extinguishing equipment and a team of workers assigned to the fire service to ensure adequate extinguishing interventions in the event of a fire.
Noise 	Risk of hearing loss due to possible exposure to noise During processing, within the production departments it is advisable to use ear defenders such as headphones, sound sources with earplugs or customized inserts. equivalent levels LAeq: The use of ear defenders is mandatory in the event of noise levels above 80 dB(A) in the Dynamitron department as it is an area at "hearing risk" in the production departments.	 In the event that external companies introduce noisy machinery and equipment, they must inform the management of Metallurgica Bresciana SpA within the scope of the safety plans/DUVRI regarding the expected noise levels to which both external workers and internal personnel may be exposed in order to adopt the most appropriate measures.
Mechanical risk from pressure accumulation, bursting	From compressors, compressed air tanks, pressure vessels, cylinders, pumps and hydraulic power units	External personnel are not authorized to carry out operations using machinery and equipment present in the plant without authorization.  External personnel are also required not to tamper with existing safety devices and protections placed to protect dangerous organs or elements.  Any interventions to be carried out in the vicinity of machinery and/or in the vicinity of risky processes must be carried out in such a way as to guarantee adequate safety conditions (including by suspending or segregating the processes carried out in the affected area), in collaboration with the Company Management.

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 10 of 17

TYPES OF EXISTING RISKS	SOURCE OF RISKS IDENTIFIED	PREVENTION AND PROTECTION MEASURES TO BE IMPLEMENTED
Electrical risk (electrocution, electric arc) 	From electrical panels, electrical equipment of equipment and machinery, electrical cabins and workshops	External personnel are not authorized to carry out operations using machinery and equipment present in the plant without authorization.  External personnel are required not to tamper with existing safety devices and protections placed to protect dangerous parts or elements of electrical panels, machines and systems.  Any work on electrical panels and systems must be carried out by specialized personnel adequately qualified to carry out electrical work. Make changes and repairs to electrical systems only when they are not live, adopting all the precautions required by the current legislation on safety of electrical work. Any work under voltage must be carried out by specialized personnel trained in application of the technical standard CEI 11-27, and in application of the procedures provided for such work, subject to authorization to be requested from Management.   Agree with the company management the procedure to be implemented for sectioning and securing the part of the electrical system affected by the works. Make sure that the electrical voltage has been removed from the systems and equipment on which you are working, especially for installations in progress and for maintenance. Make sure that the "zero energy" status is reached with the help of the wiring diagram and the tester, whose efficiency must have been tested beforehand (e.g. on an electrical socket in service). Implement a block and signal procedure in order to cut off the energy sources and avoid untimely restarts of the system on which you are working.
Chemical risk from gases, fumes, mists, dust	Fumes from the decomposition of exposure to chemical agents present in the company vapors, dust and compounds and the risk is to be considered irrelevant for health. Any maintenance work on machinery and systems of volatile organic compounds from the use of plastic materials, inks and solvents. In this case, take appropriate precautions and evaluate from time to time the use of appropriate personal protective equipment (protective clothing, gloves, respiratory masks)	For the personnel of external companies, there is no significant exposure to chemical agents present in the company vapors, dust and compounds and the risk is to be considered irrelevant for health. Any maintenance work on machinery and systems of volatile organic compounds from the use of plastic materials, inks and solvents. In this case, take appropriate precautions and evaluate from time to time the use of appropriate personal protective equipment (protective clothing, gloves, respiratory masks) 

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL			
Metallurgica Bresciana - Optotec	Of the (BS)	Rev. 06/12/2024	Page 11 of 17

TYPES OF EXISTING RISKS	SOURCE OF RISKS IDENTIFIED	PREVENTION AND PROTECTION MEASURES TO BE IMPLEMENTED
Ionizing radiation Specific risk exists 	External personnel are not authorized to access the facility at the Dynamitron facility without authorization from the facility manager.	 External personnel accessing potentially dangerous areas of the plant must be registered and provided with a dosimeter by the plant manager. External personnel are required not to tamper with existing safety devices and protections placed to protect dangerous parts or elements of electrical panels, machines and systems, detectors and safety devices. 

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 12 of 17

OBLIGATIONS OF EXTERNAL SUBJECTS AND RULES OF CONDUCT

Access to production areas, unless otherwise established, must take place together with a companion from Metallurgica Bresciana SpA or OPTOTEC SpA

Staying inside the establishment must take place in strict compliance with these rules. behavioral.

Please note that the correct behavior of your staff in compliance with the established routes, signs and work actions assigned in collaboration with our internal referents, allows us to minimize the risks and possible consequences regarding the risks indicated.

PERSONAL PROTECTIVE EQUIPMENT

External personnel must access the intervention sites using the routes established with the Management.

To access the production departments, all external personnel must wear at least: -

Ankle-length trousers, - Safety footwear
in S1P or higher version (according to EN ISO 20345), - Class 2 high visibility vest
(according to EN ISO 20471).



Furthermore, in case of access to particularly noisy departments (Dynamitron bunker in operation) it may also be necessary to wear adequate hearing protection devices (ear defenders or earplugs).



Any maintenance interventions on machinery, systems or particular processes could expose operators to other risks for which it is mandatory to take appropriate precautions by evaluating from time to time, within the respective safety plans, the use of the most appropriate personal protective equipment in reference to the identified risks (clothing, gloves, respiratory masks, fall arrest harnesses, etc.)

HOW TO ACCESS THE PLANT Interventions by

your assigned personnel will be carried out by appointment set well in advance (at least 2 working days) with our purchasing office, which will inform the managers of the departments in which you will be working of your presence.

The work must be carried out on working days between 08:00 and 18:00.

Your staff will present themselves at the guest entrance where they will have to communicate their personal details by showing an identity document and the individual identification card provided by your company.

Your staff must wait at the guest entrance to be received by our security representative or, in any case, by the representative responsible for cooperation and coordination between your and our activities in order to avoid possible interference.

It will not be possible to allow access to our establishment by personnel without an identification card provided by you. The card must be worn and kept visible for the entire duration of your presence at our establishment and in any case you will be held solely responsible for any sanctions that may be imposed for failure to display the card by your personnel.

Your staff must examine the plant plan indicating the location of the systems and the relative location to which they must strictly adhere, avoiding exposure to risks for which they have not been informed and trained.

It is the responsibility of your staff to obtain from our safety representative in charge of cooperation and coordination, all information on the state of safety in the locations and on any particular risk situations and related protection in place.

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 13 of 17

Where applicable, upon access to the establishment, your staff will have communicated or deposited at the reception desk the list of equipment and substances possibly brought into the establishment, also for the purpose of informing us of the risks deriving from your activities and the related correct protection methods to be adopted.

COOPERATION AND COORDINATION

In addition to your own responsibility regarding the risks of your business, it will be your duty and responsibility to inform your staff of the existence and nature of the risks existing in the work environments in which they are called upon to perform their work and to ensure that they receive the necessary protection.

If your work requires the temporary removal or deactivation of safety devices supplied to the systems covered by the contract, it will be the responsibility of your personnel to implement equally effective provisional measures and works, taking care to restore the protections that have been removed or deactivated at the end of the works, upon suspension of activity and in any case before abandoning the system.

It will be your duty to immediately report to our referents any deficiencies found in order to allow us to eliminate them before continuing your activity. It will also be your duty to immediately report any accident or damage resulting from your work by providing us with all the information useful for the protection of health and safety.

Should your personnel, during the performance of their activities, encounter anomalous, dangerous or even dubious situations for the purposes of risk prevention, they must immediately notify our safety representative, refraining from operating in conditions of risk to their own or others' integrity and working, within the limits of their competence, to eliminate or reduce the deficiencies and dangers detected.

YOUR OBLIGATIONS

The contractor's personnel must operate with equipment in good condition and in compliance with safety standards, and must not use equipment owned by our Company without prior written authorization issued by our safety representative (loan for use).

The contractor's personnel shall not use energy sources other than those provided by law and made available within the premises pertaining to the systems undergoing repair and/or maintenance and possibly communicated in the DUVRI.

The personnel sent by you to fulfill the provisions of the contract will operate within our Company as your employees and therefore it will be the responsibility of your organization to independently ensure the provision of adequate materials and equipment, the correct information-training and training where necessary, the control of correct operations as well as the management of first aid and evacuation in case of need, as required by current legislation on the matter.

Like the start, the end of the works and all possible suspensions of your activities (in terms of cessation and resumption) must be promptly communicated to our safety representative, specifying the progress of the works and prevention methods implemented to ensure the protection of people and plant activities.

At the end of the activity, our safety representative must also be informed (in writing) of the work carried out and all observations deemed useful for the purposes of prevention and protection of people.

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 14 of 17

SPECIFIC DETAILED RULES APPLICABLE TO SOME PROFESSIONAL FIGURES

In addition to the general behavioral rules mentioned above, valid for any professional figure who may have access to the establishment, each figure must follow the behavioral instructions specific areas of expertise as described below:

ELECTRICIAN, PLUMBERS, BLACKSMITHS, MAINTENANCE WORKERS

In addition to the general rules, the following specific rules must be respected:

- During the intervention, the machines and systems involved are under the responsibility of the external technicians, who will have to operate in compliance with safety regulations in order to protect their safety and that of the operators of Metallurgica Bresciana SpA and Optotec SpA as well as not to damage the other systems present.
- At the end of the intervention, the operators must verify and ensure that the safety conditions of the machine or system have been restored. Under no circumstances should a machine-system be put into operation that is not in safe conditions or in any case does not comply with the law.

CONSTRUCTION COMPANIES, PAINTERS

In addition to the general rules, the following specific rules must be respected:

- Adopt what is required by current legislation, to prevent the risk of falling from a height, and in any case always in the case where work is carried out at a height greater than 2 m.
- If the works fall within the scope of Title IV of Legislative Decree 81/08 regarding temporary or mobile construction sites, the work phases must be carried out in accordance with what is written in the Operational Safety Plan.
 - Before carrying out excavations or demolitions, agree on the intervention with the Management, in order to guarantee the impossibility of cutting utilities such as gas or electricity lines.

OIL, FUELS SUPPLIERS

In addition to the general rules, the following specific rules and those for drivers must be respected:

- Wear gloves, long-sleeved work clothes, safety shoes and use them until the end of the work phase; • Check that the tanker nozzle is correctly inserted into the tank, in order to avoid spills outside the tank; • Check the tank fill level; • In the event of a fuel spill, notify management immediately; • Wash your hands at the end of operations; • Check the operations for the entire time necessary to load the tank without ever leaving; • Once refueling is complete, the employee must go to the weighing/acceptance office to collect a copy of the relevant documentation; • In the event of any suspected dangerous situation of any nature, the employee must immediately suspend all activity and contact the staff of Metallurgica Bresciana SpA or Optotec SpA for instructions.

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL			
Metallurgica Bresciana - Optotec	Of the (BS)	Rev. 06/12/2024	Page 15 of 17

DRIVERS

- Access the plant only at walking pace and keep the engine running only for the strictly necessary period; do not use horns, except in case of emergency. • Upon arrival, ring the intercom and agree with the relevant offices the times and methods of access to the plant, walking to the offices to deliver / receive the administrative documentation for loading / unloading.
- Once you have received instructions from the personnel in charge, carry out loading/unloading in accordance with the follows:
 - o approaching the loading and unloading areas must always be carried out paying maximum attention to the possible presence of personnel on the ground who may suffer injuries as a result of accidental contact or impacts and taking care not to hinder other manoeuvring vehicles; o for loading and unloading operations it is mandatory to follow any instructions from the personnel in charge (warehouse manager in charge) and follow all phases of the operations; o During the wait always remain in the driver's cabin or, alternatively, in our acceptance/shipping office and, at most, only for the time necessary to check the load, only in the areas relating to loading/unloading operations; it is forbidden to move outside these areas. o in the event that the driver must go above the vehicle, he must implement all protection measures aimed at avoiding accidental falls (raise and secure the barrier of the upper walkway, anchor with suitable safety belts to any upper hooks, etc.)
 - o Once unloading or loading is complete, drivers of vehicles leaving the plant must go to the acceptance/shipping office to collect a copy of the relevant documentation. • Any other operations, which are not included in the above, must obtain the preliminary authorization of the plant manager.
- For any situation of suspected danger of any nature, the transporter must immediately suspend all activity and contact the staff of Metallurgica Bresciana SpA or Optotec SpA for instructions.

ACCESS TO ROOFS, COVERINGS, ELEVATED PLACES • In the

- event of accessing elevated places, the personnel in charge will use suitable fixed or retractable ladders, stepladders, elevating work platforms to carry out work at height in safety, walking on protected walkways near the roofs of the warehouses.
- The personnel in charge must be trained and instructed in carrying out work at height, to the use of personal protective equipment and devices to prevent falls.
 - The personnel in charge must have adequate equipment to enable them to use both hands to support themselves on the ladders and must refrain from deviating from the prescribed routes shown to them by our safety representative.

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 16 of 17

SPECIFIC RULES APPLICABLE IN CASE OF EMERGENCY-EVACUATION

In case of need, public emergency services can be contacted via telephone numbers shown on the plans displayed in the offices and departments, it being understood that in the event of any emergency situation or serious and immediate danger, our safety representative or the company management/reception must be immediately informed, in order to guarantee adequate and efficient coordination of the rescue and/or emergency management phases.

At the Metallurgica Bresciana SpA and Optotec SpA plants, a trained and instructed team of emergency management personnel is constantly present. The main tasks of personnel not directly involved in the emergency, including any visitors or personnel belonging to external companies, are: • In the event of communication of the emergency/evacuation, they follow the instructions

of the Department Heads or the Emergency Manager for the execution of the operations that will be ordered. Those who are not at their workplace must immediately go to the pre-established assembly point indicated in the company plans.

- They interrupt any internal or external telephone communication that is not related to the current emergency.
- They carry out the rapid and safe stop of systems, equipment, and work in progress. • They go quickly and in an orderly fashion, without rushing, to the meeting place planned for the inspection of the presences using the nearest emergency exit route.
- Once the presence check has been carried out at the meeting place, they remain at the disposal of the Manager of the Emergency.
- They do not return to the workplace on their own initiative before the Emergency Manager has announced that the alarm is over.

The evacuation must absolutely not turn into a chaotic and disorderly escape.

Running is prohibited inside the establishment.

IDENTIFICATION OF INTERFERENCE RISKS AND MEASURES TO ADOPT

The distribution of this document ensures the necessary information to external personnel who need to access the company regarding:

- The state of the workplace, the activity carried out, the machines used; • The identification of the dangers present; • The measures adopted by company management and those that external personnel must adopt in order to operate safely within the site.

This document therefore reports the dangers present in the company considering the presence of the plants and workers of Metallurgica Bresciana SpA and Optotec SpA without considering the interference caused by any other contractors or third parties who could operate at the plant.

The interferences that may arise due to the presence of multiple companies and the prevention and protection measures to be adopted in order to eliminate them will be analyzed in the DUVRI Single Risk Assessment Document, compiled jointly in the event of assignment of works, services or supplies, if deemed appropriate or mandatory pursuant to art. 26 Legislative Decree 81/2008.

INFORMATION ON RISKS AND RULES OF CONDUCT FOR EXTERNAL PERSONNEL

Metallurgica Bresciana - Optotec

Of the (BS)

Rev. 06/12/2024

Page 17 of 17

RESPONSIBILITY

Each company department is responsible for:

- distribute this information to its personnel in charge of going for any reason to the Metallurgica Bresciana SpA and Optotec SpA plants located in Dello (BS) in Via Guglielmo Marconi, 31;
- inform your staff about the content of this instruction; • provide the necessary personal protective equipment for each employee who will be required to go to the Metallurgica Bresciana SpA and Optotec SpA plants; • require that said staff apply the measures contained in this instruction and in the remaining cooperation and coordination documentation;
- provide their staff with a special identification card with a passport photo, personal details and identification data of the employer; • fill in the DUVRI Joint Risk Assessment Document in the parts of their competence and return it signed to the contact person of the client Metallurgica Bresciana SpA or Optotec SpA

Each contractor or self-employed worker who goes to the Metallurgica Bresciana SpA and Optotec SpA plants is responsible for strictly adhering to the contractually established agreements as well as to the rules reported in this instruction and in the cooperation and coordination of works documentation (DUVRI), as far as their competence is concerned.

MINUTES OF ACKNOWLEDGEMENT

In relation to the assignment received from Metallurgica Bresciana SpA or Optotec SpA, the undersigned

..... as Owner/Legal Representative of the

Company/Firm carrying out the activity Of:

Having acknowledged the content of this information, you undertake to send a copy to all your personnel who will be responsible for carrying out work within the Metallurgica Bresciana SpA and Optotec SpA plants and that this information will be the subject of adequate information and training for the same personnel in charge in compliance with articles 36 and 37 of Legislative Decree 81/2008.

Place: date:

Stamp and signature Contractor
or Self-employed Worker

.....