

Monitoring of W32Time

Creating an item, which indicates what information we're looking for

Item

ItemTags 3Preprocessing

Name

! State of service "W32Time" (Temps Windows)

Type

Zabbix agent

Key

service.info["W32Time",state]

Select

Type of information

Numeric (unsigned)

Host interface

192.168.175.101:10050

Units

Update interval

10s

Custom intervals

TypeIntervalPeriod

Flexible

Scheduling

50s

1-7,00:00-24:00

Remove

Add

Timeout

Global

Override

3s

Timeouts

History

Do not store

Store up to

31d

Trends

Do not store

Store up to

365d

Value mapping

type here to search

Select

Populates host inventory field

-None-

Description

Enabled

☒

Latest data

Update

Clone

Execute now

Test

Clear history and trends

Delete

Cancel

Here we can test our item, to see if it gives us the correct output and if there's no issues with the item

Test item

Get value from host☒

Host address

192.168.175.101

Port

10050

Test with

Server

Proxy

Value

0

Time

now

Not supported

Error

error text

Previous value

Prev. time

End of line sequence

LF

CRLF

Result

Result converted to Numeric (unsigned)


0

Get value and test

Cancel

Creating a trigger, which will inform us if something is wrong.

This expression will check the minimal value it receives of the last 3 checks, and if it's not equals 0, then Zabbix will create a problem on the dashboard (i.e. if 2 values are 6, but the 3rd one is 0 - the trigger won't react, which relieves some load on the server if the downtime is low enough and the problem resolves itself)

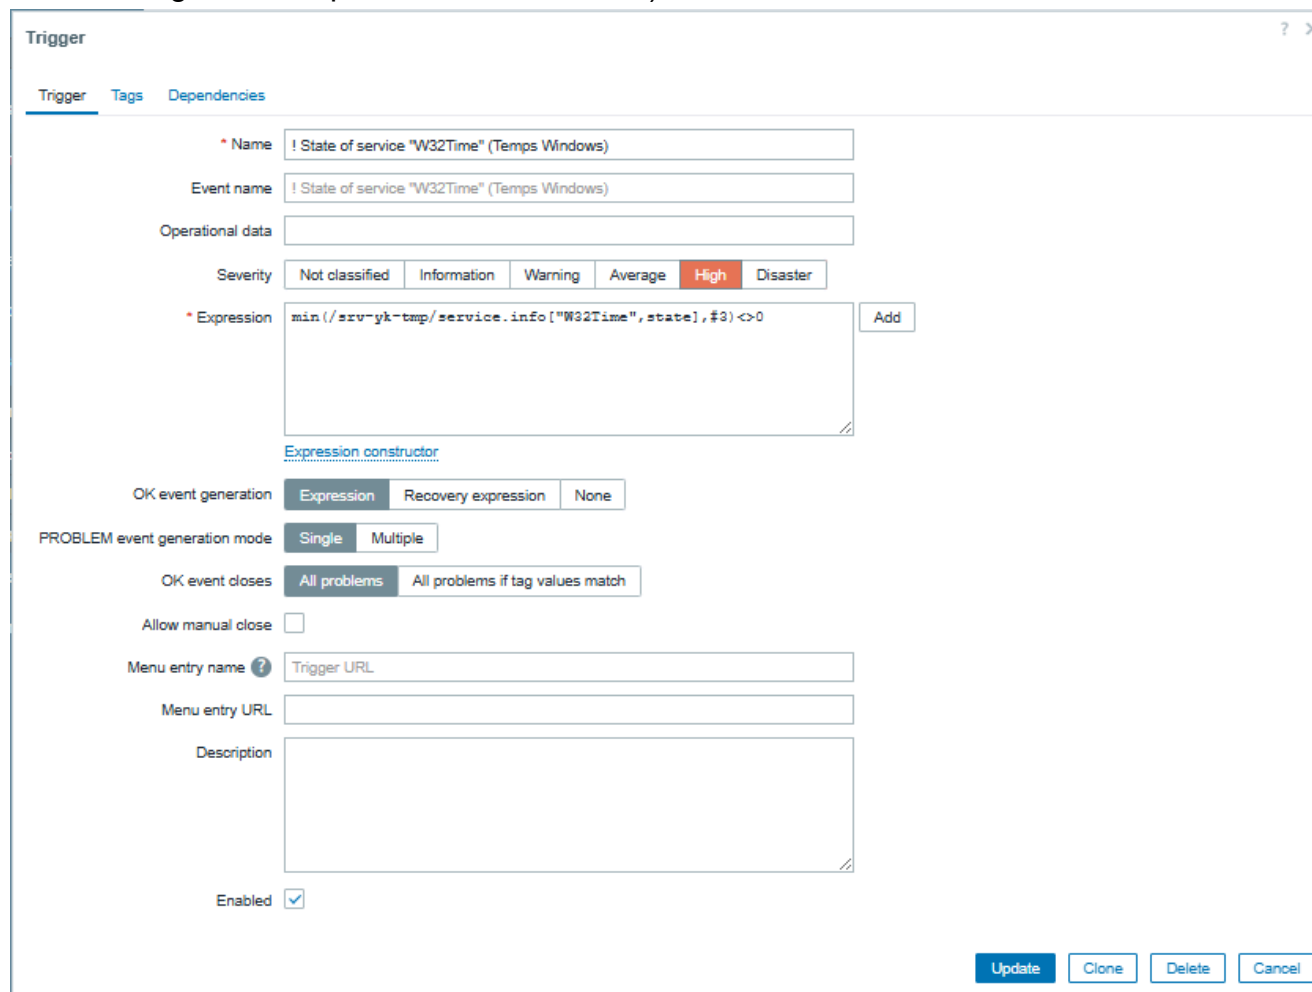


The image shows the 'Trigger' configuration window in Zabbix. It has tabs for 'Trigger', 'Tags', and 'Dependencies'. The 'Trigger' tab is active. The configuration includes:

- Name:** ! State of service "W32Time" (Temps Windows)
- Event name:** ! State of service "W32Time" (Temps Windows)
- Operational data:** (empty field)
- Severity:** Not classified, Information, Warning, Average, **High**, Disaster
- Expression:** `min (/srv-yk-tmp/service.info["W32Time",state],#3) <> 0` (with an 'Add' button)
- Expression constructor:** (link)
- OK event generation:** Expression, Recovery expression, None
- PROBLEM event generation mode:** Single, Multiple
- OK event closes:** All problems, All problems if tag values match
- Allow manual close:** ☐
- Menu entry name:** ? Trigger URL
- Menu entry URL:** (empty field)
- Description:** (empty text area)
- Enabled:** ☒

At the bottom right are buttons: Update, Clone, Delete, Cancel.

Here we can create an action that will be taken. In my case if event name contains "W32Time" (indicating there might be an issue) then it will run a specified script.

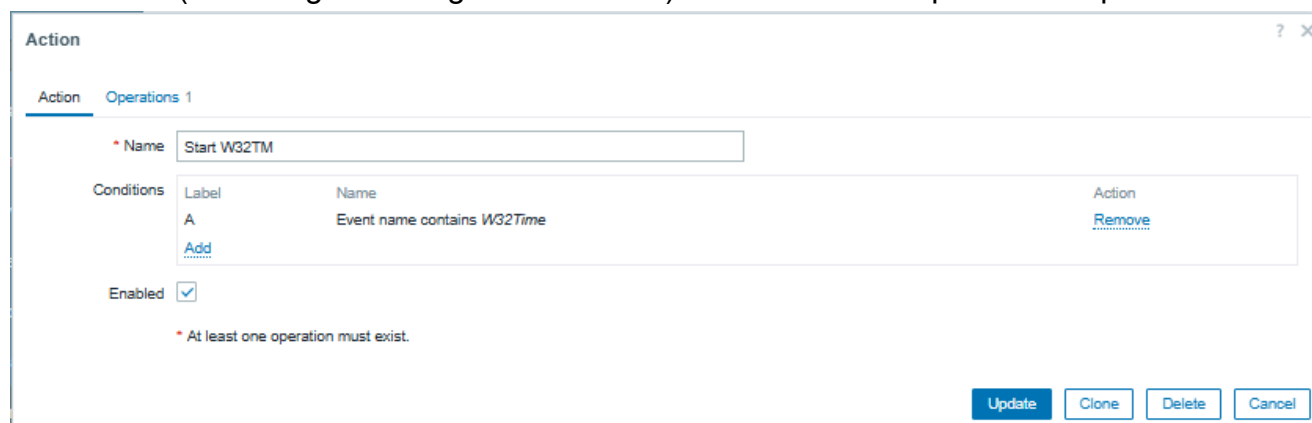

The image shows the 'Action' configuration window in Zabbix. It has tabs for 'Action' and 'Operations 1'. The 'Action' tab is active. The configuration includes:

- Name:** Start W32TM
- Conditions:** A table with 3 columns: Label, Name, and Action.

Label	Name	Action
A	Event name contains W32Time	Remove

Below the table is an 'Add' button.
- Enabled:** ☒
- At least one operation must exist.** (note)

At the bottom right are buttons: Update, Clone, Delete, Cancel.

Action

[Action](#) [Operations 1](#)

* Default operation step duration

Operations	Steps	Details	Start in	Duration	Actions
	1	Run script "Start W32TM" on hosts: srv-yk-tmp	Immediately	Default	Edit Remove
Add					

Recovery operations [Details](#) [Add](#) [Actions](#)

Update operations [Details](#) [Add](#) [Actions](#)

Pause operations for symptom problems ☒

Pause operations for suppressed problems ☒

Notify about canceled escalations ☒

* At least one operation must exist.

[Update](#) [Clone](#) [Delete](#) [Cancel](#)

Here's the script itself. It will start the service W32Time

Script

* Name

Scope [Action operation](#) [Manual host action](#) [Manual event action](#)

Type [Webhook](#) [Script](#) [SSH](#) [Telnet](#) [IPMI](#)

Execute on [Zabbix agent](#) [Zabbix proxy or server](#) [Zabbix server](#)

* Commands

Description

Host group [All](#)

[Update](#) [Clone](#) [Delete](#) [Cancel](#)

Extrait of log, showing it works:

```
1632:20250410:091204.146 Requested [{"request":"passive checks","data":[{"key":"service.info[\\W32Time\\",state]","timeout":3}]]
1632:20250410:091204.155 Sending back [{"version":"7.2.5","variant":1,"data":[{"value":"6"}]]
---
3540:20250410:091204.167 Requested [{"request":"passive checks","data":[{"key":"system.run[net start w32time,nowait]","timeout":1}]]
3540:20250410:091204.168 Executing command 'net start w32time'
3540:20250410:091204.169 zbx_execute_nowait(): executing [cmd /C "net start w32time"]
3540:20250410:091204.171 Sending back [{"version":"7.2.5","variant":1,"data":[{"value":"1"}]]
---
2752:20250410:091214.146 Requested [{"request":"passive checks","data":[{"key":"service.info[\\W32Time\\",state]","timeout":3}]]
2752:20250410:091214.152 Sending back [{"version":"7.2.5","variant":1,"data":[{"value":"0"}]]
```

Status codes of service.info:

- 0 - service running;
- 1 - service paused;
- 2 - service starting (start pending);
- 3 - service pausing (pause pending);
- 4 - service starting after pause (continue pending);
- 5 - service stopping (stop pending);

6 - service stopped;

255 - unable to get current service state.