PLC Ladder Diagrams
for
QT Nexus-200/250/300/350 all Models
(Mazatrol Fusion Nexus 640T)
Publication #311B2301

3/2006

CAUTION

This Manual is published to assist experienced personnel on the operation, maintenance and/or programming of Mazak machine tools.

All Mazak machine tools are engineered with a number of safety devices to protect personnel and equipment from injury or damage. Operators should not, however, rely solely upon these safety devices, but should operate the machine only after fully understanding what special precautions to take by reading the following documentation thoroughly.

Do not attempt to operate or perform maintenance / repair on the machine without a thorough understanding of the actions about to be taken. If any question exists, contact the nearest Mazak service center for assistance.

Certain covers, doors or safety guards may be open or removed to more clearly show machine components. These items must be in place before operating the machine. Failure to comply with this instruction may result in serious personal injury or damage to the machine tool.

This manual was considered complete and accurate at the time of publication, however, due to our desire to constantly improve the quality and specification of all Mazak products, it is subject to change or modification.

Notes:

SAFETY PRECAUTIONS

The machine is provided with a number of safety devices to protect personnel and equipment from injury and damage. Operators should not, however, rely solely upon these safety devices, but should operate the machine only after fully understanding what special precautions to take by reading the following documentation thoroughly.

• BASIC OPERATING PRACTICES

DANGER:

1) Some control panels, transformers, motors, junction boxes and other parts have high voltage terminals. These should not be touched or a severe electric shock may be sustained.
2) Do not touch any switches with wet hands. This too, can produce an electric shock.

WARNING:

1) The emergency stop pushbutton switch location should be well known, so that it can be operated at any time without having to look for it.
2) Before replacing a fuse, turn off the main incoming power switch to the machine.
3) Provide sufficient working space to avoid hazardous falls.
4) Water or oil can make floors slippery and hazardous. All floors should be clean and dry to prevent accidents
5) Do not operated any switch without a thorough understanding of the actions about to be taken.
6) Avoid accidental operation of switches.
7) Work benches near the machine must be strong enough to hold materials placed on them to prevent accidents. Articles should be prevented from slipping off the bench surface.
8) If a job is to be done by two or more persons, coordinating signals should be given at each step of the operation. The next step should not be taken unless a signal is given and acknowledged.

CAUTION:

1) In the event of power failure, turn off the main circuit breaker immediately.
2) Use the recommended hydraulic oils, lubricants and grease or acceptable equivalents.
3) Replacement fuses should have the proper current ratings.
4) Protect the NC unit, operating panel, electric control panel, etc. from shocks, since this could cause a failure or malfunction.
5) Do not change parameters or electrical settings. If changes are unavoidable, record the values prior to the change so that they can be returned to their original settings, if necessary.
6) Do not deface, scratch or remove any caution plate. Should it become illegible or missing, order another caution plate from the supplier, specifying the part number shown at the lower right corner of the plate.

• BEFORE POWERING UP

DANGER:

Cables, cords or electric wires whose insulation is damaged can produce current leaks and electric shocks. Before using, check their condition.

WARNING:

1) Be sure the instruction manual and the programming manual are fully understood before operating the machine. Every function and operating procedure should be completely clear.
2) Use approved oil resistant safety shoes, safety goggles with side covers, safe clothes, and other safety protection required.
3) Close all NC unit, operating panel, electric control panel doors and covers.

CAUTION:

1) The power cable from the factory feeder switch to the machine main circuit breaker should have a sufficient sectional area to handle the electric power used.
2) Cables which must be laid on the floor must be protected from hot chips, by using rigid or other approved conduit, so that short-circuits will not occur.
3) Before first time operation of the machine after unpacking it or from being idle for a long period of time (several days or more), each sliding part must be sufficiently lubricated. To do so, push and release the pump button several times until the oil seeps out on the sliding parts. The pump button has a return spring, so do not force it to return.
4) Oil reservoirs should be filled to indicated levels. Check and add oil, if needed.
5) For lubrication points, oil specification and appropriate levels, see the various instruction plates.
6) Switches and levers should operate smoothly. Check that they do.
7) When powering the machine on, turn on the switches in the following order: first the factory feeder switch, then the machine main circuit breaker, and then the control power on switch located on the operating panel.
8) Check the coolant level, and add coolant, if needed.

• **AFTER CONTROL POWER IS TURNED ON**

CAUTION:

When the control power “ON” switch on the operating panel is on, the "READY" lamp on the operating panel should also be on (check to see that it is).

• **ROUTINE INSPECTIONS**

WARNING:

When checking belt tensions, do not get your fingers caught between the belt and pulley.

CAUTION:

1) Check pressure gages for proper readings.
2) Check motors, gear boxes and other parts for abnormal noises.
3) Check the motor lubrication, and sliding parts for evidence of proper lubrication.
4) Check safety covers and safety devices for proper operation.
5) Check belt tensions. Replace any set of belts that have become stretched with a fresh matching set.

• **WARM UP**

CAUTION:

1) Warm up the machine, especially the spindle and feed shaft, by running the machine for 10 to 20 minutes at about one-half or one-third the maximum speed in the automatic operation mode.
2) The automatic operation program should cause each machine component to operate. At the same time, check their operations.
3) Be particularly careful to warm up the spindle which can turn above 4000 rpm.

   If the machine is used for actual machining immediately after being started up following a long idle period, the sliding parts may be worn due to the lack of oil. Also, thermal expansion of the machine components can jeopardize machining accuracy. To prevent this condition, always make sure that the machine is warmed up.

• **PREPARATIONS**

WARNING:

1) Tooling should conform to the machine specifications, dimensions and types.
2) Replace all seriously worn tools with new ones to prevent injuries.
3) The work area should be adequately lighted to facilitate safety checks.
4) Tools and other items around the machine or equipment should be stored to ensure good footing and clear aisles.
5) Do not place tools or any other items on the headstock, turret, covers and similar places (For T/M).

CAUTION:

1) Tool lengths should be within specified tolerances to prevent interference.
2) After installing a tool, make a trial run.

• **OPERATION**

WARNING:

1) Do not work with long hair that can be caught by the machine. Tie it back, out of the way.
2) Do not operate switches with gloves on. This could cause mis-operation.
3) Whenever a heavy workpiece must be moved, if there is any risk involved, two or more people should work together.
4) Only trained, qualified workers should operate forklift trucks, cranes or similar equipment and apply slings.
5) Whenever operating a forklift truck, crane or similar equipment, special care should be taken to prevent collisions and damage to the surroundings.
6) Wire ropes or slings should be strong enough to handle the loads to be lifted and should conform to the mandatory provisions.
7) Grip workpieces securely.
8) Stop the machine before adjusting the coolant nozzle at the tip.
9) Never touch a turning workpiece in the spindle with bare hands, or in any other way.
10) To remove a workpiece from the machine other than by a pallet changer, stop the tool and provide plenty of distance between the workpiece and the tool (for M/C).
11) While a workpiece or tool is turning, do not wipe it off or remove chips with a cloth or by hand. Always stop the machine first and then use a brush and a sweeper.
12) Do not operate the machine with the chuck and front safety covers removed (For T/M).
13) Use a brush to remove chips from the tool tip, do not use bare hands .
14) Stop the machine whenever installing or removing a tool.
15) Whenever machining magnesium alloy parts, wear a protective mask.

CAUTION:

1) During automatic operation, never open the machine door. Machines equipped with the door interlock will set the program to single step.
2) When performing heavy-duty machining, carefully prevent chips from being accumulated since hot chips from certain materials can cause a fire.

• TO INTERRUPT MACHINING

WARNING:

When leaving the machine temporarily after completing a job, turn off the power switch on the operation panel, and also the main circuit breaker.

• COMPLETING A JOB

CAUTION:

1) Always clean the machine or equipment. Remove and dispose of chips and clean cover windows, etc.
2) Make sure the machine has stopped running, before cleaning.
3) Return each machine component to its initial condition.
4) Check the wipers for breakage. Replace broken wipers.
5) Check the coolant, hydraulic oils and lubricants for contamination. Change them if they are seriously contaminated.
6) Check the coolant, hydraulic oil and lubricant levels. Add if necessary.
7) Clean the oil pan filter.
8) Before leaving the machine at the end of the shift, turn off the power switch on the operating panel, machine main circuit breaker and factory feeder switch in that order.

• SAFETY DEVICES

1) Front cover, rear cover and coolant cover.
2) Chuck barrier, tail barrier and tool barrier (NC software).
3) Stored stroke limit (NC software).
4) Emergency stop pushbutton switch.

• MAINTENANCE OPERATION PREPARATIONS

1) Do not proceed to do any maintenance operation unless instructed to do so by the foreman.
2) Replacement parts, consumables (packing, oil seals, O rings, bearing, oil and grease, etc.) Should be arranged in advance.
3) Prepare preventive maintenance and record maintenance programs.

CAUTION:

1) Thoroughly read and understand the safety precautions in the instruction manual.
2) Thoroughly read the whole maintenance manual and fully understand the principles, construction and precautions involved.

• MAINTENANCE OPERATION

DANGER:

1) Those not engaged in the maintenance work should not operate the main circuit breaker or the control power "ON" switch on the operating panel. For this purpose, "Do not Touch the Switch, Maintenance Operation in Progress!" or similar warning should be indicated on such switches and at any other appropriate locations. Such indication should be secured by a semi-permanent means in the reading direction.
2) With the machine turned on, any maintenance operation can be dangerous. In principle, the main circuit breaker should be turned off throughout the maintenance operation.

WARNING:

1) The electrical maintenance should be done by a qualified person or by others competent to do the job. Keep close contact with the responsible person. Do not proceed alone.
2) Overtravel limit and proximity switches and interlock mechanisms including functional parts should not be removed or modified.
3) When working at a height, use steps or ladders which are maintained and controlled daily for safety.
4) Fuses, cables, etc. made by qualified manufacturers should be employed.

• BEFORE OPERATION & MAINTENANCE BEGINS

WARNING:

1) Arrange things in order around the section to receive the maintenance, including working environments. Wipe water and oil off parts and provide safe working environments.
2) All parts and waste oils should be removed by the operator and placed far enough away from the machine to be safe.

CAUTION:

1) The maintenance person should check that the machine operates safely.
2) Maintenance and inspection data should be recorded and kept for reference.

000X717-KY 11/98

WARNING

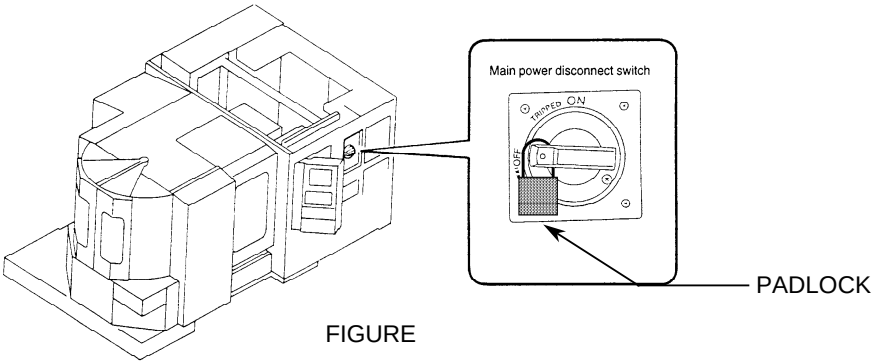
ALWAYS TURN THE MAIN CIRCUIT BREAKER TO THE "OFF" POSITION & USE AN APPROVED LOCKOUT DEVICE WHEN COMPLETING MAINTENANCE OR REPAIRS.

THE LOCKOUT PROCEDURE THAT FOLLOWS IS INTENDED TO SAFEGUARD PERSONNEL & EQUIPMENT DURING MAINTENANCE OPERATIONS, AND, REPRESENTS THE MINIMUM REQUIREMENTS. ANY ACTION SHOULD BE PRECEDED BY A "HAZARD ANALYSIS" TO DETERMINE ANY ADDITIONAL SAFETY PRECAUTIONS THAT MAY BE NECESSARY TO ENSURE THE SAFETY OF PERSONNEL AND EQUIPMENT.

***NOTE*: USE OF THE FOLLOWING LOCKOUT PROCEDURE IS MANDATORY WHEN COMPLETING MAINTENANCE OR REPAIRS.**

LOCKOUT PROCEDURE

1) THE LOCKOUT PROCESS MUST BE PERFORMED BY AUTHORIZED PERSONNEL ONLY.
2) INFORM ALL EFFECTED PERSONNEL OF YOUR INTENT TO LOCKOUT AND SERVICE THE SPECIFIED MACHINE.
3) SHUT OFF MACHINE POWER USING NORMAL SHUT DOWN PROCEDURES.
4) TURN OFF THE MACHINE AND INDIVIDUAL BUILDING CIRCUIT BREAKERS. MAKE SURE ALL STORED ELECTRICAL ENERGY IS RELIEVED. (EG: SPINDLE & AXIS SERVO CONTROLLERS)
5) CONNECT THE LOCKOUT DEVICE AS SHOWN IN FIGURE 1, AND ATTACH THE APPROPRIATE TAG AT THE MACHINE CIRCUIT BREAKER. THE TAG MUST IDENTIFY THE PERSON RESPONSIBLE FOR THE LOCKOUT. THIS WILL ENSURE THAT POWER CANNOT BE RESTORED BY ANYONE ELSE.
6) TEST THE MACHINE TO VERIFY THAT MACHINE SYSTEMS DO NOT OPERATE IN ANY WAY. ONCE TESTING IS COMPLETE, MAKE SURE ALL SWITCHES ARE IN THE "OFF" POSITION. CONFIRM THAT THE LOCKOUT DEVICES REMAIN PROPERLY INSTALLED.
7) COMPLETE THE REQUIRED MAINTENANCE OPERATIONS.
8) MAKE SURE ALL PERSONNEL ARE CLEAR OF THE MACHINE.
9) REMOVE THE LOCKOUT DEVICE. MAKE SURE ALL PERSONNEL ARE AT A SAFE LOCATION BEFORE RESTORING MACHINE POWER.



FIGURE

INSTALLATION PRECAUTIONS

The following subjects outline the items that directly affect the machine installation and start-up. To ensure an efficient and timely installation, please follow these recommendations before calling to schedule a service engineer.

• ENVIRONMENTAL REQUIREMENTS

Avoid the following places for installing the machine:

1) Avoid exposure to direct sunlight and/or near a heat source, etc. Ambient temperature during operation: 0° thru 45°C (32°F to 113°F).
2) Avoid areas where the humidity fluctuates greatly and/or if high humidity is present; normally 75% and below in relative humidity. A higher humidity deteriorates insulation and might accelerate the deterioration of parts.
3) Avoid areas that are especially dusty and/or where acid fumes, corrosive gases and salt are present.
4) Avoid areas of high vibration.
5) Avoid soft or weak ground **(minimum load bearing capacity of 1025 lbs./ft^2)**

• FOUNDATION REQUIREMENTS

For high machining accuracy, the foundation must be firm and rigid. This is typically accomplished by securely fastening the machine to the foundation with anchor bolts. In addition, the depth of concrete should be as deep as possible (minimum 6 - 8 inches). Note the following:

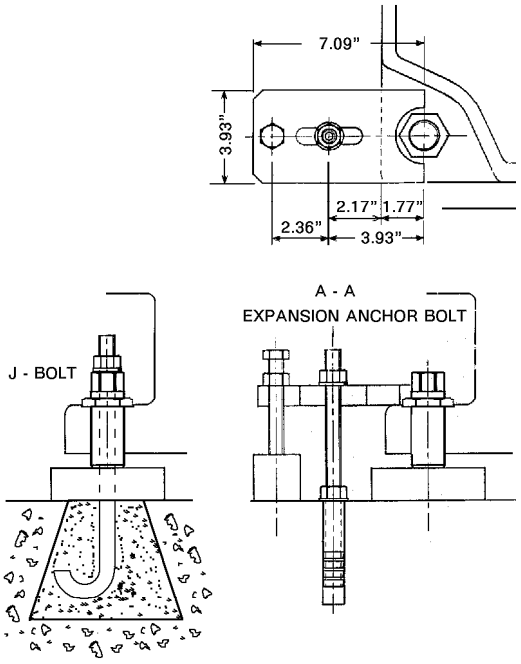
1) There can be no cracks in the foundation concrete or surrounding area.
2) Vibration proofing material (such as asphalt) should be put all around the concrete pad.
3) Form a “cone” in the foundation for J-bolt anchors, or use expansion anchors.
4) With the foundation anchor bolt holes open pour the primary **concrete at a minimum thickness of 6 - 8 inches.** Typically, the concrete must have a **minimum compression rating of 2500 lbs. @ 250 lbs. compression** and strengthened with reinforcing rods. When the concrete has cured, rough level the machine, and install the J-bolts, leveling blocks, etc., and pour grout into foundation bolt holes.
5) Mix an anti-shrinkage agent such as Denka CSA with concrete, or use Embeco grout to fill the foundation bolt holes.
6) In pouring grout, fasten the leveling block base plates with the collar retaining screws to prevent the base plates from dropping. When the grout has completely hardened, level the machine properly, and tighten M24 nuts to secure the machine to the foundation.

Note:

The machine must be anchored to the foundation with J-bolts, expansion bolts or other suitable method.

The machine accuracy and alignment specifications quoted by Mazak can usually be obtained when the minimum foundation requirements are met. However, production of close tolerance parts requires the use of an appropriate certified foundation. Foundations that do not meet certified specifications may require more frequent machine re-leveling and re-alignment, which can not be provided under terms of warranty.

If any of these conditions cannot be met, contact the nearest Mazak service office immediately.



TYPICAL MACHINE HOLD DOWN OPTIONS

• WIRING

1) Use only electrical conductors with performance ratings equivalent or superior.
2) Do not connect any power cables for devices which can cause line noise to the power distribution panel, such as arc welders and high frequency machinery.
3) Arrange for a qualified electrician to connect the power lines.
4) Incoming supply voltage should not deviate more than ±10% of specified supply voltage.
5) Source frequency should be±2 Hz of nominal frequency.

[CAUTION]


VERIFY THE ACTUAL MACHINE ELECTRICAL POWER REQUIREMENT AND THE MAIN TRANSFORMER RATING (IF APPLICABLE), AS WELL AS THE LOCAL ELECTRICAL CODE BEFORE SIZING AND INSTALLING THE INCOMING POWER WIRING.

PLEASE SEE THE ADDITIONAL CAUTIONS ON THE FOLLOWING PAGE.

• GROUNDING


1) An isolated earth ground with a resistance to ground of less than 100 ohms is required. Typically, a 5/8" copper rod, 8 feet long, and no more than 5 feet from the machine, is sufficient. Building grounds or multiple machines grounded to the same ground rod, are not acceptable.
2) The wire size should be greater than AWG (American Wire Gauge) No. 5 and SWG (British Legal Standard Wire Gauge) No. 6.

Desirable Independent Grounding:



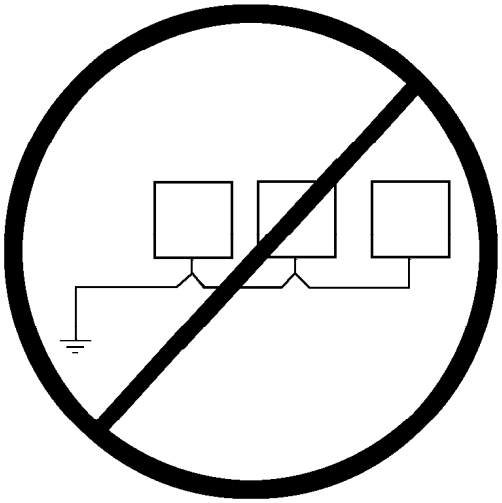
Earth resistance:
Less than 100 ohms

Common Grounds:



Resistance to ground = 100 ÷ the number of devices connected to the grounding (ohms)

Note: Never ground equipment as shown below:



CAUTION

A step-down transformer is *optional* on some machine models. Be certain to verify the transformer Kva rating (where applicable), as well as local electrical code requirements *before* sizing and installing the incoming power wiring.

Machines not equipped with a main transformer are wired for 230 VAC, 3 phase. The end user must supply a step-down transformer where factory electrical power varies more than ± 10% of the 230 VAC rating.

NOTE:

Step-down or voltage regulating transformers are external (peripheral) to the machine tool and are considered the primary input line (source) for the machine. Local electrical code or practice may require a circuit breaker or other switching device for the isolation of electrical power when this type of transformer is used. In such cases, the machine tool end user is required to supply the necessary circuit breaker or switching device.

FAILURE TO COMPLY CAN RESULT IN PERSONAL INJURY AND DAMAGE TO THE MACHINE. IF ANY QUESTION EXISTS, CONTACT THE NEAREST MAZAK SERVICE CENTER FOR ASSISTANCE.

WARNING

MAZATROL CNC CONTROLLERS PROVIDE PARAMETER SETTINGS TO LIMIT SPINDLE RPM. THESE SETTINGS ARE BASED ON THE MAXIMUM SPEED SPECIFIED BY THE CHUCK/ACTUATOR MANUFACTURER.

MAKE SURE TO SET THESE PARAMETERS ACCORDING TO CHUCK SPECIFICATION WHEN INSTALLING A CHUCKING PACKAGE. ALSO, STAMP THE MAXIMUM SPINDLE RPM ON THE CHUCK IDENTIFICATION PLATE LOCATED ON THE MACHINE TOOL COVERS.

REFERENCE THE CNC PARAMETER MANUAL SUPPLIED WITH THE SPECIFIC MACHINE TOOL TO IDENTIFY THE REQUIRED PARAMETERS TO CHANGE.

FAILURE TO COMPLY WITH THESE INSTRUCTIONS COULD RESULT IN DAMAGE TO THE MACHINE, SERIOUS INJURY OR DEATH.

IF ANY QUESTIONS EXIST, CONTACT THE NEAREST MAZAK SERVICE CENTER FOR ASSISTANCE.

WARNING

MAZAK MACHINES ARE ENGINEERED WITH A NUMBER OF SAFETY DEVICES TO PROTECT PERSONNEL AND EQUIPMENT FROM INJURY AND DAMAGE.

DO NOT REMOVE, DISCONNECT, BYPASS OR MODIFY ANY LIMIT SWITCH, INTERLOCK, COVER, OR OTHER SAFETY FEATURE IN ANY WAY, EITHER MECHANICALLY OR ELECTRICALLY.

FAILURE TO COMPLY WITH THESE INSTRUCTIONS COULD RESULT IN DAMAGE TO THE MACHINE, SERIOUS INJURY OR DEATH.

IF ANY QUESTIONS EXIST, CONTACT THE NEAREST MAZAK SERVICE CENTER FOR ASSISTANCE.

WARNING

MAZAK MACHINES ARE ENGINEERED WITH A NUMBER OF SAFETY DEVICES TO PROTECT PERSONNEL AND EQUIPMENT FROM INJURY AND DAMAGE.

MACHINE OPERATOR DOORS AND COVERS ARE DESIGNED TO WITHSTAND ACCIDENTAL IMPACT OF A BROKEN INSERT WHERE A MAXIMUM WEIGHT INSERT AT MAXIMUM TOOL DIAMETER IS RUNNING AT MAXIMUM SPINDLE RPM

NEVER USE A CUTTING TOOL OR TOOL INSERT THAT EXCEEDS MACHINE SPECIFICATIONS OR THAT OF A SPECIFIC TOOL HOLDER ITSELF, WHICHEVER IS LESS. THIS RESTRICTION APPLIES TO DIAMETER, WEIGHT, MAXIMUM SPINDLE RPM, MAXIMUM CUTTING TOOL ROTATION SPEED, ETC.

FOR COMPLETE SPECIFICATIONS, MAKE SURE TO REFERENCE OPERATION, MAINTENANCE AND DETAIL SPECIFICATION DOCUMENTATION SUPPLIED WITH THE MACHINE AND BY THE TOOLING MANUFACTURER.

NOTE: THE MAXIMUM INSERT WEIGHT FOR MAZAK MACHINES IS 20 gf. (0.04 lbs.).

FAILURE TO COMPLY WITH THESE INSTRUCTIONS COULD RESULT IN DAMAGE TO THE MACHINE, SERIOUS INJURY OR DEATH.

IF ANY QUESTIONS EXIST, CONTACT THE NEAREST MAZAK SERVICE CENTER FOR ASSISTANCE.

WARNING

BEFORE STARTING OPERATION, CHECK THAT THE WORKPIECE IS SECURELY MOUNTED IN A VISE OR A SUITABLE FIXTURE. BE CERTAIN THAT THE MOUNTING IS SUFFICIENT TO WITHSTAND CUTTING FORCES DURING WORKPIECE MACHINING.

FAILURE TO COMPLY WITH THESE INSTRUCTIONS COULD RESULT IN DAMAGE TO THE MACHINE, SERIOUS INJURY OR DEATH.

IF ANY QUESTIONS EXIST, CONTACT THE NEAREST MAZAK SERVICE CENTER FOR ASSISTANCE.

WARNING

CONFIRM PROPER WORKPIECE FIXTURING/CLAMPING, TOOL SETUP AND THAT THE MACHINE DOOR IS SECURELY CLOSED BEFORE THE START OF MACHINING.

VERIFY ALL SAFETY PRECAUTIONS OUTLINED IN THIS MANUAL BEFORE USING THE FOLLOWING CUTTING CONDITIONS:

- CUTTING CONDITIONS THAT ARE THE RESULT OF THE MAZATROL FUSION 640 AUTOMATIC CUTTING DETERMINATION FUNCTION
- CUTTING CONDITIONS SUGGESTED BY THE MACHINING NAVAGATION FUNCTION
- CUTTING CONDITIONS FOR TOOLS THAT ARE SUGGESTED TO BE USED BY THE MACHINING NAVAGATION FUNCTION

FAILURE TO COMPLY WITH THESE INSTRUCTIONS COULD RESULT IN DAMAGE TO THE MACHINE, SERIOUS INJURY OR DEATH.

IF ANY QUESTIONS EXIST, CONTACT THE NEAREST MAZAK SERVICE CENTER FOR ASSISTANCE.

DOOR INTERLOCK SAFTY SPEC.

Determined by YMW Eng. H.Q. '99/9/1
Revised by YMC Prod. Eng. '99.10.28

MACHINING CENTER

DOOR	MODE	SET UP SWITCH	
		O (OFF)	**I** (ON)
OPEN	MANUAL	Prohibit to move axis. Prohibit to start spindle running. Prohibit to operate manual ATC. Prohibit to operate manual Pallet Changer. Prohibit to run chip spiral conveyor.	Limit the rapid override. Max is 12%. Prohibit to run chip spiral conveyor. Can run spindle JOG. Can run spindle Orient. Can operate manual ATC.
	AUTO	Prohibit cycle start. Prohibit to run chip spiral conveyor.	Prohibit cycle start. Prohibit to run chip spiral conveyor.
CLOSE I V OPEN	MANUAL	Door is always locked. Door lock can be released by pushing "DOOR UNLOCK SW" on operator panel. But, it can not release in operating ATC/Pallet changer/Axis/Spindle.	
		Prohibit to move axis. Prohibit to start spindle running. Prohibit to operate manual ATC. Prohibit to operate manual Pallet Changer. Prohibit to run chip spiral conveyor.	Limit the rapid override. Max is 12%. Chip spiral conveyor would stop. Can run spindle JOG. Can run spindle Orient. Can operate manual ATC.
	AUTO	Door is always locked. Door lock can be released by pushing "DOOR UNLOCK SW" on operator panel. But, it can not release in auto operation running except single block stop or feed hold stop or M00 program stop or M01 optional stop and spindle stop. If not, Alarm displayed "Door open invalid".	
		If release the lock by note(*1), Alarm will occur then stop the all motion. Chip spiral conveyor would stop.	Prohibit cycle start. Chip spiral conveyor would stop.
CLOSE	MANUAL	No Limitation.	No Limitation.
	AUTO	No Limitation.	Can not run auto operation.

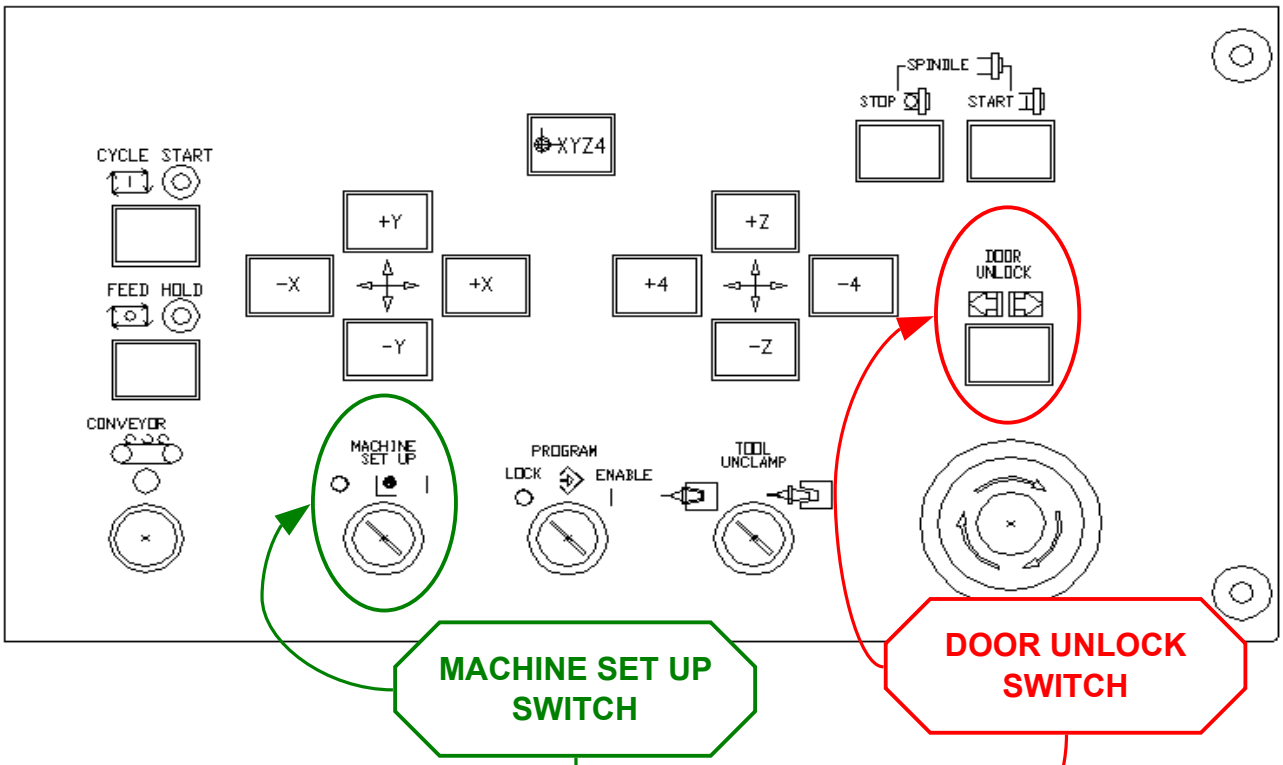
TURNING CENTER

DOOR	MODE	SET UP SWITCH	
		O (OFF)	**I** (ON)
OPEN	MANUAL	Can operate CHUCK, TAILSLEEVE , STEADY REST for Loading workpiece. Can NOT operate Spindle, Axis, Turret, Coolant, ToolEye, Partscatcher, Chip Conveyor.	Can operate CHUCK, TAILSLEEVE , STEADY REST for Loading workpiece. Can not operate Spindle running, but Can operate Spindle JOG and Spindle Orient. Limitation of speed for axis movement . (Override is 10% max.) 1 step index only for turret.
	AUTO	Can operate CHUCK, TAILSLEEVE , STEADY REST for Loading workpiece. Can not run Auto-operation.	Can operate CHUCK, TAILSLEEVE , STEADY REST for Loading workpiece. Can not run Auto-operation.
CLOSE -> OPEN	MANUAL & AUTO	Can not open the front door in Spindle running, Axis moving, Auto-running(Cycle start, Feed hold) due to Mechanical locking system. (Except Single Block Stop or M00 program stop or M01 optional stop) But, if release the lock by note(*1), Alarm will occur then stop the all motion.	
CLOSE	MANUAL	No Limitation.	No Limitation.
	AUTO	No Limitation.	Can not run Auto-operation.

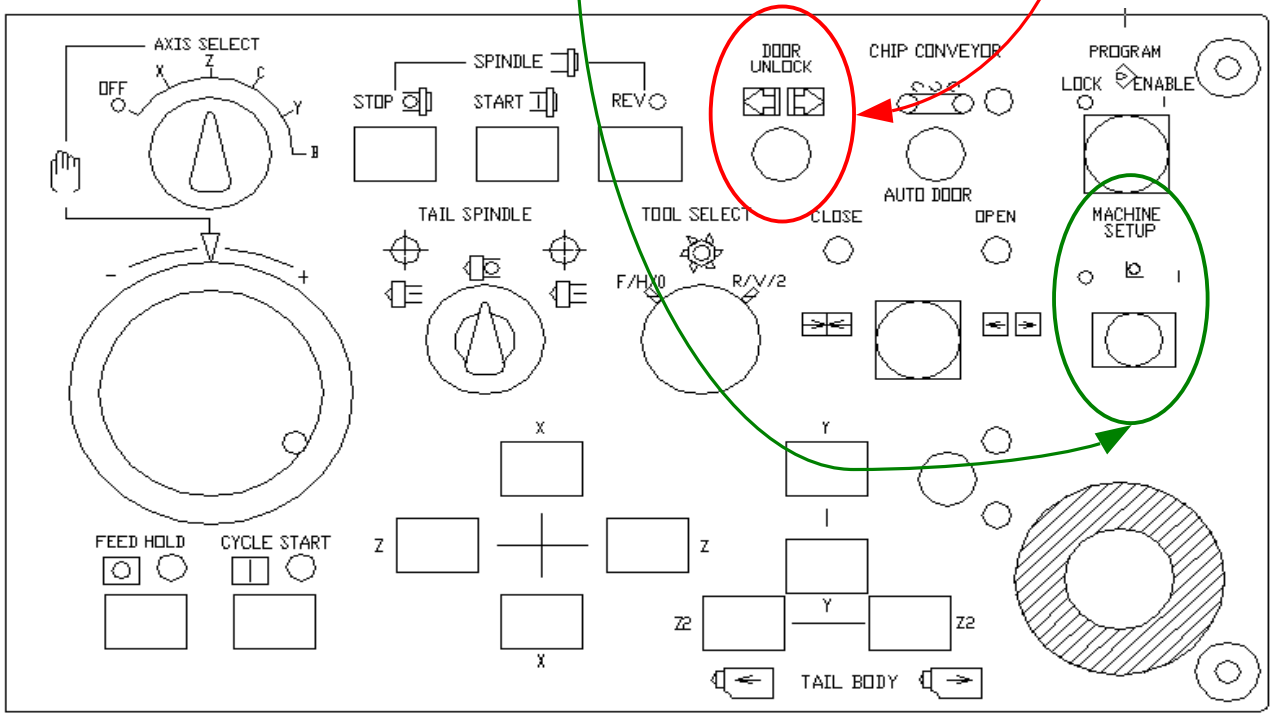
*1 : Door lock mechanism can not be released in machine stop by NC power OFF.
If it is necessary to release the lock such as emergencies, the lock can be released by operating the supplementary lock release mechanism of the main body of the safety door lock switch.
*2 : Override Limitation of Rapid speed of AXIS
Machining Center : 12%. Turning Center : 10%.
*3 : Chip Conveyor and Coolant should stop in the door open.

APPENDIX

SWITCH PANEL for M640M (Machining Center)



SWITCH PANEL for M640MT/T (Turning Center)



Return to Library

MACHINE DOCUMENTATION CUSTOMER EVALUATION

Mazak

The Other Thoroughbred From Kentucky

Your opinion is important to enable us to issue documentation that will fit your needs.
Thank you for taking the time to supply this information.

Date: _____ _____

Machine Type: _____ Machine Serial#: _____ NC Type: _____

Customer: _____ Reported By: _____

Address: _____ Position: _____

_____ Telephone#: _____

Manual Publication #: _____

	Excellent	Good	Adequate	Fair	Poor
How well is the documentation suited to your needs?	☐	☐	☐	☐	☐
Were you able to find the necessary information easily?	☐	☐	☐	☐	☐
How well are the manuals organized?	☐	☐	☐	☐	☐
How easy are the manuals to understand?	☐	☐	☐	☐	☐
Are the illustrations helpful?	☐	☐	☐	☐	☐
Overall, how do you rate the documentation?	☐	☐	☐	☐	☐

What did you like about the documentation? How can it be improved?

RETURN TO: MAZAK Corporation
Technical Publication Dept.
8025 Production Drive
Florence, Kentucky 41042

☐☐ ☐☐☐☐ ☐☐

SF-202Xa

Notes:

X0000 EMGYME EMERGENCY STOP
481

X0001 MAL1.M THERMAL TRIP(HYD
25022

X0002 MAL7.M HYDRAULIC PRESSU
25039

X0003 MAL2.M NFB TRIP (200V)
25011 25031

X0004 DCY.LS Y-AXIS ZERO POS.
461 25012 25032

X0005 MAL8.M THERMAL TRIP(FAN
26085

X0006 COOTRP TML TRIP COOLANT
1629

X0007 MAL8.M THERMAL TRIP(SBK
26086

X0008 CHO.SW CHUCK OPEN FOOT
4460 4657 4666 4668 4692 4694 4699 15403 25000 25180
25620

X0009 CHC.SW CHUCK CLOSE FOOT
4464 4669 4695 15404 25001 25181

X000A CCC.LS DOOR INTERLOCK
242 1914 2218 2224 2228 7150 7286 7302 7330 7449
7479 24509 25366 26935 26939

X000B DCX.LS X-AXIS ZERO POS.
455

X000C DCW.LS W-AXIS ZERO POS.
459

X000D DCZ.LS Z-AXIS ZERO POS.
457

X000E FANR.M SPINDLE COOLING
27081

X000F PSCO.M CONTACTOR OFF CH
26336 26959 26961 26969

X0010 TCL.LS TURRET CLAMP
25 2702 3638 6731 6793 7784 9554 9610 9612 19928
22500 25273 25275 25291 26459 26501

X0011 MMS.M WORK MEASURE STA
19866 25528

X0012 S&MOFF SPINDLE MOTOR OF
26938 26941

X0016 SPJOG SPINDLE JOG
3549 7474 8483 8527 11869 12026 12147

X0017 CYCST CYCLE START
9209 24373

X0018 FENCE SAFETY FENCE CLS
9227 24397

X0019 SPINCH SPINDLE INCHING
9235 24361

X001A EXTRET EXTERNAL RESET
3715 3754 8548 26427

X001B ALARM ALARM (RESERVED
1806 1876 1926

X001C OVRLOD OVERLOAD (RESER
1823 1830

X001D WARMUP WARM UP PROGRAM
8319 8325

X001E ATPOFF AUTO POWER OFF
15257

X001F BRTRIP BREAKER TRIP ON
8003

X0020 2CH.PS SS PRESS. EXT.
2017 2022 2046

X0021 2CH.PS SS PRESS. INT.
2019 2024 2049

X0022 SCHK_O SS CHUCK OPEN LS
5174 5178 5181 25331

X0023 SCHK_C SS CHUCK CLOSE L
5175 5179 25332

X0024 SCHC.M SS CHUCK FOOT SW
4468 4962 4976 4982 5012 5018 5026 25182 25651 26091

X0025 SCHO.M SS CHUCK FOOT SW
4476 4981 5017 25186 26095

X0026 SCFT.M SS COOLING FAN T
25734

X0030 WRUC.B WORK REST UNCLAM
27604

X0031 WRCL.B WORK REST CLAMP
27597

X0032 WRJT.L WORK REST JOINT
97 27091 27723 27735 27753 28453

X0034 SRLU.A STEADY REST LUBE A
26798

X0040 ADMFIN ADD M-CODE FIN
20460 20469 20476 20483

X0080 THRTRP S-F THERMAL TRIP
3447

X0081 CSYSAL COOLANT SYS. AL
3456

X0082 FLTWRN FILTER WARNING
28125

X0083 RPTHR R-PUMP THR.TRIP
26098

X0084 LVLLOW LEVEL LOW
28137

X0085 PRSDWN PRES.DOWN
28143

X0086 FTHOME F_TL HOME POS
9586 26809 28457

X0087 ADCS A_DR CLOSE SW
7472

X0088 MAL8.M THERMAL TRIP(F26
26088

X0089 SCYS.B SUB CYCLE ST SW
2800 8305 24970 26379 26743 26979 27011

X008A SFDH.B SUB FEED HOLD SW
9172

X008D ADMFIN ADD. M CODE FIN
20458

X0090 LUB.PS LUBE PRESSURE
26065 26074

X0091 TDFE.M TOOL EYE FORWAR
8117 8122 8146 25418 25430

X0092 TDRE.M TOOL EYE REVERS
8118 8123 8147 21490 21882 22242 25420 25431

X0093 CHO.LS CHUCK OPEN END
4400 4888 4890 4895 25326

X0094 CHC.LS CHUCK CLOSE END
4401 4887 4894 25327

X0095 PCF.LS PARTS CATCHER F
5096 7511 7517 19809 19810 25447 25457

X0096 PCR.LS PARTS CATCHER R
2696 7512 7515 8051 10650 19815 25449 25458 26555 26631
26666

X0097 LLC.PS HEAD COOLING AL
27074

X0098 CH.PS CHUCK PRESSURE
1975 1980 2005

X0099 UCH.PS UNCHUCK PRESSURE
1973 1978 2002

X009A GRS.PS GREASE PRESSURE
2126 2135 26038

X009B MEGD.M MILL JOINT ON
22505 22510 25480 25485 26817 28459

X009C MDEG.M MILL JOINT OFF
22506 22512 25486 28690

X009D FDO.LS FRONT DOOR OPEN
224 244 251 7290 7297 7419 25346 25357

X009E FDC.LS FRONT DOOR CLOS
2664 2895 7284 27045

X009F AIRRDY AIR PRESS READY
25053

X00A0 BF_ALM BAR FEEDER ALM
4454 25545

X00A1 SP_IL SPINDLE INTERLOC
3731 3762 8550 25640 25671 26430

X00A2 M_FIN M FUNCTION FIN
19944 19948 19952 19956 25582

X00A3 TOP_C1 TOP CUT CALL1
3551 8485 8494 8508 8529 11753 11871 12020 12141

X00A4 TOP_C2 TOP CUT CALL2
8507 9210 12021 12142

X00A5 SPINCH SPINDLE INCHING
3563 5905 9240 19618

X00A6 BF_RDY BAR FEEDER READY
9237 18841 18854

X00A7 BF_EMP BAR FEEDER EMPTY
11806

X00B0 Mfin.R RBT->SERVICE CAL
3559

X00B1 RST.R RBT->NC RESET
3716 3755

X00B2 CHOP.R RBT->CHUCK UNCLA
24390 26761

X00B3 CHCL.R RBT->CHUCK CLAMP
24402 26762

X00B4 ORIE.R RBT->SPINDLE ORI
24378 26763

X00B5 AB.R RBT->CHUCK AIR B
24366 26764

X00B6 FCLS.R RBT->SAFETY FENC
2230 2259 2721 2783 2937 2972 5863 7293 7378 20788
24367 24379 24391 24403 25107 25358 26755 26766 26998

X00B7 UNLK.R RBT->DOOR LOCK R
2882 2934 2971 26765

X00B8 ST.R ST.R
2818

X0100 XSELCT AXIS CODE 1
1465 1471 1477 1483 1489 15379 15433

X0101 ZSELCT AXIS CODE 2
1466 1472 1478 1484 1490

X0102 CSELCT AXIS CODE 3
1467 1473 1479 1485 1491

X0103 YSELCT AXIS CODE 4
1468 1474 1480 1486 1492

X0105 GL/CF SW
24701

X0106 CYST.B CYCLE START
2799 8304 24595 24969 26378 26742 26978 27010

X0107 FDHLD. FEED HOLD
9169

X0108 SPST.B SPINDLE START
2661 5589 5615 6025 24973 25727 25792 26985

X0109 SPSTP. SPINDLE STOP
6011 6026 6042 6086

X010A SPRV.B SPINDLE REVERSE
5985 6010

X010B TSEF.B TOOL SELECT FOR
1114 7154 7165 9340 9347 9401 24974 26156

X010C TSER.B TOOL SELECT REV
1115 7155 7166 9343 9348 9402 24975 26157

X010D DROP.B
1105 24997

X010E DRCL.B
1106 24998

X010F 1st.B TAIL BODY FORWA
641 651 24994 27886

X0110 2nd.B TAIL BODY REVER
646 654 24995

X0111 #NAME? +X
111 116 833 891 934 961 1460 24976 25897 26863
26986

X0112 #NAME? -X
112 117 834 892 935 962 1018 1461 24977 25846
25898 25945 26864 26987

X0113 #NAME? +Z
121 134 835 863 936 963 1019 1462 24978 25847
25899 25925 26865 26988

X0114 #NAME? -Z
122 135 836 864 937 964 1463 24979 25900 25913
25917 25927 25946 26866 26989

X0115 #NAME?
181 188 193 822 856 884 931 1456 24982 25890
26844 26990

X0116 #NAME?
182 189 194 823 857 885 932 1457 24987 25891
26845 26991

X0117 #NAME? #NAME?
169 174 660 825 860 888 959 1031 1453 24980
25866 25871 25887 26850 26983

X0118 #NAME? #NAME?
170 175 657 826 859 887 958 1028 1030 1452
24981 25829 25865 25888 26851 26984

X0119 LOCK.B PROGRAM LOCK
1549 2128 2137 12270 21222 26040

X011A CHIP.B CHIP CONVEYOR
1722 24999 26388

X011B UNLOCK DOOR UNLOCK SW.
2963 7451 14790 14803 27048

X011C SETUP. SETUP SW.
1099 1726 2267 2273 2275 2315 2430 2491 2503 2554
2562 2572 2585 2587 2591 2600 2663 2796 2902 4450
7151 8293 8950 8986 9030 9319 9577 11856 11859 21563
21955 22314 25468 25677 25688 25778 25787 26634 26923 26936
26940 27018

X011E CLS_L DOOR CLOSE SW.
2740

X011F CLS_R DOOR CLOSE SW.
2743

X0140 RST.B RESET
464 542 566 696 744 748 1880 1887 2065 2910
3006 3504 3684 3711 3770 3788 4655 7716 7742 8010
8296 8312 8370 8514 8553 11012 11769 12126 12154 12219
12357 12371 12809 12825 12832 12848 12855 13291 13353 13409
13937 15382 15436 23639 24591 25008 25146 25921 25964 26349
26440 26788 26953 26972 27006 27108

X0141 F-UP.B FEED UP
1396

X0142 F-DN.B FEED DOWN
1403

X0143 S-UP.B SPINDLE UP
1329 1339

X0144 S-DN.B SPINDLE DOWN
1346

X0145 R-UP.B RAPID UP
1408

X0146 R-DN.B RAPID DOWN
1418 2388 2403

X0148 AUT.B AUTO(MEMORY) MOD
787 6038 14086 14317 26608

X0149 MDI.B MDI MODE
786 6037 14110

X014A RPD.B RAPID MODE
781 14158 26588 26593

X014B HOME.B HOME POSITION
784 14139 26594

X014D H*1.B HAND PULSE*1
780 14068 14175

X014E H*10.B HAND PULSE*10
779 14065 14076 14182 14199

X0150 VFC.B VFC
1542

X0151 TAPE.B TAPE MODE
783 6035 14087 14312

X0154 CNTMEN COOLANT MENU
1044 5276

X0155 CNTSTP COOLANT STOP
7632

X0156 MF1.B MF1
46 147 180 187 196 556 1087 2786 5270 5274
6022 7158 7179 8301 9147 9317 9400 10786 10807 10825
10873 14849 14860 14917 14927 15166 15176 15198 15262 24984
24989 25893 25987 26375 26739 26847 26993 27885

X0158 WIDW.B WINDOW MENU
513

X0159 H*100. HAND PULSE*100
789 14062 14074 14192 14200

X015A MACH.M MACHINE MENU
1041 5280 24968

X015B SIGBLK SINGLE BLOCK
2643

X0198 SKP1.M TOOL EYE SKIP
198 6711 8103 15293

X0199 SKP2.M WORK MEASURE SKI
201 6713 7212 15296

X01C1 STL.N GL STL.N
2984

X01C2 FDHL.N GL FEED HLD.N
2994

X01E0 EMG.M EMAERGENCY STOP
465 483 527 1555 1802 1819 1846 1922 25140 25150

X0200 RDY1.N SERVO READY 1
549 8366 12385

X0201 RDY2.N SERVO READY 2
8365 12386

X0202 RDY3.N SERVO READY 3
4069 5433 24941

X0203 RDY4.N SERVO READY 4
8362 12380

X0204 RDY5.N SERVO READY 5
8360 12382

X0208 SMZ1.N SMOOTHING ZEEO 1
2610 6742 7995 8340 9380 25259

X0209 SMZ2.N SMOOTHING ZEEO 2
2609 3965 6745 7996 8345 9381 25260

X020A SMZ3.N SMOOTHING ZEEO 3
2606 7988 9382 22714

X020B SMZ4.N SMOOTHING ZEEO 4
2604 3957 3966 7992 8350 9385

X020C SMZ5.N SMOOTHING ZEEO 5
8355 9388 24255 24266

X0218 MSOK.N MEASURE READY
14205 16492 23377 23406

X0220 ZP11.N ZERO RETURN POSI
708 734 745 756 949 1005 1024 1535 3349 8343
8955 12274 12495 12507 24494 24598 25831

X0221 ZP12.N ZERO RETURN POSI
711 3350 8348 8958 11793 12275 12534 12549 24496 24600

X0222 ZP13.N ZERO RETURN POSI
5545

X0223 ZP14.N ZERO RETURN POSI
714 875 899 974 1004 1023 1495 2685 7547 8353
8970 12272 12587 12599 24514 24609 25853

X0224 ZP15.N ZERO RETURN POSI
717 735 746 757 947 1006 1025 1533 2709 6773
7172 8358 8953 12623 12634 24606 25832 26004 26575

X0229 ZP22.N 2nd ZERO RETURN
24498 24602

X022A ZP23.N 2nd ZERO RETURN
5536 5544 5555

X0230 RPN.N RAPID FEED
26131

X0231 CUT.N CUTTING FEED
11560 12803 12813 12823 12836 12862 12867 13074 13176 24286
26455

X0232 TAP.N TAP MODE
3666 16168 16189 21408 21498 21693 21697 21793 21890 22106
22110 22195 22441 25549 25553

X0233 THRD.N THREAD CUTTING M
26394

X0235 CSS.N CONST CUT SPEED
345

X0238 FAL.N FINISH CUTTING
324

X0239 B.PS.N
212 8863 8887 20376

X023A POL.NC POLYGON MODE
4044 4065 5398 5405 19936

X023B TPSL.N TPS MODE
15649

X023C VFCL.N VFC MODE
1544

X023D HITL.N HANDLE INTERRUPT
1440 1443 1444

X023E DEN1.N DISTRIBUTION END
3102 6750 16162 16183 27316

X023F DEN2.N DISTRIBUTION END
2501 3105 3269 3534 3697 3703 6782 7708 8826 9409
9526 10940 16165 16186 23744 23767 23790 23813 23935 25288
25960 25995 26161 27317

X0240 MA.N CONTROL UNIT REA
446 476 496 528 569 607 612 616 1145 2174
2198 12369 23373 25015 25023 25040 25054 25073 25120 25238
25559 26110 26587 26611 26704

X0241 SA.N SERVO READY
529 617 14136

X0242 TIMZ.N ALL AXIS INPOSIT
4348 4356 9025

X0243 TSMZ.N ALL AXIS SMOOTHI
2868 2940 4349 4357 7267 9026

X0244 OP.N CYCLE MODE
623 642 647 694 1765 2470 2638 2687 2691 2695
2713 2913 2920 3577 3591 3605 3713 3822 3829 3870
4256 4498 4536 4547 4565 4595 4603 5464 5487 5507
5523 6216 7677 8401 8504 9176 9322 10872 10874 11712
11716 11724 11728 11938 12064 12080 12129 12265 12405 20843
21228 21549 21942 22197 22297 22576 22940 22971 22991 23007
24122 24166 24280 24478 24589 25920 26162 26454 26456 26470
26488 26515 26531 26559 26578 26710 26908 27028 27318 27592
27599 27606 27612 27619 27640 27647 27719

X0245 STL.N CYALE START
804 1733 1766 2639 2775 2881 2930 2982 3000 3003
3592 3607 3855 3858 4791 4805 4827 5038 5081 5118
5764 5826 5925 7334 7358 7389 7495 7684 7787 9161
11741 11752 11878 12065 12081 12218 12284 12662 24139 25287
25627 25803 26134 26369 26469 26481 26489 26516 26532 26556
26598 26735 26977 27058 27319

X0246 SPL.N FEED HOLD
2992 9162 10694 12217 24543 24593 26533 27320

X0247 RST.N RESET
539 564 24165

X0248 AL1.N MACHINE ALARM
1553 1566 3004 3779

X0249 AL2.N NC ALARM
1567 3780

X024A AL3.N TOOL LIFE ALARM
1564 3781

X024B AL4.N ABS. ALARM
729 759 796 3782

X024C EIA.N EIA/ISO MODE
5713

X024D INCH.N INCH MODE
27765 27809 27814 27848

X024E SUB MICLON
14071

X024F SIMO.N SIMURATION MODE
23917 23942

X0250 JO.N JOG MODE
809 14352 14451 23370

X0251 RTO.N RAPID FEED MODE
14362

X0252 HO.N HANDLE FEED MODE
1013 1501 1517 14367 14371 25823 25841 25859

X0254 ZRNO.N HOME RETURN MOD
14357

X0258 MEMO.N AUTO MODE
8414 12071 12642 14319

X025A TEST.N MDI. MODE
8833 12048 12054 14342

X025B SPRO.N SINGLE PROCESS M
14092 14117 14335 14347 15693

X025C REST.N RESTART MODE
12047 12053 14088 14104 14334 14337 15711

X0260 SYNS.N SPINDLE PHASE SY
3905 3985 4136 4210 4738 4773 5061 5527 6091 18826
20093 20380 20383 20771 23011 25633 25664

X0262 VROS.N SPINDLE SPEED DE
327 336

X0263 FLOS.N SPINDLE ALARM
25068

X0264 ZSOS.N SPINDLE ZERO SPE
279 11802

X0265 USOS.N SPINDLE UPTO SPE
397 3667 3919 4079 4095 4714 19904 21675 21682

X0266 ORAS.N SPINDLE ORIENT F
20590 20785 20818

X026B FLOM.N MILL ALARM
25080

X026C ZSOM.N MILL ZERO SPEED
282

X026D USOM.N MILL UPTO SPEED
286 4077 4093

X026E ORAM.N MILL ORIENT FINI
6908 6942 7098 7114 28455

X0270 MF1.N M DOCE 1 STBOBE
3026 3042 3069 8584 8621 8683 16099 26193 27327

X0271 MF2.N M DOCE 2 STBOBE
3027 3078 8585 8622 8713 16114 26194 27332

X0272 MF3.N M DOCE 3 STBOBE
3028 3087 8586 8623 8743 16129 26195 27336

X0273 MF4.N M DOCE 4 STBOBE
3029 3096 8587 8624 8773 16144 26196 27341

X0274 TF.N T CODE STROBE
802 2502 5709 6395 6416 6551 6561 6699 6709 6768
6932 7135 7145 8917 9477 9494 9568 9673 22234 24263
24281 24292 25992 26135 26160 26490 26520 26596 27321

X0275 SF.N S CODE STROBE
3031 8593 8601 8604 8680 8710 8740 8770 20666 20674
20923 20942 20985

X0276 BF.N B CODE STROBE
8818 8831 12674 12885 27325

X0277 GF.N GEAR CODE STROBE
5716 5761

X0278 mf1.N m DOCE 1 STBOBE
3033 3046 3070 8637 8695 8797 16102 26189 27328

X0279 mf2.N m DOCE 2 STBOBE
3034 3079 8638 8725 8798 16117 26190 27333

X027A mf3.N m DOCE 3 STBOBE
3035 3088 8639 8755 8799 16132 26191 27337

X027B mf4.N m DOCE 4 STBOBE
3036 3097 8640 8785 8800 16147 26192 27342

X027D sf.N s CODE STROBE
3038 8648 8660 8663 8692 8722 8752 8782 20922 20929
20941 20947 21001

X0280 MP1L.N HANDLE MODE X1
14373 14380 14387 14394

X0281 MP2L.N HANDLE MODE X10
14374 14381 14388 14395

X0286 WNFN.N DATA READ&WRITE
11993 24097 24126 24134 24243 24614

X0287 WNAL.N DATA ALARM
8515 8554 12657 24098 24127 24244

X0290 PSRY.N PUSH MODE READY
3941 20086

X0291 PSFN.N PUSH FINISH
211 3943

X0293 RSMV.N SPINDLE SYNCHONI
20090

X0296 SHCK.N
20262 20266 24246

X0297
8901

X0299 PHED.N
16457

X029A PEND.N
3748 12280

X029D PCUP.N
1573

X02A0 AOPL.N AXIS
15415 24314 24351

X02A3 AEND.N PROGRAM END
20413 24348 24352

X02D0 SPFWD SP FORWARD
10565 10654 10658 10680 10903 10994 15413 25739

X02D1 SPREV SP REVERSE
10566 10655 10659 10681 10904 10995 15414 25740

X02D5
357

X02DE
22693 22696 22702

X02DF SYNC.TAP(SPINDLE
3665

X02E0 MILFWD MILL FWD
25807

X02E1 MILREV MILL REV
25808

X02EA 1A2M 1 AMP 2 MOTOR CH
6397 6418 22052

X0302 RDY3_N SERVO READY 3
4070 24962

X030A SMZ3_N SMOOTHING ZEEO 3
23086

X0312 DEN3_N DIDTRIBUTION END
20841 20915 20995 21227 21311 21333 21337 21339

X032A ZP23_N 2nd ZERO RETURN
23024

X0332 TAP_N TAP MODE
3674

X0343 TSMZ_N ALL AXIS SMOOTHI
2869 2943

X0360 SYNC_N SPINDLE PHASE SY
3906 3986 4137 4211 4739 5060 5114 5530 6092 18830
20094 21136 23017 25634 25665

X0362 VROS_N SPINDLE SPEED DE
370 376

X0363 FLOS_N SPINDLE ALARM
25069

X0364 ZSOS_N SPINDLE ZERO SPE
318 22092 22094 22115

X0365 USOS_N SPINDLE UPTO SPE
3675 3920 4713 19906 22089 22095

X0366 ORAS_N SPINDLE ORIENT F
1621 20828 21123 21184 21249

X036B FLOM_N MILL ALARM
25081

X036C ZSOM_N MILL ZERO SPEED
283

X036D USOM_N MILL UPTO SPEED
287 4078 4094

X036E ORAM.N MILL ORIENT FIN
6909 6943 7099 7115 28456

X0393 SYNS_N SPINDLE SYNCHONI
20091

X03C1 ORDT_N ORIENT DATA OUTP
21159 21334

X03D5
358

X03DA 1A2M 1 AMP 2 MOTOR CH
6398 6419 22053

X03DE
23065 23068 23074

X03DF
3673

X03EA 1A2M 1 AMP 2 MOTOR CH
6399 6420 22054

X0400 PC OFF PC POWER OFF CO
7999

X0401 COMRDY COMPUTER READY
9157 10683 24631 25270 25299 25498 26181 27381 27442 27477
27498 27516 27533 27559 27572

X0464 AUT.R ROBOT RUNNING
2876 2948

X0465 AL.R RROBOT ARARM
25514

X0467 POFF.R SPARE
7980

X046D SPIL.R CHUCK AIR BLAST
25608

X046E CFCCLS CF COVER CLOSE
7331

X046F W-CONV WORK CONVEYOR ON
7617

X0470 TSR.R TAIL SLV RET./SS
24423 25552

X0471 TSF.R TAIL SLEEVE EXT.
8976 24432

X0472 ORT2.R SS SPINDLE ORIEN
20366

X0474 CF.INV C/F INVALID
7329 23474 27057

X0475 AUT.R AUTO MODE
24441

X0476 WNS.M WORK NUMBER SERC
692 24112 24172 24199 24241

X0477 BCD11 WORK NUMBER SERC
9231 23414 24203

X0478 BCD12 WORK NUMBER SERC
4742 9244

X0479 BCD14 WORK NUMBER SERC
3723 3764 26433

X047A BCD18 WORK NUMBER SERC
9213

X047B BCD21 WORK NUMBER SERC
4744 9222

X047C BCD22 WORK NUMBER SERC
3765

```
X0490     TP1.LS     TOOL POSITION CO
                          0   6491
X0491     TP2.LS     TOOL POSITION CO
                          2   6494
X0492     TP3.LS     TOOL POSITION CO
                          4   6497
X0493     TP4.LS     TOOL POSITION CO
                          6   6500
X0494     TPR.LS     TOOL POSITION PA
                        6503
X0495     IND.LS     TURRET INDEX POS
                        6536  25263
X0496     TCL.LS     TURRET CLAMP SEN
                        3636   6729   7769  19926  22497  25244  25257  25262  25289  25435
X0497     GST.M      GEAR SHIFT TURRE
                        6962   7824
X0498     GSM.M      GEAR SHIFT MILL
                        6727   6964   7853
X04A0     EODB11     EXT.OFFSET D BCD
                       23532
X04B0     PNTFIN     EXT.MES.P.SEL FI
                       20438  23497  23501  23505  23509  23513
X04B1     MM.FIN     MEAS.M CODE FIN
                       20441  23489  23493
X04B2     EOFSTA     EXT.T.OFFSET STA
                       20442  23530  23585  23606  23609
X04B3     DSIGN      T.OFS.DATA SIGN(
                       23551  23556  23564  23566  23574  23576
X04B4     M_ERR      MEASURING ERROR
                       23600
X0521
                        5407   5410
X0902     UCIL.M     CHUCK UNCLAMP/UN
                        9218  24385
X0903     SCHC.M     SPINDLE INTERLOC
                        4469   4964   4977   4984   5013   5019   5027  25183  25652
X0905     SIN.M      MAIN SPINDLE SEL
                       21501  21599  21893  21994  22244  25595
X0906     EEMG.M     EMERGENCY STOP(G
                          484    522  25117  25141  25151
X0907     DC24.M     DC24V  CHECK
                       27041
X090D     TBF.LS     TAIL BODY FORWAR
                       21291  21295  25374  25382
X090E     TBF2LS     CARRIAGE ENGAGED
                       21290  21294  25376  25383
X090F     MAL8.M     SS BASE FAN THER
                       26087
Y0000     SB.M        POWER ON
                          611    608
Y0001     EMGB.M      EMERGENCY STOP
                          490   5196   9283  11796  24539  26937  26958  26960
Y0002     WOK.M      WORK LIGHT
                       15369
Y0003     TLOF.M     TOOL EYE ARM HI
                        8235
Y0004     TDF.M      TOOL EYE FORWAR
                        8221   8228
Y0005     TDR.M      TOOL EYE REVERS
                        8227   8231
Y0006     HRDR.M     HYDRAULIC PUMP
                         613
Y0007     CM.M       COOLANT PUMP ON
                        7780   2935   2973  27593
Y0008     MV.M       CHIP CONVEYOR M
                        1749   1729   1731   1769
Y0009     HCRF.M     HEAD COOLING RA
                        1972
Y000A     HCP.M      COOLING PUMP
                        1947
Y000B     TU.M       TURRET UNCLAMP
                        9270     26  19895  22501  25272
Y000C     TC.M       TURRET CLAMP
                        9273  25274
Y000D     WOKMR      WORK MEASURE RE
                        8150  28421
Y000E     DLR.M      DOOR LOCK RELEA
                        2978   2226   2232
Y000F     RL.M       ALARM RED
                        3784   7971
Y0010     PT.M       CYCLE FINISH YE
                        3778    271   7977
Y0011     STL.M      AUTO CYCLE GREE
                        3005
Y0012     LUBE.M    LUBE PUMP MOTOR
                        2185   2186  26066
Y0013     MILLJT    MILL JOINT
                        8938  22507  22511  25478
Y0014     AOPF.M     MAIN BREAKER TR
                        8006
Y0015     BFM.M      BAR FEEDER MODE
                       11810   4776  11736  21497  21889  25600  26227  26275
Y0016     B6MX.M     BAR FEEDER REQU
                        7965
Y0017     SFWSIG     EMERGENCY STOP
                        9286
Y0018                RUN (RESERVED I
                        1808   1713   1742   1785   1787  28468
Y0019                FWD (RESERVED I
                        1828   1817   1845   1867
Y001A                REV (RESERVED I
                        1848   1811   1851
```

```
Y001B                HSPD (RESERVED
                      1939   1716   1720   1937  28471  28475

Y001C                RES (RESERVED I
                      1888   1835   1864   1878

Y001D     FTCLMP     FLASH TOOL CLAMP
                      7260   7281  28670  28675

Y001E     FTUNCL     FLASH TOOL UNCLA
                      7263   7278  28417  28671  28674

Y001F     CHLSEL     CHUCK LOW SEL-UK
                      4448

Y0020     SSCL.M     SS CLAMP
                     23296  25914  25926

Y0021     SSBK.M     SS BRAKE
                     23301

Y0022     SSOPEN     SS CHUCK OPEN
                      8944

Y0023     SSCLSE     SS CHUCK CLOSE
                      8941

Y0024     SAB.M      SS CHUCK AIR BLA
                      6432

Y0028     TWINKL     TWINKLE INDICATO
                     10221  10218

Y0030     WRAP       WORK REST AIR PA
                     27596

Y0031     WRJ.SL     WORK REST JOINT
                     27728    106   8072   9053   9096  10706  11019  25916  25928  26647
                     27088  27105  27622  27639  27651  27712  27721  27731  27733  27748
                     27755  28448

Y0032     WRU.SL     WORK REST ARM UN
                     27582  20021  27578  27615  27620  27667  27687  27715

Y0033     WRC.SL     WORK REST ARM CL
                     27589  20023  27094  27585  27643  27648  27669  27692

Y0034                WORKREST BRAKEOF
                     27729

Y0040     EX400M     EXT.M-CODE 400M
                     24846

Y0041     EX401M     EXT.M-CODE 401M
                     24849

Y0042     EX402M     EXT.M-CODE 402M
                     24852

Y0043     EX403M     EXT.M-CODE 403M
                     24855

Y0044     EX404M     EXT.M-CODE 404M
                     24858

Y0045     EX405M     EXT.M-CODE 405M
                     24861

Y0046     EX406M     EXT.M-CODE 406M
                     24864

Y0047     EX407M     EXT.M-CODE 407M
                     24867

Y0048     EX408M     EXT.M-CODE 408M
                     24870

Y0049     EX409M     EXT.M-CODE 409M
                     24873

Y004A     EX410M     EXT.M-CODE 410M
                     24876

Y004B     EX411M     EXT.M-CODE 411M
                     24879

Y004C     EX412M     EXT.M-CODE 412M
                     24882

Y004D     EX413M     EXT.M-CODE 413M
                     24885

Y004E     EX414M     EXT.M-CODE 414M
                     24888

Y004F     EX415M     EXT.M-CODE 415M
                     24891

Y0082     MCL.M      MIST COLECTOR ON
                      3493

Y0083     MCOLNT     MIST COOLANT(SP)
                      3525  20401  20404

Y0084     HIPCLT     HIGH PRESSUE COO
                      3438

Y0085     DGIN0      DG IN BIT 0
                      3446

Y0086     DGIN1      DG IN BIT 1
                     28278  19663  20488  20492  20497  20502  20511  20515  20520  20525

Y0087     DGIN2      DG IN BIT 2
                     28283  19662  20487  20491  20496  20501  20510  20514  20519  20524

Y0088     MCNRDY     MACHINE RDY
                     28285

Y0089     TREUCL     TURRET UNCLAMP S
                      7768

Y008A                WORK CONVEYOR
                      7621

Y008B     400M       EXT.M-CODE 400M
                     24894

Y008C     401M       EXT.M-CODE 401M
                      3015

Y008D     402M       EXT.M-CODE 402M
                      3023

Y008E     403M       EXT.M-CODE 403M
                     24900

Y0090     CH.M        CHUCK CLAMP SOL
                      4877   1976   1979   2007  25304

Y0091     UCH.M       CHUCK UNCLAMP S
                      4886   1974   1981   2004  25301

Y0092                 GREASE PUMP MOT
                      2159

Y0093     C-CL.M     C AXIS CLAMP
                       430

Y0094     C-BK.M     C AXIS BRAKE
                       442
```

```
Y0095     AB.M        CHUCK AIR BLAST
                       5872

Y0096     PCF.M       PARTS CATCHER F
                       7579   5097   7565   7590   7593  19811  19882  19885  20006  25446
                      26398

Y0097     PCR.M       PARTS CATCHER R
                       7589   7580  19816  25448  26400

Y0098     TAB.M       TOOL EYE AIR BL
                       8126

Y0099     HAC.M       HEAD AIR CURTAI
                       3489

Y009A     WOUT.M      MEASURING AIR B
                       7806

Y009B     SPCOOL      SP THROUGH COOL
                       7945

Y009C     CHLSEL      CHUCK LOW SELECT
                       7737

Y009D     FDOP.M      AUTO DOOR OPEN
                       7443   7306   7423   7460  25345  28646

Y009E     FDCL.M      AUTO DOOR CLOSE
                       7470   7313   7322   7429   7447   7450   7710  25347  28651

Y009F     TALBRK      TAIL BREAKE OFF
                         96     93    966  10637  10642  25373  25375

Y00A0     BF_MD       BF MODE(YMC)
                      11739  11771

Y00A1     AUT_MD      AUTO MODE(YMC)
                       9259  11768  11805

Y00A2     STL_BF      CYCLE START(YMC)
                      11746

Y00A3     CHO_BF      CHUCK OPEN(YMC)
                      11758   8452

Y00A4     CHC_BF      CHUCK CLOSE(YMC)
                      11764

Y00A5     M68.BF      BF CALL M68(YMC)
                      11778   8456  11766  12019  12140

Y00A6     M69.BF      BF CALL M69(YMC)
                      11784   8462   8464  12018  12139

Y00A7     M65.BF      BF CALL M65(YMC)
                      11788

Y00A8     M64.BF      BF CALL M64(YMC)
                      11791

Y00A9     Z_REF.      Z HOME POS.(YMC)
                      11794

Y00AA     EMG_BF      EMG STOP(YMC)
                      11797

Y00AB     SP_STP      SPDL STOP(YMC)
                      11803

Y00B0     SPSTP       SPINDLE STOP->RB
                      24531

Y00B1     MF20.M      SERVI REQ.STRB->
                      24534   2453   2576   2936   2974  24368  24380  24392  24404  24475

Y00B2     M_CD11      M CODE 11->RBT
                       3410

Y00B3     M_CD12      M CODE 12->RBT
                       3413

Y00B4     ADWNOK      ARM DOWN OK->RBT
                      24537

Y00B5     EMGSTP      EMERGENCY STOP->
                      24541

Y00B6     FDHLD       FEED HOLD->RBT
                      24544

Y00B7     ORTSTP      ORIENT STOP->RBT
                      24548

Y00B8     CKOPN       CHUCK OPEN END->
                      24551

Y00B9     CKCLS       CHUCK CLOSE EN->
                      24554

Y00BA     SPARE       SPARE
                      24557

Y0140     POFFRQ      POWER OFF REQ(PD
                       8000

Y0141     RST.L       RESET SWITCH  .B
                       3007

Y0142     AUTO.L      AUTO MODE .B
                      14336

Y0143     MDI.L       MDI MODE .B
                      14343   2706   3574   3588   3602   3815   3871   4257   6382   7538
                      21252  21276  22198  26472  26561

Y0144     RPD.L       RAPID MODE .B
                      14363    815    919  25826  25843  25862  25874  25904  25937  25938
                      26858

Y0145     HOME.L      HOME RETURN MODE
                      14358    816    847    849   8138   9028  12470  25828  25845  25864
                      25905  25955

Y0146     H*1.L       HANDLE MODE *1 .
                      14404  25903

Y0147     H*10.L      HANDLE MODE *10
                      14407    817  25902

Y0148     VFC.L       VFC .B
                       1545

Y0149     TAPE.L      TAPE MODE .B
                      14328

Y014A     CLNT-M      COOLANT MENU .B
                       1060   1055   1057   1069   1152   1200

Y014B     CLNTSP      COOLANT STOP
                       7641

Y014C     MF1.L       MF1 SWITCH  .B
                       1121

Y014D     H*100       HANDLE MOD *100
                      14410    818  25901

Y014E     M-MENU      MACHINE MENU .B
                       1053   1048   1050   1066   1153   1199
```

```
Y014F     SGBLK      SINGLE BLOCK .B
                       2660

Y0150     RDY.L      READY.B
                       1552

Y0151     ALARM      NC ARARM
                       1572

Y0152     STL.L       CYCLE START
                       2987   2921  25088

Y0153     FDHOLD      FEED HOLD
                       2997

Y0154     SPSTAT      SPINDLE START
                       6454   6472

Y0155     SP-REV      SPINDLE REVERSE
                       6008

Y0156     1ST-HD      TAIL BODY FORWA
                       1665   6015  10188  10202

Y0157     2ND-HD      TAIL BODY REVER
                       1688   6017

Y0159     FDCL.L      RESERVED ( TOOL
                       7325

Y015A     CHIPON      CHIP CONVEYOR
                       1751

Y015B     TDBZ.M      BUZZER
                         274    268

Y015C     AXIND      AXIS INDICATOR
                          589

Y015D     WRCL.L     WKREST CLAMP LED
                       27694

Y015E     WRUC.L     WKREST UNCLP LED
                       27689

Y015F                GL/CF SW  LED
                       24527

Y0208     *SF1.N     SERVO ON X .NC
                       8995

Y0209     *SF2.N     SERVO ON Z .NC
                       8999

Y020A     *SF3.N     SERVO ON C .NC
                       9017    339   2607   5578   7989   9014

Y020B     *SF4.N     SERVO ON 4 .NC
                       9020

Y020C     *SF5.N     SERVO ON 5 .NC
                       8997

Y020D     *SF6.N     SERVO ON 6 .NC
                       9022

Y0210     *IT1.N     INTERLOCK X .NC
                       9056

Y0211     *IT2.N     INTERLOCK Z .NC
                       9062

Y0212     *IT3.N     INTERLOCK C .NC
                       9065  25972

Y0213     *IT4.N     INTERLOCK 4 .NC
                       9092  25870

Y0214     *IT5.N     INTERLOCK 5 .NC
                       9104

Y0215     *IT6.N     INTERLOCK 6 .NC
                       9106

Y0218     MLK1.N     MC. LOCK X .NC
                       9111

Y0219     MLK2.N     MC. LOCK Z .NC
                       9112

Y021A     MLK3.N     MC. LOCK C .NC
                       9120

Y021B     MLK4.N     MC. LOCK 4 .NC
                       9130

Y021C     MLK5.N     MC. LOCK 5 .NC
                       9131

Y021D     MLK6.N     MC. LOCK 6 .NC
                       9132

Y0220     J+X.N      JOG FEED +X .NC
                          115    988  12486

Y0221     J+Z.N      JOG FEED +Z .NC
                          133    989  12522  12543

Y0222     J+C.N      JOG FEED +C .NC
                          154    990

Y0223     J+B.N      JOG FEED +W .NC
                          173    991  12578

Y0224     J+Y.N      JOG FEED +Y .NC
                          185    996  12631

Y0228     J-X.N      JOG FEED -X .NC
                          120    992  12504

Y0229     J-Z.N      JOG FEED -Z .NC
                          146    993  12523  12544

Y022A     J-C.N      JOG FEED -C .NC
                          164    994

Y022B     J-B.N      JOG FEED -W .NC
                          178    995  12596

Y022C     J-Y.N      JOG FEED -Y .NC
                          192    997  12620

Y0230     CAXI.N     C AXIS SELECT .N
                       5551   4067   4123   5432   5441   5546   7990  24928  24940

Y0231     PSRQ.N     PUSH REQUEST NC
                       3976   1149   3940   3953   3963   3972  20085

Y0232     YCNT.N     Y AXIS CONTROL O
                          767    753    761   2708  20409  26574  28626

Y0233     MNSY.N     MN SYNCHRO REQ.
                       4174   3846   3907   4147   6077  21645  22061  26417

Y0234     MILL.N     MILL SELECT .NC
                       5416   8574   8581   8614   8619   8630   8635  24254

Y0235     SHKL.N     COLLISION SOFT.N
                       4360   4358

Y0236     CYUP.N
                       9200   9197
```

Y0238 RSTB.N RST.B.NC
3687 3685 3722

Y0239 M2RT.N M02.M03.RST.NC
3694

Y023D HD2.N HD2 DISPLAY REQ.
23324 23326

Y023E KEY.N PROGRAM LOCK .N
1550

Y0240 ST.N CYCLE START .NC
2852 2858 3787 6772 7676 8011 8502 12005 12118

Y0241 *SP.N FEED HOLD .NC
9186 2840

Y0242 SBK.N SINGLE BLOCK .NC
9193 2919 3586 3598 8257

Y0244 CIL.N CUTTING INTLCK.N
3682

Y0245 NRST.N M02 RESET .NC
3698

Y0246 RRW.N RESET & REWIND .
3733 8522

Y0247 QEMG.N PC EMERGENCY .NC
25157 9282 24630

Y0248 CBCA.N CHUCK-BR CANCEL.
15466

Y0249 TBCA.N TAIL-BR CANCEL .
15473

Y024A WBCA.N WORK-BR CANCEL .
15462

Y024B SLCA.N S-LIMT CANCEL .N
9305

Y024C PRT.N MES. PRNT OUT NC
814 19746

Y024D SIMU.N SUMILATION MODE
1135 23916

Y0250 HIT.N HANDLE INTERRUP.
1435

Y0251 TAPE.N TAPE SELECT NC
14318 14313 14321 14327

Y0252 TPS.N TPS. REQUEST .NC
1547

Y0253 VFC.N VFC. REQUEST .NC
1543

Y0254 ERD.N ERROR DETECT .NC
7887 7881 19818 19821

Y0255 *CDZ.N CHAMFERING .NC
7894 7890 19824 19827

Y0256 DRN.N DRY RUN .NC
15320

Y0257 BDT1.N BLOCK DELETE 1 .
15489 15720

Y0258 BDT2.N BLOCK DELETE 2 .
15495 15491 15493 15568 15723

Y0259 BDT3.N BLOCK DELETE 3 .
15501 15497 15499 15726

Y025A BDT4.N BLOCK DELETE 4 .
15507 15503 15505 15729

Y025B BDT5.N BLOCK DELETE 5 .
15513 15509 15511 15732

Y025C BDT6.N BLOCK DELETE 6 .
15519 15515 15517 15735

Y025D BDT7.N BLOCK DELETE 7 .
15525 15521 15523 15738

Y025E BDT8.N BLOCK DELETE 8 .
15531 15527 15529 15741

Y025F BDT9.N BLOCK DELETE 9 .
15537 15533 15535 15744

Y0260 J.N JOG FEED MODE .N
14262 14455 23369

Y0261 RPD.N RAPID MODE .NC
14267

Y0262 H.N HANDLE MODE .NC
14282 14292 14294 14306 14308

Y0264 ZRN.N Z-RETURN MODE .N
14273

Y0266 PTPM.N MANU.OPTIN MODE.
14231 840 14225 14261 14266 14272 14281

Y0268 MEM.N MEMORY MODE .NC
14237 9253

Y0269 T.N TAPE MODE .NC
14257

Y026A TEST.N TEST MODE .NC
14247

Y026B SPM.N SINGLE PROCESS .
14252

Y026C RSTM.N RESTART MODE .NC
14242 12159

Y0270 HX.N HANDLE X SELECT.
1507

Y0271 HZ.N HANDLE Z SELECT.
1510

Y0272 HC.N HANDLE C SELECT.
1527

Y0273 H4.N HANDLE W SELECT.
1541 1524

Y0274 H5.N HANDLE Y SELECT.
1514

Y0278 MP1.N HANDLE MULTI-0.N
14296 14396

Y0279 MP2.N HANDLE MULTI-10.
14310 14397

Y027D TSBY.N TOOL SET STD-BY.

```
                    1694

Y027E     TSET.N    TOOL SET START .
                     23354  14146  14153  23405  24277

Y0280     SRNS.N    SPINDLE FORWARD.
                       6385   3662   6433

Y0281     SRIS.N    SPINDLE REVERSE.
                       6387   3663   6434

Y0282     TL1S.N    TORQUE LMT. LOW.
                        394   9011

Y0283     TL2S.N    TORQUE LMT. HI..
                        400    395   6481   9012

Y0284     SNIS.N    ORIENT F-INDEX .
                      20751

Y0285     SIIS.N    ORIENT R-INDEX .
                      20754

Y0286     ORCS.N    SPINDLE ORIENT .
                      20794   6246

Y0287     SPEX.N    MAN SP EXT DATA
                       6252   3903   6247   6286   6343

Y0289     SYNS.N    SPINDLE SYNC. .N
                       4087   4082   5528  19933  26288

Y028A     GA1S.N    C-GAIN SELECT-1.
                       6132   6128  19962  19965

Y028B     GA2S.N    C-GAIN SELECT-2.
                       6138   6134  19963  19968

Y028D     COIL.N    SPINDLE COIL T-U
                        348    337   9004

Y028F     SIHT.N    S CODE PROTECT.N
                       8607   8591   8602   8605

Y0290     SRNM.N    MILL FORWARD.NC
                       6407   3652   6391

Y0291     SRIM.N    MILL REVERSE.NC
                       6428   3653   6412

Y0292     TL1M.N    TORQUE LIMIT .NC
                       6967

Y0294     SNIM.N    MILL FORWARD.NC
                       7091   7102   7103   7112   7113   7121

Y0295     SIIM.N    MILL REVERSE.NC
                       7096

Y0296     ORCM.N    ORIENT COMMAND.N
                       6883   6862   6885   6889   6907   6919

Y0297     MLEX.N    MILL EXT DATA.NC
                       6271   6263   6308   6317   6354  22411

Y0299     SYNM.N    SYNCHRO REQUEST.
                       4100   4097  19934

Y029E
                    5644

Y029F     IHTM.N    S CODE PROTECT.N
                       8608

Y02A0     MFN1.N    M FUNC. FIN 1 .N
                       8685   8675

Y02A1     MFN2.N    M FUNC. FIN 2 .N
                       8715   8705

Y02A2     MFN3.N    M FUNC. FIN 3 .N
                       8745   8735

Y02A3     MFN4.N    M FUNC. FIN 4 .N
                       8775   8765

Y02A4     TFIN.N    T FUNCTION FIN.N
                       7141    770   7142

Y02A5     SFN.N     S CODE FIN NC
                       8598   8681   8711   8741   8771

Y02A6     BFIN.N    B FUNCTION FIN.N
                       8830

Y02A7     GFIN.N    GEAR FUNC. FIN.N
                       5762

Y02A8     mfn1.N    m FUNC. FIN 1 .N
                       8697   8687

Y02A9     mfn2.N    m FUNC. FIN 2 .N
                       8727   8717

Y02AA     mfn3.N    m FUNC. FIN 3 .N
                       8757   8747

Y02AB     mfn4.N    m FUNC. FIN 4 .N
                       8787   8777

Y02AD     sfn.N     s CODE FIN NC
                       8657   8693   8723   8753   8783

Y02B0     ROVU.N    RAPID OV.UP NC
                       1412

Y02B1     SOVU.N    SPINDLE OV.UP NC
                       1331

Y02B2     FOVU.N    FEED OV.UP NC
                       1397

Y02B3     MOVU.N    MILL OV.UP NC
                       1341

Y02B4     ROVD.N    PAPID OV.DW NC
                       1420   2387   2402

Y02B5     SOVD.N    SPINDLE OV.DW NC
                       1349

Y02B6     FOVD.N    FEED OV.DW NC
                       1406

Y02B7     MOVD.N    MILL OV.DW NC
                       1353

Y02B8     SPST.N    SPINDLE F-RUN .N
                      21654

Y02B9     CCW.N     SPINDLE R-RUN .N
                      21657

Y02BA     MSPS.N    MILL F-RUN .NC
                      22405

Y02BB     MCCW.N    MILL R-RUN .NC
                      22409

Y02C1     ORFN.N    ORIENT FIN.NC
                      21345
```

```
Y02C3     BP-REQ     B PUSH REQ.NC
                       8898   8892   8899  20373  20377  25636  25667
Y02C8     EST.N      EX.DATA STRT .NC
                      24195  11992  24245
Y02E6     *ASP.N     ATC FEED HOLD .N
                       9107
Y02EE     *PSP.N
                       9108
Y02F0     ASTB.N     ATC BLOCK START.
                      24326  24321  24323  24334  24341
Y02F1     ARST.N     ATC BLOCK RESET.
                      24301
Y02F6     ADRN.N     ATC BLOCK DRY RU
                      14230
Y02F7     AACT.N     ATC BLOCK ENABL.
                      14233
Y030A     *SVF3      SERVO ON C _NC
                      22929    379  22927
Y0312     *IT3       INTERLOCK C _NC
                       9070  25880  25974
Y031A     MLK3       MC. LOCK C _NC
                       9128
Y0322                JOG FEED +C _NC
                        158
Y032A                JOG FEED -C _NC
                        168
Y0330     SEL-C      C AXIS SELECT _N
                      23029   4068   4124  22960  24934  24947  24954  24961
Y0333     MNSY.N     SP SYNCHRO REQ._
                       4179   3851   3908   4148   6078  20951  21341  21646  22062  26418
Y0334     MILMOD     MILL MODE _NC
                       5417
Y0340                CYCLE START _NC
                       2857
Y0341                FEED HOLD _NC
                       9187
Y0342                SINGLE BLOCK _NC
                       9194
Y0344
                       3683
Y0345                M02 RESET _NC
                       3699
Y0346                RESET & REWIND _
                       3734
Y0347                PC EMERGENCY _NC
                      25158
Y0348                CHUCK-BR CANCEL_
                      15467
Y0349                TAIL-BR CANCEL _
                      15474
Y034A                WORK-BR CANCEL _
                      15463
Y0350                HANDEL INTERRUP_
                       1437
Y0352                TPS. REQUEST _NC
                       1548
Y0354                ERROR DETECT _NC
                       7888
Y0361
                      14268
Y0362                HANDLE MODE _NC
                      14283
Y0364                Z-RETURN MODE _N
                      14274
Y0366                MANU.OPTIN MODE_
                      14232
Y0368                MEMORY MODE _NC
                      14238
Y036A                TEST MODE _NC
                      14248
Y036B                SINGLE PROCESS _
                      14253
Y036C                RESTART MODE _NC
                      14243
Y0372                HANDLE C SELECT_
                       1531
Y0378                HANDLE MULTI-0_N
                      14297
Y0379                HANDLE MULTI-10_
                      14311
Y0380     SRN.N      SPINDLE FORWARD_
                      22060   3670   6439
Y0381     SRI.N      SPINDLE REVERSE_
                      22057   3671   6440
Y0382     TL1        TORQUE LMT. LOW_
                      23291  22925
Y0383                TORQUE LMT. HI._
                         418  22926
Y0384     SNIS.N     ORITNT F-INDEX _
                      21084
Y0385     SIIS.N     ORIENT R-INDEX _
                      21087
Y0386                SPINDLE ORIENT _
                      21158   6279  20936  21335
Y0387     SPEX_N     SP SPEXT DATA NC
                       6285   3904   6280   6324   6347
Y0389     SYNC.N     SPINDLE SYNC NC
                       4091  23016  26289
Y038A                C-GAIN SELECT-1_
                       6144   6140  19972  19975
Y038B                C-GAIN SELECT-2_
                       6150   6146  19973  19978
```

```
Y038D     COIL.N     SPINDLE COIL T-U
                        382    377  22919
Y038F     SCPR.N     S CODE PROTECT_N
                       8666   8646   8661   8664
Y0390     MLFW.N     MILL FORWARD NC
                       6408
Y0391     MLRV.N     MILL REVERSE NC
                       6429
Y0392
                       6968
Y0394
                       7092
Y0395
                       7097
Y0396
                       6884
Y0397     MLEX.N     MILL EXT DATA NC
                       6272   6358
Y039E
                       5647
Y039F     SCPR.N     S CODE PROTECT N
                       8609   8667
Y03B0                RAPID   _NC
                       1413
Y03B1                SPINDLE   _NC
                       1332
Y03B2                FEED   _NC
                       1398
Y03B3                MILL   _NC
                       1342
Y03B4                RAPID   _NC
                       1421
Y03B5                SPINDLE   _NC
                       1350
Y03B6                FEED   _NC
                       1407
Y03B7                MILL   _NC
                       1354
Y03B8                SPINDLE F-RUN _N
                      22068
Y03B9                SPINDLE R-RUN _N
                      22071
Y03BA                MILL F-RUN _NC
                      22406
Y03BB                MILL R-RUN _NC
                      22410
Y03C0     CFIN_N     C AXIS ORIENT FN
                      21344
Y03C4     SPOVSY     SPDL.OVERIDE SYN
                       4114   4102   4107
Y0400     X_POS      X AXIS ZERO POS
                        456
Y0401     Z_POS      Z AXIS ZERO POS
                        458
Y0403     W_POS      W AXIS ZERO POS
                        460
Y0404     Y_POS      Y AXIS ZERO POS
                        463
Y0408                STROKE END -1
                      27982
Y040C                STROKE END -5
                      27986
Y0410                STROKE END +1
                      27985
Y0414                STROKE END +5
                      27983
Y0450     PCOFRQ     PC OFF REQEST
                       7998  15255
Y0468
                      27988
Y0470
                      27989
Y04D5     68M        BAR FEEDER CALL1
                       3422
Y04E2     PTX.M      CYCLE FINISH
                       3789   3786
Y04E5     FDCL.L     TOP DOOR CLOSE E
                       7305
Y04E6     SSP.M      SPINDLE STOP
                       5686
Y04E7     ORFN.L     SPINDLE ORIENT F
                      20801
Y04E9     SETUP      SETUP SW.
                       8952
Y04EA     RESET      RESET
                        568
Y04F3     M-18       M CODE 18
                       3419
Y04F5     ZP.L       MACHINE Z HOME P
                       8969   5072   6276   6338   6348  21874  22000  22022  25646
Y04F6     SSHOME     SS HOME POSITION
                       8973
Y04F7     AUTO       AUTO MODE(CF)
                      14424  24469  24471  25512
Y04F8     TSR.L      TAIL SLEEVE FWD
                       8983  24461  24567
Y04F9     TSF.L      TAIL SLEEVE REV
                       8980  24569
Y04FA     MCBPES     YMC B/P E-STOP
                       5197
Y04FB     SUCK.M     SPARE
```

24459 24456 24460

Y04FD SSP2.M SS SPINDLE STOP
5688 24573

Y04FE SORF.L SS ORIENT FINISH
21191 24577

Y04FF REND.M WOAK No. SERCH
24240 24251

Y0512 TUC.M TURRET UNCLAMP S
78 61 62 264 6791 6921 7191 8254 8947 19893
22285 22334 22498 25436

Y0513 TCL.M TURRET CLAMP SOL
8949

Y0520 PSEL#1 OF.TOOL SEL.M (#
23500 20433 23498

Y0521 PSEL#2 OF.TOOL SEL.M (#
23504 20434 23502

Y0522 PSEL#3 OF.TOOL SEL.M (#
23508 20435 23506

Y0523 PSEL#4 OF TOOL SEL.M (#
23512 20436 23510

Y0524 PSEL#5 OF.TOOL SEL.M (#
23516 20437 23514

Y0525 E_M112 EXT.MEASURE STAR
23492 20439 23490

Y0526 E_M113 EXT.MEASURE FIN
23496 20440 23494

Y0527 RD.FIN OF.DATA READ FIN
23608

Y0534 454M EXTERNAL M-CODE
24902

Y0535 455M EXTERNAL M-CODE
24904

Y0536 456M EXTERNAL M-CODE
24906

Y0537 457M EXTERNAL M-CODE
24908

Y0538 458M EXTERNAL M-CODE
24910

Y0539 459M EXTERNAL M-CODE
24912

Y053A 460M EXTERNAL M-CODE
24914

Y053B 461M EXTERNAL M-CODE
24916

Y053C 462M EXTERNAL M-CODE
24918

Y053D 463M EXTERNAL M-CODE
24920

Y053E 464M EXTERNAL M-CODE
24922

Y053F 465M EXTERNAL M-CODE
24924

Y0560 SSENCM SS ENCODER SEL M
5424 5420

Y0568 WSW.NC CALL WINDOW MENU
521 517 519

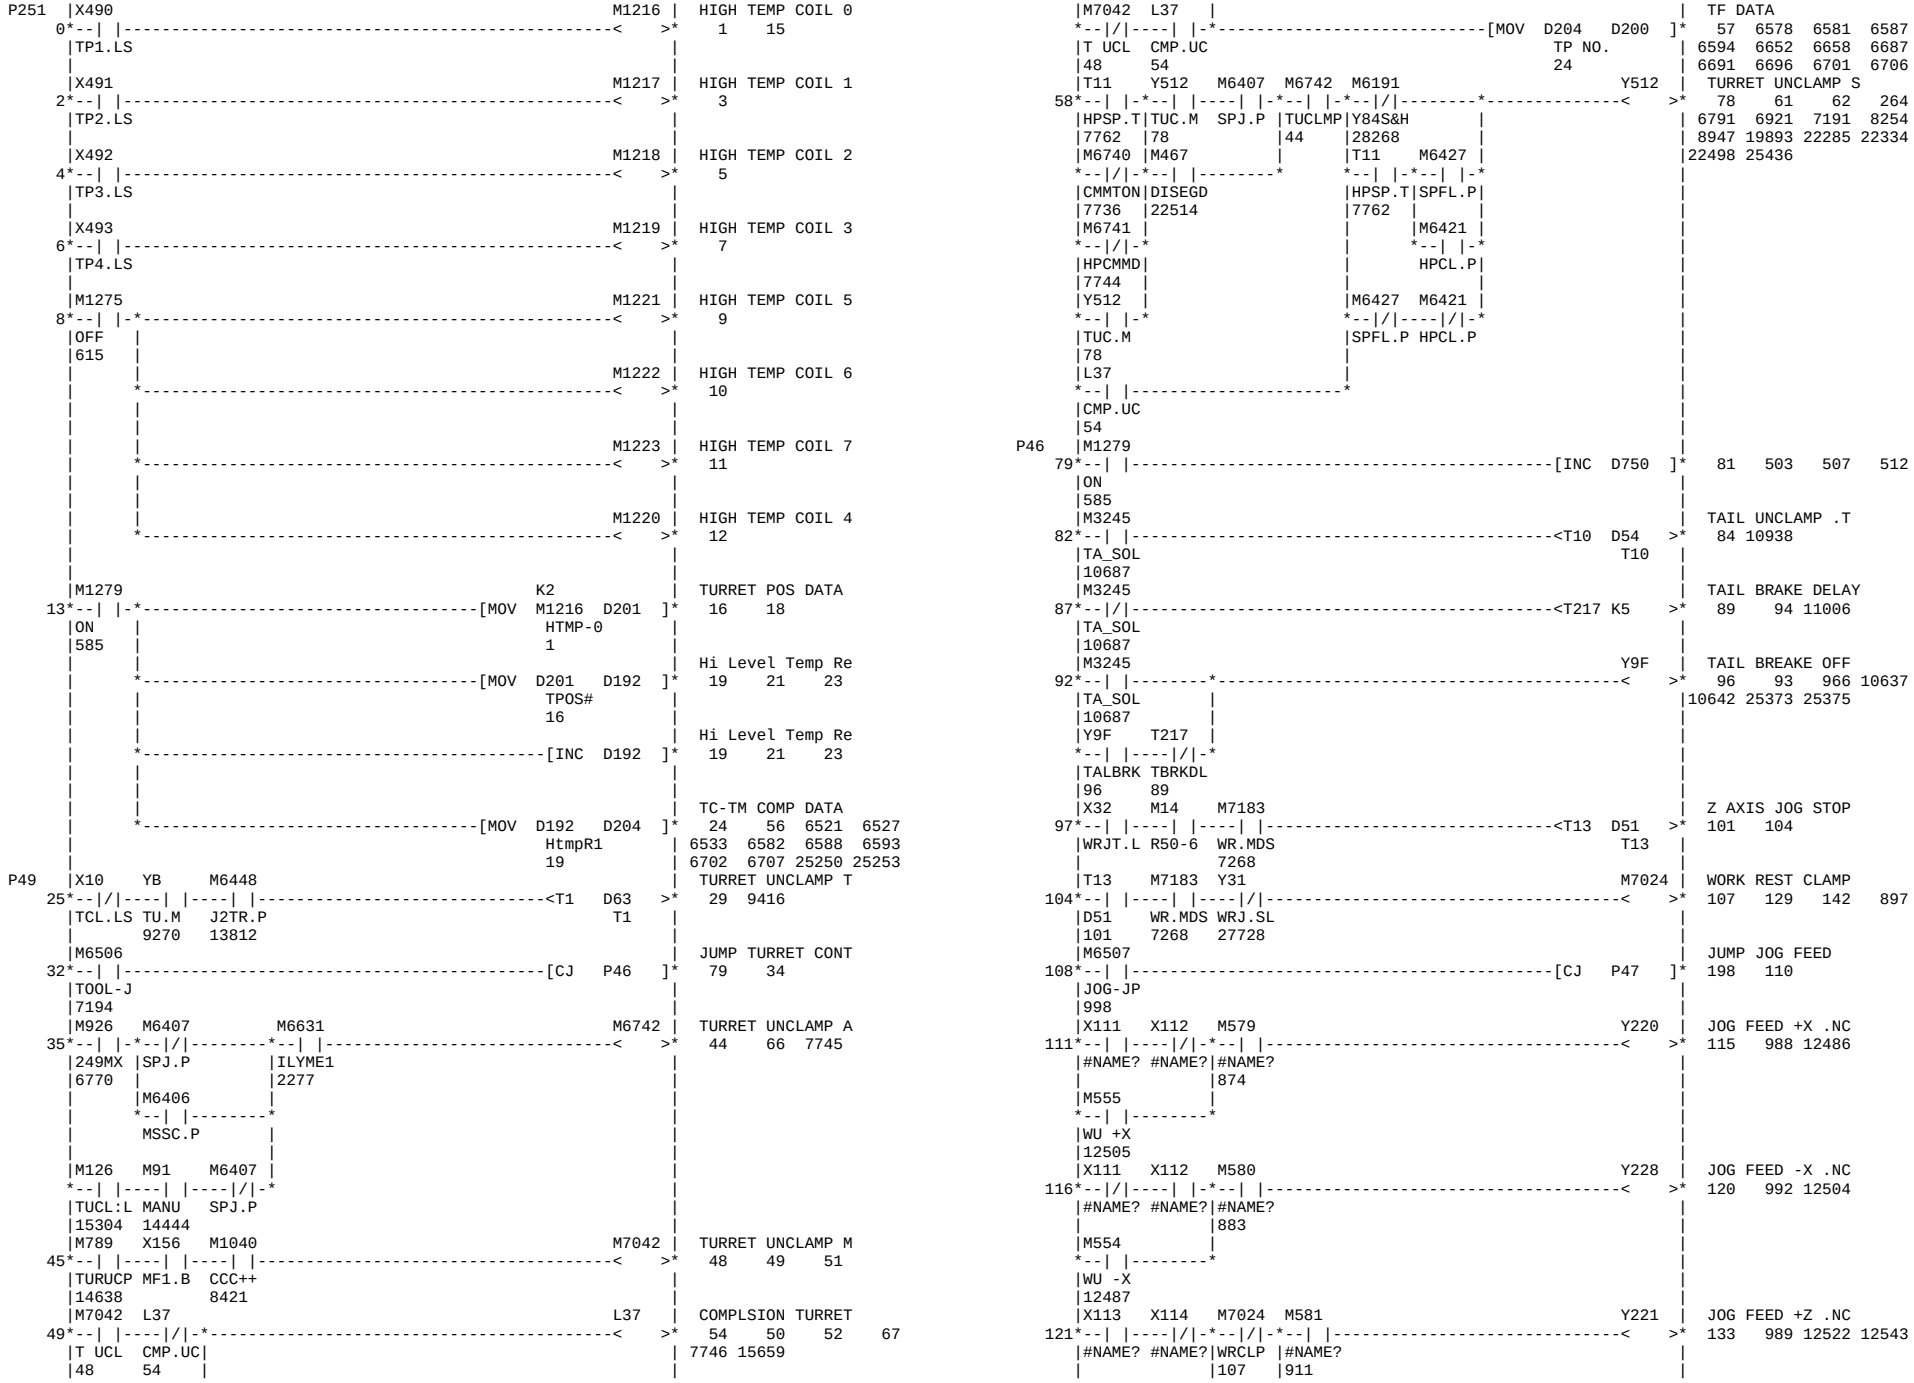
Y0901 FN.M M FUNCTION STROB
3546 2443

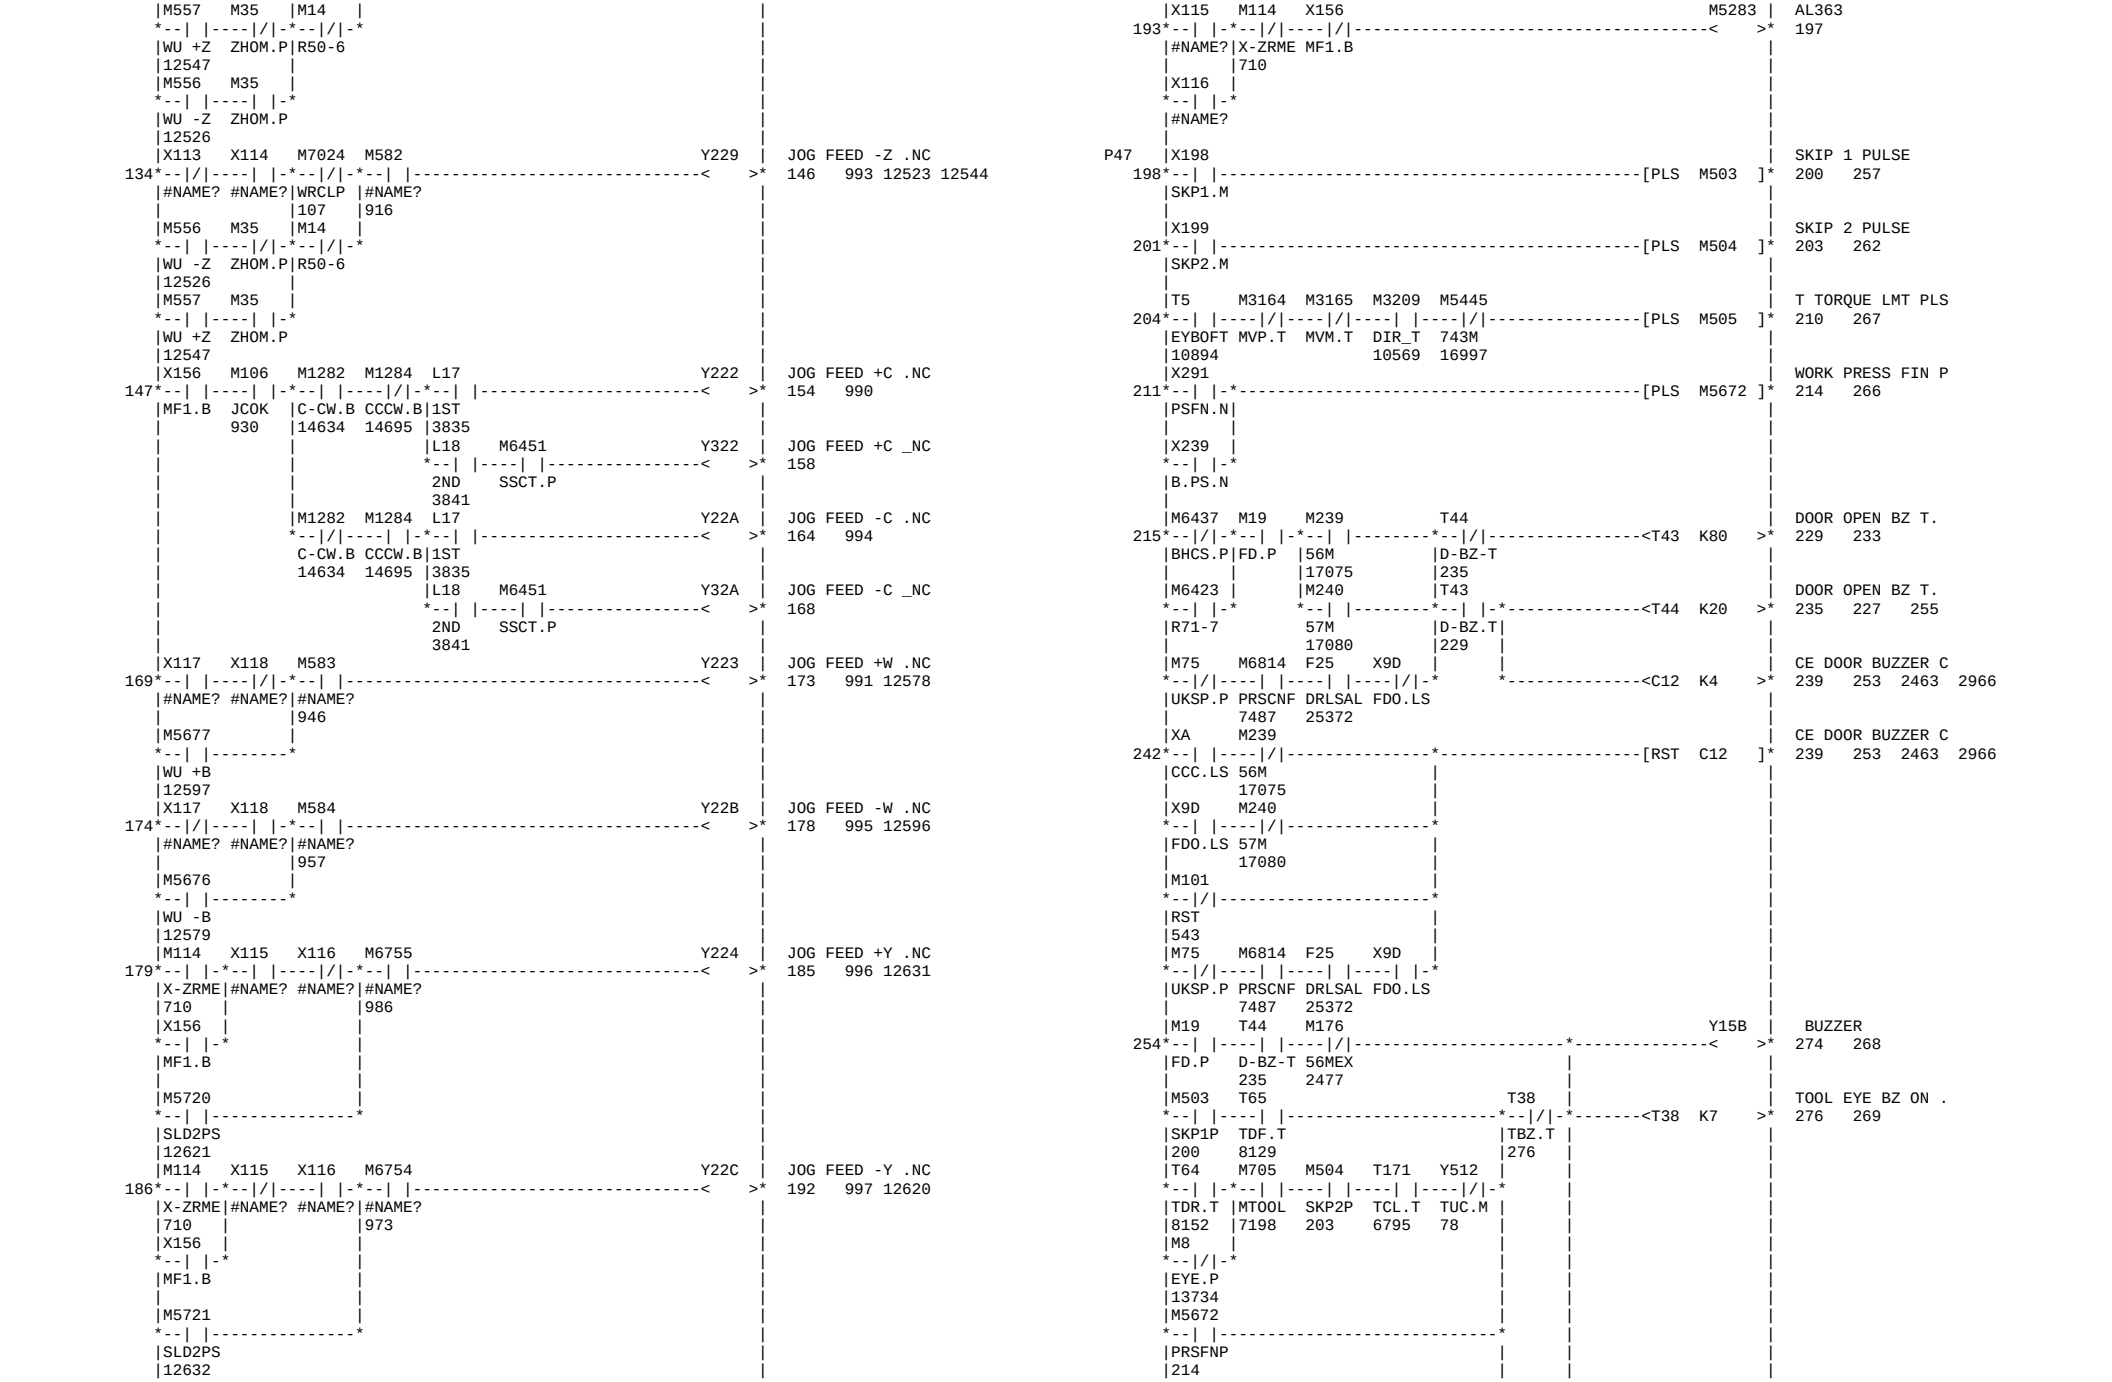
Y0902 SSOP.M MAIN/SUB SPINDLE
5684

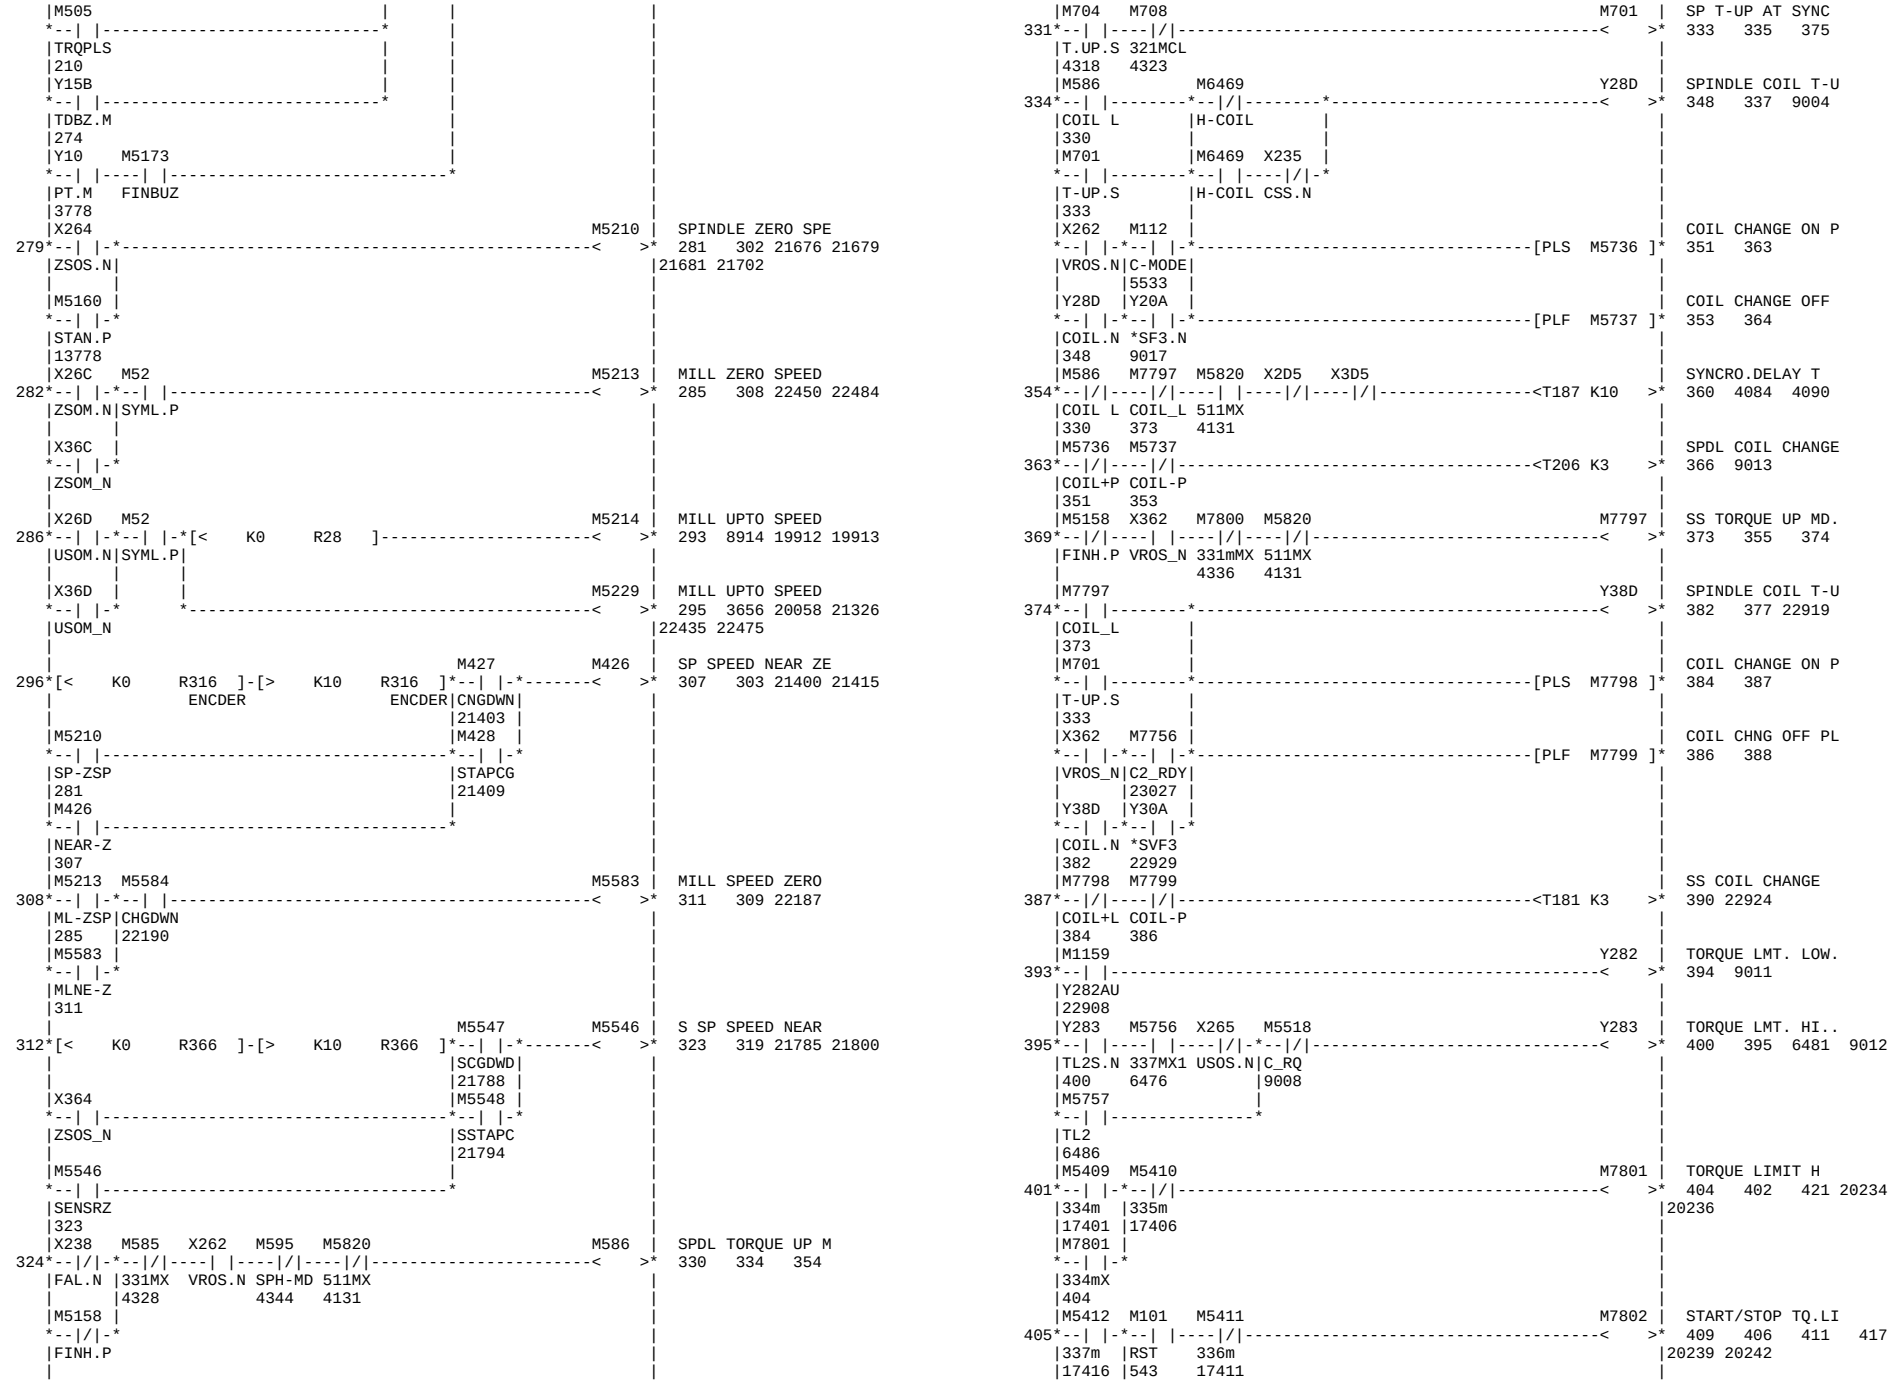
Y0903 M18.M M CODE 18/DECODE
3416

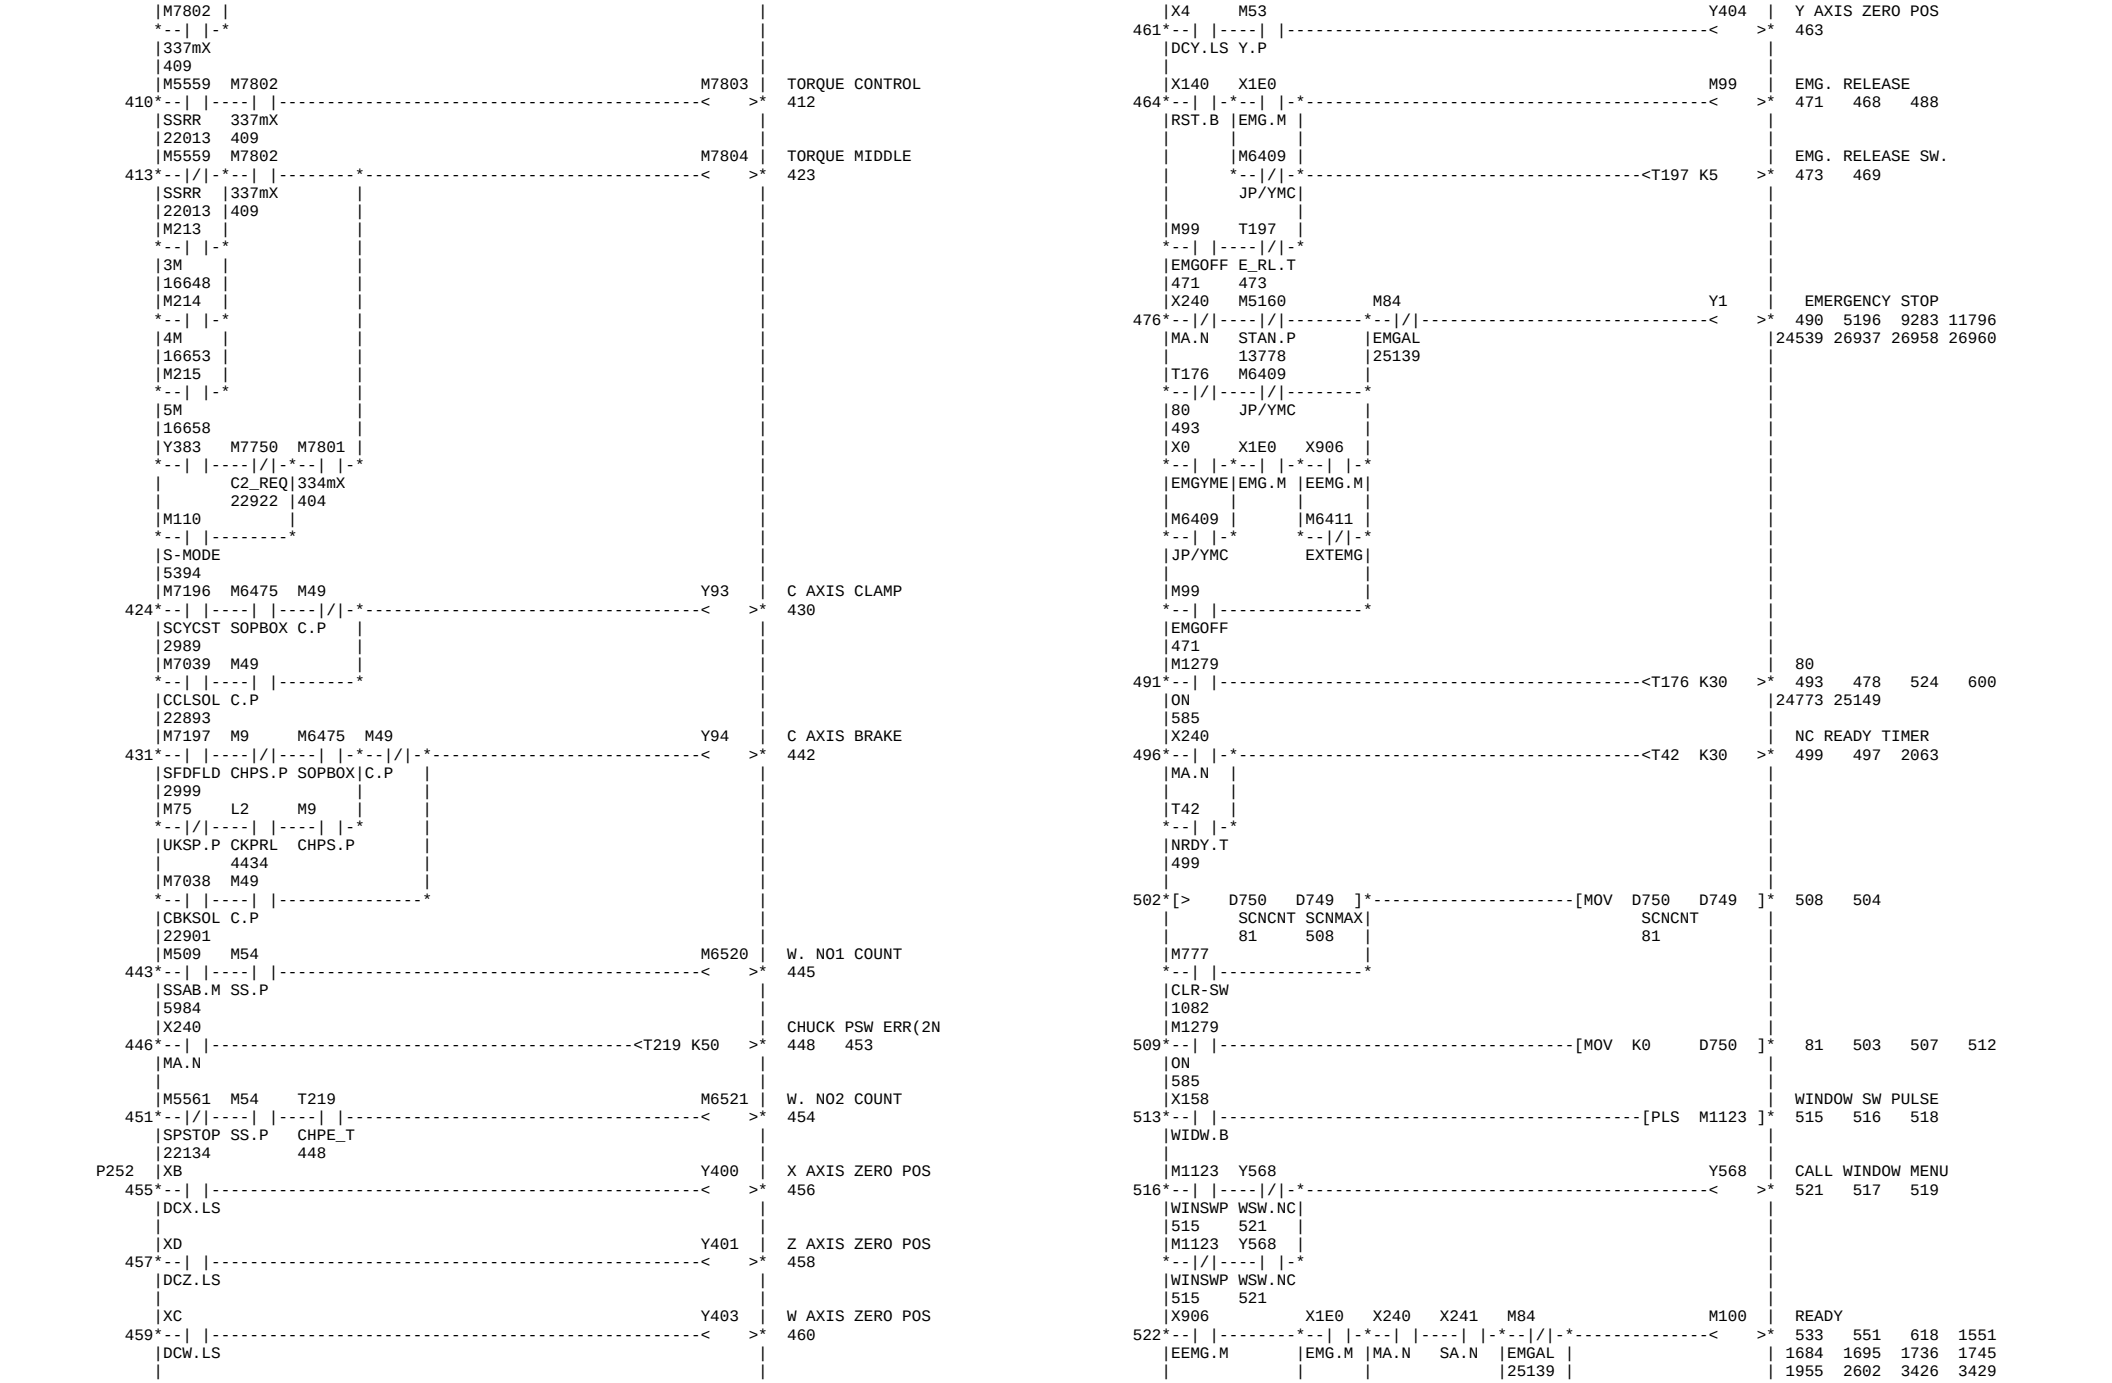
Y090B EFBC.M ENCORDER F/B CHA
3860 21715 22129

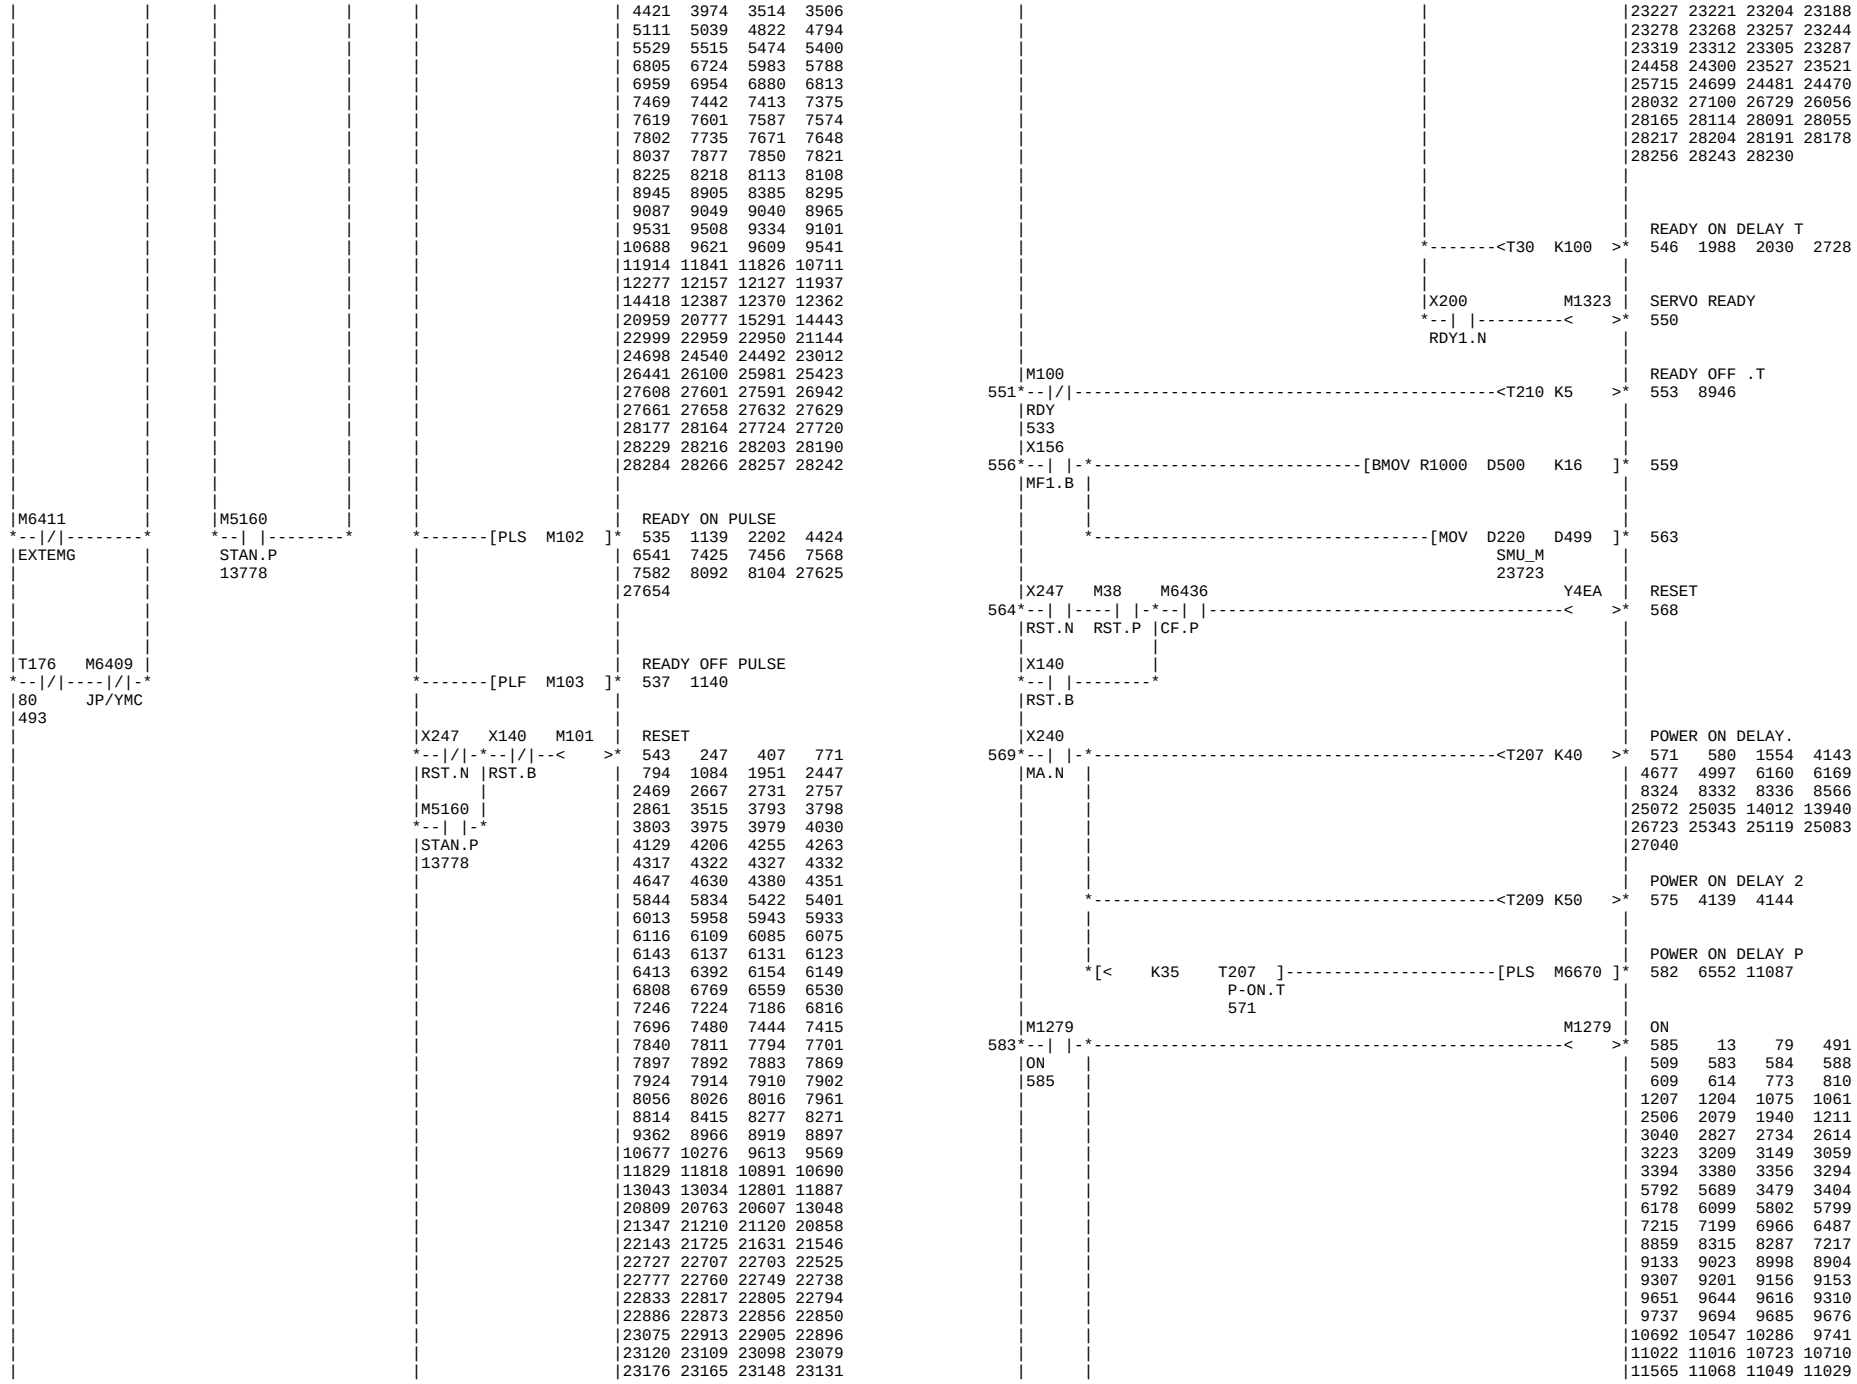
Y0913 M55.M M55
7934

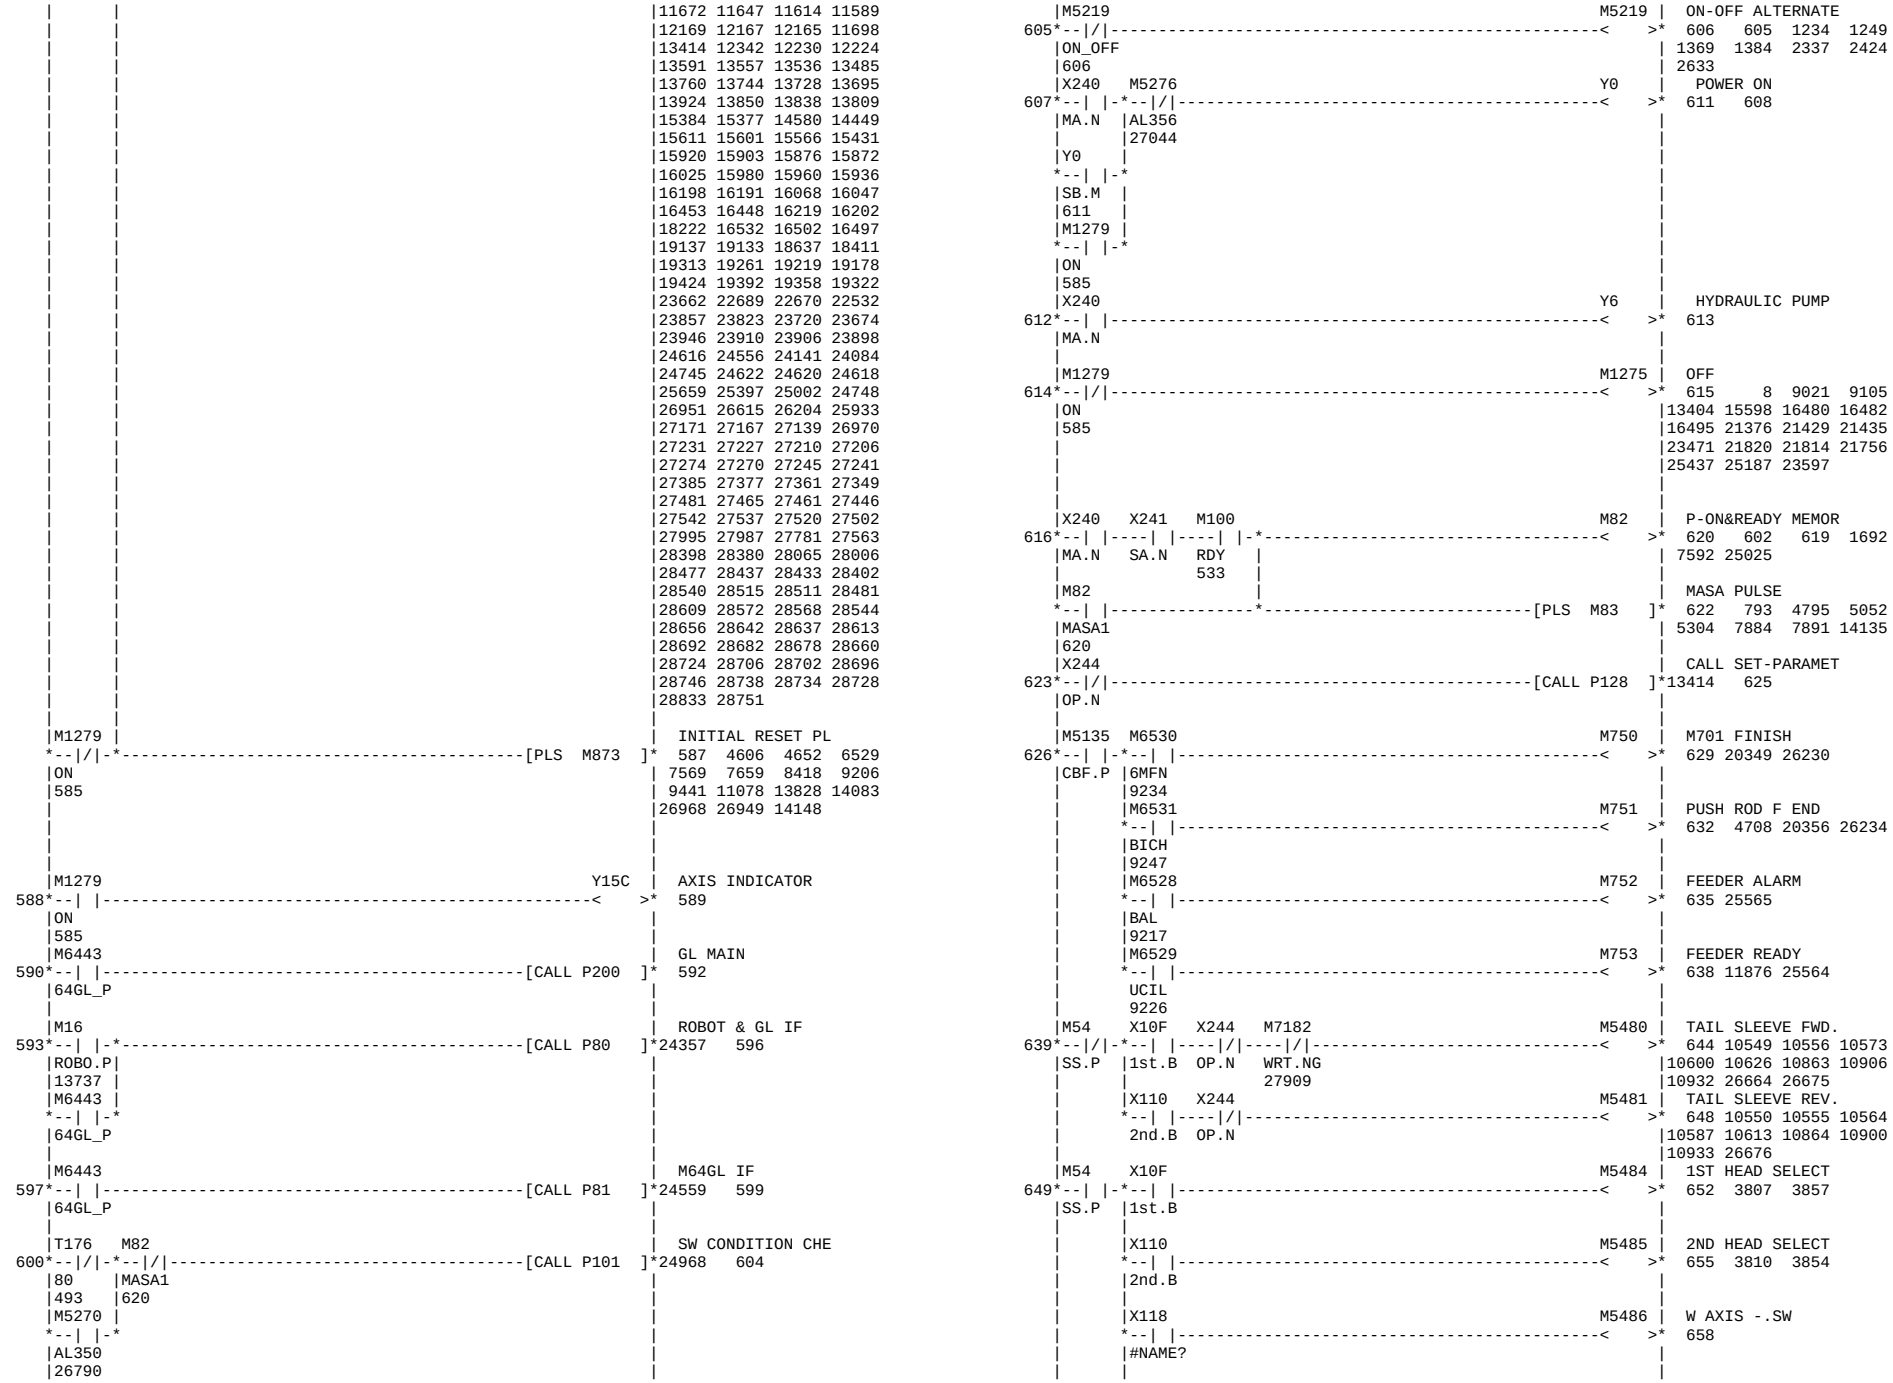

P251 X490 M1216 HIGH TEMP COIL 0
TP1.LS
X491 M1217 HIGH TEMP COIL 1
TP2.LS
X492 M1218 HIGH TEMP COIL 2
TP3.LS
X493 M1219 HIGH TEMP COIL 3
TP4.LS
M1275 M1221 HIGH TEMP COIL 5
OFF
615
M1222 HIGH TEMP COIL 6
M1223 HIGH TEMP COIL 7
M1220 HIGH TEMP COIL 4
M1279 K2 TURRET POS DATA
ON
585
HTMP-0
1
Hi Level Temp Re
TPOS#
16
Hi Level Temp Re
TC-TM COMP DATA
HtmpR1
19
P49 X10 YB M6448 TURRET UNCLAMP T
TCL.LS TU.M J2TR.P
9270 13812
M6506 JUMP TURRET CONT
TOOL-J
7194
M926 M6407 M6631 M6742 TURRET UNCLAMP A
249MX SPJ.P ILYME1
6770 2277
M6406
MSSC.P
M126 M91 M6407
TUCL:L MANU SPJ.P
15304 14444
M789 X156 M1040 M7042 TURRET UNCLAMP M
TURUCP MF1.B CCC++
14638 8421
M7042 L37 L37 COMPLSION TURRET
T UCL CMP.UC
48 54
HIGH TEMP COIL 0
1 15
HIGH TEMP COIL 1
3
HIGH TEMP COIL 2
5
HIGH TEMP COIL 3
7
HIGH TEMP COIL 5
9
HIGH TEMP COIL 6
10
HIGH TEMP COIL 7
11
HIGH TEMP COIL 4
12
TURRET POS DATA
16 18
M1216 D201
HTMP-0
1
Hi Level Temp Re
19 21 23
M1216 D192
TPOS#
16
Hi Level Temp Re
19 21 23
M1216 D204
HtmpR1
19
TC-TM COMP DATA
24 56 6521 6527
6533 6582 6588 6593
6702 6707 25250 25253
T1 D63
TURRET UNCLAMP T
29 9416
CJ P46
JUMP TURRET CONT
79 34
TURRET UNCLAMP A
44 66 7745
TURRET UNCLAMP M
48 49 51
COMPLSION TURRET
54 50 52 67
7746 15659
M7042 L37
M6742 M6191 Y512
T11 Y512
HPSP.T TUC.M SPJ.P TUCLMP Y84S&H
7762 78 44 28268
M6740 M467 T11 M6427
CMMTON DISEGD HPSP.T SPFL.P
7736 22514 7762
M6741 M6421
HPCMMD HPCL.P
7744
Y512 M6427 M6421
TUC.M SPFL.P HPCL.P
78
L37
CMP.UC
54
P46 M1279
M1279 [INC D750] TF DATA
ON
585
M3245 TAIL UNCLAMP .T
TA_SOL T10
10687
M3245 TAIL BRAKE DELAY
TA_SOL
10687
M3245 Y9F TAIL BREAKE OFF
TA_SOL
10687
Y9F T217
TALBRK TBRKDL
96 89
X32 M14 M7183 Z AXIS JOG STOP
WRJT.L R50-6 WR.MDS T13
7268
T13 M7183 Y31 M7024 WORK REST CLAMP
D51 WR.MDS WRJ.SL
101 7268 27728
M6507 JUMP JOG FEED
JOG-JP
998
X111 X112 M579 Y220 JOG FEED +X .NC
#NAME? #NAME? #NAME?
874
M555
WU +X
12505
X111 X112 M580 Y228 JOG FEED -X .NC
#NAME? #NAME? #NAME?
883
M554
WU -X
12487
X113 X114 M7024 M581 Y221 JOG FEED +Z .NC
#NAME? #NAME? WRCLP #NAME?
107 911
MOV D204 D200
TP NO.
24
TURRET UNCLAMP S
78 61 62 264
6791 6921 7191 8254
8947 19893 22285 22334
22498 25436
T10 D54
84 10938
T217 K5
89 94 11006
Y9F
96 93 966 10637
10642 25373 25375
T13 D51
101 104
CJ P47
198 110
<T1 D63 >* 29 9416
<T10 D54 >* 84 10938
<T217 K5 >* 89 94 11006
<T13 D51 >* 101 104
<INC D750] 81 503 507 512
6594 6652 6658 6687
6691 6696 6701 6706
107 129 142 897
115 988 12486
120 992 12504
133 989 12522 12543

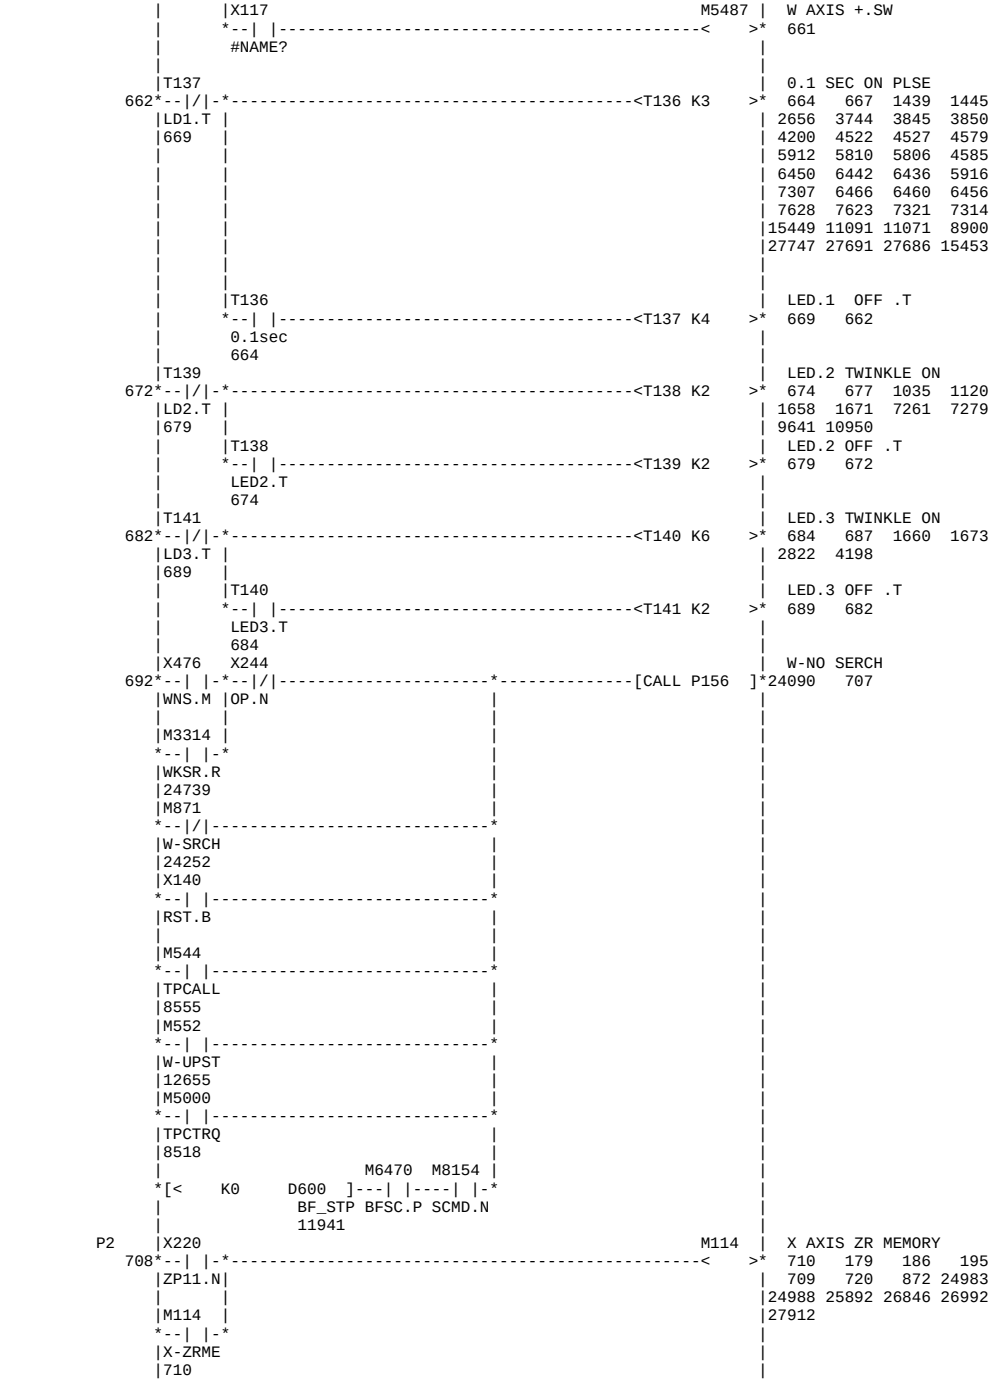

|M557 M35 |M14 |
|WU +Z ZHOM.P|R50-6
|12547 |
|M556 M35 |
|WU -Z ZHOM.P
|12526
|X113 X114 M7024 M582 Y229 | JOG FEED -Z .NC
134 146 993 12523 12544
|#NAME? #NAME?|WRCLP |#NAME?
|107 |916
|M556 M35 |M14 |
|WU -Z ZHOM.P|R50-6
|12526 |
|M557 M35 |
|WU +Z ZHOM.P
|12547
|X156 M106 M1282 M1284 L17 Y222 | JOG FEED +C .NC
147 154 990
|MF1.B JCOK |C-CW.B CCCW.B|1ST
|930 |14634 14695 |3835
|L18 M6451 Y322 | JOG FEED +C _NC
158
2ND SSCT.P
3841
|M1282 M1284 L17 Y22A | JOG FEED -C .NC
164 994
C-CW.B CCCW.B|1ST
14634 14695 |3835
|L18 M6451 Y32A | JOG FEED -C _NC
168
2ND SSCT.P
3841
|X117 X118 M583 Y223 | JOG FEED +W .NC
169 173 991 12578
|#NAME? #NAME?|#NAME?
|946
|M5677 |
|WU +B
|12597
|X117 X118 M584 Y22B | JOG FEED -W .NC
174 178 995 12596
|#NAME? #NAME?|#NAME?
|957
|M5676 |
|WU -B
|12579
|M114 X115 X116 M6755 Y224 | JOG FEED +Y .NC
179 185 996 12631
|X-ZRME|#NAME? #NAME?|#NAME?
|710 |986
|X156 |
|MF1.B
|M5720
|SLD2PS
|12621
|M114 X115 X116 M6754 Y22C | JOG FEED -Y .NC
186 192 997 12620
|X-ZRME|#NAME? #NAME?|#NAME?
|710 |973
|X156 |
|MF1.B
|M5721
|SLD2PS
|12632
|X115 M114 X156 M5283 | AL363
193 197
|#NAME?|X-ZRME MF1.B
|710
|X116 |
|#NAME?
P47 |X198 | SKIP 1 PULSE
198 200 257
|SKP1.M
|X199 | SKIP 2 PULSE
201 203 262
|SKP2.M
|T5 M3164 M3165 M3209 M5445 | T TORQUE LMT PLS
204 210 267
|EYBOFT MVP.T MVM.T DIR_T 743M
|10894 10569 16997
|X291 | WORK PRESS FIN P
211 214 266
|PSFN.N|
|X239 |
|B.PS.N
|M6437 M19 M239 T44 | DOOR OPEN BZ T.
215 229 233
|BHCS.P|FD.P |56M |D-BZ-T
|17075 |235
|M6423 | |M240 |T43 | DOOR OPEN BZ T.
235 227 255
|R71-7 57M |D-BZ.T|
17080 |229 |
|M75 M6814 F25 X9D | CE DOOR BUZZER C
239 253 2463 2966
|UKSP.P PRSCNF DRLSAL FDO.LS
7487 25372
|XA M239 | CE DOOR BUZZER C
242 239 253 2463 2966
|CCC.LS 56M
17075
|X9D M240
|FDO.LS 57M
17080
|M101
|RST
|543
|M75 M6814 F25 X9D |
|UKSP.P PRSCNF DRLSAL FDO.LS
7487 25372
|M19 T44 M176 Y15B | BUZZER
254 274 268
|FD.P D-BZ-T 56MEX
235 2477
|M503 T65 T38 | TOOL EYE BZ ON .
276 269
|SKP1P TDF.T |TBZ.T |
|200 8129 |276 |
|T64 M705 M504 T171 Y512 |
|TDR.T |MTOOL SKP2P TCL.T TUC.M |
|8152 |7198 203 6795 78 |
|M8 |
|EYE.P
|13734
|M5672
|PRSFNP
|214

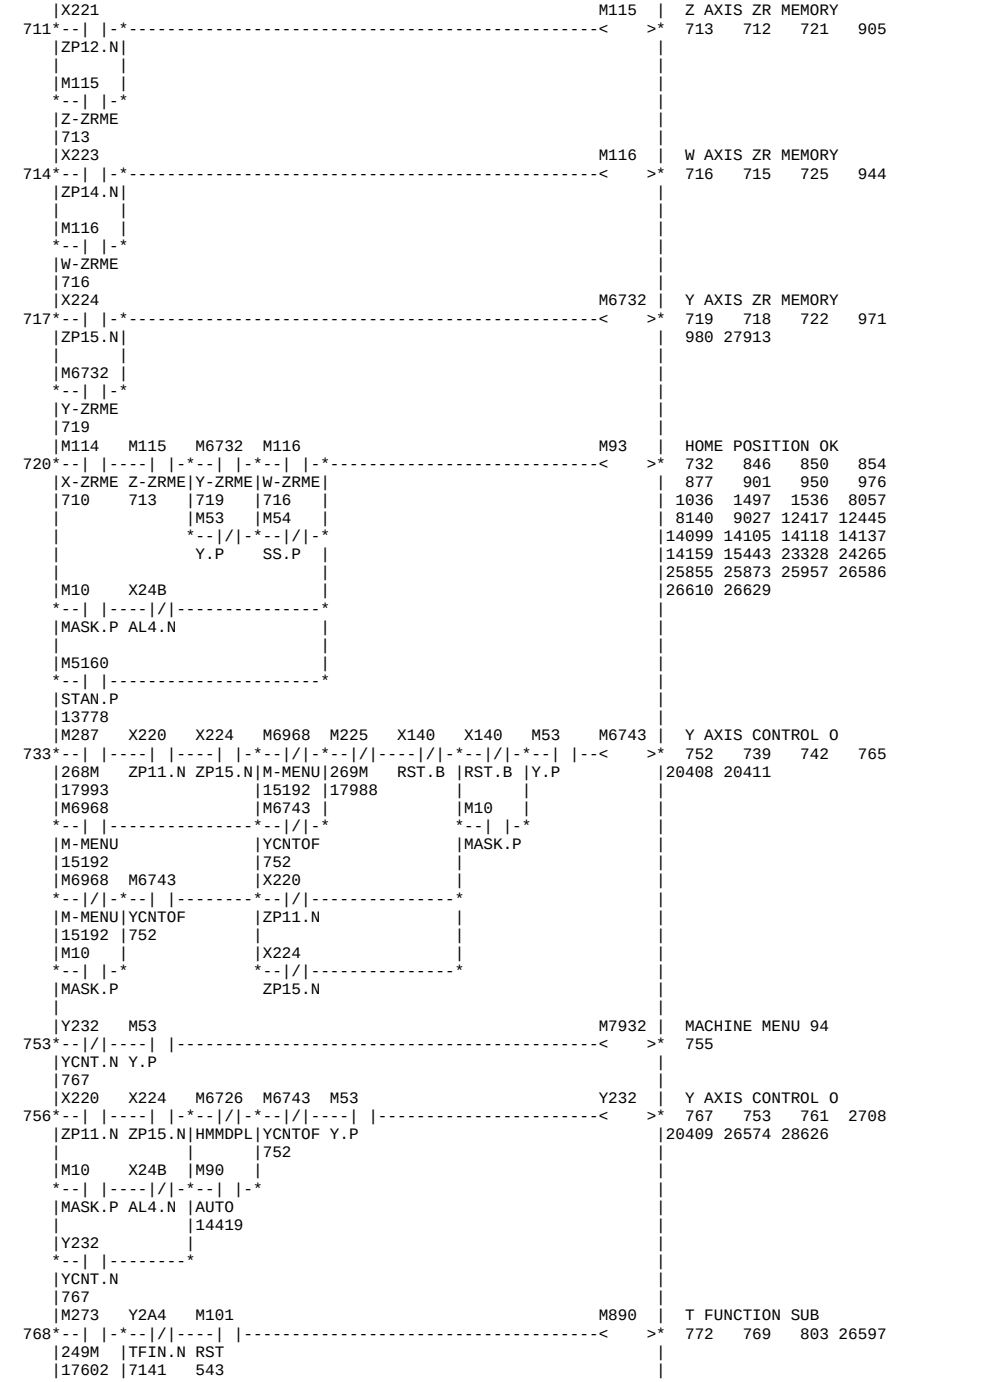

M505
TRQPLS
210
Y15B
TDBZ.M
274
Y10 M5173
PT.M FINBUZ
3778
X264 M5210 SPINDLE ZERO SPE
279 281 302 21676 21679
ZSOS.N 21681 21702
M5160
STAN.P
13778
X26C M52 M5213 MILL ZERO SPEED
282 285 308 22450 22484
ZSOM.N SYML.P
X36C
ZSOM_N
X26D M52 M5214 MILL UPTO SPEED
286 293 8914 19912 19913
USOM.N SYML.P
X36D M5229 MILL UPTO SPEED
295 3656 20058 21326
USOM_N 22435 22475
M427 M426 SP SPEED NEAR ZE
296 307 303 21400 21415
K0 R316]-[> K10 R316 ENCDER ENCDER
CNGDWN 21403
M5210 M428
SP-ZSP STAPCG 21409
281
M426
NEAR-Z
307
M5213 M5584 M5583 MILL SPEED ZERO
308 311 309 22187
ML-ZSP CHGDWN
285 22190
M5583
MLNE-Z
311
M5547 M5546 S SP SPEED NEAR
312 323 319 21785 21800
K0 R366]-[> K10 R366 SCGDWD 21788
X364 M5548
ZSOS_N SSTAPC 21794
M5546
SENSRZ
323
X238 M585 X262 M595 M5820 M586 SPDL TORQUE UP M
324 330 334 354
FAL.N 331MX VROS.N SPH-MD 511MX
4328 4344 4131
M5158
FINH.P
M704 M708 M701 SP T-UP AT SYNC
331 333 335 375
T.UP.S 321MCL
4318 4323
M586 M6469 Y28D SPINDLE COIL T-U
334 348 337 9004
COIL L H-COIL
330
M701 M6469 X235
T-UP.S H-COIL CSS.N
333
X262 M112 COIL CHANGE ON P
351 363
VROS.N C-MODE
5533
Y28D Y20A COIL CHANGE OFF
353 364
COIL.N *SF3.N
348 9017
M586 M7797 M5820 X2D5 X3D5 SYNCRO.DELAY T
354 360 4084 4090
COIL L COIL_L 511MX
330 373 4131
M5736 M5737 SPDL COIL CHANGE
363 366 9013
COIL+P COIL-P
351 353
M5158 X362 M7800 M5820 M7797 SS TORQUE UP MD.
369 373 355 374
FINH.P VROS_N 331mMX 511MX
4336 4131
M7797 Y38D SPINDLE COIL T-U
374 382 377 22919
COIL_L
373
M701 COIL CHANGE ON P
384 387
T-UP.S
333
X362 M7756 COIL CHNG OFF PL
386 388
VROS_N C2_RDY
23027
Y38D Y30A
COIL.N *SVF3
382 22929
M7798 M7799 SS COIL CHANGE
387 390 22924
COIL+L COIL-P
384 386
M1159 Y282 TORQUE LMT. LOW.
393 394 9011
Y282AU
22908
Y283 M5756 X265 M5518 Y283 TORQUE LMT. HI..
395 400 395 6481 9012
TL2S.N 337MX1 USOS.N C_RQ
400 6476 9008
M5757
TL2
6486
M5409 M5410 M7801 TORQUE LIMIT H
401 404 402 421 20234
334m 335m 20236
17401 17406
M7801
334mX
404
M5412 M101 M5411 M7802 START/STOP TQ.LI
405 409 406 411 417
337m RST 336m 20239 20242
17416 543 17411

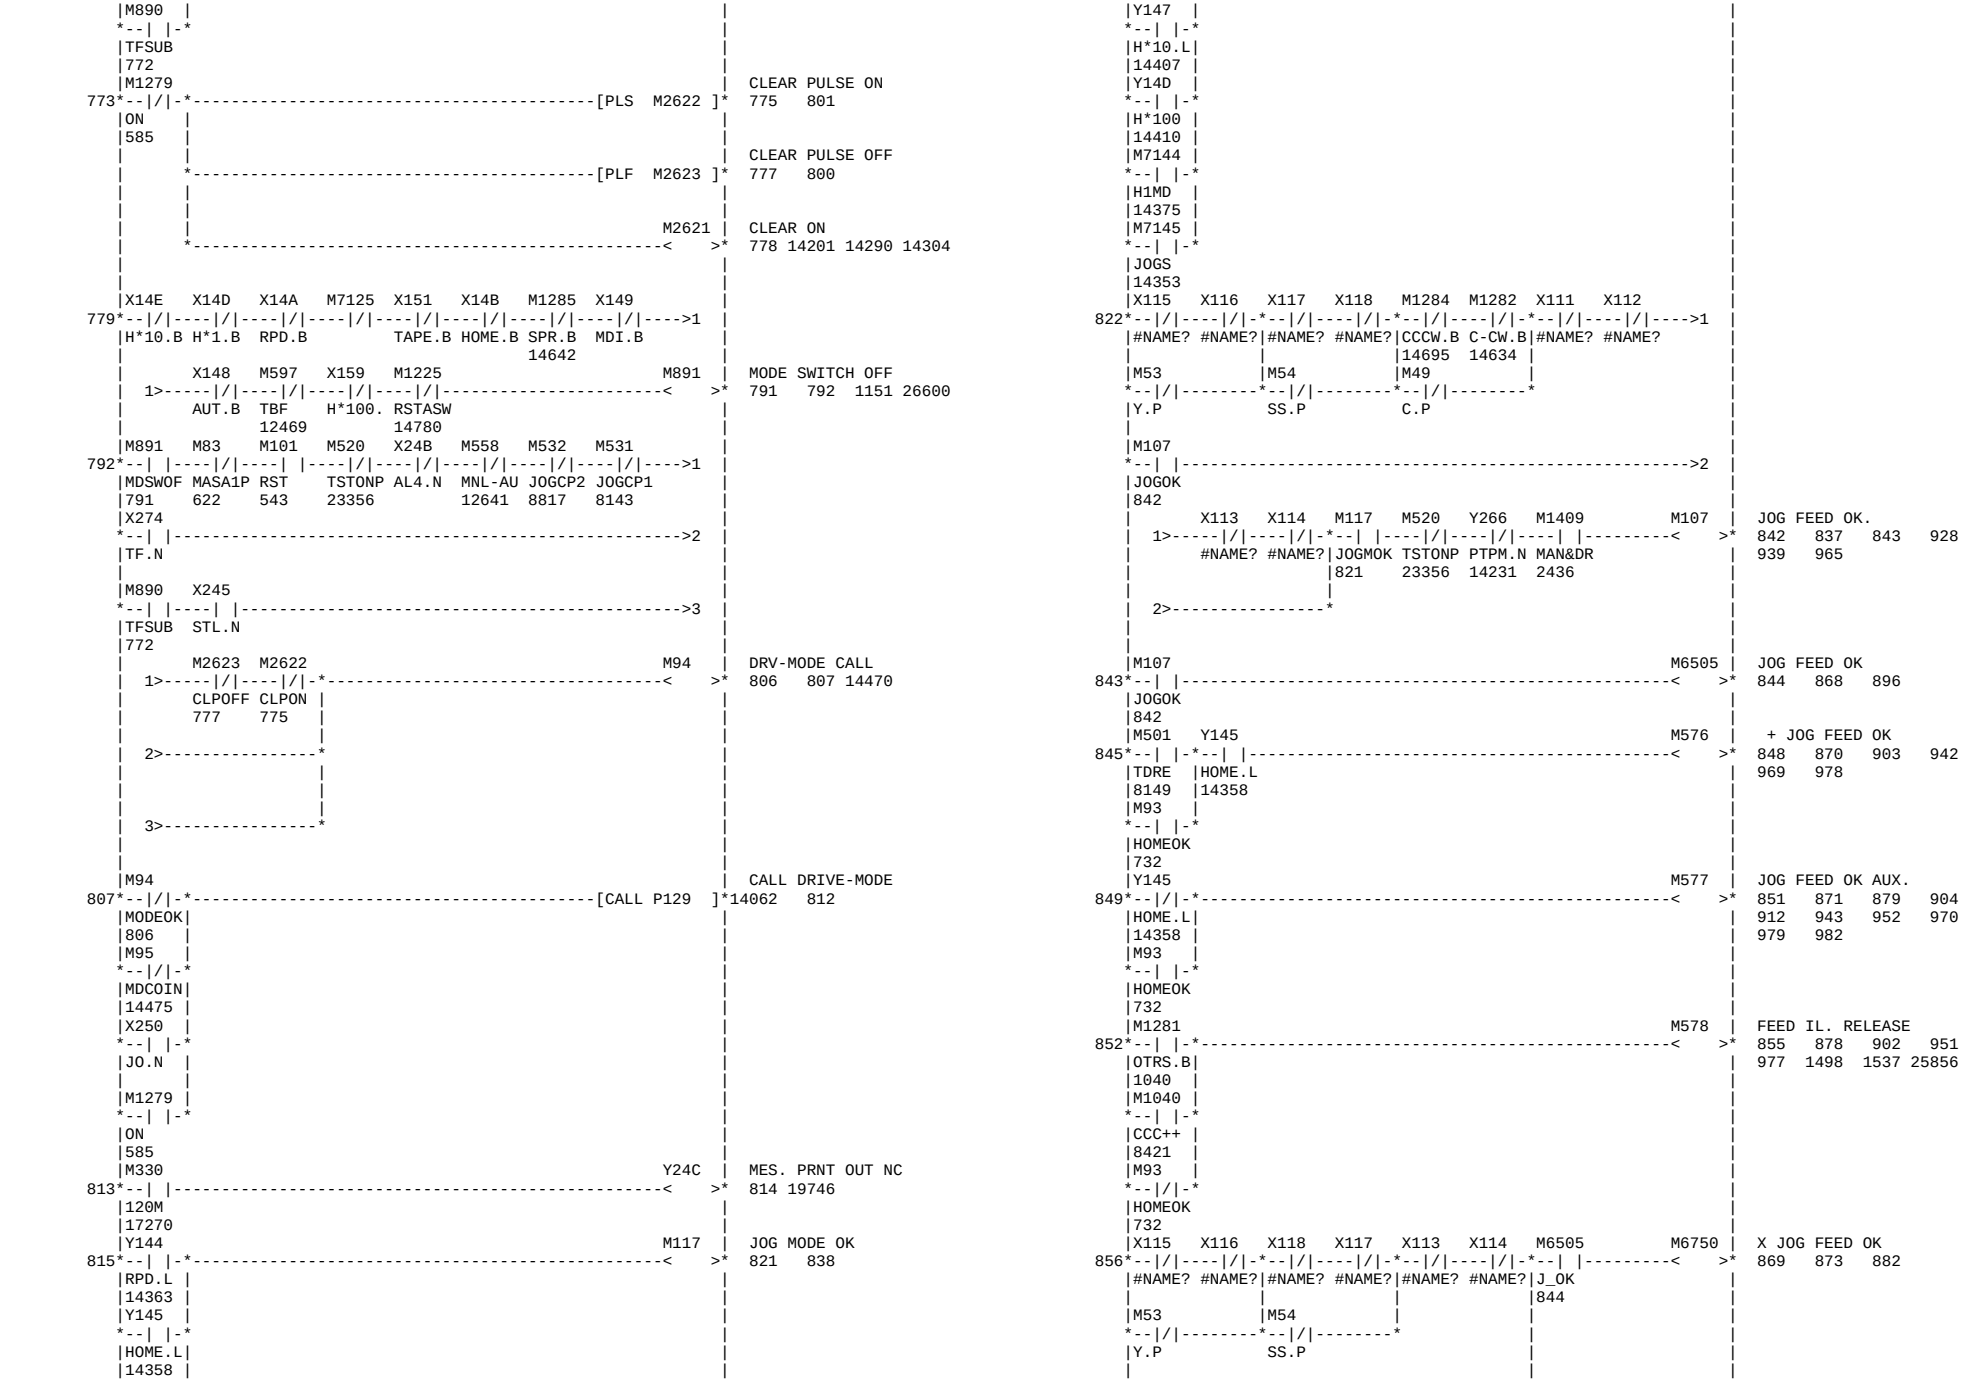

M7802
M7803 TORQUE CONTROL
410 412
SSRR 337mX
22013 409
M7802
M7804 TORQUE MIDDLE
413 423
SSRR 337mX
22013 409
M213
3M
16648
M214
4M
16653
M215
5M
16658
Y383 M7750 M7801
C2_REQ 334mX
22922 404
M110
S-MODE
5394
M7196 M6475 M49
Y93 C AXIS CLAMP
424 430
SCYCST SOPBOX C.P
2989
M7039 M49
CCLSOL C.P
22893
M7197 M9 M6475 M49
Y94 C AXIS BRAKE
431 442
SFDFLD CHPS.P SOPBOX C.P
2999
M75 L2 M9
UKSP.P CKPRL CHPS.P
4434
M7038 M49
CBKSOL C.P
22901
M509 M54
M6520 W. NO1 COUNT
443 445
SSAB.M SS.P
5984
X240
CHUCK PSW ERR(2N
446 T219 K50 448 453
MA.N
M5561 M54 T219
M6521 W. NO2 COUNT
451 454
SPSTOP SS.P CHPE_T
22134 448
P252 XB
Y400 X AXIS ZERO POS
455 456
DCX.LS
XD
Y401 Z AXIS ZERO POS
457 458
DCZ.LS
XC
Y403 W AXIS ZERO POS
459 460
DCW.LS
X4 M53
Y404 Y AXIS ZERO POS
461 463
DCY.LS Y.P
X140 X1E0
M99 EMG. RELEASE
464 471 468 488
RST.B EMG.M
M6409
EMG. RELEASE SW.
JP/YMC
T197 K5 473 469
M99 T197
EMGOFF E_RL.T
471 473
X240 M5160 M84
Y1 EMERGENCY STOP
476 490 5196 9283 11796
MA.N STAN.P EMGAL
13778 25139
24539 26937 26958 26960
T176 M6409
80 JP/YMC
493
X0 X1E0 X906
EMGYME EMG.M EEMG.M
M6409 M6411
JP/YMC EXTEMG
M99
EMGOFF
471
M1279
80
491 T176 K30 493 478 524 600
ON
585
24773 25149
X240
NC READY TIMER
496 T42 K30 499 497 2063
MA.N
T42
NRDY.T
499
502 D750 D749 MOV D750 D749 508 504
SCNCNT SCNMAX
81 508
SCNCNT
81
M777
CLR-SW
1082
M1279
509 MOV K0 D750 81 503 507 512
ON
585
X158
WINDOW SW PULSE
513 PLS M1123 515 516 518
WIDW.B
M1123 Y568
Y568 CALL WINDOW MENU
516 521 517 519
WINSWP WSW.NC
515 521
M1123 Y568
WINSWP WSW.NC
515 521
X906 X1E0 X240 X241 M84
M100 READY
522 533 551 618 1551
EEMG.M EMG.M MA.N SA.N EMGAL
25139
1684 1695 1736 1745
1955 2602 3426 3429


M6411
EXTEMG
M5160
STAN.P
13778
READY ON PULSE
T176 M6409
80 JP/YMC
493
READY OFF PULSE
X247 X140 M101
RST.N RST.B
M5160
STAN.P
13778
RESET
M100
RDY
533
X156
MF1.B
X247 M38 M6436
RST.N RST.P CF.P
X140
RST.B
X240
MA.N
M1279
ON
585
READY ON DELAY T
SERVO READY
RDY1.N
READY OFF .T
POWER ON DELAY.
POWER ON DELAY 2
POWER ON DELAY P
P-ON.T
571

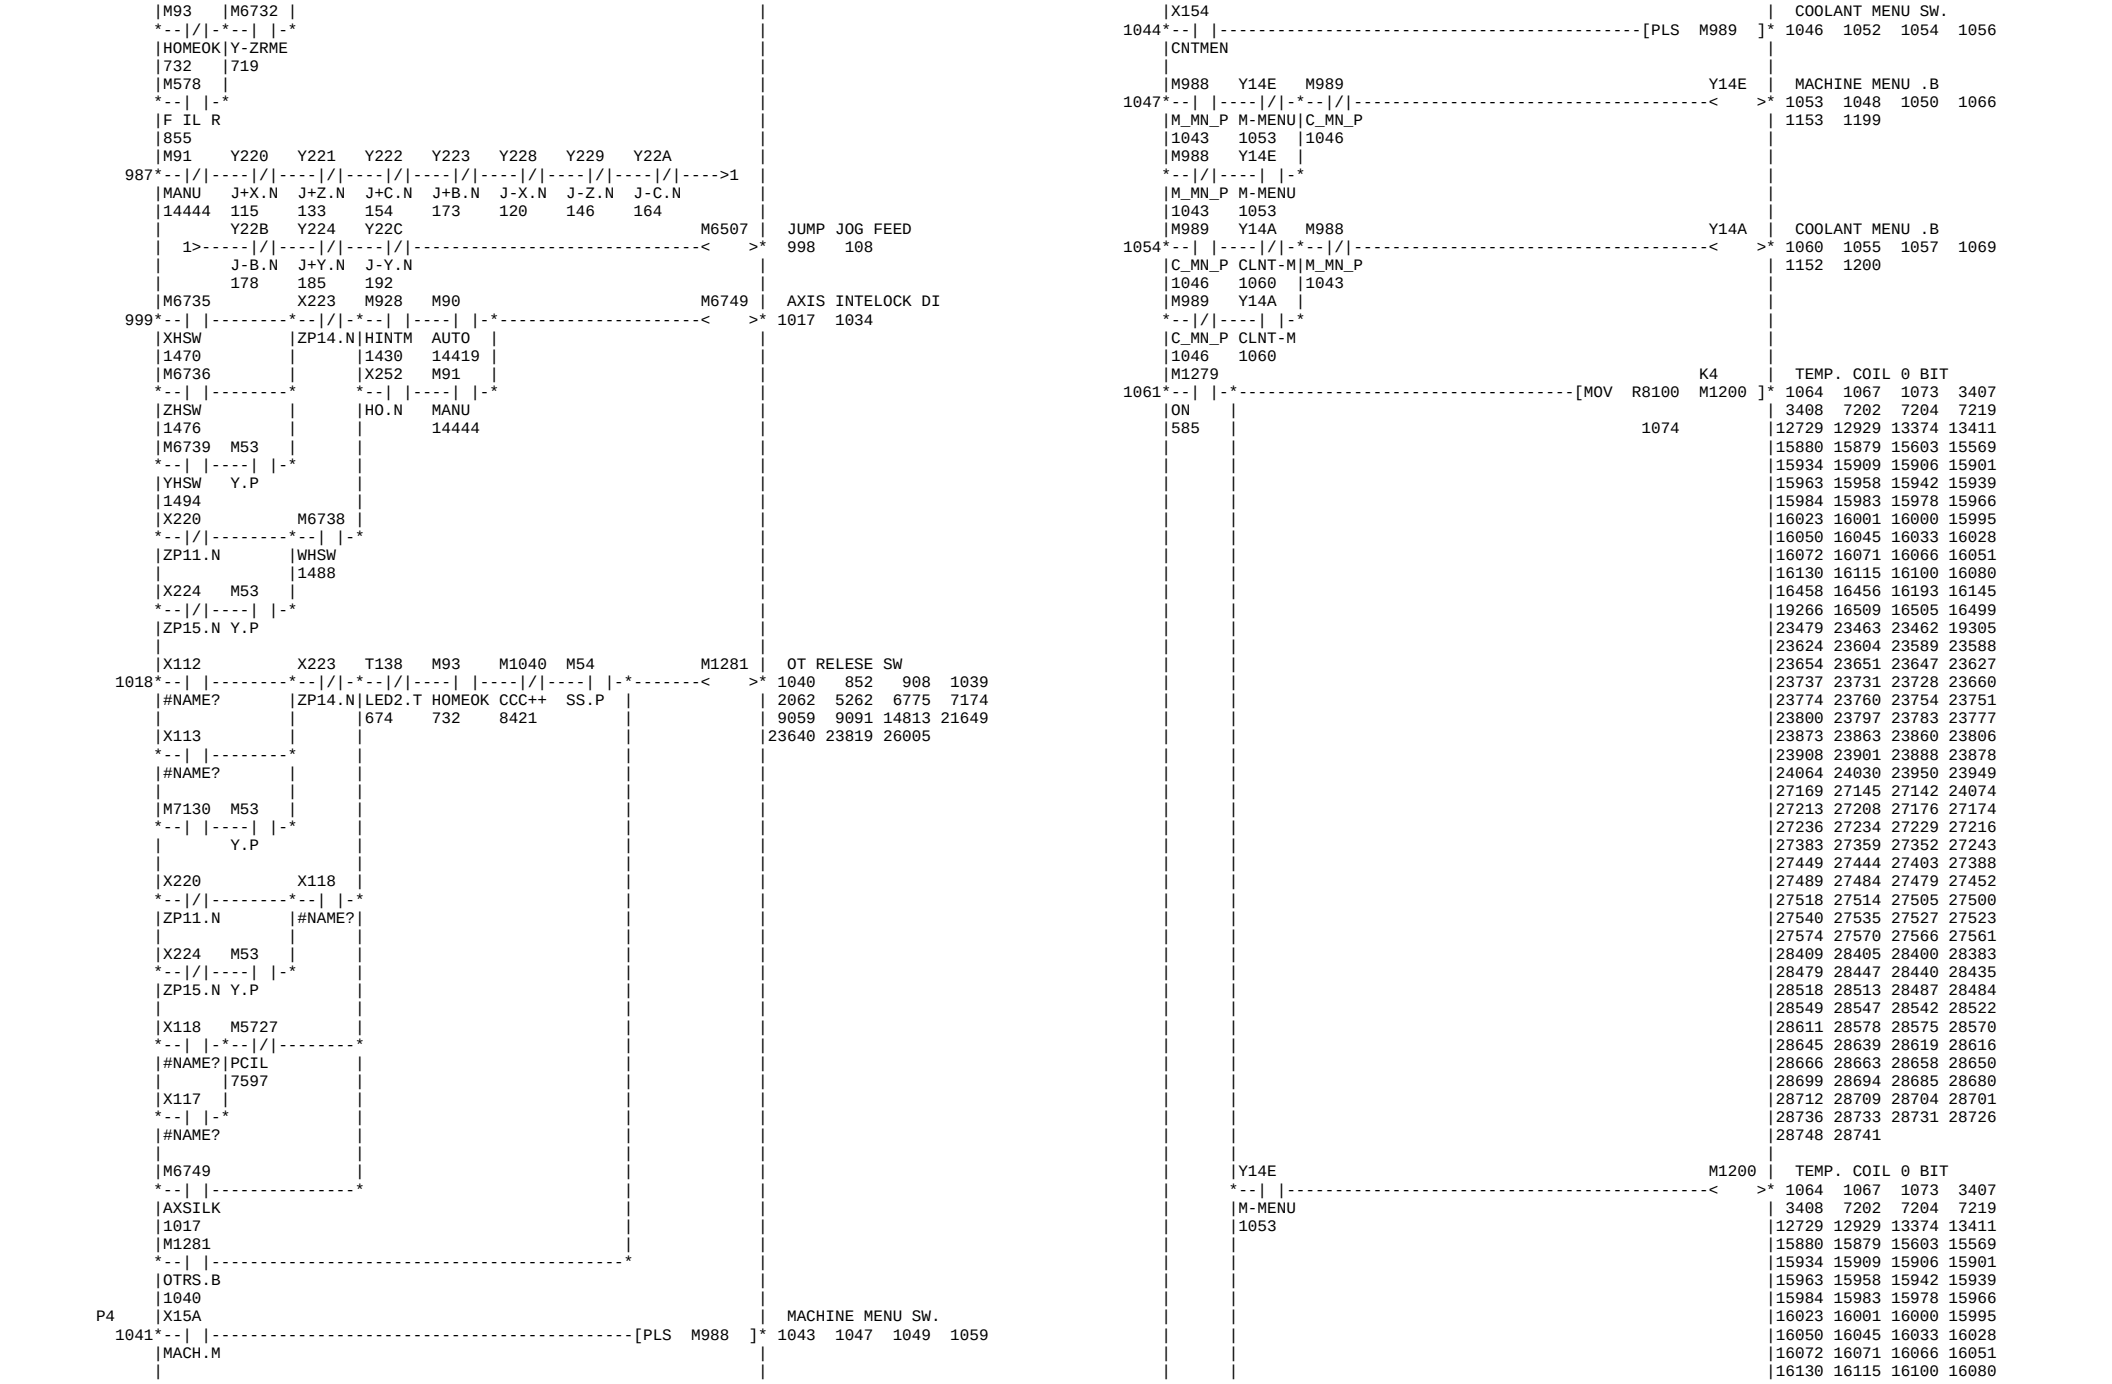

11672 11647 11614 11589
12169 12167 12165 11698
13414 12342 12230 12224
13591 13557 13536 13485
13760 13744 13728 13695
13924 13850 13838 13809
15384 15377 14580 14449
15611 15601 15566 15431
15920 15903 15876 15872
16025 15980 15960 15936
16198 16191 16068 16047
16453 16448 16219 16202
18222 16532 16502 16497
19137 19133 18637 18411
19313 19261 19219 19178
19424 19392 19358 19322
23662 22689 22670 22532
23857 23823 23720 23674
23946 23910 23906 23898
24616 24556 24141 24084
24745 24622 24620 24618
25659 25397 25002 24748
26951 26615 26204 25933
27171 27167 27139 26970
27231 27227 27210 27206
27274 27270 27245 27241
27385 27377 27361 27349
27481 27465 27461 27446
27542 27537 27520 27502
27995 27987 27781 27563
28398 28380 28065 28006
28477 28437 28433 28402
28540 28515 28511 28481
28609 28572 28568 28544
28656 28642 28637 28613
28692 28682 28678 28660
28724 28706 28702 28696
28746 28738 28734 28728
28833 28751
M1279
INITIAL RESET PL
M873
587 4606 4652 6529
ON
7569 7659 8418 9206
585
9441 11078 13828 14083
26968 26949 14148
M1279
Y15C
AXIS INDICATOR
588
589
ON
585
M6443
GL MAIN
590
592
64GL_P
M16
ROBOT & GL IF
593
CALL P80
24357 596
ROBO.P
13737
M6443
64GL_P
M6443
M64GL IF
597
CALL P81
24559 599
64GL_P
T176 M82
SW CONDITION CHE
600
CALL P101
24968 604
80 MASA1
493 620
M5270
AL350
26790
M5219
M5219
ON-OFF ALTERNATE
605
606 605 1234 1249
ON_OFF
1369 1384 2337 2424
606
2633
X240 M5276
Y0
POWER ON
607
611 608
MA.N AL356
27044
Y0
SB.M
611
M1279
ON
585
X240
Y6
HYDRAULIC PUMP
612
613
MA.N
M1279
M1275
OFF
614
615 8 9021 9105
ON
13404 15598 16480 16482
585
16495 21376 21429 21435
23471 21820 21814 21756
25437 25187 23597
X240 X241 M100
M82
P-ON&READY MEMOR
616
620 602 619 1692
MA.N SA.N RDY
7592 25025
533
M82
MASA PULSE
M83
622 793 4795 5052
MASA1
5304 7884 7891 14135
620
X244
CALL SET-PARAMET
623
CALL P128
13414 625
OP.N
M5135 M6530
M750
M701 FINISH
626
629 20349 26230
CBF.P 6MFN
9234
M6531
M751
PUSH ROD F END
632 4708 20356 26234
BICH
9247
M6528
M752
FEEDER ALARM
635 25565
BAL
9217
M6529
M753
FEEDER READY
638 11876 25564
UCIL
9226
M54 X10F X244 M7182
M5480
TAIL SLEEVE FWD.
639
644 10549 10556 10573
SS.P 1st.B OP.N WRT.NG
10600 10626 10863 10906
27909
10932 26664 26675
X110 X244
M5481
TAIL SLEEVE REV.
648 10550 10555 10564
2nd.B OP.N
10587 10613 10864 10900
10933 26676
M54 X10F
M5484
1ST HEAD SELECT
649
652 3807 3857
SS.P 1st.B
X110
M5485
2ND HEAD SELECT
655 3810 3854
2nd.B
X118
M5486
W AXIS -.SW
658
#NAME?

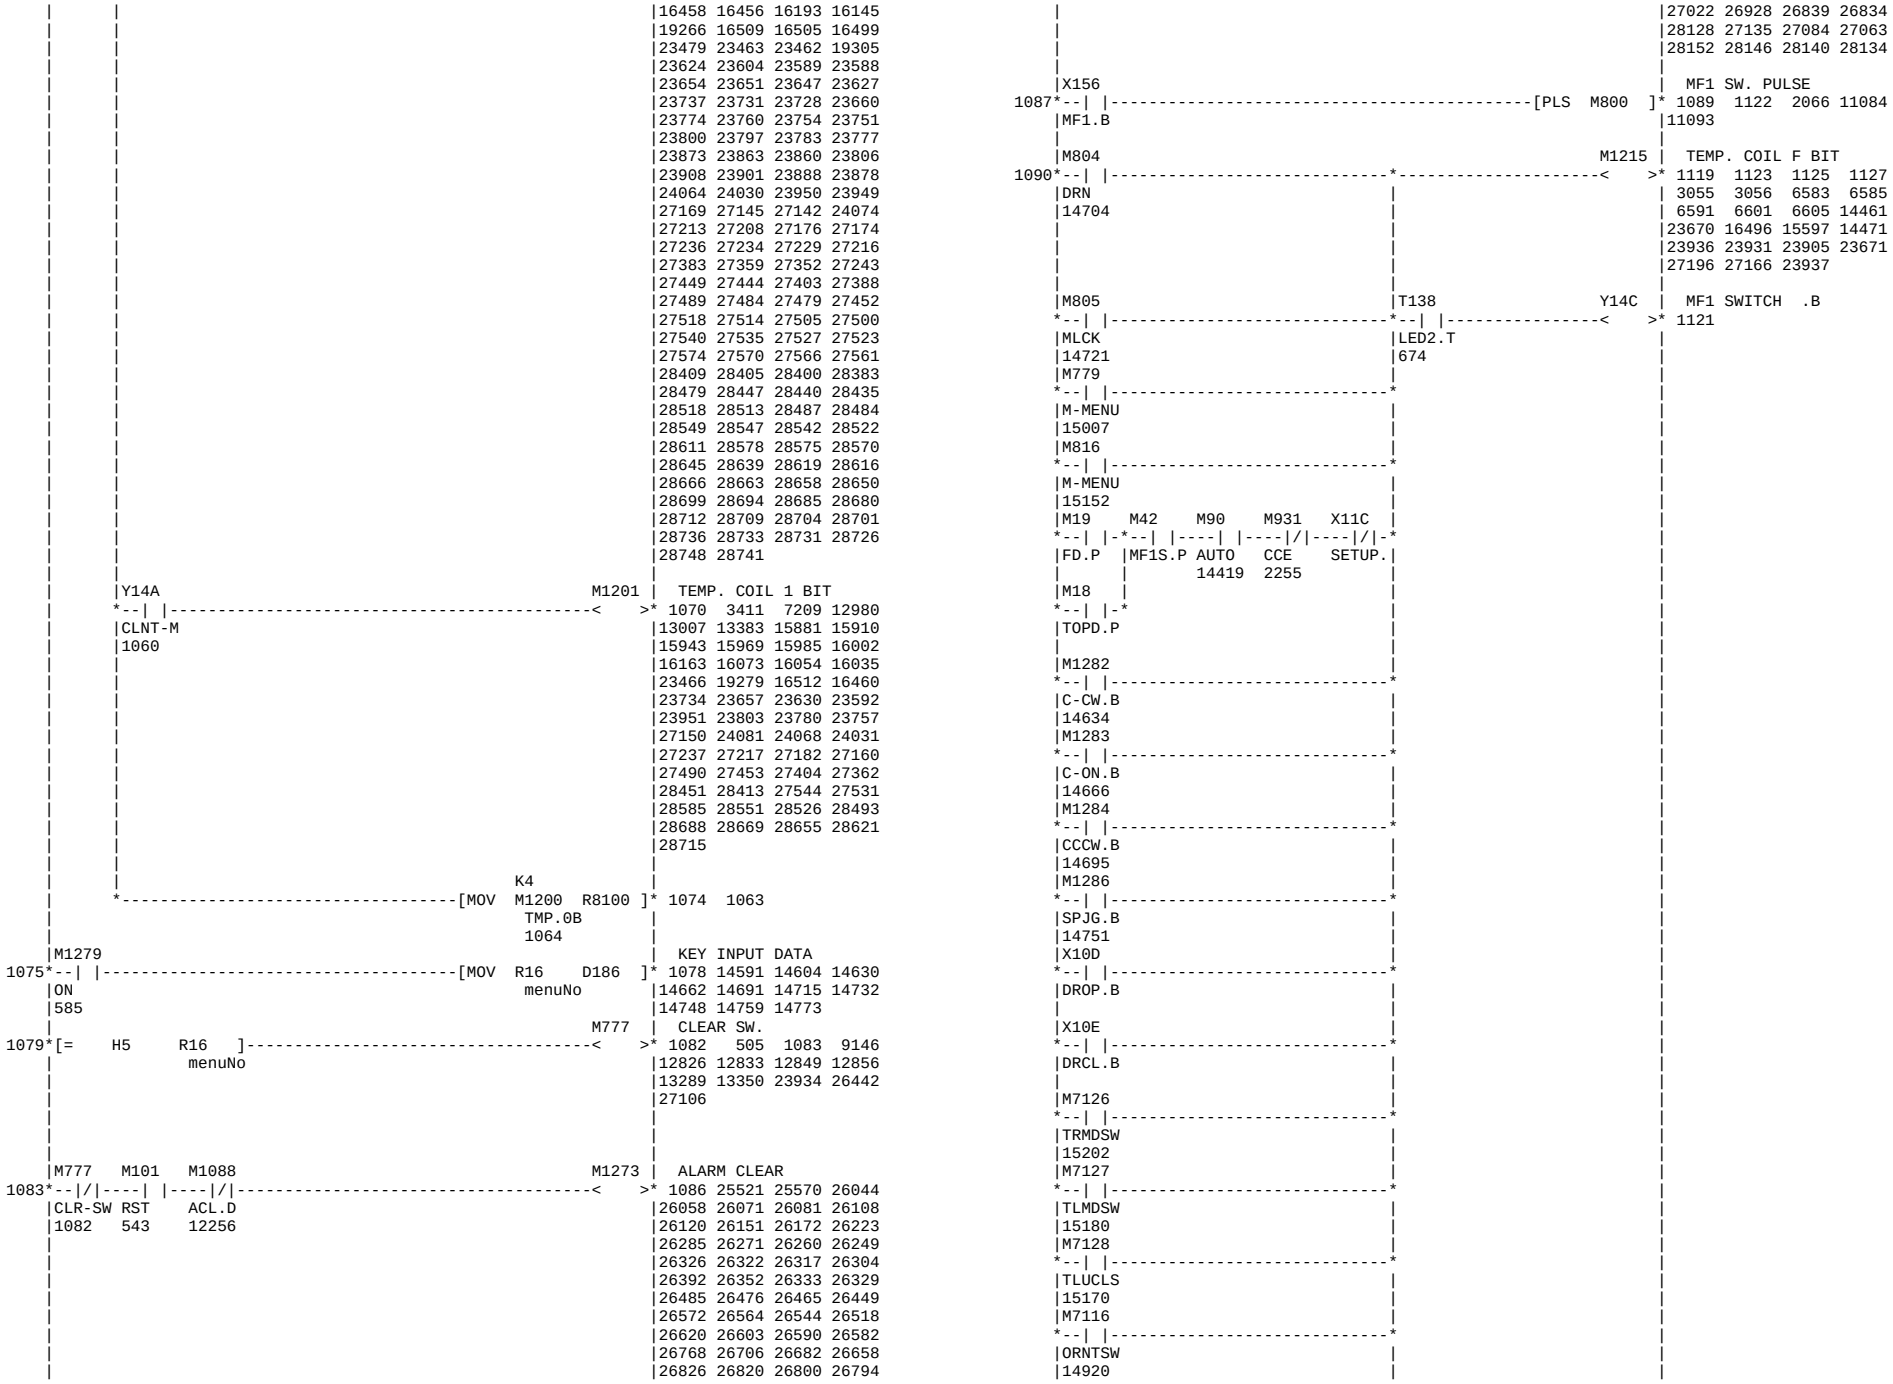

X117
M5487
W AXIS +.SW
661
#NAME?
T137
0.1 SEC ON PLSE
662
T136 K3
664 667 1439 1445
LD1.T
669
2656 3744 3845 3850
4200 4522 4527 4579
5912 5810 5806 4585
6450 6442 6436 5916
7307 6466 6460 6456
7628 7623 7321 7314
15449 11091 11071 8900
27747 27691 27686 15453
T136
LED.1 OFF .T
T137 K4
669 662
0.1sec
664
T139
LED.2 TWINKLE ON
672
T138 K2
674 677 1035 1120
LD2.T
679
1658 1671 7261 7279
9641 10950
T138
LED.2 OFF .T
T139 K2
679 672
LED2.T
674
T141
LED.3 TWINKLE ON
682
T140 K6
684 687 1660 1673
LD3.T
689
2822 4198
T140
LED.3 OFF .T
T141 K2
689 682
LED3.T
684
X476 X244
W-NO SERCH
692
24090 707
WNS.M
OP.N
M3314
WKSR.R
24739
M871
W-SRCH
24252
X140
RST.B
M544
TPCALL
8555
M552
W-UPST
12655
M5000
TPCTRQ
8518
M6470 M8154
K0 D600
BF_STP BFSC.P SCMD.N
11941
P2
X220
M114
X AXIS ZR MEMORY
708
710 179 186 195
ZP11.N
709 720 872 24983
24988 25892 26846 26992
M114
27912
X-ZRME
710

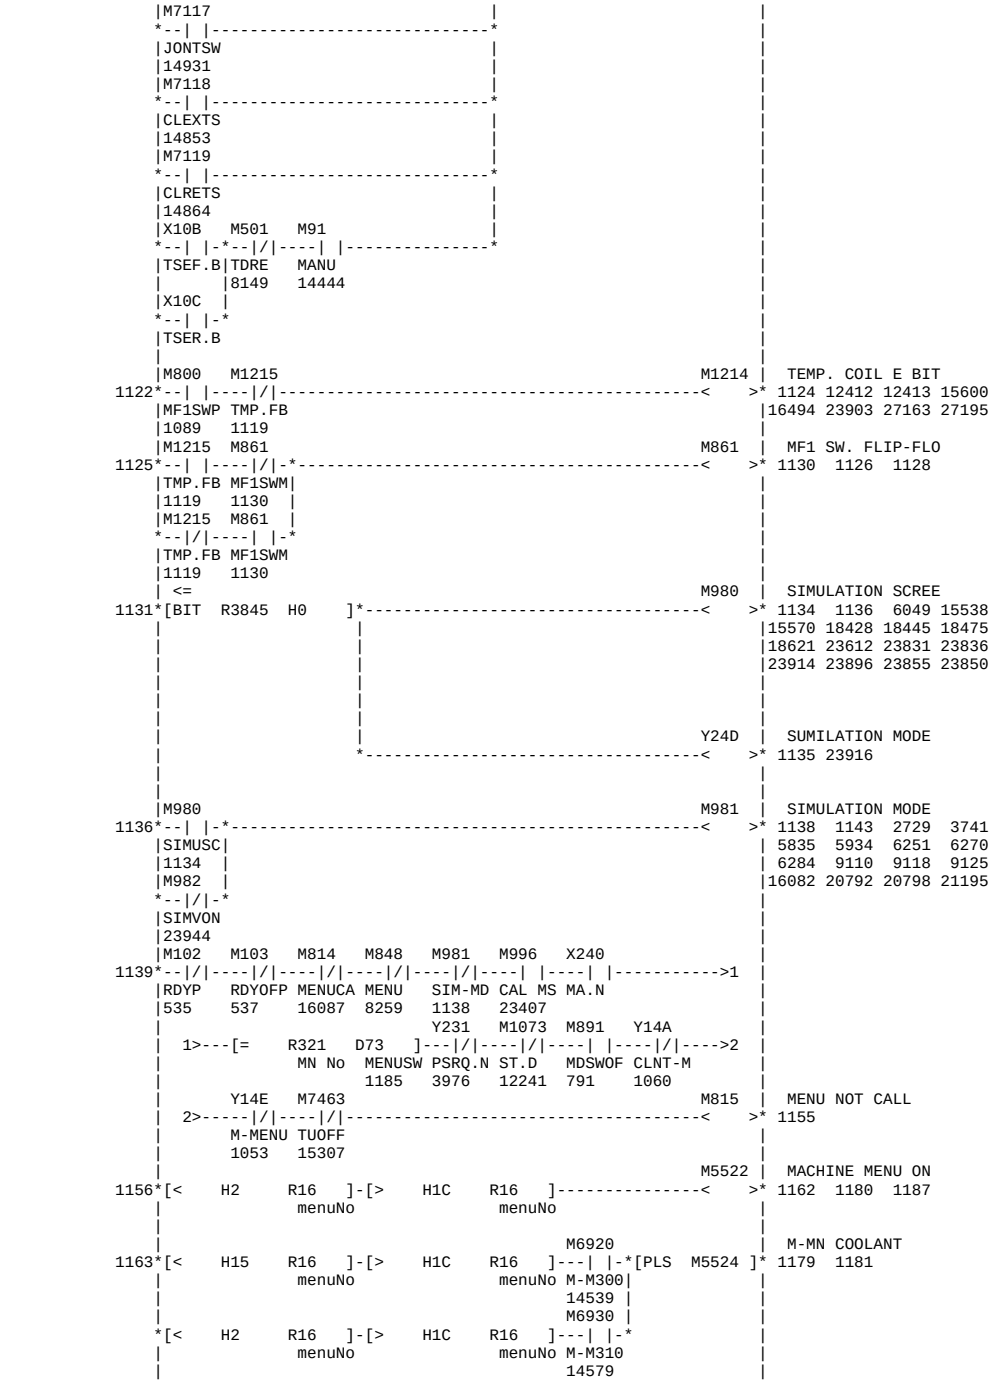

X221
M115
Z AXIS ZR MEMORY
711
713 712 721 905
ZP12.N
M115
Z-ZRME
713
X223
M116
W AXIS ZR MEMORY
714
716 715 725 944
ZP14.N
M116
W-ZRME
716
X224
M6732
Y AXIS ZR MEMORY
717
719 718 722 971
ZP15.N
980 27913
M6732
Y-ZRME
719
M114 M115 M6732 M116
M93
HOME POSITION OK
720
732 846 850 854
X-ZRME Z-ZRME Y-ZRME W-ZRME
710 713 719 716
877 901 950 976
1036 1497 1536 8057
M53 M54
8140 9027 12417 12445
14099 14105 14118 14137
Y.P SS.P
14159 15443 23328 24265
25855 25873 25957 26586
M10 X24B
26610 26629
MASK.P AL4.N
M5160
STAN.P
13778
M287 X220 X224 M6968 M225 X140 X140 M53
M6743
Y AXIS CONTROL O
733
752 739 742 765
268M ZP11.N ZP15.N M-MENU 269M RST.B RST.B Y.P
20408 20411
17993 15192 17988
M6968 M6743 M10
M-MENU YCNTOF MASK.P
15192 752
M6968 M6743 X220
M-MENU YCNTOF ZP11.N
15192 752
M10 X224
MASK.P ZP15.N
Y232 M53
M7932
MACHINE MENU 94
753
755
YCNT.N Y.P
767
X220 X224 M6726 M6743 M53
Y232
Y AXIS CONTROL O
756
767 753 761 2708
ZP11.N ZP15.N HMMDPL YCNTOF Y.P
20409 26574 28626
752
M10 X24B M90
MASK.P AL4.N AUTO
14419
Y232
YCNT.N
767
M273 Y2A4 M101
M890
T FUNCTION SUB
768
772 769 803 26597
249M TFIN.N RST
17602 7141 543

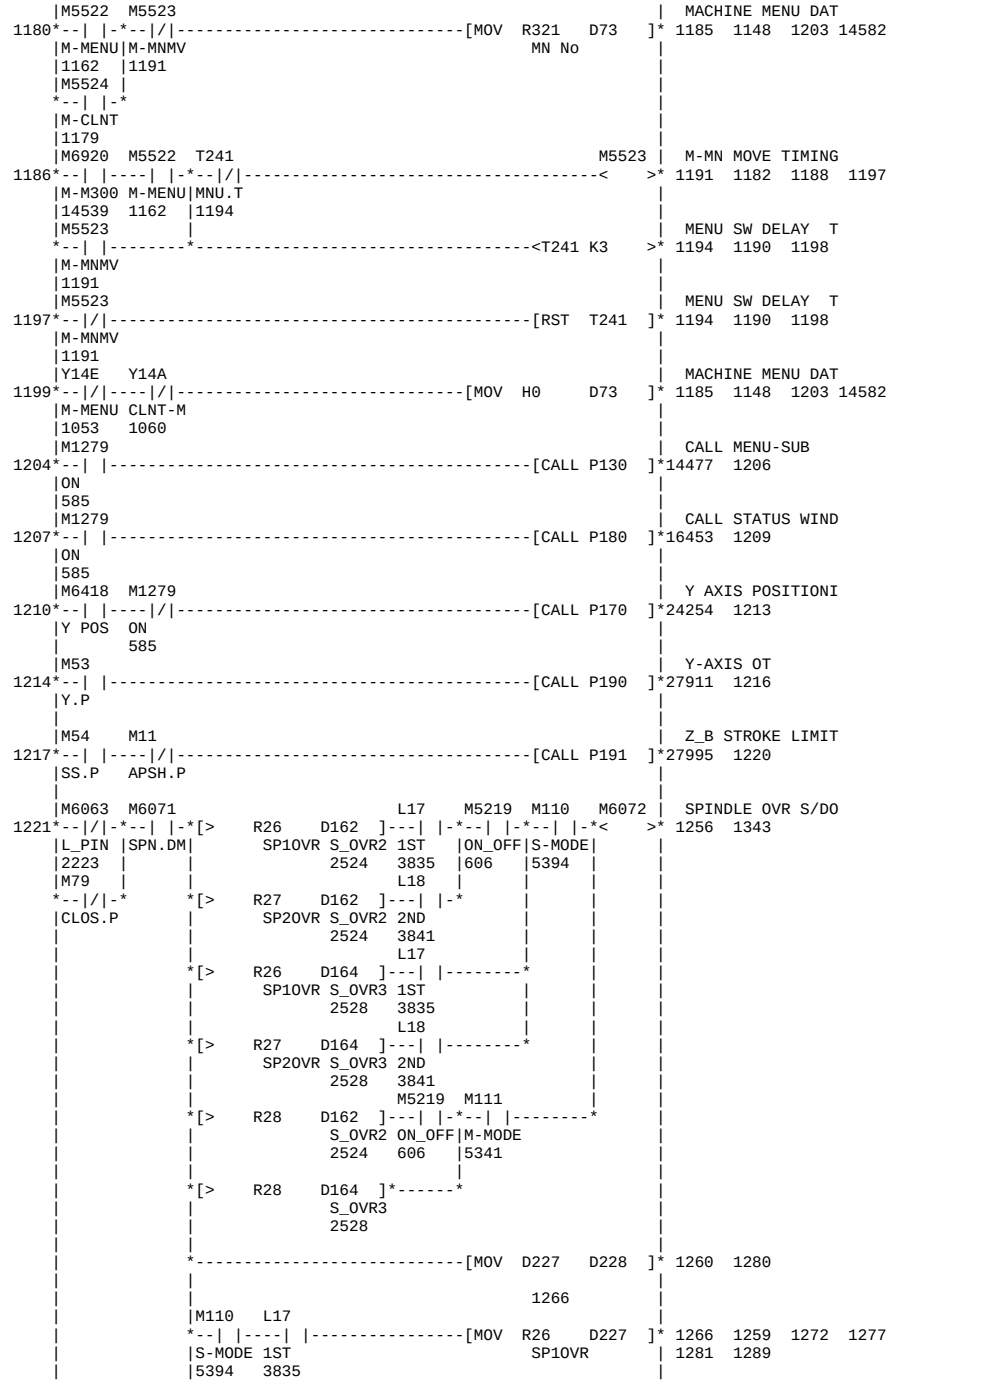

M890
TFSUB
772
M1279
ON
585
CLEAR PULSE ON
CLEAR PULSE OFF
CLEAR ON
X14E X14D X14A M7125 X151 X14B M1285 X149
H*10.B H*1.B RPD.B TAPE.B HOME.B SPR.B MDI.B
14642
X148 M597 X159 M1225 M891
MODE SWITCH OFF
AUT.B TBF H*100. RSTASW
12469 14780
M891 M83 M101 M520 X24B M558 M532 M531
MDSWOF MASA1P RST TSTONP AL4.N MNL-AU JOGCP2 JOGCP1
791 622 543 23356 12641 8817 8143
X274
TF.N
M890 X245
TFSUB STL.N
772
M2623 M2622 M94
DRV-MODE CALL
CLPOFF CLPON
777 775
M94
CALL DRIVE-MODE
MODEOK
806
M95
MDCOIN
14475
X250
JO.N
M1279
ON
585
M330 Y24C
MES. PRNT OUT NC
120M
17270
Y144 M117
JOG MODE OK
RPD.L
14363
Y145
HOME.L
14358
Y147
H*10.L
14407
Y14D
H*100
14410
M7144
H1MD
14375
M7145
JOGS
14353
X115 X116 X117 X118 M1284 M1282 X111 X112
#NAME? #NAME? #NAME? #NAME? CCCW.B C-CW.B #NAME? #NAME?
14695 14634
M53 M54 M49
Y.P SS.P C.P
M107
JOGOK
842
X113 X114 M117 M520 Y266 M1409 M107
JOG FEED OK.
#NAME? #NAME? JOGMOK TSTONP PTPM.N MAN&DR
821 23356 14231 2436
M107 M6505
JOG FEED OK
JOGOK
842
M501 Y145 M576
+ JOG FEED OK
TDRE HOME.L
8149 14358
M93
HOMEOK
732
Y145 M577
JOG FEED OK AUX.
HOME.L
14358
M93
HOMEOK
732
M1281 M578
FEED IL. RELEASE
OTRS.B
1040
M1040
CCC++
8421
M93
HOMEOK
732
X115 X116 X118 X117 X113 X114 M6505 M6750
X JOG FEED OK
#NAME? #NAME? #NAME? #NAME? #NAME? #NAME? J_OK
844
M53 M54
Y.P SS.P
773 775 801 777 800 778 14201 14290 14304 779 1 791 792 1151 26600 792 1 806 807 14470 807 812 813 814 19746 815 821 838 822 1 842 837 843 928 939 965 843 844 868 896 845 848 870 903 942 969 978 849 851 871 879 904 912 943 952 970 979 982 852 855 878 902 951 977 1498 1537 25856 856 869 873 882

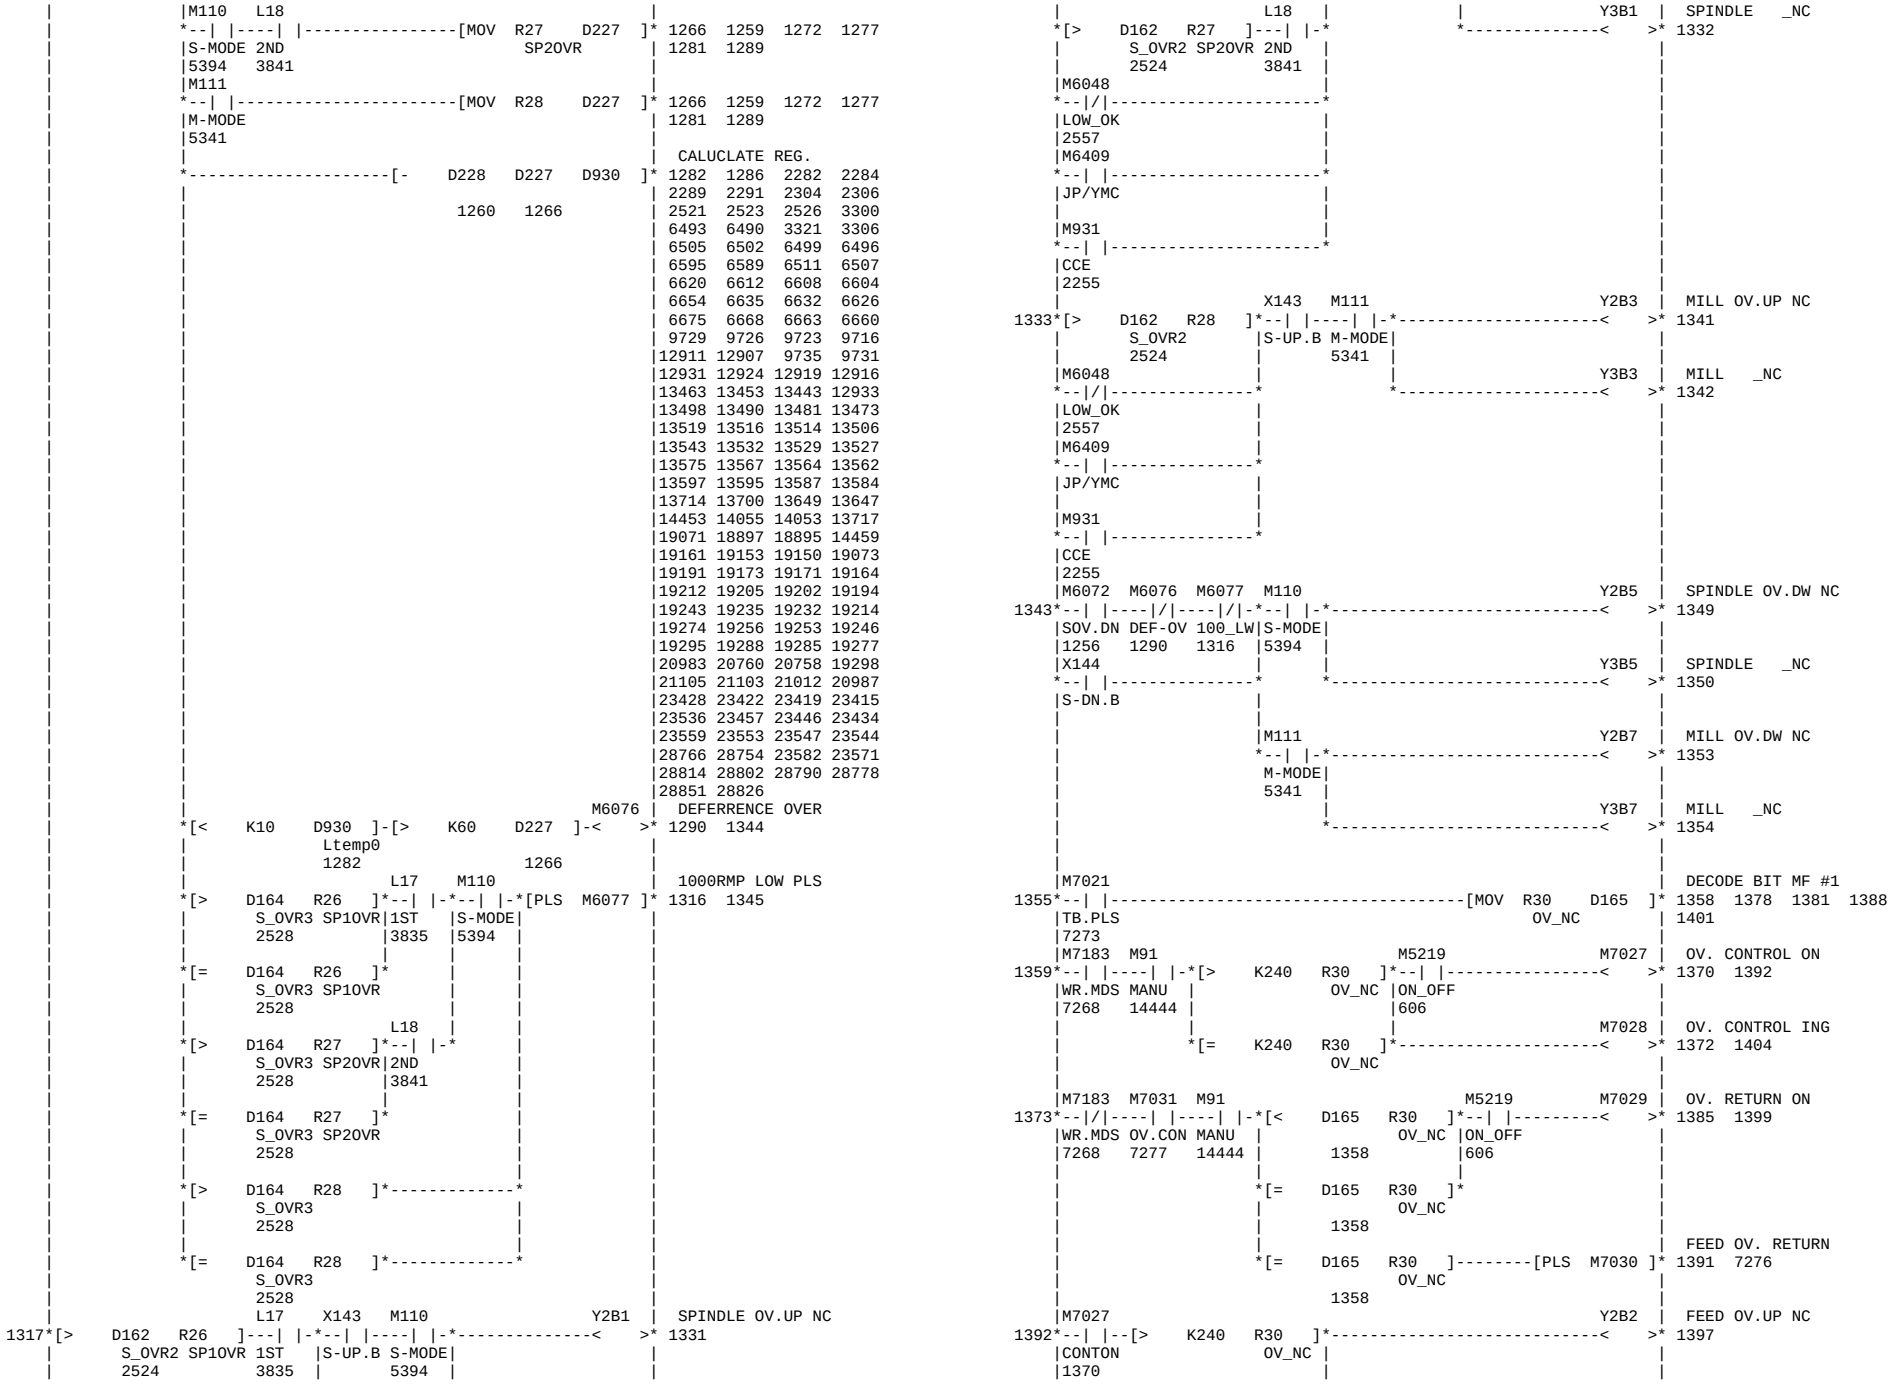

M40 M121
XZJG.P TSET:L
13747 23382
M576 M6750 M579 JOG FEED +X OK
870 874 114
#NAME? XJGOK
848 869
M577
FEEDOK
851
M114
X-ZRME
710
X223 M577 M6750 M580 JOG FEED -X OK
875 883 119
ZP14.N FEEDOK XJGOK
851 869
M54 M501
SS.P TDRE
8149
M93
HOMEOK
732
M578
F IL R
855
X115 X116 X118 X117 X111 X112 M6505 M7024 M6751 Z JOG FEED OK
884 898 910 915
#NAME? #NAME? #NAME? #NAME? #NAME? #NAME? J_OK WRCLP
844 107
M53 M54
Y.P SS.P
M40 M121
XZJG.P TSET:L
13747 23382
X223 M576 M7983 M6751 M581 JOG FEED +Z OK
899 911 132
ZP14.N #NAME? TBCLM ZJGOK
848 9024 898
M54 M577 M1281
SS.P FEEDOK OTRS.B
851 1040
M93 M115
HOMEOK Z-ZRME
732 713
M578
F IL R
855
M577 M7983 M6751 M582 JOG FEED -Z OK
912 916 145
FEEDOK TBCLM ZJGOK
851 9024 898
M501
TDRE
8149
M404 M113 M1149 L17 M107 M502 M106 C JOG FEED OK
917 930 148
CHCL-L C-OK CCLMEM 1ST JOGOK TDIL
4960 5539 22778 3835 842 8169
M69 M7768 L18 M6451
COK.P C2CLM 2ND SSCT.P
23149 3841
Y144
RPD.L
14363
X115 X116 X111 X112 X113 X114 M107 M54 M6752 W JOG FEED OK
931 941 945 955
#NAME? #NAME? #NAME? #NAME? #NAME? #NAME? JOGOK SS.P
842
M53
Y.P
M40
XZJG.P
13747
M576 M6752 M583 JOG FEED +W OK
942 946 172
#NAME? BJGOK
848 941
M577
FEEDOK
851
M116
W-ZRME
716
X224 X220 M577 M6752 M502 M584 JOG FEED -W OK
947 957 177
ZP15.N ZP11.N FEEDOK BJGOK TDIL
851 941 8169
M53 M501
Y.P TDRE
8149
M93
HOMEOK
732
M578
F IL R
855
X118 X117 X111 X112 X113 X114 M107 Y9F
958
#NAME? #NAME? #NAME? #NAME? #NAME? #NAME? JOGOK TALBRK
842 96
M54
SS.P
M53 M6753 Y JOG FEED OK
1> 968 972 985
Y.P
M576 M6753 M6754 #NAME?
969 973 191
#NAME? YJGOK
848 968
M577
FEEDOK
851
M6732
Y-ZRME
719
X223 M576 M577 M6753 M6755 #NAME?
974 986 184
ZP14.N #NAME? FEEDOK YJGOK
848 851 968
M54 M577 M501
SS.P FEEDOK TDRE
851 8149

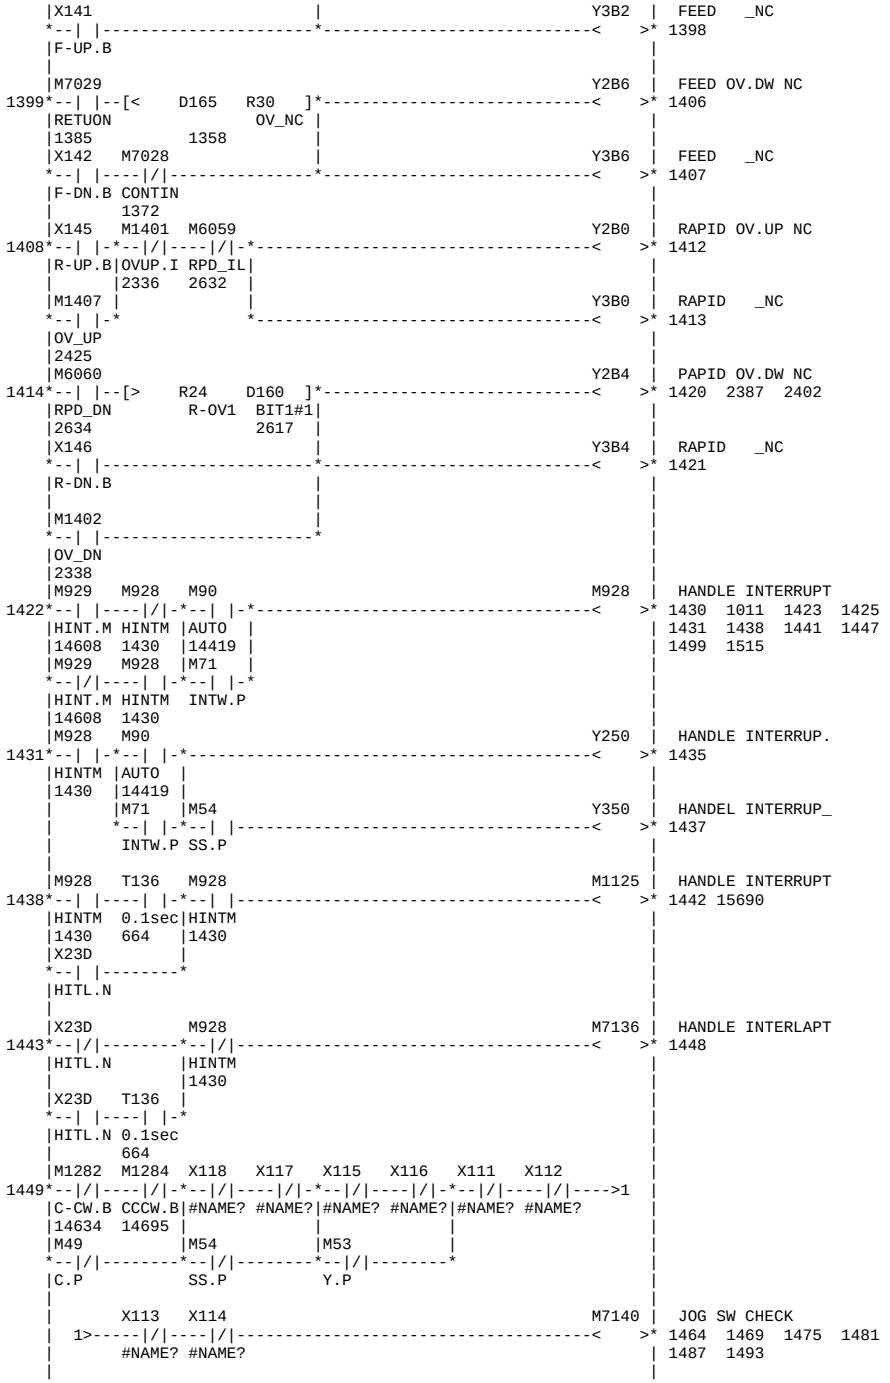

|M93 |M6732 |
--|/|---| |-*
|HOMEOK|Y-ZRME
|732 |719
|M578 |
--| |-
|F IL R
|855
|M91 Y220 Y221 Y222 Y223 Y228 Y229 Y22A
987*--|/|----|/|----|/|----|/|----|/|----|/|----|/|----|/|---->1
|MANU J+X.N J+Z.N J+C.N J+B.N J-X.N J-Z.N J-C.N
|14444 115 133 154 173 120 146 164
| Y22B Y224 Y22C M6507 | JUMP JOG FEED
| 1>-----|/|----|/|----|/|----------<> 998 108
| J-B.N J+Y.N J-Y.N
| 178 185 192
|M6735 X223 M928 M90 M6749 | AXIS INTELOCK DI
999*--| |--------*--|/|-*--| |----| |-*----------<> 1017 1034
XHSW	ZP14.N	HINTM AUTO
1470		1430 14419
M6736		X252 M91
--| |-------- *--| |----| |-*
ZHSW		HO.N MANU
1476		14444
M6739 M53	
*--		----		-*
YHSW Y.P
1494
X220 M6738
--|/|----------| |-*
ZP11.N	WHSW
	1488
X224 M53
--|/|----| |-
ZP15.N Y.P
X112 X223 T138 M93 M1040 M54 M1281	OT RELESE SW
1018*--| |--------*--|/|-*--|/|----| |----|/|----| |-*-------<> 1040 852 908 1039
#NAME? |ZP14.N|LED2.T HOMEOK CCC++ SS.P		2062 5262 6775 7174
		674 732 8421		9059 9091 14813 21649
X113		|23640 23819 26005
*--		--------*	
#NAME?			
M7130 M53			
--| |----| |-		
Y.P		
X220 X118		
*--	/	--------*--		-*	
ZP11.N	#NAME?		
X224 M53			
--|/|----| |-		
ZP15.N Y.P		
X118 M5727		
*--		-*--	/	--------*	
#NAME?|PCIL		
	7597		
X117			
--| |-		
#NAME?		
M6749		
*--		---------------*	
AXSILK	
1017	
M1281	
*--		---*
OTRS.B
1040
P4	X15A	MACHINE MENU SW.
1041*--| |---[PLS M988]* 1043 1047 1049 1059
MACH.M
X154	COOLANT MENU SW.
1044*--| |---[PLS M989]* 1046 1052 1054 1056
CNTMEN
M988 Y14E M989 Y14E	MACHINE MENU .B
1047*--| |----|/|-*--|/|----------<> 1053 1048 1050 1066
M_MN_P M-MENU	C_MN_P	1153 1199
1043 1053	1046
M988 Y14E	
*--	/	----		-*
M_MN_P M-MENU
1043 1053
M989 Y14A M988 Y14A	COOLANT MENU .B
1054*--| |----|/|-*--|/|----------<> 1060 1055 1057 1069
C_MN_P CLNT-M	M_MN_P	1152 1200
1046 1060	1043
M989 Y14A	
*--	/	----		-*
C_MN_P CLNT-M
1046 1060
M1279 K4	TEMP. COIL 0 BIT
1061*--| |-*----------[MOV R8100 M1200]* 1064 1067 1073 3407
ON		3408 7202 7204 7219
585	1074	12729 12929 13374 13411
		15880 15879 15603 15569
		15934 15909 15906 15901
		15963 15958 15942 15939
		15984 15983 15978 15966
		16023 16001 16000 15995
		16050 16045 16033 16028
		16072 16071 16066 16051
		16130 16115 16100 16080
		16458 16456 16193 16145
		19266 16509 16505 16499
		23479 23463 23462 19305
		23624 23604 23589 23588
		23654 23651 23647 23627
		23737 23731 23728 23660
		23774 23760 23754 23751
		23800 23797 23783 23777
		23873 23863 23860 23806
		23908 23901 23888 23878
		24064 24030 23950 23949
		27169 27145 27142 24074
		27213 27208 27176 27174
		27236 27234 27229 27216
		27383 27359 27352 27243
		27449 27444 27403 27388
		27489 27484 27479 27452
		27518 27514 27505 27500
		27540 27535 27527 27523
		27574 27570 27566 27561
		28409 28405 28400 28383
		28479 28447 28440 28435
		28518 28513 28487 28484
		28549 28547 28542 28522
		28611 28578 28575 28570
		28645 28639 28619 28616
		28666 28663 28658 28650
		28699 28694 28685 28680
		28712 28709 28704 28701
		28736 28733 28731 28726
		28748 28741
	Y14E M1200	TEMP. COIL 0 BIT
*--		---<> 1064 1067 1073 3407
	M-MENU	3408 7202 7204 7219
	1053	12729 12929 13374 13411
		15880 15879 15603 15569
		15934 15909 15906 15901
		15963 15958 15942 15939
		15984 15983 15978 15966
		16023 16001 16000 15995
		16050 16045 16033 16028
		16072 16071 16066 16051
		16130 16115 16100 16080

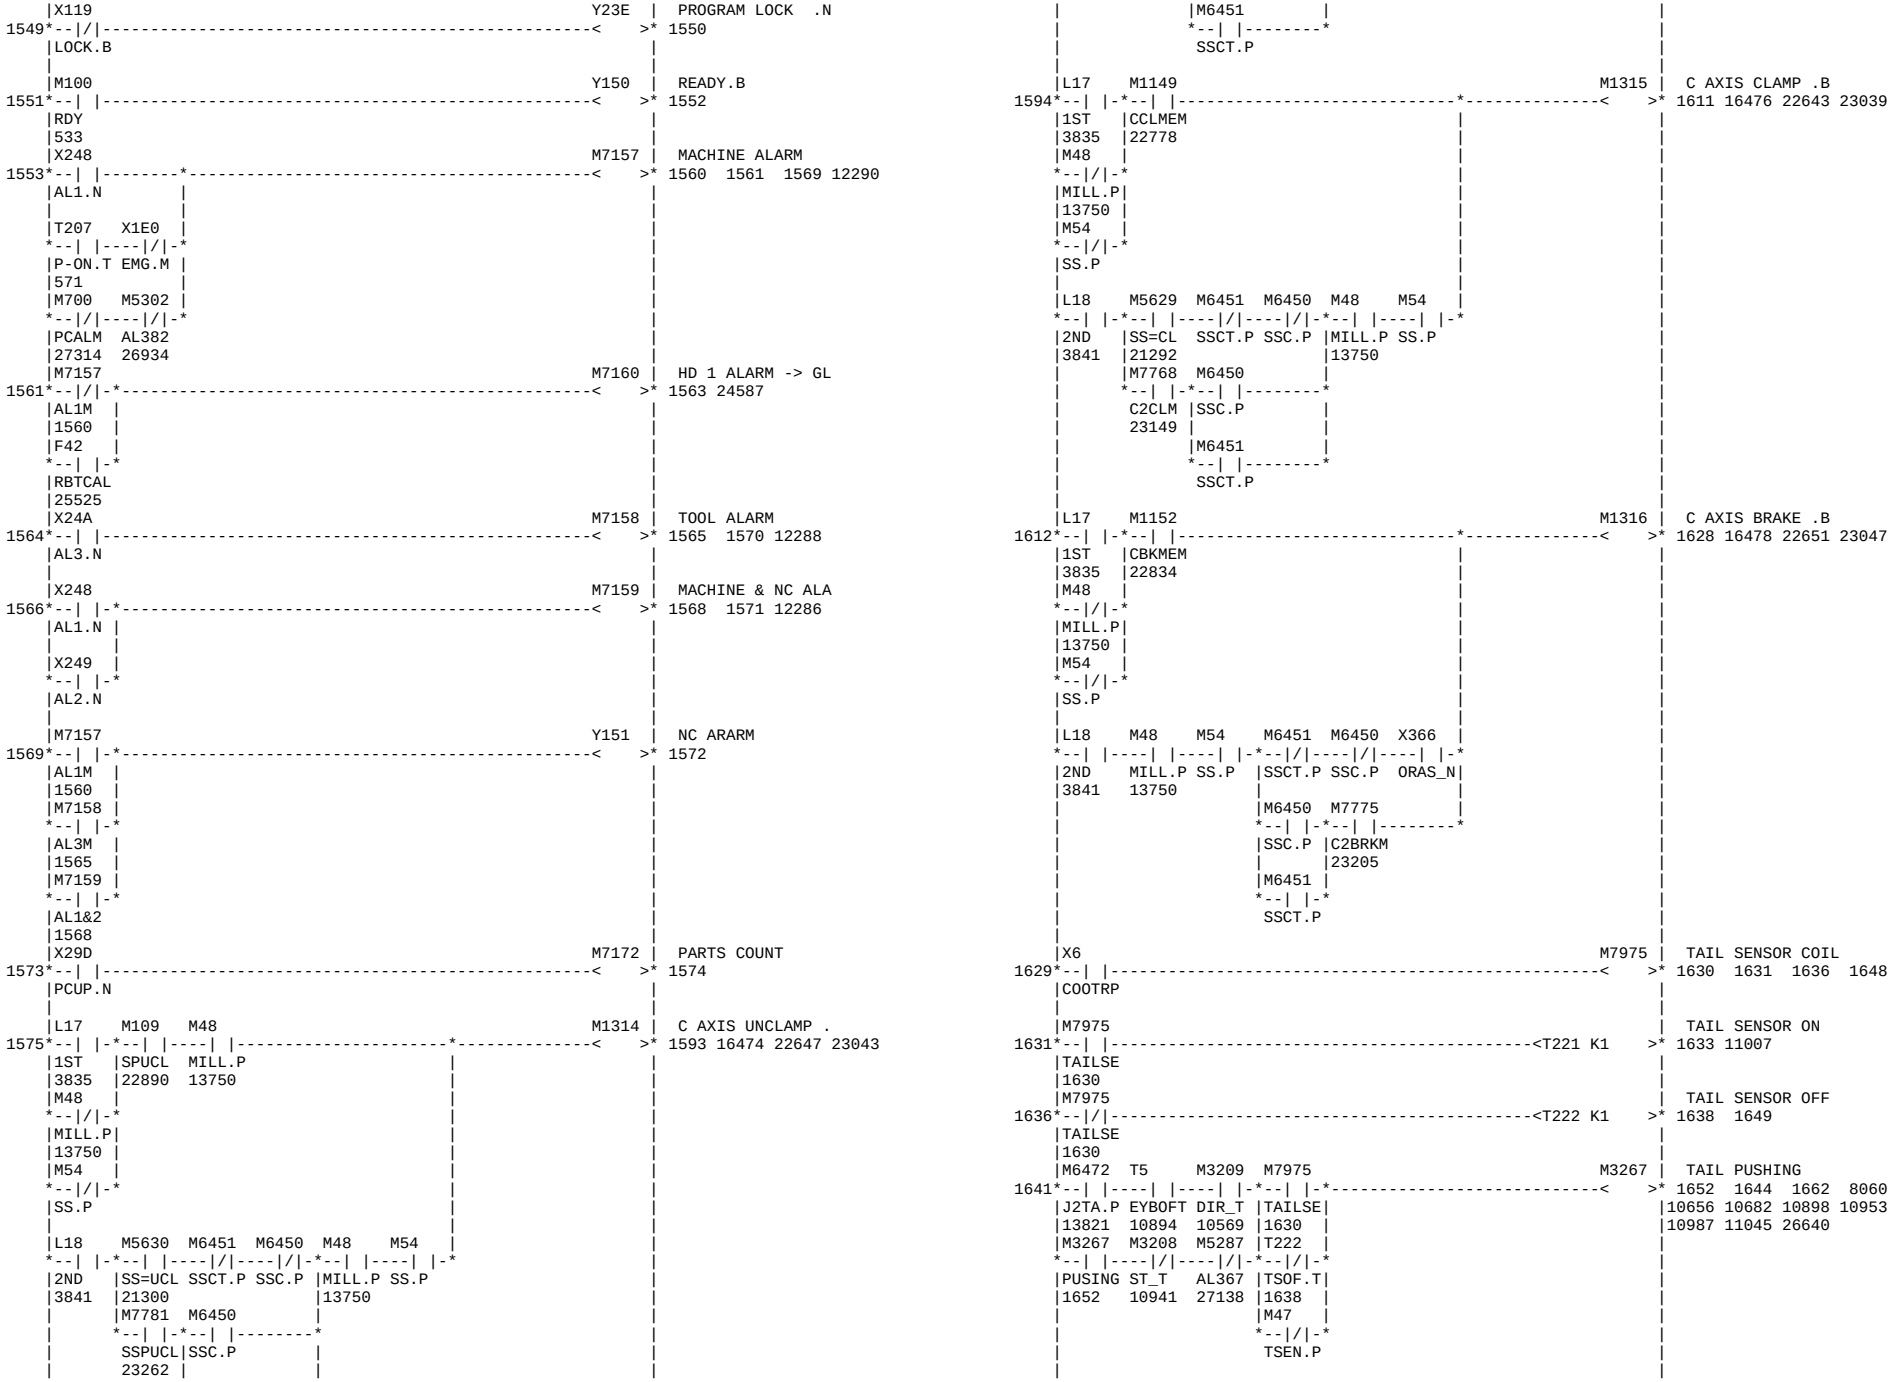

Y14A
M1201
TEMP. COIL 1 BIT
CLNT-M
1060
K4
MOV M1200 R8100
TMP.0B
1064
M1279
ON
585
MOV R16 D186
menuNo
M777
CLEAR SW.
R16
menuNo
M777 M101 M1088
M1273
ALARM CLEAR
CLR-SW RST ACL.D
1082 543 12256
X156
MF1 SW. PULSE
PLS M800
MF1.B
11093
M804
M1215
TEMP. COIL F BIT
DRN
14704
M805
T138
Y14C
MF1 SWITCH .B
MLCK
LED2.T
14721
674
M779
M-MENU
15007
M816
M-MENU
15152
M19 M42 M90 M931 X11C
FD.P MF1S.P AUTO CCE SETUP.
14419 2255
M18
TOPD.P
M1282
C-CW.B
14634
M1283
C-ON.B
14666
M1284
CCCW.B
14695
M1286
SPJG.B
14751
X10D
DROP.B
X10E
DRCL.B
M7126
TRMDSW
15202
M7127
TLMDSW
15180
M7128
TLUCLS
15170
M7116
ORNTSW
14920

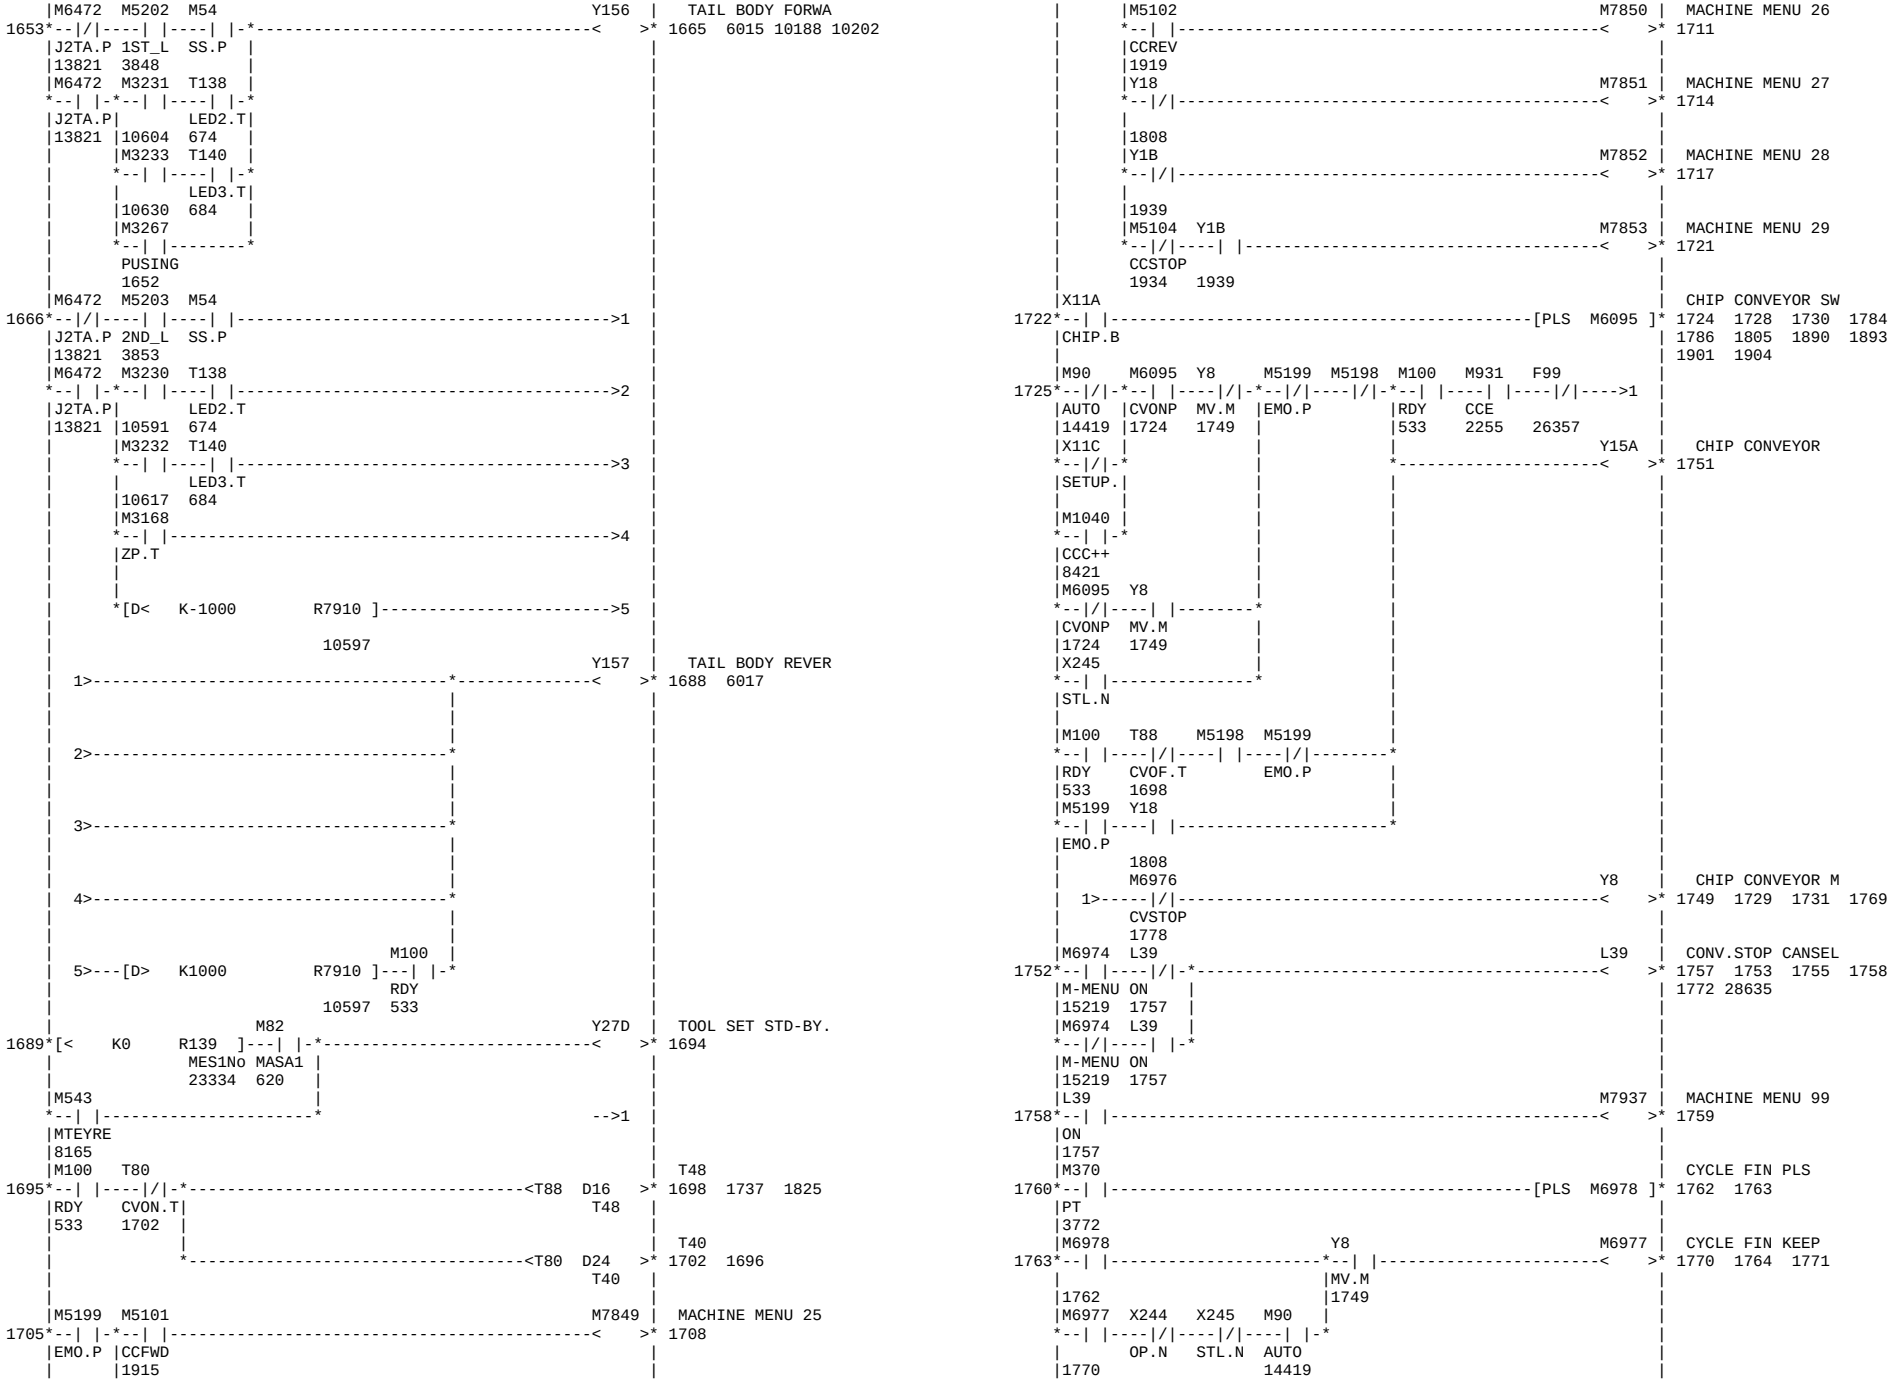

M7117
JONTSW
14931
M7118
CLEXTS
14853
M7119
CLRETS
14864
X10B M501 M91
TSEF.B TDRE MANU
8149 14444
X10C
TSER.B
M800 M1215 M1214 TEMP. COIL E BIT
1122 1124 12412 12413 15600
MF1SWP TMP.FB 16494 23903 27163 27195
1089 1119
M1215 M861 M861 MF1 SW. FLIP-FLO
1125 1130 1126 1128
TMP.FB MF1SWM
1119 1130
M1215 M861
TMP.FB MF1SWM
1119 1130
M980 SIMULATION SCREE
1131 1134 1136 6049 15538
15570 18428 18445 18475
18621 23612 23831 23836
23914 23896 23855 23850
Y24D SUMILATION MODE
1135 23916
M980 M981 SIMULATION MODE
1136 1138 1143 2729 3741
SIMUSC 5835 5934 6251 6270
1134 6284 9110 9118 9125
M982 16082 20792 20798 21195
SIMVON
23944
M102 M103 M814 M848 M981 M996 X240
1139
RDYP RDYOFP MENUCA MENU SIM-MD CAL MS MA.N
535 537 16087 8259 1138 23407
Y231 M1073 M891 Y14A
1>---[= R321 D73]---|/|----|/|----| |----|/|---->2
MN No MENUSW PSRQ.N ST.D MDSWOF CLNT-M
1185 3976 12241 791 1060
Y14E M7463 M815 MENU NOT CALL
2>-----|/|----|/|----------<
M-MENU TUOFF 1155
1053 15307
M5522 MACHINE MENU ON
1156 1162 1180 1187
*[< H2 R16]-[> H1C R16]---------- menuNo menuNo
M6920 M-MN COOLANT
1163 1179 1181
[< H15 R16]-[> H1C R16]---| |-[PLS M5524]
menuNo menuNo M-M300
14539
M6930
[< H2 R16]-[> H1C R16]---| |-
menuNo menuNo M-M310
14579

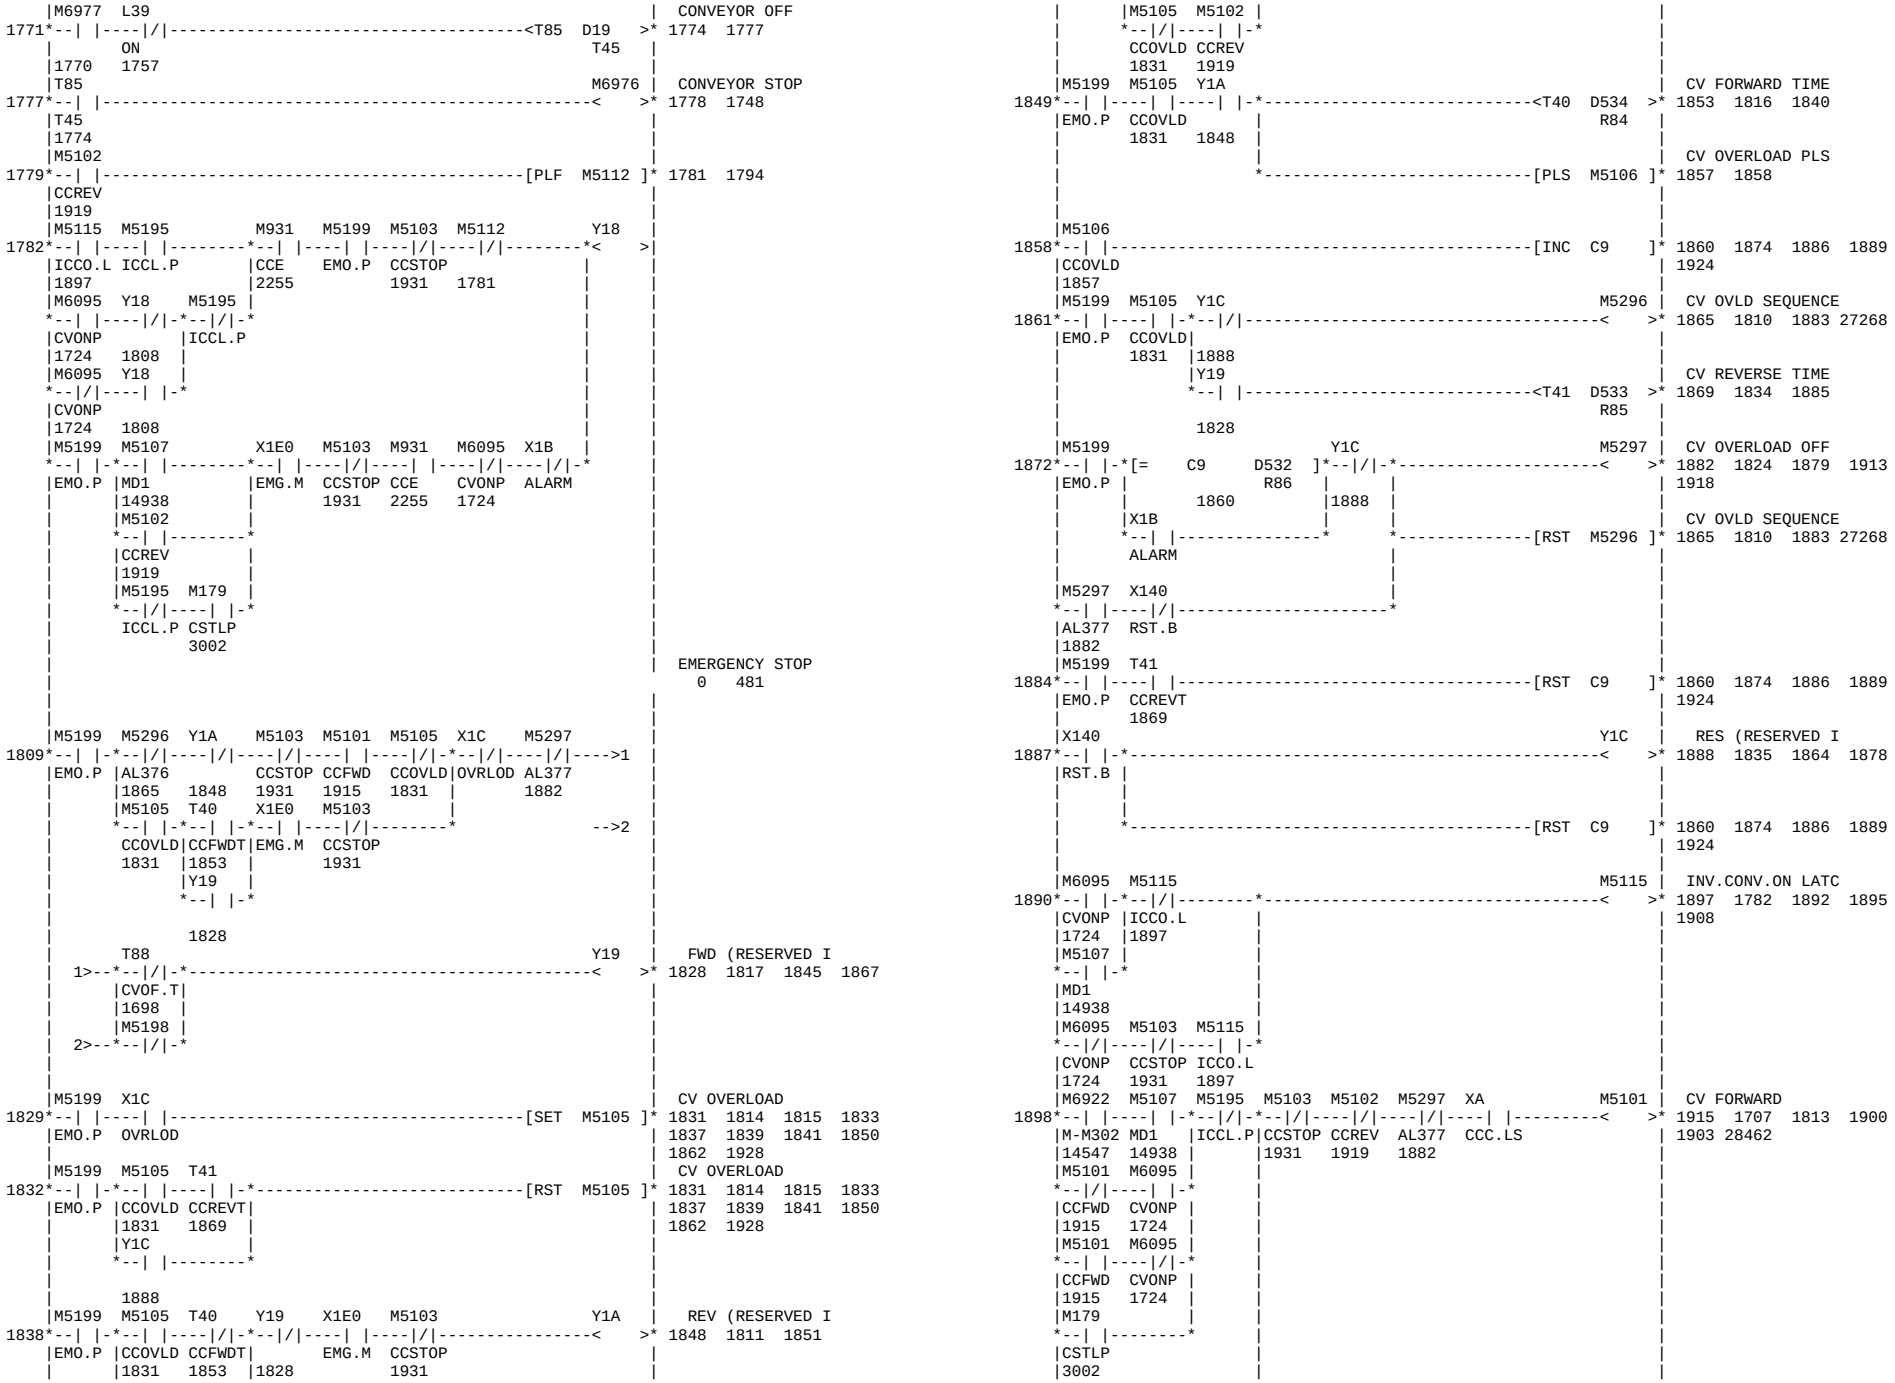

M5522 M5523 MACHINE MENU DAT
1180 1185 1148 1203 14582
M-MENU M-MNMV MN No
1162 1191
M5524
M-CLNT
1179
M6920 M5522 T241 M5523 M-MN MOVE TIMING
1186 1191 1182 1188 1197
M-M300 M-MENU MNU.T
14539 1162 1194
M5523 MENU SW DELAY T
1194 1190 1198
M-MNMV
1191
M5523 MENU SW DELAY T
1197 1194 1190 1198
M-MNMV
1191
Y14E Y14A MACHINE MENU DAT
1199 1185 1148 1203 14582
M-MENU CLNT-M
1053 1060
M1279 CALL MENU-SUB
1204 14477 1206
ON
585
M1279 CALL STATUS WIND
1207 16453 1209
ON
585
M6418 M1279 Y AXIS POSITIONI
1210 24254 1213
Y POS ON
585
M53 Y-AXIS OT
1214 27911 1216
Y.P
M54 M11 Z_B STROKE LIMIT
1217 27995 1220
SS.P APSH.P
M6063 M6071 L17 M5219 M110 M6072 SPINDLE OVR S/DO
1221 1256 1343
L_PIN SPN.DM SP1OVR S_OVR2 1ST ON_OFF S-MODE
2223 2524 3835 606 5394
M79 L18
CLOS.P SP2OVR S_OVR2 2ND
2524 3841
L17
SP1OVR S_OVR3 1ST
2528 3835
L18
SP2OVR S_OVR3 2ND
2528 3841
M5219 M111
R28 D162 S_OVR2 ON_OFF M-MODE
2524 606 5341
R28 D164 S_OVR3
2528
D227 D228 1260 1280
1266
M110 L17
R26 D227 1266 1259 1272 1277
S-MODE 1ST SP1OVR 1281 1289
5394 3835

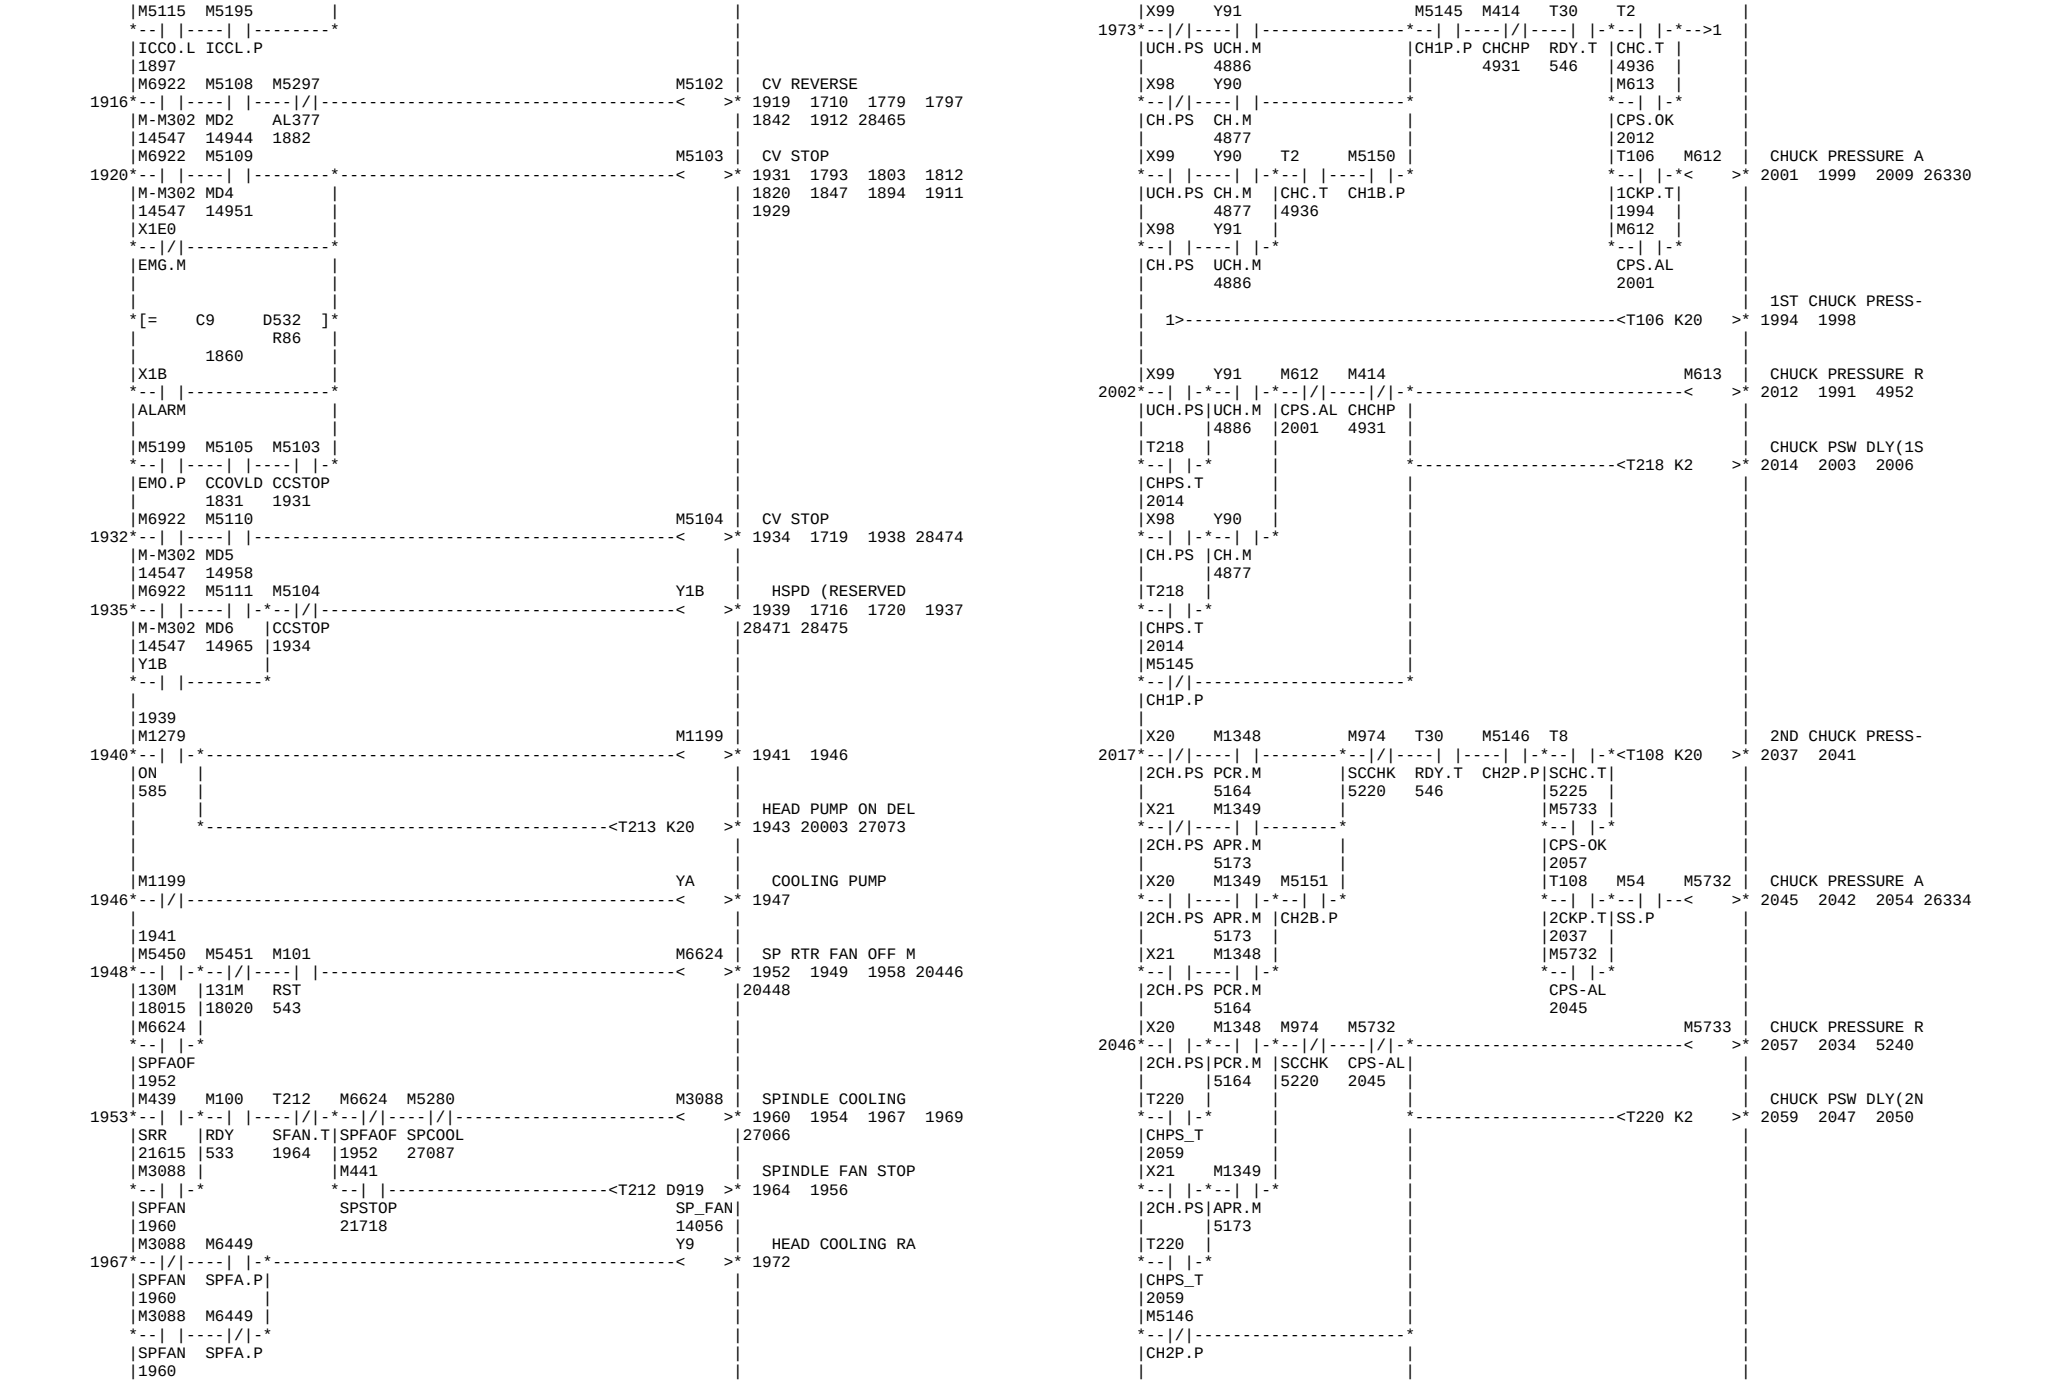

M110 L18
S-MODE 2ND SP2OVR
5394 3841
M111
M-MODE
5341
CALUCLATE REG.
1260 1266
M6076 DEFERRENCE OVER
Ltemp0
1282 1266
L17 M110 1000RMP LOW PLS
S_OVR3 SP1OVR 1ST S-MODE
2528 3835 5394
S_OVR3 SP1OVR
2528
L18
S_OVR3 SP2OVR 2ND
2528 3841
S_OVR3
2528
S_OVR3
2528
L17 X143 M110 Y2B1 SPINDLE OV.UP NC
S_OVR2 SP1OVR 1ST S-UP.B S-MODE
2524 3835 5394
L18 Y3B1 SPINDLE _NC
S_OVR2 SP2OVR 2ND
2524 3841
M6048
LOW_OK
2557
M6409
JP/YMC
M931
CCE
2255
X143 M111 Y2B3 MILL OV.UP NC
S_OVR2 S-UP.B M-MODE
2524 5341
M6048 Y3B3 MILL _NC
LOW_OK
2557
M6409
JP/YMC
M931
CCE
2255
M6072 M6076 M6077 M110 Y2B5 SPINDLE OV.DW NC
SOV.DN DEF-OV 100_LW S-MODE
1256 1290 1316 5394
X144 Y3B5 SPINDLE _NC
S-DN.B
M111 Y2B7 MILL OV.DW NC
M-MODE
5341
Y3B7 MILL _NC
M7021 DECODE BIT MF #1
TB.PLS OV_NC
7273
M7183 M91 M5219 M7027 OV. CONTROL ON
WR.MDS MANU OV_NC ON_OFF
7268 14444 606
M7028 OV. CONTROL ING
OV_NC
M7183 M7031 M91 M5219 M7029 OV. RETURN ON
WR.MDS OV.CON MANU OV_NC ON_OFF
7268 7277 14444 1358 606
OV_NC
1358
FEED OV. RETURN
OV_NC
1358
M7027 Y2B2 FEED OV.UP NC
CONTON OV_NC
1370

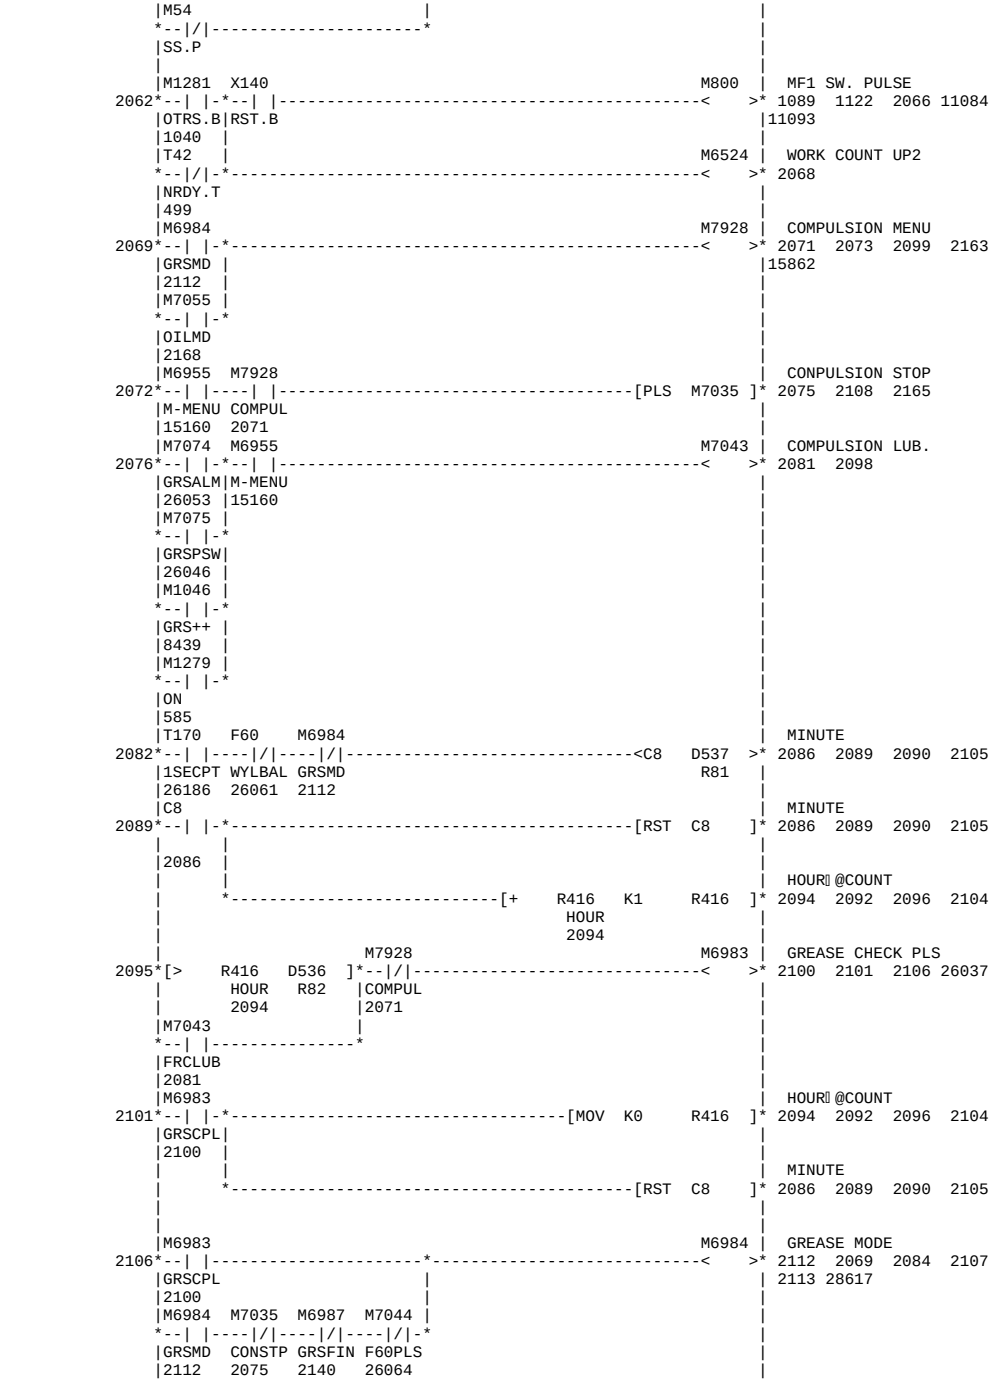

|X141 | Y3B2 | FEED _NC
--| |--------------------<
|F-UP.B
|M7029 Y2B6 | FEED OV.DW NC
1399*--| |--[< D165 R30]*----------<
|RETUON OV_NC |
|1385 1358 |
|X142 M7028 | Y3B6 | FEED _NC
--| |----|/|--------------------<
|F-DN.B CONTIN
| 1372
|X145 M1401 M6059 Y2B0 | RAPID OV.UP NC
1408*--| |-*--|/|----|/|-*----------<
|R-UP.B|OVUP.I RPD_IL|
| |2336 2632 |
|M1407 | Y3B0 | RAPID _NC
--| |- *----------<
|OV_UP
|2425
|M6060 Y2B4 | PAPID OV.DW NC
1414*--| |--[> R24 D160]*----------<
|RPD_DN R-OV1 BIT1#1|
|2634 2617 |
|X146 | Y3B4 | RAPID _NC
--| |--------------------<
|R-DN.B
|M1402
--| |----------
|OV_DN
|2338
|M929 M928 M90 M928 | HANDLE INTERRUPT
1422*--| |----|/|-*--| |-*----------<
HINT.M HINTM	AUTO
14608 1430	14419
M929 M928	M71
--|/|----| |---| |-*
HINT.M HINTM INTW.P
14608 1430
M928 M90 Y250	HANDLE INTERRUP.
1431*--| |-*--| |-*----------<
HINTM	AUTO
1430	14419
|M71 |M54 Y350	HANDEL INTERRUP_
*--		-*--		----------<
INTW.P SS.P
M928 T136 M928 M1125	HANDLE INTERRUPT
1438*--| |----| |-*--| |----------<
HINTM 0.1sec	HINTM
1430 664	1430
X23D
--| |--------
HITL.N
X23D M928 M7136	HANDLE INTERLAPT
1443*--|/|--------*--|/|----------<
HITL.N	HINTM
	1430
X23D T136
--| |----| |-
HITL.N 0.1sec
664
M1282 M1284 X118 X117 X115 X116 X111 X112
1449*--|/|----|/|-*--|/|----|/|-*--|/|----|/|-*--|/|----|/|---->1
C-CW.B CCCW.B	#NAME? #NAME?	#NAME? #NAME?	#NAME? #NAME?
14634 14695	
M49	M54	M53
--|/|----------|/|--------*--|/|--------*
C.P SS.P Y.P
X113 X114 M7140	JOG SW CHECK
1>-----	/	----	/	----------<
#NAME? #NAME?
X100 X101 X102 X103 M7140 M6735	HANDEL X SELECT
1465*--| |----|/|----|/|----|/|----| |----------<
XSELCT ZSELCT CSELCT YSELCT JSWC
1464
X100 X101 X102 X103 M7140 M6736	HANDEL Z SELECT
1471*--|/|----| |----|/|----|/|----| |----------<
XSELCT ZSELCT CSELCT YSELCT JSWC
1464
X100 X101 X102 X103 M7140 M6737	HANDEL C SELECT
1477*--| |----| |----|/|----|/|----| |----------<
XSELCT ZSELCT CSELCT YSELCT JSWC
1464
X100 X101 X102 X103 M7140 M6738	HANDEL W SELECT
1483*--| |----| |----| |----|/|----| |----------<
XSELCT ZSELCT CSELCT YSELCT JSWC
1464
X100 X101 X102 X103 M7140 M6739	HANDEL Y SELECT
1489*--|/|----|/|----| |----|/|----| |----------<
XSELCT ZSELCT CSELCT YSELCT JSWC
1464
X223 M928 M1410 M6735 Y270	HANDLE X SELECT.
1495*--| |-*--| |----| |-*--| |----------<
ZP14.N	HINTM AUT&DR	XHSW
	1430 2439	1470
M54 |X252 M1409 |M6736 Y271	HANDLE Z SELECT.
--|/|---| |----| |-*--| |----------<
SS.P	HO.N MAN&DR	ZHSW
	2436	1476
M93		M6739 M53 Y274	HANDLE Y SELECT.
--|/|- *--| |----| |----------<
HOMEOK	YHSW Y.P
732	1494
M578
--| |-
F IL R
855
M928 M1410 M6737 M1149 M49 Y273 L17 Y272	HANDLE C SELECT.
1515*--| |----| |-*--| |----|/|----| |----|/|-*--| |---------<
HINTM AUT&DR	CHSW CCLMEM C.P H4.N	1ST
1430 2439	1482 22778 1541	3835
X252 M1409		L18 M6451 Y372	HANDLE C SELECT_
--| |----| |- *--| |----| |--<
HO.N MAN&DR	2ND SSCT.P
2436	3841
|X224 X220 M6738 M54 Y273	HANDLE W SELECT.
--| |---| |-*--| |----| |----------<
	ZP15.N	ZP11.N	WHSW SS.P
			1488
|M53	
*--	/	-*
	Y.P
	M93
*--	/	--------*
	HOMEOK
	732
	M578
*--		--------*
F IL R
855
X150 Y253	VFC. REQUEST .NC
1542*--| |----------<
VFC.B
X23C Y148	VFC .B
1544*--| |----------<
VFCL.N
M1280 Y252	TPS. REQUEST .NC
1546*--| |-*----------<
TPS.B
14776
	Y352	TPS. REQUEST _NC
*----------<

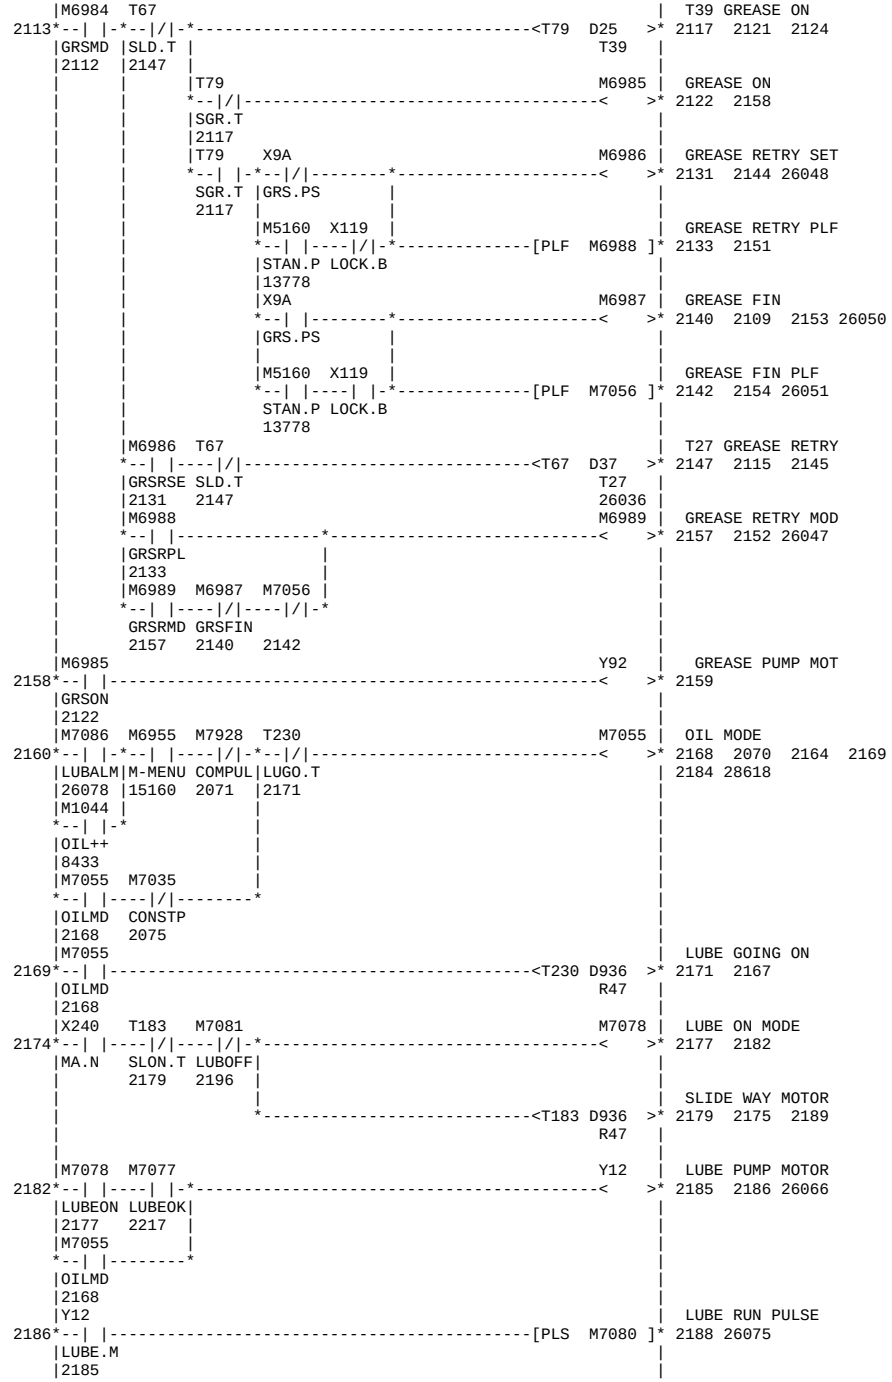

|X119 Y23E | PROGRAM LOCK .N
1549*--|/|--------<> 1550
|LOCK.B
|M100 Y150 | READY.B
1551*--| |--------<> 1552
|RDY
|533
|X248 M7157 | MACHINE ALARM
1553*--| |--------*--------<> 1560 1561 1569 12290
|AL1.N |
|T207 X1E0 |
--| |----|/|-
|P-ON.T EMG.M |
|571 |
|M700 M5302 |
--|/|----|/|-
|PCALM AL382
|27314 26934
|M7157 M7160 | HD 1 ALARM -> GL
1561*--|/|-*--------<> 1563 24587
|AL1M |
|1560 |
|F42 |
--| |-
|RBTCAL
|25525
|X24A M7158 | TOOL ALARM
1564*--| |--------<> 1565 1570 12288
|AL3.N
|X248 M7159 | MACHINE & NC ALA
1566*--| |-*--------<> 1568 1571 12286
|AL1.N |
|X249 |
--| |-
|AL2.N
|M7157 Y151 | NC ARARM
1569*--| |-*--------<> 1572
|AL1M |
|1560 |
|M7158 |
--| |-
|AL3M |
|1565 |
|M7159 |
--| |-
|AL1&2
|1568
|X29D M7172 | PARTS COUNT
1573*--| |--------<> 1574
|PCUP.N
|L17 M109 M48 M1314 | C AXIS UNCLAMP .
1575*--| |-*--| |----| |----------*--------<> 1593 16474 22647 23043
1ST	SPUCL MILL.P
3835	22890 13750
M48	
*--	/	-*
MILL.P	
13750	
M54	
*--	/	-*
SS.P
L18 M5630 M6451 M6450 M48 M54
--| |---| |----|/|----|/|-*--| |----| |-*
2ND	SS=UCL SSCT.P SSC.P	MILL.P SS.P
3841	21300	13750
|M7781 M6450	
*--		-*--		--------*
SSPUCL|SSC.P	
23262		
|M6451	
*--		--------*
SSCT.P
L17 M1149 M1315	C AXIS CLAMP .B
1594*--| |-*--| |----------*--------<> 1611 16476 22643 23039
1ST	CCLMEM
3835	22778
M48	
*--	/	-*
MILL.P	
13750	
M54	
*--	/	-*
SS.P
L18 M5629 M6451 M6450 M48 M54
--| |---| |----|/|----|/|-*--| |----| |-*
2ND	SS=CL SSCT.P SSC.P	MILL.P SS.P
3841	21292	13750
|M7768 M6450	
*--		-*--		--------*
C2CLM |SSC.P	
23149		
|M6451	
*--		--------*
SSCT.P
L17 M1152 M1316	C AXIS BRAKE .B
1612*--| |-*--| |----------*--------<> 1628 16478 22651 23047
1ST	CBKMEM
3835	22834
M48	
*--	/	-*
MILL.P	
13750	
M54	
*--	/	-*
SS.P
L18 M48 M54 M6451 M6450 X366
--| |----| |----| |---|/|----|/|----| |-*
2ND MILL.P SS.P	SSCT.P SSC.P ORAS_N
3841 13750	
	M6450 M7775
*--		-*--		--------*
	SSC.P	C2BRKM
		23205
|M6451	
*--		-*
SSCT.P
X6 M7975	TAIL SENSOR COIL
1629*--| |--------<> 1630 1631 1636 1648
COOTRP
M7975	TAIL SENSOR ON
1631*--| |--------<T221 K1 >* 1633 11007
TAILSE
1630
M7975	TAIL SENSOR OFF
1636*--|/|--------<T222 K1 >* 1638 1649
TAILSE
1630
M6472 T5 M3209 M7975 M3267	TAIL PUSHING
1641*--| |----| |----| |-*--| |-*----------<> 1652 1644 1662 8060
J2TA.P EYBOFT DIR_T	TAILSE		10656 10682 10898 10953
13821 10894 10569	1630		10987 11045 26640
M3267 M3208 M5287	T222
--| |----|/|----|/|---|/|-*
PUSING ST_T AL367	TSOF.T
1652 10941 27138	1638
	M47
*--	/	-*
TSEN.P

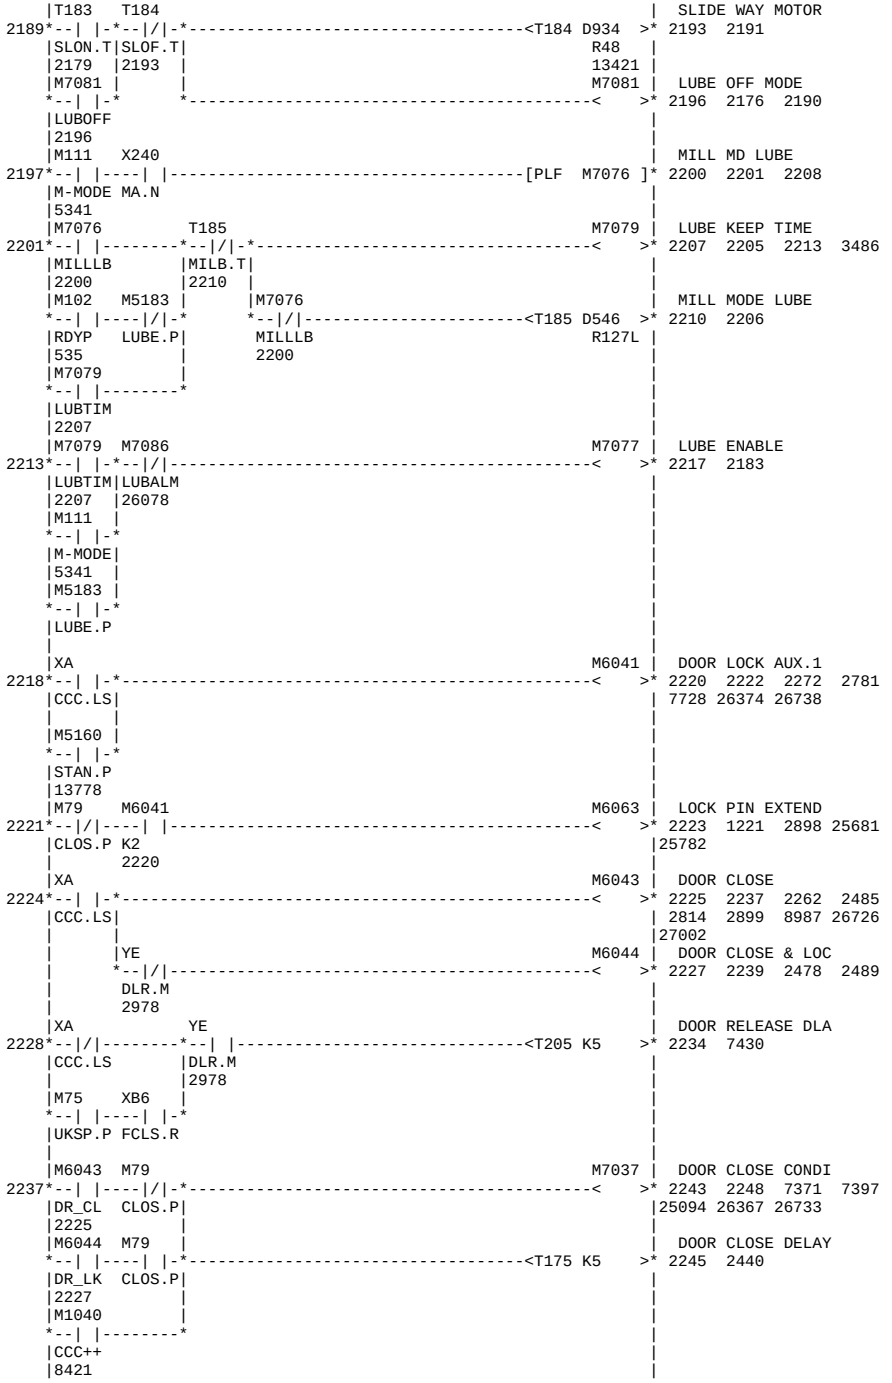

M6472 M5202 M54
Y156
TAIL BODY FORWA
1653
1665 6015 10188 10202
J2TA.P 1ST_L SS.P
13821 3848
M6472 M3231 T138
J2TA.P LED2.T
13821 10604 674
M3233 T140
LED3.T
10630 684
M3267
PUSING
1652
M6472 M5203 M54
1666
J2TA.P 2ND_L SS.P
13821 3853
M6472 M3230 T138
J2TA.P LED2.T
13821 10591 674
M3232 T140
LED3.T
10617 684
M3168
ZP.T
D< K-1000 R7910]
10597
Y157
TAIL BODY REVER
1688 6017
M100
D> K1000 R7910]
RDY
10597 533
M82
Y27D
TOOL SET STD-BY.
1689
K0 R139]
MES1No MASA1
23334 620
1694
M543
MTEYRE
8165
M100 T80
T48
1695
RDY CVON.T
533 1702
T88 D16
T88 D24
1698 1737 1825
1702 1696
M5199 M5101
M7849
MACHINE MENU 25
1705
1708
EMO.P CCFWD
1915
M5102
M7850
MACHINE MENU 26
1711
CCREV
1919
Y18
M7851
MACHINE MENU 27
1714
1808
Y1B
M7852
MACHINE MENU 28
1717
1939
M5104 Y1B
M7853
MACHINE MENU 29
1721
CCSTOP
1934 1939
X11A
CHIP CONVEYOR SW
1722
PLS M6095]
1724 1728 1730 1784
CHIP.B
1786 1805 1890 1893
1901 1904
M90 M6095 Y8 M5199 M5198 M100 M931 F99
1725
AUTO CVONP MV.M EMO.P RDY CCE
14419 1724 1749 533 2255 26357
X11C Y15A
CHIP CONVEYOR
1751
SETUP.
M1040
CCC++
8421
M6095 Y8
CVONP MV.M
1724 1749
X245
STL.N
M100 T88 M5198 M5199
RDY CVOF.T EMO.P
533 1698
M5199 Y18
EMO.P
1808
M6976
Y8
CHIP CONVEYOR M
1749 1729 1731 1769
CVSTOP
1778
M6974 L39
L39
CONV.STOP CANSEL
1752
1757 1753 1755 1758
M-MENU ON
15219 1757
M6974 L39
1772 28635
M-MENU ON
15219 1757
L39
M7937
MACHINE MENU 99
1758
1759
ON
1757
M370
CYCLE FIN PLS
1760
PLS M6978]
1762 1763
PT
3772
M6978 Y8
M6977
CYCLE FIN KEEP
1763
1770 1764 1771
MV.M
1749
M6977 X244 X245 M90
OP.N STL.N AUTO
1770 14419

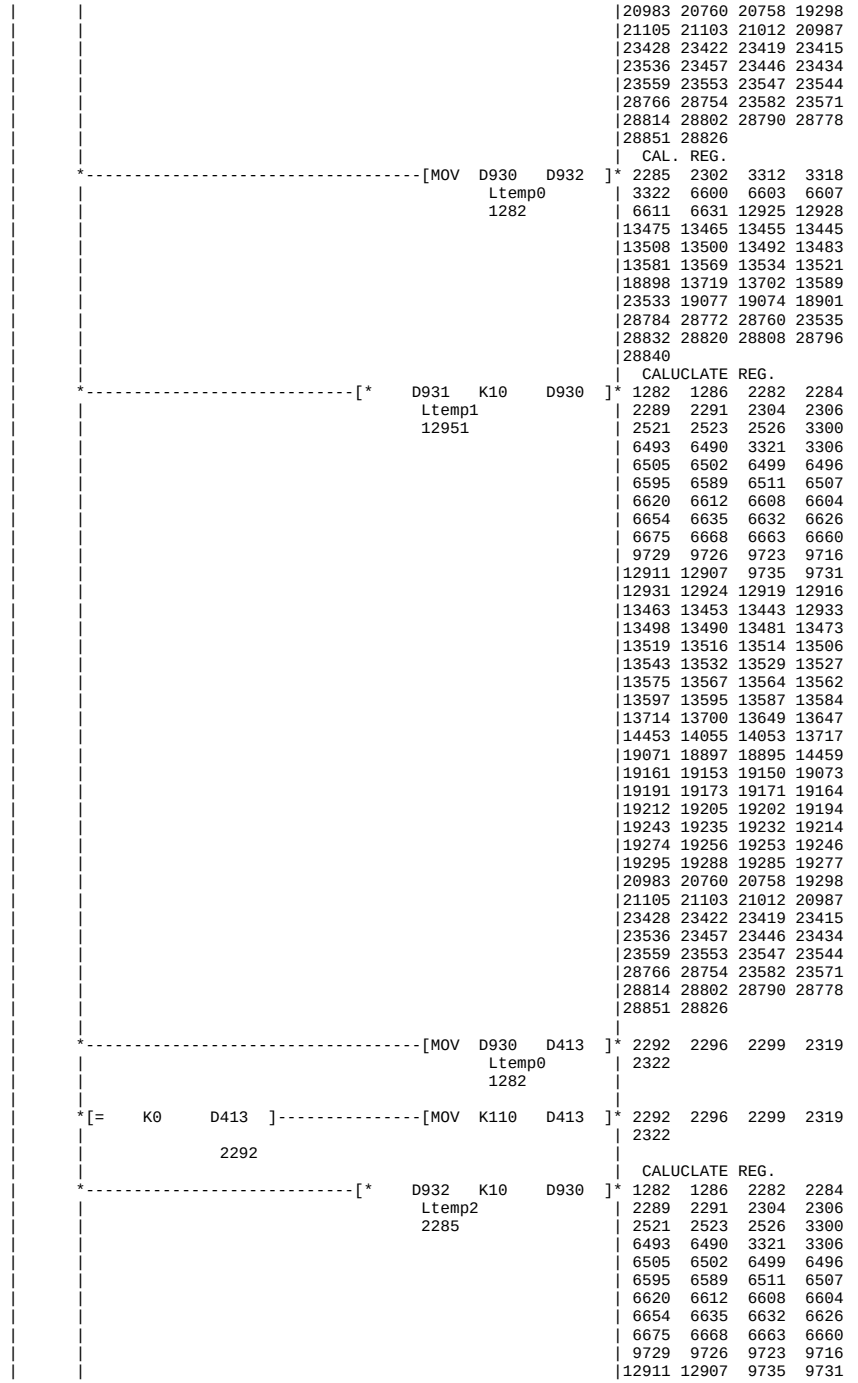

M6977 L39
CONVEYOR OFF
1771 1774 1777
ON T45
1770 1757
T85 M6976
CONVEYOR STOP
1777 1778 1748
T45
1774
M5102
1779 1781 1794
CCREV
1919
M5115 M5195 M931 M5199 M5103 M5112 Y18
1782 1857 1860 1874 1886 1889
ICCO.L ICCL.P CCE EMO.P CCSTOP
1897 2255 1931 1781
M6095 Y18 M5195
CVONP ICCL.P
1724 1808
M6095 Y18
CVONP
1724 1808
M5199 M5107 X1E0 M5103 M931 M6095 X1B
EMO.P MD1 EMG.M CCSTOP CCE CVONP ALARM
14938 1931 2255 1724
M5102
CCREV
1919
M5195 M179
ICCL.P CSTLP
3002
EMERGENCY STOP
0 481
M5199 M5296 Y1A M5103 M5101 M5105 X1C M5297
1809 1828 1831 1845 1867
EMO.P AL376 CCSTOP CCFWD CCOVLD OVRLOD AL377
1865 1848 1931 1915 1831 1882
M5105 T40 X1E0 M5103
CCOVLD CCFWDT EMG.M CCSTOP
1831 1853 1931
Y19
1828
T88 Y19
FWD (RESERVED I
1>
CVOF.T
1698
M5198
2>
M5199 X1C
CV OVERLOAD
1829 1831 1814 1815 1833
EMO.P OVRLOD
1837 1839 1841 1850
1862 1928
M5199 M5105 T41
CV OVERLOAD
1832 1831 1814 1815 1833
EMO.P CCOVLD CCREVT
1837 1839 1841 1850
1831 1869
Y1C
1862 1928
1888
M5199 M5105 T40 Y19 X1E0 M5103 Y1A
REV (RESERVED I
1838 1848 1811 1851
EMO.P CCOVLD CCFWDT EMG.M CCSTOP
1831 1853 1828 1931
M5105 M5102
CCOVLD CCREV
1831 1919
M5199 M5105 Y1A
CV FORWARD TIME
1849 1853 1816 1840
EMO.P CCOVLD R84
1831 1848
CV OVERLOAD PLS
M5106 PLS M5106
1857
M5106
1858 1860 1874 1886 1889
CCOVLD 1924
1857
M5199 M5105 Y1C M5296
CV OVLD SEQUENCE
1861 1865 1810 1883 27268
EMO.P CCOVLD
1831 1888
Y19
CV REVERSE TIME
1869 1834 1885
R85
1828
M5199 Y1C M5297
CV OVERLOAD OFF
1872 1882 1824 1879 1913
EMO.P R86 1918
1860 1888
X1B
CV OVLD SEQUENCE
1865 1810 1883 27268
ALARM
M5297 X140
AL377 RST.B
1882
M5199 T41
1884 1860 1874 1886 1889
EMO.P CCREVT 1924
1869
X140 Y1C
RES (RESERVED I
1887 1888 1835 1864 1878
RST.B
1860 1874 1886 1889
1924
M6095 M5115 M5115
INV.CONV.ON LATC
1890 1897 1782 1892 1895
CVONP ICCO.L 1908
1724 1897
M5107
MD1
14938
M6095 M5103 M5115
CVONP CCSTOP ICCO.L
1724 1931 1897
M6922 M5107 M5195 M5103 M5102 M5297 XA M5101
CV FORWARD
1898 1915 1707 1813 1900
M-M302 MD1 ICCL.P CCSTOP CCREV AL377 CCC.LS 1903 28462
14547 14938 1931 1919 1882
M5101 M6095
CCFWD CVONP
1915 1724
M5101 M6095
CCFWD CVONP
1915 1724
M179
CSTLP
3002

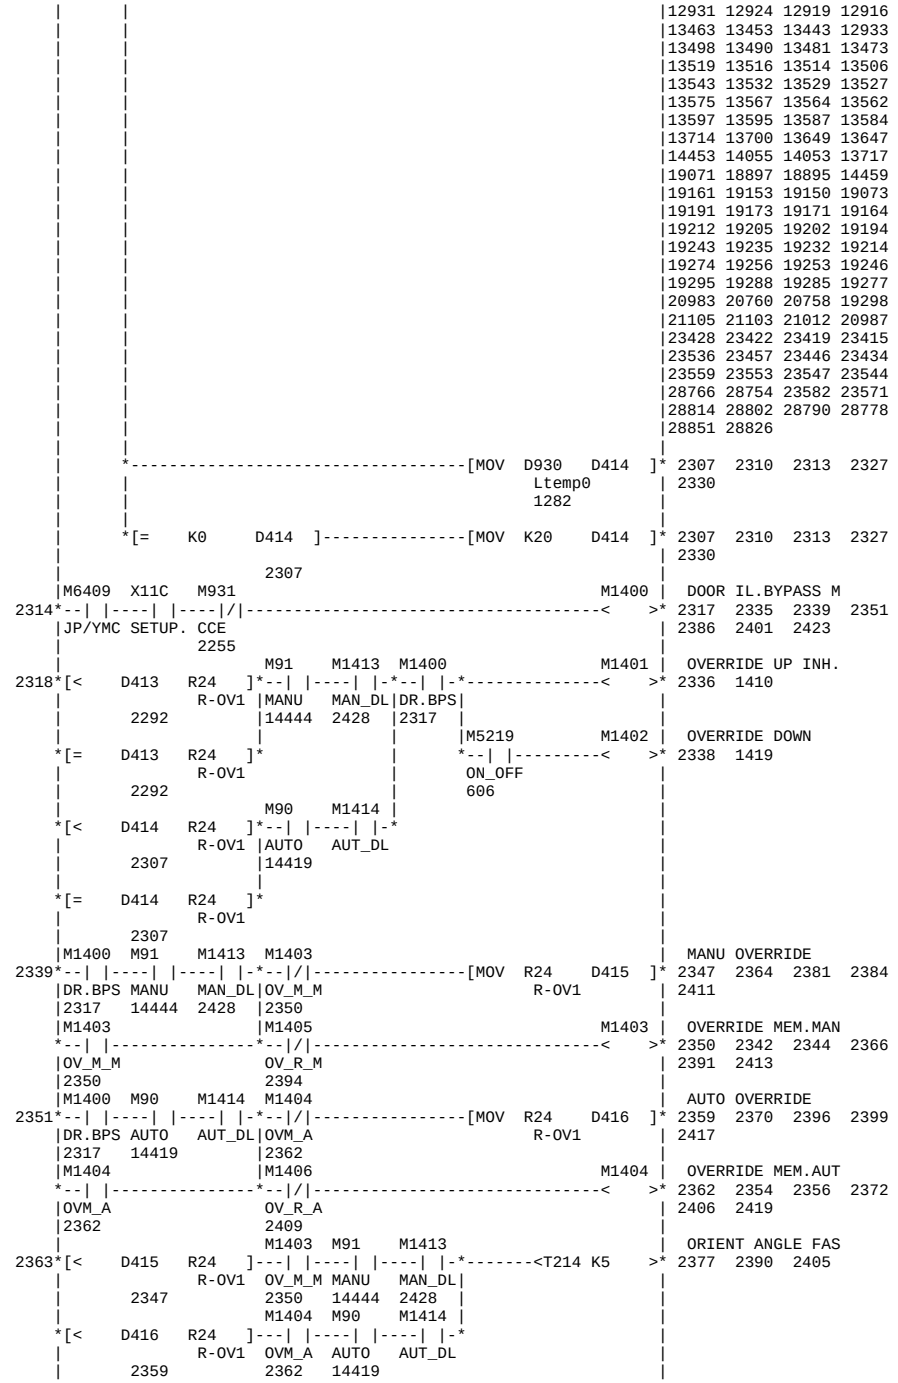

|M5115 M5195 |
--| |----| |--------
|ICCO.L ICCL.P
|1897
|M6922 M5108 M5297 M5102 | CV REVERSE
1916*--| |----| |----|/|-----------------------------------< >* 1919 1710 1779 1797
|M-M302 MD2 AL377 | 1842 1912 28465
|14547 14944 1882
|M6922 M5109 M5103 | CV STOP
1920*--| |----| |--------*----------------------------------< >* 1931 1793 1803 1812
|M-M302 MD4 | 1820 1847 1894 1911
|14547 14951 | 1929
|X1E0 |
--|/|---------------
|EMG.M |
| |
| |
[= C9 D532] |
| R86 |
| 1860 |
|X1B |
--| |---------------
|ALARM |
| |
|M5199 M5105 M5103 |
--| |----| |----| |-
|EMO.P CCOVLD CCSTOP
| 1831 1931
|M6922 M5110 M5104 | CV STOP
1932*--| |----| |---< >* 1934 1719 1938 28474
|M-M302 MD5
|14547 14958
|M6922 M5111 M5104 Y1B | HSPD (RESERVED
1935*--| |----| |-*--|/|-----------------------------------< >* 1939 1716 1720 1937
|M-M302 MD6 |CCSTOP |28471 28475
|14547 14965 |1934
|Y1B |
--| |--------
|
|1939
|M1279 M1199 |
1940*--| |-*---< >* 1941 1946
|ON |
|585 |
| | | HEAD PUMP ON DEL
| *---<T213 K20 >* 1943 20003 27073
|
|
|M1199 YA | COOLING PUMP
1946*--|/|---< >* 1947
|
|1941
|M5450 M5451 M101 M6624 | SP RTR FAN OFF M
1948*--| |-*--|/|----| |-----------------------------------< >* 1952 1949 1958 20446
|130M |131M RST |20448
|18015 |18020 543
|M6624 |
--| |-
|SPFAOF
|1952
|M439 M100 T212 M6624 M5280 M3088 | SPINDLE COOLING
1953*--| |-*--| |----|/|-*--|/|----|/|---------------------< >* 1960 1954 1967 1969
|SRR |RDY SFAN.T|SPFAOF SPCOOL |27066
|21615 |533 1964 |1952 27087
|M3088 | |M441 | SPINDLE FAN STOP
--| |- *--| |----------------------<T212 D919 >* 1964 1956
|SPFAN SPSTOP SP_FAN|
|1960 21718 14056 |
|M3088 M6449 Y9 | HEAD COOLING RA
1967*--|/|----| |-*---< >* 1972
|SPFAN SPFA.P|
|1960 |
|M3088 M6449 |
--| |----|/|-
|SPFAN SPFA.P
|1960
|X99 Y91 M5145 M414 T30 T2 |
1973*--|/|----| |---------------*--| |----|/|----| |-*--| |-*-->1 |
UCH.PS UCH.M	CH1P.P CHCHP RDY.T	CHC.T	
4886	4931 546	4936	
X98 Y90		M613	
*--	/	----		---------------* *--		-*
CH.PS CH.M		CPS.OK
4877		2012
X99 Y90 T2 M5150		T106 M612	CHUCK PRESSURE A
--| |----| |---| |----| |-* *--| |-*< >* 2001 1999 2009 26330
UCH.PS CH.M	CHC.T CH1B.P	1CKP.T	
4877	4936	1994	
X98 Y91		M612	
*--		----		-* *--		-*
CH.PS UCH.M CPS.AL
4886 2001
	1ST CHUCK PRESS-
1>---<T106 K20 >* 1994 1998
X99 Y91 M612 M414 M613	CHUCK PRESSURE R
2002*--| |-*--| |-*--|/|----|/|-*----------------------------< >* 2012 1991 4952
UCH.PS	UCH.M	CPS.AL CHCHP	
	4886	2001 4931	
T218				CHUCK PSW DLY(1S
*--		-*	*---------------------<T218 K2 >* 2014 2003 2006
CHPS.T	
2014	
X98 Y90	
*--		-*--		-*
CH.PS	CH.M
	4877
T218	
*--		-*
CHPS.T
2014
M5145
--|/|-----------------------
CH1P.P
X20 M1348 M974 T30 M5146 T8	2ND CHUCK PRESS-
2017*--|/|----| |--------*--|/|----| |----| |-*--| |-*<T108 K20 >* 2037 2041
2CH.PS PCR.M	SCCHK RDY.T CH2P.P	SCHC.T	
5164	5220 546	5225	
X21 M1349		M5733	
*--	/	----		--------* *--		-*
2CH.PS APR.M		CPS-OK
5173		2057
X20 M1349 M5151		T108 M54 M5732	CHUCK PRESSURE A
--| |----| |---| |-* *--| |-*--| |--< >* 2045 2042 2054 26334
2CH.PS APR.M	CH2B.P	2CKP.T	SS.P
5173		2037	
X21 M1348		M5732	
*--		----		-* *--		-*
2CH.PS PCR.M CPS-AL
5164 2045
X20 M1348 M974 M5732 M5733	CHUCK PRESSURE R
2046*--| |-*--| |-*--|/|----|/|-*----------------------------< >* 2057 2034 5240
2CH.PS	PCR.M	SCCHK CPS-AL	
	5164	5220 2045	
T220				CHUCK PSW DLY(2N
*--		-*	*---------------------<T220 K2 >* 2059 2047 2050
CHPS_T	
2059	
X21 M1349	
*--		-*--		-*
2CH.PS	APR.M
	5173
T220	
*--		-*
CHPS_T
2059
M5146
--|/|-----------------------
CH2P.P

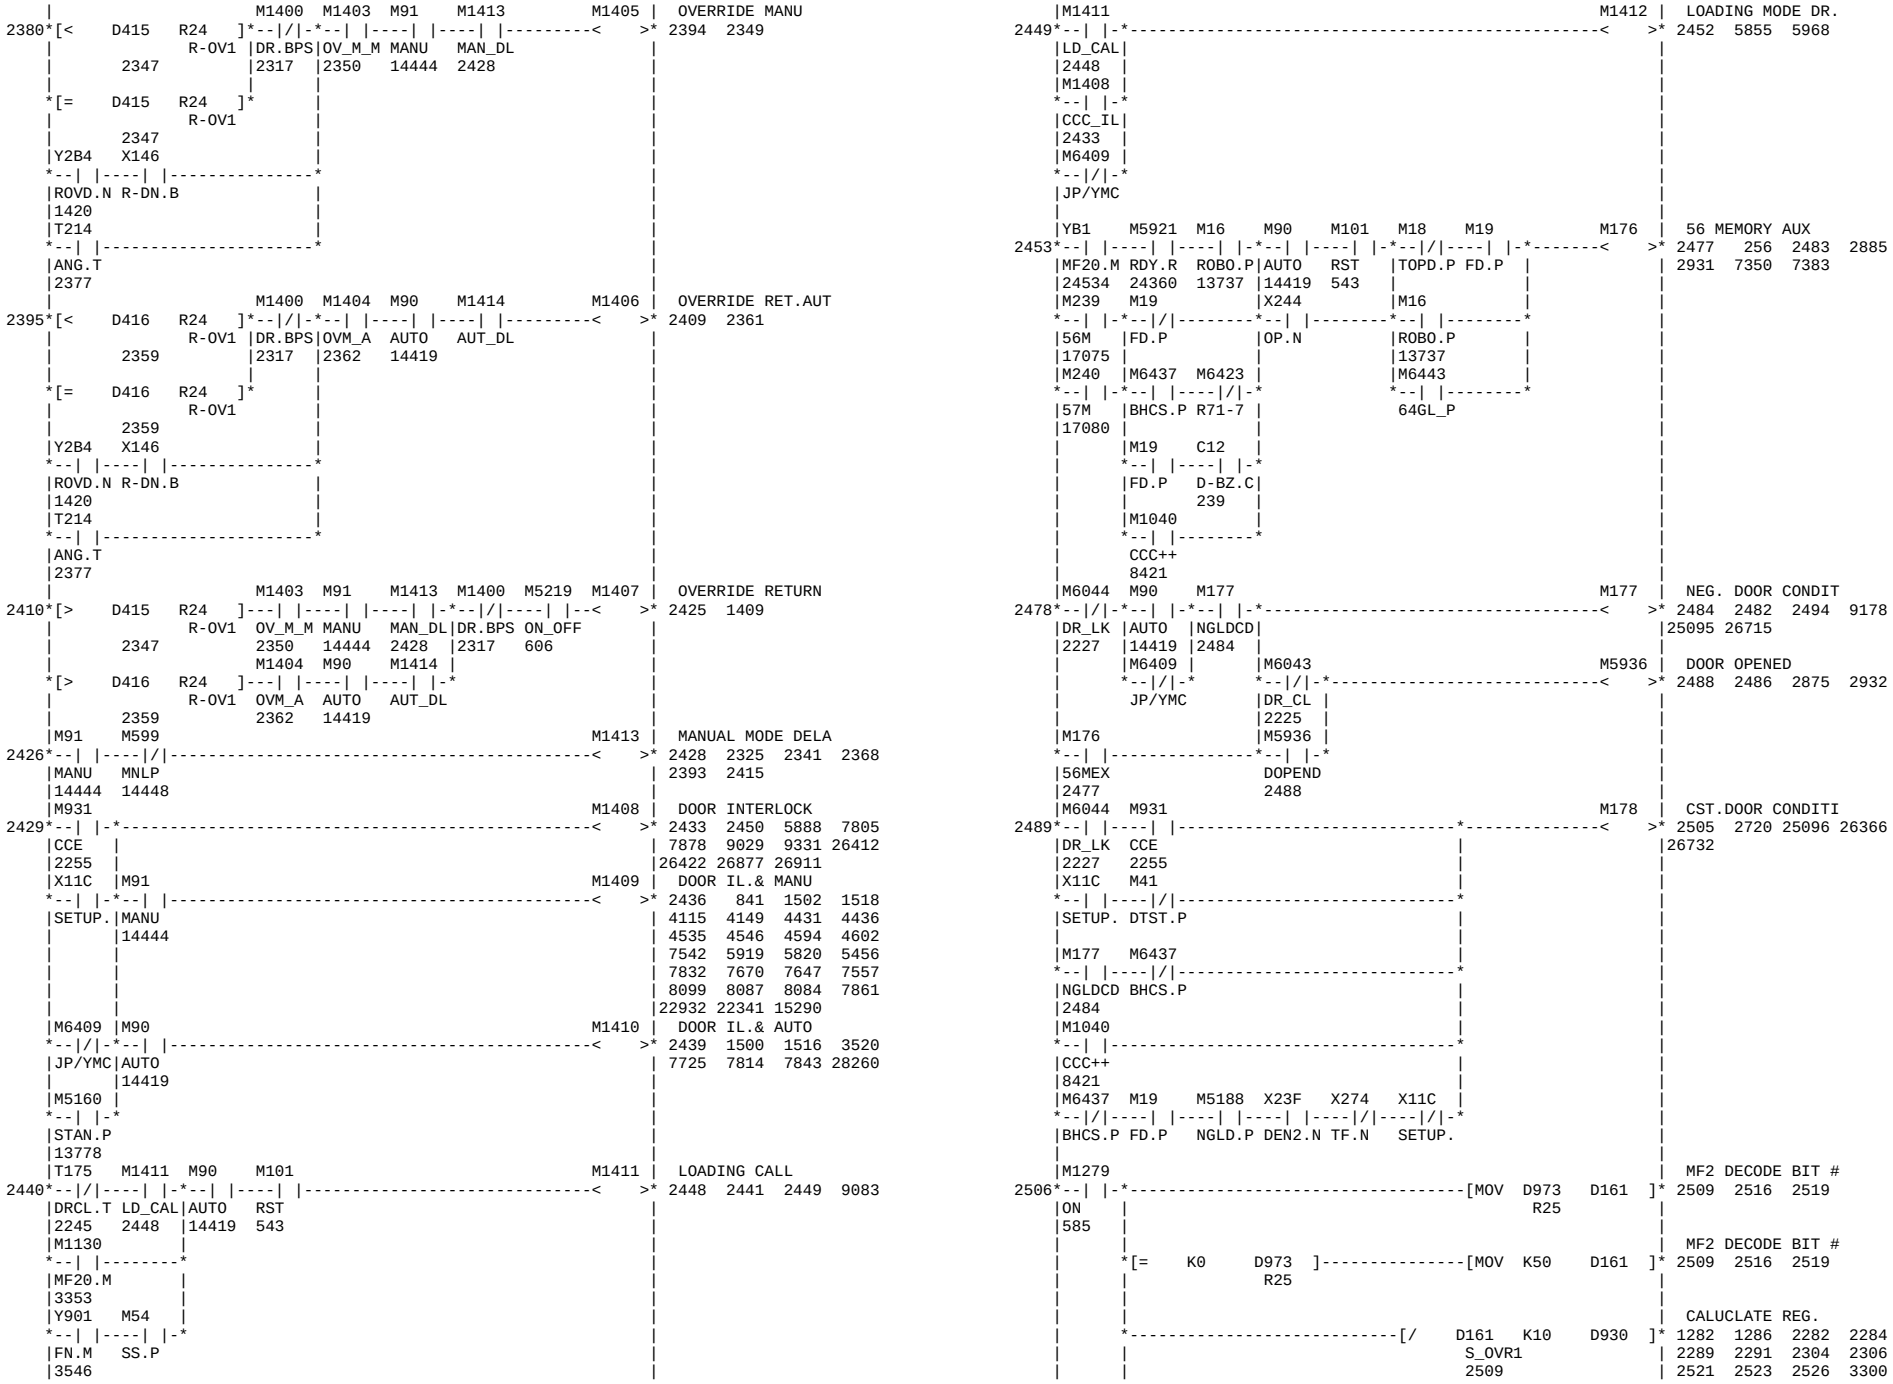

M54
SS.P
M1281 X140
M800
MF1 SW. PULSE
1089 1122 2066 11084
OTRS.B RST.B
11093
1040
T42
M6524
WORK COUNT UP2
2068
NRDY.T
499
M6984
M7928
COMPULSION MENU
2071 2073 2099 2163
GRSMD
15862
2112
M7055
OILMD
2168
M6955 M7928
CONPULSION STOP
2075 2108 2165
PLS M7035
M-MENU COMPUL
15160 2071
M7074 M6955
M7043
COMPULSION LUB.
2081 2098
GRSALM M-MENU
26053 15160
M7075
GRSPSW
26046
M1046
GRS++
8439
M1279
ON
585
T170 F60 M6984
MINUTE
2086 2089 2090 2105
C8 D537
1SECPT WYLBAL GRSMD
R81
26186 26061 2112
C8
MINUTE
2086 2089 2090 2105
RST C8
2086
HOUR@COUNT
2094 2092 2096 2104
R416 K1 R416
HOUR
2094
M7928
M6983
GREASE CHECK PLS
2100 2101 2106 26037
R416 D536
HOUR R82
2094
COMPUL
2071
M7043
FRCLUB
2081
M6983
HOUR@COUNT
2094 2092 2096 2104
MOV K0 R416
GRSCPL
2100
MINUTE
2086 2089 2090 2105
RST C8
M6983
M6984
GREASE MODE
2112 2069 2084 2107
2113 28617
GRSCPL
2100
M6984 M7035 M6987 M7044
GRSMD CONSTP GRSFIN F60PLS
2112 2075 2140 26064

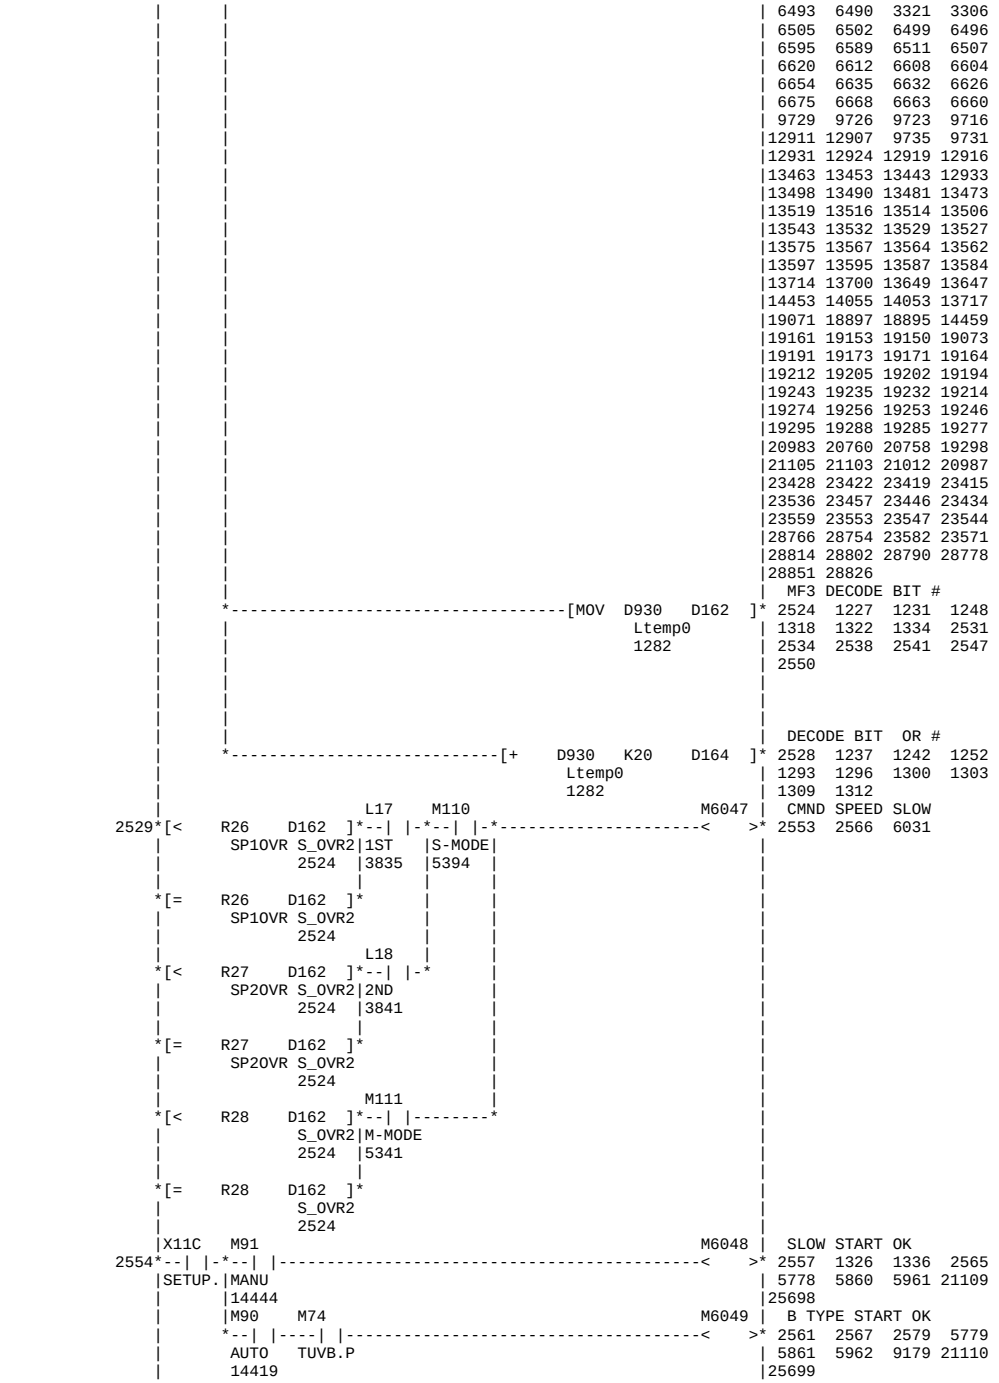

M6984 T67
T39 GREASE ON
2113 2117 2121 2124
GRSMD SLD.T
T39
2112 2147
T79
M6985
GREASE ON
2122 2158
SGR.T
2117
T79 X9A
M6986
GREASE RETRY SET
2131 2144 26048
SGR.T GRS.PS
2117
M5160 X119
GREASE RETRY PLF
2133 2151
PLF M6988
STAN.P LOCK.B
13778
X9A
M6987
GREASE FIN
2140 2109 2153 26050
GRS.PS
M5160 X119
GREASE FIN PLF
2142 2154 26051
PLF M7056
STAN.P LOCK.B
13778
M6986 T67
T27 GREASE RETRY
2147 2115 2145
GRSRSE SLD.T
T27
2131 2147
26036
M6988
M6989
GREASE RETRY MOD
2157 2152 26047
GRSRPL
2133
M6989 M6987 M7056
GRSRMD GRSFIN
2157 2140 2142
M6985
Y92
GREASE PUMP MOT
2158 2159
GRSON
2122
M7086 M6955 M7928 T230
M7055
OIL MODE
2160 2168 2070 2164 2169
LUBALM M-MENU COMPUL LUGO.T
2184 28618
26078 15160 2071 2171
M1044
OIL++
8433
M7055 M7035
OILMD CONSTP
2168 2075
M7055
LUBE GOING ON
2169 2171 2167
T230 D936
OILMD
R47
2168
X240 T183 M7081
M7078
LUBE ON MODE
2174 2177 2182
MA.N SLON.T LUBOFF
2179 2196
SLIDE WAY MOTOR
2179 2175 2189
T183 D936
R47
M7078 M7077
Y12
LUBE PUMP MOTOR
2182 2185 2186 26066
LUBEON LUBEOK
2177 2217
M7055
OILMD
2168
Y12
LUBE RUN PULSE
2186 2188 26075
PLS M7080
LUBE.M
2185

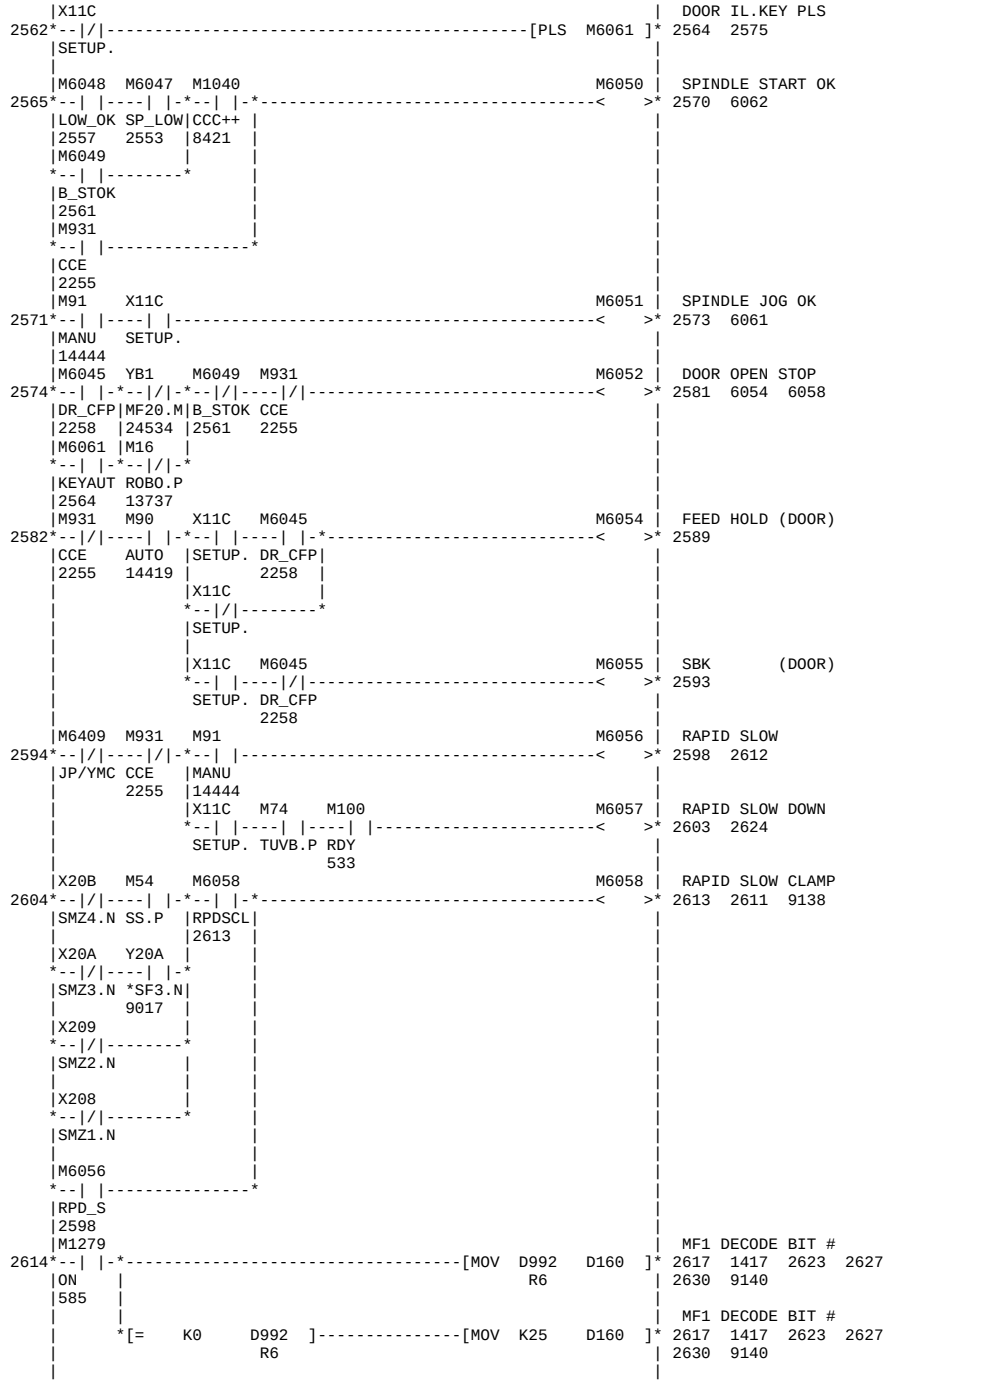

|T183 T184 | SLIDE WAY MOTOR
2189*--| |-*--|/|-*----------<T184 D934 >* 2193 2191
|SLON.T|SLOF.T| R48 |
|2179 |2193 | 13421 |
|M7081 | | M7081 | LUBE OFF MODE
--| |- *----------< >* 2196 2176 2190
|LUBOFF |
|2196 |
|M111 X240 | MILL MD LUBE
2197*--| |----| |----------[PLF M7076]* 2200 2201 2208
|M-MODE MA.N |
|5341 |
|M7076 T185 M7079 | LUBE KEEP TIME
2201*--| |--------*--|/|-*----------< >* 2207 2205 2213 3486
|MILLLB |MILB.T| |
|2200 |2210 | |
|M102 M5183 | |M7076 | MILL MODE LUBE
--| |----|/|- *--|/|----------<T185 D546 >* 2210 2206
RDYP LUBE.P	MILLLB R127L
535	2200
M7079	
*--		--------*
LUBTIM
2207
M7079 M7086 M7077	LUBE ENABLE
2213*--| |-*--|/|----------< >* 2217 2183
LUBTIM	LUBALM
2207	26078
M111	
*--		-*
M-MODE	
5341	
M5183	
*--		-*
LUBE.P
XA M6041	DOOR LOCK AUX.1
2218*--| |-*----------< >* 2220 2222 2272 2781
CCC.LS|	7728 26374 26738
M5160	
*--		-*
STAN.P
13778
M79 M6041 M6063	LOCK PIN EXTEND
2221*--|/|----| |----------< >* 2223 1221 2898 25681
CLOS.P K2	25782
2220
XA M6043	DOOR CLOSE
2224*--| |-*----------< >* 2225 2237 2262 2485
CCC.LS|	2814 2899 8987 26726
		27002
|YE M6044	DOOR CLOSE & LOC
*--	/	----------< >* 2227 2239 2478 2489
DLR.M
2978
XA YE	DOOR RELEASE DLA
2228*--|/|--------*--| |----------<T205 K5 >* 2234 7430
CCC.LS	DLR.M
	2978
M75 XB6	
*--		----		-*
UKSP.P FCLS.R
M6043 M79 M7037	DOOR CLOSE CONDI
2237*--| |----|/|-*----------< >* 2243 2248 7371 7397
DR_CL CLOS.P		25094 26367 26733
2225	
M6044 M79		DOOR CLOSE DELAY
--| |----| |-----------<T175 K5 >* 2245 2440
DR_LK CLOS.P	
2227	
M1040	
*--		--------*
CCC++
8421
M7037 M931	COVER CLOSE END
2248*--| |--------*----------< >* 2255 1098 1328 1338
DCLC		1746 1791 1804 2256
2243		2261 2316 2429 2490
M5927 M16		2569 2580 2582 2595
--| |---| |-*	2725 2773 5454 5479
AB.R |ROBO.P|	5766 5777 5859 5960
24372	13737		6032 6771 7551 7563
M5928			7649 7672 7776 7960
--| |-		8391 9033 9043 9071
ORT.R		9093 9318 9471 9576
24384		10803 10821 11740 11842
M1040	|11855 12394 12399 15412
--| |-------- |15423 21108 21562 21954
CCC++	22313 22574 22930 22963
8421	25467 25701 25791 25959
M5160	25998 26165 26389 26413
--| |-------- |26633 27001
STAN.P
13778
M931	DOOR CLOSE OFF P
2256*--|/|----------[PLS M6045]* 2258 2574 2586 2592
CCE	9177 15356 25105
2255
XB6 M931 M6043 M91 M1040 M5160 M6103	DOOR INTERLOCK
2259*--|/|-*--| |----|/|----| |----|/|----|/|----------< >* 2266 9048 9086 9100
FCLS.R	CCE DR_CL MANU CCC++ STAN.P	21487 21880 22240 25728
	2255 2225 14444 8421 13778	25793 25908
M16	
*--	/	-*
ROBO.P
13737
X11C	SET UP OFF T
2267*--|/|----------<T177 K15 >* 2269 4072 5522 6886
SETUP.	15288 20784 21126 23006
M6041 M6631	INTERLOCK YME 1
2272*--| |--------*----------< >* 2277 43 4071 5475
K2		5521 6887 8054 9041
2220		9046 9085 9099 15287
X11C	|20783 21125 22951 23005
--| |-------- |24287 25907 26711 26878
SETUP.	|26912
M1040 X11C	
*--		----		-*
CCC++ SETUP.
8421
M6409	CALUCLATE REG.
2278*--| |-*----------[/ D992 K10 D930]* 1282 1286 2282 2284
JP/YMC| R6	2289 2291 2304 2306
		2521 2523 2526 3300
		6493 6490 3321 3306
		6505 6502 6499 6496
		6595 6589 6511 6507
		6620 6612 6608 6604
		6654 6635 6632 6626
		6675 6668 6663 6660
		9729 9726 9723 9716
		12911 12907 9735 9731
		12931 12924 12919 12916
		13463 13453 13443 12933
		13498 13490 13481 13473
		13519 13516 13514 13506
		13543 13532 13529 13527
		13575 13567 13564 13562
		13597 13595 13587 13584
		13714 13700 13649 13647
		14453 14055 14053 13717
		19071 18897 18895 14459
		19161 19153 19150 19073
		19191 19173 19171 19164
		19212 19205 19202 19194
		19243 19235 19232 19214
		19274 19256 19253 19246
		19295 19288 19285 19277

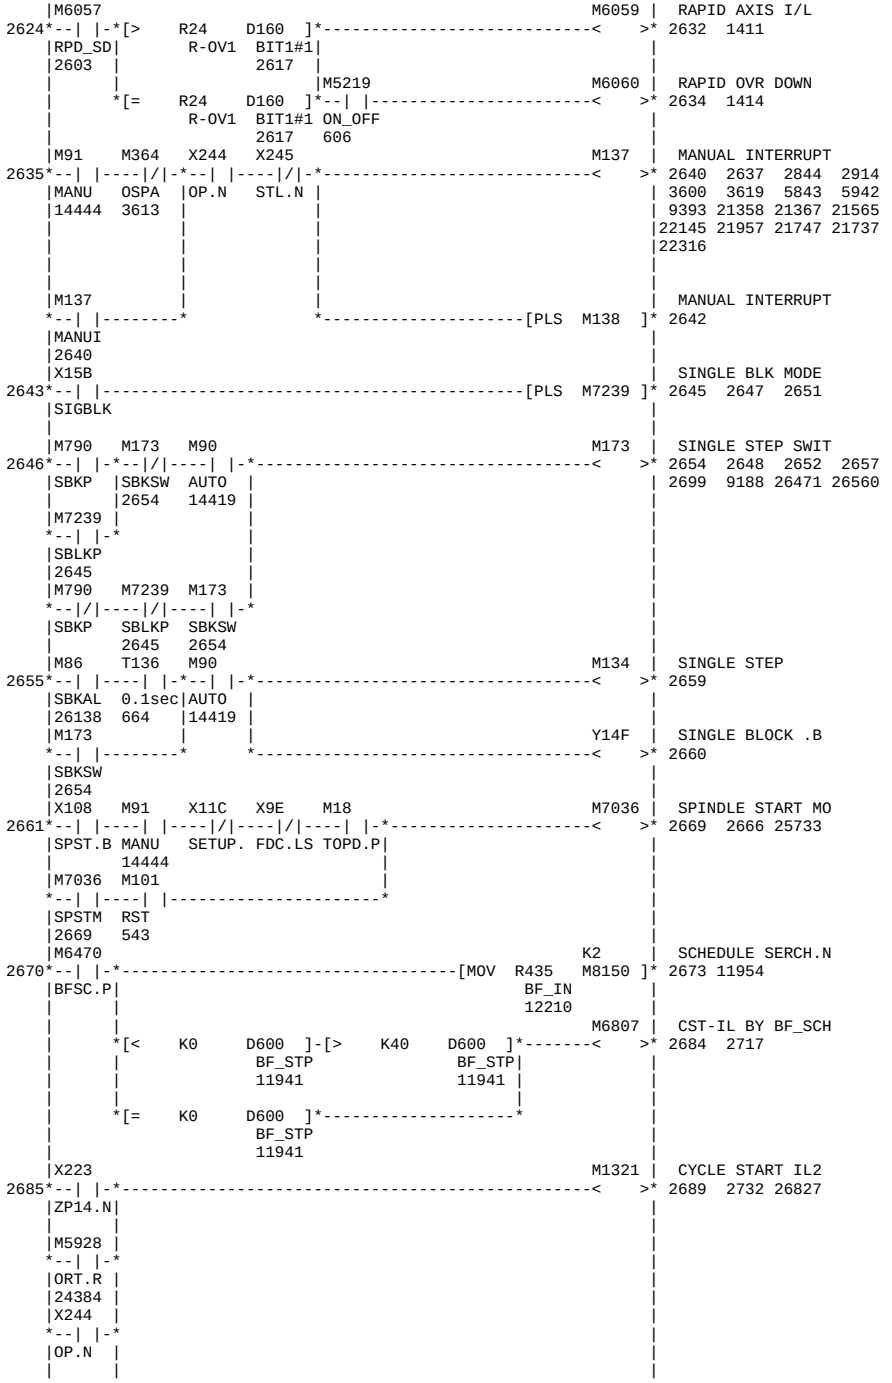

20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
CAL. REG.
MOV D930 D932
Ltemp0
1282
2285 2302 3312 3318
3322 6600 6603 6607
6611 6631 12925 12928
13475 13465 13455 13445
13508 13500 13492 13483
13581 13569 13534 13521
18898 13719 13702 13589
23533 19077 19074 18901
28784 28772 28760 23535
28832 28820 28808 28796
28840
CALUCLATE REG.
D931 K10 D930
Ltemp1
12951
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
MOV D930 D413
Ltemp0
1282
2292 2296 2299 2319
2322
K0 D413
MOV K110 D413
2292
D932 K10 D930
Ltemp2
2285
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731

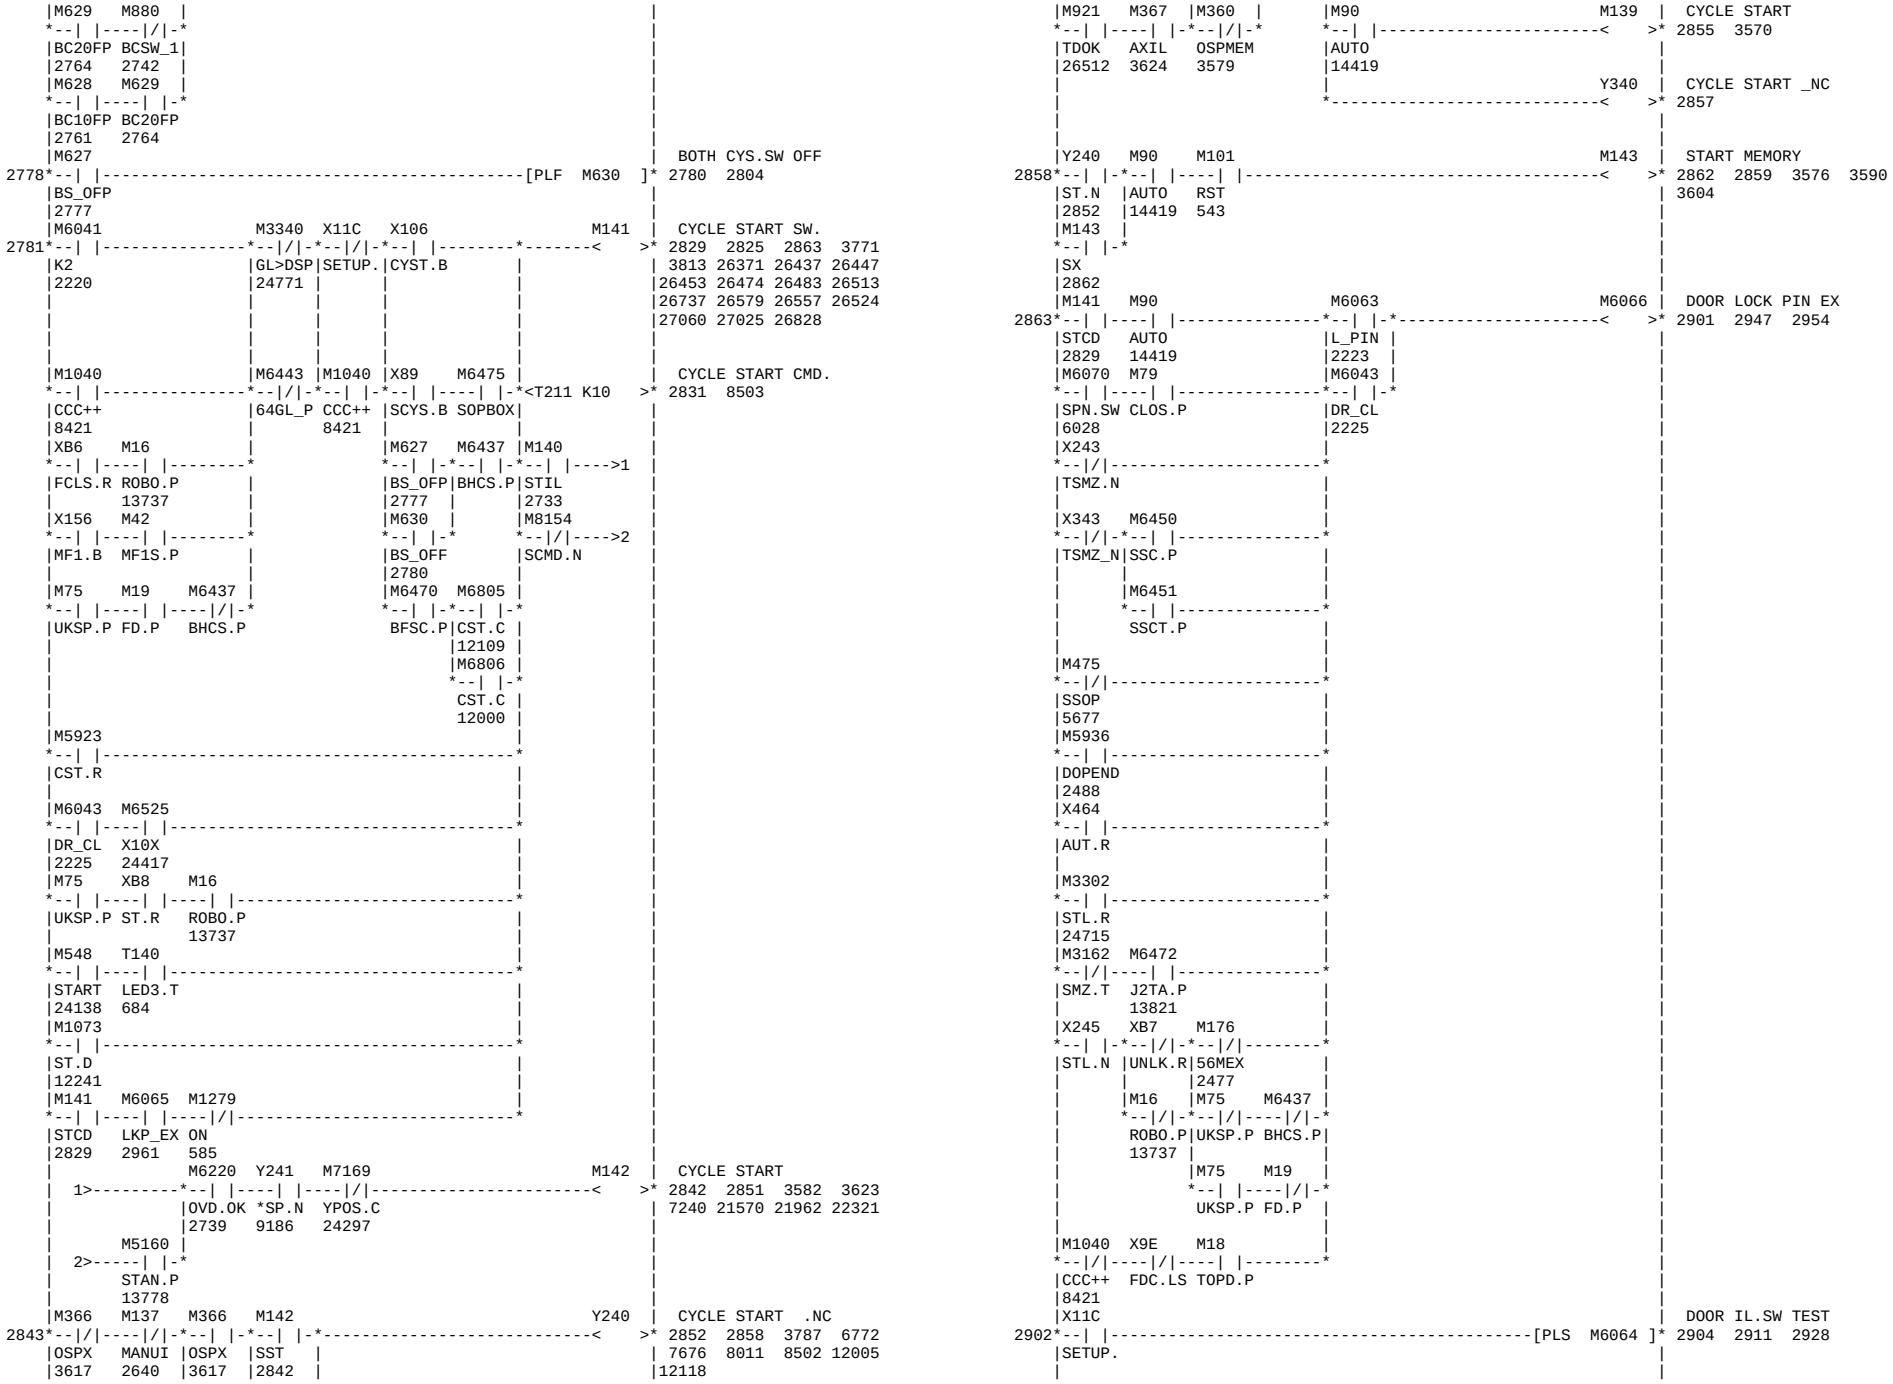

12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
MOV D930 D414
Ltemp0
1282
2307 2310 2313 2327
2330
K0 D414
MOV K20 D414
2307
2330
M6409 X11C M931
M1400
DOOR IL.BYPASS M
2314 2317 2335 2339 2351
JP/YMC SETUP. CCE
2255
2386 2401 2423
M91 M1413 M1400
M1401
OVERRIDE UP INH.
2318 2336 1410
D413 R24
R-OV1
MANU MAN_DL DR.BPS
2292
14444 2428 2317
M5219
M1402
OVERRIDE DOWN
2338 1419
ON_OFF
606
M90 M1414
AUTO AUT_DL
2307
14419
M1400 M91 M1413 M1403
MANU OVERRIDE
2339 2347 2364 2381 2384
DR.BPS MANU MAN_DL OV_M_M
2317 14444 2428 2350
M1403
MOV R24 D415
R-OV1
2411
M1405
M1403
OVERRIDE MEM.MAN
2350 2342 2344 2366
OV_M_M
OV_R_M
2350
2394
2391 2413
M1400 M90 M1414 M1404
AUTO OVERRIDE
2351 2359 2370 2396 2399
DR.BPS AUTO AUT_DL OVM_A
2317 14419 2362
MOV R24 D416
R-OV1
2417
M1404
M1406
M1404
OVERRIDE MEM.AUT
OVM_A
OV_R_A
2362
2409
2362 2354 2356 2372
2406 2419
M1403 M91 M1413
ORIENT ANGLE FAS
2363 2377 2390 2405
D415 R24
R-OV1 OV_M_M MANU MAN_DL
2347
2350 14444 2428
M1404 M90 M1414
D416 R24
R-OV1 OVM_A AUTO AUT_DL
2359
2362 14419

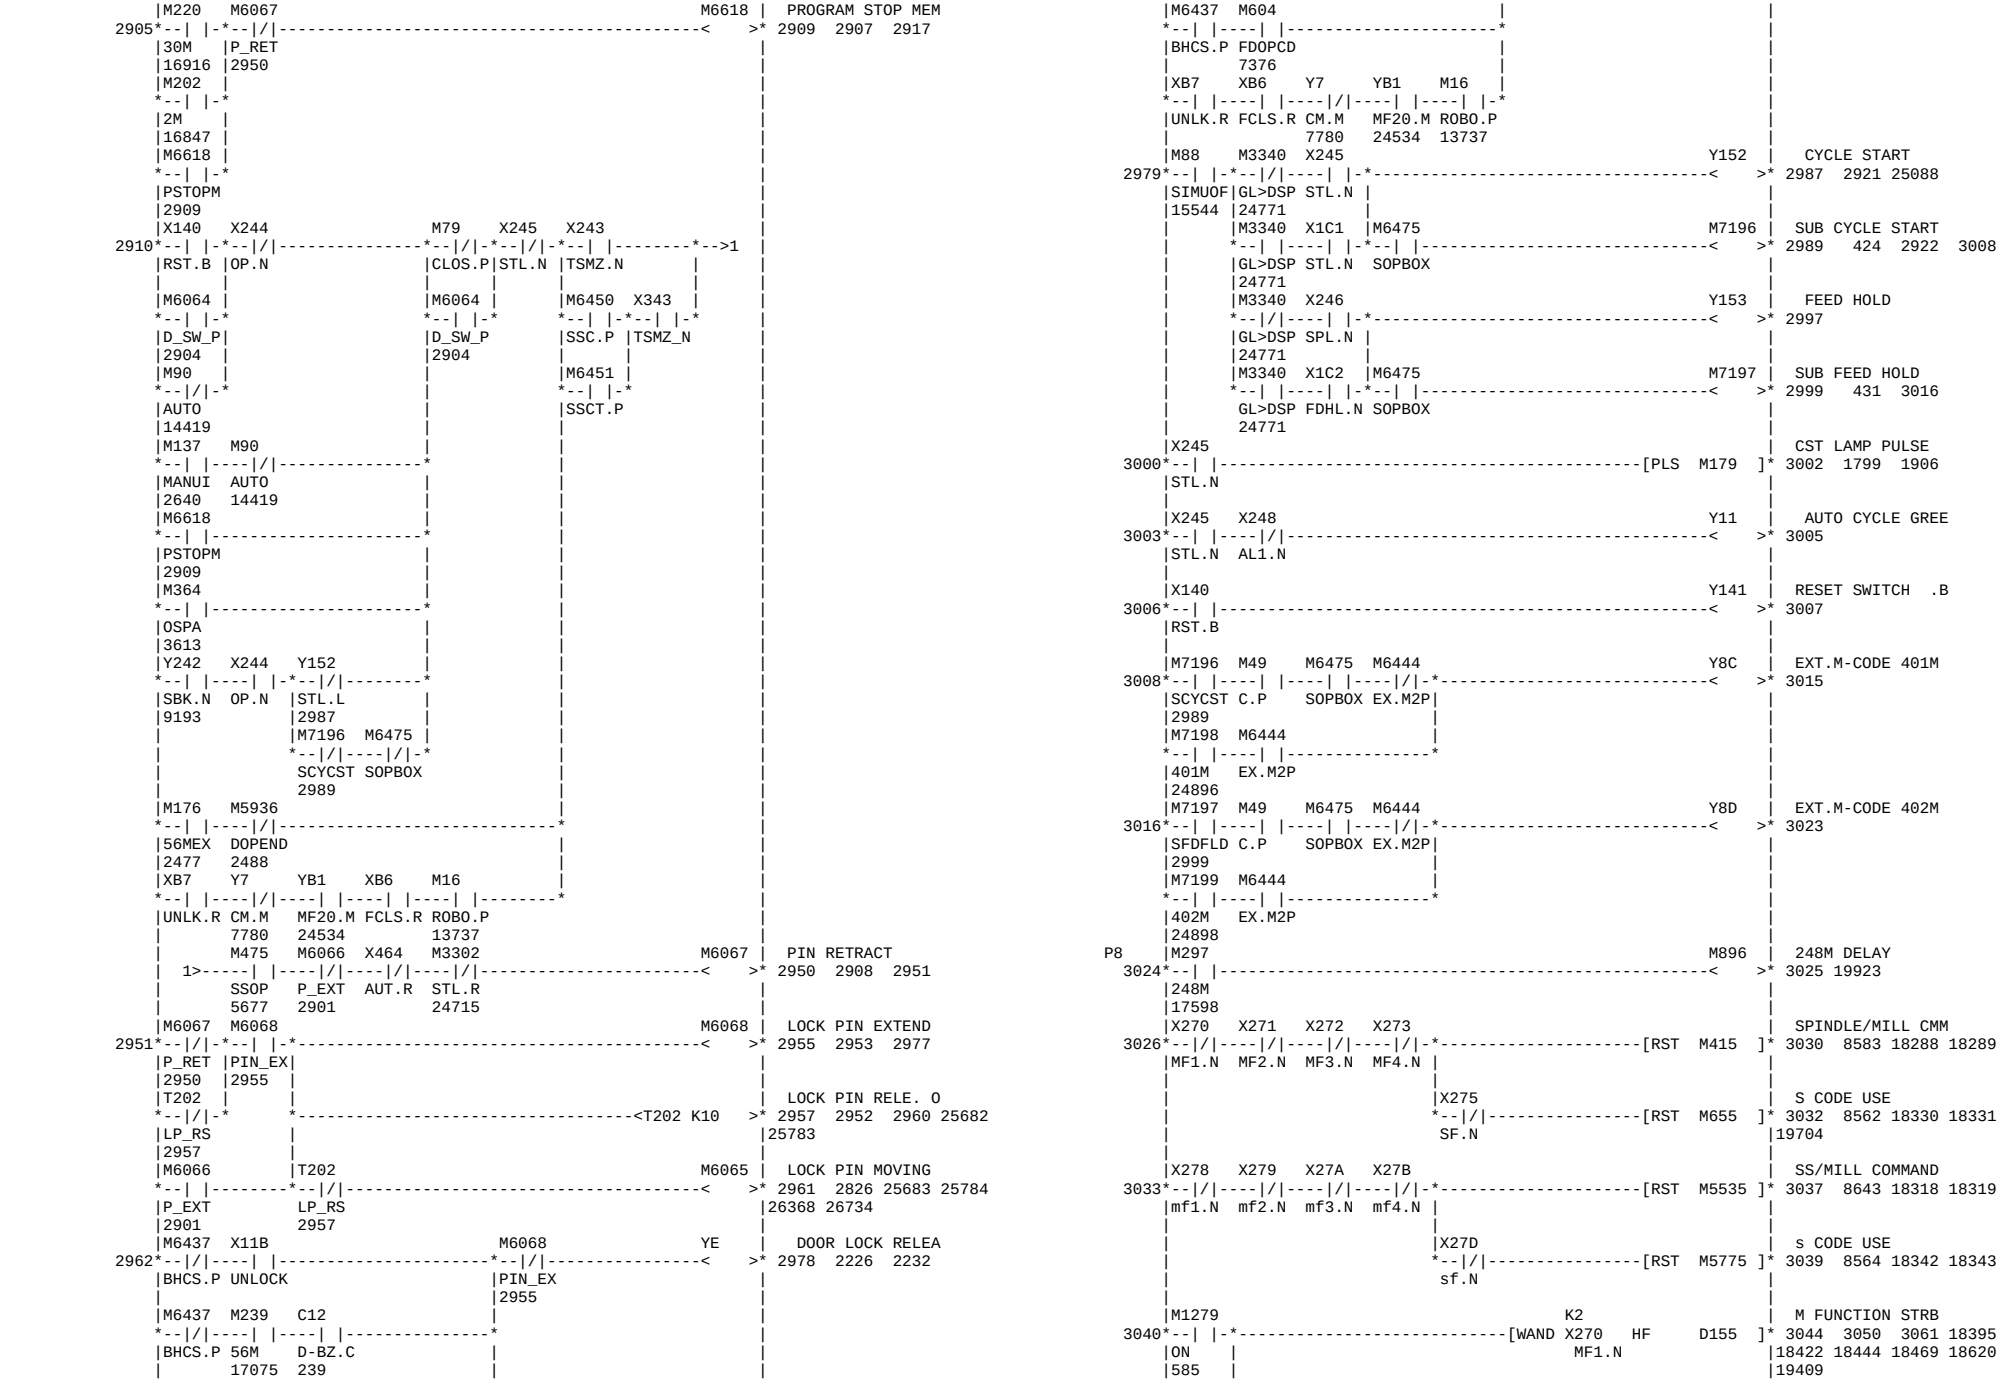

M1400 M1403 M91 M1413 M1405 | OVERRIDE MANU
2380 D415 R24 R-OV1 2347 | DR.BPS 2317 | OV_M_M MANU MAN_DL 2350 14444 2428 | 2394 2349
D415 R24 R-OV1 2347 | Y2B4 X146 | ROVD.N R-DN.B 1420 T214 | ANG.T 2377
M1400 M1404 M90 M1414 M1406 | OVERRIDE RET.AUT
2395 D416 R24 R-OV1 2359 | DR.BPS 2317 | OVM_A 2362 AUTO 14419 AUT_DL | 2409 2361
D416 R24 R-OV1 2359 | Y2B4 X146 | ROVD.N R-DN.B 1420 T214 | ANG.T 2377
M1403 M91 M1413 M1400 M5219 M1407 | OVERRIDE RETURN
2410 D415 R24 R-OV1 2347 | OV_M_M 2350 MANU 14444 MAN_DL 2428 | DR.BPS 2317 ON_OFF 606 | 2425 1409
D416 R24 R-OV1 2359 | M1404 M90 M1414 | OVM_A 2362 AUTO 14419 AUT_DL | 2426
M91 M599 M1413 | MANUAL MODE DELA
MANU MNLP | 14444 14448 | 2428 2325 2341 2368 | 2393 2415
M931 M1408 | DOOR INTERLOCK
2429 CCE | 2255 | X11C M91 M1409 | DOOR IL.& MANU
SETUP. MANU | 14444 | M6409 M90 M1410 | DOOR IL.& AUTO
JP/YMC AUTO | 14419 | M5160 | STAN.P 13778 | 2436 841 1502 1518 | 4115 4149 4431 4436 | 4535 4546 4594 4602 | 7542 5919 5820 5456 | 7832 7670 7647 7557 | 8099 8087 8084 7861 | 22932 22341 15290 | 2439 1500 1516 3520 | 7725 7814 7843 28260
T175 M1411 M90 M101 M1411 | LOADING CALL
2440 DRCL.T 2245 LD_CAL 2448 AUTO 14419 RST 543 | M1130 | MF20.M 3353 | Y901 M54 | FN.M 3546 | SS.P | 2448 2441 2449 9083
M1411 M1412 | LOADING MODE DR.
2449 LD_CAL 2448 | M1408 | CCC_IL 2433 | M6409 | JP/YMC | 2452 5855 5968
YB1 M5921 M16 M90 M101 M18 M19 M176 | 56 MEMORY AUX
2453 MF20.M 24534 RDY.R 24360 ROBO.P 13737 | AUTO 14419 RST 543 | TOPD.P | FD.P | M239 M19 | X244 | M16 | 56M 17075 | FD.P | OP.N | ROBO.P 13737 | M240 M6437 M6423 | M6443 | 57M 17080 | BHCS.P R71-7 | 64GL_P | M19 C12 | FD.P D-BZ.C 239 | M1040 | CCC++ 8421 | 2477 256 2483 2885 | 2931 7350 7383
M6044 M90 M177 M177 | NEG. DOOR CONDIT
2478 DR_LK 2227 AUTO 14419 NGLDCD 2484 | M6044 M6409 | M6043 | JP/YMC | DR_CL 2225 | M176 | M5936 | 56MEX | 2477 DOPEND 2488 | 2484 2482 2494 9178 | 25095 26715
M5936 | DOOR OPENED
2488 2486 2875 2932
M6044 M931 M178 | CST.DOOR CONDITI
2489 DR_LK 2227 CCE 2255 | X11C M41 | SETUP. DTST.P | M177 M6437 | NGLDCD 2484 BHCS.P | M1040 | CCC++ 8421 | M6437 M19 M5188 X23F X274 X11C | BHCS.P FD.P NGLD.P DEN2.N TF.N SETUP. | 2505 2720 25096 26366 | 26732
M1279 | MF2 DECODE BIT #
2506 ON 585 | MOV D973 R25 D161 | 2509 2516 2519
MOV K50 D161 | MF2 DECODE BIT #
K0 D973 R25 | 2509 2516 2519
/ D161 K10 D930 | S_OVR1 2509 | CALUCLATE REG.
1282 1286 2282 2284 | 2289 2291 2304 2306 | 2521 2523 2526 3300

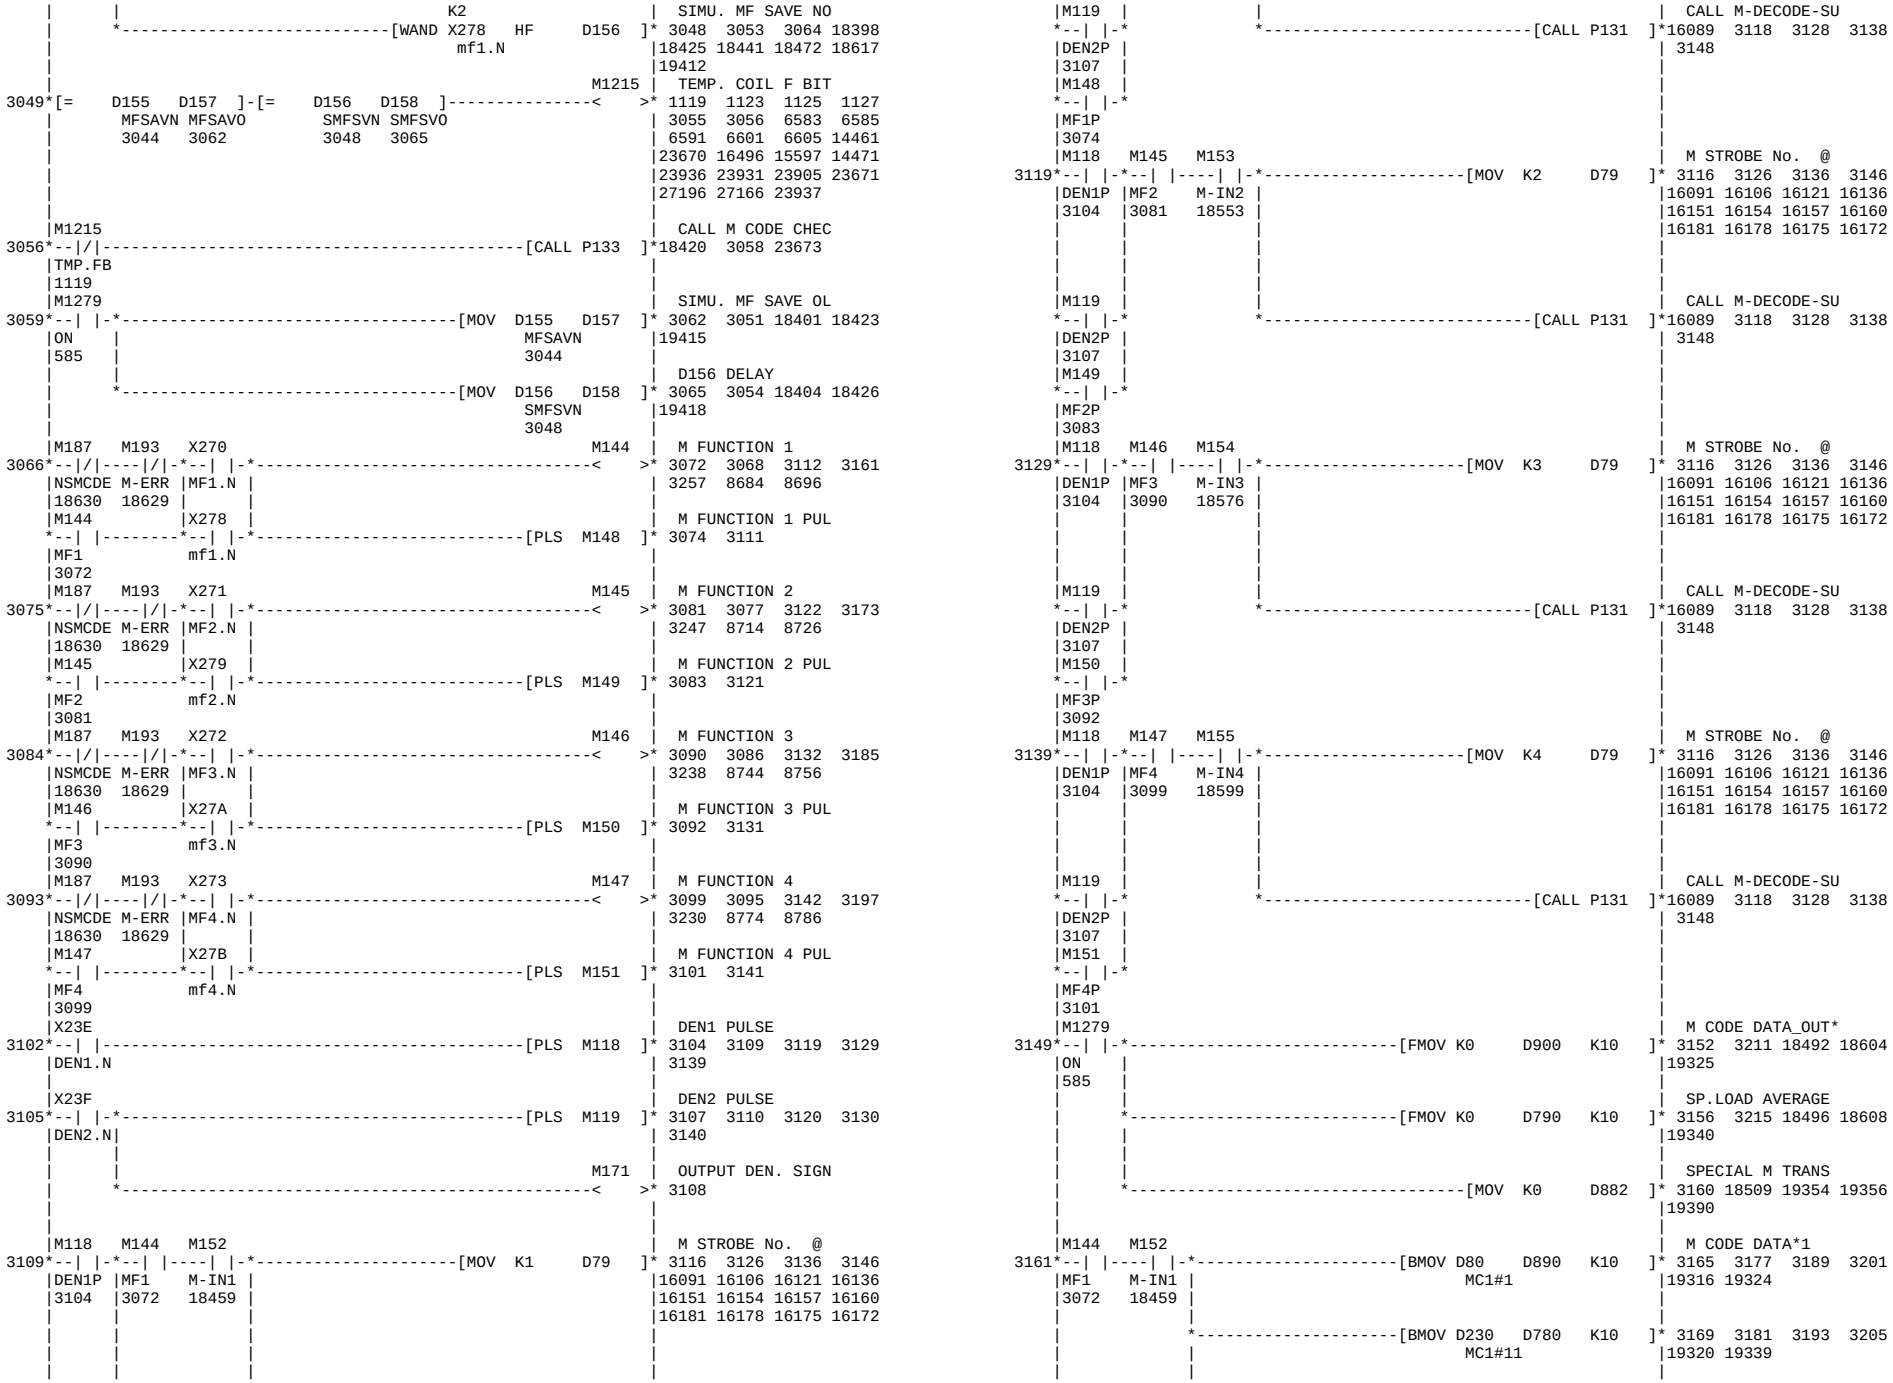


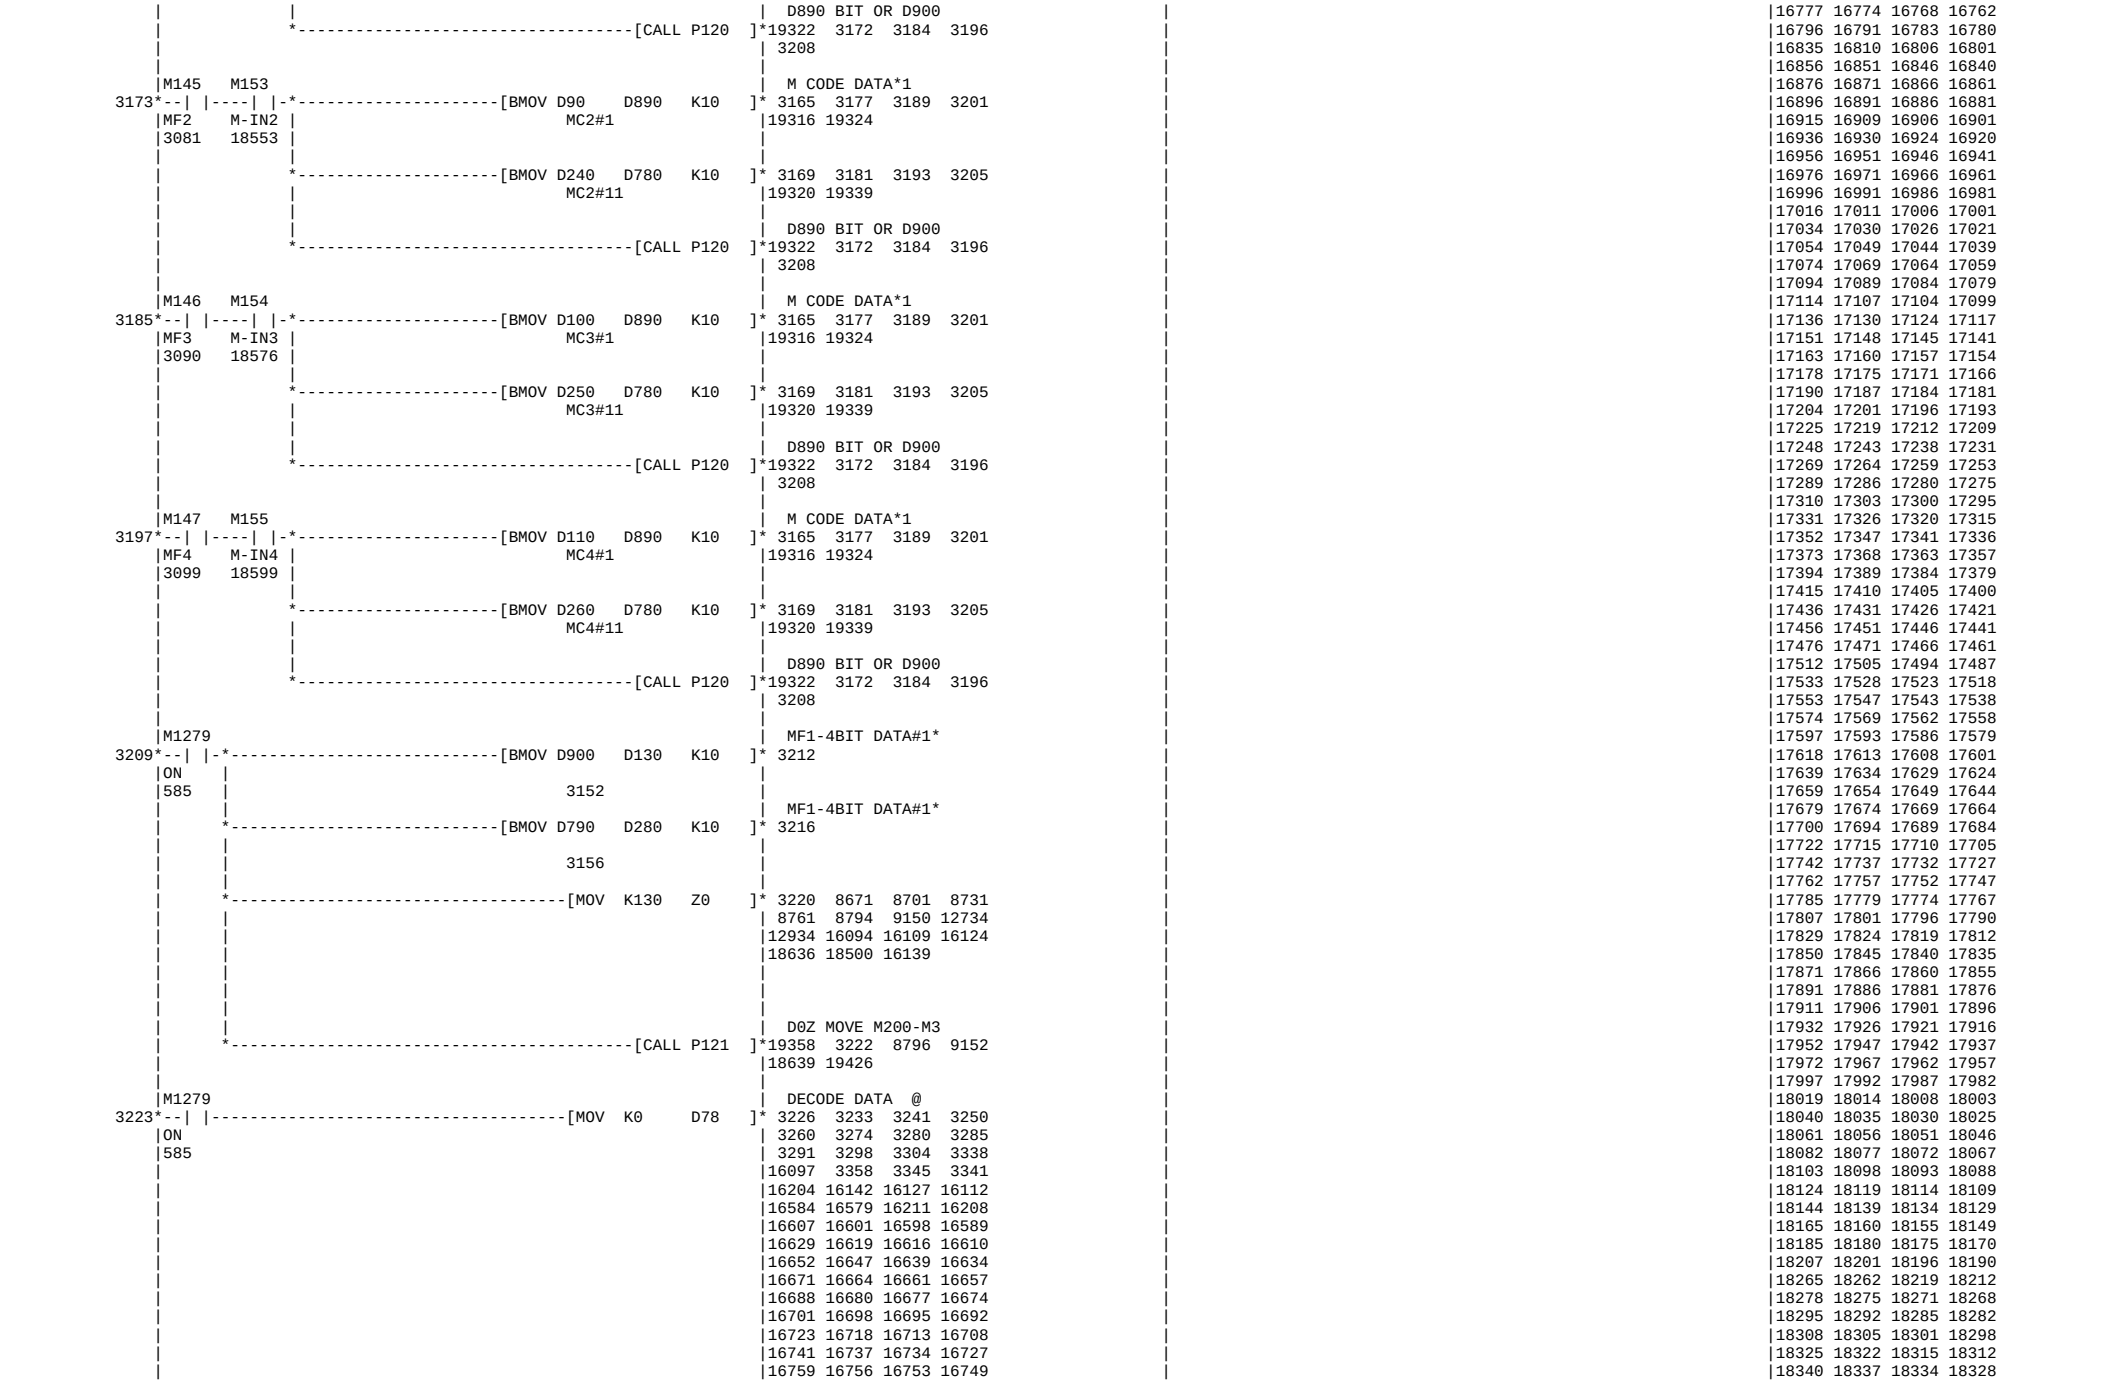


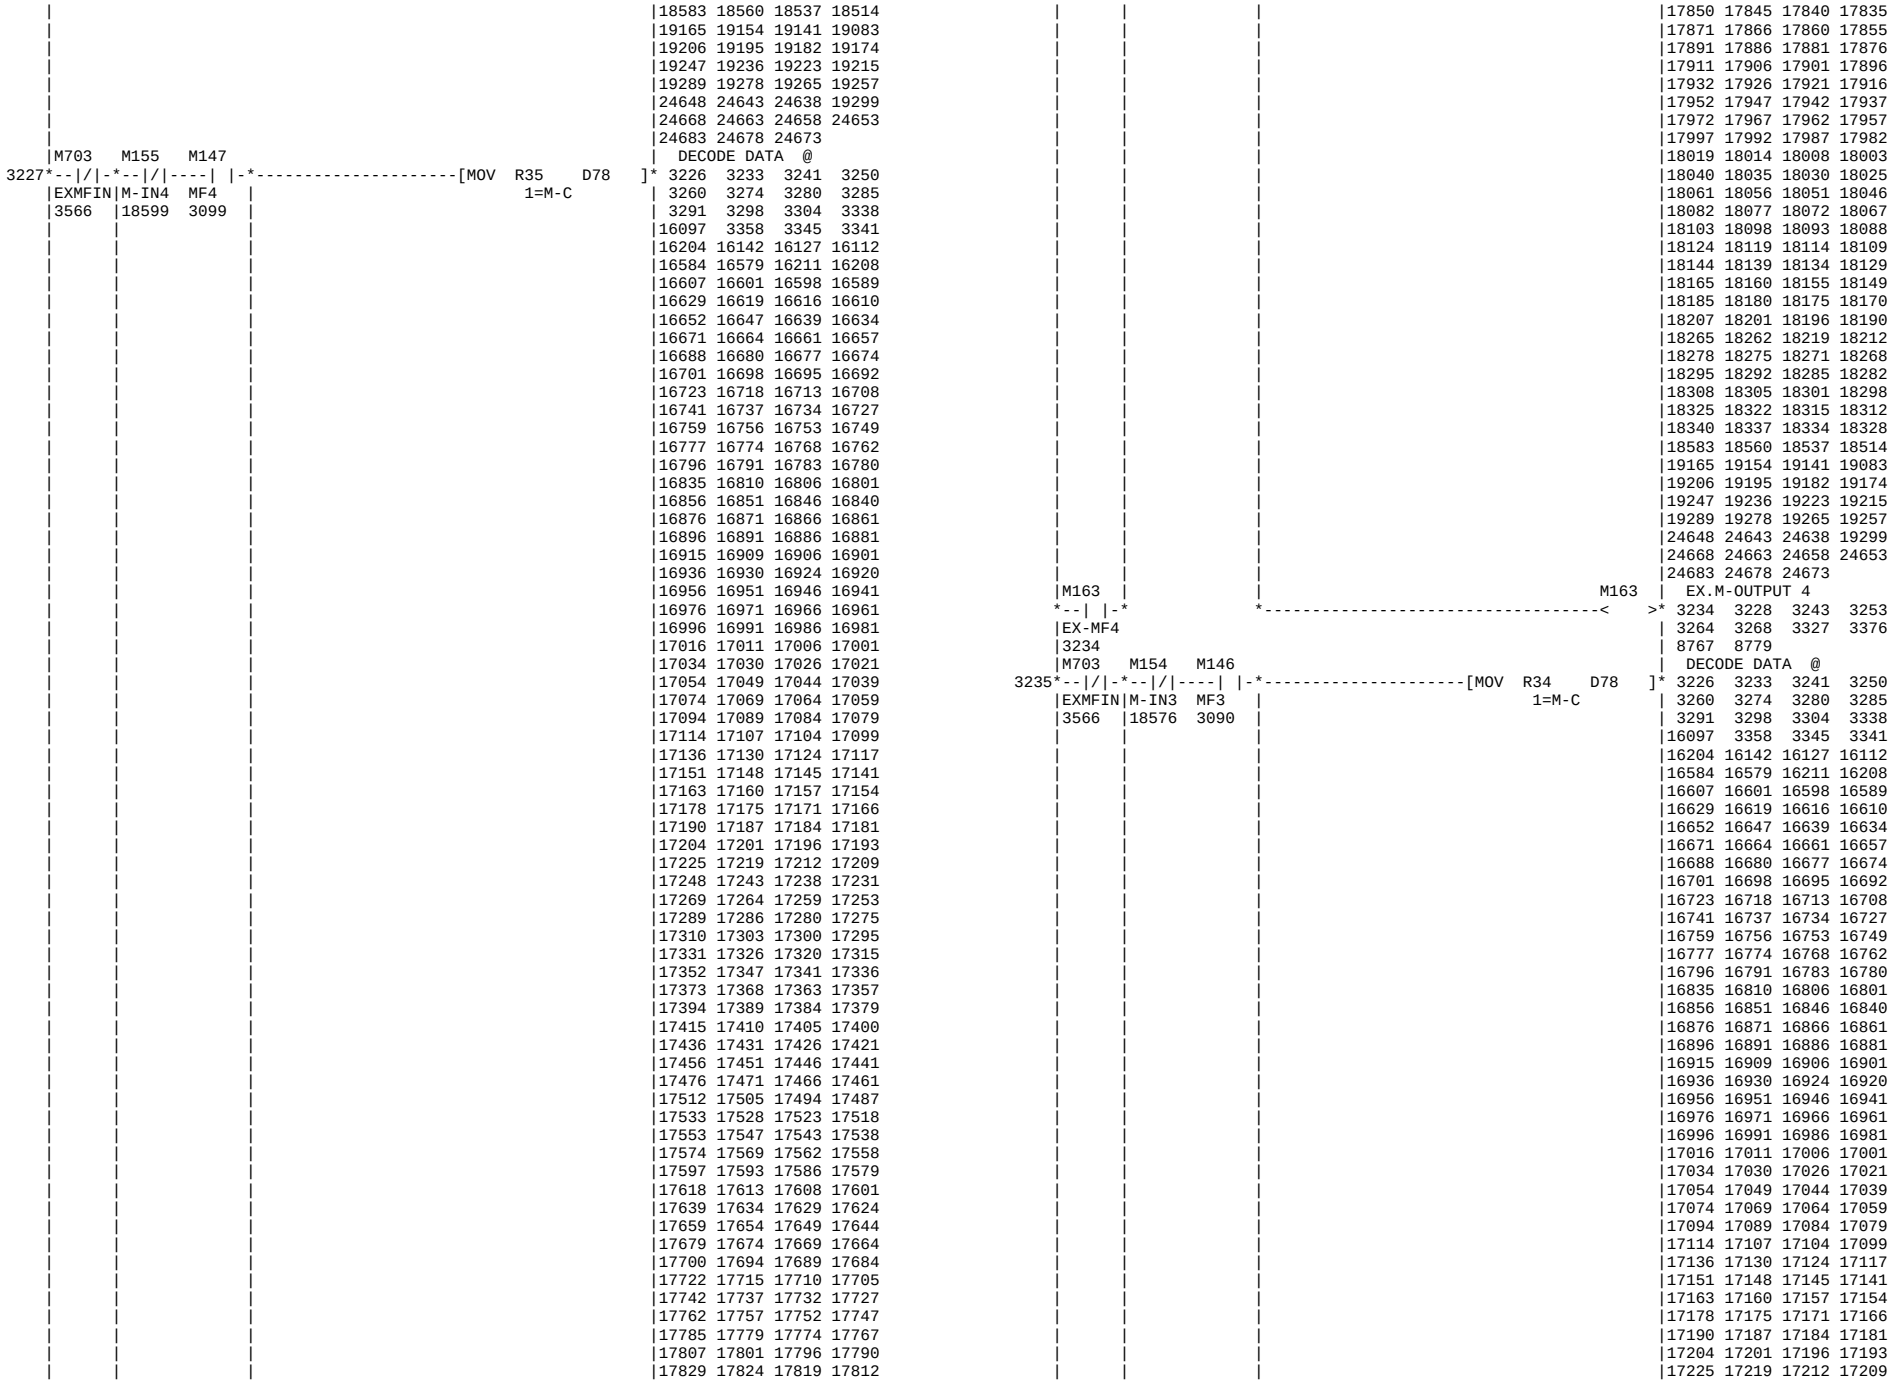

M6057
M6059 | RAPID AXIS I/L
2624 2632 1411
RPD_SD
R-OV1
BIT1#1
2603
2617
M5219
M6060 | RAPID OVR DOWN
R-OV1
BIT1#1 ON_OFF
2634 1414
2617 606
M91 M364 X244 X245
M137 | MANUAL INTERRUPT
2635 2640 2637 2844 2914
MANU OSPA OP.N STL.N
3600 3619 5843 5942
14444 3613
9393 21358 21367 21565
22145 21957 21747 21737
22316
M137
MANUAL INTERRUPT
2642
MANUI
2640
X15B
SINGLE BLK MODE
2643 2645 2647 2651
SIGBLK
M790 M173 M90
M173 | SINGLE STEP SWIT
2646 2654 2648 2652 2657
SBKP SBKSW AUTO
2699 9188 26471 26560
2654 14419
M7239
SBLKP
2645
M790 M7239 M173
SBKP SBKSW
2645 2654
M86 T136 M90
M134 | SINGLE STEP
2655 2659
SBKAL 0.1sec AUTO
26138 664 14419
M173
Y14F | SINGLE BLOCK .B
2660
SBKSW
2654
X108 M91 X11C X9E M18
M7036 | SPINDLE START MO
2661 2669 2666 25733
SPST.B MANU SETUP. FDC.LS TOPD.P
14444
M7036 M101
SPSTM RST
2669 543
M6470
K2 | SCHEDULE SERCH.N
2670 2673 11954
BFSC.P
MOV R435 M8150
BF_IN
12210
M6807 | CST-IL BY BF_SCH
K0 D600 -[> K40 D600 *
2684 2717
BF_STP
11941
BF_STP
11941
K0 D600
BF_STP
11941
X223
M1321 | CYCLE START IL2
2685 2689 2732 26827
ZP14.N
M5928
ORT.R
24384
X244
OP.N
M5182
SCST.P
M7071 X244 X10 Y232 X224 M6470 M178
2690 2634 1414
TL_CND OP.N TCL.LS YCNT.N ZP15.N BFSC.P CSTDCD
11047 767 2505
X244 X96 M502 M5160 M10 M8154 XB6
OP.N PCR.LS TDIL STAN.P MASK.P SCMD.N FCLS.R
8169 13778
M6480 M27 M173 M926 M53 M6807
R79-0: PCT.P SBKSW 249MX Y.P BF_SCH
13824 2654 6770 2684
M6472 Y143 X244 M16
J2TA.P MDI.L OP.N ROBO.P
13821 14343 13737
M54
SS.P
M931 T30 M981 M89 M101 M1321 M140
CYCLE START IL.
1> 2733 2834
CCE RDY.T SIM-MD RSTAL RST CSTIL2
2255 546 1138 25235 543 2689
M16 M18
2>
ROBO.P TOPD.P
13737
M1279
M6220 | MAIN SS OVERIDE
2734 2739 2839
ON SP1OVR SP2OVR
585
M5194
SGJ.P
X11E M6437
M880 | BOTH CYCLE SW.1
2740 2742 2746 2752 2759
CLS_L BHCS.P
2768 7335 24992
X11F M6437
M881 | BOTH CYCLE SW.2
2743 2745 2747 2753 2762
CLS_R BHCS.P
2766 7336 24993
M880
BOTH CYCLE START
2746 2749 2754 7337
BCSW_1
2742
M881
BCSW_2
2745
M880 M881 T204 M6437 M101
M631 | BOTH CYCSTART OK
2752 2758 2755 2776
BCSW_1 BCSW_2 BOTHCS BHCS.P RST
2742 2745 2749 543
M631
BOTCOK
2758
M880
BOTH CYCST.SW10F
2759 2761 2765 2770
BCSW_1
2742
M881
BOTH CYCST.SW20F
2762 2764 2767 2771
BCSW_2
2745
M628 M881 M931 M90 X245 M631
M627 | BOTH CYC.SW OFF
2765 2777 2778 2803 27015
BC10FP BCSW_2 CCE AUTO STL.N BOTCOK
2761 2745 2255 14419 2758

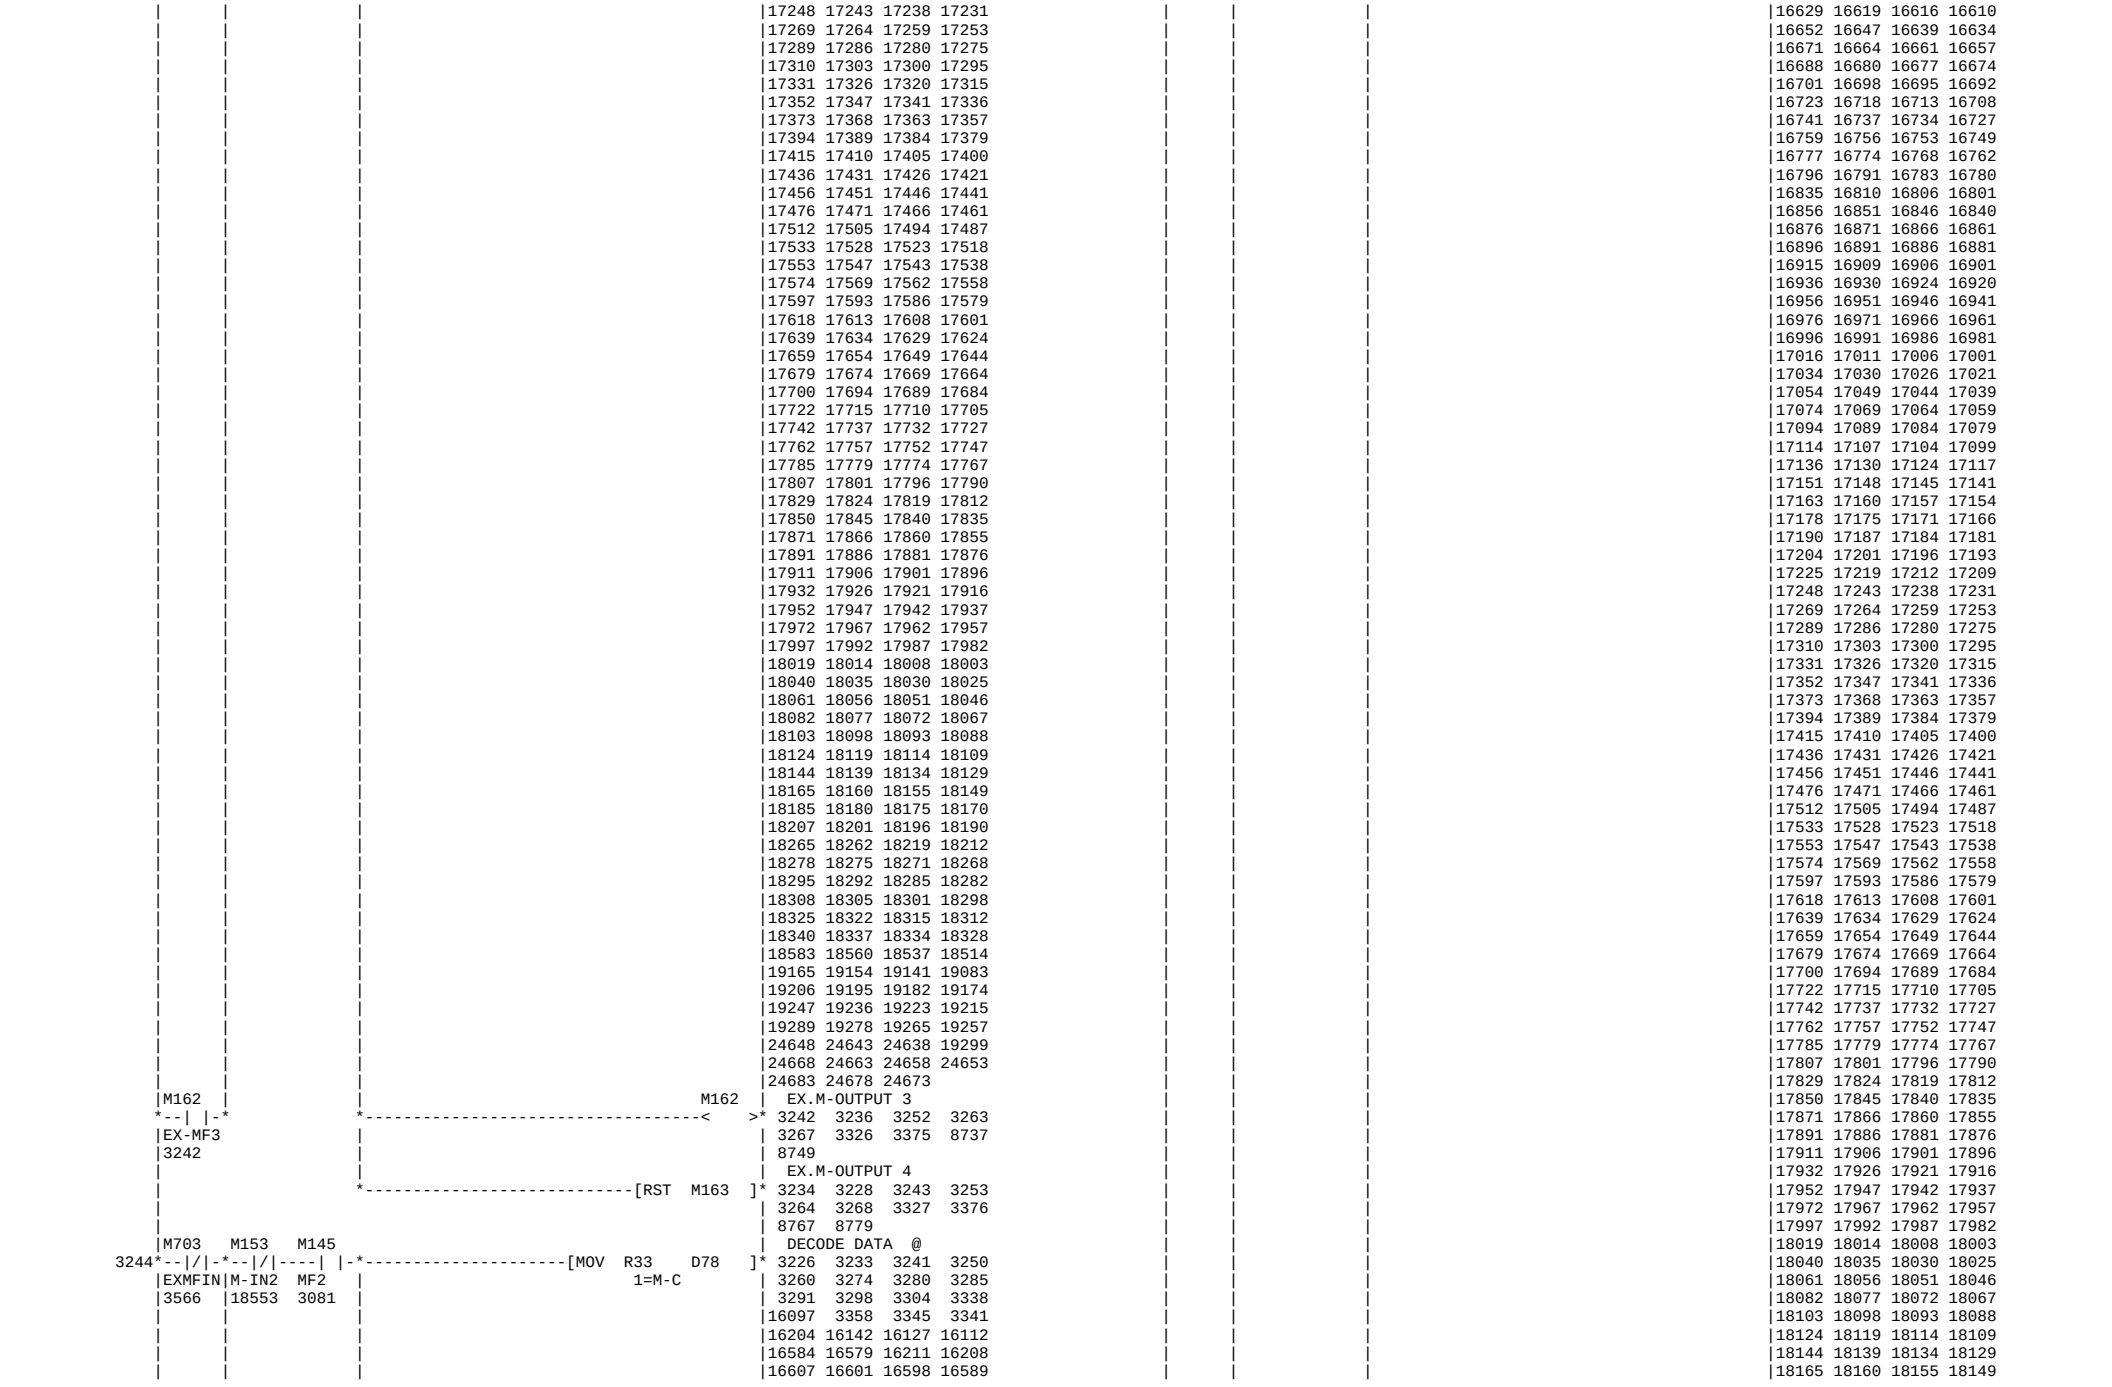

BOTH CYS.SW OFF
CYCLE START SW.
CYCLE START CMD.
CYCLE START
CYCLE START _NC
START MEMORY
DOOR LOCK PIN EX
CYCLE START .NC
DOOR IL.SW TEST

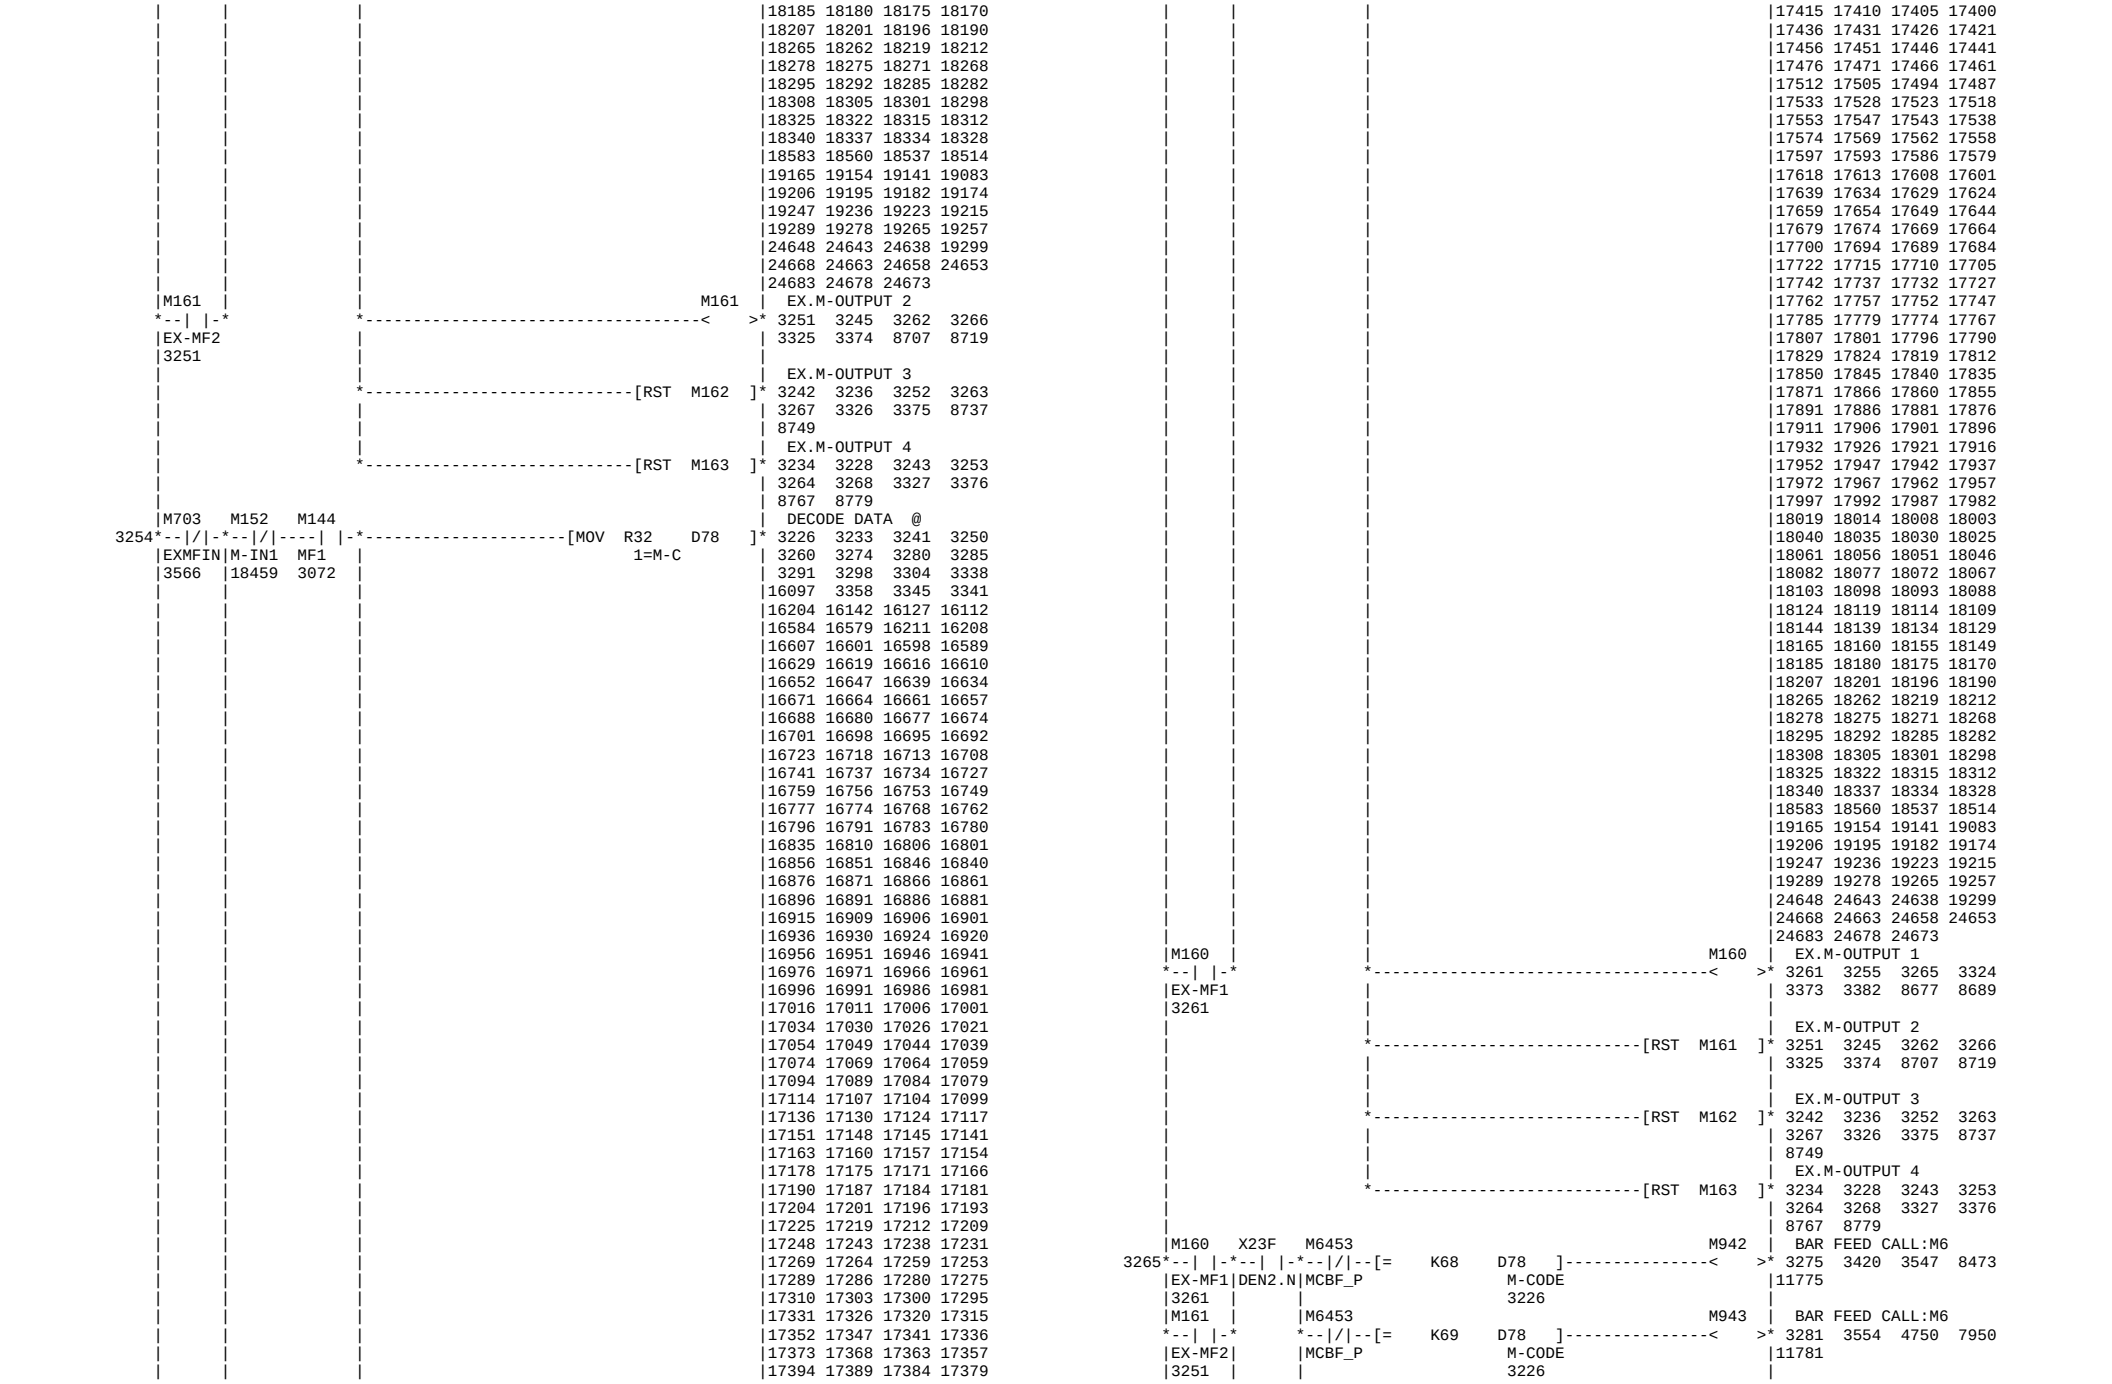

M220 M6067 M6618 | PROGRAM STOP MEM
2905 2909 2907 2917
30M P_RET
16916 2950
M202
2M
16847
M6618
PSTOPM
2909
X140 X244 M79 X245 X243
2910 >1
RST.B OP.N CLOS.P STL.N TSMZ.N
M6064 M6064 M6450 X343
D_SW_P D_SW_P SSC.P TSMZ_N
2904 2904
M90 M6451
AUTO SSCT.P
14419
M137 M90
MANUI AUTO
2640 14419
M6618
PSTOPM
2909
M364
OSPA
3613
Y242 X244 Y152
SBK.N OP.N STL.L
9193 2987
M7196 M6475
SCYCST SOPBOX
2989
M176 M5936
56MEX DOPEND
2477 2488
XB7 Y7 YB1 XB6 M16
UNLK.R CM.M MF20.M FCLS.R ROBO.P
7780 24534 13737
M475 M6066 X464 M3302 M6067 | PIN RETRACT
1> 2950 2908 2951
SSOP P_EXT AUT.R STL.R
5677 2901 24715
M6067 M6068 M6068 | LOCK PIN EXTEND
2951 2955 2953 2977
P_RET PIN_EX
2950 2955
T202 | LOCK PIN RELE. O
2957 2952 2960 25682
LP_RS 25783
2957
M6066 T202 M6065 | LOCK PIN MOVING
2961 2826 25683 25784
P_EXT LP_RS 26368 26734
2901 2957
M6437 X11B M6068 YE | DOOR LOCK RELEA
2962 2978 2226 2232
BHCS.P UNLOCK PIN_EX
2955
M6437 M239 C12
BHCS.P 56M D-BZ.C
17075 239
M6437 M604
BHCS.P FDOPCD
7376
XB7 XB6 Y7 YB1 M16
UNLK.R FCLS.R CM.M MF20.M ROBO.P
7780 24534 13737
M88 M3340 X245 Y152 | CYCLE START
2979 2987 2921 25088
SIMUOF GL>DSP STL.N
15544 24771
M3340 X1C1 M6475 M7196 | SUB CYCLE START
2989 424 2922 3008
GL>DSP STL.N SOPBOX
24771
M3340 X246 Y153 | FEED HOLD
2997
GL>DSP SPL.N
24771
M3340 X1C2 M6475 M7197 | SUB FEED HOLD
2999 431 3016
GL>DSP FDHL.N SOPBOX
24771
X245 | CST LAMP PULSE
3000 3002 1799 1906
STL.N
X245 X248 Y11 | AUTO CYCLE GREE
3003 3005
STL.N AL1.N
X140 Y141 | RESET SWITCH .B
3006 3007
RST.B
M7196 M49 M6475 M6444 Y8C | EXT.M-CODE 401M
3008 3015
SCYCST C.P SOPBOX EX.M2P
2989
M7198 M6444
401M EX.M2P
24896
M7197 M49 M6475 M6444 Y8D | EXT.M-CODE 402M
3016 3023
SFDFLD C.P SOPBOX EX.M2P
2999
M7199 M6444
402M EX.M2P
24898
P8 M297 M896 | 248M DELAY
3024 3025 19923
248M
17598
X270 X271 X272 X273 | SPINDLE/MILL CMM
3026 3030 8583 18288 18289
MF1.N MF2.N MF3.N MF4.N
X275 | S CODE USE
3032 8562 18330 18331
SF.N 19704
X278 X279 X27A X27B | SS/MILL COMMAND
3033 3037 8643 18318 18319
mf1.N mf2.N mf3.N mf4.N
X27D | s CODE USE
3039 8564 18342 18343
sf.N
M1279 K2 | M FUNCTION STRB
3040 3044 3050 3061 18395
ON MF1.N 18422 18444 18469 18620
585 19409

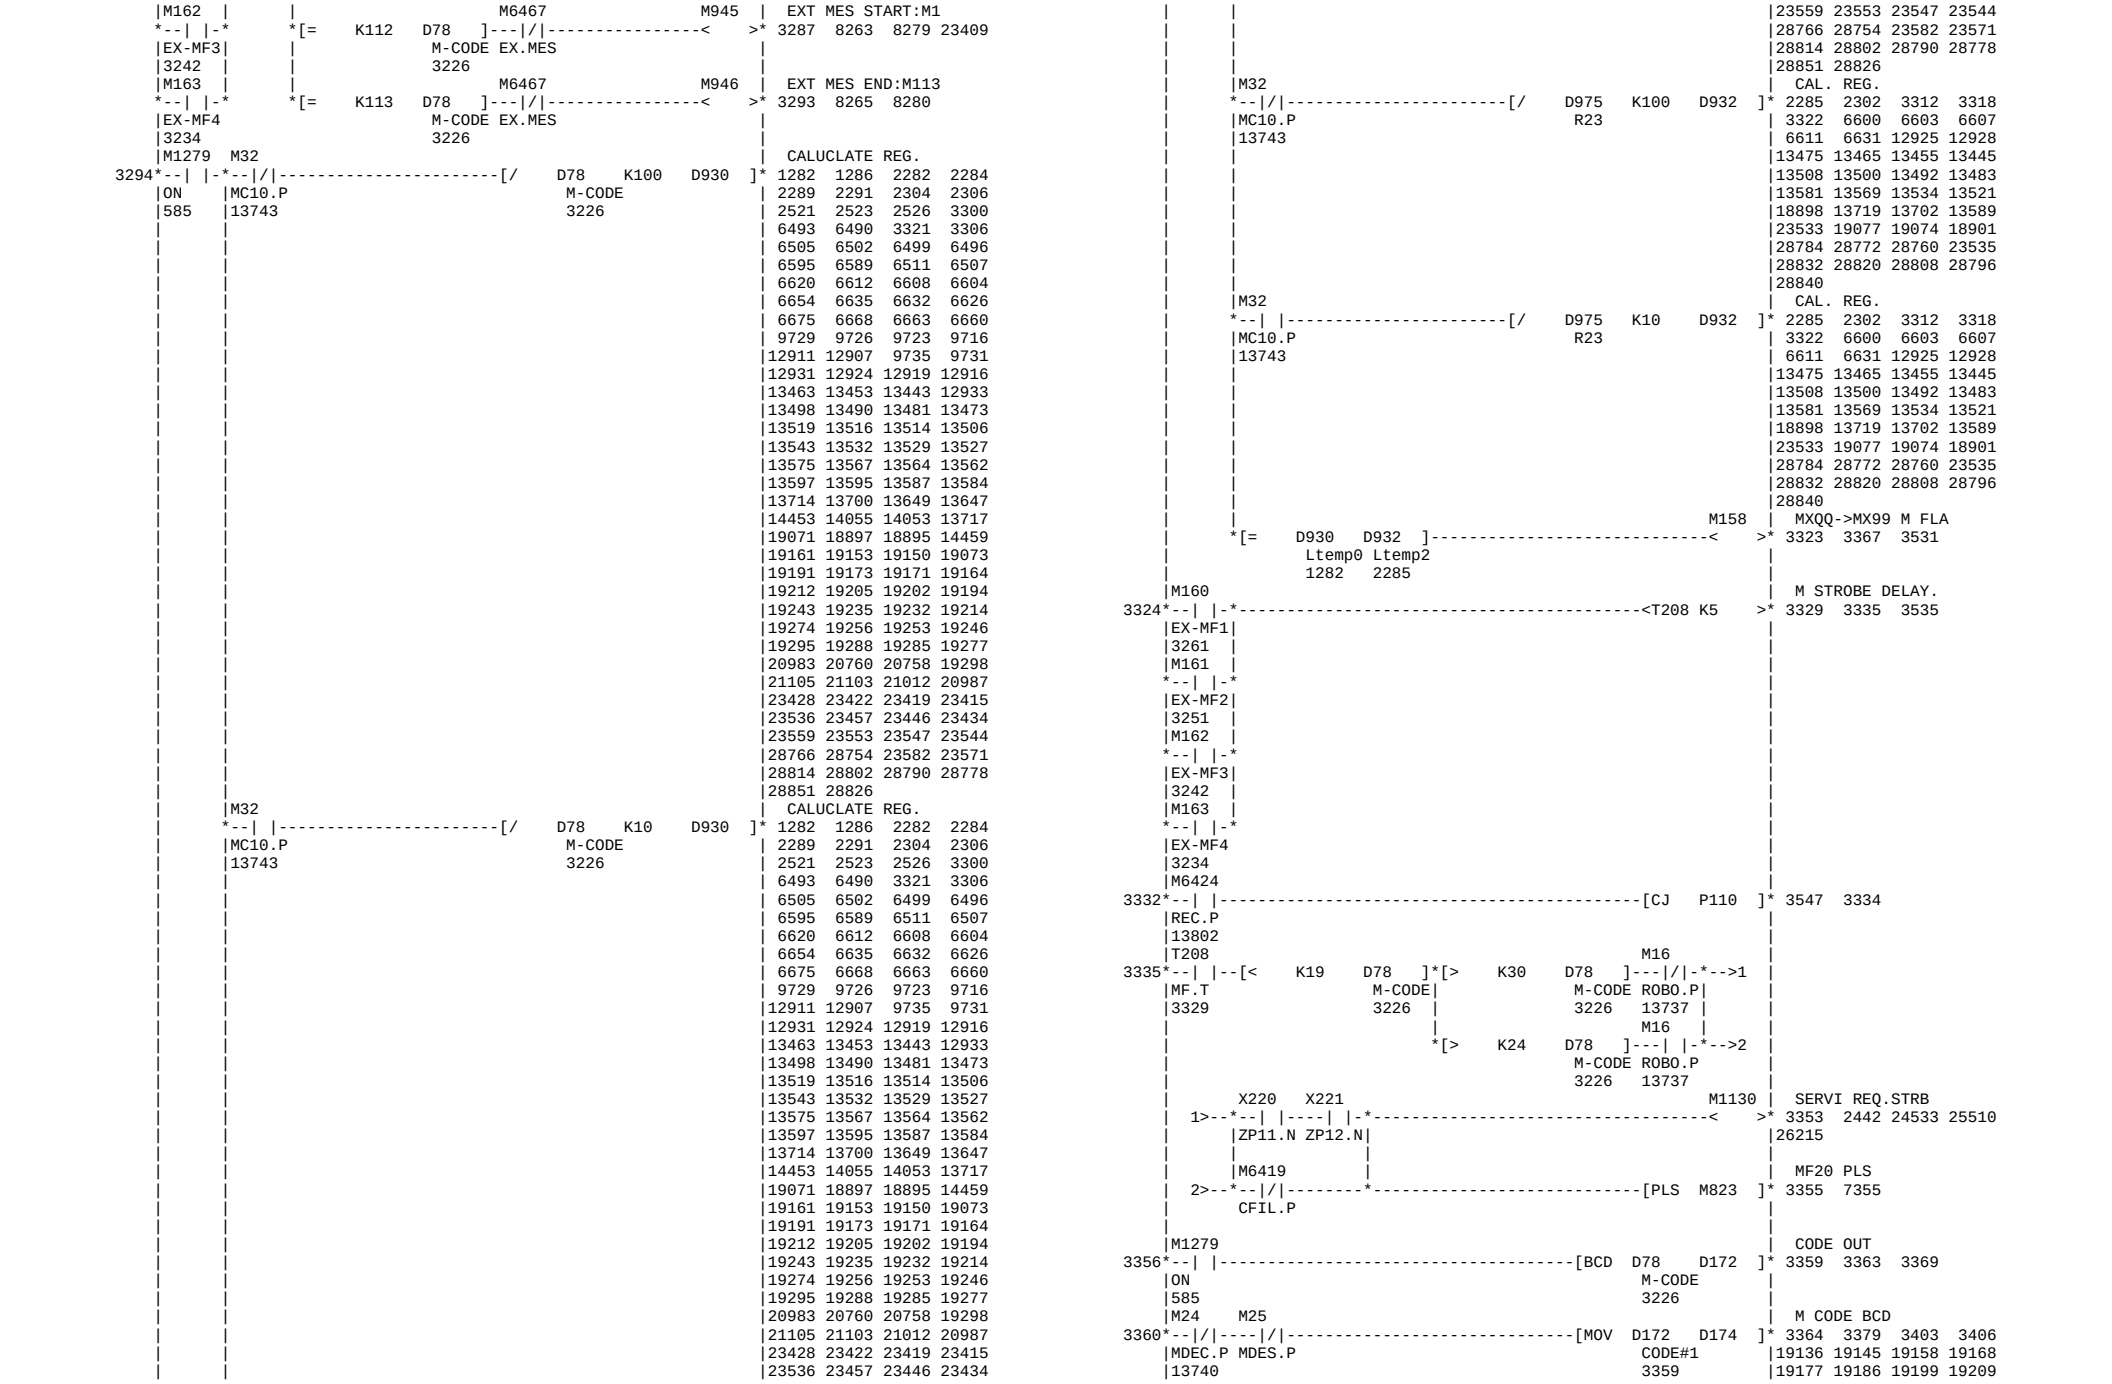


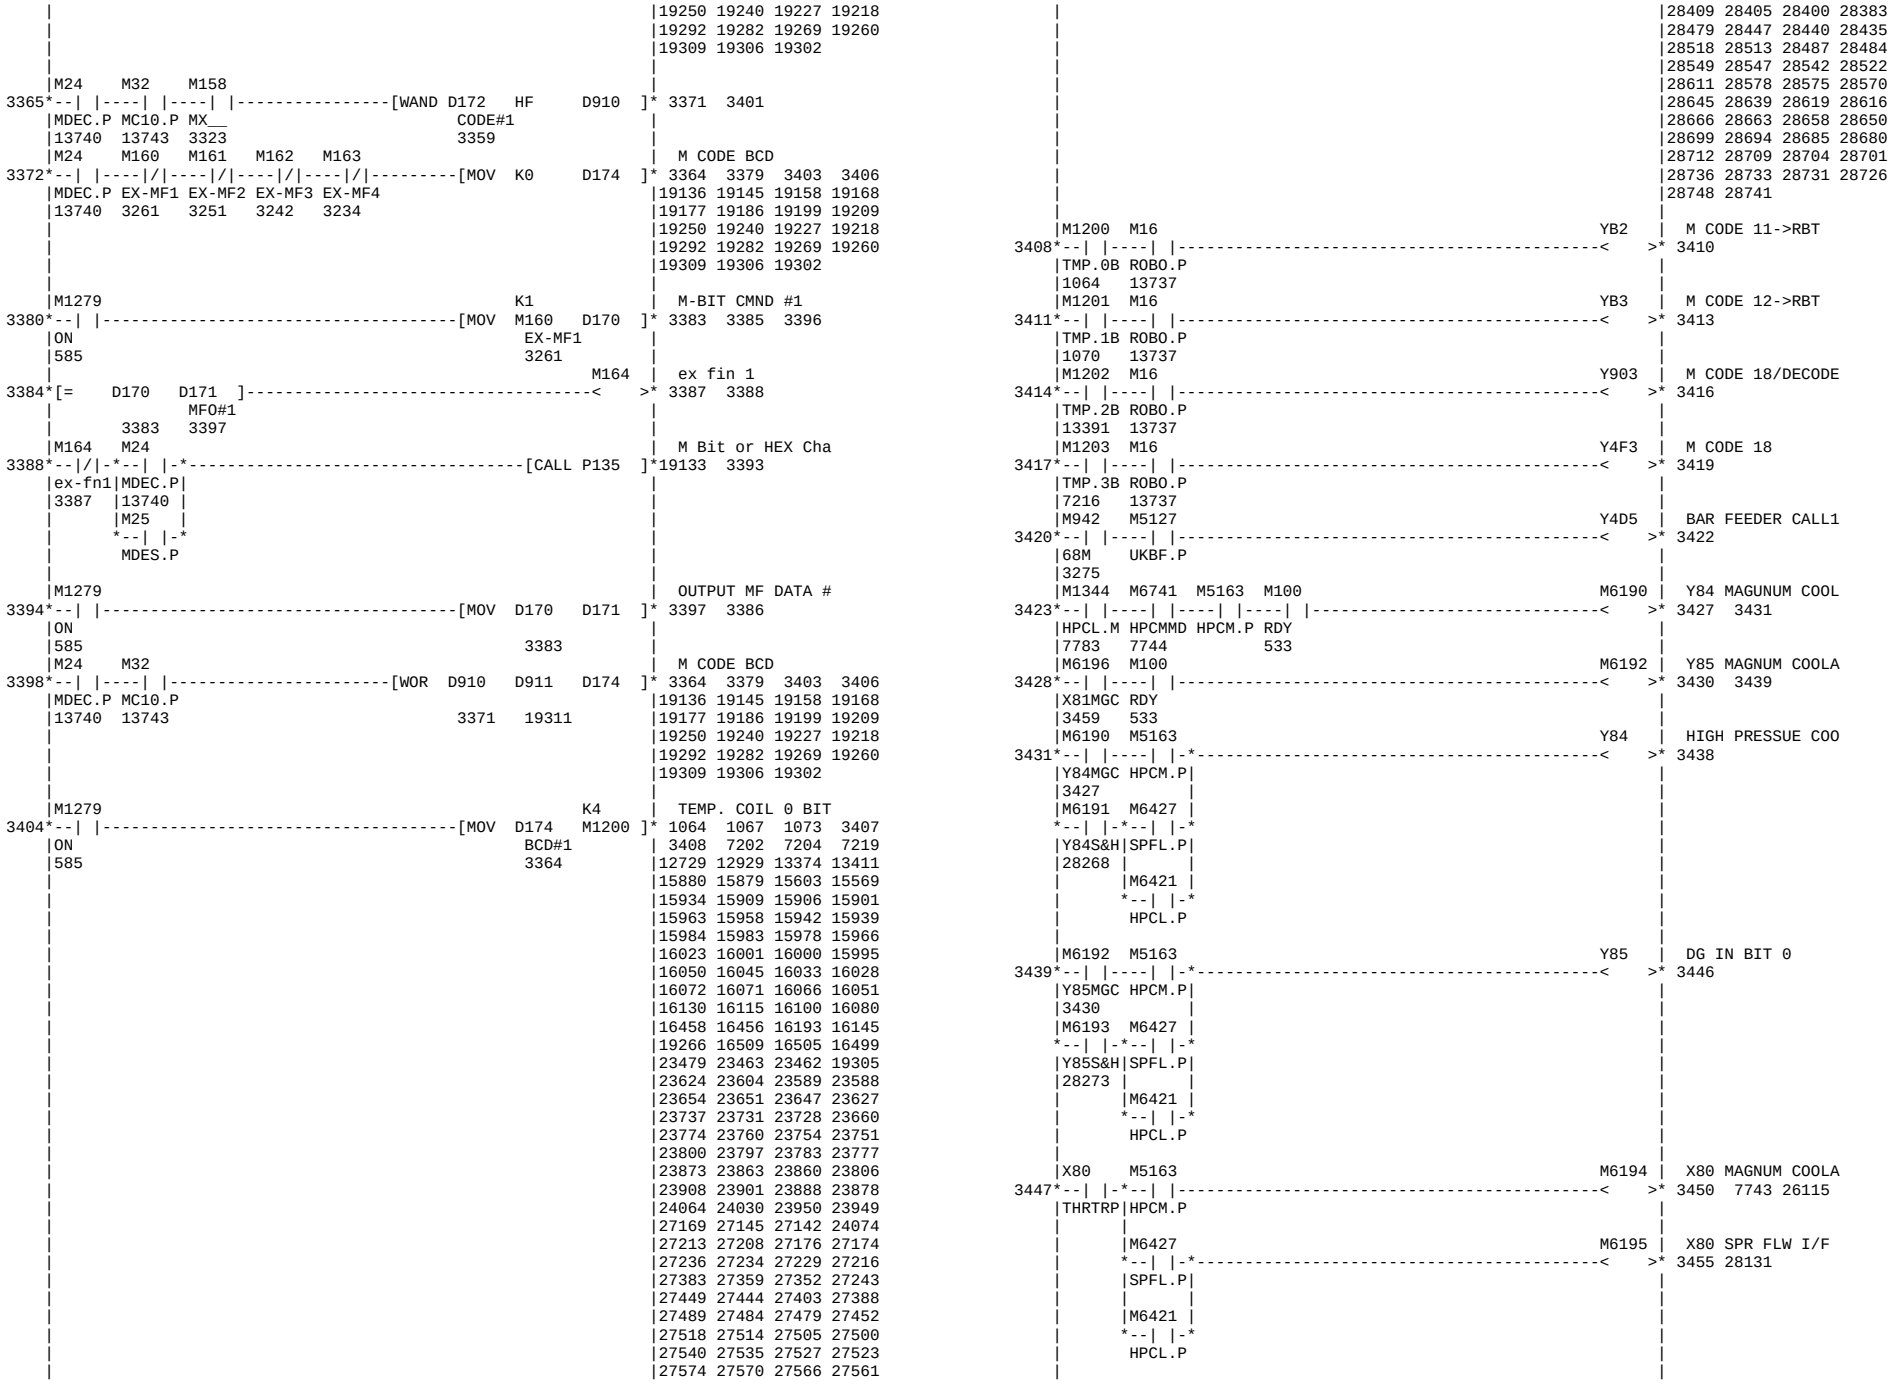


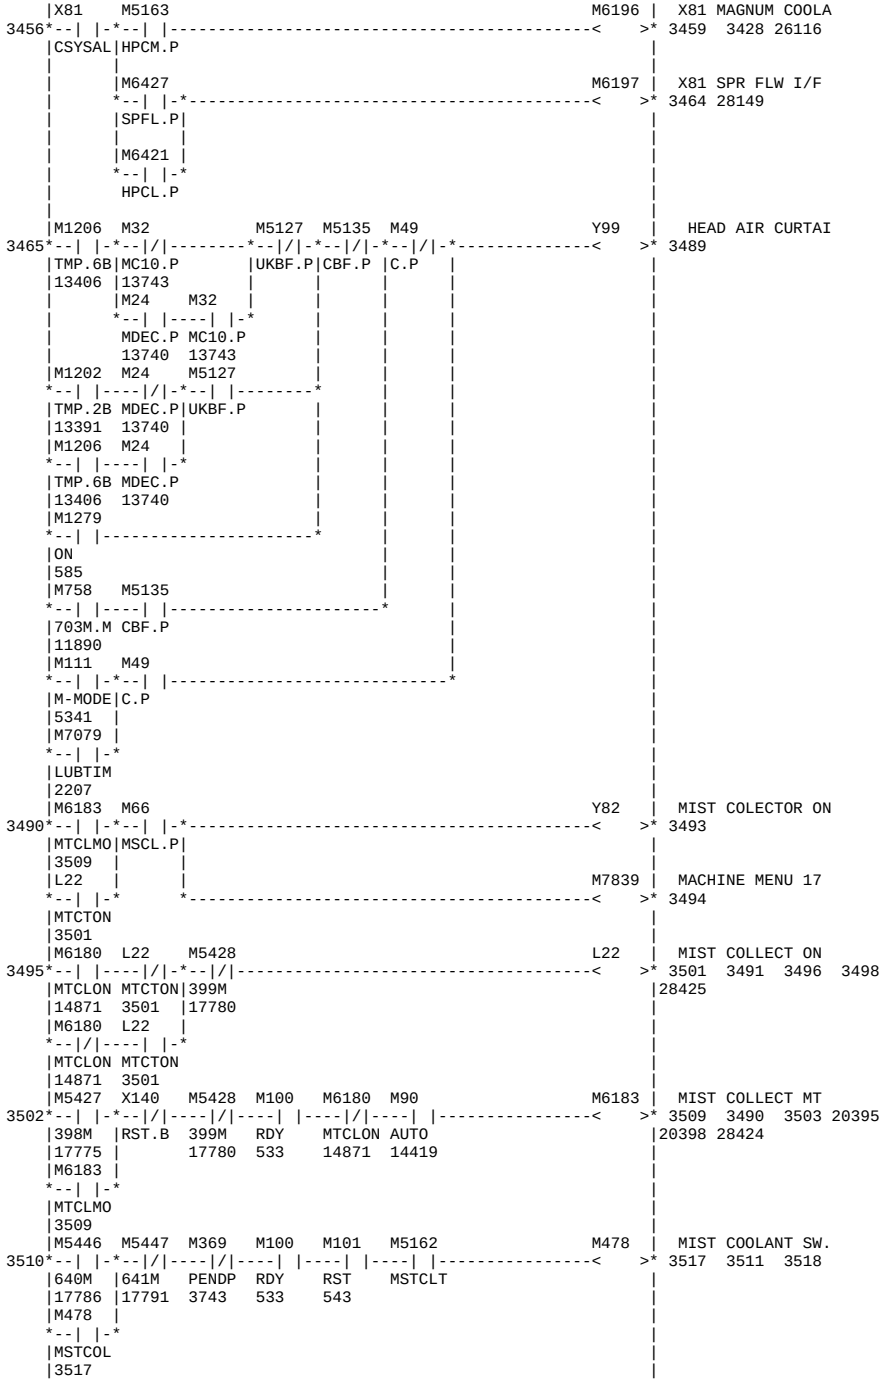

M703 M155 M147
EXMFIN M-IN4 MF4
3566 18599 3099
MOV R35 D78
1=M-C
DECODE DATA @
M163
EX-MF4
3234
M703 M154 M146
EXMFIN M-IN3 MF3
3566 18576 3090
MOV R34 D78
1=M-C
M163
EX.M-OUTPUT 4
DECODE DATA @

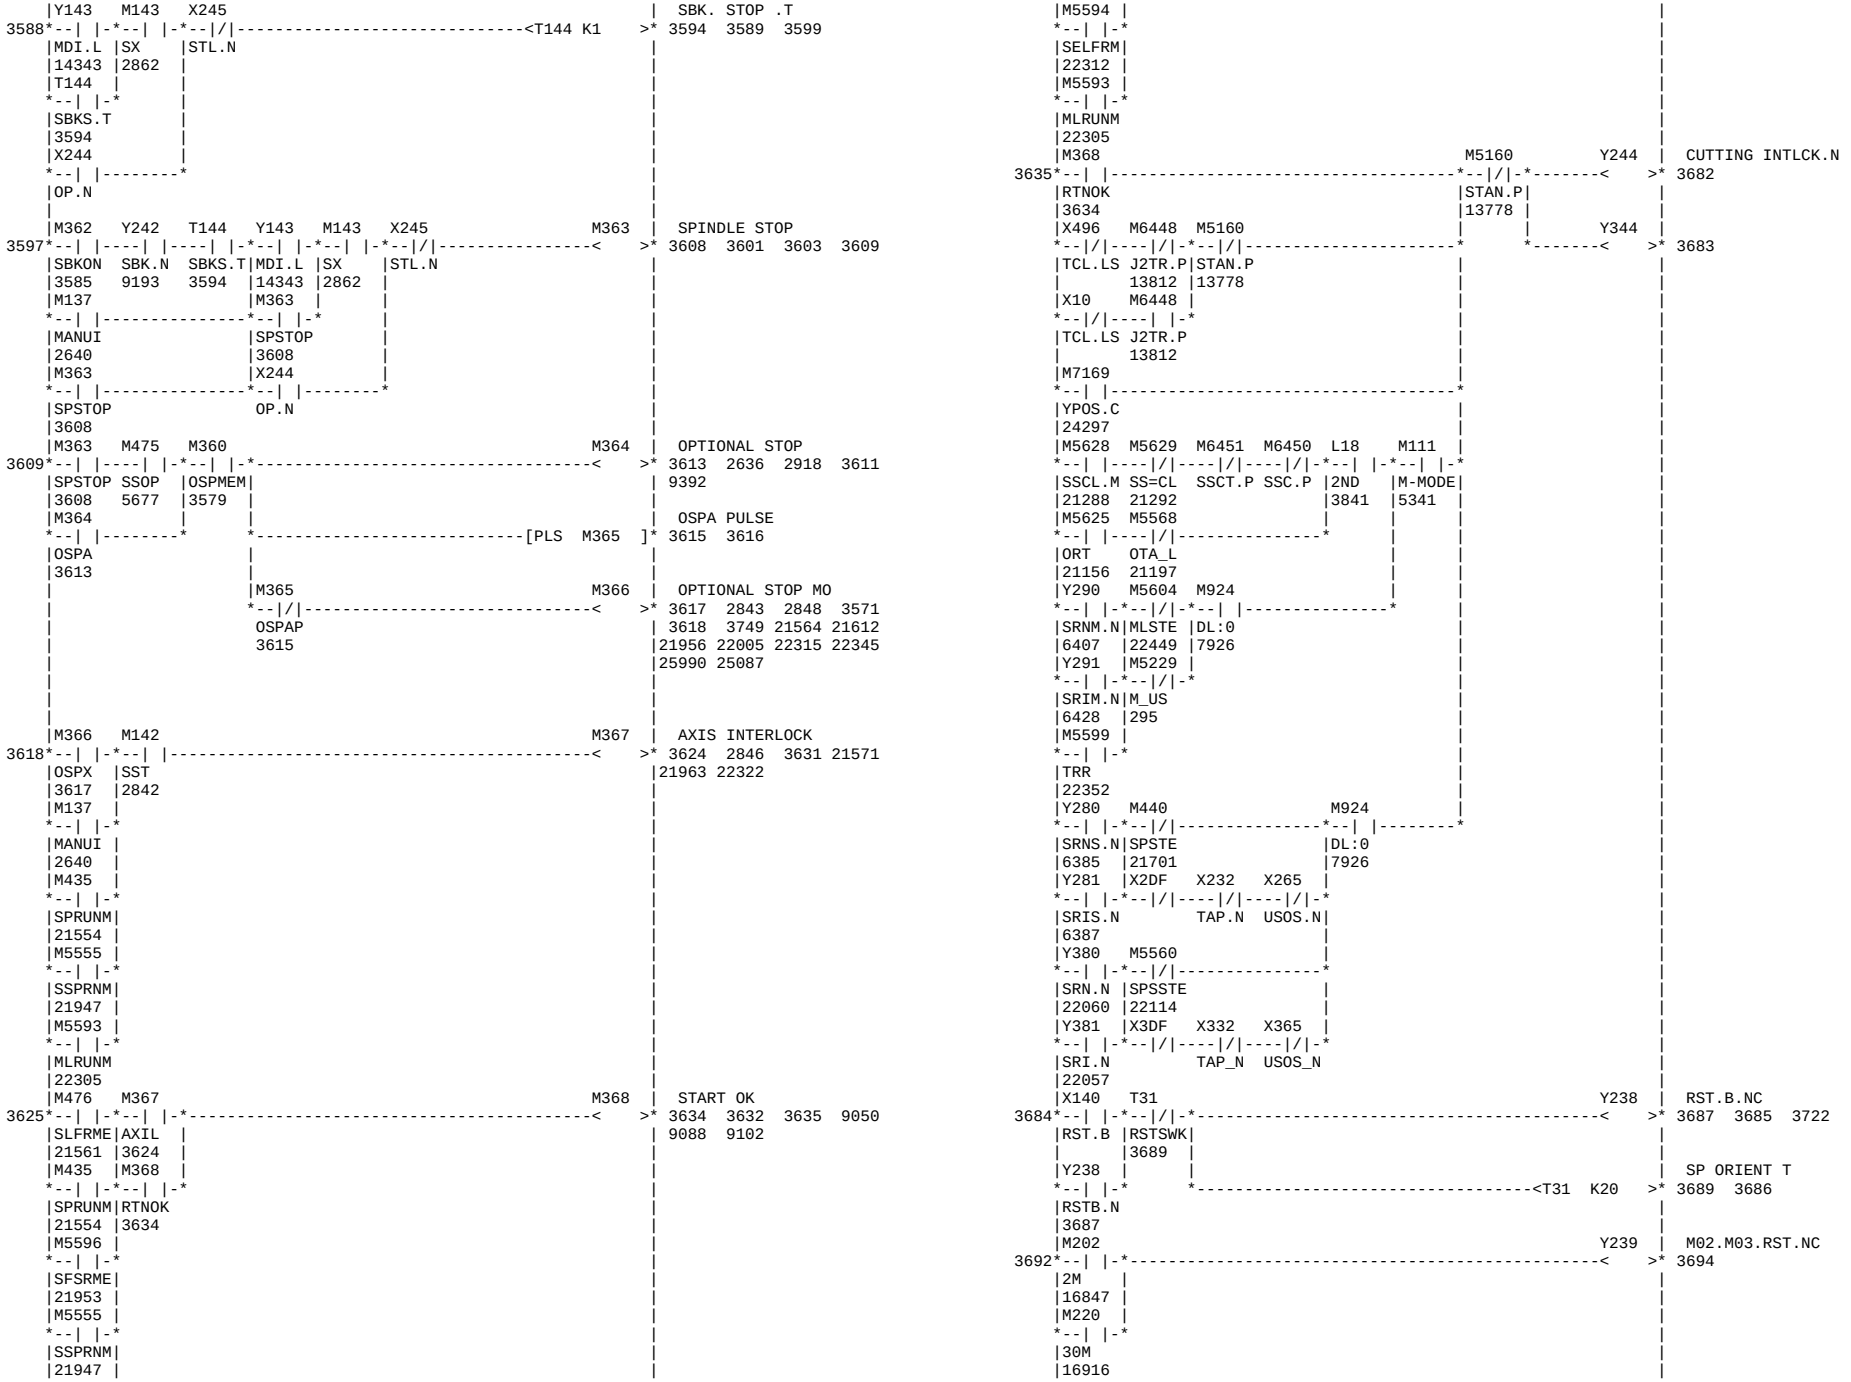

M162
EX.M-OUTPUT 3
EX-MF3
3242
EX.M-OUTPUT 4
M703 M153 M145
DECODE DATA @
EXMFIN M-IN2 MF2
3566 18553 3081
3244
M162
RST M163
MOV R33 D78
1=M-C

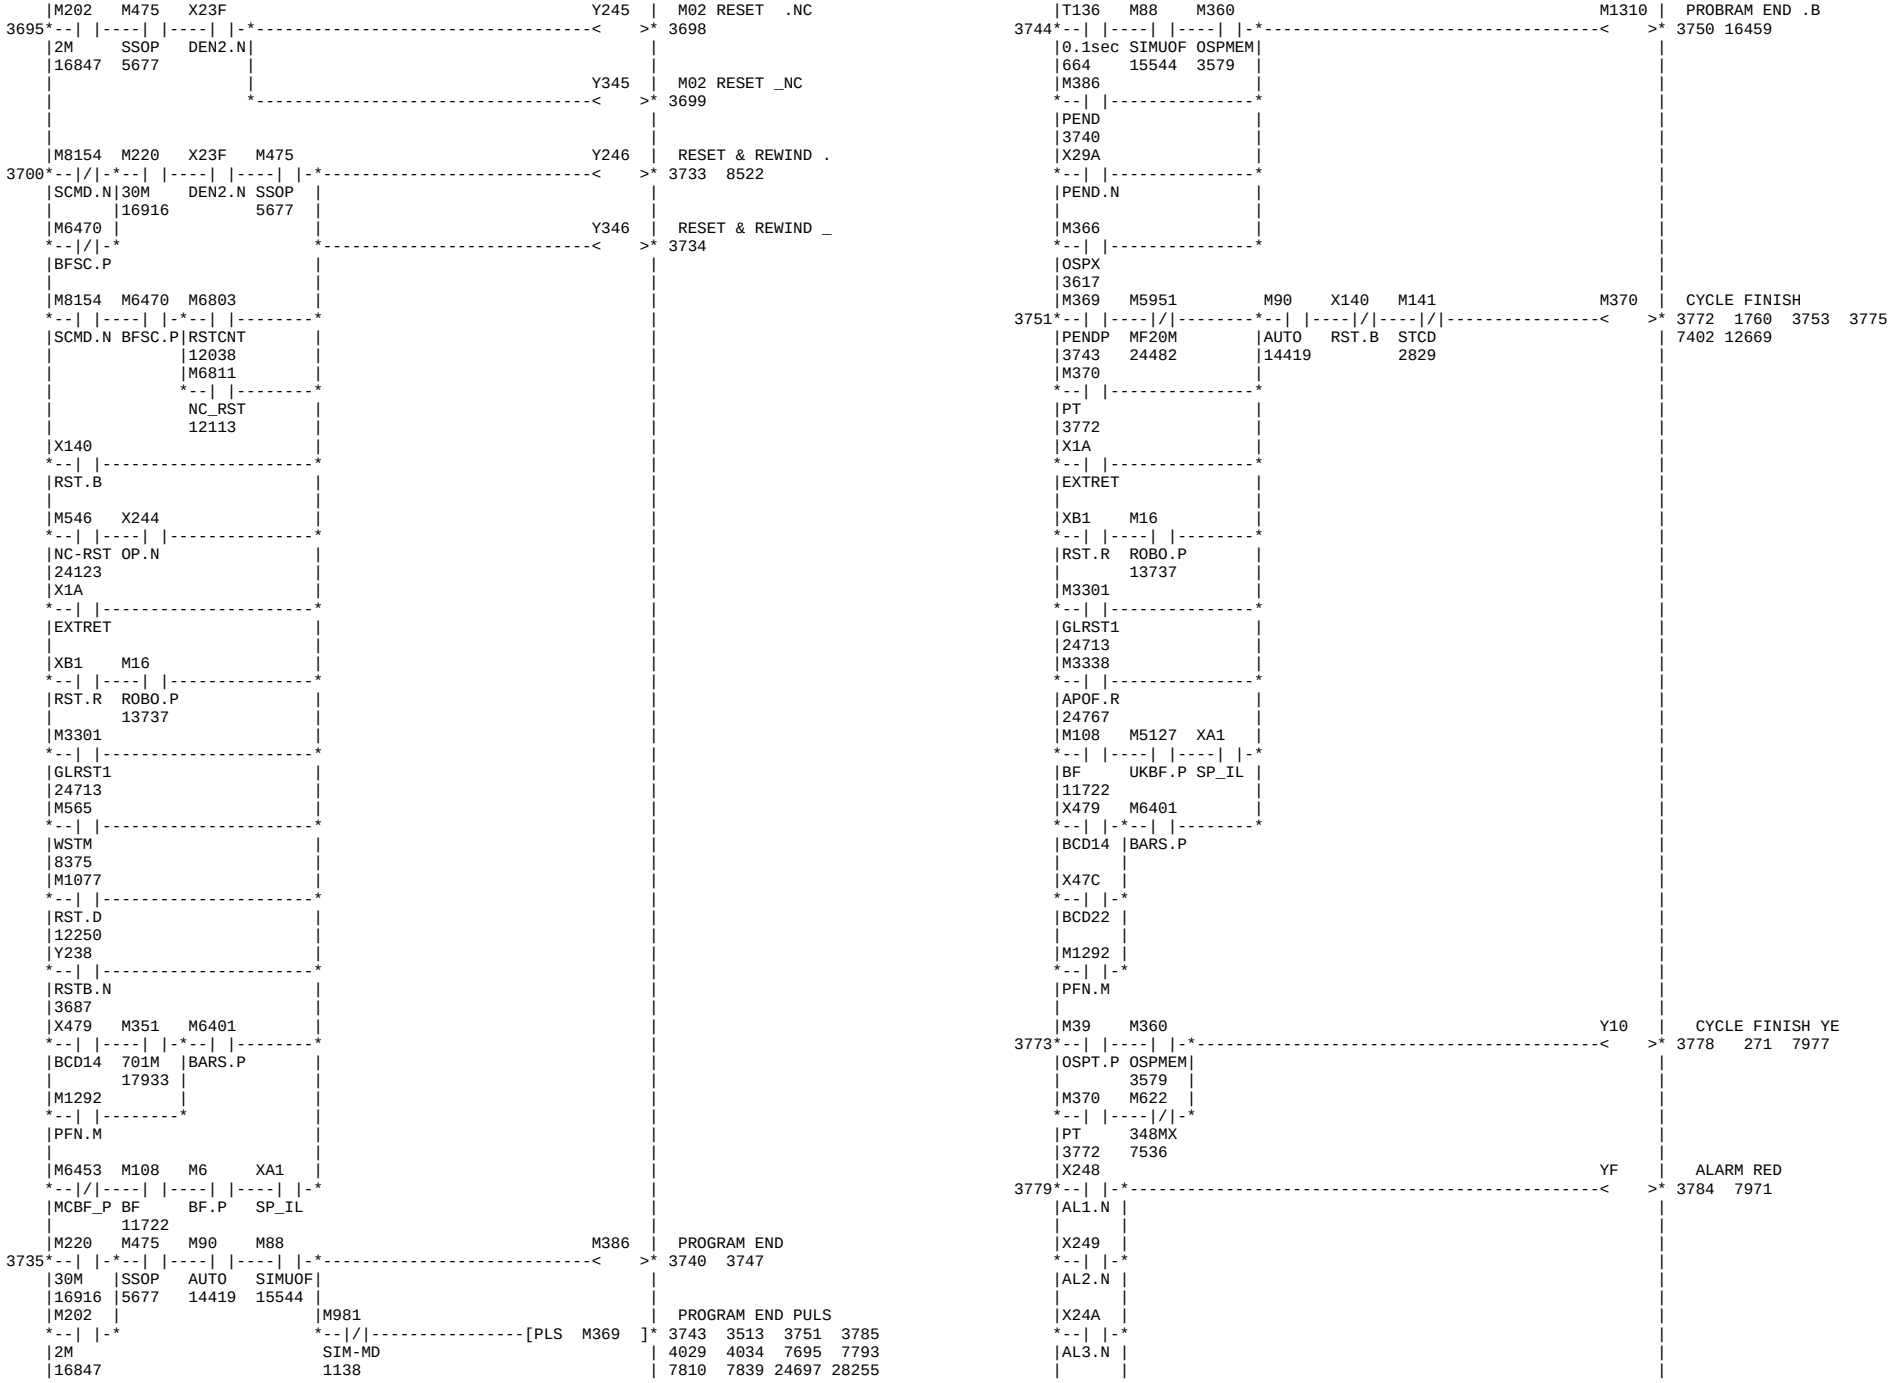

M161
EX-MF2
3251
M703 M152 M144
3254
EXMFIN M-IN1 MF1
3566 18459 3072
M161
EX.M-OUTPUT 2
3251 3245 3262 3266
3325 3374 8707 8719
EX.M-OUTPUT 3
[RST M162]
3242 3236 3252 3263
3267 3326 3375 8737
8749
EX.M-OUTPUT 4
[RST M163]
3234 3228 3243 3253
3264 3268 3327 3376
8767 8779
DECODE DATA @
[MOV R32 D78]
1=M-C
3226 3233 3241 3250
3260 3274 3280 3285
3291 3298 3304 3338
18185 18180 18175 18170
18207 18201 18196 18190
18265 18262 18219 18212
18278 18275 18271 18268
18295 18292 18285 18282
18308 18305 18301 18298
18325 18322 18315 18312
18340 18337 18334 18328
18583 18560 18537 18514
19165 19154 19141 19083
19206 19195 19182 19174
19247 19236 19223 19215
19289 19278 19265 19257
24648 24643 24638 19299
24668 24663 24658 24653
24683 24678 24673
16097 3358 3345 3341
16204 16142 16127 16112
16584 16579 16211 16208
16607 16601 16598 16589
16629 16619 16616 16610
16652 16647 16639 16634
16671 16664 16661 16657
16688 16680 16677 16674
16701 16698 16695 16692
16723 16718 16713 16708
16741 16737 16734 16727
16759 16756 16753 16749
16777 16774 16768 16762
16796 16791 16783 16780
16835 16810 16806 16801
16856 16851 16846 16840
16876 16871 16866 16861
16896 16891 16886 16881
16915 16909 16906 16901
16936 16930 16924 16920
16956 16951 16946 16941
16976 16971 16966 16961
16996 16991 16986 16981
17016 17011 17006 17001
17034 17030 17026 17021
17054 17049 17044 17039
17074 17069 17064 17059
17094 17089 17084 17079
17114 17107 17104 17099
17136 17130 17124 17117
17151 17148 17145 17141
17163 17160 17157 17154
17178 17175 17171 17166
17190 17187 17184 17181
17204 17201 17196 17193
17225 17219 17212 17209
17248 17243 17238 17231
17269 17264 17259 17253
17289 17286 17280 17275
17310 17303 17300 17295
17331 17326 17320 17315
17352 17347 17341 17336
17373 17368 17363 17357
17394 17389 17384 17379
M160
EX-MF1
3261
EX.M-OUTPUT 1
3261 3255 3265 3324
3373 3382 8677 8689
EX.M-OUTPUT 2
[RST M161]
3251 3245 3262 3266
3325 3374 8707 8719
EX.M-OUTPUT 3
[RST M162]
3242 3236 3252 3263
3267 3326 3375 8737
8749
EX.M-OUTPUT 4
[RST M163]
3234 3228 3243 3253
3264 3268 3327 3376
8767 8779
M160 X23F M6453
3265
EX-MF1 DEN2.N MCBF_P
3261
M6453
EX-MF2
3251
M942
BAR FEED CALL:M6
3275 3420 3547 8473
11775
M943
BAR FEED CALL:M6
3281 3554 4750 7950
11781
K68 D78]
K69 D78]
M-CODE
3226
17415 17410 17405 17400
17436 17431 17426 17421
17456 17451 17446 17441
17476 17471 17466 17461
17512 17505 17494 17487
17533 17528 17523 17518
17553 17547 17543 17538
17574 17569 17562 17558
17597 17593 17586 17579
17618 17613 17608 17601
17639 17634 17629 17624
17659 17654 17649 17644
17679 17674 17669 17664
17700 17694 17689 17684
17722 17715 17710 17705
17742 17737 17732 17727
17762 17757 17752 17747
17785 17779 17774 17767
17807 17801 17796 17790
17829 17824 17819 17812
17850 17845 17840 17835
17871 17866 17860 17855
17891 17886 17881 17876
17911 17906 17901 17896
17932 17926 17921 17916
17952 17947 17942 17937
17972 17967 17962 17957
17997 17992 17987 17982
18019 18014 18008 18003
18040 18035 18030 18025
18061 18056 18051 18046
18082 18077 18072 18067
18103 18098 18093 18088
18124 18119 18114 18109
18144 18139 18134 18129
18165 18160 18155 18149
18185 18180 18175 18170
18207 18201 18196 18190
18265 18262 18219 18212
18278 18275 18271 18268
18295 18292 18285 18282
18308 18305 18301 18298
18325 18322 18315 18312
18340 18337 18334 18328
18583 18560 18537 18514
19165 19154 19141 19083
19206 19195 19182 19174
19247 19236 19223 19215
19289 19278 19265 19257
24648 24643 24638 19299
24668 24663 24658 24653
24683 24678 24673

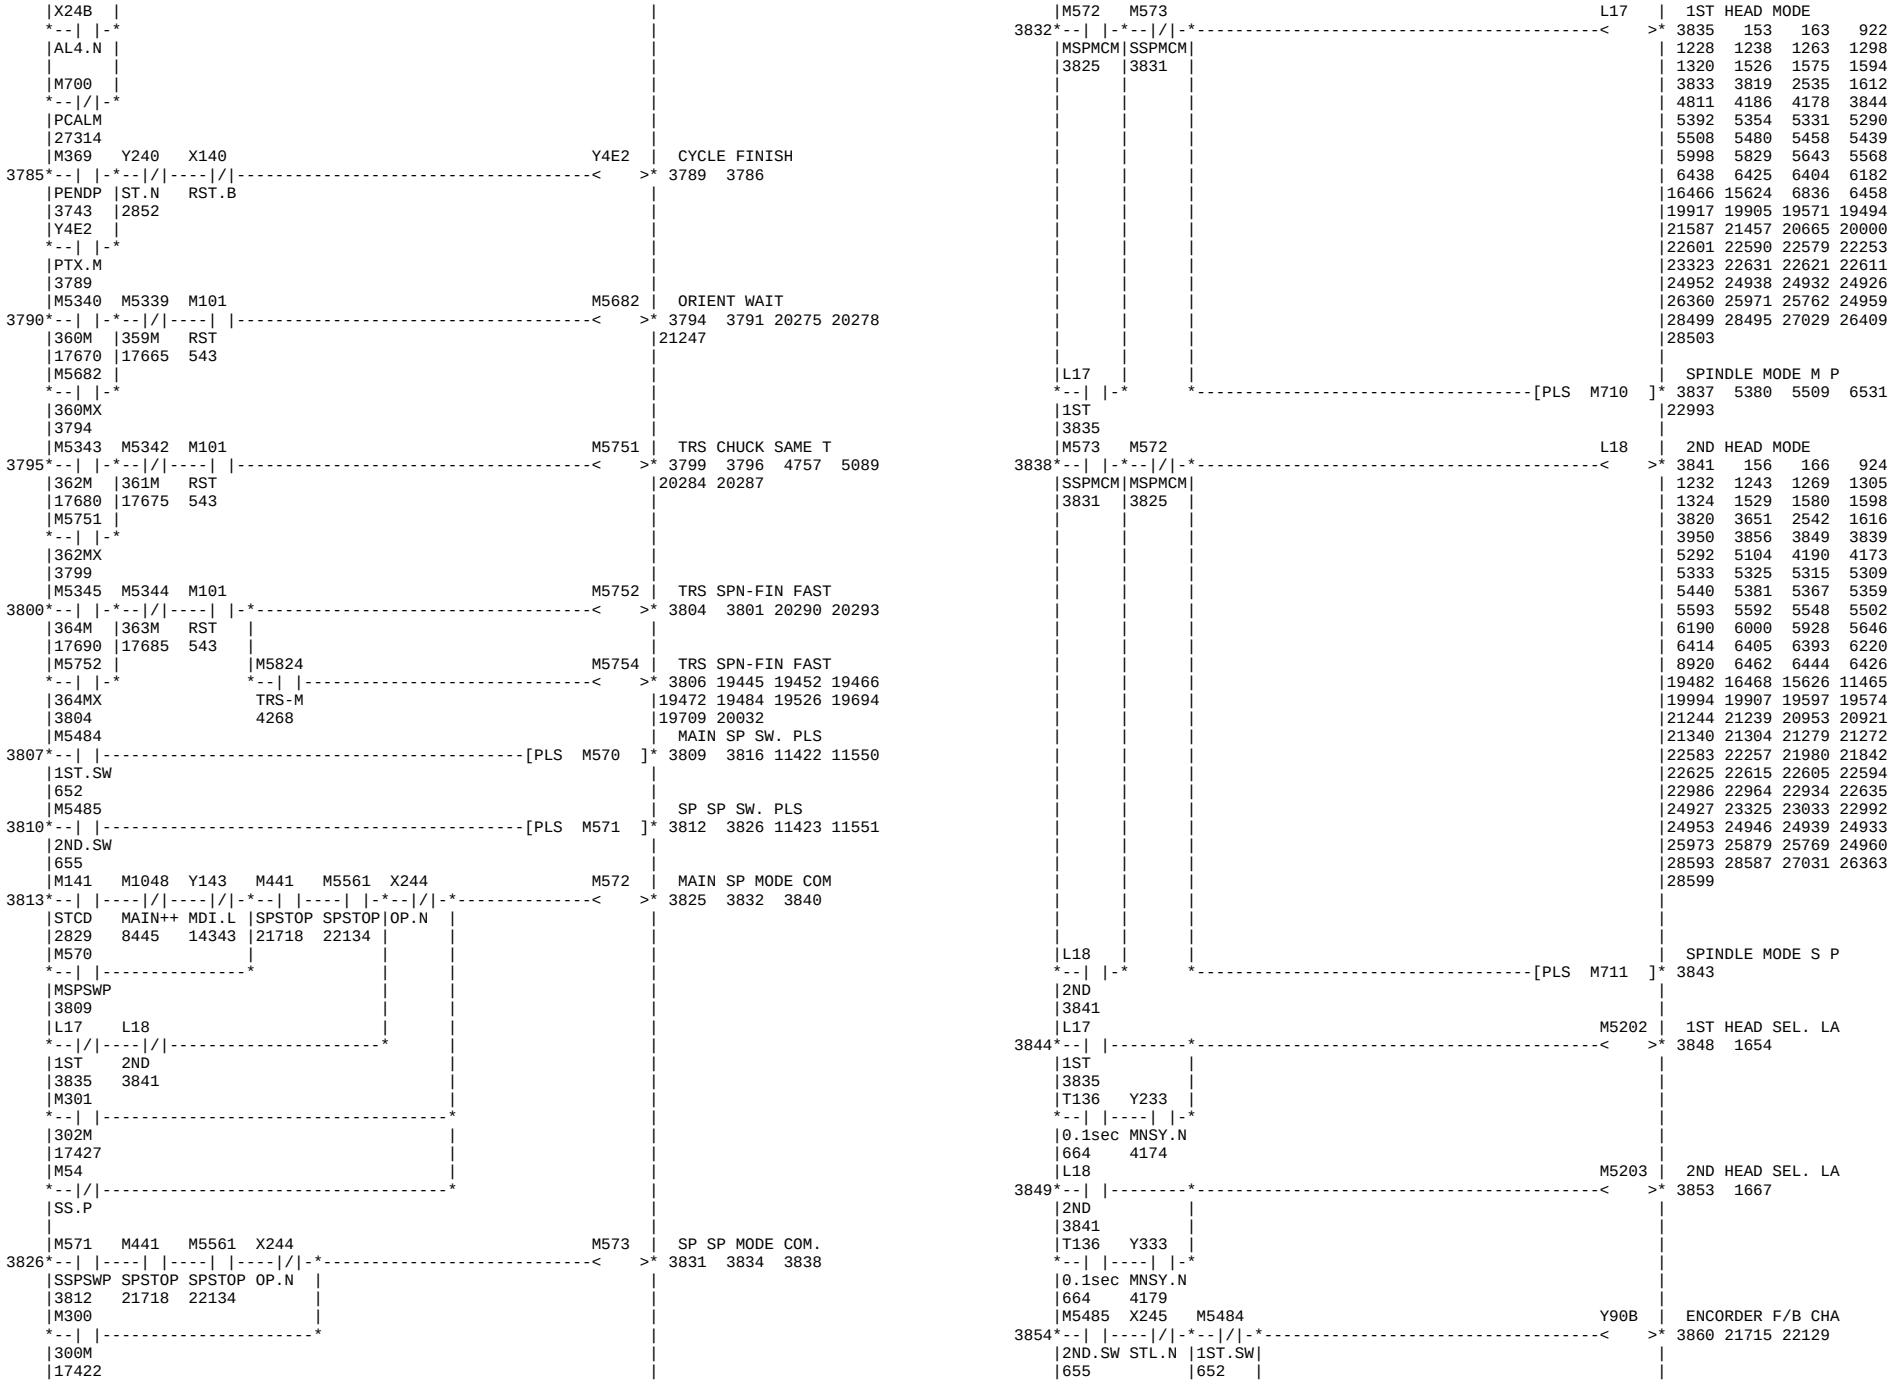

M162
M6467
M945
EXT MES START:M1
K112 D78
EX-MF3
M-CODE EX.MES
3242
3226
M163
M6467
M946
EXT MES END:M113
K113 D78
EX-MF4
M-CODE EX.MES
3234
3226
M1279 M32
CALUCLATE REG.
3294
D78 K100 D930
ON
MC10.P
M-CODE
585
13743
3226
M32
CALUCLATE REG.
D78 K10 D930
MC10.P
M-CODE
13743
3226
M32
D975 K100 D932
MC10.P
R23
13743
CAL. REG.
D975 K10 D932
M158
MXQQ->MX99 M FLA
D930 D932
Ltemp0 Ltemp2
1282 2285
M160
M STROBE DELAY.
3324
T208 K5
EX-MF1
3261
M161
EX-MF2
3251
M162
EX-MF3
3242
M163
EX-MF4
3234
M6424
3332
CJ P110
REC.P
13802
T208
M16
3335
K19 D78
K30 D78
MF.T
M-CODE
3329
3226
M-CODE ROBO.P
3226 13737
M16
K24 D78
M-CODE ROBO.P
3226 13737
X220 X221
M1130
SERVI REQ.STRB
1>
ZP11.N ZP12.N
26215
M6419
MF20 PLS
2>
CFIL.P
PLS M823
M1279
CODE OUT
3356
BCD D78 D172
ON
M-CODE
585
3226
M24 M25
M CODE BCD
3360
MOV D172 D174
MDEC.P MDES.P
CODE#1
13740
3359
3347 3334
3355 7355
3359 3363 3369
3364 3379 3403 3406
EXT MES START:M1
EXT MES END:M113
CALUCLATE REG.
CAL. REG.
MXQQ->MX99 M FLA
M STROBE DELAY.
CODE OUT
M CODE BCD

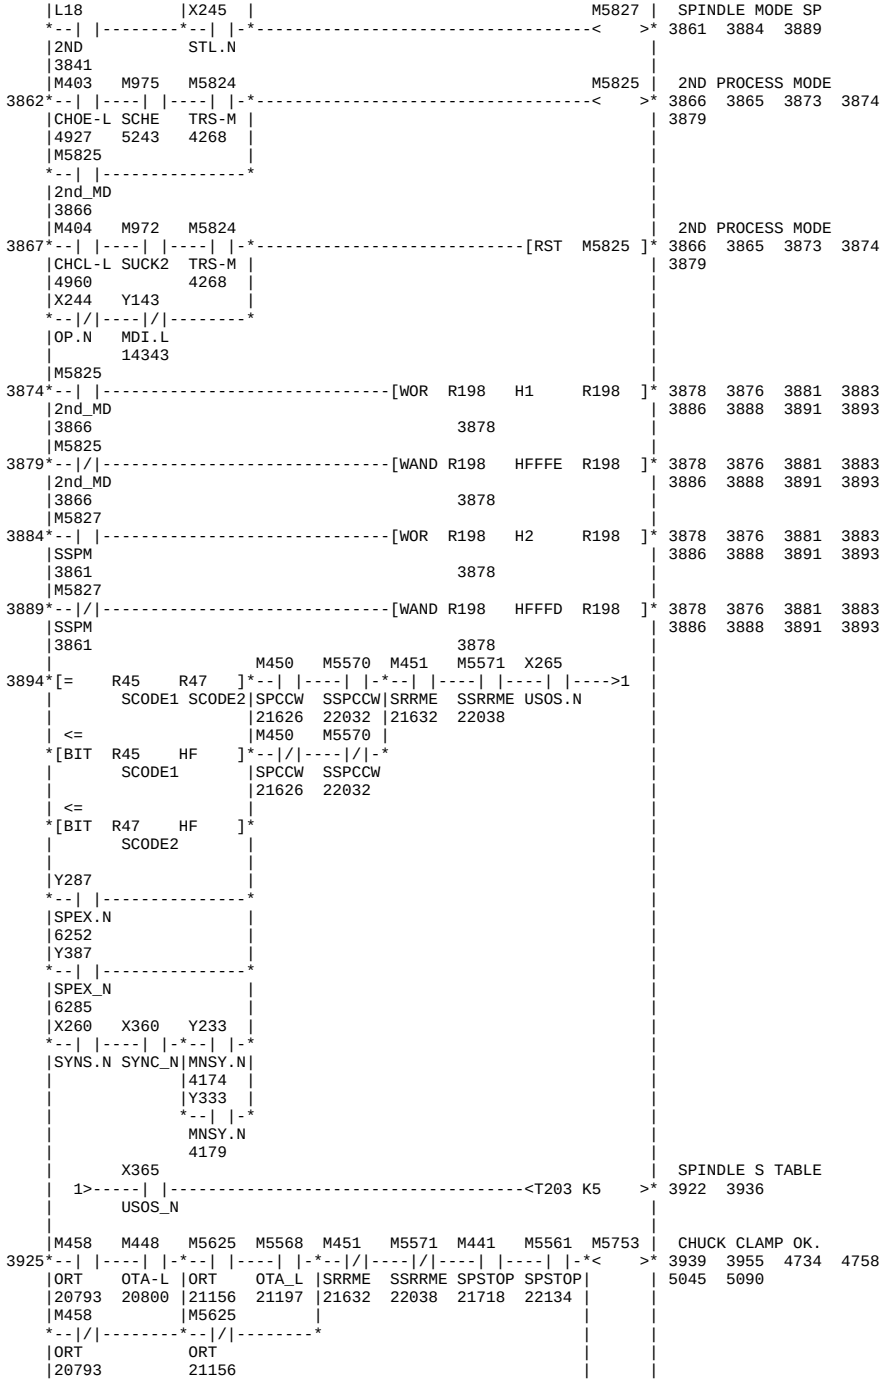

|19250 19240 19227 19218
|19292 19282 19269 19260
|19309 19306 19302
|M24 M32 M158
3365*--| |----| |----| |----------[WAND D172 HF D910]* 3371 3401
|MDEC.P MC10.P MX__ CODE#1
|13740 13743 3323 3359
|M24 M160 M161 M162 M163 | M CODE BCD
3372*--| |----|/|----|/|----|/|----|/|---------[MOV K0 D174]* 3364 3379 3403 3406
|MDEC.P EX-MF1 EX-MF2 EX-MF3 EX-MF4 |19136 19145 19158 19168
|13740 3261 3251 3242 3234 |19177 19186 19199 19209
|19250 19240 19227 19218
|19292 19282 19269 19260
|19309 19306 19302
|M1279 K1 | M-BIT CMND #1
3380*--| |-------------------------------------[MOV M160 D170]* 3383 3385 3396
|ON EX-MF1
|585 3261
M164 | ex fin 1
3384*[= D170 D171]-----------------------------------< >* 3387 3388
| MFO#1
| 3383 3397
|M164 M24 | M Bit or HEX Cha
3388*--|/|-*--| |-*---------------------------------[CALL P135]*19133 3393
ex-fn1	MDEC.P
3387	13740
	M25
--| |-
MDES.P
M1279	OUTPUT MF DATA #
3394*--| |-------------------------------------[MOV D170 D171]* 3397 3386
ON
585 3383
M24 M32	M CODE BCD
3398*--| |----| |----------------------[WOR D910 D911 D174]* 3364 3379 3403 3406
MDEC.P MC10.P	19136 19145 19158 19168
13740 13743 3371 19311	19177 19186 19199 19209
19250 19240 19227 19218
19292 19282 19269 19260
19309 19306 19302
M1279 K4	TEMP. COIL 0 BIT
3404*--| |-------------------------------------[MOV D174 M1200]* 1064 1067 1073 3407
ON BCD#1	3408 7202 7204 7219
585 3364	12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M1200 M16 YB2	M CODE 11->RBT
3408*--| |----| |---< >* 3410
TMP.0B ROBO.P
1064 13737
M1201 M16 YB3	M CODE 12->RBT
3411*--| |----| |---< >* 3413
TMP.1B ROBO.P
1070 13737
M1202 M16 Y903	M CODE 18/DECODE
3414*--| |----| |---< >* 3416
TMP.2B ROBO.P
13391 13737
M1203 M16 Y4F3	M CODE 18
3417*--| |----| |---< >* 3419
TMP.3B ROBO.P
7216 13737
M942 M5127 Y4D5	BAR FEEDER CALL1
3420*--| |----| |---< >* 3422
68M UKBF.P
3275
M1344 M6741 M5163 M100 M6190	Y84 MAGUNUM COOL
3423*--| |----| |----| |----| |-------------------------< >* 3427 3431
HPCL.M HPCMMD HPCM.P RDY
7783 7744 533
M6196 M100 M6192	Y85 MAGNUM COOLA
3428*--| |----| |---< >* 3430 3439
X81MGC RDY
3459 533
M6190 M5163 Y84	HIGH PRESSUE COO
3431*--| |----| |-*---------------------------------------< >* 3438
Y84MGC HPCM.P
3427
M6191 M6427
--| |---| |-*
Y84S&H	SPFL.P
28268	
	M6421
--| |-
HPCL.P
M6192 M5163 Y85	DG IN BIT 0
3439*--| |----| |-*---------------------------------------< >* 3446
Y85MGC HPCM.P
3430
M6193 M6427
--| |---| |-*
Y85S&H	SPFL.P
28273	
	M6421
--| |-
HPCL.P
X80 M5163 M6194	X80 MAGNUM COOLA
3447*--| |-*--| |---< >* 3450 7743 26115
THRTRP	HPCM.P
|M6427 M6195	X80 SPR FLW I/F
--| |----------------------------------------< >* 3455 28131
	SPFL.P
	M6421
--| |-
HPCL.P

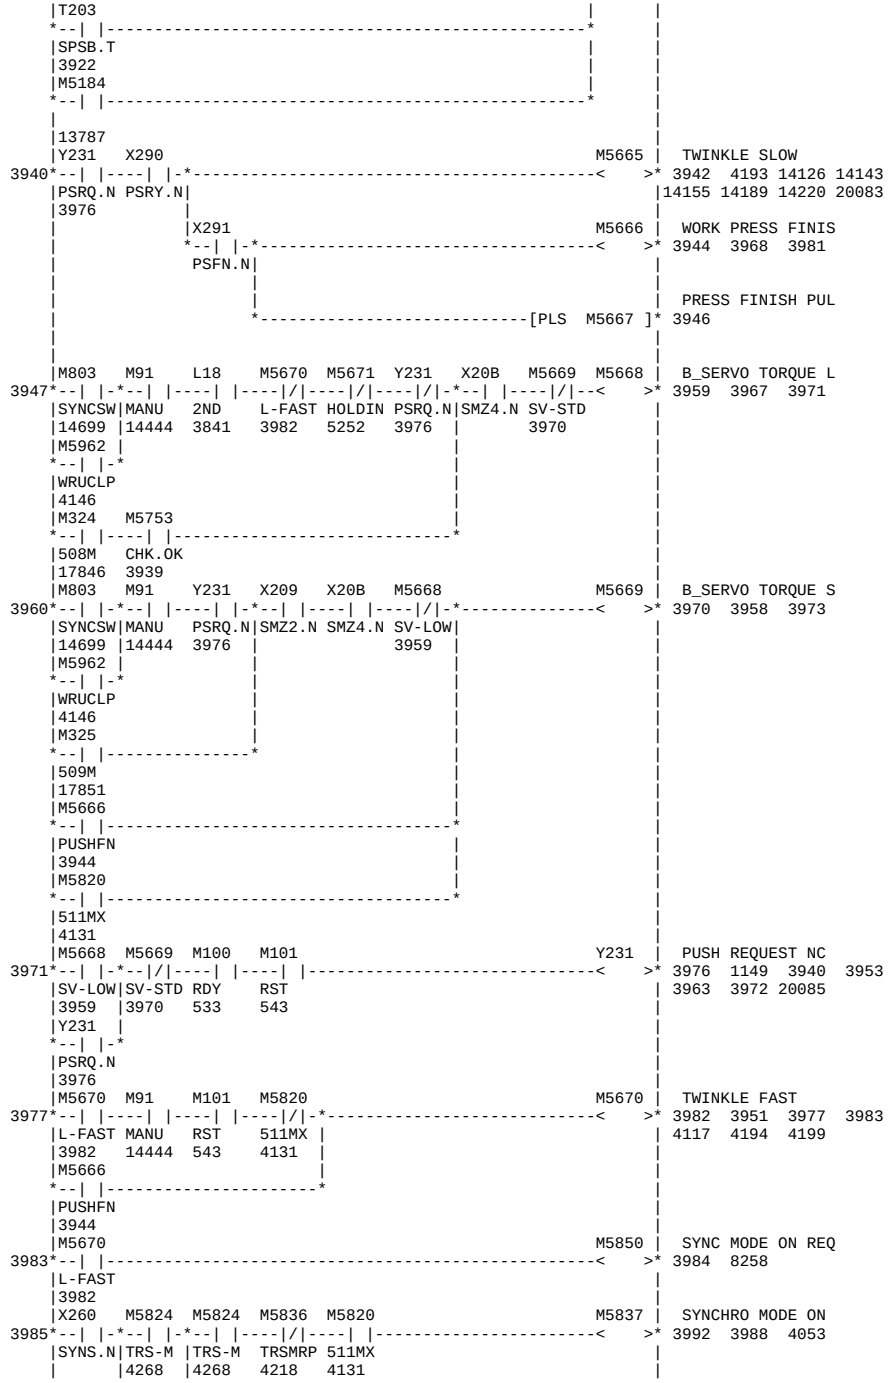

X81 M5163 M6196 X81 MAGNUM COOLA
3456 3459 3428 26116
CSYSAL HPCM.P
M6427 M6197 X81 SPR FLW I/F
SPFL.P 3464 28149
M6421
HPCL.P
M1206 M32 M5127 M5135 M49 Y99 HEAD AIR CURTAI
3465 3489
TMP.6B MC10.P UKBF.P CBF.P C.P
13406 13743
M24 M32
MDEC.P MC10.P
13740 13743
M1202 M24 M5127
TMP.2B MDEC.P UKBF.P
13391 13740
M1206 M24
TMP.6B MDEC.P
13406 13740
M1279
ON
585
M758 M5135
703M.M CBF.P
11890
M111 M49
M-MODE C.P
5341
M7079
LUBTIM
2207
M6183 M66 Y82 MIST COLECTOR ON
3490 3493
MTCLMO MSCL.P
3509
L22 M7839 MACHINE MENU 17
3494
MTCTON
3501
M6180 L22 M5428 L22 MIST COLLECT ON
3495 3501 3491 3496 3498
MTCLON MTCTON 399M 28425
14871 3501 17780
M6180 L22
MTCLON MTCTON
14871 3501
M5427 X140 M5428 M100 M6180 M90 M6183 MIST COLLECT MT
3502 3509 3490 3503 20395
398M RST.B 399M RDY MTCLON AUTO 20398 28424
17775 17780 533 14871 14419
M6183
MTCLMO
3509
M5446 M5447 M369 M100 M101 M5162 M478 MIST COOLANT SW.
3510 3517 3511 3518
640M 641M PENDP RDY RST MSTCLT
17786 17791 3743 533 543
M478
MSTCOL
3517
M478 M130 M1410 M360 M502 M494 M90 Y83 MIST COOLANT(SP)
3518 3525 20401 20404
MSTCOL CLA:L AUT&DR OSPMEM TDIL MESON AUTO
3517 7662 2439 3579 8169 8032 14419
M168 M158 X23F T208 M24 M1131 Y11 OUT(NOT R70-
3526 3544 3545
M-IN MX__ DEN2.N MF.T MDEC.P
3323 3329 13740
M24 M25 M24 M32
MDEC.P MDES.P MDEC.P MC10.P
13740 13743
M24 M32
MDEC.P MC10.P
13740 13743
M169 M24
CODE MDEC.P
13740
M1131 Y901 M FUNCTION STROB
3545 3546 2443
Y11
3544
P110 M942 M5127 X16 M5134 M5925 BAR FEEDER CAL F
3547 3558 3562
68M UKBF.P SPJOG IB68.P
3275
M5127 XA3
UKBF.P TOP_C1
M943 M6530
69M 6MFN
3281 9234
XB0 M16
Mfin
3559 3565 8678 8690 8708
Mfin.R ROBO.P 8720 8738 8750 8768
13737 8780
M3300 M703 EXT. M CODE FIN
3566 3227 3235 3244
MFIN.R 3254
24711
M5925
BFCFN
3558
XA5
SPINCH
P10 M201 M133 Y143 M143 M360 OPTIONAL STOP ME
3567 3579 2849 3521 3572
1M OPS:L MDI.L SX 3575 3612 3746 3774
16841 15313 14343 2862 6056 7726 7813 7842
22347 22007 21614 7874
28261
M200 M360 OPTIONAL MEM. PL
0M OSPMEM 3581 6048
16536 3579
M139 M360 X244 M142 M362 SINGLE STEP ON
3585 3583 3597 9190
RTNOK OSPMEM OP.N SST 19427 19430
2855 3579 2842
M366 M362
OSPX SBKON
3617 3585
Y242 M920 SINGLE BLOCK ON
3586 3587 19428 19431
SBK.N
9193

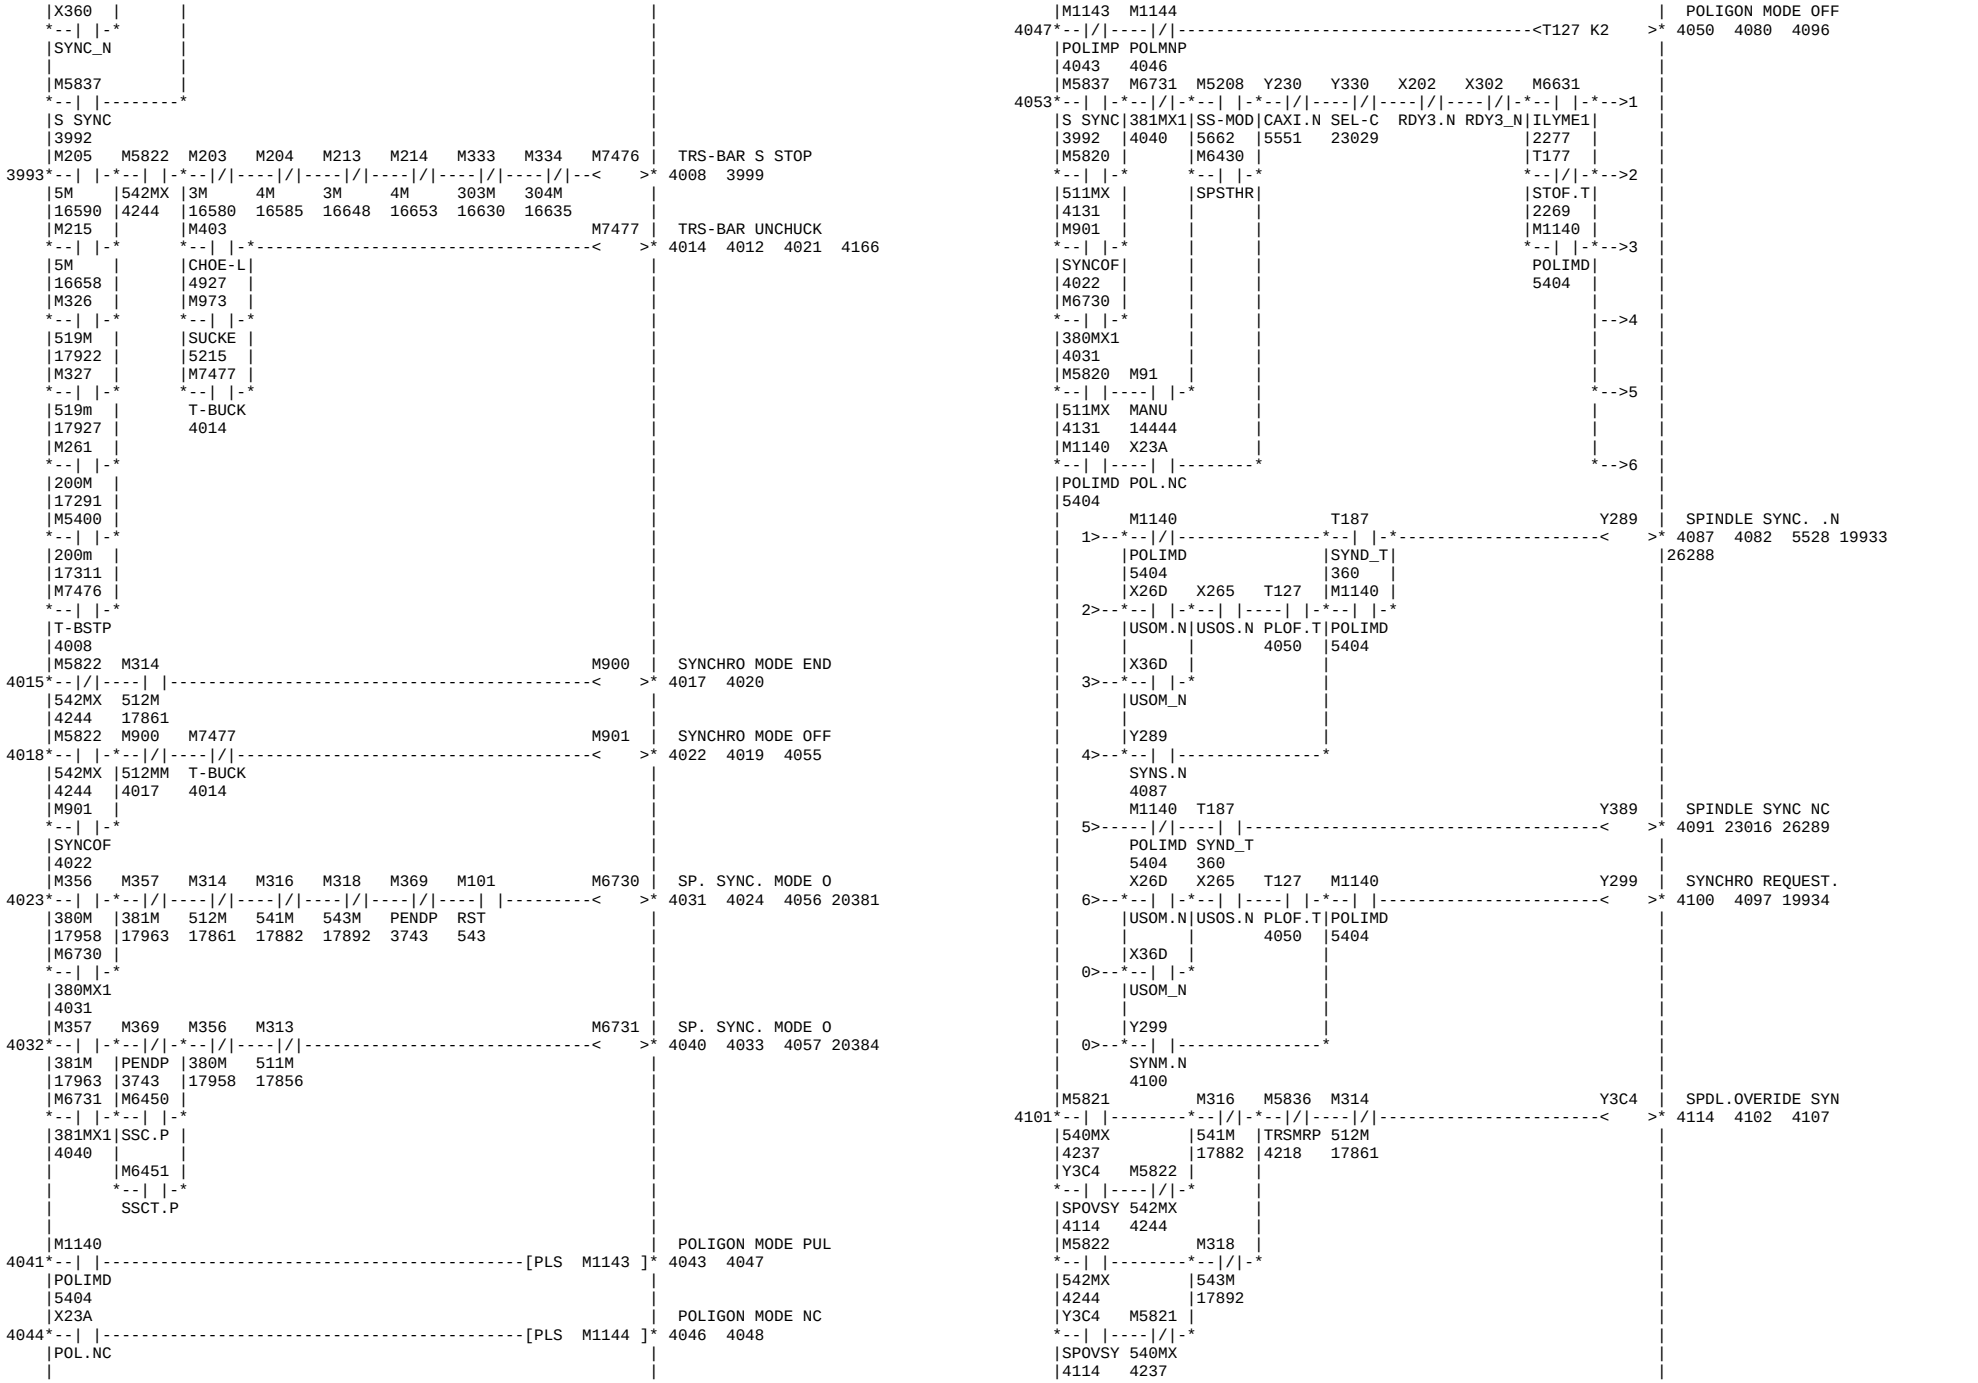

Y143 M143 X245
SBK. STOP .T
3588 3594 3589 3599
MDI.L SX STL.N
14343 2862
T144
SBKS.T
3594
X244
OP.N
M362 Y242 T144 Y143 M143 X245 M363
SPINDLE STOP
3597 3608 3601 3603 3609
SBKON SBK.N SBKS.T MDI.L SX STL.N
3585 9193 3594 14343 2862
M137 M363
MANUI SPSTOP
2640 3608
M363 X244
SPSTOP OP.N
3608
M363 M475 M360 M364
OPTIONAL STOP
3609 3613 2636 2918 3611
SPSTOP SSOP OSPMEM 9392
3608 5677 3579
M364
OSPA PULSE
3615 3616
OSPA
3613
M365 M366
OPTIONAL STOP MO
3617 2843 2848 3571
OSPAP
3618 3749 21564 21612
3615
21956 22005 22315 22345
25990 25087
M366 M142 M367
AXIS INTERLOCK
3618 3624 2846 3631 21571
OSPX SST
3617 2842
M137
MANUI
2640
M435
SPRUNM
21554
M5555
SSPRNM
21947
M5593
MLRUNM
22305
21963 22322
M476 M367 M368
START OK
3625 3634 3632 3635 9050
SLFRME AXIL
21561 3624
M435 M368
9088 9102
SPRUNM RTNOK
21554 3634
M5596
SFSRME
21953
M5555
SSPRNM
21947
M5594
SELFRM
22312
M5593
MLRUNM
22305
M368 M5160 Y244
CUTTING INTLCK.N
3635 3682
RTNOK STAN.P
3634 13778
X496 M6448 M5160 Y344
3683
TCL.LS J2TR.P STAN.P
13812 13778
X10 M6448
TCL.LS J2TR.P
13812
M7169
YPOS.C
24297
M5628 M5629 M6451 M6450 L18 M111
SSCL.M SS=CL SSCT.P SSC.P 2ND M-MODE
21288 21292 3841 5341
M5625 M5568
ORT OTA_L
21156 21197
Y290 M5604 M924
SRNM.N MLSTE DL:0
6407 22449 7926
Y291 M5229
SRIM.N M_US
6428 295
M5599
TRR
22352
Y280 M440 M924
SRNS.N SPSTE DL:0
6385 21701 7926
Y281 X2DF X232 X265
SRIS.N TAP.N USOS.N
6387
Y380 M5560
SRN.N SPSSTE
22060 22114
Y381 X3DF X332 X365
SRI.N TAP_N USOS_N
22057
X140 T31 Y238
RST.B.NC
3684 3687 3685 3722
RST.B RSTSWK
3689
Y238
SP ORIENT T
3689 3686
RSTB.N
3687
M202 Y239
M02.M03.RST.NC
3692 3694
2M
16847
M220
30M
16916

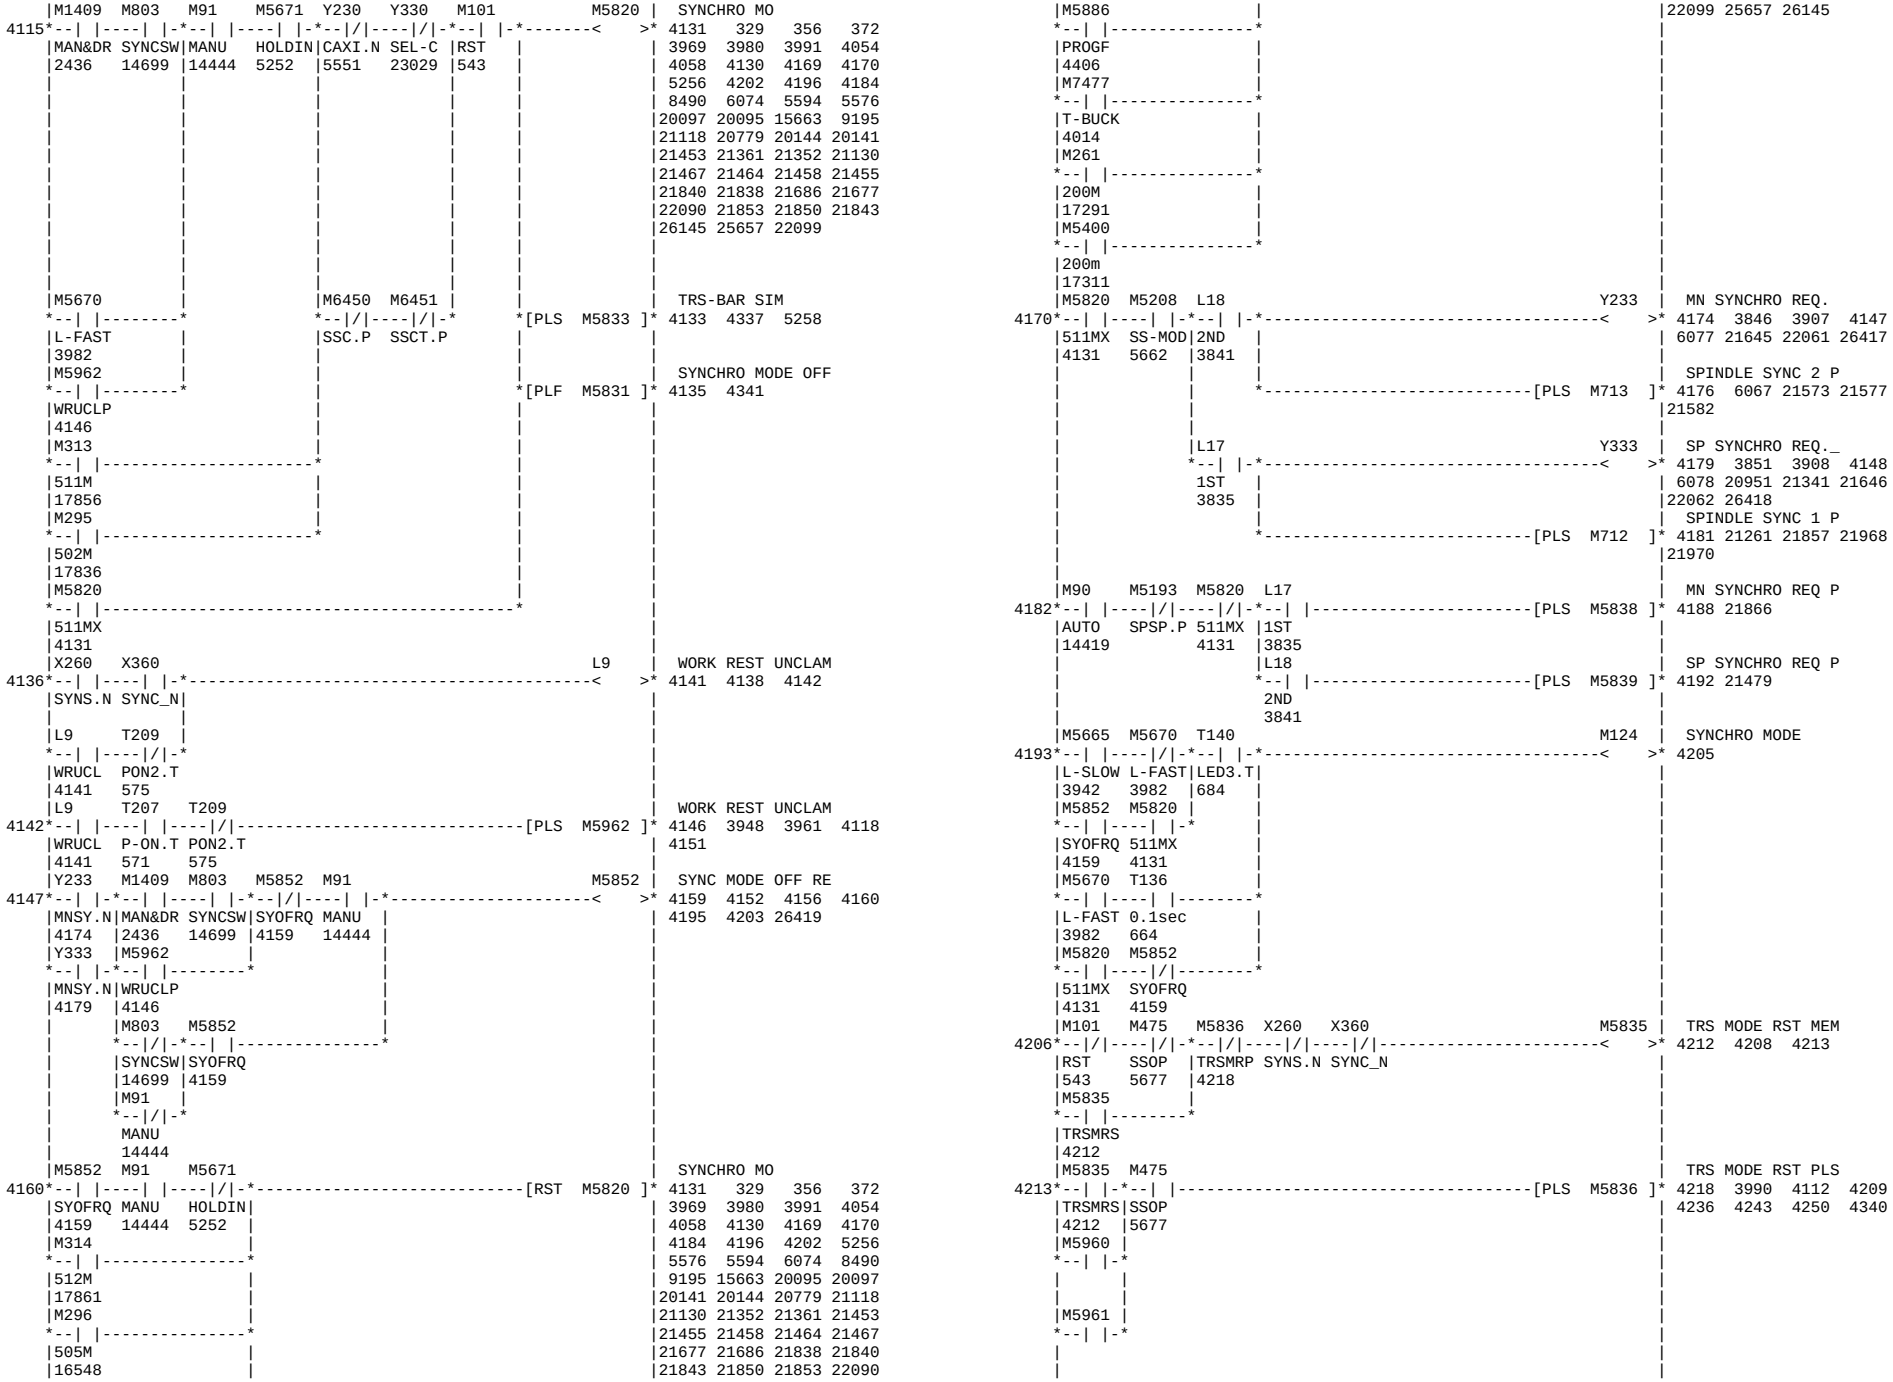

M202 M475 X23F Y245 M02 RESET .NC
3695 3698
2M SSOP DEN2.N
16847 5677
Y345 M02 RESET _NC
3699
M8154 M220 X23F M475 Y246 RESET & REWIND .
3700 3733 8522
SCMD.N 30M DEN2.N SSOP
16916 5677
M6470 Y346 RESET & REWIND _
3734
BFSC.P
M8154 M6470 M6803
SCMD.N BFSC.P RSTCNT
12038
M6811
NC_RST
12113
X140
RST.B
M546 X244
NC-RST OP.N
24123
X1A
EXTRET
XB1 M16
RST.R ROBO.P
13737
M3301
GLRST1
24713
M565
WSTM
8375
M1077
RST.D
12250
Y238
RSTB.N
3687
X479 M351 M6401
BCD14 701M BARS.P
17933
M1292
PFN.M
M6453 M108 M6 XA1
MCBF_P BF BF.P SP_IL
11722
M220 M475 M90 M88 M386 PROGRAM END
3735 3740 3747
30M SSOP AUTO SIMUOF
16916 5677 14419 15544
M202 M981 PROGRAM END PULS
2M SIM-MD 4029 4034 7695 7793
16847 1138 7810 7839 24697 28255
T136 M88 M360 M1310 PROBRAM END .B
3744 3750 16459
0.1sec SIMUOF OSPMEM
664 15544 3579
M386
PEND
3740
X29A
PEND.N
M366
OSPX
3617
M369 M5951 M90 X140 M141 M370 CYCLE FINISH
3751 3772 1760 3753 3775
PENDP MF20M AUTO RST.B STCD 7402 12669
3743 24482 14419 2829
M370
PT
3772
X1A
EXTRET
XB1 M16
RST.R ROBO.P
13737
M3301
GLRST1
24713
M3338
APOF.R
24767
M108 M5127 XA1
BF UKBF.P SP_IL
11722
X479 M6401
BCD14 BARS.P
X47C
BCD22
M1292
PFN.M
M39 M360 Y10 CYCLE FINISH YE
3773 3778 271 7977
OSPT.P OSPMEM
3579
M370 M622
PT 348MX
3772 7536
X248 YF ALARM RED
3779 3784 7971
AL1.N
X249
AL2.N
X24A
AL3.N

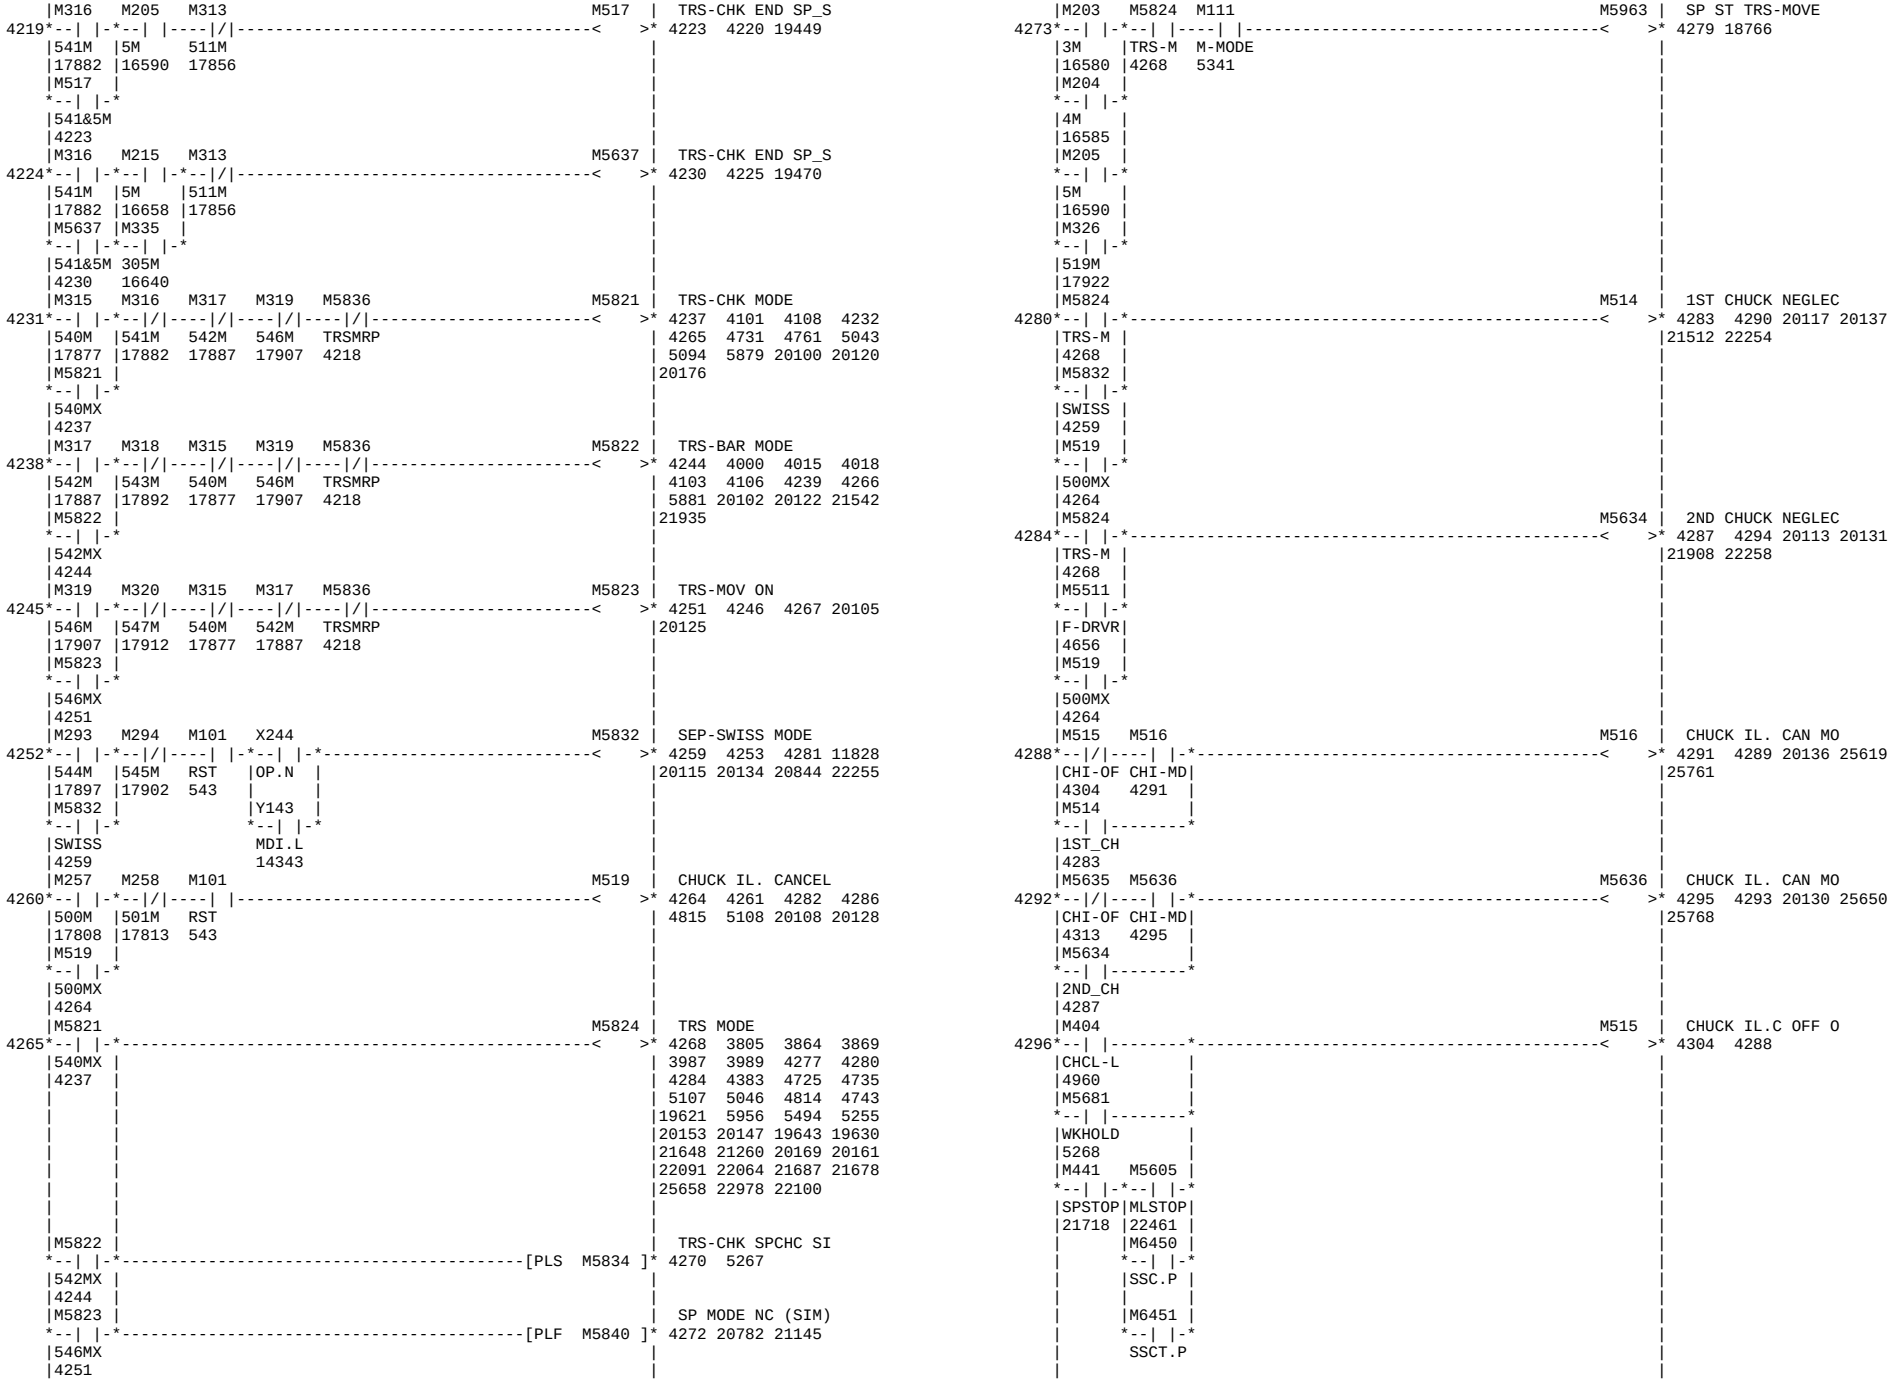

|X24B |
--| |-
|AL4.N |
| |
|M700 |
--|/|-
|PCALM
|27314
|M369 Y240 X140 Y4E2 | CYCLE FINISH
3785*--| |-*--|/|----|/|-----------------------------------< >* 3789 3786
|PENDP |ST.N RST.B
|3743 |2852
|Y4E2 |
--| |-
|PTX.M
|3789
|M5340 M5339 M101 M5682 | ORIENT WAIT
3790*--| |-*--|/|----| |-----------------------------------< >* 3794 3791 20275 20278
|360M |359M RST |21247
|17670 |17665 543
|M5682 |
--| |-
|360MX
|3794
|M5343 M5342 M101 M5751 | TRS CHUCK SAME T
3795*--| |-*--|/|----| |-----------------------------------< >* 3799 3796 4757 5089
|362M |361M RST |20284 20287
|17680 |17675 543
|M5751 |
--| |-
|362MX
|3799
|M5345 M5344 M101 M5752 | TRS SPN-FIN FAST
3800*--| |-*--|/|----| |-*---------------------------------< >* 3804 3801 20290 20293
|364M |363M RST |
|17690 |17685 543 |
|M5752 | |M5824 M5754 | TRS SPN-FIN FAST
--| |- *--| |-------------------------------< >* 3806 19445 19452 19466
|364MX TRS-M |19472 19484 19526 19694
|3804 4268 |19709 20032
|M5484 | MAIN SP SW. PLS
3807*--| |---[PLS M570]* 3809 3816 11422 11550
|1ST.SW
|652
|M5485 | SP SP SW. PLS
3810*--| |---[PLS M571]* 3812 3826 11423 11551
|2ND.SW
|655
|M141 M1048 Y143 M441 M5561 X244 M572 | MAIN SP MODE COM
3813*--| |----|/|----|/|-*--| |----| |-*--|/|-*-------------< >* 3825 3832 3840
STCD MAIN++ MDI.L	SPSTOP SPSTOP	OP.N
2829 8445 14343	21718 22134		
M570			
--| |---------------		
MSPSWP		
3809		
L17 L18		
--|/|----|/|----------------------	
1ST 2ND	
3835 3841	
M301	
*--		-------------------------------------*
302M	
17427	
M54	
*--	/	-------------------------------------*
SS.P
M571 M441 M5561 X244 M573	SP SP MODE COM.
3826*--| |----| |----| |----|/|-*---------------------------< >* 3831 3834 3838
SSPSWP SPSTOP SPSTOP OP.N
3812 21718 22134	
M300	
*--		----------------------*
300M
17422
M572 M573 L17	1ST HEAD MODE
3832*--| |-*--|/|-*---< >* 3835 153 163 922
MSPMCM	SSPMCM		1228 1238 1263 1298
3825	3831		1320 1526 1575 1594
			3833 3819 2535 1612
			4811 4186 4178 3844
			5392 5354 5331 5290
			5508 5480 5458 5439
			5998 5829 5643 5568
			6438 6425 6404 6182
			16466 15624 6836 6458
			19917 19905 19571 19494
			21587 21457 20665 20000
			22601 22590 22579 22253
			23323 22631 22621 22611
			24952 24938 24932 24926
			26360 25971 25762 24959
			28499 28495 27029 26409
			28503
L17			SPINDLE MODE M P
--| |- *----------------------------------[PLS M710]* 3837 5380 5509 6531
1ST	22993
3835
M573 M572 L18	2ND HEAD MODE
3838*--| |-*--|/|-*---< >* 3841 156 166 924
SSPMCM	MSPMCM		1232 1243 1269 1305
3831	3825		1324 1529 1580 1598
			3820 3651 2542 1616
			3950 3856 3849 3839
			5292 5104 4190 4173
			5333 5325 5315 5309
			5440 5381 5367 5359
			5593 5592 5548 5502
			6190 6000 5928 5646
			6414 6405 6393 6220
			8920 6462 6444 6426
			19482 16468 15626 11465
			19994 19907 19597 19574
			21244 21239 20953 20921
			21340 21304 21279 21272
			22583 22257 21980 21842
			22625 22615 22605 22594
			22986 22964 22934 22635
			24927 23325 23033 22992
			24953 24946 24939 24933
			25973 25879 25769 24960
			28593 28587 27031 26363
			28599
L18			SPINDLE MODE S P
--| |- *----------------------------------[PLS M711]* 3843
2ND
3841
L17 M5202	1ST HEAD SEL. LA
3844*--| |--------*---< >* 3848 1654
1ST	
3835	
T136 Y233	
*--		----		-*
0.1sec MNSY.N
664 4174
L18 M5203	2ND HEAD SEL. LA
3849*--| |--------*---< >* 3853 1667
2ND	
3841	
T136 Y333	
*--		----		-*
0.1sec MNSY.N
664 4179
M5485 X245 M5484 Y90B	ENCORDER F/B CHA
3854*--| |----|/|-*--|/|-*-----------------------------------< >* 3860 21715 22129
2ND.SW STL.N	1ST.SW	
655	652	

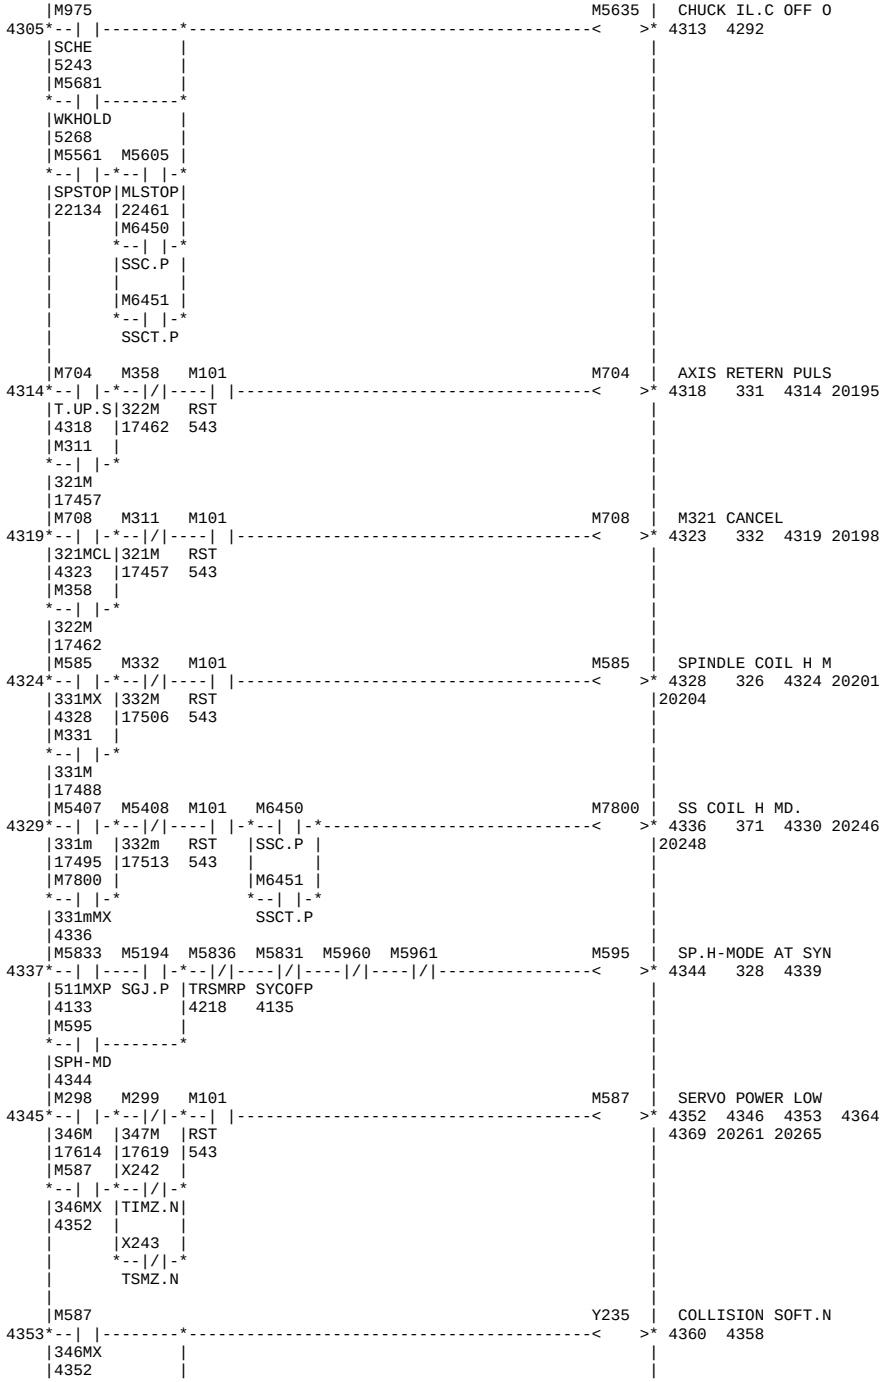

L18 X245 M5827 SPINDLE MODE SP
2ND STL.N
M403 M975 M5824 M5825 2ND PROCESS MODE
CHOE-L SCHE TRS-M
4927 5243 4268
M5825
2nd_MD
M404 M972 M5824 2ND PROCESS MODE
CHCL-L SUCK2 TRS-M
4960 4268
X244 Y143
OP.N MDI.L
14343
M5825
2nd_MD
2nd_MD
M5825
2nd_MD
M5827
SSPM
SSPM
M450 M5570 M451 M5571 X265
SCODE1 SCODE2
SPCCW SSPCW
SCODE1
SCODE2
Y287
SPEX.N
Y387
SPEX_N
X260 X360 Y233
SYNS.N SYNC_N
MNSY.N
MNSY.N
X365 SPINDLE S TABLE
USOS_N
M458 M448 M5625 M5568 M451 M5571 M441 M5561 M5753 CHUCK CLAMP OK.
ORT OTA-L
20793 20800
M458
ORT
20793


T203
SPSB.T
M5184
13787
Y231 X290 M5665 TWINKLE SLOW
PSRQ.N PSRY.N
Y231 X291 M5666 WORK PRESS FINIS
PSFN.N
PRESS FINISH PUL
M803 M91 L18 M5670 M5671 Y231 X20B M5669 M5668 B_SERVO TORQUE L
SYNCSW MANU 2ND L-FAST HOLDIN PSRQ.N SMZ4.N SV-STD
WRUCLP
M324 M5753
508M CHK.OK
M803 M91 Y231 X209 X20B M5668 M5669 B_SERVO TORQUE S
SYNCSW MANU PSRQ.N SMZ2.N SMZ4.N SV-LOW
WRUCLP
509M
PUSHFN
511MX
M5668 M5669 M100 M101 Y231 PUSH REQUEST NC
SV-LOW SV-STD RDY RST
PSRQ.N
M5670 M91 M101 M5820 M5670 TWINKLE FAST
L-FAST MANU RST 511MX
PUSHFN
M5670 M5850 SYNC MODE ON REQ
L-FAST
X260 M5824 M5824 M5836 M5820 M5837 SYNCHRO MODE ON
SYNS.N TRS-M TRS-M TRSMRP 511MX

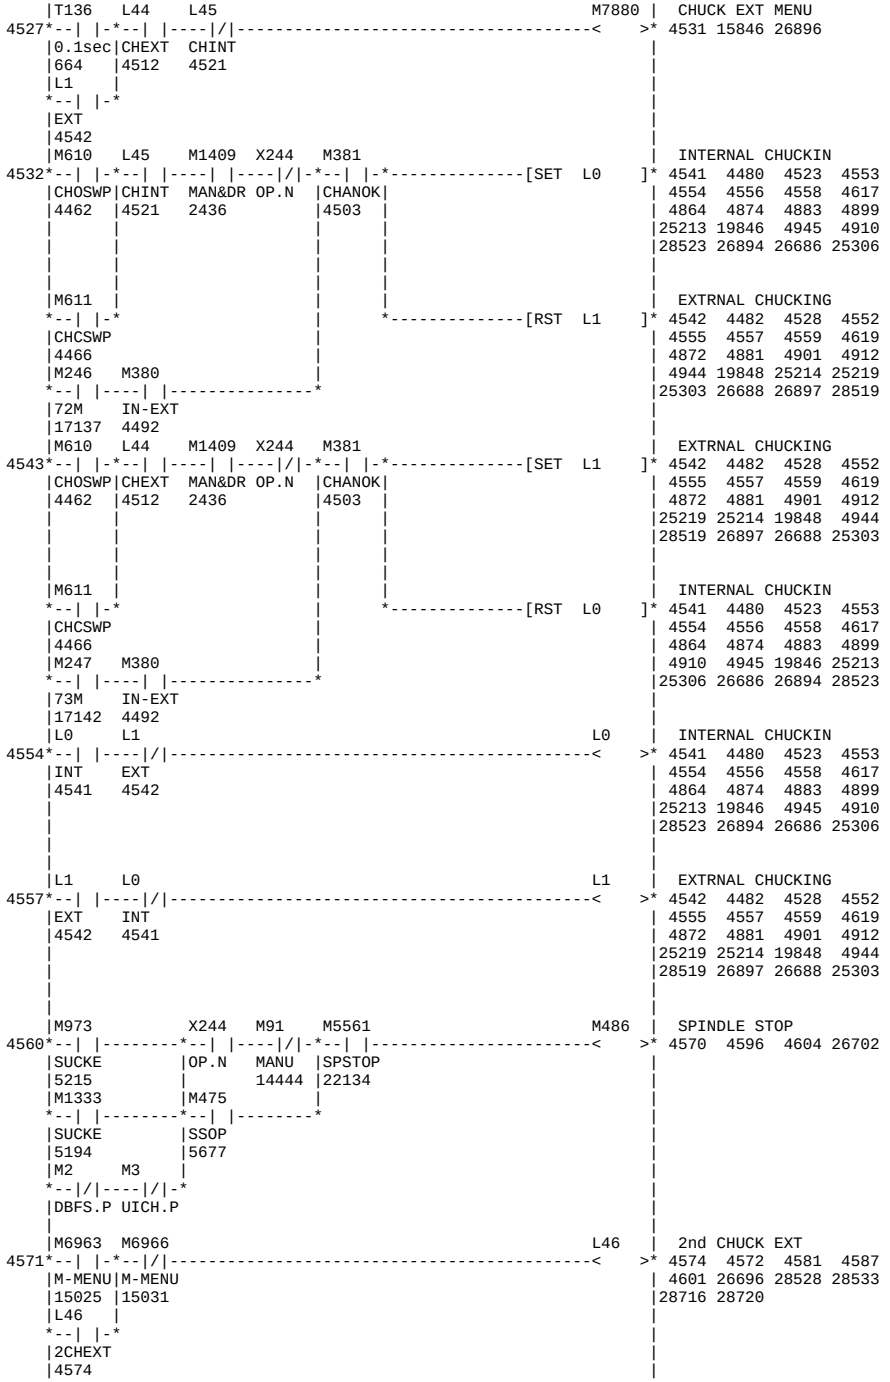

X360
SYNC_N
M5837
S SYNC
3992
M205 M5822 M203 M204 M213 M214 M333 M334 M7476
TRS-BAR S STOP
3993 4008 3999
5M 542MX 3M 4M 3M 4M 303M 304M
16590 4244 16580 16585 16648 16653 16630 16635
M215 M403 M7477
TRS-BAR UNCHUCK
4014 4012 4021 4166
5M CHOE-L
16658 4927
M326 M973
519M SUCKE
17922 5215
M327 M7477
519m T-BUCK
17927 4014
M261
200M
17291
M5400
200m
17311
M7476
T-BSTP
4008
M5822 M314 M900
SYNCHRO MODE END
4015 4017 4020
542MX 512M
4244 17861
M5822 M900 M7477 M901
SYNCHRO MODE OFF
4018 4022 4019 4055
542MX 512MM T-BUCK
4244 4017 4014
M901
SYNCOF
4022
M356 M357 M314 M316 M318 M369 M101 M6730
SP. SYNC. MODE O
4023 4031 4024 4056 20381
380M 381M 512M 541M 543M PENDP RST
17958 17963 17861 17882 17892 3743 543
M6730
380MX1
4031
M357 M369 M356 M313 M6731
SP. SYNC. MODE O
4032 4040 4033 4057 20384
381M PENDP 380M 511M
17963 3743 17958 17856
M6731 M6450
381MX1 SSC.P
4040
M6451
SSCT.P
M1140
POLIGON MODE PUL
4041 4043 4047
POLIMD
5404
X23A
POLIGON MODE NC
4044 4046 4048
POL.NC
M1143 M1144
POLIGON MODE OFF
4047 4050 4080 4096
POLIMP POLMNP
4043 4046
M5837 M6731 M5208 Y230 Y330 X202 X302 M6631
4053
S SYNC 381MX1 SS-MOD CAXI.N SEL-C RDY3.N RDY3_N ILYME1
3992 4040 5662 5551 23029 2277
M5820 M6430 T177
511MX SPSTHR STOF.T
4131 2269
M901 M1140
SYNCOF POLIMD
4022 5404
M6730
380MX1
4031
M5820 M91
511MX MANU
4131 14444
M1140 X23A
POLIMD POL.NC
5404
M1140 T187 Y289
SPINDLE SYNC. .N
4087 4082 5528 19933
26288
POLIMD SYND_T
5404 360
X26D X265 T127 M1140
USOM.N USOS.N PLOF.T POLIMD
4050 5404
X36D
USOM_N
Y289
SYNS.N
4087
M1140 T187 Y389
SPINDLE SYNC NC
4091 23016 26289
POLIMD SYND_T
5404 360
X26D X265 T127 M1140 Y299
SYNCHRO REQUEST.
4100 4097 19934
USOM.N USOS.N PLOF.T POLIMD
4050 5404
X36D
USOM_N
Y299
SYNM.N
4100
M5821 M316 M5836 M314 Y3C4
SPDL.OVERIDE SYN
4101 4114 4102 4107
540MX 541M TRSMRP 512M
4237 17882 4218 17861
Y3C4 M5822
SPOVSY 542MX
4114 4244
M5822 M318
542MX 543M
4244 17892
Y3C4 M5821
SPOVSY 540MX
4114 4237

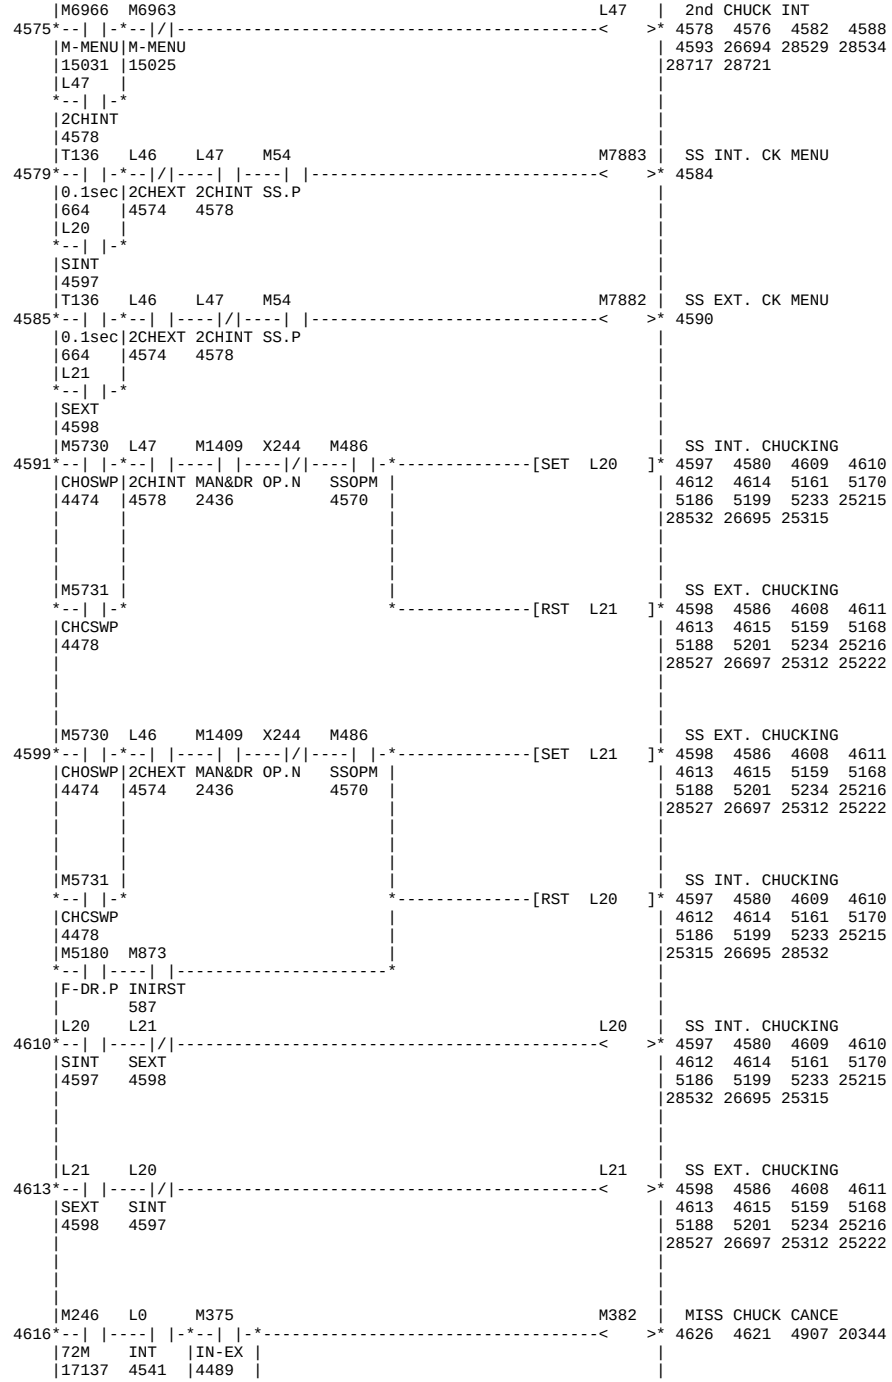

M1409 M803 M91 M5671 Y230 Y330 M101 M5820
SYNCHRO MO
4115 4131 329 356 372
MAN&DR SYNCSW MANU HOLDIN CAXI.N SEL-C RST
2436 14699 14444 5252 5551 23029 543
3969 3980 3991 4054
4058 4130 4169 4170
5256 4202 4196 4184
8490 6074 5594 5576
20097 20095 15663 9195
21118 20779 20144 20141
21453 21361 21352 21130
21467 21464 21458 21455
21840 21838 21686 21677
22090 21853 21850 21843
26145 25657 22099
M5670
TRS-BAR SIM
M6450 M6451
SSC.P SSCT.P
4133 4337 5258
L-FAST
3982
M5962
SYNCHRO MODE OFF
PLF M5831
4135 4341
WRUCLP
4146
M313
511M
17856
M295
502M
17836
M5820
511MX
4131
X260 X360 L9
WORK REST UNCLAM
4136 4141 4138 4142
SYNS.N SYNC_N
L9 T209
WRUCL PON2.T
4141 575
L9 T207 T209
WORK REST UNCLAM
4142 4146 3948 3961 4118
WRUCL P-ON.T PON2.T
4151
4141 571 575
Y233 M1409 M803 M5852 M91 M5852
SYNC MODE OFF RE
4147 4159 4152 4156 4160
MNSY.N MAN&DR SYNCSW SYOFRQ MANU
4195 4203 26419
4174 2436 14699 4159 14444
Y333 M5962
MNSY.N WRUCLP
4179 4146
M803 M5852
SYNCSW SYOFRQ
14699 4159
M91
MANU
14444
M5852 M91 M5671
SYNCHRO MO
4160 4131 329 356 372
SYOFRQ MANU HOLDIN
3969 3980 3991 4054
4159 14444 5252
4058 4130 4169 4170
M314
4184 4196 4202 5256
5576 5594 6074 8490
512M
9195 15663 20095 20097
17861
20141 20144 20779 21118
M296
21130 21352 21361 21453
505M
21455 21458 21464 21467
16548
21677 21686 21838 21840
21843 21850 21853 22090
M5886
22099 25657 26145
PROGF
4406
M7477
T-BUCK
4014
M261
200M
17291
M5400
200m
17311
M5820 M5208 L18 Y233
MN SYNCHRO REQ.
4170 4174 3846 3907 4147
511MX SS-MOD 2ND
6077 21645 22061 26417
4131 5662 3841
SPINDLE SYNC 2 P
PLS M713
4176 6067 21573 21577
21582
L17 Y333
SP SYNCHRO REQ._
4179 3851 3908 4148
1ST
6078 20951 21341 21646
3835
22062 26418
SPINDLE SYNC 1 P
PLS M712
4181 21261 21857 21968
21970
M90 M5193 M5820 L17
MN SYNCHRO REQ P
4182 4188 21866
AUTO SPSP.P 511MX 1ST
14419 4131 3835
L18
SP SYNCHRO REQ P
PLS M5839
4192 21479
2ND
3841
M5665 M5670 T140 M124
SYNCHRO MODE
4193 4205
L-SLOW L-FAST LED3.T
3942 3982 684
M5852 M5820
SYOFRQ 511MX
4159 4131
M5670 T136
L-FAST 0.1sec
3982 664
M5820 M5852
511MX SYOFRQ
4131 4159
M101 M475 M5836 X260 X360 M5835
TRS MODE RST MEM
4206 4212 4208 4213
RST SSOP TRSMRP SYNS.N SYNC_N
543 5677 4218
M5835
TRSMRS
4212
M5835 M475
TRS MODE RST PLS
4213 4218 3990 4112 4209
TRSMRS SSOP
4236 4243 4250 4340
4212 5677
M5960
M5961
PLS M5836
PLS M5838

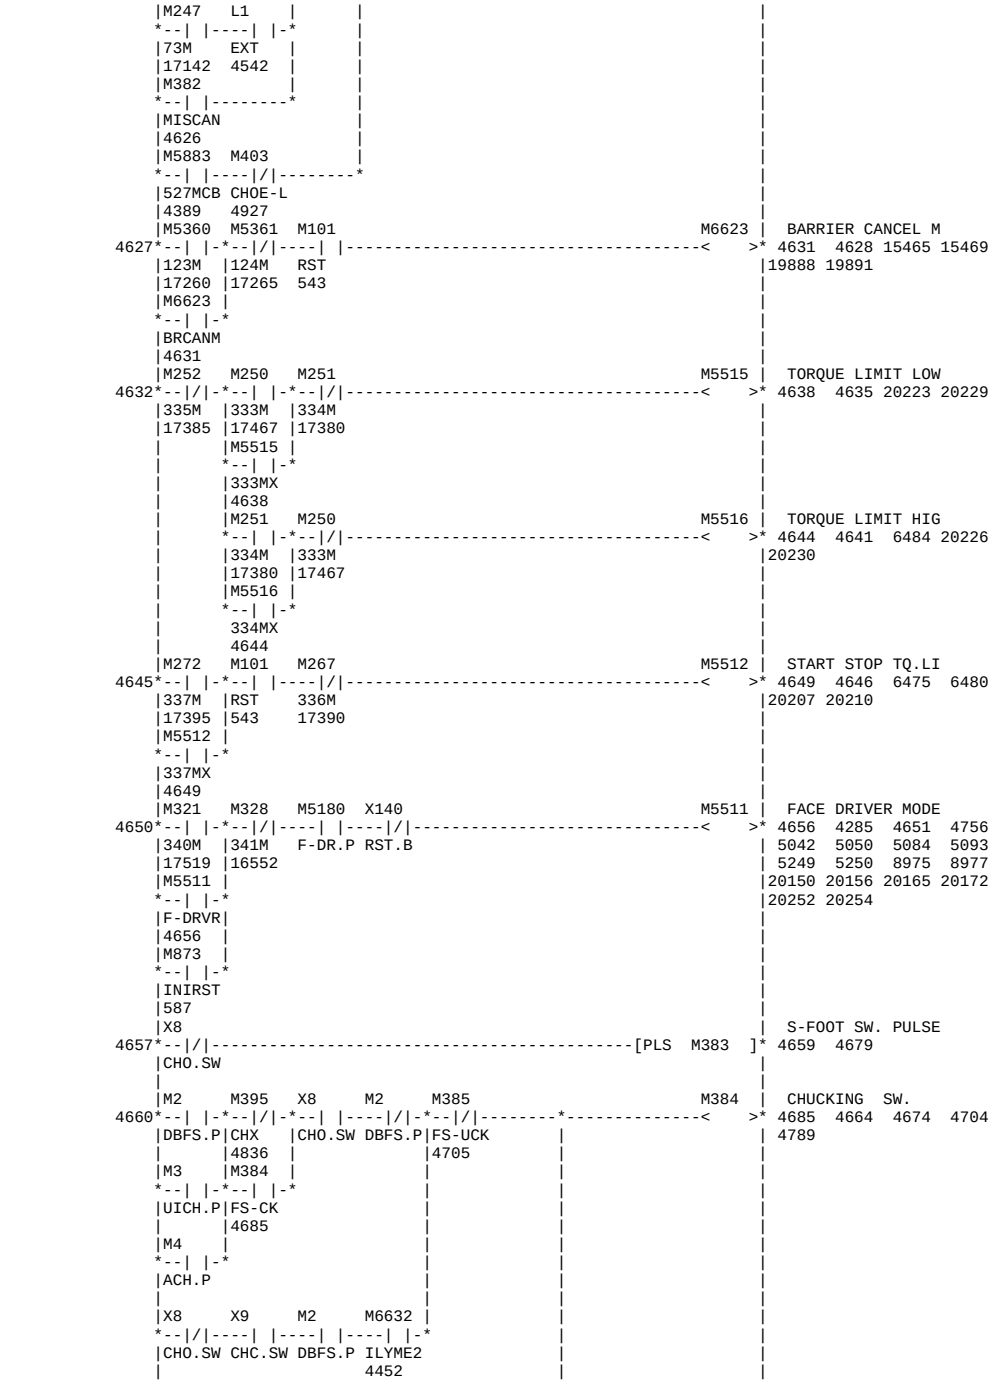

M316 M205 M313 M517 | TRS-CHK END SP_S
4219 4223 4220 19449
541M 5M 511M
17882 16590 17856
M517
541&5M
4223
M316 M215 M313 M5637 | TRS-CHK END SP_S
4224 4230 4225 19470
541M 5M 511M
17882 16658 17856
M5637 M335
541&5M 305M
4230 16640
M315 M316 M317 M319 M5836 M5821 | TRS-CHK MODE
4231 4237 4101 4108 4232
540M 541M 542M 546M TRSMRP 4265 4731 4761 5043
17877 17882 17887 17907 4218 5094 5879 20100 20120
M5821 20176
540MX
4237
M317 M318 M315 M319 M5836 M5822 | TRS-BAR MODE
4238 4244 4000 4015 4018
542M 543M 540M 546M TRSMRP 4103 4106 4239 4266
17887 17892 17877 17907 4218 5881 20102 20122 21542
M5822 21935
542MX
4244
M319 M320 M315 M317 M5836 M5823 | TRS-MOV ON
4245 4251 4246 4267 20105
546M 547M 540M 542M TRSMRP 20125
17907 17912 17877 17887 4218
M5823
546MX
4251
M293 M294 M101 X244 M5832 | SEP-SWISS MODE
4252 4259 4253 4281 11828
544M 545M RST OP.N 20115 20134 20844 22255
17897 17902 543
M5832 Y143
SWISS MDI.L
4259 14343
M257 M258 M101 M519 | CHUCK IL. CANCEL
4260 4264 4261 4282 4286
500M 501M RST 4815 5108 20108 20128
17808 17813 543
M519
500MX
4264
M5821 M5824 | TRS MODE
4265 4268 3805 3864 3869
540MX 3987 3989 4277 4280
4237 4284 4383 4725 4735
5107 5046 4814 4743
19621 5956 5494 5255
20153 20147 19643 19630
21648 21260 20169 20161
22091 22064 21687 21678
25658 22978 22100
M5822 | TRS-CHK SPCHC SI
4270 5267
542MX
4244
M5823 | SP MODE NC (SIM)
4272 20782 21145
546MX
4251
M203 M5824 M111 M5963 | SP ST TRS-MOVE
4273 4279 18766
3M TRS-M M-MODE
16580 4268 5341
M204
4M
16585
M205
5M
16590
M326
519M
17922
M5824 M514 | 1ST CHUCK NEGLEC
4280 4283 4290 20117 20137
TRS-M 21512 22254
4268
M5832
SWISS
4259
M519
500MX
4264
M5824 M5634 | 2ND CHUCK NEGLEC
4284 4287 4294 20113 20131
TRS-M 21908 22258
4268
M5511
F-DRVR
4656
M519
500MX
4264
M515 M516 M516 | CHUCK IL. CAN MO
4288 4291 4289 20136 25619
CHI-OF CHI-MD 25761
4304 4291
M514
1ST_CH
4283
M5635 M5636 M5636 | CHUCK IL. CAN MO
4292 4295 4293 20130 25650
CHI-OF CHI-MD 25768
4313 4295
M5634
2ND_CH
4287
M404 M515 | CHUCK IL.C OFF O
4296 4304 4288
CHCL-L
4960
M5681
WKHOLD
5268
M441 M5605
SPSTOP MLSTOP
21718 22461
M6450
SSC.P
M6451
SSCT.P

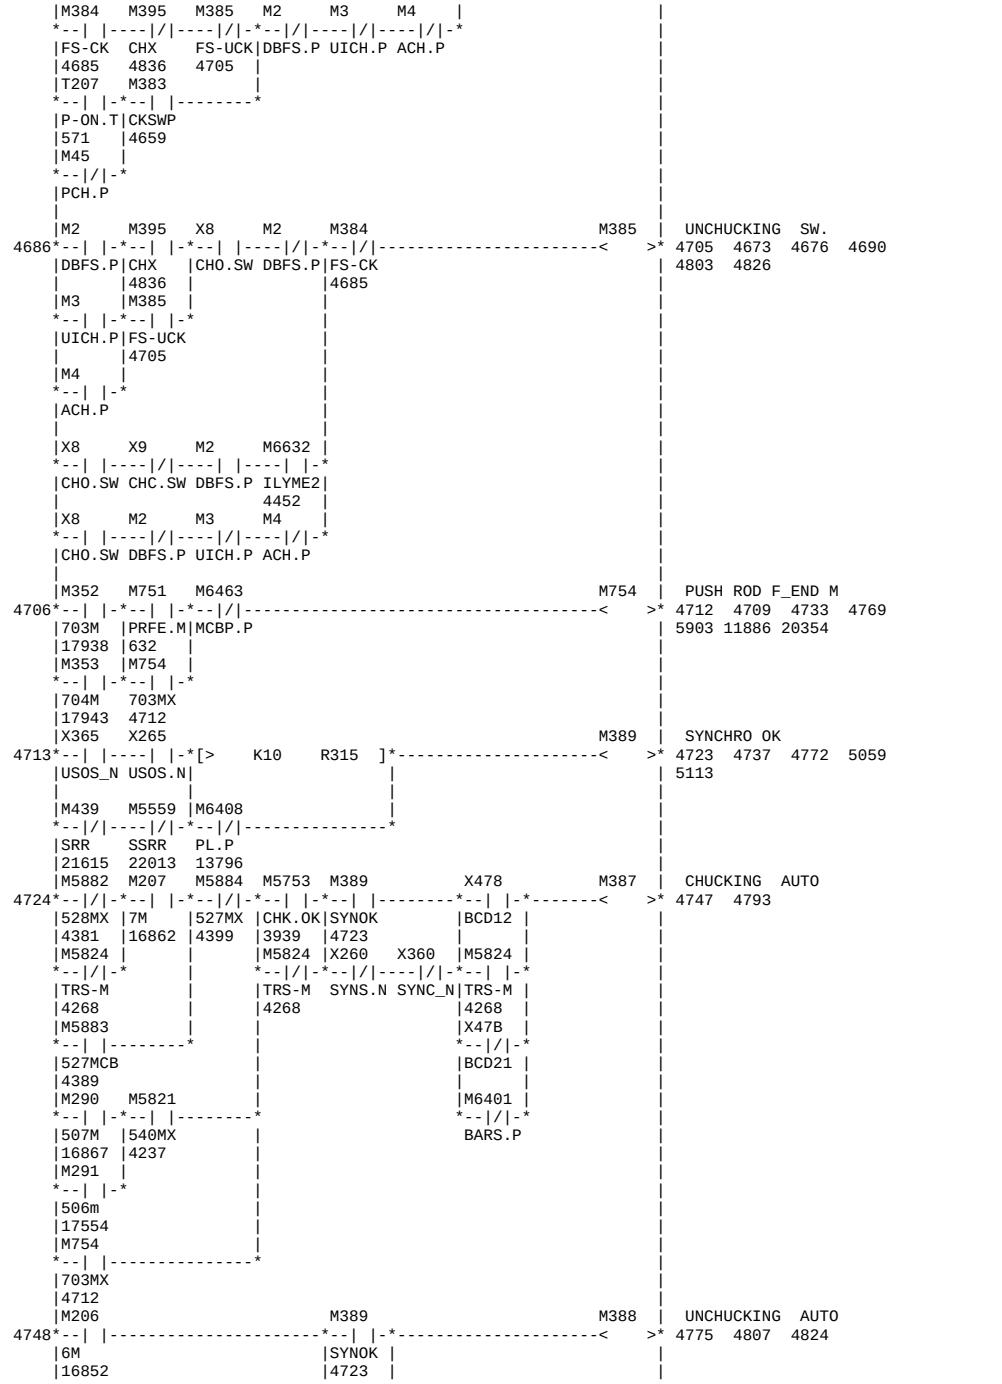

M975
M5635
CHUCK IL.C OFF O
4305
4313 4292
SCHE
5243
M5681
WKHOLD
5268
M5561 M5605
SPSTOP MLSTOP
22134 22461
M6450
SSC.P
M6451
SSCT.P
M704 M358 M101
M704
AXIS RETERN PULS
4314
4318 331 4314 20195
T.UP.S 322M RST
4318 17462 543
M311
321M
17457
M708 M311 M101
M708
M321 CANCEL
4319
4323 332 4319 20198
321MCL 321M RST
4323 17457 543
M358
322M
17462
M585 M332 M101
M585
SPINDLE COIL H M
4324
4328 326 4324 20201
331MX 332M RST
20204
4328 17506 543
M331
331M
17488
M5407 M5408 M101 M6450
M7800
SS COIL H MD.
4329
4336 371 4330 20246
331m 332m RST SSC.P
20248
17495 17513 543
M7800
M6451
SSCT.P
331mMX
4336
M5833 M5194 M5836 M5831 M5960 M5961
M595
SP.H-MODE AT SYN
4337
4344 328 4339
511MXP SGJ.P TRSMRP SYCOFP
4133
4218 4135
M595
SPH-MD
4344
M298 M299 M101
M587
SERVO POWER LOW
4345
4352 4346 4353 4364
346M 347M RST
4369 20261 20265
17614 17619 543
M587 X242
346MX TIMZ.N
4352
X243
TSMZ.N
M587
Y235
COLLISION SOFT.N
4353
4360 4358
346MX
4352
M91
M91 M5504 M587
4367 4374
MANU
MANU TRS_SL 346MX
14444
14444 4352
M5504
M587
TRS_SL
346MX
4352
X242 Y235 M5504
TIMZ.N SHKL.N TRS_SL
4360
X243
TSMZ.N
M348 M5883 M101
M5882
WORK CHECK MODE
4375
4381 4376 4382 4724
528M 527MCB RST
20346
17872 4389 543
M5882 M5884
528MX 527MX
4381 4399
M5882 M5824 M207
M5883
WORK CHECK START
4382
4389 4377 4384 4398
528MX TRS-M 7M
4623 4727 19635
4381 4268 16862
M5883 M5885 M395
T26
4392 4396
527MCB MIS-MX CHX
T26
4389 4404 4836
M347
527M
17867
T2 T66 M5883
M5884
CHUCK CLOSE END
4395
4399 4378 4397 4403
CHC.T MTRL.T 527MCB
4728 4763 19636 20341
4936 4392 4389
M5884
527MX
4399
X93 X94 M5884
M5885
NO-WORK DETECT
4400
4404 4385 4402 4766
CHO.LS CHC.LS 527MX
20343
4399
M5885
M403
M5886
PROG. OFF PRE
4406 4165 8489
MIS-MX
CHOE-L
4404
4927
M203
M518
SPINDLE M CODE
4407
4409 5786 5823 5838
3M
6478 20592
16580
M204
4M
16585
M213
M5638
2ND SPINDLE M CO
4410
4414 5922 5937 20838
3M
21116
16648
M214
4M
16653
M333
303M
16630
M334
304M
16635

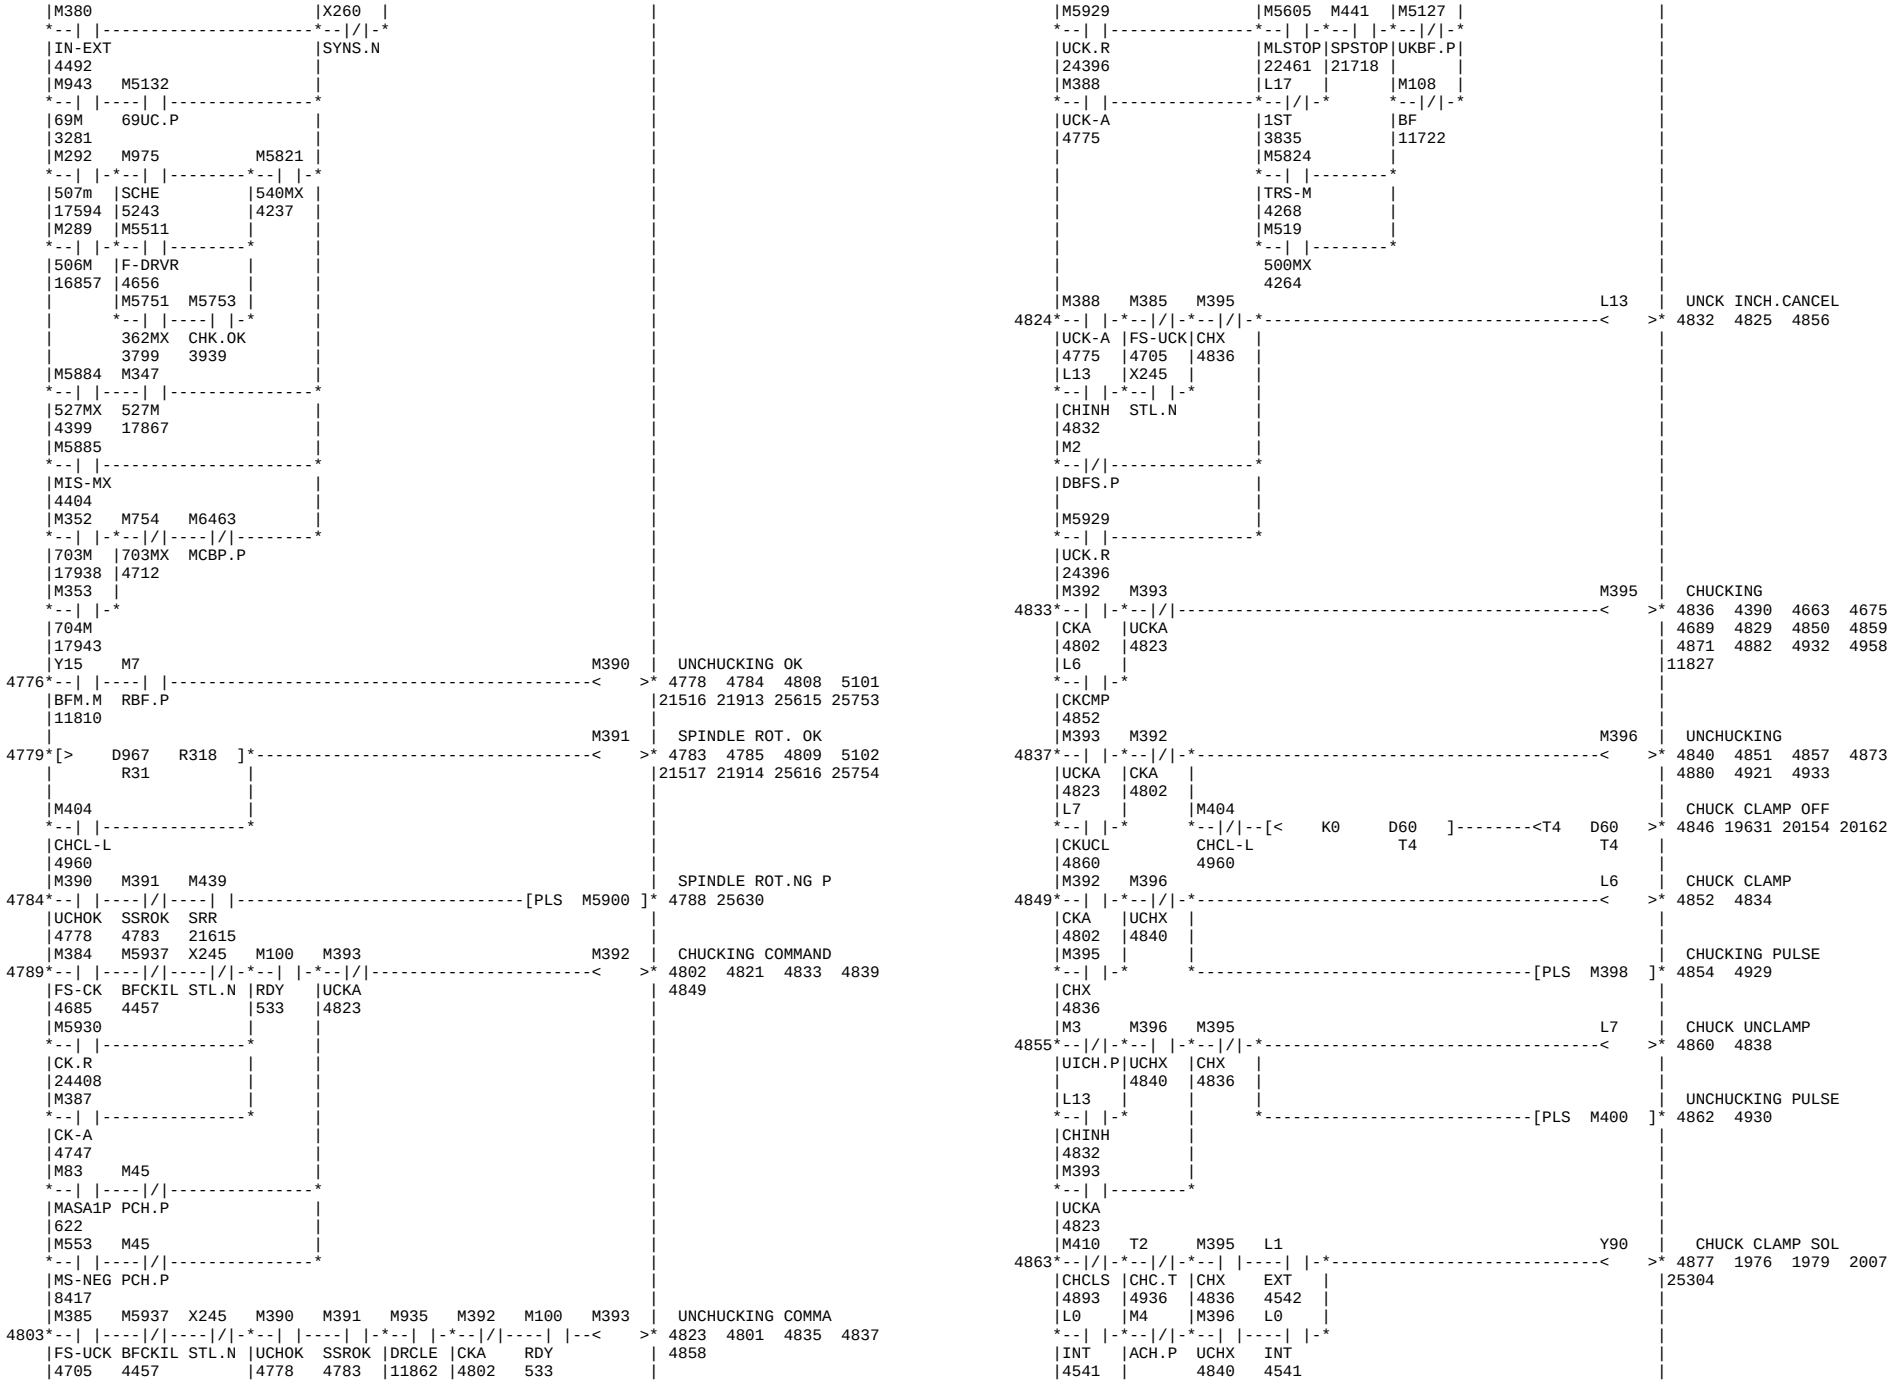
```
P12   |M8010  M8011  M91    M100                              M8011 |  CHK PRES.LOW
  4415*--| |----|/|-*--| |----| |-*---------------------------<    >* 4427  4416  4418  4428
      |CHKLWM CHKLOW|MANU   RDY   |                                  | 4430
      |15038  4427  |14444  533   |                                  |
      |M8010  M8011 |             |                                  |
      *--|/|----| |-*             |                                  |
      |CHKLWM CHKLOW              |                                  |
      |15038  4427                |                                  |
      |L2     M90                 |                                  |
      *--| |-*--| |---------------*                                  |
      |CKPRL |AUTO                |                                  |
      |4434  |14419               |                                  |
      |      |M102                |                                  |
      |      *--| |---------------*                                  |
      |       RDYP                |                                  |
      |       535                 |                                  |
      |M8011                                                  M8013 |  CHK PRES.HIGH
  4428*--|/|-----------------------------------------------------<    >* 4429  4435
      |CHKLOW                                                        |
      |4427                                                          |
      |M8011  M1409  M441                                            |  CHUCK PRESSURE L
  4430*--| |----| |-*--| |-----------------------------[SET  L2    ]* 4434   435  4422  4439
      |CHKLOW MAN&DR|SPSTOP                                          | 4440 19730 19733 28537
      |4427   2436  |21718                                           |
      |M223         |                                                |
      *--| |--------*                                                |
      |33M                                                           |
      |17012                                                         |
      |M8013  M1409  M441                                            |  CHUCK PRESSURE L
  4435*--| |----| |-*--| |-----------------------------[RST  L2    ]* 4434   435  4422  4439
      |CHK-HI MAN&DR|SPSTOP                                          | 4440 19730 19733 28537
      |4429   2436  |21718                                           |
      |M224         |                                                |
      *--| |--------*                                                |
      |34M                                                           |
      |17017                                                         |
      |L2     M9                                              M7884 |  MACHINE MENU 54
  4440*--| |----| |-*-------------------------------------------<    >* 4442
      |CKPRL  CHPS.P|                                                |
      |4434         |                                                |
      |             |M75                                      M6745 |  CHUCK LOW SELECT
      |             *--|/|-----------------------------------<    >* 4445  7941
      |             |UKSP.P                                          |
      |             |                                                |
      |             |M75                                      Y1F   |  CHUCK LOW SEL-UK
      |             *--| |-----------------------------------<    >* 4448
      |              UKSP.P                                          |
      |                                                              |
      |M90                                                    M6632 |  INTERLOCK YME 2
  4449*--|/|-*-----------------------------------------------<    >* 4452  4458  4671  4697
      |AUTO  |                                                       | 4989  5024
      |14419 |                                                       |
      |X11C  |                                                       |
      *--|/|-*                                                       |
      |SETUP.|                                                       |
      |      |                                                       |
      |M1040 |                                                       |
      *--| |-*                                                       |
      |CCC++                                                         |
      |8421                                                          |
      |M6453  XA0    M6                                       M5937 |  B/F CHUCK FSW IL
  4453*--|/|----| |----| |-*-----------------------------------<    >* 4457  4790  4804  5037
      |MCBF_P BF_ALM BF.P  |                                         | 5080
      |                    |                                         |
      |M108                |                                         |
      *--| |---------------*                                         |
      |BF                                                            |
      |11722                                                         |
      |M6632  X8                                                     |  UNCHUCK F-SW. PL
  4458*--| |-*--| |-------------------------------------[PLS  M610  ]* 4462  4532  4543 26690
      |ILYME2|CHO.SW                                                 |26892
      |4452  |                                                       |
      |      |X9                                                     |  CHUKING F-SW.PLS
      |      *--| |-------------------------------------[PLS  M611  ]* 4466  4533  4544 26691
      |      |CHC.SW                                                 |26895
      |      |                                                       |
      |      |X24                                                    |  UNCHUCK F-SW_PLS
      |      *--| |--------*--------------------------[PLS  M5730 ]* 4474  4591  4599 26699
      |      |SCHC.M       |                                         |
      |      |             |                                         |
      |      |X903   M6    |                                         |
      |      *--| |----| |-*                                         |
      |      |SCHC.M BF.P                                            |
      |      |                                                       |
      |      |X25                                                    |  CHUCKING F-SW_PL
      |      *--| |-------------------------------------[PLS  M5731 ]* 4478  4592  4600 26700
      |       SCHO.M                                                 |
      |                                                              |
      |M246   L0                                              M375  |  INT-EXT CHANGE
4479*--| |----|/|--------*------------------------------------<    >* 4489  4486  4491  4622
      |72M    INT         |                                         |19851
      |17137  4541        |                                         |
      |M247   L1          |                                         |
      *--| |----|/|--------*                                         |
      |73M    EXT         |                                         |
      |17142  4542        |                                         |
      |M246   M375   M403 |                                         |
      *--| |-*--| |----|/|-*                                         |
      |72M   |IN-EX  CHOE-L                                          |
      |17137 |4489   4927                                            |
      |M247  |                                                       |
      *--| |-*                                                       |
      |73M                                                           |
      |17142                                                         |
      |M403   M375                                            M380  |  INT-EXT CHANGE S
4490*--| |----| |-----------------------------------------------<    >* 4492  4538  4549  4749
      |CHOE-L IN-EX                                                  |
      |4927   4489                                                   |
      |M403          X244   M91    M441                       M381  |  INT-EXT CHANGE O
4493*--| |--------*--| |----|/|-*--| |----------------------<    >* 4503  4540  4551 26693
      |CHOE-L       |OP.N   MANU  |SPSTOP                          |26899
      |4927         |       14444 |21718                           |
      |M401         |M475         |                                |
      *--| |--------*--| |--------*                                 |
      |MISS         |SSOP                                            |
      |4905         |5677                                            |
      |M2     M3    |                                                |
      *--|/|----|/|-*                                                |
      |DBFS.P UICH.P                                                 |
      |                                                              |
      |M6953  M91    M6959  M246                              L44   |  CHUCK EXTERNAL
4504*--| |----| |-*--|/|-*--|/|-----------------------------<    >* 4512  4506  4524  4529
      |M-MENU MANU  |M-MENU|72M                                      | 4545 26687 28520 28524
      |15014  14444 |15019 |17137                                    |28710 28713
      |L44          |M91   |                                         |
      *--| |--------*--|/|-*                                         |
      |CHEXT        |MANU                                            |
      |4512         |14444                                           |
      |M247         |                                                |
      *--| |--------*                                                |
      |73M                                                           |
      |17142                                                         |
      |M6959  M91    M6953  M247                              L45   |  CHUCK INTERNAL
4513*--| |----| |-*--|/|-*--|/|-----------------------------<    >* 4521  4515  4525  4530
      |M-MENU MANU  |M-MENU|73M                                      | 4534 26685 28521 28525
      |15019  14444 |15014 |17142                                    |28711 28714
      |L45          |M91   |                                         |
      *--| |--------*--|/|-*                                         |
      |CHINT        |MANU                                            |
      |4521         |14444                                           |
      |M246         |                                                |
      *--| |--------*                                                |
      |72M                                                           |
      |17137                                                         |
      |T136   L44    L45                                      M7881 |  CHUCK INT MENU
4522*--| |-*--|/|----| |-------------------------------------<    >* 4526 26893
      |0.1sec|CHEXT  CHINT                                           |
      |664   |4512   4521                                           |
      |L0    |                                                      |
      *--| |-*                                                       |
      |INT                                                           |
      |4541                                                          |
```

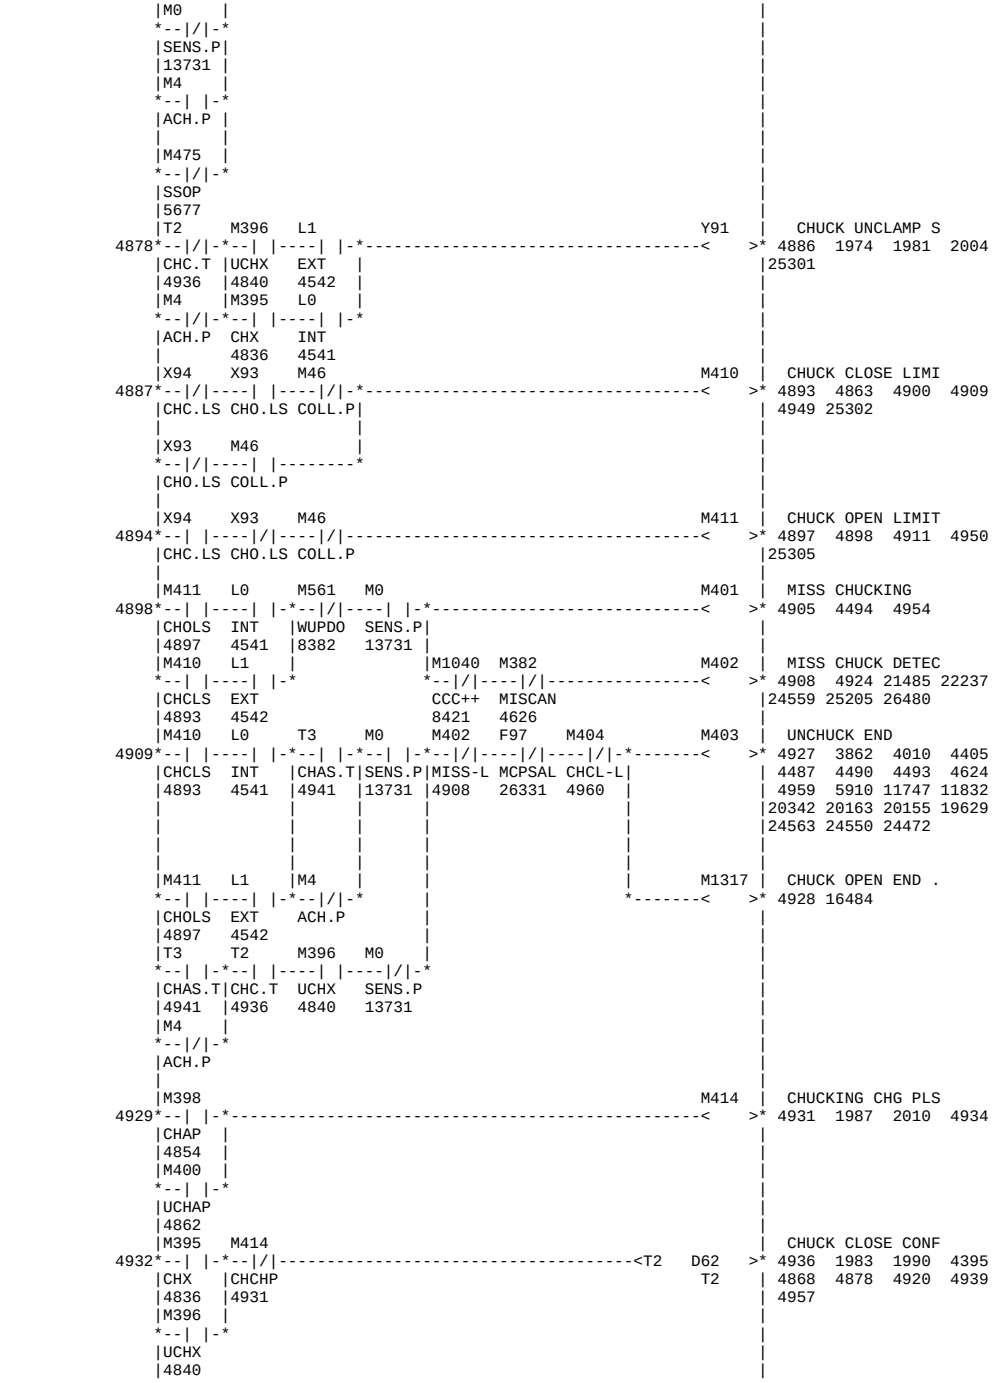

T136 L44 L45 M7880 CHUCK EXT MENU
4527 4531 15846 26896
0.1sec CHEXT CHINT
664 4512 4521
L1
EXT
4542
M610 L45 M1409 X244 M381 INTERNAL CHUCKIN
4532 4541 4480 4523 4553
CHOSWP CHINT MAN&DR OP.N CHANOK 4554 4556 4558 4617
4462 4521 2436 4503 4864 4874 4883 4899
25213 19846 4945 4910
28523 26894 26686 25306
M611 EXTRNAL CHUCKING
SET L0
RST L1
4542 4482 4528 4552
4555 4557 4559 4619
4872 4881 4901 4912
4944 19848 25214 25219
25303 26688 26897 28519
CHCSWP
4466
M246 M380
72M IN-EXT
17137 4492
M610 L44 M1409 X244 M381 EXTRNAL CHUCKING
4543 4542 4482 4528 4552
CHOSWP CHEXT MAN&DR OP.N CHANOK 4555 4557 4559 4619
4462 4512 2436 4503 4872 4881 4901 4912
25219 25214 19848 4944
28519 26897 26688 25303
M611 INTERNAL CHUCKIN
SET L0
RST L0
4541 4480 4523 4553
CHCSWP 4554 4556 4558 4617
4466 4864 4874 4883 4899
M247 M380 4910 4945 19846 25213
25306 26686 26894 28523
73M IN-EXT
17142 4492
L0 L1 L0 INTERNAL CHUCKIN
4554 4541 4480 4523 4553
INT EXT 4554 4556 4558 4617
4541 4542 4864 4874 4883 4899
25213 19846 4945 4910
28523 26894 26686 25306
L1 L0 L1 EXTRNAL CHUCKING
4557 4542 4482 4528 4552
EXT INT 4555 4557 4559 4619
4542 4541 4872 4881 4901 4912
25219 25214 19848 4944
28519 26897 26688 25303
M973 X244 M91 M5561 M486 SPINDLE STOP
4560 4570 4596 4604 26702
SUCKE OP.N MANU SPSTOP
5215 14444 22134
M1333 M475
SUCKE SSOP
5194 5677
M2 M3
DBFS.P UICH.P
M6963 M6966 L46 2nd CHUCK EXT
4571 4574 4572 4581 4587
M-MENU M-MENU 4601 26696 28528 28533
15025 15031 28716 28720
L46
2CHEXT
4574

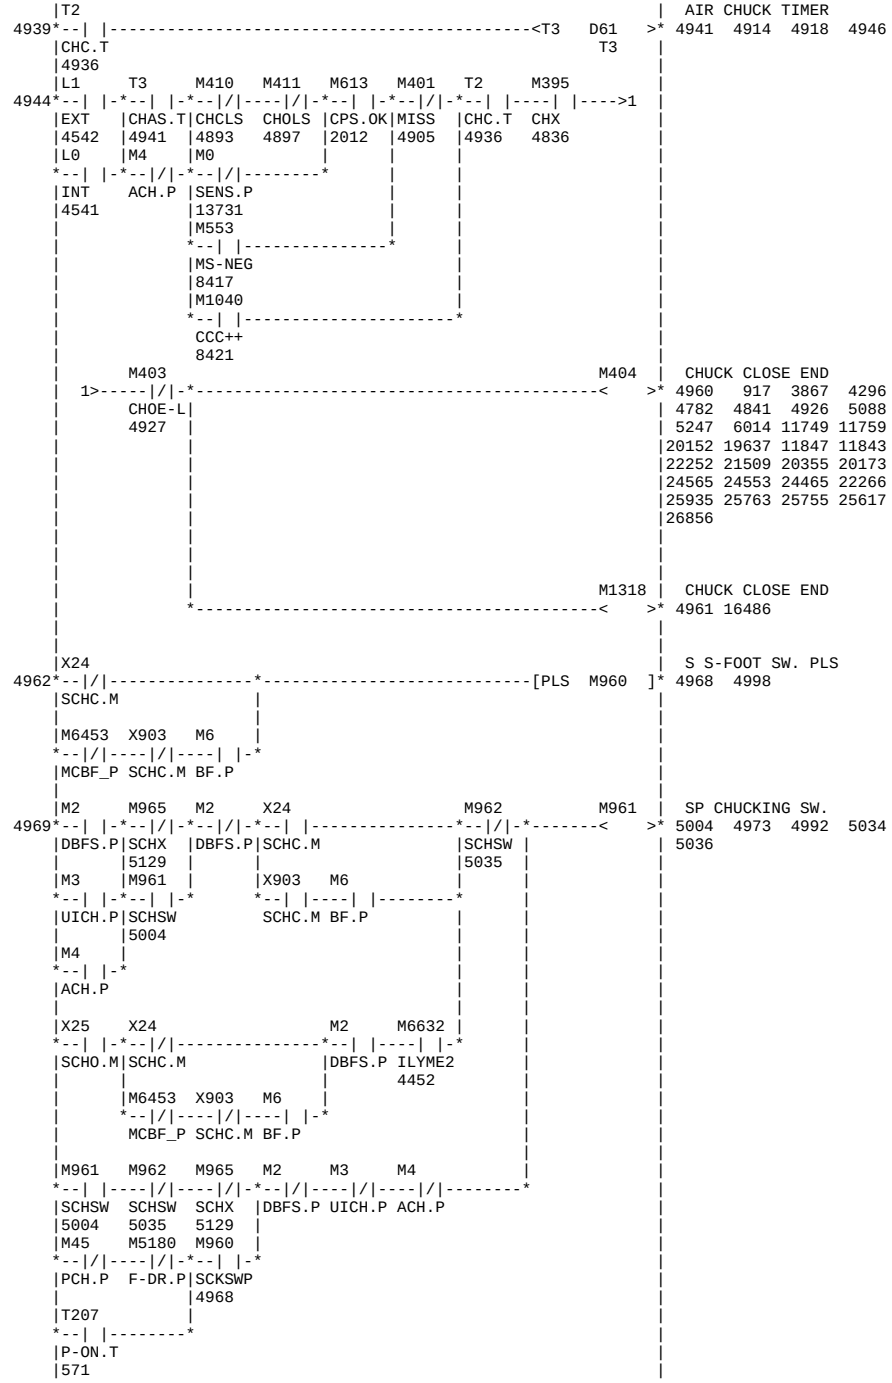

M6966 M6963 L47 2nd CHUCK INT
4575 4578 4576 4582 4588
M-MENU M-MENU 4593 26694 28529 28534
15031 15025 28717 28721
L47
2CHINT
4578
T136 L46 L47 M54 M7883 SS INT. CK MENU
4579 4584
0.1sec 2CHEXT 2CHINT SS.P
664 4574 4578
L20
SINT
4597
T136 L46 L47 M54 M7882 SS EXT. CK MENU
4585 4590
0.1sec 2CHEXT 2CHINT SS.P
664 4574 4578
L21
SEXT
4598
M5730 L47 M1409 X244 M486 SS INT. CHUCKING
4591 4597 4580 4609 4610
CHOSWP 2CHINT MAN&DR OP.N SSOPM 4612 4614 5161 5170
4474 4578 2436 4570 5186 5199 5233 25215
28532 26695 25315
M5731 SS EXT. CHUCKING
SET L20
RST L21
4598 4586 4608 4611
CHCSWP 4613 4615 5159 5168
4478 5188 5201 5234 25216
28527 26697 25312 25222
M5730 L46 M1409 X244 M486 SS EXT. CHUCKING
4599 4598 4586 4608 4611
CHOSWP 2CHEXT MAN&DR OP.N SSOPM 4613 4615 5159 5168
4474 4574 2436 4570 5188 5201 5234 25216
28527 26697 25312 25222
M5731 SS INT. CHUCKING
SET L20
RST L20
4597 4580 4609 4610
CHCSWP 4612 4614 5161 5170
4478 5186 5199 5233 25215
M5180 M873 25315 26695 28532
F-DR.P INIRST
587
L20 L21 L20 SS INT. CHUCKING
4610 4597 4580 4609 4610
SINT SEXT 4612 4614 5161 5170
4597 4598 5186 5199 5233 25215
28532 26695 25315
L21 L20 L21 SS EXT. CHUCKING
4613 4598 4586 4608 4611
SEXT SINT 4613 4615 5159 5168
4598 4597 5188 5201 5234 25216
28527 26697 25312 25222
M246 L0 M375 M382 MISS CHUCK CANCE
4616 4626 4621 4907 20344
72M INT IN-EX
17137 4541 4489

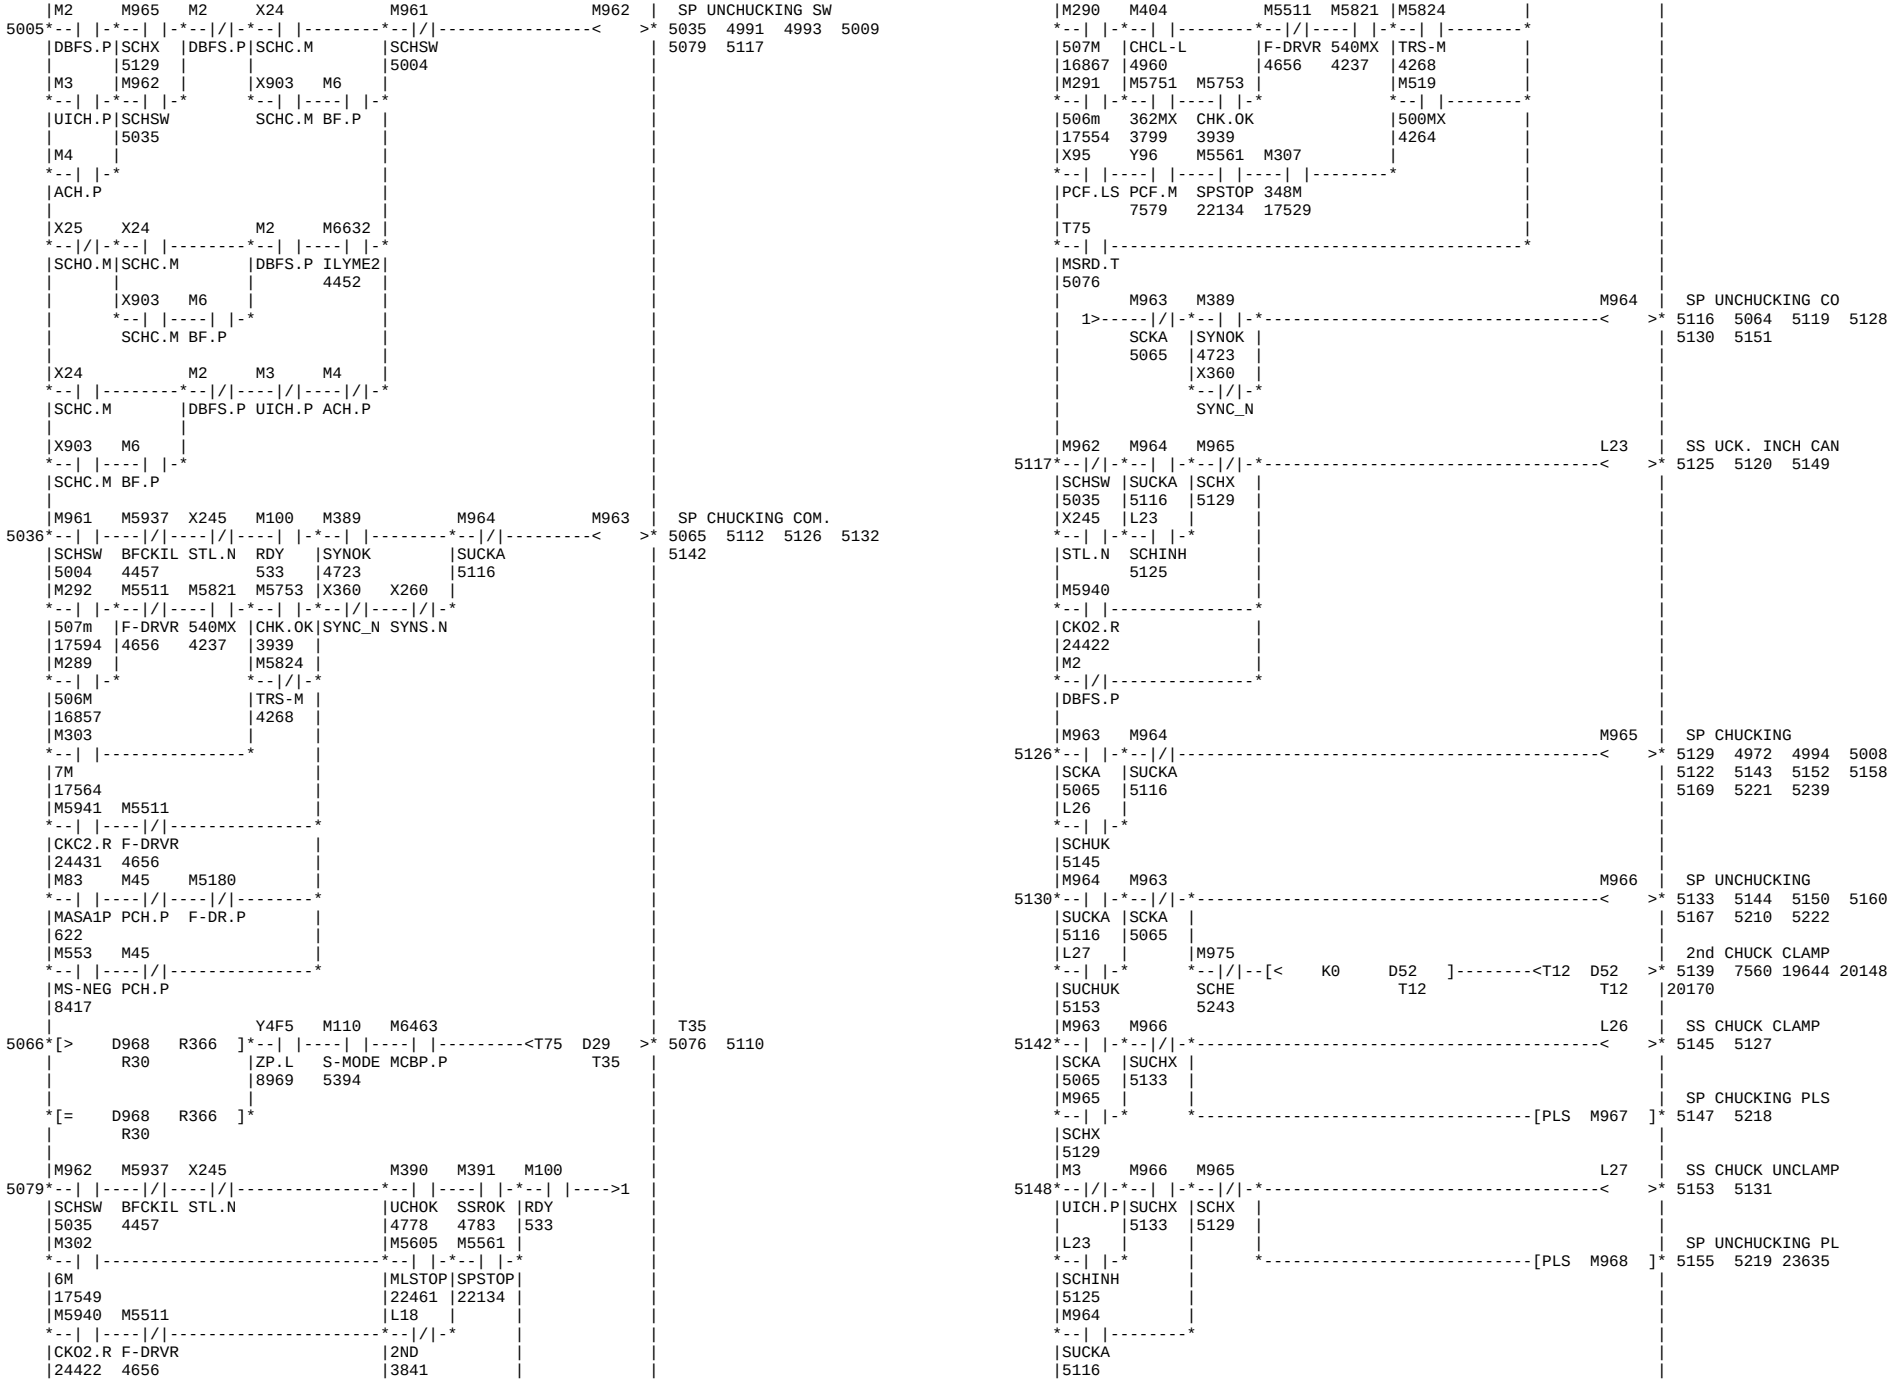

|M247 L1 |
|73M EXT |
|17142 4542 |
|M382 |
|MISCAN
|4626
|M5883 M403
|527MCB CHOE-L
|4389 4927
|M5360 M5361 M101
|123M |124M RST
|17260 |17265 543
|M6623 |
|BRCANM
|4631
|M252 M250 M251
|335M |333M |334M
|17385 |17467 |17380
|M5515 |
|333MX
|4638
|M251 M250
|334M |333M
|17380 |17467
|M5516 |
334MX
4644
|M272 M101 M267
|337M |RST 336M
|17395 |543 17390
|M5512 |
|337MX
|4649
|M321 M328 M5180 X140
|340M |341M F-DR.P RST.B
|17519 |16552
|M5511 |
|F-DRVR|
|4656 |
|M873 |
|INIRST
|587
|X8
|CHO.SW
|
|M2 M395 X8 M2 M385
|DBFS.P|CHX |CHO.SW DBFS.P|FS-UCK
| |4836 | |4705
|M3 |M384 |
|UICH.P|FS-CK
| |4685
|M4 |
|ACH.P
|
|X8 X9 M2 M6632 |
|CHO.SW CHC.SW DBFS.P ILYME2
| 4452
M6623 | BARRIER CANCEL M
4631 4628 15465 15469
19888 19891
M5515 | TORQUE LIMIT LOW
4638 4635 20223 20229
M5516 | TORQUE LIMIT HIG
4644 4641 6484 20226
20230
M5512 | START STOP TQ.LI
4649 4646 6475 6480
20207 20210
M5511 | FACE DRIVER MODE
4656 4285 4651 4756
5042 5050 5084 5093
5249 5250 8975 8977
20150 20156 20165 20172
20252 20254
[PLS M383]
S-FOOT SW. PULSE
4659 4679
M384 | CHUCKING SW.
4685 4664 4674 4704
4789

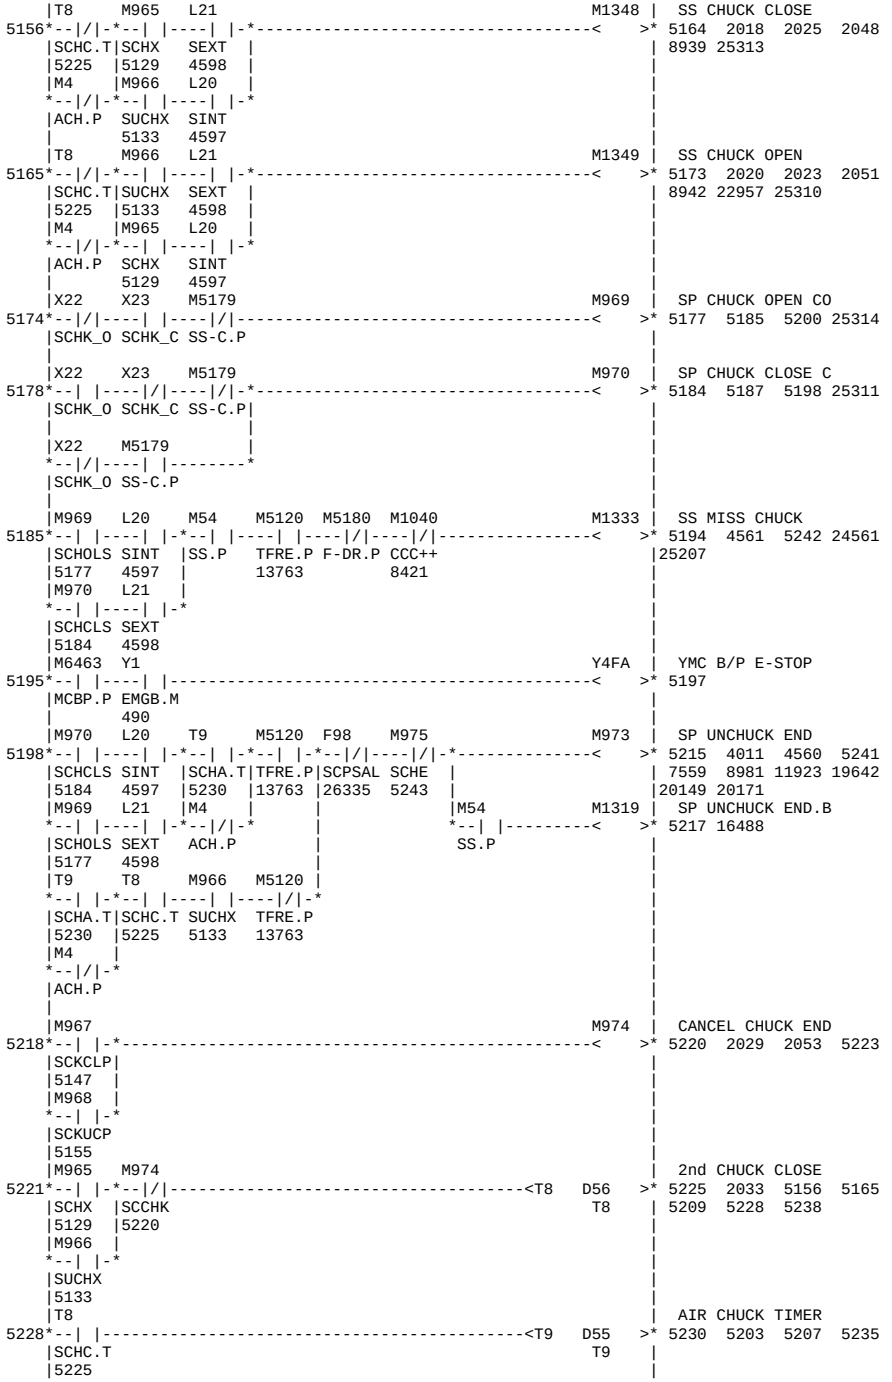

|M384 M395 M385 M2 M3 M4 |
|FS-CK CHX FS-UCK|DBFS.P UICH.P ACH.P
|4685 4836 4705 |
|T207 M383 |
|P-ON.T|CKSWP
|571 |4659
|M45 |
|PCH.P
|
|M2 M395 X8 M2 M384
|DBFS.P|CHX |CHO.SW DBFS.P|FS-CK
| |4836 | |4685
|M3 |M385 |
|UICH.P|FS-UCK
| |4705
|M4 |
|ACH.P
|
|X8 X9 M2 M6632 |
|CHO.SW CHC.SW DBFS.P ILYME2|
| 4452 |
|X8 M2 M3 M4 |
|CHO.SW DBFS.P UICH.P ACH.P
|
|M352 M751 M6463
|703M |PRFE.M|MCBP.P
|17938 |632 |
|M353 |M754 |
|704M 703MX
|17943 4712
|X365 X265
|USOS_N USOS.N|
| | |
|M439 M5559 |M6408
|SRR SSRR PL.P
|21615 22013 13796
|M5882 M207 M5884 M5753 M389 X478
528MX	7M	527MX	CHK.OK	SYNOK	BCD12
4381	16862	4399	3939	4723	
M5824			M5824	X260 X360	M5824
		TRS-M		TRS-M SYNS.N SYNC_N	TRS-M
		4268		4268	4268
		M5883			X47B
		527MCB			BCD21
		4389			
		M290 M5821			M6401
		507M	540MX		BARS.P
		16867	4237
		M291
		506m
		17554
		M754
		703MX
		4712
		M206 M389
		6M	SYNOK
		16852	4723
M384 M395 M385 M2 M3 M4
FS-CK CHX FS-UCK DBFS.P UICH.P ACH.P
4685 4836 4705
T207 M383
P-ON.T CKSWP
571 4659
M45
PCH.P
M2 M395 X8 M2 M384 | UNCHUCKING SW.
DBFS.P CHX CHO.SW DBFS.P FS-CK | 4803 4826
4836 4685
M3 M385
UICH.P FS-UCK
4705
M4
ACH.P
X8 X9 M2 M6632
CHO.SW CHC.SW DBFS.P ILYME2
4452
X8 M2 M3 M4
CHO.SW DBFS.P UICH.P ACH.P
M352 M751 M6463 | PUSH ROD F_END M
703M PRFE.M MCBP.P | 5903 11886 20354
17938 632
M353 M754
704M 703MX
17943 4712
X365 X265 | SYNCHRO OK
USOS_N USOS.N | 5113
M439 M5559 M6408
SRR SSRR PL.P
21615 22013 13796
M5882 M207 M5884 M5753 M389 X478 | CHUCKING AUTO
528MX 7M 527MX CHK.OK SYNOK BCD12
4381 16862 4399 3939 4723
M5824 M5824 X260 X360 M5824
TRS-M TRS-M SYNS.N SYNC_N TRS-M
4268 4268 4268
M5883 X47B
527MCB BCD21
4389
M290 M5821 M6401
507M 540MX BARS.P
16867 4237
M291
506m
17554
M754
703MX
4712
M206 M389 | UNCHUCKING AUTO
6M SYNOK | 4807 4824
16852 4723
M6463 | PUSH ROD F_END M
4705 4673 4676 4690
4712 4709 4733 4769
5103
4723 4737 4772 5059
M5512 | START STOP TQ.LI
4649 4646 6475 6480
20207 20210
M5511 | FACE DRIVER MODE
4656 4285 4651 4756
5042 5050 5084 5093
5249 5250 8975 8977
20150 20156 20165 20172
20252 20254
M5515 |
4638
M5516 |
4644
M5512 |
4649
M5511 |
4656 4285 4651 4756
5042 5050 5084 5093
5249 5250 8975 8977
20150 20156 20165 20172
20252 20254
M6623 | BARRIER CANCEL M
4631 4628 15465 15469
19888 19891
M5515 | TORQUE LIMIT LOW
4638 4635 20223 20229
M5516 | TORQUE LIMIT HIG
4644 4641 6484 20226
20230
M5512 | START STOP TQ.LI
4649 4646 6475 6480
20207 20210
M5511 | FACE DRIVER MODE
4656 4285 4651 4756
5042 5050 5084 5093
5249 5250 8975 8977
20150 20156 20165 20172
20252 20254
[PLS M383]
S-FOOT SW. PULSE
4659 4679
M384 | CHUCKING SW.
4685 4664 4674 4704
4789

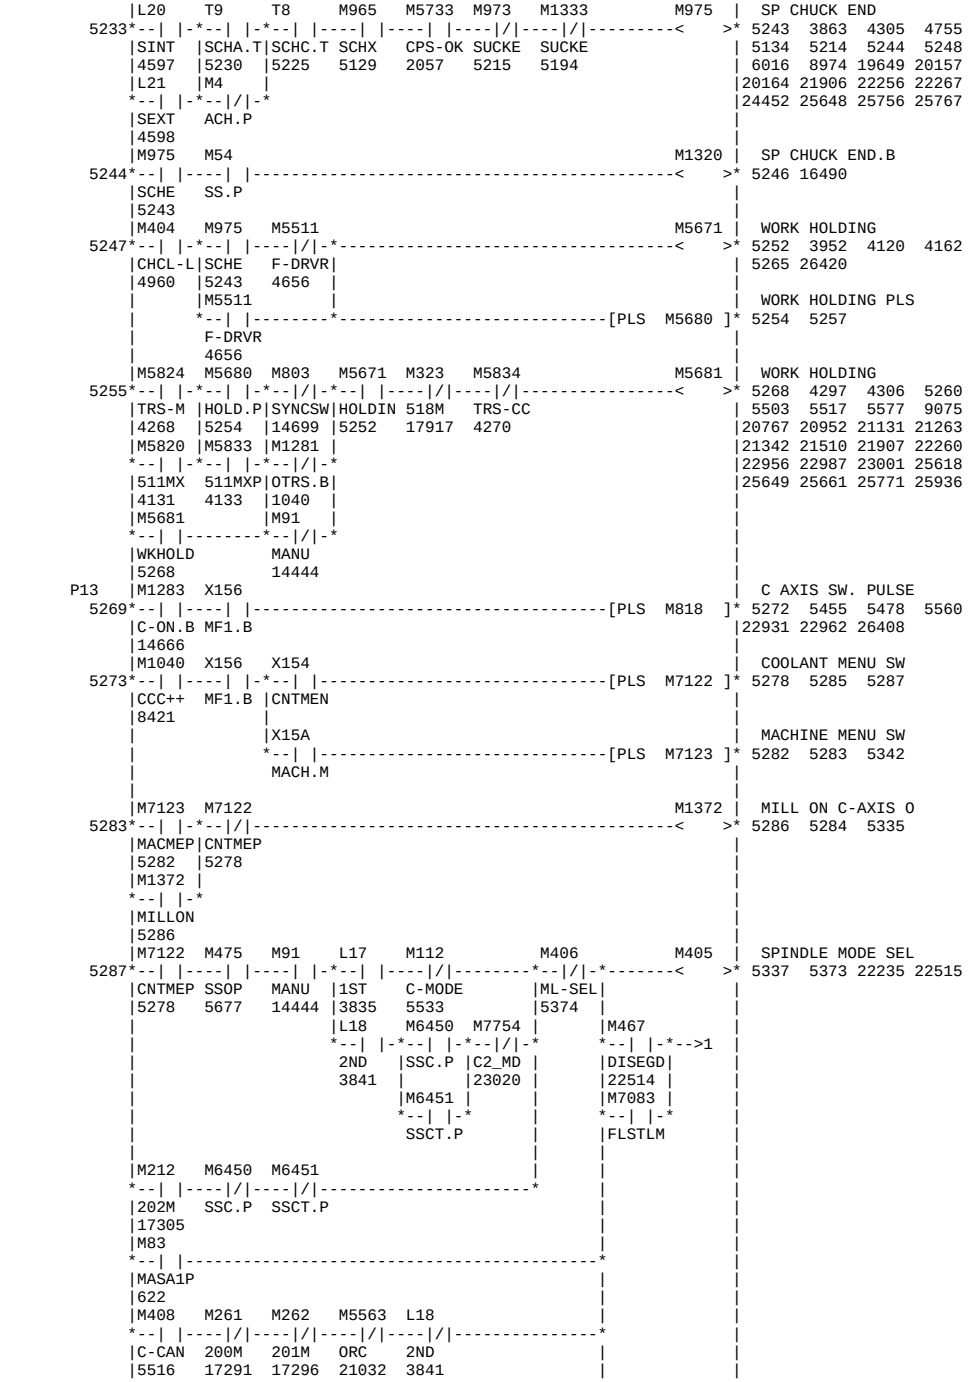

M380 X260
IN-EXT SYNS.N
4492
M943 M5132
69M 69UC.P
3281
M292 M975 M5821
507m SCHE 540MX
17594 5243 4237
M289 M5511
506M F-DRVR
16857 4656
M5751 M5753
362MX CHK.OK
3799 3939
M5884 M347
527MX 527M
4399 17867
M5885
MIS-MX
4404
M352 M754 M6463
703M 703MX MCBP.P
17938 4712
M353
704M
17943
Y15 M7 M390 UNCHUCKING OK
4776 4778 4784 4808 5101
BFM.M RBF.P
21516 21913 25615 25753
11810
M391 SPINDLE ROT. OK
4779 4783 4785 4809 5102
D967 R318
R31
21517 21914 25616 25754
M404
CHCL-L
4960
M390 M391 M439 SPINDLE ROT.NG P
4784 4788 25630
UCHOK SSROK SRR
4778 4783 21615
M384 M5937 X245 M100 M393 M392 CHUCKING COMMAND
4789 4802 4821 4833 4839
FS-CK BFCKIL STL.N RDY UCKA
4685 4457 533 4823
M5930
CK.R
24408
M387
CK-A
4747
M83 M45
MASA1P PCH.P
622
M553 M45
MS-NEG PCH.P
8417
M385 M5937 X245 M390 M391 M935 M392 M100 M393 UNCHUCKING COMMA
4803 4823 4801 4835 4837
FS-UCK BFCKIL STL.N UCHOK SSROK DRCLE CKA RDY
4705 4457 4778 4783 11862 4802 533
4858
M5929 M5605 M441 M5127
UCK.R MLSTOP SPSTOP UKBF.P
24396 22461 21718
M388 L17 M108
UCK-A 1ST BF
4775 3835 11722
M5824
TRS-M
4268
M519
500MX
4264
M388 M385 M395 L13 UNCK INCH.CANCEL
4824 4832 4825 4856
UCK-A FS-UCK CHX
4775 4705 4836
L13 X245
CHINH STL.N
4832
M2
DBFS.P
M5929
UCK.R
24396
M392 M393 M395 CHUCKING
4833 4836 4390 4663 4675
CKA UCKA 4689 4829 4850 4859
4802 4823 4871 4882 4932 4958
L6 11827
CKCMP
4852
M393 M392 M396 UNCHUCKING
4837 4840 4851 4857 4873
UCKA CKA 4880 4921 4933
4823 4802
L7 M404 CHUCK CLAMP OFF
CKUCL CHCL-L K0 D60 D60 T4 D60 T4
4860 4960
4846 19631 20154 20162
M392 M396 L6 CHUCK CLAMP
4849 4852 4834
CKA UCHX
4802 4840
M395 CHUCKING PULSE
4854 4929
CHX
4836
M3 M396 M395 L7 CHUCK UNCLAMP
4855 4860 4838
UICH.P UCHX CHX
4840 4836
L13 UNCHUCKING PULSE
4862 4930
CHINH
4832
M393
UCKA
4823
M410 T2 M395 L1 Y90 CHUCK CLAMP SOL
4863 4877 1976 1979 2007
CHCLS CHC.T CHX EXT 25304
4893 4936 4836 4542
L0 M4 M396 L0
INT ACH.P UCHX INT
4541 4840 4541

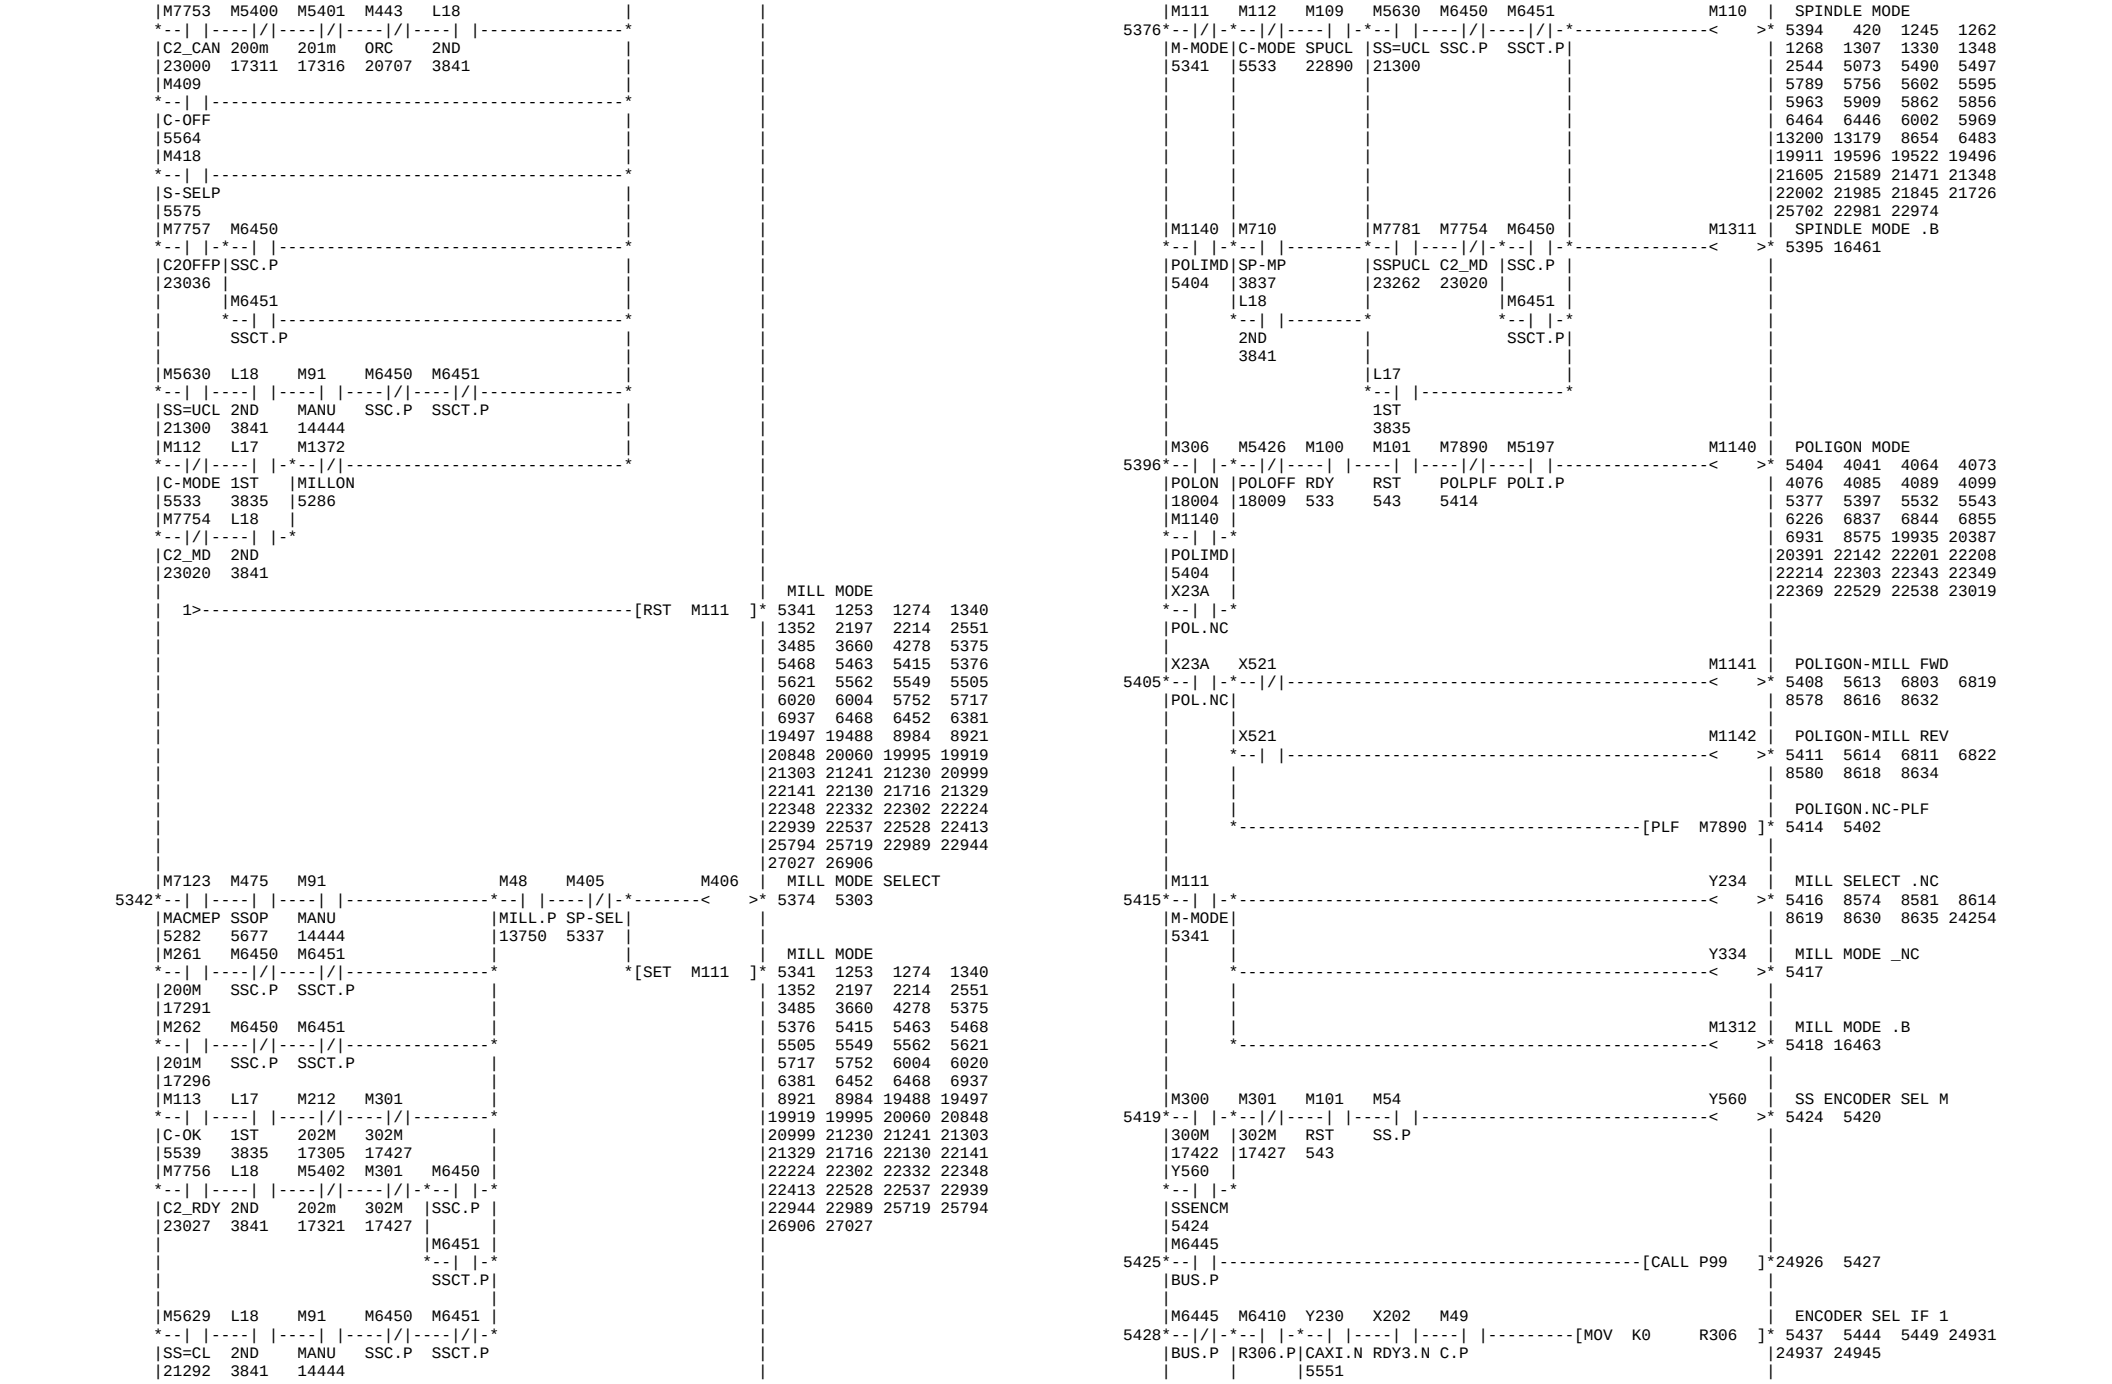

M0
SENS.P
13731
M4
ACH.P
M475
SSOP
5677
T2 M396 L1 Y91 CHUCK UNCLAMP S
4878 4886 1974 1981 2004
CHC.T UCHX EXT 25301
4936 4840 4542
M4 M395 L0
ACH.P CHX INT
4836 4541
X94 X93 M46 M410 CHUCK CLOSE LIMI
4887 4893 4863 4900 4909
CHC.LS CHO.LS COLL.P 4949 25302
X93 M46
CHO.LS COLL.P
X94 X93 M46 M411 CHUCK OPEN LIMIT
4894 4897 4898 4911 4950
CHC.LS CHO.LS COLL.P 25305
M411 L0 M561 M0 M401 MISS CHUCKING
4898 4905 4494 4954
CHOLS INT WUPDO SENS.P
4897 4541 8382 13731
M410 L1 M1040 M382 M402 MISS CHUCK DETEC
4908 4924 21485 22237
CHCLS EXT CCC++ MISCAN 24559 25205 26480
4893 4542 8421 4626
M410 L0 T3 M0 M402 F97 M404 M403 UNCHUCK END
4909 4927 3862 4010 4405
CHCLS INT CHAS.T SENS.P MISS-L MCPSAL CHCL-L 4487 4490 4493 4624
4893 4541 4941 13731 4908 26331 4960 4959 5910 11747 11832
20342 20163 20155 19629
24563 24550 24472
M411 L1 M4 M1317 CHUCK OPEN END .
4928 16484
CHOLS EXT ACH.P
4897 4542
T3 T2 M396 M0
CHAS.T CHC.T UCHX SENS.P
4941 4936 4840 13731
M4
ACH.P
M398 M414 CHUCKING CHG PLS
4929 4931 1987 2010 4934
CHAP
4854
M400
UCHAP
4862
M395 M414 CHUCK CLOSE CONF
4932 4936 1983 1990 4395
CHX CHCHP T2 4868 4878 4920 4939
4836 4931 4957
M396
UCHX
4840

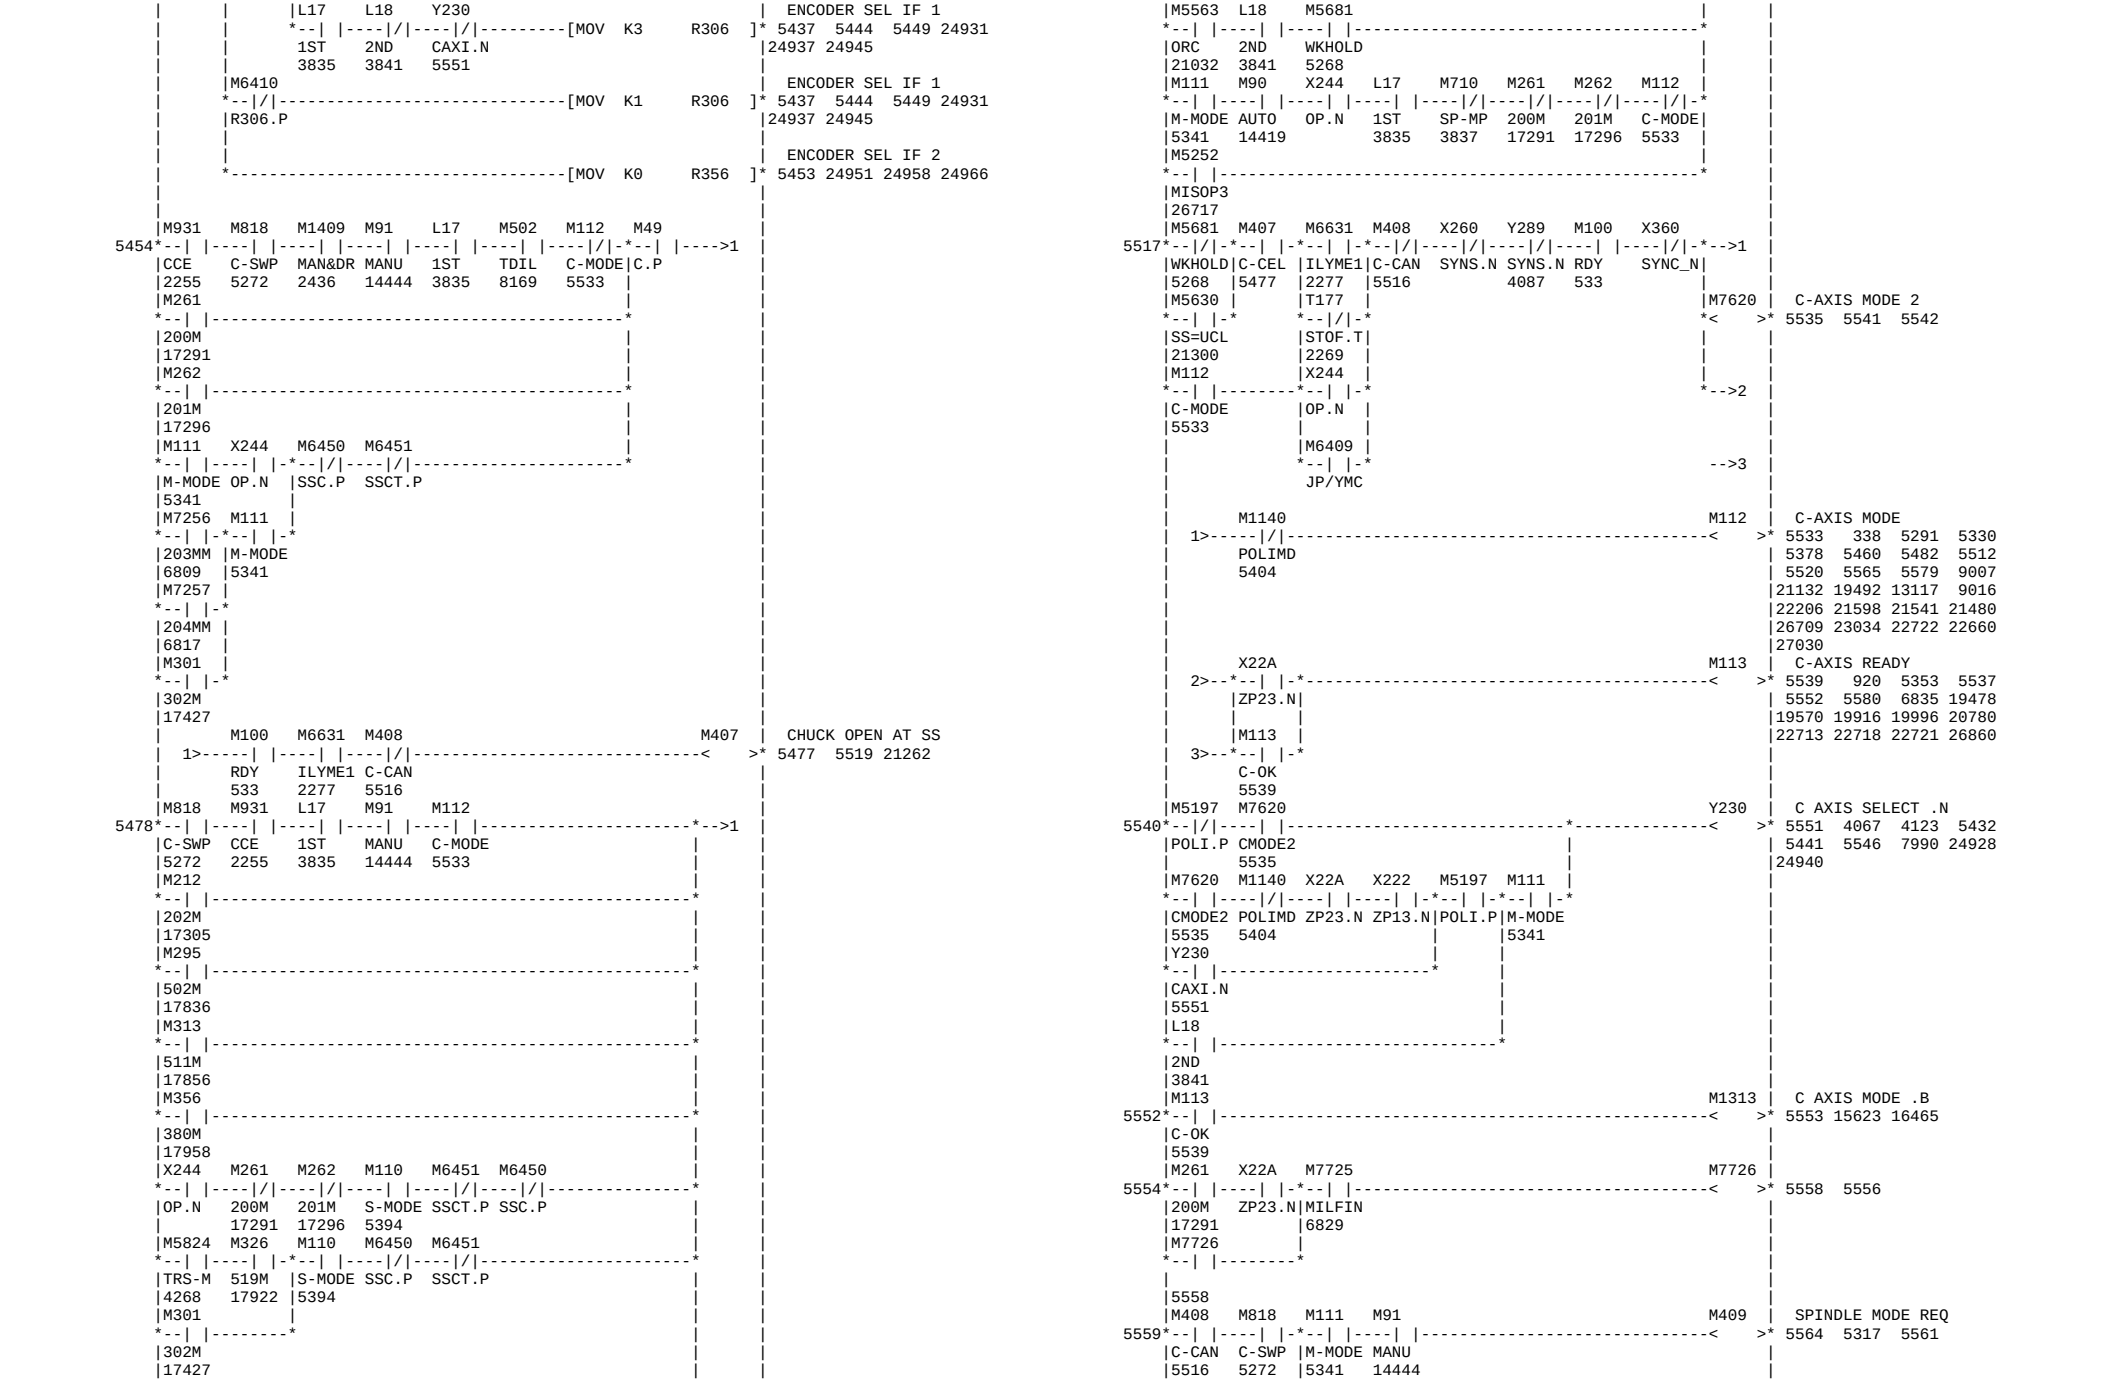

T2 AIR CHUCK TIMER
4939 T3 D61 4941 4914 4918 4946
CHC.T T3
4936
L1 T3 M410 M411 M613 M401 T2 M395
4944 4542 4941 4893 4897 2012 4905 4936 4836
EXT CHAS.T CHCLS CHOLS CPS.OK MISS CHC.T CHX
L0 M4 M0
INT ACH.P SENS.P
4541 13731
M553
MS-NEG
8417
M1040
CCC++
8421
M403 M404 CHUCK CLOSE END
1> CHOE-L 4960 917 3867 4296
4927 4782 4841 4926 5088
5247 6014 11749 11759
20152 19637 11847 11843
22252 21509 20355 20173
24565 24553 24465 22266
25935 25763 25755 25617
26856
M1318 CHUCK CLOSE END
4961 16486
X24 S S-FOOT SW. PLS
4962 [PLS M960] 4968 4998
SCHC.M
M6453 X903 M6
MCBF_P SCHC.M BF.P
M2 M965 M2 X24 M962 M961 SP CHUCKING SW.
4969 5004 4973 4992 5034
DBFS.P SCHX DBFS.P SCHC.M SCHSW 5036
5129 5035
M3 M961 X903 M6
UICH.P SCHSW SCHC.M BF.P
5004
M4
ACH.P
X25 X24 M2 M6632
SCHO.M SCHC.M DBFS.P ILYME2
4452
M6453 X903 M6
MCBF_P SCHC.M BF.P
M961 M962 M965 M2 M3 M4
SCHSW SCHSW SCHX DBFS.P UICH.P ACH.P
5004 5035 5129
M45 M5180 M960
PCH.P F-DR.P SCKSWP
4968
T207
P-ON.T
571

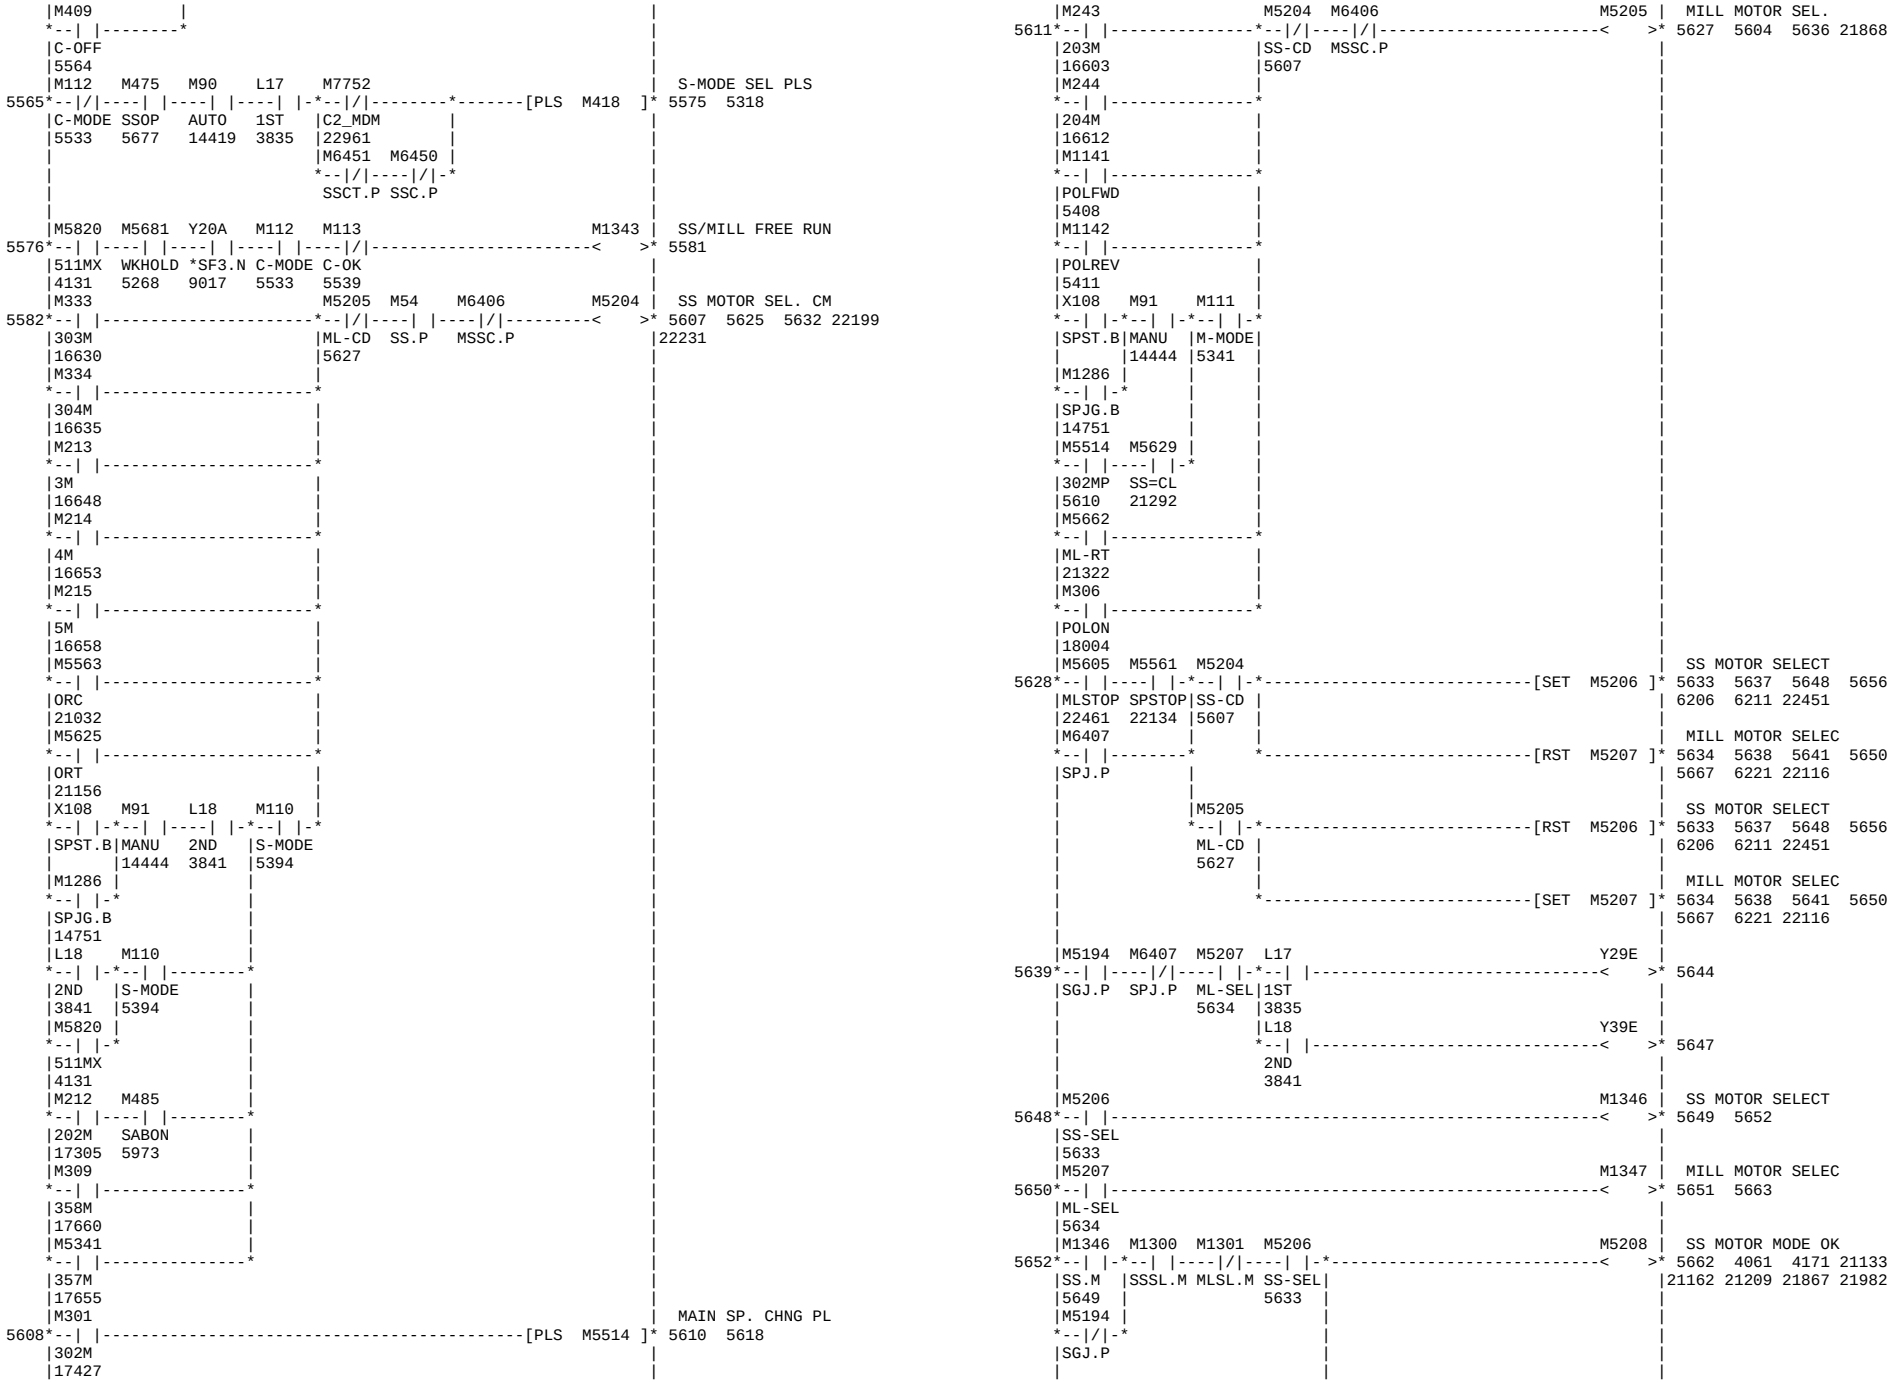

M2 M965 M2 X24 M961 M962 | SP UNCHUCKING SW
5005 5035 4991 4993 5009
DBFS.P SCHX DBFS.P SCHC.M SCHSW 5079 5117
5129 M962 5004
M3 X903 M6
UICH.P SCHSW SCHC.M BF.P
5035
M4
ACH.P
X25 X24 M2 M6632
SCHO.M SCHC.M DBFS.P ILYME2
4452
X903 M6
SCHC.M BF.P
X24 M2 M3 M4
SCHC.M DBFS.P UICH.P ACH.P
X903 M6
SCHC.M BF.P
M961 M5937 X245 M100 M389 M964 M963 | SP CHUCKING COM.
5036 5065 5112 5126 5132
SCHSW BFCKIL STL.N RDY SYNOK SUCKA 5142
5004 4457 533 4723 5116
M292 M5511 M5821 M5753 X360 X260
507m F-DRVR 540MX CHK.OK SYNC_N SYNS.N
17594 4656 4237 3939
M289 M5840
506M TRS-M
16857 4268
M303
7M
17564
M5941 M5511
CKC2.R F-DRVR
24431 4656
M83 M45 M5180
MASA1P PCH.P F-DR.P
622
M553 M45
MS-NEG PCH.P
8417
Y4F5 M110 M6463 T35
5066 5076 5110
D968 R366 R30 ZP.L S-MODE MCBP.P T35
8969 5394
D968 R366 R30
M962 M5937 X245 M390 M391 M100
5079 5153 5243
SCHSW BFCKIL STL.N UCHOK SSROK RDY
5035 4457 4778 4783 533
M302 M5605 M5561
6M MLSTOP SPSTOP
17549 22461 22134
M5940 M5511 L18
CKO2.R F-DRVR 2ND
24422 4656 3841
M290 M404 M5511 M5821 M5824
507M CHCL-L F-DRVR 540MX TRS-M
16867 4960 4656 4237 4268
M291 M5751 M5753 M519
506m 362MX CHK.OK 500MX
17554 3799 3939 4264
X95 Y96 M5561 M307
PCF.LS PCF.M SPSTOP 348M
7579 22134 17529
T75
MSRD.T
5076
M963 M389 M964 | SP UNCHUCKING CO
1> 5116 5064 5119 5128
SCKA SYNOK 5130 5151
5065 4723
X360
SYNC_N
M962 M964 M965 L23 | SS UCK. INCH CAN
5117 5125 5120 5149
SCHSW SUCKA SCHX
5035 5116 5129
X245 L23
STL.N SCHINH
5125
M5940
CKO2.R
24422
M2
DBFS.P
M963 M964 M965 | SP CHUCKING
5126 5129 4972 4994 5008
SCKA SUCKA 5122 5143 5152 5158
5065 5116 5169 5221 5239
L26
SCHUK
5145
M964 M963 M966 | SP UNCHUCKING
5130 5133 5144 5150 5160
SUCKA SCKA 5167 5210 5222
5116 5065
L27 M975 | 2nd CHUCK CLAMP
5139 7560 19644 20148
SUCHUK SCHE T12 T12 D52 T12
5153 5243 20170
M963 M966 L26 | SS CHUCK CLAMP
5142 5145 5127
SCKA SUCHX
5065 5133
M965
SCHX
5129
M3 M966 M965 L27 | SS CHUCK UNCLAMP
5148 5153 5131
UICH.P SUCHX SCHX
5133 5129
L23
SCHINH
5125
M964
SUCKA
5116

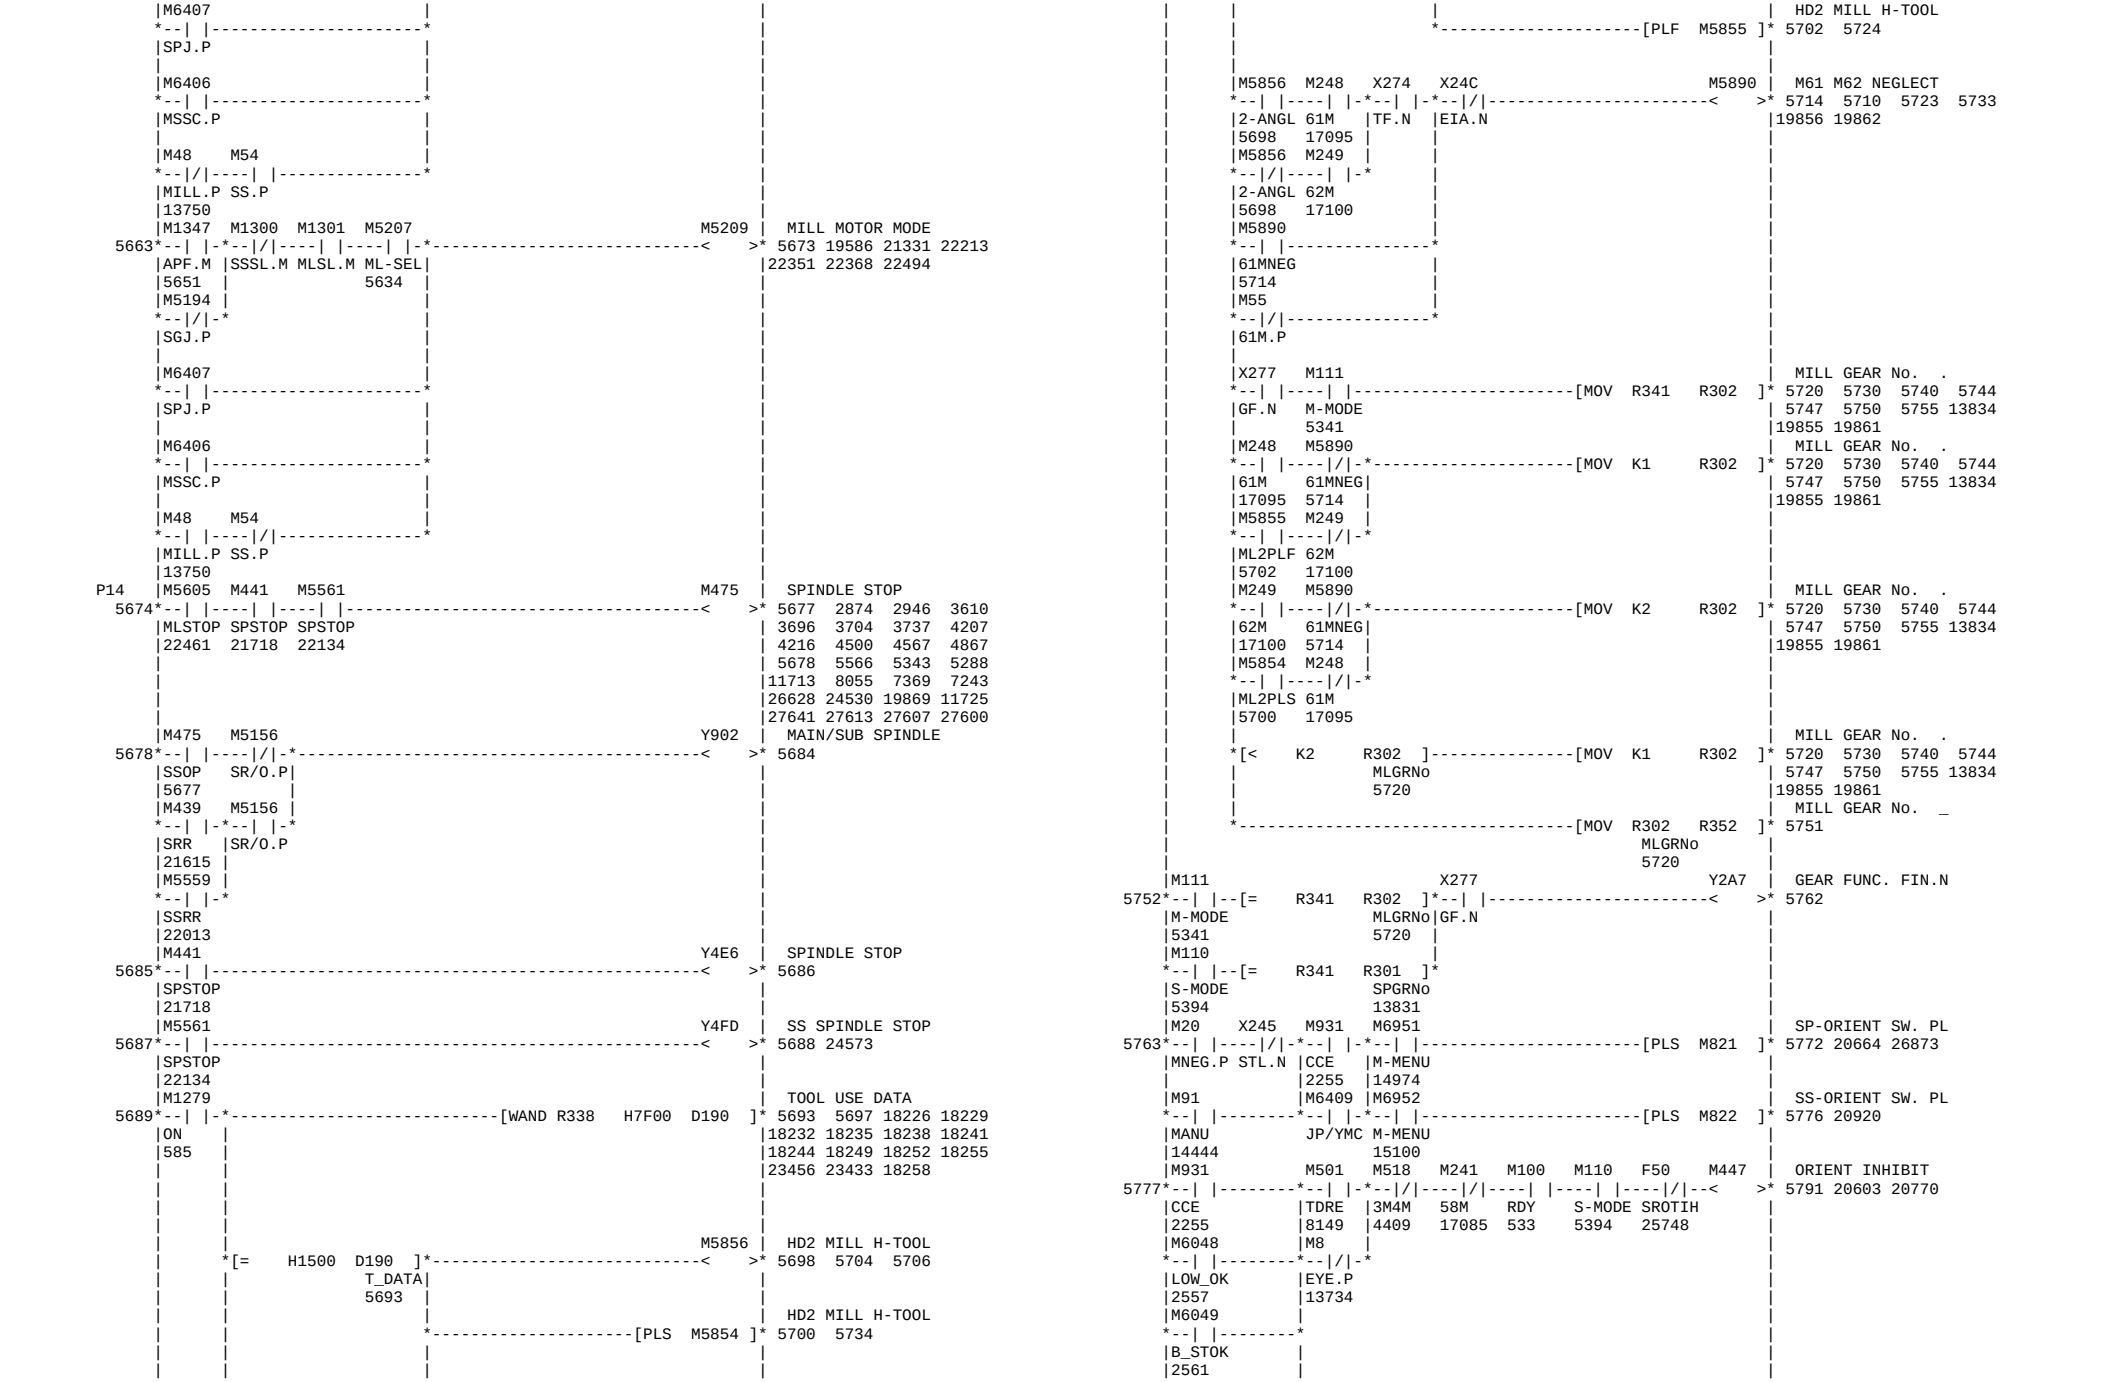

M1348 SS CHUCK CLOSE
5156 5164 2018 2025 2048
8939 25313
M1349 SS CHUCK OPEN
5165 5173 2020 2023 2051
8942 22957 25310
M969 SP CHUCK OPEN CO
5174 5177 5185 5200 25314
M970 SP CHUCK CLOSE C
5178 5184 5187 5198 25311
M1333 SS MISS CHUCK
5185 5194 4561 5242 24561
25207
Y4FA YMC B/P E-STOP
5195 5197
M973 SP UNCHUCK END
5198 5215 4011 4560 5241
7559 8981 11923 19642
20149 20171
M1319 SP UNCHUCK END.B
5217 16488
M974 CANCEL CHUCK END
5218 5220 2029 2053 5223
M974 2nd CHUCK CLOSE
5221 5225 2033 5156 5165
5209 5228 5238
AIR CHUCK TIMER
5228 5230 5203 5207 5235


M5733 M973 M1333 M975 SP CHUCK END
5233 5243 3863 4305 4755
5134 5214 5244 5248
6016 8974 19649 20157
20164 21906 22256 22267
24452 25648 25756 25767
M1320 SP CHUCK END.B
5244 5246 16490
M5671 WORK HOLDING
5247 5252 3952 4120 4162
5265 26420
WORK HOLDING PLS
5254 5257
M5681 WORK HOLDING
5255 5268 4297 4306 5260
5503 5517 5577 9075
20767 20952 21131 21263
21342 21510 21907 22260
22956 22987 23001 25618
25649 25661 25771 25936
P13 C AXIS SW. PULSE
5269 5272 5455 5478 5560
22931 22962 26408
COOLANT MENU SW
5273 5278 5285 5287
MACHINE MENU SW
5282 5283 5342
M1372 MILL ON C-AXIS O
5283 5286 5284 5335
M405 SPINDLE MODE SEL
5287 5337 5373 22235 22515

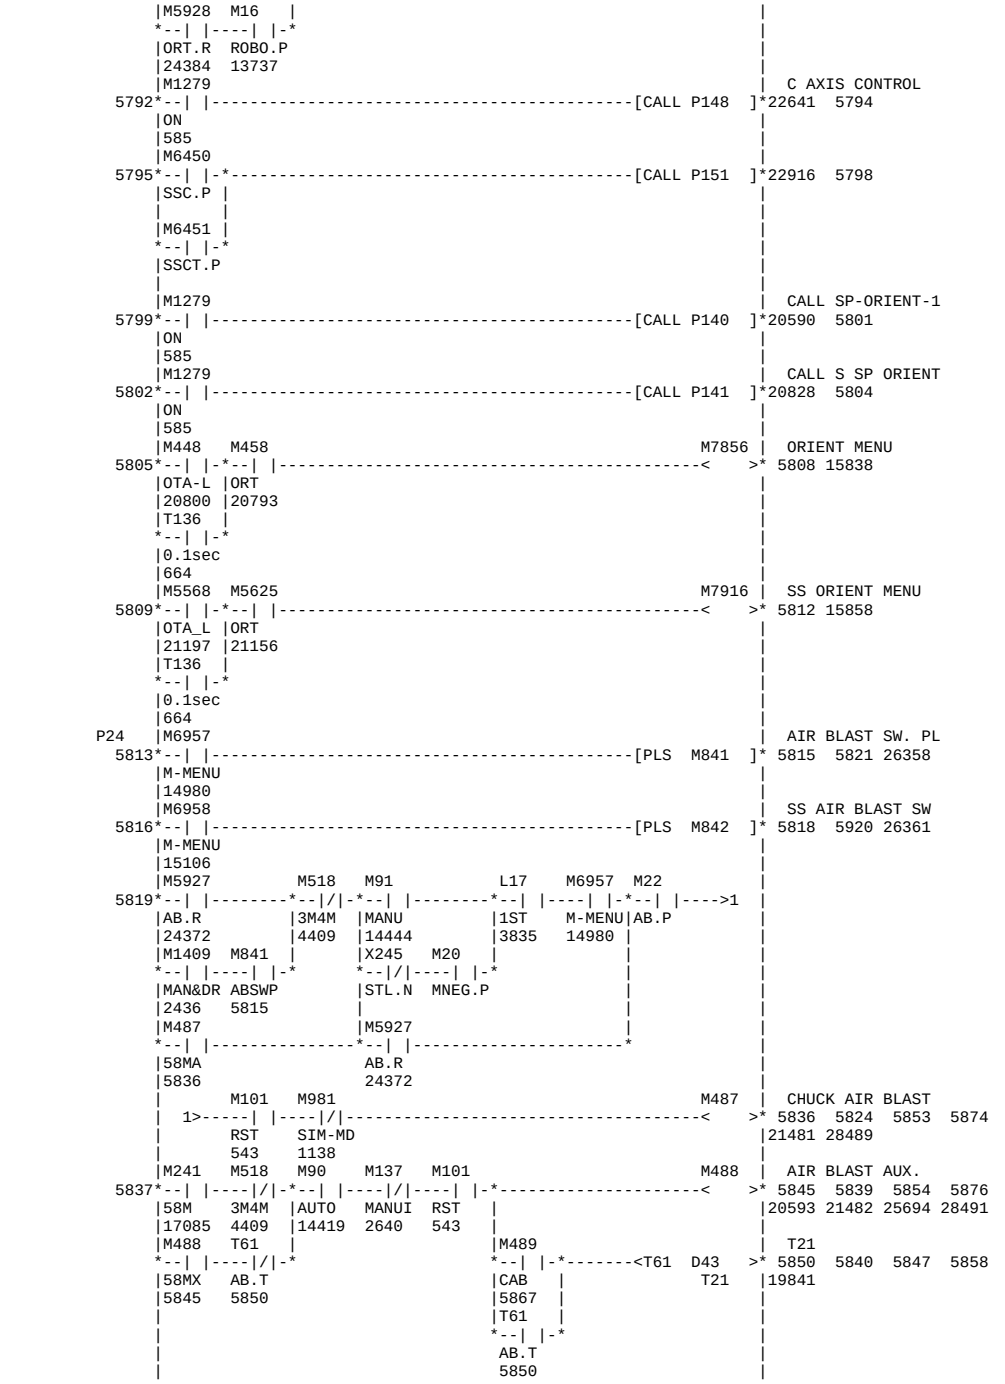

M7753 M5400 M5401 M443 L18
C2_CAN 200m 201m ORC 2ND
23000 17311 17316 20707 3841
M409
C-OFF
5564
M418
S-SELP
5575
M7757 M6450
C2OFFP SSC.P
23036
M6451
SSCT.P
M5630 L18 M91 M6450 M6451
SS=UCL 2ND MANU SSC.P SSCT.P
21300 3841 14444
M112 L17 M1372
C-MODE 1ST MILLON
5533 3835 5286
M7754 L18
C2_MD 2ND
23020 3841
1>
[RST M111]
MILL MODE
5341 1253 1274 1340
1352 2197 2214 2551
3485 3660 4278 5375
5468 5463 5415 5376
5621 5562 5549 5505
6020 6004 5752 5717
6937 6468 6452 6381
19497 19488 8984 8921
20848 20060 19995 19919
21303 21241 21230 20999
22141 22130 21716 21329
22348 22332 22302 22224
22939 22537 22528 22413
25794 25719 22989 22944
27026 26906
M7123 M475 M91 M48 M405 M406
MILL MODE SELECT
5342 5374 5303
MACMEP SSOP MANU
5282 5677 14444
M261 M6450 M6451
MILL.P SP-SEL
13750 5337
[SET M111]
MILL MODE
5341 1253 1274 1340
1352 2197 2214 2551
3485 3660 4278 5375
5376 5415 5463 5468
5505 5549 5562 5621
5717 5752 6004 6020
6381 6452 6468 6937
8921 8984 19488 19497
19919 19995 20060 20848
20999 21230 21241 21303
21329 21716 22130 22141
22224 22302 22332 22348
22413 22528 22537 22939
22944 22989 25719 25794
26906 27027
200M SSC.P SSCT.P
17291
M262 M6450 M6451
201M SSC.P SSCT.P
17296
M113 L17 M212 M301
C-OK 1ST 202M 302M
5539 3835 17305 17427
M7756 L18 M5402 M301 M6450
C2_RDY 2ND 202m 302M SSC.P
23027 3841 17321 17427
M6451
SSCT.P
M5629 L18 M91 M6450 M6451
SS=CL 2ND MANU SSC.P SSCT.P
21292 3841 14444
M111 M112 M109 M5630 M6450 M6451
5376
M110
SPINDLE MODE
M-MODE C-MODE SPUCL SS=UCL SSC.P SSCT.P
5341 5533 22890 21300
5394 420 1245 1262
1268 1307 1330 1348
2544 5073 5490 5497
5789 5756 5602 5595
5963 5909 5862 5856
6464 6446 6002 5969
13200 13179 8654 6483
19911 19596 19522 19496
21605 21589 21471 21348
22002 21985 21845 21726
25702 22981 22974
M1140 M710 M7781 M7754 M6450
M1311
SPINDLE MODE .B
POLIMD SP-MP SSPUCL C2_MD SSC.P
5404 3837 23262 23020
L18
M6451
2ND
3841
SSCT.P
L17
1ST
3835
5395 16461
M306 M5426 M100 M101 M7890 M5197
M1140
POLIGON MODE
5396
POLON POLOFF RDY RST POLPLF POLI.P
18004 18009 533 543 5414
M1140
POLIMD
5404
X23A
5404 4041 4064 4073
4076 4085 4089 4099
5377 5397 5532 5543
6226 6837 6844 6855
6931 8575 19935 20387
20391 22142 22201 22208
22214 22303 22343 22349
22369 22529 22538 23019
POL.NC
X23A X521
M1141
POLIGON-MILL FWD
5405
POL.NC
5408 5613 6803 6819
8578 8616 8632
X521
M1142
POLIGON-MILL REV
5411 5614 6811 6822
8580 8618 8634
POLIGON.NC-PLF
[PLF M7890]
5414 5402
M111
Y234
MILL SELECT .NC
5415
M-MODE
5341
5416 8574 8581 8614
8619 8630 8635 24254
Y334
MILL MODE _NC
5417
M1312
MILL MODE .B
5418 16463
M300 M301 M101 M54
Y560
SS ENCODER SEL M
5419
300M 302M RST SS.P
17422 17427 543
Y560
SSENCM
5424
M6445
5424 5420
[CALL P99]
5425
BUS.P
24926 5427
M6445 M6410 Y230 X202 M49
ENCODER SEL IF 1
5428
[MOV K0 R306]
BUS.P R306.P CAXI.N RDY3.N C.P
5551
5437 5444 5449 24931
24937 24945

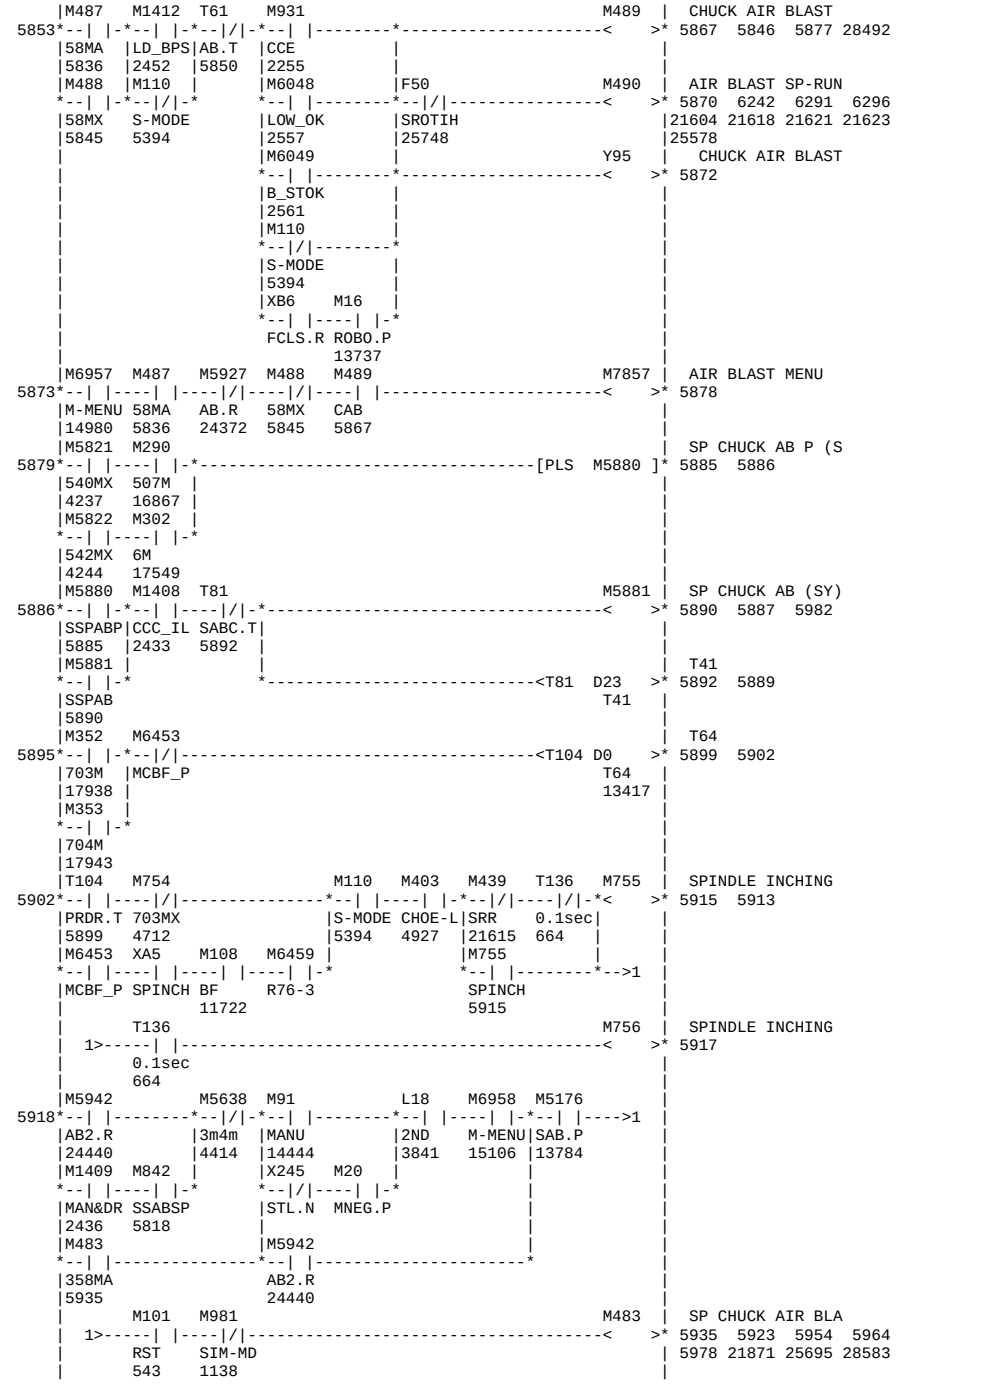

L17 L18 Y230
1ST 2ND CAXI.N
3835 3841 5551
M6410
R306.P
MOV K3 R306
MOV K1 R306
MOV K0 R356
ENCODER SEL IF 1
ENCODER SEL IF 1
ENCODER SEL IF 2
5437 5444 5449 24931
24937 24945
5453 24951 24958 24966
M931 M818 M1409 M91 L17 M502 M112 M49
CCE C-SWP MAN&DR MANU 1ST TDIL C-MODE C.P
2255 5272 2436 14444 3835 8169 5533
M261
200M
17291
M262
201M
17296
M111 X244 M6450 M6451
M-MODE OP.N SSC.P SSCT.P
5341
M7256 M111
203MM M-MODE
6809 5341
M7257
204MM
6817
M301
302M
17427
M100 M6631 M408 M407
CHUCK OPEN AT SS
5477 5519 21262
RDY ILYME1 C-CAN
533 2277 5516
M818 M931 L17 M91 M112
C-SWP CCE 1ST MANU C-MODE
5272 2255 3835 14444 5533
M212
202M
17305
M295
502M
17836
M313
511M
17856
M356
380M
17958
X244 M261 M262 M110 M6451 M6450
OP.N 200M 201M S-MODE SSCT.P SSC.P
17291 17296 5394
M5824 M326 M110 M6450 M6451
TRS-M 519M S-MODE SSC.P SSCT.P
4268 17922 5394
M301
302M
17427
M5563 L18 M5681
ORC 2ND WKHOLD
21032 3841 5268
M111 M90 X244 L17 M710 M261 M262 M112
M-MODE AUTO OP.N 1ST SP-MP 200M 201M C-MODE
5341 14419 3835 3837 17291 17296 5533
M5252
MISOP3
26717
M5681 M407 M6631 M408 X260 Y289 M100 X360
WKHOLD C-CEL ILYME1 C-CAN SYNS.N SYNS.N RDY SYNC_N
5268 5477 2277 5516 4087 533
M5630 T177
SS=UCL STOF.T
21300 2269
M112 X244
C-MODE OP.N
5533
M6409
JP/YMC
M1140
POLIMD
5404
X22A
ZP23.N
M113
M5197 M7620
POLI.P CMODE2
5535
M7620 M1140 X22A X222 M5197 M111
CMODE2 POLIMD ZP23.N ZP13.N POLI.P M-MODE
5535 5404 5341
Y230
CAXI.N
5551
L18
2ND
3841
M113
C-OK
5539
M261 X22A M7725
200M ZP23.N MILFIN
17291 6829
M7726
5558
M408 M818 M111 M91
C-CAN C-SWP M-MODE MANU
5516 5272 5341 14444
M7620 C-AXIS MODE 2
5535 5541 5542
M7620 C-AXIS MODE
5533 338 5291 5330
5378 5460 5482 5512
5520 5565 5579 9007
21132 19492 13117 9016
22206 21598 21541 21480
26709 23034 22722 22660
27030
M7620 C-AXIS READY
5539 920 5353 5537
5552 5580 6835 19478
19570 19916 19996 20780
22713 22718 22721 26860
M7620 C AXIS SELECT .N
5551 4067 4123 5432
5441 5546 7990 24928
24940
M1313 C AXIS MODE .B
5553 15623 16465
5558 5556
M7726
M409 SPINDLE MODE REQ
5564 5317 5561

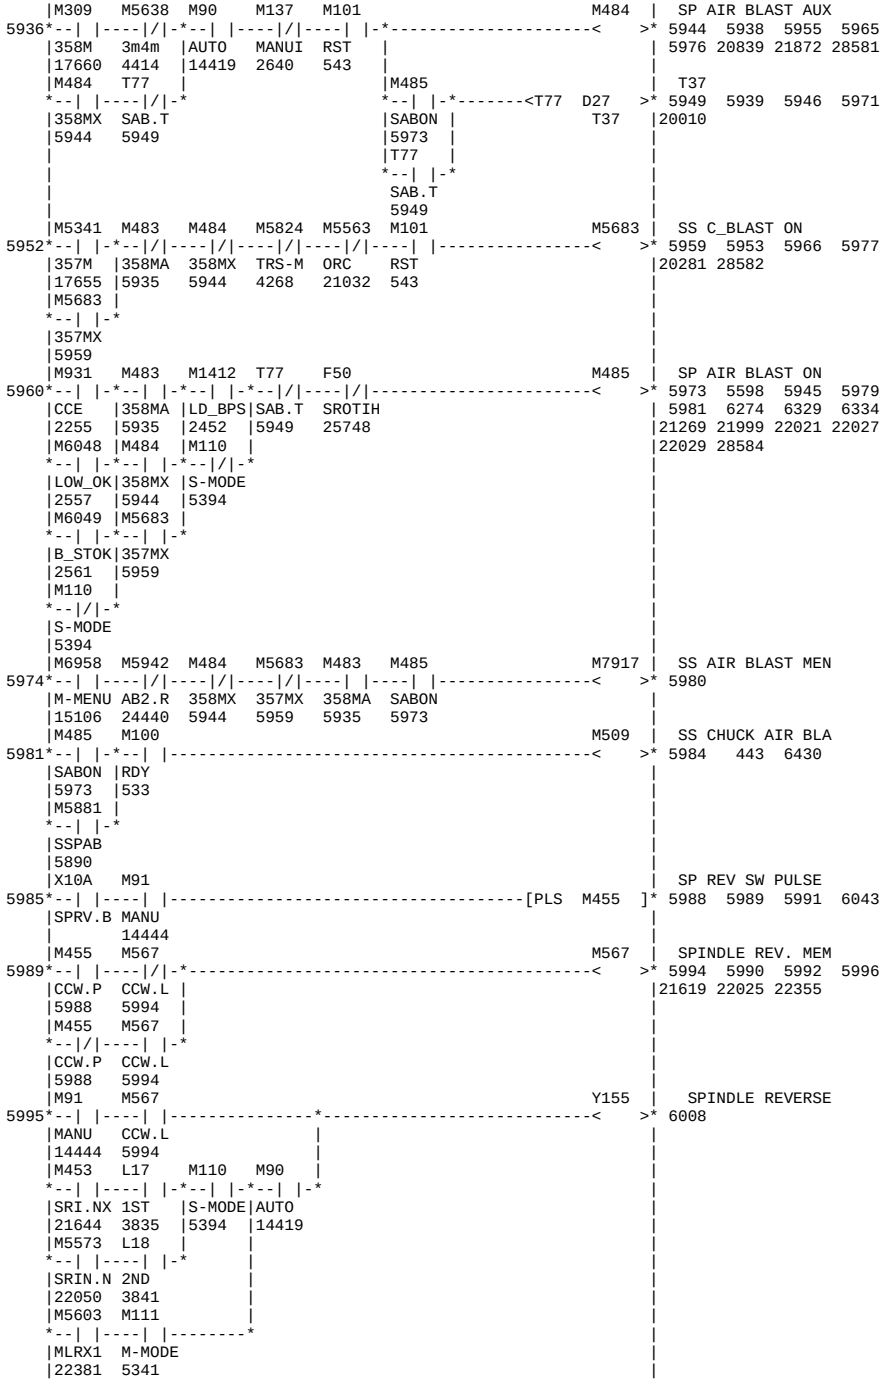

M409
C-OFF
5564
M112 M475 M90 L17 M7752
S-MODE SEL PLS
5565 C-MODE SSOP AUTO 1ST C2_MDM PLS M418 5575 5318
5533 5677 14419 3835 22961
M6451 M6450
SSCT.P SSC.P
M5820 M5681 Y20A M112 M113 M1343
SS/MILL FREE RUN
5576 511MX WKHOLD *SF3.N C-MODE C-OK 5581
4131 5268 9017 5533 5539
M333 M5205 M54 M6406 M5204
SS MOTOR SEL. CM
5582 303M ML-CD SS.P MSSC.P 5607 5625 5632 22199
16630 5627 22231
M334
304M
16635
M213
3M
16648
M214
4M
16653
M215
5M
16658
M5563
ORC
21032
M5625
ORT
21156
X108 M91 L18 M110
SPST.B MANU 2ND S-MODE
14444 3841 5394
M1286
SPJG.B
14751
L18 M110
2ND S-MODE
3841 5394
M5820
511MX
4131
M212 M485
202M SABON
17305 5973
M309
358M
17660
M5341
357M
17655
M301
MAIN SP. CHNG PL
5608 M5514 5610 5618
302M
17427
M243 M5204 M6406 M5205
MILL MOTOR SEL.
5611 SS-CD MSSC.P 5627 5604 5636 21868
203M
16603
5607
M244
204M
16612
M1141
POLFWD
5408
M1142
POLREV
5411
X108 M91 M111
SPST.B MANU M-MODE
14444 5341
M1286
SPJG.B
14751
M5514 M5629
302MP SS=CL
5610 21292
M5662
ML-RT
21322
M306
POLON
18004
M5605 M5561 M5204
SS MOTOR SELECT
5628 MLSTOP SPSTOP SS-CD SET M5206 5633 5637 5648 5656
22461 22134 5607 6206 6211 22451
M6407
MILL MOTOR SELEC
RST M5207 5634 5638 5641 5650
SPJ.P 5667 6221 22116
M5205
SS MOTOR SELECT
RST M5206 5633 5637 5648 5656
ML-CD 6206 6211 22451
5627
MILL MOTOR SELEC
SET M5207 5634 5638 5641 5650
5667 6221 22116
M5194 M6407 M5207 L17 Y29E
5639 SGJ.P SPJ.P ML-SEL 1ST 5644
5634 3835
L18 Y39E
5647
2ND
3841
M5206 M1346
SS MOTOR SELECT
5648 SS-SEL 5649 5652
5633
M5207 M1347
MILL MOTOR SELEC
5650 ML-SEL 5651 5663
5634
M1346 M1300 M1301 M5206 M5208
SS MOTOR MODE OK
5652 SS.M SSSL.M MLSL.M SS-SEL 5662 4061 4171 21133
5649 5633 21162 21209 21867 21982
M5194
SGJ.P

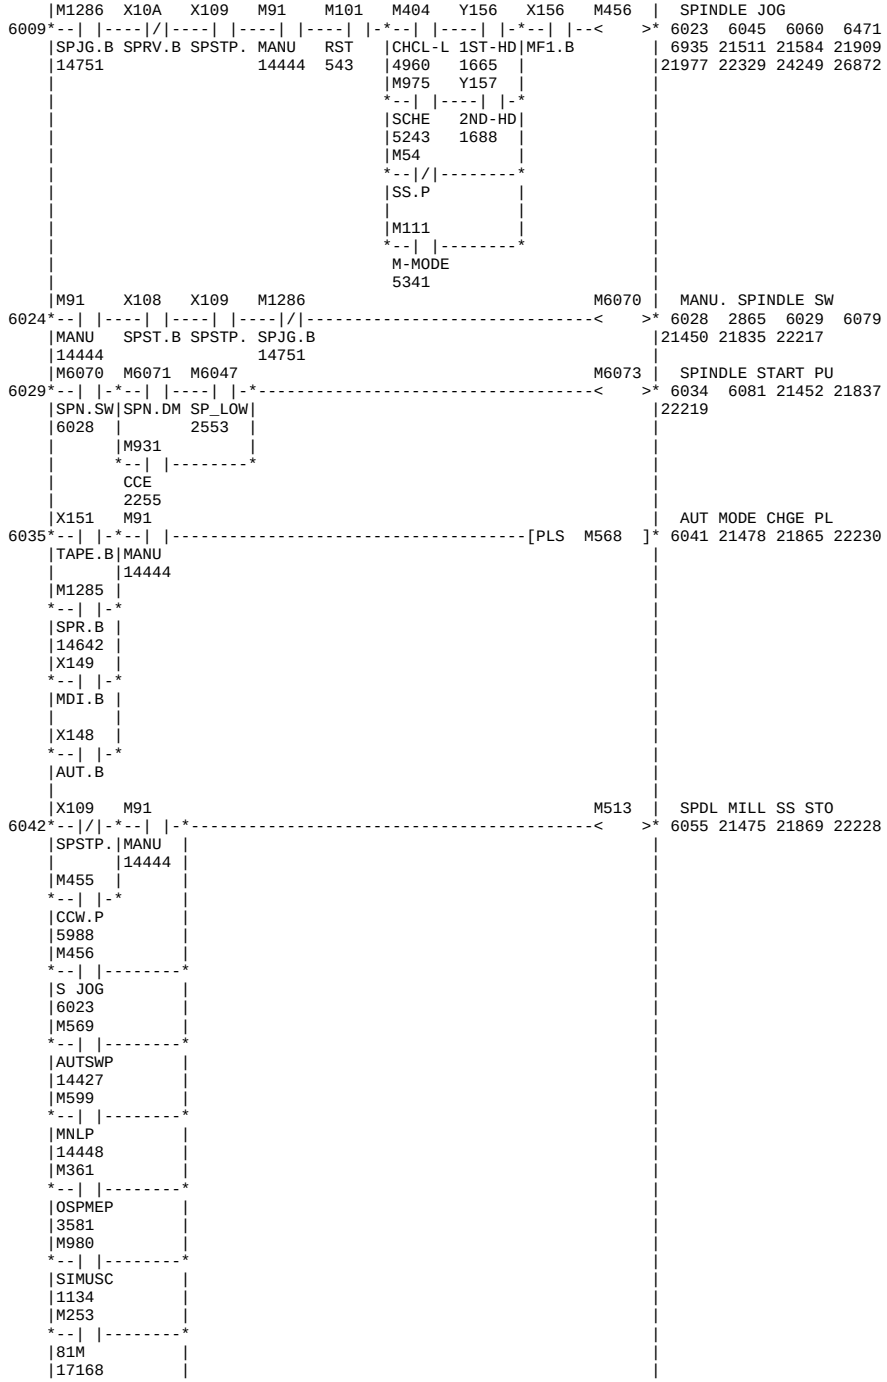

M6407
SPJ.P
M6406
MSSC.P
M48 M54
MILL.P SS.P
13750
M1347 M1300 M1301 M5207 M5209 | MILL MOTOR MODE
5663 5673 19586 21331 22213
APF.M SSSL.M MLSL.M ML-SEL 22351 22368 22494
5651 5634
M5194
SGJ.P
M6407
SPJ.P
M6406
MSSC.P
M48 M54
MILL.P SS.P
13750
P14 M5605 M441 M5561 M475 | SPINDLE STOP
5674 5677 2874 2946 3610
MLSTOP SPSTOP SPSTOP 3696 3704 3737 4207
22461 21718 22134 4216 4500 4567 4867
5678 5566 5343 5288
11713 8055 7369 7243
26628 24530 19869 11725
27641 27613 27607 27600
M475 M5156 Y902 | MAIN/SUB SPINDLE
5678 5684
SSOP SR/O.P
5677
M439 M5156
SRR SR/O.P
21615
M5559
SSRR
22013
M441 Y4E6 | SPINDLE STOP
5685 5686
SPSTOP
21718
M5561 Y4FD | SS SPINDLE STOP
5687 5688 24573
SPSTOP
22134
M1279 | TOOL USE DATA
5689 5693 5697 18226 18229
ON 18232 18235 18238 18241
585 18244 18249 18252 18255
23456 23433 18258
M5856 | HD2 MILL H-TOOL
H1500 D190 5698 5704 5706
T_DATA
5693
| HD2 MILL H-TOOL
[PLS M5854] 5700 5734

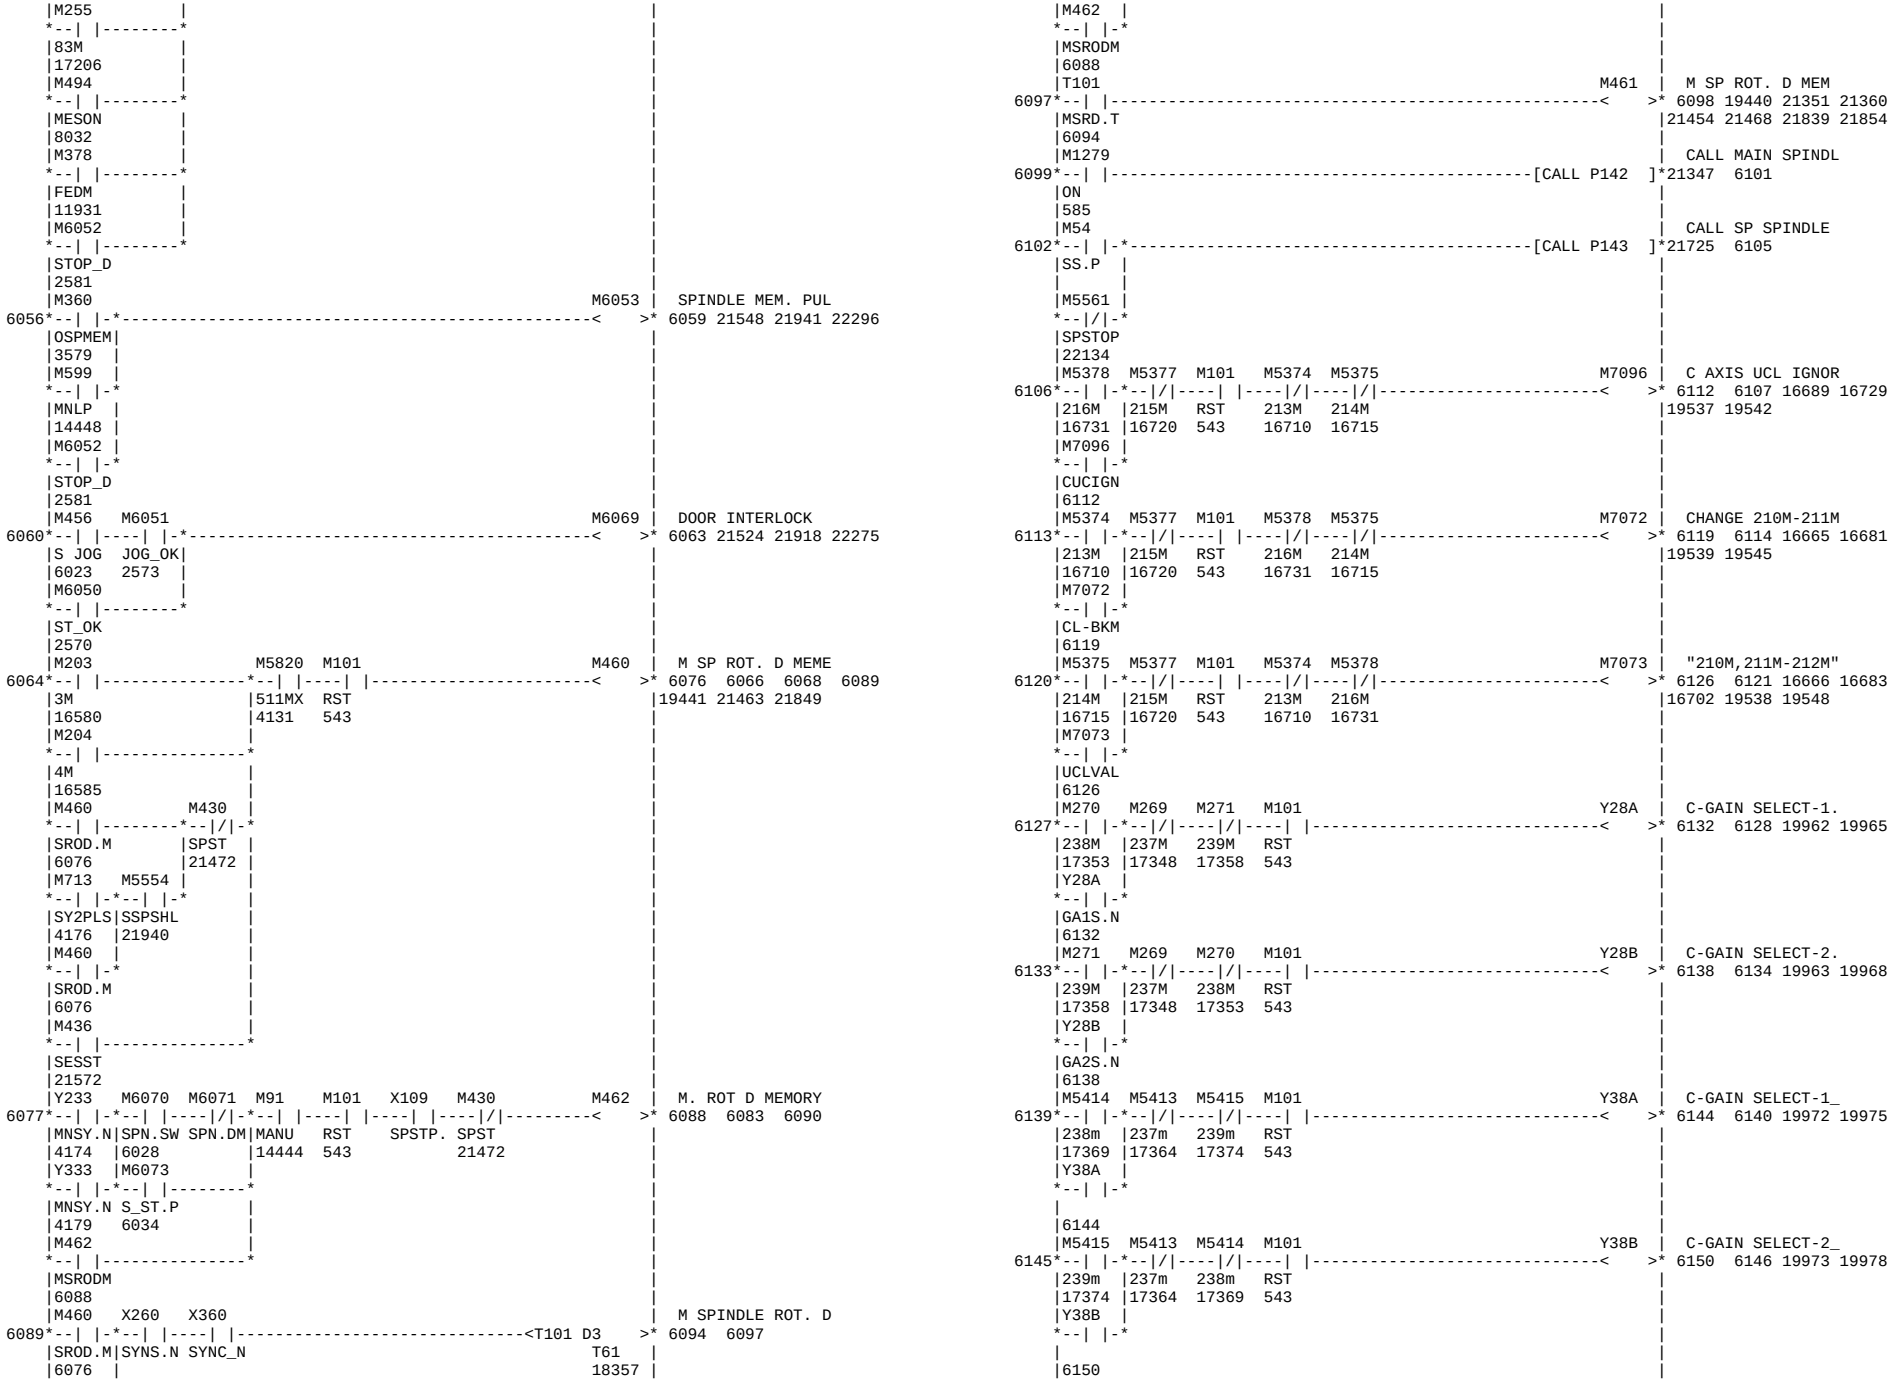
| HD2 MILL H-TOOL
[PLF M5855] 5702 5724
M5856 M248 X274 X24C M5890 | M61 M62 NEGLECT
5714 5710 5723 5733
2-ANGL 61M TF.N EIA.N 19856 19862
5698 17095
M5856 M249
2-ANGL 62M
5698 17100
M5890
61MNEG
5714
M55
61M.P
X277 M111 | MILL GEAR No. .
[MOV R341 R302] 5720 5730 5740 5744
GF.N M-MODE 5747 5750 5755 13834
5341 19855 19861
M248 M5890 | MILL GEAR No. .
[MOV K1 R302] 5720 5730 5740 5744
61M 61MNEG 5747 5750 5755 13834
17095 5714 19855 19861
M5855 M249
ML2PLF 62M
5702 17100
M249 M5890 | MILL GEAR No. .
[MOV K2 R302] 5720 5730 5740 5744
62M 61MNEG 5747 5750 5755 13834
17100 5714 19855 19861
M5854 M248
ML2PLS 61M
5700 17095
| MILL GEAR No. .
[< K2 R302] [MOV K1 R302] 5720 5730 5740 5744
MLGRNo 5747 5750 5755 13834
5720 19855 19861
| MILL GEAR No. _
[MOV R302 R352] 5751
MLGRNo
5720
M111 X277 Y2A7 | GEAR FUNC. FIN.N
5752 5762
M-MODE MLGRNo GF.N
5341 5720
M110
S-MODE SPGRNo
5394 13831
M20 X245 M931 M6951 | SP-ORIENT SW. PL
5763 5772 20664 26873
MNEG.P STL.N CCE M-MENU
2255 14974
M91 M6409 M6952 | SS-ORIENT SW. PL
5776 20920
MANU JP/YMC M-MENU
14444 15100
M931 M501 M518 M241 M100 M110 F50 M447 | ORIENT INHIBIT
5777 5791 20603 20770
CCE TDRE 3M4M 58M RDY S-MODE SROTIH
2255 8149 4409 17085 533 5394 25748
M6048 M8
LOW_OK EYE.P
2557 13734
M6049
B_STOK
2561

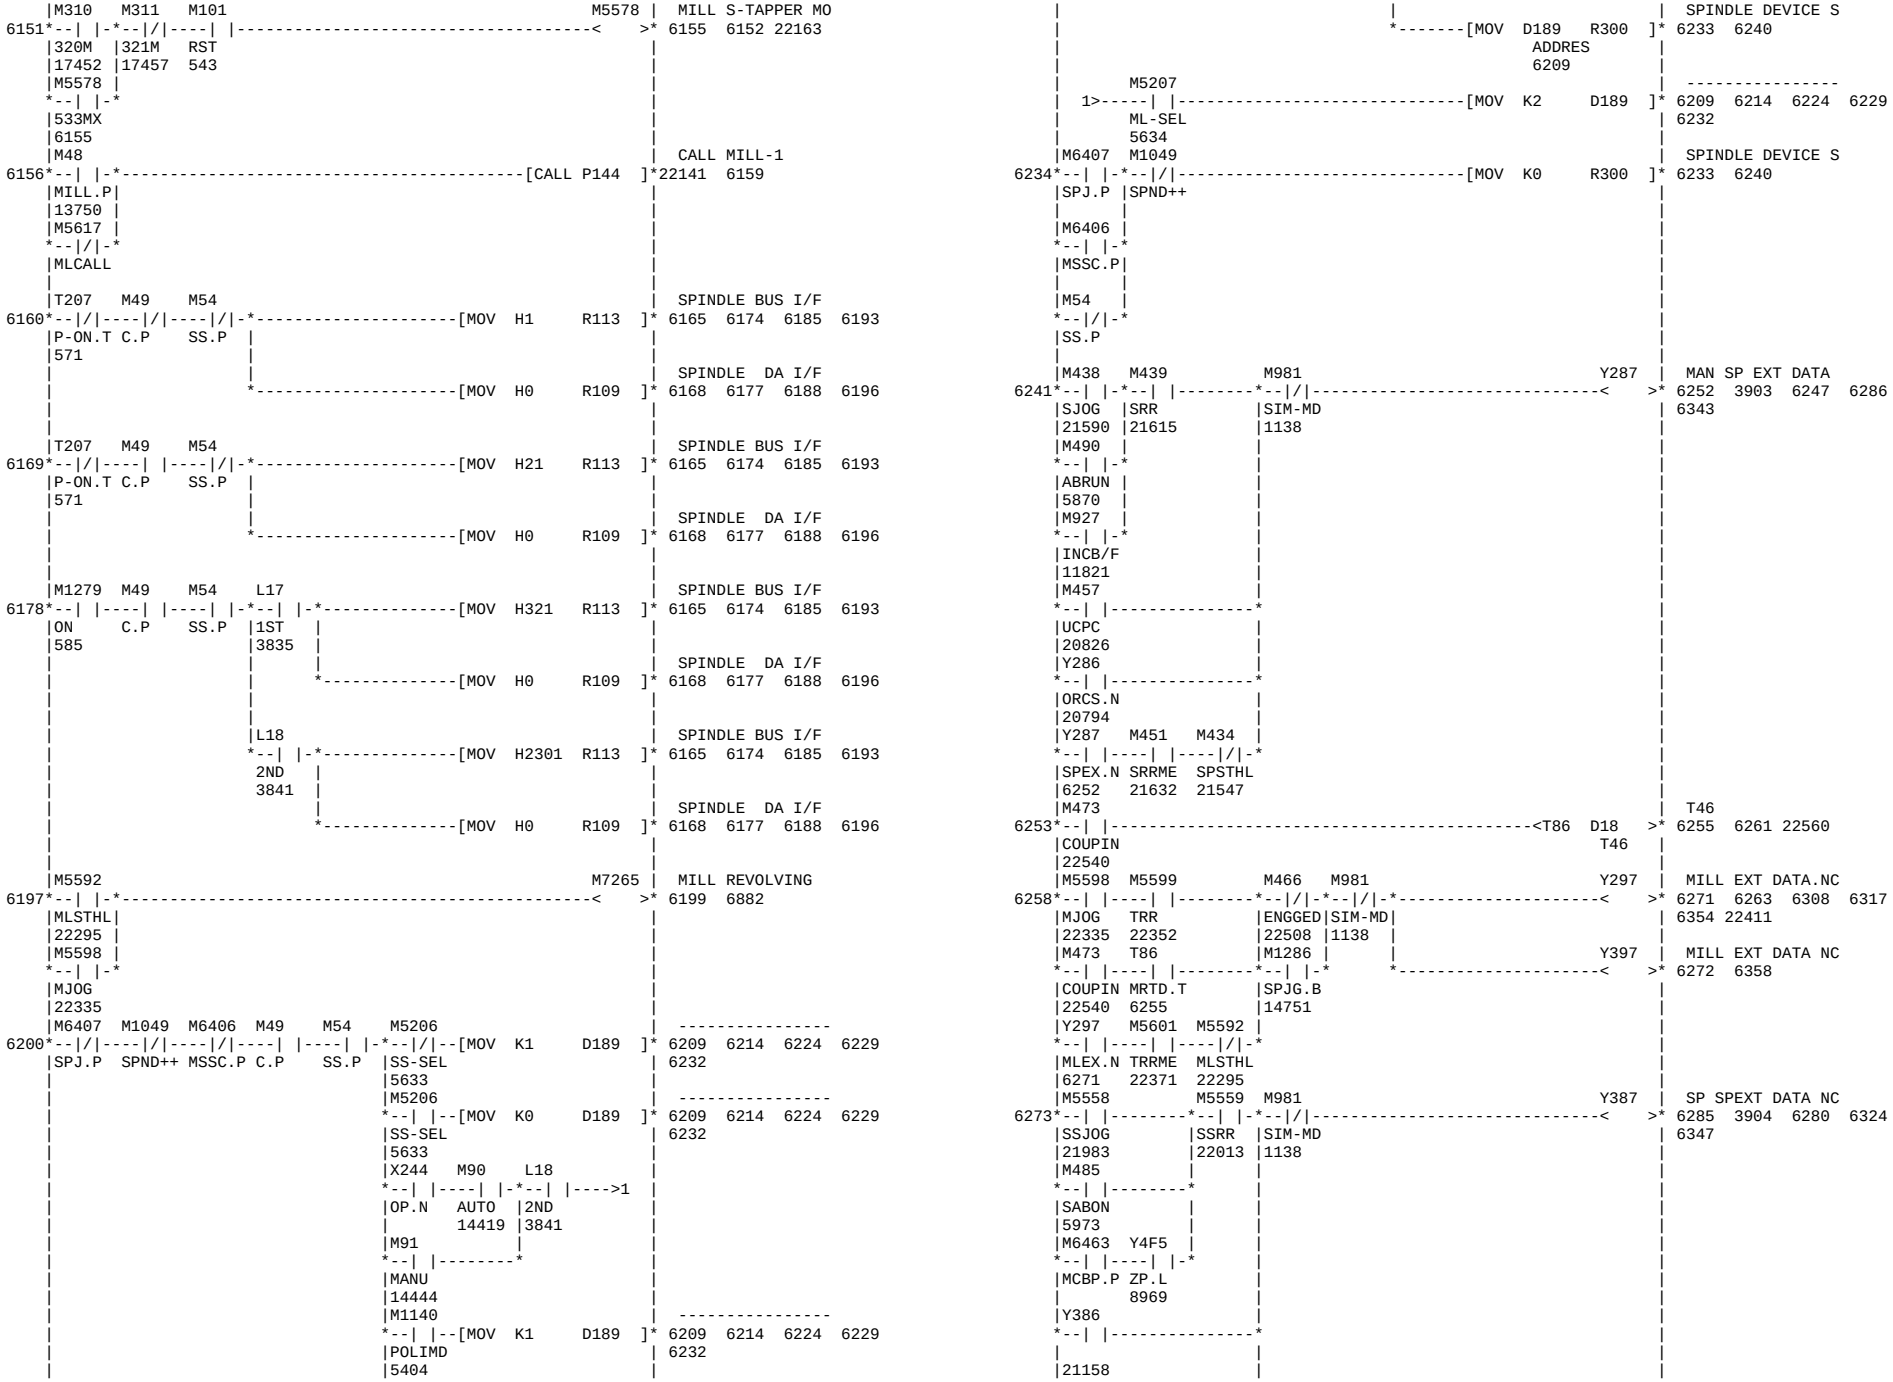

|M5928 M16 |
--| |----| |-
|ORT.R ROBO.P
|24384 13737
|M1279
C AXIS CONTROL
5792*--| |----------[CALL P148]*22641 5794
|ON
|585
|M6450
5795*--| |-*----------[CALL P151]*22916 5798
|SSC.P |
| |
|M6451 |
--| |-
|SSCT.P
|M1279
CALL SP-ORIENT-1
5799*--| |----------[CALL P140]*20590 5801
|ON
|585
|M1279
CALL S SP ORIENT
5802*--| |----------[CALL P141]*20828 5804
|ON
|585
|M448 M458 M7856
ORIENT MENU
5805*--| |-*--| |----------< >* 5808 15838
|OTA-L |ORT
|20800 |20793
|T136 |
--| |-
|0.1sec
|664
|M5568 M5625 M7916
SS ORIENT MENU
5809*--| |-*--| |----------< >* 5812 15858
|OTA_L |ORT
|21197 |21156
|T136 |
--| |-
|0.1sec
|664
P24 |M6957
AIR BLAST SW. PL
5813*--| |----------[PLS M841]* 5815 5821 26358
|M-MENU
|14980
|M6958
SS AIR BLAST SW
5816*--| |----------[PLS M842]* 5818 5920 26361
|M-MENU
|15106
|M5927 M518 M91 L17 M6957 M22
5819*--| |--------*--|/|-*--| |--------*--| |----| |-*--| |---->1
|AB.R |3M4M |MANU |1ST M-MENU|AB.P
|24372 |4409 |14444 |3835 14980 |
|M1409 M841 | |X245 M20 | |
--| |----| |- *--|/|----| |-* |
|MAN&DR ABSWP |STL.N MNEG.P |
|2436 5815 |
|M487 |M5927 |
--| |-----------------| |----------*
|58MA AB.R
|5836 24372
| M101 M981 M487
CHUCK AIR BLAST
1>-----| |----|/|----------< >* 5836 5824 5853 5874
| RST SIM-MD 21481 28489
| 543 1138
|M241 M518 M90 M137 M101 M488
AIR BLAST AUX.
5837*--| |----|/|-*--| |----|/|----| |-*----------< >* 5845 5839 5854 5876
|58M 3M4M |AUTO MANUI RST | 20593 21482 25694 28491
|17085 4409 |14419 2640 543 |
|M488 T61 | |M489
T21
--| |----|/|- *--| |-*-------<T61 D43 >* 5850 5840 5847 5858
|58MX AB.T |CAB | T21 |19841
|5845 5850 |5867 |
| |T61 |
| *--| |-*
| AB.T
| 5850

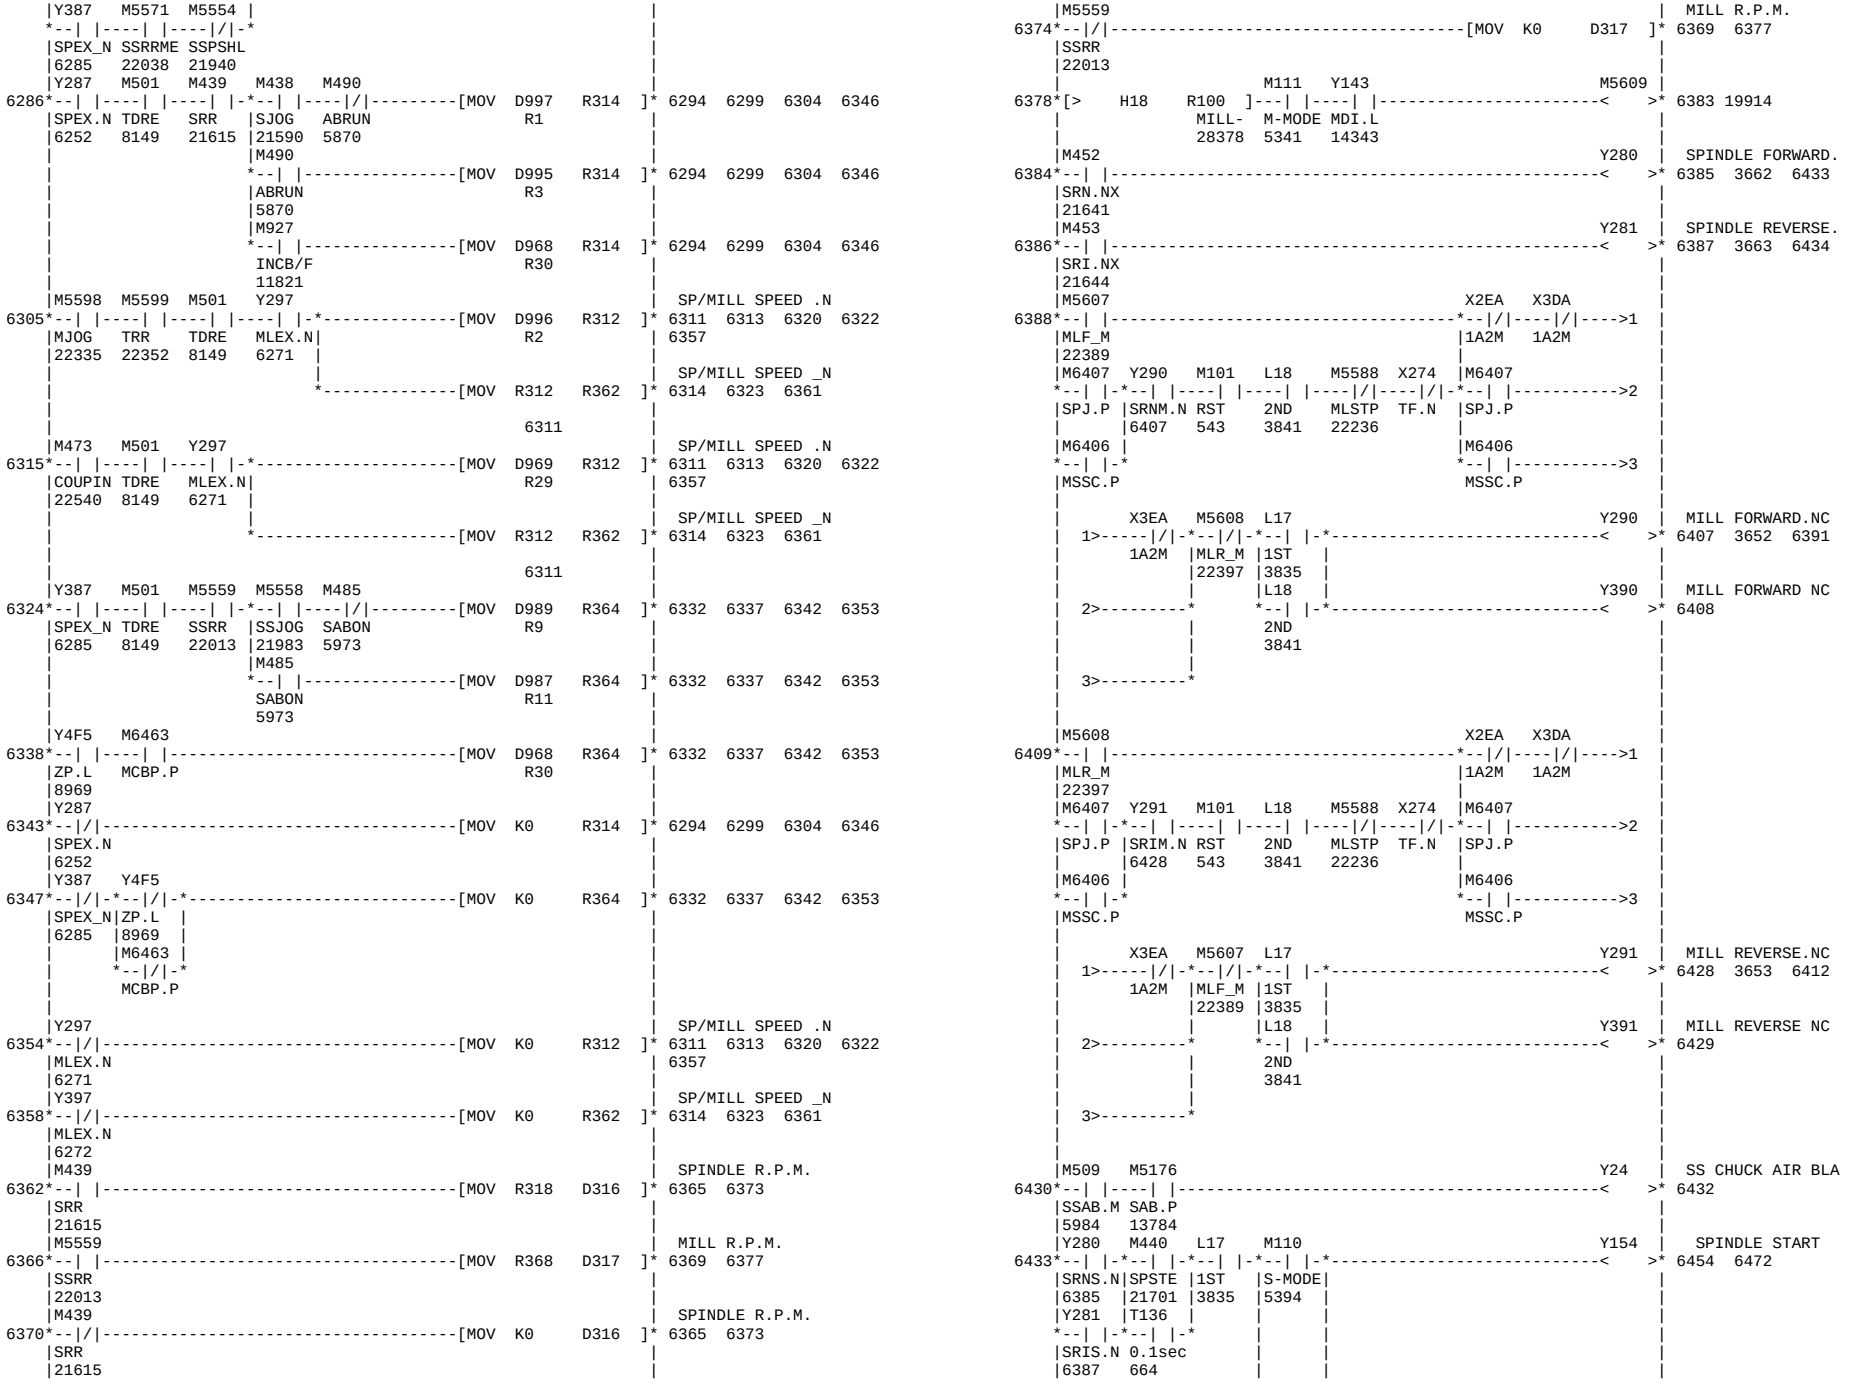

|M487 M1412 T61 M931 M489
CHUCK AIR BLAST
5853*--| |-*--| |-*--|/|-*--| |--------*----------< >* 5867 5846 5877 28492
|58MA |LD_BPS|AB.T |CCE |
|5836 |2452 |5850 |2255 |
|M488 |M110 | |M6048 |F50 M490
AIR BLAST SP-RUN
--| |---|/|-* *--| |--------*--|/|----------< >* 5870 6242 6291 6296
|58MX S-MODE |LOW_OK |SROTIH |21604 21618 21621 21623
|5845 5394 |2557 |25748 |25578
|M6049 | Y95
CHUCK AIR BLAST
|*--| |--------*----------< >* 5872
|B_STOK |
|2561 |
|M110 |
|*--|/|--------*
|S-MODE |
|5394 |
|XB6 M16 |
|*--| |----| |-*
| FCLS.R ROBO.P
| 13737
|M6957 M487 M5927 M488 M489 M7857
AIR BLAST MENU
5873*--| |----| |----|/|----|/|----| |----------< >* 5878
|M-MENU 58MA AB.R 58MX CAB
|14980 5836 24372 5845 5867
|M5821 M290
SP CHUCK AB P (S
5879*--| |----| |-*----------[PLS M5880]* 5885 5886
|540MX 507M |
|4237 16867 |
|M5822 M302 |
--| |----| |-
|542MX 6M
|4244 17549
|M5880 M1408 T81 M5881
SP CHUCK AB (SY)
5886*--| |-*--| |----|/|-*----------< >* 5890 5887 5982
|SSPABP|CCC_IL SABC.T|
|5885 |2433 5892 |
|M5881 |
T41
--| |- *----------<T81 D23 >* 5892 5889
|SSPAB T41
|5890
|M352 M6453
T64
5895*--| |-*--|/|----------<T104 D0 >* 5899 5902
|703M |MCBF_P T64
|17938 | 13417
|M353 |
--| |-
|704M
|17943
|T104 M754 M110 M403 M439 T136 M755
SPINDLE INCHING
5902*--| |----|/|----------*--| |----| |-*--|/|----|/|-*< >* 5915 5913
PRDR.T 703MX	S-MODE CHOE-L	SRR 0.1sec
5899 4712	5394 4927	21615 664
M6453 XA5 M108 M6459		M755
--| |----| |----| |----| |- *--| |--------*-->1
MCBF_P SPINCH BF R76-3 SPINCH
11722 5915
T136 M756
SPINDLE INCHING
1>-----		----------< >* 5917
0.1sec
664
M5942 M5638 M91 L18 M6958 M5176
5918*--| |--------*--|/|-*--| |--------*--| |----| |-*--| |---->1
AB2.R	3m4m	MANU	2ND M-MENU	SAB.P
24440	4414	14444	3841 15106	13784
M1409 M842	|X245 M20	
--| |----| |- *--|/|----| |-*
MAN&DR SSABSP	STL.N MNEG.P
2436 5818
M483	M5942
*--		---------------*--		----------*
358MA AB2.R
5935 24440
M101 M981 M483
SP CHUCK AIR BLA
1>-----		----	/	----------< >* 5935 5923 5954 5964
RST SIM-MD 5978 21871 25695 28583
543 1138

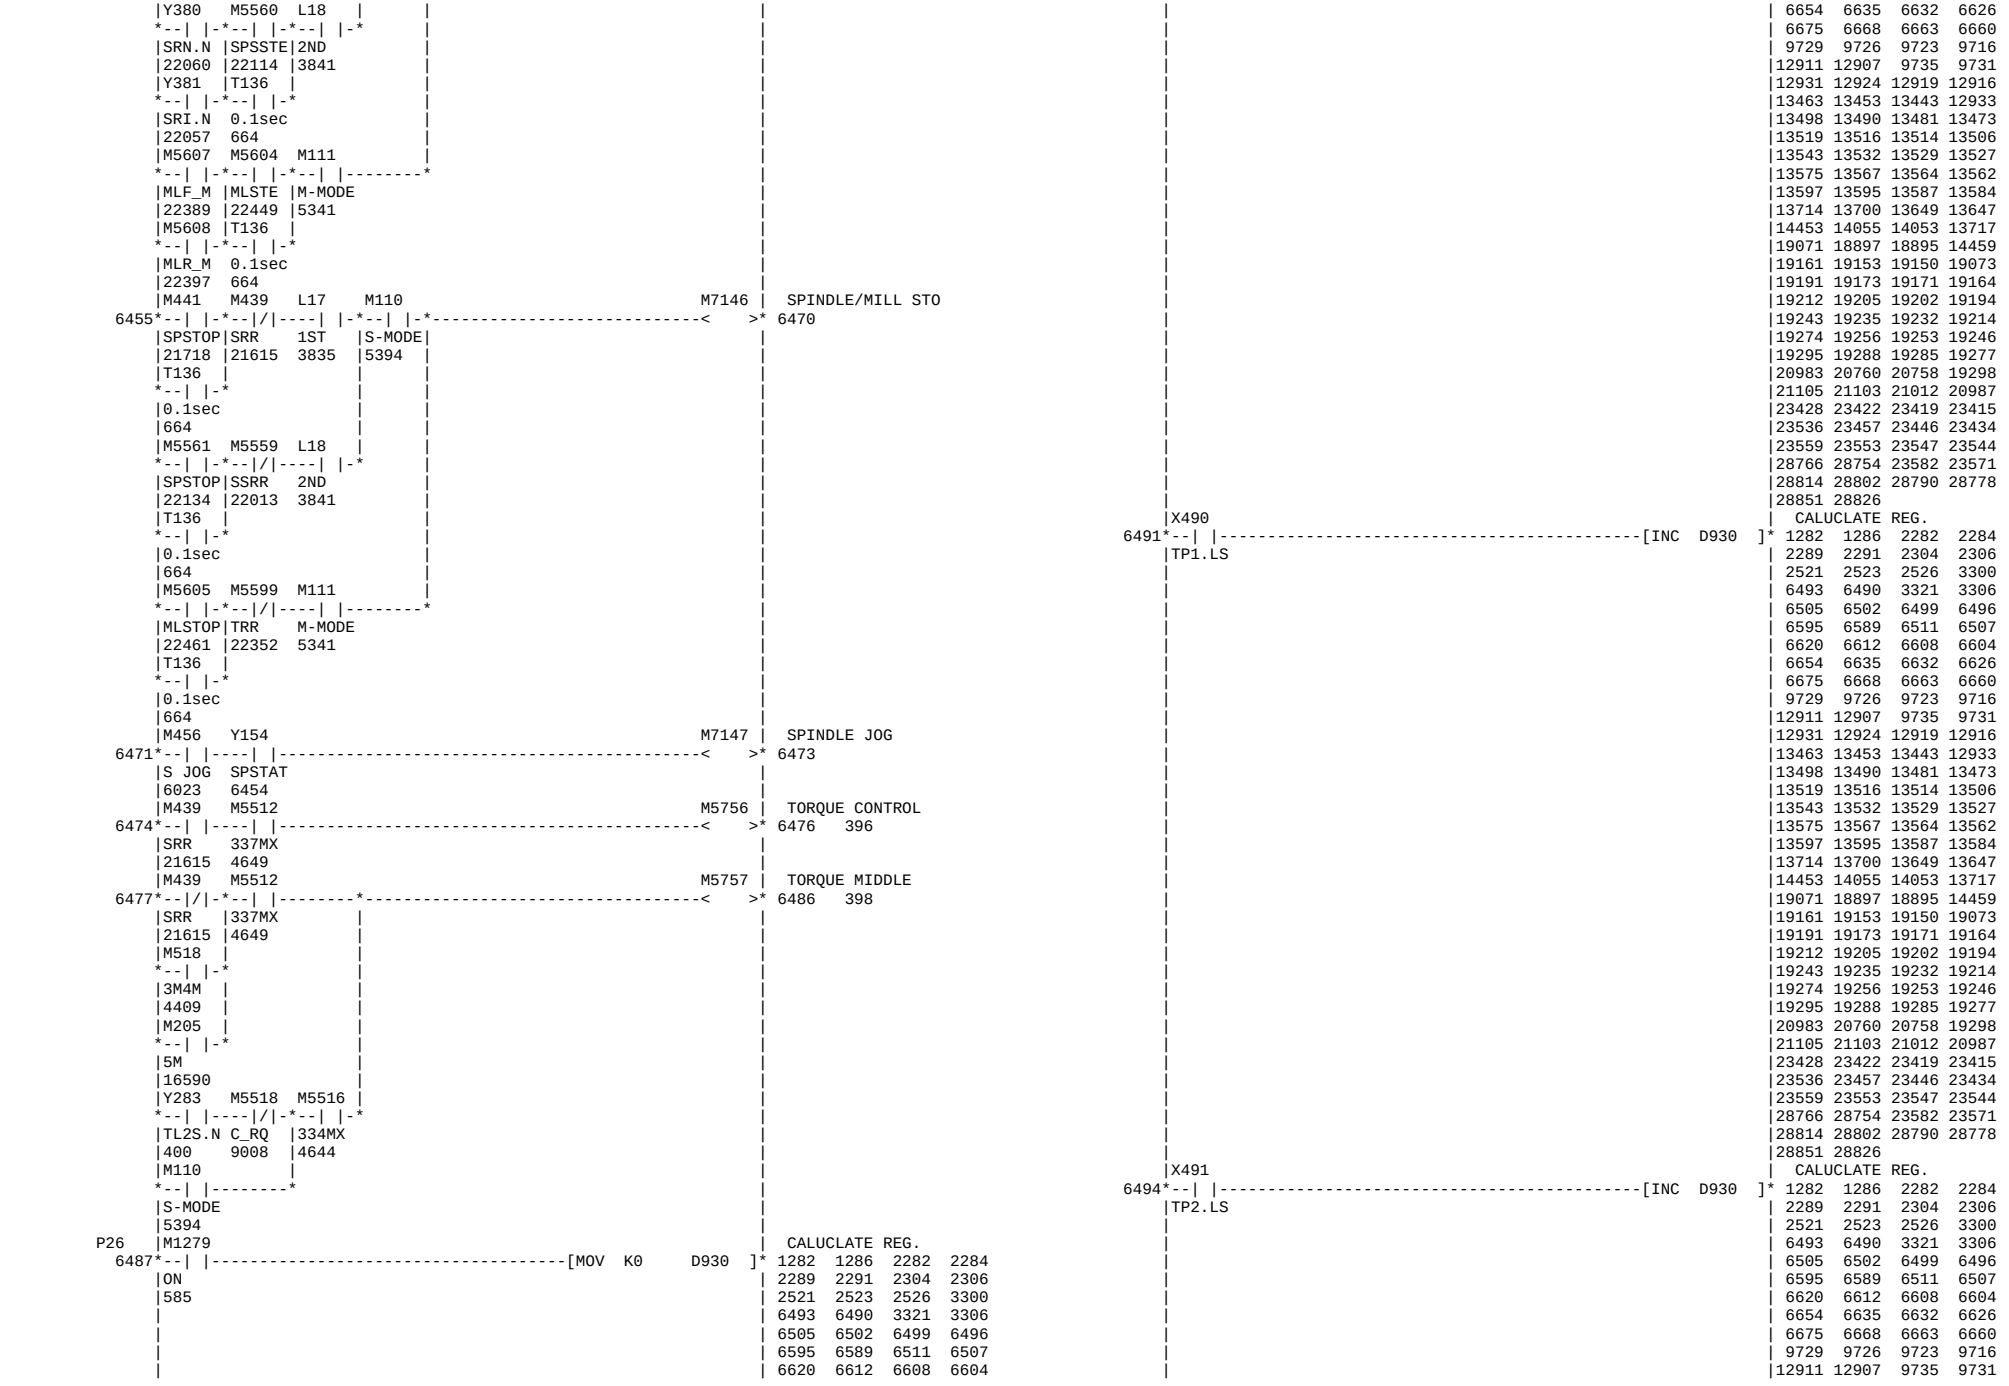

M309 M5638 M90 M137 M101 M484 SP AIR BLAST AUX
358M 3m4m AUTO MANUI RST
17660 4414 14419 2640 543
M484 T77
358MX SAB.T
5944 5949
M485 T37
SABON
5973
T77
SAB.T
5949
M5341 M483 M484 M5824 M5563 M101 M5683 SS C_BLAST ON
357M 358MA 358MX TRS-M ORC RST
17655 5935 5944 4268 21032 543
M5683
357MX
5959
M931 M483 M1412 T77 F50 M485 SP AIR BLAST ON
CCE 358MA LD_BPS SAB.T SROTIH
2255 5935 2452 5949 25748
M6048 M484 M110
LOW_OK 358MX S-MODE
2557 5944 5394
M6049 M5683
B_STOK 357MX
2561 5959
M110
S-MODE
5394
M6958 M5942 M484 M5683 M483 M485 M7917 SS AIR BLAST MEN
M-MENU AB2.R 358MX 357MX 358MA SABON
15106 24440 5944 5959 5935 5973
M485 M100 M509 SS CHUCK AIR BLA
SABON RDY
5973 533
M5881
SSPAB
5890
X10A M91 SP REV SW PULSE
SPRV.B MANU
14444
M455 M567 M567 SPINDLE REV. MEM
CCW.P CCW.L
5988 5994
M455 M567
CCW.P CCW.L
5988 5994
M91 M567 Y155 SPINDLE REVERSE
MANU CCW.L
14444 5994
M453 L17 M110 M90
SRI.NX 1ST S-MODE AUTO
21644 3835 5394 14419
M5573 L18
SRIN.N 2ND
22050 3841
M5603 M111
MLRX1 M-MODE
22381 5341

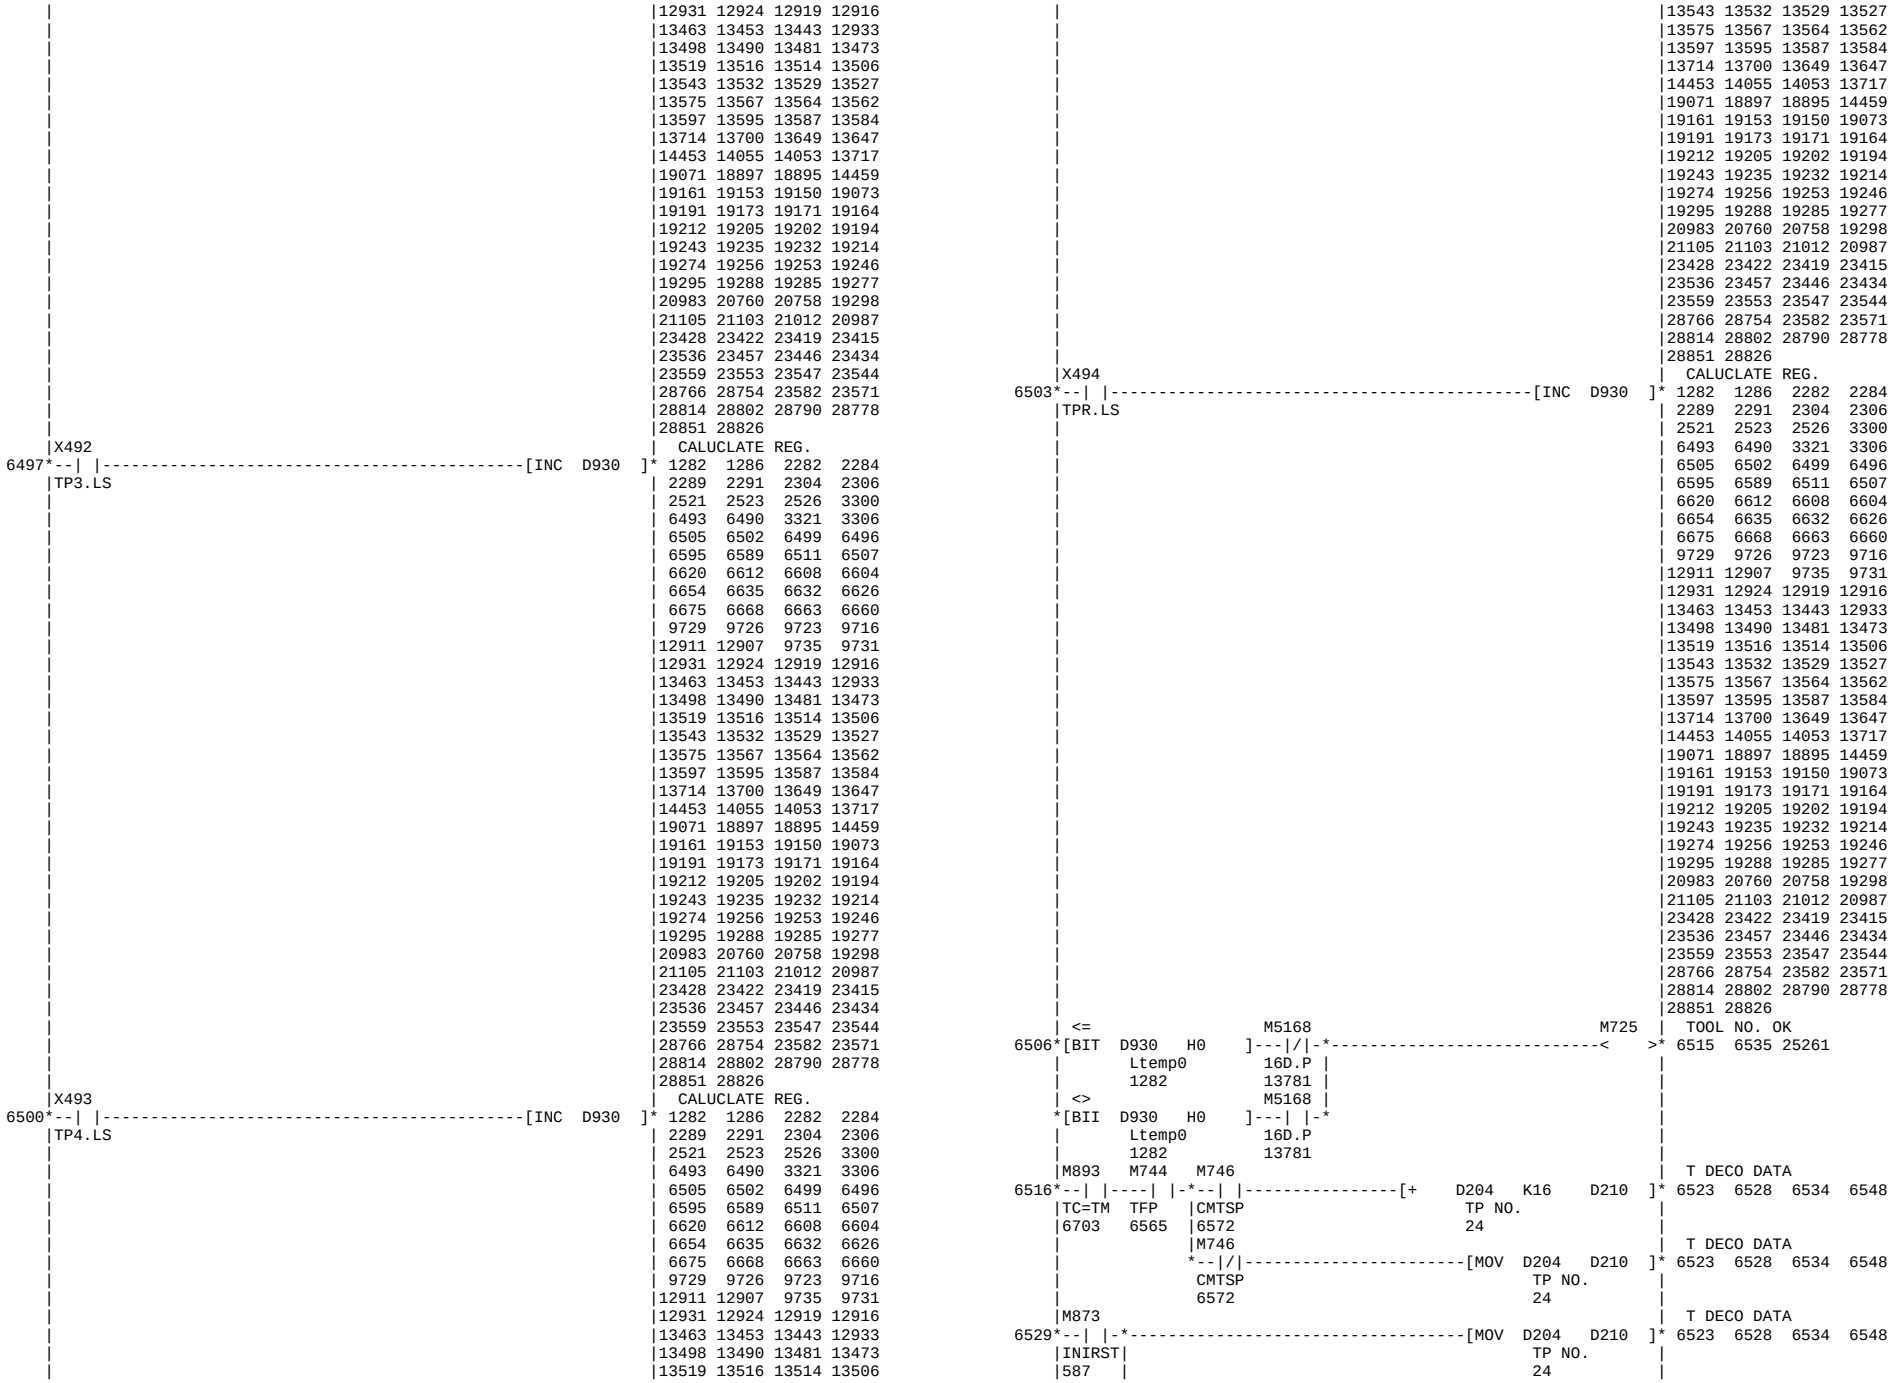

M1286 X10A X109 M91 M101 M404 Y156 X156 M456 SPINDLE JOG
SPJG.B SPRV.B SPSTP. MANU RST
14751 14444 543
CHCL-L 1ST-HD MF1.B
4960 1665
M975 Y157
SCHE 2ND-HD
5243 1688
M54
SS.P
M111
M-MODE
5341
M91 X108 X109 M1286 M6070 MANU. SPINDLE SW
MANU SPST.B SPSTP. SPJG.B
14444 14751
M6070 M6071 M6047 M6073 SPINDLE START PU
SPN.SW SPN.DM SP_LOW
6028 2553
M931
CCE
2255
X151 M91 AUT MODE CHGE PL
TAPE.B MANU
14444
M1285
SPR.B
14642
X149
MDI.B
X148
AUT.B
X109 M91 M513 SPDL MILL SS STO
SPSTP. MANU
14444
M455
CCW.P
5988
M456
S JOG
6023
M569
AUTSWP
14427
M599
MNLP
14448
M361
OSPMEP
3581
M980
SIMUSC
1134
M253
81M
17168

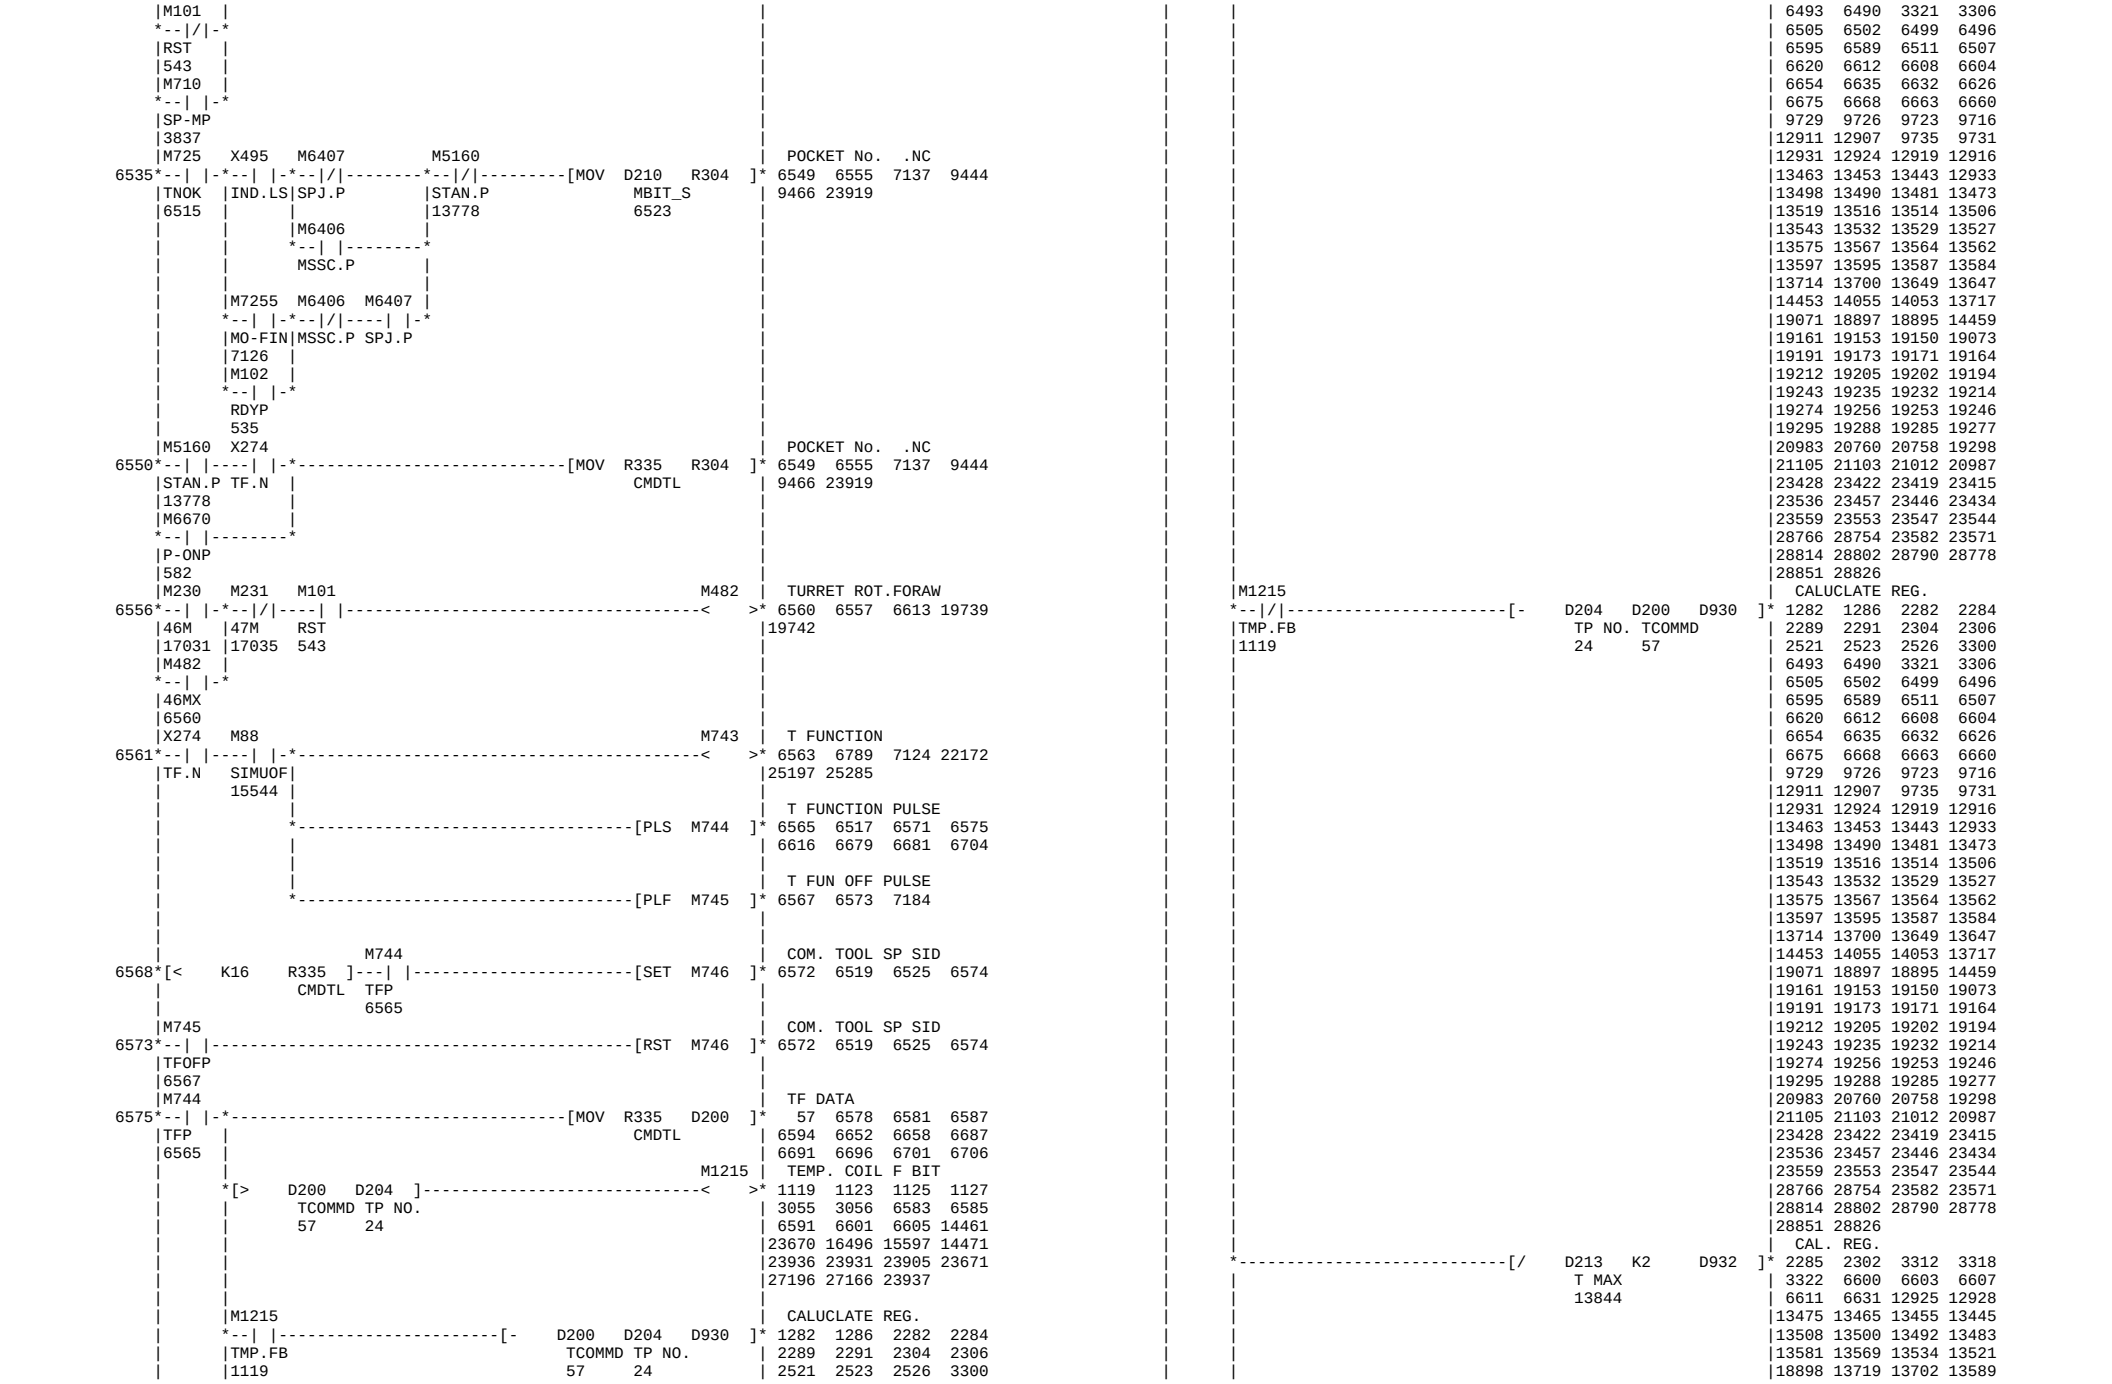

M255
83M
17206
M494
MESON
8032
M378
FEDM
11931
M6052
STOP_D
2581
M360
M6053
SPINDLE MEM. PUL
6056 6059 21548 21941 22296
OSPMEM
3579
M599
MNLP
14448
M6052
STOP_D
2581
M456 M6051
M6069
DOOR INTERLOCK
6060 6063 21524 21918 22275
S JOG JOG_OK
6023 2573
M6050
ST_OK
2570
M203
M5820 M101
M460
M SP ROT. D MEME
6064 6076 6066 6068 6089
3M
511MX RST
19441 21463 21849
16580
4131 543
M204
4M
16585
M460 M430
SROD.M
SPST
6076
21472
M713 M5554
SY2PLS SSPSHL
4176 21940
M460
SROD.M
6076
M436
SESST
21572
Y233 M6070 M6071 M91 M101 X109 M430
M462
M. ROT D MEMORY
6077 6088 6083 6090
MNSY.N SPN.SW SPN.DM MANU RST SPSTP. SPST
4174 6028 14444 543 21472
Y333 M6073
MNSY.N S_ST.P
4179 6034
M462
MSRODM
6088
M460 X260 X360
M SPINDLE ROT. D
6089 6094 6097
SROD.M SYNS.N SYNC_N
T101 D3
T61
18357
M462
MSRODM
6088
T101
M461
M SP ROT. D MEM
6097 6098 19440 21351 21360
MSRD.T
6094
M1279
21454 21468 21839 21854
CALL MAIN SPINDL
6099 21347 6101
ON
585
M54
CALL SP SPINDLE
6102 21725 6105
SS.P
M5561
SPSTOP
22134
M5378 M5377 M101 M5374 M5375
M7096
C AXIS UCL IGNOR
6106 6112 6107 16689 16729
216M 215M RST 213M 214M
19537 19542
16731 16720 543 16710 16715
M7096
CUCIGN
6112
M5374 M5377 M101 M5378 M5375
M7072
CHANGE 210M-211M
6113 6119 6114 16665 16681
213M 215M RST 216M 214M
19539 19545
16710 16720 543 16731 16715
M7072
CL-BKM
6119
M5375 M5377 M101 M5374 M5378
M7073
"210M,211M-212M"
6120 6126 6121 16666 16683
214M 215M RST 213M 216M
16702 19538 19548
16715 16720 543 16710 16731
M7073
UCLVAL
6126
M270 M269 M271 M101
Y28A
C-GAIN SELECT-1.
6127 6132 6128 19962 19965
238M 237M 239M RST
17353 17348 17358 543
Y28A
GA1S.N
6132
M271 M269 M270 M101
Y28B
C-GAIN SELECT-2.
6133 6138 6134 19963 19968
239M 237M 238M RST
17358 17348 17353 543
Y28B
GA2S.N
6138
M5414 M5413 M5415 M101
Y38A
C-GAIN SELECT-1_
6139 6144 6140 19972 19975
238m 237m 239m RST
17369 17364 17374 543
Y38A
6144
M5415 M5413 M5414 M101
Y38B
C-GAIN SELECT-2_
6145 6150 6146 19973 19978
239m 237m 238m RST
17374 17364 17369 543
Y38B
6150

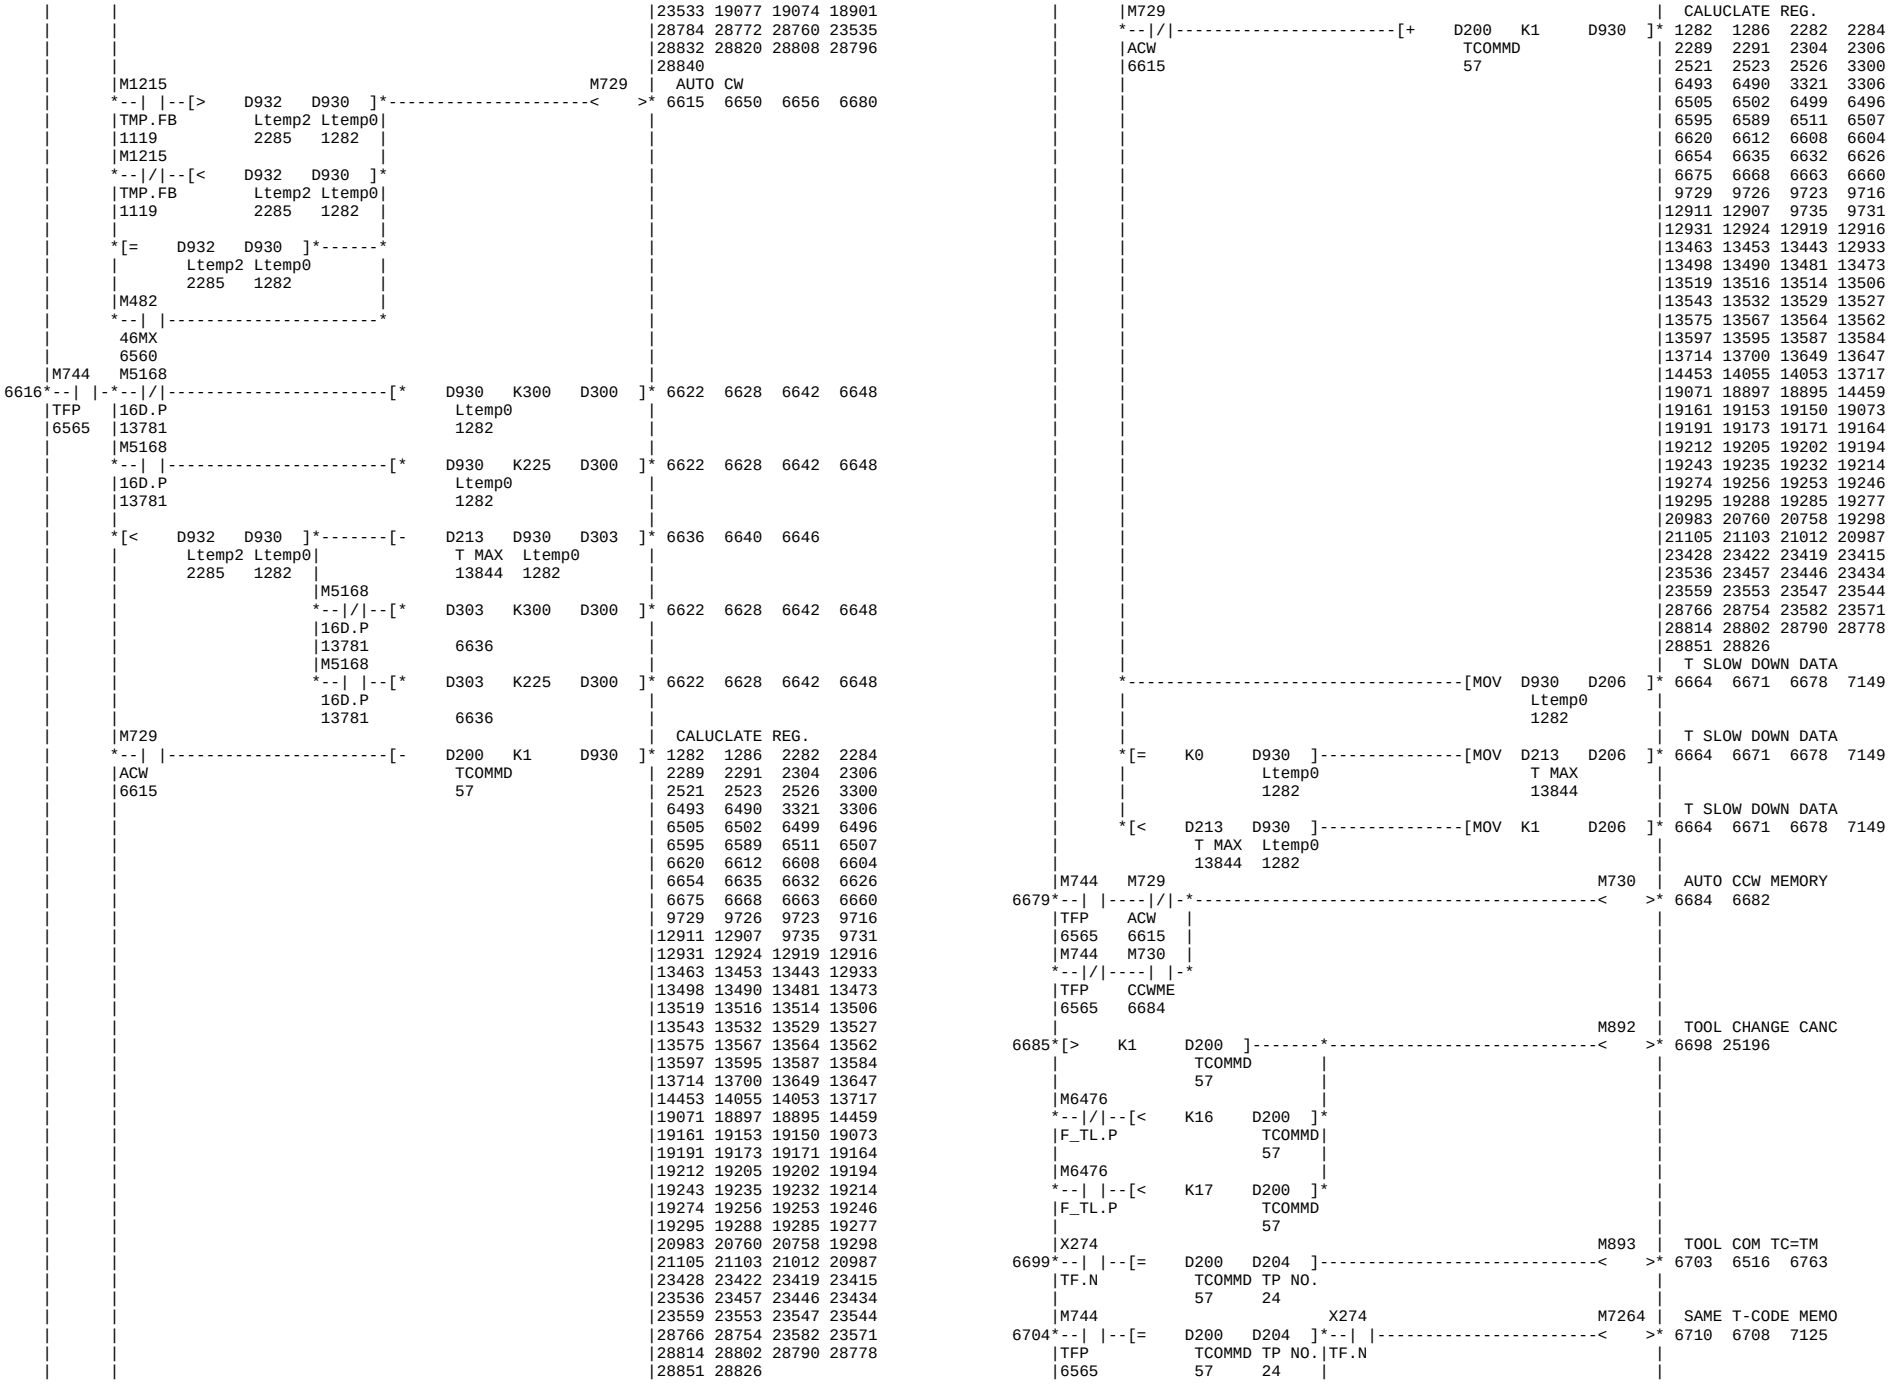

M310 M311 M101 M5578 MILL S-TAPPER MO
6151 6155 6152 22163
320M 321M RST
17452 17457 543
M5578
533MX
6155
M48 CALL MILL-1
6156 22141 6159
MILL.P
13750
M5617
MLCALL
T207 M49 M54 SPINDLE BUS I/F
6160 6165 6174 6185 6193
P-ON.T C.P SS.P
571
SPINDLE DA I/F
MOV H1 R113
6168 6177 6188 6196
MOV H0 R109
T207 M49 M54 SPINDLE BUS I/F
6169 6165 6174 6185 6193
P-ON.T C.P SS.P
571
SPINDLE DA I/F
MOV H21 R113
6168 6177 6188 6196
MOV H0 R109
M1279 M49 M54 L17 SPINDLE BUS I/F
6178 6165 6174 6185 6193
ON C.P SS.P 1ST
585 3835
SPINDLE DA I/F
MOV H321 R113
6168 6177 6188 6196
MOV H0 R109
L18 SPINDLE BUS I/F
6165 6174 6185 6193
2ND
3841
SPINDLE DA I/F
MOV H2301 R113
6168 6177 6188 6196
MOV H0 R109
M5592 M7265 MILL REVOLVING
6197 6199 6882
MLSTHL
22295
M5598
MJOG
22335
M6407 M1049 M6406 M49 M54 M5206
6200 6209 6214 6224 6229
SPJ.P SPND++ MSSC.P C.P SS.P SS-SEL 6232
5633
M5206
MOV K1 D189
MOV K0 D189 6209 6214 6224 6229
SS-SEL 6232
5633
X244 M90 L18
OP.N AUTO 2ND
14419 3841
M91
MANU
14444
M1140
MOV K1 D189 6209 6214 6224 6229
POLIMD 6232
5404
SPINDLE DEVICE S
6233 6240
MOV D189 R300
ADDRES
6209
M5207
1> 6209 6214 6224 6229
MOV K2 D189
ML-SEL 6232
5634
M6407 M1049 SPINDLE DEVICE S
6234 6233 6240
SPJ.P SPND++
M6406
MSSC.P
M54
SS.P
MOV K0 R300
M438 M439 M981 Y287 MAN SP EXT DATA
6241 6252 3903 6247 6286
SJOG SRR SIM-MD 6343
21590 21615 1138
M490
ABRUN
5870
M927
INCB/F
11821
M457
UCPC
20826
Y286
ORCS.N
20794
Y287 M451 M434
SPEX.N SRRME SPSTHL
6252 21632 21547
M473 T46
6253 6255 6261 22560
COUPIN T46
22540
M5598 M5599 M466 M981 Y297 MILL EXT DATA.NC
6258 6271 6263 6308 6317
MJOG TRR ENGGED SIM-MD 6354 22411
22335 22352 22508 1138
M473 T86 M1286 Y397 MILL EXT DATA NC
6272 6358
COUPIN MRTD.T SPJG.B
22540 6255 14751
Y297 M5601 M5592
MLEX.N TRRME MLSTHL
6271 22371 22295
M5558 M5559 M981 Y387 SP SPEXT DATA NC
6273 6285 3904 6280 6324
SSJOG SSRR SIM-MD 6347
21983 22013 1138
M485
SABON
5973
M6463 Y4F5
MCBP.P ZP.L
8969
Y386
21158

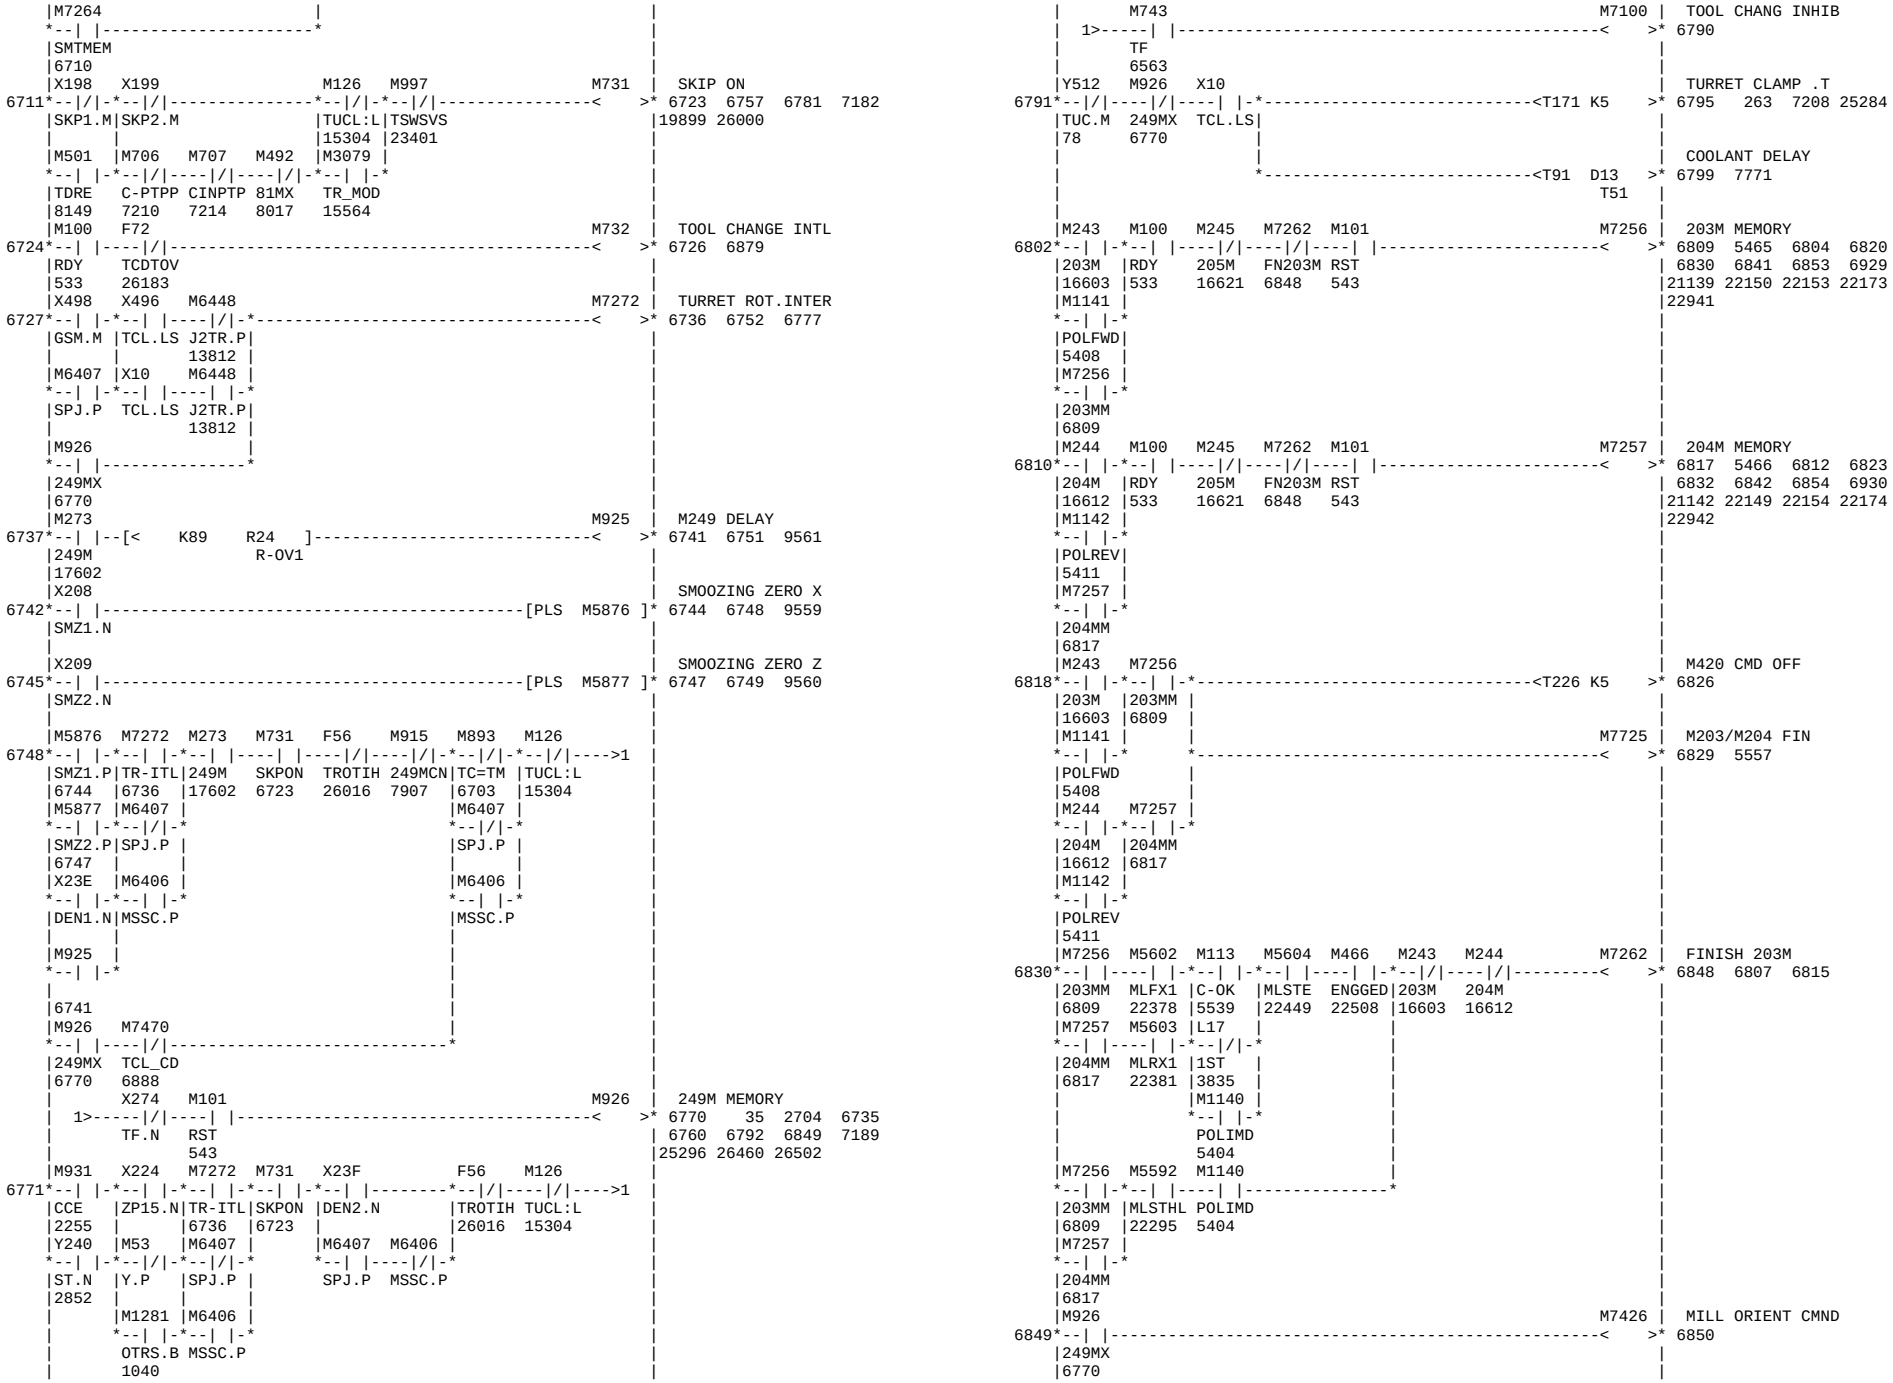

Y387 M5571 M5554
SPEX_N SSRRME SSPSHL
6285 22038 21940
Y287 M501 M439 M438 M490
SPEX.N TDRE SRR SJOG ABRUN
6252 8149 21615 21590 5870
M490
ABRUN
5870
M927
INCB/F
11821
M5598 M5599 M501 Y297
MJOG TRR TDRE MLEX.N
22335 22352 8149 6271
SP/MILL SPEED .N
M473 M501 Y297
COUPIN TDRE MLEX.N
22540 8149 6271
SP/MILL SPEED _N
Y387 M501 M5559 M5558 M485
SPEX_N TDRE SSRR SSJOG SABON
6285 8149 22013 21983 5973
M485
SABON
5973
Y4F5 M6463
ZP.L MCBP.P
8969
Y287
SPEX.N
6252
Y387 Y4F5
SPEX_N ZP.L
6285 8969
M6463
MCBP.P
Y297
MLEX.N
6271
Y397
MLEX.N
6272
M439
SRR
21615
M5559
SSRR
21615
SRR
21615
MOV D997 R314 6294 6299 6304 6346
MOV D995 R314 6294 6299 6304 6346
MOV D968 R314 6294 6299 6304 6346
MOV D996 R312 6311 6313 6320 6322
6357
MOV R312 R362 6314 6323 6361
6311
MOV D969 R312 6311 6313 6320 6322
6357
MOV R312 R362 6314 6323 6361
6311
MOV D989 R364 6332 6337 6342 6353
MOV D987 R364 6332 6337 6342 6353
MOV D968 R364 6332 6337 6342 6353
MOV K0 R314 6294 6299 6304 6346
MOV K0 R364 6332 6337 6342 6353
MOV K0 R312 6311 6313 6320 6322
6357
MOV K0 R362 6314 6323 6361
MOV R318 D316 6365 6373
MOV R368 D317 6369 6377
MOV K0 D316 6365 6373
SP/MILL SPEED .N
SP/MILL SPEED _N
SP/MILL SPEED .N
SP/MILL SPEED _N
SP/MILL SPEED .N
SP/MILL SPEED _N
SPINDLE R.P.M.
MILL R.P.M.
SPINDLE R.P.M.
M5559
MILL R.P.M.
6374 6369 6377
SSRR
22013
M111 Y143 M5609
6378 H18 R100 M111 Y143
MILL- M-MODE MDI.L
28378 5341 14343
M452 Y280
SPINDLE FORWARD.
6384 6385 3662 6433
SRN.NX
21641
M453 Y281
SPINDLE REVERSE.
6386 6387 3663 6434
SRI.NX
21644
M5607 X2EA X3DA
6388
MLF_M 1A2M 1A2M
22389
M6407 Y290 M101 L18 M5588 X274 M6407
SPJ.P SRNM.N RST 2ND MLSTP TF.N SPJ.P
6407 543 3841 22236
M6406 M6406
MSSC.P MSSC.P
X3EA M5608 L17 Y290
1A2M MLR_M 1ST
22397 3835
L18 Y390
2ND
3841
M5608 X2EA X3DA
6409
MLR_M 1A2M 1A2M
22397
M6407 Y291 M101 L18 M5588 X274 M6407
SPJ.P SRIM.N RST 2ND MLSTP TF.N SPJ.P
6428 543 3841 22236
M6406 M6406
MSSC.P MSSC.P
X3EA M5607 L17 Y291
1A2M MLF_M 1ST
22389 3835
L18 Y391
2ND
3841
M509 M5176 Y24
6430 6432
SSAB.M SAB.P
5984 13784
Y280 M440 L17 M110 Y154
SPINDLE START
6433 6454 6472
SRNS.N SPSTE 1ST S-MODE
6385 21701 3835 5394
Y281 T136
SRIS.N 0.1sec
6387 664
MILL FORWARD.NC
6407 3652 6391
MILL FORWARD NC
6408
MILL REVERSE.NC
6428 3653 6412
MILL REVERSE NC
6429
SS CHUCK AIR BLA
6432

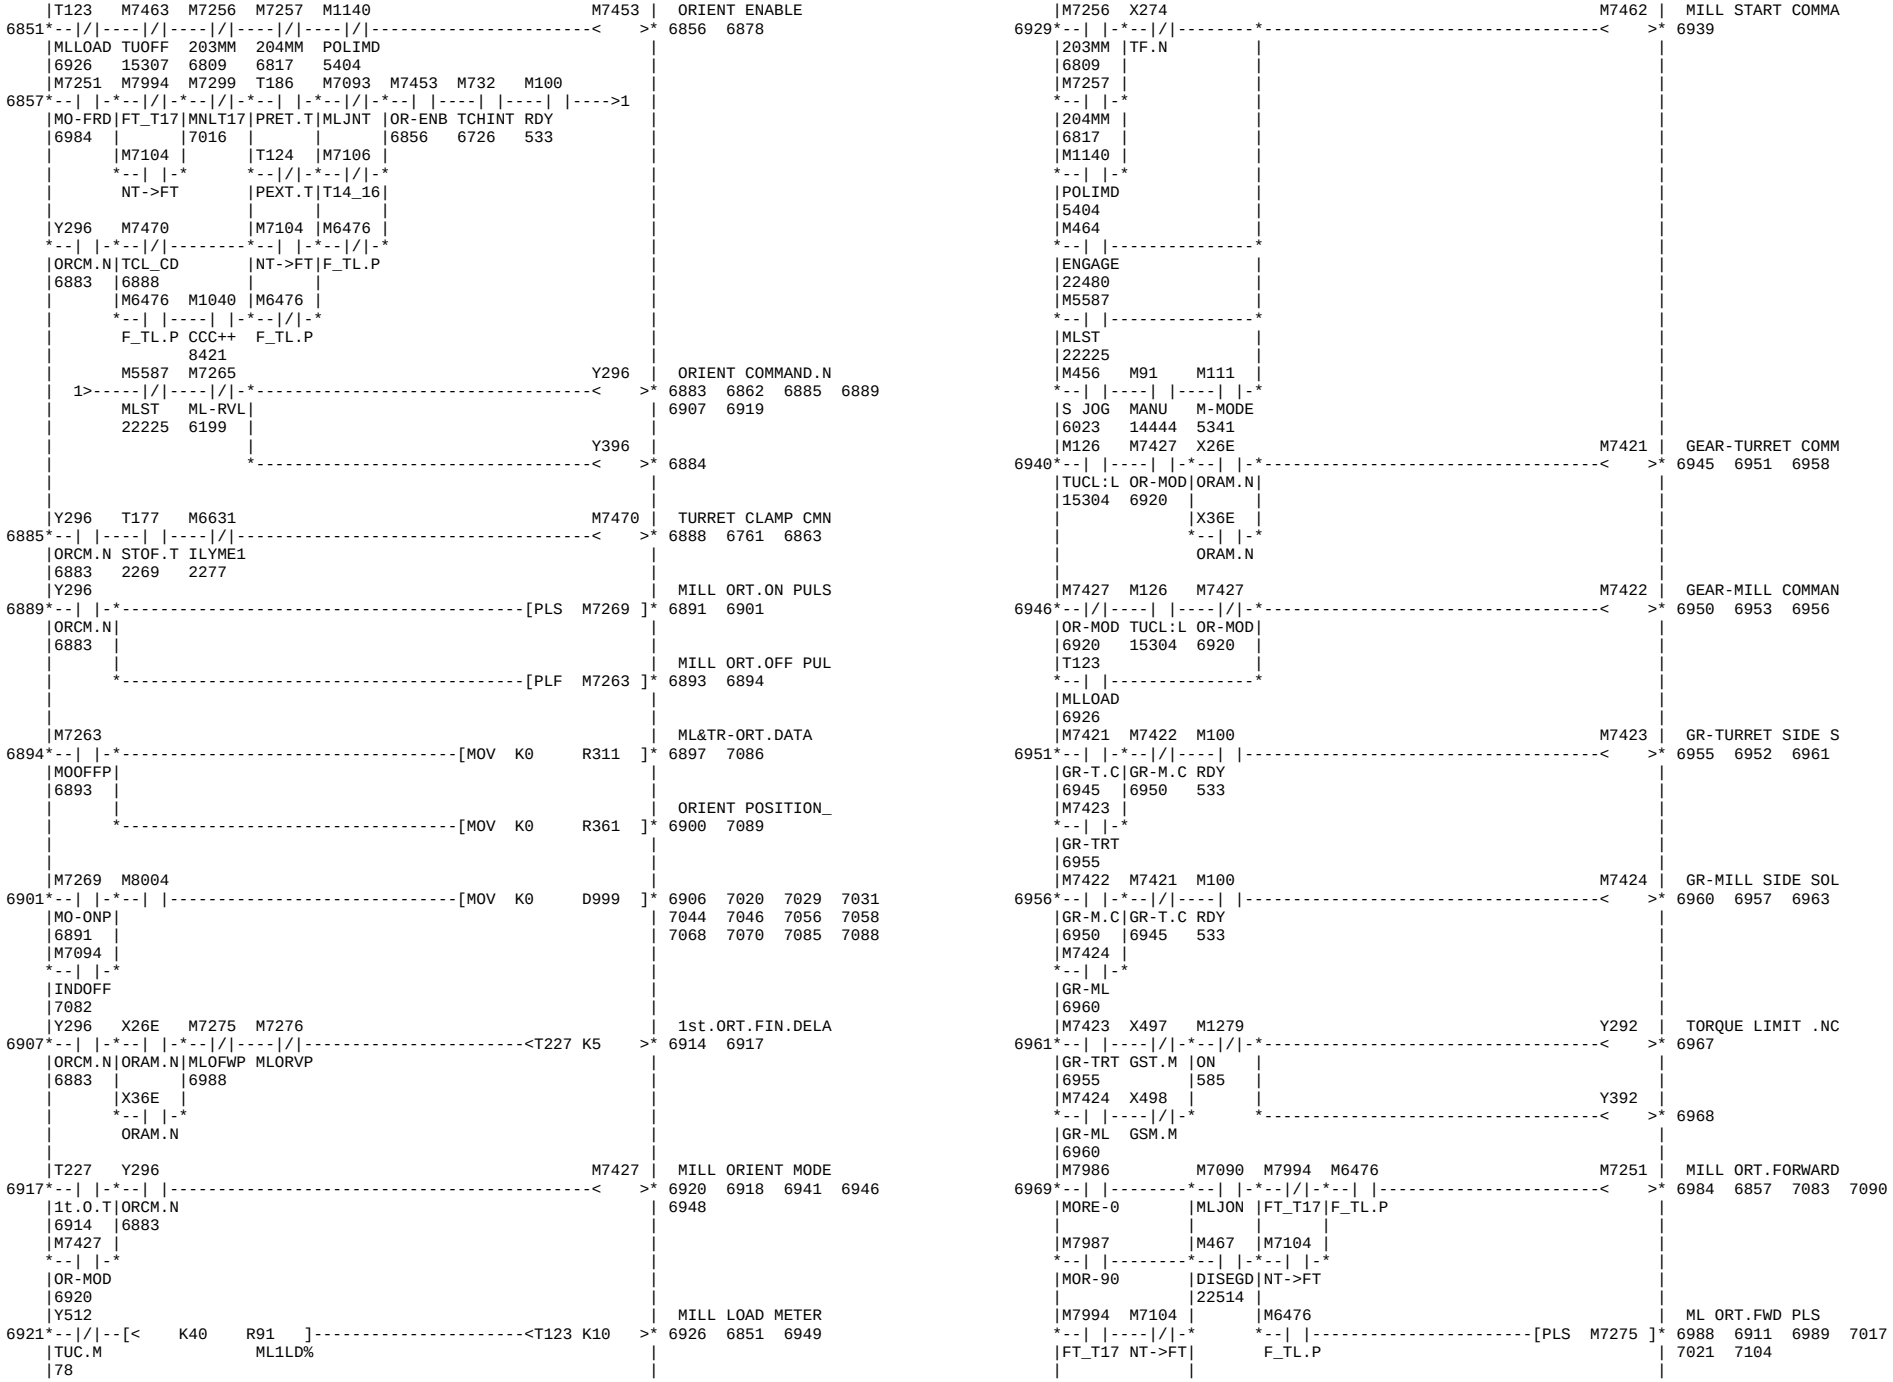

|Y380 M5560 L18 |
--| |---| |-*--| |-*
|SRN.N |SPSSTE|2ND
|22060 |22114 |3841
|Y381 |T136 |
--| |---| |-*
|SRI.N 0.1sec
|22057 664
|M5607 M5604 M111
--| |---| |-*--| |--------*
|MLF_M |MLSTE |M-MODE
|22389 |22449 |5341
|M5608 |T136 |
--| |---| |-*
|MLR_M 0.1sec
|22397 664
|M441 M439 L17 M110 M7146 | SPINDLE/MILL STO
6455*--| |-*--|/|----| |-*--| |-*----------<
SPSTOP	SRR 1ST	S-MODE
21718	21615 3835	5394
T136		
--| |-	
0.1sec	
664	
M5561 M5559 L18
--| |---|/|----| |-*
SPSTOP	SSRR 2ND
22134	22013 3841
T136
*--		-*
0.1sec
664
M5605 M5599 M111
--| |---|/|----| |--------*
MLSTOP	TRR M-MODE
22461	22352 5341
T136
*--		-*
0.1sec
664
M456 Y154 M7147	SPINDLE JOG
6471*--| |----| |----------<
S JOG SPSTAT
6023 6454
M439 M5512 M5756	TORQUE CONTROL
6474*--| |----| |----------<
SRR 337MX
21615 4649
M439 M5512 M5757	TORQUE MIDDLE
6477*--|/|-*--| |--------*----------<
SRR	337MX
21615	4649
M518	
*--		-*
3M4M	
4409	
M205	
*--		-*
5M
16590
Y283 M5518 M5516
--| |----|/|---| |-*
TL2S.N C_RQ	334MX
400 9008	4644
M110
*--		--------*
S-MODE
5394
P26	M1279	CALCULATE REG.
6487*--		-------------------------------------[MOV K0 D930]*
ON
585
6 6654 6635 6632 6626
6 6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
X490	CALUCLATE REG.
6491*--		----------[INC D930]* 1282 1286 2282 2284
TP1.LS 2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
X491	CALUCLATE REG.
6494*--		----------[INC D930]* 1282 1286 2282 2284
TP2.LS 2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731

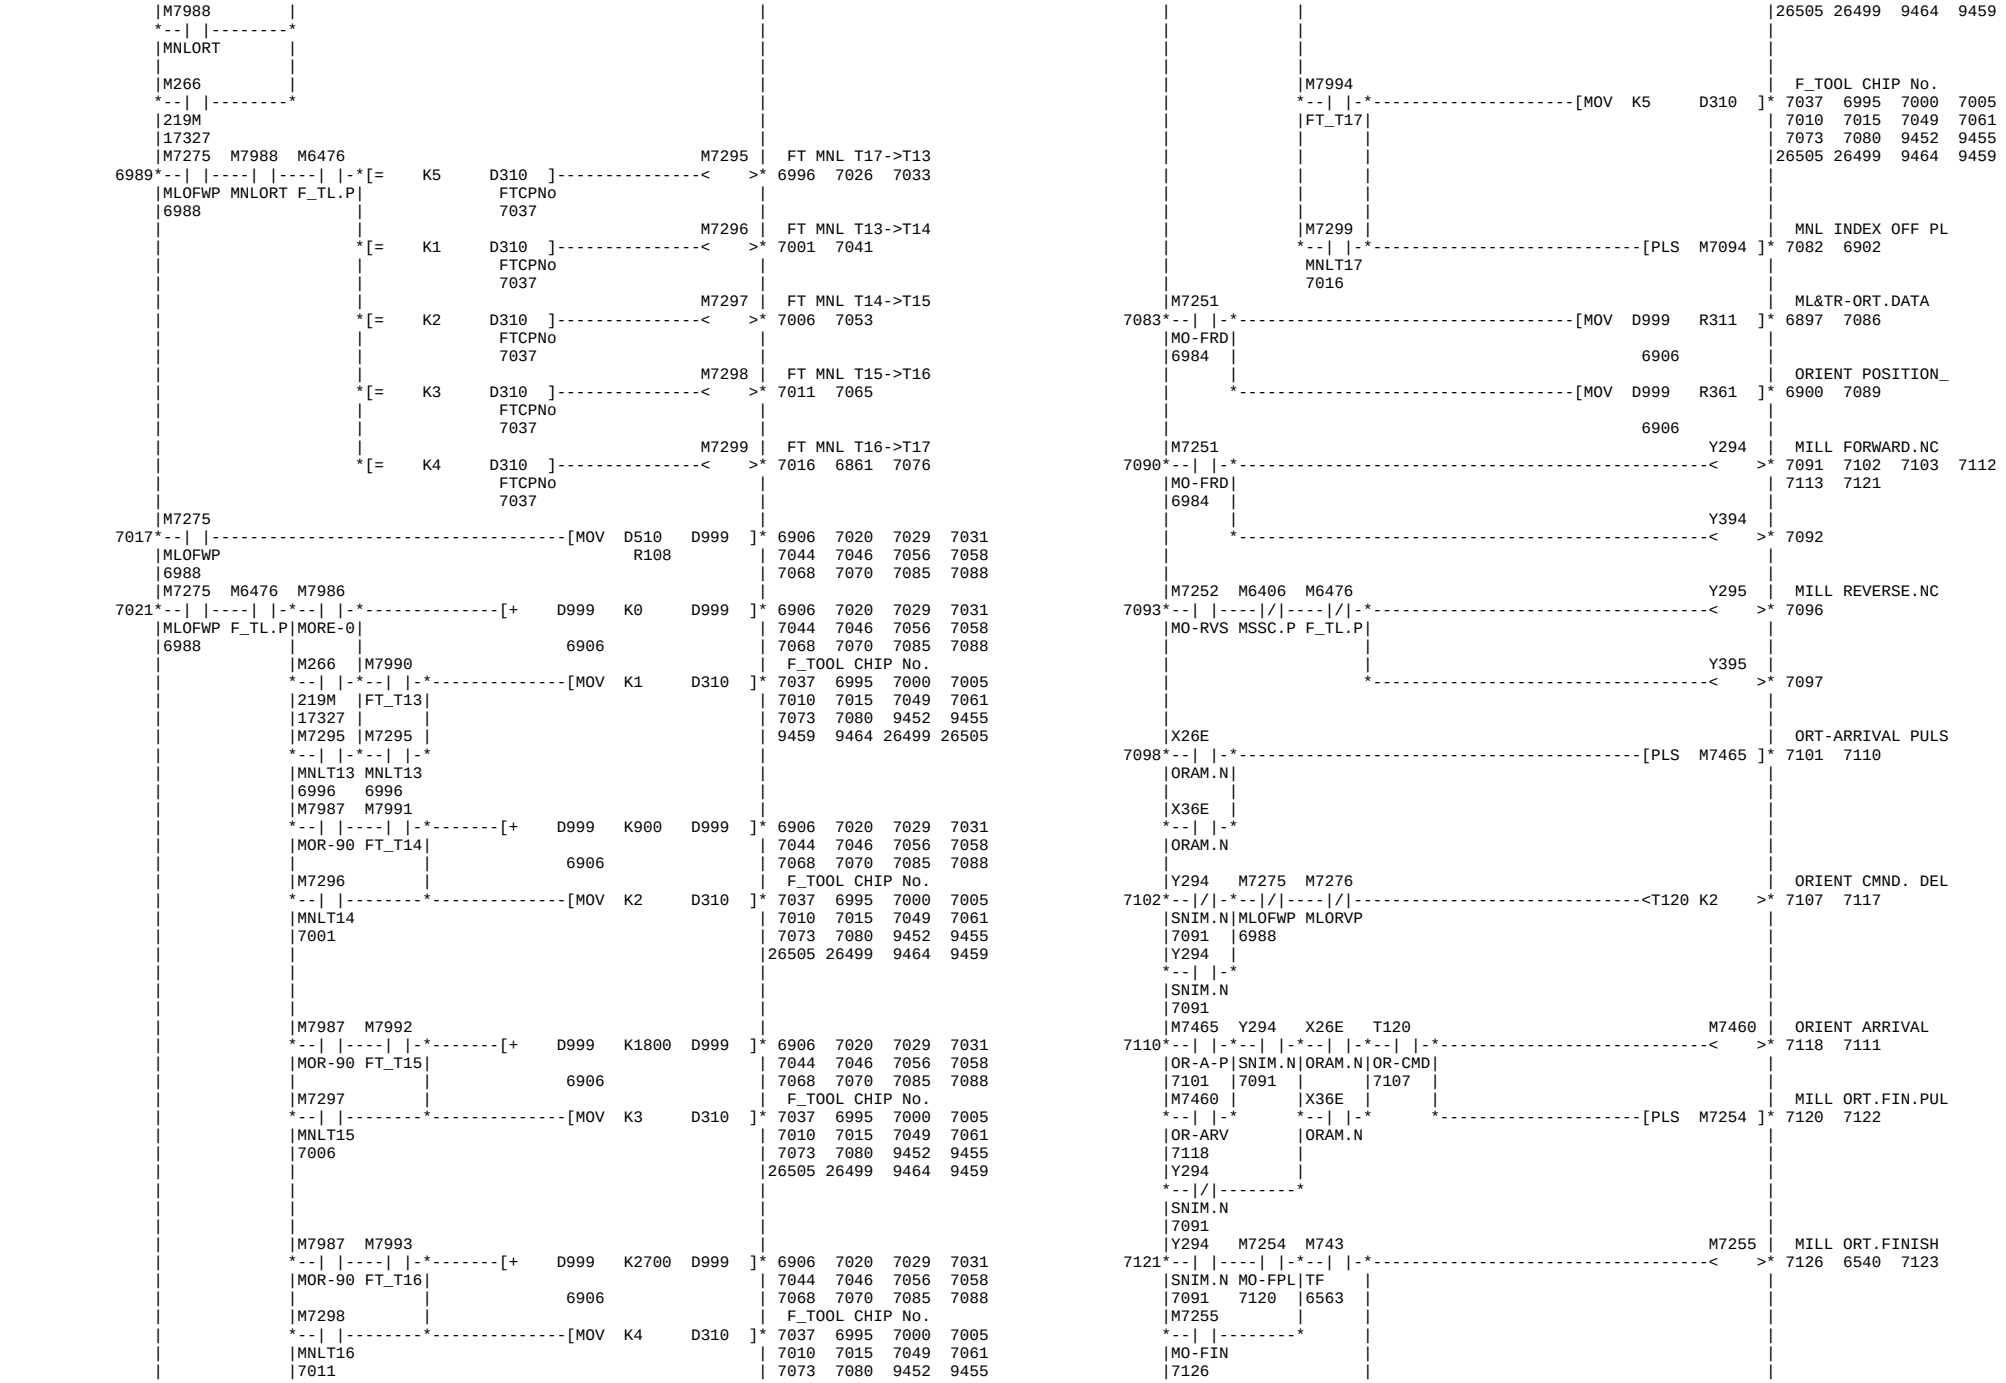

|12931 12924 12919 12916
|13463 13453 13443 12933
|13498 13490 13481 13473
|13519 13516 13514 13506
|13543 13532 13529 13527
|13575 13567 13564 13562
|13597 13595 13587 13584
|13714 13700 13649 13647
|14453 14055 14053 13717
|19071 18897 18895 14459
|19161 19153 19150 19073
|19191 19173 19171 19164
|19212 19205 19202 19194
|19243 19235 19232 19214
|19274 19256 19253 19246
|19295 19288 19285 19277
|20983 20760 20758 19298
|21105 21103 21012 20987
|23428 23422 23419 23415
|23536 23457 23446 23434
|23559 23553 23547 23544
|28766 28754 23582 23571
|28814 28802 28790 28778
|28851 28826
|X492
|CALUCLATE REG.
6497*--| |----------[INC D930]* 1282 1286 2282 2284
|TP3.LS
| 2289 2291 2304 2306
| 2521 2523 2526 3300
| 6493 6490 3321 3306
| 6505 6502 6499 6496
| 6595 6589 6511 6507
| 6620 6612 6608 6604
| 6654 6635 6632 6626
| 6675 6668 6663 6660
| 9729 9726 9723 9716
|12911 12907 9735 9731
|12931 12924 12919 12916
|13463 13453 13443 12933
|13498 13490 13481 13473
|13519 13516 13514 13506
|13543 13532 13529 13527
|13575 13567 13564 13562
|13597 13595 13587 13584
|13714 13700 13649 13647
|14453 14055 14053 13717
|19071 18897 18895 14459
|19161 19153 19150 19073
|19191 19173 19171 19164
|19212 19205 19202 19194
|19243 19235 19232 19214
|19274 19256 19253 19246
|19295 19288 19285 19277
|20983 20760 20758 19298
|21105 21103 21012 20987
|23428 23422 23419 23415
|23536 23457 23446 23434
|23559 23553 23547 23544
|28766 28754 23582 23571
|28814 28802 28790 28778
|28851 28826
|X493
|CALUCLATE REG.
6500*--| |----------[INC D930]* 1282 1286 2282 2284
|TP4.LS
| 2289 2291 2304 2306
| 2521 2523 2526 3300
| 6493 6490 3321 3306
| 6505 6502 6499 6496
| 6595 6589 6511 6507
| 6620 6612 6608 6604
| 6654 6635 6632 6626
| 6675 6668 6663 6660
| 9729 9726 9723 9716
|12911 12907 9735 9731
|12931 12924 12919 12916
|13463 13453 13443 12933
|13498 13490 13481 13473
|13519 13516 13514 13506
|13543 13532 13529 13527
|13575 13567 13564 13562
|13597 13595 13587 13584
|13714 13700 13649 13647
|14453 14055 14053 13717
|19071 18897 18895 14459
|19161 19153 19150 19073
|19191 19173 19171 19164
|19212 19205 19202 19194
|19243 19235 19232 19214
|19274 19256 19253 19246
|19295 19288 19285 19277
|20983 20760 20758 19298
|21105 21103 21012 20987
|23428 23422 23419 23415
|23536 23457 23446 23434
|23559 23553 23547 23544
|28766 28754 23582 23571
|28814 28802 28790 28778
|28851 28826
|X494
|CALCULATE REG.
6503*--| |----------[INC D930]* 1282 1286 2282 2284
|TPR.LS
| 2289 2291 2304 2306
| 2521 2523 2526 3300
| 6493 6490 3321 3306
| 6505 6502 6499 6496
| 6595 6589 6511 6507
| 6620 6612 6608 6604
| 6654 6635 6632 6626
| 6675 6668 6663 6660
| 9729 9726 9723 9716
|12911 12907 9735 9731
|12931 12924 12919 12916
|13463 13453 13443 12933
|13498 13490 13481 13473
|13519 13516 13514 13506
|13543 13532 13529 13527
|13575 13567 13564 13562
|13597 13595 13587 13584
|13714 13700 13649 13647
|14453 14055 14053 13717
|19071 18897 18895 14459
|19161 19153 19150 19073
|19191 19173 19171 19164
|19212 19205 19202 19194
|19243 19235 19232 19214
|19274 19256 19253 19246
|19295 19288 19285 19277
|20983 20760 20758 19298
|21105 21103 21012 20987
|23428 23422 23419 23415
|23536 23457 23446 23434
|23559 23553 23547 23544
|28766 28754 23582 23571
|28814 28802 28790 28778
|28851 28826
| <= M5168 M725 | TOOL NO. OK
6506*[BIT D930 H0]---|/|-*----------< >* 6515 6535 25261
| Ltemp0 16D.P |
| 1282 13781 |
| <> M5168 |
[BII D930 H0]---| |-
| Ltemp0 16D.P
| 1282 13781
|M893 M744 M746 | T DECO DATA
6516*--| |----| |-*--| |----------[+ D204 K16 D210]* 6523 6528 6534 6548
|TC=TM TFP |CMTSP TP NO.
|6703 6565 |6572 24
| |M746 | T DECO DATA
| *--|/|----------[MOV D204 D210]* 6523 6528 6534 6548
| CMTSP TP NO.
| 6572 24
|M873 | T DECO DATA
6529*--| |-*----------[MOV D204 D210]* 6523 6528 6534 6548
|INIRST| TP NO.
|587 | 24

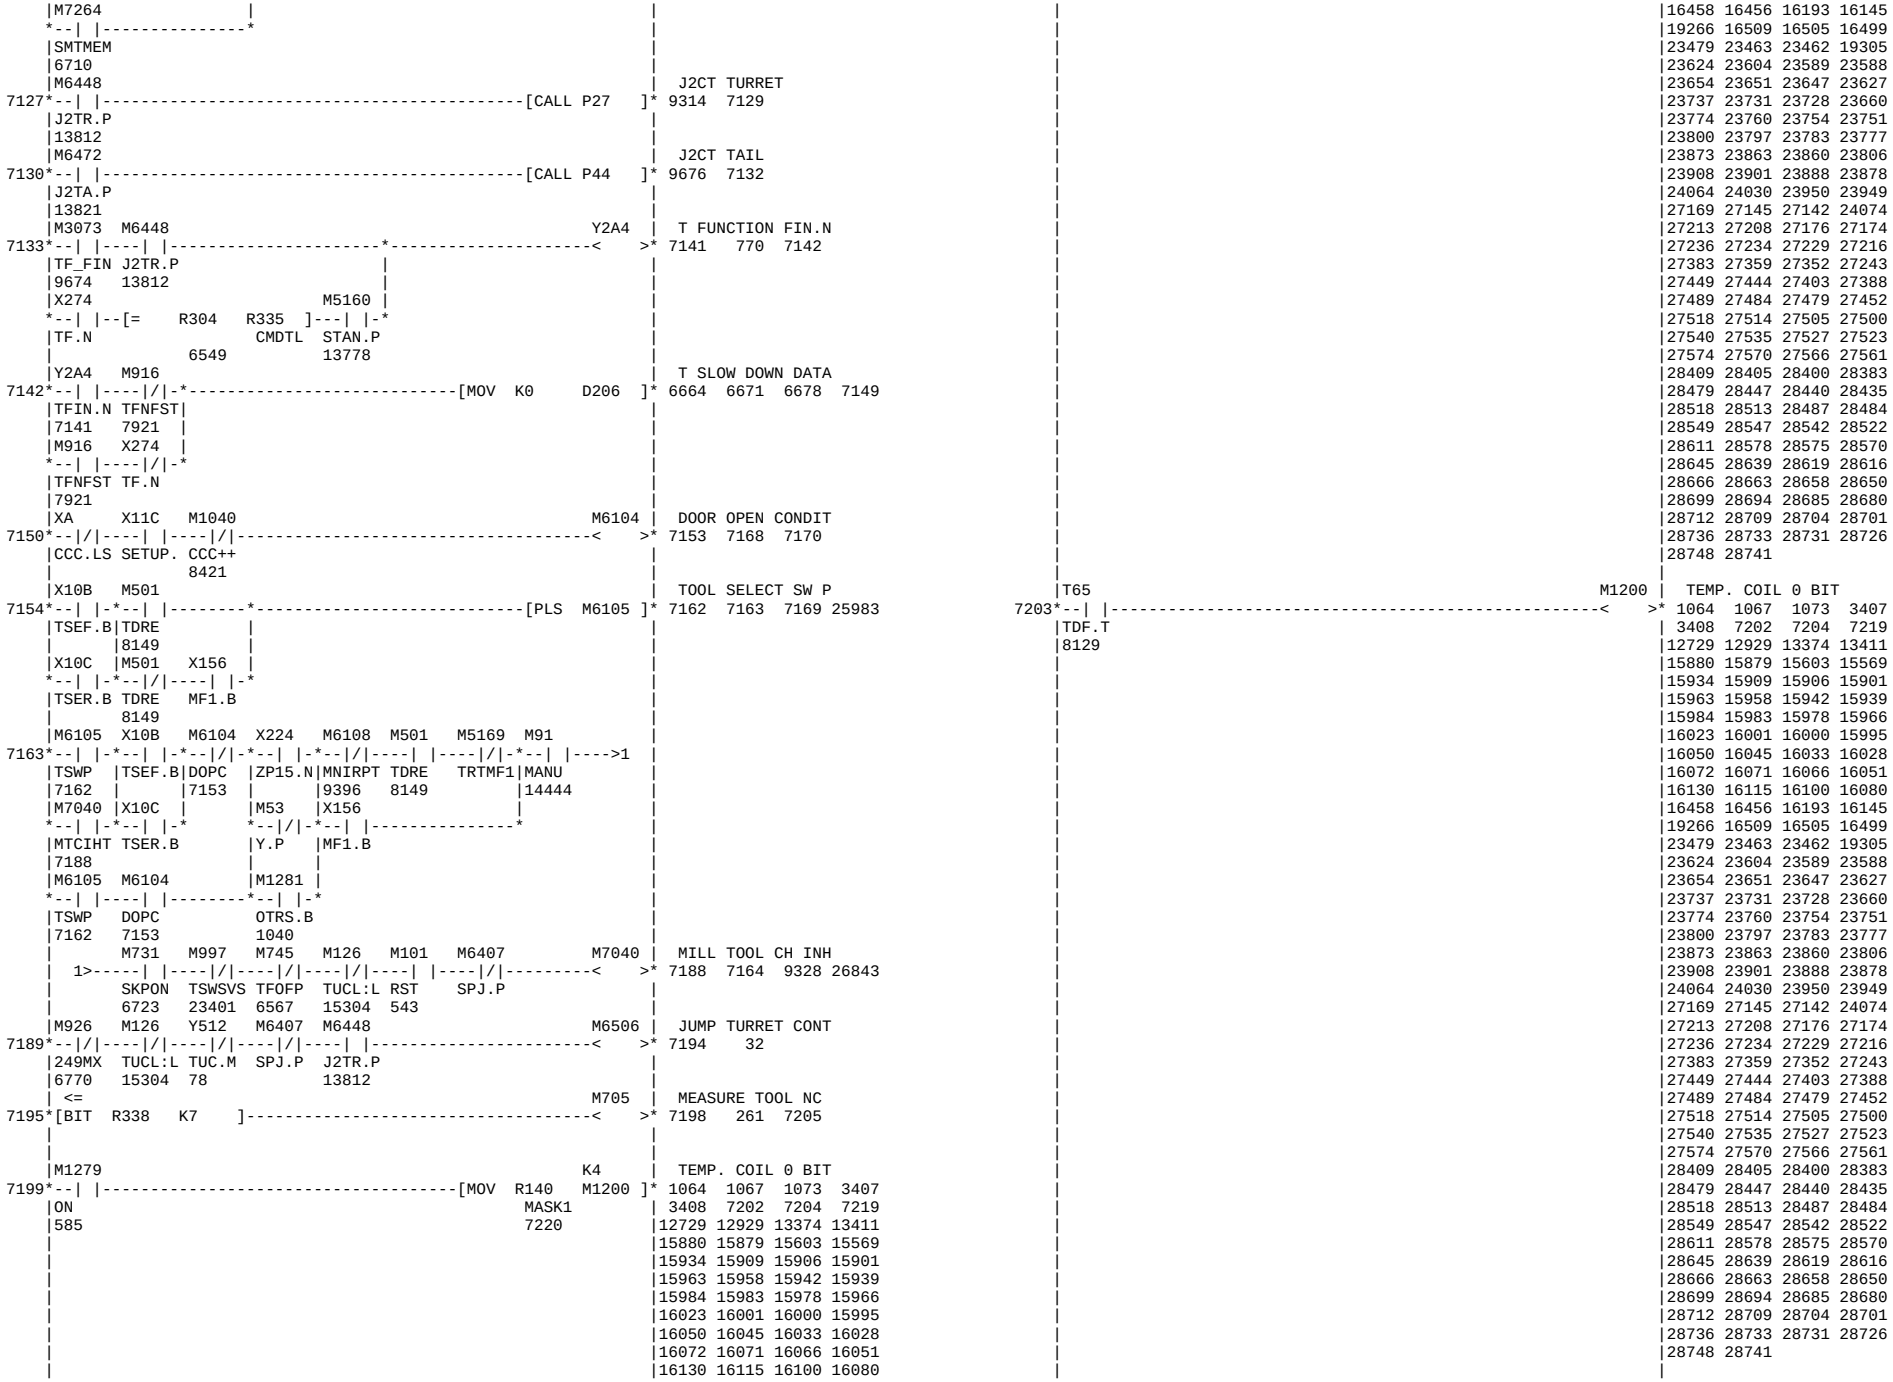

M101
RST
543
M710
SP-MP
3837
M725 X495 M6407 M5160
TNOK IND.LS SPJ.P STAN.P MBIT_S
6515 13778 6523
M6406
MSSC.P
M7255 M6406 M6407
MO-FIN MSSC.P SPJ.P
7126
M102
RDYP
535
M5160 X274
STAN.P TF.N
13778
M6670
P-ONP
582
M230 M231 M101 M482
46M 47M RST
17031 17035 543
M482
46MX
6560
X274 M88 M743
TF.N SIMUOF
15544
M744
K16 R335 CMDTL TFP 6565
M745
TFOFP
6567
M744
TFP
6565
D200 D204
TCOMMD TP NO.
57 24
M1215
TMP.FB
1119
D200 D204 D930
TCOMMD TP NO.
57 24
POCKET No. .NC
MOV D210 R304
MOV R335 R304
CMDTL
POCKET No. .NC
MOV R335 D200
CMDTL
TURRET ROT.FORAW
TF DATA
TEMP. COIL F BIT
CALUCLATE REG.
T FUNCTION
T FUNCTION PULSE
PLS M744
T FUN OFF PULSE
PLF M745
COM. TOOL SP SID
SET M746
COM. TOOL SP SID
RST M746
CALUCLATE REG.
M1215
D204 D200 D930
TP NO. TCOMMD
24 57
CAL. REG.
D213 K2 D932
T MAX
13844
6535 6549 6555 7137 9444
9466 23919
6550 6549 6555 7137 9444
9466 23919
6556 6560 6557 6613 19739
19742
6561 6563 6789 7124 22172
25197 25285
6565 6517 6571 6575
6616 6679 6681 6704
6568 6572 6519 6525 6574
6573 6572 6519 6525 6574
6575 57 6578 6581 6587
6594 6652 6658 6687
6691 6696 6701 6706
1119 1123 1125 1127
3055 3056 6583 6585
6591 6601 6605 14461
23670 16496 15597 14471
23936 23931 23905 23671
27196 27166 23937
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
2285 2302 3312 3318
3322 6600 6603 6607
6611 6631 12925 12928
13475 13465 13455 13445
13508 13500 13492 13483
13581 13569 13534 13521
18898 13719 13702 13589

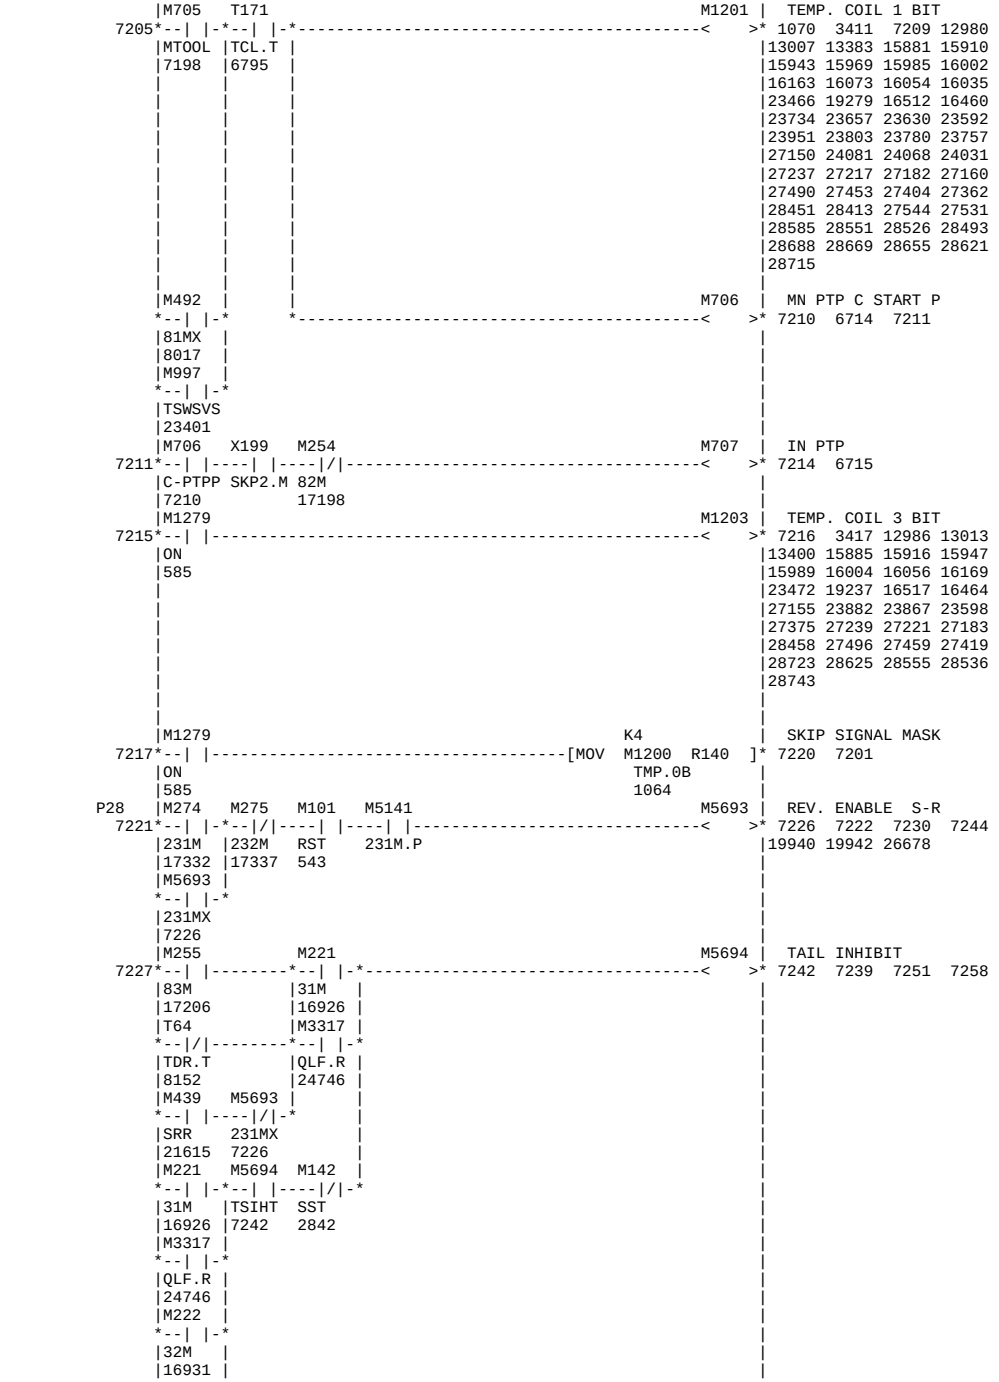

M1215
M729
AUTO CW
TMP.FB
Ltemp2 Ltemp0
1119
2285 1282
D932 D930
M482
46MX
6560
M744 M5168
6616
TFP 6565
16D.P
13781
D930 K300 D300
Ltemp0
1282
D930 K225 D300
D932 D930
D213 D930 D303
T MAX Ltemp0
13844 1282
D303 K300 D300
D303 K225 D300
CALUCLATE REG.
D200 K1 D930
TCOMMD
57
ACW
6615
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
M729
CALUCLATE REG.
ACW
TCOMMD
6615
57
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
T SLOW DOWN DATA
6664 6671 6678 7149
D930 D206
Ltemp0
1282
D213 D206
T MAX
13844
K0 D930
K1 D206
AUTO CCW MEMORY
6679
6684 6682
TFP ACW
6565 6615
M744 M730
CCWME
6684
TOOL CHANGE CANC
6685
6698 25196
K1 D200
K16 D200
K17 D200
F_TL.P
TCOMMD
57
M6476
TOOL COM TC=TM
6699
D200 D204
TF.N
TCOMMD TP NO.
57 24
X274
M892
M893
6703 6516 6763
SAME T-CODE MEMO
6704
M7264
6710 6708 7125

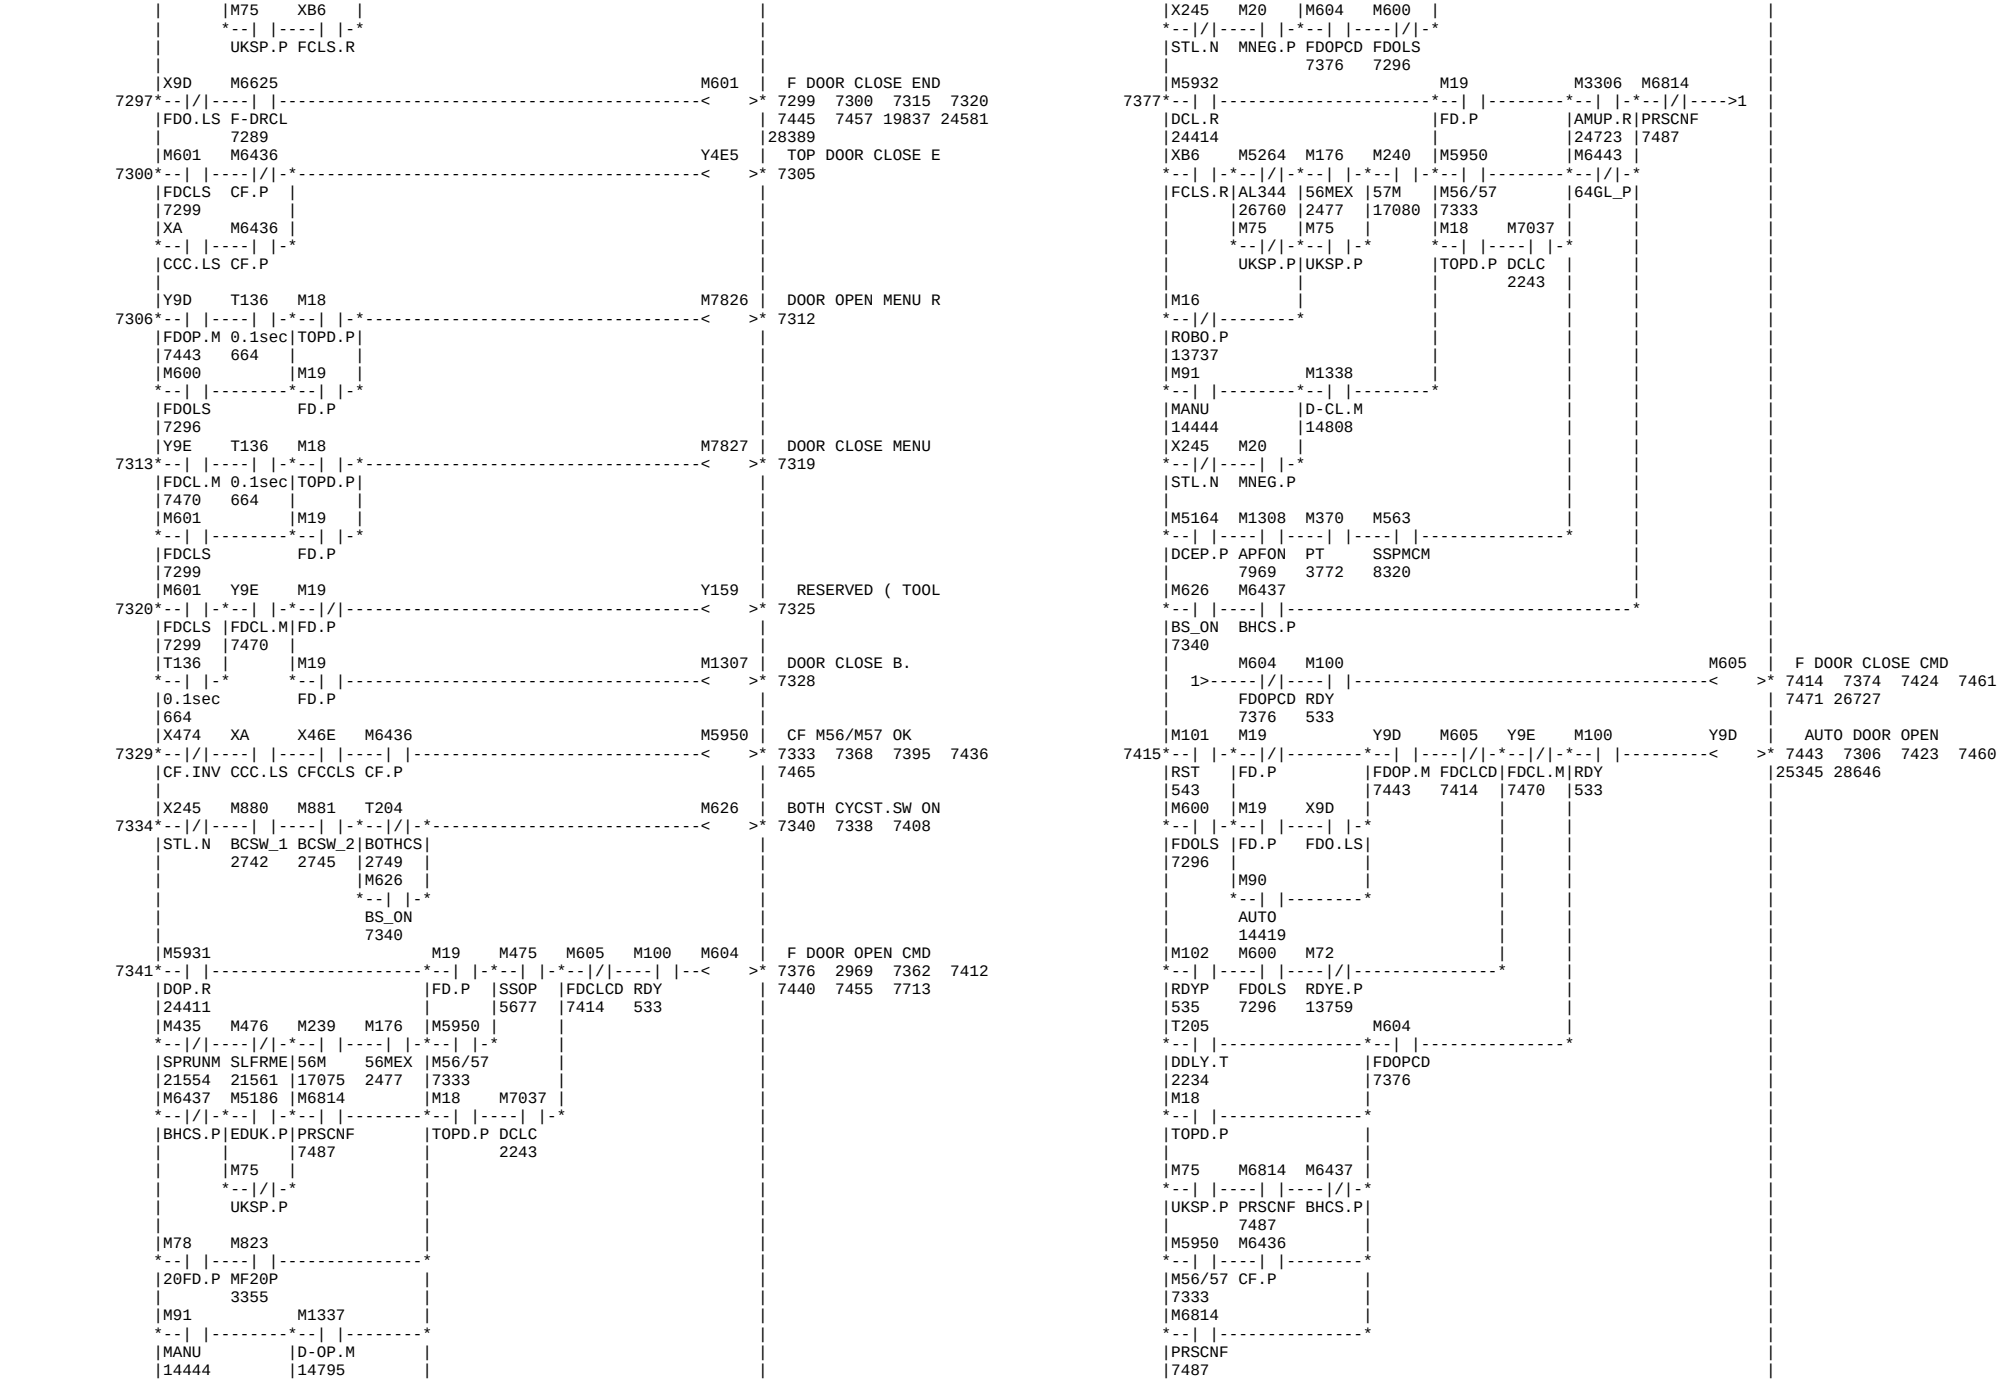

M7264
SMTMEM
6710
X198 X199 M126 M997 M731 SKIP ON
SKP1.M SKP2.M TUCL:L TSWSVS
15304 23401
M501 M706 M707 M492 M3079
TDRE C-PTPP CINPTP 81MX TR_MOD
8149 7210 7214 8017 15564
M100 F72 M732 TOOL CHANGE INTL
RDY TCDTOV
533 26183
X498 X496 M6448 M7272 TURRET ROT.INTER
GSM.M TCL.LS J2TR.P
13812
M6407 X10 M6448
SPJ.P TCL.LS J2TR.P
13812
M926
249MX
6770
M273 M925 M249 DELAY
249M R-OV1
17602
X208 SMOOZING ZERO X
SMZ1.N
X209 SMOOZING ZERO Z
SMZ2.N
M5876 M7272 M273 M731 F56 M915 M893 M126
SMZ1.P TR-ITL 249M SKPON TROTIH 249MCN TC=TM TUCL:L
6744 6736 17602 6723 26016 7907 6703 15304
M5877 M6407 M6407
SMZ2.P SPJ.P SPJ.P
6747 X23E M6406 M6406
DEN1.N MSSC.P MSSC.P
M925
6741
M926 M7470
249MX TCL_CD
6770 6888
X274 M101 M926 249M MEMORY
1>----- TF.N RST 6770 35 2704 6735
543 6760 6792 6849 7189
25296 26460 26502
M931 X224 M7272 M731 X23F F56 M126
CCE ZP15.N TR-ITL SKPON DEN2.N TROTIH TUCL:L
2255 6736 6723 26016 15304
Y240 M53 M6407 M6407 M6406
ST.N Y.P SPJ.P SPJ.P MSSC.P
2852
M1281 M6406
OTRS.B MSSC.P
1040
M743 M7100 TOOL CHANG INHIB
1>----- TF 6790
6563
Y512 M926 X10 TURRET CLAMP .T
TUC.M 249MX TCL.LS 6795 263 7208 25284
78 6770
COOLANT DELAY
T171 K5 6799 7771
T91 D13 T51
M243 M100 M245 M7262 M101 M7256 203M MEMORY
203M RDY 205M FN203M RST 6809 5465 6804 6820
16603 533 16621 6848 543 6830 6841 6853 6929
M1141 21139 22150 22153 22173
POLFWD 22941
5408
M7256
203MM
6809
M244 M100 M245 M7262 M101 M7257 204M MEMORY
204M RDY 205M FN203M RST 6817 5466 6812 6823
16612 533 16621 6848 543 6832 6842 6854 6930
M1142 21142 22149 22154 22174
POLREV 22942
5411
M7257
204MM
6817
M243 M7256 M420 CMD OFF
203M 203MM T226 K5 6826
16603 6809
M1141 M7725 M203/M204 FIN
POLFWD 6829 5557
5408
M244 M7257
204M 204MM
16612 6817
M1142
POLREV
5411
M7256 M5602 M113 M5604 M466 M243 M244 M7262 FINISH 203M
203MM MLFX1 C-OK MLSTE ENGGED 203M 204M 6848 6807 6815
6809 22378 5539 22449 22508 16603 16612
M7257 M5603 L17
204MM MLRX1 1ST
6817 22381 3835
M1140
POLIMD
5404
M7256 M5592 M1140
203MM MLSTHL POLIMD
6809 22295 5404
M7257
204MM
6817
M926 M7426 MILL ORIENT CMND
249MX 6850
6770

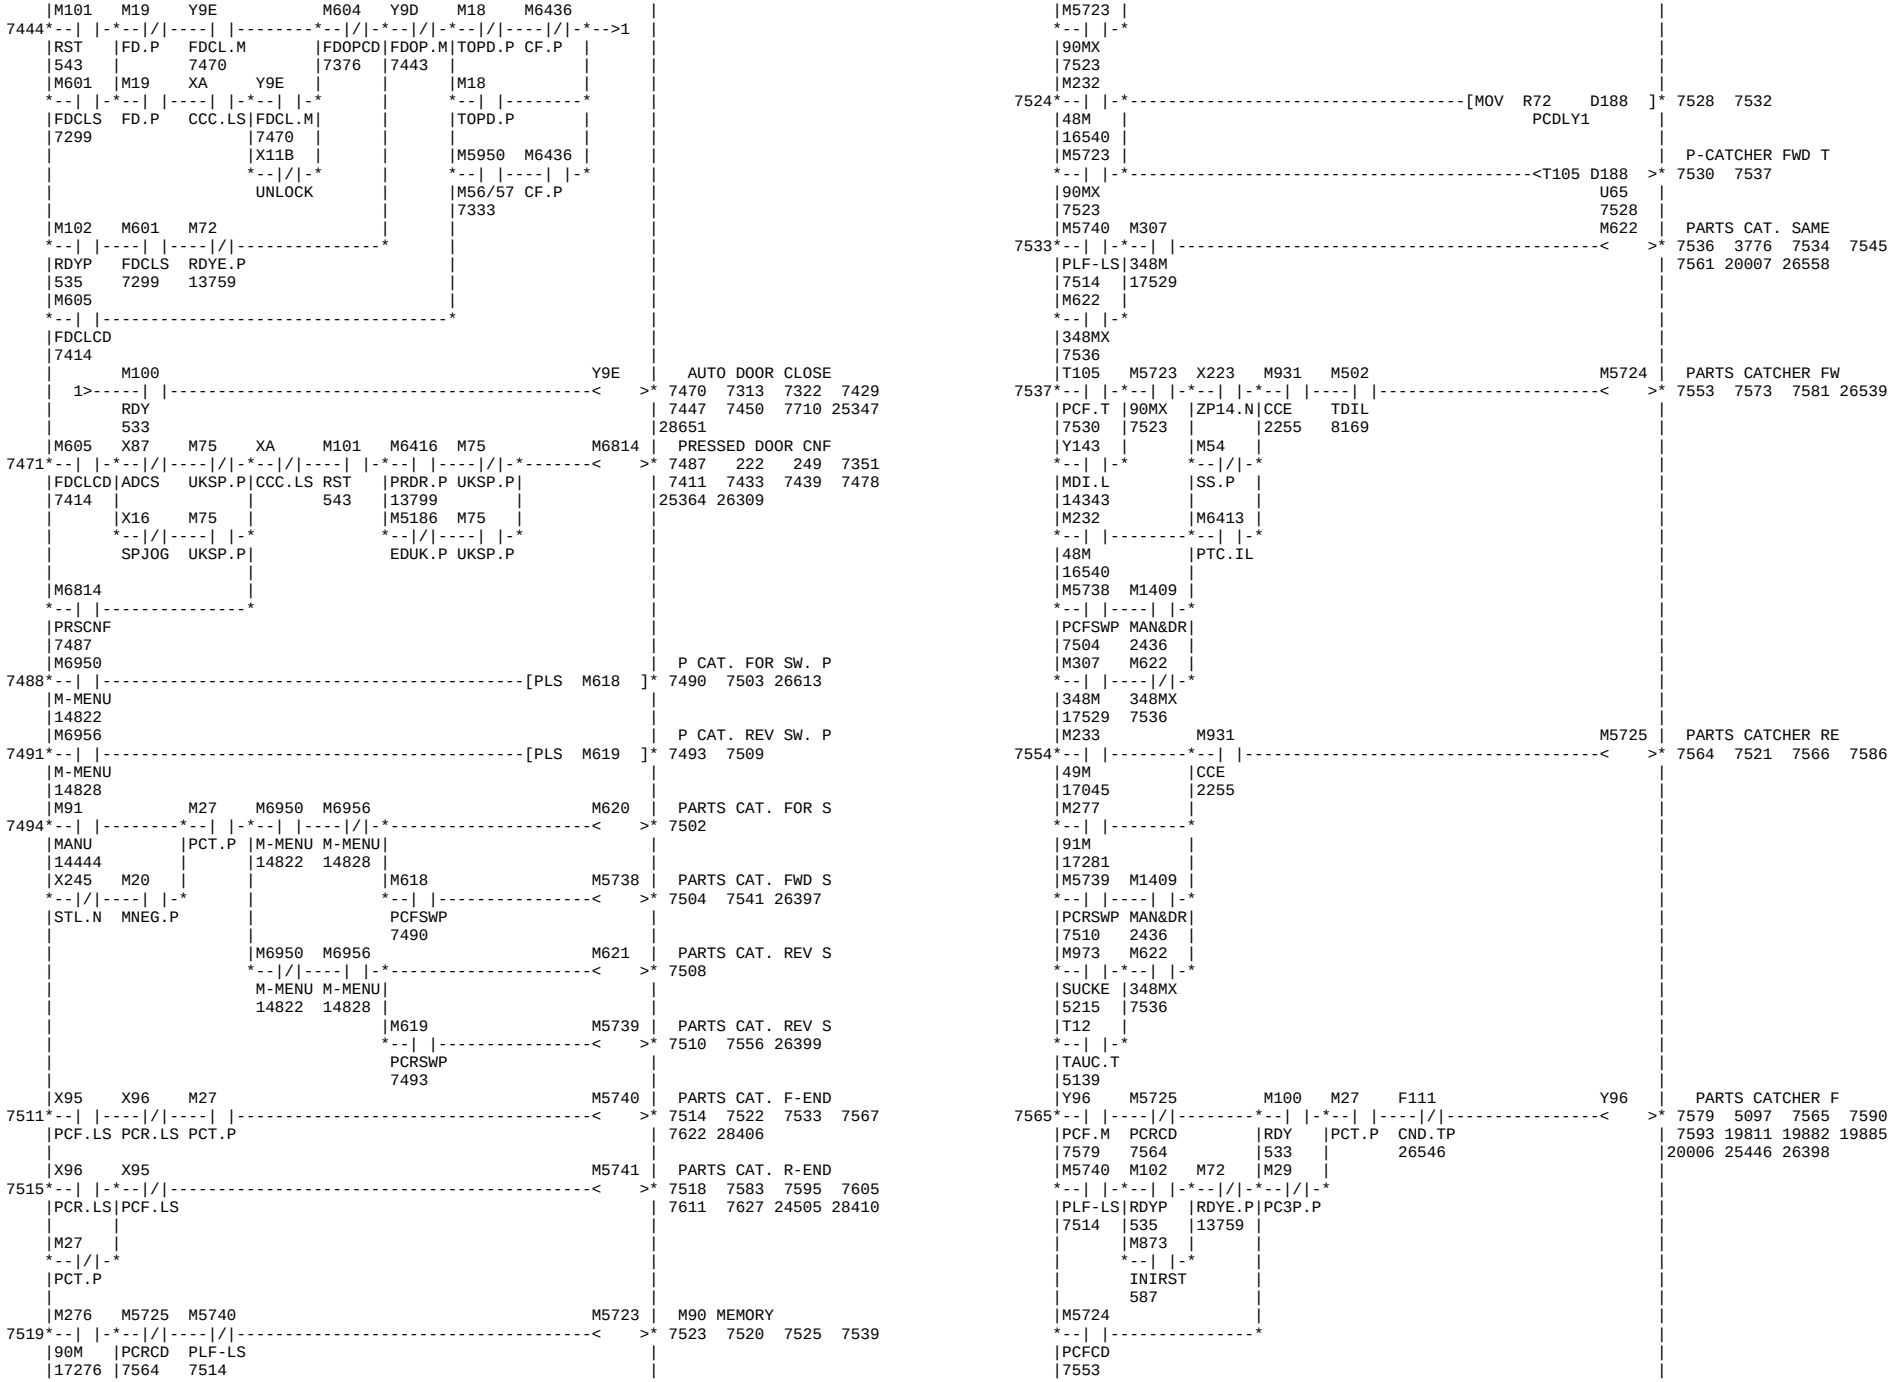

T123 M7463 M7256 M7257 M1140 M7453 | ORIENT ENABLE
6851 6856 6878
MLLOAD TUOFF 203MM 204MM POLIMD
6926 15307 6809 6817 5404
M7251 M7994 M7299 T186 M7093 M7453 M732 M100
6857
MO-FRD FT_T17 MNLT17 PRET.T MLJNT OR-ENB TCHINT RDY
6984 7016 6856 6726 533
M7104 T124 M7106
NT->FT PEXT.T T14_16
Y296 M7470 M7104 M6476
ORCM.N TCL_CD NT->FT F_TL.P
6883 6888
M6476 M1040 M6476
F_TL.P CCC++ F_TL.P
8421
M5587 M7265 Y296 | ORIENT COMMAND.N
1 6883 6862 6885 6889
MLST ML-RVL 6907 6919
22225 6199
Y396
6884
Y296 T177 M6631 M7470 | TURRET CLAMP CMN
6885 6888 6761 6863
ORCM.N STOF.T ILYME1
6883 2269 2277
Y296 | MILL ORT.ON PULS
6889 6891 6901
ORCM.N
6883
PLS M7269
MILL ORT.OFF PUL
PLF M7263 6893 6894
M7263 | ML&TR-ORT.DATA
6894 6897 7086
MOOFFP
6893
MOV K0 R311
ORIENT POSITION_
MOV K0 R361 6900 7089
M7269 M8004
6901 6906 7020 7029 7031
MO-ONP 7044 7046 7056 7058
6891 7068 7070 7085 7088
M7094
INDOFF
7082
Y296 X26E M7275 M7276 | 1st.ORT.FIN.DELA
6907 6914 6917
ORCM.N ORAM.N MLOFWP MLORVP
6883 6988
X36E
ORAM.N
T227 Y296 M7427 | MILL ORIENT MODE
6917 6920 6918 6941 6946
1t.O.T ORCM.N 6948
6914 6883
M7427
OR-MOD
6920
Y512 | MILL LOAD METER
6921 6926 6851 6949
TUC.M ML1LD%
78
M7256 X274 M7462 | MILL START COMMA
6929 6939
203MM TF.N
6809
M7257
204MM
6817
M1140
POLIMD
5404
M464
ENGAGE
22480
M5587
MLST
22225
M456 M91 M111
S JOG MANU M-MODE
6023 14444 5341
M126 M7427 X26E M7421 | GEAR-TURRET COMM
6940 6945 6951 6958
TUCL:L OR-MOD ORAM.N
15304 6920
X36E
ORAM.N
M7427 M126 M7427 M7422 | GEAR-MILL COMMAN
6946 6950 6953 6956
OR-MOD TUCL:L OR-MOD
6920 15304 6920
T123
MLLOAD
6926
M7421 M7422 M100 M7423 | GR-TURRET SIDE S
6951 6955 6952 6961
GR-T.C GR-M.C RDY
6945 6950 533
M7423
GR-TRT
6955
M7422 M7421 M100 M7424 | GR-MILL SIDE SOL
6956 6960 6957 6963
GR-M.C GR-T.C RDY
6950 6945 533
M7424
GR-ML
6960
M7423 X497 M1279 Y292 | TORQUE LIMIT .NC
6961 6967
GR-TRT GST.M ON
6955 585
M7424 X498 Y392
6968
GR-ML GSM.M
6960
M7986 M7090 M7994 M6476 M7251 | MILL ORT.FORWARD
6969 6984 6857 7083 7090
MORE-0 MLJON FT_T17 F_TL.P
M7987 M467 M7104
MOR-90 DISEGD NT->FT
22514
M7994 M7104 M6476
FT_T17 NT->FT F_TL.P PLS M7275 | ML ORT.FWD PLS
6988 6911 6989 7017
7021 7104

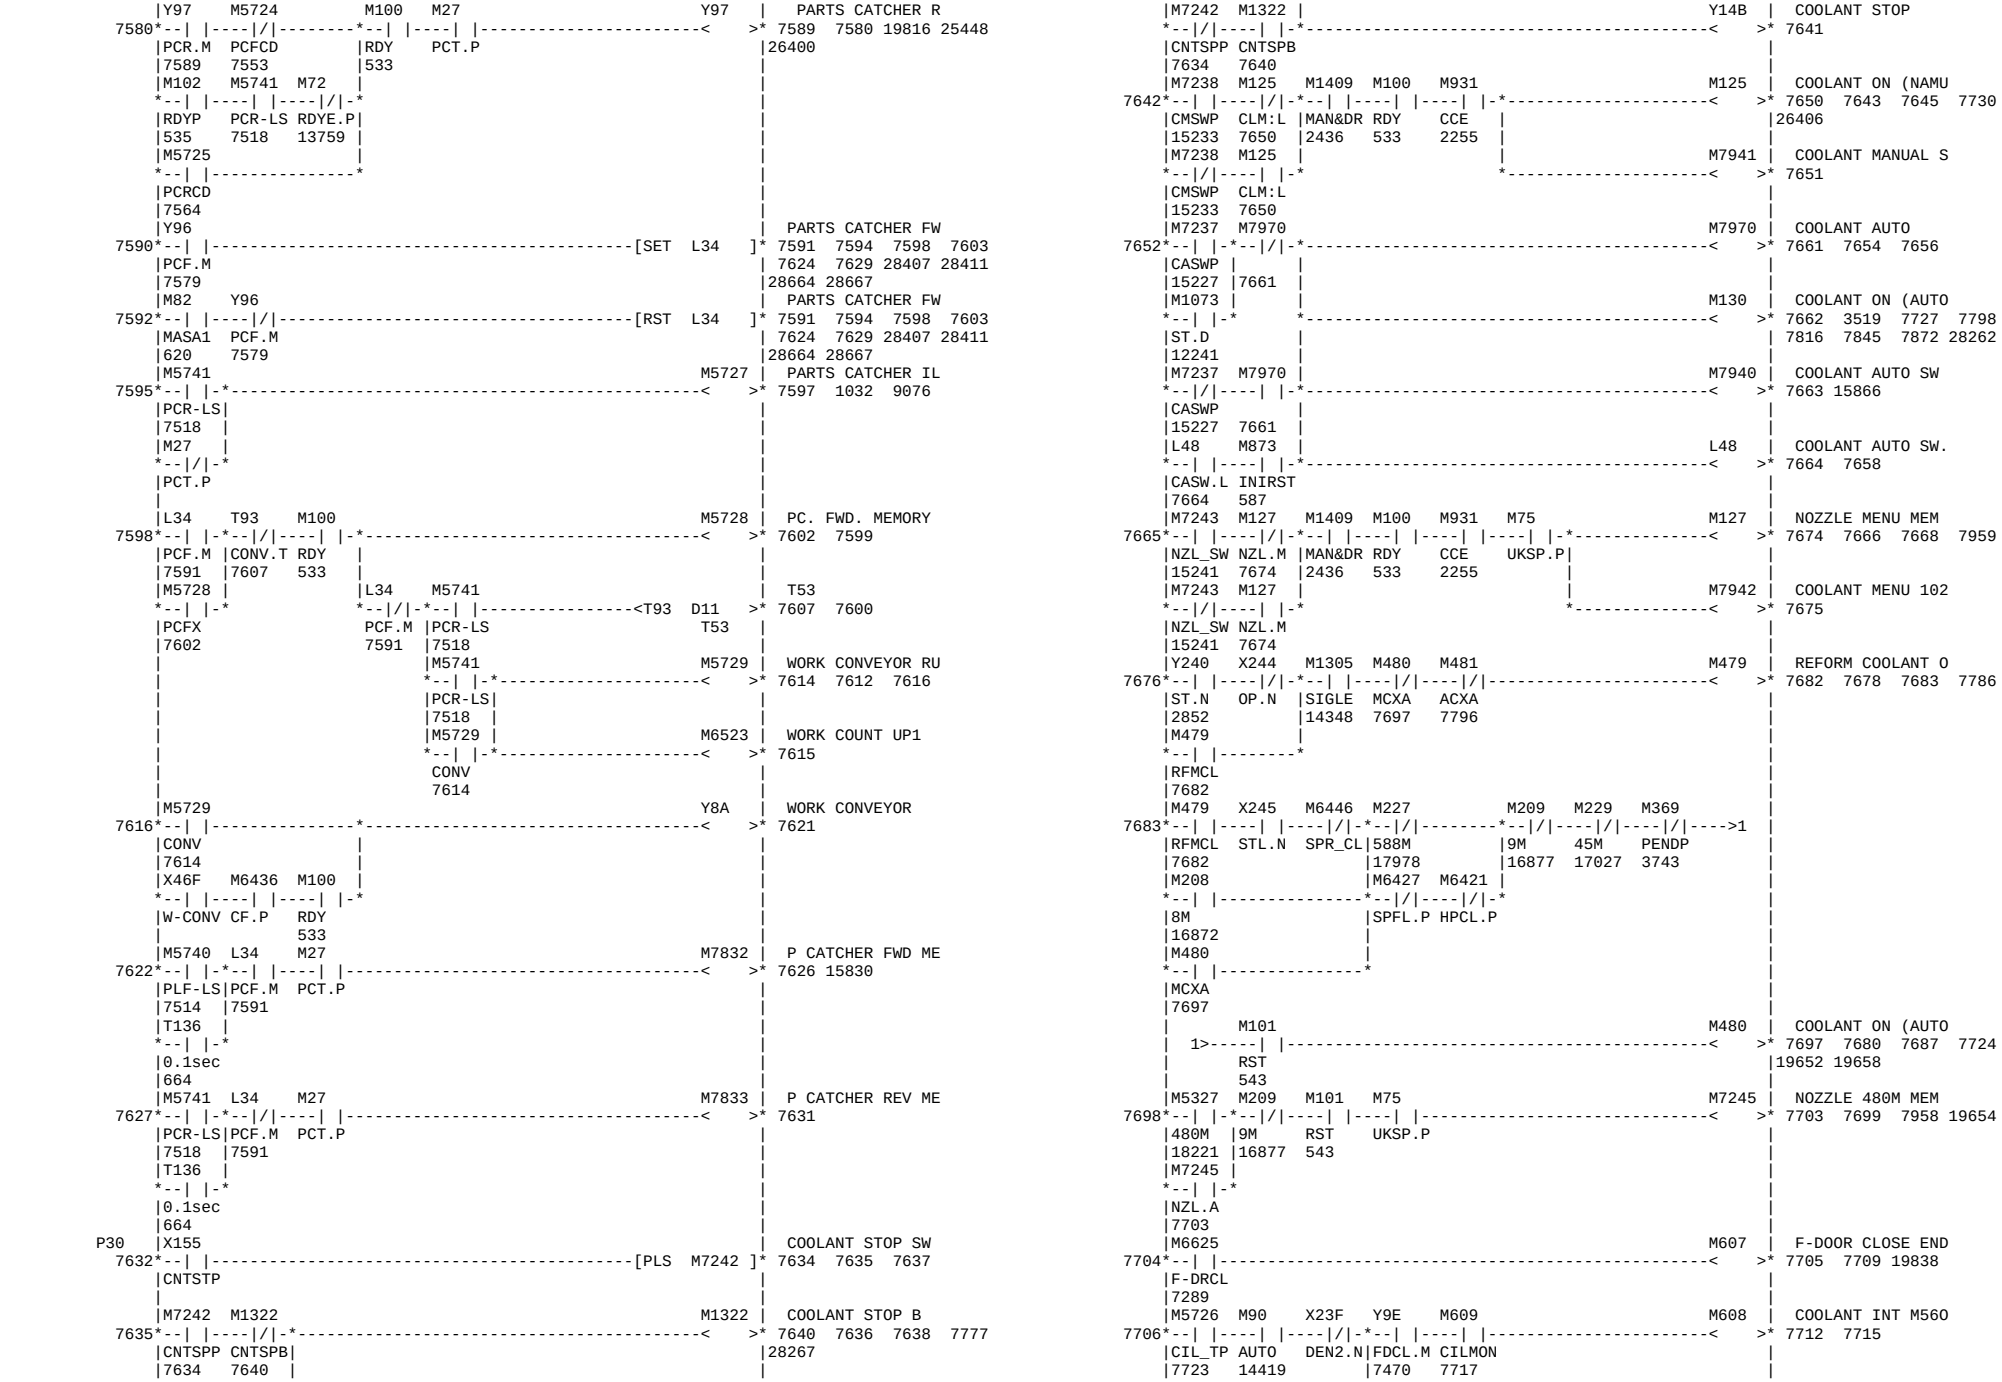

M7988
MNLORT
M266
219M
17327
M7275 M7988 M6476
MLOFWP MNLORT F_TL.P
6988
M7275 M6476 M7986
MLOFWP F_TL.P
6988
M266 M7990
219M FT_T13
17327
M7295 M7295
MNLT13 MNLT13
6996 6996
M7987 M7991
MOR-90 FT_T14
M7296
MNLT14
7001
M7987 M7992
MOR-90 FT_T15
M7297
MNLT15
7006
M7987 M7993
MOR-90 FT_T16
M7298
MNLT16
7011
M7275
MLOFWP
6988
M7295
M7296
M7297
M7298
M7299
M7994
FT_T17
M7299
M7251
MO-FRD
6984
M7251
MO-FRD
6984
M7252 M6406 M6476
MO-RVS MSSC.P F_TL.P
X26E
ORAM.N
X36E
ORAM.N
Y294 M7275 M7276
SNIM.N MLOFWP MLORVP
7091 6988
Y294
SNIM.N
7091
M7465 Y294 X26E T120
OR-A-P SNIM.N ORAM.N OR-CMD
7101 7091 7107
M7460
OR-ARV ORAM.N
7118
Y294
SNIM.N
7091
Y294 M7254 M743
SNIM.N MO-FPL TF
7091 7120 6563
M7255
MO-FIN
7126
M7460
M7254
M7255
Y294
Y295
Y395
6906
6906
Y294
Y394
Y294
Y295
Y395
M7465
M7460
M7254
M7255
D510 D999
R108
K0 D999
6906
K1 D310
K2 D310
K3 D310
K4 D310
K5 D310
FTCPNo
7037
K900 D999
K1800 D999
K2700 D999
T120 K2
D999 K5 D310
D999 R311
D999 R361
D999 Y294
D999 Y395
R311 6906
R361 6906
Y294 Y394
Y295 Y395
M7299
M7294
FT_T17
M7299
MNLT17
7016
F_TOOL CHIP No.
MNL INDEX OFF PL
ML&TR-ORT.DATA
ORIENT POSITION_
MILL FORWARD.NC
MILL REVERSE.NC
ORIENT CMND. DEL
ORIENT ARRIVAL
MILL ORT.FIN.PUL
MILL ORT.FINISH
ORT-ARRIVAL PULS
6906 7020 7029 7031
7044 7046 7056 7058
7068 7070 7085 7088
7037 6995 7000 7005
7010 7015 7049 7061
7073 7080 9452 9455
9459 9464 26499 26505
26505 26499 9464 9459
6996 7026 7033
7001 7041
7006 7053
7011 7065
7016 6861 7076
7037 6995 7000 7005
7010 7015 7049 7061
7073 7080 9452 9455
7068 7070 7085 7088
7118 7120 7126 7255 7294 7464 7465 7710 7907 7994 7995 8000 8001 8002 8003 8004 8005 8006 8007 8008 8009 8010 8011 8012 8013 8014 8015 8016 8017 8018 8019 8020 8021 8022 8023 8024 8025 8026 8027 8028 8029 8030 8031 8032 8033 8034 8035 8036 8037 8038 8039 8040 8041 8042 8043 8044 8045 8046 8047 8048 8049 8050 8051 8052 8053 8054 8055 8056 8057 8058 8059 8060 8061 8062 8063 8064 8065 8066 8067 8068 8069 8070 8071 8072 8073 8074 8075 8076 8077 8078 8079 8080 8081 8082 8083 8084 8085 8086 8087 8088 8089 8090 8091 8092 8093 8094 8095 8096 8097 8098 8099 8100 8101 8102 8103 8104 8105 8106 8107 8108 8109 8110 8111 8112 8113 8114 8115 8116 8117 8118 8119 8120 8121 8122 8123 8124 8125 8126 8127 8128 8129 8130 8131 8132 8133 8134 8135 8136 8137 8138 8139 8140 8141 8142 8143 8144 8145 8146 8147 8148 8149 8150 8151 8152 8153 8154 8155 8156 8157 8158 8159 8160 8161 8162 8163 8164 8165 8166 8167 8168 8169 8170 8171 8172 8173 8174 8175 8176 8177 8178 8179 8180 8181 8182 8183 8184 8185 8186 8187 8188 8189 8190 8191 8192 8193 8194 8195 8196 8197 8198 8199 8200 8201 8202 8203 8204 8205 8206 8207 8208 8209 8210 8211 8212 8213 8214 8215 8216 8217 8218 8219 8220 8221 8222 8223 8224 8225 8226 8227 8228 8229 8230 8231 8232 8233 8234 8235 8236 8237 8238 8239 8240 8241 8242 8243 8244 8245 8246 8247 8248 8249 8250 8251 8252 8253 8254 8255 8256 8257 8258 8259 8260 8261 8262 8263 8264 8265 8266 8267 8268 8269 8270 8271 8272 8273 8274 8275 8276 8277 8278 8279 8280 8281 8282 8283 8284 8285 8286 8287 8288 8289 8290 8291 8292 8293 8294 8295 8296 8297 8298 8299 8300 8301 8302 8303 8304 8305 8306 8307 8308 8309 8310 8311 8312 8313 8314 8315 8316 8317 8318 8319 8320 8321 8322 8323 8324 8325 8326 8327 8328 8329 8330 8331 8332 8333 8334 8335 8336 8337 8338 8339 8340 8341 8342 8343 8344 8345 8346 8347 8348 8349 8350 8351 8352 8353 8354 8355 8356 8357 8358 8359 8360 8361 8362 8363 8364 8365 8366 8367 8368 8369 8370 8371 8372 8373 8374 8375 8376 8377 8378 8379 8380 8381 8382 8383 8384 8385 8386 8387 8388 8389 8390 8391 8392 8393 8394 8395 8396 8397 8398 8399 8400 8401 8402 8403 8404 8405 8406 8407 8408 8409 8410 8411 8412 8413 8414 8415 8416 8417 8418 8419 8420 8421 8422 8423 8424 8425 8426 8427 8428 8429 8430 8431 8432 8433 8434 8435 8436 8437 8438 8439 8440 8441 8442 8443 8444 8445 8446 8447 8448 8449 8450 8451 8452 8453 8454 8455 8456 8457 8458 8459 8460 8461 8462 8463 8464 8465 8466 8467 8468 8469 8470 8471 8472 8473 8474 8475 8476 8477 8478 8479 8480 8481 8482 8483 8484 8485 8486 8487 8488 8489 8490 8491 8492 8493 8494 8495 8496 8497 8498 8499 8500 8501 8502 8503 8504 8505 8506 8507 8508 8509 8510 8511 8512 8513 8514 8515 8516 8517 8518 8519 8520 8521 8522 8523 8524 8525 8526 8527 8528 8529 8530 8531 8532 8533 8534 8535 8536 8537 8538 8539 8540 8541 8542 8543 8544 8545 8546 8547 8548 8549 8550 8551 8552 8553 8554 8555 8556 8557 8558 8559 8560 8561 8562 8563 8564 8565 8566 8567 8568 8569 8570 8571 8572 8573 8574 8575 8576 8577 8578 8579 8580 8581 8582 8583 8584 8585 8586 8587 8588 8589 8590 8591 8592 8593 8594 8595 8596 8597 8598 8599 8600 8601 8602 8603 8604 8605 8606 8607 8608 8609 8610 8611 8612 8613 8614 8615 8616 8617 8618 8619 8620 8621 8622 8623 8624 8625 8626 8627 8628 8629 8630 8631 8632 8633 8634 8635 8636 8637 8638 8639 8640 8641 8642 8643 8644 8645 8646 8647 8648 8649 8650 8651 8652 8653 8654 8655 8656 8657 8658 8659 8660 8661 8662 8663 8664 8665 8666 8667 8668 8669 8670 8671 8672 8673 8674 8675 8676 8677 8678 8679 8680 8681 8682 8683 8684 8685 8686 8687 8688 8689 8690 8691 8692 8693 8694 8695 8696 8697 8698 8699 8700 8701 8702 8703 8704 8705 8706 8707 8708 8709 8710 8711 8712 8713 8714 8715 8716 8717 8718 8719 8720 8721 8722 8723 8724 8725 8726 8727 8728 8729 8730 8731 8732 8733 8734 8735 8736 8737 8738 8739 8740 8741 8742 8743 8744 8745 8746 8747 8748 8749 8750 8751 8752 8753 8754 8755 8756 8757 8758 8759 8760 8761 8762 8763 8764 8765 8766 8767 8768 8769 8770 8771 8772 8773 8774 8775 8776 8777 8778 8779 8780 8781 8782 8783 8784 8785 8786 8787 8788 8789 8790 8791 8792 8793 8794 8795 8796 8797 8798 8799 8800 8801 8802 8803 8804 8805 8806 8807 8808 8809 8810 8811 8812 8813 8814 8815 8816 8817 8818 8819 8820 8821 8822 8823 8824 8825 8826 8827 8828 8829 8830 8831 8832 8833 8834 8835 8836 8837 8838 8839 8840 8841 8842 8843 8844 8845 8846 8847 8848 8849 8850 8851 8852 8853 8854 8855 8856 8857 8858 8859 8860 8861 8862 8863 8864 8865 8866 8867 8868 8869 8870 8871 8872 8873 8874 8875 8876 8877 8878 8879 8880 8881 8882 8883 8884 8885 8886 8887 8888 8889 8890 8891 8892 8893 8894 8895 8896 8897 8898 8899 8900 8901 8902 8903 8904 8905 8906 8907 8908 8909 8910 8911 8912 8913 8914 8915 8916 8917 8918 8919 8920 8921 8922 8923 8924 8925 8926 8927 8928 8929 8930 8931 8932 8933 8934 8935 8936 8937 8938 8939 8940 8941 8942 8943 8944 8945 8946 8947 8948 8949 8950 8951 8952 8953 8954 8955 8956 8957 8958 8959 8960 8961 8962 8963 8964 8965 8966 8967 8968 8969 8970 8971 8972 8973 8974 8975 8976 8977 8978 8979 8980 8981 8982 8983 8984 8985 8986 8987 8988 8989 8990 8991 8992 8993 8994 8995 8996 8997 8998 8999 9000 9001 9002 9003 9004 9005 9006 9007 9008 9009 9010 9011 9012 9013 9014 9015 9016 9017 9018 9019 9020 9021 9022 9023 9024 9025 9026 9027 9028 9029 9030 9031 9032 9033 9034 9035 9036 9037 9038 9039 9040 9041 9042 9043 9044 9045 9046 9047 9048 9049 9050 9051 9052 9053 9054 9055 9056 9057 9058 9059 9060 9061 9062 9063 9064 9065 9066 9067 9068 9069 9070 9071 9072 9073 9074 9075 9076 9077 9078 9079 9080 9081 9082 9083 9084 9085 9086 9087 9088 9089 9090 9091 9092 9093 9094 9095 9096 9097 9098 9099 9100 9101 9102 9103 9104 9105 9106 9107 9108 9109 9110 9111 9112 9113 9114 9115 9116 9117 9118 9119 9120 9121 9122 9123 9124 9125 9126 9127 9128 9129 9130 9131 9132 9133 9134 9135 9136 9137 9138 9139 9140 9141 9142 9143 9144 9145 9146 9147 9148 9149 9150 9151 9152 9153 9154 9155 9156 9157 9158 9159 9160 9161 9162 9163 9164 9165 9166 9167 9168 9169 9170 9171 9172 9173 9174 9175 9176 9177 9178 9179 9180 9181 9182 9183 9184 9185 9186 9187 9188 9189 9190 9191 9192 9193 9194 9195 9196 9197 9198 9199 9200 9201 9202 9203 9204 9205 9206 9207 9208 9209 9210 9211 9212 9213 9214 9215 9216 9217 9218 9219 9220 9221 9222 9223 9224 9225 9226 9227 9228 9229 9230 9231 9232 9233 9234 9235 9236 9237 9238 9239 9240 9241 9242 9243 9244 9245 9246 9247 9248 9249 9250 9251 9252 9253 9254 9255 9256 9257 9258 9259 9260 9261 9262 9263 9264 9265 9266 9267 9268 9269 9270 9271 9272 9273 9274 9275 9276 9277 9278 9279 9280 9281 9282 9283 9284 9285 9286 9287 9288 9289 9290 9291 9292 9293 9294 9295 9296 9297 9298 9299 9300 9301 9302 9303 9304 9305 9306 9307 9308 9309 9310 9311 9312 9313 9314 9315 9316 9317 9318 9319 9320 9321 9322 9323 9324 9325 9326 9327 9328 9329 9330 9331 9332 9333 9334 9335 9336 9337 9338 9339 9340 9341 9342 9343 9344 9345 9346 9347 9348 9349 9350 9351 9352 9353 9354 9355 9356 9357 9358 9359 9360 9361 9362 9363 9364 9365 9366 9367 9368 9369 9370 9371 9372 9373 9374 9375 9376 9377 9378 9379 9380 9381 9382 9383 9384 9385 9386 9387 9388 9389 9390 9391 9392 9393 9394 9395 9396 9397 9398 9399 9400 9401 9402 9403 9404 9405 9406 9407 9408 9409 9410 9411 9412 9413 9414 9415 9416 9417 9418 9419 9420 9421 9422 9423 9424 9425 9426 9427 9428 9429 9430 9431 9432 9433 9434 9435 9436 9437 9438 9439 9440 9441 9442 9443 9444 9445 9446 9447 9448 9449 9450 9451 9452 9453 9454 9455 9456 9457 9458 9459 9460 9461 9462 9463 9464 9465 9466 9467 9468 9469 9470 9471 9472 9473 9474 9475 9476 9477 9478 9479 9480 9481 9482 9483 9484 9485 9486 9487 9488 9489 9490 9491 9492 9493 9494 9495 9496 9497 9498 9499 9500 9501 9502 9503 9504 9505 9506 9507 9508 9509 9510 9511 9512 9513 9514 9515 9516 9517 9518 9519 9520 9521 9522 9523 9524 9525 9526 9527 9528 9529 9530 9531 9532 9533 9534 9535 9536 9537 9538 9539 9540 9541 9542 9543 9544 9545 9546 9547 9548 9549 9550 9551 9552 9553 9554 9555 9556 9557 9558 9559 9560 9561 9562 9563 9564 9565 9566 9567 9568 9569 9570 9571 9572 9573 9574 9575 9576 9577 9578 9579 9580 9581 9582 9583 9584 9585 9586 9587 9588 9589 9590 9591 9592 9593 9594 9595 9596 9597 9598 9599 9600 9601 9602 9603 9604 9605 9606 9607 9608 9609 9610 9611 9612 9613 9614 9615 9616 9617 9618 9619 9620 9621 9622 9623 9624 9625 9626 9627 9628 9629 9630 9631 9632 9633 9634 9635 9636 9637 9638 9639 9640 9641 9642 9643 9644 9645 9646 9647 9648 9649 9650 9651 9652 9653 9654 9655 9656 9657 9658 9659 9660 9661 9662 9663 9664 9665 9666 9667 9668 9669 9670 9671 9672 9673 9674 9675 9676 9677 9678 9679 9680 9681 9682 9683 9684 9685 9686 9687 9688 9689 9690 9691 9692 9693 9694 9695 9696 9697 9698 9699 9700 9701 9702 9703 9704 9705 9706 9707 9708 9709 9710 9711 9712 9713 9714 9715 9716 9717 9718 9719 9720 9721 9722 9723 9724 9725 9726 9727 9728 9729 9730 9731 9732 9733 9734 9735 9736 9737 9738 9739 9740 9741 9742 9743 9744 9745 9746 9747 9748 9749 9750 9751 9752 9753 9754 9755 9756 9757 9758 9759 9760 9761 9762 9763 9764 9765 9766 9767 9768 9769 9770 9771 9772 9773 9774 9775 9776 9777 9778 9779 9780 9781 9782 9783 9784 9785 9786 9787 9788 9789 9790 9791 9792 9793 9794 9795 9796 9797 9798 9799 9800 9801 9802 9803 9804 9805 9806 9807 9808 9809 9810 9811 9812 9813 9814 9815 9816 9817 9818 9819 9820 9821 9822 9823 9824 9825 9826 9827 9828 9829 9830 9831 9832 9833 9834 9835 9836 9837 9838 9839 9840 9841 9842 9843 9844 9845 9846 9847 9848 9849 9850 9851 9852 9853 9854 9855 9856 9857 9858 9859 9860 9861 9862 9863 9864 9865 9866 9867 9868 9869 9870 9871 9872 9873 9874 9875 9876 9877 9878 9879 9880 9881 9882 9883 9884 9885 9886 9887 9888 9889 9890 9891 9892 9893 9894 9895 9896 9897 9898 9899 9900 9901 9902 9903 9904 9905 9906 9907 9908 9909 9910 9911 9912 9913 9914 9915 9916 9917 9918 9919 9920 9921 9922 9923 9924 9925 9926 9927 9928 9929 9930 9931 9932 9933 9934 9935 9936 9937 9938 9939 9940 9941 9942 9943 9944 9945 9946 9947 9948 9949 9950 9951 9952 9953 9954 9955 9956 9957 9958 9959 9960 9961 9962 9963 9964 9965 9966 9967 9968 9969 9970 9971 9972 9973 9974 9975 9976 9977 9978 9979 9980 9981 9982 9983 9984 9985 9986 9987 9988 9989 9990 9991 9992 9993 9994 9995 9996 9997 9998 9999 10000

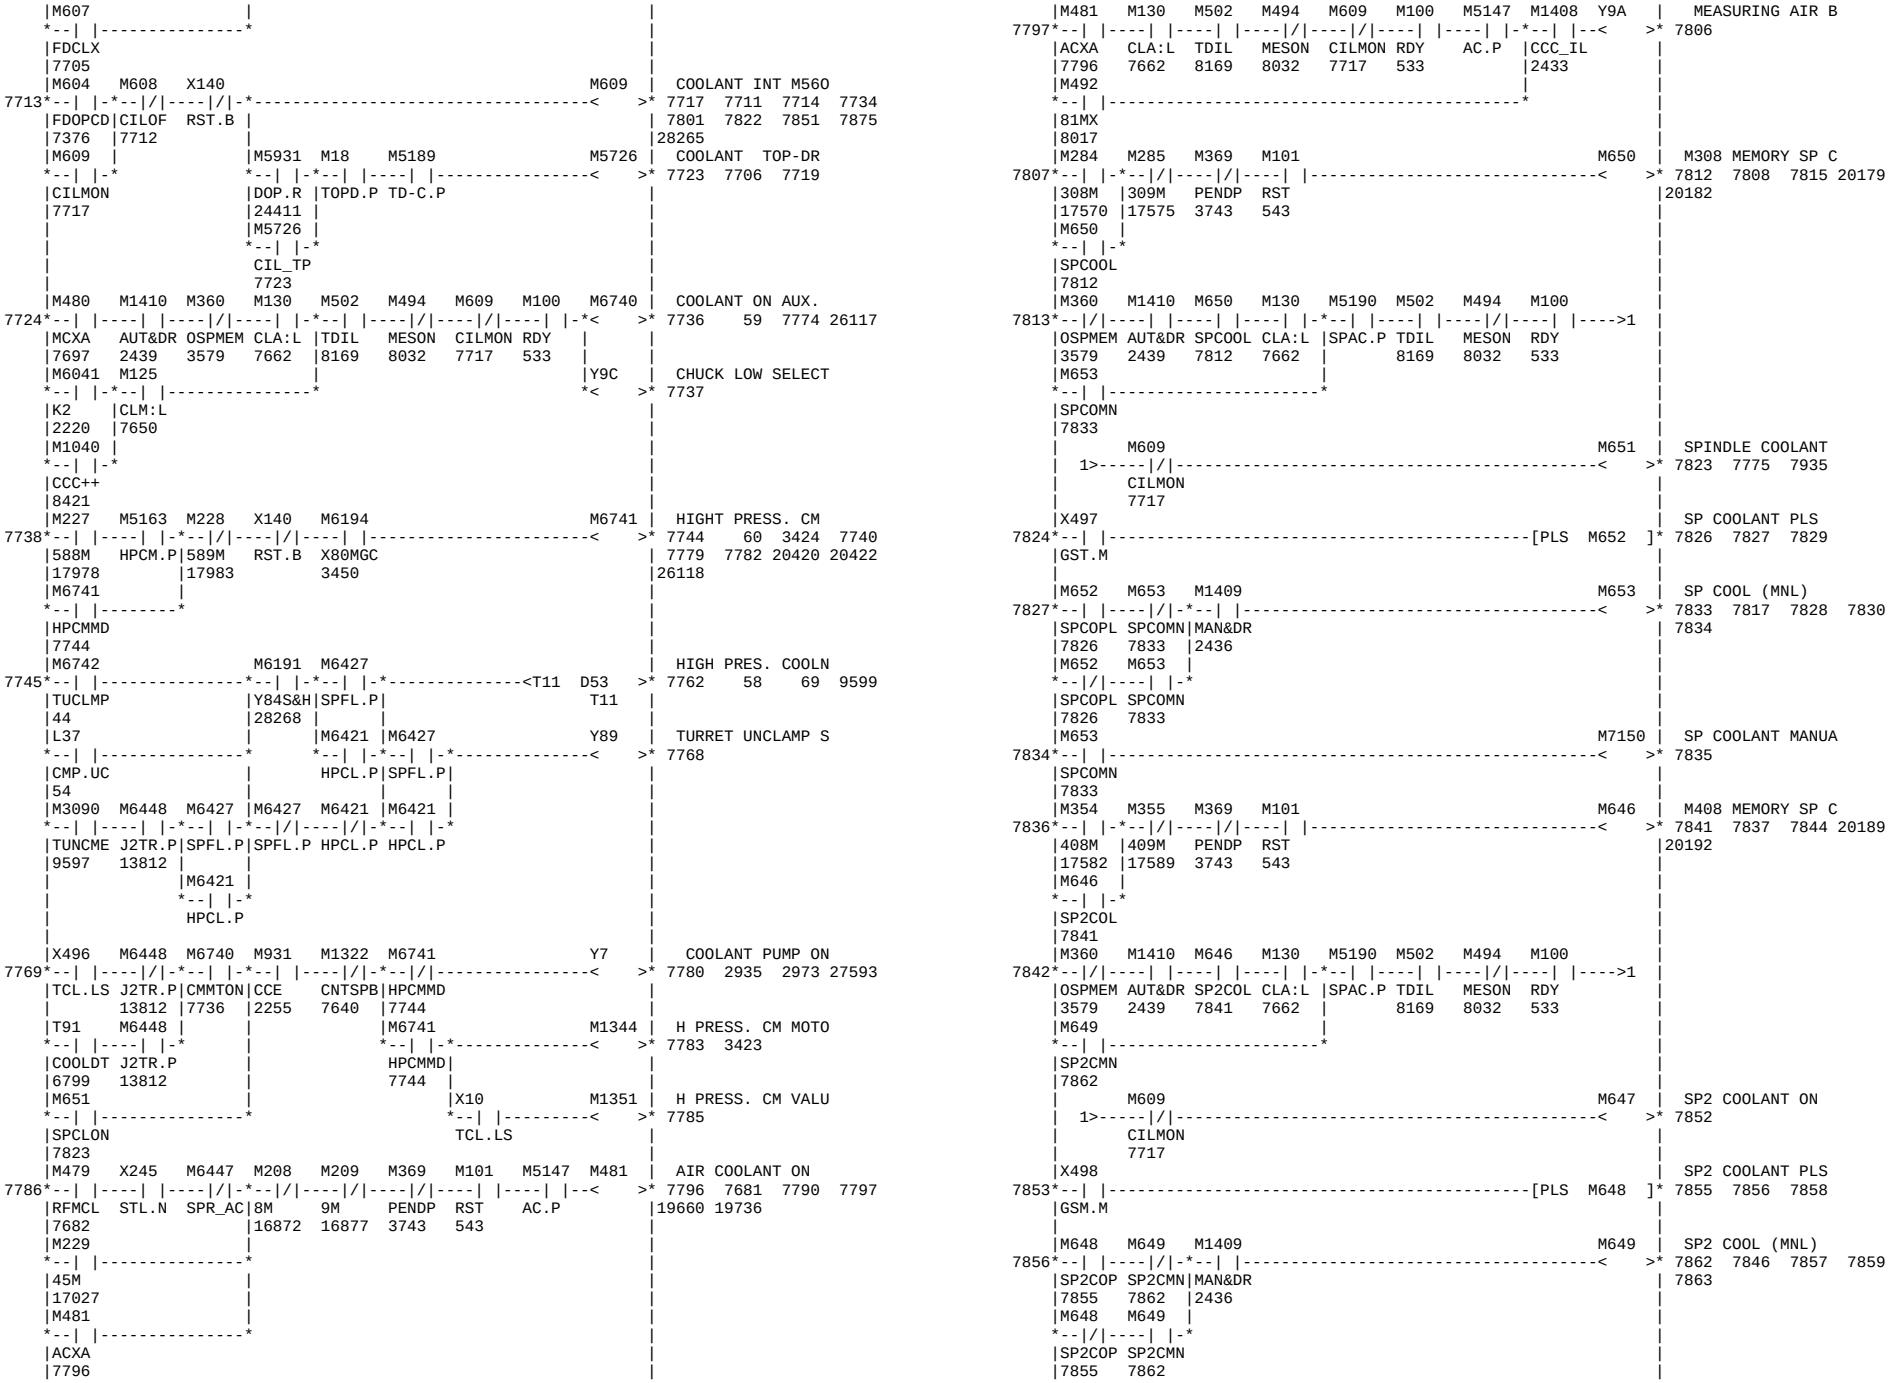

M7264
SMTMEM
6710
M6448
J2CT TURRET
9314 7129
J2TR.P
13812
M6472
J2CT TAIL
9676 7132
J2TA.P
13821
M3073 M6448
Y2A4
T FUNCTION FIN.N
7141 770 7142
TF_FIN J2TR.P
9674 13812
X274
M5160
R304 R335
TF.N
CMDTL STAN.P
6549
13778
Y2A4 M916
T SLOW DOWN DATA
6664 6671 6678 7149
TFIN.N TFNFST
7141 7921
M916 X274
TFNFST TF.N
7921
XA X11C M1040
M6104
DOOR OPEN CONDIT
7153 7168 7170
CCC.LS SETUP. CCC++
8421
X10B M501
TOOL SELECT SW P
7162 7163 7169 25983
TSEF.B TDRE
8149
X10C M501 X156
TSER.B TDRE MF1.B
8149
M6105 X10B M6104 X224 M6108 M501 M5169 M91
TSWP TSEF.B DOPC ZP15.N MNIRPT TDRE TRTMF1 MANU
7162 7153 9396 8149 14444
M7040 X10C M53 X156
MTCIHT TSER.B Y.P MF1.B
7188
M6105 M6104 M1281
TSWP DOPC OTRS.B
7162 7153 1040
M731 M997 M745 M126 M101 M6407
M7040
MILL TOOL CH INH
7188 7164 9328 26843
SKPON TSWSVS TFOFP TUCL:L RST SPJ.P
6723 23401 6567 15304 543
M926 M126 Y512 M6407 M6448
M6506
JUMP TURRET CONT
7194 32
249MX TUCL:L TUC.M SPJ.P J2TR.P
6770 15304 78
13812
M705
MEASURE TOOL NC
7198 261 7205
BIT R338 K7
M1279
K4
TEMP. COIL 0 BIT
1064 1067 1073 3407
MOV R140 M1200
ON
MASK1
585
7220
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
T65
M1200
TDF.T
8129
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741

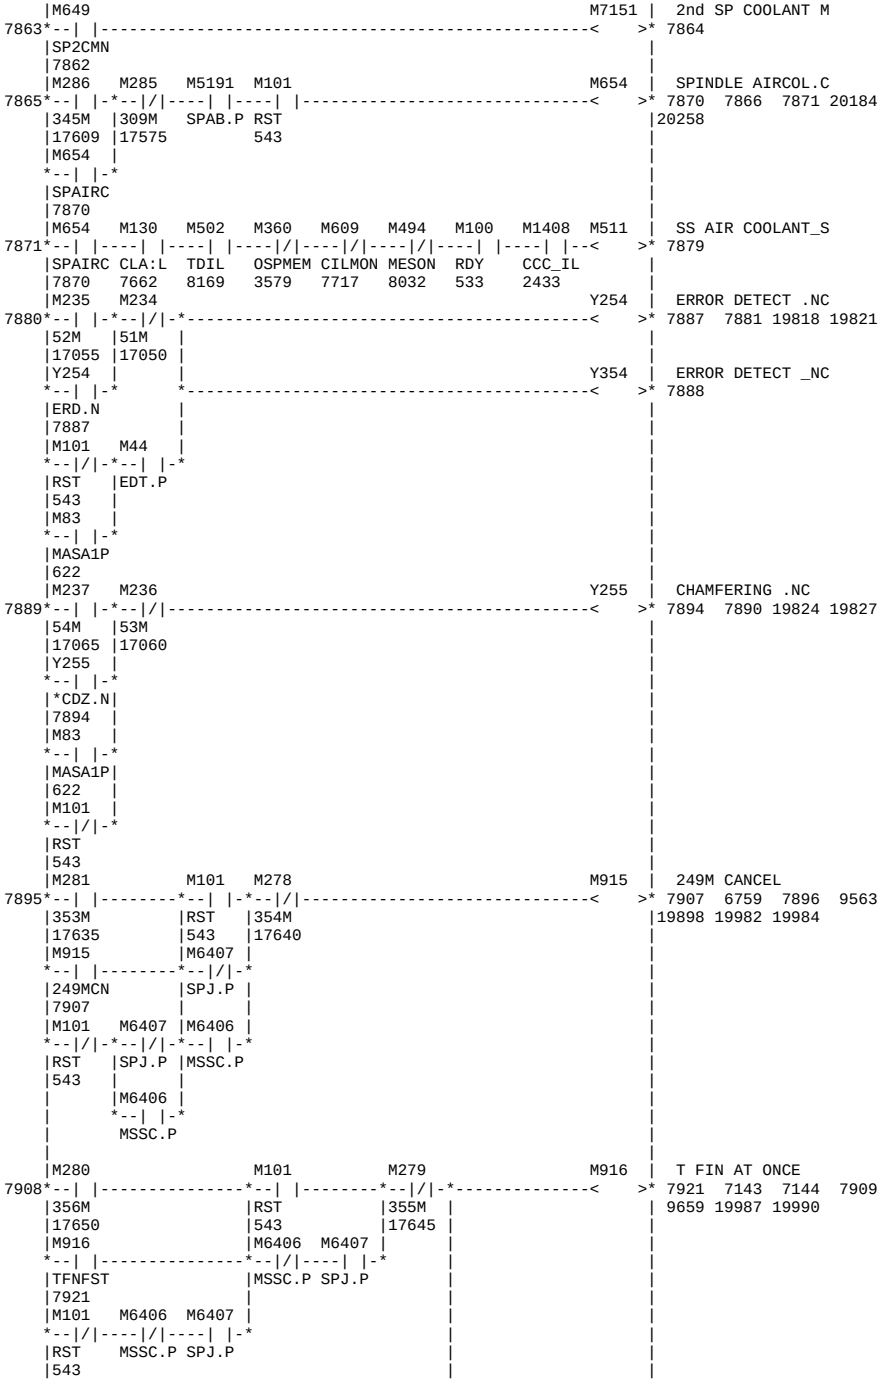

|M705 T171 M1201 | TEMP. COIL 1 BIT
7205*--| |-*--| |-*----------<>* 1070 3411 7209 12980
|MTOOL |TCL.T | |13007 13383 15881 15910
|7198 |6795 | |15943 15969 15985 16002
|16163 16073 16054 16035
|23466 19279 16512 16460
|23734 23657 23630 23592
|23951 23803 23780 23757
|27150 24081 24068 24031
|27237 27217 27182 27160
|27490 27453 27404 27362
|28451 28413 27544 27531
|28585 28551 28526 28493
|28688 28669 28655 28621
|28715
|M492 | M706 | MN PTP C START P
--| |- *----------<>* 7210 6714 7211
|81MX |
|8017 |
|M997 |
--| |-
|TSWSVS
|23401
|M706 X199 M254 M707 | IN PTP
7211*--| |----| |----|/|----------<>* 7214 6715
|C-PTPP SKP2.M 82M
|7210 17198
|M1279 M1203 | TEMP. COIL 3 BIT
7215*--| |----------<>* 7216 3417 12986 13013
|ON |13400 15885 15916 15947
|585 |15989 16004 16056 16169
|23472 19237 16517 16464
|27155 23882 23867 23598
|27375 27239 27221 27183
|28458 27496 27459 27419
|28723 28625 28555 28536
|28743
|M1279 K4 | SKIP SIGNAL MASK
7217*--| |----------[MOV M1200 R140]* 7220 7201
|ON TMP.0B
|585 1064
P28 |M274 M275 M101 M5141 M5693 | REV. ENABLE S-R
7221*--| |-*--|/|----| |----| |----------<>* 7226 7222 7230 7244
|231M |232M RST 231M.P |19940 19942 26678
|17332 |17337 543
|M5693 |
--| |-
|231MX
|7226
|M255 M221 M5694 | TAIL INHIBIT
7227*--| |--------*--| |-*----------<>* 7242 7239 7251 7258
83M	31M
17206	16926
T64	M3317
--|/|----------| |-*
TDR.T	QLF.R
8152	24746
M439 M5693	
*--		----	/	-*
SRR 231MX
21615 7226
M221 M5694 M142
--| |---| |----|/|-*
31M	TSIHT SST
16926	7242 2842
M3317
--| |-
QLF.R
24746
M222
--| |-
32M
16931
M3318
--| |-
QLR.R
24749
M475 T21 M101 M221 M5694 T64 M5695	TAIL FWD. COMMAN
7243*--| |-*--| |----| |-*--| |-*--|/|----| |----------<>* 7253 10574 10662 10667
SSOP	TLMCHK RST	31M	TSIHT TDR.T	10865 10899
5677	10773 543	16926	7242 8152
M5693	|M3317
--| |- *--| |-*
231MX	QLF.R
7226	24746
M222 M5694 M5696	TAIL REV. COMMAN
--| |---|/|----------<>* 7259 10567 10665 10801
32M	TSIHT	10866 10905
16931	7242
M3318
--| |-
QLR.R
24749
Y1D T138 Y1E M6476 M7836	MACHINE MENU 14
7260*--| |----| |-*--|/|----| |----------<>* 7265
FTCLMP LED2.T	FTUNCL F_TL.P
674
T124
--| |--------
PEXT.T
M7844 X243	WORK REST MODE S
7266*--| |----| |----------[SET M7183]* 7268 99 105 1359
M-MN20 TSMZ.N	1373 7270 7271 7274
27746	14100 14111 14119 14138
28449 27752 27749 14160
28686 28452
M7844	WORK REST MODE S
7269*--|/|----------[RST M7183]* 7268 99 105 1359
M-MN20	1373 7270 7271 7274
27746	14100 14111 14119 14138
28449 27752 27749 14160
28686 28452
M7183	TB MODE MNU PLS
7271*--| |----------[PLS M7021]* 7273 1355 14165
WR.MDS
7268
M7183 M7030 M7031	FEED OV. CONTROL
7274*--| |-*--|/|----------<>* 7277 1374 7275
WR.MDS	OV.RET
7268	1391
M7031
--| |-
OV.CON
7277
Y1E T138 Y1D M6476 M7837	MACHINE MENU 15
7278*--| |----| |-*--|/|----| |----------<>* 7283
FTUNCL LED2.T	FTCLMP F_TL.P
674
T186
--| |--------
PRET.T
P29 |X9E M19 M6625	F-DOOR CLOS CONF
7284*--| |----|/|-*----------<>* 7289 7291 7298 7704
FDC.LS FD.P		7975 25348 25361
XA M19
--| |----| |-
CCC.LS FD.P
X9D M6625 M600	F DOOR OPEN END
7290*--| |-*--|/|--------*----------<>* 7296 7308 7363 7416
FDO.LS	F-DRCL		7426 19834 24508 24579
	7289		28384

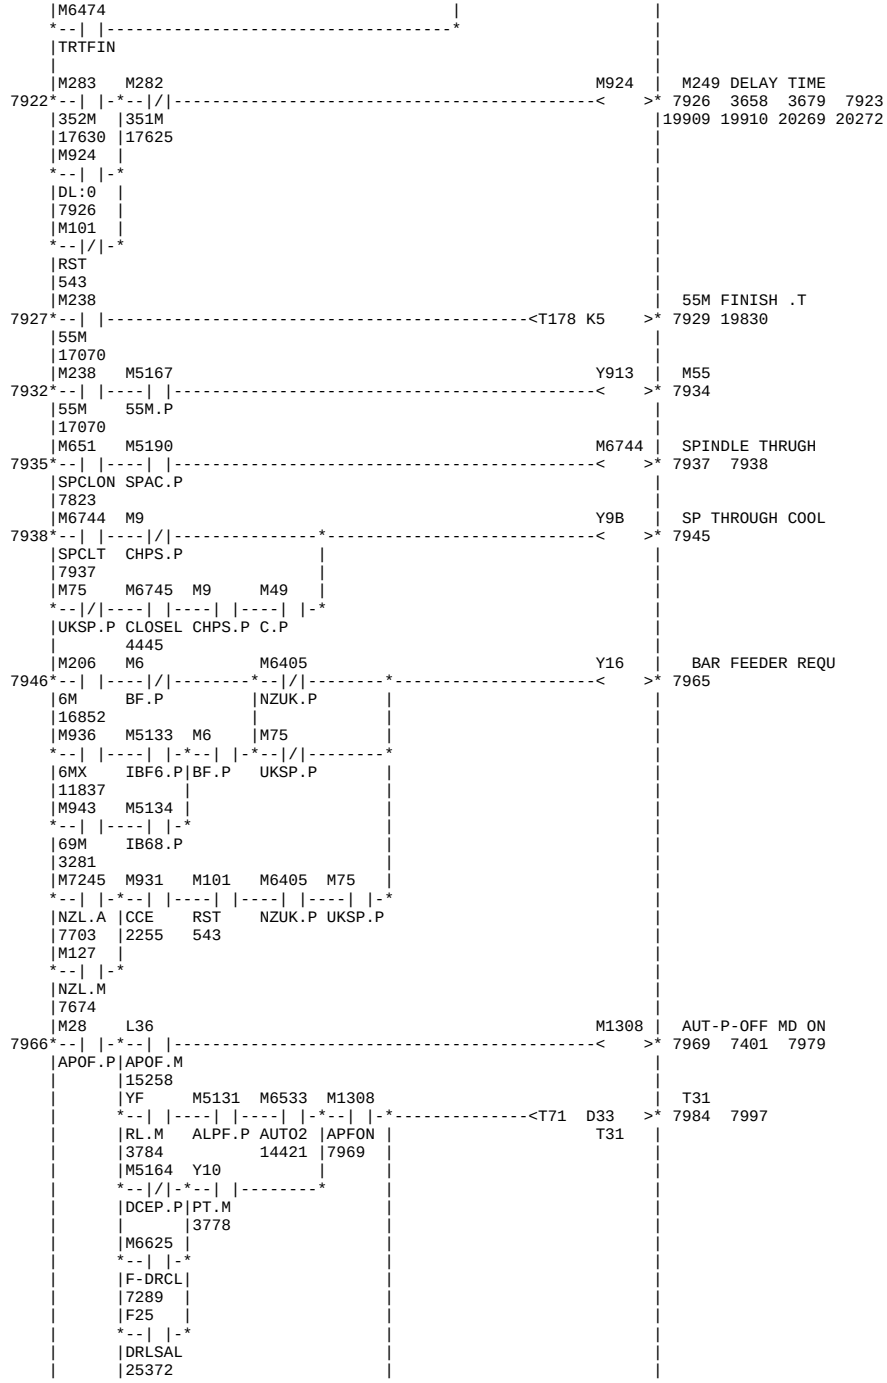

|M75 XB6 |
UKSP.P FCLS.R
|X9D M6625 M601 | F DOOR CLOSE END
7297 |FDO.LS F-DRCL | 7299 7300 7315 7320
| 7289 | 7445 7457 19837 24581
|601 M6436 Y4E5 | TOP DOOR CLOSE E
7300 |FDCLS CF.P | 7305
|7299 |
|XA M6436 |
|CCC.LS CF.P |
|Y9D T136 M18 M7826 | DOOR OPEN MENU R
7306 |FDOP.M 0.1sec|TOPD.P| 7312
|7443 664 |
|M600 |M19 |
|FDOLS FD.P |
|7296 |
|Y9E T136 M18 M7827 | DOOR CLOSE MENU
7313 |FDCL.M 0.1sec|TOPD.P| 7319
|7470 664 |
|M601 |M19 |
|FDCLS FD.P |
|7299 |
|M601 Y9E M19 Y159 | RESERVED (TOOL
7320 |FDCLS |FDCL.M|FD.P | 7325
|7299 |7470 |
|T136 | |M19 M1307 | DOOR CLOSE B.
|0.1sec FD.P | 7328
|664 |
|X474 XA X46E M6436 M5950 | CF M56/M57 OK
7329 |CF.INV CCC.LS CFCCLS CF.P | 7333 7368 7395 7436
| 7465
|X245 M880 M881 T204 M626 | BOTH CYCST.SW ON
7334 |STL.N BCSW_1 BCSW_2|BOTHCS| 7340 7338 7408
| 2742 2745 |2749 |
|M626 |
|BS_ON
|7340
|M5931 M19 M475 M605 M100 M604 | F DOOR OPEN CMD
7341 |DOP.R |FD.P |SSOP |FDCLCD RDY | 7376 2969 7362 7412
|24411 |5677 |7414 533 | 7440 7455 7713
M435 M476 M239 M176	M5950
SPRUNM SLFRME	56M 56MEX	M56/57
21554 21561	17075 2477	7333
M6437 M5186	M6814	M18 M7037
BHCS.P	EDUK.P	PRSCNF	TOPD.P DCLC
		7487	2243
|M75	
UKSP.P
M78 M823
20FD.P MF20P
3355
M91 M1337
MANU	D-OP.M
14444	14795
X245 M20	M604 M600
STL.N MNEG.P FDOPCD FDOLS
7376 7296
M5932 M19 M3306 M6814
7377 |DCL.R |FD.P |AMUP.R|PRSCNF	1
24414	24723	7487
XB6 M5264 M176 M240	M5950	M6443
FCLS.R	AL344	56MEX	57M	M56/57	64GL_P
	26760	2477	17080	7333	
	M75	M75		M18 M7037	
UKSP.P|UKSP.P |TOPD.P DCLC	
		2243	
M16			
ROBO.P		
13737		
M91 M1338		
MANU	D-CL.M		
14444	14808		
X245 M20			
STL.N MNEG.P		
M5164 M1308 M370 M563		
DCEP.P APFON PT SSPMCM		
7969 3772 8320		
M626 M6437		
BS_ON BHCS.P		
7340		
M604 M100 M605	F DOOR CLOSE CMD
1>-----	/	----		----------<
FDOPCD RDY	7471 26727
7376 533
M101 M19 Y9D M605 Y9E M100 Y9D	AUTO DOOR OPEN
7415 |RST |FD.P |FDOP.M FDCLCD|FDCL.M|RDY |25345 28646
543	7443 7414	7470	533
M600	M19 X9D		
FDOLS |FD.P FDO.LS|	
7296			
M90		
AUTO		
14419		
M102 M600 M72		
RDYP FDOLS RDYE.P	
535 7296 13759	
T205 M604	
DDLY.T	FDOPCD
2234	7376
M18
TOPD.P
M75 M6814 M6437
UKSP.P PRSCNF BHCS.P
7487
M5950 M6436
M56/57 CF.P
7333
M6814
PRSCNF
7487

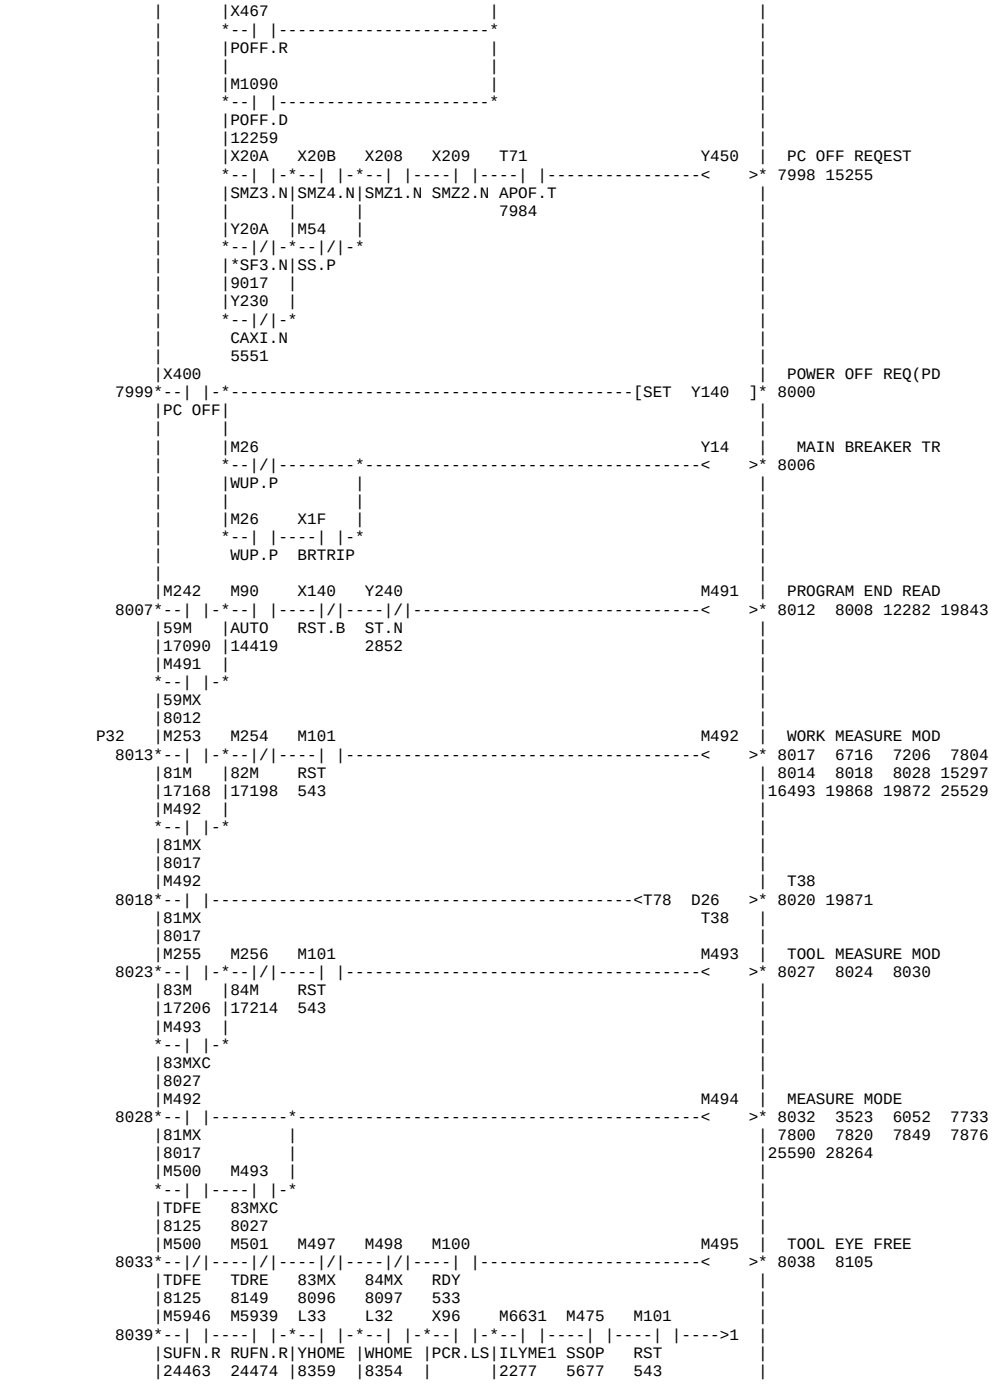

M101 M19 Y9E M604 Y9D M18 M6436
RST FD.P FDCL.M FDOPCD FDOP.M TOPD.P CF.P
543 7470 7376 7443
M601 M19 XA Y9E M18
FDCLS FD.P CCC.LS FDCL.M TOPD.P
7299 7470 M5950 M6436
X11B
UNLOCK
M56/57 CF.P
7333
M102 M601 M72
RDYP FDCLS RDYE.P
535 7299 13759
M605
FDCLCD
7414
M100 Y9E AUTO DOOR CLOSE
1>
RDY
533
M605 X87 M75 XA M101 M6416 M75 M6814 PRESSED DOOR CNF
FDCLCD ADCS UKSP.P CCC.LS RST PRDR.P UKSP.P
7414 543 13799 M5186 M75
X16 M75
SPJOG UKSP.P EDUK.P UKSP.P
M6814
PRSCNF
7487
M6950 P CAT. FOR SW. P
M-MENU
14822
M6956 P CAT. REV SW. P
M-MENU
14828
M91 M27 M6950 M6956 M620 PARTS CAT. FOR S
MANU PCT.P M-MENU M-MENU
14444 14822 14828
X245 M20 M618 M5738 PARTS CAT. FWD S
STL.N MNEG.P PCFSWP
7490
M6950 M6956 M621 PARTS CAT. REV S
M-MENU M-MENU
14822 14828
M619 M5739 PARTS CAT. REV S
PCRSWP
7493
X95 X96 M27 M5740 PARTS CAT. F-END
PCF.LS PCR.LS PCT.P
X96 X95 M5741 PARTS CAT. R-END
PCR.LS PCF.LS
M27
PCT.P
M276 M5725 M5740 M5723 M90 MEMORY
90M PCRCD PLF-LS
17276 7564 7514
M5723
90MX
7523
M232
MOV R72 D188
48M PCDLY1
16540
M5723 P-CATCHER FWD T
T105 D188
90MX U65
7523 7528
M5740 M307 M622 PARTS CAT. SAME
PLF-LS 348M
7514 17529
M622
348MX
7536
T105 M5723 X223 M931 M502 M5724 PARTS CATCHER FW
PCF.T 90MX ZP14.N CCE TDIL
7530 7523 2255 8169
Y143 M54
MDI.L SS.P
14343
M232 M6413
48M PTC.IL
16540
M5738 M1409
PCFSWP MAN&DR
7504 2436
M307 M622
348M 348MX
17529 7536
M233 M931 M5725 PARTS CATCHER RE
49M CCE
17045 2255
M277
91M
17281
M5739 M1409
PCRSWP MAN&DR
7510 2436
M973 M622
SUCKE 348MX
5215 7536
T12
TAUC.T
5139
Y96 M5725 M100 M27 F111 Y96 PARTS CATCHER F
PCF.M PCRCD RDY PCT.P CND.TP
7579 7564 533 26546
M5740 M102 M72 M29
PLF-LS RDYP RDYE.P PC3P.P
7514 535 13759
M873
INIRST
587
M5724
PCFCD
7553

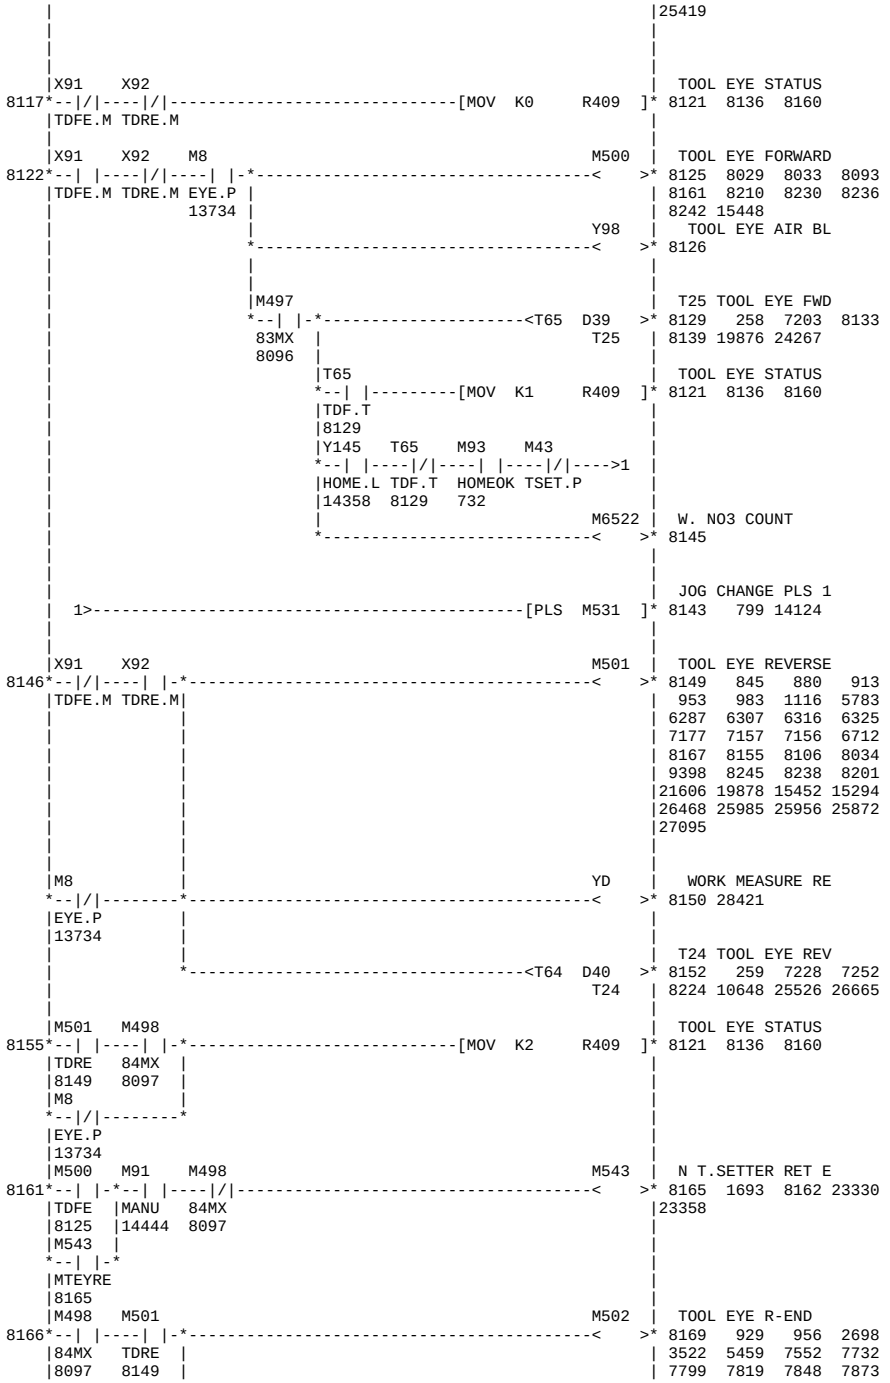

Y97 M5724 M100 M27 Y97 | PARTS CATCHER R
7580 7589 7580 19816 25448
PCR.M PCFCD RDY PCT.P 26400
7589 7553 533
M102 M5741 M72
RDYP PCR-LS RDYE.P
535 7518 13759
M5725
PCRCD
7564
Y96 | PARTS CATCHER FW
7590 7591 7594 7598 7603
PCF.M 7624 7629 28407 28411
7579 28664 28667
M82 Y96 | PARTS CATCHER FW
7592 7591 7594 7598 7603
MASA1 PCF.M 7624 7629 28407 28411
620 7579 28664 28667
M5741 M5727 | PARTS CATCHER IL
7595 7597 1032 9076
PCR-LS
7518
M27
PCT.P
L34 T93 M100 M5728 | PC. FWD. MEMORY
7598 7602 7599
PCF.M CONV.T RDY
7591 7607 533
M5728 T53
T93 D11 7607 7600
PCFX PCF.M PCR-LS T53
7602 7591 7518
M5741 M5729 | WORK CONVEYOR RU
7614 7612 7616
PCR-LS
7518
M5729 M6523 | WORK COUNT UP1
7615
CONV
7614
M5729 Y8A | WORK CONVEYOR
7616 7621
CONV
7614
X46F M6436 M100
W-CONV CF.P RDY
533
M5740 L34 M27 M7832 | P CATCHER FWD ME
7622 7626 15830
PLF-LS PCF.M PCT.P
7514 7591
T136
0.1sec
664
M5741 L34 M27 M7833 | P CATCHER REV ME
7627 7631
PCR-LS PCF.M PCT.P
7518 7591
T136
0.1sec
664
P30 X155 | COOLANT STOP SW
7632 7634 7635 7637
CNTSTP
M7242 M1322 M1322 | COOLANT STOP B
7635 7640 7636 7638 7777
CNTSPP CNTSPB 28267
7634 7640
M7242 M1322 Y14B | COOLANT STOP
7641
CNTSPP CNTSPB
7634 7640
M7238 M125 M1409 M100 M931 M125 | COOLANT ON (NAMU
7642 7650 7643 7645 7730
CMSWP CLM:L MAN&DR RDY CCE 26406
15233 7650 2436 533 2255
M7238 M125 M7941 | COOLANT MANUAL S
7651
CMSWP CLM:L
15233 7650
M7237 M7970 M7970 | COOLANT AUTO
7652 7661 7654 7656
CASWP
15227 7661
M1073 M130 | COOLANT ON (AUTO
7662 3519 7727 7798
ST.D 7816 7845 7872 28262
12241
M7237 M7970 M7940 | COOLANT AUTO SW
7663 15866
CASWP
15227 7661
L48 M873 L48 | COOLANT AUTO SW.
7664 7658
CASW.L INIRST
7664 587
M7243 M127 M1409 M100 M931 M75 M127 | NOZZLE MENU MEM
7665 7674 7666 7668 7959
NZL_SW NZL.M MAN&DR RDY CCE UKSP.P
15241 7674 2436 533 2255
M7243 M127 M7942 | COOLANT MENU 102
7675
NZL_SW NZL.M
15241 7674
Y240 X244 M1305 M480 M481 M479 | REFORM COOLANT O
7676 7682 7678 7683 7786
ST.N OP.N SIGLE MCXA ACXA
2852 14348 7697 7796
M479
RFMCL
7682
M479 X245 M6446 M227 M209 M229 M369
7683 1
RFMCL STL.N SPR_CL 588M 9M 45M PENDP
7682 17978 16877 17027 3743
M208 M6427 M6421
8M SPFL.P HPCL.P
16872
M480
MCXA
7697
M101 M480 | COOLANT ON (AUTO
1 7697 7680 7687 7724
RST 19652 19658
543
M5327 M209 M101 M75 M7245 | NOZZLE 480M MEM
7698 7703 7699 7958 19654
480M 9M RST UKSP.P
18221 16877 543
M7245
NZL.A
7703
M6625 M607 | F-DOOR CLOSE END
7704 7705 7709 19838
F-DRCL
7289
M5726 M90 X23F Y9E M609 M608 | COOLANT INT M56O
7706 7712 7715
CIL_TP AUTO DEN2.N FDCL.M CILMON
7723 14419 7470 7717

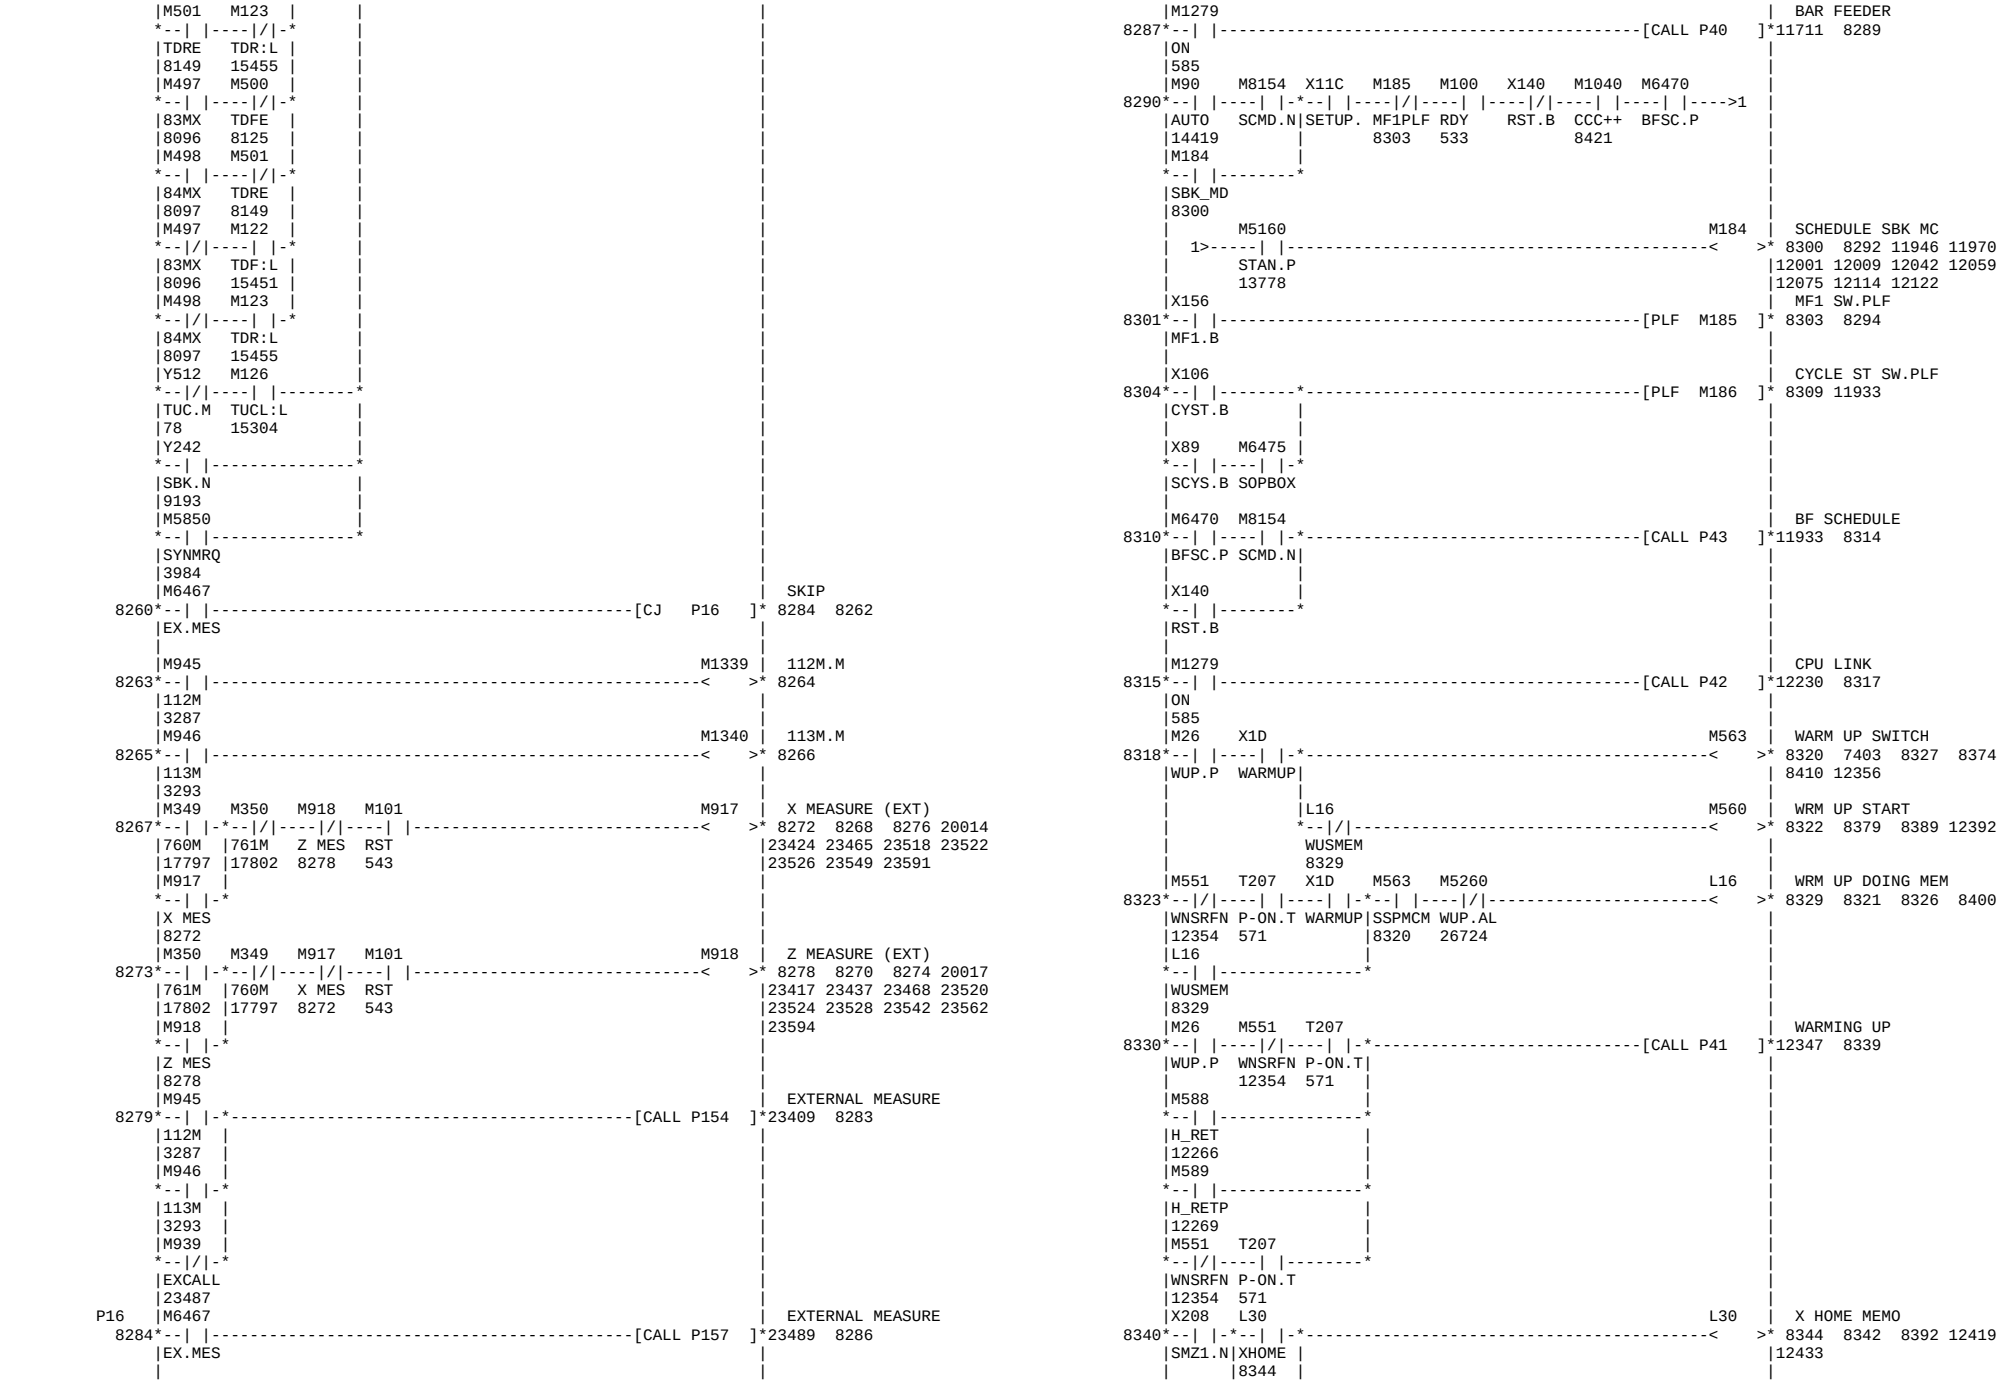


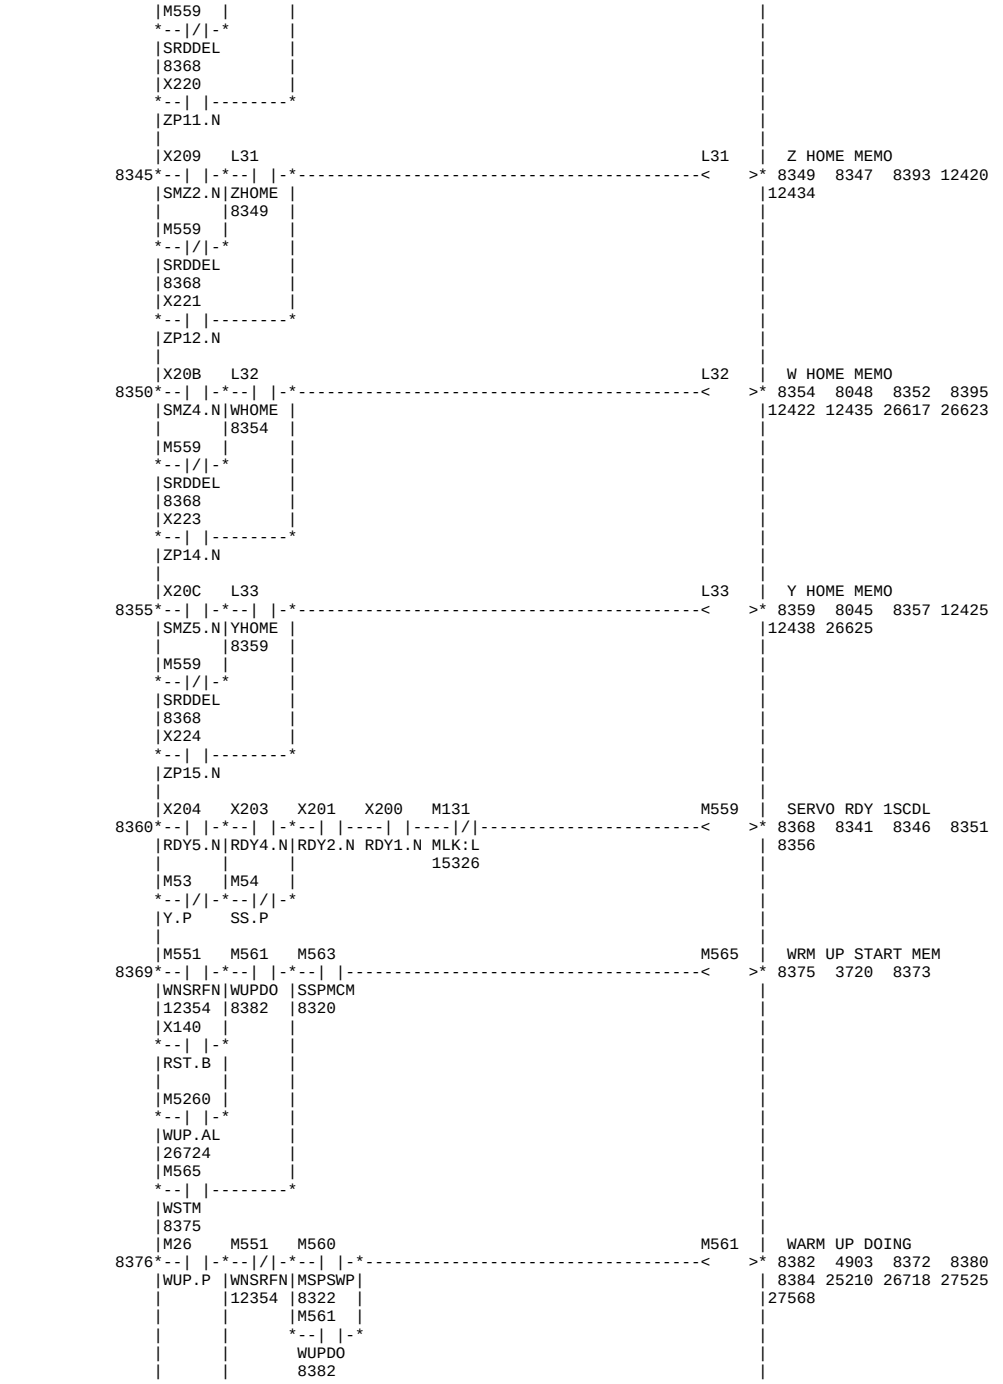

M649
M7151
2nd SP COOLANT M
7863
7864
SP2CMN
7862
M286 M285 M5191 M101
M654
SPINDLE AIRCOL.C
7865
7870 7866 7871 20184
345M 309M SPAB.P RST
20258
17609 17575 543
M654
SPAIRC
7870
M654 M130 M502 M360 M609 M494 M100 M1408 M511
SS AIR COOLANT_S
7871
7879
SPAIRC CLA:L TDIL OSPMEM CILMON MESON RDY CCC_IL
7870 7662 8169 3579 7717 8032 533 2433
M235 M234
Y254
ERROR DETECT .NC
7880
7887 7881 19818 19821
52M 51M
17055 17050
Y254
Y354
ERROR DETECT _NC
7888
ERD.N
7887
M101 M44
RST EDT.P
543
M83
MASA1P
622
M237 M236
Y255
CHAMFERING .NC
7889
7894 7890 19824 19827
54M 53M
17065 17060
Y255
*CDZ.N
7894
M83
MASA1P
622
M101
RST
543
M281 M101 M278
M915
249M CANCEL
7895
7907 6759 7896 9563
353M RST 354M
19898 19982 19984
17635 543 17640
M915 M6407
249MCN SPJ.P
7907
M101 M6407 M6406
RST SPJ.P MSSC.P
543
M6406
MSSC.P
M280 M101 M279
M916
T FIN AT ONCE
7908
7921 7143 7144 7909
356M RST 355M
9659 19987 19990
17650 543 17645
M916 M6406 M6407
TFNFST MSSC.P SPJ.P
7921
M101 M6406 M6407
RST MSSC.P SPJ.P
543

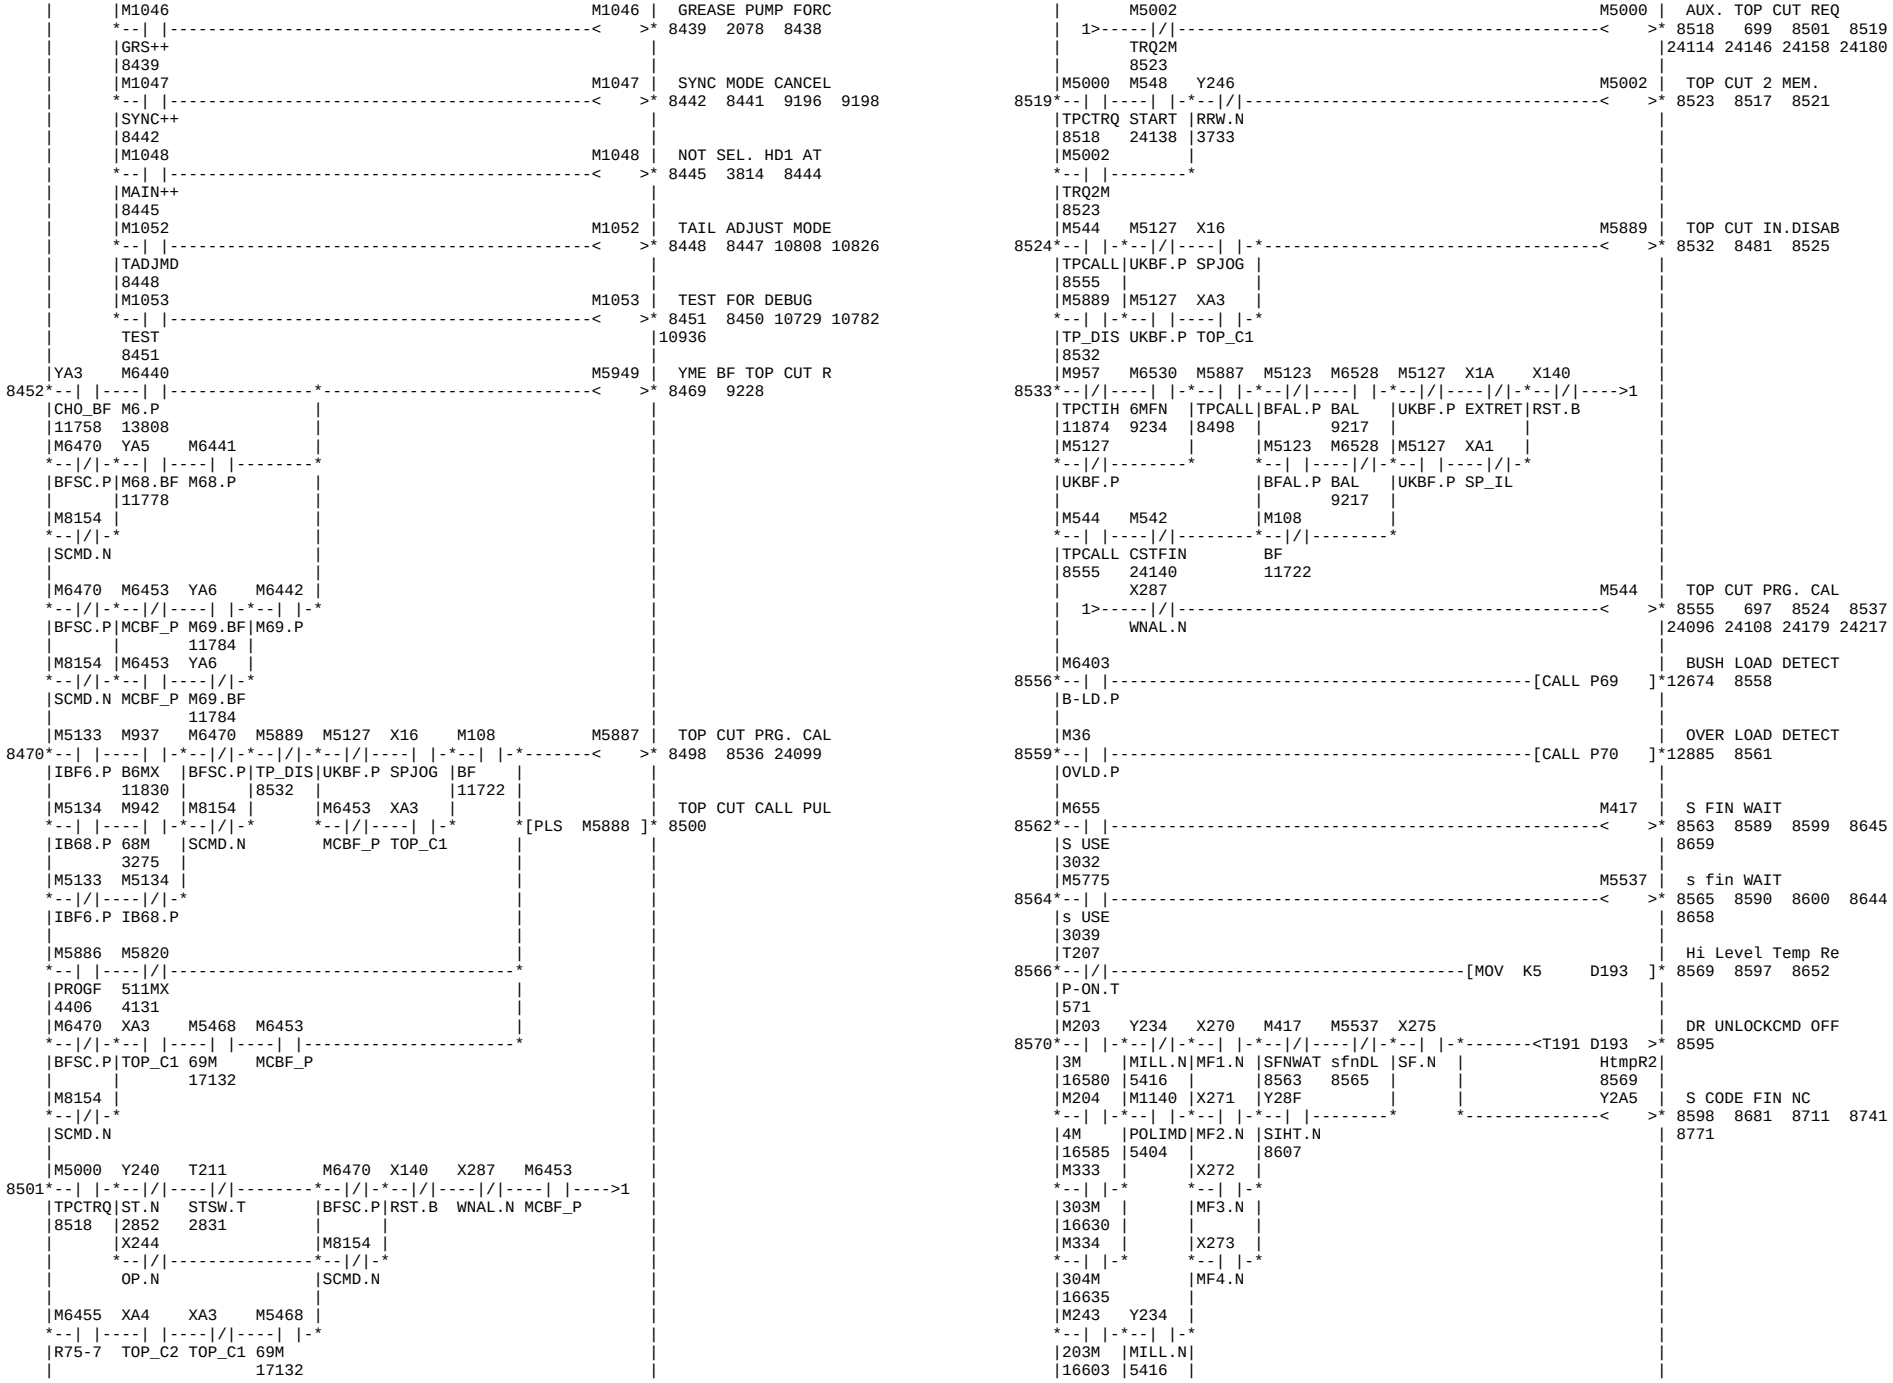

M6474
TRTFIN
M283 M282
M924
M249 DELAY TIME
7922
7926 3658 3679 7923
352M 351M
19909 19910 20269 20272
17630 17625
M924
DL:0
7926
M101
RST
543
M238
55M FINISH .T
7927
7929 19830
55M
17070
M238 M5167
Y913
M55
7932
7934
55M 55M.P
17070
M651 M5190
M6744
SPINDLE THRUGH
7935
7937 7938
SPCLON SPAC.P
7823
M6744 M9
Y9B
SP THROUGH COOL
7938
7945
SPCLT CHPS.P
7937
M75 M6745 M9 M49
UKSP.P CLOSEL CHPS.P C.P
4445
M206 M6 M6405
Y16
BAR FEEDER REQU
7946
7965
6M BF.P NZUK.P
16852
M936 M5133 M6 M75
6MX IBF6.P BF.P UKSP.P
11837
M943 M5134
69M IB68.P
3281
M7245 M931 M101 M6405 M75
NZL.A CCE RST NZUK.P UKSP.P
7703 2255 543
M127
NZL.M
7674
M28 L36
M1308
AUT-P-OFF MD ON
7966
7969 7401 7979
APOF.P APOF.M
15258
YF M5131 M6533 M1308
T31
RL.M ALPF.P AUTO2 APFON
T31
3784 14421 7969
M5164 Y10
DCEP.P PT.M
3778
M6625
F-DRCL
7289
F25
DRLSAL
25372
T71 D33
7984 7997

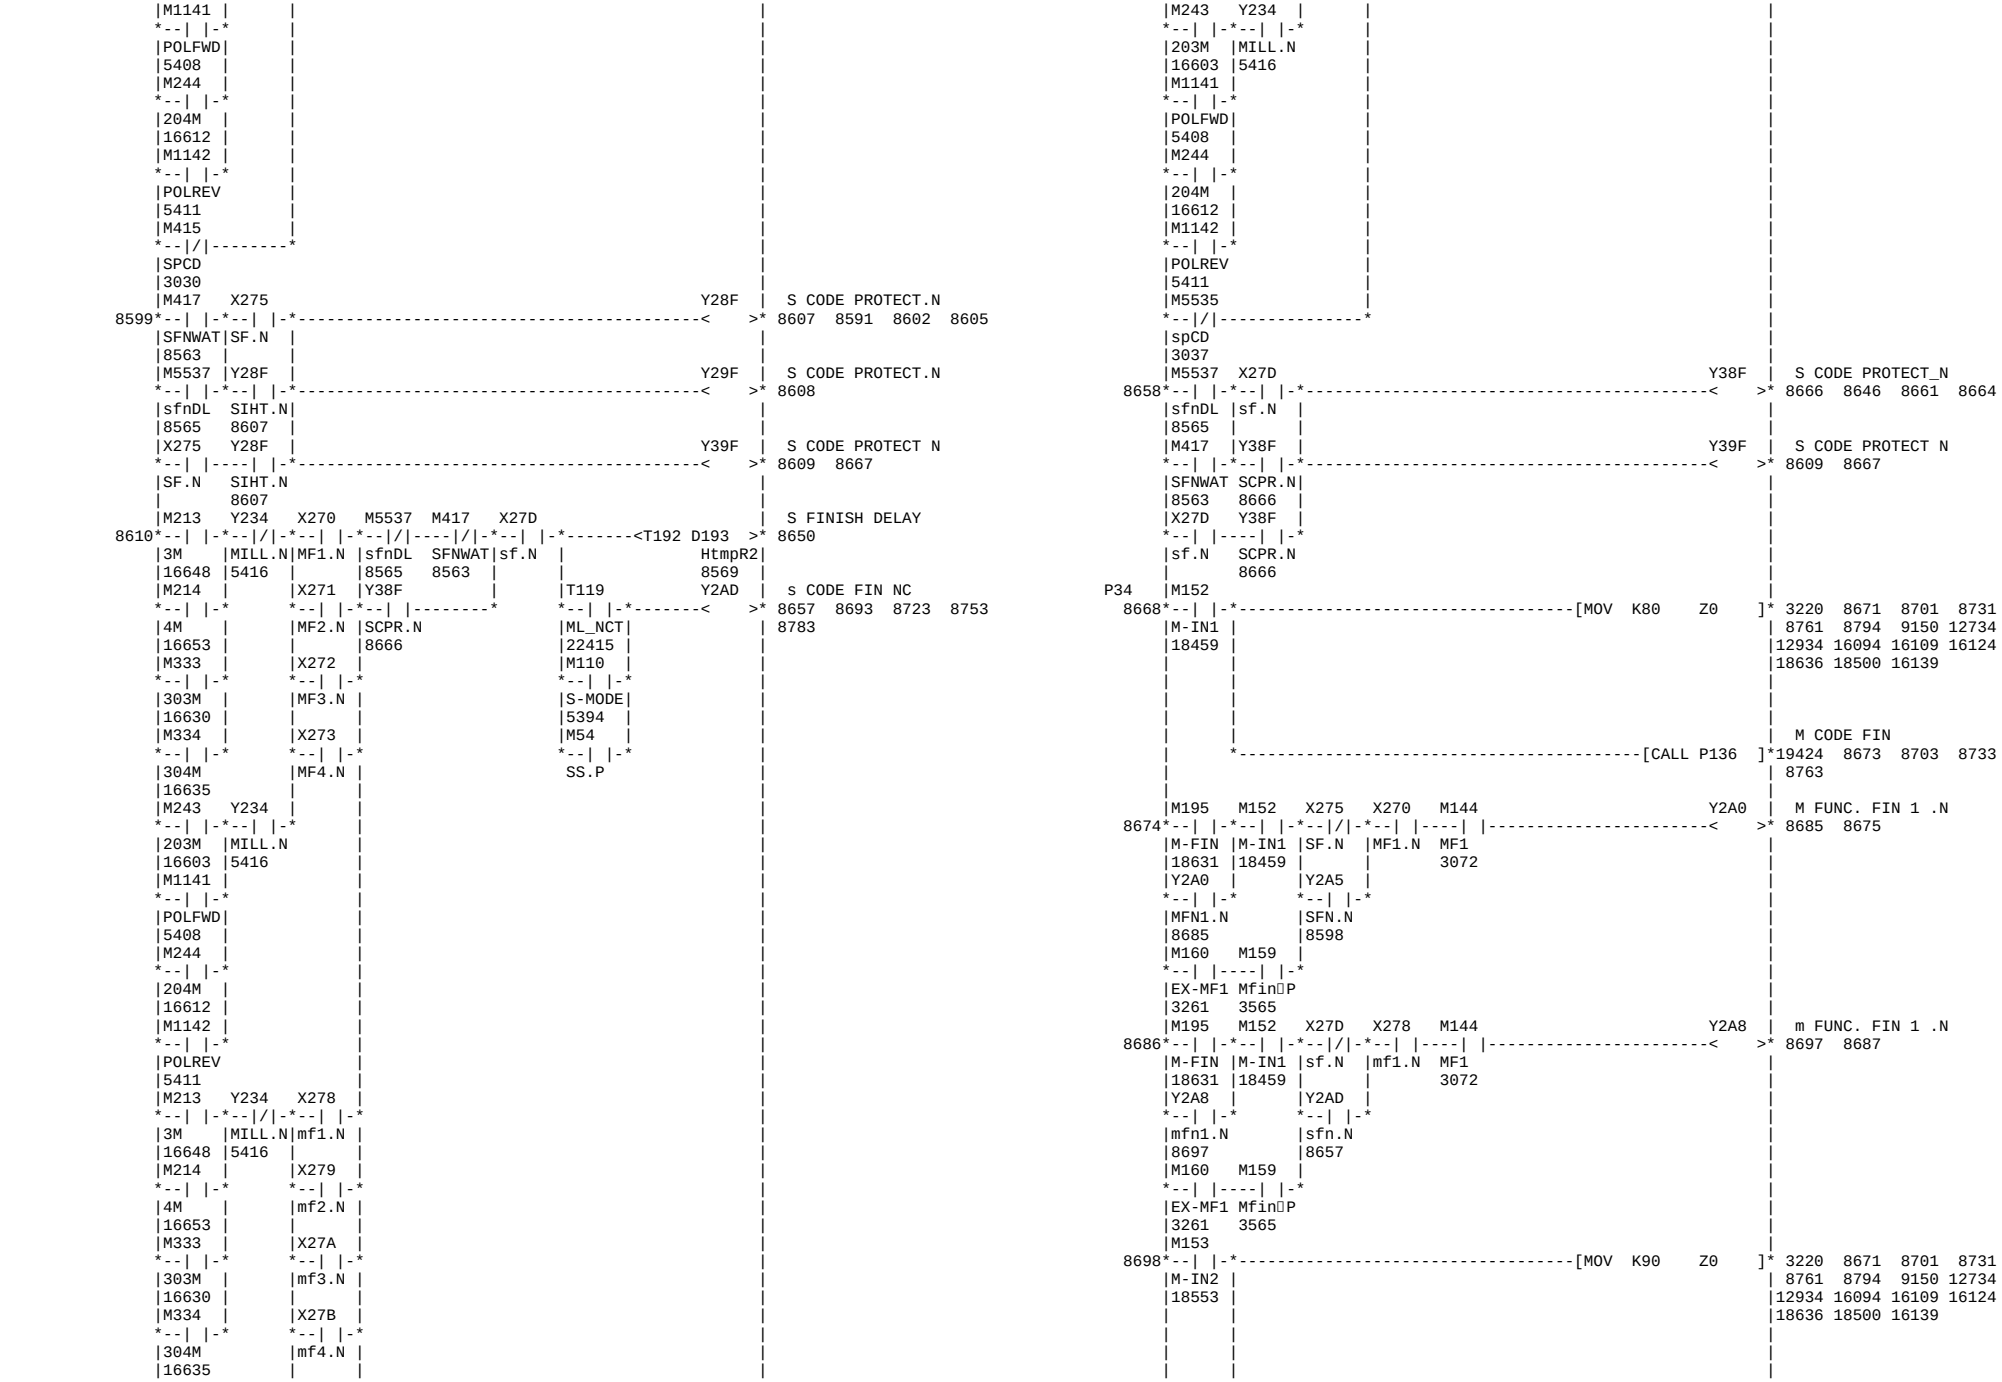

X467
POFF.R
M1090
POFF.D
12259
X20A X20B X208 X209 T71 Y450
PC OFF REQEST
7998 15255
SMZ3.N SMZ4.N SMZ1.N SMZ2.N APOF.T
7984
Y20A M54
*SF3.N SS.P
9017
Y230
CAXI.N
5551
X400
POWER OFF REQ(PD
7999 8000
PC OFF
M26 Y14
MAIN BREAKER TR
8006
WUP.P
M26 X1F
WUP.P BRTRIP
M242 M90 X140 Y240 M491
PROGRAM END READ
8007 8012 8008 12282 19843
59M AUTO RST.B ST.N
17090 14419 2852
M491
59MX
8012
P32 M253 M254 M101 M492
WORK MEASURE MOD
8013 8017 6716 7206 7804
81M 82M RST
8014 8018 8028 15297
17168 17198 543
16493 19868 19872 25529
M492
81MX
8017
M492
T38
8018 8020 19871
81MX
T38
8017
M255 M256 M101 M493
TOOL MEASURE MOD
8023 8027 8024 8030
83M 84M RST
17206 17214 543
M493
83MXC
8027
M492
MEASURE MODE
8028 8032 3523 6052 7733
81MX
8017
M500 M493
7800 7820 7849 7876
25590 28264
TDFE 83MXC
8125 8027
M500 M501 M497 M498 M100 M495
TOOL EYE FREE
8033 8038 8105
TDFE TDRE 83MX 84MX RDY
8125 8149 8096 8097 533
M5946 M5939 L33 L32 X96 M6631 M475 M101
8039 SUFN.R RUFN.R YHOME WHOME PCR.LS ILYME1 SSOP RST
24463 24474 8359 8354 2277 5677 543
M16 M6443 M53 M54 M27
ROBO.P 64GL_P Y.P SS.P PCT.P
13737
M91
MANU
14444
M93 M6472 M14
1>
HOMEOK J2TA.P R50-6
732 13821
M6472 M3267 M14
J2TA.P PUSING R117L R50-6
13821 1652 10597
[D= R7910 D566]
R117L
10597
M496
TOOL EYE FWD. OK
2> 8082 8091 26885
Y31
3>
WRJ.SL WRPOS. R124L
27728 27758
[D= R400 D552]
WRPOS. R124L
27758
M780 M1409
TOOL EYE F-SW. M
8083 8085 8112 24260
TDFSW MAN&DR
14620 2436
M780 M1409 M496 M8
TOOL EYE FWD.CMM
8086 8096 8035 8110 8115
TDFSW MAN&DR TDFOK EYE.P
14620 2436 8082 13734
8127 8217 8241 8247
15450 25417
M255 M90
TOOL EYE REV.CMM
83M AUTO
17206 14419
M102 M500
8097 8036 8111 8116
8156 8164 8166 8222
8232 8244 8250 15454
25419
RDYP TDFE
535 8125
M781 M1409 X198 M100 M8
TOOL EYE FWD.CMM
8098 8096 8035 8110 8115
TDRSW MAN&DR SKP1.M RDY EYE.P
14598 2436 533 13734
M256 M90
84M AUTO
17214 14419
M102 M501
TOOL EYE F-SW. M
8085 8112 24260
RDYP TDRE
535 8149
M495
EYEFRE
8038
M100
TOOL EYE FWD.CMM
8113 8096 8035 8110 8115
RDY
533
F31
8127 8217 8241 8247
15450 25417
TOOL EYE REV.CMM
8097 8036 8111 8116
TELSAL
25434
8156 8164 8166 8222
8232 8244 8250 15454

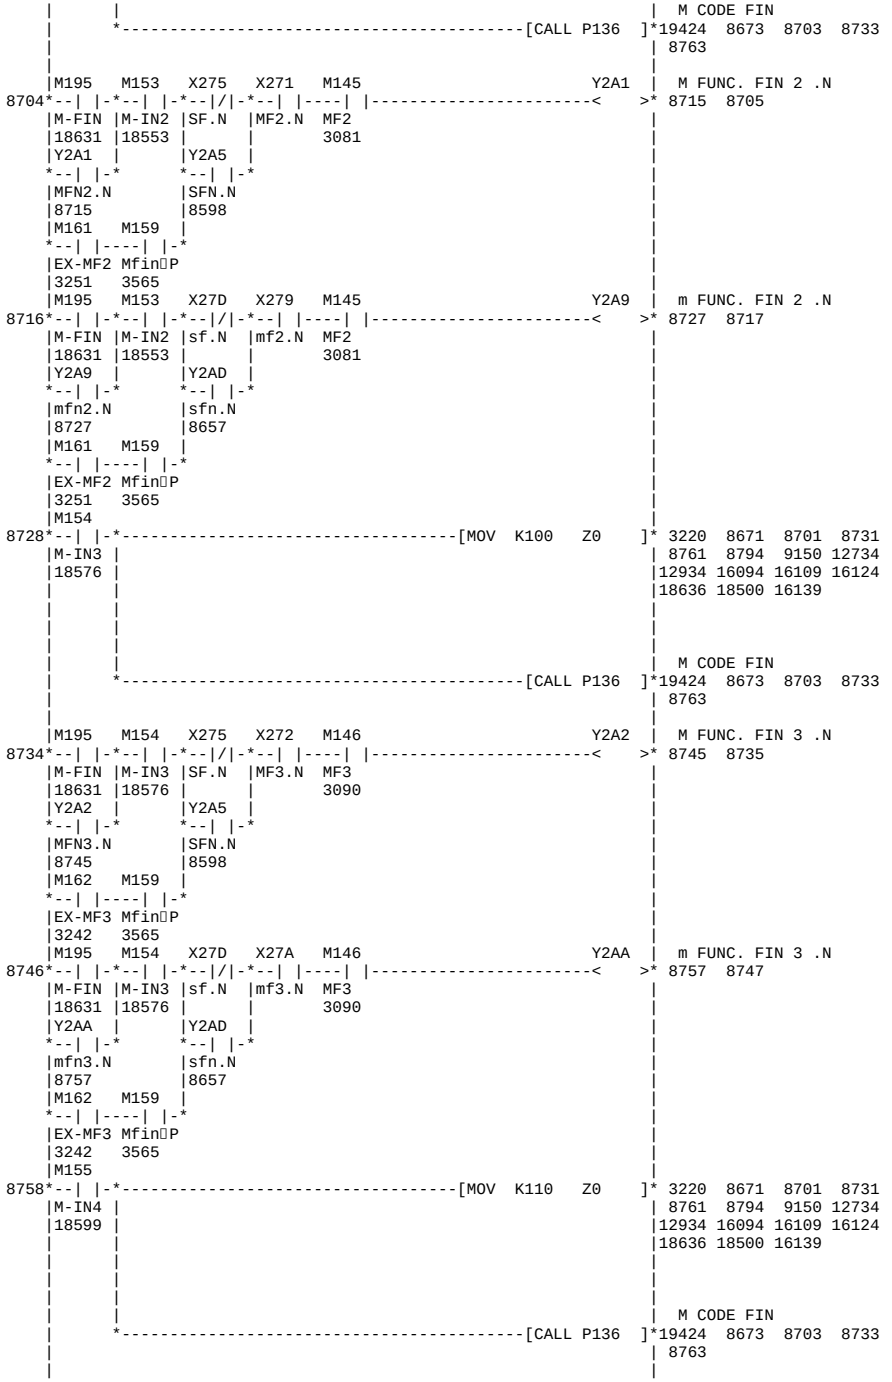


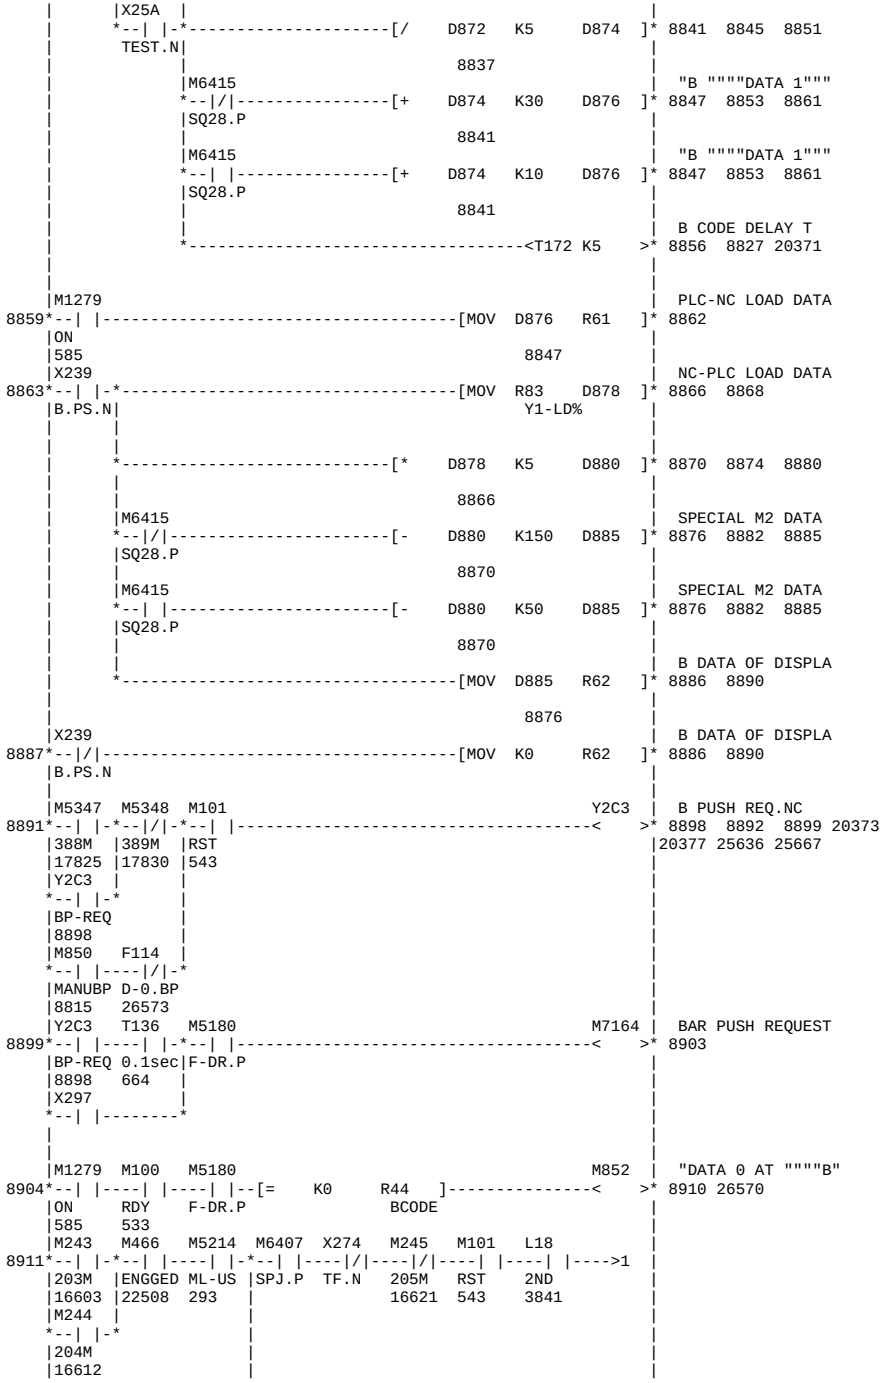

M501 M123
TDRE TDR:L
8149 15455
M497 M500
83MX TDFE
8096 8125
M498 M501
84MX TDRE
8097 8149
M497 M122
83MX TDF:L
8096 15451
M498 M123
84MX TDR:L
8097 15455
Y512 M126
TUC.M TUCL:L
78 15304
Y242
SBK.N
9193
M5850
SYNMRQ
3984
M6467
SKIP
8260 [CJ P16]* 8284 8262
EX.MES
M945
M1339
112M.M
8263 8264
112M
3287
M946
M1340
113M.M
8265 8266
113M
3293
M349 M350 M918 M101
M917
X MEASURE (EXT)
8267 8272 8268 8276 20014
760M 761M Z MES RST
17797 17802 8278 543
23424 23465 23518 23522
23526 23549 23591
M917
X MES
8272
M350 M349 M917 M101
M918
Z MEASURE (EXT)
8273 8278 8270 8274 20017
761M 760M X MES RST
17802 17797 8272 543
23417 23437 23468 23520
23524 23528 23542 23562
M918
Z MES
8278
M945
EXTERNAL MEASURE
8279 [CALL P154]* 23409 8283
112M
3287
M946
113M
3293
M939
EXCALL
23487
P16 M6467
EXTERNAL MEASURE
8284 [CALL P157]* 23489 8286
EX.MES
M1279
BAR FEEDER
8287 [CALL P40]* 11711 8289
ON
585
M90 M8154 X11C M185 M100 X140 M1040 M6470
8290 >1
AUTO SCMD.N SETUP. MF1PLF RDY RST.B CCC++ BFSC.P
14419 8303 533 8421
M184
SBK_MD
8300
M5160
M184
SCHEDULE SBK MC
1> 8300 8292 11946 11970
STAN.P
13778
12001 12009 12042 12059
12075 12114 12122
X156
MF1 SW.PLF
8301 [PLF M185]* 8303 8294
MF1.B
X106
CYCLE ST SW.PLF
8304 [PLF M186]* 8309 11933
CYST.B
X89 M6475
SCYS.B SOPBOX
M6470 M8154
BF SCHEDULE
8310 [CALL P43]* 11933 8314
BFSC.P SCMD.N
X140
RST.B
M1279
CPU LINK
8315 [CALL P42]* 12230 8317
ON
585
M26 X1D
M563
WARM UP SWITCH
8318 8320 7403 8327 8374
WUP.P WARMUP
8410 12356
L16
M560
WRM UP START
8322 8379 8389 12392
WUSMEM
8329
M551 T207 X1D M563 M5260
L16
WRM UP DOING MEM
8323 8329 8321 8326 8400
WNSRFN P-ON.T WARMUP SSPMCM WUP.AL
12354 571 8320 26724
L16
WUSMEM
8329
M26 M551 T207
WARMING UP
8330 [CALL P41]* 12347 8339
WUP.P WNSRFN P-ON.T
12354 571
M588
H_RET
12266
M589
H_RETP
12269
M551 T207
WNSRFN P-ON.T
12354 571
X208 L30
L30
X HOME MEMO
8340 8344 8342 8392 12419
SMZ1.N XHOME
8344
12433

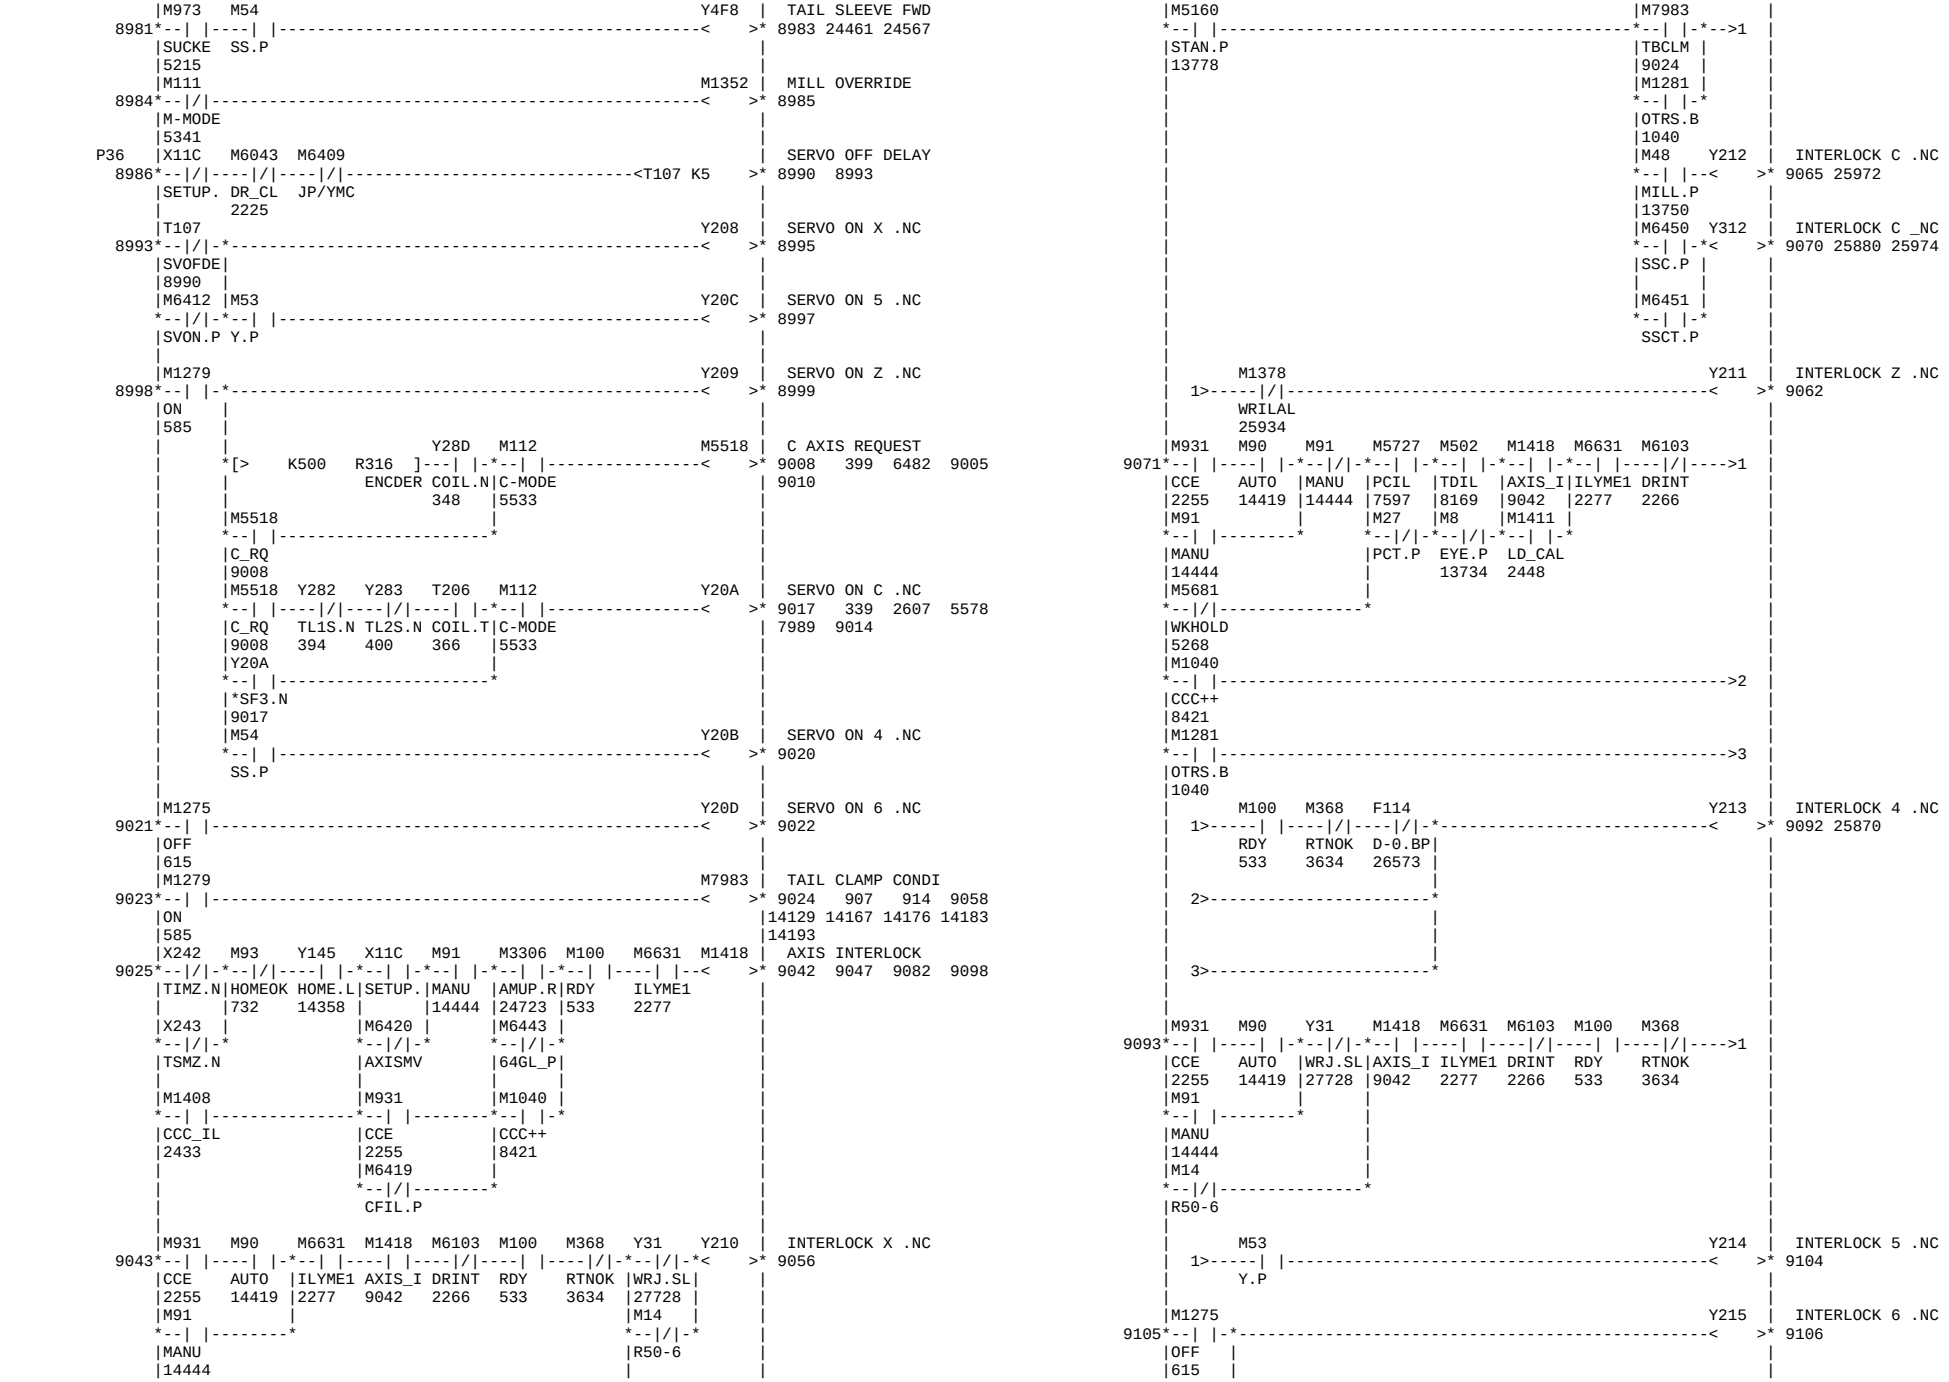

M559
SRDDEL
8368
X220
ZP11.N
X209 L31
L31 Z HOME MEMO
8345 8349 8347 8393 12420
SMZ2.N ZHOME
12434
8349
M559
SRDDEL
8368
X221
ZP12.N
X20B L32
L32 W HOME MEMO
8350 8354 8048 8352 8395
SMZ4.N WHOME
12422 12435 26617 26623
8354
M559
SRDDEL
8368
X223
ZP14.N
X20C L33
L33 Y HOME MEMO
8355 8359 8045 8357 12425
SMZ5.N YHOME
12438 26625
8359
M559
SRDDEL
8368
X224
ZP15.N
X204 X203 X201 X200 M131
M559 SERVO RDY 1SCDL
8360 8368 8341 8346 8351
RDY5.N RDY4.N RDY2.N RDY1.N MLK:L
8356
15326
M53 M54
Y.P SS.P
M551 M561 M563
M565 WRM UP START MEM
8369 8375 3720 8373
WNSRFN WUPDO SSPMCM
12354 8382 8320
X140
RST.B
M5260
WUP.AL
26724
M565
WSTM
8375
M26 M551 M560
M561 WARM UP DOING
8376 8382 4903 8372 8380
WUP.P WNSRFN MSPSWP
8384 25210 26718 27525
12354 8322
27568
M561
WUPDO
8382
M561 M100 M5260
M7162 WARM UP CYCLE
8387
WUPDO RDY WUP.AL
8382 533 26724
M5164 M560 M931 L16 X244 M551 M26
8388 1
DCEP.P MSPSWP CCE WUSMEM OP.N WNSRFN WUP.P
8322 2255 8329 12354
M5164
DCEP.P
L30 M10 M5165
XHOME MASK.P WUCK.P
8344
L31
ZHOME
8349
M54 L32
SS.P WHOME
8354
K1 D980
R18
K9999 D980
R18
M563
M562 WARM UP NOT READ
8411 26722
1
SSPMCM
8320
M552 X258 M101 M551
M553 MISS CHUCK CANCE
8412 8417 4798 4953 5056
W-UPST MEMO.N RST WNSRFN
8413 21514 21911 22262
12655 543 12354
25342
M553
MS-NEG
8417
M873 M1040
M1040 INTERLOCK CANCEL
8418 8421 47 853 1037
INIRST CCC++
1727 2242 2253 2264
587 8421
2274 2465 2497 2568
4451 2894 2797 2782
5273 5193 4955 4906
8297 7729 7152 6865
18933 9090 9038 8420
26753 26749 26385 25746
27052 27020 27004
M1041
M1041 NFB.TRIP CANCEL
8424 8423 25027 26102
NFB++
8424
M1042
M1042 HDYR.PSW CANCEL
8427 8426 25042
HYDR++
8427
M1043
M1043 AIR PSW CANCEL
8430 8429 25056
APS++
8430
M1044
M1044 OIL PUMP FORCE
8433 2161 8432
OIL++
8433
M1045
M1045 SS LOCK PIN TEST
8436 8435 21253 21277
8436

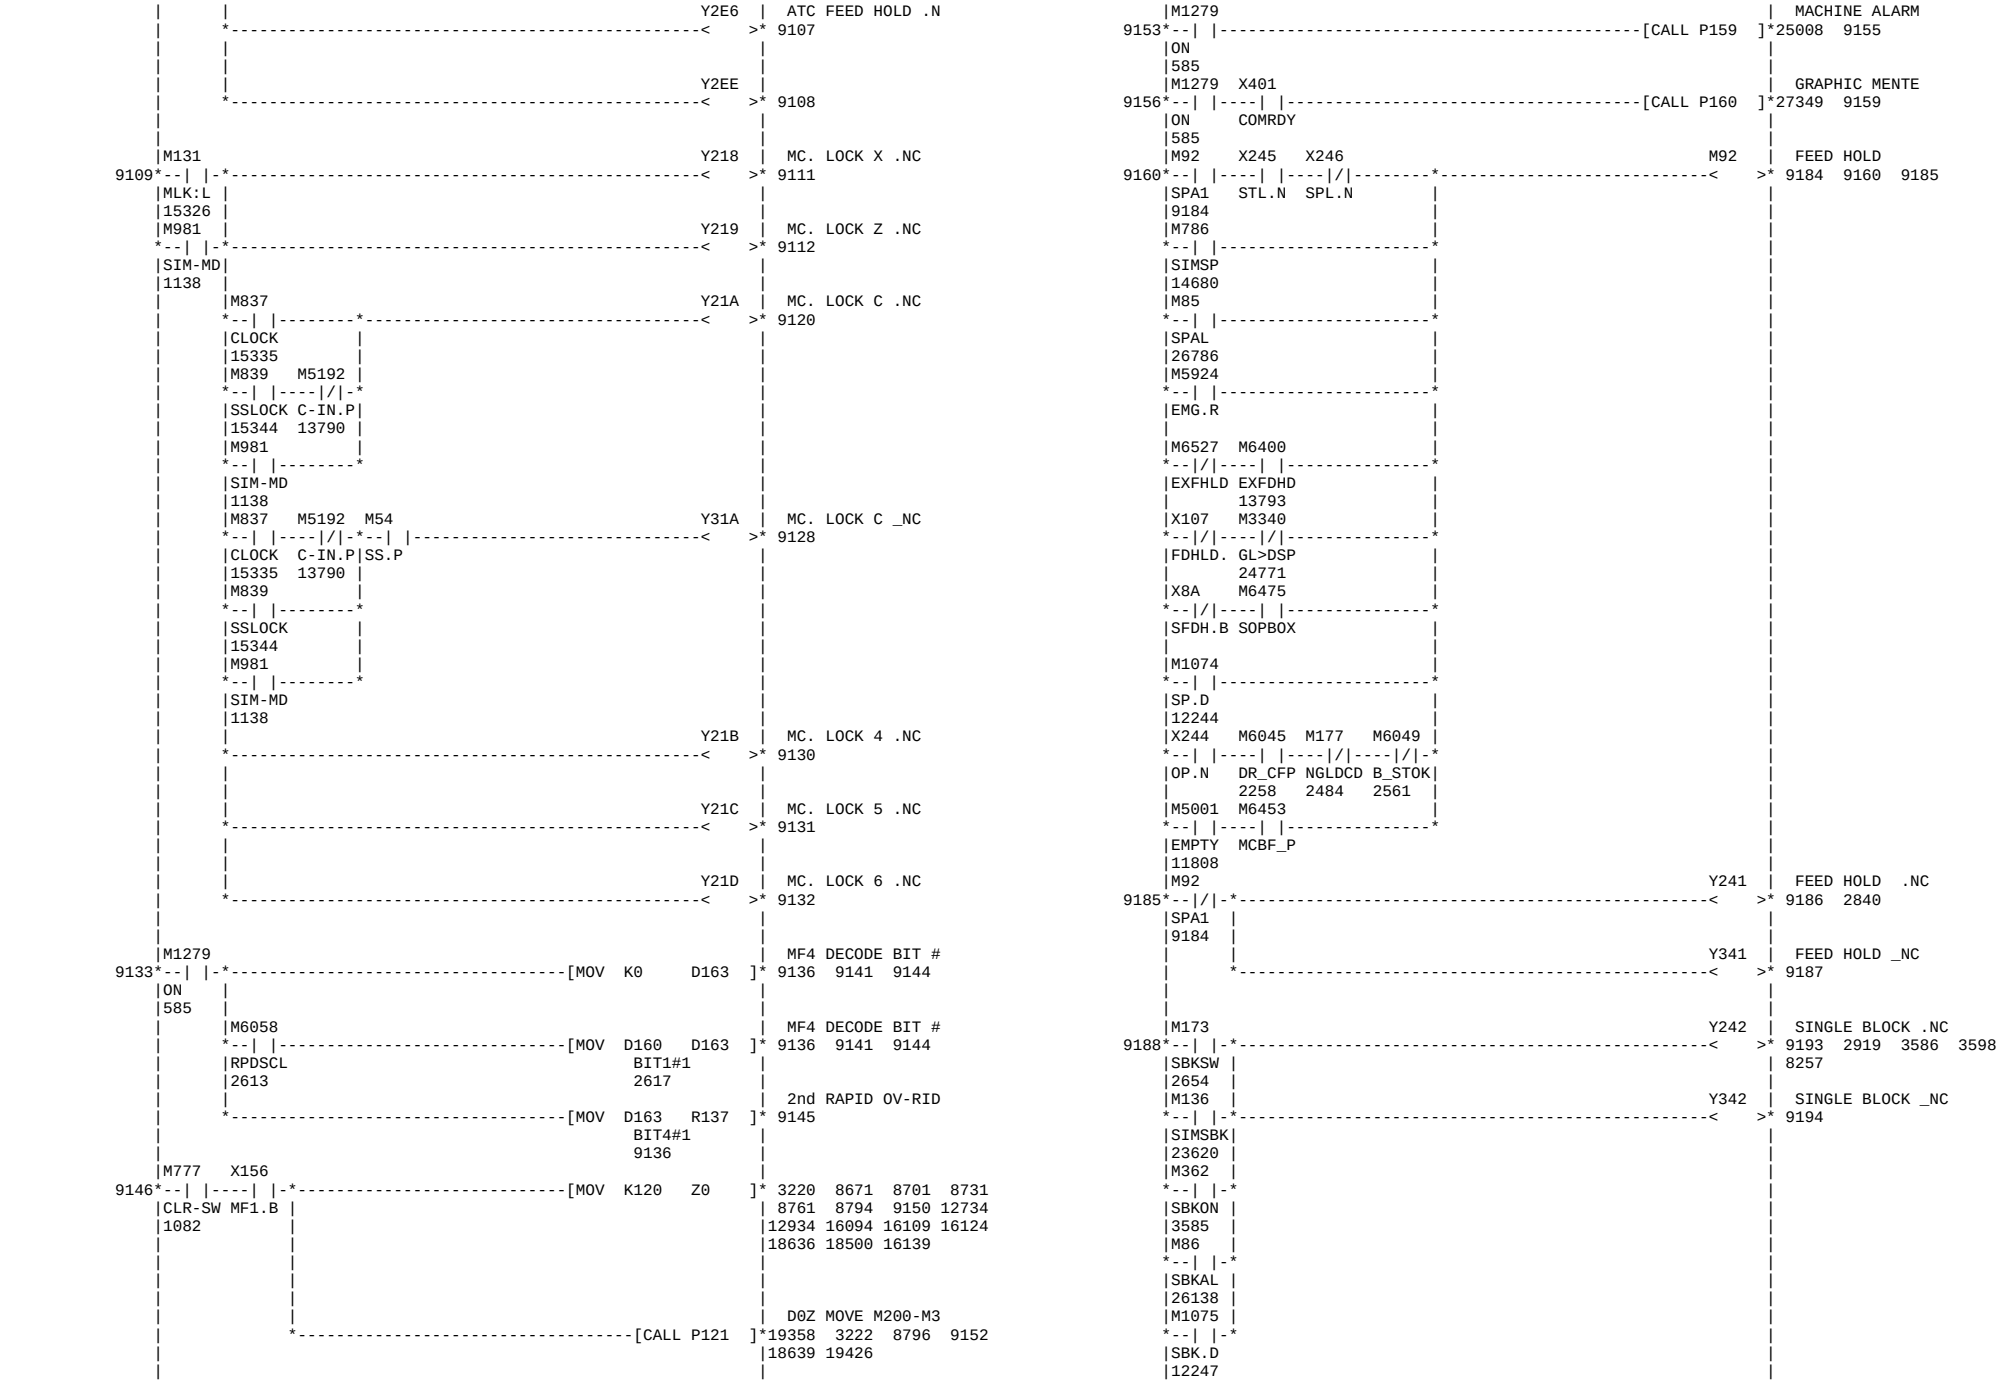

M1046 M1046 | GREASE PUMP FORC
8439 2078 8438
GRS++
8439
M1047 M1047 | SYNC MODE CANCEL
8442 8441 9196 9198
SYNC++
8442
M1048 M1048 | NOT SEL. HD1 AT
8445 3814 8444
MAIN++
8445
M1052 M1052 | TAIL ADJUST MODE
8448 8447 10808 10826
TADJMD
8448
M1053 M1053 | TEST FOR DEBUG
8451 8450 10729 10782
TEST
8451
10936
YA3 M6440 M5949 | YME BF TOP CUT R
8452 8469 9228
CHO_BF M6.P
11758 13808
M6470 YA5 M6441
BFSC.P M68.BF M68.P
11778
M8154
SCMD.N
M6470 M6453 YA6 M6442
BFSC.P MCBF_P M69.BF M69.P
11784
M8154 M6453 YA6
SCMD.N MCBF_P M69.BF
11784
M5133 M937 M6470 M5889 M5127 X16 M108 M5887 | TOP CUT PRG. CAL
8470 8498 8536 24099
IBF6.P B6MX BFSC.P TP_DIS UKBF.P SPJOG BF
11830 8532 11722
M5134 M942 M8154 M6453 XA3 | TOP CUT CALL PUL
IB68.P 68M SCMD.N MCBF_P TOP_C1 [PLS M5888] 8500
3275
M5133 M5134
IBF6.P IB68.P
M5886 M5820
PROGF 511MX
4406 4131
M6470 XA3 M5468 M6453
BFSC.P TOP_C1 69M MCBF_P
17132
M8154
SCMD.N
M5000 Y240 T211 M6470 X140 X287 M6453
8501 1>
TPCTRQ ST.N STSW.T BFSC.P RST.B WNAL.N MCBF_P
8518 2852 2831
X244 M8154
OP.N SCMD.N
M6455 XA4 XA3 M5468
R75-7 TOP_C2 TOP_C1 69M
17132
M5002 M5000 | AUX. TOP CUT REQ
1>
8518 699 8501 8519
TRQ2M 24114 24146 24158 24180
8523
M5000 M548 Y246 M5002 | TOP CUT 2 MEM.
8519 8523 8517 8521
TPCTRQ START RRW.N
8518 24138 3733
M5002
TRQ2M
8523
M544 M5127 X16 M5889 | TOP CUT IN.DISAB
8524 8532 8481 8525
TPCALL UKBF.P SPJOG
8555
M5889 M5127 XA3
TP_DIS UKBF.P TOP_C1
8532
M957 M6530 M5887 M5123 M6528 M5127 X1A X140
8533 1
TPCTIH 6MFN TPCALL BFAL.P BAL UKBF.P EXTRET RST.B
11874 9234 8498 9217
M5127 M5123 M6528 M5127 XA1
UKBF.P BFAL.P BAL UKBF.P SP_IL
9217
M544 M542 M108
TPCALL CSTFIN BF
8555 24140 11722
X287 M544 | TOP CUT PRG. CAL
1> 8555 697 8524 8537
WNAL.N 24096 24108 24179 24217
M6403 | BUSH LOAD DETECT
8556 [CALL P69] 12674 8558
B-LD.P
M36 | OVER LOAD DETECT
8559 [CALL P70] 12885 8561
OVLD.P
M655 M417 | S FIN WAIT
8562 8563 8589 8599 8645
S USE 8659
3032
M5775 M5537 | s fin WAIT
8564 8565 8590 8600 8644
s USE 8658
3039
T207 | Hi Level Temp Re
8566 [MOV K5 D193] 8569 8597 8652
P-ON.T
571
M203 Y234 X270 M417 M5537 X275 | DR UNLOCKCMD OFF
8570 <T191 D193 8595
3M MILL.N MF1.N SFNWAT sfnDL SF.N HtmpR2
16580 5416 8563 8565 8569
M204 M1140 X271 Y28F Y2A5 | S CODE FIN NC
8598 8681 8711 8741
4M POLIMD MF2.N SIHT.N 8771
16585 5404 8607
M333 X272
303M MF3.N
16630
M334 X273
304M MF4.N
16635
M243 Y234
203M MILL.N
16603 5416

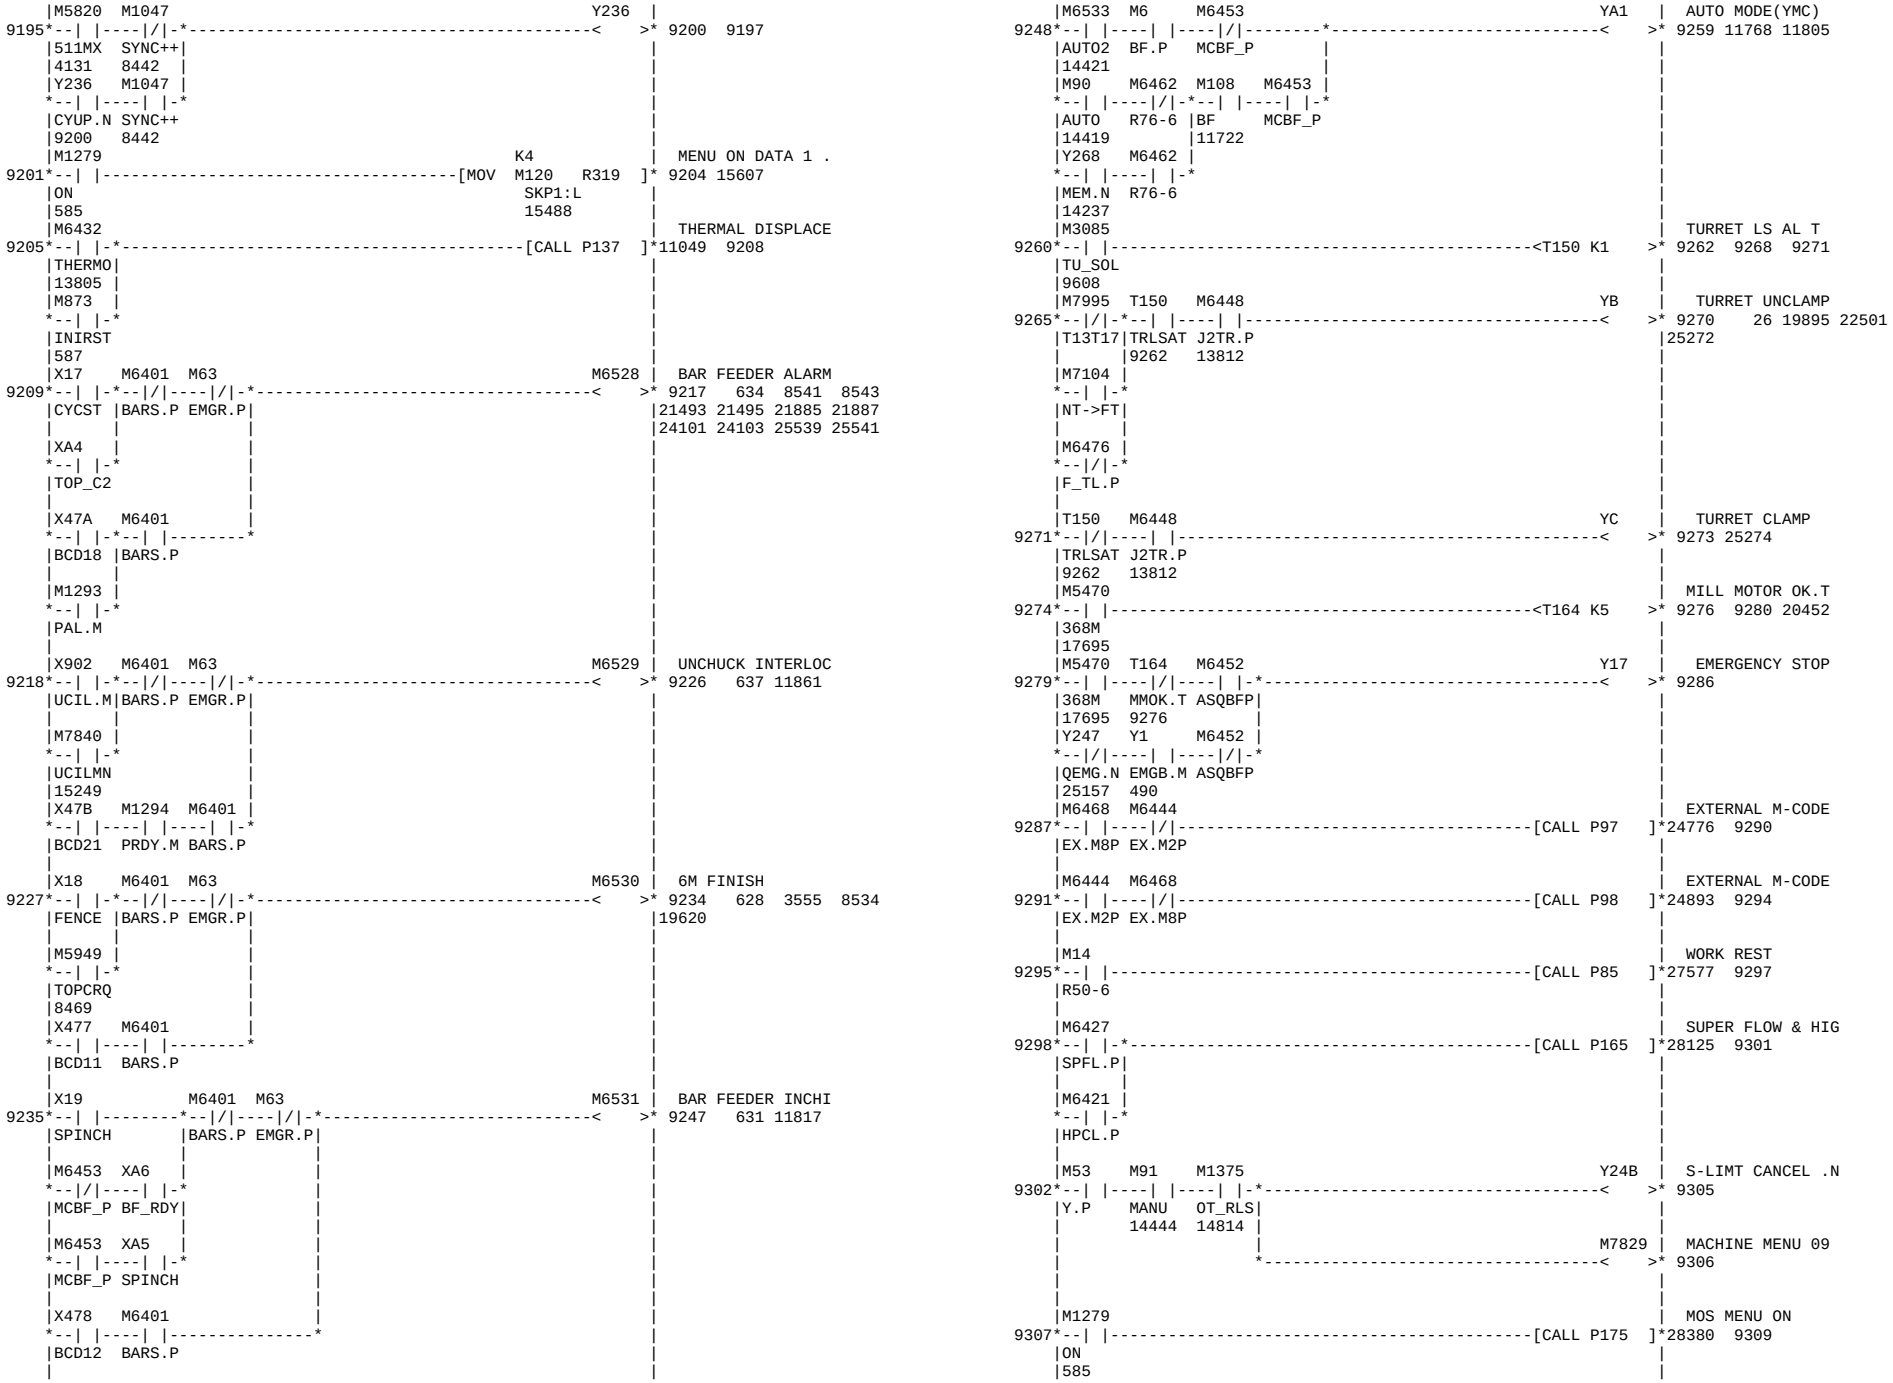

|M1141 |
|POLFWD|
|5408 |
|M244 |
|204M |
|16612 |
|M1142 |
|POLREV
|5411
|M415
|SPCD
|3030
|M417 X275 Y28F | S CODE PROTECT.N
8599 8607 8591 8602 8605
|SFNWAT|SF.N |
|8563 |
|M5537 |Y28F | Y29F | S CODE PROTECT.N
8608
|sfnDL SIHT.N|
|8565 8607 |
|X275 Y28F | Y39F | S CODE PROTECT N
8609 8667
|SF.N SIHT.N
| 8607
|M213 Y234 X270 M5537 M417 X27D | S FINISH DELAY
8610 8650
|3M |MILL.N|MF1.N |sfnDL SFNWAT|sf.N | HtmpR2|
|16648 |5416 | |8565 8563 | | 8569 |
|M214 | |X271 |Y38F | |T119 Y2AD | s CODE FIN NC
8657 8693 8723 8753
|4M | |MF2.N |SCPR.N |ML_NCT| 8783
16653			8666	22415
M333		X272		M110
303M		MF3.N		S-MODE
16630				5394
M334		X273		M54
304M		MF4.N	SS.P
16635	
M243 Y234
203M	MILL.N
16603	5416
M1141
POLFWD
5408
M244
204M
16612
M1142
POLREV
5411
M213 Y234 X278
3M	MILL.N	mf1.N
16648	5416	
M214		X279
4M		mf2.N
16653		
M333		X27A
303M		mf3.N
16630		
M334		X27B
304M	mf4.N
16635	
M243 Y234
203M	MILL.N
16603	5416
M1141
POLFWD
5408
M244
204M
16612
M1142
POLREV
5411
M5535
spCD
3037
M5537 X27D Y38F	S CODE PROTECT_N
8658 8666 8646 8661 8664
sfnDL	sf.N
8565	
M417	Y38F	Y39F	S CODE PROTECT N
8609 8667
SFNWAT SCPR.N
8563 8666
X27D Y38F
sf.N SCPR.N
8666
P34 |M152
8668 8760 8671 8701 8731
M-IN1	8761 8794 9150 12734
18459	12934 16094 16109 16124
	18636 18500 16139
M CODE FIN
19424 8673 8703 8733
8763
M195 M152 X275 X270 M144 Y2A0	M FUNC. FIN 1 .N
8674 8685 8675
M-FIN	M-IN1	SF.N	MF1.N MF1
18631	18459		3072
Y2A0		Y2A5
MFN1.N	SFN.N
8685	8598
M160 M159
EX-MF1 Mfin□P
3261 3565
M195 M152 X27D X278 M144 Y2A8	m FUNC. FIN 1 .N
8686 8697 8687
M-FIN	M-IN1	sf.N	mf1.N MF1
18631	18459		3072
Y2A8		Y2AD
mfn1.N	sfn.N
8697	8657
M160 M159
EX-MF1 Mfin□P
3261 3565
M153
8698 8760 8671 8701 8731
M-IN2	8761 8794 9150 12734
18553	12934 16094 16109 16124
	18636 18500 16139

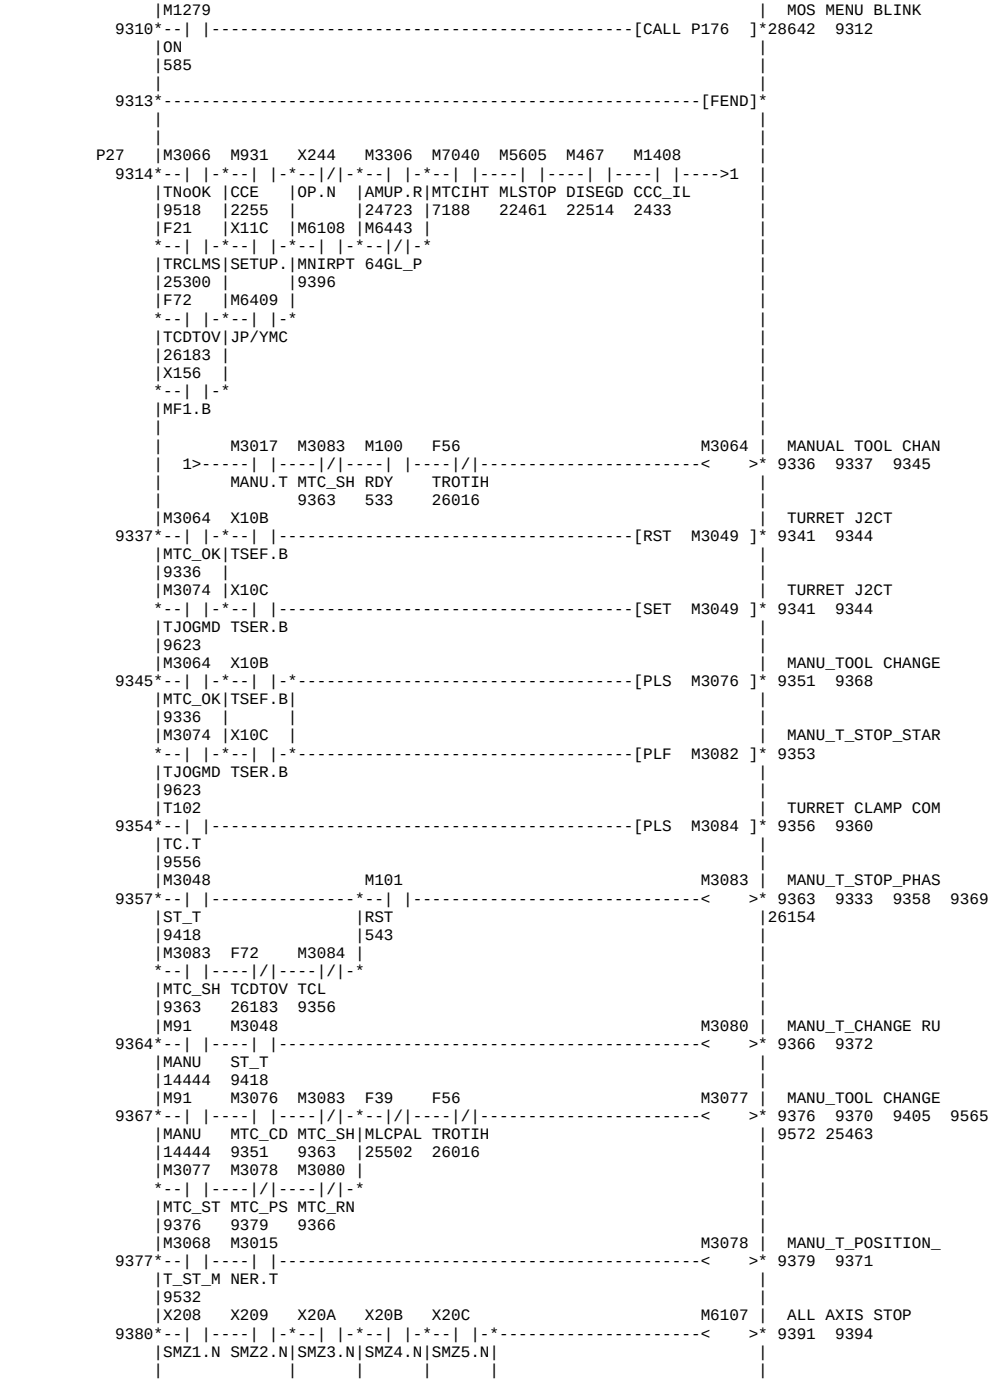

M CODE FIN
CALL P136
19424 8673 8703 8733
8763
M195 M153 X275 X271 M145 Y2A1
M FUNC. FIN 2 .N
8704
8715 8705
M-FIN M-IN2 SF.N MF2.N MF2
18631 18553 3081
Y2A1 Y2A5
MFN2.N SFN.N
8715 8598
M161 M159
EX-MF2 Mfin□P
3251 3565
M195 M153 X27D X279 M145 Y2A9
m FUNC. FIN 2 .N
8716
8727 8717
M-FIN M-IN2 sf.N mf2.N MF2
18631 18553 3081
Y2A9 Y2AD
mfn2.N sfn.N
8727 8657
M161 M159
EX-MF2 Mfin□P
3251 3565
M154
8728
MOV K100 Z0
3220 8671 8701 8731
M-IN3
18576
8761 8794 9150 12734
12934 16094 16109 16124
18636 18500 16139
M CODE FIN
CALL P136
19424 8673 8703 8733
8763
M195 M154 X275 X272 M146 Y2A2
M FUNC. FIN 3 .N
8734
8745 8735
M-FIN M-IN3 SF.N MF3.N MF3
18631 18576 3090
Y2A2 Y2A5
MFN3.N SFN.N
8745 8598
M162 M159
EX-MF3 Mfin□P
3242 3565
M195 M154 X27D X27A M146 Y2AA
m FUNC. FIN 3 .N
8746
8757 8747
M-FIN M-IN3 sf.N mf3.N MF3
18631 18576 3090
Y2AA Y2AD
mfn3.N sfn.N
8757 8657
M162 M159
EX-MF3 Mfin□P
3242 3565
M155
8758
MOV K110 Z0
3220 8671 8701 8731
M-IN4
18599
8761 8794 9150 12734
12934 16094 16109 16124
18636 18500 16139
M CODE FIN
CALL P136
19424 8673 8703 8733
8763
M195 M155 X275 X273 M147 Y2A3
M FUNC. FIN 4 .N
8764
8775 8765
M-FIN M-IN4 SF.N MF4.N MF4
18631 18599 3099
Y2A3 Y2A5
MFN4.N SFN.N
8775 8598
M163 M159
EX-MF4 Mfin□P
3234 3565
M195 M155 X27D X27B M147 Y2AB
m FUNC. FIN 4 .N
8776
8787 8777
M-FIN M-IN4 sf.N mf4.N MF4
18631 18599 3099
Y2AB Y2AD
mfn4.N sfn.N
8787 8657
M163 M159
EX-MF4 Mfin□P
3234 3565
M152
8788
MOV K130 Z0
3220 8671 8701 8731
M-IN1
18459
8761 8794 9150 12734
12934 16094 16109 16124
18636 18500 16139
M153
D0Z MOVE M200-M3
CALL P121
19358 3222 8796 9152
M-IN2
18553
M154
18639 19426
M-IN3
18576
M155
M-IN4
18599
X278 X279 X27A X27B K1
TEMP. COIL 0 BIT
8797
MOV K0 M6320
8803 16103 16118 16133
mf1.N mf2.N mf3.N mf4.N
16148 16196 16508 16519
M7124 M5180 M91
MANU B.P REQ.PLS
8804
PLS M851
8808 8810 8812
F-DR.P MANU
14444
M850 M851 M101 M850
MANU B.P REQ.
8809
8815 8809 8811 8894
MANUBP MBPLS. RST
26568
8815 8808 543
M850 M851
JOG CHANGE PLS 2
PLS M532
8817 798 14125
MANUBP MBPLS.
8815 8808
X276 M219 M5349 X23F Y2A6
B FUNCTION FIN.N
8818
8830
BF.N BCODE B data 19M 387M DEN2.N
12888 16897 17820
M36 T172
OVLD.P SCOF.T
8856
M5180
F-DR.P
X276 M5349
"NC-PLC """B"""
8831
MOV R60 D872
8837 8839
BF.N 387M
17820

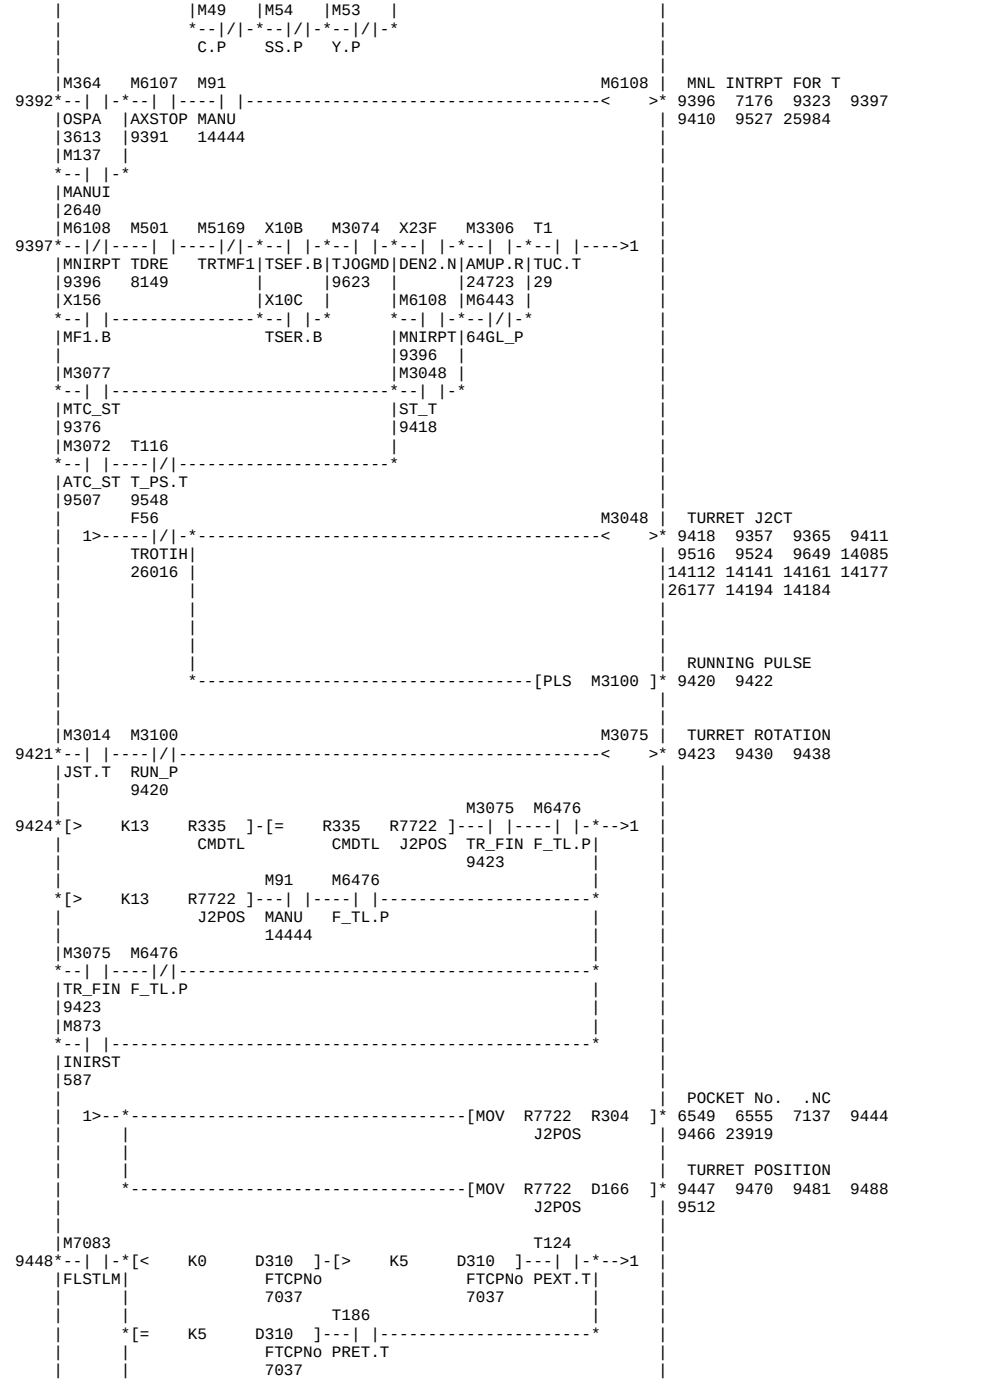

|X25A |
--| |-----------[/ D872 K5 D874]* 8841 8845 8851
TEST.N|
8837
|M6415
--|/|----------[+ D874 K30 D876] 8847 8853 8861
|SQ28.P
8841
|M6415
--| |----------[+ D874 K10 D876] 8847 8853 8861
|SQ28.P
8841
----------<T172 K5 > 8856 8827 20371
|M1279
8859*--| |----------[MOV D876 R61]* 8862
|ON
|585 8847
|X239
8863*--| |-*----------[MOV R83 D878]* 8866 8868
|B.PS.N| Y1-LD%
----------[D878 K5 D880]* 8870 8874 8880
8866
|M6415
--|/|----------[- D880 K150 D885] 8876 8882 8885
|SQ28.P
8870
|M6415
--| |----------[- D880 K50 D885] 8876 8882 8885
|SQ28.P
8870
----------[MOV D885 R62] 8886 8890
8876
|X239
8887*--|/|----------[MOV K0 R62]* 8886 8890
|B.PS.N
|M5347 M5348 M101 Y2C3 | B PUSH REQ.NC
8891*--| |-*--|/|-*--| |----------< >* 8898 8892 8899 20373
|388M |389M |RST |20377 25636 25667
|17825 |17830 |543
|Y2C3 | |
--| |-
|BP-REQ
|8898
|M850 F114 |
--| |----|/|-
|MANUBP D-0.BP
|8815 26573
|Y2C3 T136 M5180 M7164 | BAR PUSH REQUEST
8899*--| |----| |-*--| |----------< >* 8903
|BP-REQ 0.1sec|F-DR.P
|8898 664 |
|X297 |
--| |--------
|M1279 M100 M5180 M852 | "DATA 0 AT """B"
8904*--| |----| |----| |--[= K0 R44]----------< >* 8910 26570
|ON RDY F-DR.P BCODE
|585 533
|M243 M466 M5214 M6407 X274 M245 M101 L18
8911*--| |-*--| |----| |-*--| |----|/|----|/|----| |----| |---->1
|203M |ENGGED ML-US |SPJ.P TF.N 205M RST 2ND
|16603 |22508 293 | 16621 543 3841
|M244 | |
--| |-
|204M |
|16612 |
|M7972 |
--| |---------------
|EGEKEP
|8924
| M111 M220 M212 M7972 | KEEP MILL ENGAGE
| 1>-----| |----|/|----|/|----------< >* 8924 8915 8932
| M-MODE 30M 202M
| 5341 16916 17305
|M463 M470 M48 Y13 | MILL JOINT
8925*--| |----|/|--------*--| |----------< >* 8938 22507 22511 25478
|EG_SOL MLINCH |MILL.P
|22504 22561 |13750
|M463 T111 M470 |
--| |----|/|----| |-
|EG_SOL MIC1.T MLINCH|
|22504 22544 22561 |
|M6407 M7972 |
--| |----| |--------
|SPJ.P EGEKEP |
| 8924 |
|M7090 M6476 |
--| |----| |--------
|MLJON F_TL.P
|M1348 M54 Y23 | SS CHUCK CLOSE
8939*--| |----| |----------< >* 8941
|PCR.M SS.P
|5164
|M1349 M54 Y22 | SS CHUCK OPEN
8942*--| |----| |----------< >* 8944
|APR.M SS.P
|5173
|M100 Y512 M6407 Y513 | TURRET CLAMP SOL
8945*--| |-*--|/|----| |----------< >* 8949
|RDY |TUC.M SPJ.P
|533 |78
|T210 |
--| |-
|RDYOFT
|553
|X11C M6436 Y4E9 | SETUP SW.
8950*--| |----| |----------< >* 8952
|SETUP. CF.P
|X224 X220 M5128 X221 M6436 M6463 Y4F5 | MACHINE Z HOME P
8953*--| |-*--| |----| |-*--| |-*--| |----|/|-*----------< >* 8969 5072 6276 6338
|ZP15.N|ZP11.N HPS.P |ZP12.N|CF.P MCBP.P| | 6348 21874 22000 22022
| | 13766 | | |25646
|M53 | |M1296 | |
--|/|- *--| |-* |
Y.P	UD.LS
M5128	
--|/|----------
HPS.P
13766
M352 M188 M100 M101 M6463
--| |----| |----| |----| |----| |--------
703M MCBP.M RDY RST MCBP.P
17938 11733 533 543
X223 M6436 Y4F6	SS HOME POSITION
8970*--| |-*--| |----------< >* 8973
ZP14.N	CF.P
M54
--|/|-
SS.P
M975 M5511 M54 Y4F9	TAIL SLEEVE REV
8974*--| |----|/|-*--| |----------< >* 8980 24569
SCHE F-DRVR	SS.P
5243 4656
X471 M5511
--| |----| |-
TSF.R F-DRVR
4656

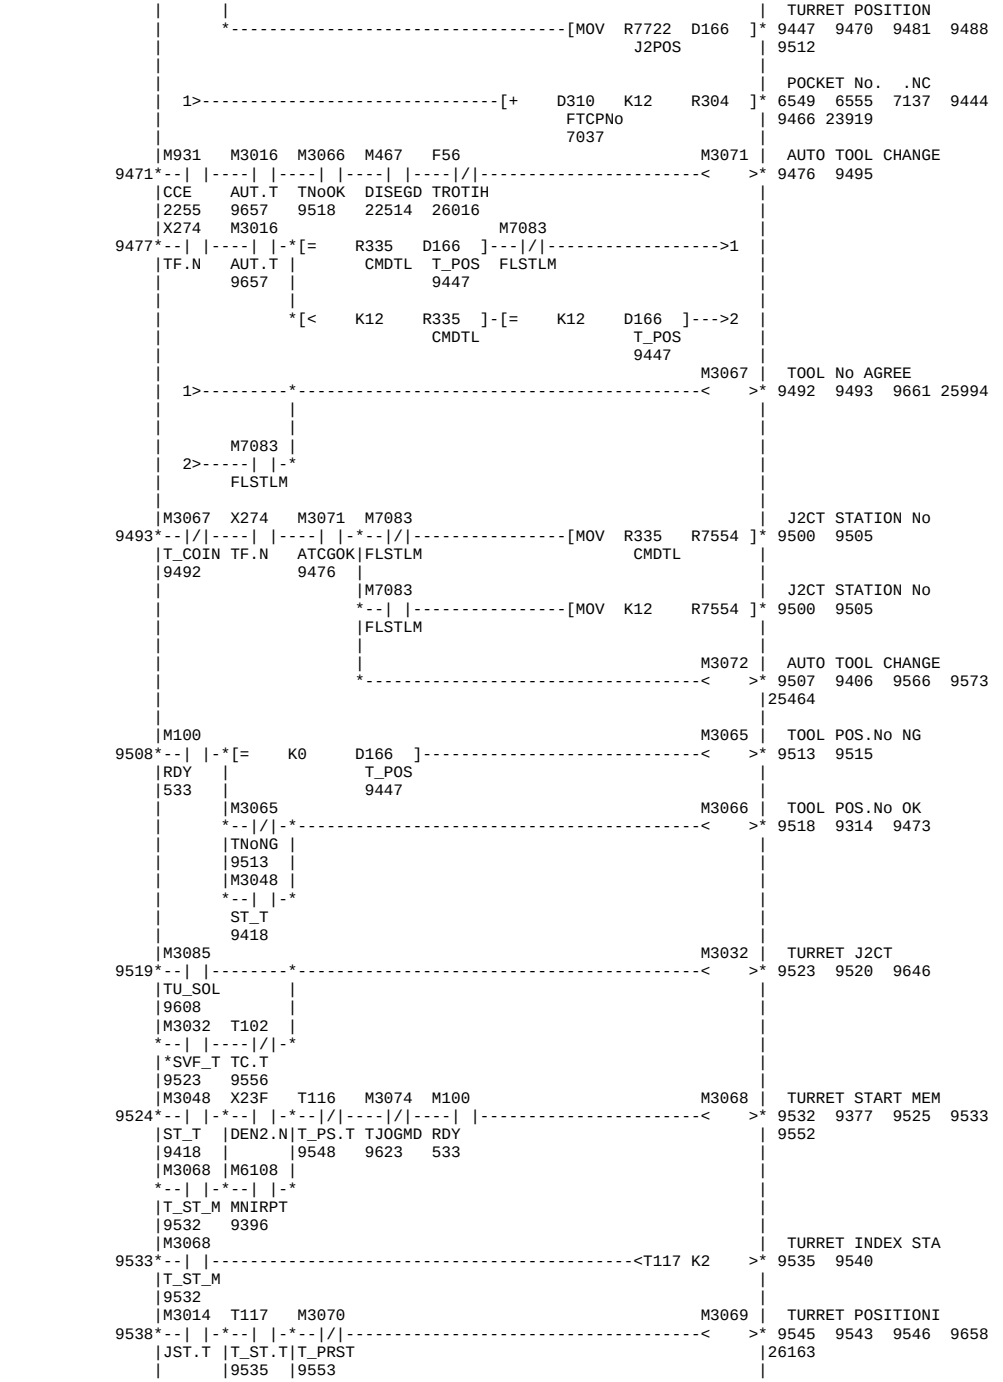

M973 M54 Y4F8 TAIL SLEEVE FWD
8981 8983 24461 24567
SUCKE SS.P
5215
M111 M1352 MILL OVERRIDE
8984 8985
M-MODE
5341
P36 X11C M6043 M6409 SERVO OFF DELAY
8986 8990 8993
SETUP. DR_CL JP/YMC
2225
T107 Y208 SERVO ON X .NC
8993 8995
SVOFDE
8990
M6412 M53 Y20C SERVO ON 5 .NC
8997
SVON.P Y.P
M1279 Y209 SERVO ON Z .NC
8998 8999
ON
585
Y28D M112 M5518 C AXIS REQUEST
9008 399 6482 9005
K500 R316 ENCDER COIL.N C-MODE
9010
348 5533
M5518
C_RQ
9008
M5518 Y282 Y283 T206 M112 Y20A SERVO ON C .NC
9017 339 2607 5578
C_RQ TL1S.N TL2S.N COIL.T C-MODE
7989 9014
9008 394 400 366 5533
Y20A
*SF3.N
9017
M54 Y20B SERVO ON 4 .NC
9020
SS.P
M1275 Y20D SERVO ON 6 .NC
9021 9022
OFF
615
M1279 M7983 TAIL CLAMP CONDI
9023 9024 907 914 9058
ON 14129 14167 14176 14183
585 14193
X242 M93 Y145 X11C M91 M3306 M100 M6631 M1418 AXIS INTERLOCK
9025 9042 9047 9082 9098
TIMZ.N HOMEOK HOME.L SETUP. MANU AMUP.R RDY ILYME1
732 14358 14444 24723 533 2277
X243 M6420 M6443
TSMZ.N AXISMV 64GL_P
M1408 M931 M1040
CCC_IL CCE CCC++
2433 2255 8421
M6419
CFIL.P
M931 M90 M6631 M1418 M6103 M100 M368 Y31 Y210 INTERLOCK X .NC
9043 9056
CCE AUTO ILYME1 AXIS_I DRINT RDY RTNOK WRJ.SL
2255 14419 2277 9042 2266 533 3634 27728
M91 M14
MANU R50-6
14444
M5160 M7983
9071 9065 25972
STAN.P TBCLM
13778 9024
M1281
OTRS.B
1040
M48 Y212 INTERLOCK C .NC
MILL.P
13750
M6450 Y312 INTERLOCK C _NC
9070 25880 25974
SSC.P
M6451
SSCT.P
M1378 Y211 INTERLOCK Z .NC
9062
WRILAL
25934
M931 M90 M91 M5727 M502 M1418 M6631 M6103
CCE AUTO MANU PCIL TDIL AXIS_I ILYME1 DRINT
2255 14419 14444 7597 8169 9042 2277 2266
M91 M27 M8 M1411
MANU PCT.P EYE.P LD_CAL
14444 13734 2448
M5681
WKHOLD
5268
M1040
CCC++
8421
M1281
OTRS.B
1040
M100 M368 F114 Y213 INTERLOCK 4 .NC
9092 25870
RDY RTNOK D-0.BP
533 3634 26573
M931 M90 Y31 M1418 M6631 M6103 M100 M368
9093
CCE AUTO WRJ.SL AXIS_I ILYME1 DRINT RDY RTNOK
2255 14419 27728 9042 2277 2266 533 3634
M91
MANU
14444
M14
R50-6
M53 Y214 INTERLOCK 5 .NC
9104
Y.P
M1275 Y215 INTERLOCK 6 .NC
9105 9106
OFF
615

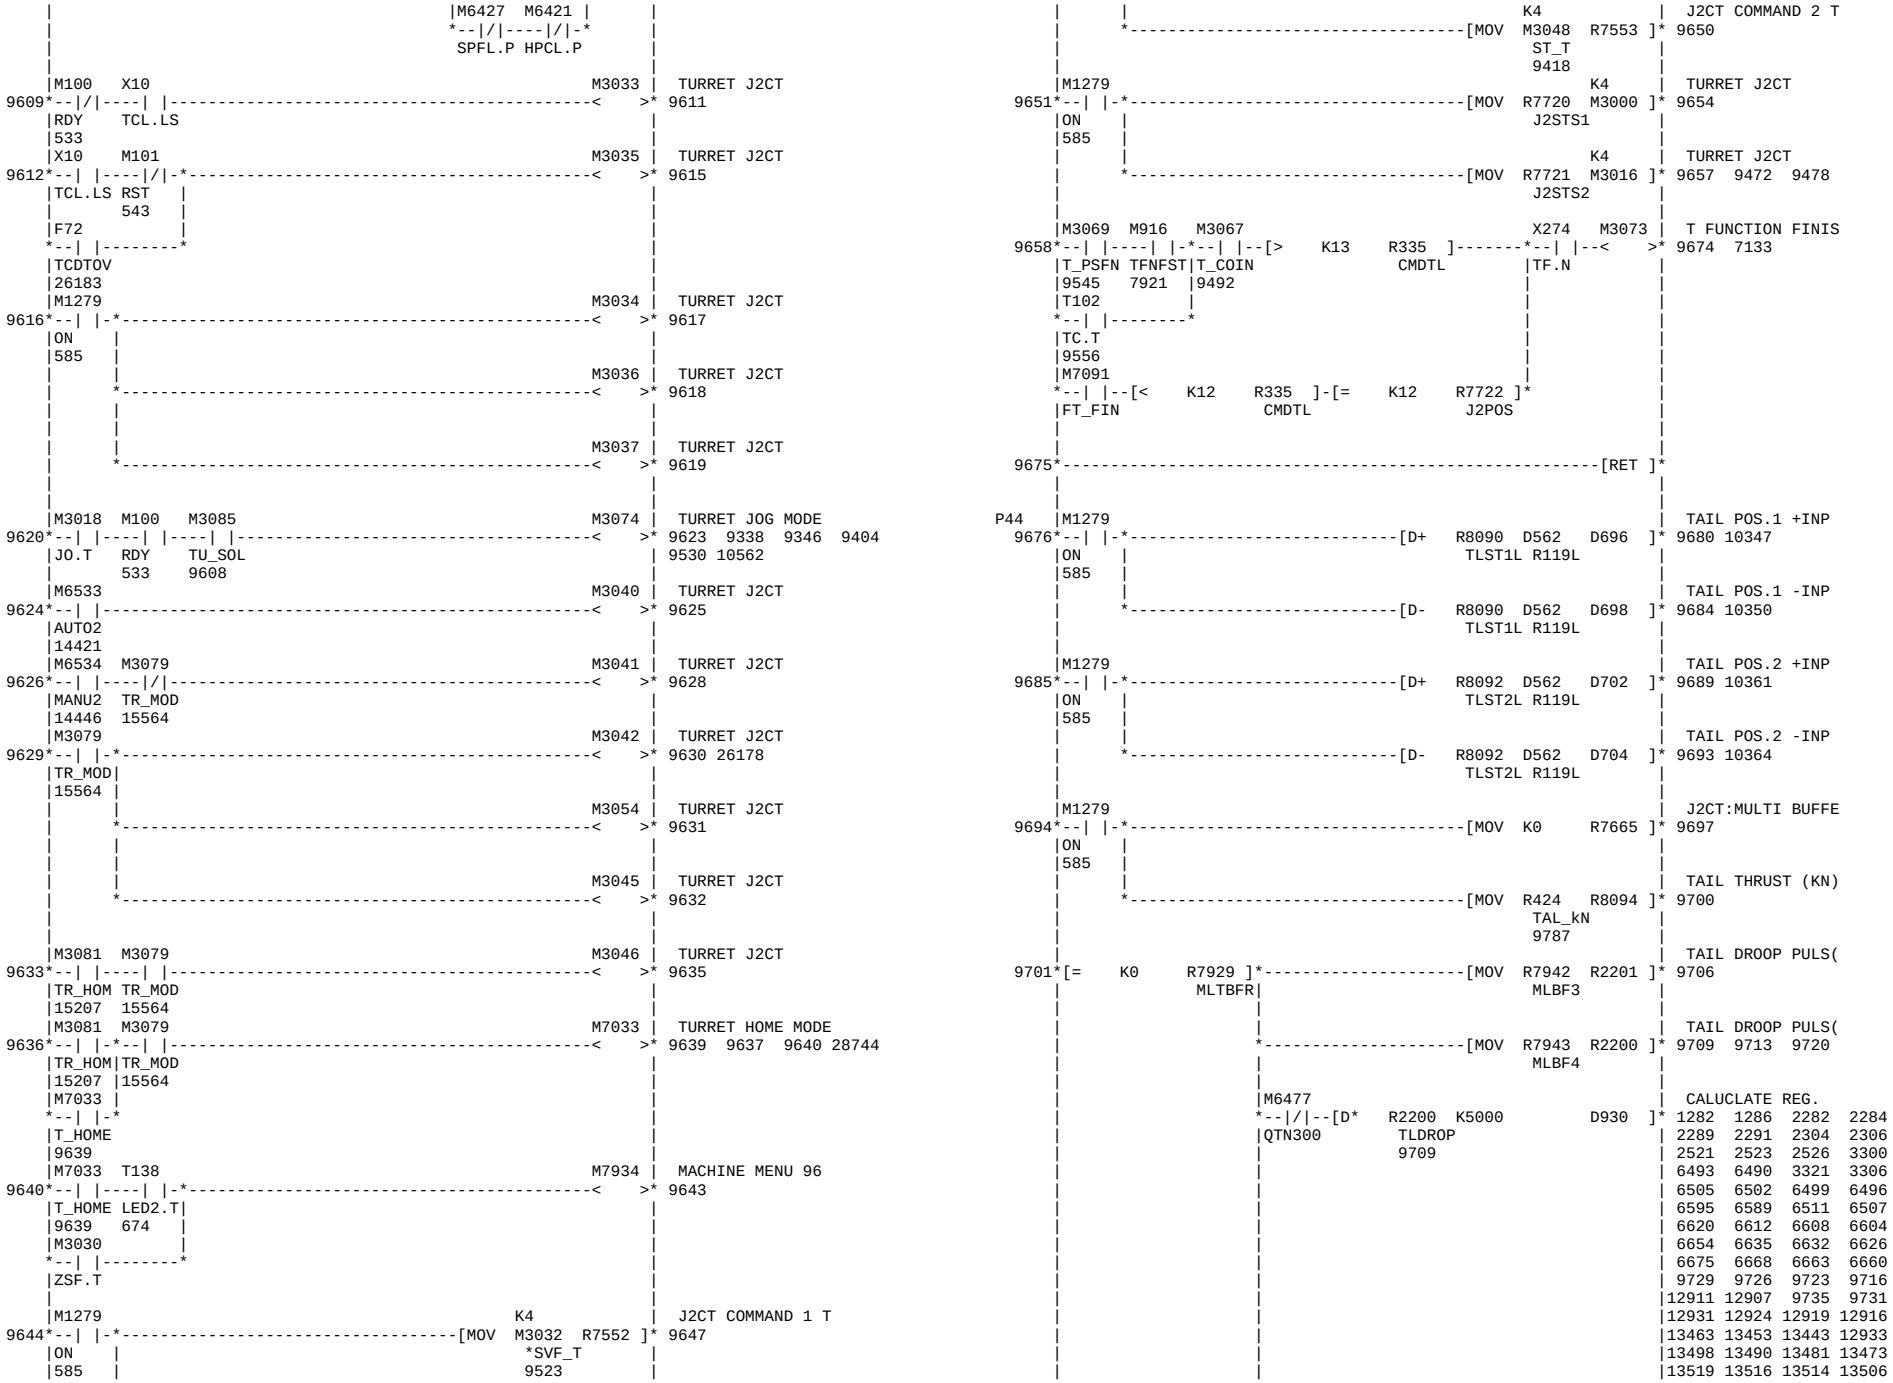

Y2E6 | ATC FEED HOLD .N
9107
Y2EE
9108
M131
Y218 | MC. LOCK X .NC
9109
MLK:L
15326
M981
Y219 | MC. LOCK Z .NC
9112
SIM-MD
1138
M837
Y21A | MC. LOCK C .NC
9120
CLOCK
15335
M839 M5192
SSLOCK C-IN.P
15344 13790
M981
SIM-MD
1138
M837 M5192 M54
Y31A | MC. LOCK C _NC
9128
CLOCK C-IN.P SS.P
15335 13790
M839
SSLOCK
15344
M981
SIM-MD
1138
Y21B | MC. LOCK 4 .NC
9130
Y21C | MC. LOCK 5 .NC
9131
Y21D | MC. LOCK 6 .NC
9132
M1279
MF4 DECODE BIT #
9133
ON
585
[MOV K0 D163]
9136 9141 9144
M6058
MF4 DECODE BIT #
RPDSCL
2613
[MOV D160 D163]
BIT1#1
2617
9136 9141 9144
2nd RAPID OV-RID
[MOV D163 R137]
BIT4#1
9136
9145
M777 X156
9146
CLR-SW MF1.B
1082
[MOV K120 Z0]
3220 8671 8701 8731
8761 8794 9150 12734
12934 16094 16109 16124
18636 18500 16139
D0Z MOVE M200-M3
[CALL P121]
19358 3222 8796 9152
18639 19426
M1279
MACHINE ALARM
9153
ON
585
[CALL P159]
25008 9155
M1279 X401
GRAPHIC MENTE
9156
ON COMRDY
585
[CALL P160]
27349 9159
M92 X245 X246 M92
FEED HOLD
9160
SPA1 STL.N SPL.N
9184
M786
SIMSP
14680
M85
SPAL
26786
M5924
EMG.R
M6527 M6400
EXFHLD EXFDHD
13793
X107 M3340
FDHLD. GL>DSP
24771
X8A M6475
SFDH.B SOPBOX
M1074
SP.D
12244
X244 M6045 M177 M6049
OP.N DR_CFP NGLDCD B_STOK
2258 2484 2561
M5001 M6453
EMPTY MCBF_P
11808
M92
Y241 | FEED HOLD .NC
9185
SPA1
9184
9186 2840
Y341 | FEED HOLD _NC
9187
M173
Y242 | SINGLE BLOCK .NC
9188
SBKSW
2654
9193 2919 3586 3598
8257
M136
Y342 | SINGLE BLOCK _NC
9194
SIMSBK
23620
M362
SBKON
3585
M86
SBKAL
26138
M1075
SBK.D
12247

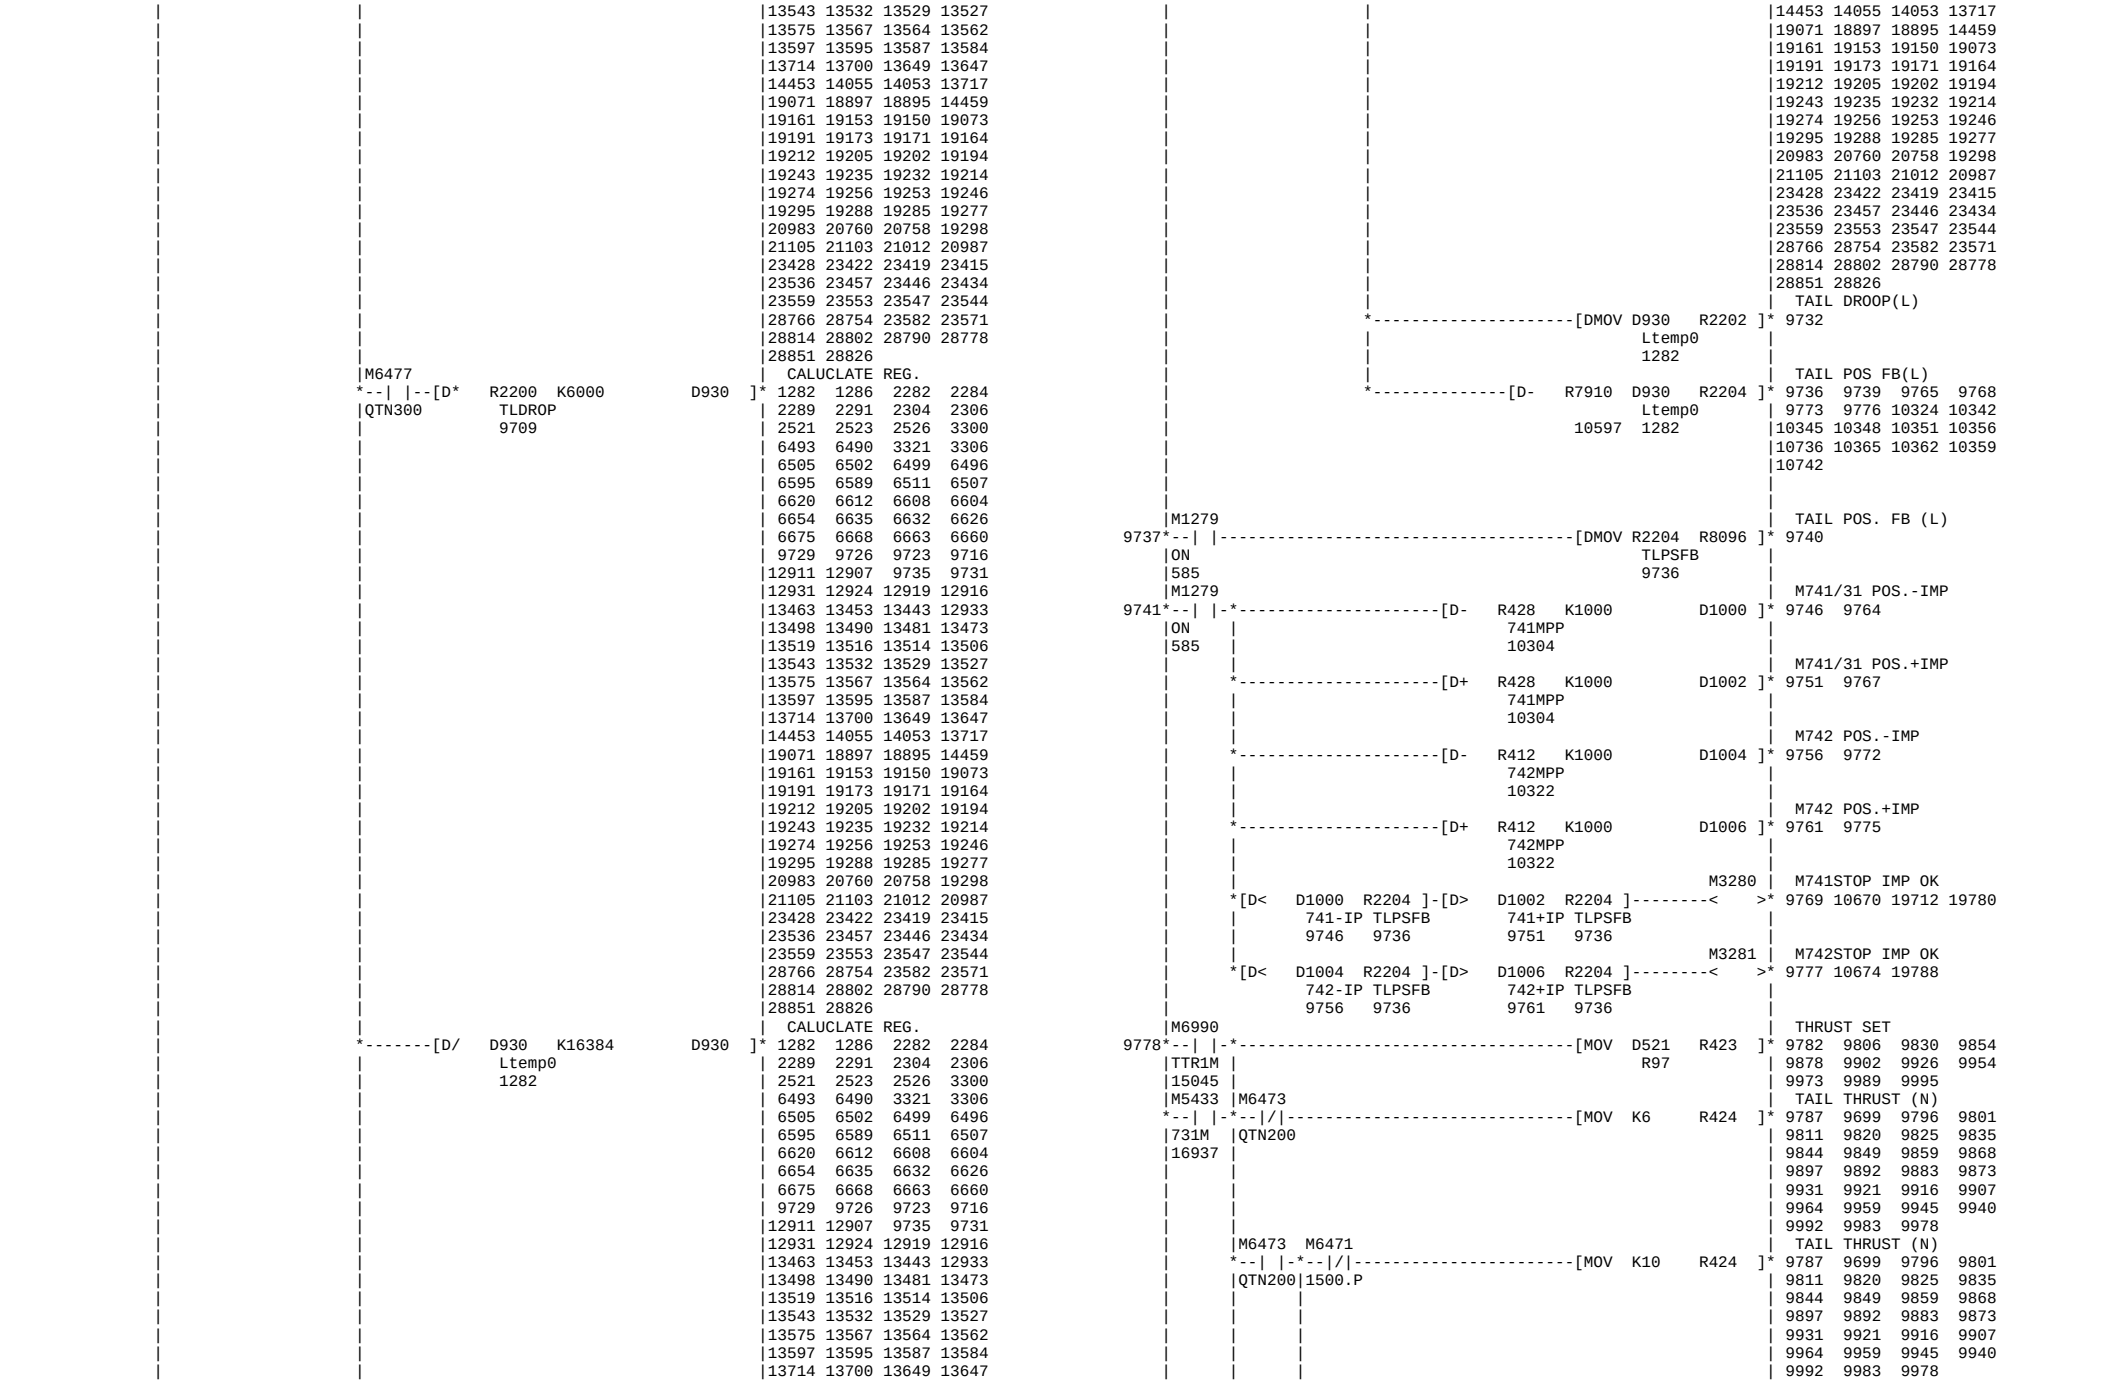

|M5820 M1047 Y236 |
9195*--| |----|/|-*----------<>* 9200 9197
|511MX SYNC++|
|4131 8442 |
|Y236 M1047 |
--| |----| |-
|CYUP.N SYNC++
|9200 8442
|M1279 K4 | MENU ON DATA 1 .
9201*--| |----------[MOV M120 R319]* 9204 15607
|ON SKP1:L
|585 15488
|M6432 | THERMAL DISPLACE
9205*--| |-*----------[CALL P137]*11049 9208
|THERMO|
|13805 |
|M873 |
--| |-
|INIRST
|587
|X17 M6401 M63 M6528 | BAR FEEDER ALARM
9209*--| |-*--|/|----|/|-*----------<>* 9217 634 8541 8543
|CYCST |BARS.P EMGR.P| |21493 21495 21885 21887
| | | |24101 24103 25539 25541
|XA4 | |
--| |-
|TOP_C2
|
|X47A M6401
--| |---| |--------*
|BCD18 |BARS.P
| |
|M1293 |
--| |-
|PAL.M
|
|X902 M6401 M63 M6529 | UNCHUCK INTERLOC
9218*--| |-*--|/|----|/|-*----------<>* 9226 637 11861
UCIL.M	BARS.P EMGR.P
M7840	
*--		-*
UCILMN
15249
X47B M1294 M6401
--| |----| |----| |-
BCD21 PRDY.M BARS.P
X18 M6401 M63 M6530	6M FINISH
9227*--| |-*--|/|----|/|-*----------<>* 9234 628 3555 8534
FENCE	BARS.P EMGR.P		19620
M5949	
*--		-*
TOPCRQ
8469
X477 M6401
--| |----| |--------
BCD11 BARS.P
X19 M6401 M63 M6531	BAR FEEDER INCHI
9235*--| |--------*--|/|----|/|-*----------<>* 9247 631 11817
SPINCH	BARS.P EMGR.P
M6453 XA6	
--|/|----| |-
MCBF_P BF_RDY	
M6453 XA5	
--| |----| |-
MCBF_P SPINCH
X478 M6401
--| |----| |---------------
BCD12 BARS.P
M6533 M6 M6453 YA1	AUTO MODE(YMC)
9248*--| |----| |----|/|--------*----------<>* 9259 11768 11805
AUTO2 BF.P MCBF_P
14421
M90 M6462 M108 M6453
--| |----|/|---| |----| |-*
AUTO R76-6	BF MCBF_P
14419	11722
Y268 M6462
--| |----| |-
MEM.N R76-6
14237
M3085	TURRET LS AL T
9260*--		----------<T150 K1 >* 9262 9268 9271
TU_SOL
9608
M7995 T150 M6448 YB	TURRET UNCLAMP
9265*--|/|-*--| |----| |----------<>* 9270 26 19895 22501
T13T17	TRLSAT J2TR.P	25272
	9262 13812
M7104
*--		-*
NT->FT
M6476
*--	/	-*
F_TL.P
T150 M6448 YC	TURRET CLAMP
9271*--|/|----| |----------<>* 9273 25274
TRLSAT J2TR.P
9262 13812
M5470	MILL MOTOR OK.T
9274*--		----------<T164 K5 >* 9276 9280 20452
368M
17695
M5470 T164 M6452 Y17	EMERGENCY STOP
9279*--| |----|/|----| |-*----------<>* 9286
368M MMOK.T ASQBFP
17695 9276
Y247 Y1 M6452
--|/|----| |----|/|-
QEMG.N EMGB.M ASQBFP
25157 490
M6468 M6444	EXTERNAL M-CODE
9287*--| |----|/|----------[CALL P97]*24776 9290
EX.M8P EX.M2P
M6444 M6468	EXTERNAL M-CODE
9291*--| |----|/|----------[CALL P98]*24893 9294
EX.M2P EX.M8P
M14	WORK REST
9295*--		----------[CALL P85]*27577 9297
R50-6
M6427	SUPER FLOW & HIG
9298*--		-*----------[CALL P165]*28125 9301
SPFL.P
M6421
*--		-*
HPCL.P
M53 M91 M1375 Y24B	S-LIMT CANCEL .N
9302*--| |----| |----| |-*----------<>* 9305
Y.P MANU OT_RLS
14444 14814
	M7829	MACHINE MENU 09
----------<> 9306
M1279	MOS MENU ON
9307*--		----------[CALL P175]*28380 9309
ON
585

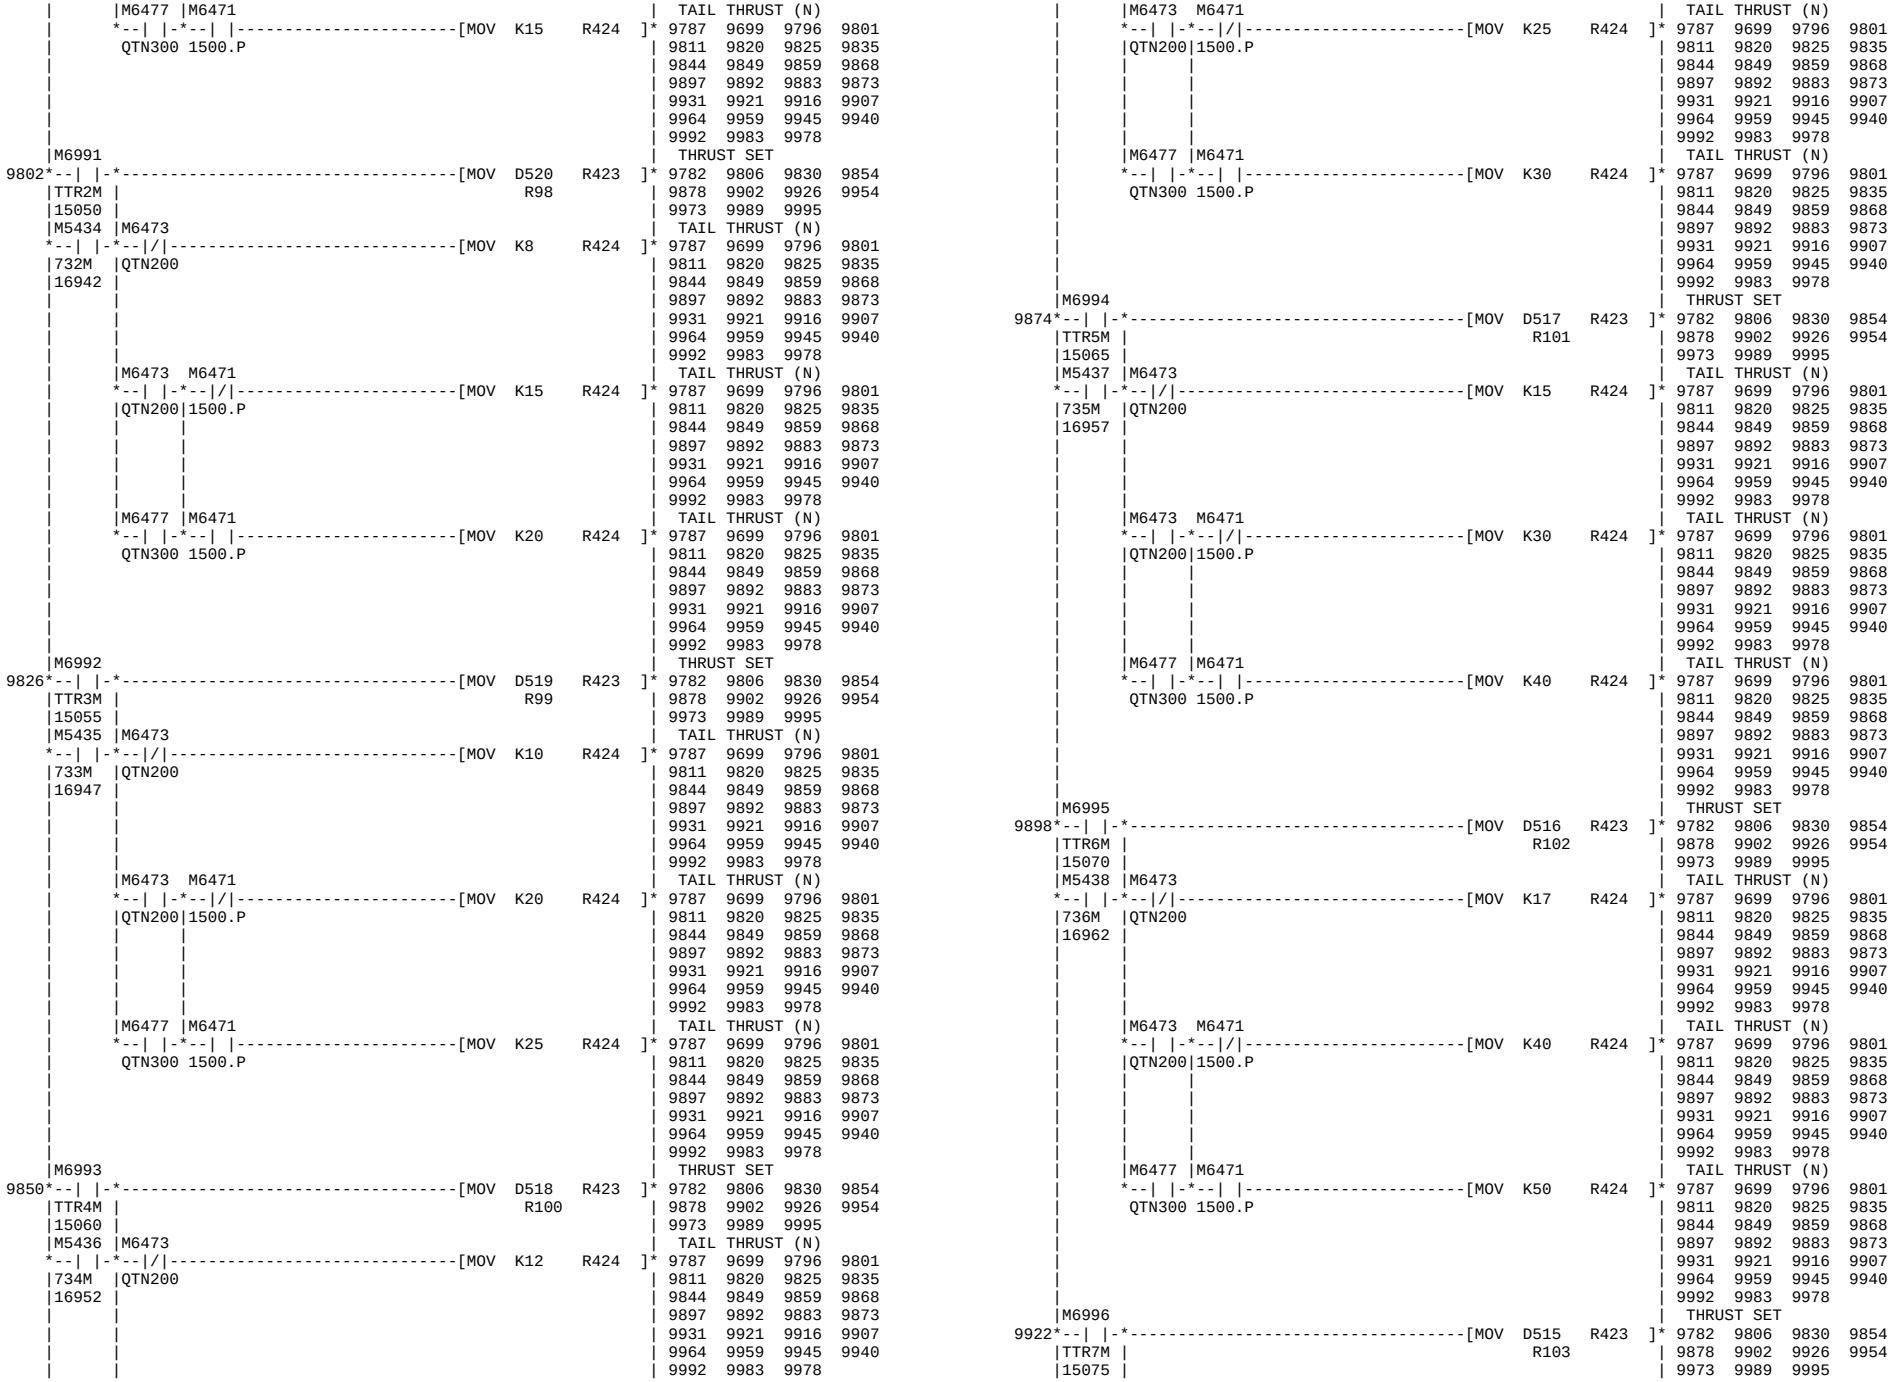

|M1279
MOS MENU BLINK
9310*--| |-----[CALL P176]*28642 9312
|ON
|585
9313*-----[FEND]*
P27 |M3066 M931 X244 M3306 M7040 M5605 M467 M1408
9314*--| |-*--| |-*--|/|-*--| |-*--| |----| |----| |----| |---->1
|TNoOK |CCE |OP.N |AMUP.R|MTCIHT MLSTOP DISEGD CCC_IL
|9518 |2255 | |24723 |7188 22461 22514 2433
|F21 |X11C |M6108 |M6443 |
|TRCLMS|SETUP.|MNIRPT 64GL_P
|25300 | |9396
|F72 |M6409 |
|TCDTOV|JP/YMC
|26183 |
|X156 |
|MF1.B
|M3017 M3083 M100 F56 M3064 | MANUAL TOOL CHAN
1>-----| |----|/|----| |---|/|-----------------------< >* 9336 9337 9345
MANU.T MTC_SH RDY TROTIH
9363 533 26016
|M3064 X10B | TURRET J2CT
9337*--| |-*--| |-----[RST M3049]* 9341 9344
|MTC_OK|TSEF.B
|9336 |
|M3074 |X10C | TURRET J2CT
--| |---| |-----[SET M3049]* 9341 9344
|TJOGMD TSER.B
|9623
|M3064 X10B | MANU_TOOL CHANGE
9345*--| |-*--| |-*-----[PLS M3076]* 9351 9368
|MTC_OK|TSEF.B|
|9336 | |
|M3074 |X10C | | MANU_T_STOP_STAR
--| |---| |-*-----[PLF M3082]* 9353
|TJOGMD TSER.B
|9623
|T102 | TURRET CLAMP COM
9354*--| |-----[PLS M3084]* 9356 9360
|TC.T
|9556
|M3048 M101 M3083 | MANU_T_STOP_PHAS
9357*--| |---------*--| |-----------------------------< >* 9363 9333 9358 9369
|ST_T |RST |26154
|9418 |543
|M3083 F72 M3084 |
--| |----|/|----|/|-
|MTC_SH TCDTOV TCL
|9363 26183 9356
|M91 M3048 M3080 | MANU_T_CHANGE RU
9364*--| |----| |---< >* 9366 9372
|MANU ST_T
|14444 9418
|M91 M3076 M3083 F39 F56 M3077 | MANU_TOOL CHANGE
9367*--| |----| |----|/|-*--|/|----|/|-----------------------< >* 9376 9370 9405 9565
|MANU MTC_CD MTC_SH|MLCPAL TROTIH | 9572 25463
|14444 9351 9363 |25502 26016
|M3077 M3078 M3080 |
--| |----|/|----|/|-
|MTC_ST MTC_PS MTC_RN
|9376 9379 9366
|M3068 M3015 M3078 | MANU_T_POSITION_
9377*--| |----| |---< >* 9379 9371
|T_ST_M NER.T
|9532
|X208 X209 X20A X20B X20C M6107 | ALL AXIS STOP
9380*--| |----| |-*--| |-*--| |-*--| |-*---------------------< >* 9391 9394
|SMZ1.N SMZ2.N|SMZ3.N|SMZ4.N|SMZ5.N|

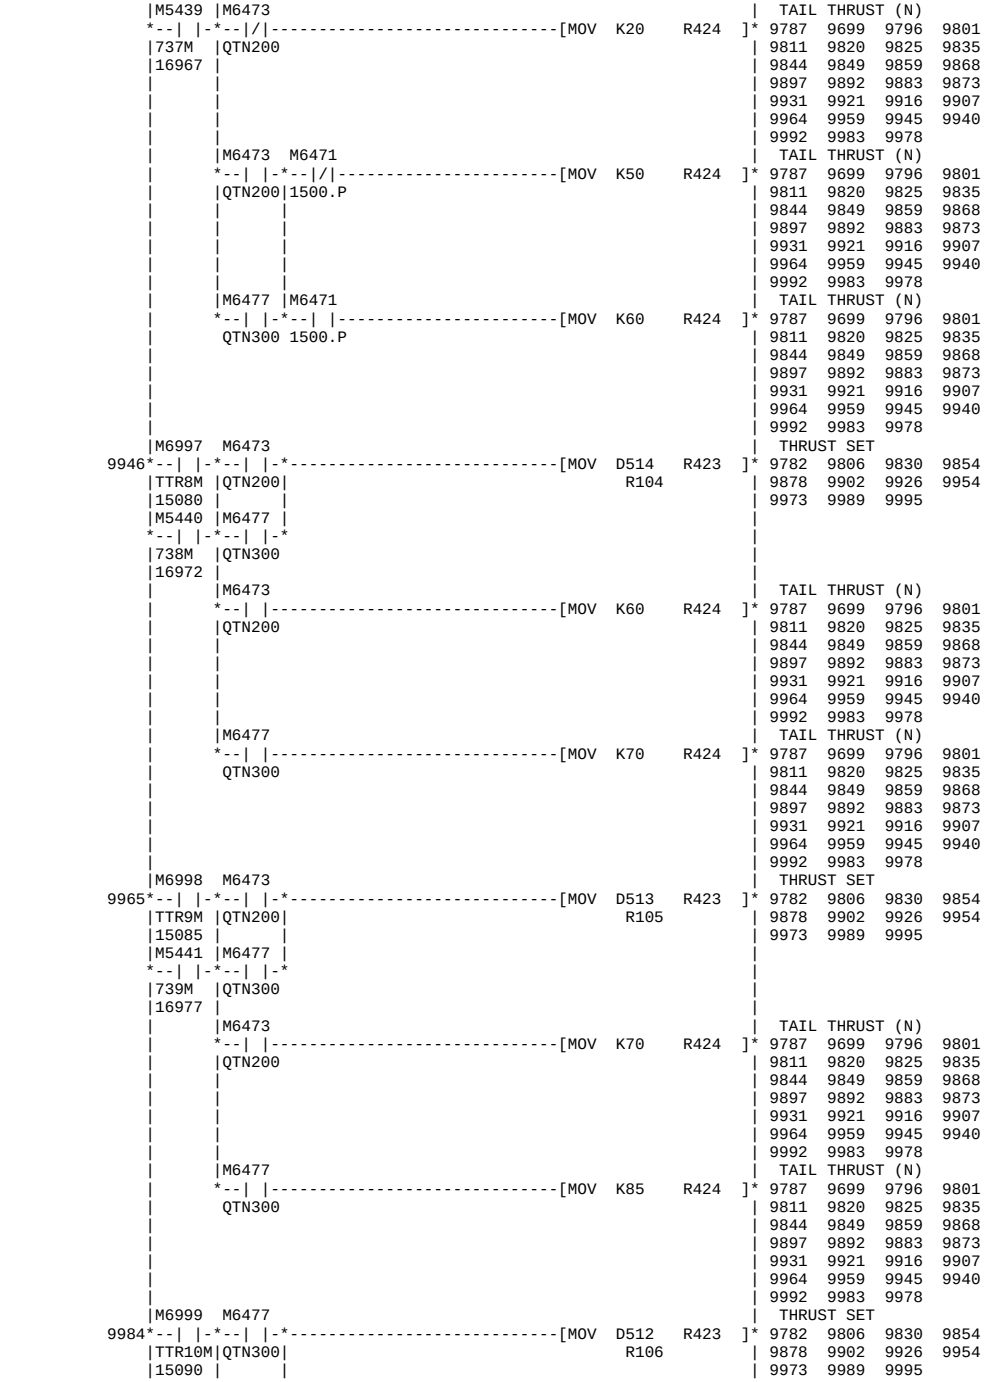

|M49 |M54 |M53 |
--|/|---|/|-*--|/|-*
C.P SS.P Y.P
|M364 M6107 M91 M6108 | MNL INTRPT FOR T
9392*--| |-*--| |----| |-----------------------------------< >* 9396 7176 9323 9397
|OSPA |AXSTOP MANU | 9410 9527 25984
|3613 |9391 14444
|M137 |
--| |-
|MANUI
|2640
|M6108 M501 M5169 X10B M3074 X23F M3306 T1
9397*--|/|----| |----|/|-*--| |-*--| |-*--| |-*--| |-*--| |----|/|----| |----->1
|MNIRPT TDRE TRTMF1|TSEF.B|TJOGMD|DEN2.N|AMUP.R|TUC.T
|9396 8149 | |9623 | |24723 |29
|X156 |X10C | |M6108 |M6443 |
--| |-----------------| |-* *--| |-*--|/|-*
|MF1.B TSER.B |MNIRPT|64GL_P
| |9396 |
|M3077 |M3048 |
--| |-------------------------------| |-*
|MTC_ST |ST_T
|9376 |9418
|M3072 T116 |
--| |----|/|----------------------
|ATC_ST T_PS.T
|9507 9548
|F56 M3048 | TURRET J2CT
1>-----|/|-*---< >* 9418 9357 9365 9411
TROTIH| | 9516 9524 9649 14085
26016 | |14112 14141 14161 14177
| |26177 14194 14184
| |
| |
| | RUNNING PULSE
----------------------------------[PLS M3100] 9420 9422
|M3014 M3100 M3075 | TURRET ROTATION
9421*--| |----|/|---< >* 9423 9430 9438
|JST.T RUN_P
|9420
M3075 M6476
9424*[> K13 R335]-[= R335 R7722]---| |----| |-*-->1
CMDTL CMDTL J2POS TR_FIN F_TL.P|
9423 |
M91 M6476 |
[> K13 R7722]---| |----| |----------------------
J2POS MANU F_TL.P |
14444 |
|M3075 M6476 |
--| |----|/|---
|TR_FIN F_TL.P |
|9423 |
|M873 |
--| |---
|INIRST
|587
| POCKET No. .NC
1>--*----------------------------------[MOV R7722 R304]* 6549 6555 7137 9444
J2POS | 9466 23919
| TURRET POSITION
----------------------------------[MOV R7722 D166] 9447 9470 9481 9488
J2POS | 9512
|M7083 T124
9448*--| |-*[< K0 D310]-[> K5 D310]---| |-*-->1
|FLSTLM| FTCPNo FTCPNo PEXT.T|
| 7037 7037 |
T186 |
[= K5 D310]---| |----------------------
FTCPNo PRET.T
7037

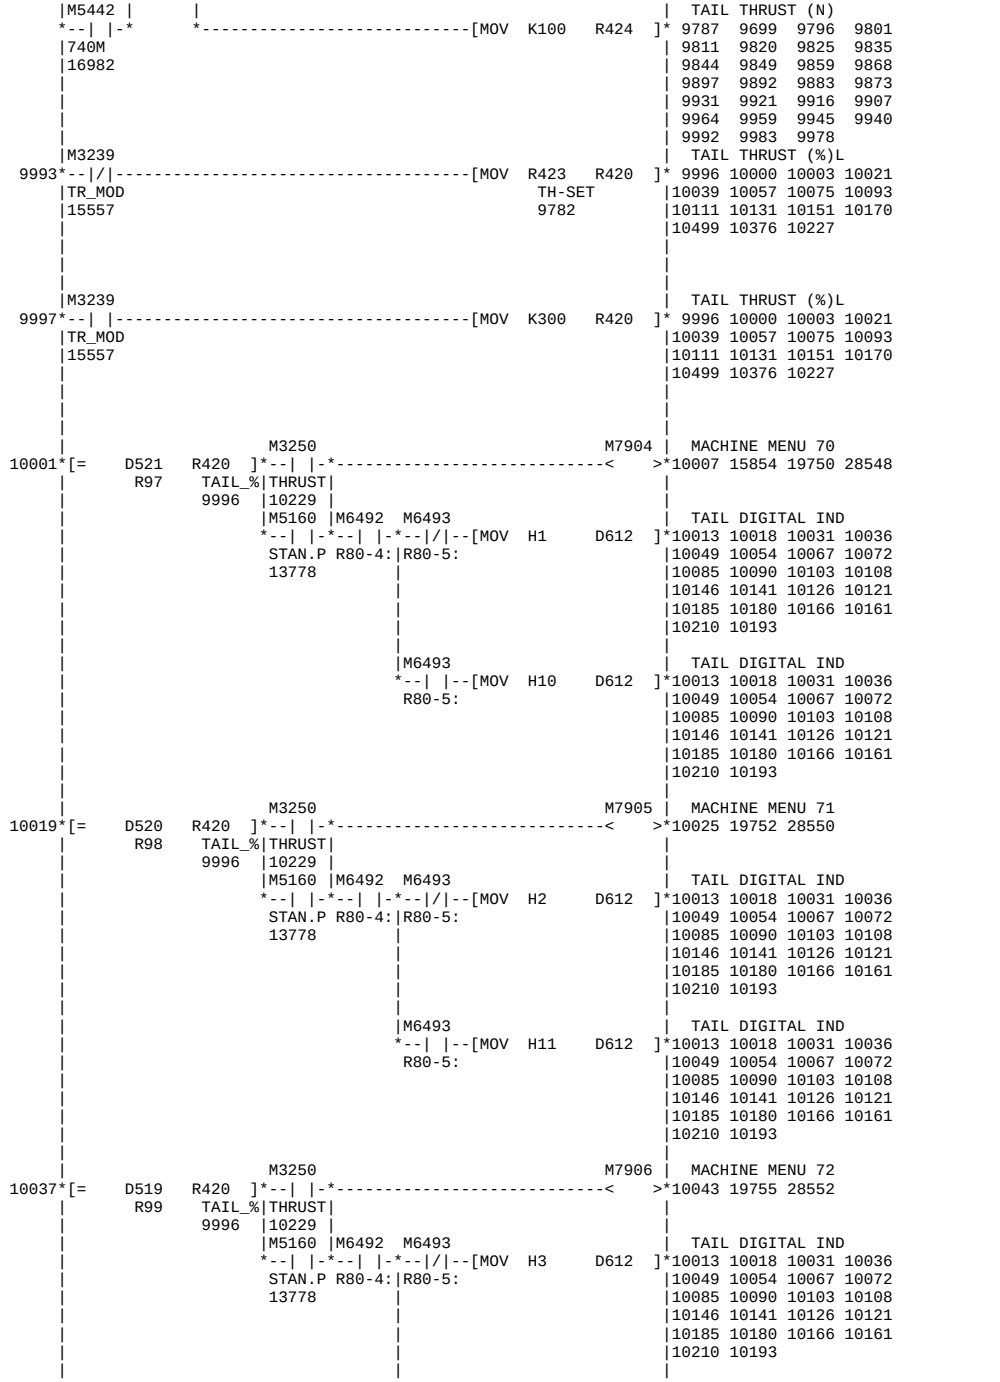

TURRET POSITION
9447 9470 9481 9488
9512
J2POS
[MOV R7722 D166]
POCKET No. .NC
6549 6555 7137 9444
9466 23919
FTCPNo
7037
[+ D310 K12 R304]
AUTO TOOL CHANGE
9476 9495
M931 M3016 M3066 M467 F56 M3071
CCE AUT.T TNoOK DISEGD TROTIH
2255 9657 9518 22514 26016
X274 M3016 M7083
TF.N AUT.T
9657
CMDTL T_POS FLSTLM
9447
R335 D166]
K12 R335]-[= K12 D166]
CMDTL T_POS
9447
TOOL No AGREE
9492 9493 9661 25994
M7083
FLSTLM
M3067 X274 M3071 M7083
J2CT STATION No
9500 9505
T_COIN TF.N ATCGOK FLSTLM CMDTL
9492 9476
[MOV K12 R335 R7554]
J2CT STATION No
9500 9505
M7083
FLSTLM
AUTO TOOL CHANGE
9507 9406 9566 9573
25464
M3072
M100
TOOL POS.No NG
9513 9515
M3065
RDY
533
T_POS
9447
K0 D166]
TOOL POS.No OK
9518 9314 9473
M3066
TNoNG
9513
M3048
ST_T
9418
TURRET J2CT
9523 9520 9646
M3032
M3085
TU_SOL
9608
M3032 T102
SVF_T TC.T
9523 9556
TURRET START MEM
9532 9377 9525 9533
9552
M3068
M3048 X23F T116 M3074 M100
ST_T DEN2.N T_PS.T TJOGMD RDY
9418 9548 9623 533
M6108
T_ST_M MNIRPT
9532 9396
TURRET INDEX STA
9535 9540
M3068
T_ST_M
9532
<T117 K2
TURRET POSITIONI
9545 9543 9546 9658
26163
M3069
M3014 T117 M3070
JST.T T_ST.T T_PRST
9535 9553
M3013 M100
JSA.T RDY
533
M3069
T_PSFN
9545
M3069
TURRET INDEX FIN
9548 9407 9529 9551
9580 25471
T_PSFN
9545
T116 M3068
M3070
TURRET FIN MEM R
9553 9544
T_PS.T T_ST_M
9548 9532
X10
T62:TURRET CLAMP
9556 9354 9521 9660
26514
TCL.LS
T62
18354
M5876 M273 M915 M3077 M3072 M126 X274 M101
SMZ1.P 249M 249MCN MTC_ST ATC_ST TUCL:L TF.N RST
6744 17602 7907 9376 9507 15304 543
M5877
SMZ2.P
6747
M925
6741
M3086
249MX
9571
F39
M3086
TURET UNCLAMP
9571 9564 9574 25466
MLCPAL
25502
M3077 M931 M7463 T116 T124
MTC_ST CCE TUOFF T_PS.T
9376 2255 15307 9548
M3072 X11C
M7104
ATC_ST SETUP.
9507
M3086
NT->FT
M7083
249MX
9571
M3085
FLSTLM
M6476
TU_SOL
9608
M126
F_TL.P
TUCL:L
15304
X86 M7090 M7092 M3306 M467
FTHOME MLJON TRNUCL AMUP.R DISEGD
24723 22514
M6443
64GL_P
M6191 M3085
Y84S&H
28268
T11 M6427
HPSP.T SPFL.P
7762
M6421
HPCL.P
TURET UNCLAMP M
9597 7747
TURET UNCLAMP SO
9608 9260 9519 9575
9622 25465

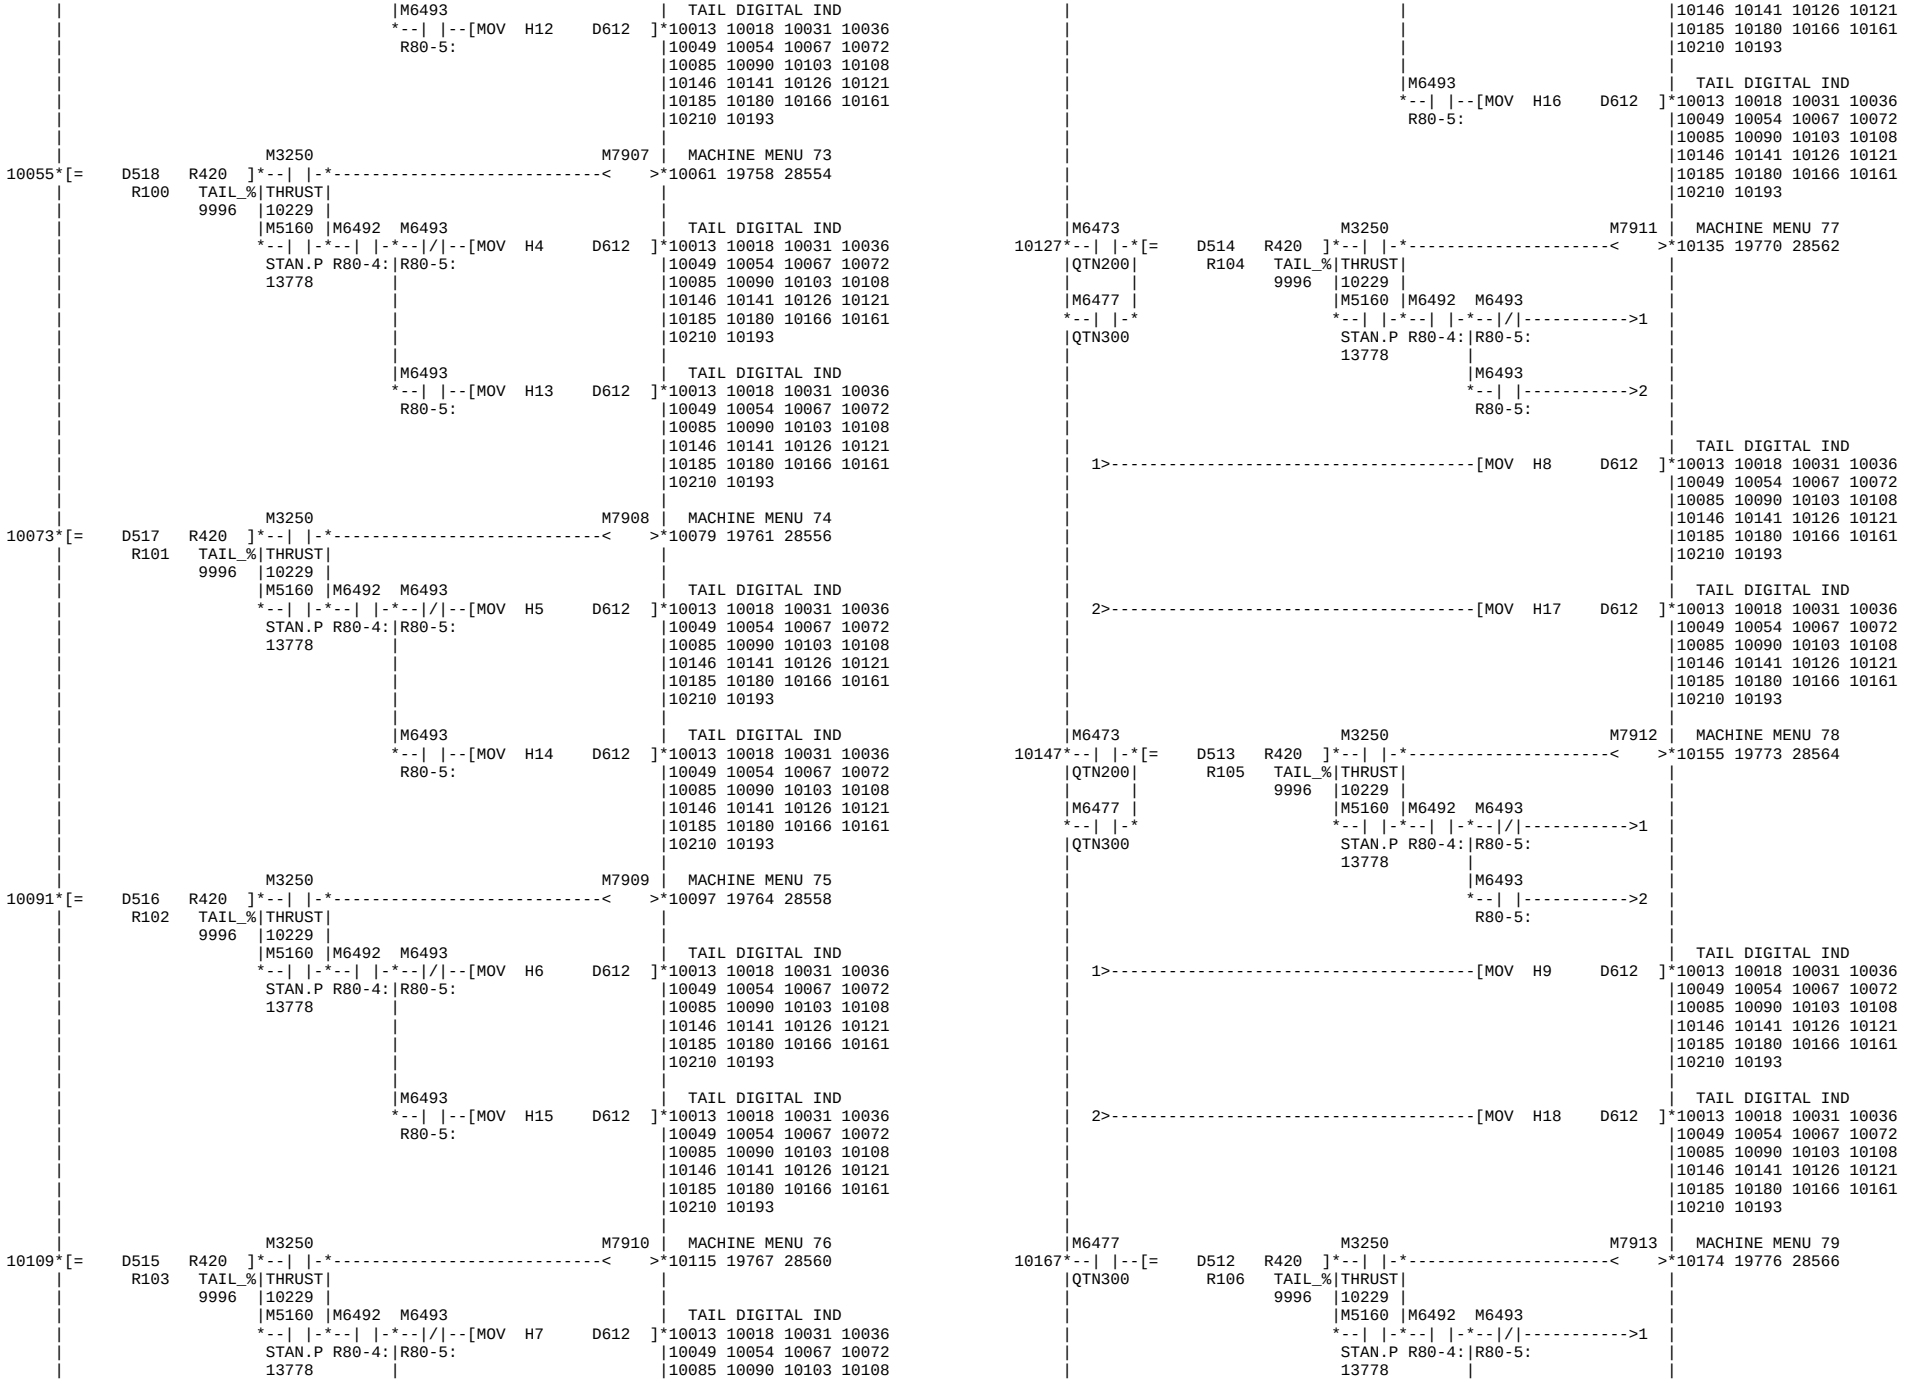

|M6427 M6421 |
--|/|----|/|-
SPFL.P HPCL.P
|M100 X10 M3033 | TURRET J2CT
9609*--|/|----| |----------<>* 9611
|RDY TCL.LS
|533
|X10 M101 M3035 | TURRET J2CT
9612*--| |----|/|-*----------<>* 9615
|TCL.LS RST |
| 543 |
|F72 |
--| |--------
|TCDTOV
|26183
|M1279 M3034 | TURRET J2CT
9616*--| |-*----------<>* 9617
|ON |
|585 |
| | M3036 | TURRET J2CT
| *----------<>* 9618
| |
| |
| | M3037 | TURRET J2CT
| *----------<>* 9619
|
|
|M3018 M100 M3085 M3074 | TURRET JOG MODE
9620*--| |----| |----| |----------<>* 9623 9338 9346 9404
|JO.T RDY TU_SOL | 9530 10562
| 533 9608 |
|M6533 M3040 | TURRET J2CT
9624*--| |----------<>* 9625
|AUTO2
|14421
|M6534 M3079 M3041 | TURRET J2CT
9626*--| |----|/|----------<>* 9628
|MANU2 TR_MOD
|14446 15564
|M3079 M3042 | TURRET J2CT
9629*--| |-*----------<>* 9630 26178
|TR_MOD|
|15564 |
| | M3054 | TURRET J2CT
| *----------<>* 9631
| |
| |
| | M3045 | TURRET J2CT
| *----------<>* 9632
|
|
|M3081 M3079 M3046 | TURRET J2CT
9633*--| |----| |----------<>* 9635
|TR_HOM TR_MOD
|15207 15564
|M3081 M3079 M7033 | TURRET HOME MODE
9636*--| |-*--| |----------<>* 9639 9637 9640 28744
|TR_HOM|TR_MOD
|15207 |15564
|M7033 |
--| |-
|T_HOME
|9639
|M7033 T138 M7934 | MACHINE MENU 96
9640*--| |----| |-*----------<>* 9643
|T_HOME LED2.T|
|9639 674 |
|M3030 |
--| |--------
|ZSF.T
|
|M1279 K4 | J2CT COMMAND 1 T
9644*--| |-*----------[MOV M3032 R7552]* 9647
|ON | *SVF_T |
|585 | 9523 |
| | K4 | J2CT COMMAND 2 T
| *----------[MOV M3048 R7553]* 9650
| ST_T |
| 9418 |
|M1279 K4 | TURRET J2CT
9651*--| |-*----------[MOV R7720 M3000]* 9654
|ON | J2STS1 |
|585 | |
| | K4 | TURRET J2CT
| *----------[MOV R7721 M3016]* 9657 9472 9478
| J2STS2 |
|
|M3069 M916 M3067 X274 M3073 | T FUNCTION FINIS
9658*--| |----| |-*--| |--[> K13 R335]-------*--| |--<>* 9674 7133
T_PSFN TFNFST	T_COIN CMDTL	TF.N
9545 7921	9492	
T102		
--| |--------	
TC.T	
9556	
M7091	
*--		--[< K12 R335]-[= K12 R7722]*
FT_FIN CMDTL J2POS
9675*----------[RET]*
P44	M1279	TAIL POS.1 +INP
9676*--| |-*----------[D+ R8090 D562 D696]* 9680 10347
ON	TLST1L R119L
585	
		TAIL POS.1 -INP
----------[D- R8090 D562 D698] 9684 10350
TLST1L R119L
M1279	TAIL POS.2 +INP
9685*--| |-*----------[D+ R8092 D562 D702]* 9689 10361
ON	TLST2L R119L
585	
		TAIL POS.2 -INP
----------[D- R8092 D562 D704] 9693 10364
TLST2L R119L
M1279	J2CT:MULTI BUFFE
9694*--| |-*----------[MOV K0 R7665]* 9697
ON	
585	
		TAIL THRUST (KN)
----------[MOV R424 R8094] 9700
TAL_kN
9787
	TAIL DROOP PULS(
9701*[= K0 R7929]*----------[MOV R7942 R2201]* 9706
MLTBFR	MLBF3
		TAIL DROOP PULS(
----------[MOV R7943 R2200] 9709 9713 9720
	MLBF4
	M6477	CALUCLATE REG.
*--	/	--[D* R2200 K5000 D930]* 1282 1286 2282 2284
	QTN300 TLDROP	2289 2291 2304 2306
	9709	2521 2523 2526 3300
		6493 6490 3321 3306
		6505 6502 6499 6496
		6595 6589 6511 6507
		6620 6612 6608 6604
		6654 6635 6632 6626
		6675 6668 6663 6660
		9729 9726 9723 9716
		12911 12907 9735 9731
		12931 12924 12919 12916
		13463 13453 13443 12933
		13498 13490 13481 13473
		13519 13516 13514 13506

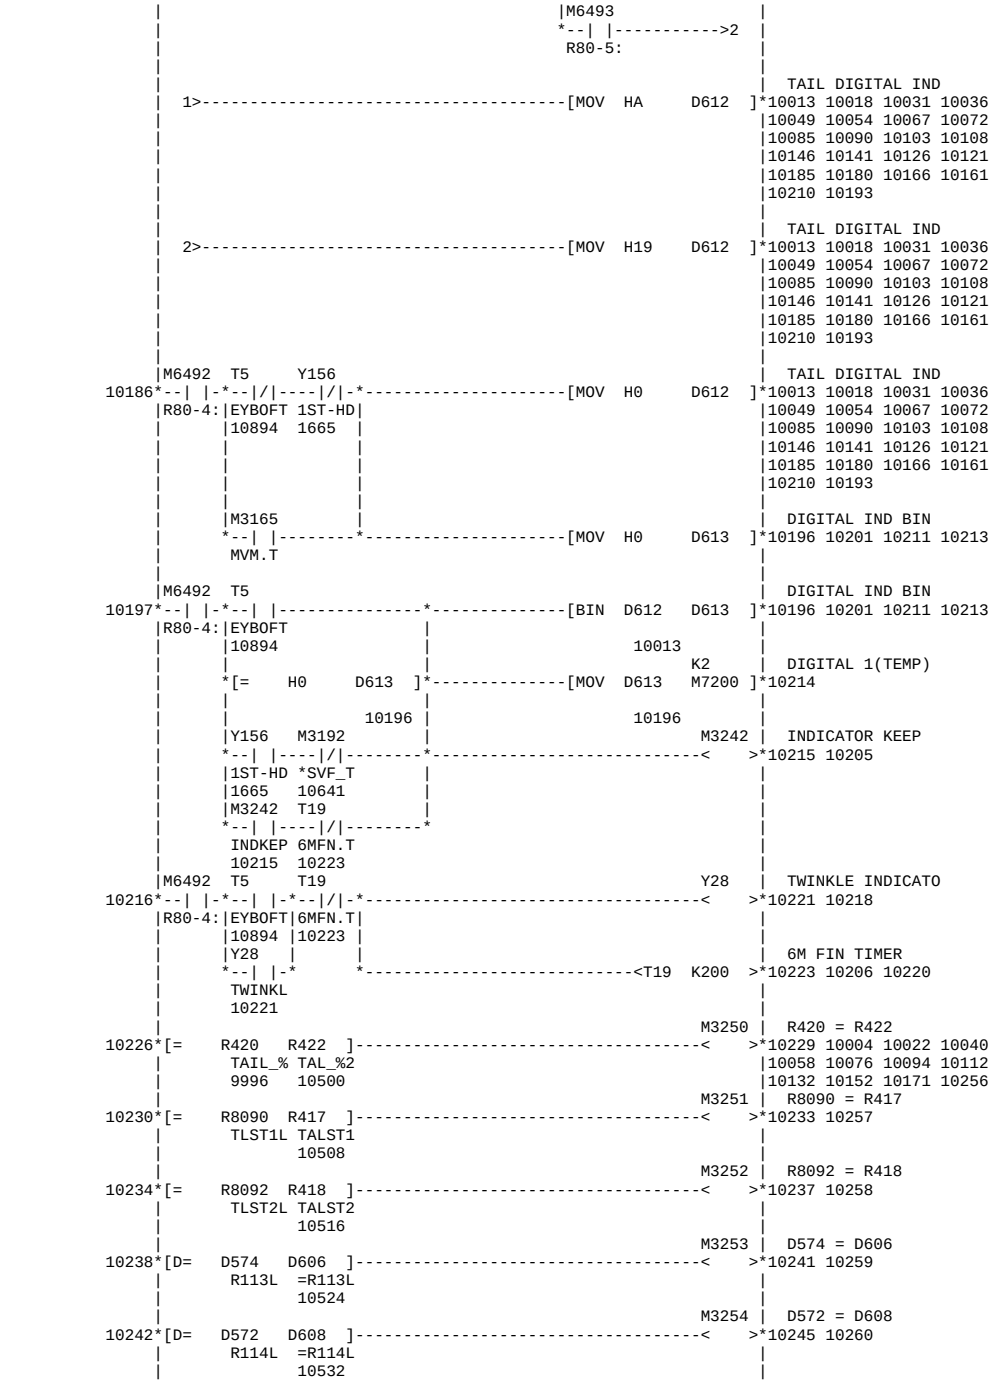

M6477
CALUCLATE REG.
QTN300
TLDROP
9709
R2200 K6000 D930
M6473
CALUCLATE REG.
Ltemp0
1282
R7910 D930 R2204
10597 1282
M1279
TAIL DROOP(L)
TAIL POS FB(L)
TAIL POS. FB (L)
M741/31 POS.-IMP
M741/31 POS.+IMP
M742 POS.-IMP
M742 POS.+IMP
M741STOP IMP OK
M742STOP IMP OK
THRUST SET
TAIL THRUST (N)
TAIL THRUST (N)

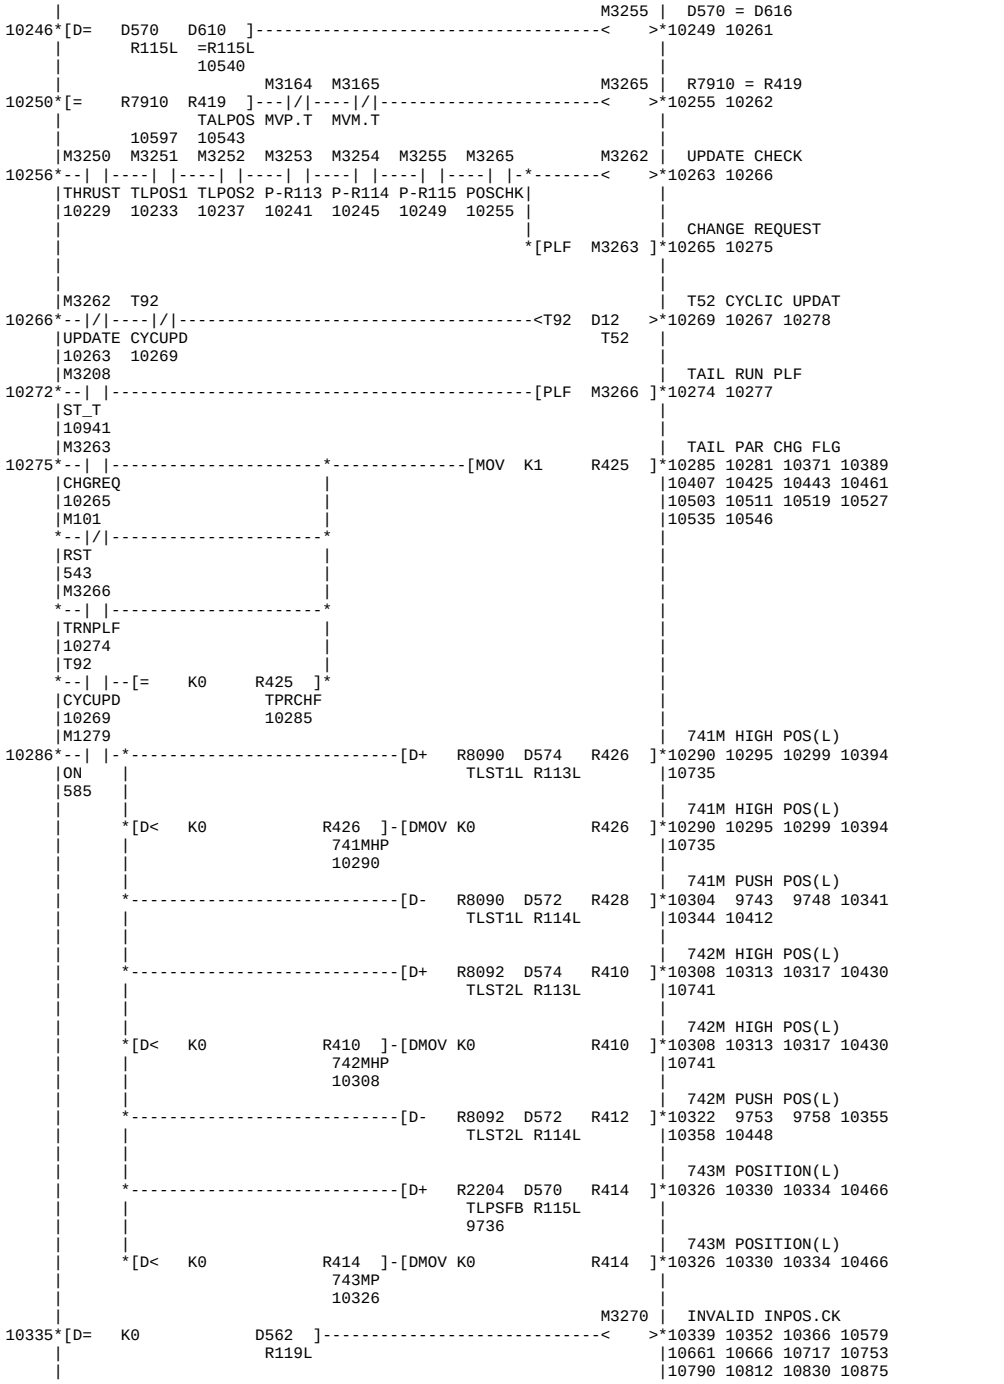

|M6477 |M6471 | TAIL THRUST (N)
--| |---| |----------[MOV K15 R424]* 9787 9699 9796 9801
QTN300 1500.P | 9811 9820 9825 9835
| 9844 9849 9859 9868
| 9897 9892 9883 9873
| 9931 9921 9916 9907
| 9964 9959 9945 9940
| 9992 9983 9978
|M6991 | THRUST SET
9802*--| |-*----------[MOV D520 R423]* 9782 9806 9830 9854
|TTR2M | R98 | 9878 9902 9926 9954
|15050 | | 9973 9989 9995
|M5434 |M6473 | TAIL THRUST (N)
--| |---|/|----------[MOV K8 R424]* 9787 9699 9796 9801
|732M |QTN200 | 9811 9820 9825 9835
|16942 | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
|M6473 M6471 | TAIL THRUST (N)
--| |---|/|----------[MOV K15 R424]* 9787 9699 9796 9801
|QTN200|1500.P | 9811 9820 9825 9835
| | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
|M6477 |M6471 | TAIL THRUST (N)
--| |---| |----------[MOV K20 R424]* 9787 9699 9796 9801
QTN300 1500.P | 9811 9820 9825 9835
| 9844 9849 9859 9868
| 9897 9892 9883 9873
| 9931 9921 9916 9907
| 9964 9959 9945 9940
| 9992 9983 9978
|M6992 | THRUST SET
9826*--| |-*----------[MOV D519 R423]* 9782 9806 9830 9854
|TTR3M | R99 | 9878 9902 9926 9954
|15055 | | 9973 9989 9995
|M5435 |M6473 | TAIL THRUST (N)
--| |---|/|----------[MOV K10 R424]* 9787 9699 9796 9801
|733M |QTN200 | 9811 9820 9825 9835
|16947 | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
|M6473 M6471 | TAIL THRUST (N)
--| |---|/|----------[MOV K20 R424]* 9787 9699 9796 9801
|QTN200|1500.P | 9811 9820 9825 9835
| | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
|M6477 |M6471 | TAIL THRUST (N)
--| |---| |----------[MOV K25 R424]* 9787 9699 9796 9801
QTN300 1500.P | 9811 9820 9825 9835
| 9844 9849 9859 9868
| 9897 9892 9883 9873
| 9931 9921 9916 9907
| 9964 9959 9945 9940
| 9992 9983 9978
|M6993 | THRUST SET
9850*--| |-*----------[MOV D518 R423]* 9782 9806 9830 9854
|TTR4M | R100 | 9878 9902 9926 9954
|15060 | | 9973 9989 9995
|M5436 |M6473 | TAIL THRUST (N)
--| |---|/|----------[MOV K12 R424]* 9787 9699 9796 9801
|734M |QTN200 | 9811 9820 9825 9835
|16952 | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
|M6473 M6471 | TAIL THRUST (N)
--| |---|/|----------[MOV K25 R424]* 9787 9699 9796 9801
|QTN200|1500.P | 9811 9820 9825 9835
| | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
|M6477 |M6471 | TAIL THRUST (N)
--| |---| |----------[MOV K30 R424]* 9787 9699 9796 9801
QTN300 1500.P | 9811 9820 9825 9835
| 9844 9849 9859 9868
| 9897 9892 9883 9873
| 9931 9921 9916 9907
| 9964 9959 9945 9940
| 9992 9983 9978
|M6994 | THRUST SET
9874*--| |-*----------[MOV D517 R423]* 9782 9806 9830 9854
|TTR5M | R101 | 9878 9902 9926 9954
|15065 | | 9973 9989 9995
|M5437 |M6473 | TAIL THRUST (N)
--| |---|/|----------[MOV K15 R424]* 9787 9699 9796 9801
|735M |QTN200 | 9811 9820 9825 9835
|16957 | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
|M6473 M6471 | TAIL THRUST (N)
--| |---|/|----------[MOV K30 R424]* 9787 9699 9796 9801
|QTN200|1500.P | 9811 9820 9825 9835
| | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
|M6477 |M6471 | TAIL THRUST (N)
--| |---| |----------[MOV K40 R424]* 9787 9699 9796 9801
QTN300 1500.P | 9811 9820 9825 9835
| 9844 9849 9859 9868
| 9897 9892 9883 9873
| 9931 9921 9916 9907
| 9964 9959 9945 9940
| 9992 9983 9978
|M6995 | THRUST SET
9898*--| |-*----------[MOV D516 R423]* 9782 9806 9830 9854
|TTR6M | R102 | 9878 9902 9926 9954
|15070 | | 9973 9989 9995
|M5438 |M6473 | TAIL THRUST (N)
--| |---|/|----------[MOV K17 R424]* 9787 9699 9796 9801
|736M |QTN200 | 9811 9820 9825 9835
|16962 | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
|M6473 M6471 | TAIL THRUST (N)
--| |---|/|----------[MOV K40 R424]* 9787 9699 9796 9801
|QTN200|1500.P | 9811 9820 9825 9835
| | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
|M6477 |M6471 | TAIL THRUST (N)
--| |---| |----------[MOV K50 R424]* 9787 9699 9796 9801
QTN300 1500.P | 9811 9820 9825 9835
| 9844 9849 9859 9868
| 9897 9892 9883 9873
| 9931 9921 9916 9907
| 9964 9959 9945 9940
| 9992 9983 9978
|M6996 | THRUST SET
9922*--| |-*----------[MOV D515 R423]* 9782 9806 9830 9854
|TTR7M | R103 | 9878 9902 9926 9954
|15075 | | 9973 9989 9995

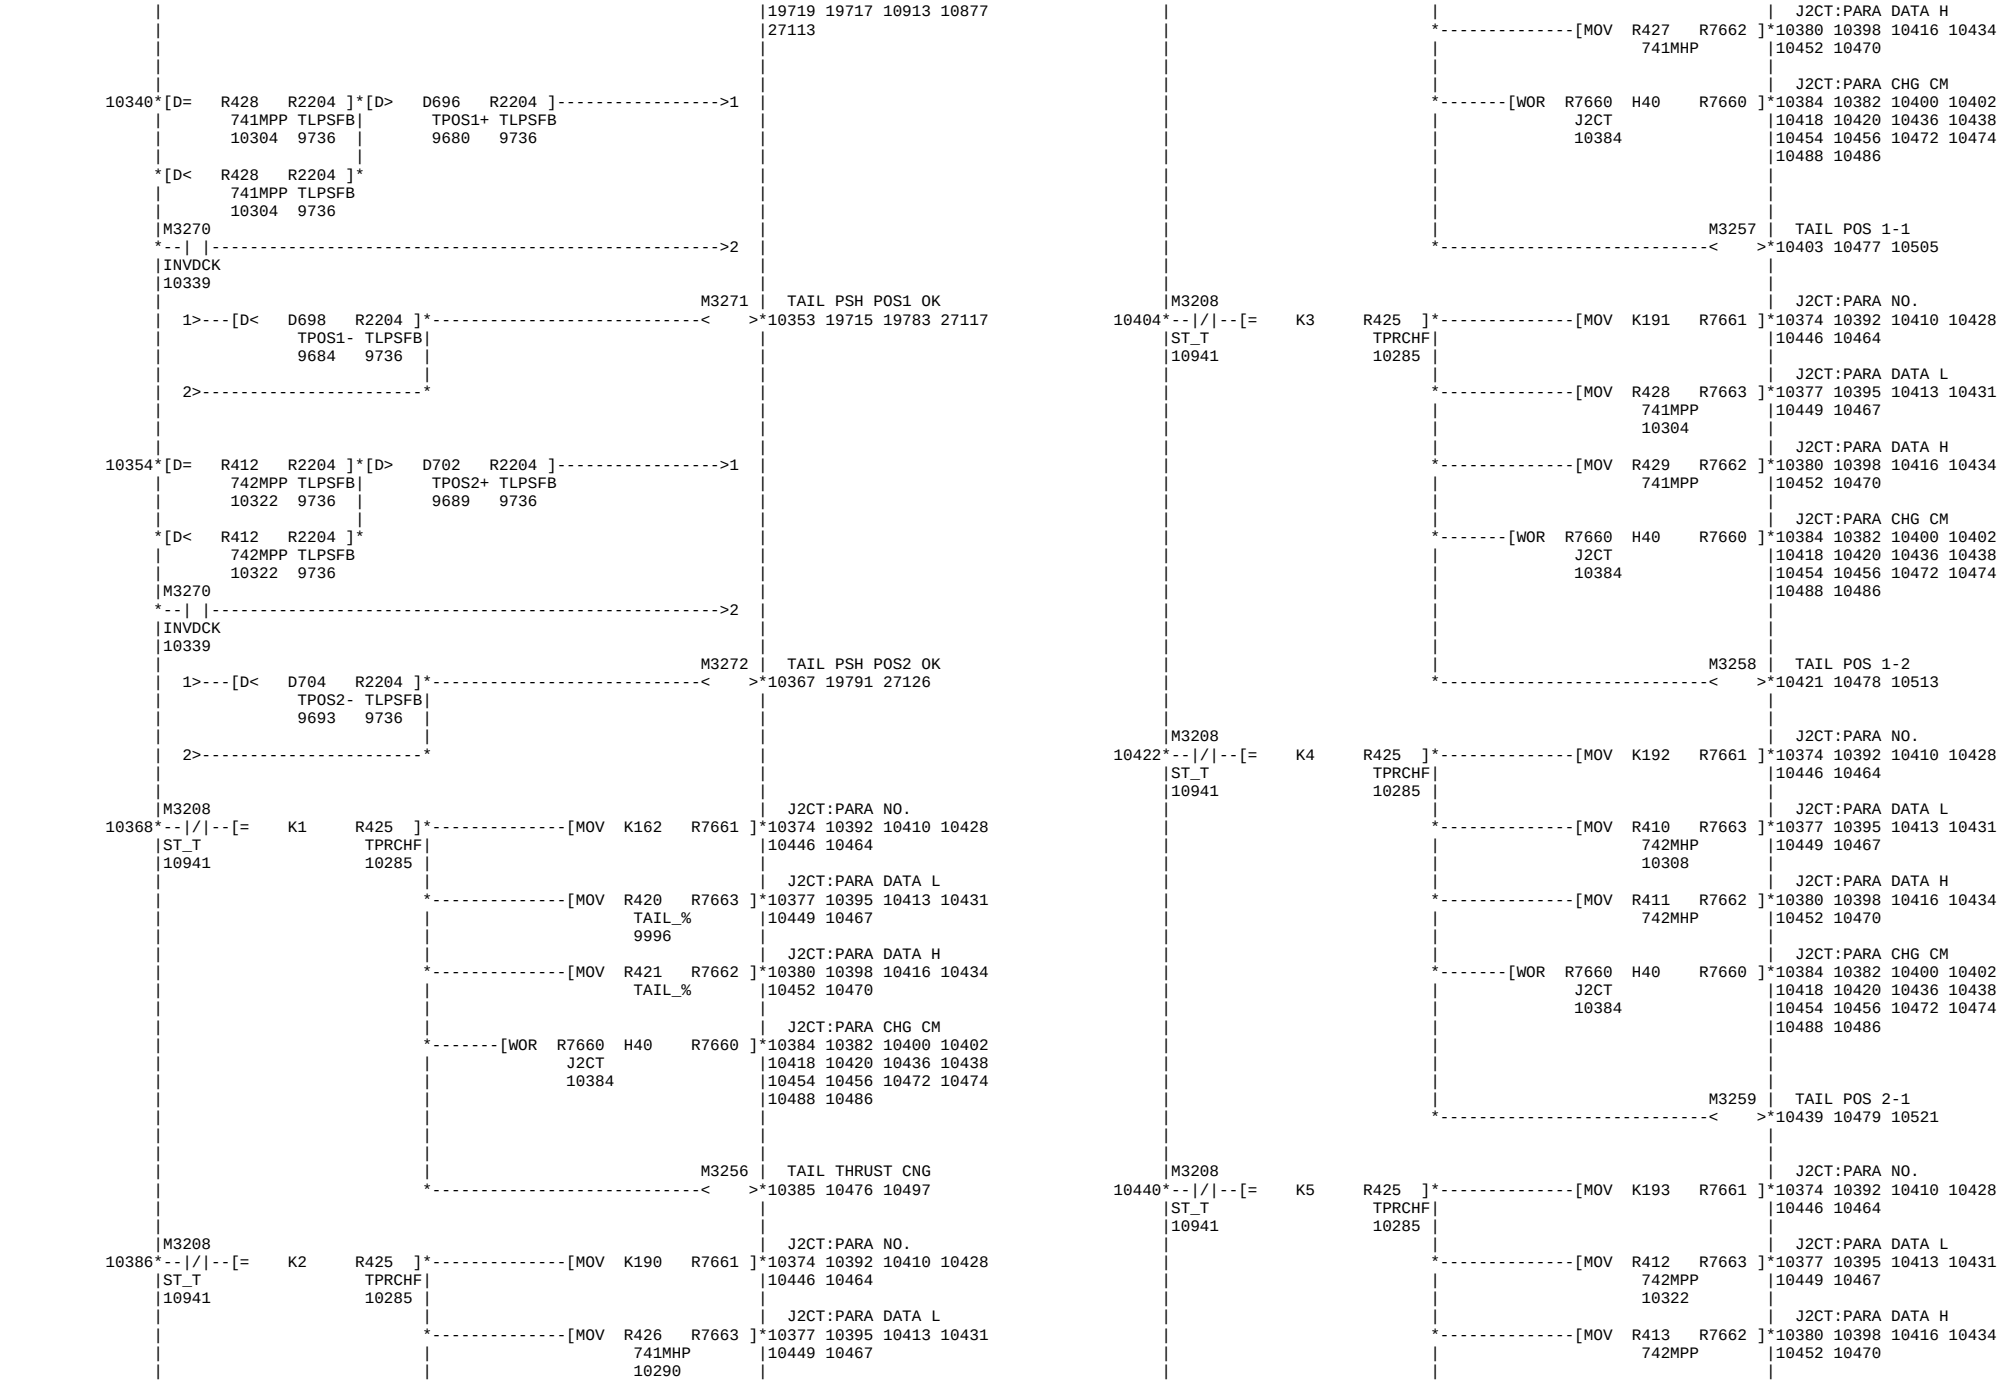

|M5439 |M6473 | TAIL THRUST (N)
--| |---|/|----------[MOV K20 R424]* 9787 9699 9796 9801
|737M |QTN200 | 9811 9820 9825 9835
|16967 | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
| |M6473 M6471 | TAIL THRUST (N)
| *--| |-*--|/|----------[MOV K50 R424]* 9787 9699 9796 9801
| |QTN200|1500.P | 9811 9820 9825 9835
| | | | 9844 9849 9859 9868
| | | | 9897 9892 9883 9873
| | | | 9931 9921 9916 9907
| | | | 9964 9959 9945 9940
| | | | 9992 9983 9978
| |M6477 |M6471 | TAIL THRUST (N)
| *--| |-*--| |----------[MOV K60 R424]* 9787 9699 9796 9801
| QTN300 1500.P | 9811 9820 9825 9835
| | 9844 9849 9859 9868
| | 9897 9892 9883 9873
| | 9931 9921 9916 9907
| | 9964 9959 9945 9940
| | 9992 9983 9978
|M6997 M6473 | THRUST SET
9946*--| |-*--| |-*----------[MOV D514 R423]* 9782 9806 9830 9854
|TTR8M |QTN200| R104 | 9878 9902 9926 9954
|15080 | | | 9973 9989 9995
|M5440 |M6477 | |
--| |---| |-* |
|738M |QTN300 | |
|16972 | | |
| |M6473 | TAIL THRUST (N)
| *--| |----------[MOV K60 R424]* 9787 9699 9796 9801
| |QTN200 | 9811 9820 9825 9835
| | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
| |M6477 | TAIL THRUST (N)
| *--| |----------[MOV K70 R424]* 9787 9699 9796 9801
| QTN300 | 9811 9820 9825 9835
| | 9844 9849 9859 9868
| | 9897 9892 9883 9873
| | 9931 9921 9916 9907
| | 9964 9959 9945 9940
| | 9992 9983 9978
|M6998 M6473 | THRUST SET
9965*--| |-*--| |-*----------[MOV D513 R423]* 9782 9806 9830 9854
|TTR9M |QTN200| R105 | 9878 9902 9926 9954
|15085 | | | 9973 9989 9995
|M5441 |M6477 | |
--| |---| |-* |
|739M |QTN300 | |
|16977 | | |
| |M6473 | TAIL THRUST (N)
| *--| |----------[MOV K70 R424]* 9787 9699 9796 9801
| |QTN200 | 9811 9820 9825 9835
| | | 9844 9849 9859 9868
| | | 9897 9892 9883 9873
| | | 9931 9921 9916 9907
| | | 9964 9959 9945 9940
| | | 9992 9983 9978
| |M6477 | TAIL THRUST (N)
| *--| |----------[MOV K85 R424]* 9787 9699 9796 9801
| QTN300 | 9811 9820 9825 9835
| | 9844 9849 9859 9868
| | 9897 9892 9883 9873
| | 9931 9921 9916 9907
| | 9964 9959 9945 9940
| | 9992 9983 9978
|M6999 M6477 | THRUST SET
9984*--| |-*--| |-*----------[MOV D512 R423]* 9782 9806 9830 9854
|TTR10M|QTN300| R106 | 9878 9902 9926 9954
|15090 | | | 9973 9989 9995

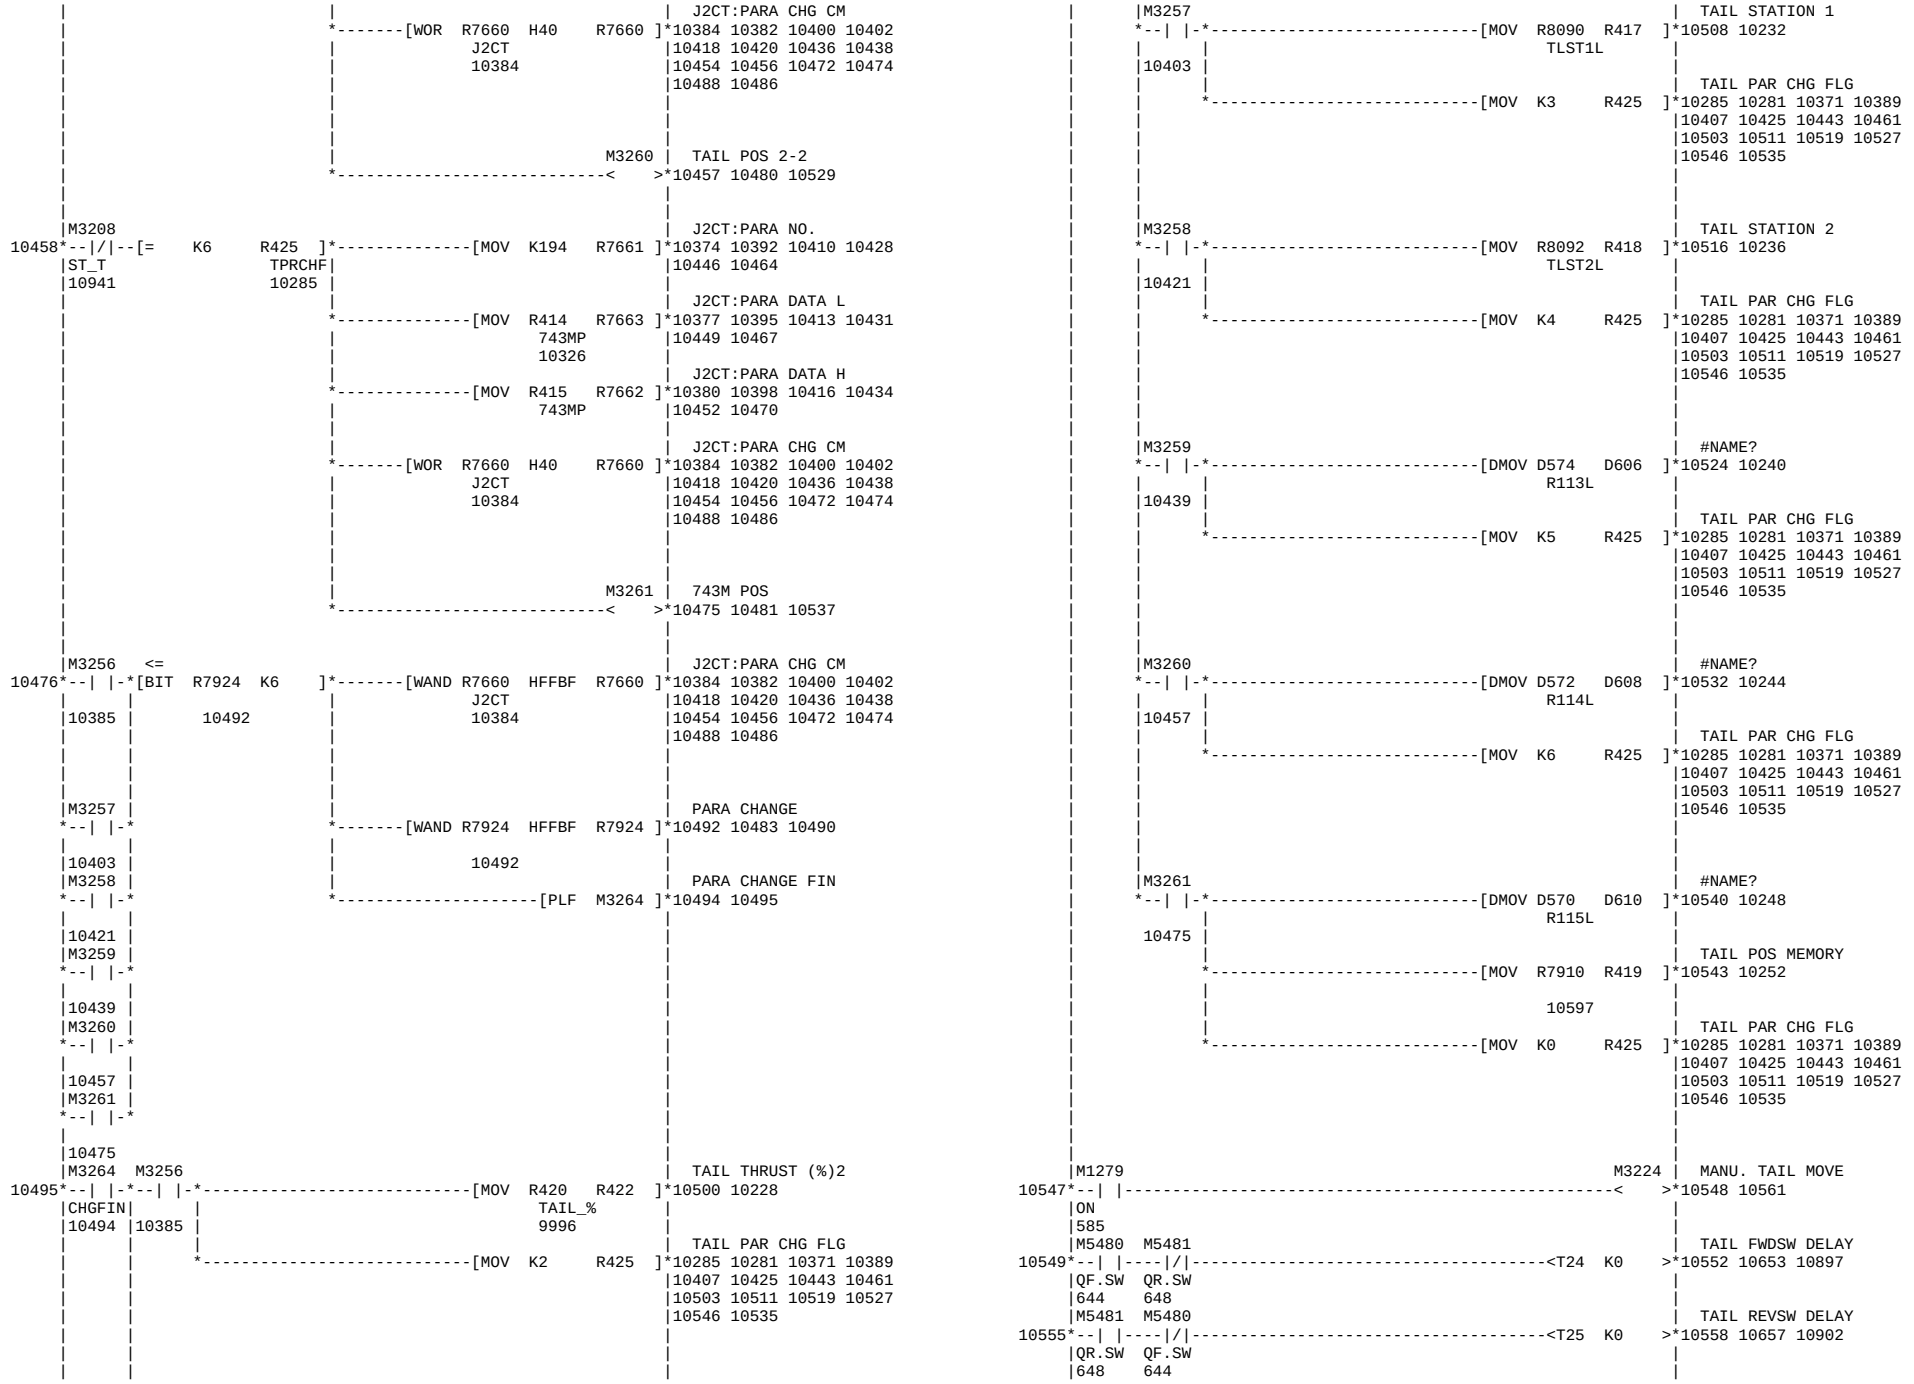

|M5442 | | | TAIL THRUST (N)
--| |- *----------[MOV K100 R424]* 9787 9699 9796 9801
|740M | 9811 9820 9825 9835
|16982 | 9844 9849 9859 9868
| | 9897 9892 9883 9873
| | 9931 9921 9916 9907
| | 9964 9959 9945 9940
| | 9992 9983 9978
|M3239 | TAIL THRUST (%)L
9993*--|/|----------[MOV R423 R420]* 9996 10000 10003 10021
|TR_MOD TH-SET |10039 10057 10075 10093
|15557 9782 |10111 10131 10151 10170
| |10499 10376 10227
|M3239 | TAIL THRUST (%)L
9997*--| |----------[MOV K300 R420]* 9996 10000 10003 10021
|TR_MOD |10039 10057 10075 10093
|15557 |10111 10131 10151 10170
| |10499 10376 10227
| M3250 M7904 | MACHINE MENU 70
10001*[= D521 R420]*--| |-*----------< >*10007 15854 19750 28548
| R97 TAIL_%|THRUST| |
| 9996 |10229 | |
| |M5160 |M6492 M6493 | TAIL DIGITAL IND
| *--| |-*--| |-*--|/|--[MOV H1 D612]*10013 10018 10031 10036
| STAN.P R80-4:|R80-5: |10049 10054 10067 10072
| 13778 | |10085 10090 10103 10108
| | |10146 10141 10126 10121
| | |10185 10180 10166 10161
| | |10210 10193
| |M6493 | TAIL DIGITAL IND
| *--| |--[MOV H10 D612]*10013 10018 10031 10036
| R80-5: |10049 10054 10067 10072
| |10085 10090 10103 10108
| |10146 10141 10126 10121
| |10185 10180 10166 10161
| |10210 10193
| M3250 M7905 | MACHINE MENU 71
10019*[= D520 R420]*--| |-*----------< >*10025 19752 28550
| R98 TAIL_%|THRUST| |
| 9996 |10229 | |
| |M5160 |M6492 M6493 | TAIL DIGITAL IND
| *--| |-*--| |-*--|/|--[MOV H2 D612]*10013 10018 10031 10036
| STAN.P R80-4:|R80-5: |10049 10054 10067 10072
| 13778 | |10085 10090 10103 10108
| | |10146 10141 10126 10121
| | |10185 10180 10166 10161
| | |10210 10193
| |M6493 | TAIL DIGITAL IND
| *--| |--[MOV H11 D612]*10013 10018 10031 10036
| R80-5: |10049 10054 10067 10072
| |10085 10090 10103 10108
| |10146 10141 10126 10121
| |10185 10180 10166 10161
| |10210 10193
| M3250 M7906 | MACHINE MENU 72
10037*[= D519 R420]*--| |-*----------< >*10043 19755 28552
| R99 TAIL_%|THRUST| |
| 9996 |10229 | |
| |M5160 |M6492 M6493 | TAIL DIGITAL IND
| *--| |-*--| |-*--|/|--[MOV H3 D612]*10013 10018 10031 10036
| STAN.P R80-4:|R80-5: |10049 10054 10067 10072
| 13778 | |10085 10090 10103 10108
| | |10146 10141 10126 10121
| | |10185 10180 10166 10161
| | |10210 10193
| | |

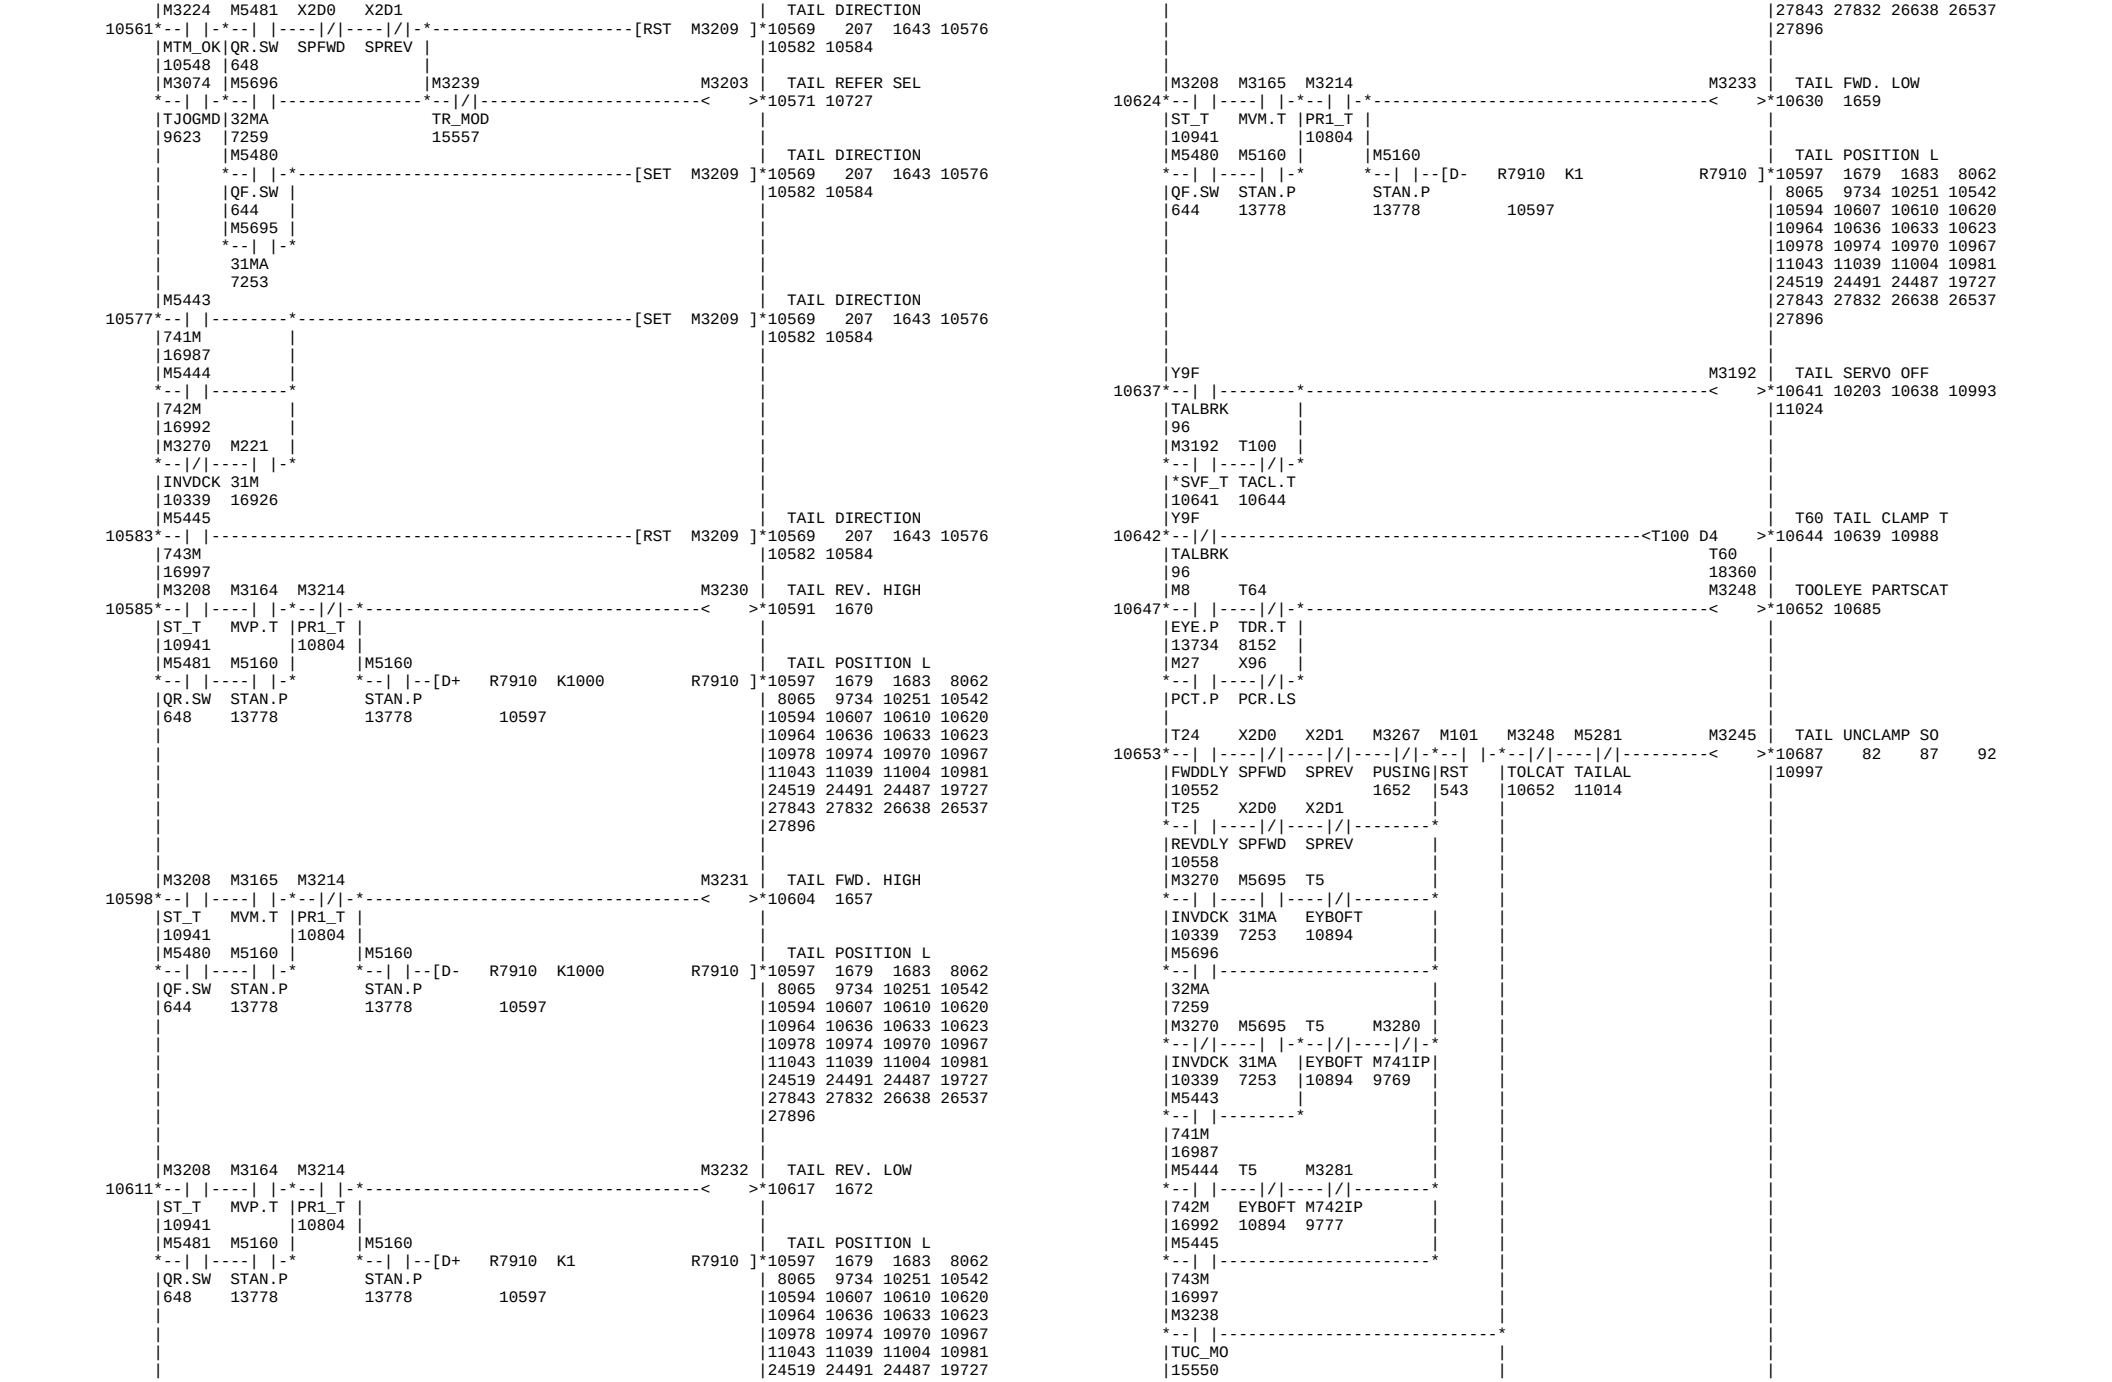

M6493
TAIL DIGITAL IND
MOV H12 D612
R80-5:
10013 10018 10031 10036
10049 10054 10067 10072
10085 10090 10103 10108
10146 10141 10126 10121
10185 10180 10166 10161
10210 10193
M3250
M7907
MACHINE MENU 73
10055 D518 R420
R100 TAIL_% THRUST
9996 10229
10061 19758 28554
M5160 M6492 M6493
STAN.P R80-4: R80-5:
13778
MOV H4 D612
M6493
TAIL DIGITAL IND
MOV H13 D612
R80-5:
M3250
M7908
MACHINE MENU 74
10073 D517 R420
R101 TAIL_% THRUST
9996 10229
10079 19761 28556
M5160 M6492 M6493
STAN.P R80-4: R80-5:
13778
MOV H5 D612
M6493
TAIL DIGITAL IND
MOV H14 D612
R80-5:
M3250
M7909
MACHINE MENU 75
10091 D516 R420
R102 TAIL_% THRUST
9996 10229
10097 19764 28558
M5160 M6492 M6493
STAN.P R80-4: R80-5:
13778
MOV H6 D612
M6493
TAIL DIGITAL IND
MOV H15 D612
R80-5:
M3250
M7910
MACHINE MENU 76
10109 D515 R420
R103 TAIL_% THRUST
9996 10229
10115 19767 28560
M5160 M6492 M6493
STAN.P R80-4: R80-5:
13778
MOV H7 D612
M6473
M3250
M7911
MACHINE MENU 77
10127 D514 R420
R104 TAIL_% THRUST
9996 10229
10135 19770 28562
QTN200
M6477
QTN300
M5160 M6492 M6493
STAN.P R80-4: R80-5:
13778
M6493
TAIL DIGITAL IND
MOV H8 D612
MOV H17 D612
M6473
M3250
M7912
MACHINE MENU 78
10147 D513 R420
R105 TAIL_% THRUST
9996 10229
10155 19773 28564
QTN200
M6477
QTN300
M5160 M6492 M6493
STAN.P R80-4: R80-5:
13778
M6493
TAIL DIGITAL IND
MOV H9 D612
MOV H18 D612
M6477
M3250
M7913
MACHINE MENU 79
10167 D512 R420
R106 TAIL_% THRUST
9996 10229
10174 19776 28566
QTN300
M5160 M6492 M6493
STAN.P R80-4: R80-5:
13778

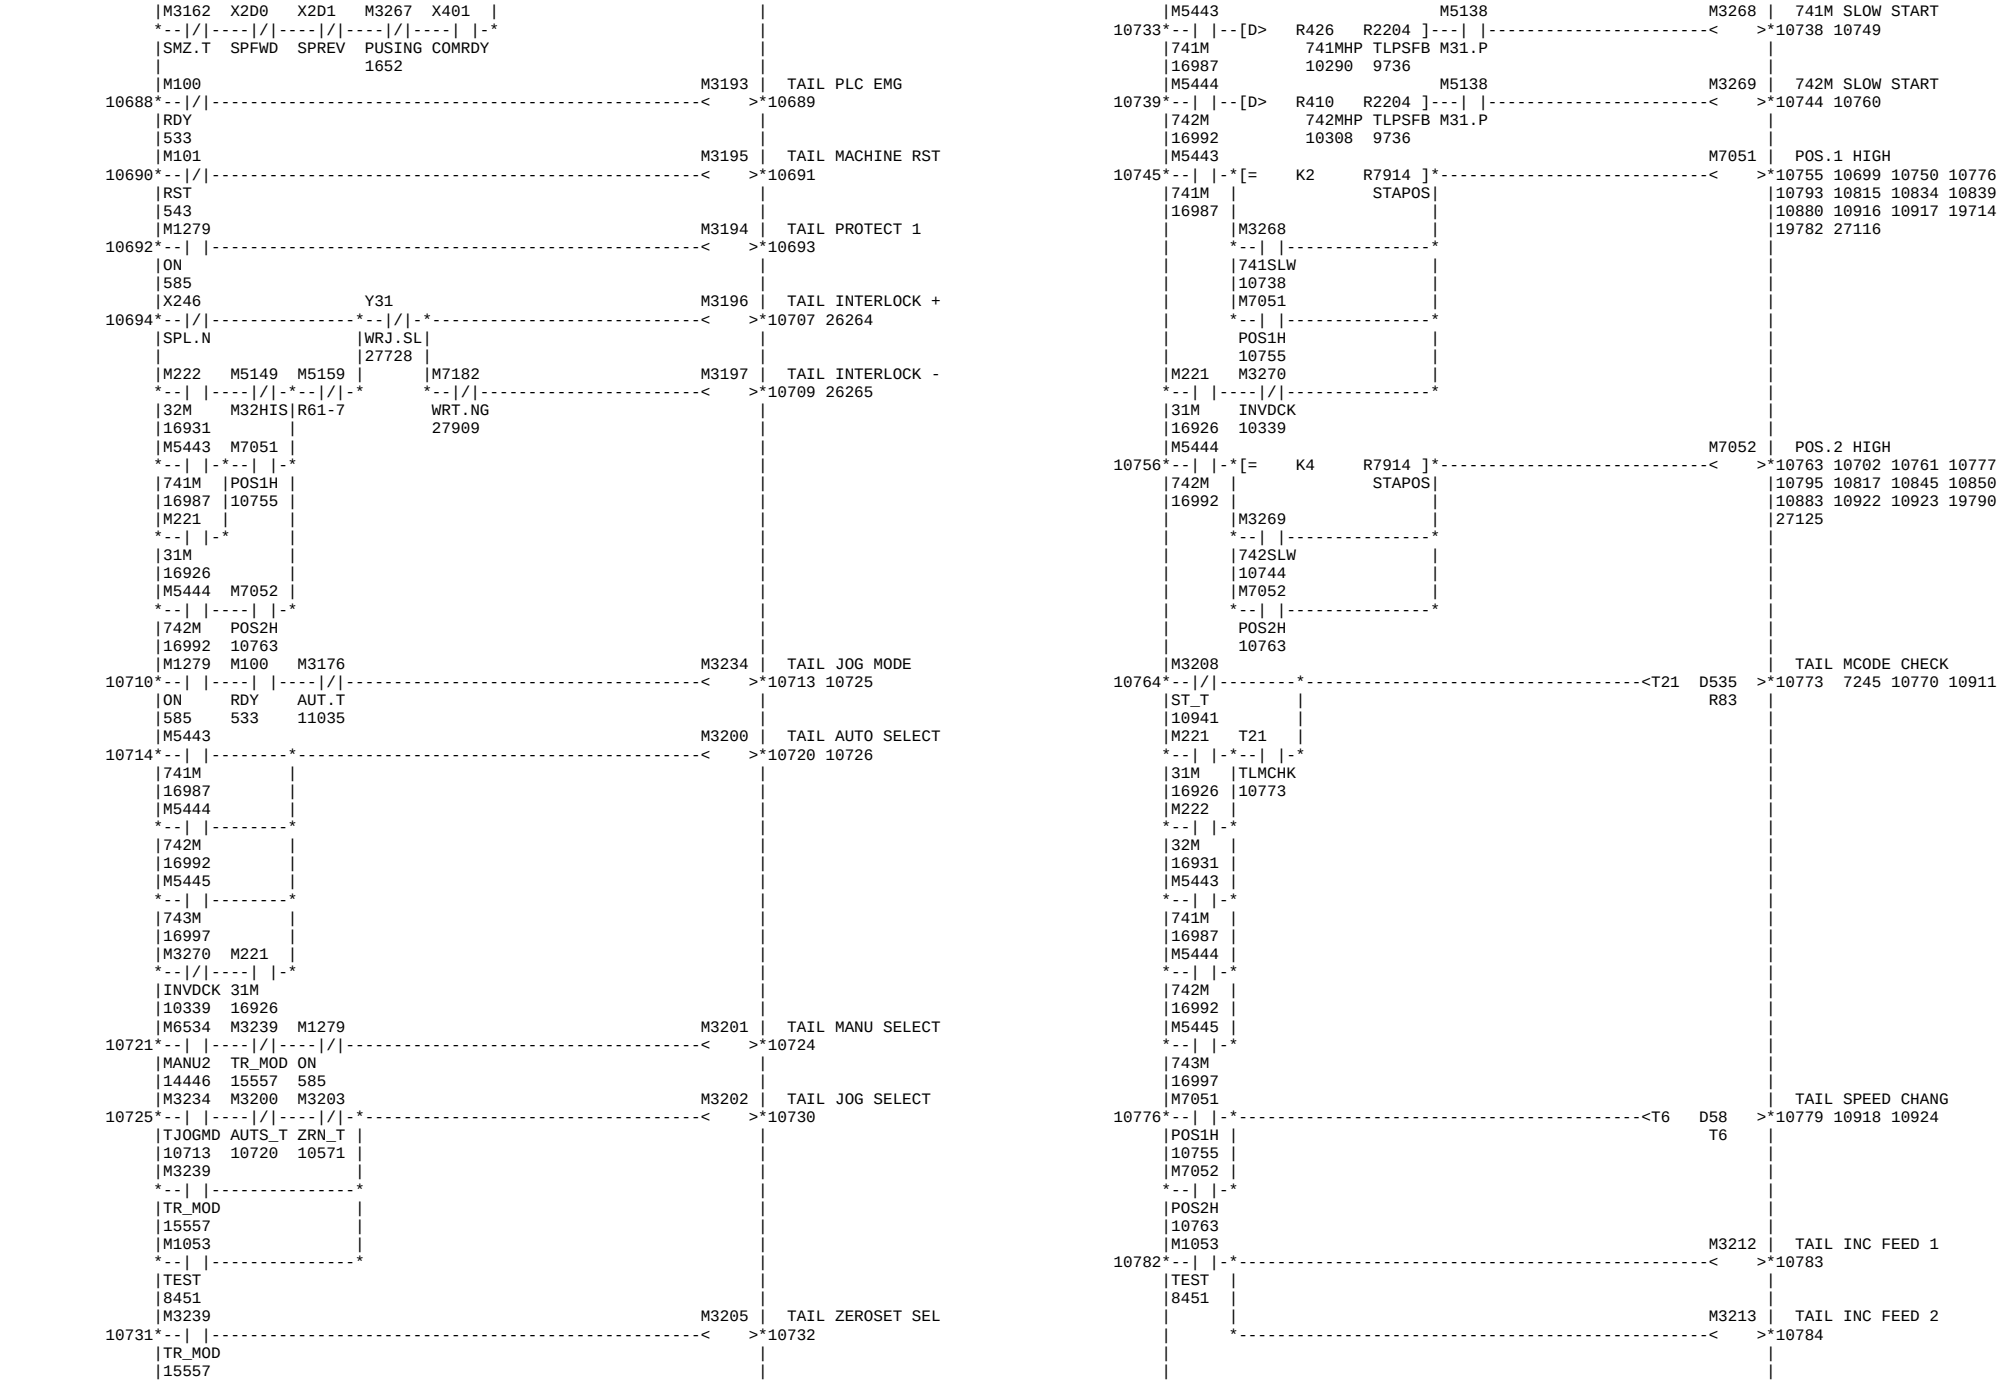

|M6493
*--| |---------->2
R80-5:
TAIL DIGITAL IND
1>[MOV HA D612]*10013 10018 10031 10036
10049 10054 10067 10072
10085 10090 10103 10108
10146 10141 10126 10121
10185 10180 10166 10161
10210 10193
TAIL DIGITAL IND
2>[MOV H19 D612]*10013 10018 10031 10036
10049 10054 10067 10072
10085 10090 10103 10108
10146 10141 10126 10121
10185 10180 10166 10161
10210 10193
M6492 T5 Y156
TAIL DIGITAL IND
10186*--| |-*--|/|----|/|-*[MOV H0 D612]*10013 10018 10031 10036
R80-4:|EYBOFT 1ST-HD|
10049 10054 10067 10072
10894 1665
10085 10090 10103 10108
10146 10141 10126 10121
10185 10180 10166 10161
10210 10193
M3165
--| |--------[MOV H0 D613]*10196 10201 10211 10213
MVM.T
M6492 T5
DIGITAL IND BIN
10197*--| |-*--| |---------------*--------------[BIN D612 D613]*10196 10201 10211 10213
R80-4:|EYBOFT
10894
10013
K2
DIGITAL 1(TEMP)
[= H0 D613]--------------[MOV D613 M7200]*10214
10196
10196
Y156 M3192
M3242
INDICATOR KEEP
--| |----|/|------------------<> *10215 10205
1ST-HD *SVF_T
1665 10641
M3242 T19
--| |----|/|--------
INDKEP 6MFN.T
10215 10223
M6492 T5 T19
Y28
TWINKLE INDICATO
10216*--| |-*--| |-*--|/|-*----------<> *10221 10218
R80-4:|EYBOFT|6MFN.T|
10894 |10223 |
Y28 | |
6M FIN TIMER
--| |- *----------<T19 K200 >*10223 10206 10220
TWINKL
10221
M3250
R420 = R422
10226*[= R420 R422]----------<> *10229 10004 10022 10040
TAIL_% TAL_%2
10058 10076 10094 10112
9996 10500
10132 10152 10171 10256
M3251
R8090 = R417
10230*[= R8090 R417]----------<> *10233 10257
TLST1L TALST1
10508
M3252
R8092 = R418
10234*[= R8092 R418]----------<> *10237 10258
TLST2L TALST2
10516
M3253
D574 = D606
10238*[D= D574 D606]----------<> *10241 10259
R113L =R113L
10524
M3254
D572 = D608
10242*[D= D572 D608]----------<> *10245 10260
R114L =R114L
10532

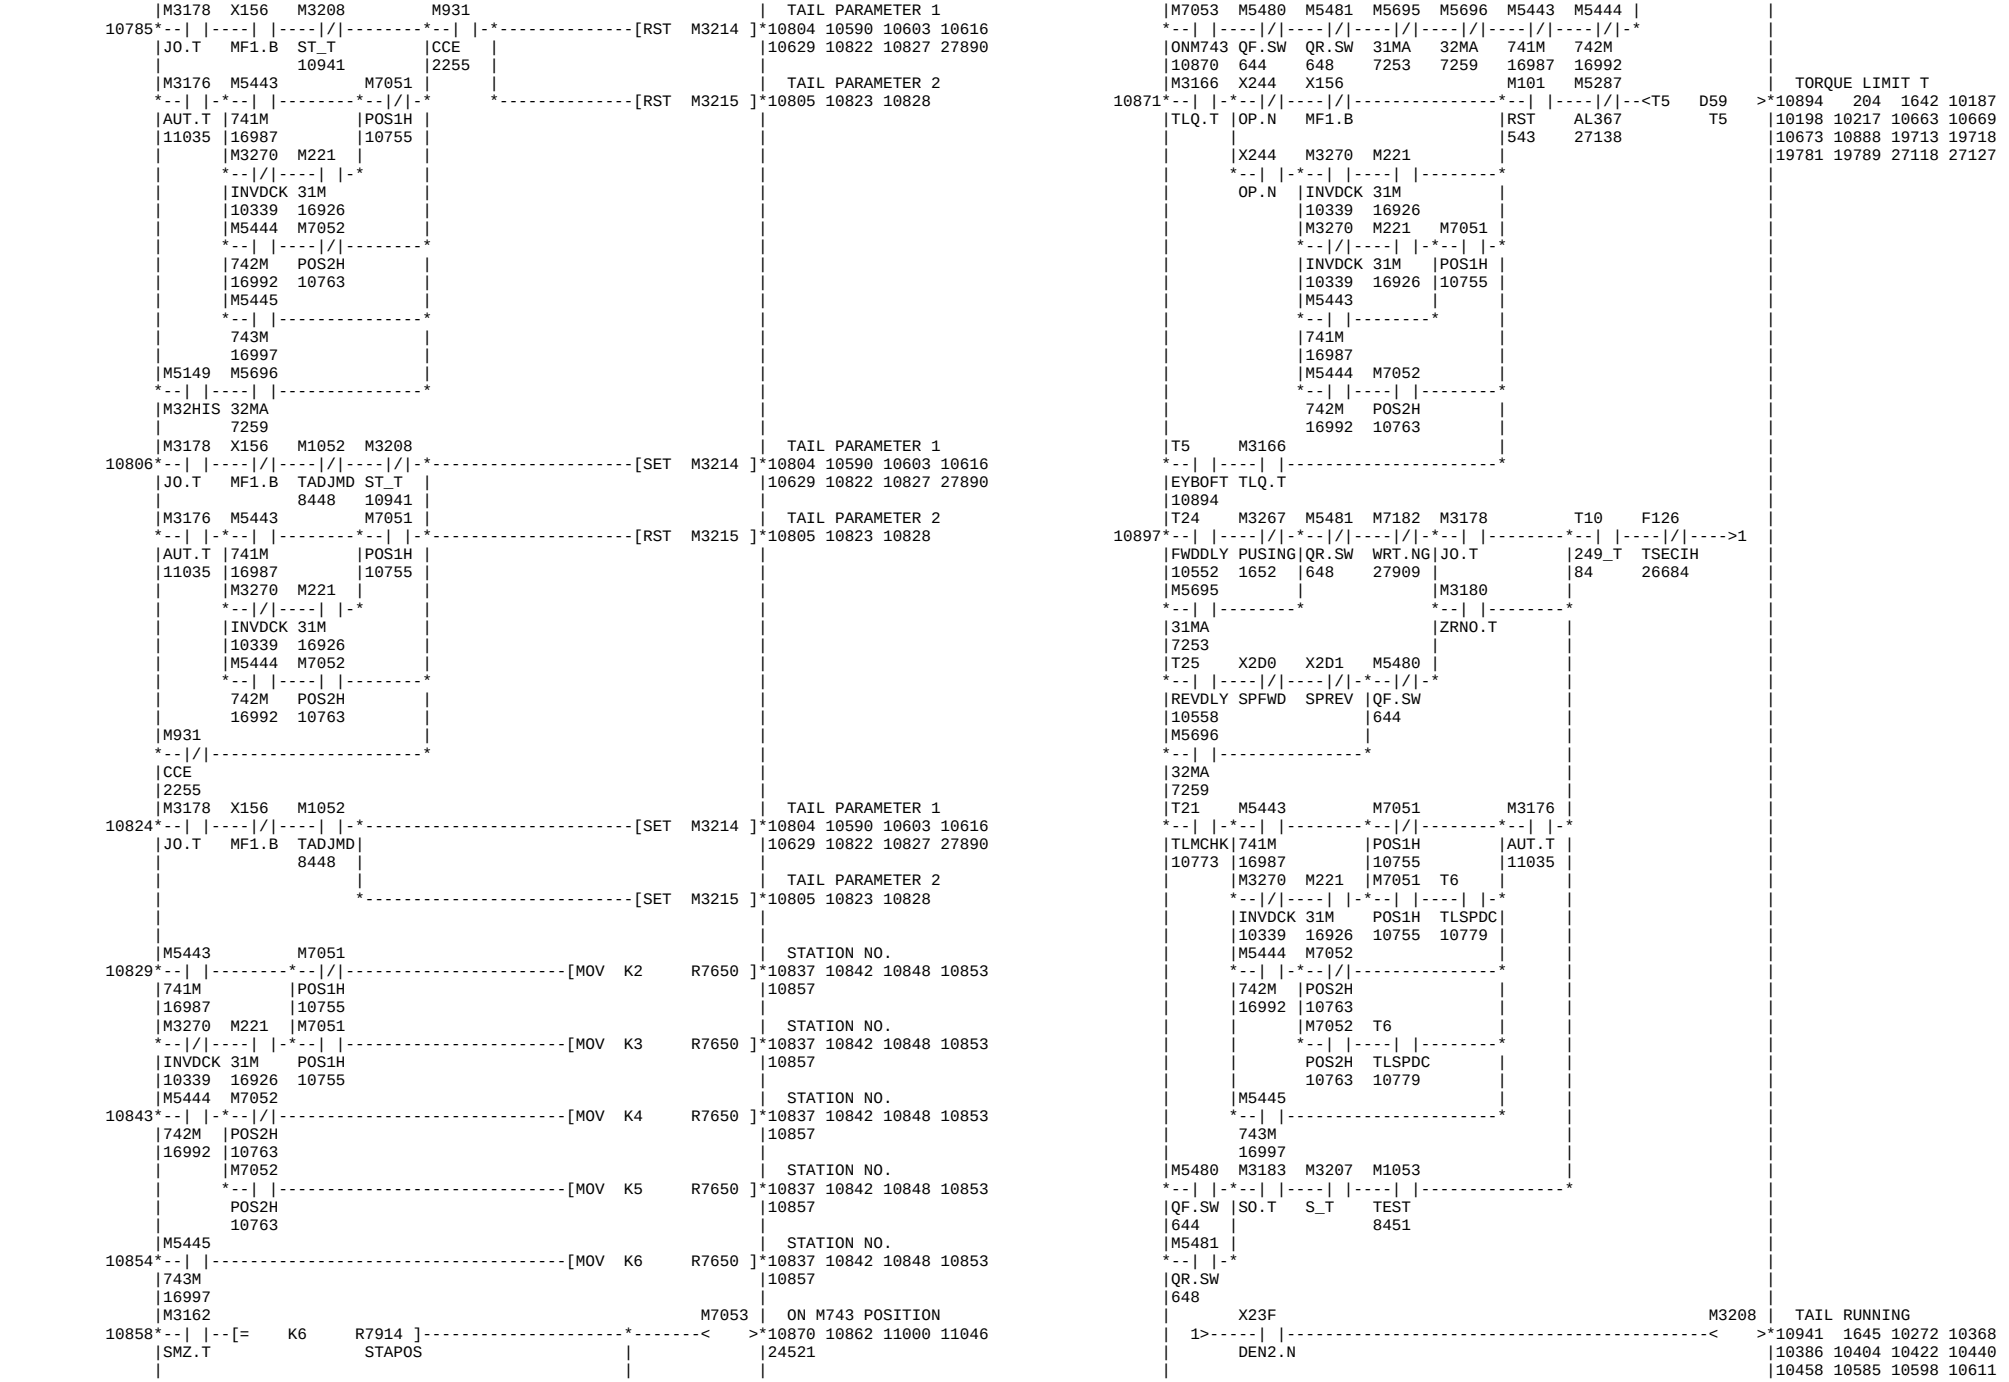

M3255
D570 = D616
10246*[D= D570 D610]----------<> *10249 10261
R115L =R115L
10540
M3164 M3165 M3265
R7910 = R419
10250*[= R7910 R419]---|/|----|/|----------<> *10255 10262
TALPOS MVP.T MVM.T
10597 10543
M3250 M3251 M3252 M3253 M3254 M3255 M3265 M3262
UPDATE CHECK
10256*--| |----| |----| |----| |----| |----| |----| |-*-------<> *10263 10266
THRUST TLPOS1 TLPOS2 P-R113 P-R114 P-R115 POSCHK|
10229 10233 10237 10241 10245 10249 10255 |
CHANGE REQUEST
*[PLF M3263]*10265 10275
M3262 T92
T52 CYCLIC UPDAT
10266*--|/|----|/|----------<T92 D12 >*10269 10267 10278
UPDATE CYCUPD
T52
10263 10269
M3208
TAIL RUN PLF
10272*--| |----------[PLF M3266]*10274 10277
ST_T
10941
M3263
TAIL PAR CHG FLG
10275*--| |----------*----------[MOV K1 R425]*10285 10281 10371 10389
CHGREQ
10265
10407 10425 10443 10461
10503 10511 10519 10527
M101
10535 10546
--|/|----------
RST
543
M3266
--| |----------
TRNPLF
10274
T92
--| |--[= K0 R425]
CYCUPD
TPRCHF
10269
10285
M1279
741M HIGH POS(L)
10286*--| |-*----------[D+ R8090 D574 R426]*10290 10295 10299 10394
ON
TLST1L R113L
10735
585
741M HIGH POS(L)
*[D< K0 R426]-[DMOV K0 R426]*10290 10295 10299 10394
741MHP
10290
10735
741M PUSH POS(L)
*----------[D- R8090 D572 R428]*10304 9743 9748 10341
TLST1L R114L
10344 10412
742M HIGH POS(L)
*----------[D+ R8092 D574 R410]*10308 10313 10317 10430
TLST2L R113L
10741
742M HIGH POS(L)
*[D< K0 R410]-[DMOV K0 R410]*10308 10313 10317 10430
742MHP
10308
10741
742M PUSH POS(L)
*----------[D- R8092 D572 R412]*10322 9753 9758 10355
TLST2L R114L
10358 10448
743M POSITION(L)
*----------[D+ R2204 D570 R414]*10326 10330 10334 10466
TLPSFB R115L
9736
743M POSITION(L)
*[D< K0 R414]-[DMOV K0 R414]*10326 10330 10334 10466
743MP
10326
M3270
INVALID INPOS.CK
10335*[D= K0 D562]----------<> *10339 10352 10366 10579
R119L
10661 10666 10717 10753
10790 10812 10830 10875

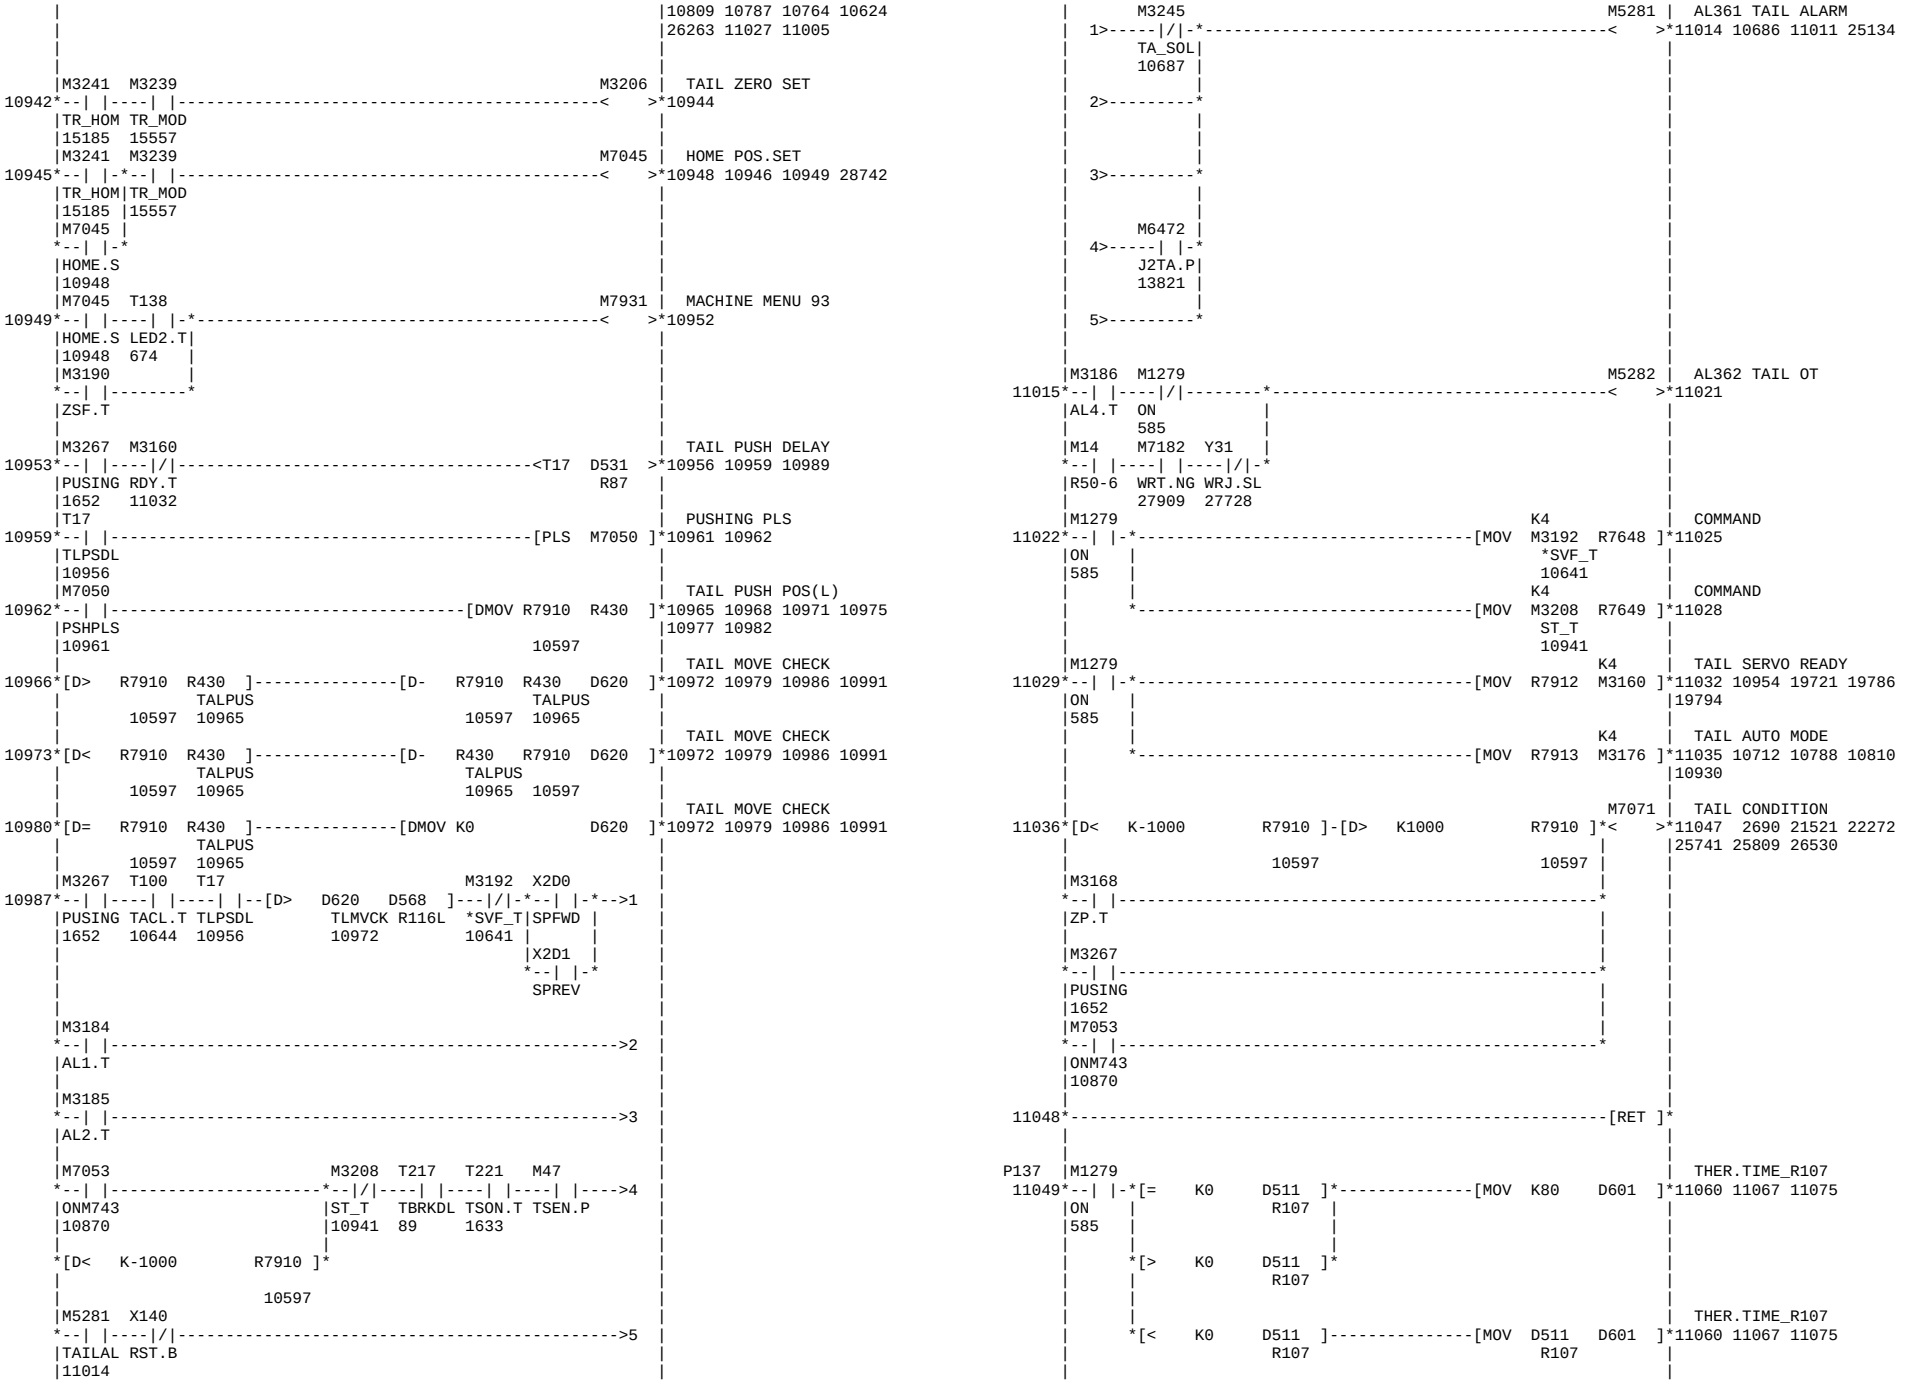

19719 19717 10913 10877
27113
10340*[D= R428 R2204]*[D> D696 R2204]----------->1
741MPP TLPSFB| TPOS1+ TLPSFB
10304 9736 | 9680 9736
[D< R428 R2204]
741MPP TLPSFB
10304 9736
M3270
*--| |----------->2
INVDCK
10339
M3271 | TAIL PSH POS1 OK
1>---[D< D698 R2204]*----------< >*10353 19715 19783 27117
TPOS1- TLPSFB|
9684 9736 |
2>----------*
10354*[D= R412 R2204]*[D> D702 R2204]----------->1
742MPP TLPSFB| TPOS2+ TLPSFB
10322 9736 | 9689 9736
[D< R412 R2204]
742MPP TLPSFB
10322 9736
M3270
*--| |----------->2
INVDCK
10339
M3272 | TAIL PSH POS2 OK
1>---[D< D704 R2204]*----------< >*10367 19791 27126
TPOS2- TLPSFB|
9693 9736 |
2>----------*
M3208 | J2CT:PARA NO.
10368*--|/|--[= K1 R425]*----------[MOV K162 R7661]*10374 10392 10410 10428
ST_T TPRCHF| |10446 10464
10941 10285 |
| J2CT:PARA DATA L
*----------[MOV R420 R7663]*10377 10395 10413 10431
TAIL_% |10449 10467
9996
| J2CT:PARA DATA H
*----------[MOV R421 R7662]*10380 10398 10416 10434
TAIL_% |10452 10470
| J2CT:PARA CHG CM
*-------[WOR R7660 H40 R7660]*10384 10382 10400 10402
J2CT |10418 10420 10436 10438
10384 |10454 10456 10472 10474
|10488 10486
M3256 | TAIL THRUST CNG
*----------< >*10385 10476 10497
M3208 | J2CT:PARA NO.
10386*--|/|--[= K2 R425]*----------[MOV K190 R7661]*10374 10392 10410 10428
ST_T TPRCHF| |10446 10464
10941 10285 |
| J2CT:PARA DATA L
*----------[MOV R426 R7663]*10377 10395 10413 10431
741MHP |10449 10467
10290 |
| J2CT:PARA DATA H
*----------[MOV R427 R7662]*10380 10398 10416 10434
741MHP |10452 10470
| J2CT:PARA CHG CM
*-------[WOR R7660 H40 R7660]*10384 10382 10400 10402
J2CT |10418 10420 10436 10438
10384 |10454 10456 10472 10474
|10488 10486
M3257 | TAIL POS 1-1
*----------< >*10403 10477 10505
M3208 | J2CT:PARA NO.
10404*--|/|--[= K3 R425]*----------[MOV K191 R7661]*10374 10392 10410 10428
ST_T TPRCHF| |10446 10464
10941 10285 |
| J2CT:PARA DATA L
*----------[MOV R428 R7663]*10377 10395 10413 10431
741MPP |10449 10467
10304
| J2CT:PARA DATA H
*----------[MOV R429 R7662]*10380 10398 10416 10434
741MPP |10452 10470
| J2CT:PARA CHG CM
*-------[WOR R7660 H40 R7660]*10384 10382 10400 10402
J2CT |10418 10420 10436 10438
10384 |10454 10456 10472 10474
|10488 10486
M3258 | TAIL POS 1-2
*----------< >*10421 10478 10513
M3208 | J2CT:PARA NO.
10422*--|/|--[= K4 R425]*----------[MOV K192 R7661]*10374 10392 10410 10428
ST_T TPRCHF| |10446 10464
10941 10285 |
| J2CT:PARA DATA L
*----------[MOV R410 R7663]*10377 10395 10413 10431
742MHP |10449 10467
10308
| J2CT:PARA DATA H
*----------[MOV R411 R7662]*10380 10398 10416 10434
742MHP |10452 10470
| J2CT:PARA CHG CM
*-------[WOR R7660 H40 R7660]*10384 10382 10400 10402
J2CT |10418 10420 10436 10438
10384 |10454 10456 10472 10474
|10488 10486
M3259 | TAIL POS 2-1
*----------< >*10439 10479 10521
M3208 | J2CT:PARA NO.
10440*--|/|--[= K5 R425]*----------[MOV K193 R7661]*10374 10392 10410 10428
ST_T TPRCHF| |10446 10464
10941 10285 |
| J2CT:PARA DATA L
*----------[MOV R412 R7663]*10377 10395 10413 10431
742MPP |10449 10467
10322
| J2CT:PARA DATA H
*----------[MOV R413 R7662]*10380 10398 10416 10434
742MPP |10452 10470

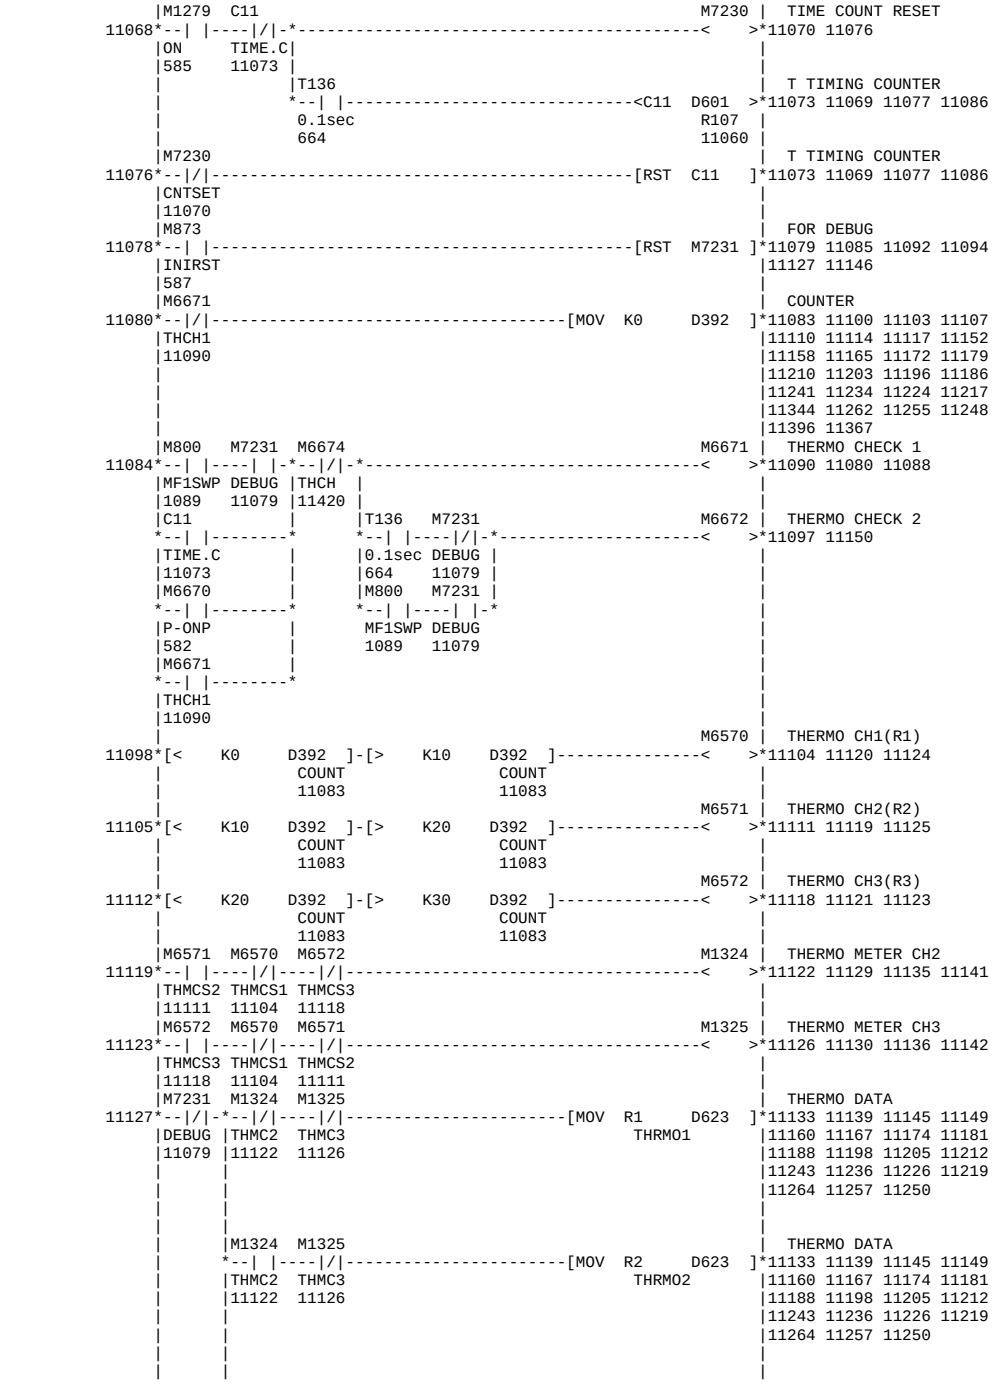

J2CT:PARA CHG CM
TAIL POS 2-2
J2CT:PARA NO.
J2CT:PARA DATA L
J2CT:PARA DATA H
J2CT:PARA CHG CM
743M POS
J2CT:PARA CHG CM
PARA CHANGE
PARA CHANGE FIN
TAIL THRUST (%)2
TAIL PAR CHG FLG
TAIL STATION 1
TAIL PAR CHG FLG
TAIL STATION 2
TAIL PAR CHG FLG
#NAME?
TAIL PAR CHG FLG
#NAME?
TAIL PAR CHG FLG
#NAME?
TAIL POS MEMORY
TAIL PAR CHG FLG
MANU. TAIL MOVE
TAIL FWDSW DELAY
TAIL REVSW DELAY

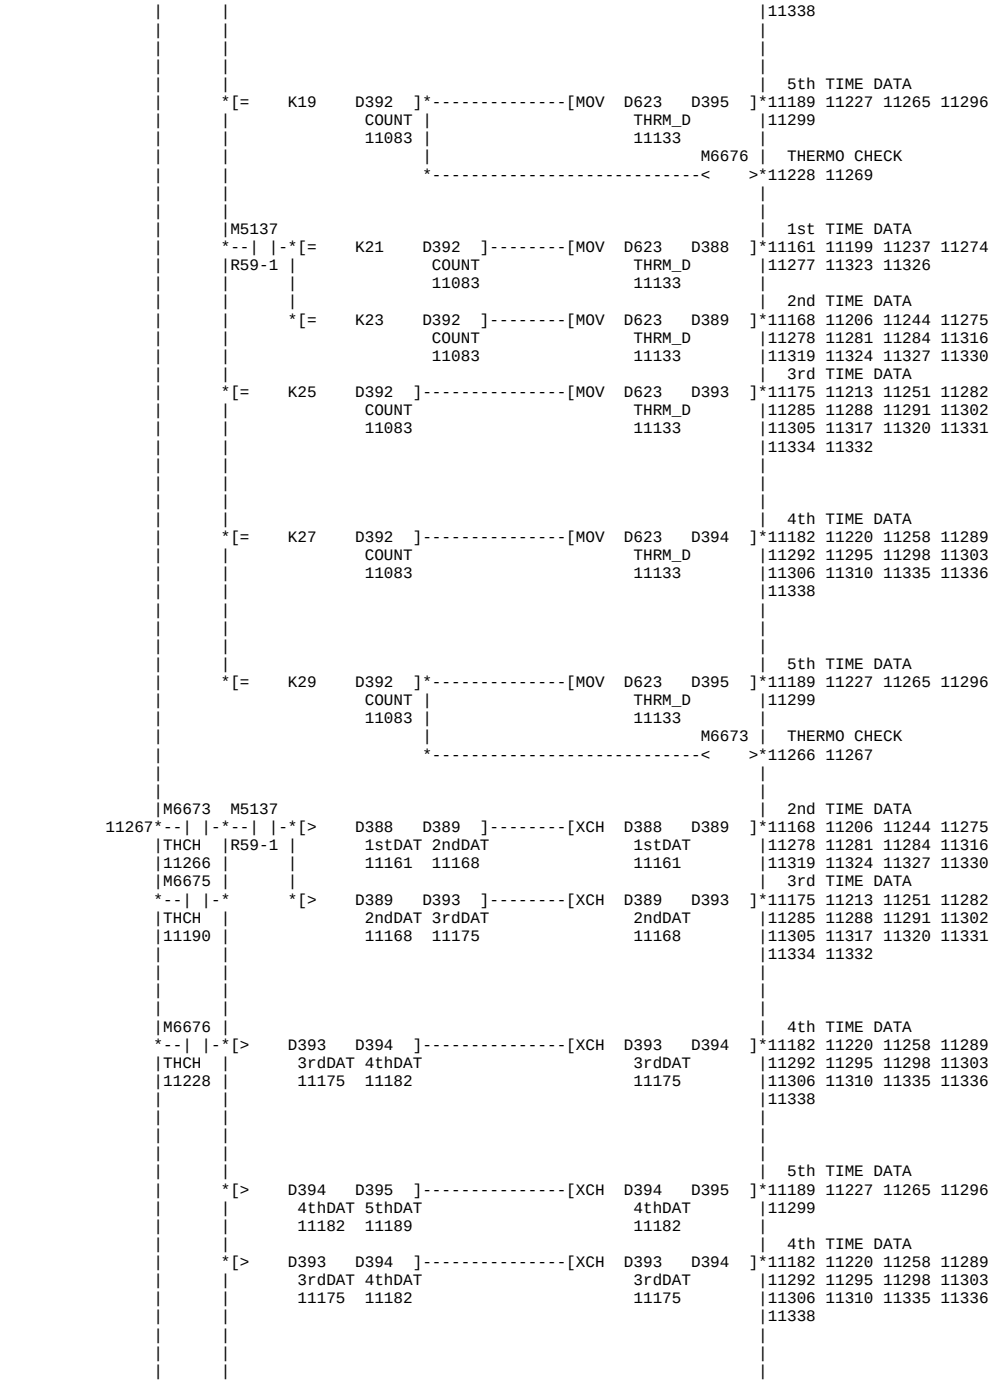

M3224 M5481 X2D0 X2D1
TAIL DIRECTION
10561 10569 207 1643 10576
RST M3209
10582 10584
MTM_OK QR.SW SPFWD SPREV
10548 648
M3074 M5696 M3239 M3203
TAIL REFER SEL
TJOGMD 32MA TR_MOD
9623 7259 15557
10571 10727
M5480
TAIL DIRECTION
SET M3209
10569 207 1643 10576
QF.SW
644
M5695
10582 10584
31MA
7253
M5443
TAIL DIRECTION
10577 10569 207 1643 10576
SET M3209
741M
16987
M5444
10582 10584
742M
16992
M3270 M221
INVDCK 31M
10339 16926
M5445
TAIL DIRECTION
10583 10569 207 1643 10576
RST M3209
10582 10584
743M
16997
M3208 M3164 M3214 M3230
TAIL REV. HIGH
10585 10591 1670
ST_T MVP.T PR1_T
10941 10804
M5481 M5160 M5160
TAIL POSITION L
QR.SW STAN.P STAN.P
648 13778 13778 10597
R7910 K1000 R7910
10597 1679 1683 8062
8065 9734 10251 10542
10594 10607 10610 10620
10964 10636 10633 10623
10978 10974 10970 10967
11043 11039 11004 10981
24519 24491 24487 19727
27843 27832 26638 26537
27896
M3208 M3165 M3214 M3231
TAIL FWD. HIGH
10598 10604 1657
ST_T MVM.T PR1_T
10941 10804
M5480 M5160 M5160
TAIL POSITION L
QF.SW STAN.P STAN.P
644 13778 13778 10597
D- R7910 K1000 R7910
10597 1679 1683 8062
8065 9734 10251 10542
10594 10607 10610 10620
10964 10636 10633 10623
10978 10974 10970 10967
11043 11039 11004 10981
24519 24491 24487 19727
27843 27832 26638 26537
27896
M3208 M3164 M3214 M3232
TAIL REV. LOW
10611 10617 1672
ST_T MVP.T PR1_T
10941 10804
M5481 M5160 M5160
TAIL POSITION L
QR.SW STAN.P STAN.P
648 13778 13778 10597
D+ R7910 K1
10597 1679 1683 8062
8065 9734 10251 10542
10594 10607 10610 10620
10964 10636 10633 10623
10978 10974 10970 10967
11043 11039 11004 10981
24519 24491 24487 19727
27843 27832 26638 26537
27896
M3208 M3165 M3214 M3233
TAIL FWD. LOW
10624 10630 1659
ST_T MVM.T PR1_T
10941 10804
M5480 M5160 M5160
TAIL POSITION L
QF.SW STAN.P STAN.P
644 13778 13778 10597
D- R7910 K1
R7910
10597 1679 1683 8062
8065 9734 10251 10542
10594 10607 10610 10620
10964 10636 10633 10623
10978 10974 10970 10967
11043 11039 11004 10981
24519 24491 24487 19727
27843 27832 26638 26537
27896
Y9F
M3192
TAIL SERVO OFF
10637 10641 10203 10638 10993
TALBRK
96
M3192 T100
11024
*SVF_T TACL.T
10641 10644
Y9F
T60 TAIL CLAMP T
10642 10644 10639 10988
T100 D4
TALBRK
96
T60
18360
M8 T64
M3248
TOOLEYE PARTSCAT
10647 10652 10685
EYE.P TDR.T
13734 8152
M27 X96
PCT.P PCR.LS
T24 X2D0 X2D1 M3267 M101 M3248 M5281
M3245
TAIL UNCLAMP SO
10653 10687 82 87 92
FWDDLY SPFWD SPREV PUSING RST
TOLCAT TAILAL
10552 1652 543 10652 11014
10997
T25 X2D0 X2D1
REVDLY SPFWD SPREV
10558
M3270 M5695 T5
INVDCK 31MA EYBOFT
10339 7253 10894
M5696
32MA
7259
M3270 M5695 T5 M3280
INVDCK 31MA EYBOFT M741IP
10339 7253 10894 9769
M5443
741M
16987
M5444 T5 M3281
742M EYBOFT M742IP
16992 10894 9777
M5445
743M
16997
M3238
TUC_MO
15550

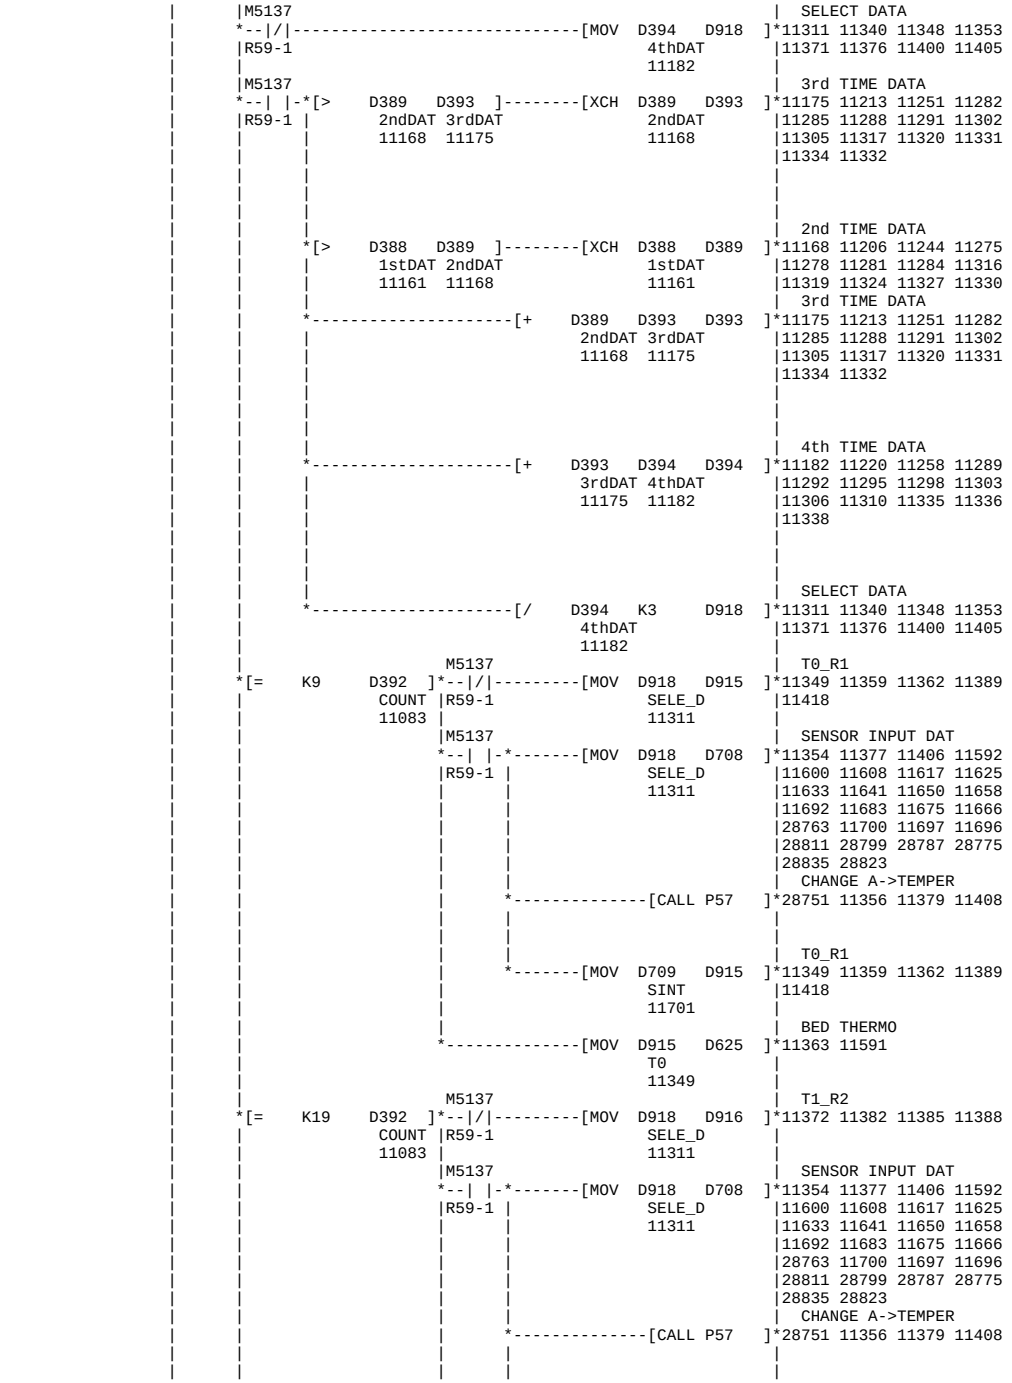

M3162 X2D0 X2D1 M3267 X401
SMZ.T SPFWD SPREV PUSING COMRDY
1652
M100 M3193 TAIL PLC EMG
10688 10689
RDY
533
M101 M3195 TAIL MACHINE RST
10690 10691
RST
543
M1279 M3194 TAIL PROTECT 1
10692 10693
ON
585
X246 Y31 M3196 TAIL INTERLOCK +
10694 10707 26264
SPL.N WRJ.SL
27728
M222 M5149 M5159 M7182 M3197 TAIL INTERLOCK -
10709 26265
32M M32HIS R61-7 WRT.NG
16931 27909
M5443 M7051
741M POS1H
16987 10755
M221
31M
16926
M5444 M7052
742M POS2H
16992 10763
M1279 M100 M3176 M3234 TAIL JOG MODE
10710 10713 10725
ON RDY AUT.T
585 533 11035
M5443 M3200 TAIL AUTO SELECT
10714 10720 10726
741M
16987
M5444
742M
16992
M5445
743M
16997
M3270 M221
INVDCK 31M
10339 16926
M6534 M3239 M1279 M3201 TAIL MANU SELECT
10721 10724
MANU2 TR_MOD ON
14446 15557 585
M3234 M3200 M3203 M3202 TAIL JOG SELECT
10725 10730
TJOGMD AUTS_T ZRN_T
10713 10720 10571
M3239
TR_MOD
15557
M1053
TEST
8451
M3239 M3205 TAIL ZEROSET SEL
10731 10732
TR_MOD
15557
M5443 M5138 M3268 741M SLOW START
10733 10738 10749
741M 741MHP TLPSFB M31.P
16987 10290 9736
M5444 M5138 M3269 742M SLOW START
10739 10744 10760
742M 742MHP TLPSFB M31.P
16992 10308 9736
M5443 M7051 POS.1 HIGH
10745 10755 10699 10750 10776
741M STAPOS 10793 10815 10834 10839
16987 10880 10916 10917 19714
M3268 19782 27116
741SLW
10738
M7051
POS1H
10755
M221 M3270
INVDCK
16926 10339
M5444 M7052 POS.2 HIGH
10756 10763 10702 10761 10777
742M STAPOS 10795 10817 10845 10850
16992 10883 10922 10923 19790
M3269 27125
742SLW
10744
M7052
POS2H
10763
M3208 TAIL MCODE CHECK
10764 10773 7245 10770 10911
ST_T
10941
M221 T21
31M TLMCHK
16926 10773
M222
32M
16931
M5443
741M
16987
M5444
742M
16992
M5445
743M
16997
M7051 TAIL SPEED CHANG
10776 10779 10918 10924
POS1H
10755
M7052
POS2H
10763
M1053 M3212 TAIL INC FEED 1
10782 10783
TEST
8451
M3213 TAIL INC FEED 2
10784

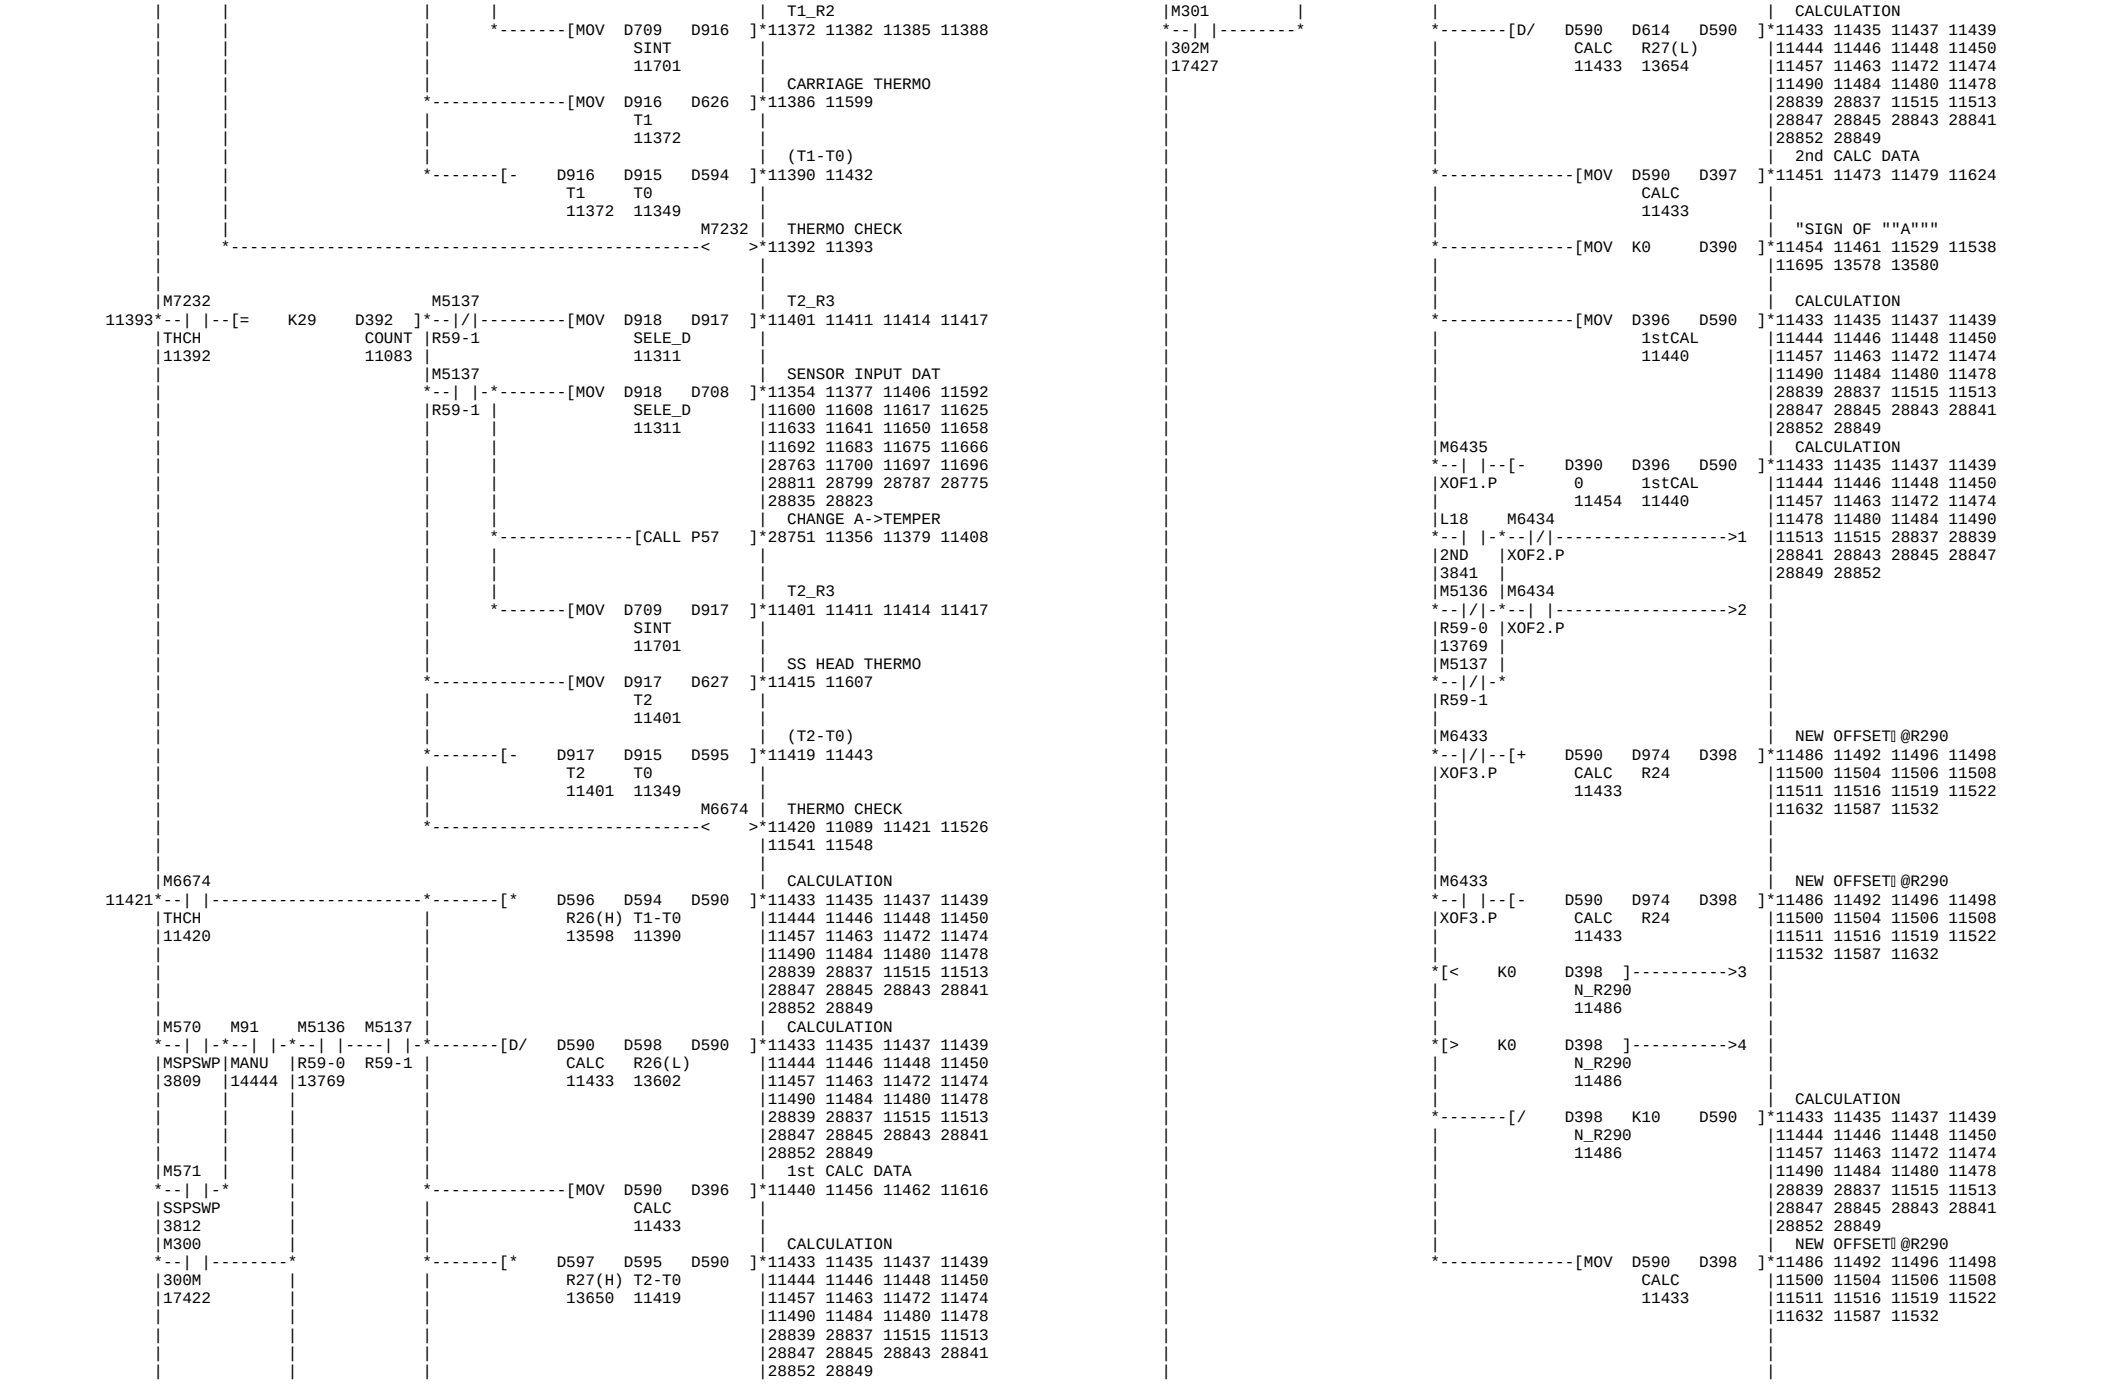


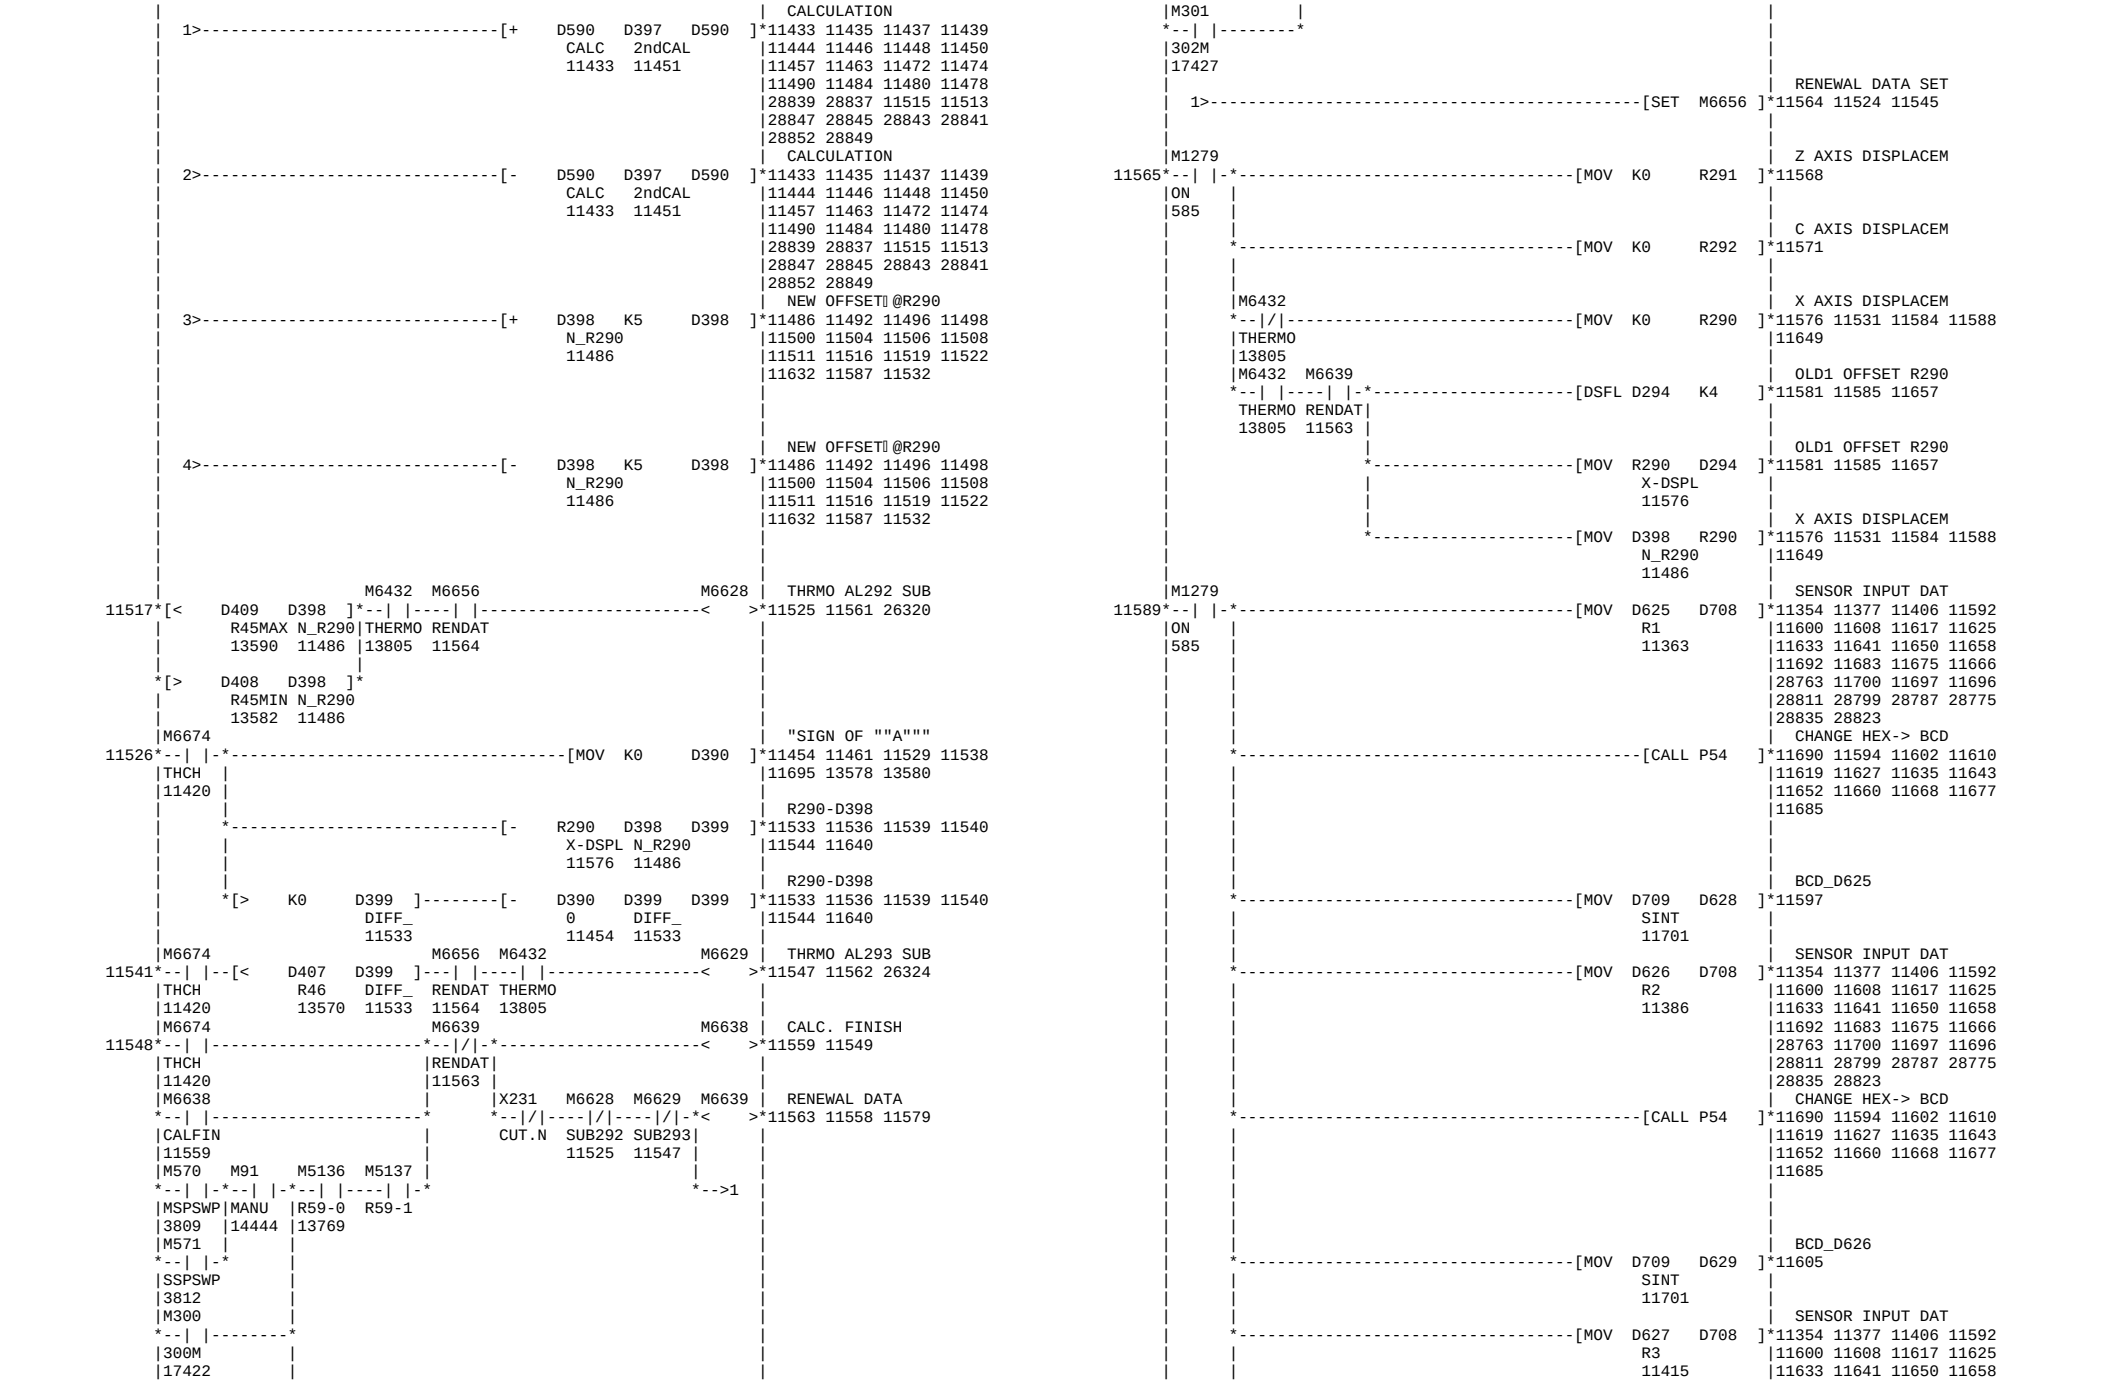

M3241 M3239 M3206 | TAIL ZERO SET
10942 10944
TR_HOM TR_MOD
15185 15557
M3241 M3239 M7045 | HOME POS.SET
10945 10948 10946 10949 28742
TR_HOM TR_MOD
15185 15557
M7045
HOME.S
10948
M7045 T138 M7931 | MACHINE MENU 93
10949 10952
HOME.S LED2.T
10948 674
M3190
ZSF.T
M3267 M3160 | TAIL PUSH DELAY
10953 10956 10959 10989
PUSING RDY.T R87
1652 11032
T17 | PUSHING PLS
10959 10961 10962
TLPSDL
10956
M7050 | TAIL PUSH POS(L)
10962 10965 10968 10971 10975
PSHPLS 10977 10982
10961 10597
| TAIL MOVE CHECK
10966 10972 10979 10986 10991
TALPUS TALPUS
10597 10965 10597 10965
| TAIL MOVE CHECK
10973 10972 10979 10986 10991
TALPUS TALPUS
10597 10965 10965 10597
| TAIL MOVE CHECK
10980 10972 10979 10986 10991
TALPUS
10597 10965
M3267 T100 T17 M3192 X2D0
10987 1
PUSING TACL.T TLPSDL TLMVCK R116L *SVF_T SPFWD
1652 10644 10956 10972 10641
X2D1
SPREV
M3184
2
AL1.T
M3185
3
AL2.T
M7053 M3208 T217 T221 M47
4
ONM743 ST_T TBRKDL TSON.T TSEN.P
10870 10941 89 1633
10597
M5281 X140
5
TAILAL RST.B
11014
10809 10787 10764 10624
26263 11027 11005
M3245 M5281 | AL361 TAIL ALARM
11014 10686 11011 25134
TA_SOL
10687
M6472
J2TA.P
13821
M3186 M1279 M5282 | AL362 TAIL OT
11015 11021
AL4.T ON
585
M14 M7182 Y31
R50-6 WRT.NG WRJ.SL
27909 27728
M1279 K4 | COMMAND
11022 11025
ON M3192 R7648
585 *SVF_T
10641
K4 | COMMAND
M3208 R7649 11028
ST_T
10941
M1279 K4 | TAIL SERVO READY
11029 11032 10954 19721 19786
ON 19794
585
K4 | TAIL AUTO MODE
M3176 11035 10712 10788 10810
10930
M7071 | TAIL CONDITION
11036 11047 2690 21521 22272
K-1000 R7910 -[D> K1000 R7910 25741 25809 26530
10597 10597
M3168
ZP.T
M3267
PUSING
1652
M7053
ONM743
10870
11048
P137 M1279 | THER.TIME_R107
11049 11060 11067 11075
ON K0 D511 K80 D601
585 R107
K0 D511
R107
K0 D511
R107
| THER.TIME_R107
11060 11067 11075
R107

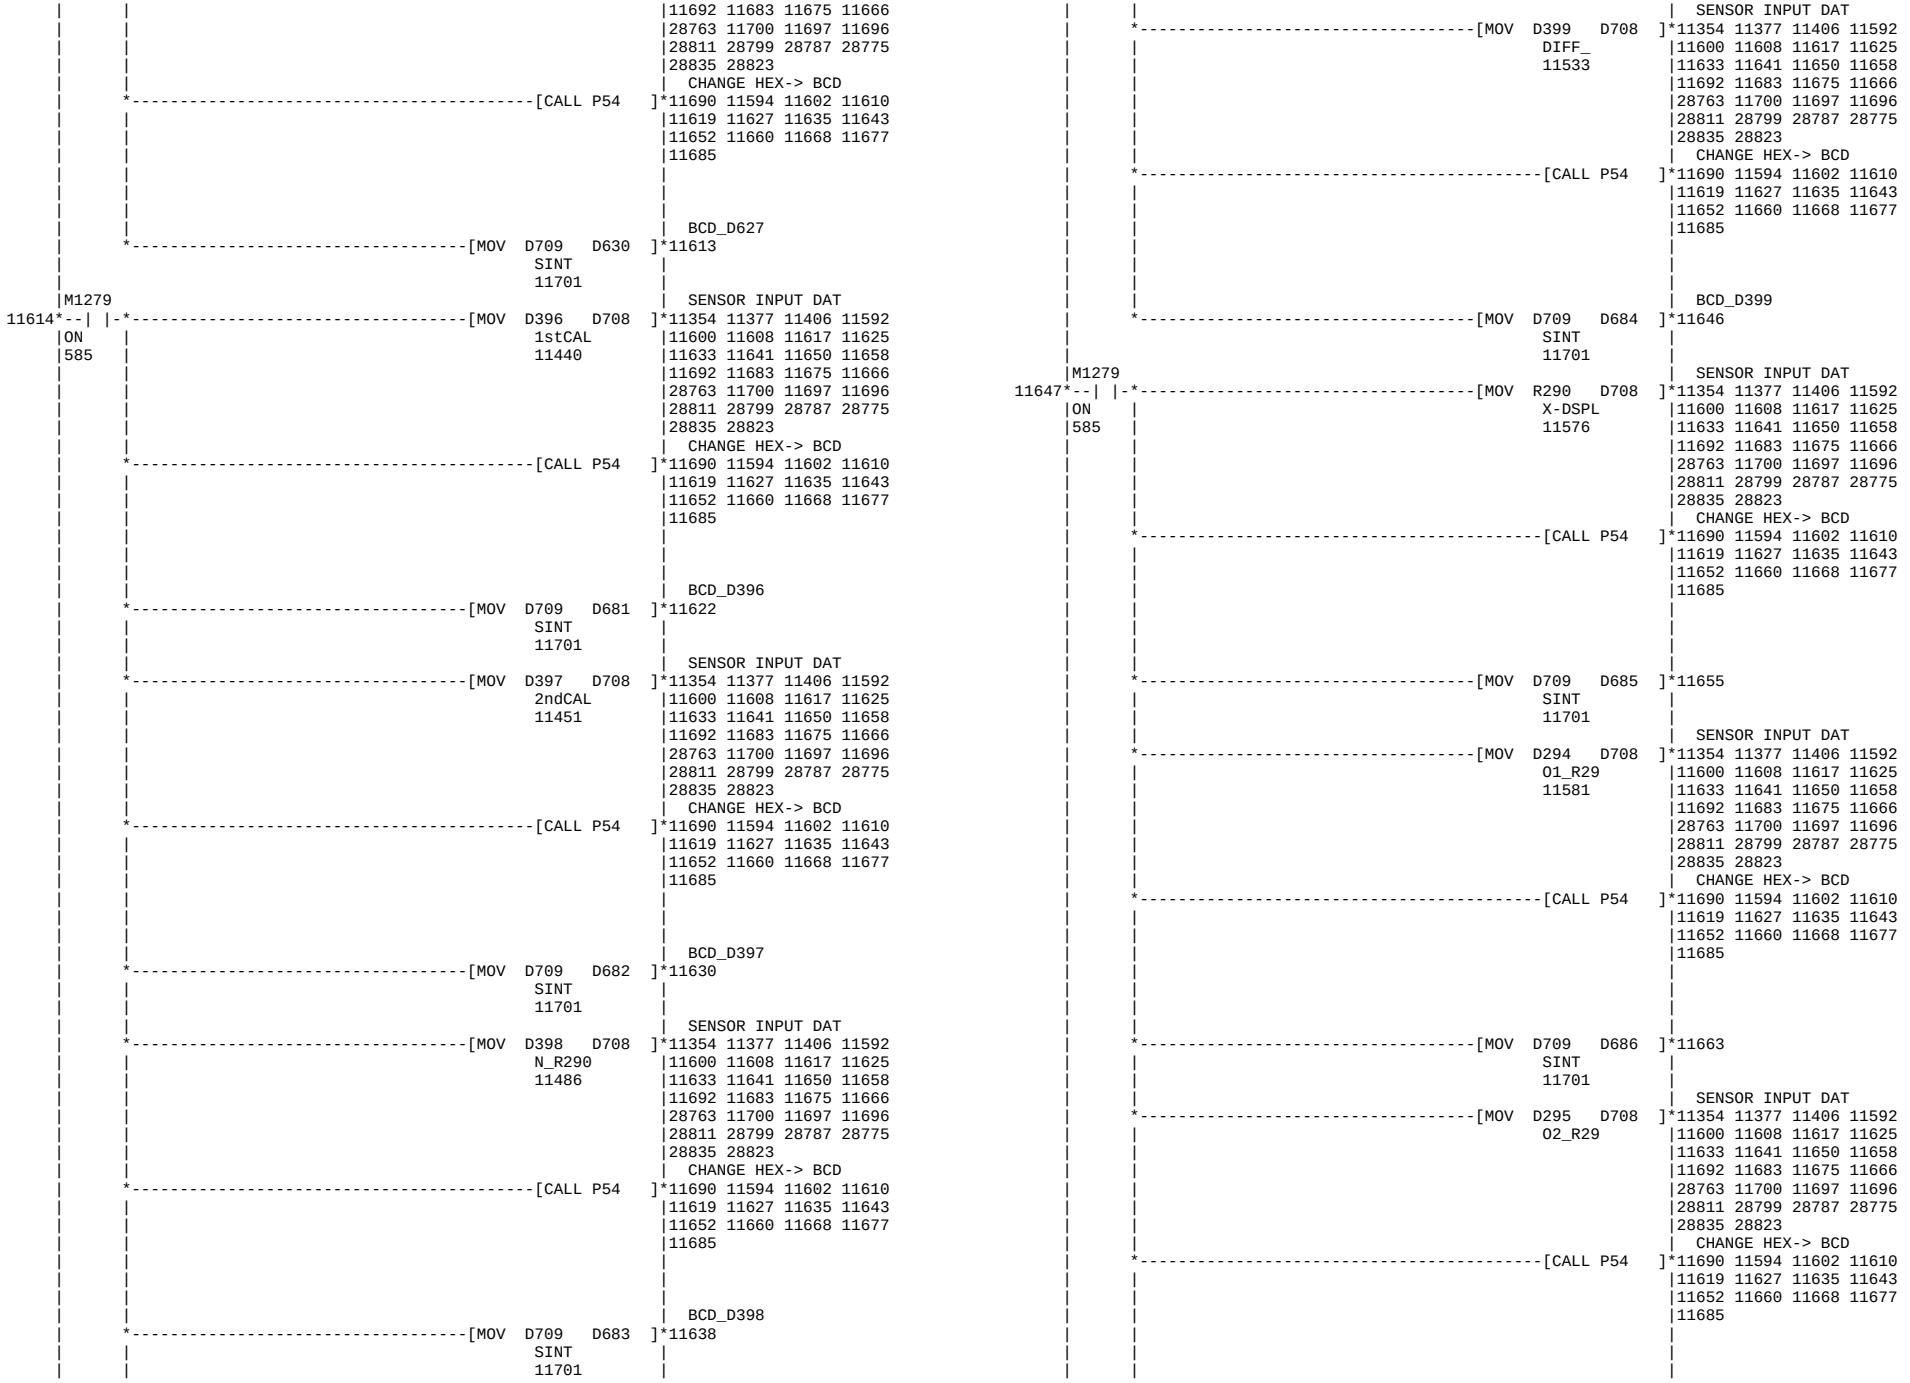

M1279 C11
M7230
TIME COUNT RESET
11068 11070 11076
ON TIME.C
585 11073
T136
C11 D601
0.1sec
664
R107
11060
T TIMING COUNTER
11073 11069 11077 11086
M7230
RST C11
CNTSET
11070
M873
FOR DEBUG
11078 11079 11085 11092 11094
RST M7231
INIRST
587
M6671
COUNTER
11080 11083 11100 11103 11107
MOV K0 D392
THCH1
11090
11110 11114 11117 11152
11158 11165 11172 11179
11210 11203 11196 11186
11241 11234 11224 11217
11344 11262 11255 11248
11396 11367
M800 M7231 M6674
M6671
THERMO CHECK 1
11084 11090 11080 11088
MF1SWP DEBUG
1089 11079
THCH
11420
M6672
THERMO CHECK 2
11097 11150
C11
T136 M7231
TIME.C
11073
M6670
0.1sec DEBUG
664 11079
M800 M7231
P-ONP
582
MF1SWP DEBUG
1089 11079
M6671
THCH1
11090
M6570
THERMO CH1(R1)
11098 11104 11120 11124
K0 D392
K10 D392
COUNT
11083
M6571
THERMO CH2(R2)
11105 11111 11119 11125
K10 D392
K20 D392
M6572
THERMO CH3(R3)
11112 11118 11121 11123
K20 D392
K30 D392
M6571 M6570 M6572
M1324
THERMO METER CH2
11119 11122 11129 11135 11141
THMCS2 THMCS1 THMCS3
11111 11104 11118
M6572 M6570 M6571
M1325
THERMO METER CH3
11123 11126 11130 11136 11142
THMCS3 THMCS1 THMCS2
11118 11104 11111
M7231 M1324 M1325
THERMO DATA
11127 11133 11139 11145 11149
MOV R1 D623
DEBUG
11079
THMC2 THMC3
11122 11126
THRMO1
11160 11167 11174 11181
11188 11198 11205 11212
11243 11236 11226 11219
11264 11257 11250
M1324 M1325
MOV R2 D623
THRMO2
M1324 M1325
MOV R3 D623
THRMO3
M7231
THERMO DATA
11146 11133 11139 11145 11149
BIN D624 D623
DEBUG
11079
11160 11167 11174 11181
11188 11198 11205 11212
11243 11236 11226 11219
11264 11257 11250
M6672
COUNTER
11150 11083 11100 11103 11107
INC D392
THCH2
11097
11110 11114 11117 11152
11158 11165 11172 11179
11210 11203 11196 11186
11241 11234 11224 11217
11344 11262 11255 11248
11396 11367
M5137
1st TIME DATA
11161 11199 11237 11274
R59-1
K1 D392
K3 D392
K5 D392
K7 D392
K9 D392
K11 D392
K13 D392
K15 D392
K17 D392
MOV D623 D388
MOV D623 D389
MOV D623 D393
MOV D623 D394
MOV D623 D395
COUNT
11083
THRM_D
11133
11277 11323 11326
2nd TIME DATA
11168 11206 11244 11275
11278 11281 11284 11316
11319 11324 11327 11330
3rd TIME DATA
11175 11213 11251 11282
11285 11288 11291 11302
11305 11317 11320 11331
11334 11332
4th TIME DATA
11182 11220 11258 11289
11292 11295 11298 11303
11306 11310 11335 11336
11338
5th TIME DATA
11189 11227 11265 11296
11299
M6675
THERMO CHECK
11190 11268

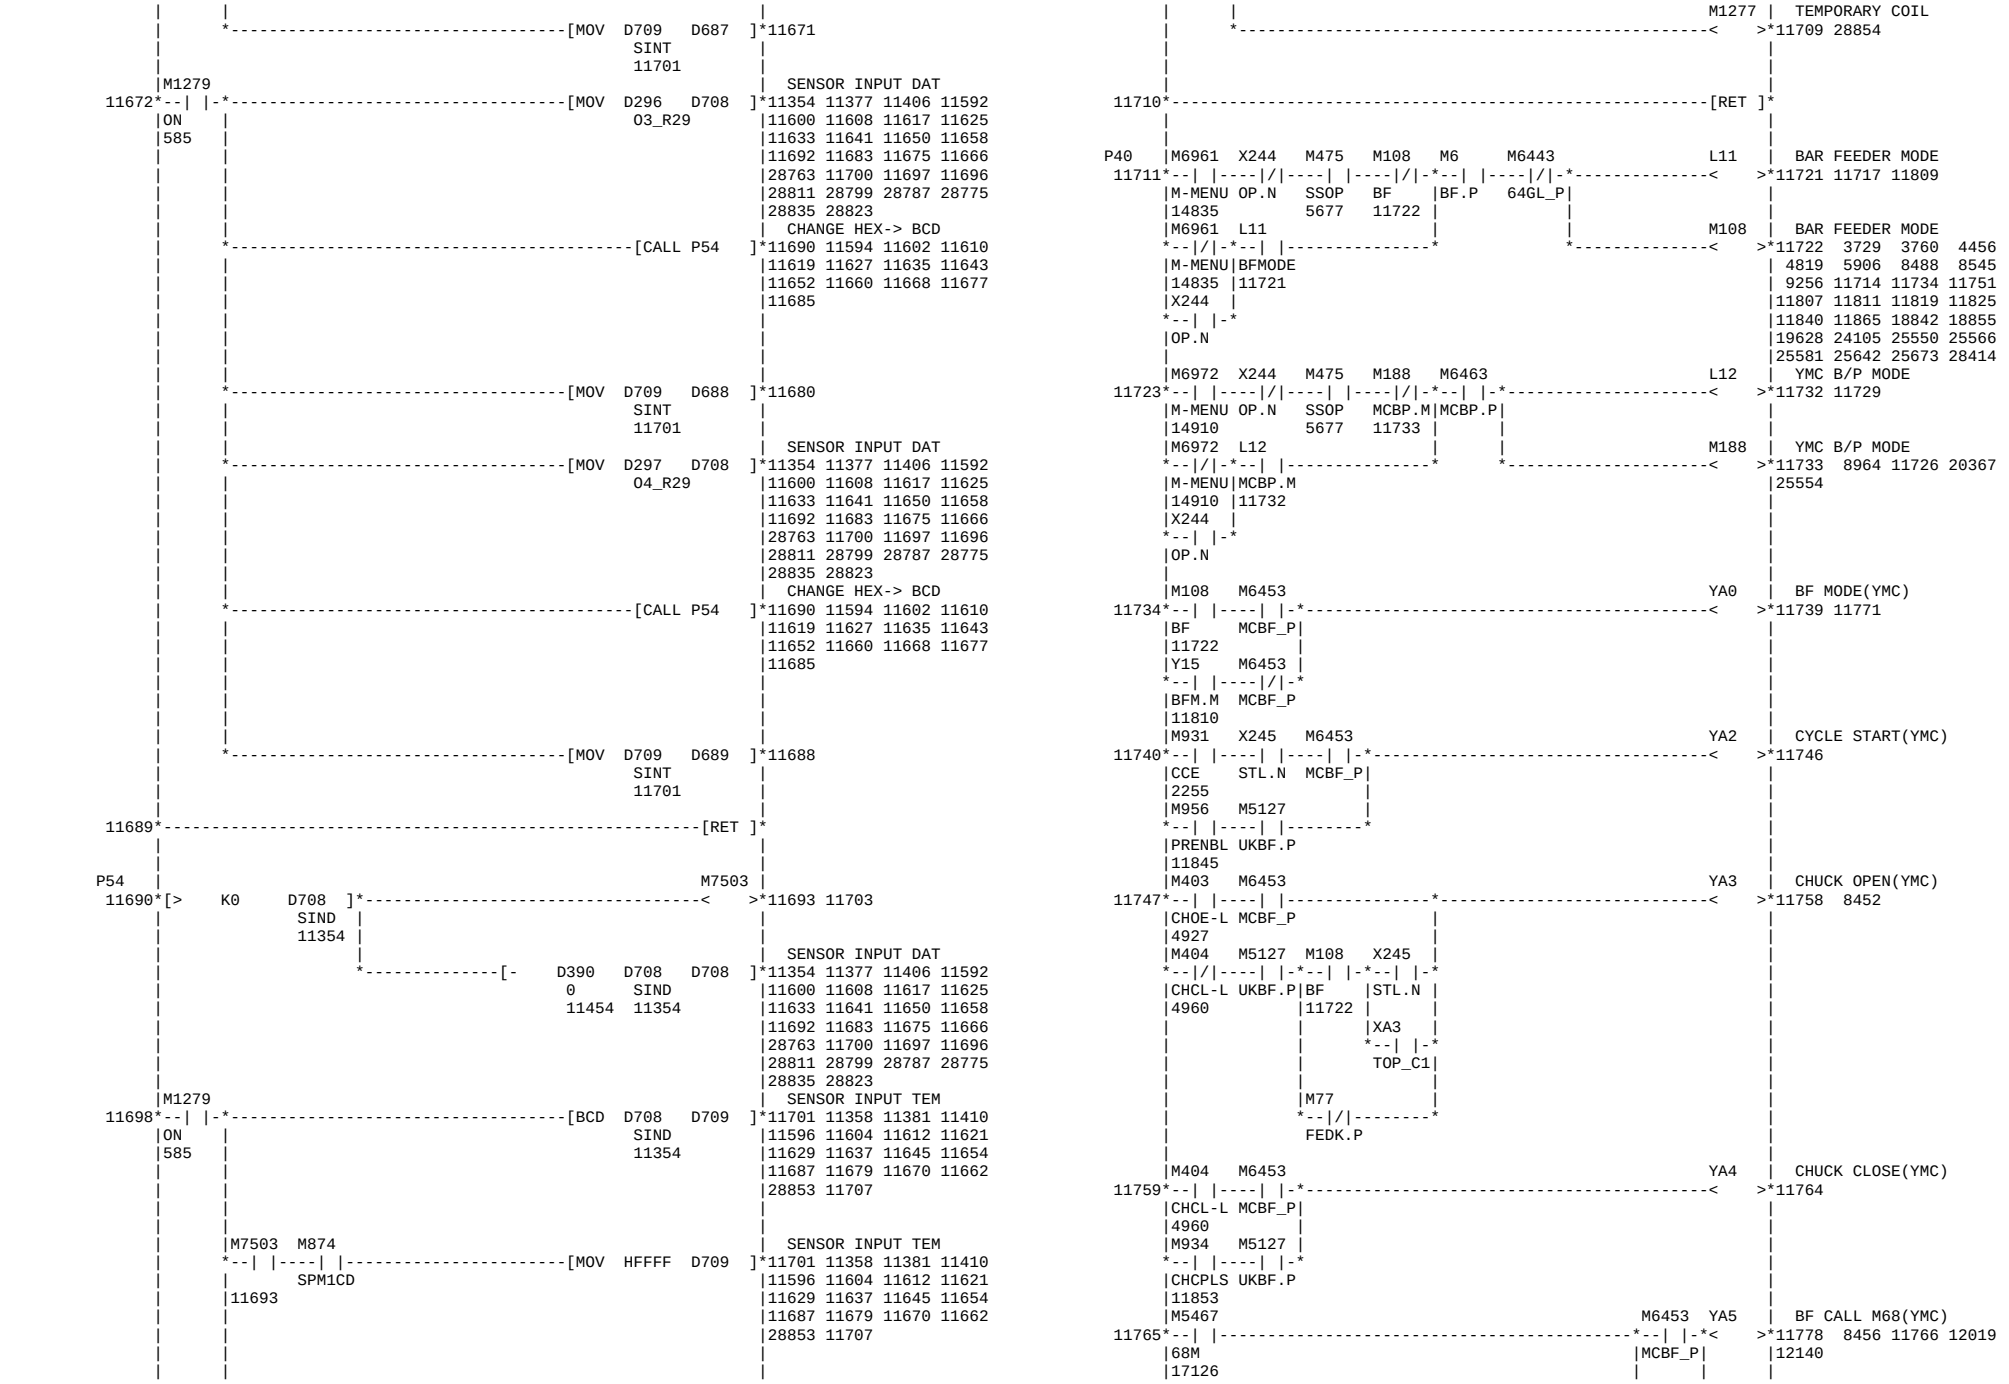

11338
5th TIME DATA
[= K19 D392]--------------[MOV D623 D395]*11189 11227 11265 11296
COUNT | THRM_D |11299
11083 | 11133 |
M6676 | THERMO CHECK
*----------<
>*11228 11269
M5137
1st TIME DATA
--| |-[= K21 D392]--------[MOV D623 D388]*11161 11199 11237 11274
R59-1 | COUNT THRM_D |11277 11323 11326
11083 11133 |
2nd TIME DATA
*[= K23 D392]--------[MOV D623 D389]*11168 11206 11244 11275
COUNT THRM_D |11278 11281 11284 11316
11083 11133 |11319 11324 11327 11330
3rd TIME DATA
*[= K25 D392]--------------[MOV D623 D393]*11175 11213 11251 11282
COUNT THRM_D |11285 11288 11291 11302
11083 11133 |11305 11317 11320 11331
11334 11332
4th TIME DATA
*[= K27 D392]--------------[MOV D623 D394]*11182 11220 11258 11289
COUNT THRM_D |11292 11295 11298 11303
11083 11133 |11306 11310 11335 11336
11338
5th TIME DATA
[= K29 D392]--------------[MOV D623 D395]*11189 11227 11265 11296
COUNT | THRM_D |11299
11083 | 11133 |
M6673 | THERMO CHECK
*----------<
>*11266 11267
M6673 M5137
2nd TIME DATA
11267*--| |-*--| |-*[> D388 D389]--------[XCH D388 D389]*11168 11206 11244 11275
THCH R59-1 | 1stDAT 2ndDAT 1stDAT |11278 11281 11284 11316
11266 | 11161 11168 11161 |11319 11324 11327 11330
M6675 | 3rd TIME DATA
--| |- *[> D389 D393]--------[XCH D389 D393]*11175 11213 11251 11282
THCH | 2ndDAT 3rdDAT 2ndDAT |11285 11288 11291 11302
11190 | 11168 11175 11168 |11305 11317 11320 11331
11334 11332
M6676 |
4th TIME DATA
--| |-[> D393 D394]--------------[XCH D393 D394]*11182 11220 11258 11289
THCH | 3rdDAT 4thDAT 3rdDAT |11292 11295 11298 11303
11228 | 11175 11182 11175 |11306 11310 11335 11336
11338
5th TIME DATA
*[> D394 D395]--------------[XCH D394 D395]*11189 11227 11265 11296
4thDAT 5thDAT 4thDAT |11299
11182 11189 11182 |
4th TIME DATA
*[> D393 D394]--------------[XCH D393 D394]*11182 11220 11258 11289
3rdDAT 4thDAT 3rdDAT |11292 11295 11298 11303
11175 11182 11175 |11306 11310 11335 11336
11338

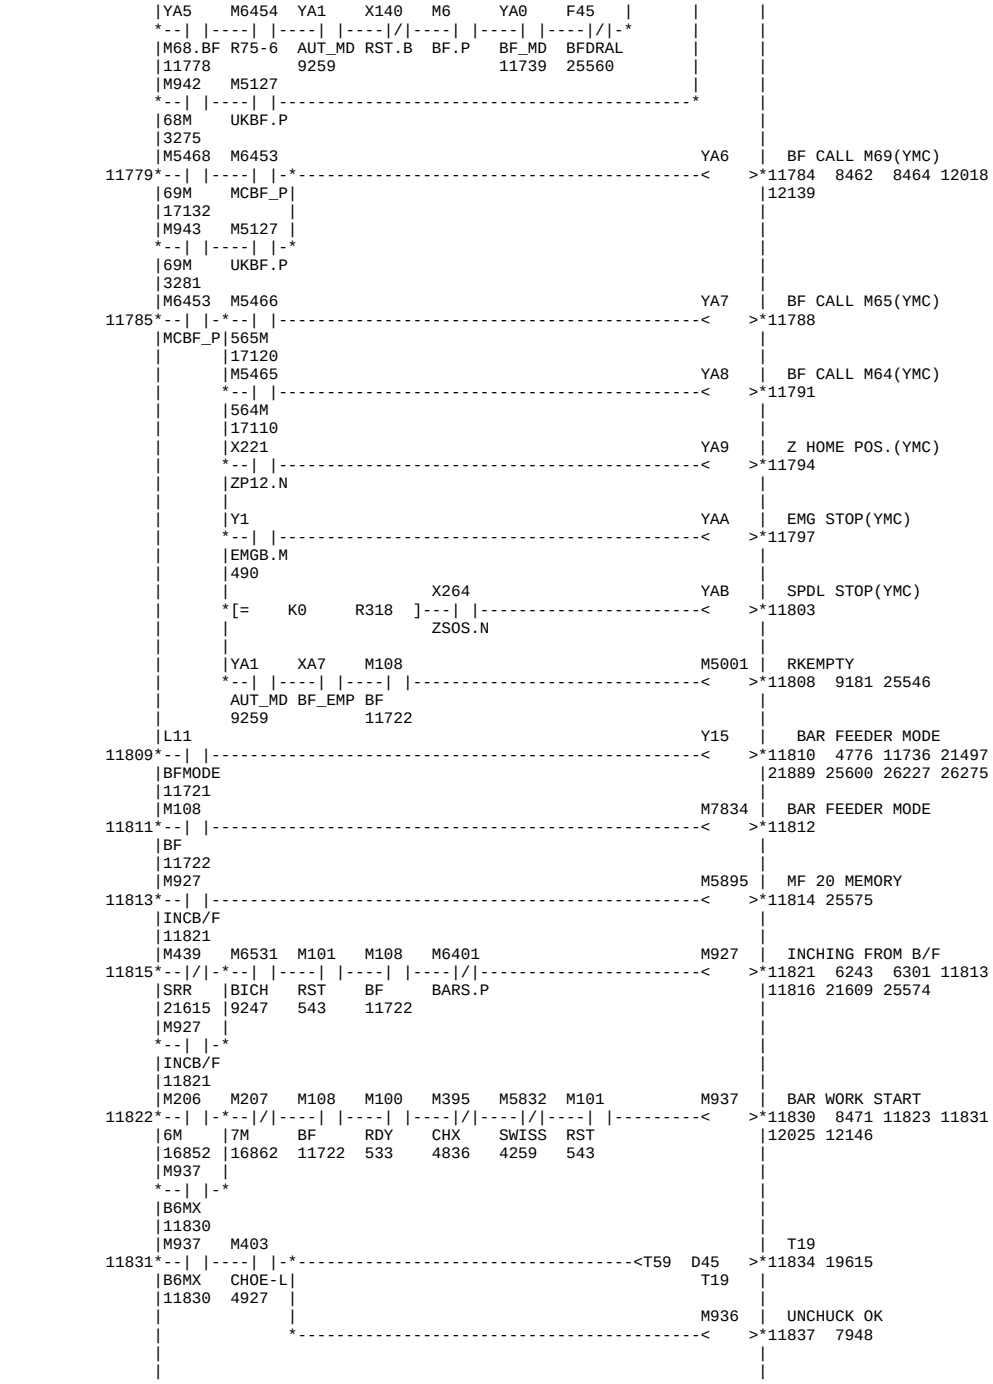

M5137
SELECT DATA
*--|/|----------[MOV D394 D918]*11311 11340 11348 11353
R59-1 4thDAT |11371 11376 11400 11405
11182 |
M5137
3rd TIME DATA
--| |-[> D389 D393]--------[XCH D389 D393]*11175 11213 11251 11282
R59-1 | 2ndDAT 3rdDAT 2ndDAT |11285 11288 11291 11302
11168 11175 11168 |11305 11317 11320 11331
11334 11332
2nd TIME DATA
*[> D388 D389]--------[XCH D388 D389]*11168 11206 11244 11275
1stDAT 2ndDAT 1stDAT |11278 11281 11284 11316
11161 11168 11161 |11319 11324 11327 11330
3rd TIME DATA
*----------[+ D389 D393 D393]*11175 11213 11251 11282
2ndDAT 3rdDAT |11285 11288 11291 11302
11168 11175 |11305 11317 11320 11331
11334 11332
4th TIME DATA
*----------[+ D393 D394 D394]*11182 11220 11258 11289
3rdDAT 4thDAT |11292 11295 11298 11303
11175 11182 |11306 11310 11335 11336
11338
SELECT DATA
*----------[/ D394 K3 D918]*11311 11340 11348 11353
4thDAT |11371 11376 11400 11405
11182 |
M5137
T0_R1
[= K9 D392]--|/|---------[MOV D918 D915]*11349 11359 11362 11389
COUNT |R59-1 SELE_D |11418
11083 | 11311 |
M5137
SENSOR INPUT DAT
--| |--------[MOV D918 D708]*11354 11377 11406 11592
R59-1 | SELE_D |11600 11608 11617 11625
11311 |11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
CHANGE A->TEMPER
*--------------[CALL P57]*28751 11356 11379 11408
T0_R1
*-------[MOV D709 D915]*11349 11359 11362 11389
SINT |11418
11701 |
BED THERMO
*--------------[MOV D915 D625]*11363 11591
T0 |
11349 |
M5137
T1_R2
[= K19 D392]--|/|---------[MOV D918 D916]*11372 11382 11385 11388
COUNT |R59-1 SELE_D |
11083 | 11311 |
M5137
SENSOR INPUT DAT
--| |--------[MOV D918 D708]*11354 11377 11406 11592
R59-1 | SELE_D |11600 11608 11617 11625
11311 |11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
CHANGE A->TEMPER
*--------------[CALL P57]*28751 11356 11379 11408

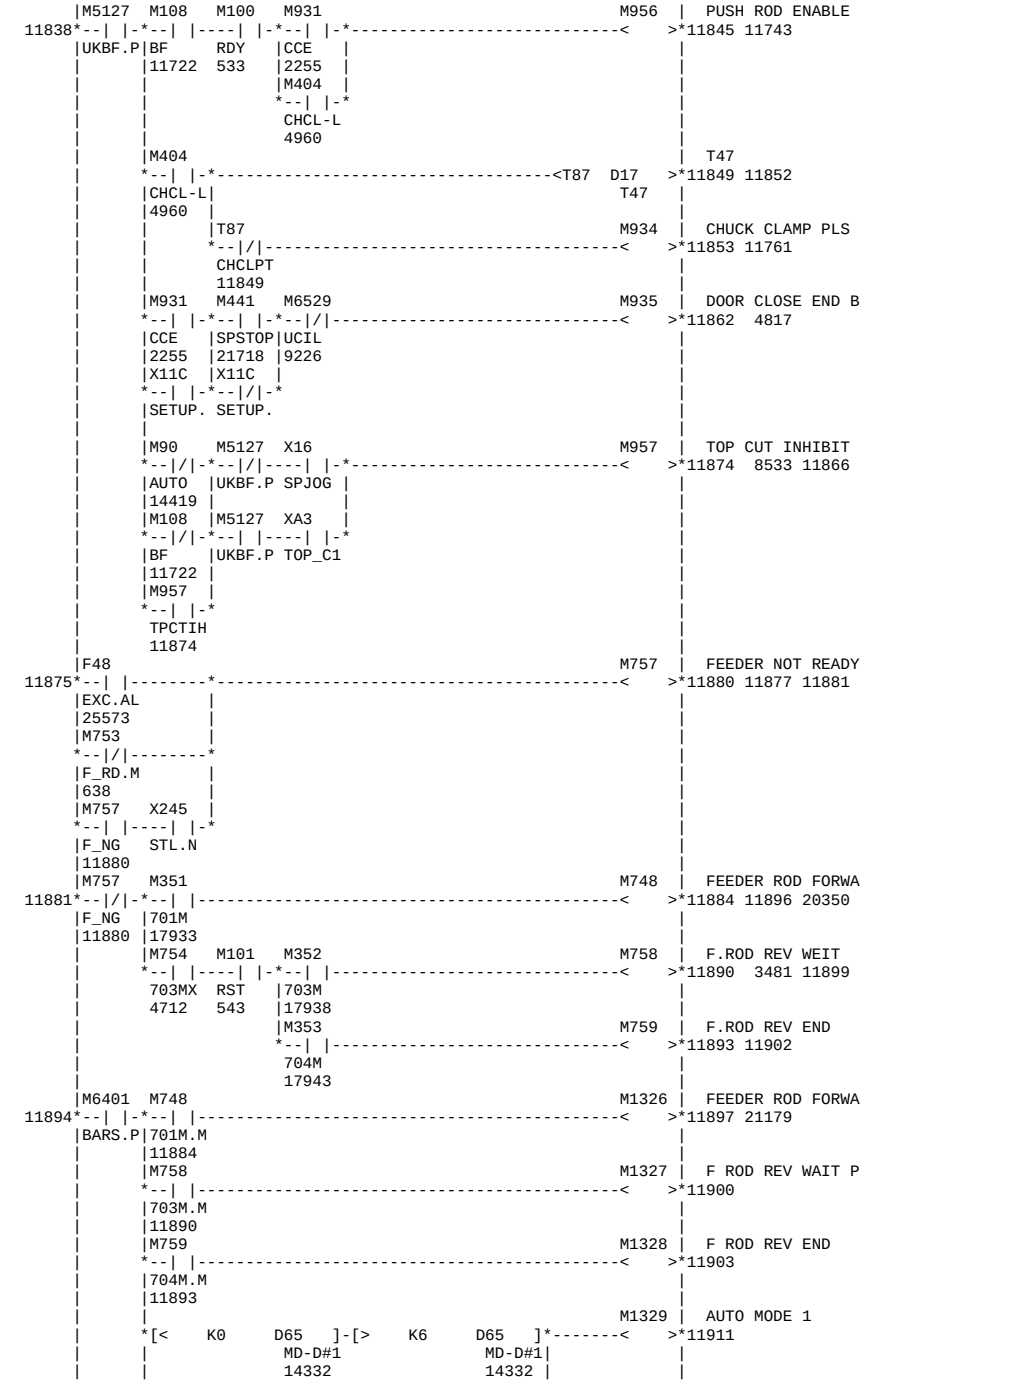

T1_R2
11372 11382 11385 11388
SINT
11701
CARRIAGE THERMO
11386 11599
T1
11372
(T1-T0)
11390 11432
T1 T0
11372 11349
M7232
THERMO CHECK
11392 11393
M7232
11393
THCH
11392
K29 D392
COUNT
11083
M5137
T2_R3
11401 11411 11414 11417
R59-1
SELE_D
11311
M5137
SENSOR INPUT DAT
11354 11377 11406 11592
R59-1
SELE_D
11311
11600 11608 11617 11625
11633 11641 11650 11658
11692 11683 11675 11666
28763 11700 11697 11696
28811 28799 28787 28775
28835 28823
CHANGE A->TEMPER
28751 11356 11379 11408
T2_R3
11401 11411 11414 11417
SINT
11701
SS HEAD THERMO
11415 11607
T2
11401
(T2-T0)
11419 11443
T2 T0
11401 11349
M6674
THERMO CHECK
11420 11089 11421 11526
11541 11548
M6674
11421
THCH
11420
CALCULATION
11433 11435 11437 11439
R26(H) T1-T0
13598 11390
11444 11446 11448 11450
11457 11463 11472 11474
11490 11484 11480 11478
28839 28837 11515 11513
28847 28845 28843 28841
28852 28849
M570 M91 M5136 M5137
MSPSWP MANU R59-0 R59-1
3809 14444 13769
CALCULATION
11433 11435 11437 11439
CALC R26(L)
11433 13602
11444 11446 11448 11450
11457 11463 11472 11474
11490 11484 11480 11478
28839 28837 11515 11513
28847 28845 28843 28841
28852 28849
M571
SSPSWP
3812
1st CALC DATA
11440 11456 11462 11616
M300
300M
17422
CALCULATION
11433 11435 11437 11439
R27(H) T2-T0
13650 11419
11444 11446 11448 11450
11457 11463 11472 11474
11490 11484 11480 11478
28839 28837 11515 11513
28847 28845 28843 28841
28852 28849
M301
302M
17427
CALCULATION
11433 11435 11437 11439
CALC R27(L)
11433 13654
11444 11446 11448 11450
11457 11463 11472 11474
11490 11484 11480 11478
28839 28837 11515 11513
28847 28845 28843 28841
28852 28849
2nd CALC DATA
11451 11473 11479 11624
CALC
11433
"SIGN OF ""A"""
11454 11461 11529 11538
11695 13578 13580
CALCULATION
11433 11435 11437 11439
1stCAL
11440
11444 11446 11448 11450
11457 11463 11472 11474
11490 11484 11480 11478
28839 28837 11515 11513
28847 28845 28843 28841
28852 28849
M6435
CALCULATION
11433 11435 11437 11439
XOF1.P
0 1stCAL
11454 11440
11444 11446 11448 11450
11457 11463 11472 11474
L18 M6434
11478 11480 11484 11490
11513 11515 28837 28839
2ND XOF2.P
3841
28841 28843 28845 28847
28849 28852
M5136 M6434
R59-0 XOF2.P
13769
M5137
R59-1
M6433
NEW OFFSET@R290
11486 11492 11496 11498
XOF3.P
CALC R24
11433
11500 11504 11506 11508
11511 11516 11519 11522
11632 11587 11532
M6433
NEW OFFSET@R290
11486 11492 11496 11498
XOF3.P
CALC R24
11433
11500 11504 11506 11508
11511 11516 11519 11522
11532 11587 11632
K0 D398
N_R290
11486
K0 D398
N_R290
11486
CALCULATION
11433 11435 11437 11439
D398 K10 D590
N_R290
11486
11444 11446 11448 11450
11457 11463 11472 11474
11490 11484 11480 11478
28839 28837 11515 11513
28847 28845 28843 28841
28852 28849
NEW OFFSET@R290
11486 11492 11496 11498
CALC
11433
11500 11504 11506 11508
11511 11516 11519 11522
11632 11587 11532

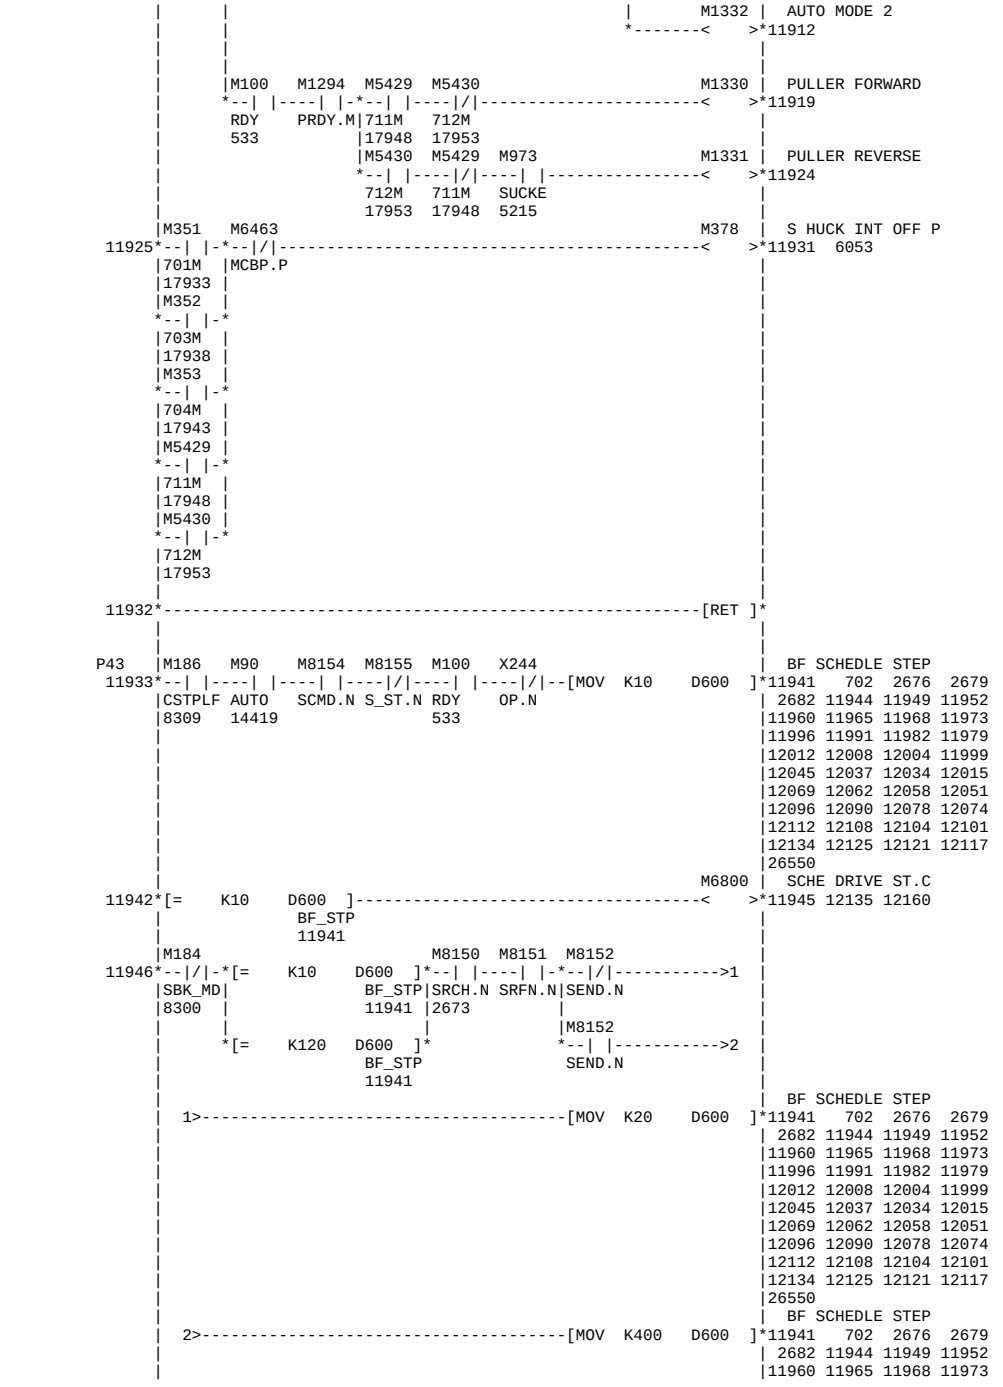


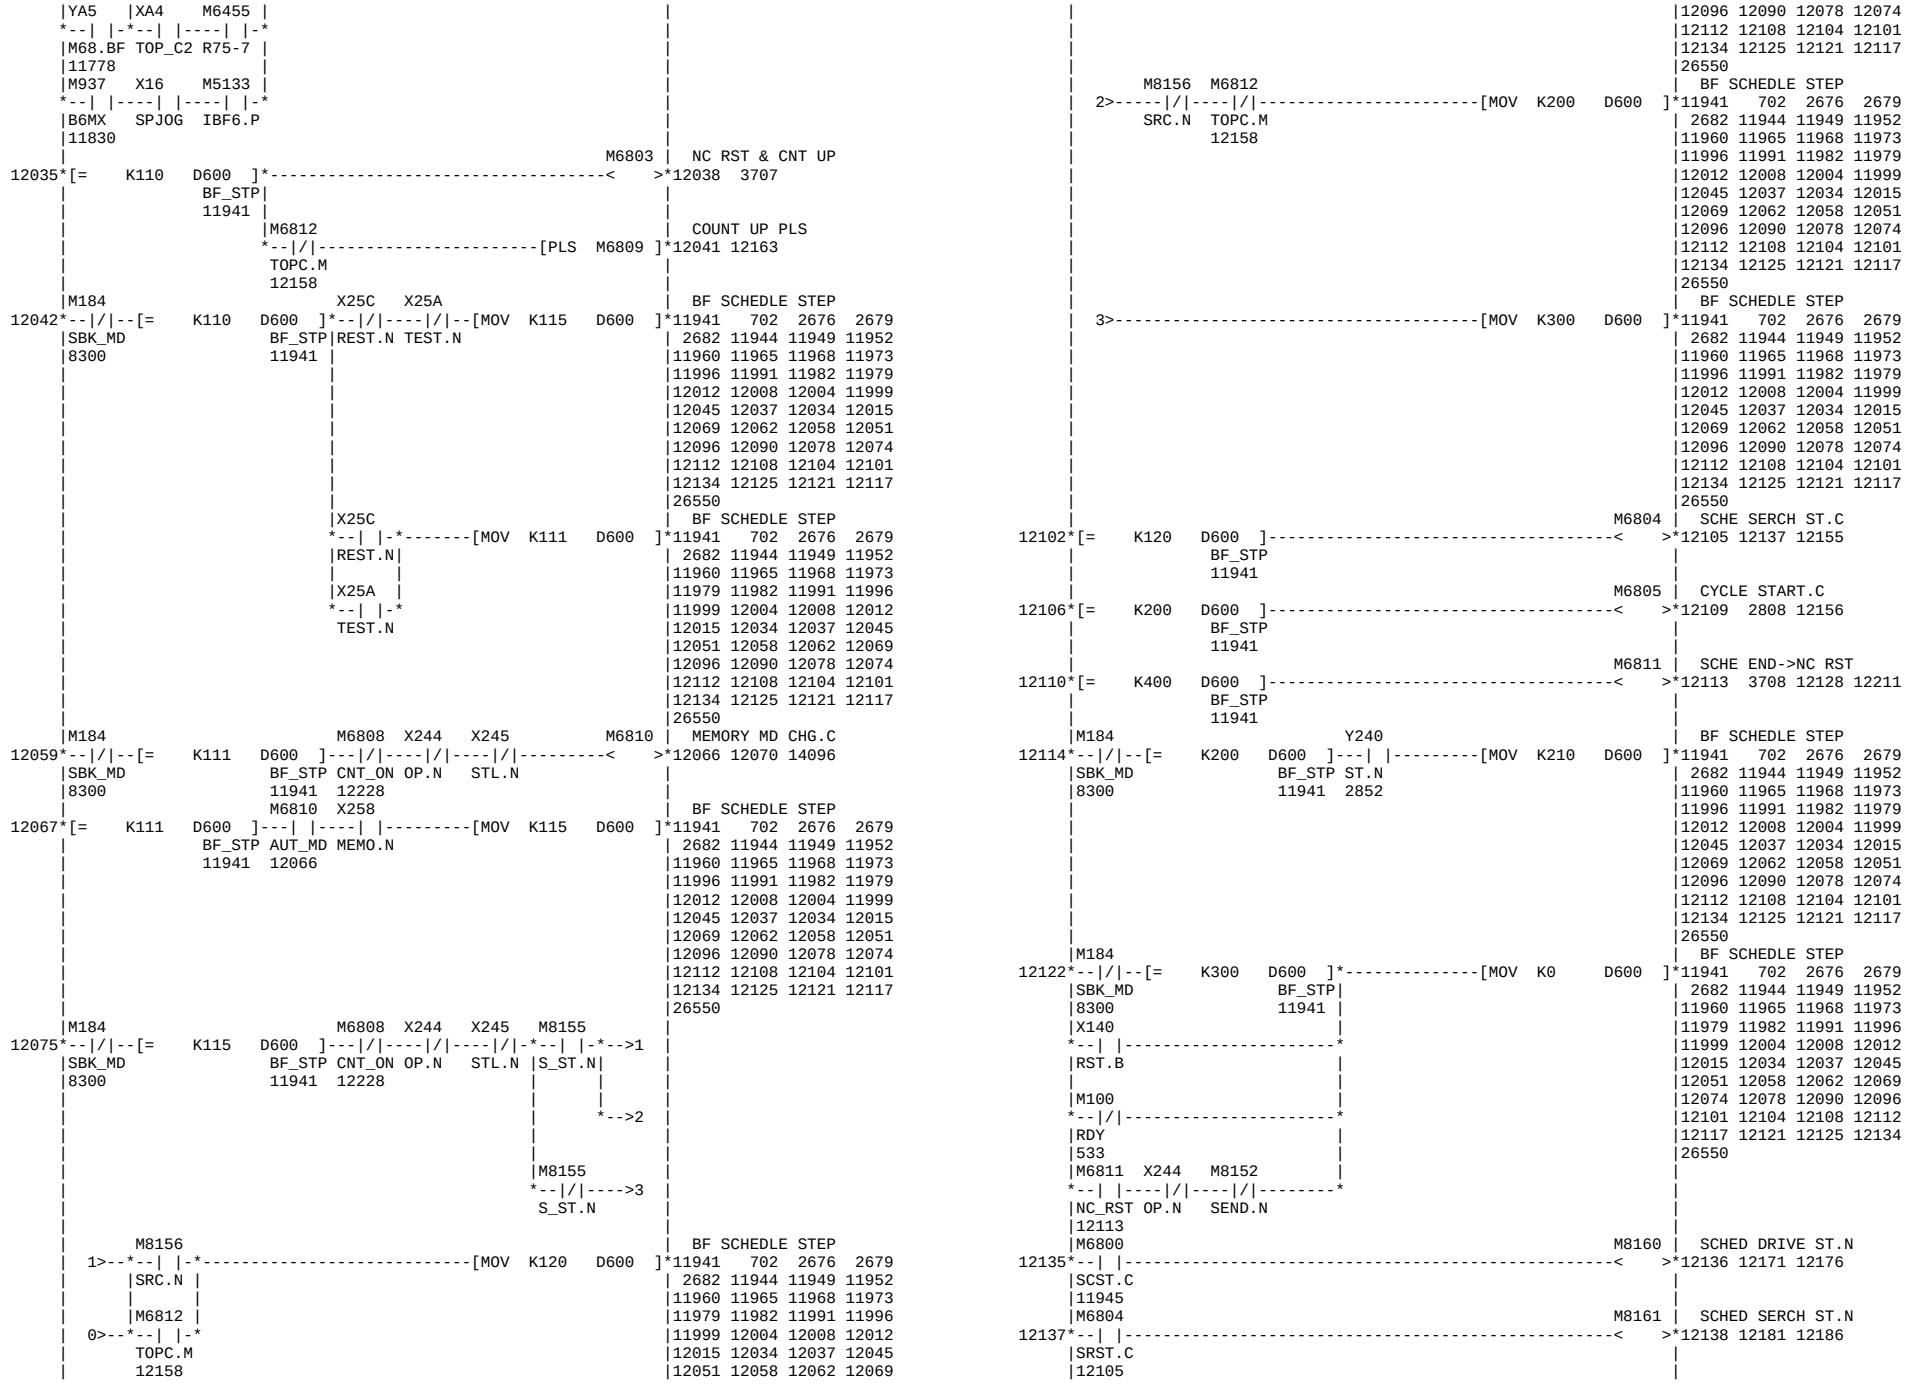

|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
| CHANGE HEX-> BCD
*----------[CALL P54]*11690 11594 11602 11610
|11619 11627 11635 11643
|11652 11660 11668 11677
|11685
| BCD_D627
*----------[MOV D709 D630]*11613
SINT
11701
|M1279 | SENSOR INPUT DAT
11614*--| |-*----------[MOV D396 D708]*11354 11377 11406 11592
|ON | 1stCAL |11600 11608 11617 11625
|585 | 11440 |11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
| CHANGE HEX-> BCD
*----------[CALL P54]*11690 11594 11602 11610
|11619 11627 11635 11643
|11652 11660 11668 11677
|11685
| BCD_D396
*----------[MOV D709 D681]*11622
SINT
11701
| SENSOR INPUT DAT
*----------[MOV D397 D708]*11354 11377 11406 11592
2ndCAL |11600 11608 11617 11625
11451 |11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
| CHANGE HEX-> BCD
*----------[CALL P54]*11690 11594 11602 11610
|11619 11627 11635 11643
|11652 11660 11668 11677
|11685
| BCD_D397
*----------[MOV D709 D682]*11630
SINT
11701
| SENSOR INPUT DAT
*----------[MOV D398 D708]*11354 11377 11406 11592
N_R290 |11600 11608 11617 11625
11486 |11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
| CHANGE HEX-> BCD
*----------[CALL P54]*11690 11594 11602 11610
|11619 11627 11635 11643
|11652 11660 11668 11677
|11685
| BCD_D398
*----------[MOV D709 D683]*11638
SINT
11701
| SENSOR INPUT DAT
*----------[MOV D399 D708]*11354 11377 11406 11592
DIFF_ |11600 11608 11617 11625
11533 |11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
| CHANGE HEX-> BCD
*----------[CALL P54]*11690 11594 11602 11610
|11619 11627 11635 11643
|11652 11660 11668 11677
|11685
| BCD_D399
*----------[MOV D709 D684]*11646
SINT
11701
|M1279 | SENSOR INPUT DAT
11647*--| |-*----------[MOV R290 D708]*11354 11377 11406 11592
|ON | X-DSPL |11600 11608 11617 11625
|585 | 11576 |11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
| CHANGE HEX-> BCD
*----------[CALL P54]*11690 11594 11602 11610
|11619 11627 11635 11643
|11652 11660 11668 11677
|11685
| BCD_D709
*----------[MOV D709 D685]*11655
SINT
11701
| SENSOR INPUT DAT
*----------[MOV D294 D708]*11354 11377 11406 11592
O1_R29 |11600 11608 11617 11625
11581 |11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
| CHANGE HEX-> BCD
*----------[CALL P54]*11690 11594 11602 11610
|11619 11627 11635 11643
|11652 11660 11668 11677
|11685
| BCD_D710
*----------[MOV D709 D686]*11663
SINT
11701
| SENSOR INPUT DAT
*----------[MOV D295 D708]*11354 11377 11406 11592
O2_R29 |11600 11608 11617 11625
|11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
| CHANGE HEX-> BCD
*----------[CALL P54]*11690 11594 11602 11610
|11619 11627 11635 11643
|11652 11660 11668 11677
|11685

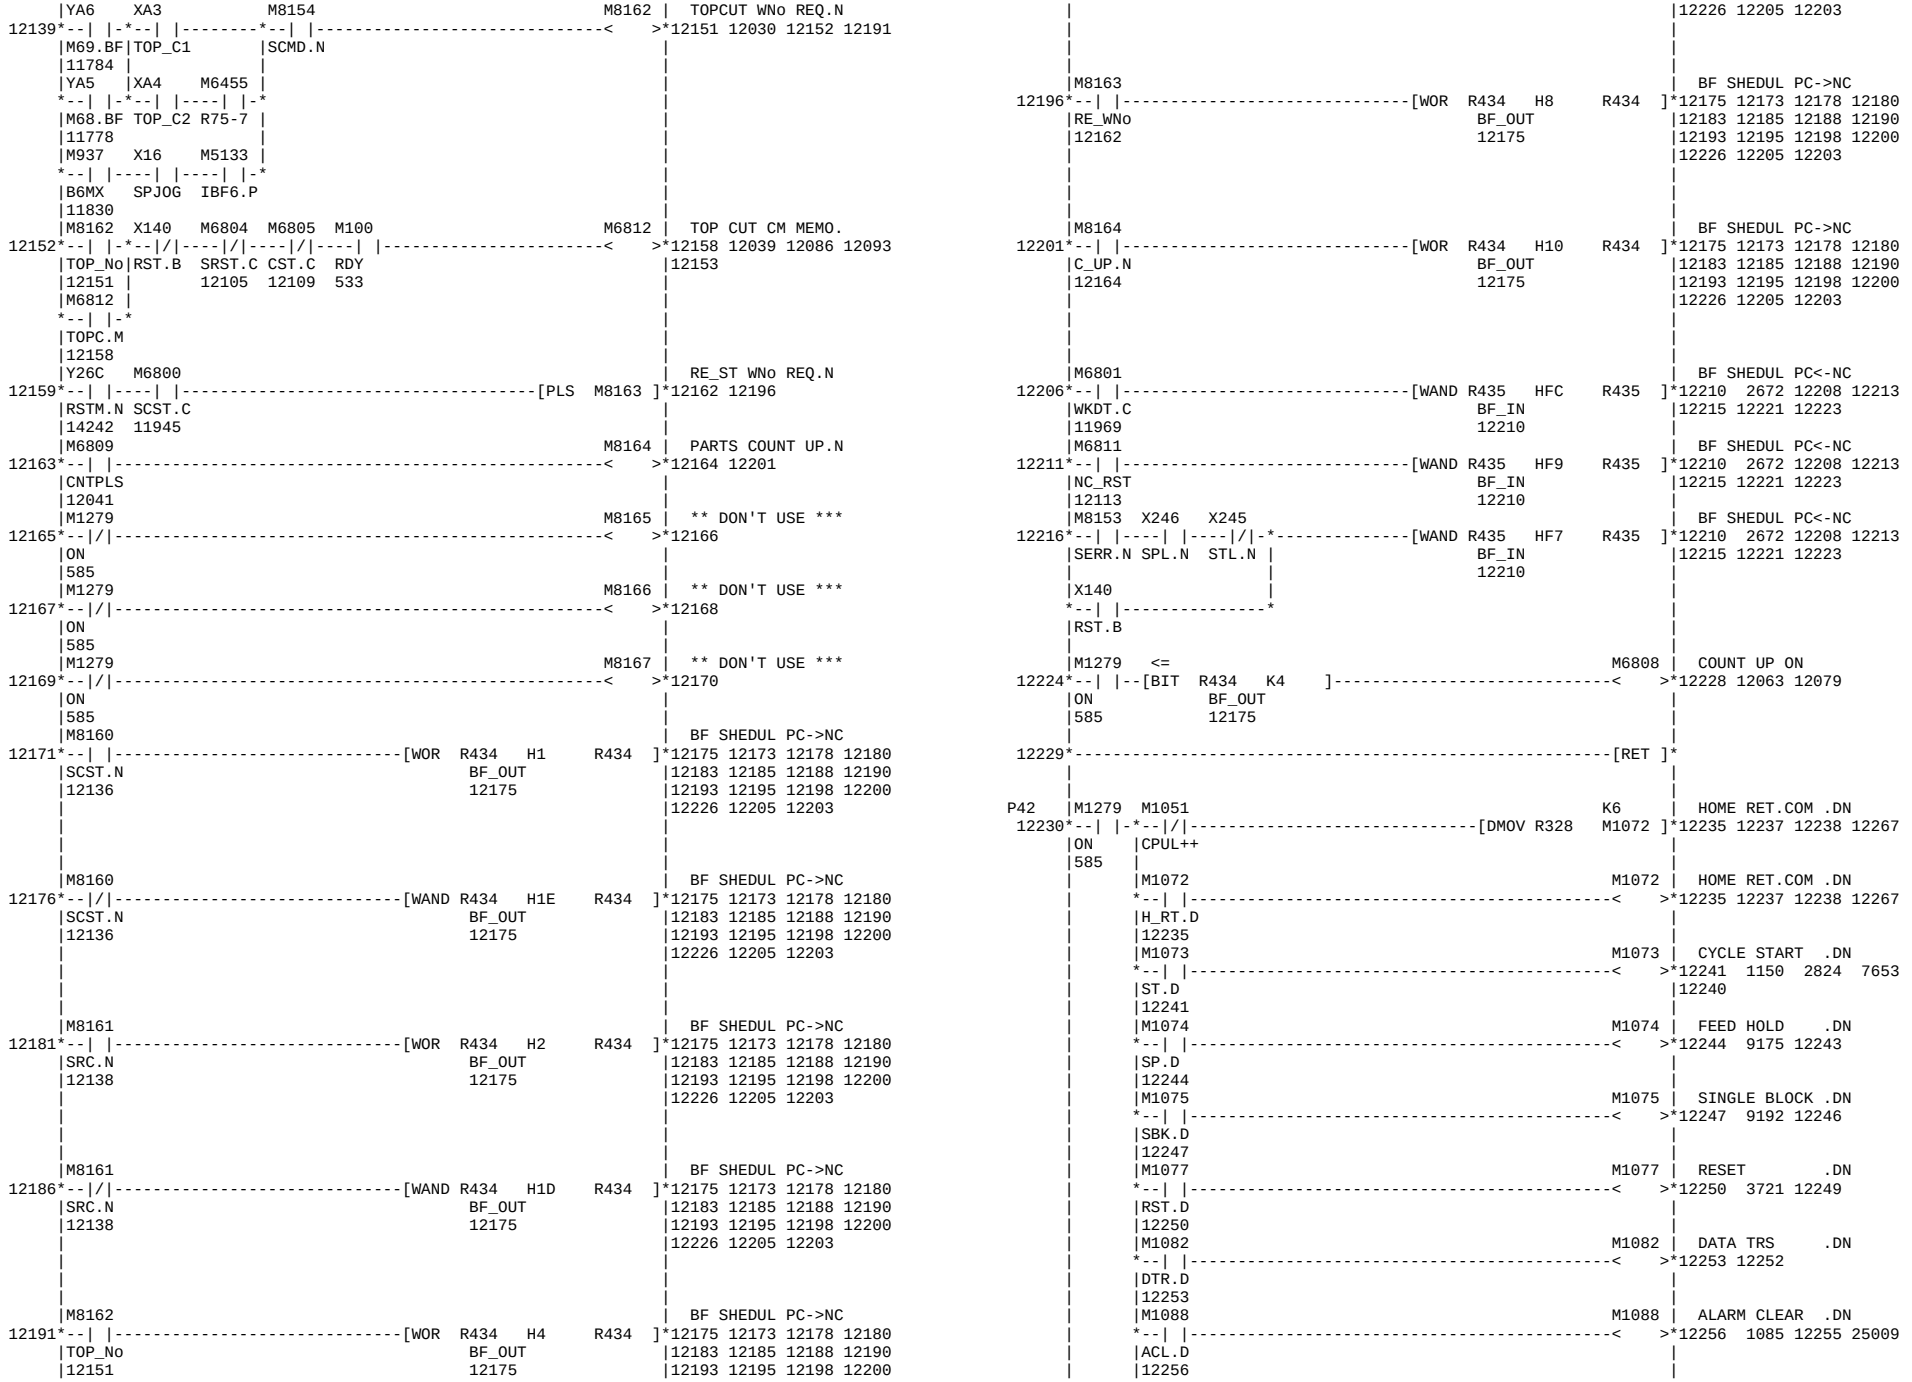

[MOV D709 D687]*11671
SINT
11701
M1279
SENSOR INPUT DAT
11672*--| |-*[MOV D296 D708]*11354 11377 11406 11592
ON O3_R29 |11600 11608 11617 11625
585 |11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
CHANGE HEX-> BCD
[CALL P54]*11690 11594 11602 11610
|11619 11627 11635 11643
|11652 11660 11668 11677
|11685
[MOV D709 D688]*11680
SINT
11701
SENSOR INPUT DAT
[MOV D297 D708]*11354 11377 11406 11592
O4_R29 |11600 11608 11617 11625
|11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
CHANGE HEX-> BCD
[CALL P54]*11690 11594 11602 11610
|11619 11627 11635 11643
|11652 11660 11668 11677
|11685
[MOV D709 D689]*11688
SINT
11701
11689*[RET]*
M7503
P54
11690*[> K0 D708]*<
SIND
11354
SENSOR INPUT DAT
[D390 D708 D708]*11354 11377 11406 11592
0 SIND |11600 11608 11617 11625
11454 11354 |11633 11641 11650 11658
|11692 11683 11675 11666
|28763 11700 11697 11696
|28811 28799 28787 28775
|28835 28823
M1279
SENSOR INPUT TEM
11698*--| |-*[BCD D708 D709]*11701 11358 11381 11410
ON SIND |11596 11604 11612 11621
585 11354 |11629 11637 11645 11654
|11687 11679 11670 11662
|28853 11707
M7503 M874
SENSOR INPUT TEM
*--| |----| |[MOV HFFFF D709]*11701 11358 11381 11410
SPM1CD |11596 11604 11612 11621
11693 |11629 11637 11645 11654
|11687 11679 11670 11662
|28853 11707
M1277
TEMPORARY COIL
<*11709 28854
11710*[RET]*
P40 M6961 X244 M475 M108 M6 M6443 L11
BAR FEEDER MODE
11711*--| |----|/|----| |----|/|-*--| |----|/|-*<*11721 11717 11809
M-MENU OP.N SSOP BF |BF.P 64GL_P|
14835 5677 11722 |
M6961 L11 | | M108
BAR FEEDER MODE
--|/|---| |*<*11722 3729 3760 4456
M-MENU|BFMODE | 4819 5906 8488 8545
14835 |11721 | 9256 11714 11734 11751
X244 | |11807 11811 11819 11825
--| |- |11840 11865 18842 18855
OP.N |19628 24105 25550 25566
|25581 25642 25673 28414
M6972 X244 M475 M188 M6463 L12
YMC B/P MODE
11723*--| |----|/|----| |----|/|-*--| |-*<*11732 11729
M-MENU OP.N SSOP MCBP.M|MCBP.P|
14910 5677 11733 | |
M6972 L12 | | M188
YMC B/P MODE
--|/|---| |*<*11733 8964 11726 20367
M-MENU|MCBP.M |25554
14910 |11732
X244 |
--| |-
OP.N
M108 M6453 YA0
BF MODE(YMC)
11734*--| |----| |-*<*11739 11771
BF MCBF_P|
11722 |
Y15 M6453 |
--| |----|/|-
BFM.M MCBF_P
11810
M931 X245 M6453 YA2
CYCLE START(YMC)
11740*--| |----| |----| |-*<*11746
CCE STL.N MCBF_P|
2255 |
M956 M5127 |
--| |----| |--------
PRENBL UKBF.P
11845
M403 M6453 YA3
CHUCK OPEN(YMC)
11747*--| |----| |----------*<*11758 8452
CHOE-L MCBF_P |
4927 |
M404 M5127 M108 X245 |
--|/|----| |---| |-*--| |-*
CHCL-L UKBF.P|BF |STL.N |
4960 |11722 | |
|XA3 |
--| |-
TOP_C1|
|
M77 |
--|/|--------
FEDK.P
M404 M6453 YA4
CHUCK CLOSE(YMC)
11759*--| |----| |-*<*11764
CHCL-L MCBF_P|
4960 |
M934 M5127 |
--| |----| |-
CHCPLS UKBF.P
11853
M5467 M6453 YA5
BF CALL M68(YMC)
11765*--| |-----------*--| |-*<*11778 8456 11766 12019
68M |MCBF_P| |12140
17126

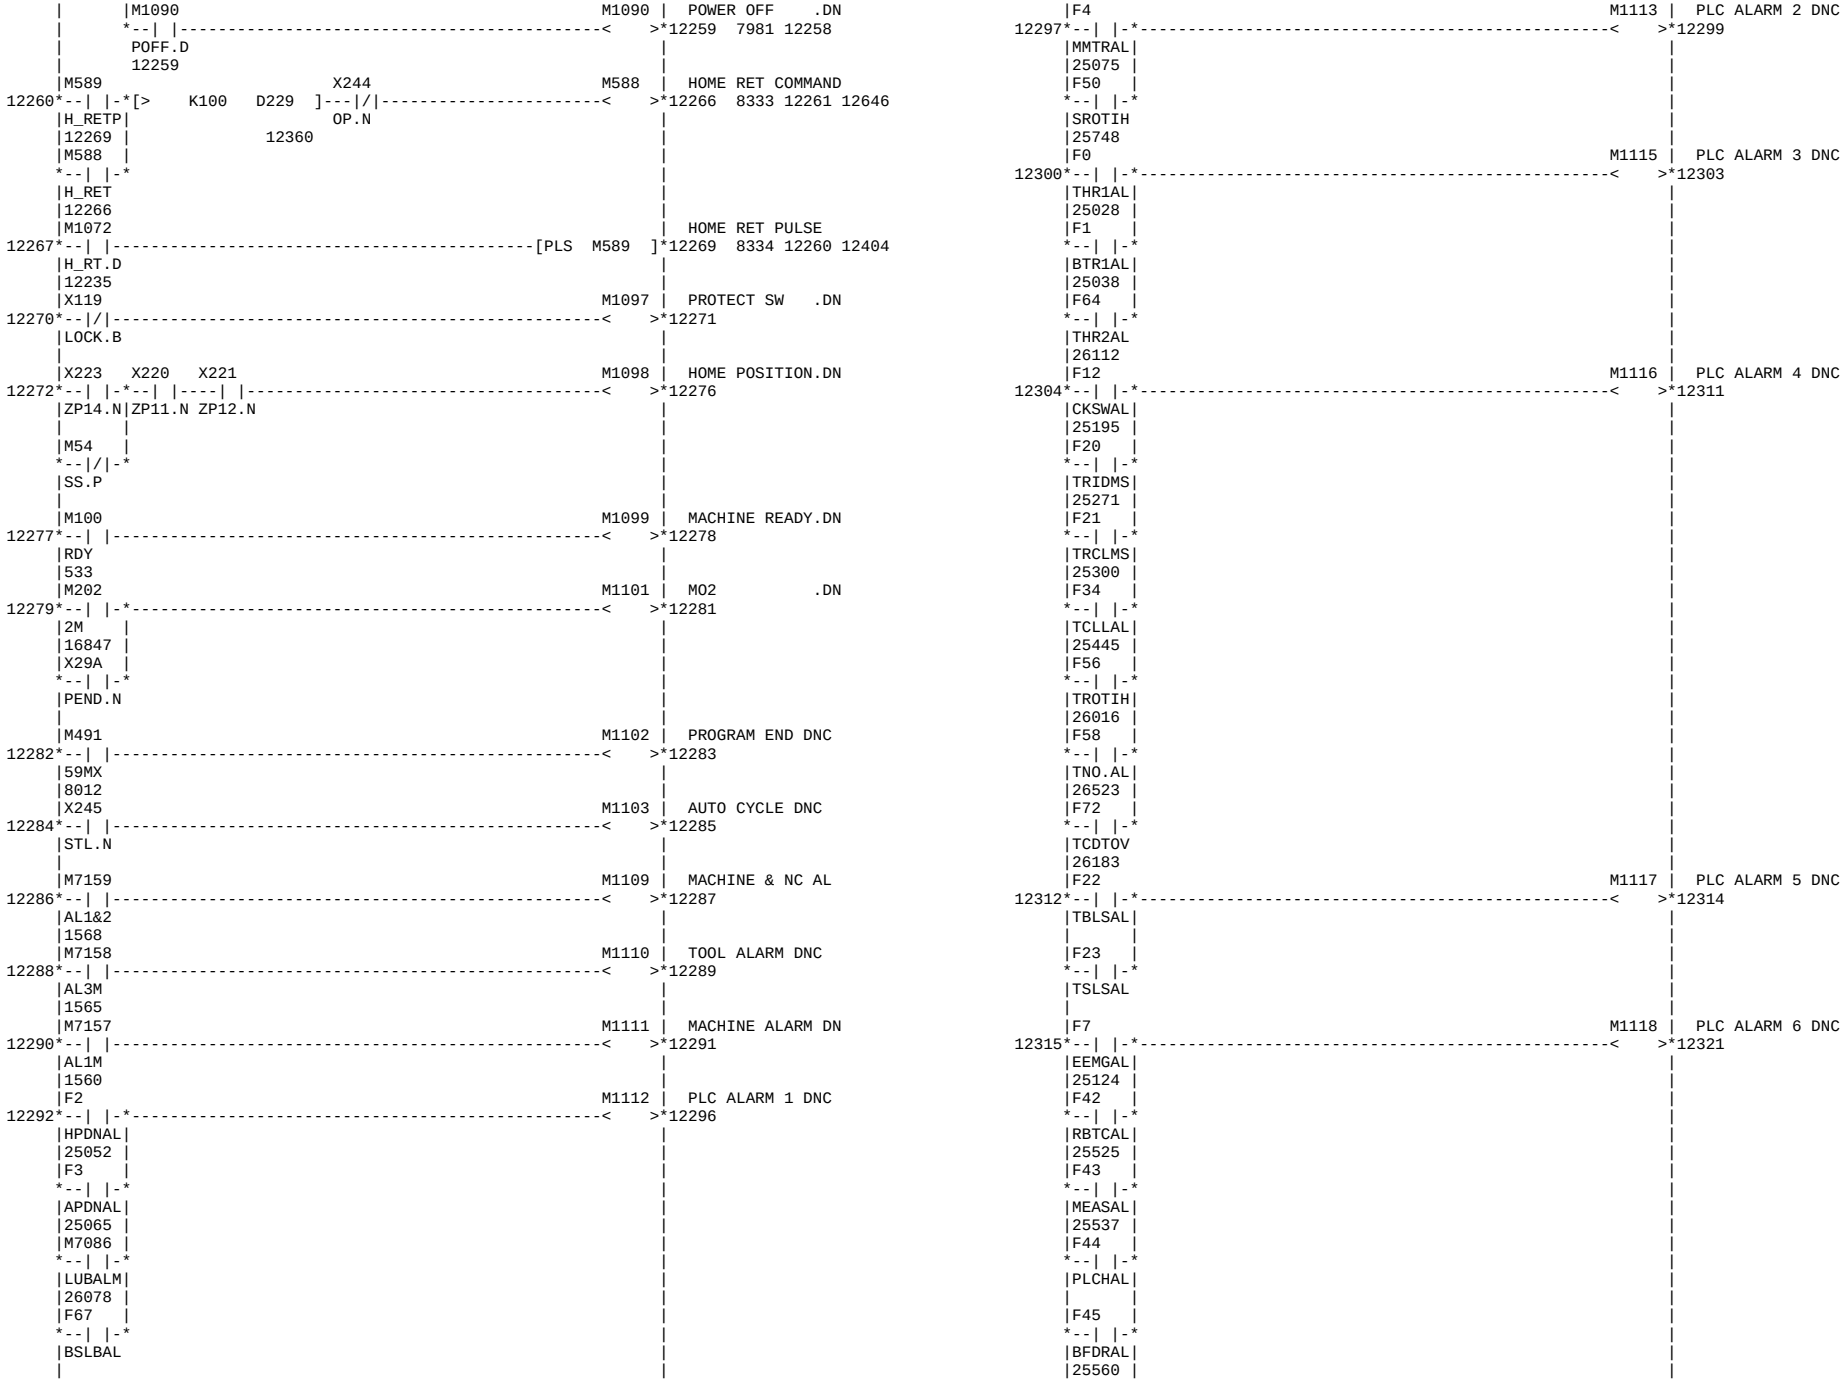

YA5 M6454 YA1 X140 M6 YA0 F45
M68.BF R75-6 AUT_MD RST.B BF.P BF_MD BFDRAL
11778 9259 11739 25560
M942 M5127
68M UKBF.P
3275
M5468 M6453 YA6 BF CALL M69(YMC)
11779 11784 8462 8464 12018
69M MCBF_P 12139
17132
M943 M5127
69M UKBF.P
3281
M6453 M5466 YA7 BF CALL M65(YMC)
11785 11788
MCBF_P 565M
17120
M5465 YA8 BF CALL M64(YMC)
11791
564M
17110
X221 YA9 Z HOME POS.(YMC)
11794
ZP12.N
Y1 YAA EMG STOP(YMC)
11797
EMGB.M
490
X264 YAB SPDL STOP(YMC)
K0 R318 11803
ZSOS.N
YA1 XA7 M108 M5001 RKEMPTY
11808 9181 25546
AUT_MD BF_EMP BF
9259 11722
L11 Y15 BAR FEEDER MODE
11809 11810 4776 11736 21497
BFMODE 21889 25600 26227 26275
11721
M108 M7834 BAR FEEDER MODE
11811 11812
BF
11722
M927 M5895 MF 20 MEMORY
11813 11814 25575
INCB/F
11821
M439 M6531 M101 M108 M6401 M927 INCHING FROM B/F
11815 11821 6243 6301 11813
SRR BICH RST BF BARS.P 11816 21609 25574
21615 9247 543 11722
M927
INCB/F
11821
M206 M207 M108 M100 M395 M5832 M101 M937 BAR WORK START
11822 11830 8471 11823 11831
6M 7M BF RDY CHX SWISS RST 12025 12146
16852 16862 11722 533 4836 4259 543
M937
B6MX
11830
M937 M403 T19
11831 T59 D45 11834 19615
B6MX CHOE-L T19
11830 4927
M936 UNCHUCK OK
11837 7948

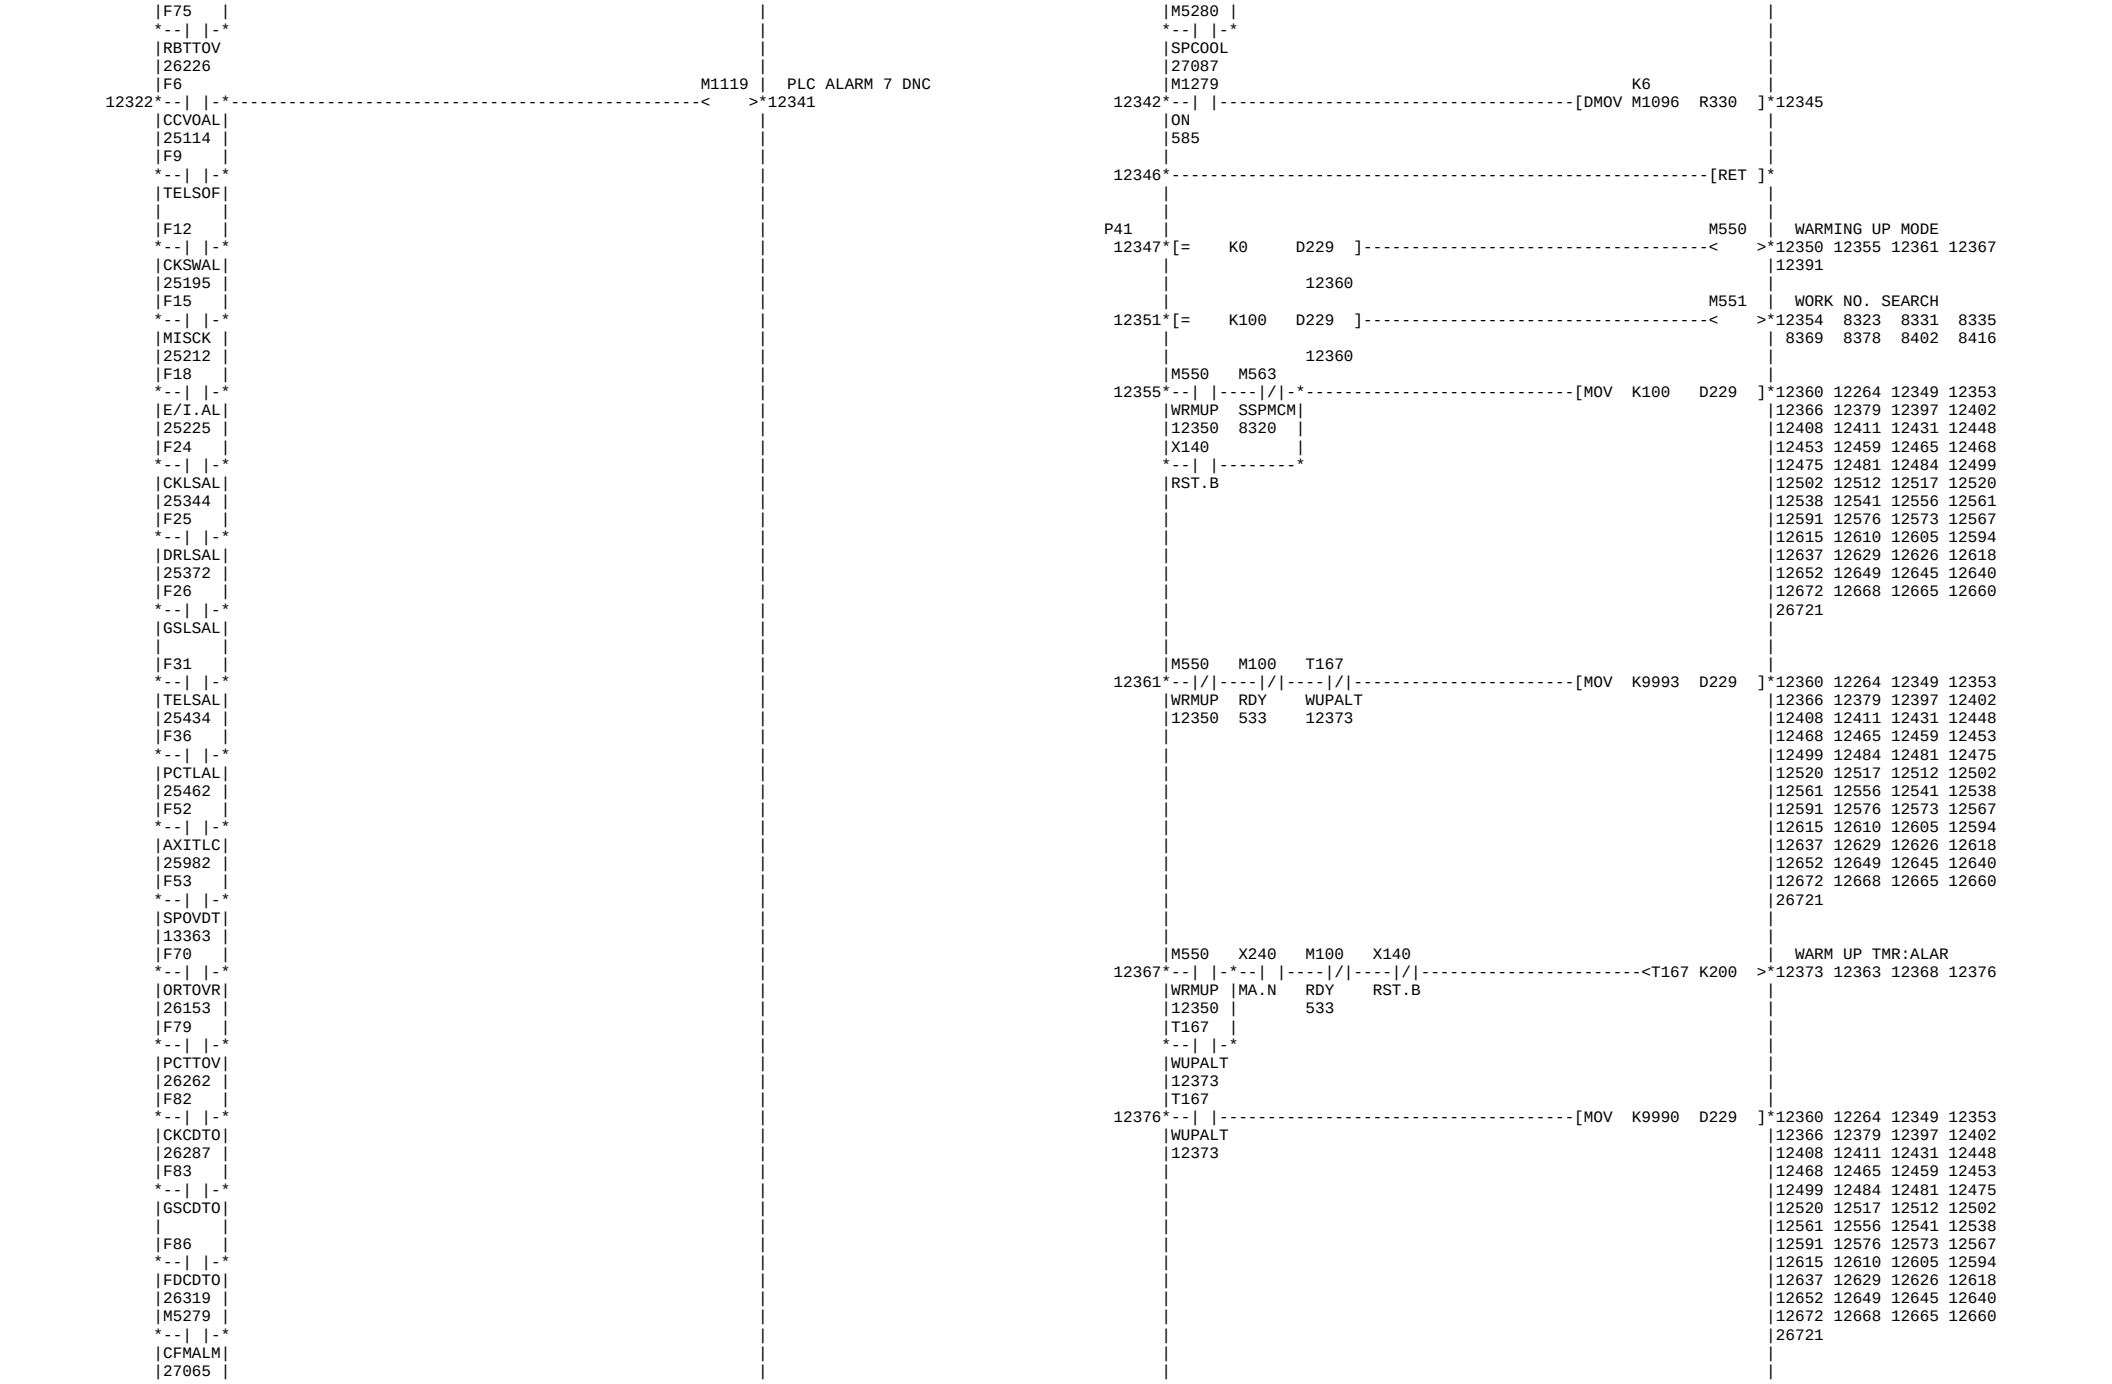

M5127 M108 M100 M931 M956 PUSH ROD ENABLE
11838 11845 11743
UKBF.P BF RDY CCE
11722 533 2255
M404
CHCL-L
4960
M404 T47
T87 D17 11849 11852
CHCL-L T47
4960
T87 M934 CHUCK CLAMP PLS
11853 11761
CHCLPT
11849
M931 M441 M6529 M935 DOOR CLOSE END B
11862 4817
CCE SPSTOP UCIL
2255 21718 9226
X11C X11C
SETUP. SETUP.
M90 M5127 X16 M957 TOP CUT INHIBIT
11874 8533 11866
AUTO UKBF.P SPJOG
14419
M108 M5127 XA3
BF UKBF.P TOP_C1
11722
M957
TPCTIH
11874
F48 M757 FEEDER NOT READY
11875 11880 11877 11881
EXC.AL
25573
M753
F_RD.M
638
M757 X245
F_NG STL.N
11880
M757 M351 M748 FEEDER ROD FORWA
11881 11884 11896 20350
F_NG 701M
11880 17933
M754 M101 M352 M758 F.ROD REV WEIT
11890 3481 11899
703MX RST 703M
4712 543 17938
M353 M759 F.ROD REV END
11893 11902
704M
17943
M6401 M748 M1326 FEEDER ROD FORWA
11894 11897 21179
BARS.P 701M.M
11884
M758 M1327 F ROD REV WAIT P
11900
703M.M
11890
M759 M1328 F ROD REV END
11903
704M.M
11893
M1329 AUTO MODE 1
K0 D65 K6 D65 11911
MD-D#1 MD-D#1
14332 14332

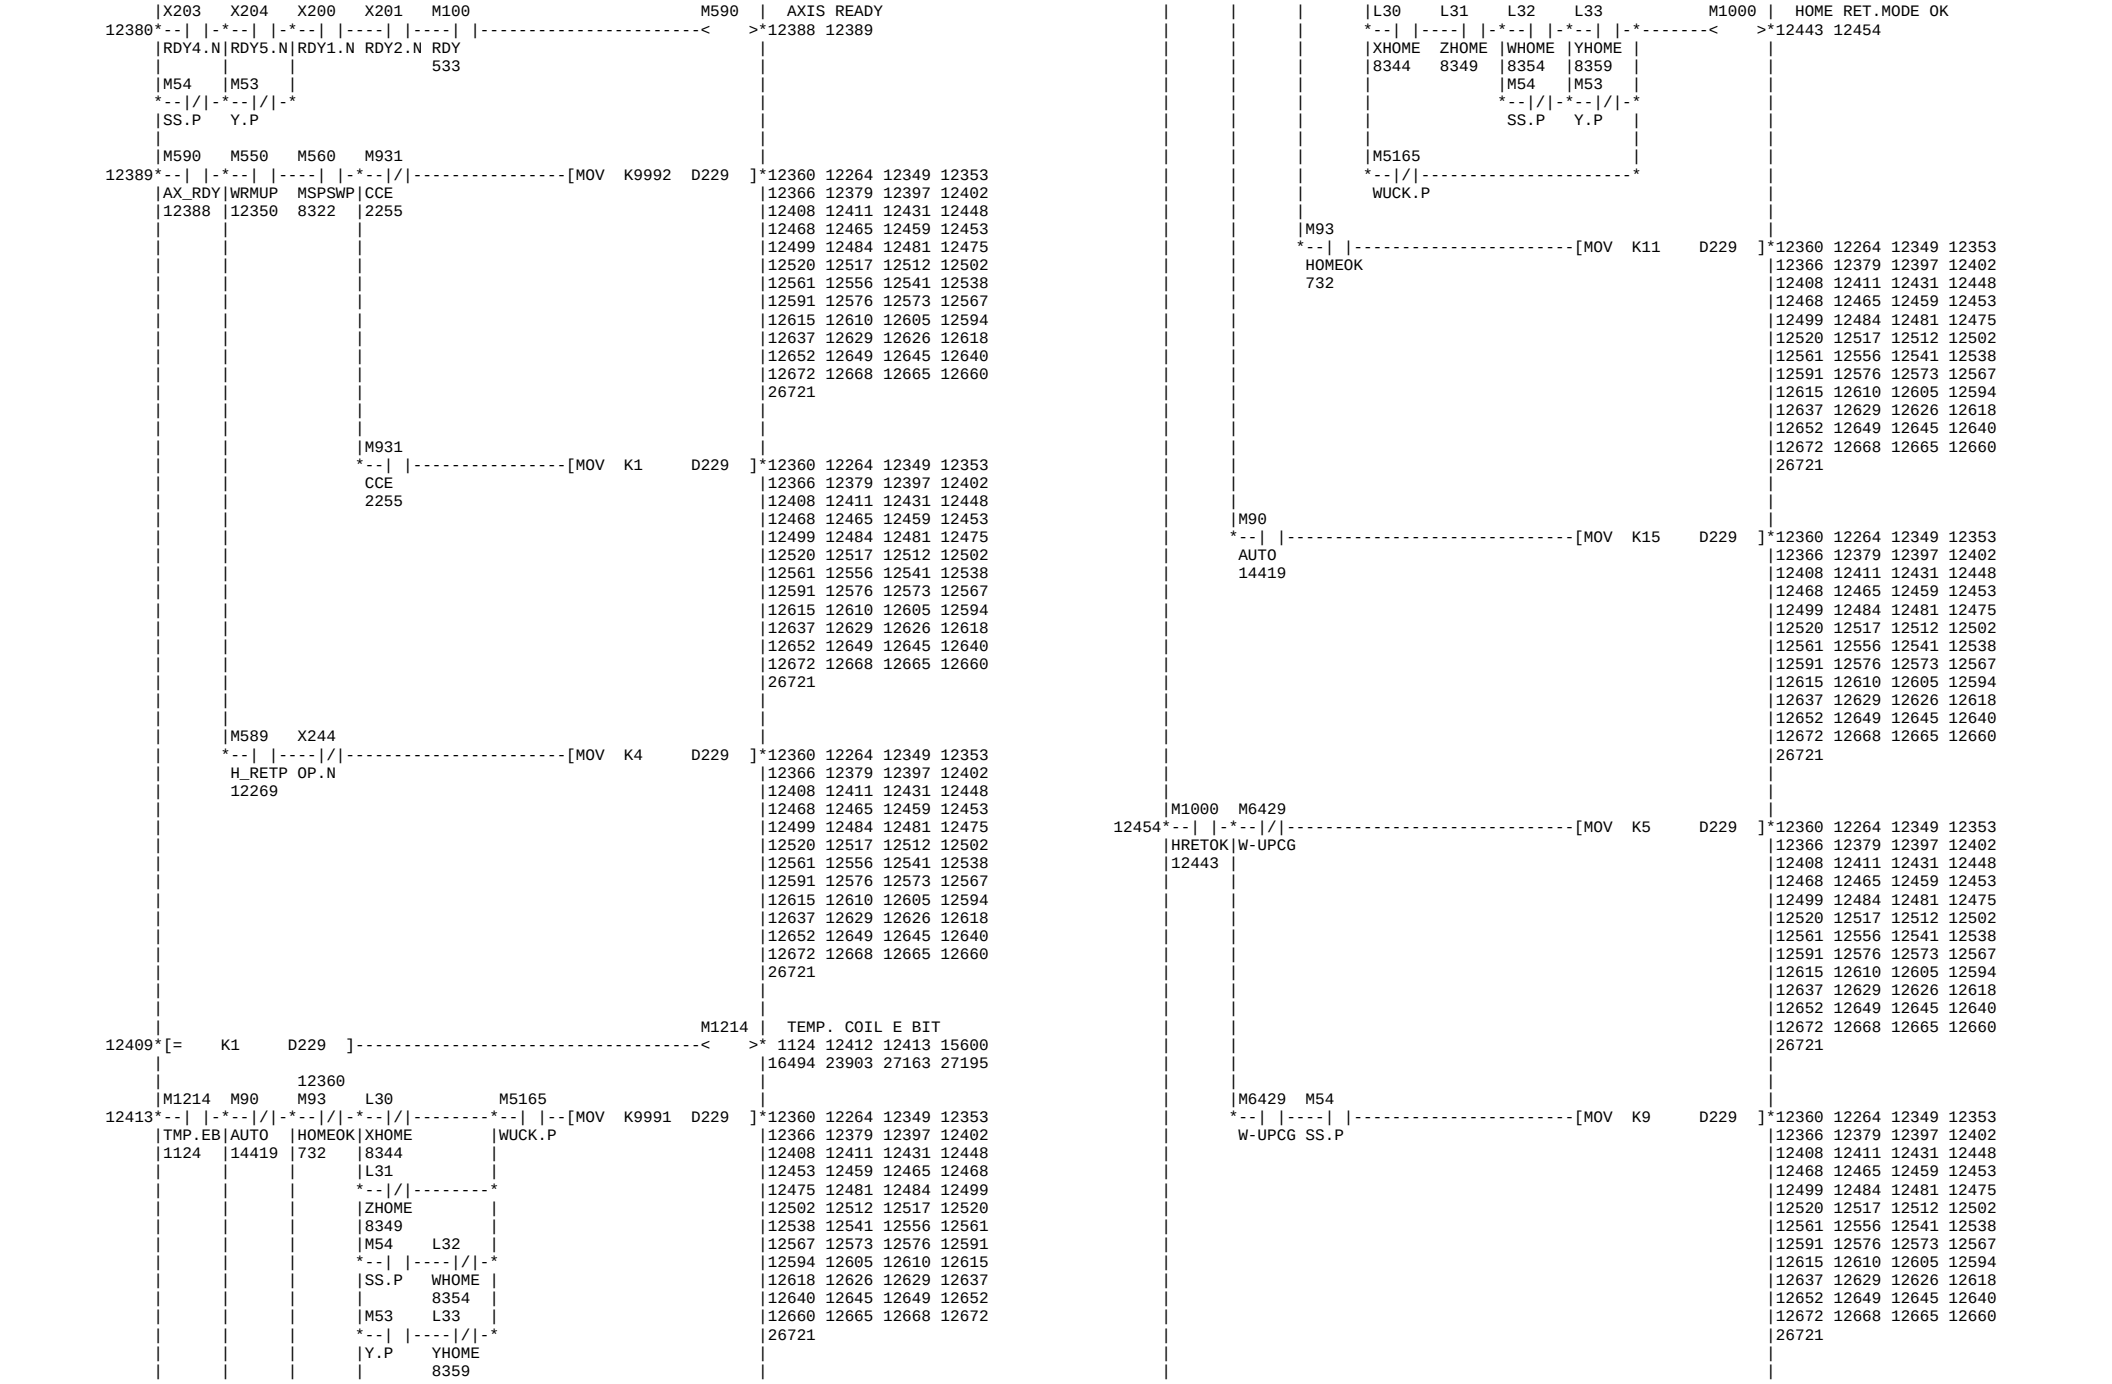

M1332 | AUTO MODE 2
*11912
M100 M1294 M5429 M5430 M1330 | PULLER FORWARD
RDY PRDY.M 711M 712M *11919
533 17948 17953
M5430 M5429 M973 M1331 | PULLER REVERSE
712M 711M SUCKE *11924
17953 17948 5215
M351 M6463 M378 | S HUCK INT OFF P
11925 *11931 6053
701M MCBP.P
17933
M352
703M
17938
M353
704M
17943
M5429
711M
17948
M5430
712M
17953
11932 [RET]*
P43 M186 M90 M8154 M8155 M100 X244 | BF SCHEDLE STEP
11933 [MOV K10 D600]* 11941 702 2676 2679
CSTPLF AUTO SCMD.N S_ST.N RDY OP.N | 2682 11944 11949 11952
8309 14419 533 | 11960 11965 11968 11973
| 11996 11991 11982 11979
| 12012 12008 12004 11999
| 12045 12037 12034 12015
| 12069 12062 12058 12051
| 12096 12090 12078 12074
| 12112 12108 12104 12101
| 12134 12125 12121 12117
| 26550
M6800 | SCHE DRIVE ST.C
11942 [= K10 D600]* *11945 12135 12160
BF_STP
11941
M184 M8150 M8151 M8152
11946 K10 D600]* *11941 702 2676 2679
SBK_MD BF_STP SRCH.N SRFN.N SEND.N | 2682 11944 11949 11952
8300 11941 2673 | 11960 11965 11968 11973
M8152 | 11996 11991 11982 11979
[= K120 D600]* *2 | 12012 12008 12004 11999
BF_STP SEND.N | 12045 12037 12034 12015
11941 | 12069 12062 12058 12051
| 12096 12090 12078 12074
| 12112 12108 12104 12101
| 12134 12125 12121 12117
| 26550
| BF SCHEDLE STEP
1>[MOV K20 D600]* 11941 702 2676 2679
| 2682 11944 11949 11952
| 11960 11965 11968 11973
| 11996 11991 11982 11979
| 12012 12008 12004 11999
| 12045 12037 12034 12015
| 12069 12062 12058 12051
| 12096 12090 12078 12074
| 12112 12108 12104 12101
| 12134 12125 12121 12117
| 26550
| BF SCHEDLE STEP
2>[MOV K400 D600]* 11941 702 2676 2679
| 2682 11944 11949 11952
| 11960 11965 11968 11973
| 11996 11991 11982 11979
| 12012 12008 12004 11999
| 12045 12037 12034 12015
| 12069 12062 12058 12051
| 12096 12090 12078 12074
| 12112 12108 12104 12101
| 12134 12125 12121 12117
| 26550
M6801 | WKNo.DATA SET.C
11966 [= K20 D600]* *11969 12206 24229
BF_STP
11941
M184
11970 [D= D870 R258]>1
SBK_MD BF_STP
8300 11941 24232 24094
| BF SCHEDLE STEP
1>[MOV K30 D600]* 11941 702 2676 2679
| 2682 11944 11949 11952
| 11960 11965 11968 11973
| 11996 11991 11982 11979
| 12012 12008 12004 11999
| 12045 12037 12034 12015
| 12069 12062 12058 12051
| 12096 12090 12078 12074
| 12112 12108 12104 12101
| 12134 12125 12121 12117
| 26550
| CST CMD DELAY.T
11980 [= K30 D600]<T23 K10 >* 11984 11987
BF_STP
11941
T23 M6802 | WKNo.SERCH ST.C
11987 *11988 24193
CST.DL
11984
Y2C8 X286 | BF SCHEDLE STEP
11989 [= K30 D600]* [MOV K40 D600]* 11941 702 2676 2679
BF_STP EST.N WNFN.N | 2682 11944 11949 11952
11941 24195 | 11960 11965 11968 11973
| 11996 11991 11982 11979
| 12012 12008 12004 11999
| 12045 12037 12034 12015
| 12069 12062 12058 12051
| 12096 12090 12078 12074
| 12112 12108 12104 12101
| 12134 12125 12121 12117
| 26550
M6806 | CYCLE START.C
11997 [= K40 D600]* *12000 2809
BF_STP
11941
M184 Y240 | BF SCHEDLE STEP
12001 K40 D600]* [MOV K100 D600]* 11941 702 2676 2679
SBK_MD BF_STP ST.N | 2682 11944 11949 11952
8300 11941 2852 | 11960 11965 11968 11973
| 11996 11991 11982 11979
| 12012 12008 12004 11999
| 12045 12037 12034 12015
| 12069 12062 12058 12051
| 12096 12090 12078 12074
| 12112 12108 12104 12101
| 12134 12125 12121 12117
| 26550
M184 M220 | BF SCHEDLE STEP
12009 K100 D600]* [= K110 D600]* 11941 702 2676 2679
SBK_MD BF_STP 30M | 2682 11944 11949 11952
8300 11941 16916 | 11960 11965 11968 11973
[= K210 D600]* | 11979 11982 11991 11996
BF_STP | 11999 12004 12008 12012
11941 | 12015 12034 12037 12045
YA6 XA3 M8154 M8162 | 12051 12058 12062 12069
M69.BF TOP_C1 SCMD.N TOP_No | 12074 12078 12090 12096
11784 12151 | 12101 12104 12108 12112
| 12117 12121 12125 12134
| 26550

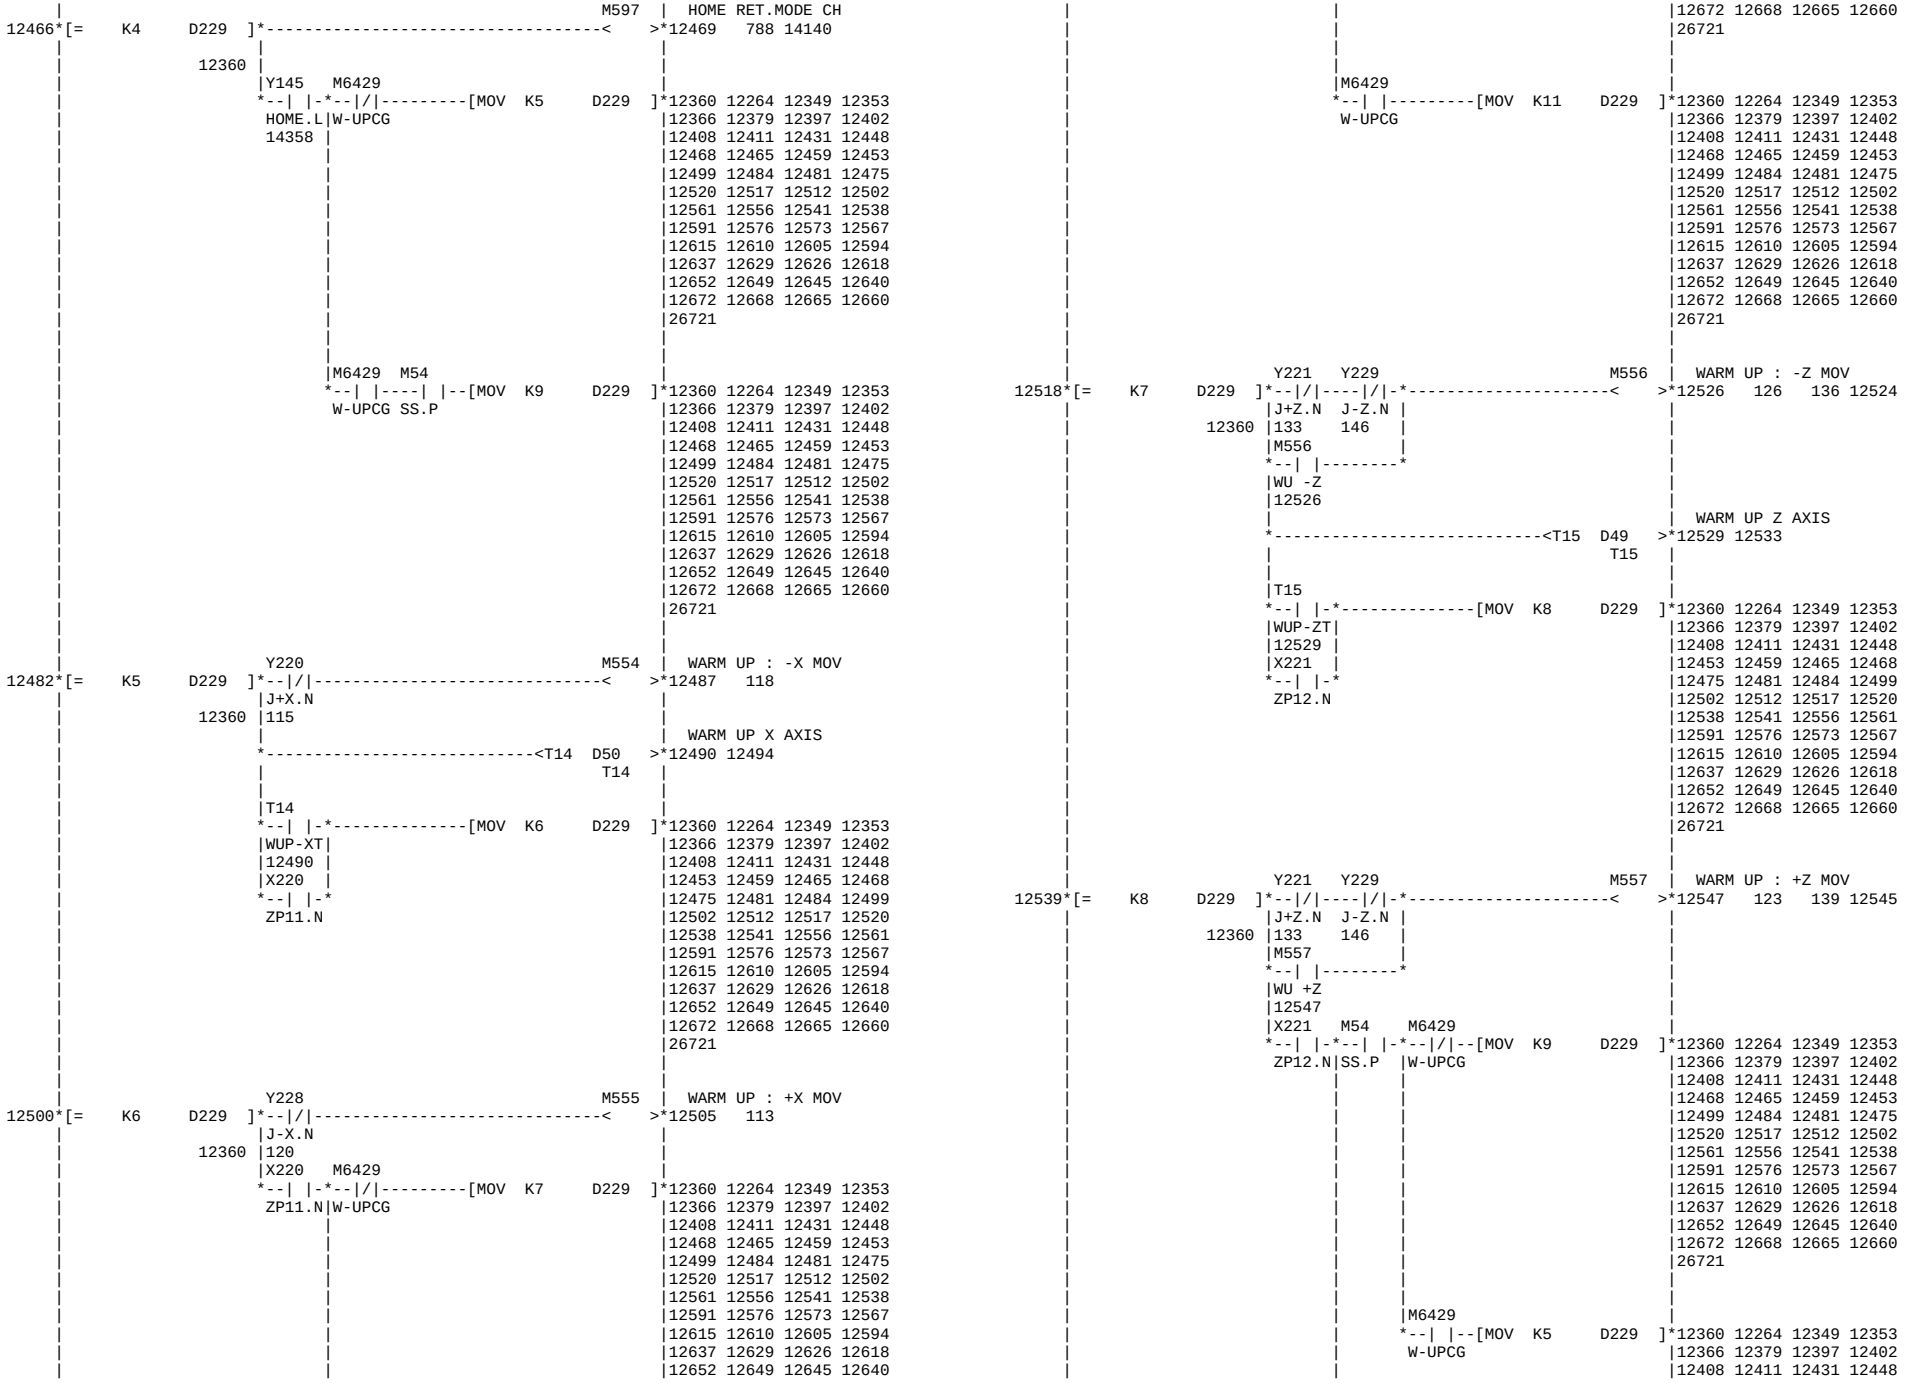


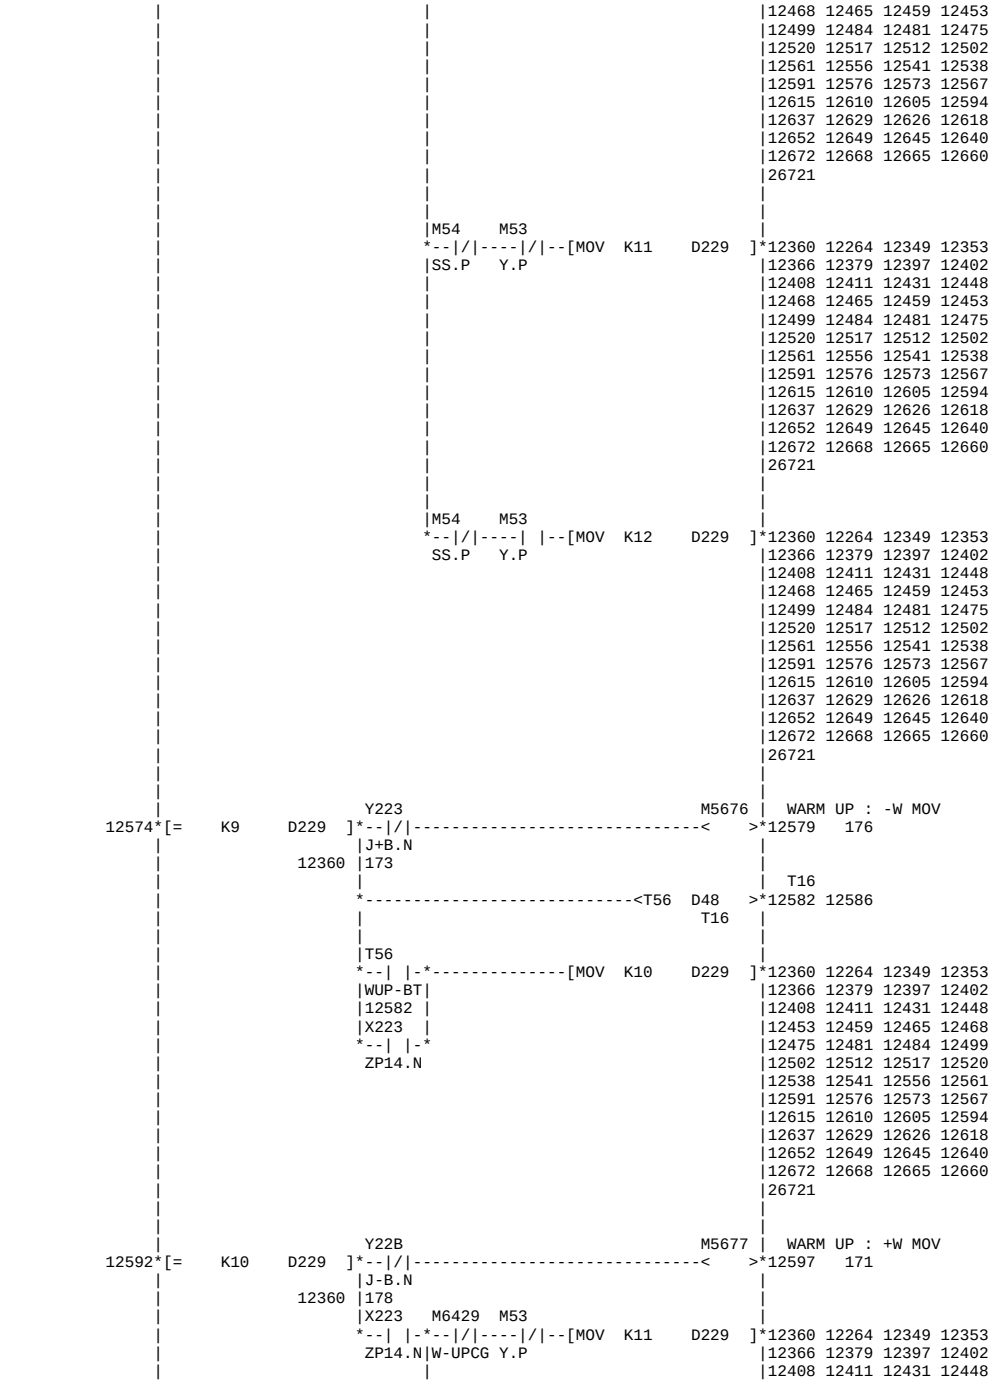

YA6 XA3 M8154 M8162 TOPCUT WNo REQ.N
12139 12151 12030 12152 12191
M69.BF TOP_C1 SCMD.N
11784
YA5 XA4 M6455
M68.BF TOP_C2 R75-7
11778
M937 X16 M5133
B6MX SPJOG IBF6.P
11830
M8162 X140 M6804 M6805 M100 M6812 TOP CUT CM MEMO.
12152 12158 12039 12086 12093
TOP_No RST.B SRST.C CST.C RDY 12153
12151 12105 12109 533
M6812
TOPC.M
12158
Y26C M6800 RE_ST WNo REQ.N
12159 12162 12196
RSTM.N SCST.C
14242 11945
M6809 M8164 PARTS COUNT UP.N
12163 12164 12201
CNTPLS
12041
M1279 M8165 ** DON'T USE ***
12165 12166
ON
585
M1279 M8166 ** DON'T USE ***
12167 12168
ON
585
M1279 M8167 ** DON'T USE ***
12169 12170
ON
585
M8160 BF SHEDUL PC->NC
12171 12175 12173 12178 12180
SCST.N BF_OUT 12183 12185 12188 12190
12136 12175 12193 12195 12198 12200
12226 12205 12203
M8160 BF SHEDUL PC->NC
12176 12175 12173 12178 12180
SCST.N BF_OUT 12183 12185 12188 12190
12136 12175 12193 12195 12198 12200
12226 12205 12203
M8161 BF SHEDUL PC->NC
12181 12175 12173 12178 12180
SRC.N BF_OUT 12183 12185 12188 12190
12138 12175 12193 12195 12198 12200
12226 12205 12203
M8161 BF SHEDUL PC->NC
12186 12175 12173 12178 12180
SRC.N BF_OUT 12183 12185 12188 12190
12138 12175 12193 12195 12198 12200
12226 12205 12203
M8162 BF SHEDUL PC->NC
12191 12175 12173 12178 12180
TOP_No BF_OUT 12183 12185 12188 12190
12151 12175 12193 12195 12198 12200
12226 12205 12203
M8163 BF SHEDUL PC->NC
12196 12175 12173 12178 12180
RE_WNo BF_OUT 12183 12185 12188 12190
12162 12175 12193 12195 12198 12200
12226 12205 12203
M8164 BF SHEDUL PC->NC
12201 12175 12173 12178 12180
C_UP.N BF_OUT 12183 12185 12188 12190
12164 12175 12193 12195 12198 12200
12226 12205 12203
M6801 BF SHEDUL PC<-NC
12206 12210 2672 12208 12213
WKDT.C BF_IN 12215 12221 12223
11969 12210
M6811 BF SHEDUL PC<-NC
12211 12210 2672 12208 12213
NC_RST BF_IN 12215 12221 12223
12113 12210
M8153 X246 X245 BF SHEDUL PC<-NC
12216 12210 2672 12208 12213
SERR.N SPL.N STL.N BF_IN 12215 12221 12223
12210
X140
RST.B
M1279 <= M6808 COUNT UP ON
12224 12228 12063 12079
ON BF_OUT
585 12175
12229 RET
P42 M1279 M1051 K6 HOME RET.COM .DN
12230 12235 12237 12238 12267
ON CPUL++
585
M1072 M1072 HOME RET.COM .DN
12235 12237 12238 12267
H_RT.D
12235
M1073 M1073 CYCLE START .DN
12241 1150 2824 7653
ST.D 12240
12241
M1074 M1074 FEED HOLD .DN
12244 9175 12243
SP.D
12244
M1075 M1075 SINGLE BLOCK .DN
12247 9192 12246
SBK.D
12247
M1077 M1077 RESET .DN
12250 3721 12249
RST.D
12250
M1082 M1082 DATA TRS .DN
12253 12252
DTR.D
12253
M1088 M1088 ALARM CLEAR .DN
12256 1085 12255 25009
ACL.D
12256

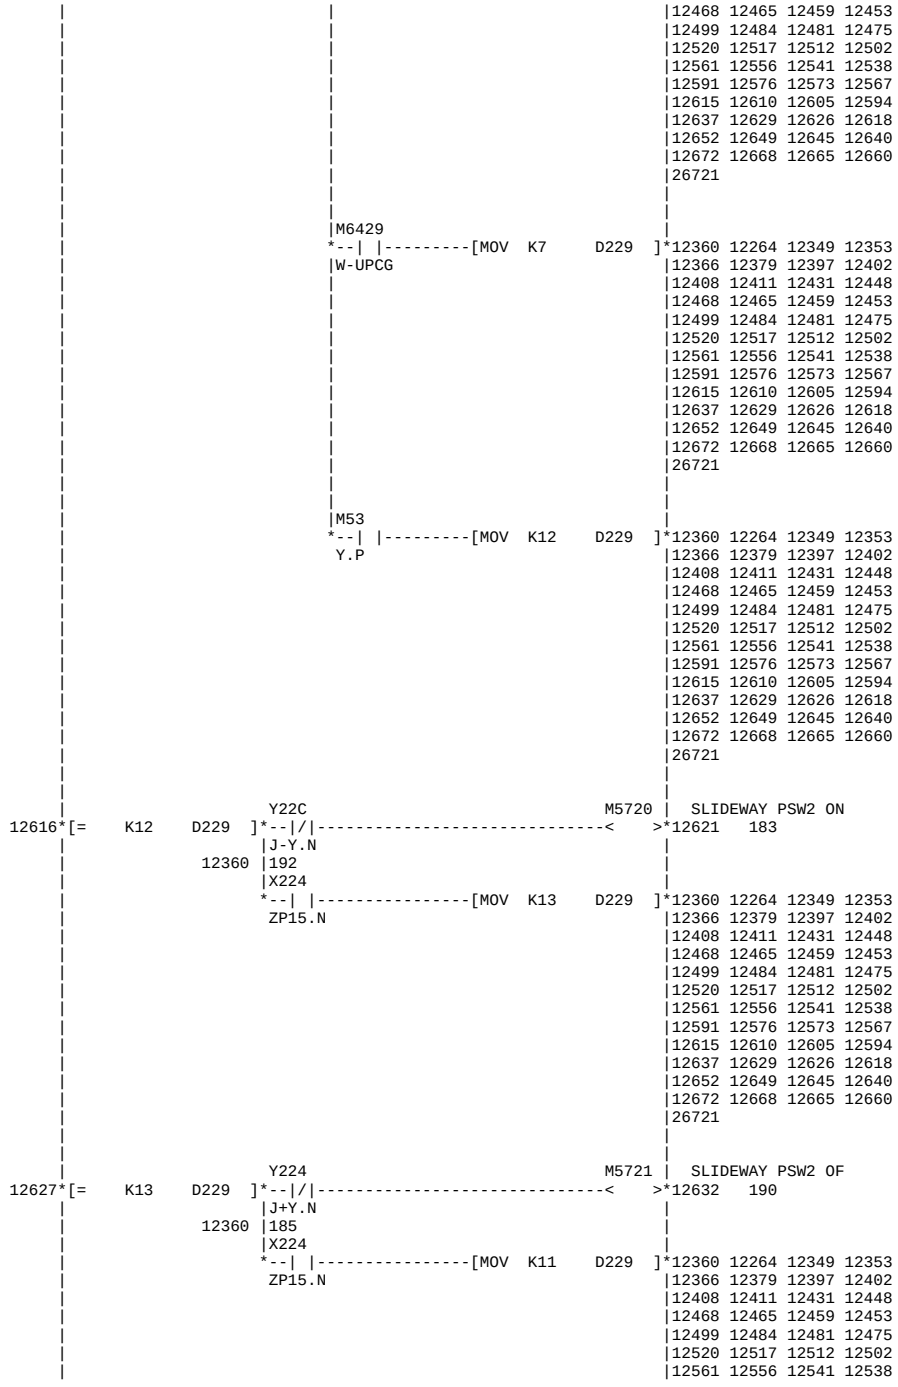

|M1090 M1090 | POWER OFF .DN
*--| |----------<>*12259 7981 12258
POFF.D
12259
|M589 X244 M588 | HOME RET COMMAND
12260*--| |-*[> K100 D229]---|/|----------<>*12266 8333 12261 12646
|H_RETP| OP.N
|12269 | 12360
|M588 |
--| |-
|H_RET
|12266
|M1072 | HOME RET PULSE
12267*--| |----------[PLS M589]*12269 8334 12260 12404
|H_RT.D
|12235
|X119 M1097 | PROTECT SW .DN
12270*--|/|----------<>*12271
|LOCK.B
|X223 X220 X221 M1098 | HOME POSITION.DN
12272*--| |-*--| |----| |----------<>*12276
|ZP14.N|ZP11.N ZP12.N
|M54 |
--|/|-
|SS.P
|M100 M1099 | MACHINE READY.DN
12277*--| |----------<>*12278
|RDY
|533
|M202 M1101 | MO2 .DN
12279*--| |-*----------<>*12281
|2M |
|16847 |
|X29A |
--| |-
|PEND.N
|M491 M1102 | PROGRAM END DNC
12282*--| |----------<>*12283
|59MX
|8012
|X245 M1103 | AUTO CYCLE DNC
12284*--| |----------<>*12285
|STL.N
|M7159 M1109 | MACHINE & NC AL
12286*--| |----------<>*12287
|AL1&2
|1568
|M7158 M1110 | TOOL ALARM DNC
12288*--| |----------<>*12289
|AL3M
|1565
|M7157 M1111 | MACHINE ALARM DN
12290*--| |----------<>*12291
|AL1M
|1560
|F2 M1112 | PLC ALARM 1 DNC
12292*--| |-*----------<>*12296
|HPDNAL|
|25052 |
|F3 |
--| |-
|APDNAL|
|25065 |
|M7086 |
--| |-
|LUBALM|
|26078 |
|F67 |
--| |-
|BSLBAL
|F4 M1113 | PLC ALARM 2 DNC
12297*--| |-*----------<>*12299
|MMTRAL|
|25075 |
|F50 |
--| |-
|SROTIH
|25748
|F0 M1115 | PLC ALARM 3 DNC
12300*--| |-*----------<>*12303
|THR1AL|
|25028 |
|F1 |
--| |-
|BTR1AL|
|25038 |
|F64 |
--| |-
|THR2AL
|26112
|F12 M1116 | PLC ALARM 4 DNC
12304*--| |-*----------<>*12311
|CKSWAL|
|25195 |
|F20 |
--| |-
|TRIDMS|
|25271 |
|F21 |
--| |-
|TRCLMS|
|25300 |
|F34 |
--| |-
|TCLLAL|
|25445 |
|F56 |
--| |-
|TROTIH|
|26016 |
|F58 |
--| |-
|TNO.AL|
|26523 |
|F72 |
--| |-
|TCDTOV
|26183
|F22 M1117 | PLC ALARM 5 DNC
12312*--| |-*----------<>*12314
|TBLSAL|
| |
|F23 |
--| |-
|TSLSAL
|F7 M1118 | PLC ALARM 6 DNC
12315*--| |-*----------<>*12321
|EEMGAL|
|25124 |
|F42 |
--| |-
|RBTCAL|
|25525 |
|F43 |
--| |-
|MEASAL|
|25537 |
|F44 |
--| |-
|PLCHAL|
| |
|F45 |
--| |-
|BFDRAL|
|25560 |

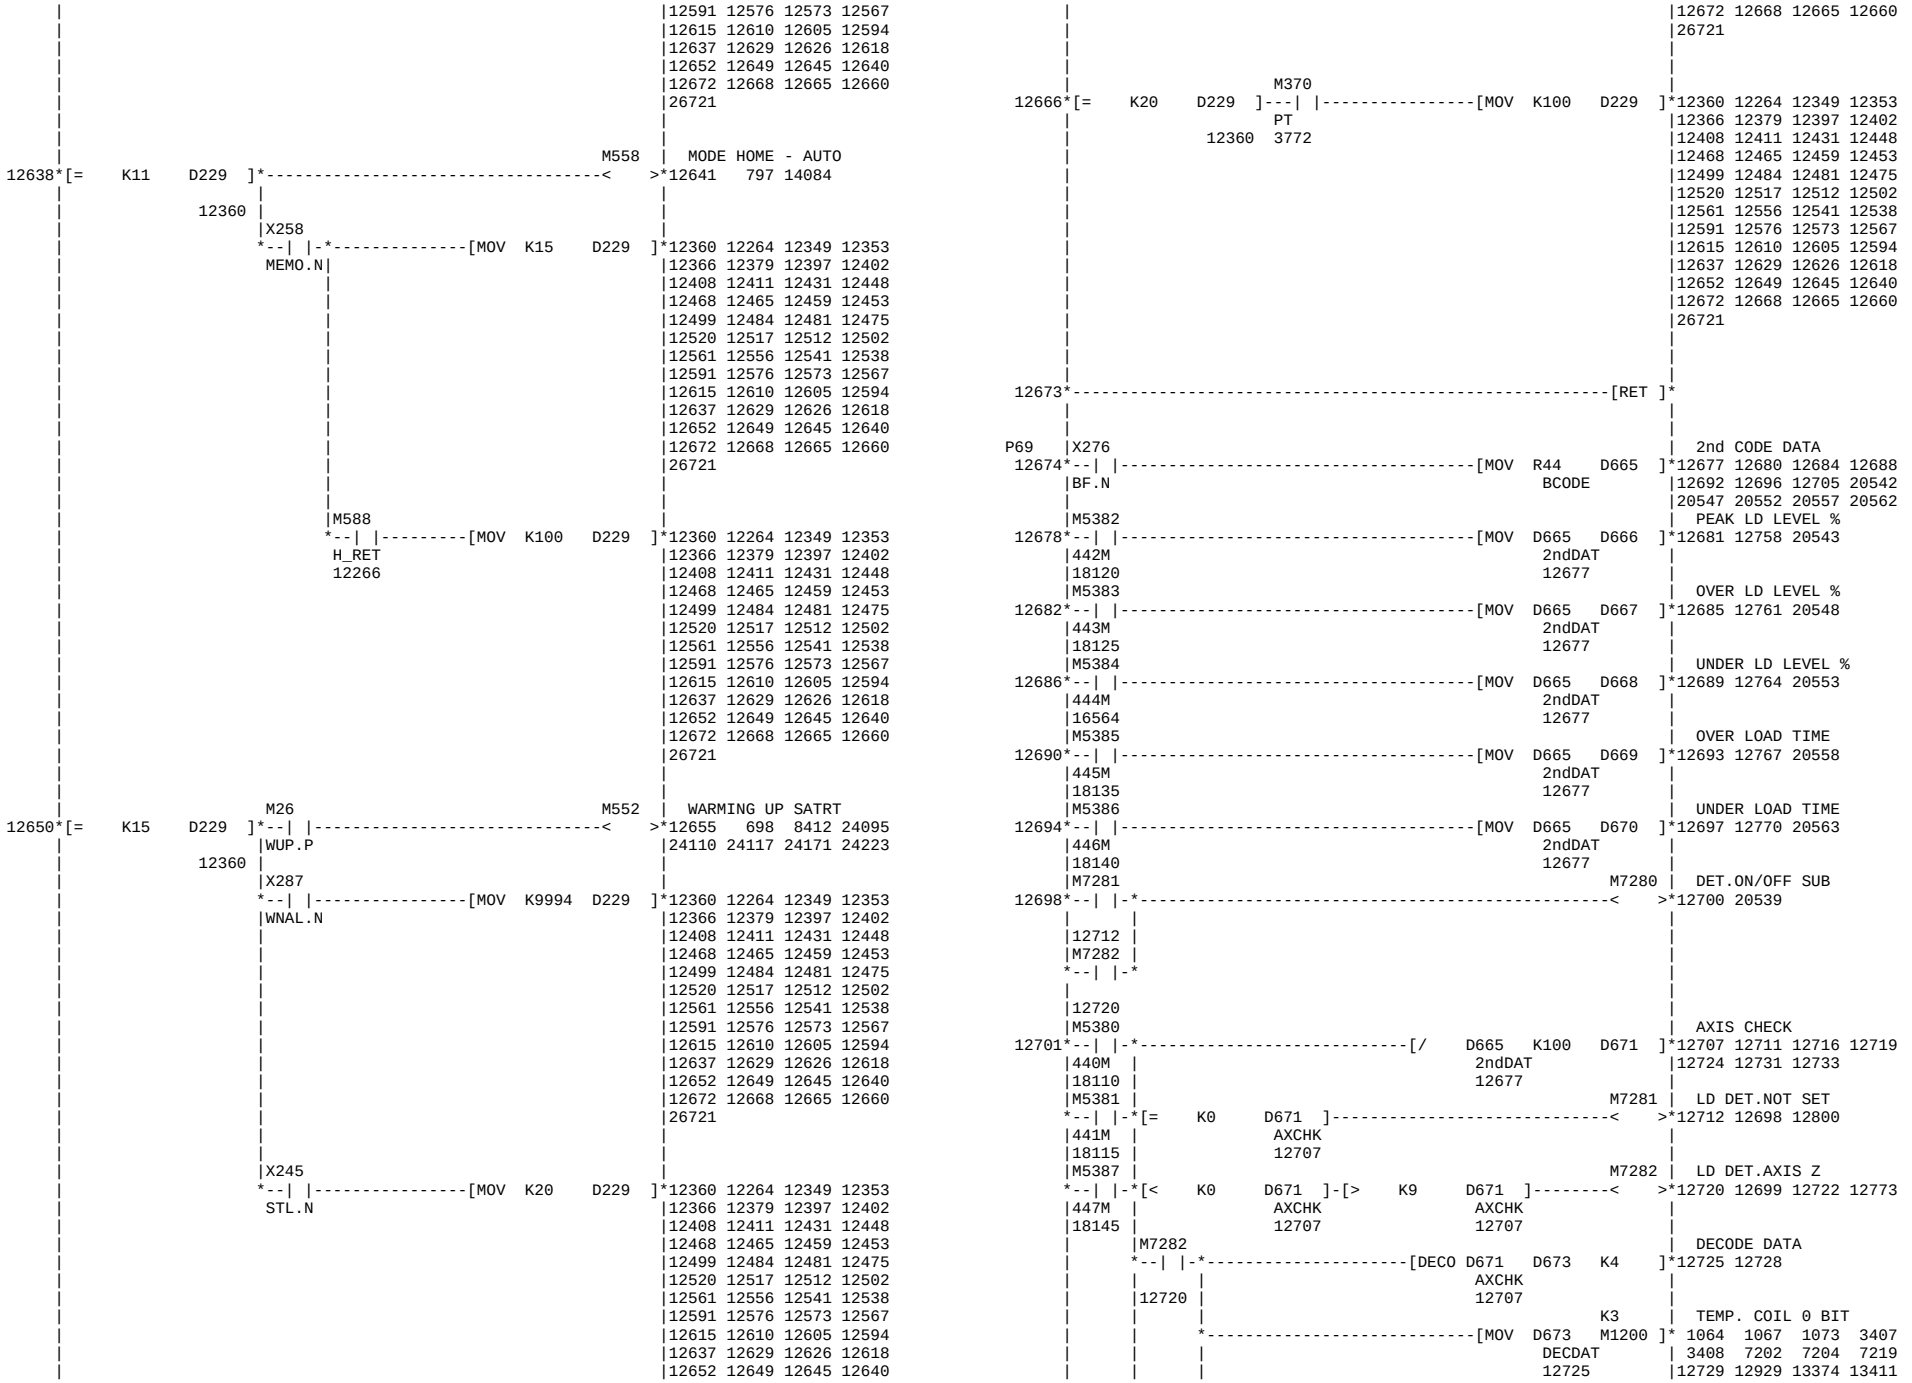

|F75 |
--| |-
|RBTTOV
|26226
|F6
M1119 | PLC ALARM 7 DNC
12322*--| |-*----------<
>*12341
|CCVOAL|
|25114 |
|F9 |
--| |-
|TELSOF|
|F12 |
--| |-
|CKSWAL|
|25195 |
|F15 |
--| |-
|MISCK |
|25212 |
|F18 |
--| |-
|E/I.AL|
|25225 |
|F24 |
--| |-
|CKLSAL|
|25344 |
|F25 |
--| |-
|DRLSAL|
|25372 |
|F26 |
--| |-
|GSLSAL|
|F31 |
--| |-
|TELSAL|
|25434 |
|F36 |
--| |-
|PCTLAL|
|25462 |
|F52 |
--| |-
|AXITLC|
|25982 |
|F53 |
--| |-
|SPOVDT|
|13363 |
|F70 |
--| |-
|ORTOVR|
|26153 |
|F79 |
--| |-
|PCTTOV|
|26262 |
|F82 |
--| |-
|CKCDTO|
|26287 |
|F83 |
--| |-
|GSCDTO|
|F86 |
--| |-
|FDCDTO|
|26319 |
|M5279 |
--| |-
|CFMALM|
|27065 |
|M5280 |
--| |-
|SPCOOL
|27087
|M1279
K6
12342*--| |----------[DMOV M1096 R330]*
>*12345
|ON
|585
12346*----------[RET]*
P41
M550 | WARMING UP MODE
12347*[= K0 D229]----------<
>*12350 12355 12361 12367
|12391
12360
M551 | WORK NO. SEARCH
12351*[= K100 D229]----------<
>*12354 8323 8331 8335
| 8369 8378 8402 8416
12360
|M550 M563
12355*--| |----|/|-*----------[MOV K100 D229]*
>*12360 12264 12349 12353
|WRMUP SSPMCM|
|12350 8320 |
|X140 |
--| |--------
|RST.B
|12366 12379 12397 12402
|12408 12411 12431 12448
|12453 12459 12465 12468
|12475 12481 12484 12499
|12502 12512 12517 12520
|12538 12541 12556 12561
|12591 12576 12573 12567
|12615 12610 12605 12594
|12637 12629 12626 12618
|12652 12649 12645 12640
|12672 12668 12665 12660
|26721
|M550 M100 T167
12361*--|/|----|/|----|/|----------[MOV K9993 D229]*
>*12360 12264 12349 12353
|WRMUP RDY WUPALT
|12350 533 12373
|12366 12379 12397 12402
|12408 12411 12431 12448
|12468 12465 12459 12453
|12499 12484 12481 12475
|12520 12517 12512 12502
|12561 12556 12541 12538
|12591 12576 12573 12567
|12615 12610 12605 12594
|12637 12629 12626 12618
|12652 12649 12645 12640
|12672 12668 12665 12660
|26721
|M550 X240 M100 X140
| WARM UP TMR:ALAR
12367*--| |-*--| |----|/|----|/|----------<T167 K200 >*12373 12363 12368 12376
|WRMUP |MA.N RDY RST.B
|12350 | 533
|T167 |
--| |-
|WUPALT
|12373
|T167
12376*--| |----------[MOV K9990 D229]*
>*12360 12264 12349 12353
|WUPALT
|12373
|12366 12379 12397 12402
|12408 12411 12431 12448
|12468 12465 12459 12453
|12499 12484 12481 12475
|12520 12517 12512 12502
|12561 12556 12541 12538
|12591 12576 12573 12567
|12615 12610 12605 12594
|12637 12629 12626 12618
|12652 12649 12645 12640
|12672 12668 12665 12660
|26721

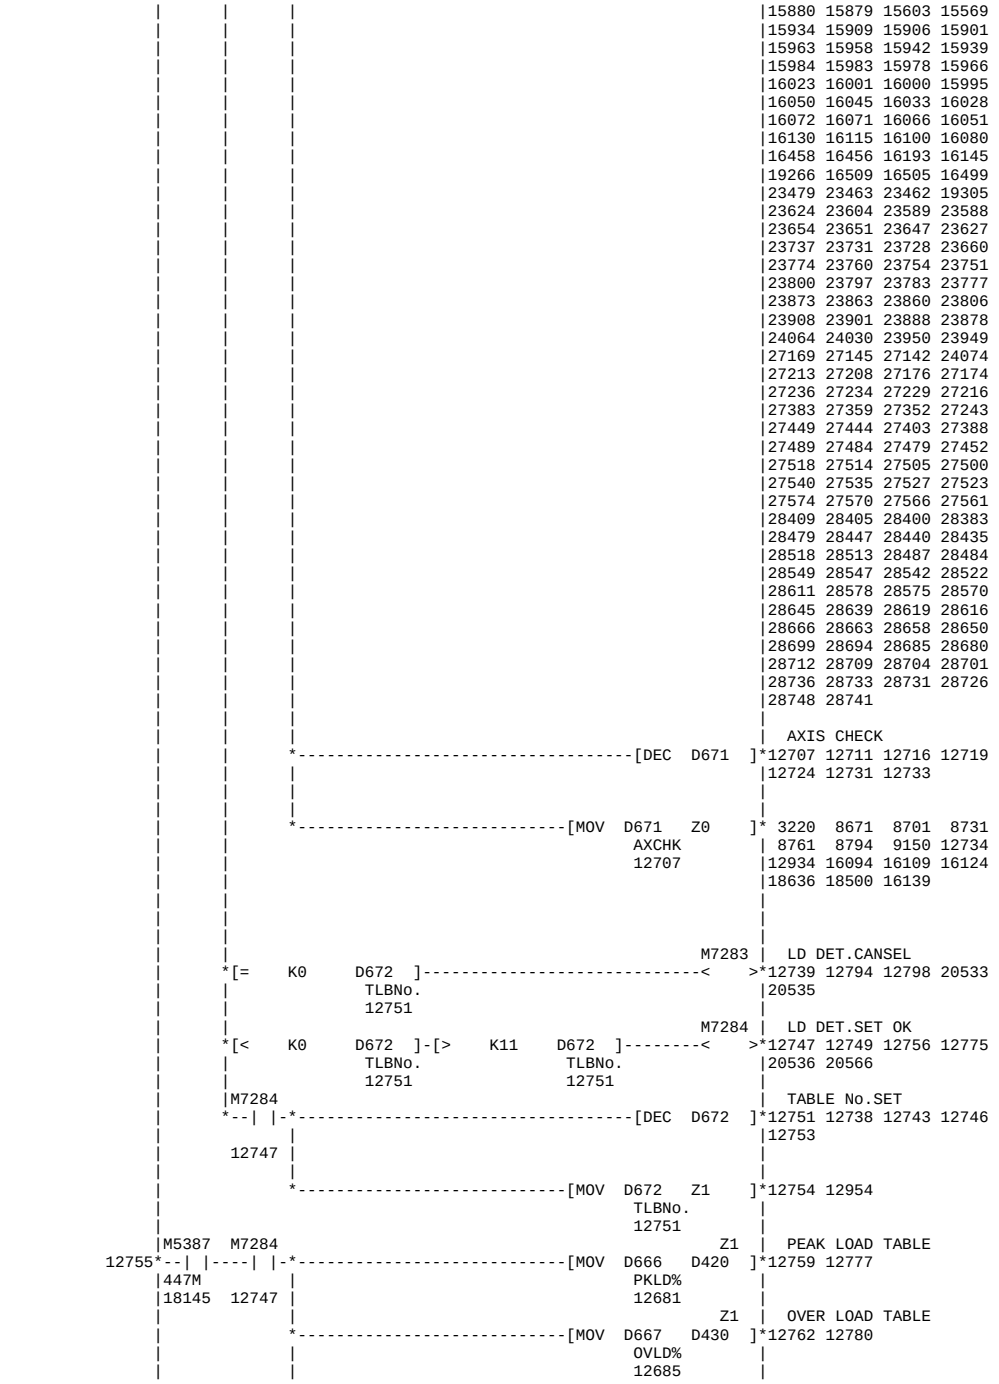

X203 X204 X200 X201 M100 M590 AXIS READY
RDY4.N RDY5.N RDY1.N RDY2.N RDY
533
M54 M53
SS.P Y.P
M590 M550 M560 M931
AX_RDY WRMUP MSPSWP CCE
12388 12350 8322 2255
M931
CCE
2255
M589 X244
H_RETP OP.N
12269
M1214 TEMP. COIL E BIT
12360
M1214 M90 M93 L30 M5165
TMP.EB AUTO HOMEOK XHOME WUCK.P
1124 14419 732 8344
L31
ZHOME
8349
M54 L32
SS.P WHOME
8354
M53 L33
Y.P YHOME
8359
L30 L31 L32 L33 M1000 HOME RET.MODE OK
XHOME ZHOME WHOME YHOME
8344 8349 8354 8359
M54 M53
SS.P Y.P
M5165
WUCK.P
M93
HOMEOK
732
M90
AUTO
14419
M1000 M6429
HRETOK W-UPCG
12443
M6429 M54
W-UPCG SS.P
12388 12389
12360 12264 12349 12353
12366 12379 12397 12402
12408 12411 12431 12448
12468 12465 12459 12453
12499 12484 12481 12475
12520 12517 12512 12502
12561 12556 12541 12538
12591 12576 12573 12567
12615 12610 12605 12594
12637 12629 12626 12618
12652 12649 12645 12640
12672 12668 12665 12660
26721
1124 12412 12413 15600
16494 23903 27163 27195
12443 12454

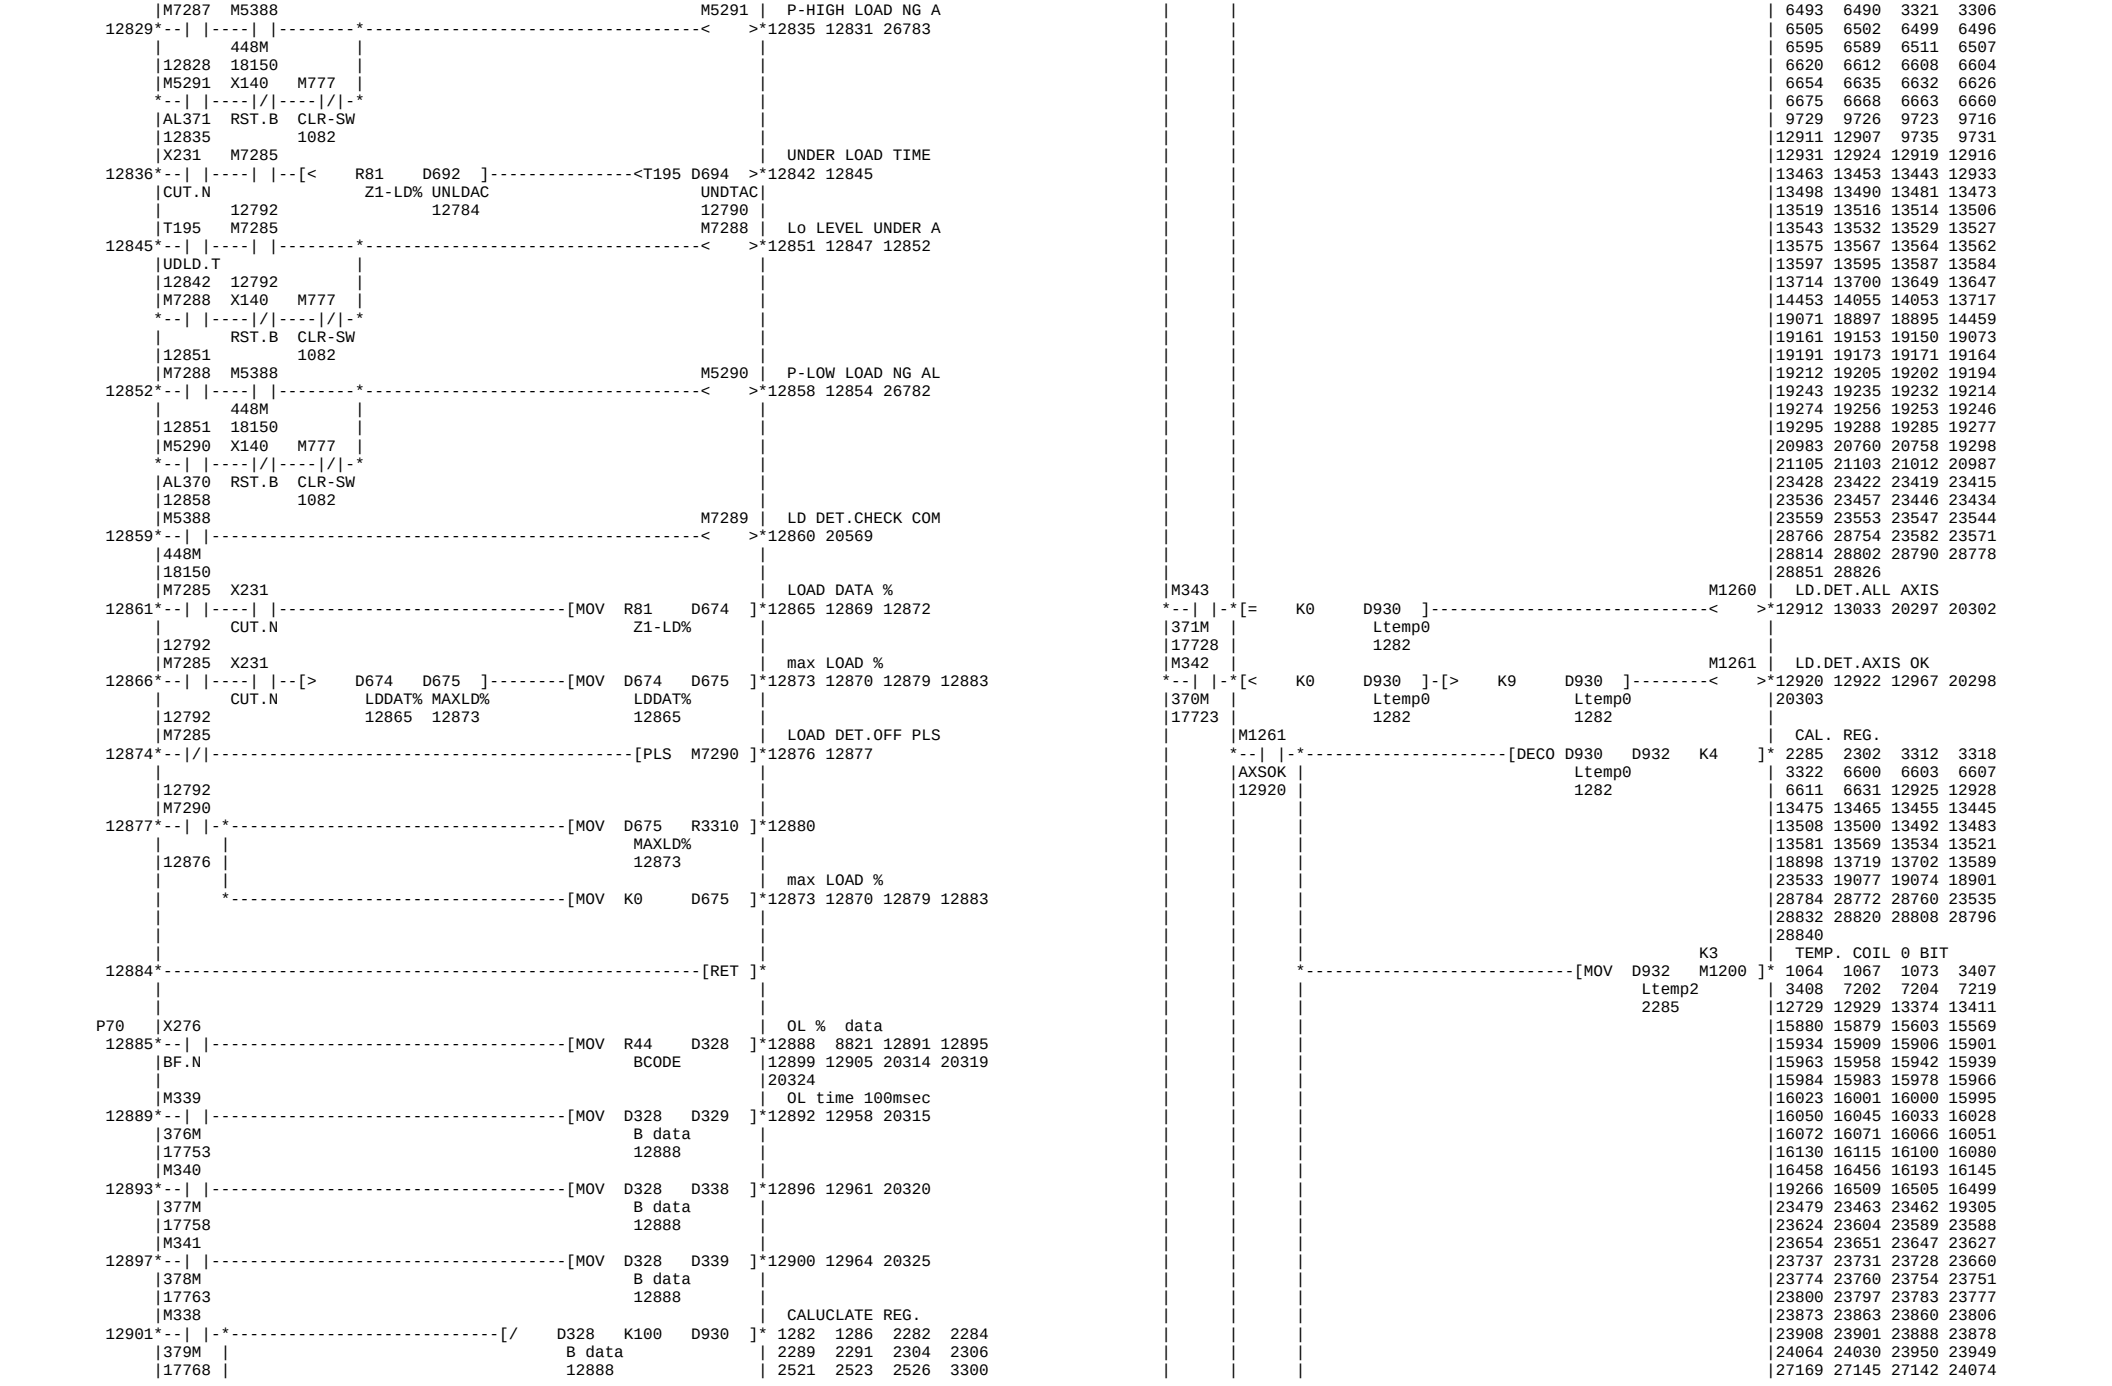

M597 | HOME RET.MODE CH
12466*[= K4 D229]*----------<
>*12469 788 14140
12360
Y145 M6429
--| |---|/|---------[MOV K5 D229]*12360 12264 12349 12353
HOME.L|W-UPCG |12366 12379 12397 12402
14358 |12408 12411 12431 12448
|12468 12465 12459 12453
|12499 12484 12481 12475
|12520 12517 12512 12502
|12561 12556 12541 12538
|12591 12576 12573 12567
|12615 12610 12605 12594
|12637 12629 12626 12618
|12652 12649 12645 12640
|12672 12668 12665 12660
|26721
|M6429 M54
*--| |----| |--[MOV K9 D229]*12360 12264 12349 12353
W-UPCG SS.P |12366 12379 12397 12402
|12408 12411 12431 12448
|12468 12465 12459 12453
|12499 12484 12481 12475
|12520 12517 12512 12502
|12561 12556 12541 12538
|12591 12576 12573 12567
|12615 12610 12605 12594
|12637 12629 12626 12618
|12652 12649 12645 12640
|12672 12668 12665 12660
|26721
Y220 M554 | WARM UP : -X MOV
12482*[= K5 D229]*--|/|----------<
>*12487 118
|J+X.N
12360 |115
| WARM UP X AXIS
*----------<T14 D50 >*12490 12494
T14
|T14
--| |-----------[MOV K6 D229]*12360 12264 12349 12353
|WUP-XT| |12366 12379 12397 12402
|12490 | |12408 12411 12431 12448
|X220 | |12453 12459 12465 12468
--| |- |12475 12481 12484 12499
ZP11.N |12502 12512 12517 12520
|12538 12541 12556 12561
|12591 12576 12573 12567
|12615 12610 12605 12594
|12637 12629 12626 12618
|12652 12649 12645 12640
|12672 12668 12665 12660
|26721
Y228 M555 | WARM UP : +X MOV
12500*[= K6 D229]*--|/|----------<
>*12505 113
|J-X.N
12360 |120
|X220 M6429
--| |---|/|---------[MOV K7 D229]*12360 12264 12349 12353
ZP11.N|W-UPCG |12366 12379 12397 12402
|12408 12411 12431 12448
|12468 12465 12459 12453
|12499 12484 12481 12475
|12520 12517 12512 12502
|12561 12556 12541 12538
|12591 12576 12573 12567
|12615 12610 12605 12594
|12637 12629 12626 12618
|12652 12649 12645 12640
|12672 12668 12665 12660
|26721
|M6429
--| |---| |-*--|/|--[MOV K11 D229]*12360 12264 12349 12353
W-UPCG |12366 12379 12397 12402
|12408 12411 12431 12448
|12468 12465 12459 12453
|12499 12484 12481 12475
|12520 12517 12512 12502
|12561 12556 12541 12538
|12591 12576 12573 12567
|12615 12610 12605 12594
|12637 12629 12626 12618
|12652 12649 12645 12640
|12672 12668 12665 12660
|26721
Y221 Y229 M556 | WARM UP : -Z MOV
12518*[= K7 D229]*--|/|----|/|-*----------<
>*12526 126 136 12524
|J+Z.N J-Z.N |
12360 |133 146 |
|M556 |
--| |--------
|WU -Z
|12526
| WARM UP Z AXIS
*----------<T15 D49 >*12529 12533
T15
|T15
--| |-----------[MOV K8 D229]*12360 12264 12349 12353
|WUP-ZT| |12366 12379 12397 12402
|12529 | |12408 12411 12431 12448
|X221 | |12453 12459 12465 12468
--| |- |12475 12481 12484 12499
ZP12.N |12502 12512 12517 12520
|12538 12541 12556 12561
|12591 12576 12573 12567
|12615 12610 12605 12594
|12637 12629 12626 12618
|12652 12649 12645 12640
|12672 12668 12665 12660
|26721
Y221 Y229 M557 | WARM UP : +Z MOV
12539*[= K8 D229]*--|/|----|/|-*----------<
>*12547 123 139 12545
|J+Z.N J-Z.N |
12360 |133 146 |
|M557 |
--| |--------
|WU +Z
|12547
|X221 M54 M6429
--| |---| |-*--|/|--[MOV K9 D229]*12360 12264 12349 12353
ZP12.N|SS.P |W-UPCG |12366 12379 12397 12402
|12408 12411 12431 12448
|12468 12465 12459 12453
|12499 12484 12481 12475
|12520 12517 12512 12502
|12561 12556 12541 12538
|12591 12576 12573 12567
|12615 12610 12605 12594
|12637 12629 12626 12618
|12652 12649 12645 12640
|12672 12668 12665 12660
|26721
|M6429
*--| |--[MOV K5 D229]*12360 12264 12349 12353
W-UPCG |12366 12379 12397 12402
|12408 12411 12431 12448

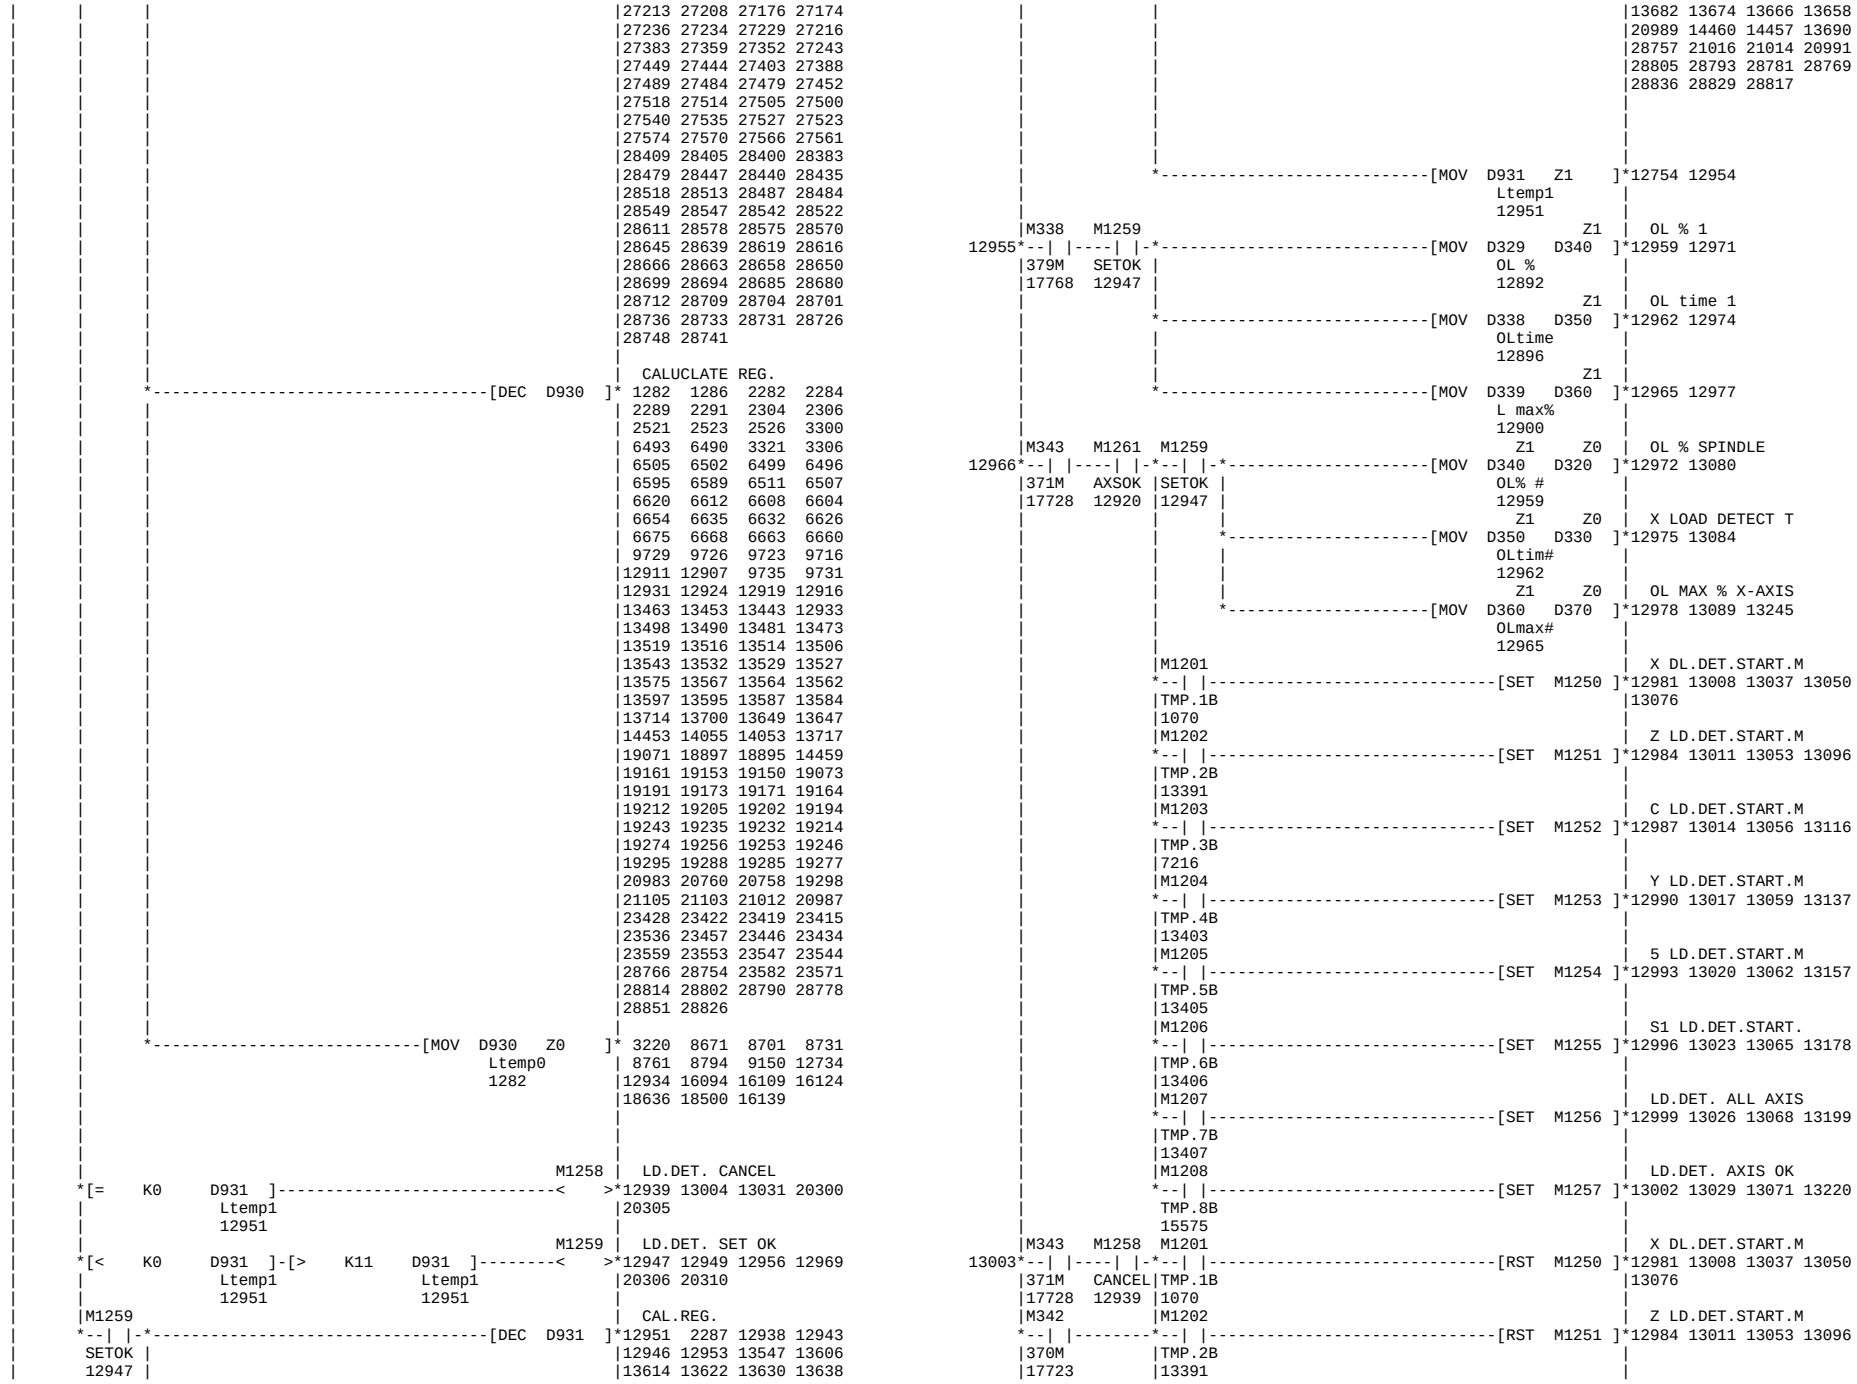

M54 M53
SS.P Y.P
M54 M53
SS.P Y.P
Y223 M5676 WARM UP : -W MOV
J+B.N
T56
WUP-BT
12582
X223
ZP14.N
Y22B M5677 WARM UP : +W MOV
J-B.N
X223 M6429 M53
ZP14.N W-UPCG Y.P

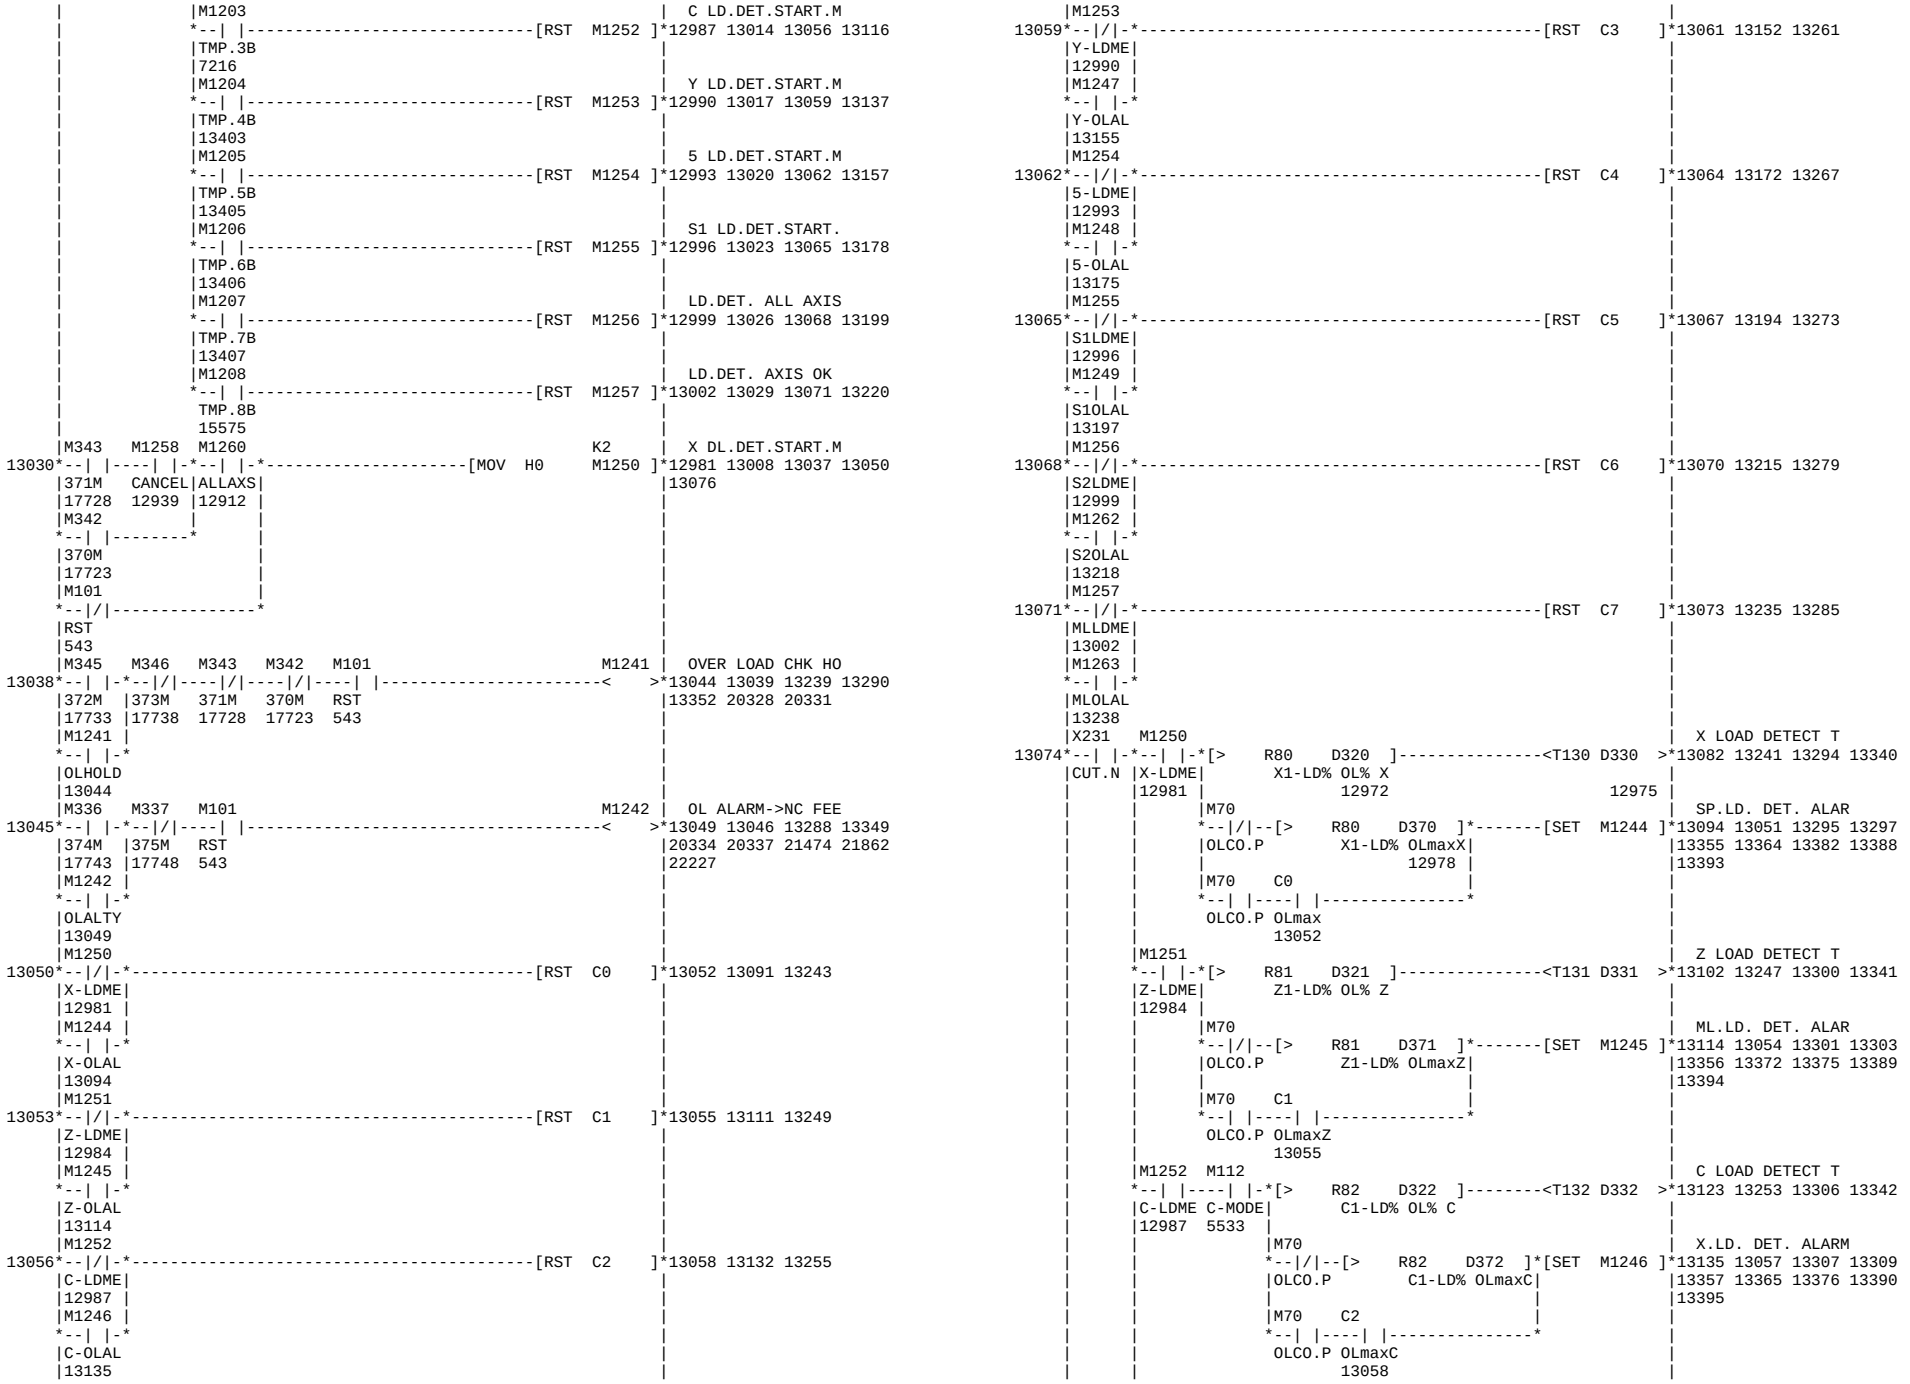

M6429
W-UPCG
M53
Y.P
Y22C M5720 SLIDEWAY PSW2 ON
J-Y.N
X224
ZP15.N
Y224 M5721 SLIDEWAY PSW2 OF
J+Y.N
X224
ZP15.N

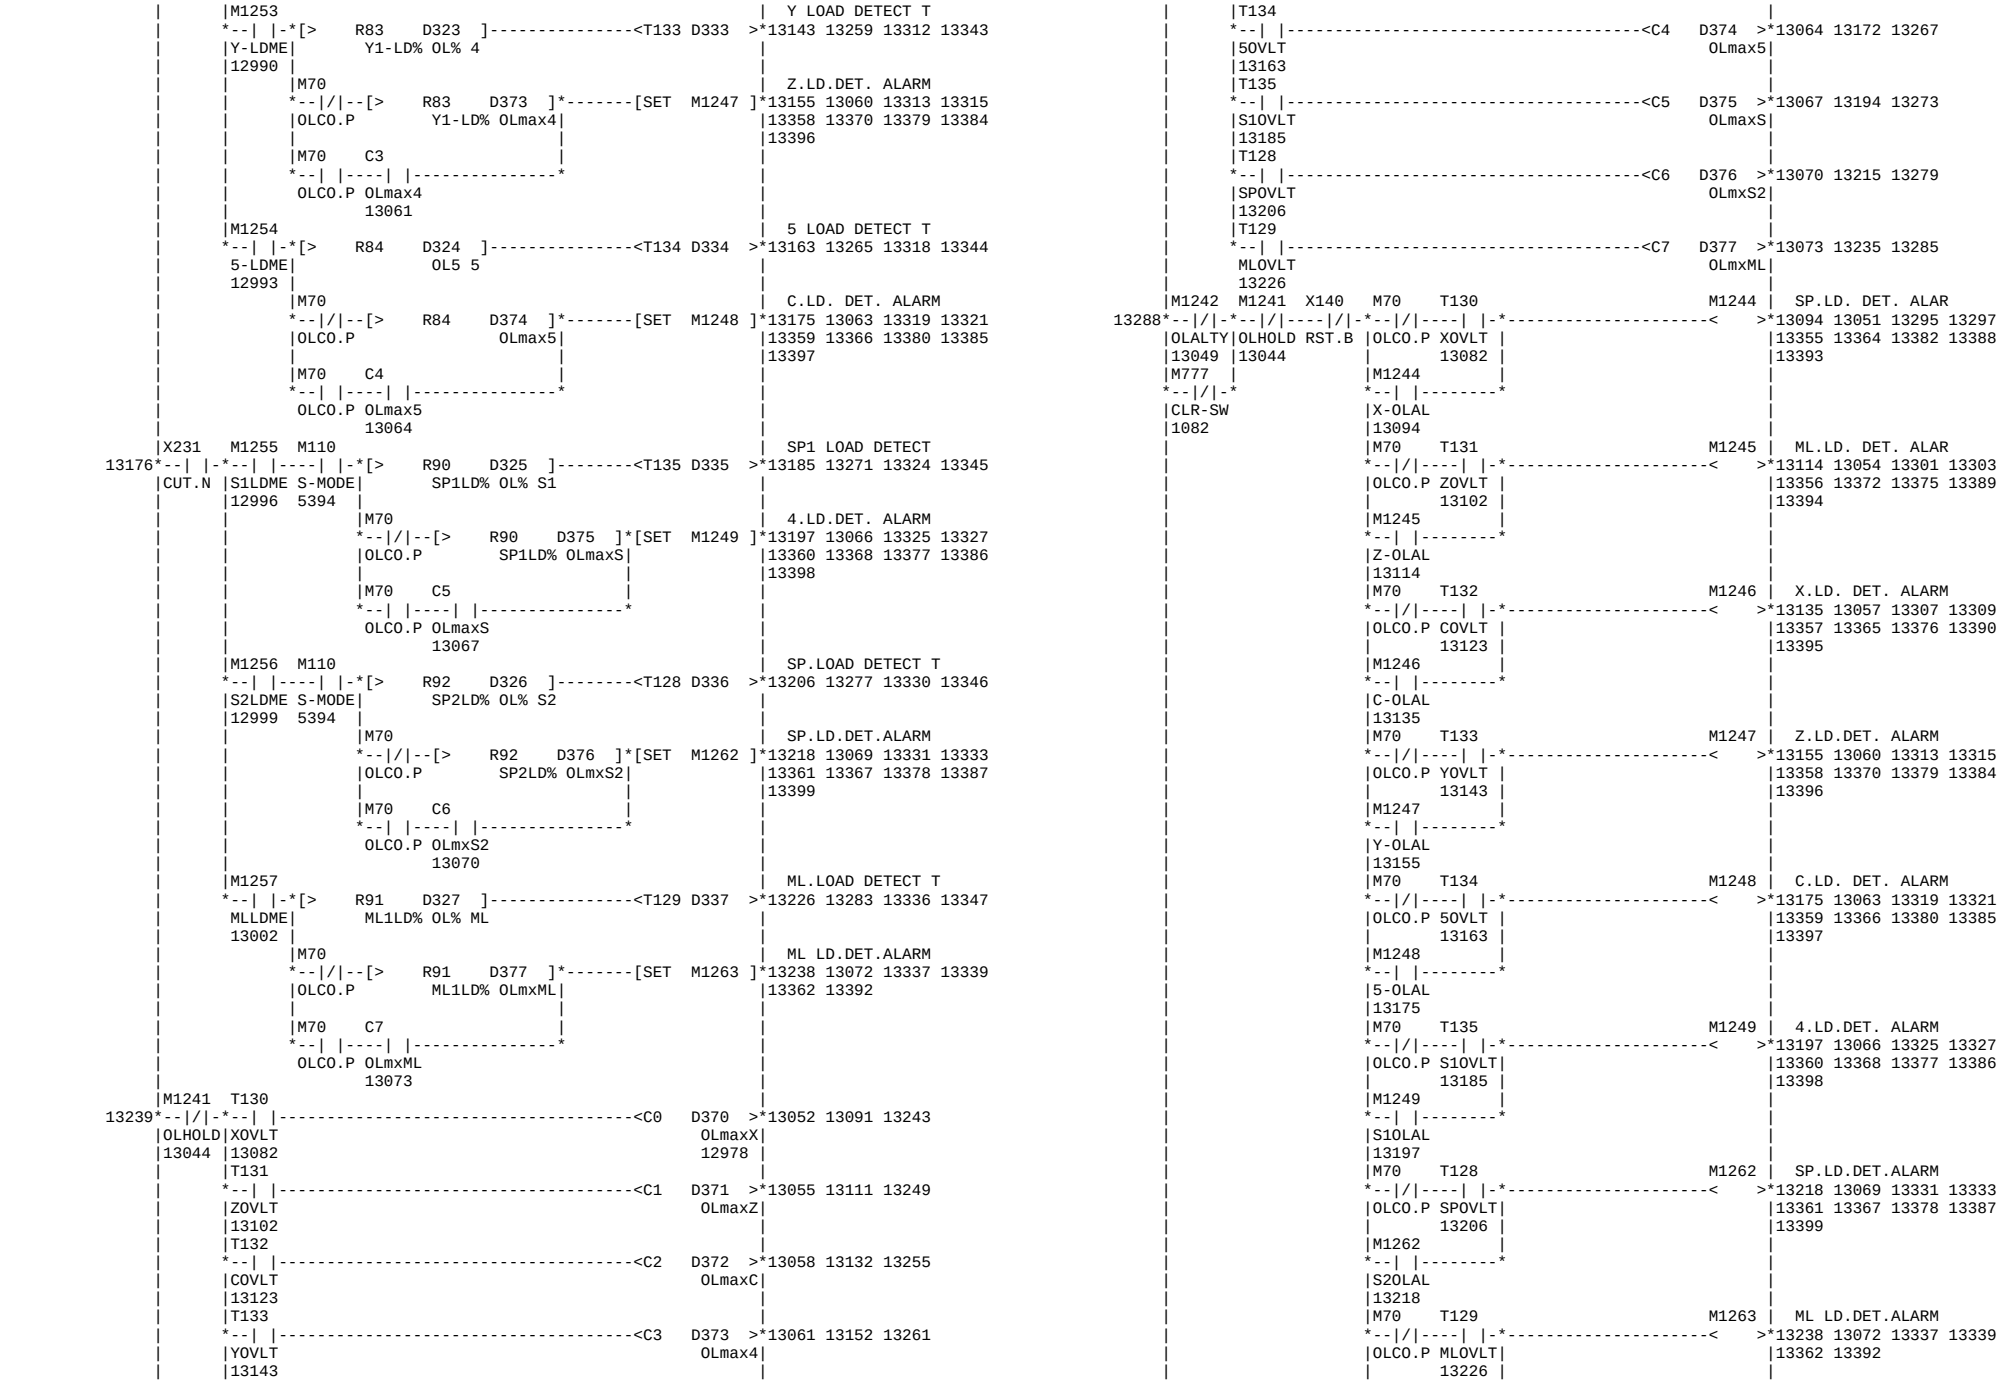

M558
MODE HOME - AUTO
M588
M26
M552
WARMING UP SATRT

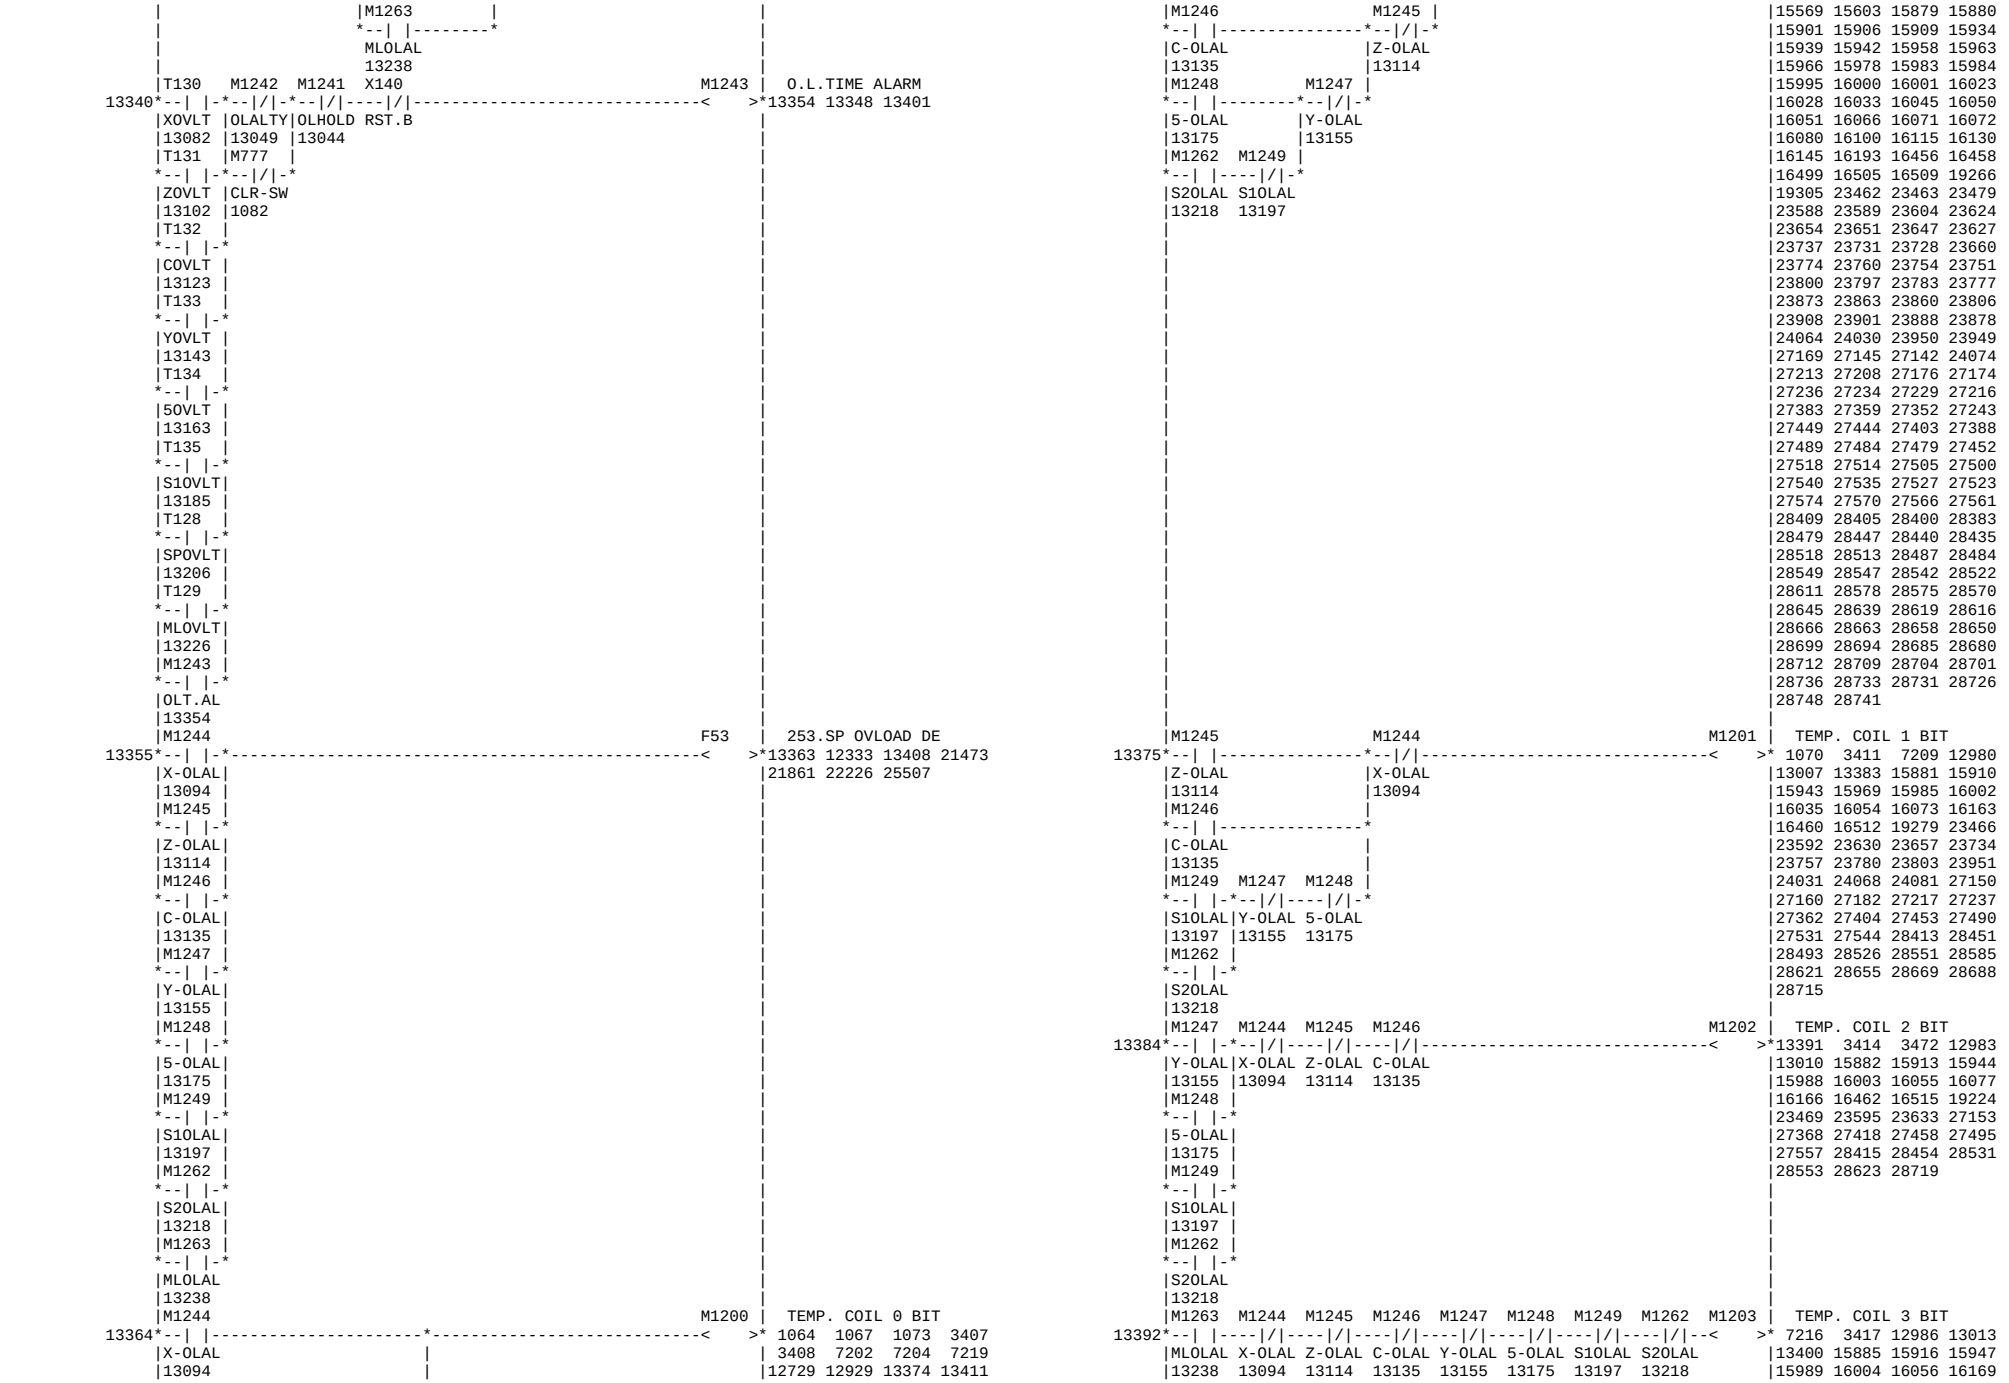

|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
|
| AXIS CHECK
*----------[DEC D671]*12707 12711 12716 12719
|12724 12731 12733
|
|
----------[MOV D671 Z0] 3220 8671 8701 8731
AXCHK | 8761 8794 9150 12734
12707 |12934 16094 16109 16124
|18636 18500 16139
|
|
|
M7283 | LD DET.CANSEL
*[= K0 D672]----------< >*12739 12794 12798 20533
TLBNo. |20535
12751 |
M7284 | LD DET.SET OK
*[< K0 D672]-[> K11 D672]--------< >*12747 12749 12756 12775
TLBNo. TLBNo. |20536 20566
12751 12751 |
| TABLE No.SET
M7284 |
--| |-----------[DEC D672]*12751 12738 12743 12746
| |12753
12747 | |
| |
*----------[MOV D672 Z1]*12754 12954
TLBNo. |
12751 |
Z1 | PEAK LOAD TABLE
M5387 M7284 |
12755*--| |----| |-*----------[MOV D666 D420]*12759 12777
|447M | PKLD% |
|18145 12747 | 12681 |
| Z1 | OVER LOAD TABLE
*----------[MOV D667 D430]*12762 12780
| OVLD% |
| 12685 |
| Z1 | UNDER LOAD TABLE
*----------[MOV D668 D440]*12765 12783
| UNLD% |
| 12689 |
| Z1 | OVER TIME TABLE
*----------[MOV D669 D450]*12768 12786
| OVLD.T |
| 12693 |
| Z1 | UNDER TIME TABLE
*----------[MOV D670 D460]*12771 12789
| UNLD.T |
| 12697 |
M5381 M7282 M7284 Z1 | PEAK LOAD ACT.
12772*--| |----| |-*--| |-*----------[MOV D420 D690]*12778 12807
|441M | | PKLDTB |
|18115 12720 |12747 | 12759 |
| | Z1 | OVER LOAD ACT.
| *----------[MOV D430 D691]*12781 12817
| | OVTMTB |
| | 12762 |
| | Z1 | UNDER LOAD ACT.
| *----------[MOV D440 D692]*12784 12840
| | UNLDTB |
| | 12765 |
| | Z1 | OVER TIME ACT.
| *----------[MOV D450 D693]*12787 12821
| | OVTMTB |
| | 12768 |
| | Z1 | UNDER TIME ACT.
| *----------[MOV D460 D694]*12790 12844
| | UNTMTB |
| | 12771 |
| | | Z AXIS DET.OK
| *----------[SET M7285]*12792 12796 12802 12804
| | |12814 12837 12846 12861
| | |12866 12874
M5381 M7283 | Z AXIS DET.OK
12793*--| |----| |-*----------[RST M7285]*12792 12796 12802 12804
|441M | |12814 12837 12846 12861
|18115 12739 | |12866 12874
|M5380 | |
--| |-------- |
|440M | |
|18110 | |
M5381 M7283 M7281 | Z AXIS DET.OK
12797*--| |----| |-*--| |-*----------[RST M7285]*12792 12796 12802 12804
|441M | | |12814 12837 12846 12861
|18115 12739 |12712 | |12866 12874
|M5380 | | |
--| |-------- | |
440M		
18110		
M101		
*--	/	---------------*
RST	
543	
X231 M7285 M7286	PEAK OVER AL.
12803*--| |----| |--[> R81 D690]*----------< >*12811 12808
CUT.N Z1-LD% PKLDAC	
12792 12778	
M7286 X140	M5292	P-PEAK OVER NG A
--| |----|/|--------------------< >*12812 26784
RST.B
12811
X231 M7285	OVER LOAD TIME
12813*--| |----| |--[> R81 D691]----------<T190 D693 >*12819 12822
CUT.N Z1-LD% OVLDAC OVRTAC
12792 12781 12787
T190 X231 M7287	Hi LEVEL OVER AL
12822*--| |----| |--------*----------< >*12828 12824 12829
OVLD.T CUT.N	
12819	
M7287 X140 M777	
--| |----|/|----|/|-
RST.B CLR-SW
12828 1082

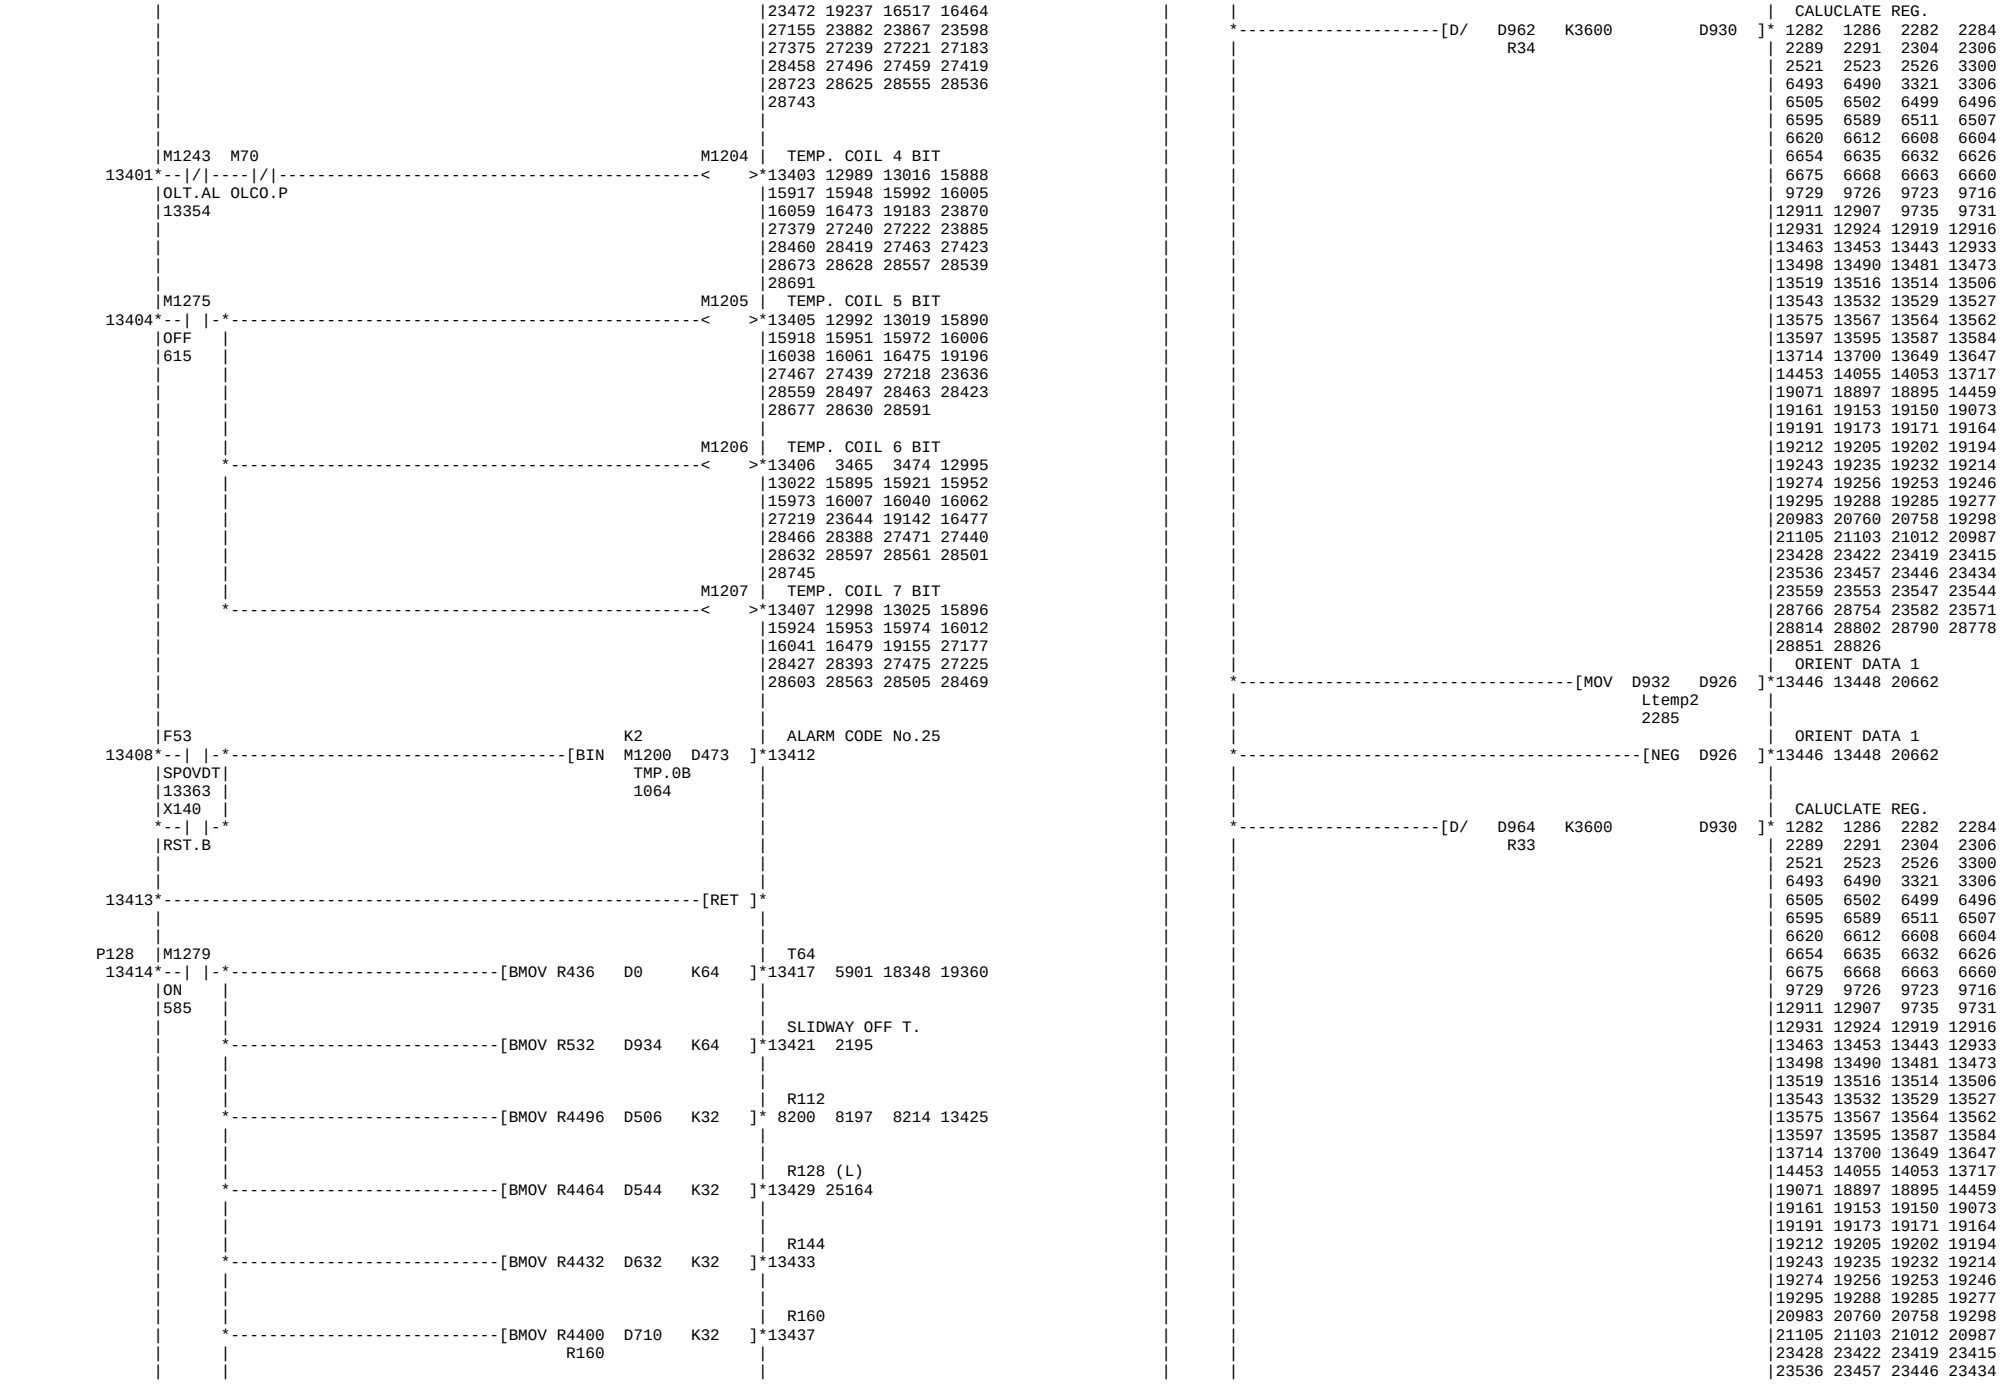

M7287 M5388 M5291 | P-HIGH LOAD NG A
12829 12835 12831 26783
448M
12828 18150
M5291 X140 M777
AL371 RST.B CLR-SW
12835 1082
X231 M7285 | UNDER LOAD TIME
12836 12842 12845
CUT.N Z1-LD% UNLDAC UNDTAC
12792 12784 12790
T195 M7285 M7288 | Lo LEVEL UNDER A
12845 12851 12847 12852
UDLD.T
12842 12792
M7288 X140 M777
RST.B CLR-SW
12851 1082
M7288 M5388 M5290 | P-LOW LOAD NG AL
12852 12858 12854 26782
448M
12851 18150
M5290 X140 M777
AL370 RST.B CLR-SW
12858 1082
M5388 M7289 | LD DET.CHECK COM
12859 12860 20569
448M
18150
M7285 X231 | LOAD DATA %
12861 12865 12869 12872
CUT.N Z1-LD%
12792
M7285 X231 | max LOAD %
12866 12873 12870 12879 12883
CUT.N LDDAT% MAXLD% LDDAT%
12792 12865 12873 12865
M7285 | LOAD DET.OFF PLS
12874 12876 12877
12792
M7290
12877 12880
MAXLD%
12876 12873
| max LOAD %
12873 12870 12879 12883
12884
P70 X276 | OL % data
12885 12888 8821 12891 12895
BF.N BCODE 12899 12905 20314 20319
20324
M339 | OL time 100msec
12889 12892 12958 20315
376M B data
17753 12888
M340
12893 12896 12961 20320
377M B data
17758 12888
M341
12897 12900 12964 20325
378M B data
17763 12888
M338 | CALUCLATE REG.
12901 1282 1286 2282 2284
379M B data 2289 2291 2304 2306
17768 12888 2521 2523 2526 3300
M1260 | LD.DET.ALL AXIS
12912 13033 20297 20302
M343
371M K0 D930 Ltemp0
17728 1282
M342
M1261 | LD.DET.AXIS OK
12920 12922 12967 20298
370M K0 D930 Ltemp0 K9 D930 Ltemp0
17723 1282 1282 20303
M1261 | CAL. REG.
AXSOK DECO D930 D932 K4 2285 3312 3318
12920 Ltemp0 3322 6600 6603 6607
1282 6611 6631 12925 12928
13475 13465 13455 13445
13508 13500 13492 13483
13581 13569 13534 13521
18898 13719 13702 13589
23533 19077 19074 18901
28784 28772 28760 23535
28832 28820 28808 28796
28840
K3 | TEMP. COIL 0 BIT
MOV D932 M1200 1064 1067 1073 3407
Ltemp2 3408 7202 7204 7219
2285 12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826

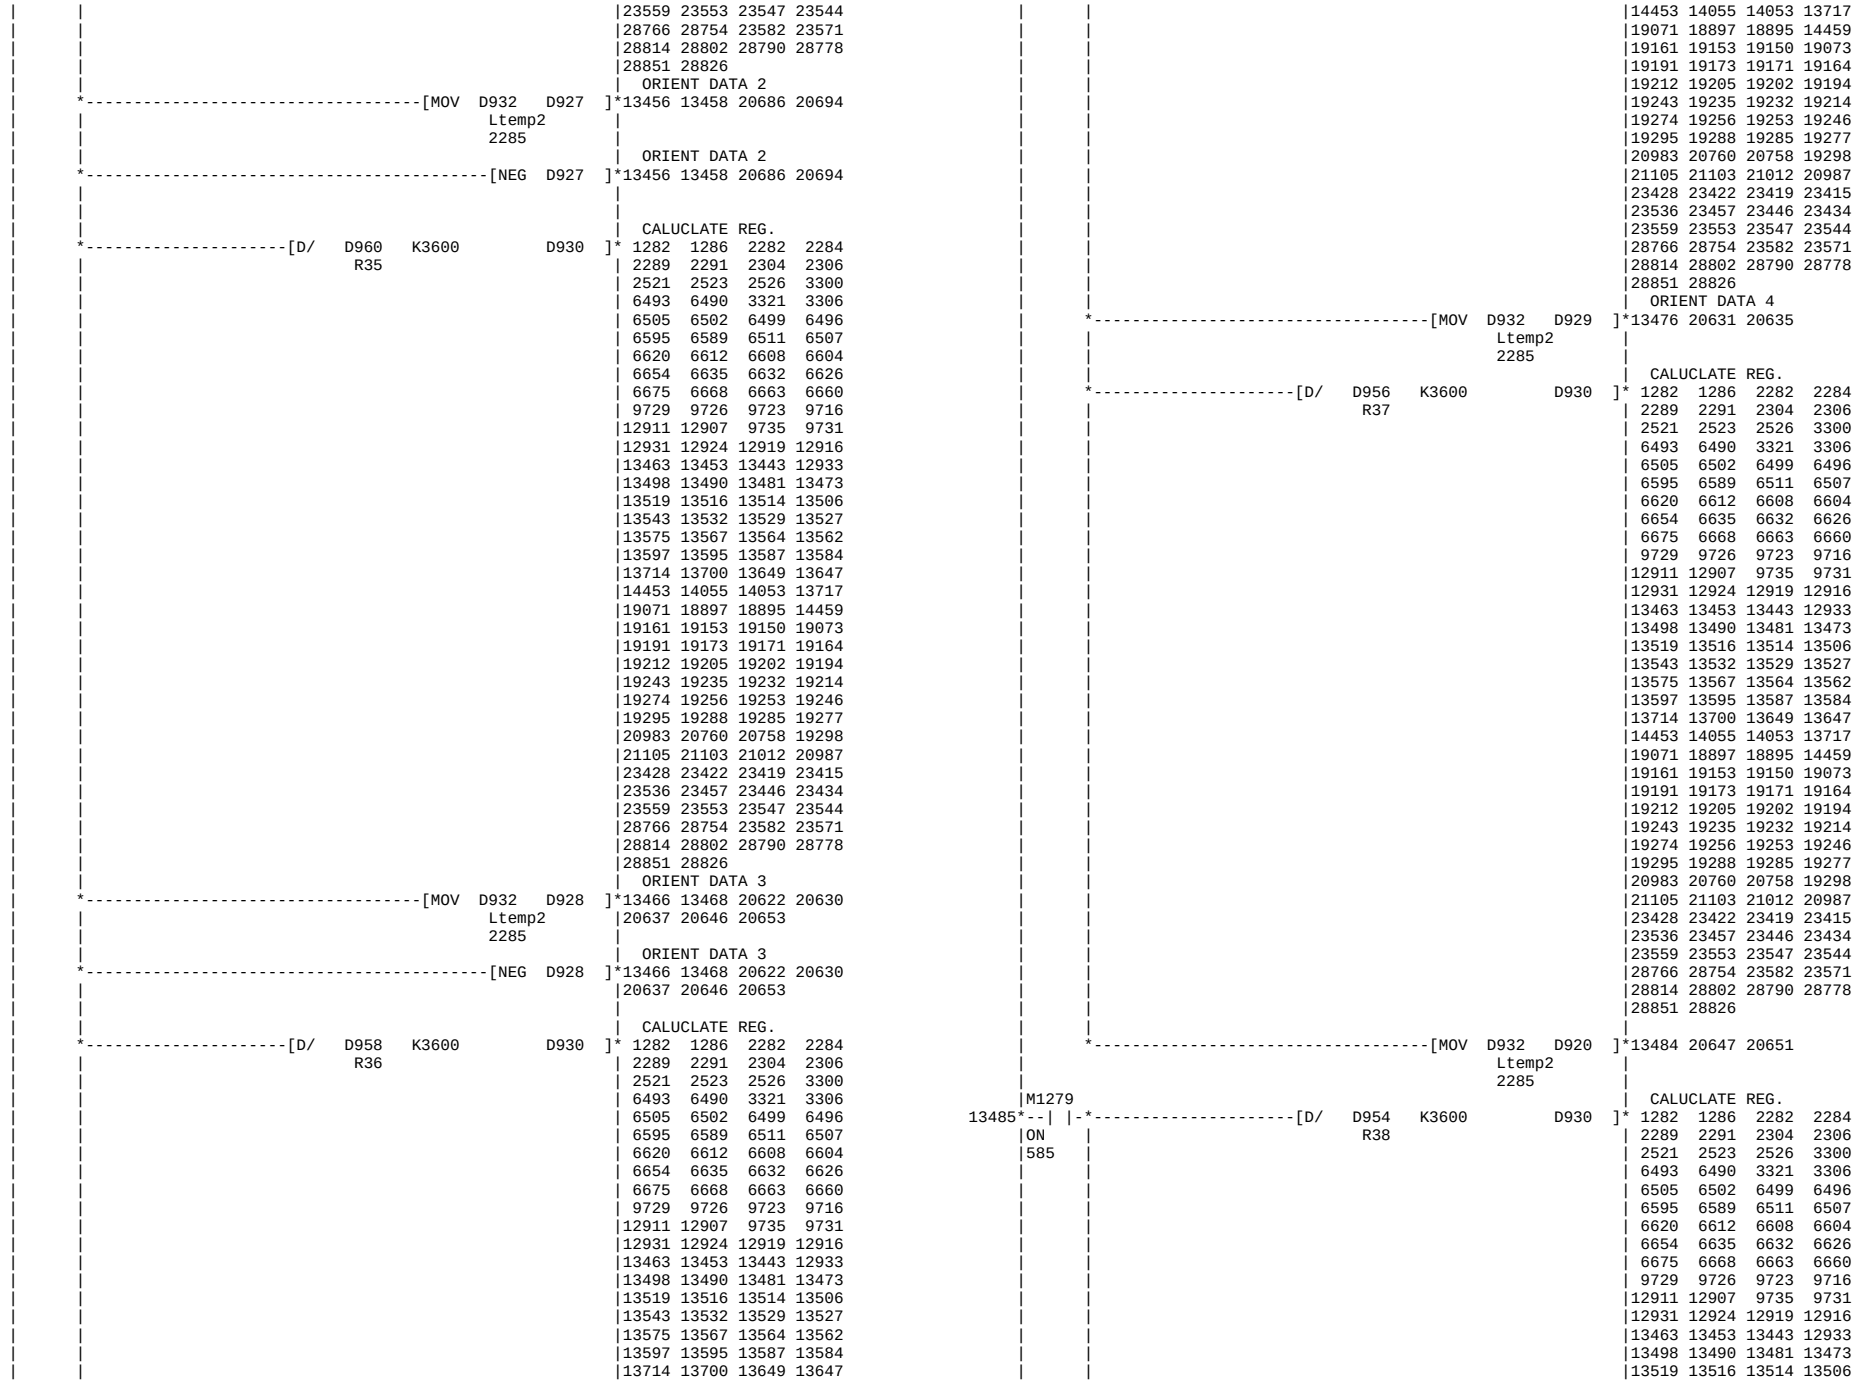

|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
|
| CALUCLATE REG.
----------[DEC D930] 1282 1286 2282 2284
| 2289 2291 2304 2306
| 2521 2523 2526 3300
| 6493 6490 3321 3306
| 6505 6502 6499 6496
| 6595 6589 6511 6507
| 6620 6612 6608 6604
| 6654 6635 6632 6626
| 6675 6668 6663 6660
| 9729 9726 9723 9716
|12911 12907 9735 9731
|12931 12924 12919 12916
|13463 13453 13443 12933
|13498 13490 13481 13473
|13519 13516 13514 13506
|13543 13532 13529 13527
|13575 13567 13564 13562
|13597 13595 13587 13584
|13714 13700 13649 13647
|14453 14055 14053 13717
|19071 18897 18895 14459
|19161 19153 19150 19073
|19191 19173 19171 19164
|19212 19205 19202 19194
|19243 19235 19232 19214
|19274 19256 19253 19246
|19295 19288 19285 19277
|20983 20760 20758 19298
|21105 21103 21012 20987
|23428 23422 23419 23415
|23536 23457 23446 23434
|23559 23553 23547 23544
|28766 28754 23582 23571
|28814 28802 28790 28778
|28851 28826
|
----------[MOV D930 Z0] 3220 8671 8701 8731
Ltemp0 | 8761 8794 9150 12734
1282 |12934 16094 16109 16124
|18636 18500 16139
|
|
|
M1258 | LD.DET. CANCEL
*[= K0 D931]----------< >*12939 13004 13031 20300
Ltemp1 |20305
12951 |
M1259 | LD.DET. SET OK
*[< K0 D931]-[> K11 D931]--------< >*12947 12949 12956 12969
Ltemp1 Ltemp1 |20306 20310
12951 12951 |
|M1259 | CAL.REG.
--| |-----------[DEC D931]*12951 2287 12938 12943
SETOK | |12946 12953 13547 13606
12947 | |13614 13622 13630 13638
|13682 13674 13666 13658
|20989 14460 14457 13690
|28757 21016 21014 20991
|28805 28793 28781 28769
|28836 28829 28817
|
|
|
|
*----------[MOV D931 Z1]*12754 12954
Ltemp1 |
12951 |
M338 M1259 Z1 | OL % 1
12955*--| |----| |-*----------[MOV D329 D340]*12959 12971
379M SETOK | OL % |
17768 12947 | 12892 |
Z1 | OL time 1
*----------[MOV D338 D350]*12962 12974
OLtime |
12896 |
Z1 |
*----------[MOV D339 D360]*12965 12977
L max% |
12900 |
M343 M1261 M1259 Z1 Z0 | OL % SPINDLE
12966*--| |----| |-*--| |-*----------[MOV D340 D320]*12972 13080
371M AXSOK |SETOK | OL% # |
17728 12920 |12947 | 12959 |
Z1 Z0 | X LOAD DETECT T
*----------[MOV D350 D330]*12975 13084
OLtim# |
12962 |
Z1 Z0 | OL MAX % X-AXIS
*----------[MOV D360 D370]*12978 13089 13245
OLmax# |
12965 |
|M1201 | X DL.DET.START.M
*--| |----------[SET M1250]*12981 13008 13037 13050
|TMP.1B |13076
|1070 |
|M1202 | Z LD.DET.START.M
*--| |----------[SET M1251]*12984 13011 13053 13096
|TMP.2B |
|13391 |
|M1203 | C LD.DET.START.M
*--| |----------[SET M1252]*12987 13014 13056 13116
|TMP.3B |
|7216 |
|M1204 | Y LD.DET.START.M
*--| |----------[SET M1253]*12990 13017 13059 13137
|TMP.4B |
|13403 |
|M1205 | 5 LD.DET.START.M
*--| |----------[SET M1254]*12993 13020 13062 13157
|TMP.5B |
|13405 |
|M1206 | S1 LD.DET.START.
*--| |----------[SET M1255]*12996 13023 13065 13178
|TMP.6B |
|13406 |
|M1207 | LD.DET. ALL AXIS
*--| |----------[SET M1256]*12999 13026 13068 13199
|TMP.7B |
|13407 |
|M1208 | LD.DET. AXIS OK
*--| |----------[SET M1257]*13002 13029 13071 13220
TMP.8B |
15575 |
M343 M1258 M1201 | X DL.DET.START.M
13003*--| |----| |-*--| |----------[RST M1250]*12981 13008 13037 13050
371M CANCEL|TMP.1B |13076
17728 12939 |1070 |
M342 |M1202 | Z LD.DET.START.M
--| |----------| |----------[RST M1251]*12984 13011 13053 13096
|370M |TMP.2B |
|17723 |13391 |


|M1203 | C LD.DET.START.M
*--| |----------[RST M1252]*12987 13014 13056 13116
|TMP.3B |
|7216 |
|M1204 | Y LD.DET.START.M
*--| |----------[RST M1253]*12990 13017 13059 13137
|TMP.4B |
|13403 |
|M1205 | 5 LD.DET.START.M
*--| |----------[RST M1254]*12993 13020 13062 13157
|TMP.5B |
|13405 |
|M1206 | S1 LD.DET.START.
*--| |----------[RST M1255]*12996 13023 13065 13178
|TMP.6B |
|13406 |
|M1207 | LD.DET. ALL AXIS
*--| |----------[RST M1256]*12999 13026 13068 13199
|TMP.7B |
|13407 |
|M1208 | LD.DET. AXIS OK
*--| |----------[RST M1257]*13002 13029 13071 13220
TMP.8B |
15575 |
|M343 M1258 M1260 K2 | X DL.DET.START.M
13030*--| |----| |-*--| |-*----------[MOV H0 M1250]*12981 13008 13037 13050
|371M CANCEL|ALLAXS| |13076
|17728 12939 |12912 | |
|M342 | | |
--| |-------- | |
370M	
17723	
M101	
*--	/	---------------*
RST
543
M345 M346 M343 M342 M101 M1241	OVER LOAD CHK HO
13038*--| |-*--|/|----|/|----|/|----| |----------< >*13044 13039 13239 13290
372M	373M 371M 370M RST	13352 20328 20331
17733	17738 17728 17723 543
M1241	
*--		-*
OLHOLD
13044
M336 M337 M101 M1242	OL ALARM->NC FEE
13045*--| |-*--|/|----| |----------< >*13049 13046 13288 13349
374M	375M RST	20334 20337 21474 21862
17743	17748 543	22227
M1242	
*--		-*
OLALTY
13049
M1250
13050*--|/|-*----------[RST C0]*13052 13091 13243
X-LDME	
12981	
M1244	
*--		-*
X-OLAL
13094
M1251
13053*--|/|-*----------[RST C1]*13055 13111 13249
Z-LDME	
12984	
M1245	
*--		-*
Z-OLAL
13114
M1252
13056*--|/|-*----------[RST C2]*13058 13132 13255
C-LDME	
12987	
M1246	
*--		-*
C-OLAL
13135
M1253
13059*--|/|-*----------[RST C3]*13061 13152 13261
Y-LDME	
12990	
M1247	
*--		-*
Y-OLAL
13155
M1254
13062*--|/|-*----------[RST C4]*13064 13172 13267
5-LDME	
12993	
M1248	
*--		-*
5-OLAL
13175
M1255
13065*--|/|-*----------[RST C5]*13067 13194 13273
S1LDME	
12996	
M1249	
*--		-*
S1OLAL
13197
M1256
13068*--|/|-*----------[RST C6]*13070 13215 13279
S2LDME	
12999	
M1262	
*--		-*
S2OLAL
13218
M1257
13071*--|/|-*----------[RST C7]*13073 13235 13285
MLLDME	
13002	
M1263	
*--		-*
MLOLAL
13238
X231 M1250	X LOAD DETECT T
13074*--| |-*--| |-*[> R80 D320]----------<T130 D330 >*13082 13241 13294 13340
CUT.N	X-LDME	X1-LD% OL% X
	12981	12972 12975
		M70	SP.LD. DET. ALAR
	--|/|--[> R80 D370]-------[SET M1244]*13094 13051 13295 13297
	|OLCO.P X1-LD% OLmaxX| |13355 13364 13382 13388
		12978		13393
		M70 C0	
	--| |----| |----------
	OLCO.P OLmax
	13052
|M1251	Z LOAD DETECT T
*--		-*[> R81 D321]----------<T131 D331 >*13102 13247 13300 13341
	Z-LDME	Z1-LD% OL% Z
	12984	
		M70	ML.LD. DET. ALAR
	--|/|--[> R81 D371]-------[SET M1245]*13114 13054 13301 13303
	|OLCO.P Z1-LD% OLmaxZ| |13356 13372 13375 13389
				13394
		M70 C1	
	--| |----| |----------
	OLCO.P OLmaxZ
	13055
|M1252 M112	C LOAD DETECT T
*--		----		-*[> R82 D322]--------<T132 D332 >*13123 13253 13306 13342
	C-LDME C-MODE	C1-LD% OL% C
	12987 5533	
		M70	X.LD. DET. ALARM
	--|/|--[> R82 D372][SET M1246]*13135 13057 13307 13309
	|OLCO.P C1-LD% OLmaxC| |13357 13365 13376 13390
				13395
		M70 C2	
	--| |----| |----------
	OLCO.P OLmaxC
	13058


|M1253 | Y LOAD DETECT T
--| |-[> R83 D323]----------<T133 D333 >*13143 13259 13312 13343
Y-LDME| Y1-LD% OL% 4 |
12990 | |
|M70 | Z.LD.DET. ALARM
--|/|--[> R83 D373]-------[SET M1247]*13155 13060 13313 13315
|OLCO.P Y1-LD% OLmax4| |13358 13370 13379 13384
| | |13396
|M70 C3 |
--| |----| |----------
OLCO.P OLmax4
13061
|M1254 | 5 LOAD DETECT T
--| |-[> R84 D324]----------<T134 D334 >*13163 13265 13318 13344
5-LDME| OL5 5 |
12993 | |
|M70 | C.LD. DET. ALARM
--|/|--[> R84 D374]-------[SET M1248]*13175 13063 13319 13321
|OLCO.P OLmax5| |13359 13366 13380 13385
| | |13397
|M70 C4 |
--| |----| |----------
OLCO.P OLmax5
13064
|X231 M1255 M110 | SP1 LOAD DETECT
13176*--| |-*--| |----| |-*[> R90 D325]--------<T135 D335 >*13185 13271 13324 13345
|CUT.N |S1LDME S-MODE| SP1LD% OL% S1 |
|12996 5394 | |
|M70 | 4.LD.DET. ALARM
--|/|--[> R90 D375][SET M1249]*13197 13066 13325 13327
|OLCO.P SP1LD% OLmaxS| |13360 13368 13377 13386
| | |13398
|M70 C5 |
--| |----| |----------
OLCO.P OLmaxS
13067
|M1256 M110 | SP.LOAD DETECT T
--| |----| |-[> R92 D326]--------<T128 D336 >*13206 13277 13330 13346
|S2LDME S-MODE| SP2LD% OL% S2 |
|12999 5394 | |
|M70 | SP.LD.DET.ALARM
--|/|--[> R92 D376][SET M1262]*13218 13069 13331 13333
|OLCO.P SP2LD% OLmxS2| |13361 13367 13378 13387
| | |13399
|M70 C6 |
--| |----| |----------
OLCO.P OLmxS2
13070
|M1257 | ML.LOAD DETECT T
--| |-[> R91 D327]----------<T129 D337 >*13226 13283 13336 13347
MLLDME| ML1LD% OL% ML |
13002 | |
|M70 | ML LD.DET.ALARM
--|/|--[> R91 D377]-------[SET M1263]*13238 13072 13337 13339
|OLCO.P ML1LD% OLmxML| |13362 13392
| | |
|M70 C7 |
--| |----| |----------
OLCO.P OLmxML
13073
|M1241 T130 |
13239*--|/|-*--| |----------<C0 D370 >*13052 13091 13243
|OLHOLD|XOVLT OLmaxX|
|13044 |13082 12978 |
|T131 |
*--| |----------<C1 D371 >*13055 13111 13249
|ZOVLT OLmaxZ|
|13102 |
|T132 |
*--| |----------<C2 D372 >*13058 13132 13255
|COVLT OLmaxC|
|13123 |
|T133 |
*--| |----------<C3 D373 >*13061 13152 13261
|YOVLT OLmax4|
|13143 |
|T134 |
*--| |----------<C4 D374 >*13064 13172 13267
|5OVLT OLmax5|
|13163 |
|T135 |
*--| |----------<C5 D375 >*13067 13194 13273
|S1OVLT OLmaxS|
|13185 |
|T128 |
*--| |----------<C6 D376 >*13070 13215 13279
|SPOVLT OLmxS2|
|13206 |
|T129 |
*--| |----------<C7 D377 >*13073 13235 13285
MLOVLT OLmxML|
13226 |
|M1242 M1241 X140 M70 T130 M1244 | SP.LD. DET. ALAR
13288*--|/|-*--|/|----|/|-*--|/|----| |-*----------< >*13094 13051 13295 13297
|OLALTY|OLHOLD RST.B |OLCO.P XOVLT | |13355 13364 13382 13388
|13049 |13044 | 13082 | |13393
|M777 | |M1244 | |
--|/|- *--| |--------* |
|CLR-SW |X-OLAL |
|1082 |13094 |
|M70 T131 M1245 | ML.LD. DET. ALAR
--|/|----| |-----------< >*13114 13054 13301 13303
|OLCO.P ZOVLT | |13356 13372 13375 13389
| 13102 | |13394
|M1245 | |
--| |-------- |
|Z-OLAL |
|13114 |
|M70 T132 M1246 | X.LD. DET. ALARM
--|/|----| |-----------< >*13135 13057 13307 13309
|OLCO.P COVLT | |13357 13365 13376 13390
| 13123 | |13395
|M1246 | |
--| |-------- |
|C-OLAL |
|13135 |
|M70 T133 M1247 | Z.LD.DET. ALARM
--|/|----| |-----------< >*13155 13060 13313 13315
|OLCO.P YOVLT | |13358 13370 13379 13384
| 13143 | |13396
|M1247 | |
--| |-------- |
|Y-OLAL |
|13155 |
|M70 T134 M1248 | C.LD. DET. ALARM
--|/|----| |-----------< >*13175 13063 13319 13321
|OLCO.P 5OVLT | |13359 13366 13380 13385
| 13163 | |13397
|M1248 | |
--| |-------- |
|5-OLAL |
|13175 |
|M70 T135 M1249 | 4.LD.DET. ALARM
--|/|----| |-----------< >*13197 13066 13325 13327
|OLCO.P S1OVLT| |13360 13368 13377 13386
| 13185 | |13398
|M1249 | |
--| |-------- |
|S1OLAL |
|13197 |
|M70 T128 M1262 | SP.LD.DET.ALARM
--|/|----| |-----------< >*13218 13069 13331 13333
|OLCO.P SPOVLT| |13361 13367 13378 13387
| 13206 | |13399
|M1262 | |
--| |-------- |
|S2OLAL |
|13218 |
|M70 T129 M1263 | ML LD.DET.ALARM
--|/|----| |-----------< >*13238 13072 13337 13339
|OLCO.P MLOVLT| |13362 13392
| 13226 | |

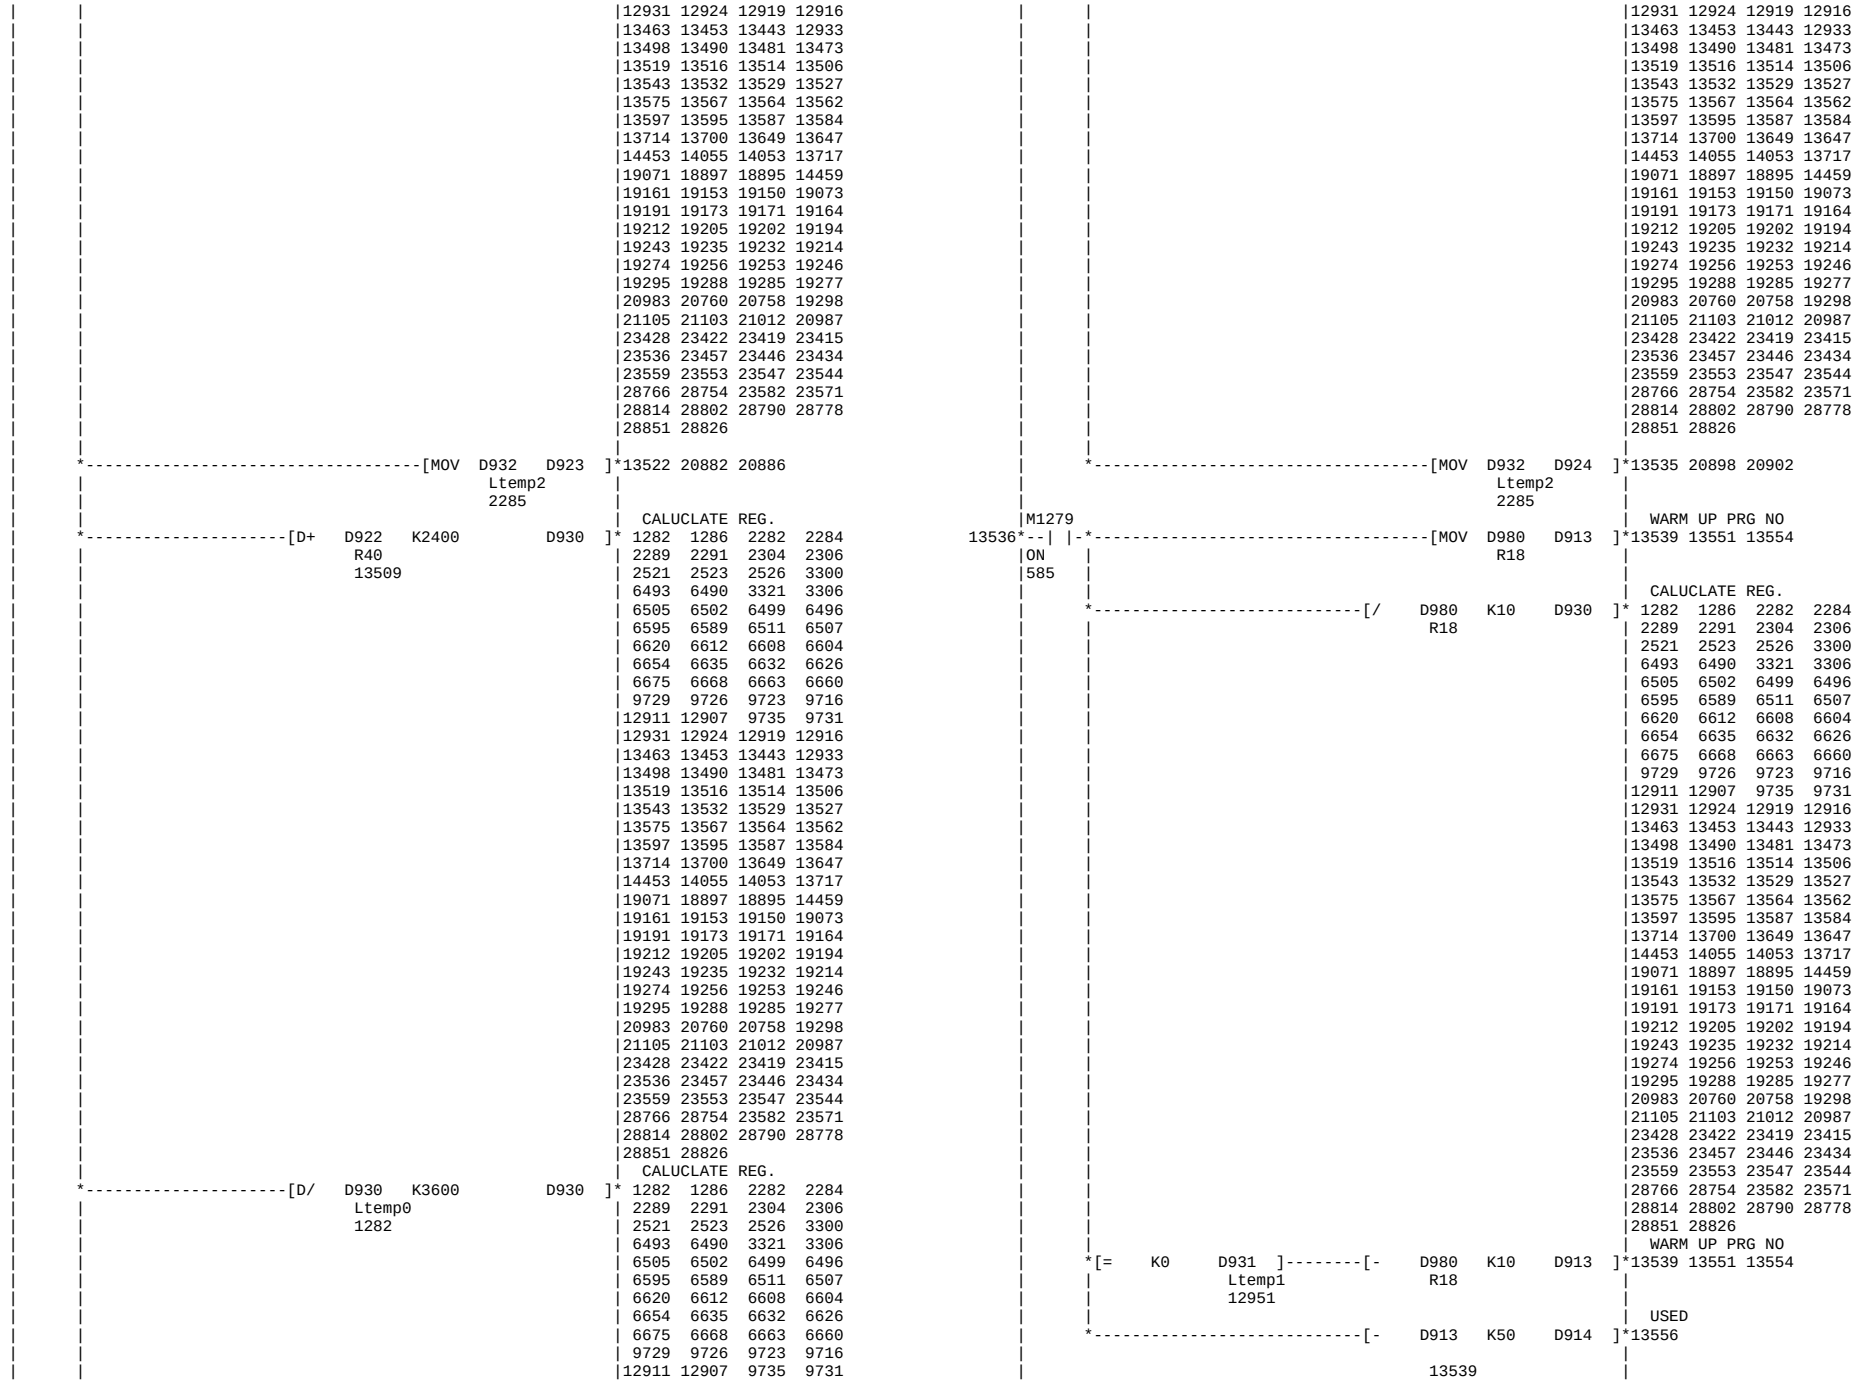

|M1263 |
--| |--------
MLOLAL
13238
|T130 M1242 M1241 X140 M1243 | O.L.TIME ALARM
13340*--| |-*--|/|-*--|/|----|/|----------<
|XOVLT |OLALTY|OLHOLD RST.B
|13082 |13049 |13044
|T131 |M777 |
--| |---|/|-*
|ZOVLT |CLR-SW
|13102 |1082
|T132 |
--| |-
|COVLT |
|13123 |
|T133 |
--| |-
|YOVLT |
|13143 |
|T134 |
--| |-
|5OVLT |
|13163 |
|T135 |
--| |-
|S1OVLT|
|13185 |
|T128 |
--| |-
|SPOVLT|
|13206 |
|T129 |
--| |-
|MLOVLT|
|13226 |
|M1243 |
--| |-
|OLT.AL
|13354
|M1244 F53 | 253.SP OVLOAD DE
13355*--| |-*----------<
|X-OLAL|
|13094 |
|M1245 |
--| |-
|Z-OLAL|
|13114 |
|M1246 |
--| |-
|C-OLAL|
|13135 |
|M1247 |
--| |-
|Y-OLAL|
|13155 |
|M1248 |
--| |-
|5-OLAL|
|13175 |
|M1249 |
--| |-
|S1OLAL|
|13197 |
|M1262 |
--| |-
|S2OLAL|
|13218 |
|M1263 |
--| |-
|MLOLAL
|13238
|M1244 M1200 | TEMP. COIL 0 BIT
13364*--| |----------*----------<
|X-OLAL |
|13094 |
13355*--| |-*----------<
|13363 12333 13408 21473
|21861 22226 25507
13364*--| |----------*----------<
| 1064 1067 1073 3407
| 3408 7202 7204 7219
|12729 12929 13374 13411
|M1246 M1245 |
--| |------------|/|-*
|C-OLAL |Z-OLAL
|13135 |13114
|M1248 M1247 |
--| |----------|/|-*
|5-OLAL |Y-OLAL
|13175 |13155
|M1262 M1249 |
--| |----|/|-
|S2OLAL S1OLAL
|13218 13197
13375*--| |----------*--|/|----------<
|Z-OLAL |X-OLAL
|13114 |13094
|M1246 |
--| |----------
|C-OLAL |
|13135 |
|M1249 M1247 M1248 |
--| |---|/|----|/|-*
|S1OLAL|Y-OLAL 5-OLAL
|13197 |13155 13175
|M1262 |
--| |-
|S2OLAL
|13218
|M1247 M1244 M1245 M1246 M1202 | TEMP. COIL 2 BIT
13384*--| |-*--|/|----|/|----|/|----------<
|Y-OLAL|X-OLAL Z-OLAL C-OLAL
|13155 |13094 13114 13135
|M1248 |
--| |-
|5-OLAL|
|13175 |
|M1249 |
--| |-
|S1OLAL|
|13197 |
|M1262 |
--| |-
|S2OLAL
|13218
|M1263 M1244 M1245 M1246 M1247 M1248 M1249 M1262 M1203 | TEMP. COIL 3 BIT
13392*--| |----|/|----|/|----|/|----|/|----|/|----|/|----|/|----|/|--<
|MLOLAL X-OLAL Z-OLAL C-OLAL Y-OLAL 5-OLAL S1OLAL S2OLAL
|13238 13094 13114 13135 13155 13175 13197 13218
M1201 | TEMP. COIL 1 BIT
13375*--| |----------<
|13007 13383 15881 15910
|15943 15969 15985 16002
|16035 16054 16073 16163
|16460 16512 19279 23466
|23592 23630 23657 23734
|23757 23780 23803 23951
|24031 24068 24081 27150
|27160 27182 27217 27237
|27362 27404 27453 27490
|27531 27544 28413 28451
|28493 28526 28551 28585
|28621 28655 28669 28688
|28715
13384*--| |----------<
|13391 3414 3472 12983
|13010 15882 15913 15944
|15988 16003 16055 16077
|16166 16462 16515 19224
|23469 23595 23633 27153
|27368 27418 27458 27495
|27557 28415 28454 28531
|28553 28623 28719
13392*--| |----------<
| 7216 3417 12986 13013
|13400 15885 15916 15947
|15989 16004 16056 16169
|15569 15603 15879 15880
|15901 15906 15909 15934
|15939 15942 15958 15963
|15966 15978 15983 15984
|15995 16000 16001 16023
|16028 16033 16045 16050
|16051 16066 16071 16072
|16080 16100 16115 16130
|16145 16193 16456 16458
|16499 16505 16509 19266
|19305 23462 23463 23479
|23588 23589 23604 23624
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741

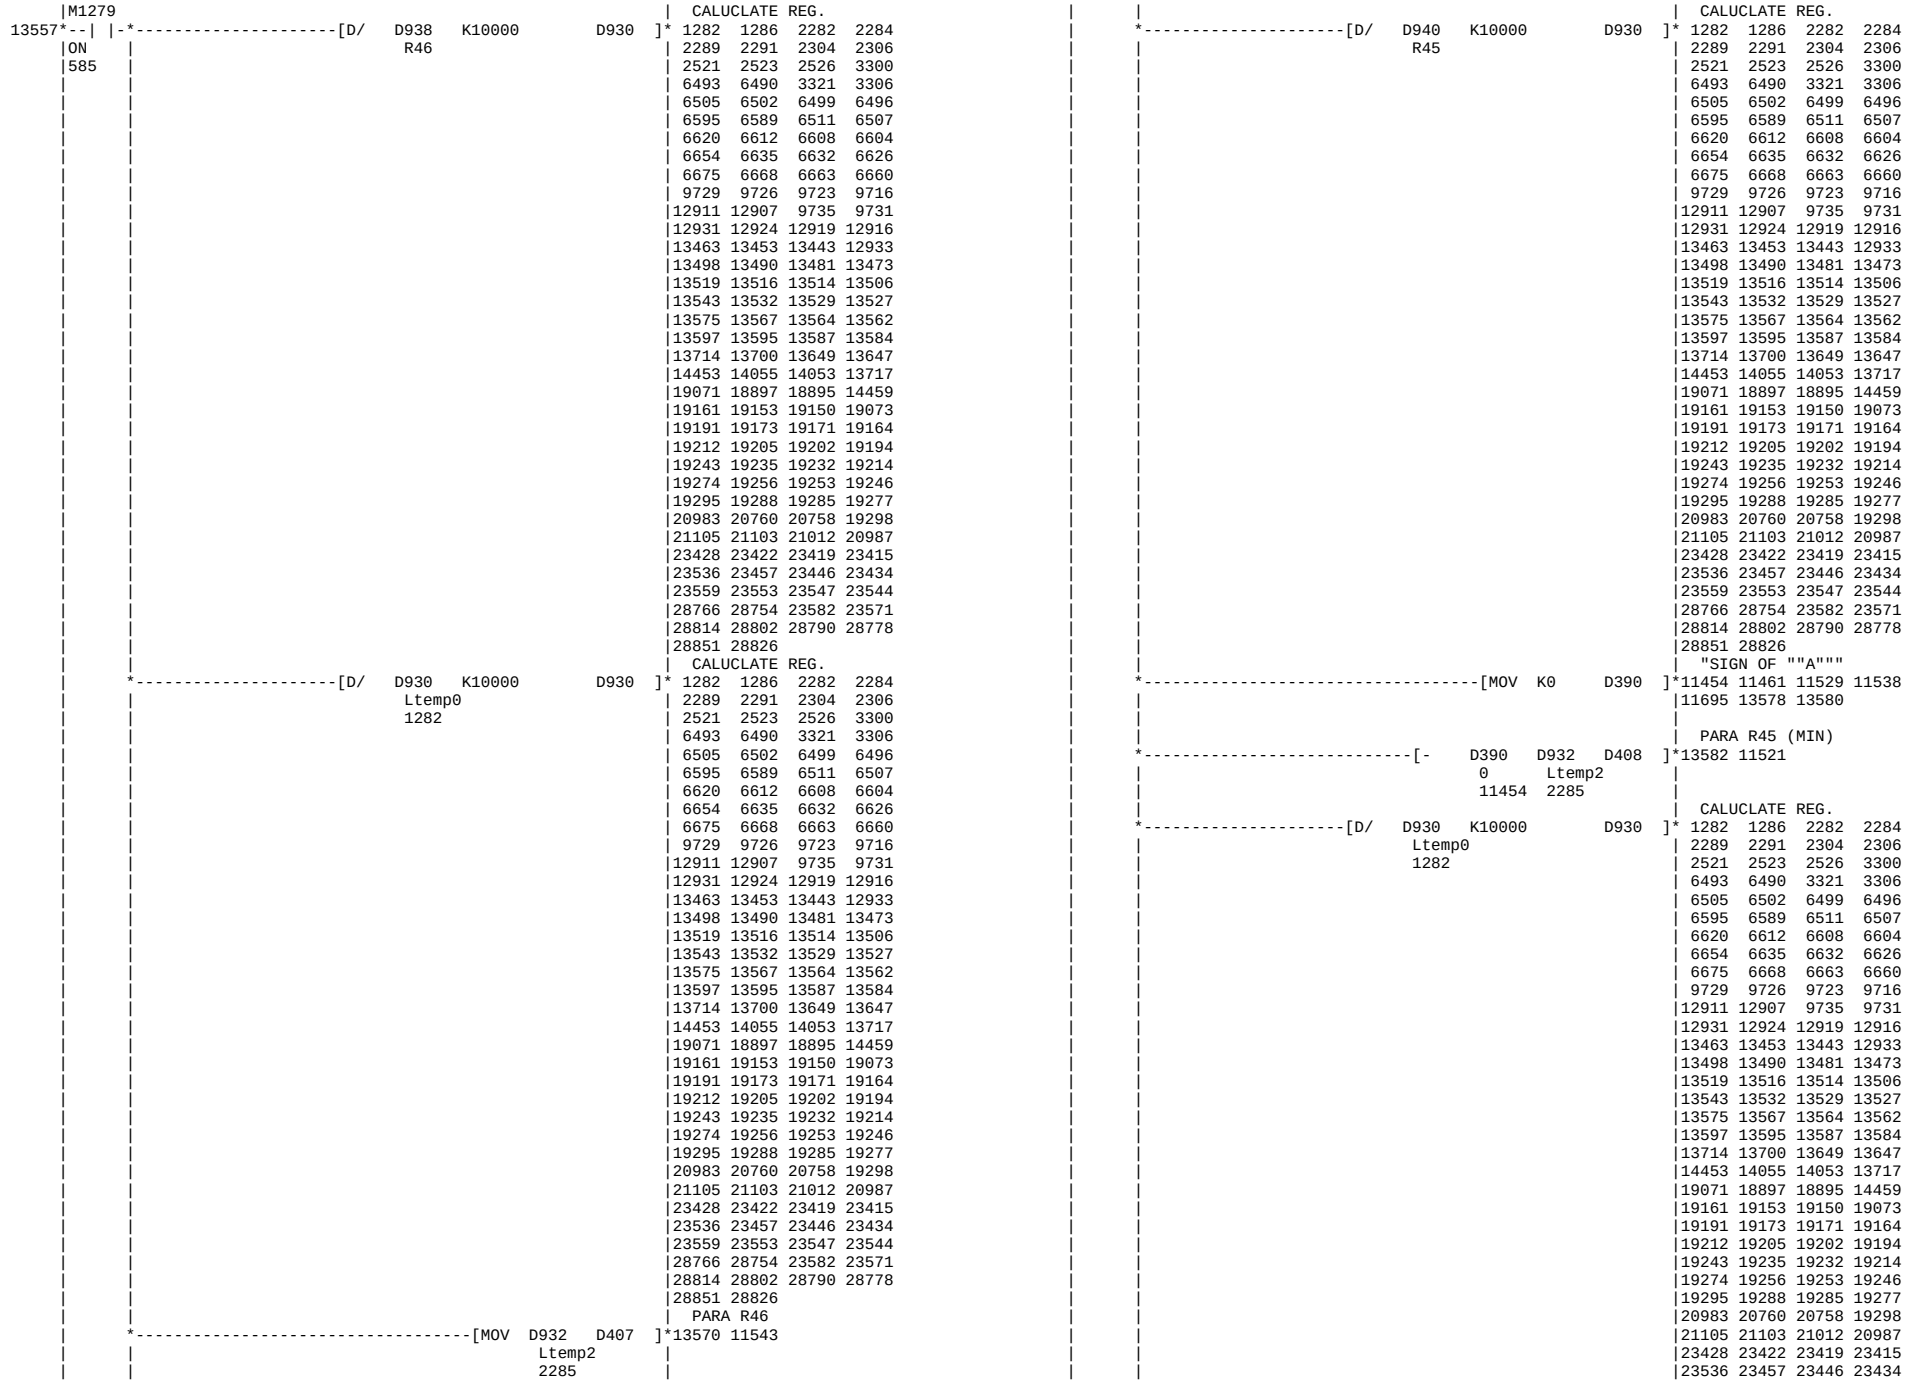

|23472 19237 16517 16464
|27155 23882 23867 23598
|27375 27239 27221 27183
|28458 27496 27459 27419
|28723 28625 28555 28536
|28743
|M1243 M70 M1204 | TEMP. COIL 4 BIT
13401*--|/|----|/|----------<
|OLT.AL OLCO.P
|13354
|M1275 M1205 | TEMP. COIL 5 BIT
13404*--| |-*----------<
|OFF |
|615 |
|M1206 | TEMP. COIL 6 BIT
*----------<
|M1207 | TEMP. COIL 7 BIT
*----------<
|F53 K2 | ALARM CODE No.25
13408*--| |-*----------[BIN M1200 D473]*13412
SPOVDT	TMP.0B
13363	1064
X140	
--| |-
RST.B
13413*----------[RET]*
P128 |M1279	T64
13414*--| |-*----------[BMOV R436 D0 K64]*13417 5901 18348 19360
ON
585
	SLIDWAY OFF T.
*----------[BMOV R532 D934 K64]*13421 2195
	R112
----------[BMOV R4496 D506 K32] 8200 8197 8214 13425
	R128 (L)
*----------[BMOV R4464 D544 K32]*13429 25164
	R144
*----------[BMOV R4432 D632 K32]*13433
	R160
*----------[BMOV R4400 D710 K32]*13437
R160
27379 27240 27222 23885
28460 28419 27463 27423
28673 28628 28557 28539
28691
16059 16473 19183 23870
28632 28597 28561 28501
28745
15924 15953 15974 16012
16041 16479 19155 27177
28427 28393 27475 27225
28603 28563 28505 28469
15917 15948 15992 16005
28677 28630 28591
15973 16007 16040 16062
27219 23644 19142 16477
28466 28388 27471 27440
13022 15895 15921 15952
28559 28497 28463 28423
27467 27439 27218 23636
16038 16061 16475 19196
15918 15951 15972 16006
*----------<
13405 12992 13019 15890
16406 3465 3474 12995
16475 19196 19407 19406
16472 19183 23870 23869
16473 19183 23870 23869
16474 19184 23871 23868
16475 19196 19407 19406
16476 19195 19406 19405
16477 19194 19405 19404
16478 19193 19404 19403
16479 19155 27177 27176
16480 19154 27176 27175
16481 19153 27175 27174
16482 19152 27174 27173
16483 19151 27173 27172
16484 19150 27172 27171
16485 19149 27171 27170
16486 19148 27170 27169
16487 19147 27169 27168
16488 19146 27168 27167

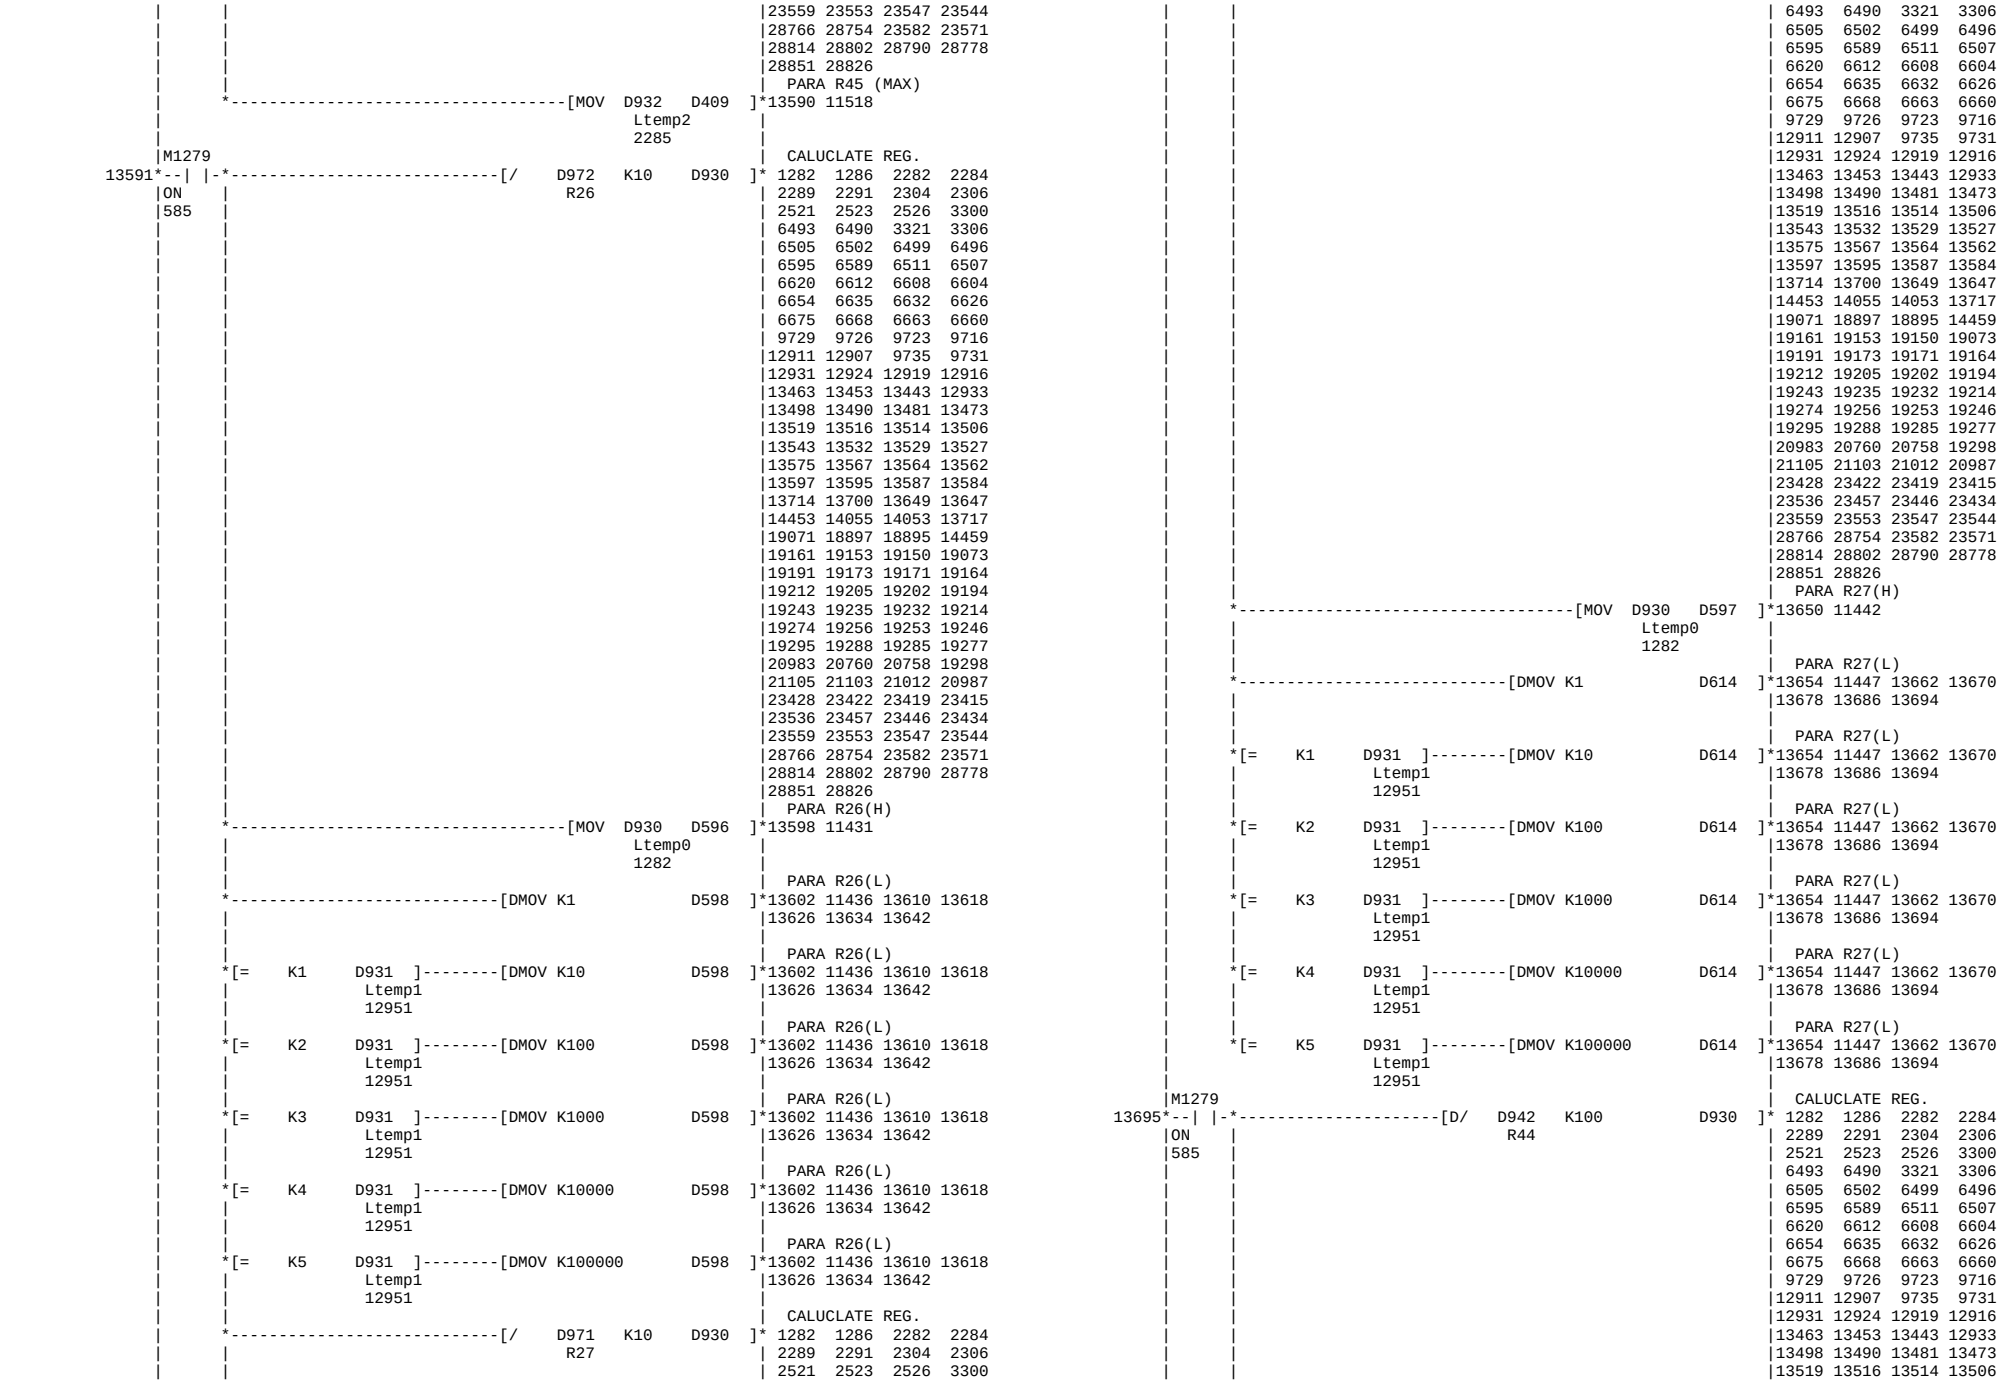

[MOV D932 D927]
Ltemp2
2285
ORIENT DATA 2
[NEG D927]
ORIENT DATA 2
[D/ D960 K3600 D930]
R35
CALUCLATE REG.
[MOV D932 D928]
Ltemp2
2285
ORIENT DATA 3
[NEG D928]
ORIENT DATA 3
[D/ D958 K3600 D930]
R36
CALUCLATE REG.
[MOV D932 D929]
Ltemp2
2285
ORIENT DATA 4
[D/ D956 K3600 D930]
R37
CALUCLATE REG.
[MOV D932 D920]
Ltemp2
2285
M1279
ON
585
[D/ D954 K3600 D930]
R38
CALUCLATE REG.

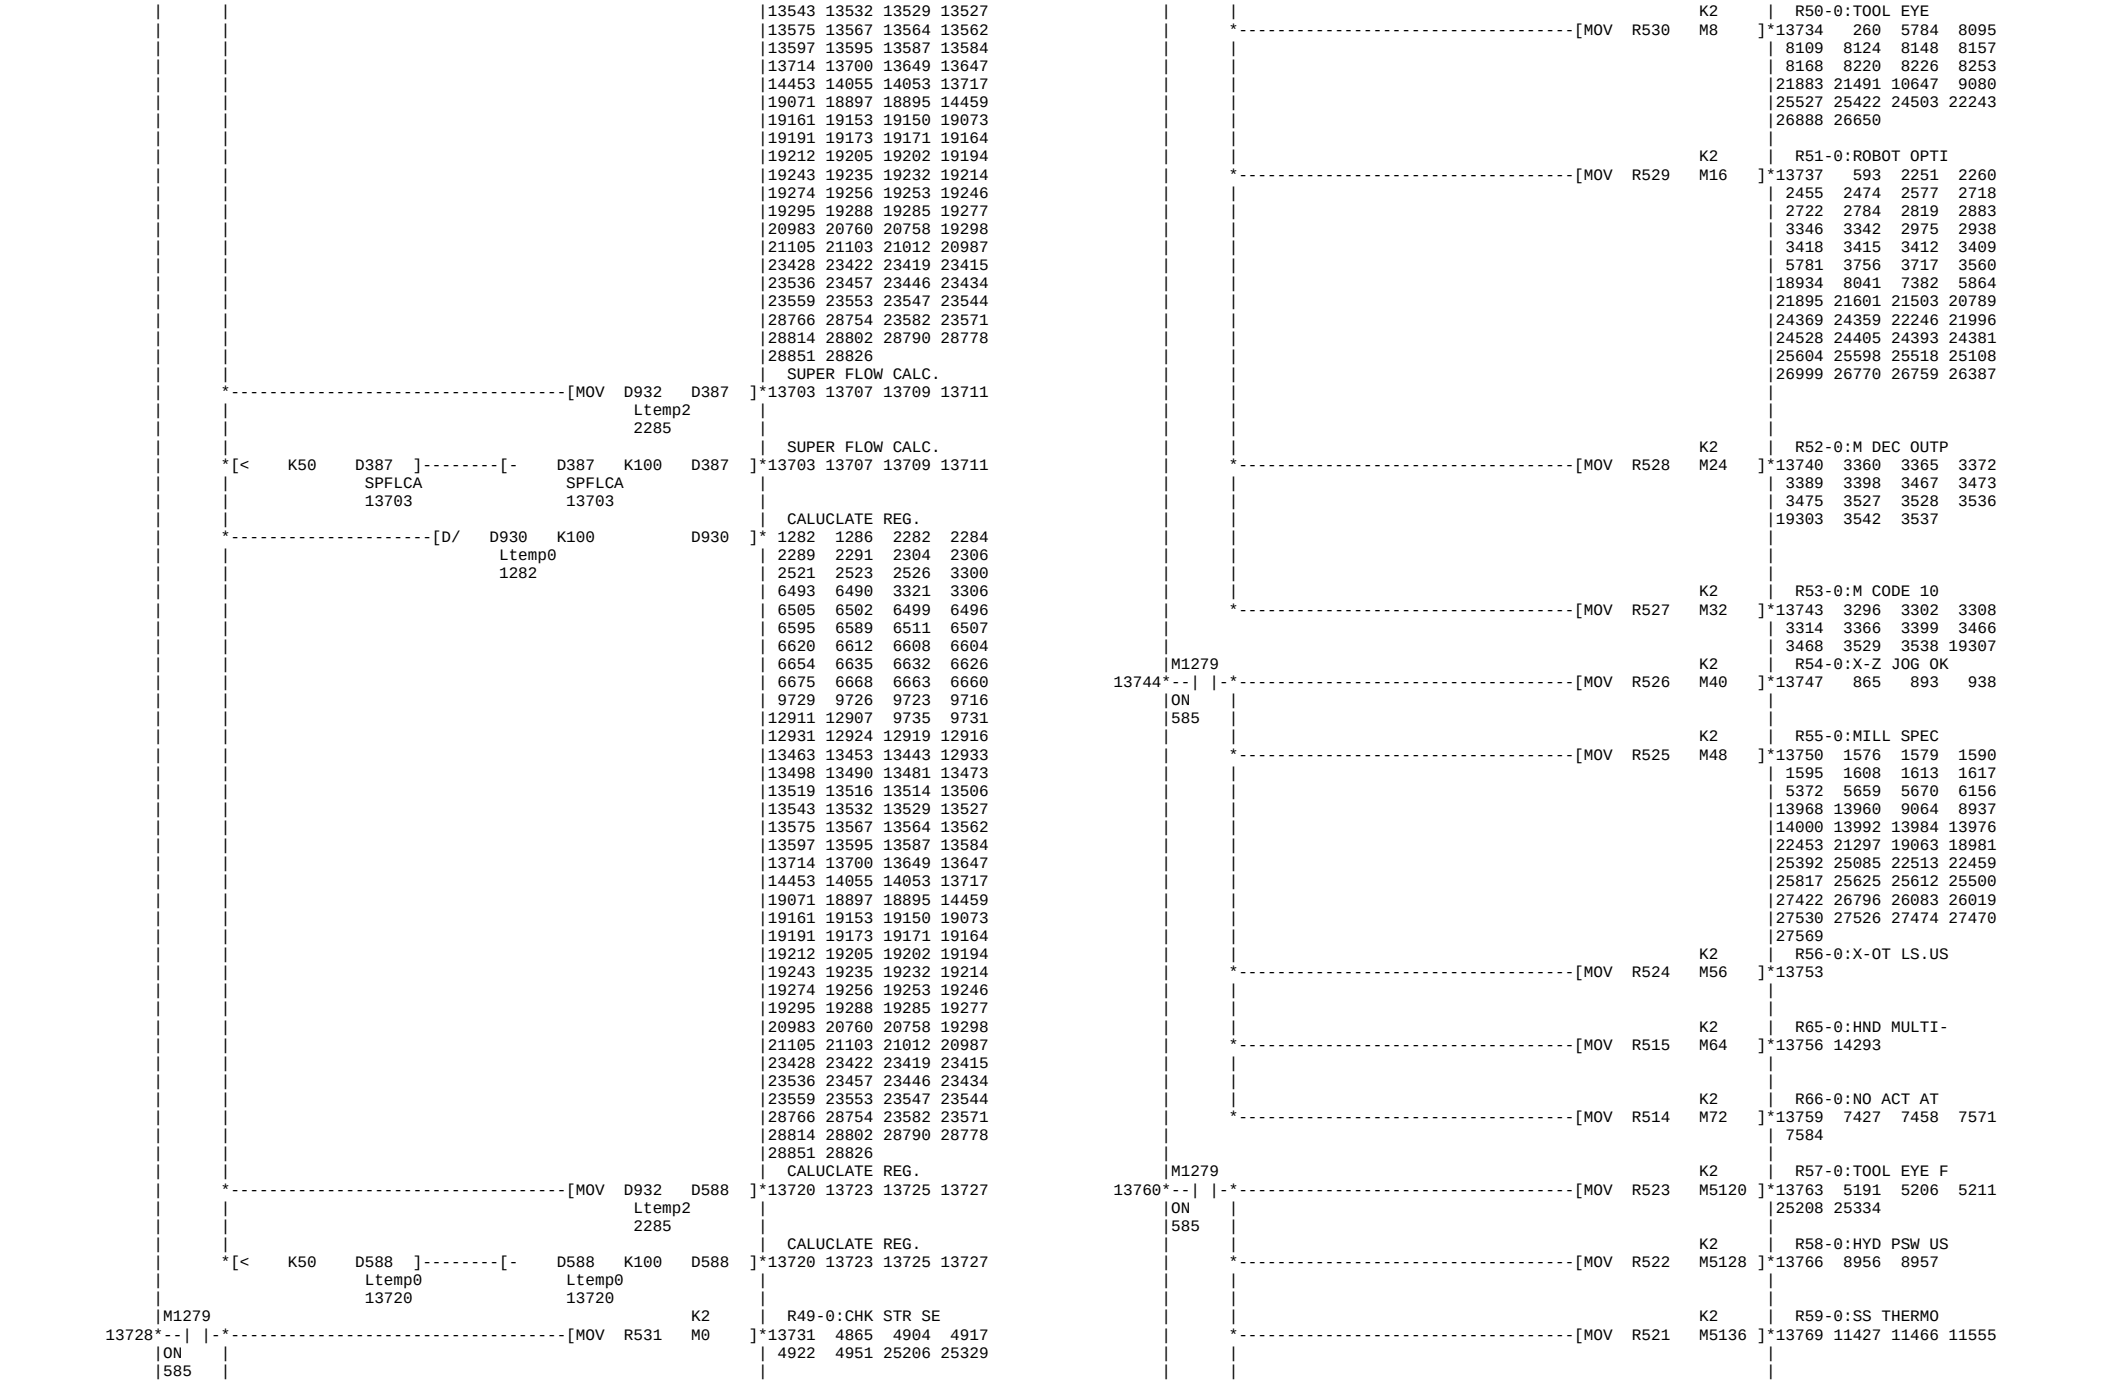
```
|      |                                          |13543 13532 13529 13527
|      |                                          |13575 13567 13564 13562
|      |                                          |13597 13595 13587 13584
|      |                                          |13714 13700 13649 13647
|      |                                          |14453 14055 14053 13717
|      |                                          |19071 18897 18895 14459
|      |                                          |19161 19153 19150 19073
|      |                                          |19191 19173 19171 19164
|      |                                          |19212 19205 19202 19194
|      |                                          |19243 19235 19232 19214
|      |                                          |19274 19256 19253 19246
|      |                                          |19295 19288 19285 19277
|      |                                          |20983 20760 20758 19298
|      |                                          |21105 21103 21012 20987
|      |                                          |23428 23422 23419 23415
|      |                                          |23536 23457 23446 23434
|      |                                          |23559 23553 23547 23544
|      |                                          |28766 28754 23582 23571
|      |                                          |28814 28802 28790 28778
|      |                                          |28851 28826
|      |                                          |
|      *----------------------------------[MOV  D932   D925  ]*13493 20969 20978 20992
|      |                                  Ltemp2       |21017
|      |                                  2285         |
|      |                                               |  CALUCLATE REG.
|      *--------------------[D/   D952   K3600         D930  ]* 1282  1286  2282  2284
|      |                           R39                 |  2289  2291  2304  2306
|      |                                               |  2521  2523  2526  3300
|      |                                               |  6493  6490  3321  3306
|      |                                               |  6505  6502  6499  6496
|      |                                               |  6595  6589  6511  6507
|      |                                               |  6620  6612  6608  6604
|      |                                               |  6654  6635  6632  6626
|      |                                               |  6675  6668  6663  6660
|      |                                               |  9729  9726  9723  9716
|      |                                               |12911 12907  9735  9731
|      |                                               |12931 12924 12919 12916
|      |                                               |13463 13453 13443 12933
|      |                                               |13498 13490 13481 13473
|      |                                               |13519 13516 13514 13506
|      |                                               |13543 13532 13529 13527
|      |                                               |13575 13567 13564 13562
|      |                                               |13597 13595 13587 13584
|      |                                               |13714 13700 13649 13647
|      |                                               |14453 14055 14053 13717
|      |                                               |19071 18897 18895 14459
|      |                                               |19161 19153 19150 19073
|      |                                               |19191 19173 19171 19164
|      |                                               |19212 19205 19202 19194
|      |                                               |19243 19235 19232 19214
|      |                                               |19274 19256 19253 19246
|      |                                               |19295 19288 19285 19277
|      |                                               |20983 20760 20758 19298
|      |                                               |21105 21103 21012 20987
|      |                                               |23428 23422 23419 23415
|      |                                               |23536 23457 23446 23434
|      |                                               |23559 23553 23547 23544
|      |                                               |28766 28754 23582 23571
|      |                                               |28814 28802 28790 28778
|      |                                               |28851 28826
|      |                                               |
|      *----------------------------------[MOV  D932   D921  ]*13501 20913
|      |                                  Ltemp2       |
|      |                                  2285         |
|      |                                               |  CALUCLATE REG.
|      *--------------------[D/   D950   K3600         D930  ]* 1282  1286  2282  2284
|      |                           R40                 |  2289  2291  2304  2306
|      |                                               |  2521  2523  2526  3300
|      |                                               |  6493  6490  3321  3306
|      |                                               |  6505  6502  6499  6496
|      |                                               |  6595  6589  6511  6507
|      |                                               |  6620  6612  6608  6604
|      |                                               |  6654  6635  6632  6626
|      |                                               |  6675  6668  6663  6660
|      |                                               |  9729  9726  9723  9716
|      |                                               |12911 12907  9735  9731
```

```
|      |                                          |12931 12924 12919 12916
|      |                                          |13463 13453 13443 12933
|      |                                          |13498 13490 13481 13473
|      |                                          |13519 13516 13514 13506
|      |                                          |13543 13532 13529 13527
|      |                                          |13575 13567 13564 13562
|      |                                          |13597 13595 13587 13584
|      |                                          |13714 13700 13649 13647
|      |                                          |14453 14055 14053 13717
|      |                                          |19071 18897 18895 14459
|      |                                          |19161 19153 19150 19073
|      |                                          |19191 19173 19171 19164
|      |                                          |19212 19205 19202 19194
|      |                                          |19243 19235 19232 19214
|      |                                          |19274 19256 19253 19246
|      |                                          |19295 19288 19285 19277
|      |                                          |20983 20760 20758 19298
|      |                                          |21105 21103 21012 20987
|      |                                          |23428 23422 23419 23415
|      |                                          |23536 23457 23446 23434
|      |                                          |23559 23553 23547 23544
|      |                                          |28766 28754 23582 23571
|      |                                          |28814 28802 28790 28778
|      |                                          |28851 28826
|      |                                          |
|      *----------------------------------[MOV  D932   D922  ]*13509 13511 13524 20873
|      |                                  Ltemp2       |20881 20888 20897 20904
|      |                                  2285         |
|      |                                               |  CALUCLATE REG.
|      *--------------------[D+   D922   K1200         D930  ]* 1282  1286  2282  2284
|      |                           R40                 |  2289  2291  2304  2306
|      |                           13509               |  2521  2523  2526  3300
|      |                                               |  6493  6490  3321  3306
|      |                                               |  6505  6502  6499  6496
|      |                                               |  6595  6589  6511  6507
|      |                                               |  6620  6612  6608  6604
|      |                                               |  6654  6635  6632  6626
|      |                                               |  6675  6668  6663  6660
|      |                                               |  9729  9726  9723  9716
|      |                                               |12911 12907  9735  9731
|      |                                               |12931 12924 12919 12916
|      |                                               |13463 13453 13443 12933
|      |                                               |13498 13490 13481 13473
|      |                                               |13519 13516 13514 13506
|      |                                               |13543 13532 13529 13527
|      |                                               |13575 13567 13564 13562
|      |                                               |13597 13595 13587 13584
|      |                                               |13714 13700 13649 13647
|      |                                               |14453 14055 14053 13717
|      |                                               |19071 18897 18895 14459
|      |                                               |19161 19153 19150 19073
|      |                                               |19191 19173 19171 19164
|      |                                               |19212 19205 19202 19194
|      |                                               |19243 19235 19232 19214
|      |                                               |19274 19256 19253 19246
|      |                                               |19295 19288 19285 19277
|      |                                               |20983 20760 20758 19298
|      |                                               |21105 21103 21012 20987
|      |                                               |23428 23422 23419 23415
|      |                                               |23536 23457 23446 23434
|      |                                               |23559 23553 23547 23544
|      |                                               |28766 28754 23582 23571
|      |                                               |28814 28802 28790 28778
|      |                                               |28851 28826
|      |                                               |
|      *--------------------[D/   D930   K3600         D930  ]* 1282  1286  2282  2284
|      |                           Ltemp0              |  2289  2291  2304  2306
|      |                           1282                |  2521  2523  2526  3300
|      |                                               |  6493  6490  3321  3306
|      |                                               |  6505  6502  6499  6496
|      |                                               |  6595  6589  6511  6507
|      |                                               |  6620  6612  6608  6604
|      |                                               |  6654  6635  6632  6626
|      |                                               |  6675  6668  6663  6660
|      |                                               |  9729  9726  9723  9716
|      |                                               |12911 12907  9735  9731
```


[MOV D932 D923]
Ltemp2
2285
CALUCLATE REG.
[D+ D922 K2400 D930]
R40
13509
[D/ D930 K3600 D930]
Ltemp0
1282
13522 20882 20886
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
M1279
13536
ON
585
[MOV D980 D913]
R18
[/ D980 K10 D930]
R18
[= K0 D931]
Ltemp1
12951
[- D980 K10 D913]
R18
[- D913 K50 D914]
13539
13535 20898 20902
WARM UP PRG NO
13539 13551 13554
[MOV D932 D924]
Ltemp2
2285
USED
13556


M1279
13557
ON
585
[D/ D938 K10000 D930]
R46
CALUCLATE REG.
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
[D/ D930 K10000 D930]
Ltemp0
1282
[MOV D932 D407]
Ltemp2
2285
13570 11543
PARA R46
[D/ D940 K10000 D930]
R45
[MOV K0 D390]
11454 11461 11529 11538
11695 13578 13580
"SIGN OF ""A"""
[- D390 D932 D408]
13582 11521
0 Ltemp2
11454 2285
PARA R45 (MIN)

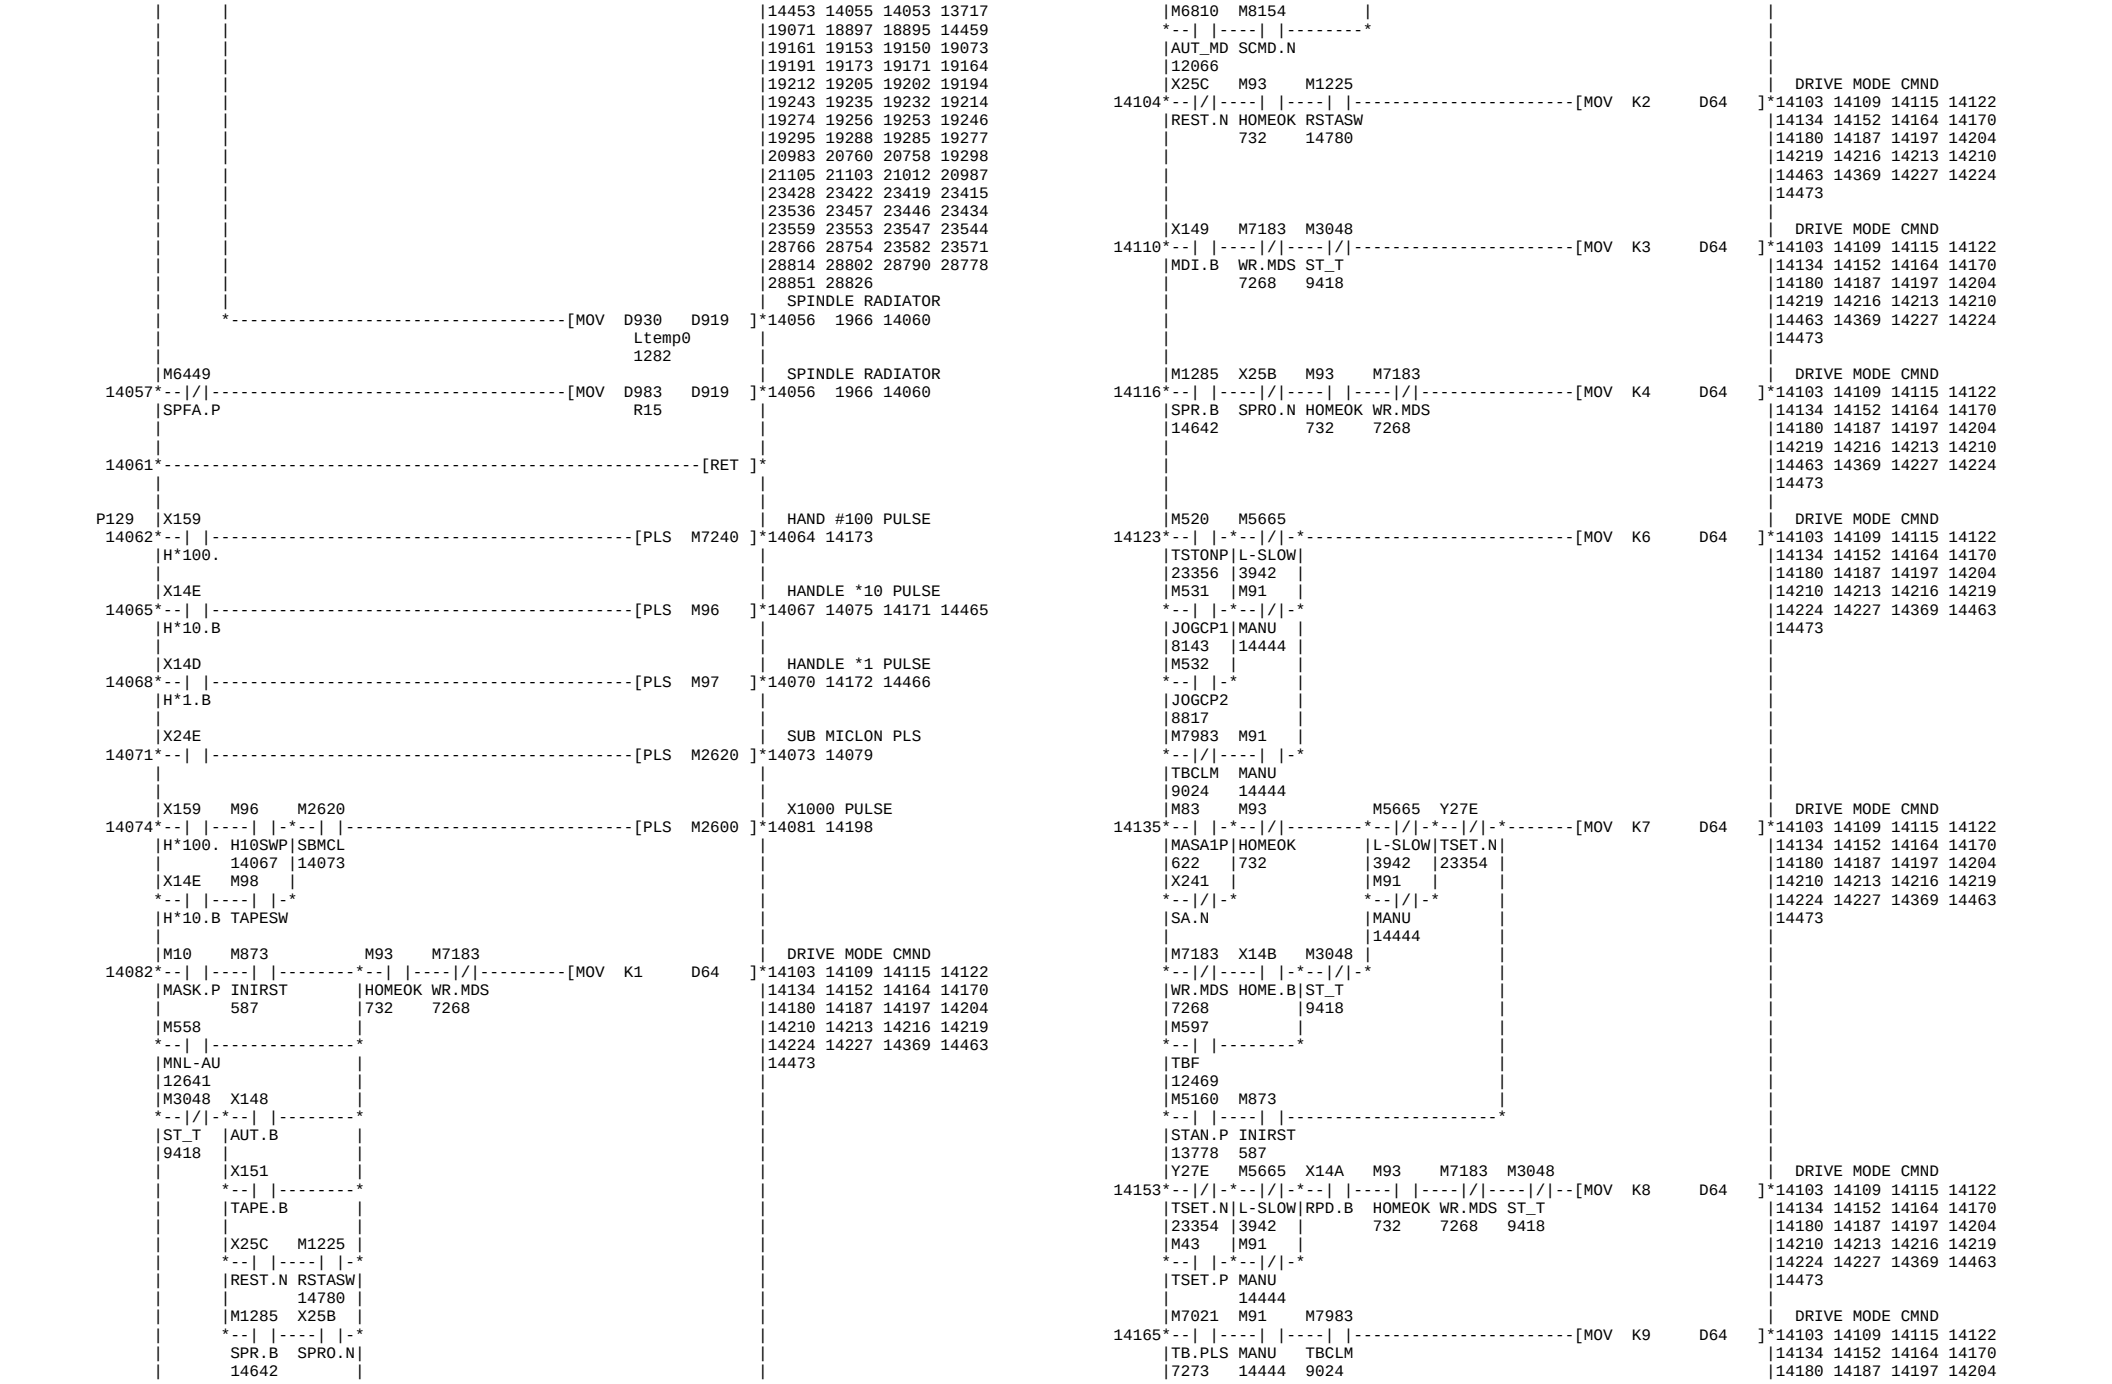

M1279
ON
585
[MOV D932 D409]
Ltemp2
2285
PARA R45 (MAX)
[/ D972 K10 D930]
R26
CALUCLATE REG.
[MOV D930 D596]
Ltemp0
1282
PARA R26(H)
[DMOV K1 D598]
[= K1 D931]
Ltemp1
12951
[DMOV K10 D598]
[= K2 D931]
[DMOV K100 D598]
[= K3 D931]
[DMOV K1000 D598]
[= K4 D931]
[DMOV K10000 D598]
[= K5 D931]
[DMOV K100000 D598]
[/ D971 K10 D930]
R27
[MOV D930 D597]
[DMOV K1 D614]
[DMOV K10 D614]
[DMOV K100 D614]
[DMOV K1000 D614]
[DMOV K10000 D614]
[DMOV K100000 D614]
PARA R27(H)
PARA R27(L)
[/D D942 K100 D930]
R44

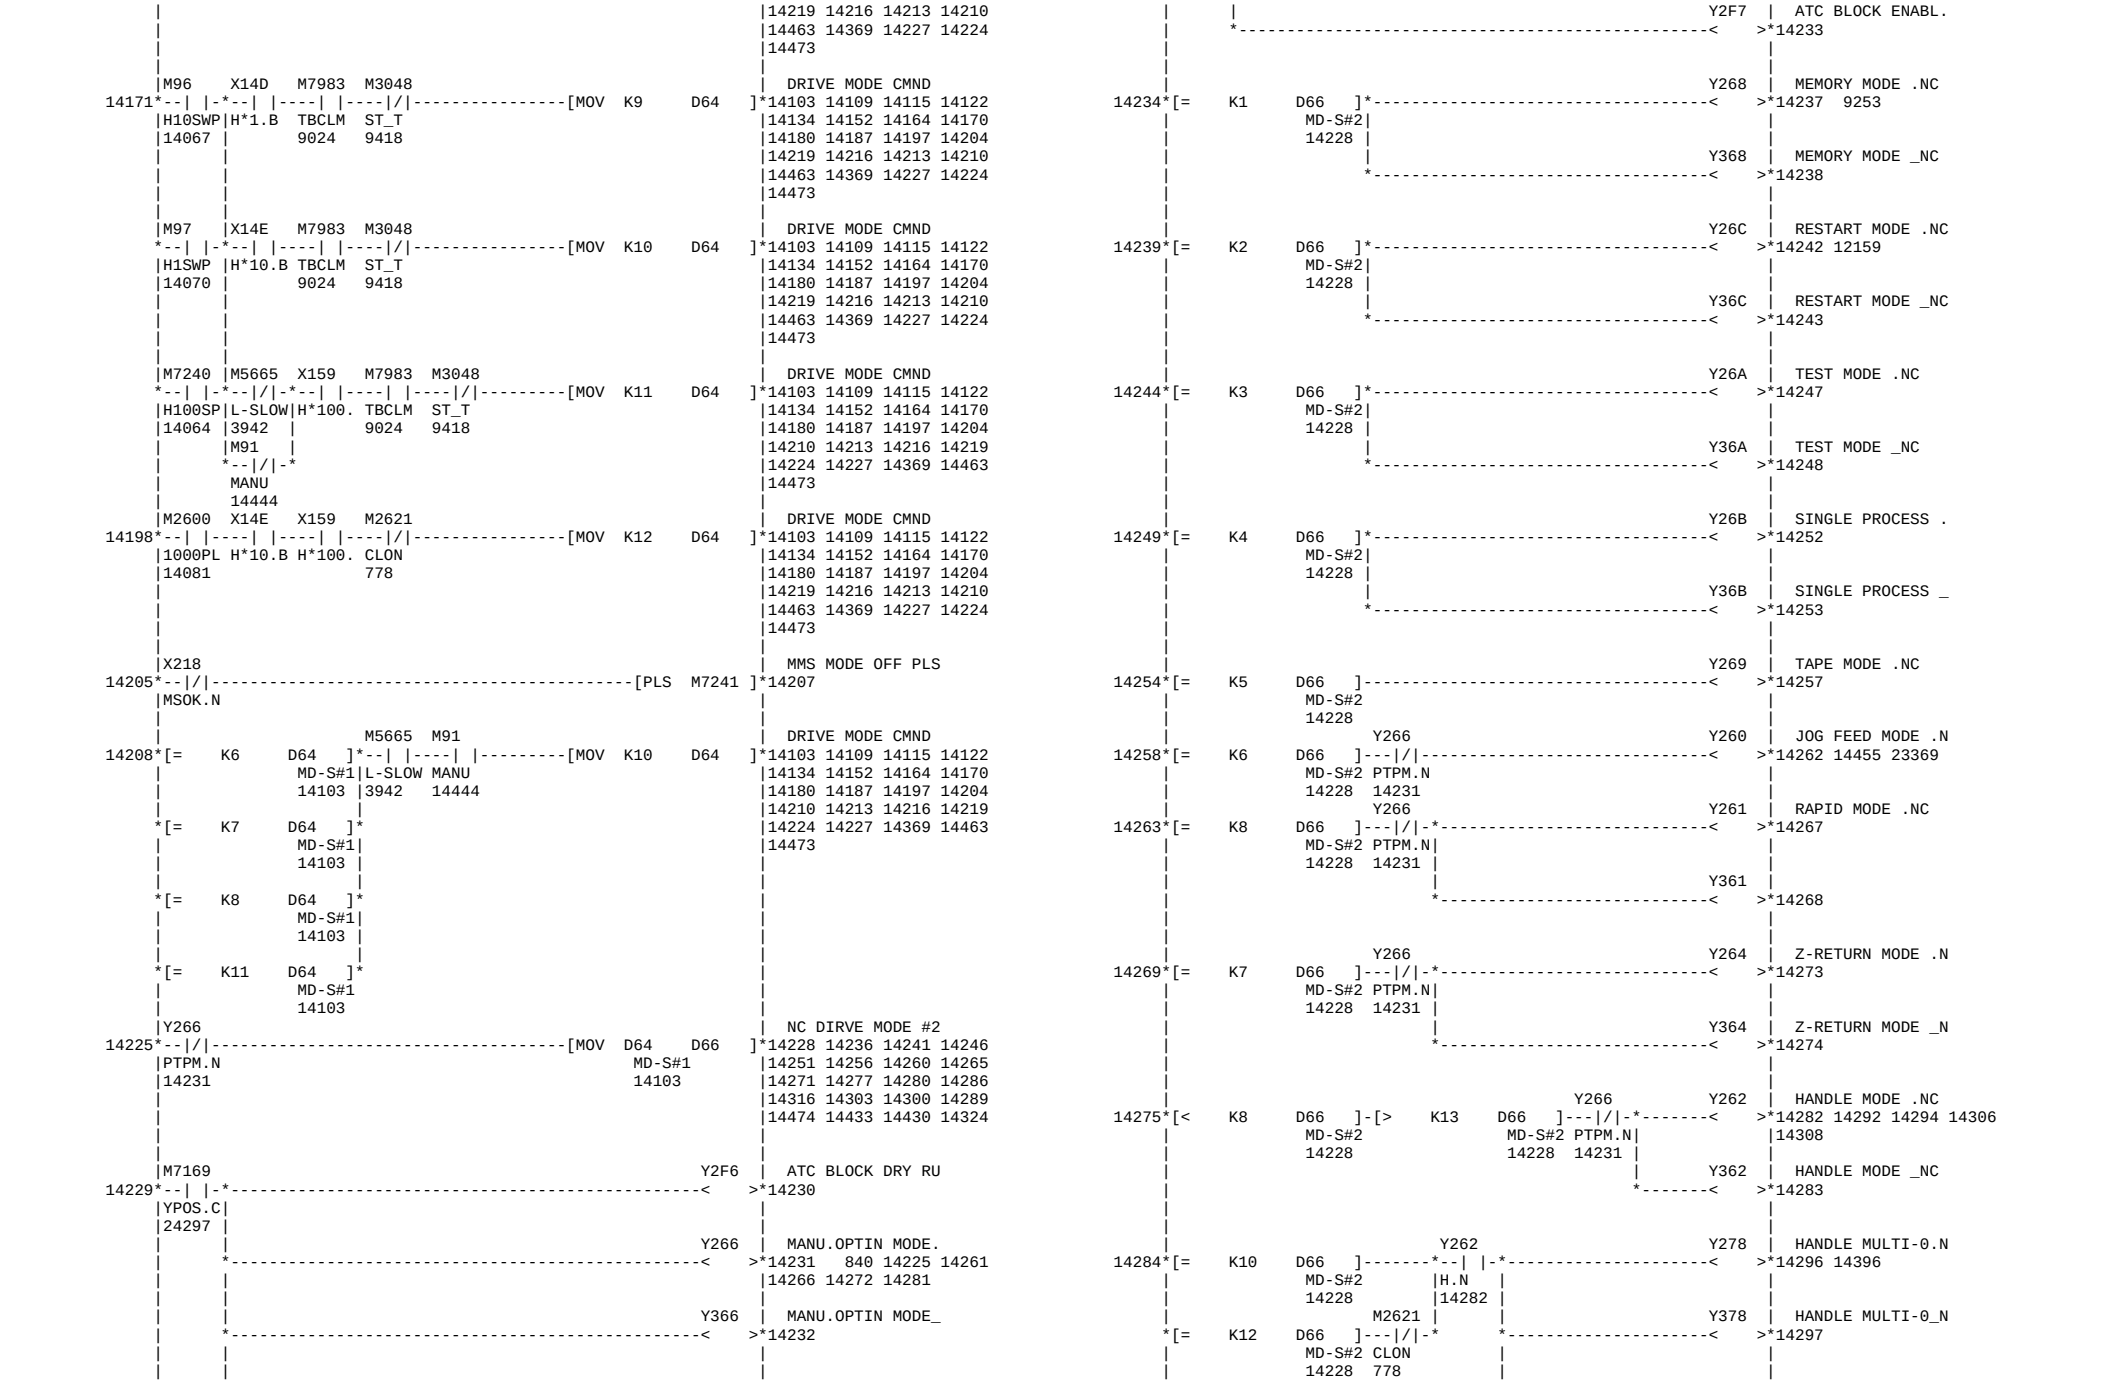

[MOV D932 D387] Ltemp2 2285
SUPER FLOW CALC.
[< K50 D387] SPFLCA 13703
[- D387 K100 D387] SPFLCA 13703
SUPER FLOW CALC.
[D/ D930 K100 D930] Ltemp0 1282
CALUCLATE REG.
[MOV D932 D588] Ltemp2 2285
CALUCLATE REG.
[< K50 D588] Ltemp0 13720
[- D588 K100 D588] Ltemp0 13720
M1279
[MOV R531 M0]
ON
585
[MOV R530 M8]
[MOV R529 M16]
[MOV R528 M24]
[MOV R527 M32]
M1279
[MOV R526 M40]
ON
585
[MOV R525 M48]
[MOV R515 M64]
[MOV R514 M72]
M1279
[MOV R523 M5120]
ON
585
[MOV R522 M5128]
[MOV R521 M5136]
K2
R50-0:TOOL EYE
R51-0:ROBOT OPTI
R52-0:M DEC OUTP
R53-0:M CODE 10
R54-0:X-Z JOG OK
R55-0:MILL SPEC
R56-0:X-OT LS.US
R65-0:HND MULTI-
R66-0:NO ACT AT
R57-0:TOOL EYE F
R58-0:HYD PSW US
R59-0:SS THERMO
R49-0:CHK STR SE

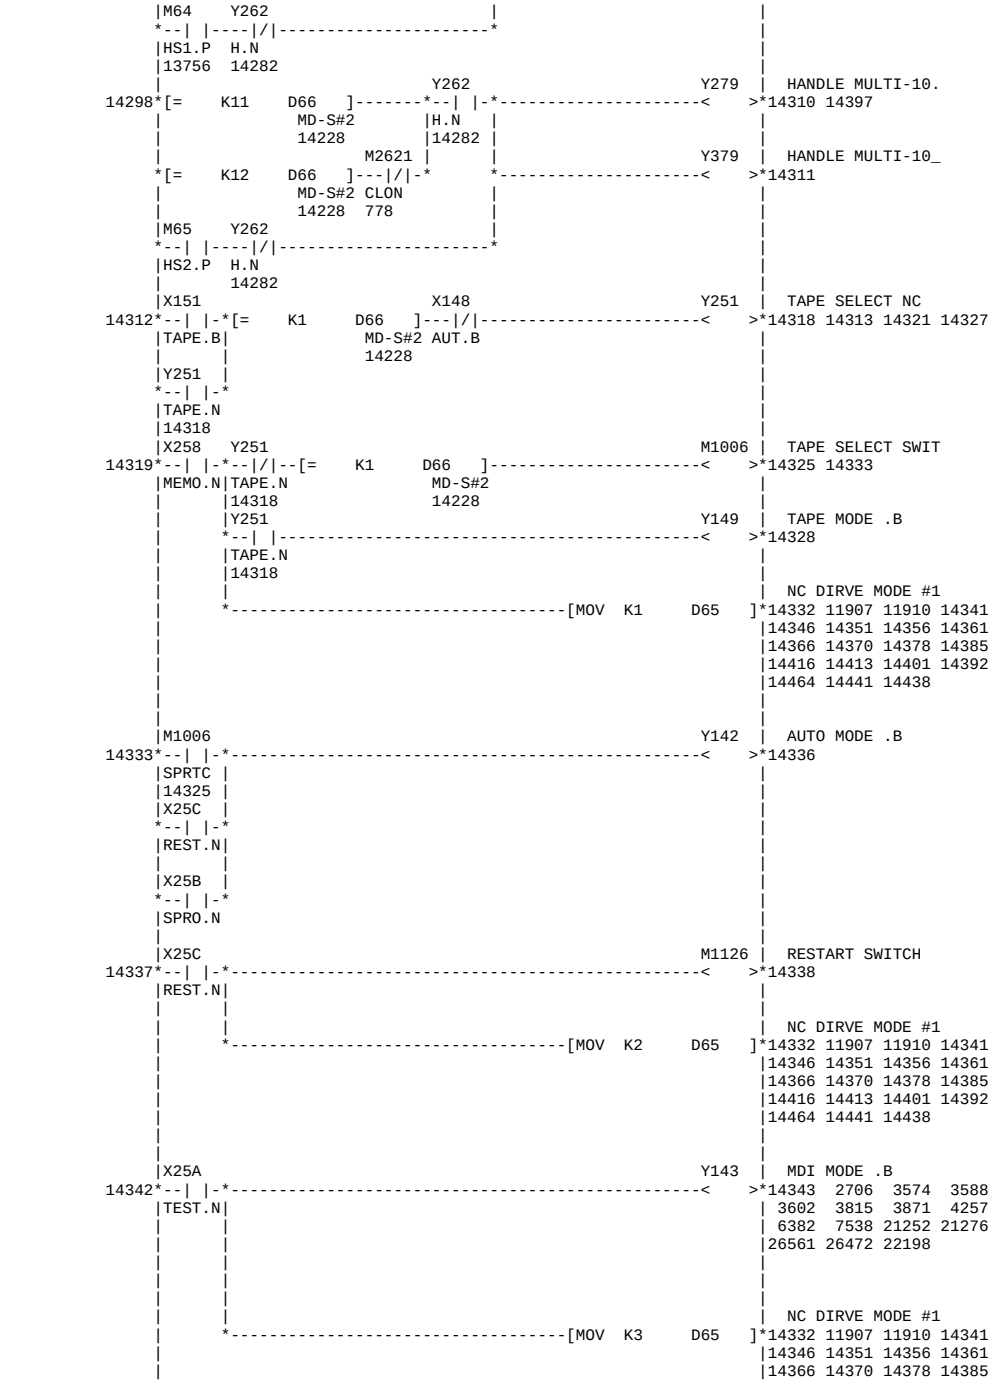
```
     |      |                                    K2     |  R60-0:
     |      *-----------------------------------[MOV  R520   M5144 ]*13772
     |      |                                           |
     |      |                                           |
     |      |                                    K2     |  R61-0:DISENGAGE
     |      *-----------------------------------[MOV  R519   M5152 ]*13775 22485
     |      |                                           |
     |      |                                           |
     |      |                                    K2     |  R62-0:TEST STAND
     |      *-----------------------------------[MOV  R518   M5160 ]*13778   280   477   530
     |      |                                           |  540   731  2127  2136
     |      |                                           | 2219  2254  2265  2432
     |      |                                           | 3681  3641  2836  2703
     |      |                                           | 8299  7139  6550  6546
     |      |                                           |10041 10023 10005  9051
     |      |                                           |10113 10095 10077 10059
     |      |                                           |10588 10172 10153 10133
     |      |                                           |10614 10605 10601 10592
     |      |                                           |13963 10631 10627 10618
     |      |                                           |13995 13987 13979 13971
     |      |                                           |19924 14147 14008 14003
     |      |                                           |25278 25113 25037 19931
     |      |                                           |25745 25501 25396 25293
     |      |                                           |26425 26182 26039 25816
     |      |                                           |26822 26612 26503 26463
     |      |                                           |27086 27003 26930
     |      |                                           |
     |      |                                           |
     |      |                                    K2     |  R63-0:16 POS TUR
     |      *-----------------------------------[MOV  R517   M5168 ]*13781  6509  6513  6618
     |      |                                           | 6624  6638  6644 13841
     |      |                                           |13846
     |      |                                    K2     |  R64-0:SS AIR BLA
     |      *-----------------------------------[MOV  R516   M5176 ]*13784  5932  6431 18958
     |      |                                           |26362
     |      |                                           |
     |      |                                    K2     |  R67-0:
     |      *-----------------------------------[MOV  R513   M5184 ]*13787  3937
     |      |                                           |
     |      |                                           |
     |      |                                    K2     |  R68-0:C/SS-INTLK
     |      *-----------------------------------[MOV  R512   M5192 ]*13790  9116  9123 15330
     |      |                                           |15339 15347 15352 28508
     |      |                                           |28606
     |      |                                    K2     |  R69-0:ADD FEED H
     |      *-----------------------------------[MOV  R511   M6400 ]*13793  9167 26451
     |      |                                           |
     |      |                                           |
     |      |                                    K2     |  R70-0:DOOR IL PL
     |      *-----------------------------------[MOV  R510   M6408 ]*13796  4721
     |      |                                           |
     |      |                                           |
     |      |                                    K2     |  R71-0:PRS.DR CNF
     |      *-----------------------------------[MOV  R509   M6416 ]*13799  7481
     |      |                                           |
     |      |                                           |
     |      |                                    K2     |  R72-0:RECODE MOD
     |      *-----------------------------------[MOV  R508   M6424 ]*13802  3332 24476 25511
     |      |                                           |26216
     |      |                                           |
     |      |                                    K2     |  R73-0:THERMO SEN
     |      *-----------------------------------[MOV  R507   M6432 ]*13805  9205 11523 11546
     |      |                                           |11573 11578
     |      |                                           |
     |      |                                    K2     |  R74-0:TOP CUT M6
     |      *-----------------------------------[MOV  R506   M6440 ]*13808  8453
     |      |                                           |
     |      |                                           |
     |     |M1279                                 K2     |  R75-0:J2CT TURRE
13809*--| |-*-----------------------------------[MOV  R505   M6448 ]*13812    27  3637  3639
     |     |ON    |                                      | 6730  6732  7127  7134
     |     |585   |                                      | 7193  7748  7770  7772
     |      |                                           |14025 14019  9272  9269
     |      |                                           |15281 14043 14037 14031
     |      |                                           |19929 19927 19896 19894
     |      |                                           |25277 25269 22499 22496
     |      |                                           |26159 26015 25292 25290
     |      |                                           |26462 26179
     |      |                                           |
     |      |                                           |
     |      |                                    K2     |  R76-0:TOP CUT PR
     |      *-----------------------------------[MOV  R504   M6456 ]*13815 19949
     |      |                                           |
     |      |                                           |
     |      |                                    K2     |  R77-0:Y-AXIS BAR
     |      *-----------------------------------[MOV  R503   M6464 ]*13818 13856 13865 13872
     |      |                                           |13879 27911 27916 27952
     |      |                                           |27991
     |      |                                    K2     |  R78-0:J2CT TAIL
     |      *-----------------------------------[MOV  R502   M6472 ]*13821  1641  1653  1656
     |      |                                           | 1666  1669  2693  2879
     |      |                                           | 7130  8058  8059 11009
     |      |                                           |14039 14033 14027 14021
     |      |                                           |15997 15884 15470 14045
     |      |                                           |19041 19026 19021 16053
     |      |                                           |24523 24483 22274 21523
     |      |                                           |25912 25811 25743 25170
     |      |                                           |26680 26636 26541 26534
     |      |                                           |27835 27807 27137 26841
     |      |                                           |27894 27841
     |      |                                    K2     |  R79-0:TAIL POS
     |      *-----------------------------------[MOV  R501   M6480 ]*13824  2692 26535
     |      |                                           |
     |      |                                           |
     |      |                                    K2     |  R80-0:
     |      *-----------------------------------[MOV  R500   M6488 ]*13827
     |      |                                           |
     |      |                                           |
     |     |M873                                        |  SPINDLE GEAR No.
13828*--| |-*-----------------------------------[MOV  K1     R301  ]*13831  5759
     |     |INIRST|                                     |
     |     |587   |                                     |
     |      |                                           |  MILL GEAR No.  .
     |      *-----------------------------------[MOV  K1     R302  ]* 5720  5730  5740  5744
     |      |                                           | 5747  5750  5755 13834
     |      |                                           |19855 19861
     |      |                                           |  SPONDLE GEAR No_
     |      *-----------------------------------[MOV  K1     R351  ]*13837
     |      |                                           |
     |      |                                           |
     |     |M1279                                        M721  |  TOOL NO. MAX 12
13838*--| |-*-----------------------------------------------<    >*13839
     |     |ON    |                                      |
     |     |585   |                                      |
     |      |M5168                                       |  TURRET SPEC DATA
     |      *--|/|-------------------------------[MOV  K12    D213  ]*13844  6598  6634  6670
     |      |16D.P                                       | 6674 13849
     |      |13781                                       |
     |      |M5168                                       |  TURRET SPEC DATA
     |      *--| |-----------------------------[MOV  K16    D213  ]*13844  6598  6634  6670
     |       16D.P                                       | 6674 13849
     |       13781                                       |
     |     |M1279  M53    M54                           |  OT. LS. CANCEL
13850*--| |-*--|/|----|/|--------*--------------[MOV  H1F    R114  ]*13861 13868 13875 13886
     |     |ON    |Y.P    SS.P         |                 |
     |     |585   |                   |                 |
     |      |M53    M54    M6464 |                      |
     |      *--| |----|/|----|/|-*                      |
     |      |Y.P    SS.P   X-Y_OT                      |
     |      |              13818                       |
     |      |M53    M54    M6464                       |  OT. LS. CANCEL
     |      *--| |----|/|----| |---------------[MOV  HE     R114  ]*13861 13868 13875 13886
     |      |Y.P    SS.P   X-Y_OT                      |
     |      |              13818                       |
     |      |M53    M54    M6464                       |  OT. LS. CANCEL
     |      *--| |----| |----| |---------------[MOV  H2EE   R114  ]*13861 13868 13875 13886
     |      |Y.P    SS.P   X-Y_OT                      |
     |      |              13818                       |
     |      |M53    M54    M6464                       |  OT. LS. CANCEL
     |      *--| |----| |----|/|-*--------------[MOV  H2FF   R114  ]*13861 13868 13875 13886
     |      |Y.P    SS.P   X-Y_OT|                     |
     |      |              13818 |                     |
```

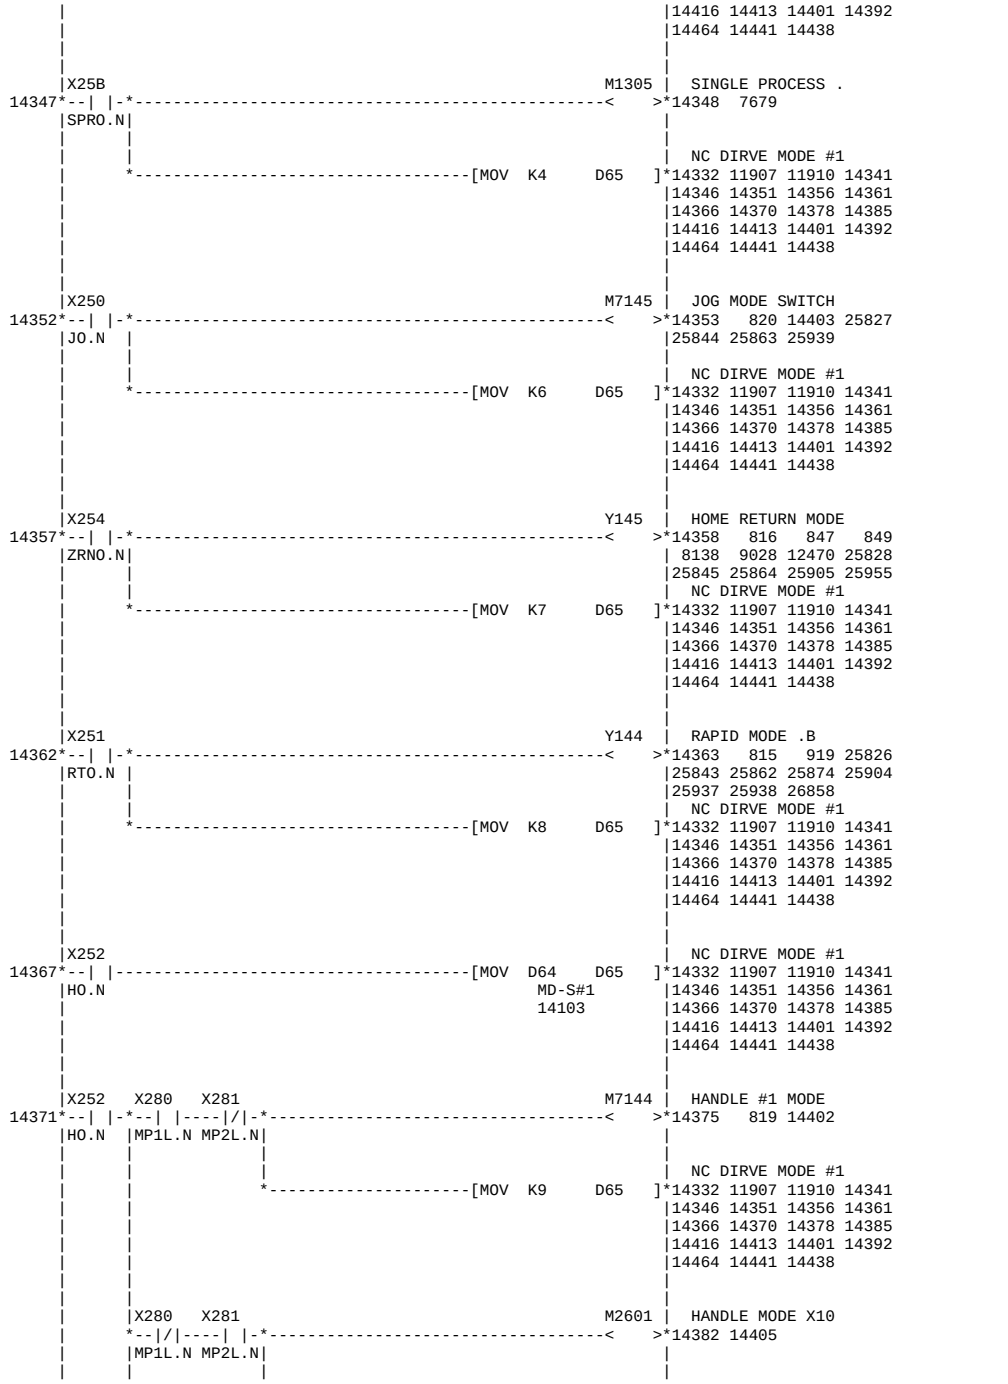
```
     |      |M53    M54          |                                                  |
     |      *--|/|----| |--------*                                                  |
     |      |Y.P    SS.P                                                           |
     |      |                                                                      |
     |      |M54    M53                                                            |  REFERENCE LS. CN
     |      *--|/|----|/|-----------------------[MOV  H3C    R115  ]*13892 13898 13904 13910
     |      |SS.P   Y.P                                                            |
     |      |                                                                      |
     |      |M54    M53                                                            |  REFERENCE LS. CN
     |      *--| |----|/|-----------------------[MOV  H34    R115  ]*13892 13898 13904 13910
     |      |SS.P   Y.P                                                            |
     |      |                                                                      |
     |      |M54    M53                                                            |  REFERENCE LS. CN
     |      *--|/|----| |-----------------------[MOV  H2C    R115  ]*13892 13898 13904 13910
     |      |SS.P   Y.P                                                            |
     |      |                                                                      |
     |      |M54    M53                                                            |  REFERENCE LS. CN
     |      *--| |----| |-----------------------[MOV  H24    R115  ]*13892 13898 13904 13910
     |      |SS.P   Y.P                                                            |
     |      |                                                                      |
     |      |M6450  M6451                                                          |
     |      *--|/|----|/|-----------------------[MOV  H4     R117  ]*13916 13923
     |      |SSC.P  SSCT.P                                                         |
     |      |                                                                      |
     |      |M6450                                                                 |
     |      *--| |-*---------------------------[MOV  H84    R117  ]*13916 13923
     |      |SSC.P |                                                               |
     |      |      |                                                               |
     |      |M6451 |                                                               |
     |      *--| |-*                                                             |
     |       SSCT.P                                                               |
     |                                                                            |
     |M1279                                                                       |  HIGH SPEED INPUT
13924*--| |-*-----------------------------------[MOV  H7     R132  ]*13927
     |ON    |                                                                     |
     |585   |                                                                     |
     |      |                                                                     |  HIGH SPEED OUTPU
     |      *-----------------------------------[MOV  H9     R134  ]*13930
     |      |                                                                     |
     |      |                                                                     |
     |      |                                                                     |  SKIP SIGNAL MASK
     |      *-----------------------------------[MOV  H0     R141  ]*13933
     |      |                                                                     |
     |      |                                                                     |
     |      |                                                                     |
     |      *-----------------------------------[MOV  H0     R142  ]*13936
     |                                                                            |
     |                                                                            |
     |X140                                                                        |  RESET
13937*--| |-------------------------------------------[RST  L80   ]*13938 13939
     |RST.B                                                                       |
     |                                                                            |
     |L80    T207                                                                 |  PLC VERSION
13939*--|/|----|/|-*---------------------------[MOV  H3336  R399  ]*13943
     |RESET  P-ON.T|                                                              |
     |13938  571   |                                                              |
     |             |                                                              |  PLC VERSION
     |             *---------------------------[MOV  H3533  R398  ]*13946
     |             |                                                              |
     |             |                                                              |
     |             |                                                              |  PLC VERSION
     |             *---------------------------[MOV  H3131  R397  ]*13949
     |             |                                                              |
     |             |                                                              |
     |             |                                                              |  PLC VERSION
     |             *---------------------------[MOV  H4C32  R396  ]*13952
     |             |                                                              |
     |             |                                                              |
     |             |                                                              |  PLC VERSION
     |             *---------------------------[MOV  H3330  R395  ]*13955
     |             |                                                              |
     |             |                                                              |
     |             |                                                              |  PLC VERSION
     |             *---------------------------[MOV  H3120  R349  ]*13958
     |             |                                                              |
     |             |                                                              |
```

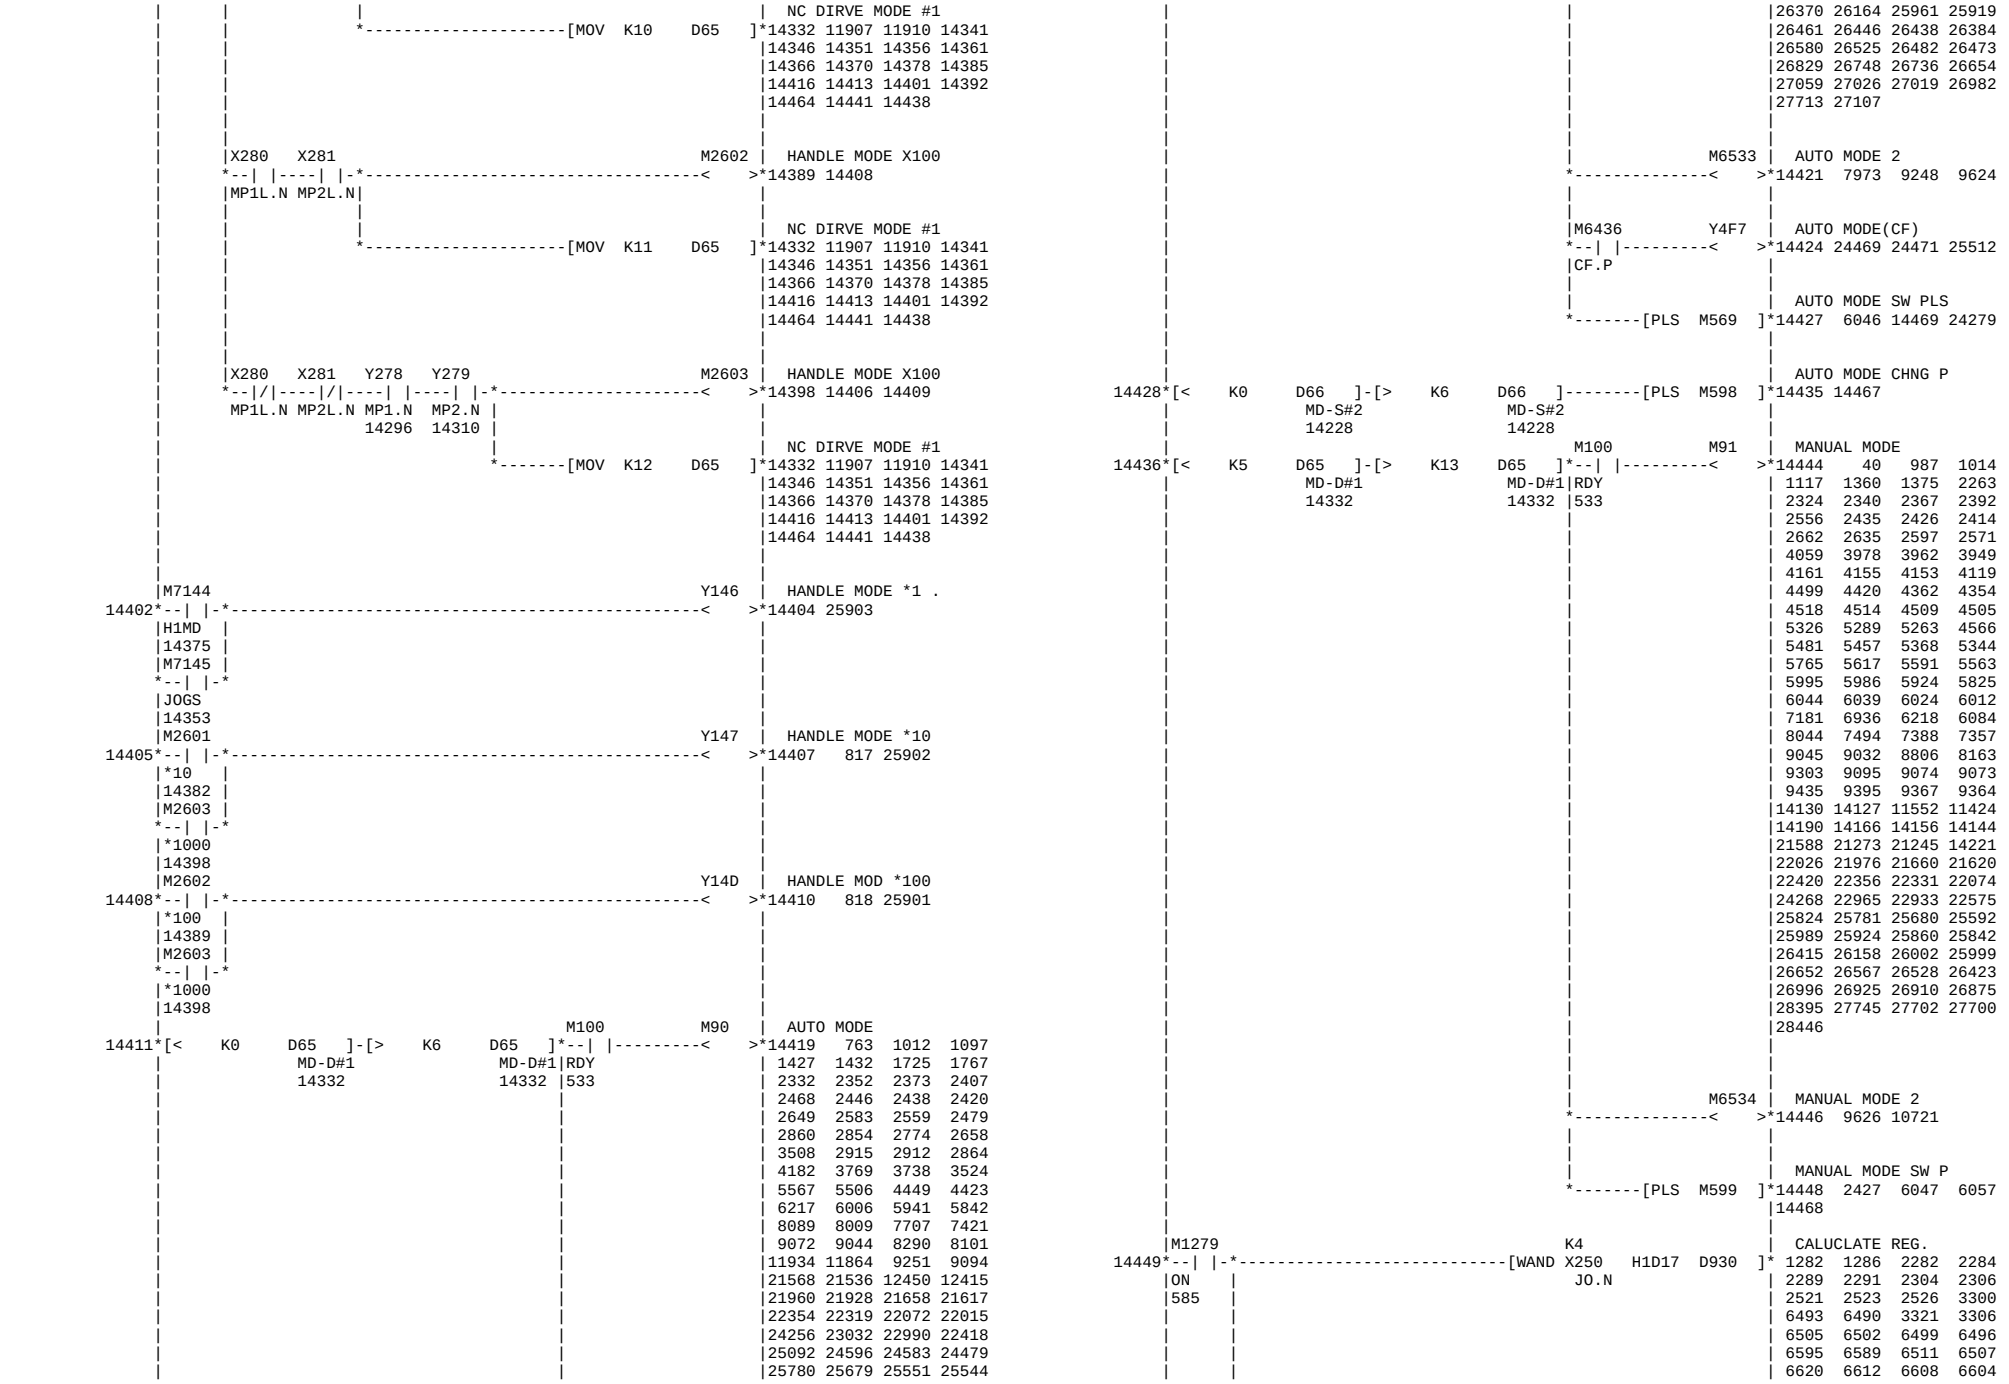
```
     |             |M48    M54    M53    M5160                                    |  MACHINE CODE DAT
     |             *--|/|----|/|----|/|----|/|--[MOV  H0     R394  ]*13966 13974 13982 13990
     |             |MILL.P SS.P   Y.P    STAN.P                                   |13998 14006 14011
     |             |13750                13778                                    |
     |             |M48    M54    M53    M5160                                    |  MACHINE CODE DAT
     |             *--| |----|/|----|/|----|/|--[MOV  H9     R394  ]*13966 13974 13982 13990
     |             |MILL.P SS.P   Y.P    STAN.P                                   |13998 14006 14011
     |             |13750                13778                                    |
     |             |M48    M54    M53    M5160                                    |  MACHINE CODE DAT
     |             *--|/|----| |----|/|----|/|--[MOV  H2004  R394  ]*13966 13974 13982 13990
     |             |MILL.P SS.P   Y.P    STAN.P                                   |13998 14006 14011
     |             |13750                13778                                    |
     |             |M48    M54    M53    M5160                                    |  MACHINE CODE DAT
     |             *--| |----| |----|/|----|/|--[MOV  H200D  R394  ]*13966 13974 13982 13990
     |             |MILL.P SS.P   Y.P    STAN.P                                   |13998 14006 14011
     |             |13750                13778                                    |
     |             |M48    M54    M53    M5160                                    |  MACHINE CODE DAT
     |             *--| |----|/|----| |----|/|--[MOV  H29    R394  ]*13966 13974 13982 13990
     |             |MILL.P SS.P   Y.P    STAN.P                                   |13998 14006 14011
     |             |13750                13778                                    |
     |             |M48    M54    M53    M5160                                    |  MACHINE CODE DAT
     |             *--| |----| |----| |----|/|--[MOV  H202D  R394  ]*13966 13974 13982 13990
     |             |MILL.P SS.P   Y.P    STAN.P                                   |13998 14006 14011
     |             |13750                13778                                    |
     |             |M5160                                                         |  MACHINE CODE DAT
     |             *--| |----------------------[MOV  H8000  R394  ]*13966 13974 13982 13990
     |              STAN.P                                                        |13998 14006 14011
     |              13778                                                         |
     |T207                                                                        |  SPECIAL M5 DATA
14012*--|/|-*-----------------------------------[MOV  H1991  D888  ]*14015
     |P-ON.T|                                                                     |
     |571   |                                                                     |
     |      |                                                                     |  SPECIAL M6 DATA
     |      *-----------------------------------[MOV  H624   D889  ]*14018
     |                                                                            |
     |                                                                            |
     |M6448  M6443  M6472                                                         |  J2CT SELECT SETT
14019*--|/|----|/|----|/|----------------------[MOV  K0     R7540 ]*14024 14030 14036 14042
     |J2TR.P 64GL_P J2TA.P                                                        |14048
     |13812         13821                                                         |
     |M6448  M6443  M6472                                                         |  J2CT SELECT SETT
14025*--| |----|/|----|/|----------------------[MOV  K1     R7540 ]*14024 14030 14036 14042
     |J2TR.P 64GL_P J2TA.P                                                        |14048
     |13812         13821                                                         |
     |M6448  M6443  M6472                                                         |  J2CT SELECT SETT
14031*--| |----|/|----| |----------------------[MOV  H8011  R7540 ]*14024 14030 14036 14042
     |J2TR.P 64GL_P J2TA.P                                                        |14048
     |13812         13821                                                         |
     |M6448  M6443  M6472                                                         |  J2CT SELECT SETT
14037*--| |----| |----|/|----------------------[MOV  H8061  R7540 ]*14024 14030 14036 14042
     |J2TR.P 64GL_P J2TA.P                                                        |14048
     |13812         13821                                                         |
     |M6448  M6443  M6472                                                         |  J2CT SELECT SETT
14043*--| |----| |----| |----------------------[MOV  H8071  R7540 ]*14024 14030 14036 14042
     |J2TR.P 64GL_P J2TA.P                                                        |14048
     |13812         13821                                                         |
     |M6449                                                                       |  CALUCLATE REG.
14049*--| |-*----------------------------[*    D983   K600   D930  ]* 1282  1286  2282  2284
     |SPFA.P|                             R15                                    | 2289  2291  2304  2306
     |      |                                                                     | 2521  2523  2526  3300
     |      |                                                                     | 6493  6490  3321  3306
     |      |                                                                     | 6505  6502  6499  6496
     |      |                                                                     | 6595  6589  6511  6507
     |      |                                                                     | 6620  6612  6608  6604
     |      |                                                                     | 6654  6635  6632  6626
     |      |                                                                     | 6675  6668  6663  6660
     |      |                                                                     | 9729  9726  9723  9716
     |      |                                                                     |12911 12907  9735  9731
     |      |                                                                     |12931 12924 12919 12916
     |      |                                                                     |13463 13453 13443 12933
     |      |                                                                     |13498 13490 13481 13473
     |      |                                                                     |13519 13516 13514 13506
     |      |                                                                     |13543 13532 13529 13527
     |      |                                                                     |13575 13567 13564 13562
     |      |                                                                     |13597 13595 13587 13584
     |      |                                                                     |13714 13700 13649 13647
```

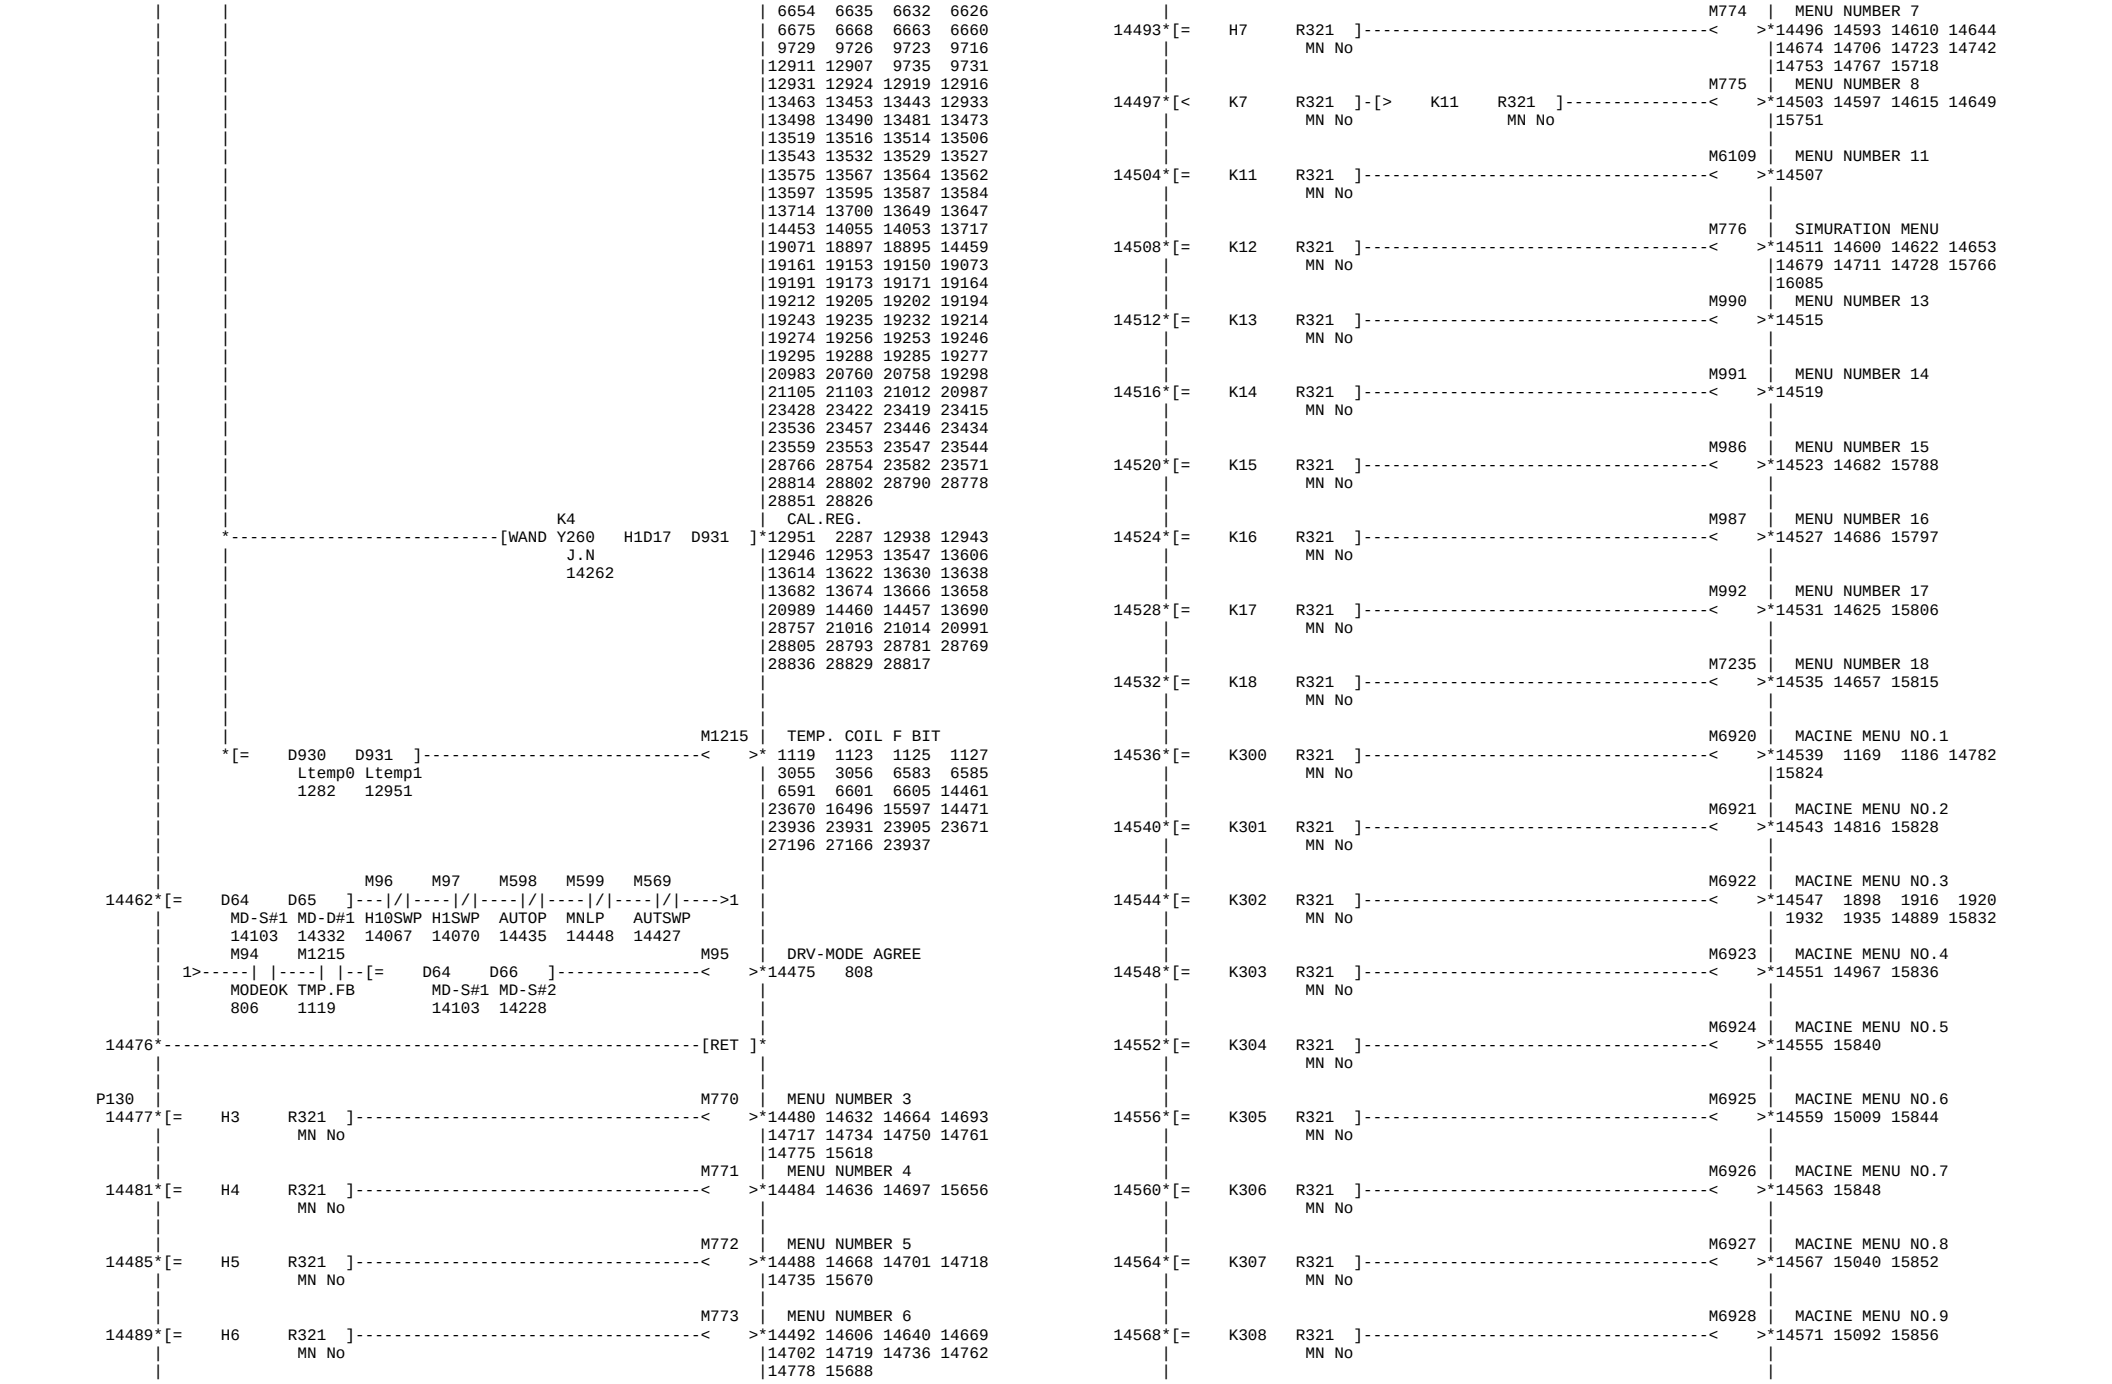


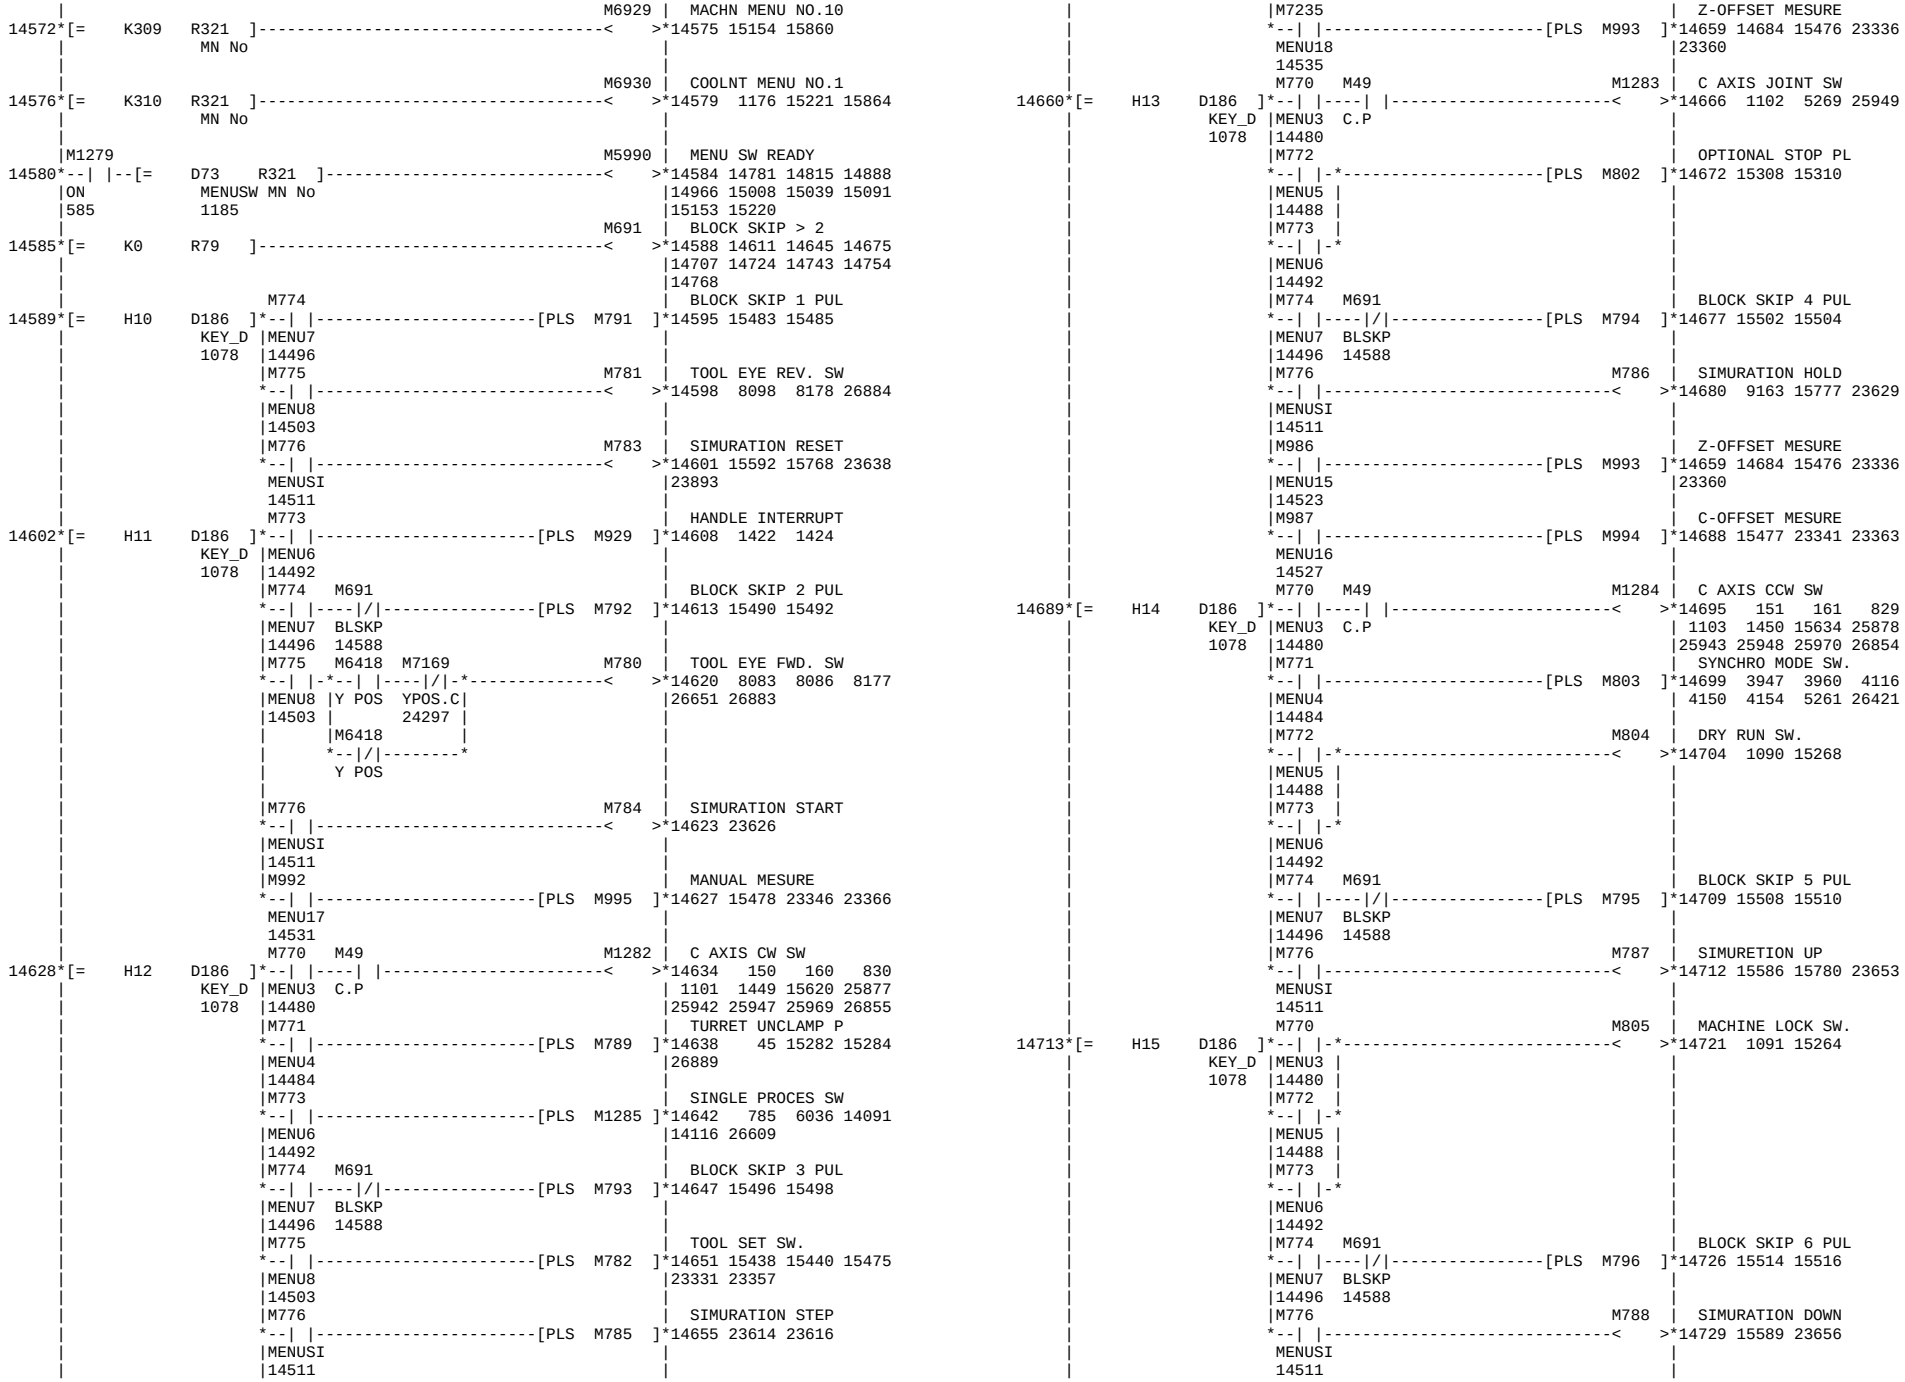

M96 X14D M7983 M3048
H10SWP H*1.B TBCLM ST_T
14067 9024 9418
M97 X14E M7983 M3048
H1SWP H*10.B TBCLM ST_T
14070 9024 9418
M7240 M5665 X159 M7983 M3048
H100SP L-SLOW H*100. TBCLM ST_T
14064 3942 9024 9418
M91
MANU
14444
M2600 X14E X159 M2621
1000PL H*10.B H*100. CLON
14081 778
X218
MSOK.N
M5665 M91
K6 D64 MD-S#1 14103
L-SLOW MANU
3942 14444
K7 D64 MD-S#1 14103
K8 D64 MD-S#1 14103
K11 D64 MD-S#1 14103
Y266
PTPM.N
14231
M7169
YPOS.C
24297
Y2F6
Y266
Y366
MOV K9 D64
MOV K10 D64
MOV K11 D64
MOV K12 D64
PLS M7241
MOV K10 D64
MOV D64 D66
DRIVE MODE CMND
MMS MODE OFF PLS
NC DIRVE MODE #2
ATC BLOCK DRY RU
MANU.OPTIN MODE.
MANU.OPTIN MODE_
14103 14109 14115 14122
14134 14152 14164 14170
14180 14187 14197 14204
14219 14216 14213 14210
14463 14369 14227 14224
14473
14210 14213 14216 14219
14224 14227 14369 14463
14207
14228 14236 14241 14246
14251 14256 14260 14265
14271 14277 14280 14286
14316 14303 14300 14289
14474 14433 14430 14324
14230
14231 840 14225 14261
14266 14272 14281
14232
K1 D66 MD-S#2 14228
K2 D66 MD-S#2 14228
K3 D66 MD-S#2 14228
K4 D66 MD-S#2 14228
K5 D66 MD-S#2 14228
K6 D66 MD-S#2 PTPM.N 14228 14231
K8 D66 MD-S#2 PTPM.N 14228 14231
K9 D64
K10 D64
K11 D64
K12 D64
K13 D66
Y2F7
Y268
Y26C
Y26A
Y26B
Y269
Y260
Y261
Y264
Y262
Y278
Y378
ATC BLOCK ENABL.
MEMORY MODE .NC
MEMORY MODE _NC
RESTART MODE .NC
RESTART MODE _NC
TEST MODE .NC
TEST MODE _NC
SINGLE PROCESS .
SINGLE PROCESS _
TAPE MODE .NC
JOG FEED MODE .N
RAPID MODE .NC
HANDLE MODE .NC
HANDLE MODE _NC
Z-RETURN MODE .N
Z-RETURN MODE _N
HANDLE MULTI-0.N
HANDLE MULTI-0_N
14233
14237 9253
14238
14242 12159
14243
14247
14248
14252
14253
14257
14262 14455 23369
14267
14268
14273
14274
14282 14292 14294 14306
14308
14283
14296 14396
14297

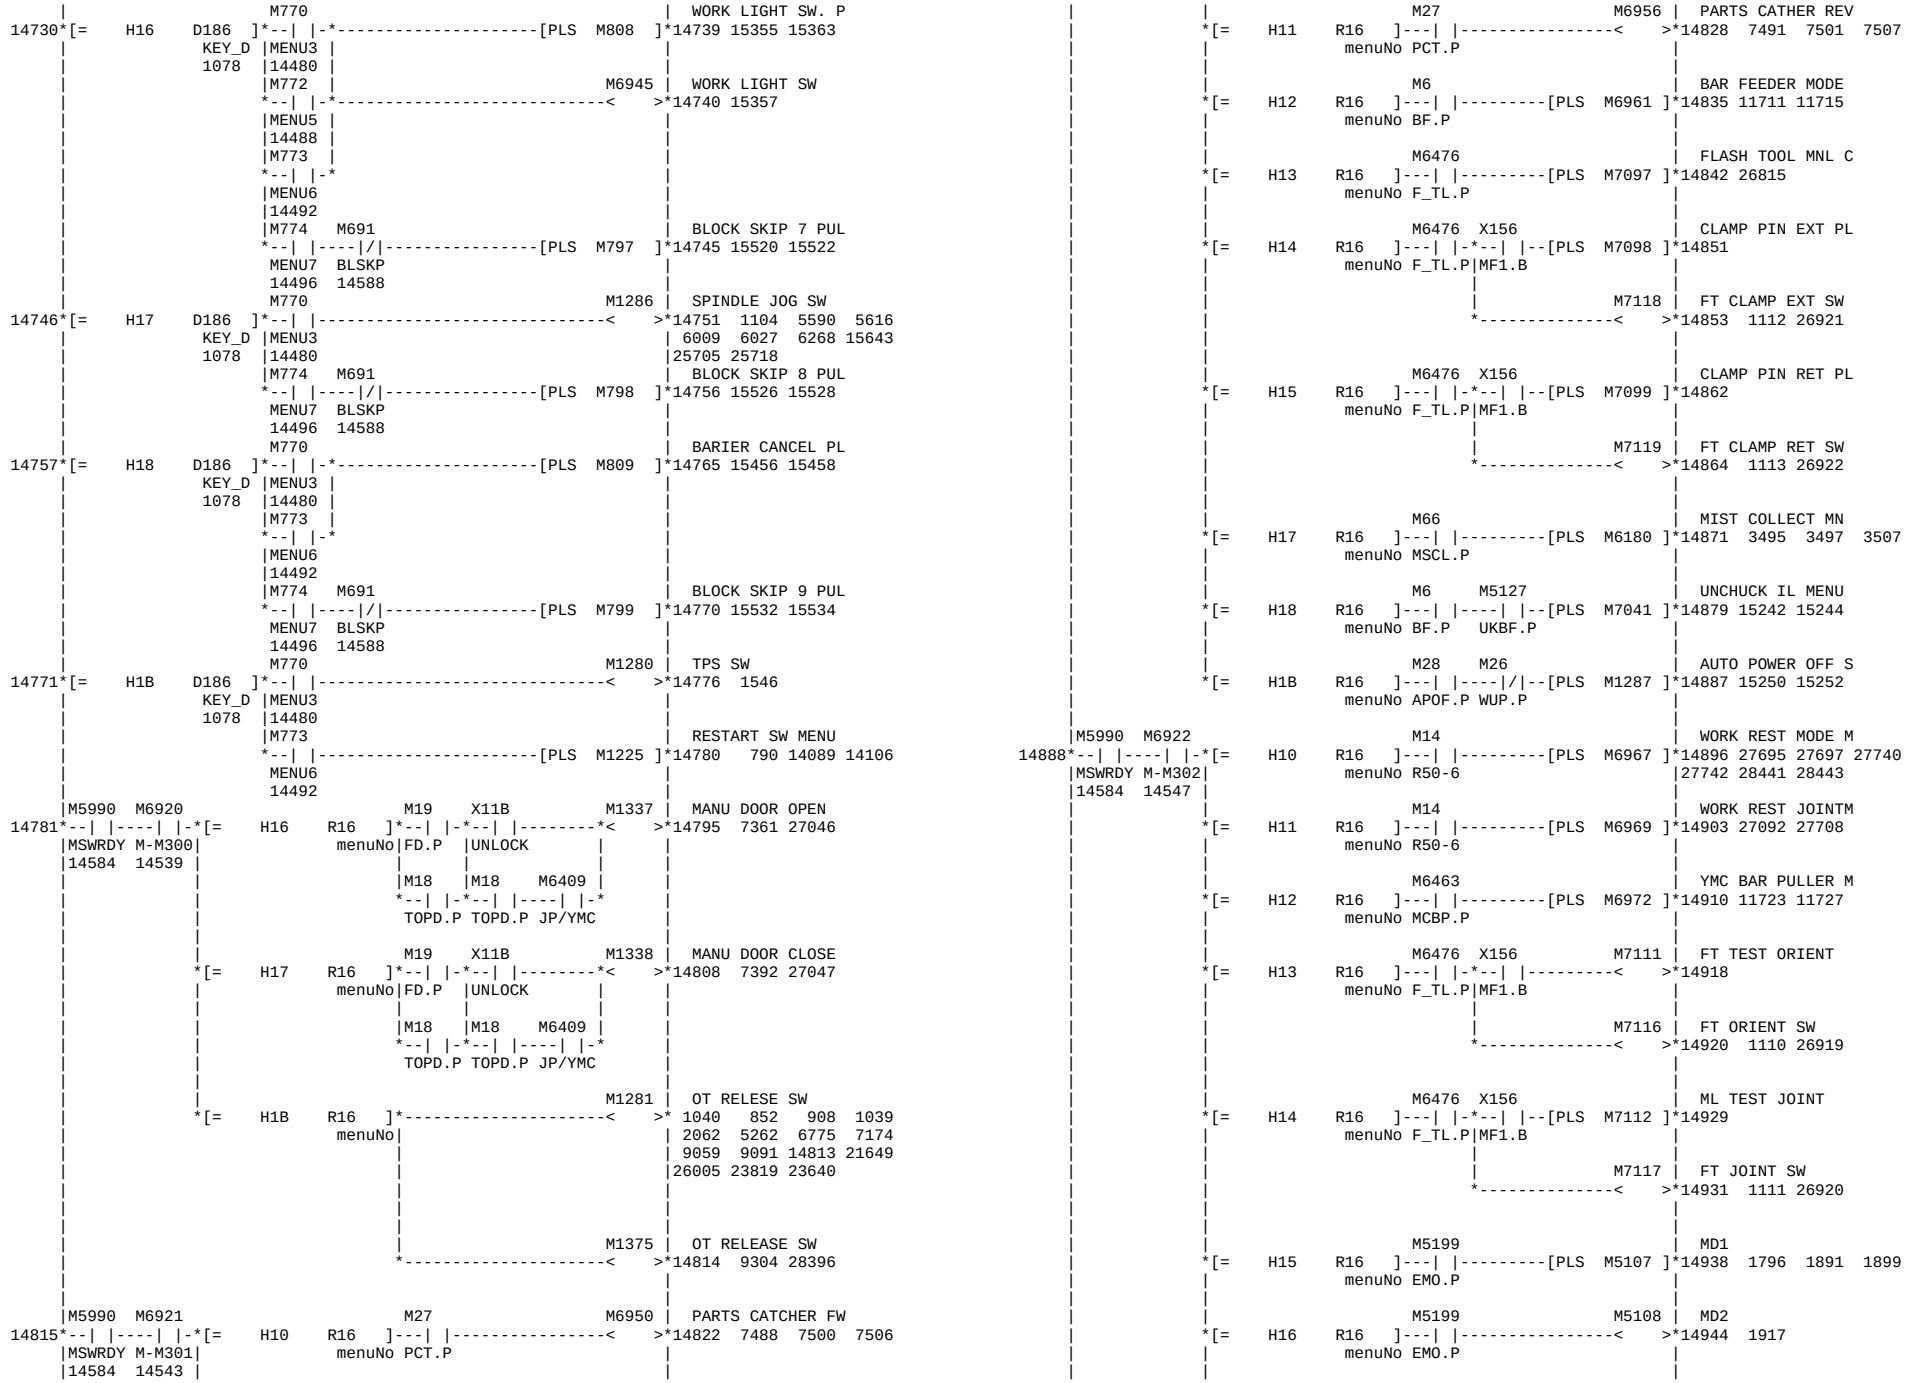

M64 Y262
HS1.P H.N
13756 14282
Y262 Y279 | HANDLE MULTI-10.
14298 K11 D66 MD-S#2 H.N 14228 14282 14310 14397
M2621 Y379 | HANDLE MULTI-10_
K12 D66 MD-S#2 CLON 14228 778 14311
M65 Y262
HS2.P H.N
14282
X151 X148 Y251 | TAPE SELECT NC
14312 K1 D66 MD-S#2 AUT.B 14228 14318 14313 14321 14327
TAPE.B
Y251
TAPE.N
14318
X258 Y251 M1006 | TAPE SELECT SWIT
14319 K1 D66 14325 14333
MEMO.N TAPE.N MD-S#2 14228
14318
Y251 Y149 | TAPE MODE .B
TAPE.N 14328
14318
| NC DIRVE MODE #1
MOV K1 D65 14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
M1006 Y142 | AUTO MODE .B
14333 14336
SPRTC
14325
X25C
REST.N
X25B
SPRO.N
X25C M1126 | RESTART SWITCH
14337 14338
REST.N
| NC DIRVE MODE #1
MOV K2 D65 14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
X25A Y143 | MDI MODE .B
14342 14343 2706 3574 3588
TEST.N 3602 3815 3871 4257
6382 7538 21252 21276
26561 26472 22198
| NC DIRVE MODE #1
MOV K3 D65 14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385

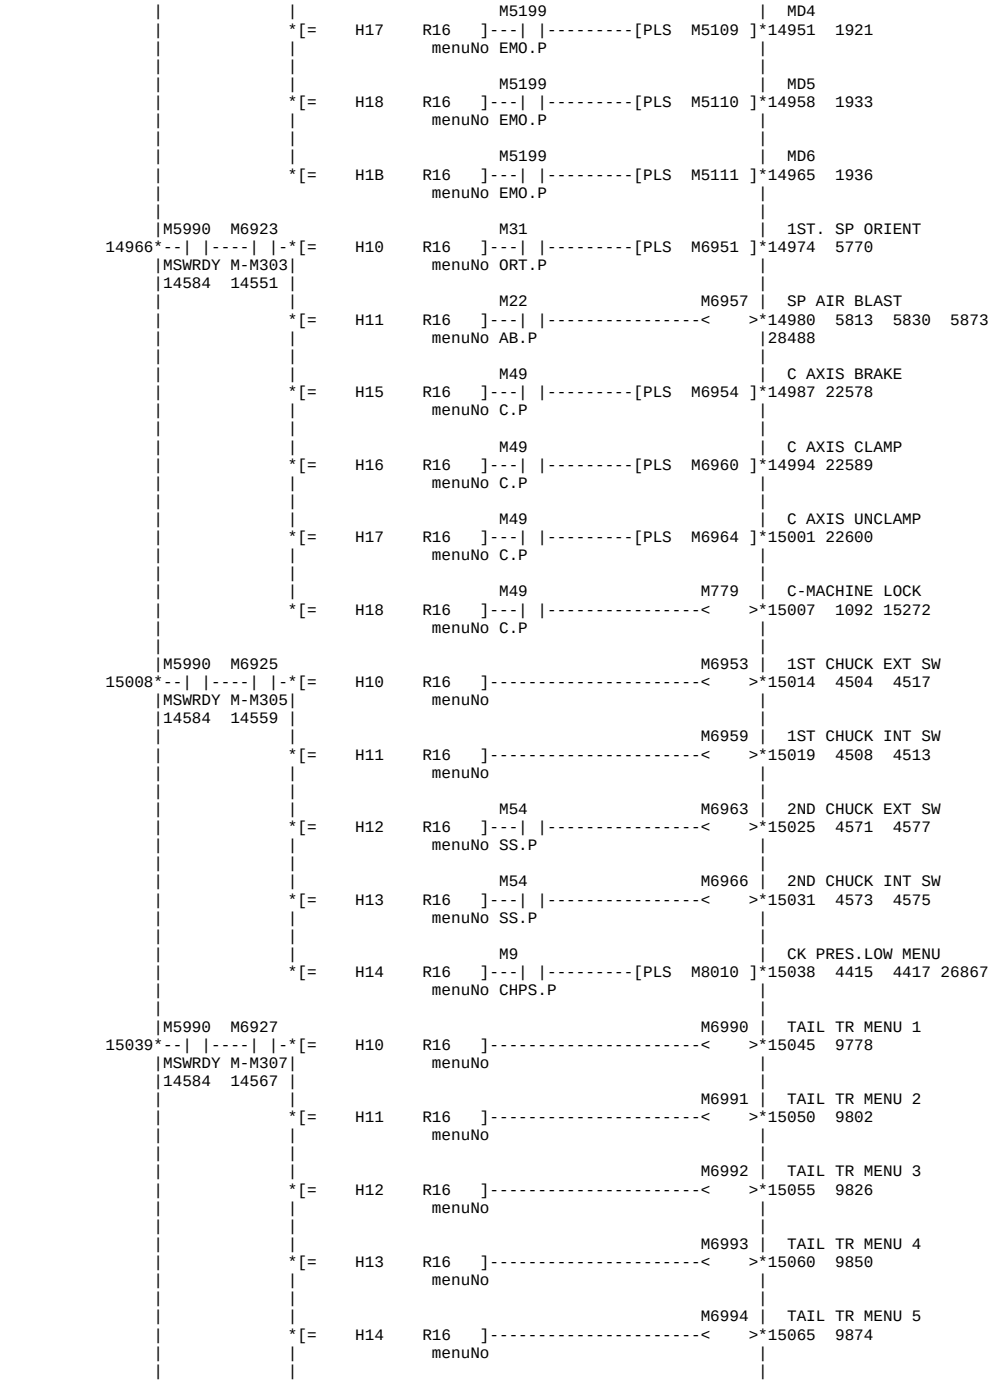

14416 14413 14401 14392
14464 14441 14438
X25B M1305 | SINGLE PROCESS .
14347 14348 7679
SPRO.N
| NC DIRVE MODE #1
MOV K4 D65 14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
X250 M7145 | JOG MODE SWITCH
14352 14353 820 14403 25827
JO.N 25844 25863 25939
| NC DIRVE MODE #1
MOV K6 D65 14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
X254 Y145 | HOME RETURN MODE
14357 14358 816 847 849
ZRNO.N 8138 9028 12470 25828
25845 25864 25905 25955
| NC DIRVE MODE #1
MOV K7 D65 14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
X251 Y144 | RAPID MODE .B
14362 14363 815 919 25826
RTO.N 25843 25862 25874 25904
25937 25938 26858
| NC DIRVE MODE #1
MOV K8 D65 14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
X252 | NC DIRVE MODE #1
14367 MOV D64 D65 14332 11907 11910 14341
HO.N MD-S#1 14103 14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
X252 X280 X281 M7144 | HANDLE #1 MODE
14371 14375 819 14402
HO.N MP1L.N MP2L.N
| NC DIRVE MODE #1
MOV K9 D65 14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
X280 X281 M2601 | HANDLE MODE X10
14382 14405
MP1L.N MP2L.N

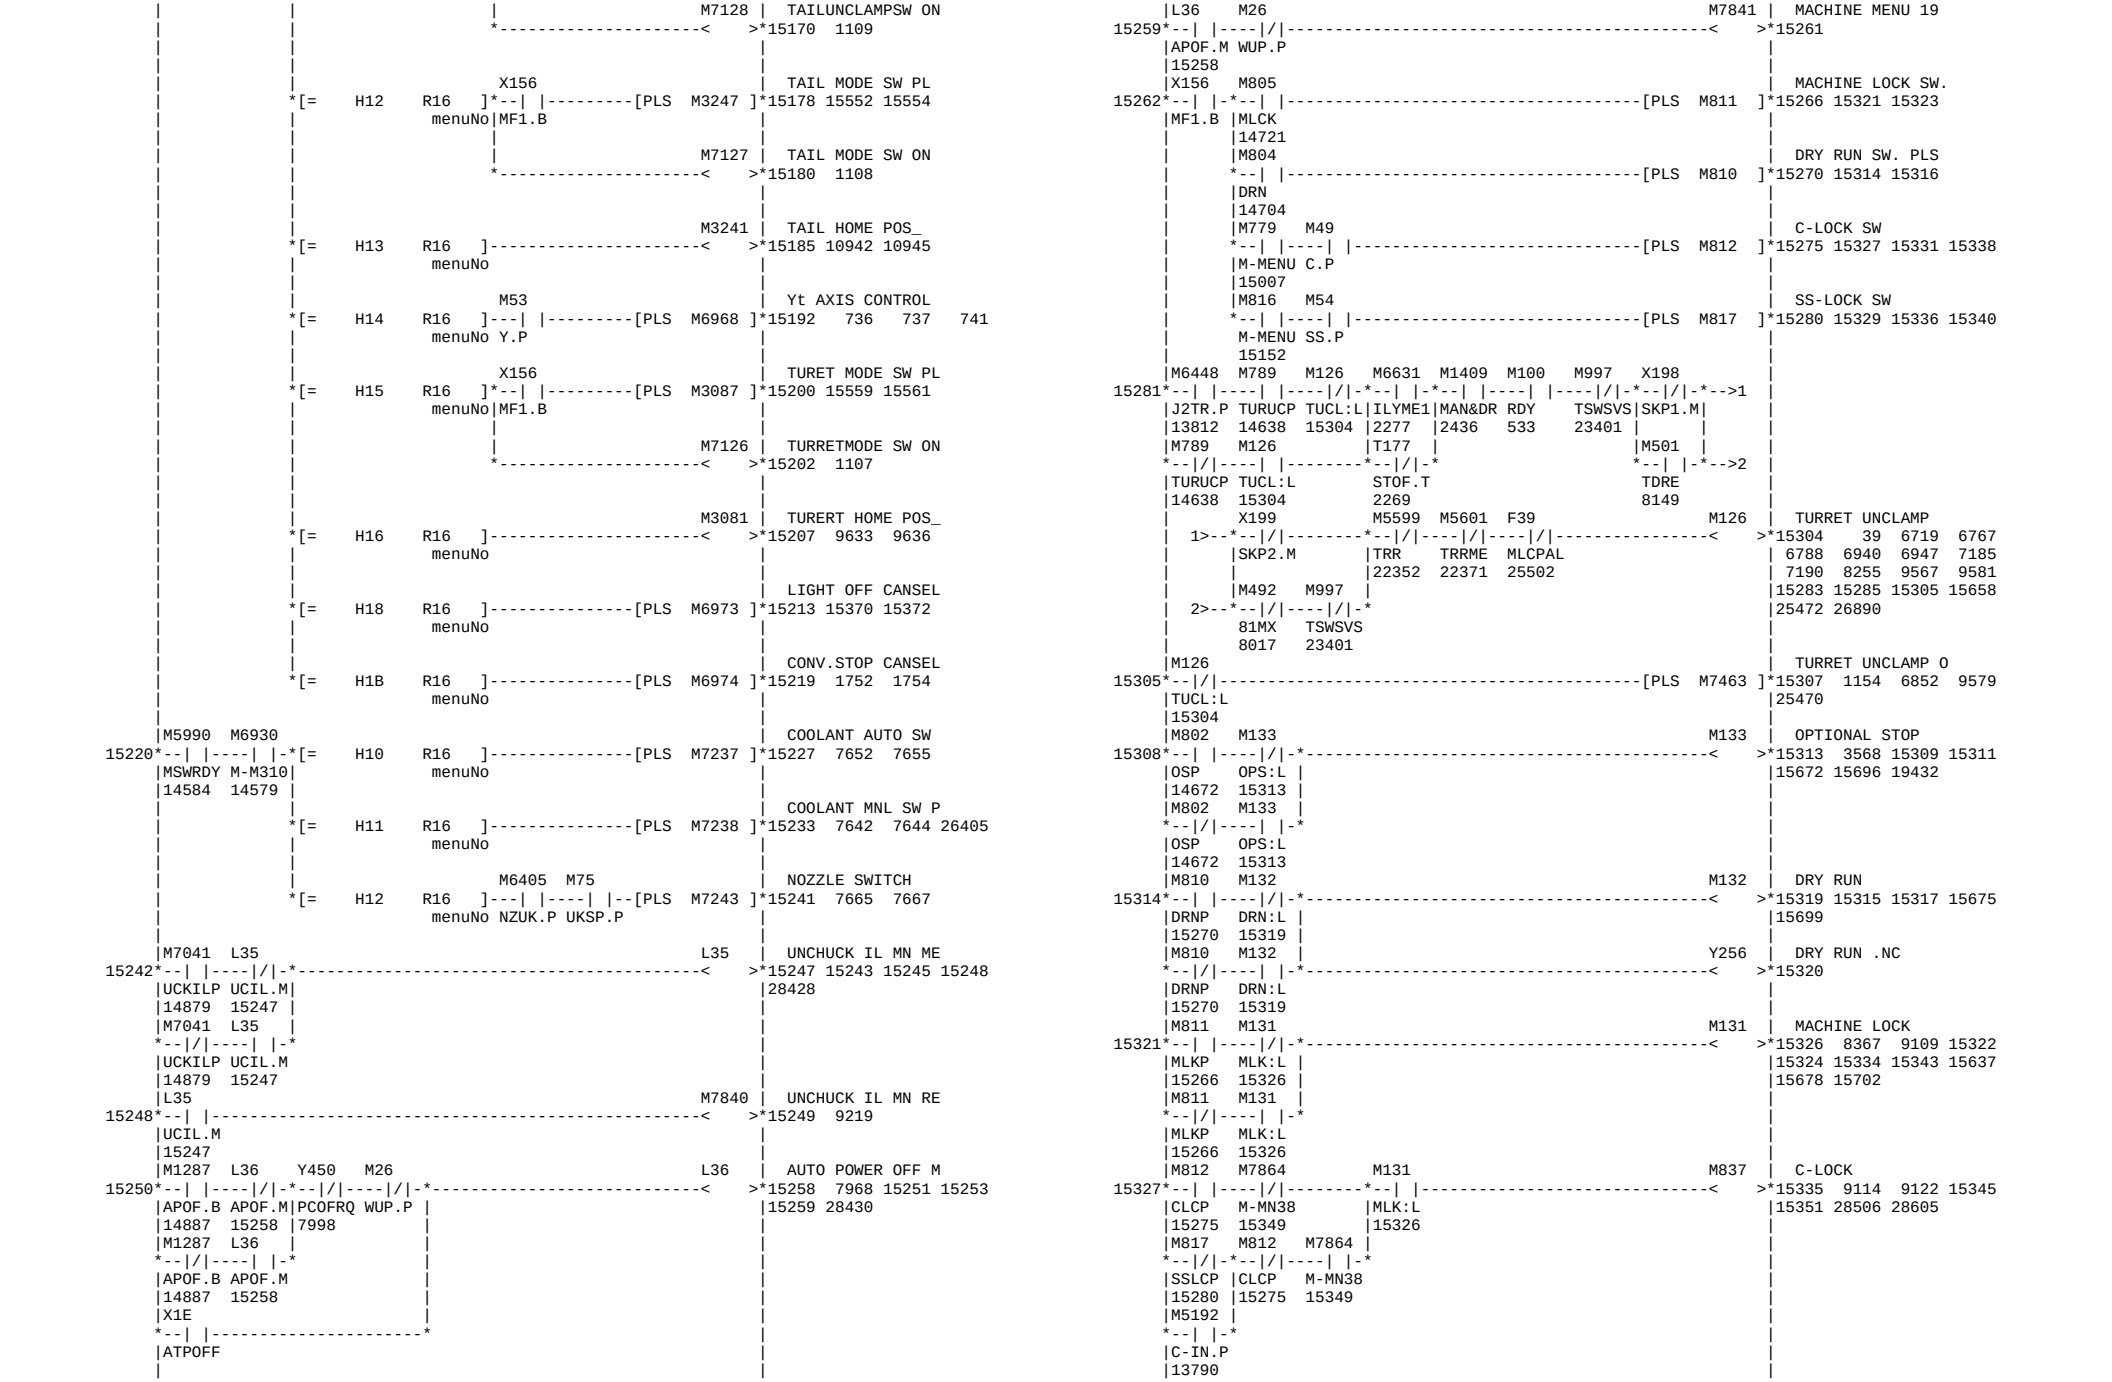

NC DIRVE MODE #1
14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
MOV K10 D65
X280 X281 M2602
MP1L.N MP2L.N
HANDLE MODE X100
14389 14408
NC DIRVE MODE #1
14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
MOV K11 D65
X280 X281 Y278 Y279 M2603
MP1L.N MP2L.N MP1.N MP2.N
14296 14310
HANDLE MODE X100
14398 14406 14409
NC DIRVE MODE #1
14332 11907 11910 14341
14346 14351 14356 14361
14366 14370 14378 14385
14416 14413 14401 14392
14464 14441 14438
MOV K12 D65
M7144 Y146
HANDLE MODE *1 .
14402 14404 25903
H1MD
14375
M7145
JOGS
14353
M2601 Y147
HANDLE MODE *10
14405 14407 817 25902
*10
14382
M2603
*1000
14398
M2602 Y14D
HANDLE MOD *100
14408 14410 818 25901
*100
14389
M2603
*1000
14398
M100 M90
AUTO MODE
14411 14419 763 1012 1097
K0 D65 K6 D65
MD-D#1 MD-D#1 RDY
14332 14332 533
1427 1432 1725 1767
2332 2352 2373 2407
2468 2446 2438 2420
2649 2583 2559 2479
2860 2854 2774 2658
3508 2915 2912 2864
4182 3769 3738 3524
5567 5506 4449 4423
6217 6006 5941 5842
8089 8009 7707 7421
9072 9044 8290 8101
11934 11864 9251 9094
21568 21536 12450 12415
21960 21928 21658 21617
22354 22319 22072 22015
24256 23032 22990 22418
25092 24596 24583 24479
25780 25679 25551 25544
26370 26164 25961 25919
26461 26446 26438 26384
26580 26525 26482 26473
26829 26748 26736 26654
27059 27026 27019 26982
27713 27107
M6533
AUTO MODE 2
14421 7973 9248 9624
M6436 Y4F7
AUTO MODE(CF)
14424 24469 24471 25512
CF.P
AUTO MODE SW PLS
14427 6046 14469 24279
PLS M569
AUTO MODE CHNG P
14435 14467
PLS M598
14428 14228 14228
K0 D66 D66 K6 D66
MD-S#2 MD-S#2
MANUAL MODE
14444 40 987 1014
M100 M91
14436 14228 14332 14332
K5 D65 D65 K13 D65
MD-D#1 MD-D#1 RDY
533
1117 1360 1375 2263
2324 2340 2367 2392
2556 2435 2426 2414
2662 2635 2597 2571
4059 3978 3962 3949
4161 4155 4153 4119
4499 4420 4362 4354
4518 4514 4509 4505
5326 5289 5263 4566
5481 5457 5368 5344
5765 5617 5591 5563
5995 5986 5924 5825
6044 6039 6024 6012
7181 6936 6218 6084
8044 7494 7388 7357
9045 9032 8806 8163
9303 9095 9074 9073
9435 9395 9367 9364
14130 14127 11552 11424
14190 14166 14156 14144
21588 21273 21245 14221
22026 21976 21660 21620
22420 22356 22331 22074
24268 22965 22933 22575
25824 25781 25680 25592
25989 25924 25860 25842
26415 26158 26002 25999
26652 26567 26528 26423
26996 26925 26910 26875
28395 27745 27702 27700
28446
M6534
MANUAL MODE 2
14446 9626 10721
PLS M599
MANUAL MODE SW P
14448 2427 6047 6057
14468
M1279
K4
CALUCLATE REG.
14449 JO.N
ON
585
WAND X250 H1D17 D930
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604

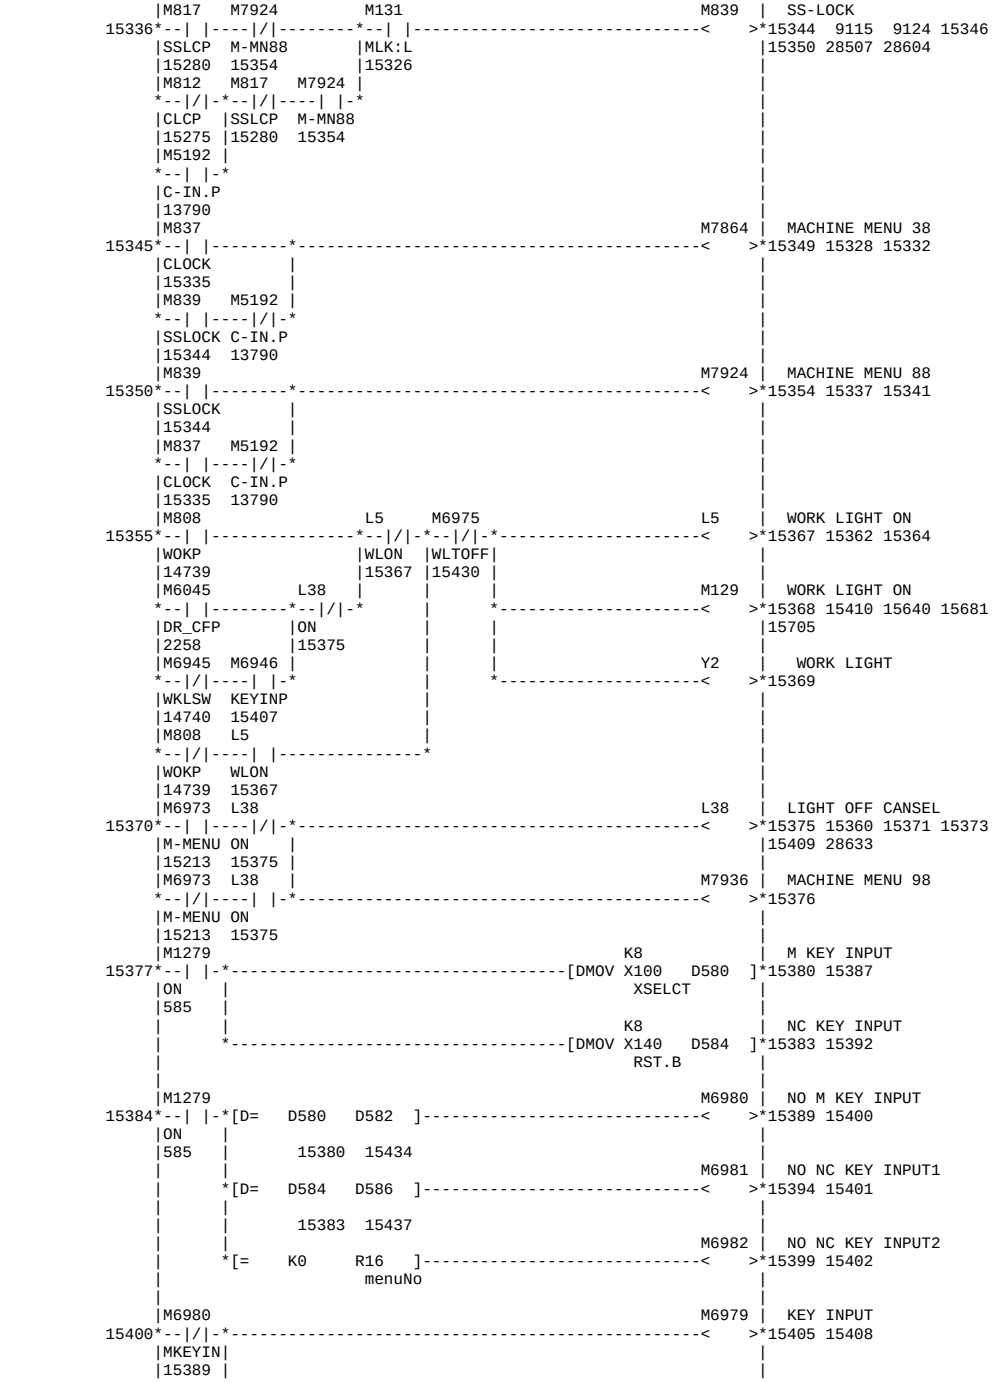

K4
WAND Y260 H1D17 D931
J.N
14262
CAL.REG.
M1215 TEMP. COIL F BIT
D930 D931
Ltemp0 Ltemp1
1282 12951
M96 M97 M598 M599 M569
D64 D65
MD-S#1 MD-D#1 H10SWP H1SWP AUTOP MNLP AUTSWP
14103 14332 14067 14070 14435 14448 14427
M94 M1215
M95 DRV-MODE AGREE
D64 D66
MODEOK TMP.FB
806 1119
MD-S#1 MD-S#2
14103 14228
RET
M770 MENU NUMBER 3
H3 R321
MN No
M771 MENU NUMBER 4
H4 R321
MN No
M772 MENU NUMBER 5
H5 R321
MN No
M773 MENU NUMBER 6
H6 R321
MN No
M774 MENU NUMBER 7
H7 R321
MN No
M775 MENU NUMBER 8
K7 R321 K11 R321
MN No MN No
M6109 MENU NUMBER 11
K11 R321
MN No
M776 SIMURATION MENU
K12 R321
MN No
M990 MENU NUMBER 13
K13 R321
MN No
M991 MENU NUMBER 14
K14 R321
MN No
M986 MENU NUMBER 15
K15 R321
MN No
M987 MENU NUMBER 16
K16 R321
MN No
M992 MENU NUMBER 17
K17 R321
MN No
M7235 MENU NUMBER 18
K18 R321
MN No
M6920 MACINE MENU NO.1
K300 R321
MN No
M6921 MACINE MENU NO.2
K301 R321
MN No
M6922 MACINE MENU NO.3
K302 R321
MN No
M6923 MACINE MENU NO.4
K303 R321
MN No
M6924 MACINE MENU NO.5
K304 R321
MN No
M6925 MACINE MENU NO.6
K305 R321
MN No
M6926 MACINE MENU NO.7
K306 R321
MN No
M6927 MACINE MENU NO.8
K307 R321
MN No
M6928 MACINE MENU NO.9
K308 R321
MN No

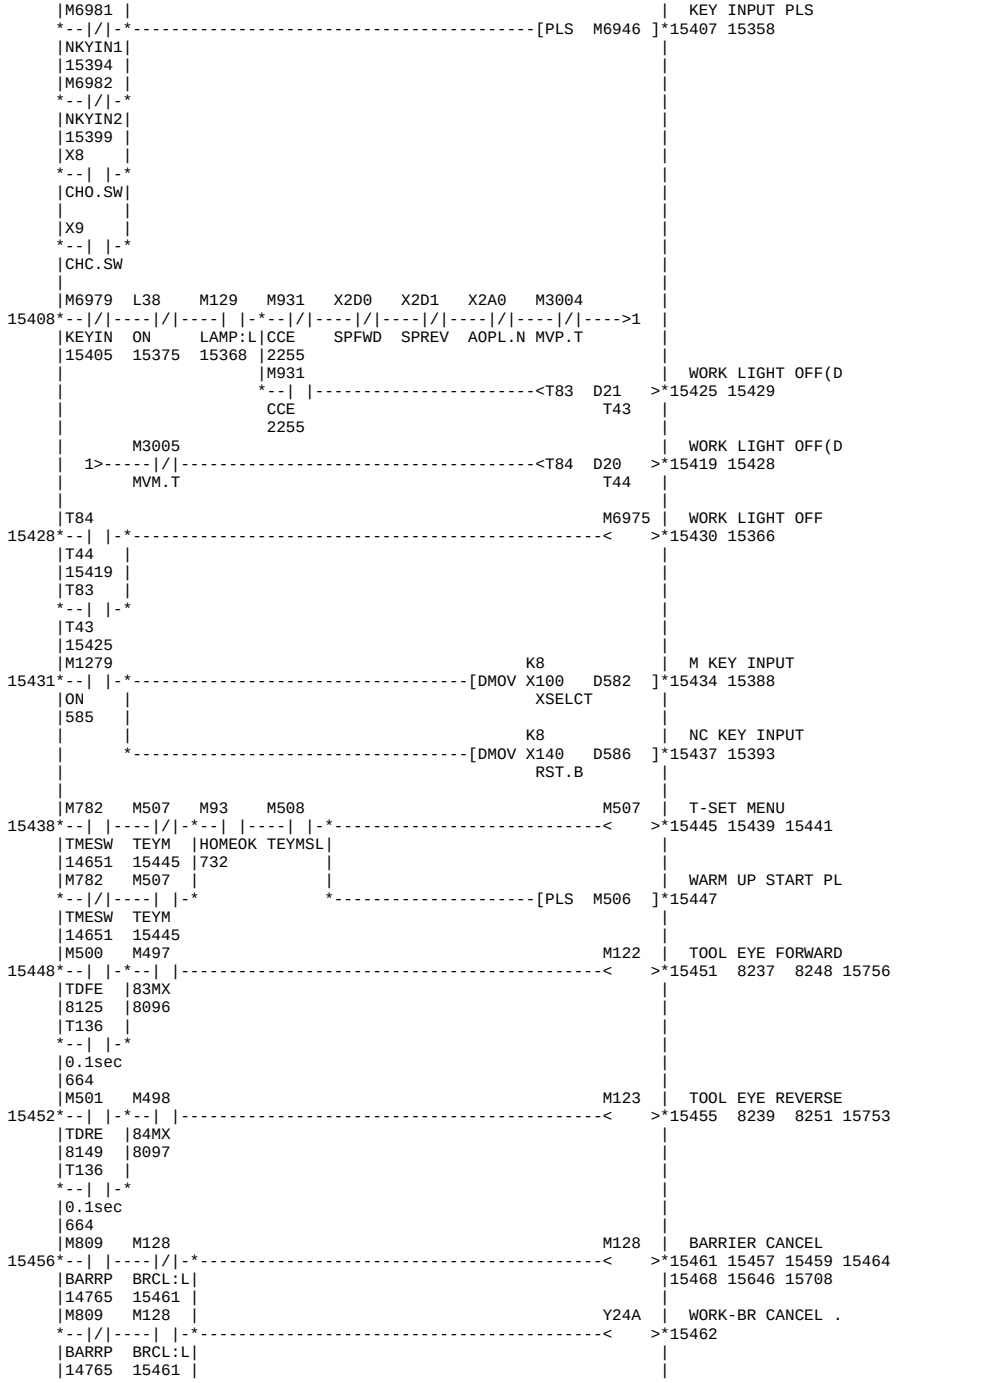

M6929 | MACHN MENU NO.10
14572*[= K309 R321]----------<
MN No
M6930 | COOLNT MENU NO.1
14576*[= K310 R321]----------<
MN No
M1279
M5990 | MENU SW READY
14580*--| |--[= D73 R321]----------<
ON MENUSW MN No
585 1185
M691 | BLOCK SKIP > 2
14585*[= K0 R79]----------<
M774 | BLOCK SKIP 1 PUL
14589*[= H10 D186]*--| |----------[PLS M791]
KEY_D |MENU7
1078 |14496
|M775 M781 | TOOL EYE REV. SW
*--| |----------<
|MENU8
|14503
|M776 M783 | SIMURATION RESET
*--| |----------<
MENUSI
14511
M773 | HANDLE INTERRUPT
14602*[= H11 D186]*--| |----------[PLS M929]
KEY_D |MENU6
1078 |14492
|M774 M691 | BLOCK SKIP 2 PUL
*--| |----|/|----------[PLS M792]
|MENU7 BLSKP
|14496 14588
|M775 M6418 M7169 M780 | TOOL EYE FWD. SW
--| |---| |----|/|-*----------<
MENU8	Y POS YPOS.C
14503	24297
	M6418
--|/|--------
Y POS
M776 M784	SIMURATION START
*--| |----------<
MENUSI
14511
M992	MANUAL MESURE
*--| |----------[PLS M995]
MENU17
14531
M770 M49 M1282	C AXIS CW SW
14628*[= H12 D186]*--| |----| |----------<
KEY_D	MENU3 C.P
1078	14480
M771	TURRET UNCLAMP P
*--| |----------[PLS M789]
MENU4
14484
M773	SINGLE PROCES SW
*--| |----------[PLS M1285]
MENU6
14492
M774 M691	BLOCK SKIP 3 PUL
*--| |----|/|----------[PLS M793]
MENU7 BLSKP
14496 14588
M775	TOOL SET SW.
*--| |----------[PLS M782]
MENU8
14503
M776	SIMURATION STEP
*--| |----------[PLS M785]
MENUSI
14511
M7235	Z-OFFSET MESURE
*--| |----------[PLS M993]
MENU18
14535
M770 M49 M1283	C AXIS JOINT SW
14660*[= H13 D186]*--| |----| |----------<
KEY_D	MENU3 C.P
1078	14480
M772	OPTIONAL STOP PL
--| |-----------[PLS M802]
MENU5
14488
M773
--| |-
MENU6
14492
M774 M691	BLOCK SKIP 4 PUL
*--| |----|/|----------[PLS M794]
MENU7 BLSKP
14496 14588
M776 M786	SIMURATION HOLD
*--| |----------<
MENUSI
14511
M986	Z-OFFSET MESURE
*--| |----------[PLS M993]
MENU15
14523
M987	C-OFFSET MESURE
*--| |----------[PLS M994]
MENU16
14527
M770 M49 M1284	C AXIS CCW SW
14689*[= H14 D186]*--| |----| |----------<
KEY_D	MENU3 C.P
1078	14480
M771	SYNCHRO MODE SW.
*--| |----------[PLS M803]
MENU4
14484
M772 M804	DRY RUN SW.
--| |-----------<
MENU5
14488
M773
--| |-
MENU6
14492
M774 M691	BLOCK SKIP 5 PUL
*--| |----|/|----------[PLS M795]
MENU7 BLSKP
14496 14588
M776 M787	SIMURETION UP
*--| |----------<
MENUSI
14511
M770 M805	MACHINE LOCK SW.
14713*[= H15 D186]*--| |-*----------<
KEY_D	MENU3
1078	14480
M772
--| |-
MENU5
14488
M773
--| |-
MENU6
14492
M774 M691	BLOCK SKIP 6 PUL
*--| |----|/|----------[PLS M796]
MENU7 BLSKP
14496 14588
M776 M788	SIMURATION DOWN
*--| |----------<
MENUSI
14511


M770 | WORK LIGHT SW. P
14730*[= H16 D186]*--| |-*[PLS M808]*14739 15355 15363
KEY_D |MENU3 |
1078 |14480 |
|M772 | M6945 | WORK LIGHT SW
--| |-< >*14740 15357
|MENU5 |
|14488 |
|M773 |
--| |-
|MENU6
|14492
|M774 M691 | BLOCK SKIP 7 PUL
*--| |----|/|[PLS M797]*14745 15520 15522
MENU7 BLSKP
14496 14588
M770 M1286 | SPINDLE JOG SW
14746*[= H17 D186]*--| |< >*14751 1104 5590 5616
KEY_D |MENU3 | 6009 6027 6268 15643
1078 |14480 |25705 25718
|M774 M691 | BLOCK SKIP 8 PUL
*--| |----|/|[PLS M798]*14756 15526 15528
MENU7 BLSKP
14496 14588
M770 | BARIER CANCEL PL
14757*[= H18 D186]*--| |-*[PLS M809]*14765 15456 15458
KEY_D |MENU3 |
1078 |14480 |
|M773 |
--| |-
|MENU6
|14492
|M774 M691 | BLOCK SKIP 9 PUL
*--| |----|/|[PLS M799]*14770 15532 15534
MENU7 BLSKP
14496 14588
M770 M1280 | TPS SW
14771*[= H1B D186]*--| |< >*14776 1546
KEY_D |MENU3 |
1078 |14480 |
|M773 | RESTART SW MENU
*--| |[PLS M1225]*14780 790 14089 14106
MENU6
14492
|M5990 M6920 M19 X11B M1337 | MANU DOOR OPEN
14781*--| |----| |-*[= H16 R16]*--| |-*--| |--------*< >*14795 7361 27046
MSWRDY M-M300	menuNo	FD.P	UNLOCK	
14584 14539				
M18	M18 M6409	
*--		-*--		----		-*
TOPD.P TOPD.P JP/YMC
M19 X11B M1338	MANU DOOR CLOSE
[= H17 R16]--| |-*--| |--------*< >*14808 7392 27047
menuNo	FD.P	UNLOCK	
M18	M18 M6409	
--| |---| |----| |-* |
TOPD.P TOPD.P JP/YMC |
M1281 | OT RELESE SW
[= H1B R16]--------------------< >* 1040 852 908 1039
menuNo| | 2062 5262 6775 7174
| | 9059 9091 14813 21649
| |26005 23819 23640
|
|
|
M1375 | OT RELEASE SW
*--------------------< >*14814 9304 28396
|M5990 M6921 M27 M6950 | PARTS CATCHER FW
14815*--| |----| |-*[= H10 R16]---| |----------------< >*14822 7488 7500 7506
|MSWRDY M-M301| menuNo PCT.P |
|14584 14543 | |
M27 M6956 | PARTS CATHER REV
*[= H11 R16]---| |----------------< >*14828 7491 7501 7507
menuNo PCT.P
M6 | BAR FEEDER MODE
*[= H12 R16]---| |---------[PLS M6961]*14835 11711 11715
menuNo BF.P
M6476 | FLASH TOOL MNL C
*[= H13 R16]---| |---------[PLS M7097]*14842 26815
menuNo F_TL.P
M6476 X156 | CLAMP PIN EXT PL
[= H14 R16]---| |---| |--[PLS M7098]*14851
menuNo F_TL.P|MF1.B
| |
| M7118 | FT CLAMP EXT SW
*--------------< >*14853 1112 26921
M6476 X156 | CLAMP PIN RET PL
[= H15 R16]---| |---| |--[PLS M7099]*14862
menuNo F_TL.P|MF1.B
| |
| M7119 | FT CLAMP RET SW
*--------------< >*14864 1113 26922
M66 | MIST COLLECT MN
*[= H17 R16]---| |---------[PLS M6180]*14871 3495 3497 3507
menuNo MSCL.P
M6 M5127 | UNCHUCK IL MENU
*[= H18 R16]---| |----| |--[PLS M7041]*14879 15242 15244
menuNo BF.P UKBF.P
M28 M26 | AUTO POWER OFF S
*[= H1B R16]---| |----|/|--[PLS M1287]*14887 15250 15252
menuNo APOF.P WUP.P
|M5990 M6922 M14 | WORK REST MODE M
14888*--| |----| |-*[= H10 R16]---| |---------[PLS M6967]*14896 27695 27697 27740
|MSWRDY M-M302| menuNo R50-6 |27742 28441 28443
|14584 14547 | |
M14 | WORK REST JOINTM
*[= H11 R16]---| |---------[PLS M6969]*14903 27092 27708
menuNo R50-6
M6463 | YMC BAR PULLER M
*[= H12 R16]---| |---------[PLS M6972]*14910 11723 11727
menuNo MCBP.P
M6476 X156 M7111 | FT TEST ORIENT
[= H13 R16]---| |---| |---------< >*14918
menuNo F_TL.P|MF1.B
| |
| M7116 | FT ORIENT SW
*--------------< >*14920 1110 26919
M6476 X156 | ML TEST JOINT
[= H14 R16]---| |---| |--[PLS M7112]*14929
menuNo F_TL.P|MF1.B
| |
| M7117 | FT JOINT SW
*--------------< >*14931 1111 26920
M5199 | MD1
*[= H15 R16]---| |---------[PLS M5107]*14938 1796 1891 1899
menuNo EMO.P
M5199 M5108 | MD2
*[= H16 R16]---| |----------------< >*14944 1917
menuNo EMO.P
|

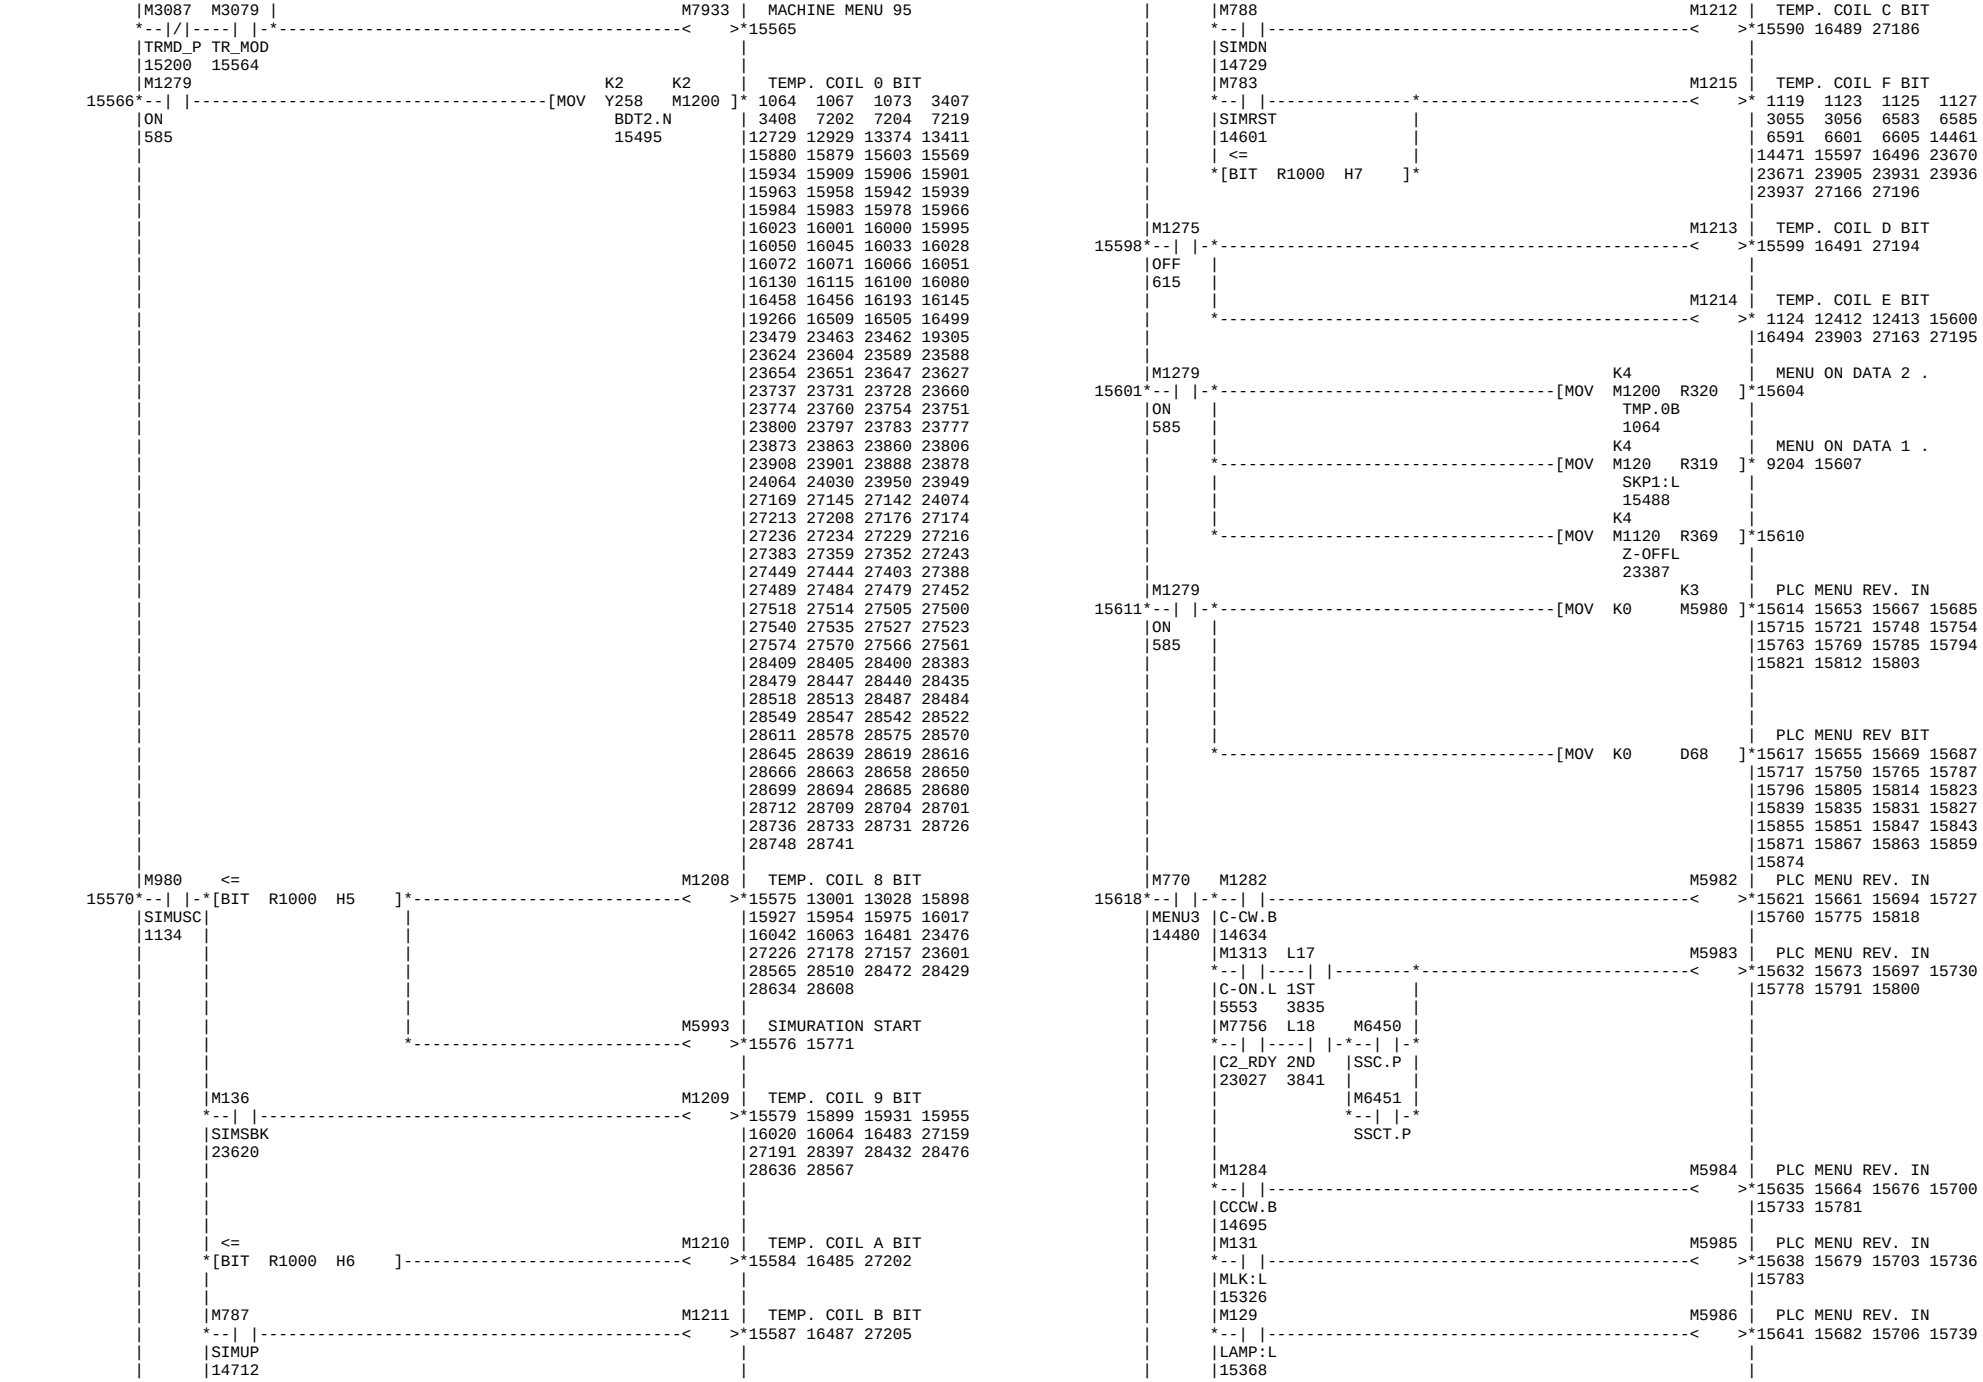

M5199 | MD4
H17 R16]---| |---------[PLS M5109]*14951 1921
menuNo EMO.P
M5199 | MD5
H18 R16]---| |---------[PLS M5110]*14958 1933
menuNo EMO.P
M5199 | MD6
H1B R16]---| |---------[PLS M5111]*14965 1936
menuNo EMO.P
M5990 M6923
14966*--| |----| |-*[= H10 R16]---| |---------[PLS M6951]*14974 5770
MSWRDY M-M303|
14584 14551 |
menuNo ORT.P
M31 | 1ST. SP ORIENT
M22 M6957 | SP AIR BLAST
H11 R16]---| |----------< >*14980 5813 5830 5873
menuNo AB.P 28488
M49 | C AXIS BRAKE
H15 R16]---| |---------[PLS M6954]*14987 22578
menuNo C.P
M49 | C AXIS CLAMP
H16 R16]---| |---------[PLS M6960]*14994 22589
menuNo C.P
M49 | C AXIS UNCLAMP
H17 R16]---| |---------[PLS M6964]*15001 22600
menuNo C.P
M49 M779 | C-MACHINE LOCK
H18 R16]---| |----------< >*15007 1092 15272
menuNo C.P
M5990 M6925 M6953 | 1ST CHUCK EXT SW
15008*--| |----| |-*[= H10 R16]----------< >*15014 4504 4517
MSWRDY M-M305|
14584 14559 |
menuNo
M6959 | 1ST CHUCK INT SW
H11 R16]----------< >*15019 4508 4513
menuNo
M54 M6963 | 2ND CHUCK EXT SW
H12 R16]---| |----------< >*15025 4571 4577
menuNo SS.P
M54 M6966 | 2ND CHUCK INT SW
H13 R16]---| |----------< >*15031 4573 4575
menuNo SS.P
M9 | CK PRES.LOW MENU
H14 R16]---| |---------[PLS M8010]*15038 4415 4417 26867
menuNo CHPS.P
M5990 M6927 M6990 | TAIL TR MENU 1
15039*--| |----| |-*[= H10 R16]----------< >*15045 9778
MSWRDY M-M307|
14584 14567 |
menuNo
M6991 | TAIL TR MENU 2
H11 R16]----------< >*15050 9802
menuNo
M6992 | TAIL TR MENU 3
H12 R16]----------< >*15055 9826
menuNo
M6993 | TAIL TR MENU 4
H13 R16]----------< >*15060 9850
menuNo
M6994 | TAIL TR MENU 5
H14 R16]----------< >*15065 9874
menuNo
M6995 | TAIL TR MENU 6
H15 R16]----------< >*15070 9898
menuNo
M6996 | TAIL TR MENU 7
H16 R16]----------< >*15075 9922
menuNo
M6997 | TAIL TR MENU 8
H17 R16]----------< >*15080 9946
menuNo
M6998 | TAIL TR MENU 9
H18 R16]----------< >*15085 9965
menuNo
M6999 | TAIL TR MENU 10
H1B R16]----------< >*15090 9984
menuNo
M5990 M6928 M54 M5178 | 2ND. SP ORIENT
15091*--| |----| |-*[= H10 R16]---| |----| |--[PLS M6952]*15100 5774
MSWRDY M-M308| menuNo SS.P SORT.P
14584 14571 |
M54 M6958 | SS AIR BLAST
H11 R16]---| |----------< >*15106 5816 5929 5974
menuNo SS.P 28579
M54 M6451 | 2nd SP BRAKE PLS
H15 R16]---| |----| |--[PLS M6947]*15114 22582
menuNo SS.P SSCT.P
M54 M6450 M6451
H16 R16]---| |-*--|/|----|/|---->1
menuNo SS.P |SSC.P SSCT.P
M6450 | 2nd SP CLAMP PLS
--| |-[PLS M6948]*15130 22593
SSC.P
M6451
--| |-
SSCT.P
M54 M6450 M6451
H17 R16]---| |-*--|/|----|/|---->2
menuNo SS.P |SSC.P SSCT.P
M6450 | 2nd SP UNCLA PLS
--| |-[PLS M6949]*15146 22604
SSC.P
M6451
--| |-
SSCT.P
M54 M816 | SS-MACHINE LOCK
H18 R16]---| |----------< >*15152 1093 15277
menuNo SS.P
2ND SP LOCK PIN
1>----------[PLS M6962]*15124 21243
2ND SP L-PIN OFF
2>----------[PLS M6965]*15140 21271
M5990 M6929 PUMP FORCE MENU
15153*--| |----| |-*[= H10 R16]----------[PLS M6955]*15160 2072 2080 2162
MSWRDY M-M309| menuNo
14584 14575 |
X156 | TAIL UNCLAMP
H11 R16]*--| |---------[PLS M3246]*15168 15545 15547
menuNo|MF1.B

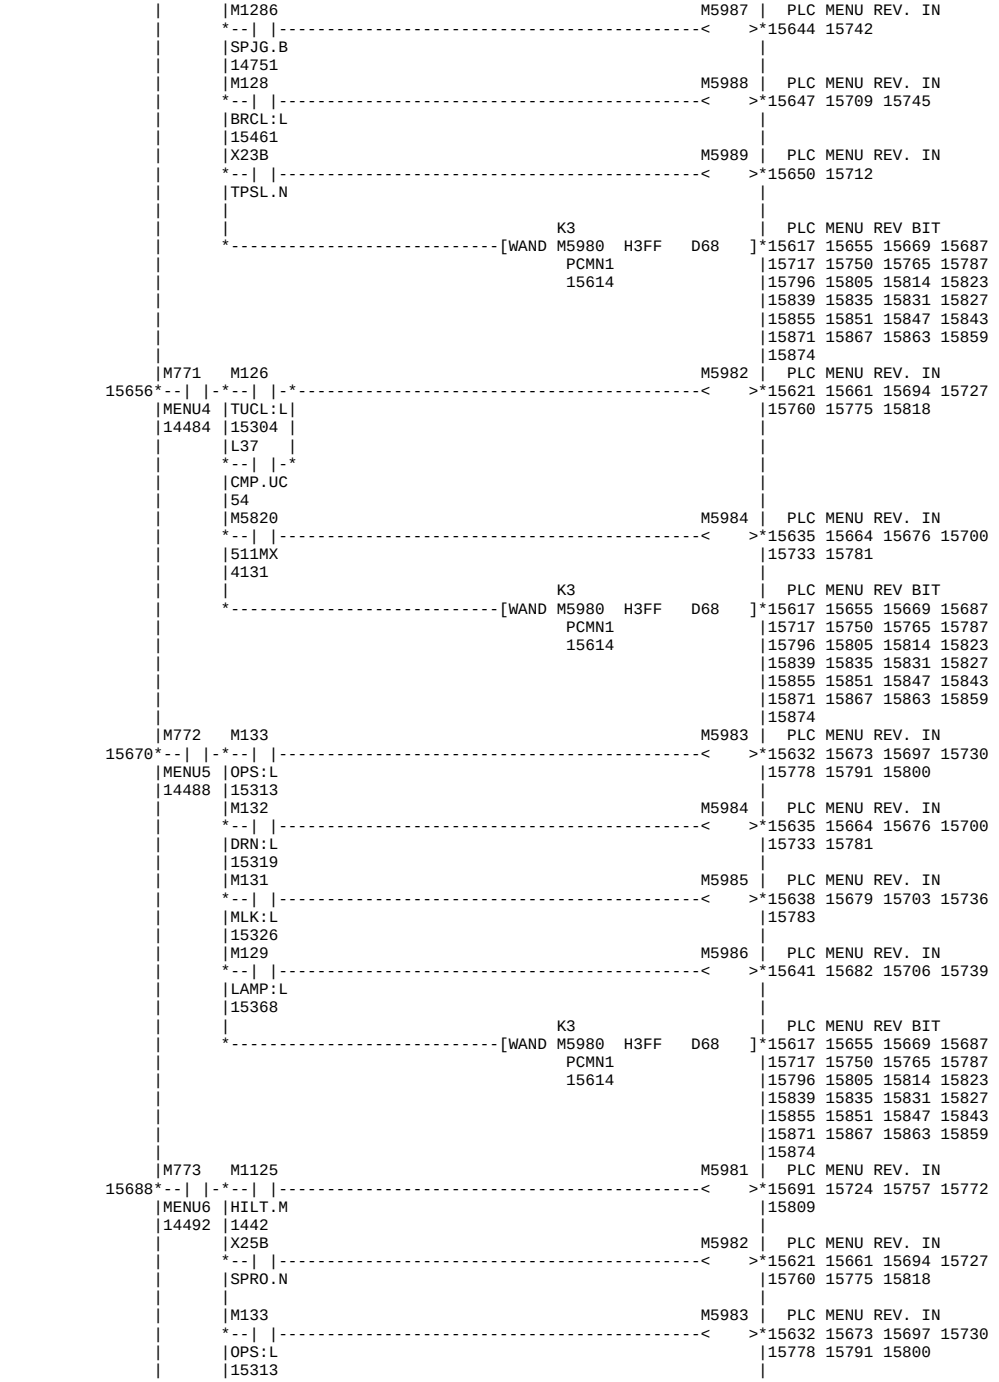

M7128 | TAILUNCLAMPSW ON
*15170 1109
X156 | TAIL MODE SW PL
[= H12 R16]--| |---------[PLS M3247]*15178 15552 15554
menuNo|MF1.B
M7127 | TAIL MODE SW ON
*15180 1108
M3241 | TAIL HOME POS_
*[= H13 R16]----------*15185 10942 10945
menuNo
M53 | Yt AXIS CONTROL
*[= H14 R16]---| |---------[PLS M6968]*15192 736 737 741
menuNo Y.P
X156 | TURET MODE SW PL
[= H15 R16]--| |---------[PLS M3087]*15200 15559 15561
menuNo|MF1.B
M7126 | TURRETMODE SW ON
*15202 1107
M3081 | TURERT HOME POS_
*[= H16 R16]----------*15207 9633 9636
menuNo
| LIGHT OFF CANSEL
*[= H18 R16]----------[PLS M6973]*15213 15370 15372
menuNo
| CONV.STOP CANSEL
*[= H1B R16]----------[PLS M6974]*15219 1752 1754
menuNo
M5990 M6930 | COOLANT AUTO SW
15220*--| |----| |-*[= H10 R16]----------[PLS M7237]*15227 7652 7655
MSWRDY M-M310| menuNo
14584 14579 |
| COOLANT MNL SW P
*[= H11 R16]----------[PLS M7238]*15233 7642 7644 26405
menuNo
M6405 M75 | NOZZLE SWITCH
*[= H12 R16]---| |----| |--[PLS M7243]*15241 7665 7667
menuNo NZUK.P UKSP.P
M7041 L35 L35 | UNCHUCK IL MN ME
15242*--| |----|/|-*----------<*15247 15243 15245 15248
UCKILP UCIL.M| 28428
14879 15247 |
M7041 L35 |
--|/|----| |-
UCKILP UCIL.M
14879 15247
L35 M7840 | UNCHUCK IL MN RE
15248*--| |----------<*15249 9219
UCIL.M
15247
M1287 L36 Y450 M26 L36 | AUTO POWER OFF M
15250*--| |----|/|-*--|/|----|/|-*----------<*15258 7968 15251 15253
APOF.B APOF.M|PCOFRQ WUP.P | 15259 28430
14887 15258 |7998 |
M1287 L36 |
--|/|----| |-
APOF.B APOF.M
14887 15258
X1E
--| |----------
ATPOFF
L36 M26 M7841 | MACHINE MENU 19
15259*--| |----|/|----------<*15261
APOF.M WUP.P
15258
X156 M805 | MACHINE LOCK SW.
15262*--| |-*--| |---------[PLS M811]*15266 15321 15323
MF1.B |MLCK
14721
M804 | DRY RUN SW. PLS
*--| |---------[PLS M810]*15270 15314 15316
DRN
14704
M779 M49 | C-LOCK SW
*--| |----| |---------[PLS M812]*15275 15327 15331 15338
M-MENU C.P
15007
M816 M54 | SS-LOCK SW
*--| |----| |---------[PLS M817]*15280 15329 15336 15340
M-MENU SS.P
15152
M6448 M789 M126 M6631 M1409 M100 M997 X198
15281*--| |----| |----|/|-*--| |-*--| |----| |----|/|-*--|/|-*-->1
J2TR.P TURUCP TUCL:L|ILYME1|MAN&DR RDY TSWSVS|SKP1.M|
13812 14638 15304 |2277 |2436 533 23401 |
M789 M126 |T177 | |M501 |
--|/|----| |----------|/|-* *--| |-*-->2
TURUCP TUCL:L STOF.T TDRE
14638 15304 2269 8149
X199 M5599 M5601 F39 M126 | TURRET UNCLAMP
1>--*--|/|--------*--|/|----|/|----|/|----------<*15304 39 6719 6767
SKP2.M |TRR TRRME MLCPAL | 6788 6940 6947 7185
|22352 22371 25502 | 7190 8255 9567 9581
M492 M997 |15283 15285 15305 15658
2>--*--|/|----|/|-*25472 26890
81MX TSWSVS
8017 23401
M126 | TURRET UNCLAMP O
15305*--|/|----------[PLS M7463]*15307 1154 6852 9579
TUCL:L 25470
15304
M802 M133 M133 | OPTIONAL STOP
15308*--| |----|/|-*----------<*15313 3568 15309 15311
OSP OPS:L | 15672 15696 19432
14672 15313 |
M802 M133 |
--|/|----| |-
OSP OPS:L
14672 15313
M810 M132 M132 | DRY RUN
15314*--| |----|/|-*----------<*15319 15315 15317 15675
DRNP DRN:L | 15699
15270 15319 |
M810 M132 | Y256 | DRY RUN .NC
--|/|----| |-----------<*15320
DRNP DRN:L
15270 15319
M811 M131 M131 | MACHINE LOCK
15321*--| |----|/|-*----------<*15326 8367 9109 15322
MLKP MLK:L | 15324 15334 15343 15637
15266 15326 | 15678 15702
M811 M131 |
--|/|----| |-
MLKP MLK:L
15266 15326
M812 M7864 M131 M837 | C-LOCK
15327*--| |----|/|--------*--| |----------<*15335 9114 9122 15345
CLCP M-MN38 |MLK:L 15351 28506 28605
15275 15349 |15326
M817 M812 M7864 |
--|/|---|/|----| |-*
SSLCP |CLCP M-MN38
15280 |15275 15349
M5192 |
--| |-
C-IN.P
13790

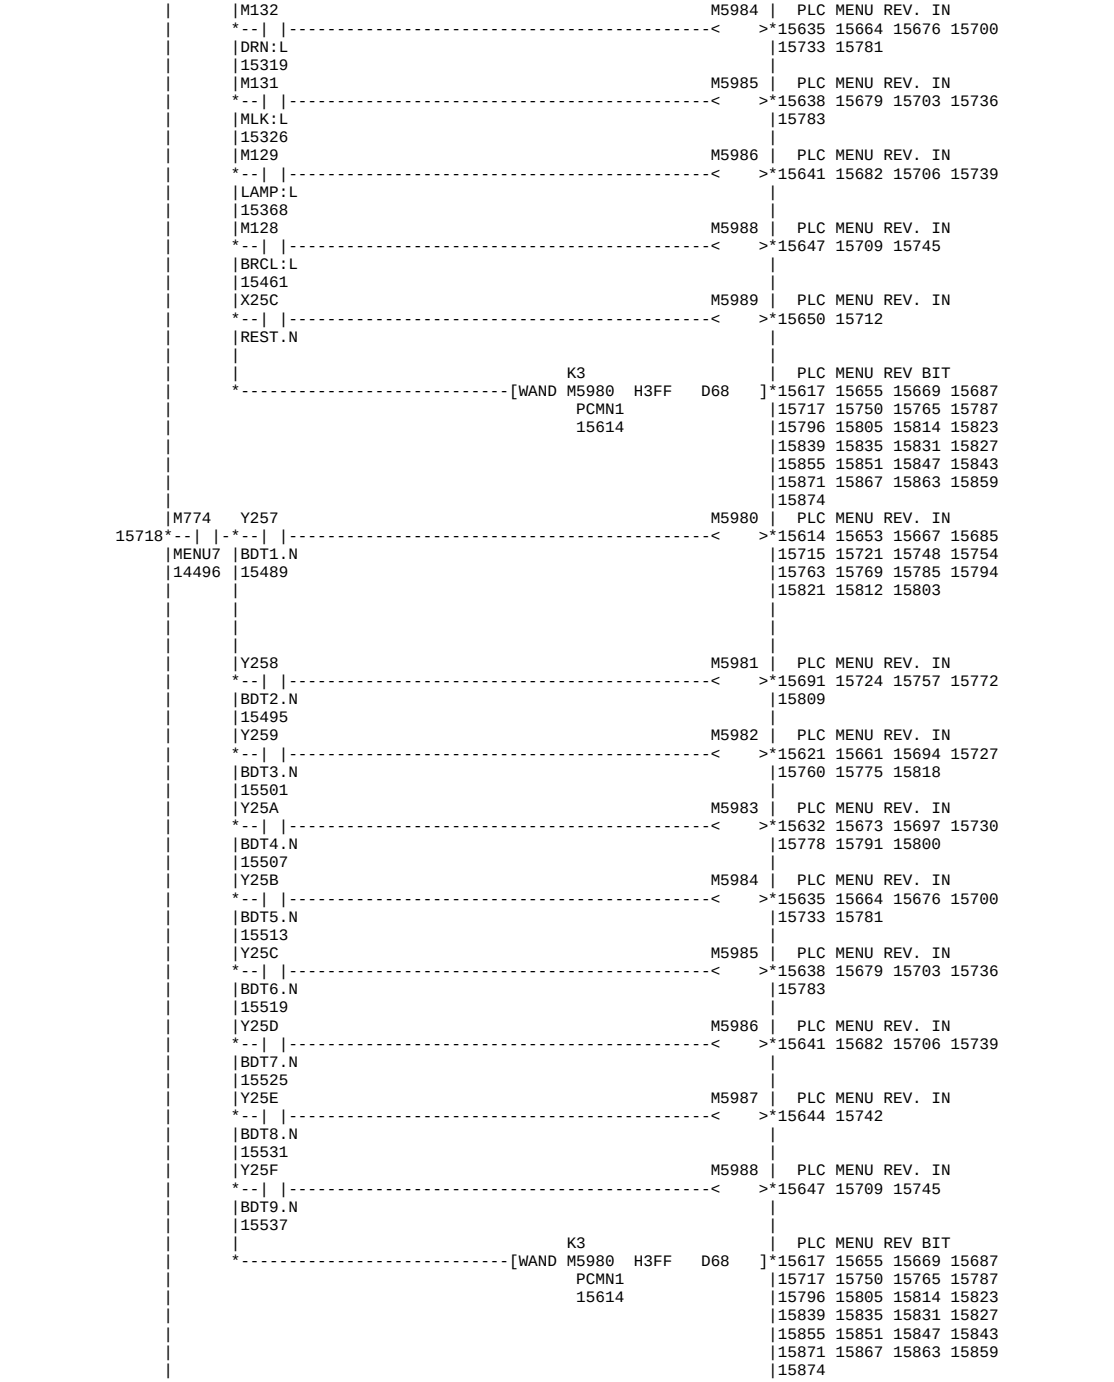

M817 M7924 M131 M839 SS-LOCK
15336 15344 9115 9124 15346
SSLCP M-MN88 MLK:L 15350 28507 28604
15280 15354 15326
M812 M817 M7924
CLCP SSLCP M-MN88
15275 15280 15354
M5192
C-IN.P
13790
M837 M7864 MACHINE MENU 38
15345 15349 15328 15332
CLOCK
15335
M839 M5192
SSLOCK C-IN.P
15344 13790
M839 M7924 MACHINE MENU 88
15350 15354 15337 15341
SSLOCK
15344
M837 M5192
CLOCK C-IN.P
15335 13790
M808 L5 M6975 L5 WORK LIGHT ON
15355 15367 15362 15364
WOKP WLON WLTOFF
14739 15367 15430
M6045 L38 M129 WORK LIGHT ON
15368 15410 15640 15681
DR_CFP ON 15705
2258 15375
M6945 M6946 Y2 WORK LIGHT
15369
WKLSW KEYINP
14740 15407
M808 L5
WOKP WLON
14739 15367
M6973 L38 L38 LIGHT OFF CANSEL
15370 15375 15360 15371 15373
M-MENU ON 15409 28633
15213 15375
M6973 L38 M7936 MACHINE MENU 98
15376
M-MENU ON
15213 15375
M1279 K8 M KEY INPUT
15377 DMOV X100 D580 15380 15387
ON XSELCT
585
K8 NC KEY INPUT
DMOV X140 D584 15383 15392
RST.B
M1279 M6980 NO M KEY INPUT
15384 D= D580 D582 15389 15400
ON
585 15380 15434
M6981 NO NC KEY INPUT1
D= D584 D586 15394 15401
15383 15437
M6982 NO NC KEY INPUT2
K0 R16 15399 15402
menuNo
M6980 M6979 KEY INPUT
15400 15405 15408
MKEIN
15389

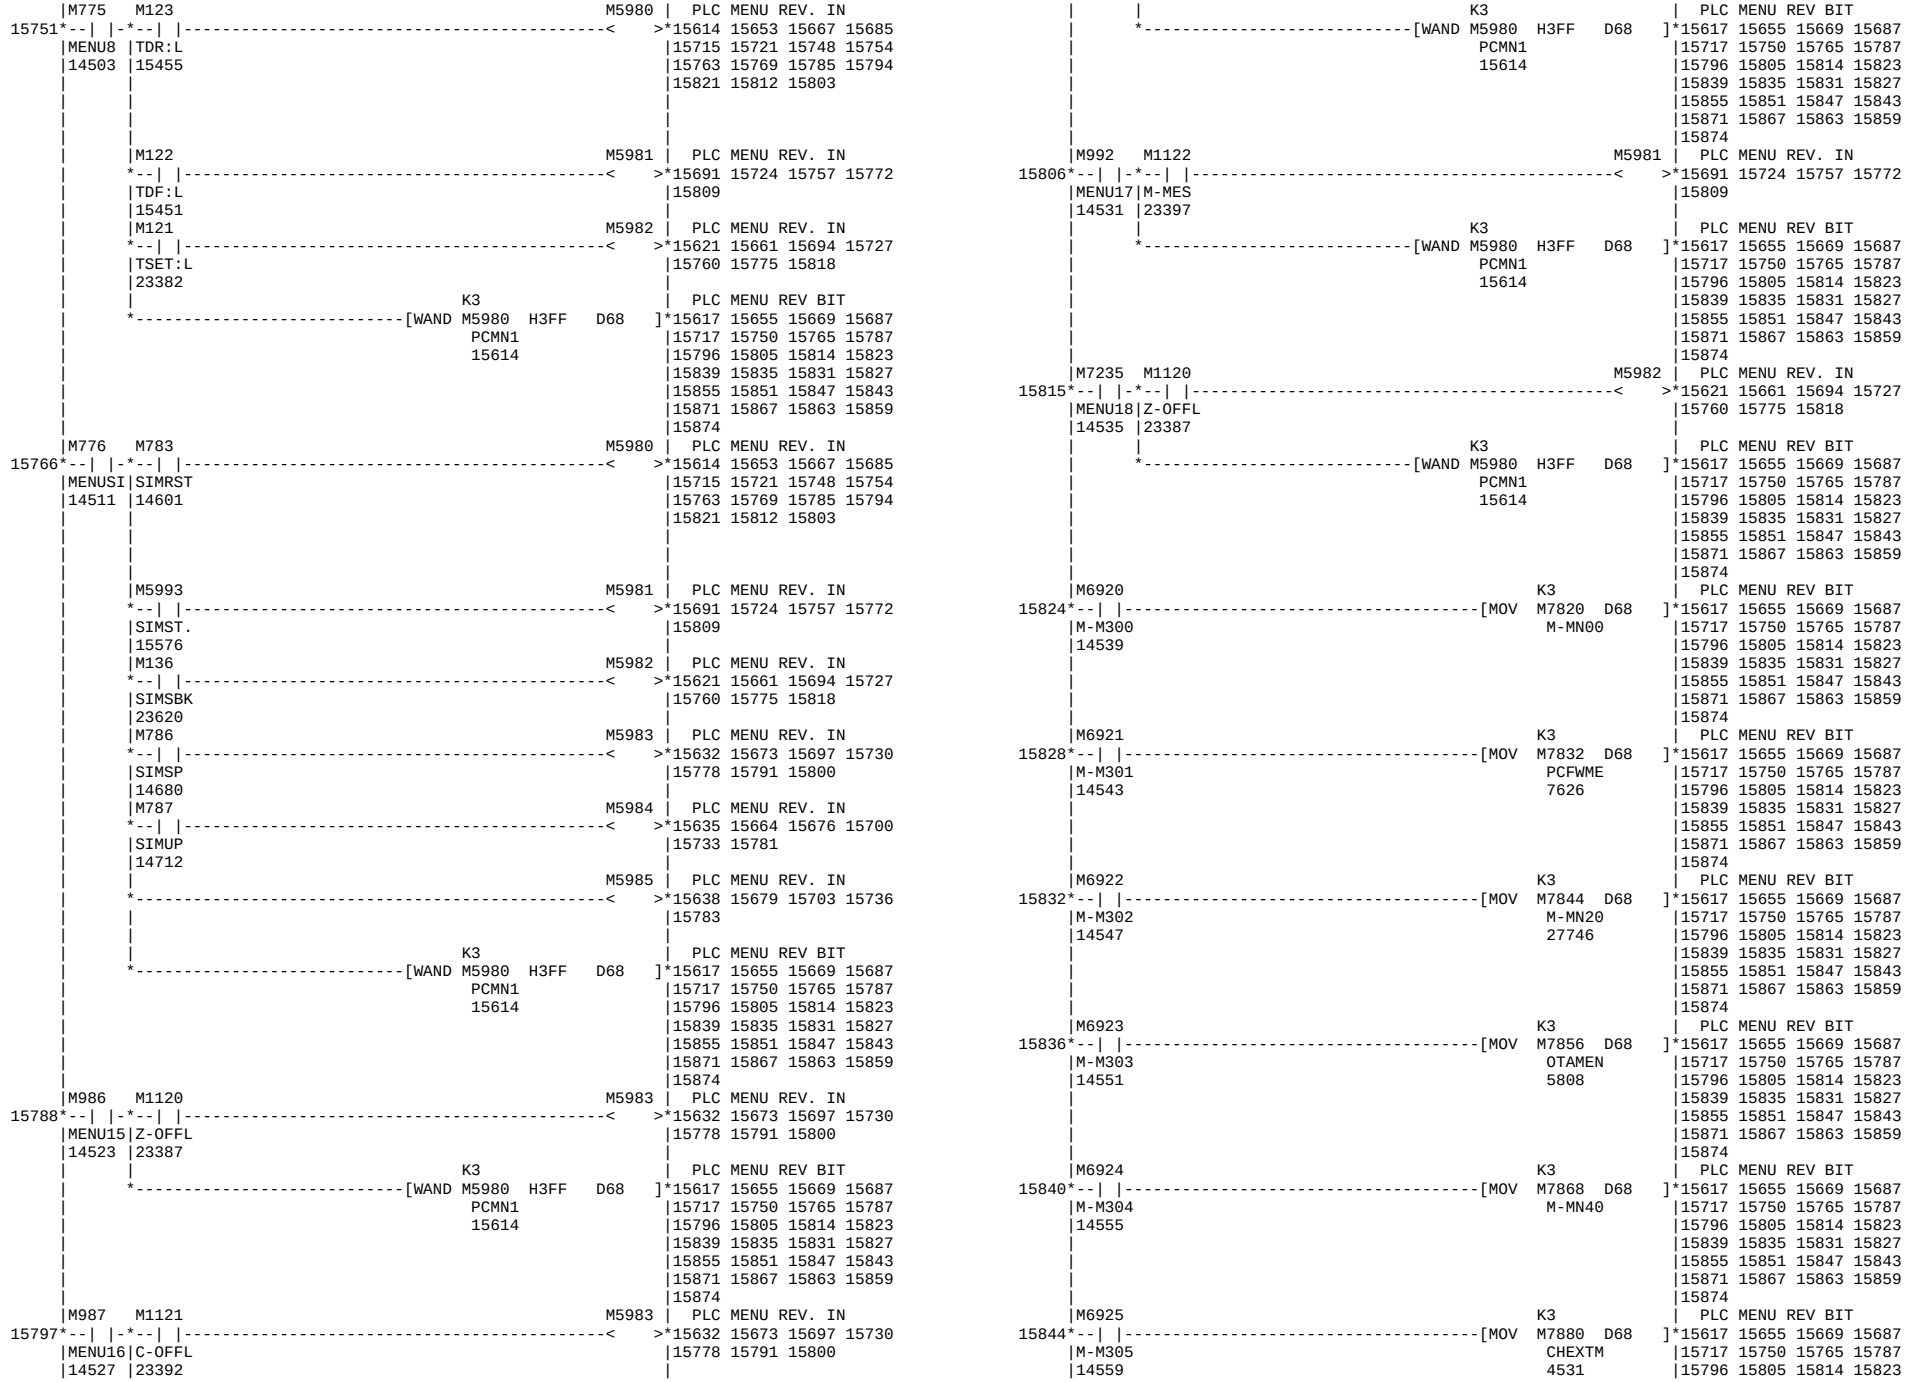

M6981 KEY INPUT PLS
PLS M6946 15407 15358
NKYIN1
15394
M6982
NKYIN2
15399
X8
CHO.SW
X9
CHC.SW
M6979 L38 M129 M931 X2D0 X2D1 X2A0 M3004
15408 1
KEYIN ON LAMP:L CCE SPFWD SPREV AOPL.N MVP.T
15405 15375 15368 2255
M931 WORK LIGHT OFF(D
T83 D21 15425 15429
CCE T43
2255
M3005 WORK LIGHT OFF(D
1 T84 D20 15419 15428
MVM.T T44
T84 M6975 WORK LIGHT OFF
15428 15430 15366
T44
15419
T83
T43
15425
M1279 K8 M KEY INPUT
15431 DMOV X100 D582 15434 15388
ON XSELCT
585
K8 NC KEY INPUT
DMOV X140 D586 15437 15393
RST.B
M782 M507 M93 M508 M507 T-SET MENU
15438 15445 15439 15441
TMESW TEYM HOMEOK TEYMSL
14651 15445 732
M782 M507 PLS M506 15447
TMESW TEYM
14651 15445
M500 M497 M122 TOOL EYE FORWARD
15448 15451 8237 8248 15756
TDFE 83MX
8125 8096
T136
0.1sec
664
M501 M498 M123 TOOL EYE REVERSE
15452 15455 8239 8251 15753
TDRE 84MX
8149 8097
T136
0.1sec
664
M809 M128 M128 BARRIER CANCEL
15456 15461 15457 15459 15464
BARRP BRCL:L 15468 15646 15708
14765 15461
M809 M128 Y24A WORK-BR CANCEL .
15462
BARRP BRCL:L
14765 15461

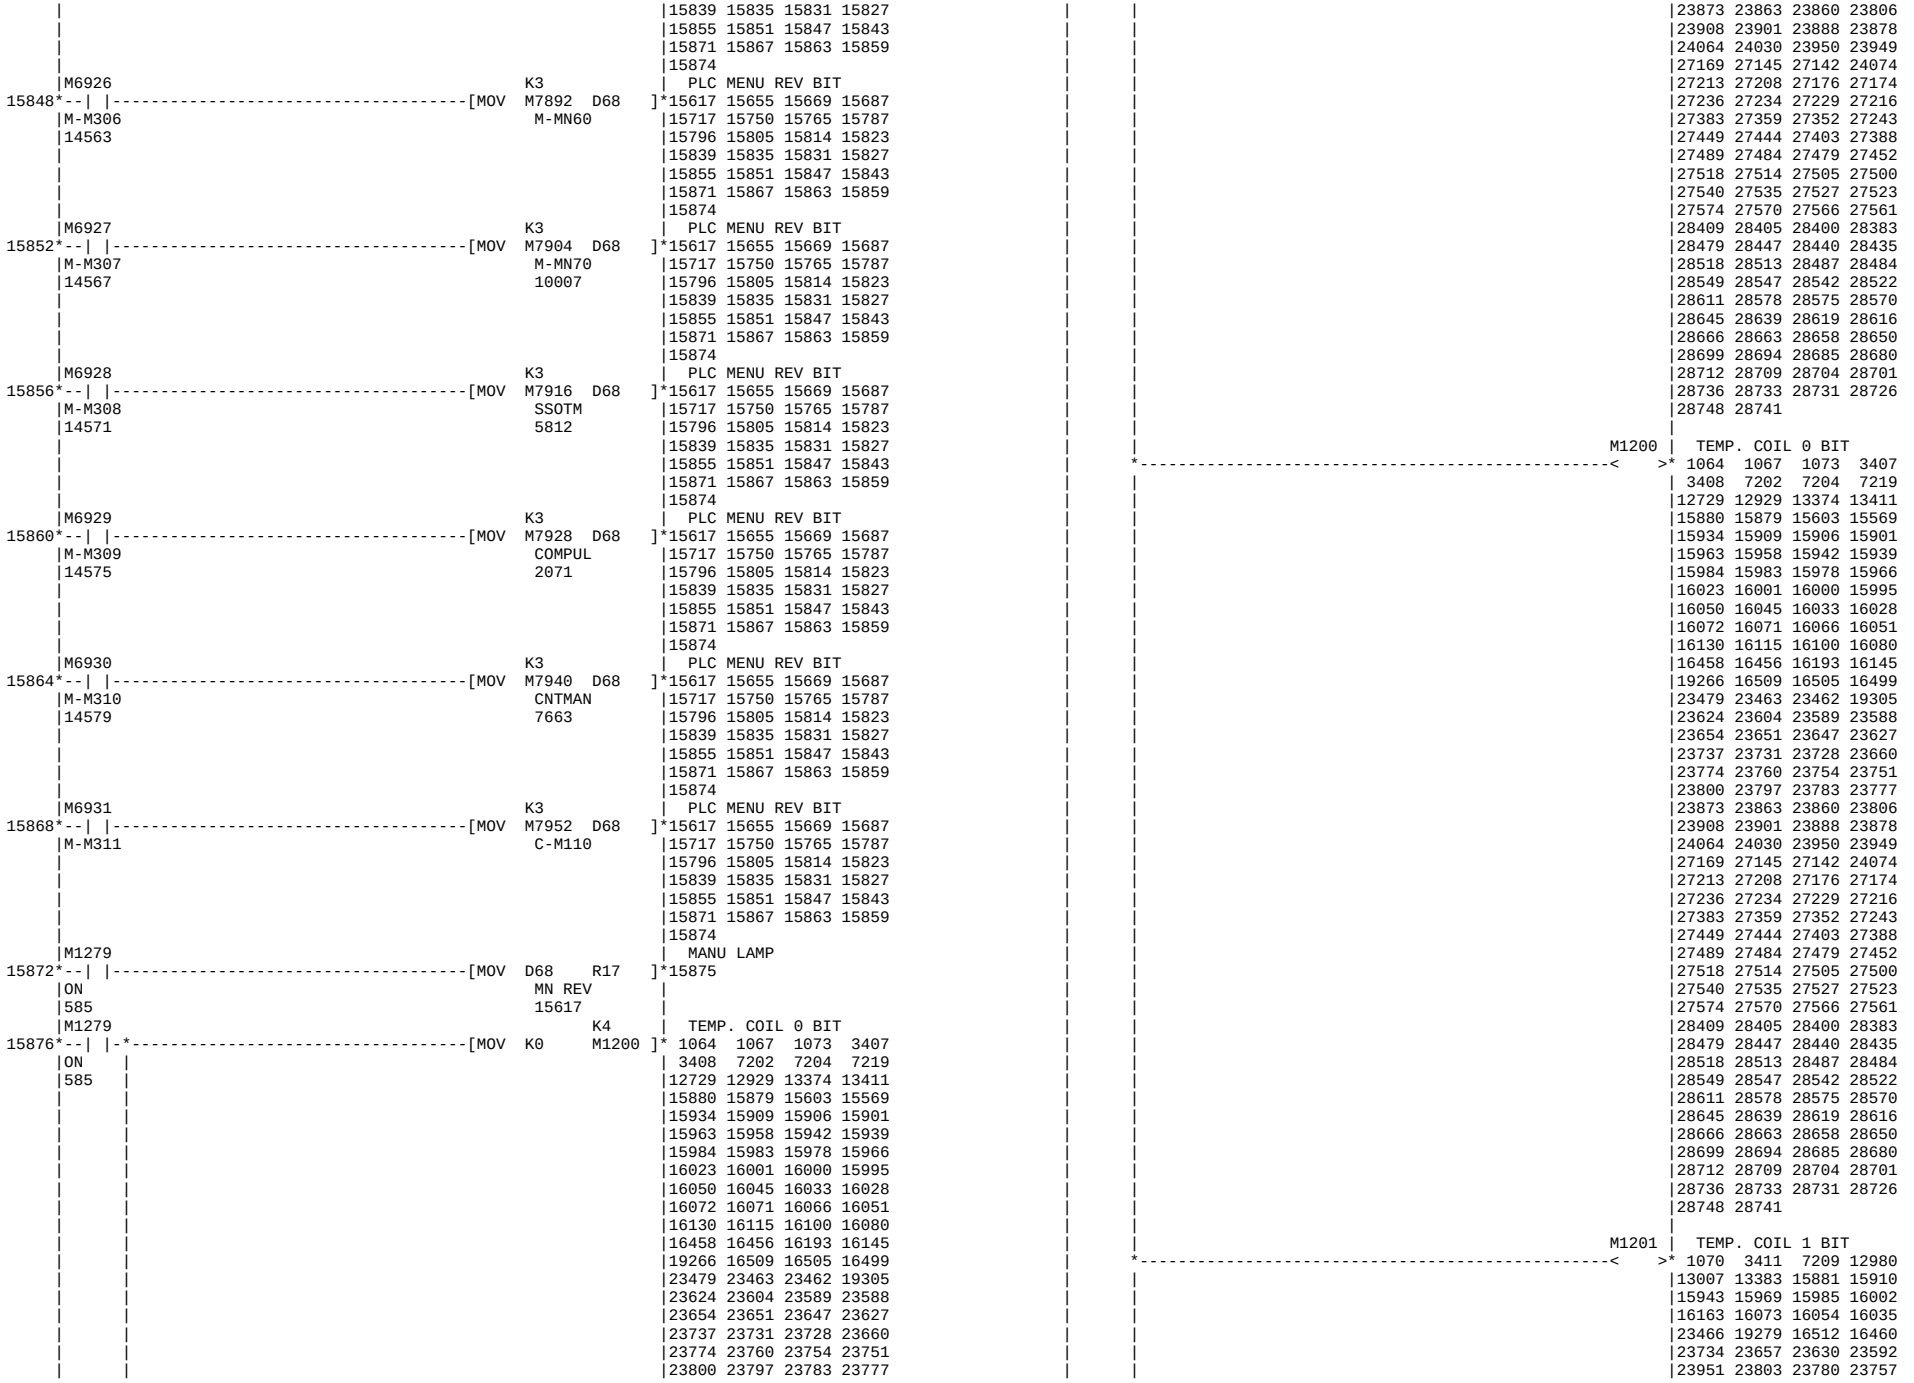
```
     |            |                                     Y34A  |  WORK-BR CANCEL _
     |            *-------------------------------------------<    >*15463
     |                                                         |
     |                                                         |
     |M128                                                Y248  |  CHUCK-BR CANCEL.
15464*--| |-*-------------------------------------------------<    >*15466
     |BRCL:L|                                                  |
     |15461 |                                                  |
     |M6623 |                                             Y348  |  CHUCK-BR CANCEL_
     *--| |-*-------------------------------------------------<    >*15467
     |BRCANM                                                   |
     |4631                                                     |
     |M128                                                Y249  |  TAIL-BR CANCEL .
15468*--| |--------*-------------------------------------------<    >*15473
     |BRCL:L       |                                           |
     |15461        |                                           |
     |M6623        |                                      Y349  |  TAIL-BR CANCEL _
     *--| |--------*-------------------------------------------<    >*15474
     |BRCANM       |                                           |
     |4631         |                                           |
     |M6472  M54   |                                           |
     *--|/|----|/|-*                                           |
     |J2TA.P SS.P                                              |
     |13821                                                    |
     |M782                                                     |  MEASURING
15475*--| |-*-----------------------------------------[CALL P153  ]*23328 15482
     |TMESW |                                                  |
     |14651 |                                                  |
     |M993  |                                                  |
     *--| |-*                                                  |
     |Z-OFF |                                                  |
     |14659 |                                                  |
     |M994  |                                                  |
     *--| |-*                                                  |
     |C-OFF |                                                  |
     |14688 |                                                  |
     |M995  |                                                  |
     *--| |-*                                                  |
     |M0MES |                                                  |
     |14627 |                                                  |
     |M996  |                                                  |
     *--|/|-*                                                  |
     |CAL MS|                                                  |
     |23407 |                                                  |
     |M7236 |                                                  |
     *--| |-*                                                  |
     |                                                         |
     |                                                         |
     |M791   M120                                         M120  |  SKIP1
15483*--| |----|/|-*-------------------------------------------<    >*15488  9203 15484 15486
     |SKIP1P SKP1:L|                                            |15606
     |14595  15488 |                                           |
     |M791   M120  |                                      Y257  |  BLOCK DELETE 1 .
     *--|/|----| |-*-------------------------------------------<    >*15489 15720
     |SKIP1P SKP1:L                                            |
     |14595  15488                                             |
     |M792   Y258                                         Y258  |  BLOCK DELETE 2 .
15490*--| |----|/|-*-------------------------------------------<    >*15495 15491 15493 15568
     |SKIP2P BDT2.N|                                           |15723
     |14613  15495 |                                           |
     |M792   Y258  |                                           |
     *--|/|----| |-*                                           |
     |SKIP2P BDT2.N                                            |
     |14613  15495                                             |
     |M793   Y259                                         Y259  |  BLOCK DELETE 3 .
15496*--| |----|/|-*-------------------------------------------<    >*15501 15497 15499 15726
     |SKIP3P BDT3.N|                                           |
     |14647  15501 |                                           |
     |M793   Y259  |                                           |
     *--|/|----| |-*                                           |
     |SKIP3P BDT3.N                                            |
     |14647  15501                                             |
     |M794   Y25A                                         Y25A  |  BLOCK DELETE 4 .
15502*--| |----|/|-*-------------------------------------------<    >*15507 15503 15505 15729
     |SKIP4P BDT4.N|                                           |
     |14677  15507 |                                           |
     |M794   Y25A  |                                           |
     *--|/|----| |-*                                           |
     |SKIP4P BDT4.N                                            |
     |14677  15507                                             |
     |M795   Y25B                                         Y25B  |  BLOCK DELETE 5 .
15508*--| |----|/|-*-------------------------------------------<    >*15513 15509 15511 15732
     |SKIP5P BDT5.N|                                           |
     |14709  15513 |                                           |
     |M795   Y25B  |                                           |
     *--|/|----| |-*                                           |
     |SKIP5P BDT5.N                                            |
     |14709  15513                                             |
     |M796   Y25C                                         Y25C  |  BLOCK DELETE 6 .
15514*--| |----|/|-*-------------------------------------------<    >*15519 15515 15517 15735
     |SKIP6P BDT6.N|                                           |
     |14726  15519 |                                           |
     |M796   Y25C  |                                           |
     *--|/|----| |-*                                           |
     |SKIP6P BDT6.N                                            |
     |14726  15519                                             |
     |M797   Y25D                                         Y25D  |  BLOCK DELETE 7 .
15520*--| |----|/|-*-------------------------------------------<    >*15525 15521 15523 15738
     |SKIP7P BDT7.N|                                           |
     |14745  15525 |                                           |
     |M797   Y25D  |                                           |
     *--|/|----| |-*                                           |
     |SKIP7P BDT7.N                                            |
     |14745  15525                                             |
     |M798   Y25E                                         Y25E  |  BLOCK DELETE 8 .
15526*--| |----|/|-*-------------------------------------------<    >*15531 15527 15529 15741
     |SKIP8P BDT8.N|                                           |
     |14756  15531 |                                           |
     |M798   Y25E  |                                           |
     *--|/|----| |-*                                           |
     |SKIP8P BDT8.N                                            |
     |14756  15531                                             |
     |M799   Y25F                                         Y25F  |  BLOCK DELETE 9 .
15532*--| |----|/|-*-------------------------------------------<    >*15537 15533 15535 15744
     |SKIP9P BDT9.N|                                           |
     |14770  15537 |                                           |
     |M799   Y25F  |                                           |
     *--|/|----| |-*                                           |
     |SKIP9P BDT9.N                                            |
     |14770  15537                                             |
     |M980                                                     |  SIMULATION OFF .
15538*--|/|-*-----------------------------------------<T142 K5    >*15540 15543
     |SIMUSC|                                                  |
     |1134  |                                                  |
     |      |T142                                         M88   |  SIMULATION OFF
     |      *--| |-------------------------------------------<    >*15544  2979  3739  3745
     |       SIOF.T                                            | 6562 16086 18420 18438
     |       15540                                             |18467 18614 20617 20625
     |                                                         |20876 20868 20657 20641
     |                                                         |22006 21613 20908 20892
     |                                                         |22346
     |                                                         |
     |M3246  M3238                                        M3238 |  TAIL UNCL MODE
15545*--| |----|/|-*-------------------------------------------<    >*15550 10678 15546 15548
     |TUCLMP TUC_MO|                                           |28620
     |15168  15550 |                                           |
     |M3246  M3238 |                                      M7929 |  MACHINE MENU 91
     *--|/|----| |-*-------------------------------------------<    >*15551
     |TUCLMP TUC_MO                                            |
     |15168  15550                                             |
     |M3247  M3239                                        M3239 |  TAIL MODE
15552*--| |----|/|-*-------------------------------------------<    >*15557  9993  9997 10570
     |TRMD_P TR_MOD|                                           |10722 10728 10731 10943
     |15178  15557 |                                           |10947 15553 15555 28622
     |M3247  M3239 |                                      M7930 |  MACHINE MENU 92
     *--|/|----| |-*-------------------------------------------<    >*15558
     |TRMD_P TR_MOD                                            |
     |15178  15557                                             |
     |M3087  M3079                                        M3079 |  TURRET MODE
15559*--| |----|/|-*-------------------------------------------<    >*15564  6720  9627  9629
     |TRMD_P TR_MOD|                                           | 9634  9638 15560 15562
     |15200  15564 |                                           |26155 28629
```

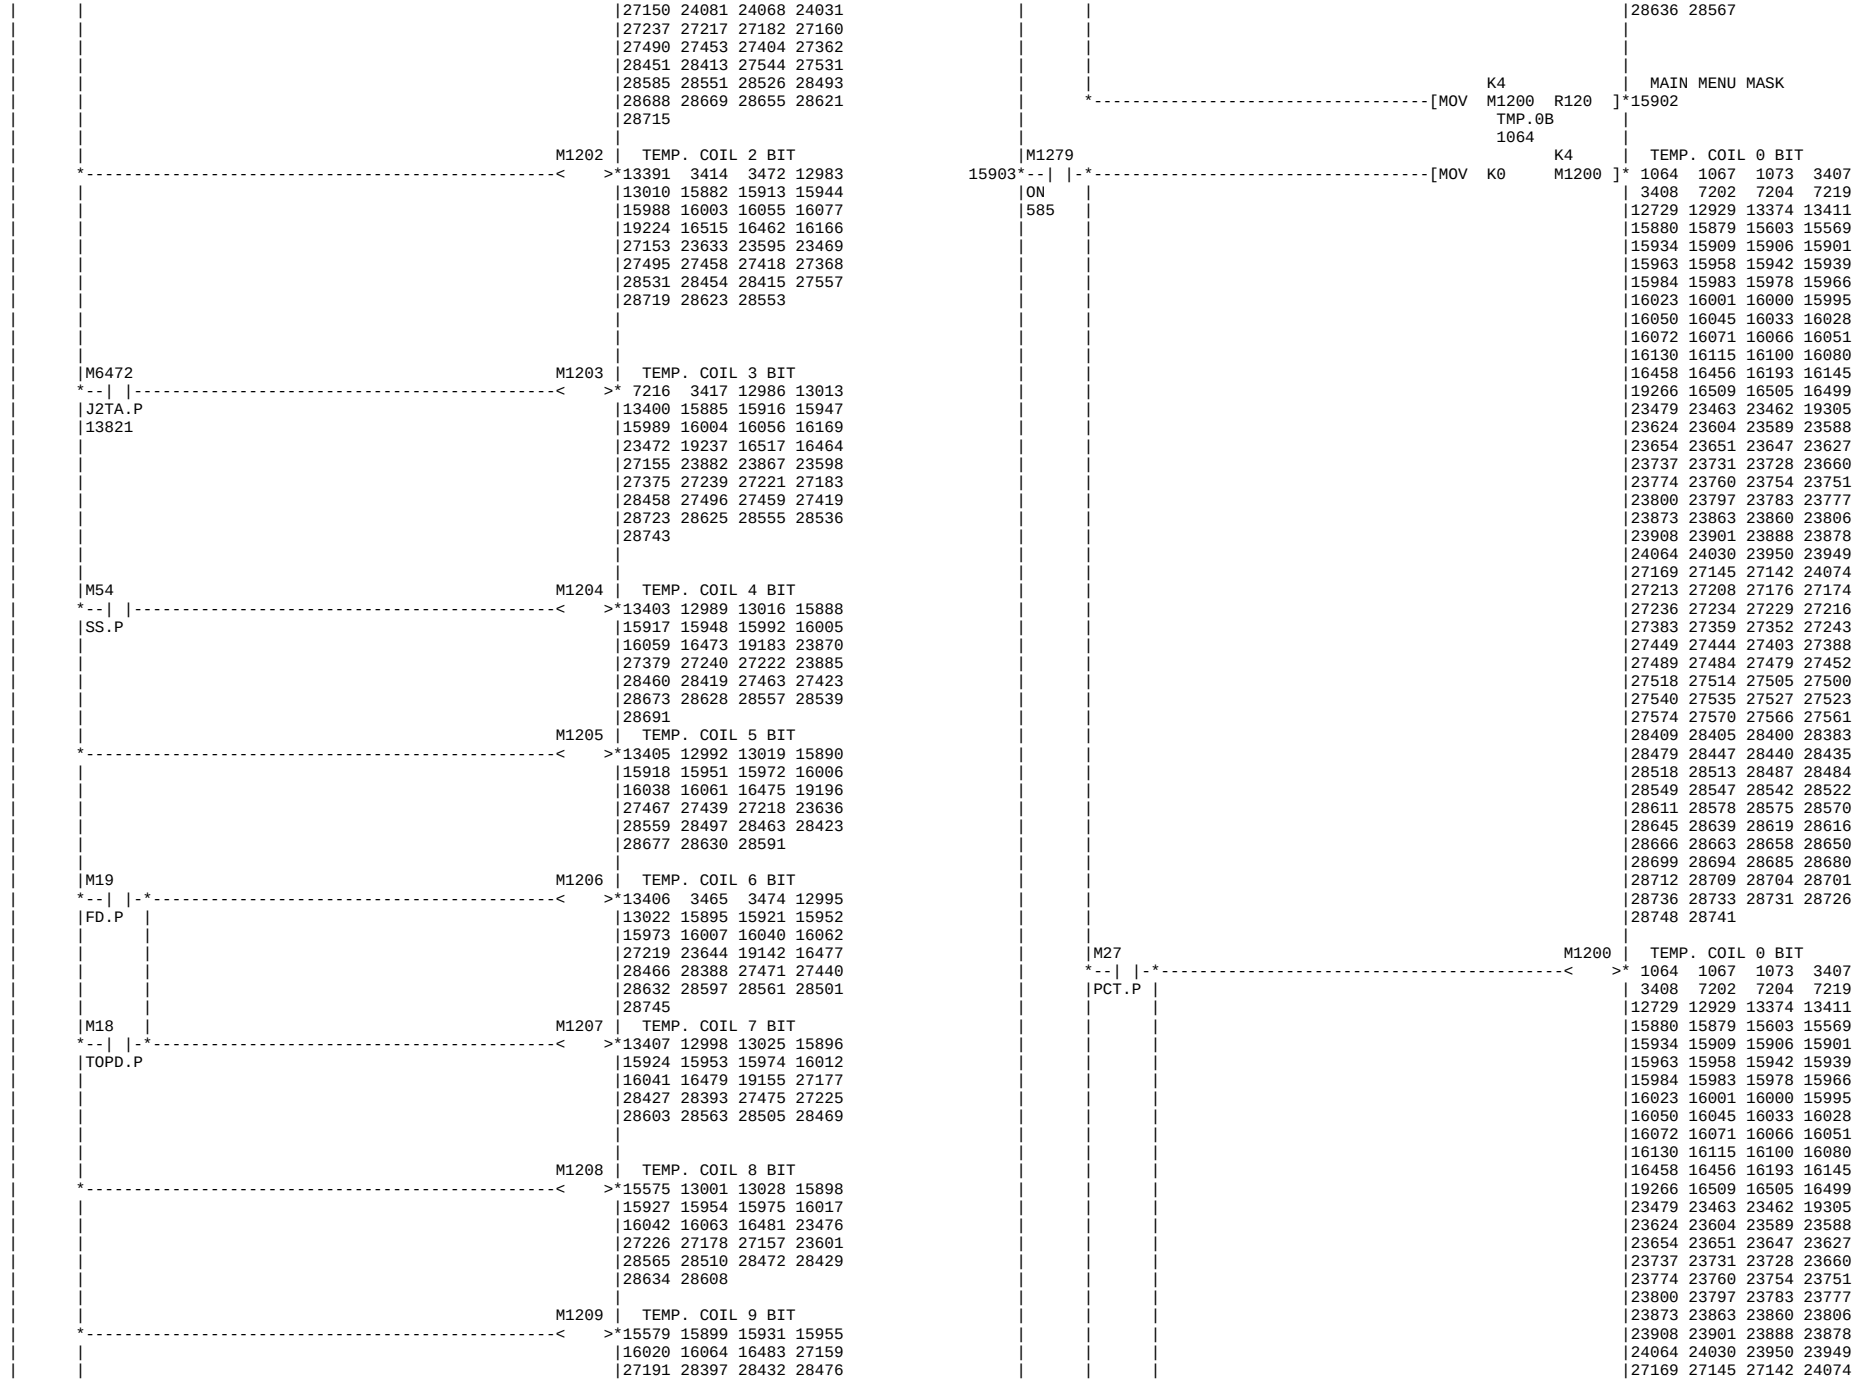

M3087 M3079
M7933 | MACHINE MENU 95
15565
TRMD_P TR_MOD
15200 15564
M1279
K2 K2 | TEMP. COIL 0 BIT
15566 ON [MOV Y258 M1200]* 1064 1067 1073 3407
BDT2.N | 3408 7202 7204 7219
585 15495 |12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
M980 <=
M1208 | TEMP. COIL 8 BIT
15570 [BIT R1000 H5]* 15575 13001 13028 15898
SIMUSC 15927 15954 15975 16017
1134 16042 16063 16481 23476
27226 27178 27157 23601
28565 28510 28472 28429
28634 28608
M5993 | SIMURATION START
15576 15771
M136
M1209 | TEMP. COIL 9 BIT
15579 15899 15931 15955
SIMSBK 16020 16064 16483 27159
23620 27191 28397 28432 28476
28636 28567
<=
M1210 | TEMP. COIL A BIT
[BIT R1000 H6] 15584 16485 27202
M787
M1211 | TEMP. COIL B BIT
15587 16487 27205
SIMUP
14712
M788
M1212 | TEMP. COIL C BIT
15590 16489 27186
SIMDN
14729
M783
M1215 | TEMP. COIL F BIT
1119 1123 1125 1127
SIMRST 3055 3056 6583 6585
14601 6591 6601 6605 14461
<= 14471 15597 16496 23670
[BIT R1000 H7]* 23671 23905 23931 23936
23937 27166 27196
M1275
M1213 | TEMP. COIL D BIT
15598 OFF 15599 16491 27194
615
M1214 | TEMP. COIL E BIT
1124 12412 12413 15600
16494 23903 27163 27195
M1279 K4 | MENU ON DATA 2 .
15601 ON [MOV M1200 R320]* 15604
585 TMP.0B
1064
K4 | MENU ON DATA 1 .
[MOV M120 R319]* 9204 15607
SKP1:L
15488
K4
[MOV M1120 R369]* 15610
Z-OFFL
23387
M1279 K3 | PLC MENU REV. IN
15611 ON [MOV K0 M5980]* 15614 15653 15667 15685
585 15715 15721 15748 15754
15763 15769 15785 15794
15821 15812 15803
| PLC MENU REV BIT
[MOV K0 D68]* 15617 15655 15669 15687
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
M770 M1282
M5982 | PLC MENU REV. IN
15618 MENU3 15621 15661 15694 15727
C-CW.B 15760 15775 15818
14480 14634
M1313 L17
M5983 | PLC MENU REV. IN
15632 15673 15697 15730
C-ON.L 1ST 15778 15791 15800
5553 3835
M7756 L18 M6450
C2_RDY 2ND SSC.P
23027 3841
M6451
SSCT.P
M1284
M5984 | PLC MENU REV. IN
15635 15664 15676 15700
CCCW.B 15733 15781
14695
M131
M5985 | PLC MENU REV. IN
15638 15679 15703 15736
MLK:L 15783
15326
M129
M5986 | PLC MENU REV. IN
15641 15682 15706 15739
LAMP:L
15368

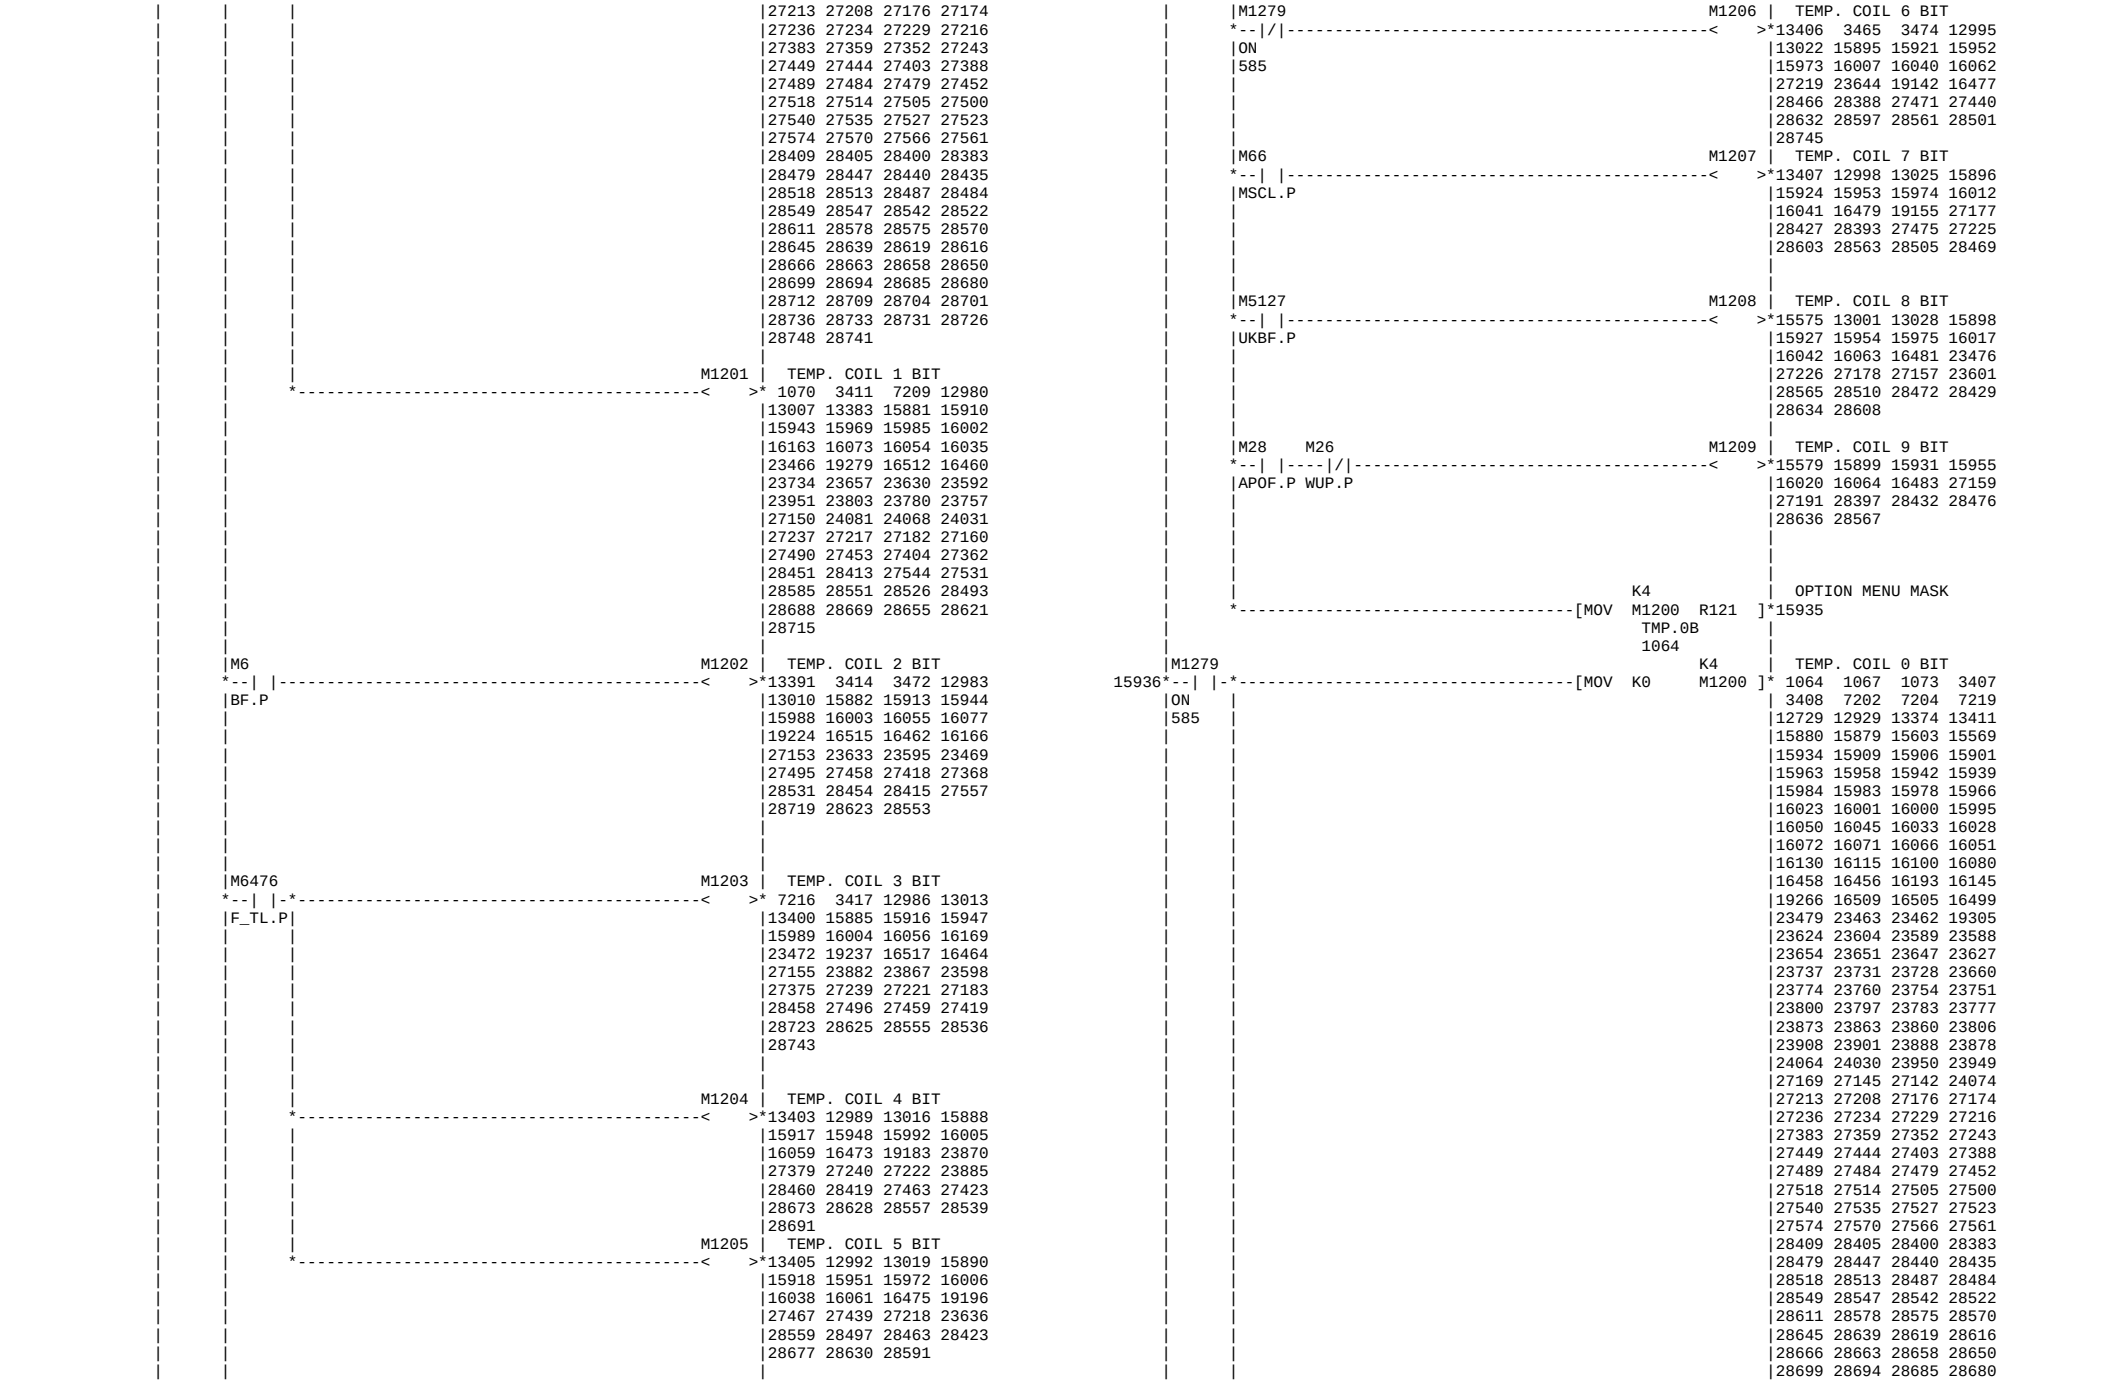

M1286
M5987 | PLC MENU REV. IN
*--| |-----------<
>*15644 15742
SPJG.B
14751
M128
M5988 | PLC MENU REV. IN
*--| |-----------<
>*15647 15709 15745
BRCL:L
15461
X23B
M5989 | PLC MENU REV. IN
*--| |-----------<
>*15650 15712
TPSL.N
K3
| PLC MENU REV BIT
*----------[WAND M5980 H3FF D68]*15617 15655 15669 15687
PCMN1
15614
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
M771 M126
M5982 | PLC MENU REV. IN
15656*--| |-*--| |-*-----------<
>*15621 15661 15694 15727
MENU4 |TUCL:L|
14484 |15304 |
L37
15760 15775 15818
--| |-
CMP.UC
54
M5820
M5984 | PLC MENU REV. IN
*--| |-----------<
>*15635 15664 15676 15700
511MX
15733 15781
4131
K3
| PLC MENU REV BIT
*----------[WAND M5980 H3FF D68]*15617 15655 15669 15687
PCMN1
15614
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
M772 M133
M5983 | PLC MENU REV. IN
15670*--| |-*--| |-----------<
>*15632 15673 15697 15730
MENU5 |OPS:L
14488 |15313
15778 15791 15800
M132
M5984 | PLC MENU REV. IN
*--| |-----------<
>*15635 15664 15676 15700
DRN:L
15319
M131
M5985 | PLC MENU REV. IN
*--| |-----------<
>*15638 15679 15703 15736
MLK:L
15783
15326
M129
M5986 | PLC MENU REV. IN
*--| |-----------<
>*15641 15682 15706 15739
LAMP:L
15368
K3
| PLC MENU REV BIT
*----------[WAND M5980 H3FF D68]*15617 15655 15669 15687
PCMN1
15614
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
M773 M1125
M5981 | PLC MENU REV. IN
15688*--| |-*--| |-----------<
>*15691 15724 15757 15772
MENU6 |HILT.M
14492 |1442
15809
X25B
M5982 | PLC MENU REV. IN
*--| |-----------<
>*15621 15661 15694 15727
SPRO.N
15760 15775 15818
M133
M5983 | PLC MENU REV. IN
*--| |-----------<
>*15632 15673 15697 15730
OPS:L
15313
15778 15791 15800

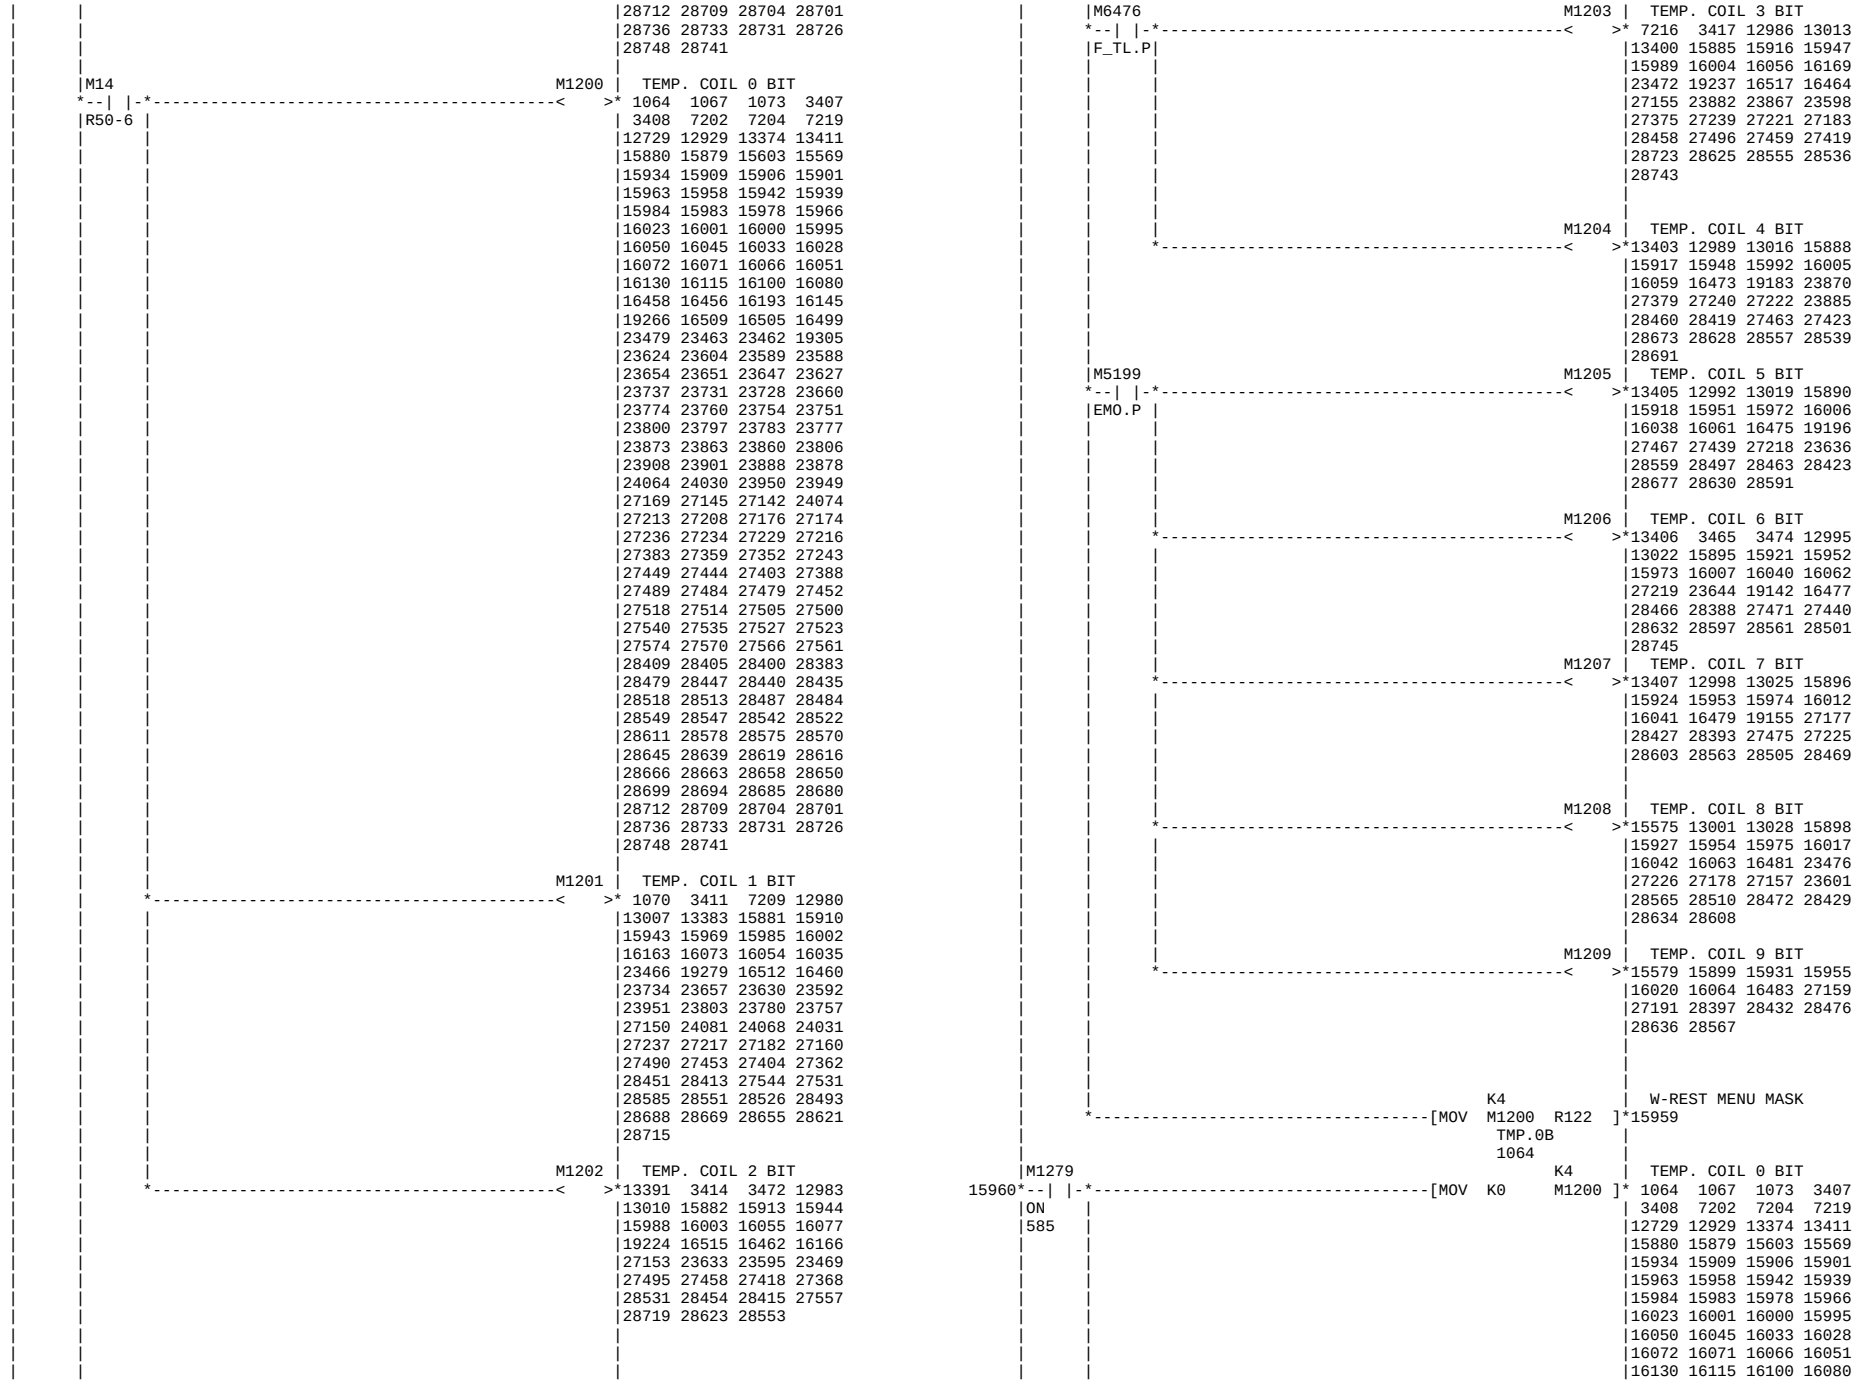

M132
M5984 | PLC MENU REV. IN
*--| |-----------<
>*15635 15664 15676 15700
DRN:L
15733 15781
15319
M131
M5985 | PLC MENU REV. IN
*--| |-----------<
>*15638 15679 15703 15736
MLK:L
15783
15326
M129
M5986 | PLC MENU REV. IN
*--| |-----------<
>*15641 15682 15706 15739
LAMP:L
15368
M128
M5988 | PLC MENU REV. IN
*--| |-----------<
>*15647 15709 15745
BRCL:L
15461
X25C
M5989 | PLC MENU REV. IN
*--| |-----------<
>*15650 15712
REST.N
K3
| PLC MENU REV BIT
*----------[WAND M5980 H3FF D68]*15617 15655 15669 15687
PCMN1
15614
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
M774 Y257
M5980 | PLC MENU REV. IN
15718*--| |-*--| |-----------<
>*15614 15653 15667 15685
MENU7 |BDT1.N
14496 |15489
15715 15721 15748 15754
15763 15769 15785 15794
15821 15812 15803
Y258
M5981 | PLC MENU REV. IN
*--| |-----------<
>*15691 15724 15757 15772
BDT2.N
15809
15495
Y259
M5982 | PLC MENU REV. IN
*--| |-----------<
>*15621 15661 15694 15727
BDT3.N
15760 15775 15818
15501
Y25A
M5983 | PLC MENU REV. IN
*--| |-----------<
>*15632 15673 15697 15730
BDT4.N
15778 15791 15800
15507
Y25B
M5984 | PLC MENU REV. IN
*--| |-----------<
>*15635 15664 15676 15700
BDT5.N
15733 15781
15513
Y25C
M5985 | PLC MENU REV. IN
*--| |-----------<
>*15638 15679 15703 15736
BDT6.N
15783
15519
Y25D
M5986 | PLC MENU REV. IN
*--| |-----------<
>*15641 15682 15706 15739
BDT7.N
15525
Y25E
M5987 | PLC MENU REV. IN
*--| |-----------<
>*15644 15742
BDT8.N
15531
Y25F
M5988 | PLC MENU REV. IN
*--| |-----------<
>*15647 15709 15745
BDT9.N
15537
K3
| PLC MENU REV BIT
*----------[WAND M5980 H3FF D68]*15617 15655 15669 15687
PCMN1
15614
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874

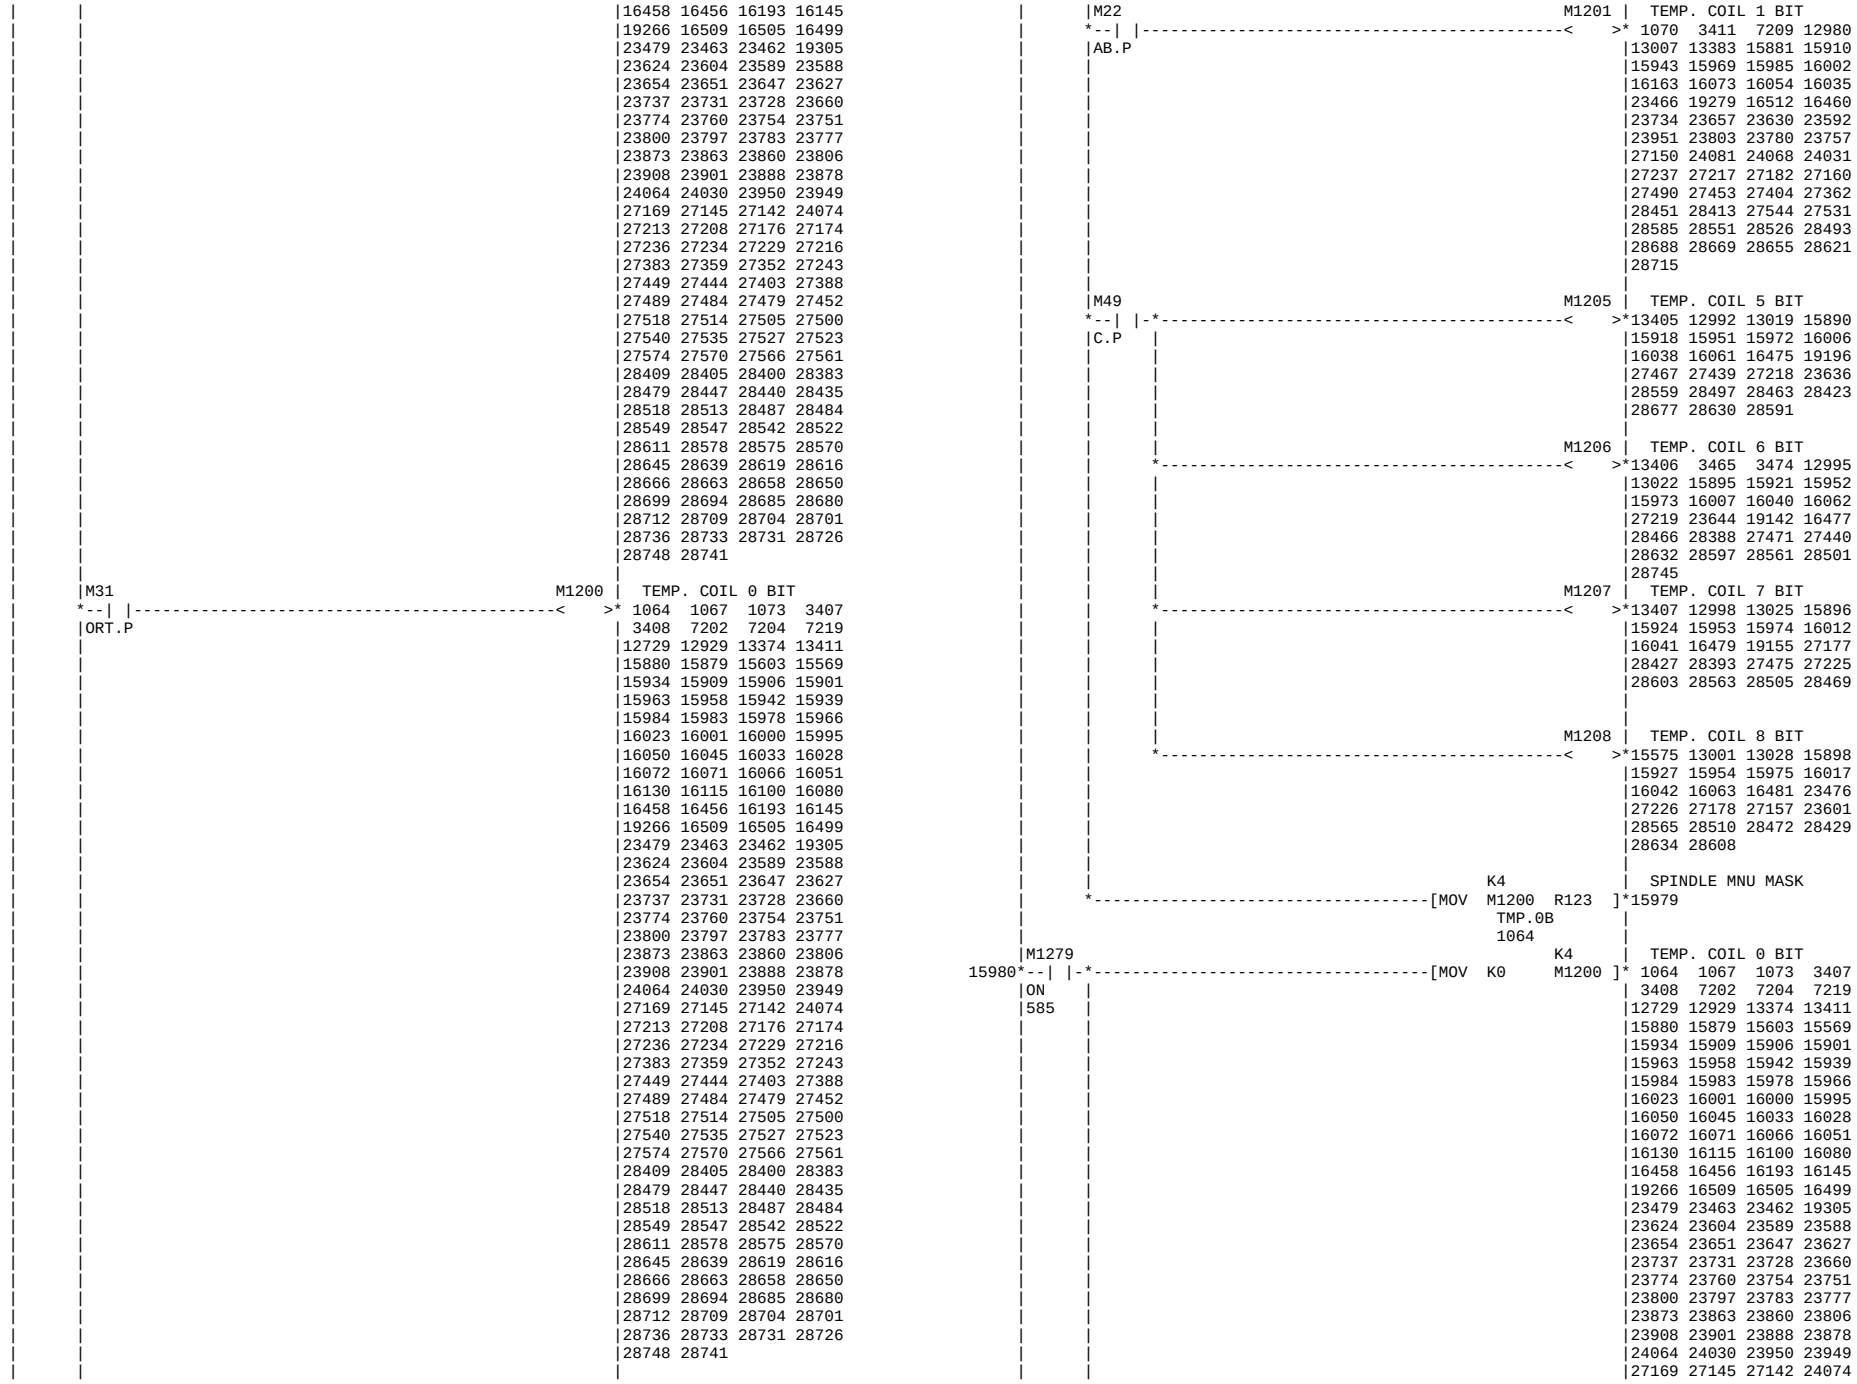

M775 M123 M5980 | PLC MENU REV. IN
15751 | | | 15614 15653 15667 15685
MENU8 | TDR:L | 15715 15721 15748 15754
14503 | 15455 | 15763 15769 15785 15794
| | 15821 15812 15803
M122 M5981 | PLC MENU REV. IN
| | 15691 15724 15757 15772
TDF:L | 15809
15451 |
M121 M5982 | PLC MENU REV. IN
| | 15621 15661 15694 15727
TSET:L | 15760 15775 15818
23382 |
K3 | PLC MENU REV BIT
[WAND M5980 H3FF D68] | 15617 15655 15669 15687
PCMN1 | 15717 15750 15765 15787
15614 | 15796 15805 15814 15823
| 15839 15835 15831 15827
| 15855 15851 15847 15843
| 15871 15867 15863 15859
| 15874
M776 M783 M5980 | PLC MENU REV. IN
15766 | | | 15614 15653 15667 15685
MENUSI | SIMRST | 15715 15721 15748 15754
14511 | 14601 | 15763 15769 15785 15794
| | 15821 15812 15803
M5993 M5981 | PLC MENU REV. IN
| | 15691 15724 15757 15772
SIMST. | 15809
15576 |
M136 M5982 | PLC MENU REV. IN
| | 15621 15661 15694 15727
SIMSBK | 15760 15775 15818
23620 |
M786 M5983 | PLC MENU REV. IN
| | 15632 15673 15697 15730
SIMSP | 15778 15791 15800
14680 |
M787 M5984 | PLC MENU REV. IN
| | 15635 15664 15676 15700
SIMUP | 15733 15781
14712 |
M5985 | PLC MENU REV. IN
| | 15638 15679 15703 15736
| 15783
|
K3 | PLC MENU REV BIT
[WAND M5980 H3FF D68] | 15617 15655 15669 15687
PCMN1 | 15717 15750 15765 15787
15614 | 15796 15805 15814 15823
| 15839 15835 15831 15827
| 15855 15851 15847 15843
| 15871 15867 15863 15859
| 15874
M986 M1120 M5983 | PLC MENU REV. IN
15788 | | | 15632 15673 15697 15730
MENU15 | Z-OFFL | 15778 15791 15800
14523 | 23387 |
K3 | PLC MENU REV BIT
[WAND M5980 H3FF D68] | 15617 15655 15669 15687
PCMN1 | 15717 15750 15765 15787
15614 | 15796 15805 15814 15823
| 15839 15835 15831 15827
| 15855 15851 15847 15843
| 15871 15867 15863 15859
| 15874
M987 M1121 M5983 | PLC MENU REV. IN
15797 | | | 15632 15673 15697 15730
MENU16 | C-OFFL | 15778 15791 15800
14527 | 23392 |
K3 | PLC MENU REV BIT
[WAND M5980 H3FF D68] | 15617 15655 15669 15687
PCMN1 | 15717 15750 15765 15787
15614 | 15796 15805 15814 15823
| 15839 15835 15831 15827
| 15855 15851 15847 15843
| 15871 15867 15863 15859
| 15874
M992 M1122 M5981 | PLC MENU REV. IN
15806 | | | 15691 15724 15757 15772
MENU17 | M-MES | 15809
14531 | 23397 |
K3 | PLC MENU REV BIT
[WAND M5980 H3FF D68] | 15617 15655 15669 15687
PCMN1 | 15717 15750 15765 15787
15614 | 15796 15805 15814 15823
| 15839 15835 15831 15827
| 15855 15851 15847 15843
| 15871 15867 15863 15859
| 15874
M7235 M1120 M5982 | PLC MENU REV. IN
15815 | | | 15621 15661 15694 15727
MENU18 | Z-OFFL | 15760 15775 15818
14535 | 23387 |
K3 | PLC MENU REV BIT
[WAND M5980 H3FF D68] | 15617 15655 15669 15687
PCMN1 | 15717 15750 15765 15787
15614 | 15796 15805 15814 15823
| 15839 15835 15831 15827
| 15855 15851 15847 15843
| 15871 15867 15863 15859
| 15874
M6920 K3 | PLC MENU REV BIT
15824 | | [MOV M7820 D68] | 15617 15655 15669 15687
M-M300 | M-MN00 | 15717 15750 15765 15787
14539 | | 15796 15805 15814 15823
| | 15839 15835 15831 15827
| | 15855 15851 15847 15843
| | 15871 15867 15863 15859
| | 15874
M6921 K3 | PLC MENU REV BIT
15828 | | [MOV M7832 D68] | 15617 15655 15669 15687
M-M301 | PCFWME | 15717 15750 15765 15787
14543 | 7626 | 15796 15805 15814 15823
| | 15839 15835 15831 15827
| | 15855 15851 15847 15843
| | 15871 15867 15863 15859
| | 15874
M6922 K3 | PLC MENU REV BIT
15832 | | [MOV M7844 D68] | 15617 15655 15669 15687
M-M302 | M-MN20 | 15717 15750 15765 15787
14547 | 27746 | 15796 15805 15814 15823
| | 15839 15835 15831 15827
| | 15855 15851 15847 15843
| | 15871 15867 15863 15859
| | 15874
M6923 K3 | PLC MENU REV BIT
15836 | | [MOV M7856 D68] | 15617 15655 15669 15687
M-M303 | OTAMEN | 15717 15750 15765 15787
14551 | 5808 | 15796 15805 15814 15823
| | 15839 15835 15831 15827
| | 15855 15851 15847 15843
| | 15871 15867 15863 15859
| | 15874
M6924 K3 | PLC MENU REV BIT
15840 | | [MOV M7868 D68] | 15617 15655 15669 15687
M-M304 | M-MN40 | 15717 15750 15765 15787
14555 | | 15796 15805 15814 15823
| | 15839 15835 15831 15827
| | 15855 15851 15847 15843
| | 15871 15867 15863 15859
| | 15874
M6925 K3 | PLC MENU REV BIT
15844 | | [MOV M7880 D68] | 15617 15655 15669 15687
M-M305 | CHEXTM | 15717 15750 15765 15787
14559 | 4531 | 15796 15805 15814 15823

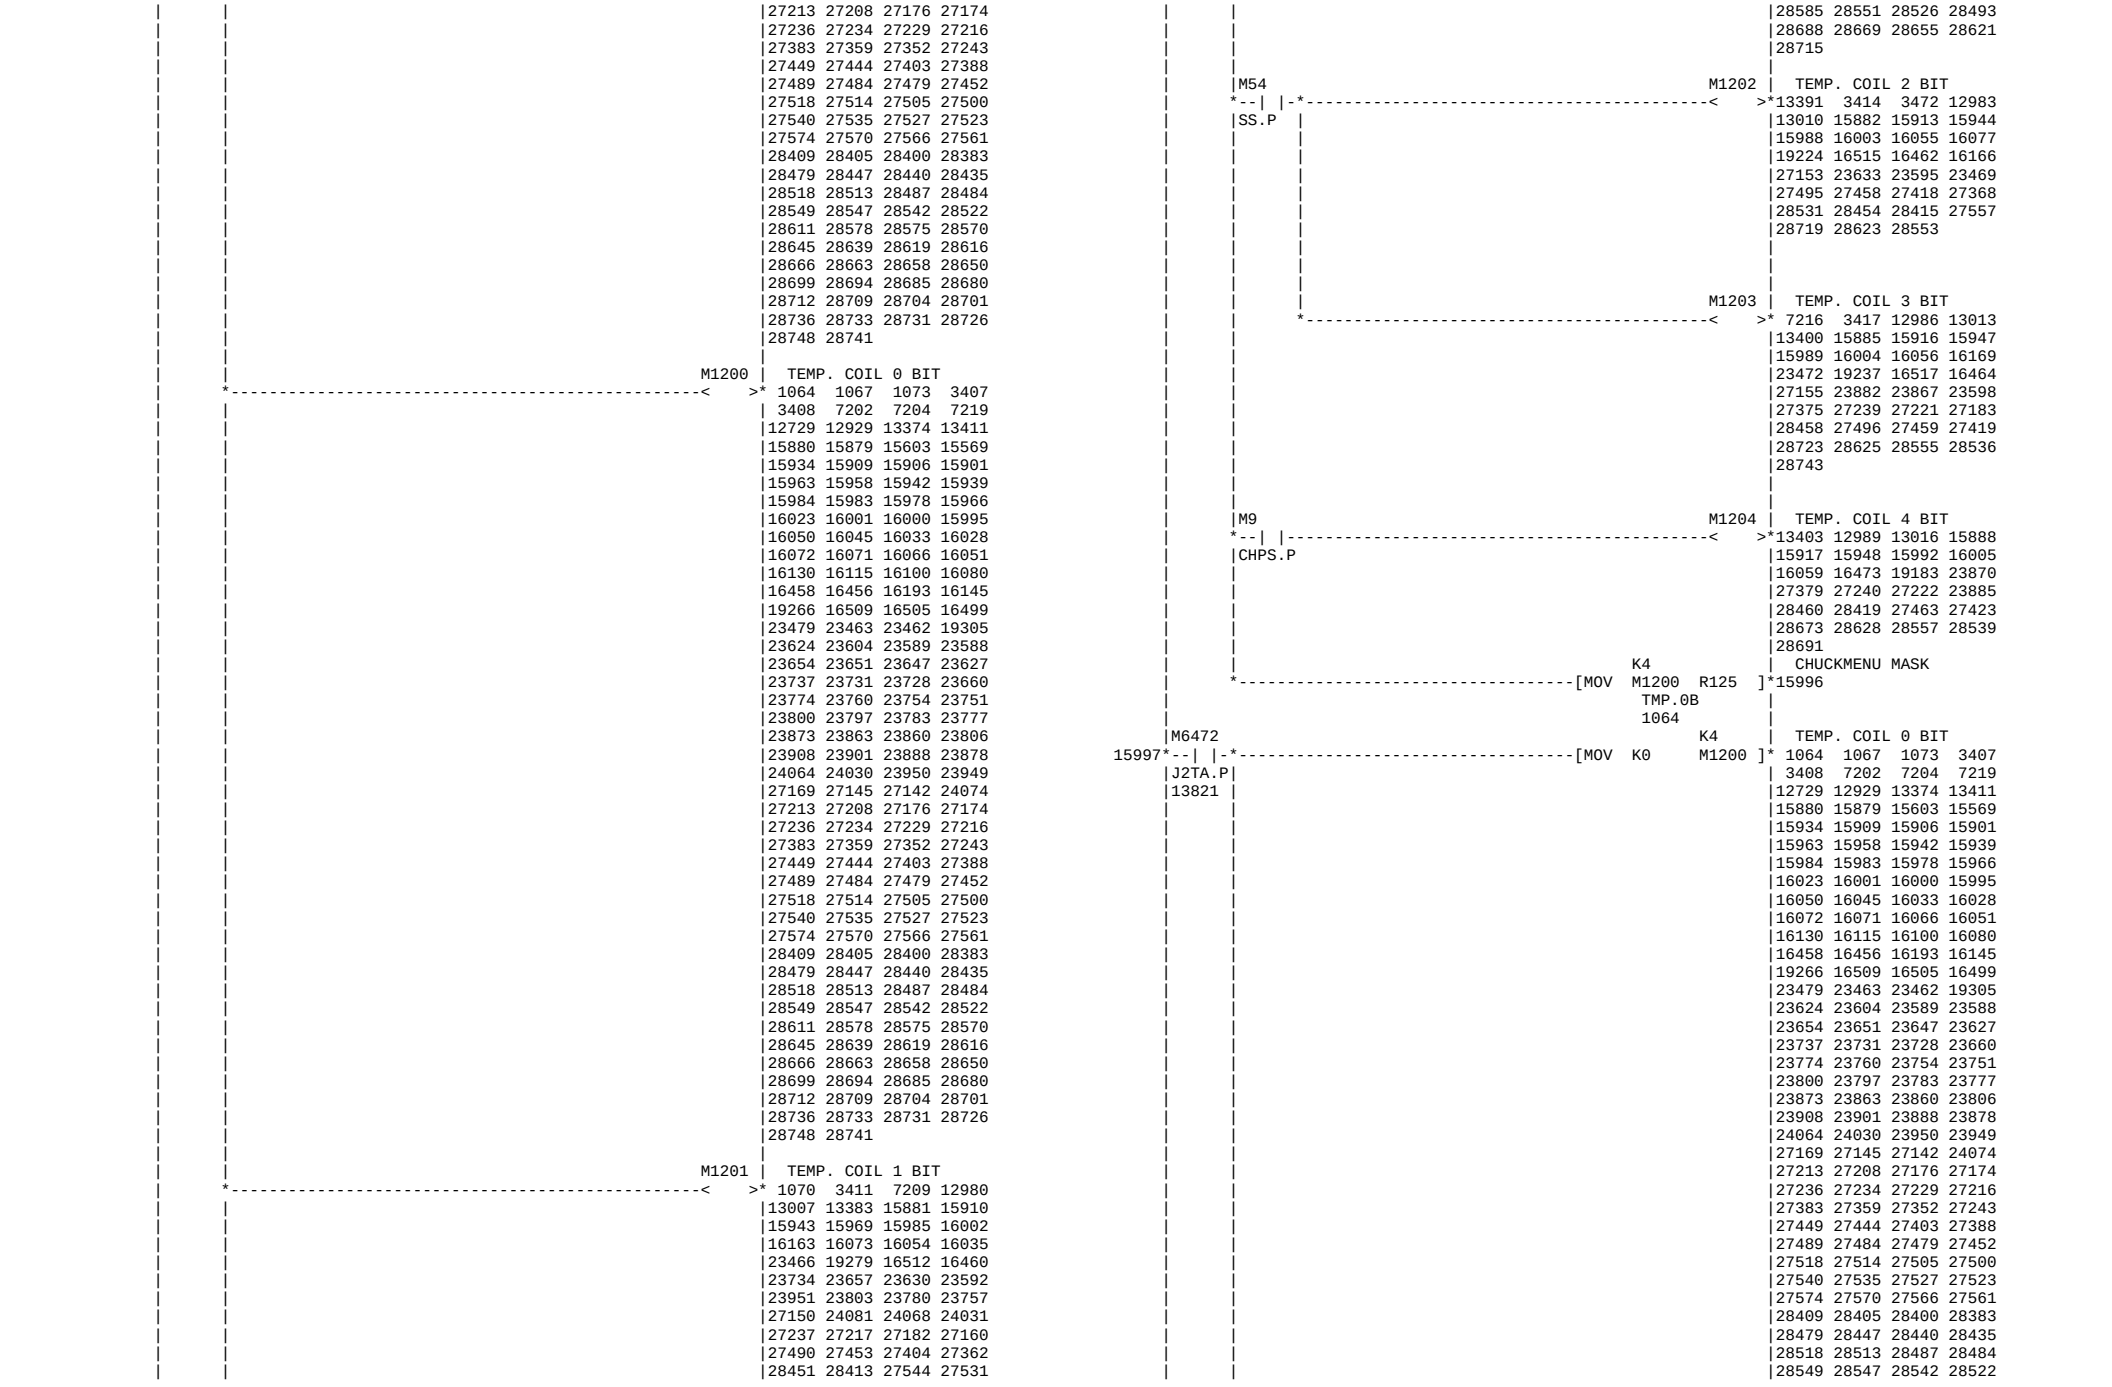

M6926 K3 PLC MENU REV BIT
15848 M-M306 14563 MOV M7892 D68 M-MN60
M6927 K3 PLC MENU REV BIT
15852 M-M307 14567 MOV M7904 D68 M-MN70 10007
M6928 K3 PLC MENU REV BIT
15856 M-M308 14571 MOV M7916 D68 SSOTM 5812
M6929 K3 PLC MENU REV BIT
15860 M-M309 14575 MOV M7928 D68 COMPUL 2071
M6930 K3 PLC MENU REV BIT
15864 M-M310 14579 MOV M7940 D68 CNTMAN 7663
M6931 K3 PLC MENU REV BIT
15868 M-M311 MOV M7952 D68 C-M110
M1279 MANU LAMP
15872 ON 585 MOV D68 R17 MN REV 15617
M1279 K4 TEMP. COIL 0 BIT
15876 ON 585 MOV K0 M1200
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
15617 15655 15669 15687
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
15617 15655 15669 15687
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
15617 15655 15669 15687
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
15617 15655 15669 15687
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
15617 15655 15669 15687
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
15617 15655 15669 15687
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
15617 15655 15669 15687
15717 15750 15765 15787
15796 15805 15814 15823
15839 15835 15831 15827
15855 15851 15847 15843
15871 15867 15863 15859
15874
15875
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M1200 TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M1201 TEMP. COIL 1 BIT
1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757

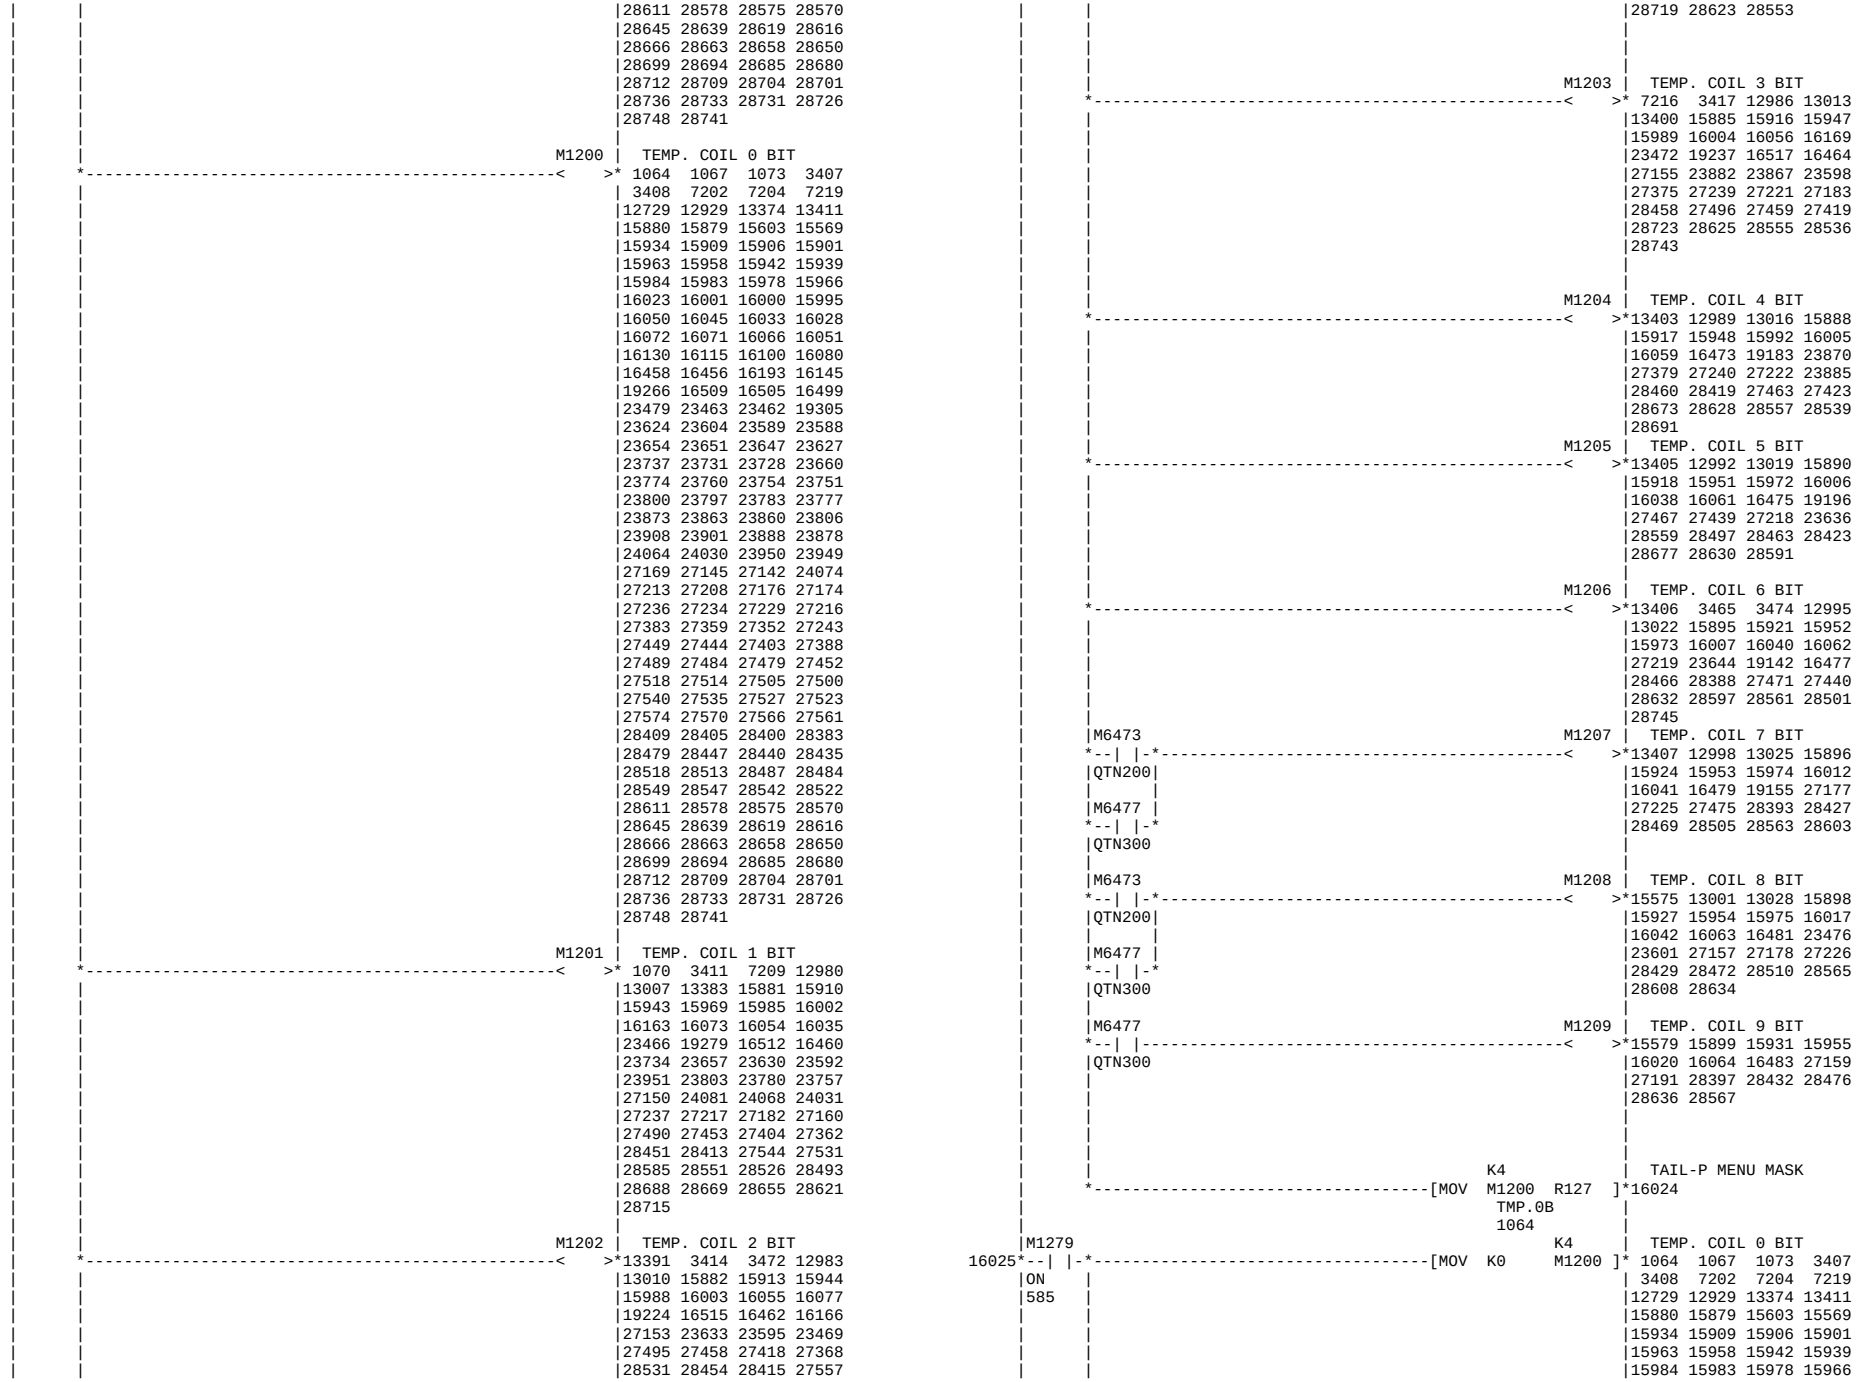

27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
M1202 | TEMP. COIL 2 BIT
13391 3414 3472 12983
13010 15882 15913 15944
15988 16003 16055 16077
19224 16515 16462 16166
27153 23633 23595 23469
27495 27458 27418 27368
28531 28454 28415 27557
28719 28623 28553
M6472
M1203 | TEMP. COIL 3 BIT
7216 3417 12986 13013
J2TA.P
13400 15885 15916 15947
13821
15989 16004 16056 16169
23472 19237 16517 16464
27155 23882 23867 23598
27375 27239 27221 27183
28458 27496 27459 27419
28723 28625 28555 28536
28743
M54
M1204 | TEMP. COIL 4 BIT
13403 12989 13016 15888
SS.P
15917 15948 15992 16005
16059 16473 19183 23870
27379 27240 27222 23885
28460 28419 27463 27423
28673 28628 28557 28539
28691
M1205 | TEMP. COIL 5 BIT
13405 12992 13019 15890
15918 15951 15972 16006
16038 16061 16475 19196
27467 27439 27218 23636
28559 28497 28463 28423
28677 28630 28591
M19
M1206 | TEMP. COIL 6 BIT
13406 3465 3474 12995
FD.P
13022 15895 15921 15952
15973 16007 16040 16062
27219 23644 19142 16477
28466 28388 27471 27440
28632 28597 28561 28501
28745
M18
M1207 | TEMP. COIL 7 BIT
13407 12998 13025 15896
TOPD.P
15924 15953 15974 16012
16041 16479 19155 27177
28427 28393 27475 27225
28603 28563 28505 28469
M1208 | TEMP. COIL 8 BIT
15575 13001 13028 15898
15927 15954 15975 16017
16042 16063 16481 23476
27226 27178 27157 23601
28565 28510 28472 28429
28634 28608
M1209 | TEMP. COIL 9 BIT
15579 15899 15931 15955
16020 16064 16483 27159
27191 28397 28432 28476
28636 28567
K4
MAIN MENU MASK
MOV M1200 R120
TMP.0B
1064
15902
M1279
K4
TEMP. COIL 0 BIT
15903
MOV K0 M1200
1064 1067 1073 3407
ON
3408 7202 7204 7219
585
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M27
M1200 | TEMP. COIL 0 BIT
1064 1067 1073 3407
PCT.P
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074

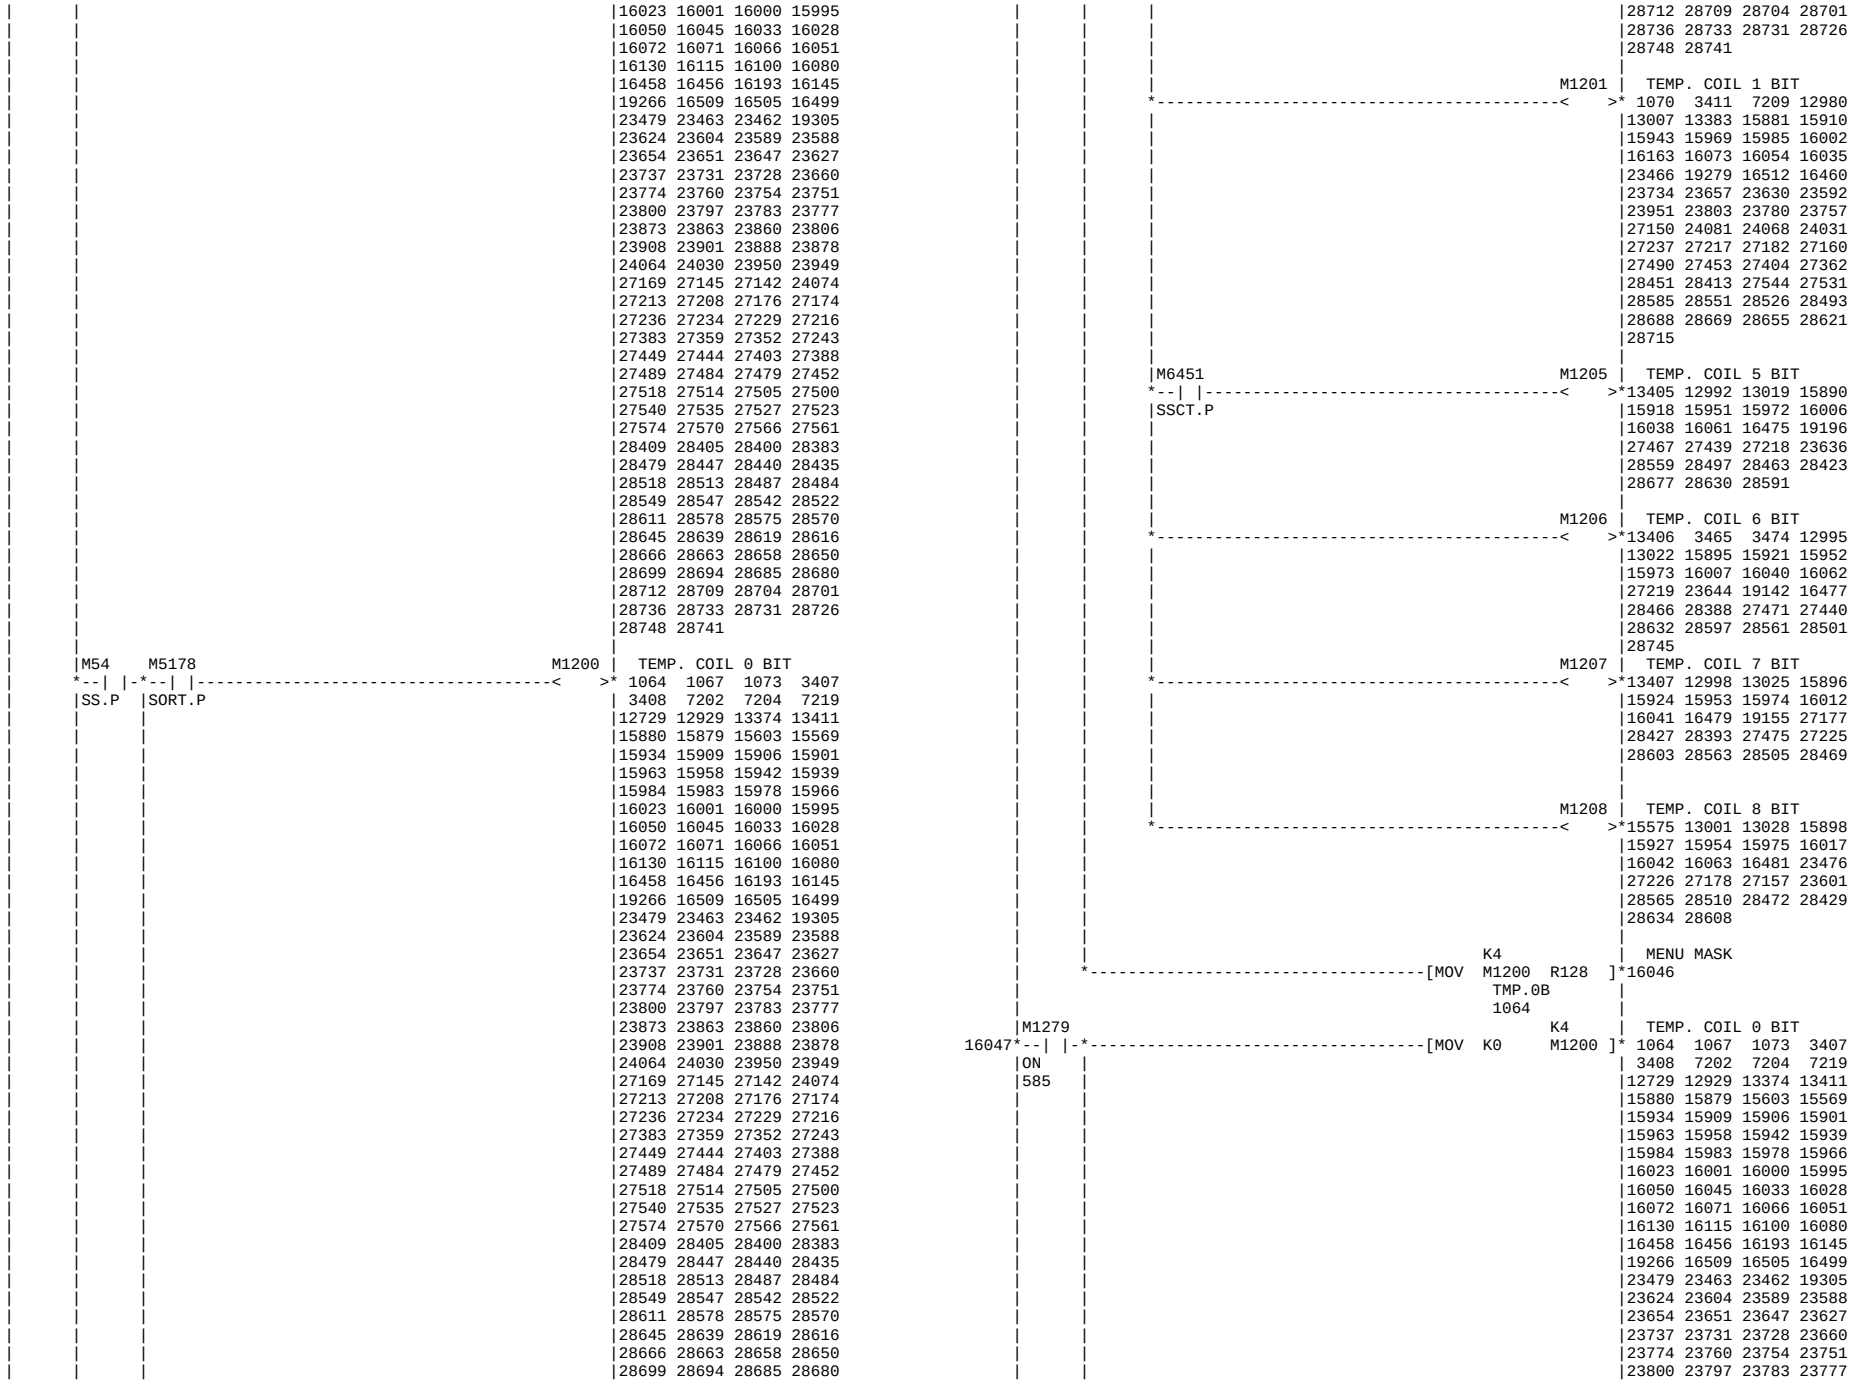

|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
M1201 | TEMP. COIL 1 BIT
>* 1070 3411 7209 12980
|13007 13383 15881 15910
|15943 15969 15985 16002
|16163 16073 16054 16035
|23466 19279 16512 16460
|23734 23657 23630 23592
|23951 23803 23780 23757
|27150 24081 24068 24031
|27237 27217 27182 27160
|27490 27453 27404 27362
|28451 28413 27544 27531
|28585 28551 28526 28493
|28688 28669 28655 28621
|28715
M6
M1202 | TEMP. COIL 2 BIT
>*13391 3414 3472 12983
BF.P
|13010 15882 15913 15944
|15988 16003 16055 16077
|19224 16515 16462 16166
|27153 23633 23595 23469
|27495 27458 27418 27368
|28531 28454 28415 27557
|28719 28623 28553
M6476
M1203 | TEMP. COIL 3 BIT
>* 7216 3417 12986 13013
F_TL.P|
|13400 15885 15916 15947
|15989 16004 16056 16169
|23472 19237 16517 16464
|27155 23882 23867 23598
|27375 27239 27221 27183
|28458 27496 27459 27419
|28723 28625 28555 28536
|28743
M1204 | TEMP. COIL 4 BIT
>*13403 12989 13016 15888
|15917 15948 15992 16005
|16059 16473 19183 23870
|27379 27240 27222 23885
|28460 28419 27463 27423
|28673 28628 28557 28539
|28691
M1205 | TEMP. COIL 5 BIT
>*13405 12992 13019 15890
|15918 15951 15972 16006
|16038 16061 16475 19196
|27467 27439 27218 23636
|28559 28497 28463 28423
|28677 28630 28591
M1279
M1206 | TEMP. COIL 6 BIT
>*13406 3465 3474 12995
ON
|13022 15895 15921 15952
585
|15973 16007 16040 16062
|27219 23644 19142 16477
|28466 28388 27471 27440
|28632 28597 28561 28501
|28745
M66
M1207 | TEMP. COIL 7 BIT
>*13407 12998 13025 15896
MSCL.P
|15924 15953 15974 16012
|16041 16479 19155 27177
|28427 28393 27475 27225
|28603 28563 28505 28469
M5127
M1208 | TEMP. COIL 8 BIT
>*15575 13001 13028 15898
UKBF.P
|15927 15954 15975 16017
|16042 16063 16481 23476
|27226 27178 27157 23601
|28565 28510 28472 28429
|28634 28608
M28 M26
M1209 | TEMP. COIL 9 BIT
>*15579 15899 15931 15955
APOF.P WUP.P
|16020 16064 16483 27159
|27191 28397 28432 28476
|28636 28567
K4
| OPTION MENU MASK
[MOV M1200 R121]*15935
TMP.0B
1064
M1279
K4
M1200]* TEMP. COIL 0 BIT
15936*--| |-*----------[MOV K0
ON
585
| 1064 1067 1073 3407
| 3408 7202 7204 7219
|12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680

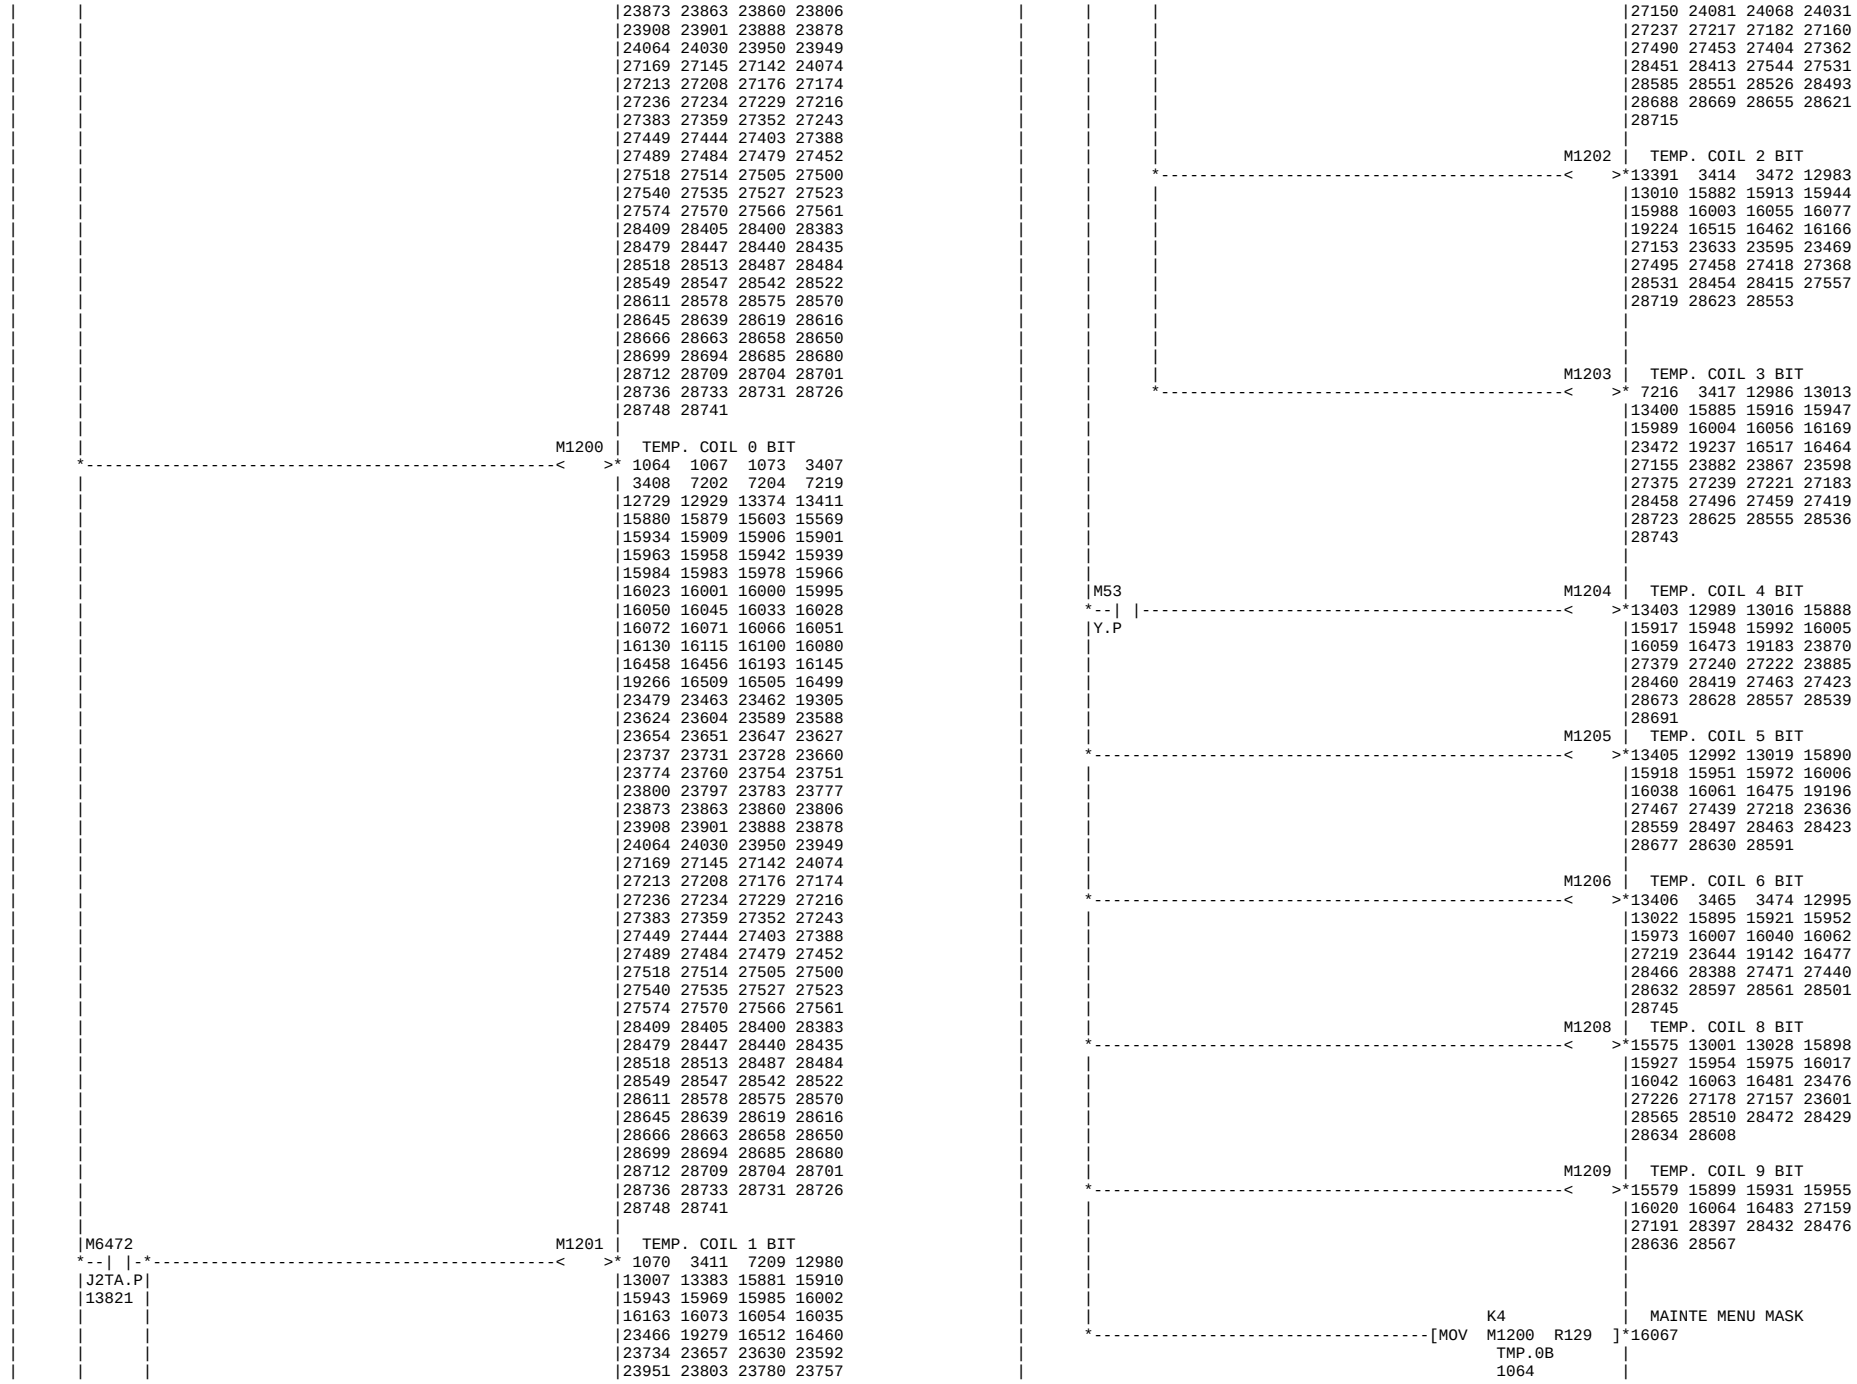

M14
R50-6
M1200 | TEMP. COIL 0 BIT
>* 1064 1067 1073 3407
| 3408 7202 7204 7219
|12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
M1201 | TEMP. COIL 1 BIT
>* 1070 3411 7209 12980
|13007 13383 15881 15910
|15943 15969 15985 16002
|16163 16073 16054 16035
|23466 19279 16512 16460
|23734 23657 23630 23592
|23951 23803 23780 23757
|27150 24081 24068 24031
|27237 27217 27182 27160
|27490 27453 27404 27362
|28451 28413 27544 27531
|28585 28551 28526 28493
|28688 28669 28655 28621
|28715
M1202 | TEMP. COIL 2 BIT
>*13391 3414 3472 12983
|13010 15882 15913 15944
|15988 16003 16055 16077
|19224 16515 16462 16166
|27153 23633 23595 23469
|27495 27458 27418 27368
|28531 28454 28415 27557
|28719 28623 28553
M6476
F_TL.P
M5199
EMO.P
M1203 | TEMP. COIL 3 BIT
>* 7216 3417 12986 13013
|13400 15885 15916 15947
|15989 16004 16056 16169
|23472 19237 16517 16464
|27155 23882 23867 23598
|27375 27239 27221 27183
|28458 27496 27459 27419
|28723 28625 28555 28536
|28743
M1204 | TEMP. COIL 4 BIT
>*13403 12989 13016 15888
|15917 15948 15992 16005
|16059 16473 19183 23870
|27379 27240 27222 23885
|28460 28419 27463 27423
|28673 28628 28557 28539
|28691
M1205 | TEMP. COIL 5 BIT
>*13405 12992 13019 15890
|15918 15951 15972 16006
|16038 16061 16475 19196
|27467 27439 27218 23636
|28559 28497 28463 28423
|28677 28630 28591
M1206 | TEMP. COIL 6 BIT
>*13406 3465 3474 12995
|13022 15895 15921 15952
|15973 16007 16040 16062
|27219 23644 19142 16477
|28466 28388 27471 27440
|28632 28597 28561 28501
|28745
M1207 | TEMP. COIL 7 BIT
>*13407 12998 13025 15896
|15924 15953 15974 16012
|16041 16479 19155 27177
|28427 28393 27475 27225
|28603 28563 28505 28469
M1208 | TEMP. COIL 8 BIT
>*15575 13001 13028 15898
|15927 15954 15975 16017
|16042 16063 16481 23476
|27226 27178 27157 23601
|28565 28510 28472 28429
|28634 28608
M1209 | TEMP. COIL 9 BIT
>*15579 15899 15931 15955
|16020 16064 16483 27159
|27191 28397 28432 28476
|28636 28567
K4 | W-REST MENU MASK
[MOV M1200 R122]*15959
TMP.0B
1064
M1279
ON
585
15960
[MOV K0 K4 M1200]* 1064 1067 1073 3407
| 3408 7202 7204 7219
|12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080

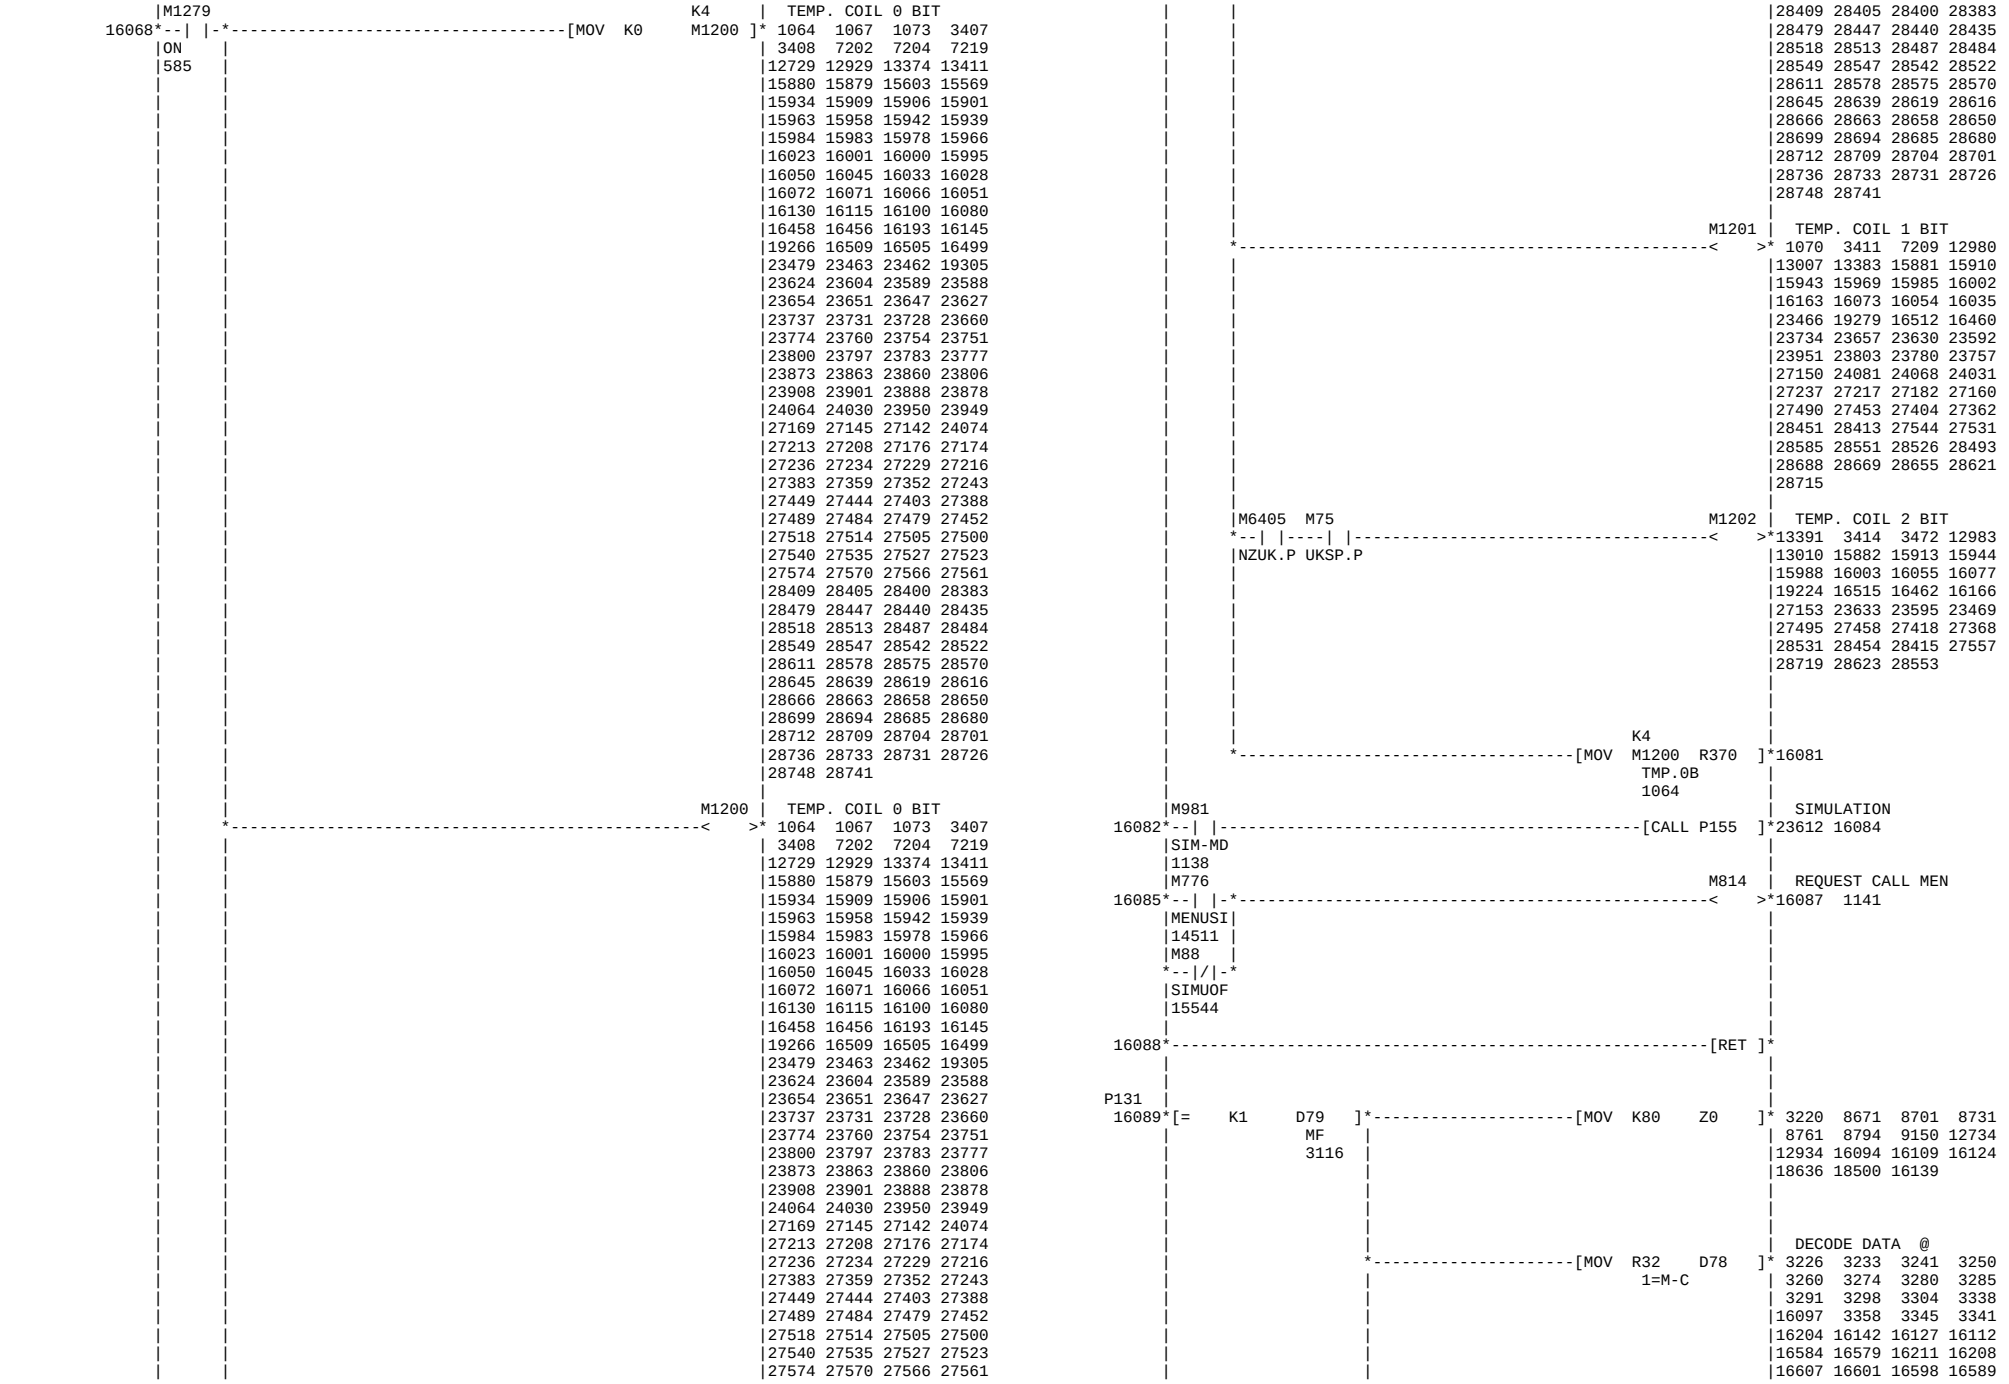

M31
ORT.P
M1200
TEMP. COIL 0 BIT
M22
AB.P
M1201
TEMP. COIL 1 BIT
M49
C.P
M1205
TEMP. COIL 5 BIT
M1206
TEMP. COIL 6 BIT
M1207
TEMP. COIL 7 BIT
M1208
TEMP. COIL 8 BIT
K4
SPINDLE MNU MASK
MOV M1200 R123
TMP.0B
1064
15979
M1279
ON
585
15980
MOV K0 M1200
K4
TEMP. COIL 0 BIT

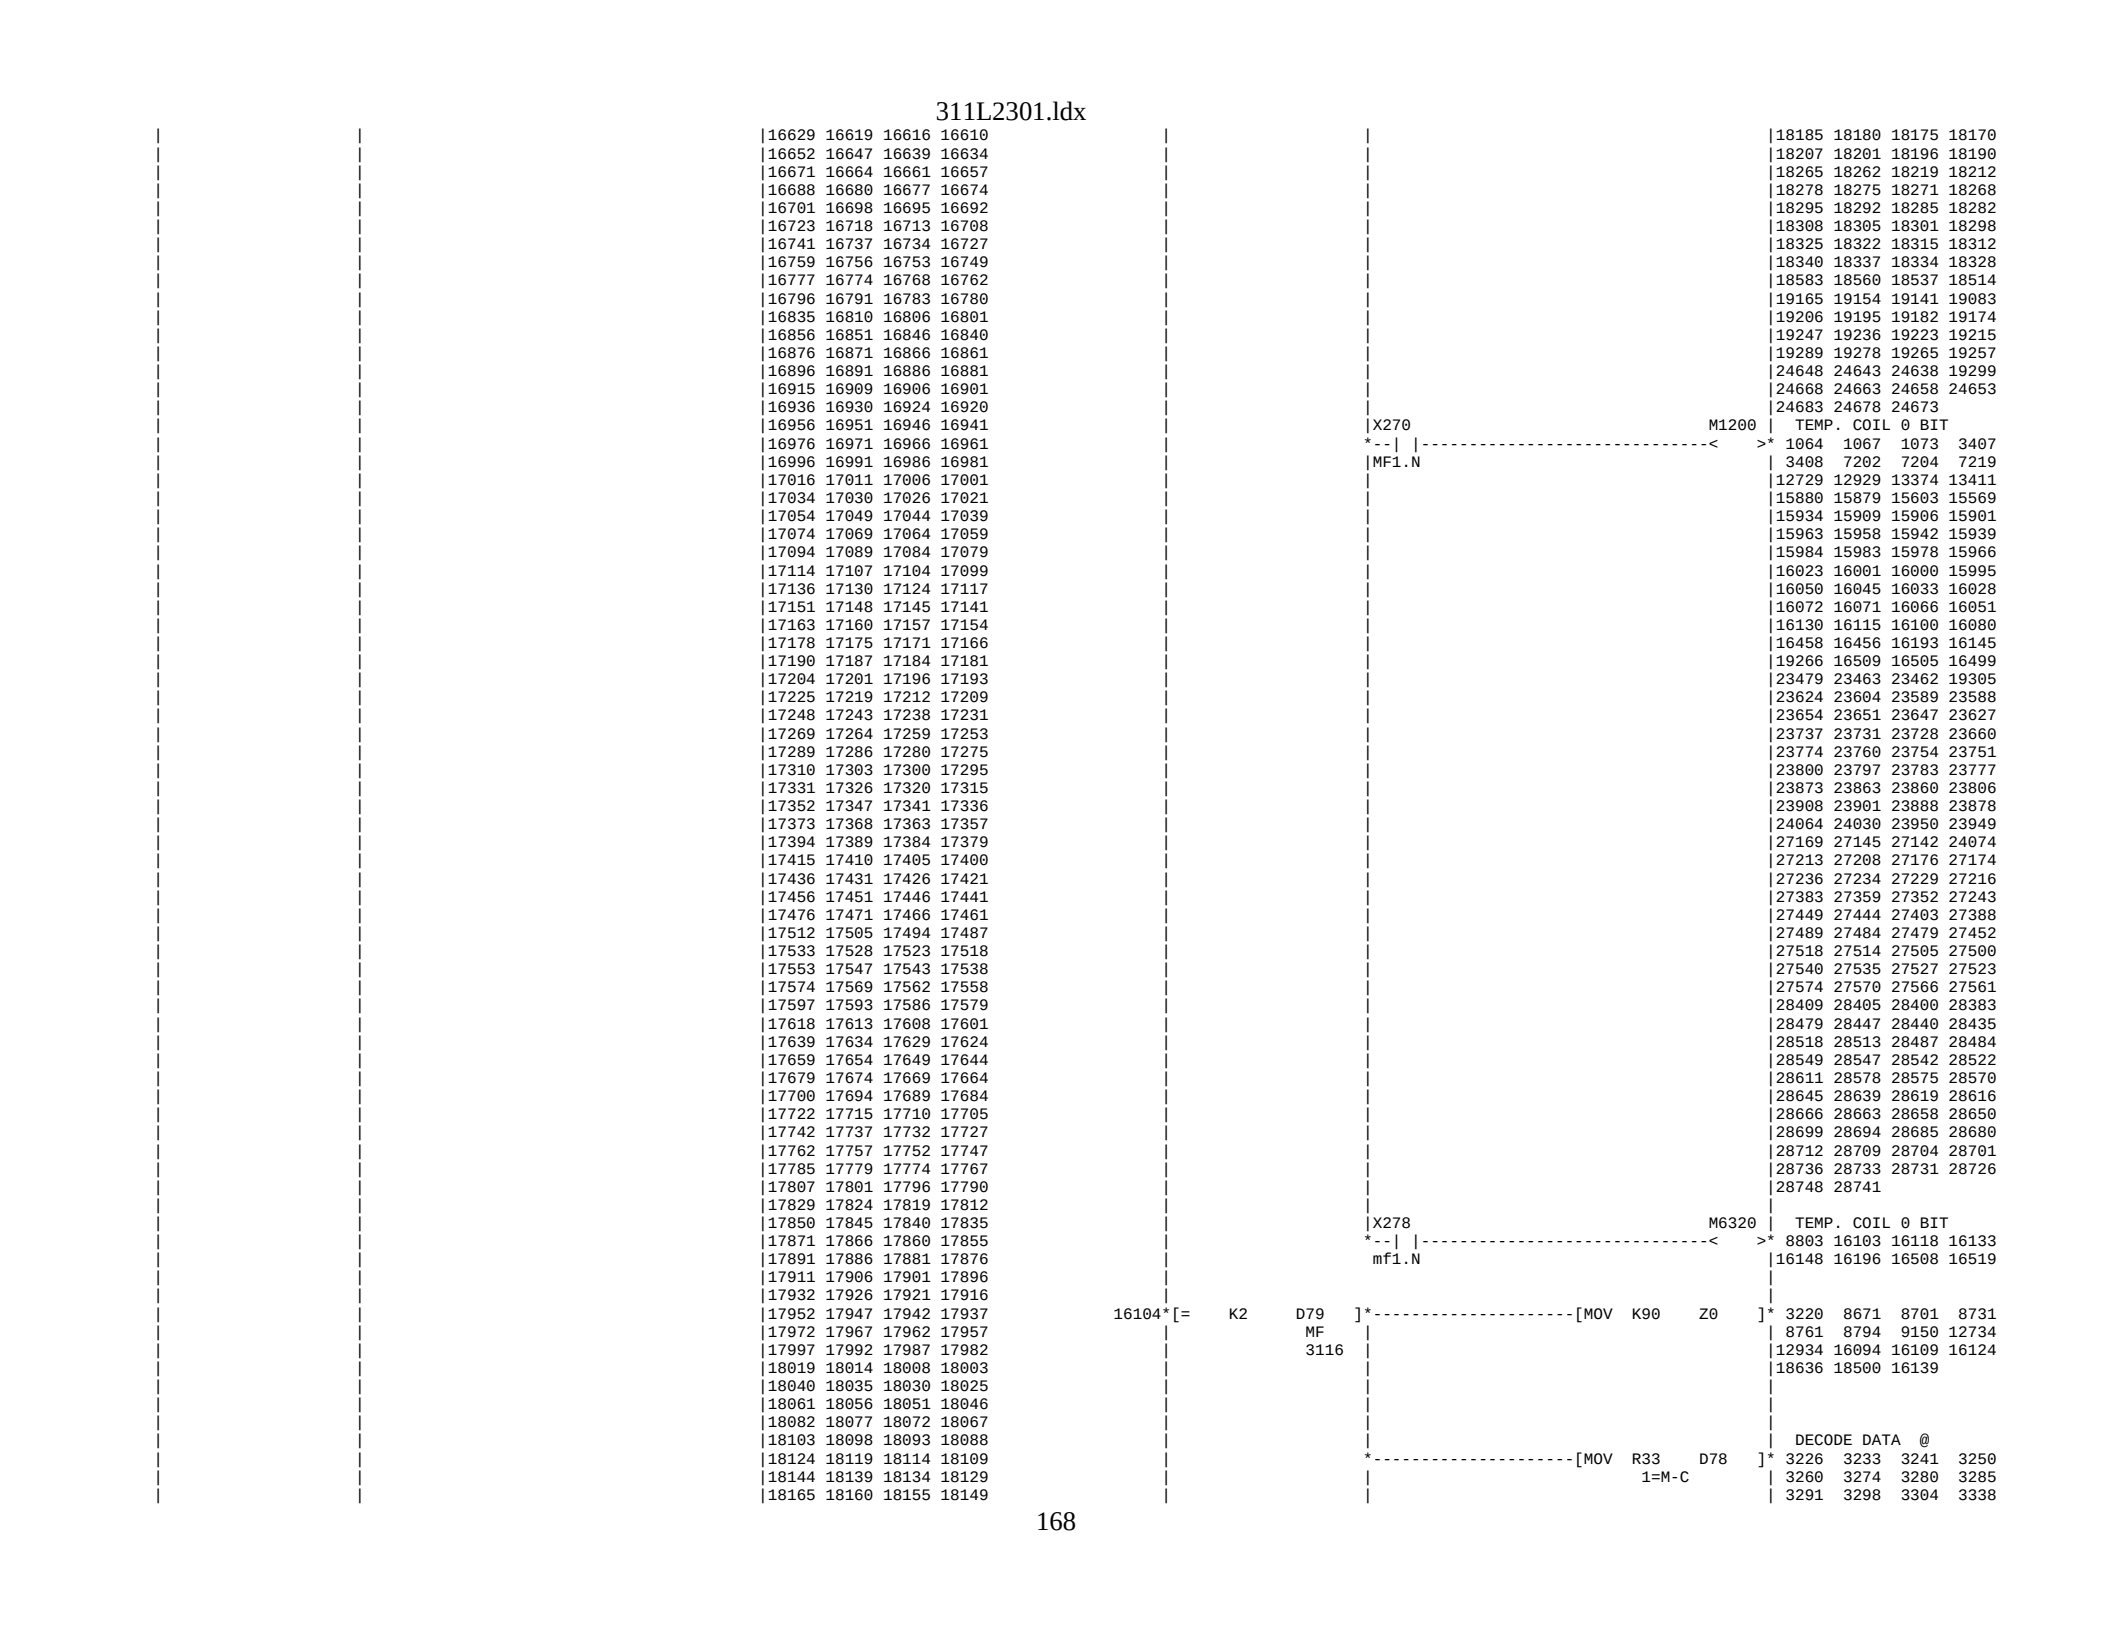

M1200 | TEMP. COIL 0 BIT
M1201 | TEMP. COIL 1 BIT
M54
M1202 | TEMP. COIL 2 BIT
SS.P
M1203 | TEMP. COIL 3 BIT
M9
M1204 | TEMP. COIL 4 BIT
CHPS.P
K4 | CHUCKMENU MASK
[MOV M1200 R125]
TMP.0B
1064
M6472
K4 | TEMP. COIL 0 BIT
15997
J2TA.P
13821
[MOV K0 M1200]


M1200 | TEMP. COIL 0 BIT
M1201 | TEMP. COIL 1 BIT
M1202 | TEMP. COIL 2 BIT
M1203 | TEMP. COIL 3 BIT
M1204 | TEMP. COIL 4 BIT
M1205 | TEMP. COIL 5 BIT
M1206 | TEMP. COIL 6 BIT
M1207 | TEMP. COIL 7 BIT
M1208 | TEMP. COIL 8 BIT
M1209 | TEMP. COIL 9 BIT
M6473
QTN200
M6477
QTN300
K4 TAIL-P MENU MASK
[MOV M1200 TMP.0B R127]
[MOV K0 M1200]
M1279
ON
585
16025
>* 1064 1067 1073 3407
| 3408 7202 7204 7219
|12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
>* 1070 3411 7209 12980
|13007 13383 15881 15910
|15943 15969 15985 16002
|16163 16073 16054 16035
|23466 19279 16512 16460
|23734 23657 23630 23592
|23951 23803 23780 23757
|27150 24081 24068 24031
|27237 27217 27182 27160
|27490 27453 27404 27362
|28451 28413 27544 27531
|28585 28551 28526 28493
|28688 28669 28655 28621
|28715
>*13391 3414 3472 12983
|13010 15882 15913 15944
|15988 16003 16055 16077
|19224 16515 16462 16166
|27153 23633 23595 23469
|27495 27458 27418 27368
|28531 28454 28415 27557
|28719 28623 28553
>* 7216 3417 12986 13013
|13400 15885 15916 15947
|15989 16004 16056 16169
|23472 19237 16517 16464
|27155 23882 23867 23598
|27375 27239 27221 27183
|28458 27496 27459 27419
|28723 28625 28555 28536
|28743
>*13403 12989 13016 15888
|15917 15948 15992 16005
|16059 16473 19183 23870
|27379 27240 27222 23885
|28460 28419 27463 27423
|28673 28628 28557 28539
|28691
>*13405 12992 13019 15890
|15918 15951 15972 16006
|16038 16061 16475 19196
|27467 27439 27218 23636
|28559 28497 28463 28423
|28677 28630 28591
>*13406 3465 3474 12995
|13022 15895 15921 15952
|15973 16007 16040 16062
|27219 23644 19142 16477
|28466 28388 27471 27440
|28632 28597 28561 28501
|28745
>*13407 12998 13025 15896
|15924 15953 15974 16012
|16041 16479 19155 27177
|27225 27475 28393 28427
|28469 28505 28563 28603
>*15575 13001 13028 15898
|15927 15954 15975 16017
|16042 16063 16481 23476
|23601 27157 27178 27226
|28429 28472 28510 28565
|28608 28634
>*15579 15899 15931 15955
|16020 16064 16483 27159
|27191 28397 28432 28476
|28636 28567
>*16024
|1064
>* 1064 1067 1073 3407
| 3408 7202 7204 7219
|12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966

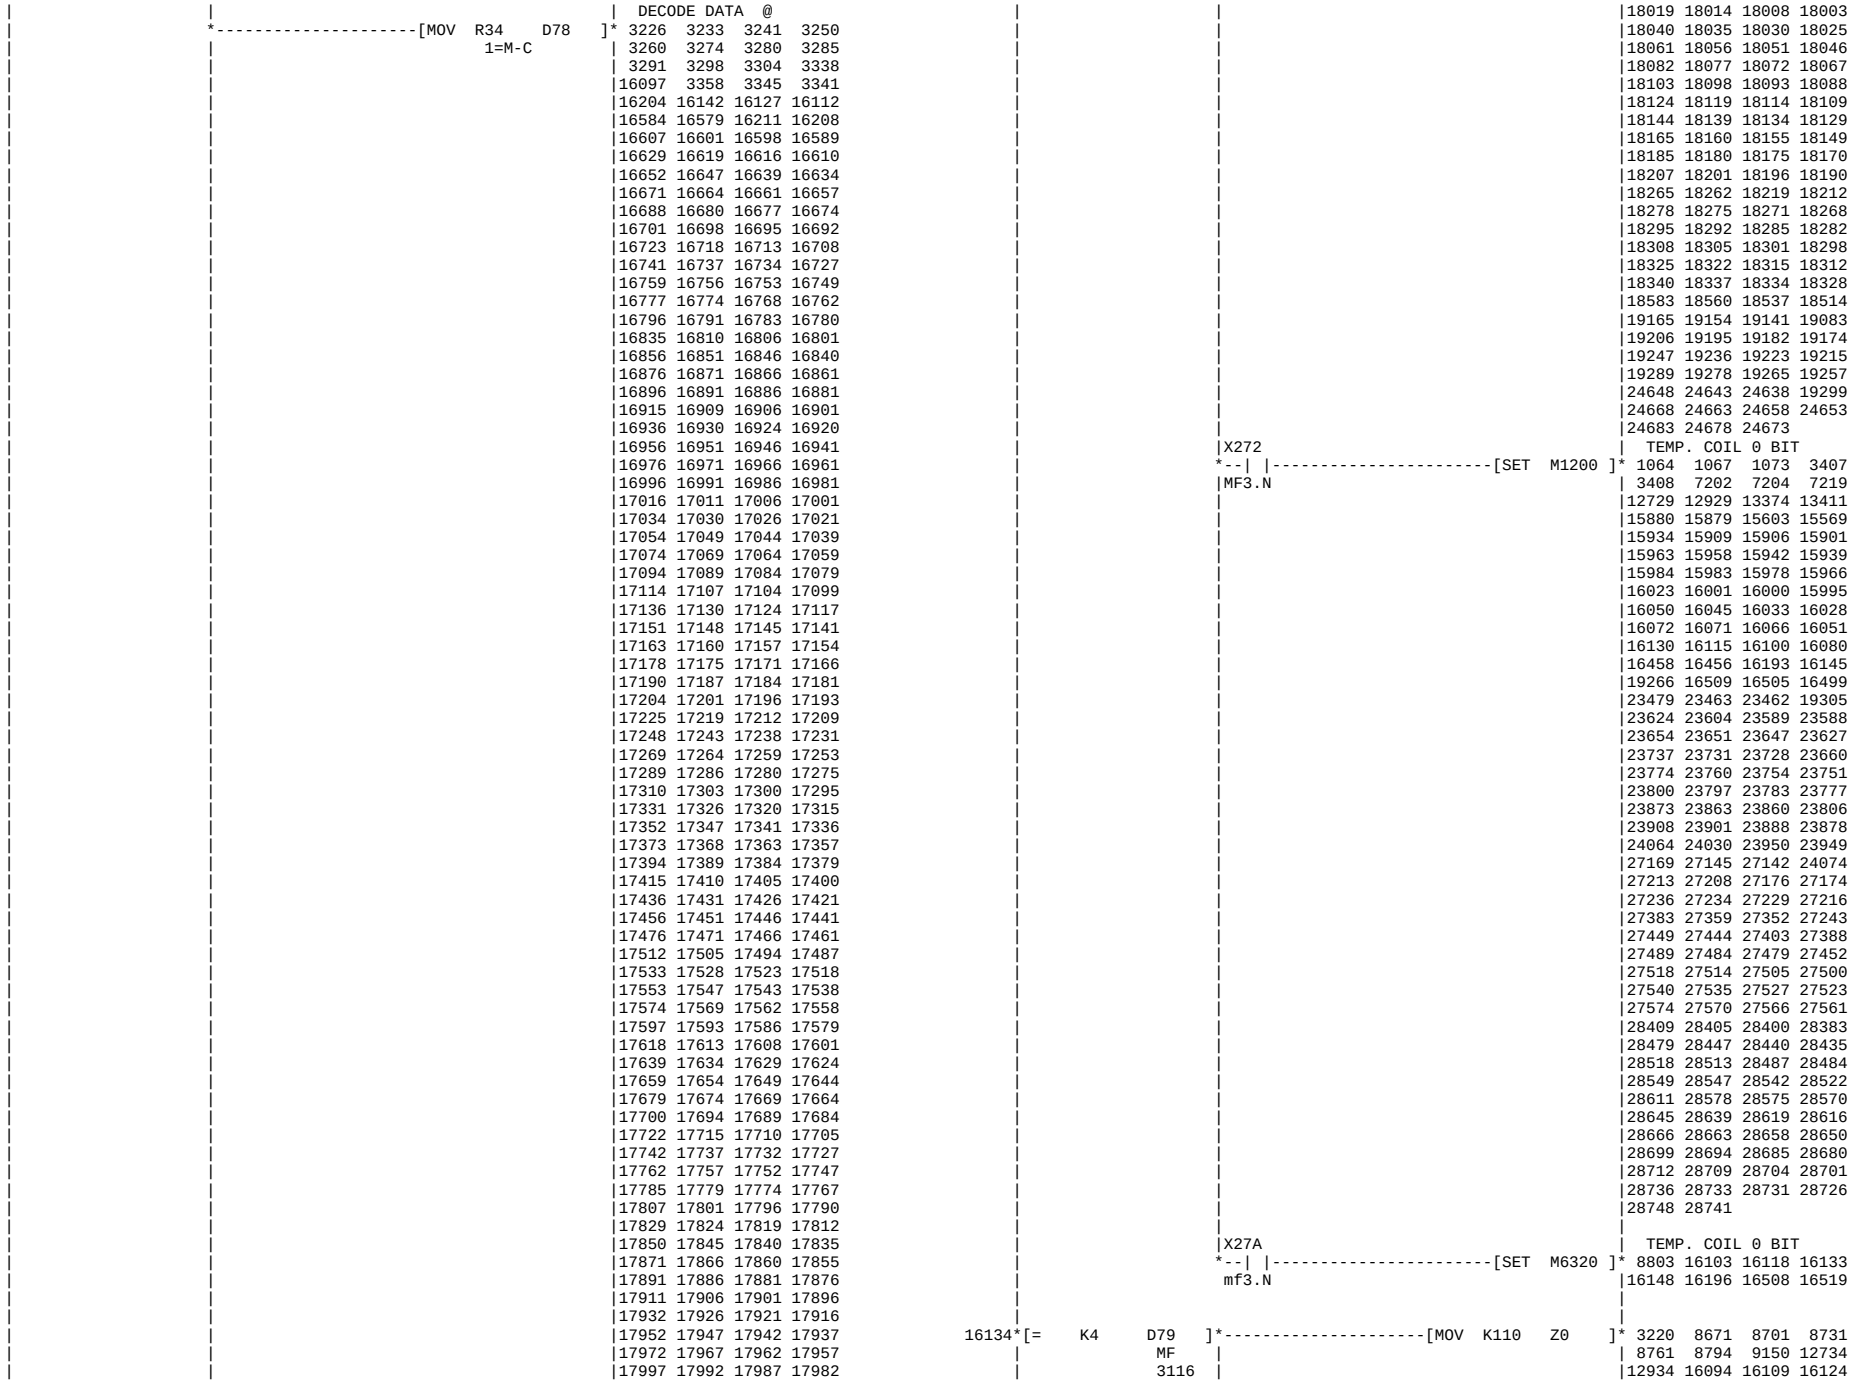

M54 M5178 M1200 TEMP. COIL 0 BIT
SS.P SORT.P
M1279 K4 MENU MASK
ON TMP.0B
585 1064
M1201 TEMP. COIL 1 BIT
M6451 M1205 TEMP. COIL 5 BIT
SSCT.P
M1206 TEMP. COIL 6 BIT
M1207 TEMP. COIL 7 BIT
M1208 TEMP. COIL 8 BIT
16047
[MOV K4 M1200 R128]
[MOV K0 M1200]
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
13405 12992 13019 15890
15918 15951 15972 16006
16038 16061 16475 19196
27467 27439 27218 23636
28559 28497 28463 28423
28677 28630 28591
13406 3465 3474 12995
13022 15895 15921 15952
15973 16007 16040 16062
27219 23644 19142 16477
28466 28388 27471 27440
28632 28597 28561 28501
28745
13407 12998 13025 15896
15924 15953 15974 16012
16041 16479 19155 27177
28427 28393 27475 27225
28603 28563 28505 28469
15575 13001 13028 15898
15927 15954 15975 16017
16042 16063 16481 23476
27226 27178 27157 23601
28565 28510 28472 28429
28634 28608
16046


M1200 | TEMP. COIL 0 BIT
M1201 | TEMP. COIL 1 BIT
M1202 | TEMP. COIL 2 BIT
M1203 | TEMP. COIL 3 BIT
M1204 | TEMP. COIL 4 BIT
M1205 | TEMP. COIL 5 BIT
M1206 | TEMP. COIL 6 BIT
M1208 | TEMP. COIL 8 BIT
M1209 | TEMP. COIL 9 BIT
M6472
J2TA.P
13821
M53
Y.P
K4
[MOV M1200 R129]
TMP.0B
1064
MAINTE MENU MASK

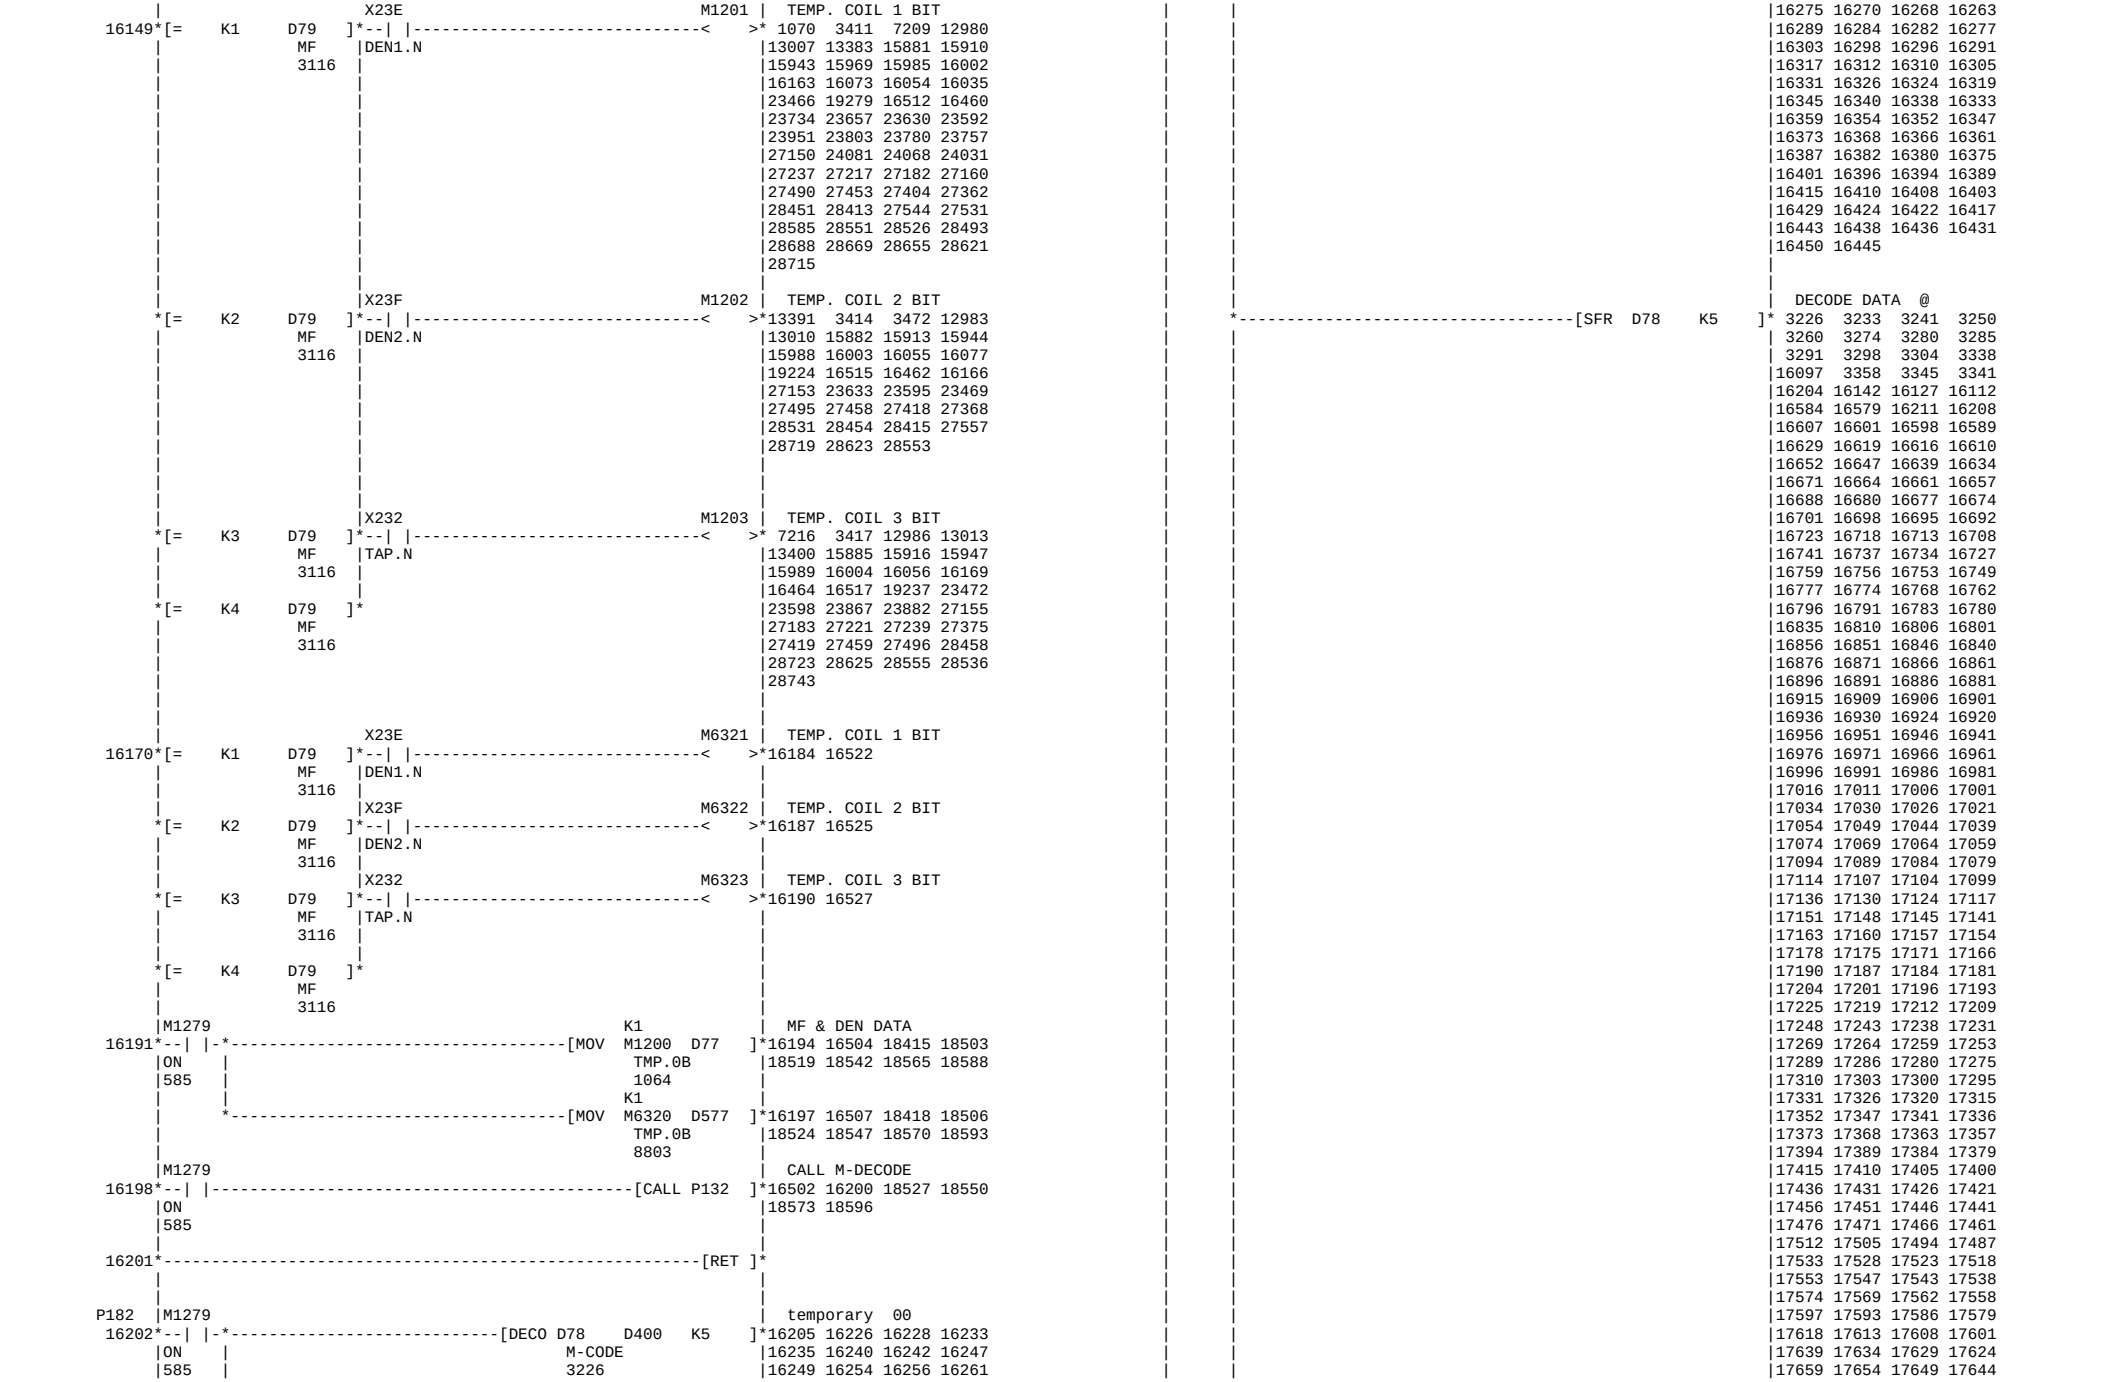

M1279
16068
ON
585
K4
M1200
[MOV K0 M1200]
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M1201
TEMP. COIL 1 BIT
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
M6405 M75
NZUK.P UKSP.P
M1202
TEMP. COIL 2 BIT
13391 3414 3472 12983
13010 15882 15913 15944
15988 16003 16055 16077
19224 16515 16462 16166
27153 23633 23595 23469
27495 27458 27418 27368
28531 28454 28415 27557
28719 28623 28553
K4
[MOV M1200 R370]
TMP.0B
1064
16081
M981
SIMULATION
16082
[CALL P155]
23612 16084
SIM-MD
1138
M776
M814
REQUEST CALL MEN
16085
[K1 D79]
16087 1141
MENUSI
14511
M88
SIMUOF
15544
16088
[RET]
P131
16089
[K1 D79]
MF
3116
[MOV K80 Z0]
8761 8794 9150 12734
12934 16094 16109 16124
18636 18500 16139
DECODE DATA @
[MOV R32 D78]
1=M-C
3220 8671 8701 8731
3226 3233 3241 3250
3260 3274 3280 3285
3291 3298 3304 3338
16097 3358 3345 3341
16204 16142 16127 16112
16584 16579 16211 16208
16607 16601 16598 16589



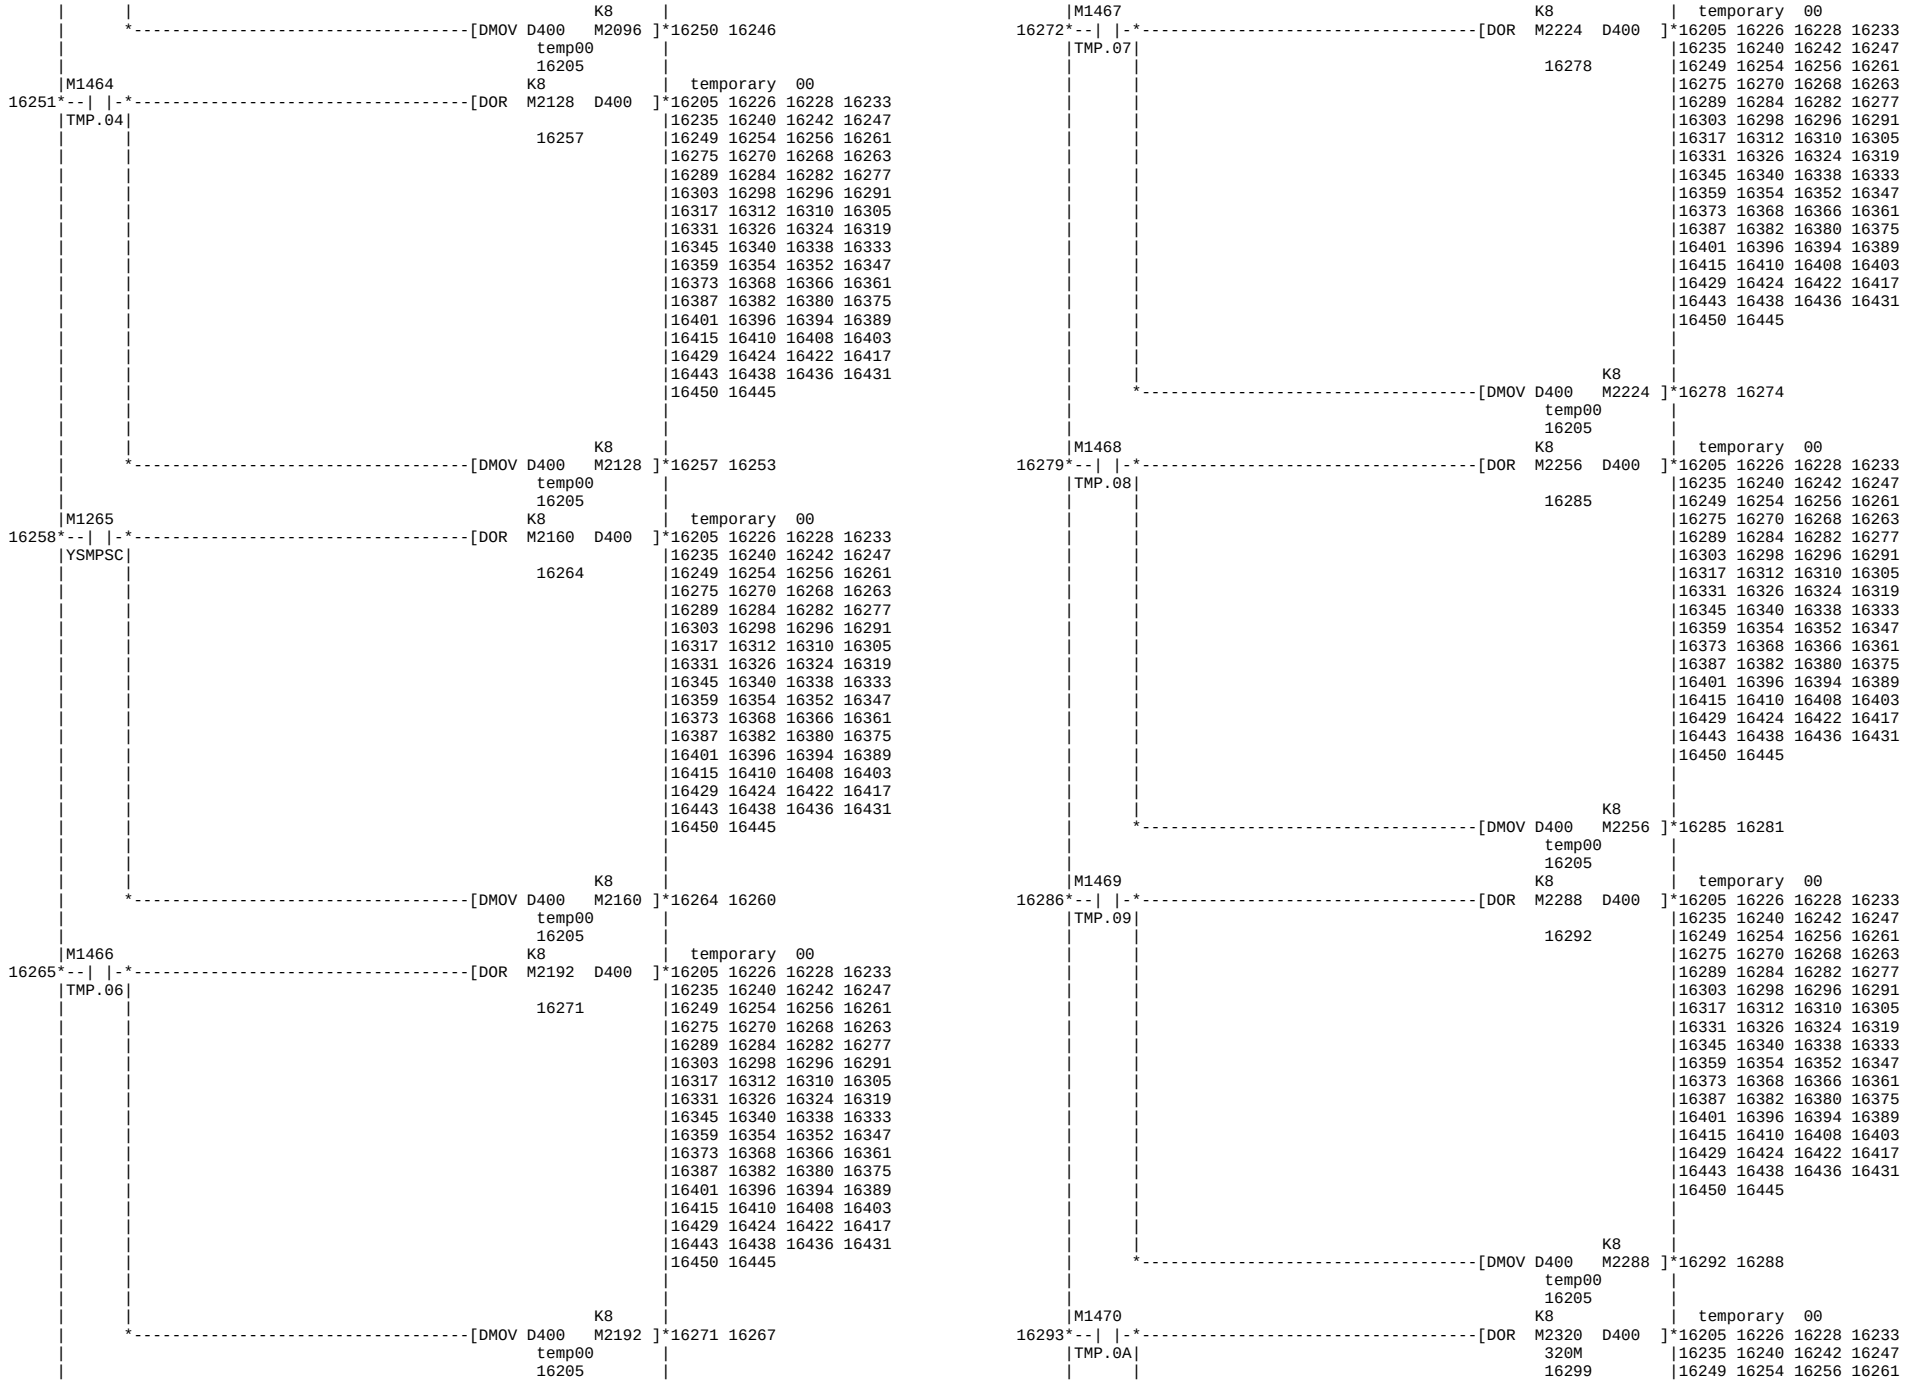
```
|                    |                    |16097  3358  3345  3341                |                    |                                                  |18103 18098 18093 18088
|                    |                    |16204 16142 16127 16112                |                    |                                                  |18124 18119 18114 18109
|                    |                    |16584 16579 16211 16208                |                    |                                                  |18144 18139 18134 18129
|                    |                    |16607 16601 16598 16589                |                    |                                                  |18165 18160 18155 18149
|                    |                    |16629 16619 16616 16610                |                    |                                                  |18185 18180 18175 18170
|                    |                    |16652 16647 16639 16634                |                    |                                                  |18207 18201 18196 18190
|                    |                    |16671 16664 16661 16657                |                    |                                                  |18265 18262 18219 18212
|                    |                    |16688 16680 16677 16674                |                    |                                                  |18278 18275 18271 18268
|                    |                    |16701 16698 16695 16692                |                    |                                                  |18295 18292 18285 18282
|                    |                    |16723 16718 16713 16708                |                    |                                                  |18308 18305 18301 18298
|                    |                    |16741 16737 16734 16727                |                    |                                                  |18325 18322 18315 18312
|                    |                    |16759 16756 16753 16749                |                    |                                                  |18340 18337 18334 18328
|                    |                    |16777 16774 16768 16762                |                    |                                                  |18583 18560 18537 18514
|                    |                    |16796 16791 16783 16780                |                    |                                                  |19165 19154 19141 19083
|                    |                    |16835 16810 16806 16801                |                    |                                                  |19206 19195 19182 19174
|                    |                    |16856 16851 16846 16840                |                    |                                                  |19247 19236 19223 19215
|                    |                    |16876 16871 16866 16861                |                    |                                                  |19289 19278 19265 19257
|                    |                    |16896 16891 16886 16881                |                    |                                                  |24648 24643 24638 19299
|                    |                    |16915 16909 16906 16901                |                    |                                                  |24668 24663 24658 24653
|                    |                    |16936 16930 16924 16920                |                    |                                                  |24683 24678 24673
|                    |                    |16956 16951 16946 16941                |                    |X271                                              |  TEMP. COIL 0 BIT
|                    |                    |16976 16971 16966 16961                |                    |*--| |----------------------[SET  M1200 ]* 1064  1067  1073  3407
|                    |                    |16996 16991 16986 16981                |                    |MF2.N                                             | 3408  7202  7204  7219
|                    |                    |17016 17011 17006 17001                |                    |                                                  |12729 12929 13374 13411
|                    |                    |17034 17030 17026 17021                |                    |                                                  |15880 15879 15603 15569
|                    |                    |17054 17049 17044 17039                |                    |                                                  |15934 15909 15906 15901
|                    |                    |17074 17069 17064 17059                |                    |                                                  |15963 15958 15942 15939
|                    |                    |17094 17089 17084 17079                |                    |                                                  |15984 15983 15978 15966
|                    |                    |17114 17107 17104 17099                |                    |                                                  |16023 16001 16000 15995
|                    |                    |17136 17130 17124 17117                |                    |                                                  |16050 16045 16033 16028
|                    |                    |17151 17148 17145 17141                |                    |                                                  |16072 16071 16066 16051
|                    |                    |17163 17160 17157 17154                |                    |                                                  |16130 16115 16100 16080
|                    |                    |17178 17175 17171 17166                |                    |                                                  |16458 16456 16193 16145
|                    |                    |17190 17187 17184 17181                |                    |                                                  |19266 16509 16505 16499
|                    |                    |17204 17201 17196 17193                |                    |                                                  |23479 23463 23462 19305
|                    |                    |17225 17219 17212 17209                |                    |                                                  |23624 23604 23589 23588
|                    |                    |17248 17243 17238 17231                |                    |                                                  |23654 23651 23647 23627
|                    |                    |17269 17264 17259 17253                |                    |                                                  |23737 23731 23728 23660
|                    |                    |17289 17286 17280 17275                |                    |                                                  |23774 23760 23754 23751
|                    |                    |17310 17303 17300 17295                |                    |                                                  |23800 23797 23783 23777
|                    |                    |17331 17326 17320 17315                |                    |                                                  |23873 23863 23860 23806
|                    |                    |17352 17347 17341 17336                |                    |                                                  |23908 23901 23888 23878
|                    |                    |17373 17368 17363 17357                |                    |                                                  |24064 24030 23950 23949
|                    |                    |17394 17389 17384 17379                |                    |                                                  |27169 27145 27142 24074
|                    |                    |17415 17410 17405 17400                |                    |                                                  |27213 27208 27176 27174
|                    |                    |17436 17431 17426 17421                |                    |                                                  |27236 27234 27229 27216
|                    |                    |17456 17451 17446 17441                |                    |                                                  |27383 27359 27352 27243
|                    |                    |17476 17471 17466 17461                |                    |                                                  |27449 27444 27403 27388
|                    |                    |17512 17505 17494 17487                |                    |                                                  |27489 27484 27479 27452
|                    |                    |17533 17528 17523 17518                |                    |                                                  |27518 27514 27505 27500
|                    |                    |17553 17547 17543 17538                |                    |                                                  |27540 27535 27527 27523
|                    |                    |17574 17569 17562 17558                |                    |                                                  |27574 27570 27566 27561
|                    |                    |17597 17593 17586 17579                |                    |                                                  |28409 28405 28400 28383
|                    |                    |17618 17613 17608 17601                |                    |                                                  |28479 28447 28440 28435
|                    |                    |17639 17634 17629 17624                |                    |                                                  |28518 28513 28487 28484
|                    |                    |17659 17654 17649 17644                |                    |                                                  |28549 28547 28542 28522
|                    |                    |17679 17674 17669 17664                |                    |                                                  |28611 28578 28575 28570
|                    |                    |17700 17694 17689 17684                |                    |                                                  |28645 28639 28619 28616
|                    |                    |17722 17715 17710 17705                |                    |                                                  |28666 28663 28658 28650
|                    |                    |17742 17737 17732 17727                |                    |                                                  |28699 28694 28685 28680
|                    |                    |17762 17757 17752 17747                |                    |                                                  |28712 28709 28704 28701
|                    |                    |17785 17779 17774 17767                |                    |                                                  |28736 28733 28731 28726
|                    |                    |17807 17801 17796 17790                |                    |                                                  |28748 28741
|                    |                    |17829 17824 17819 17812                |                    |                                                  |
|                    |                    |17850 17845 17840 17835                |                    |X279                                              |  TEMP. COIL 0 BIT
|                    |                    |17871 17866 17860 17855                |                    |*--| |----------------------[SET  M6320 ]* 8803 16103 16118 16133
|                    |                    |17891 17886 17881 17876                |                    | mf2.N                                            |16148 16196 16508 16519
|                    |                    |17911 17906 17901 17896                |                    |                                                  |
|                    |                    |17932 17926 17921 17916                |                    |                                                  |
|                    |                    |17952 17947 17942 17937          16119*[=    K3     D79   ]*---------------------[MOV  K100   Z0    ]* 3220  8671  8701  8731
|                    |                    |17972 17967 17962 17957                |              MF    |                                                  | 8761  8794  9150 12734
|                    |                    |17997 17992 17987 17982                |              3116  |                                                  |12934 16094 16109 16124
|                    |                    |18019 18014 18008 18003                |                    |                                                  |18636 18500 16139
|                    |                    |18040 18035 18030 18025                |                    |                                                  |
|                    |                    |18061 18056 18051 18046                |                    |                                                  |
|                    |                    |18082 18077 18072 18067                |                    |                                                  |
```

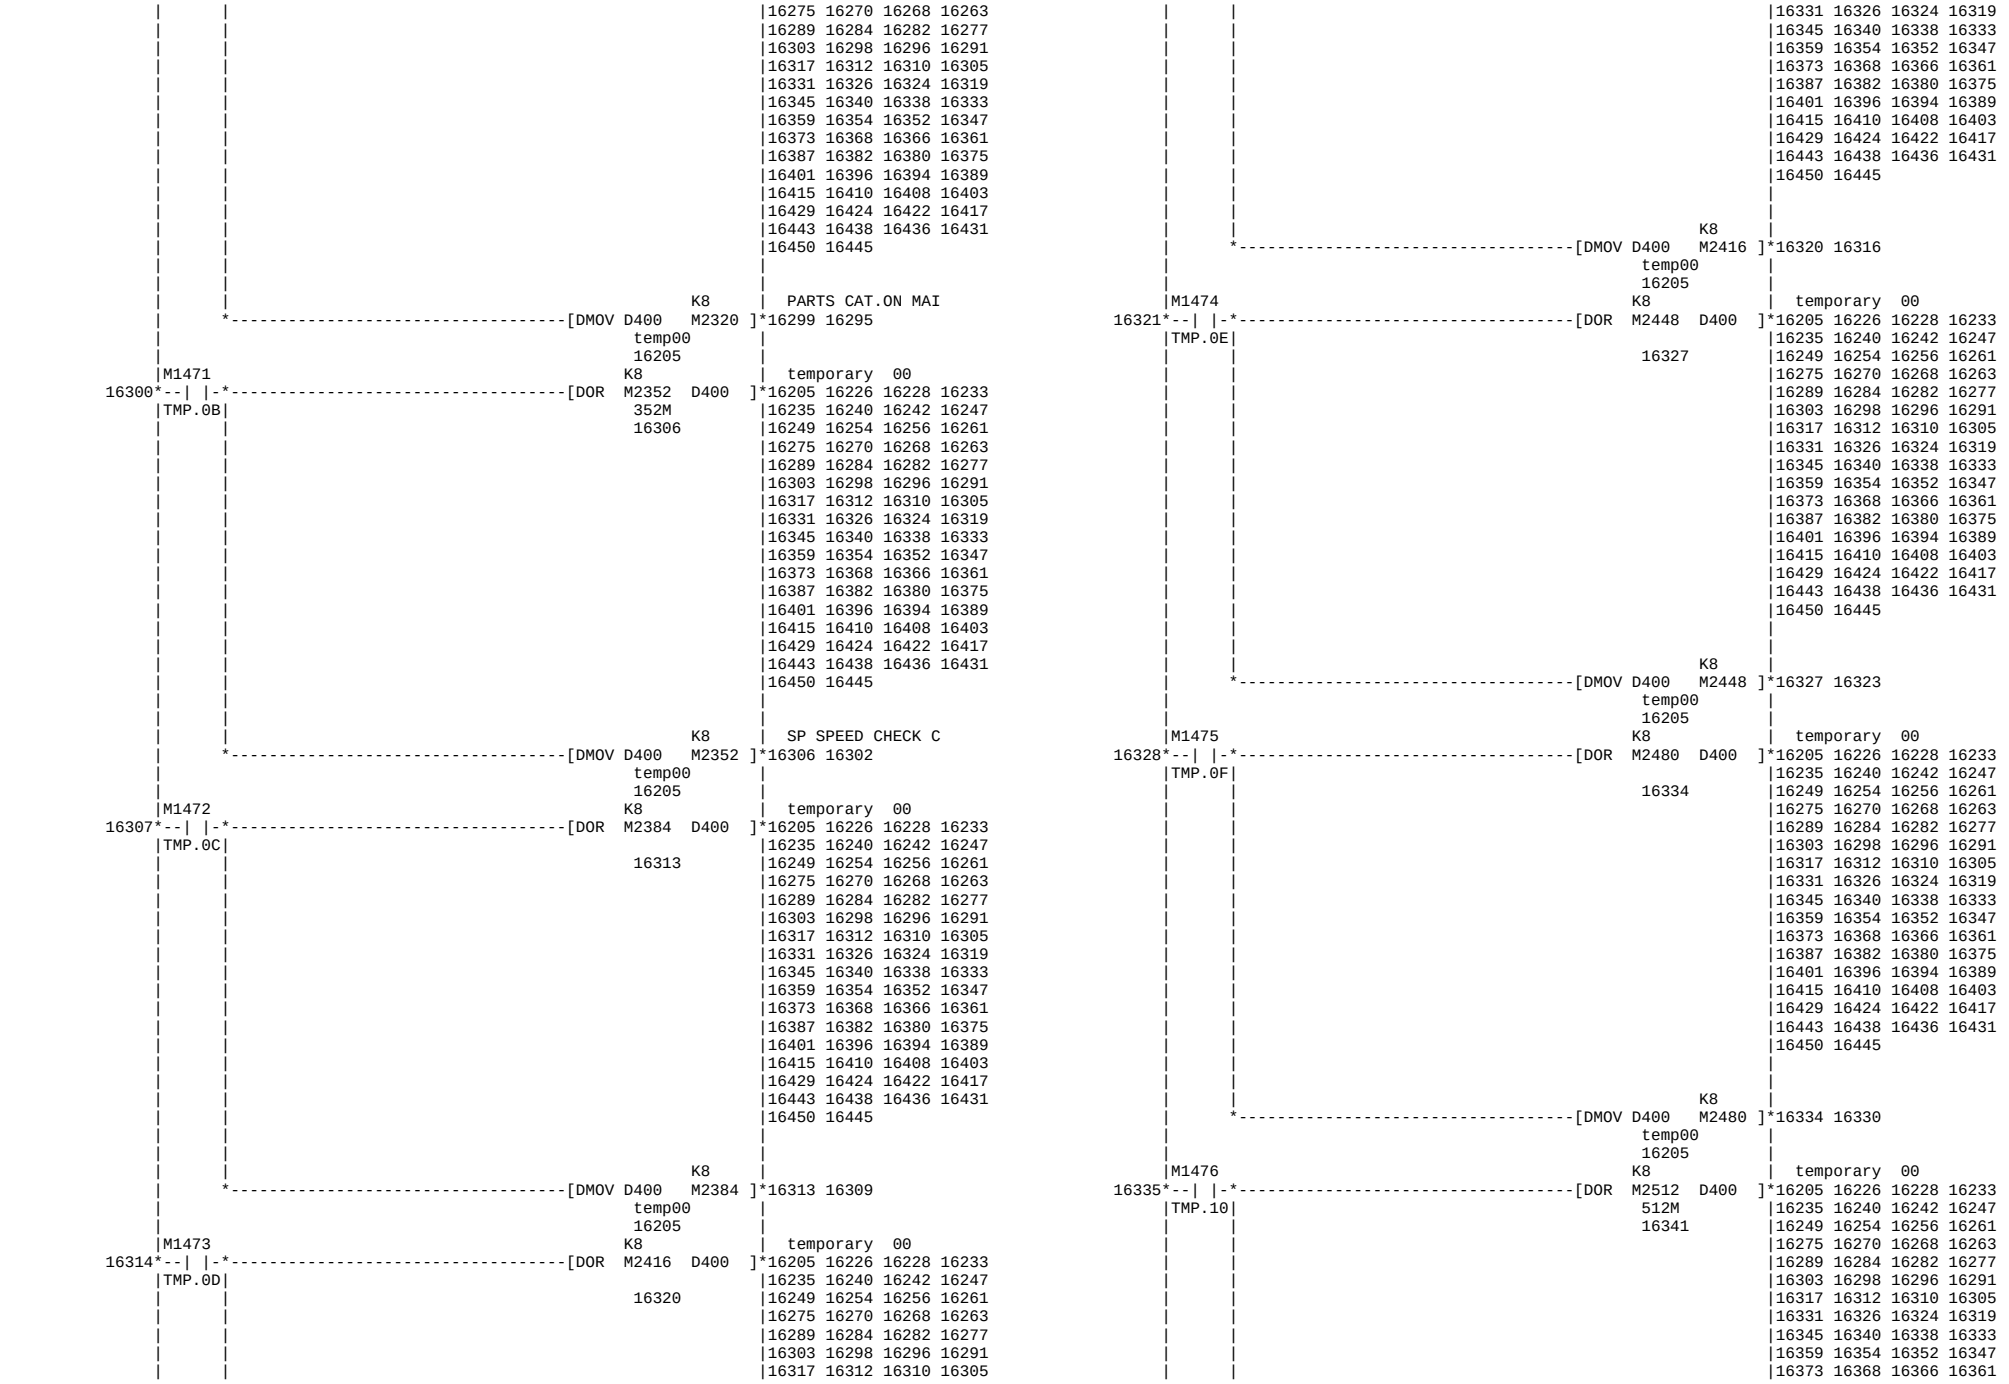

DECODE DATA @
MOV R34 D78
1=M-C
MOV K110 Z0
SET M1200
SET M6320
X272
X27A
MF3.N
mf3.N
TEMP. COIL 0 BIT
TEMP. COIL 0 BIT
K4 D79
MF
3116

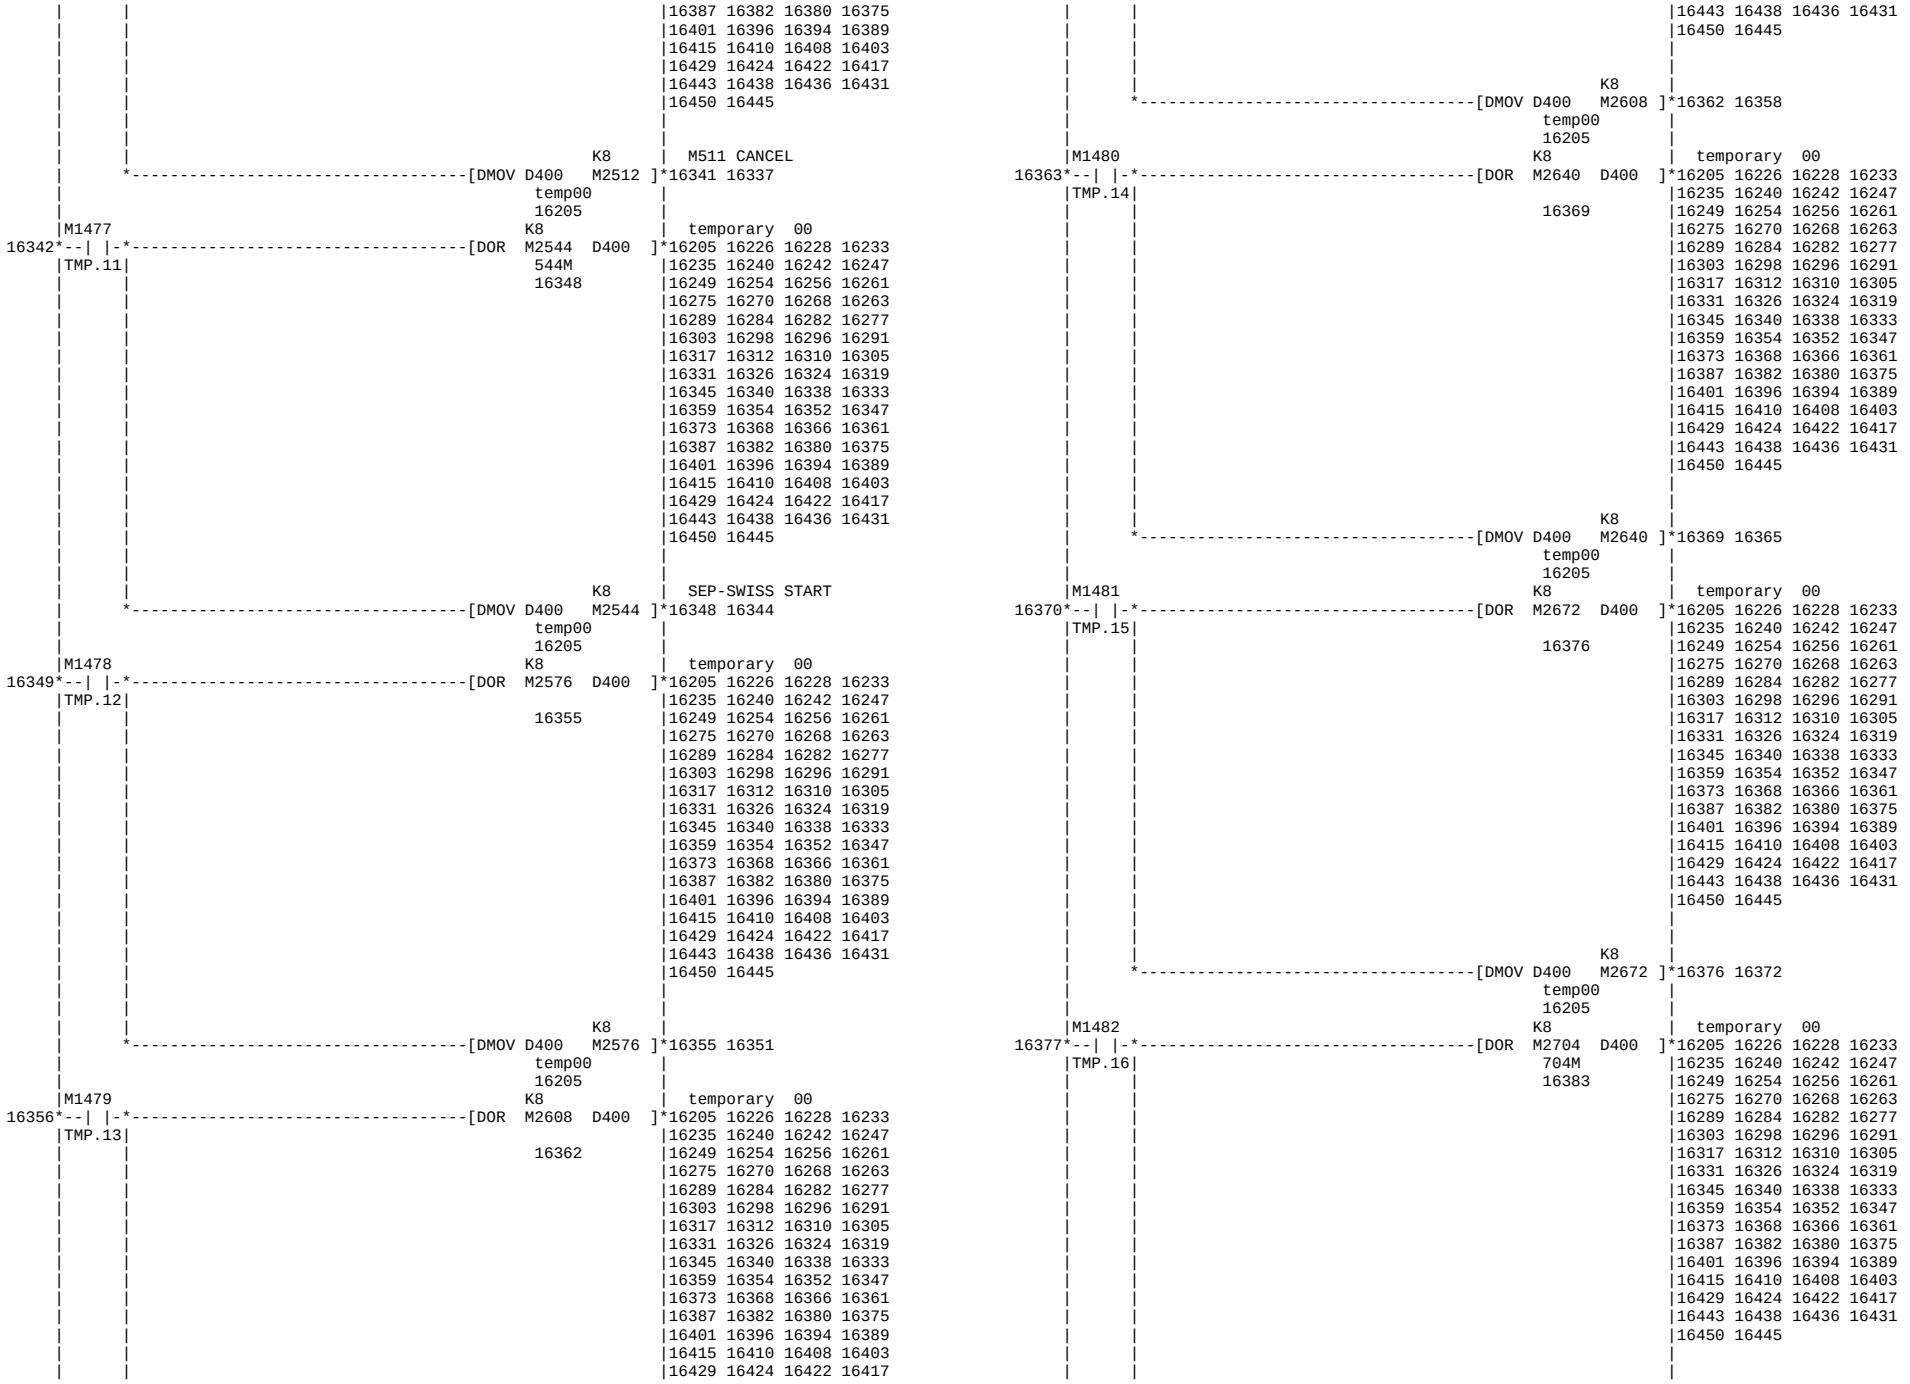
```
|                                  |18636 18500 16139                                                
```

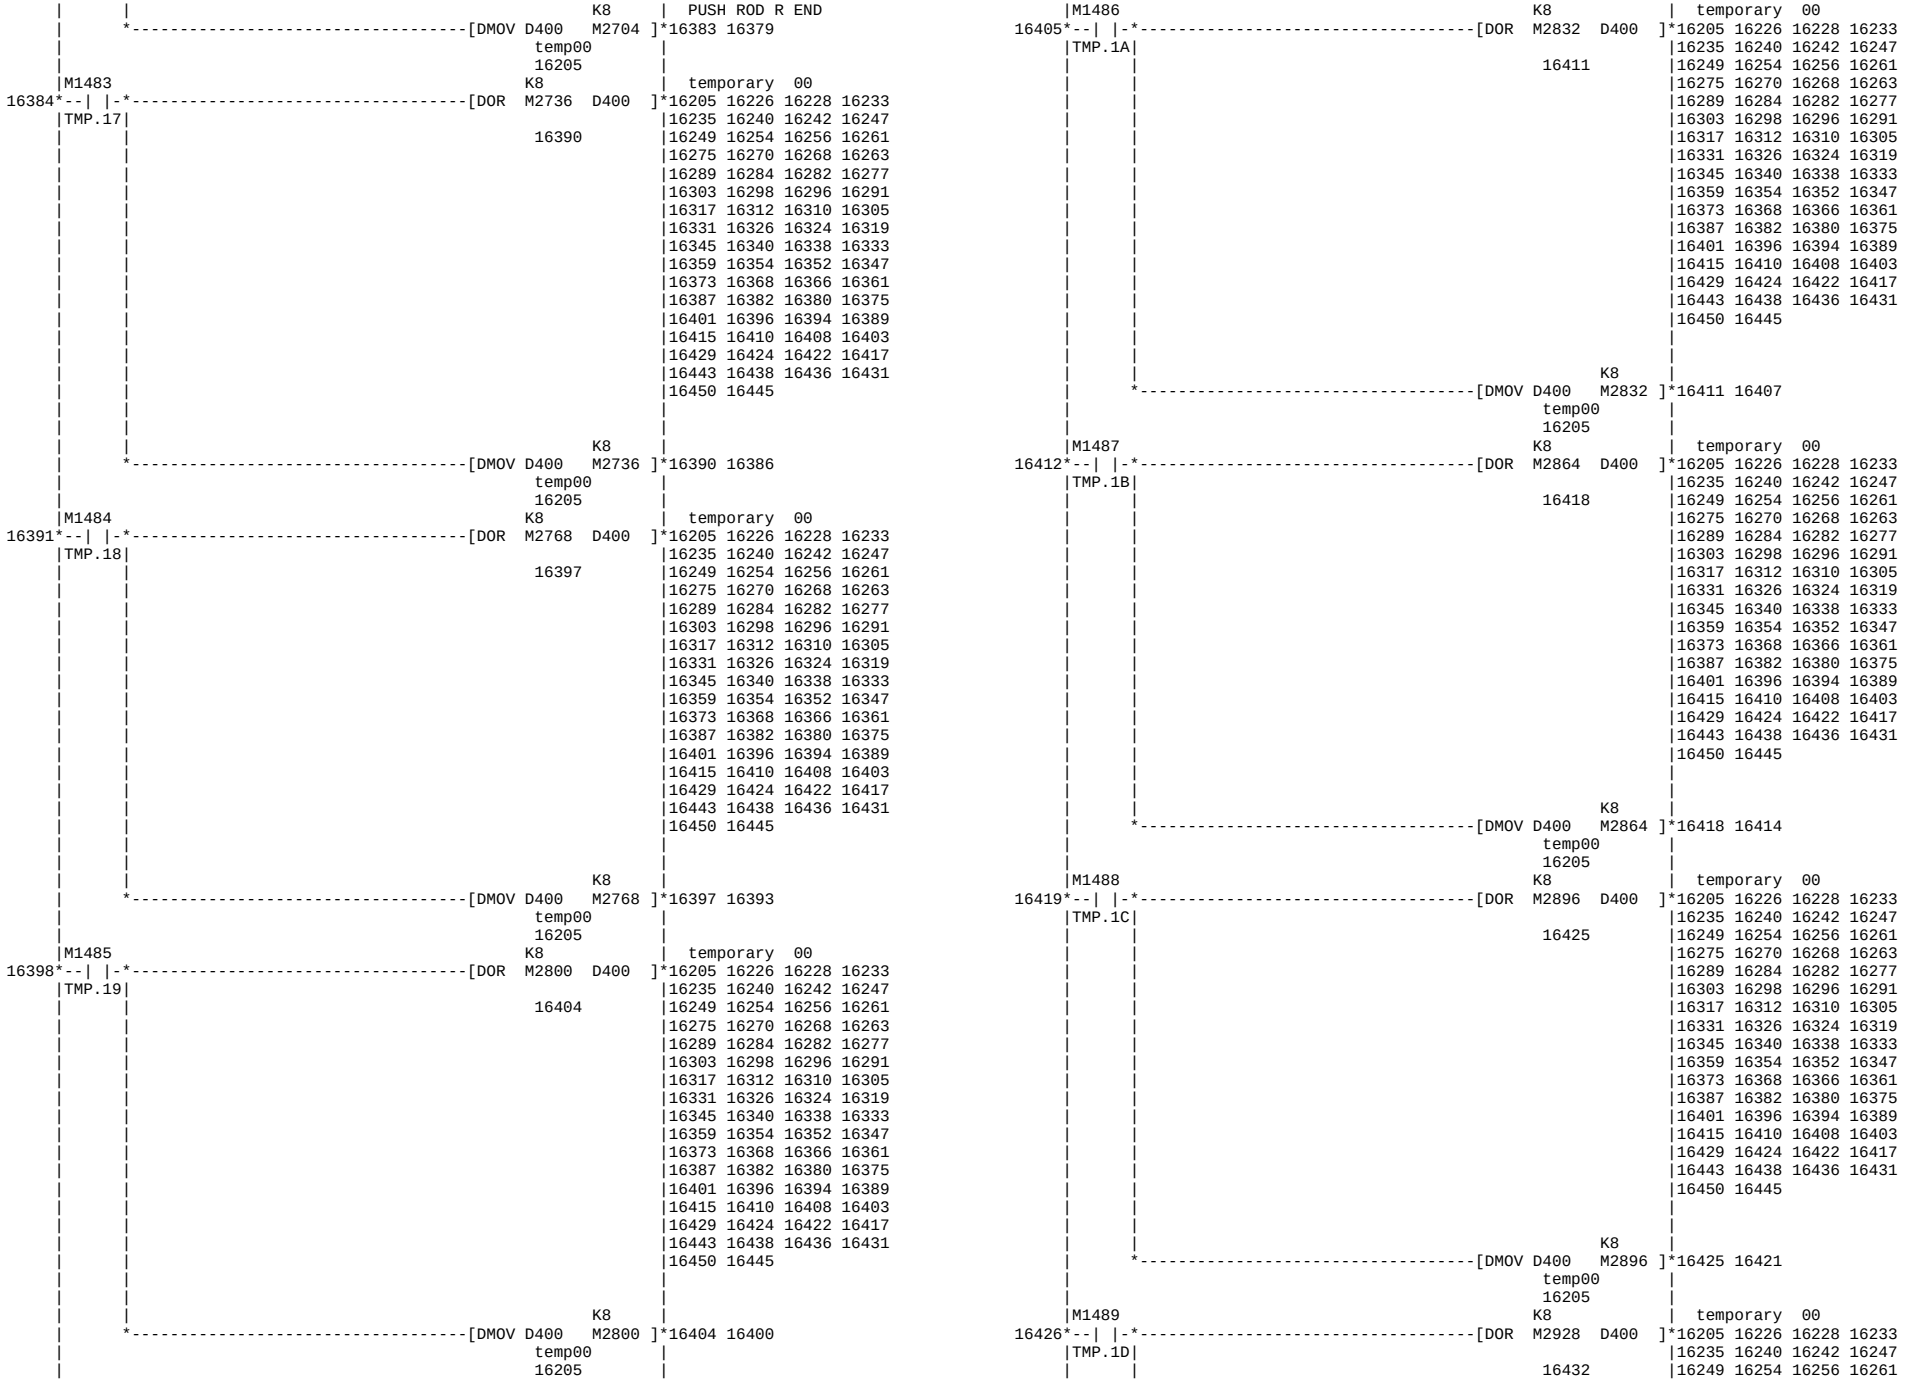


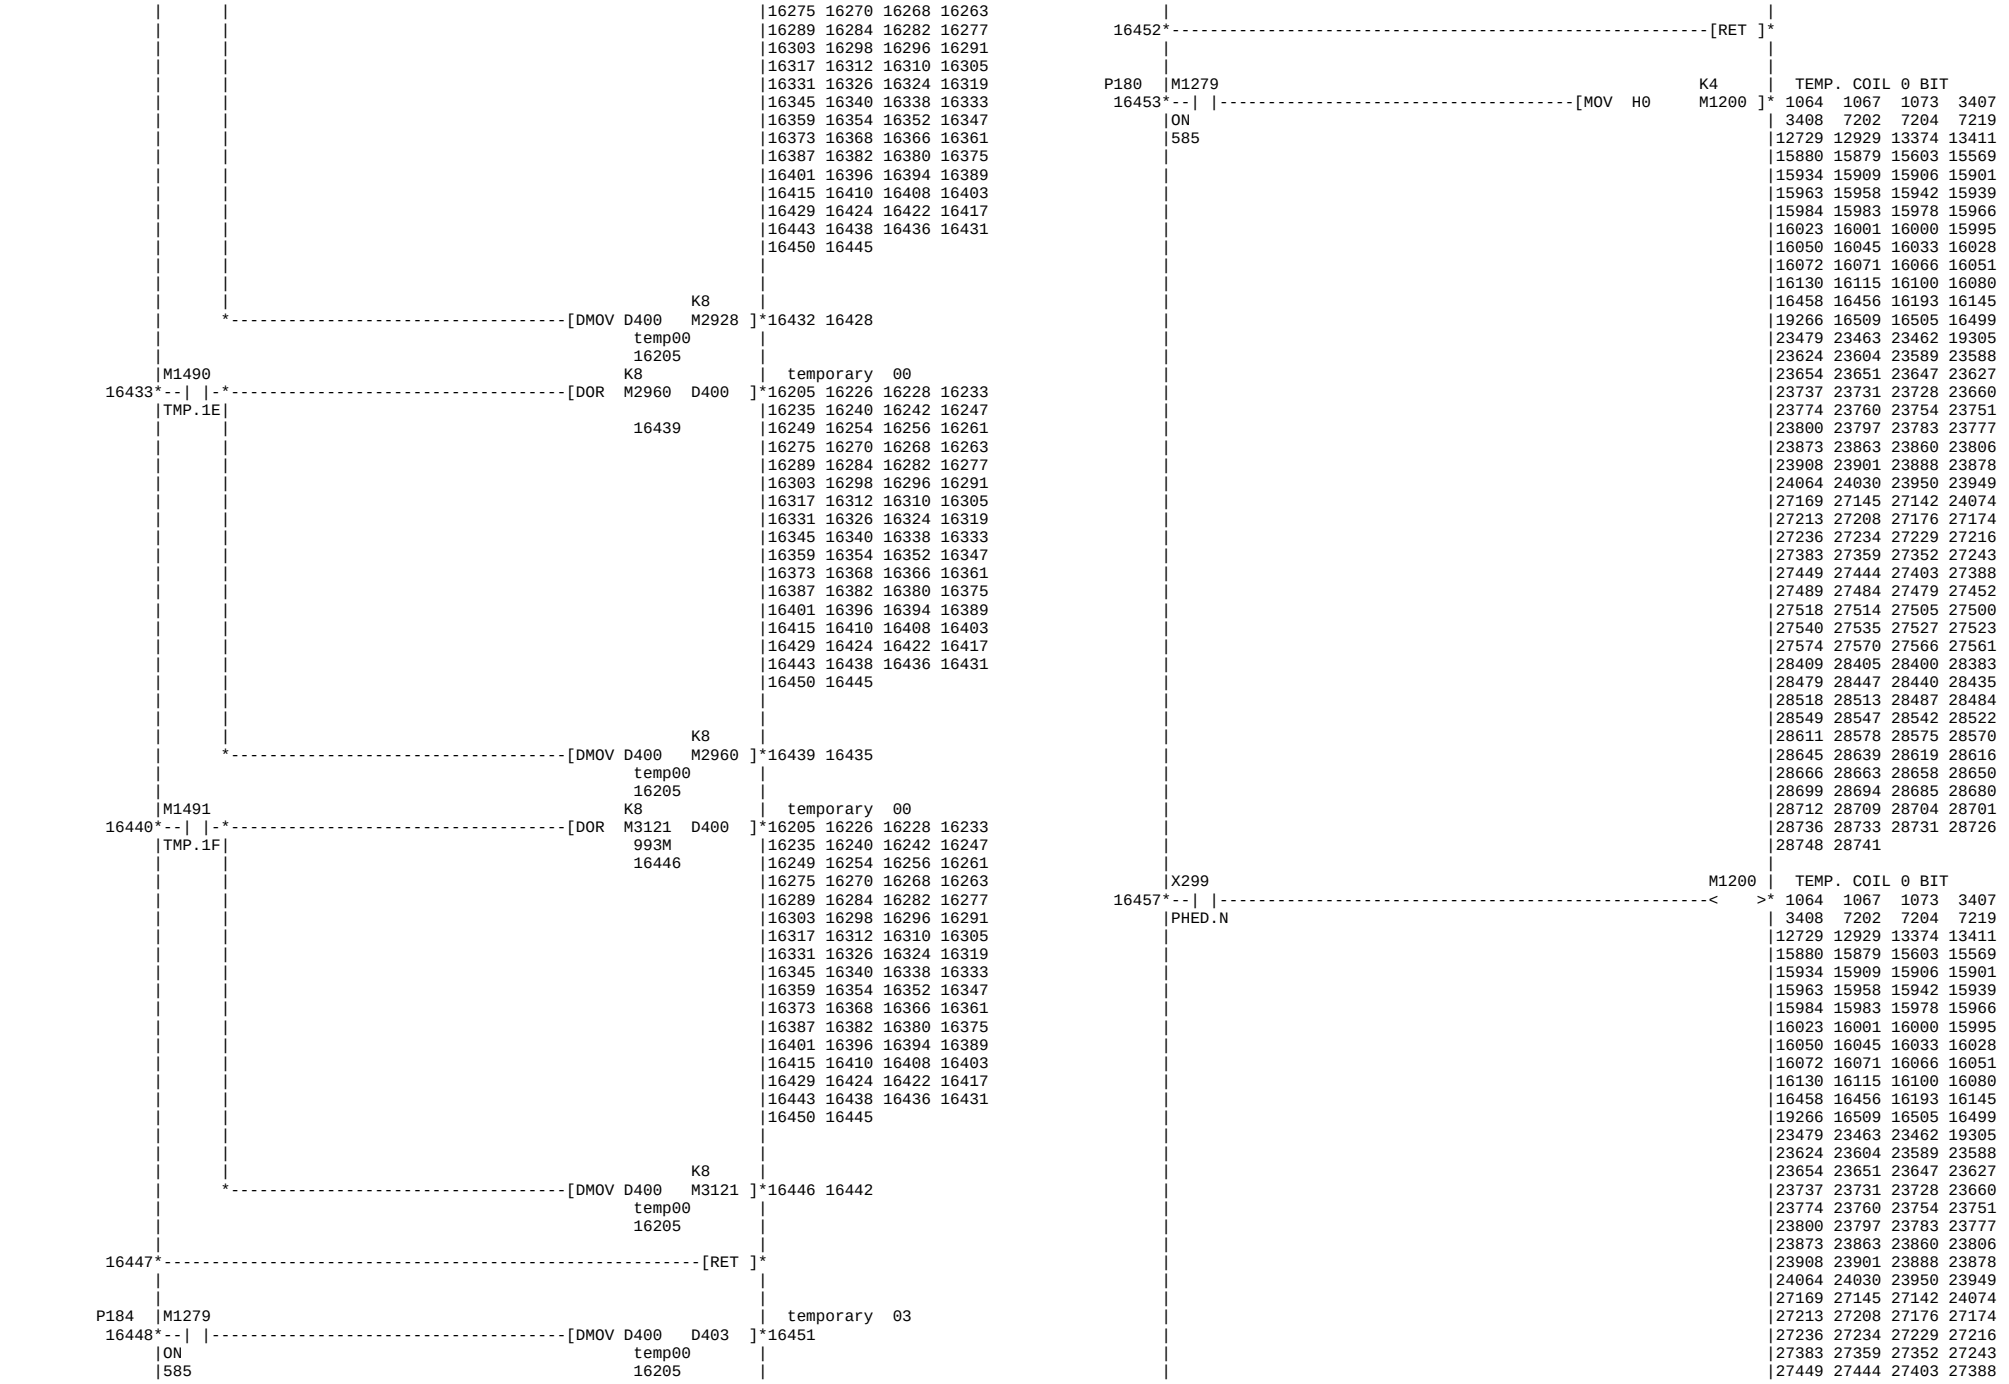
```
      |      |                                                |17679 17674 17669 17664
      |      |                                                |17700 17694 17689 17684
      |      |                                                |17722 17715 17710 17705
      |      |                                                |17742 17737 17732 17727
      |      |                                                |17762 17757 17752 17747
      |      |                                                |17785 17779 17774 17767
      |      |                                                |17807 17801 17796 17790
      |      |                                                |17829 17824 17819 17812
      |      |                                                |17850 17845 17840 17835
      |      |                                                |17871 17866 17860 17855
      |      |                                                |17891 17886 17881 17876
      |      |                                                |17911 17906 17901 17896
      |      |                                                |17932 17926 17921 17916
      |      |                                                |17952 17947 17942 17937
      |      |                                                |17972 17967 17962 17957
      |      |                                                |17997 17992 17987 17982
      |      |                                                |18019 18014 18008 18003
      |      |                                                |18040 18035 18030 18025
      |      |                                                |18061 18056 18051 18046
      |      |                                                |18082 18077 18072 18067
      |      |                                                |18103 18098 18093 18088
      |      |                                                |18124 18119 18114 18109
      |      |                                                |18144 18139 18134 18129
      |      |                                                |18165 18160 18155 18149
      |      |                                                |18185 18180 18175 18170
      |      |                                                |18207 18201 18196 18190
      |      |                                                |18265 18262 18219 18212
      |      |                                                |18278 18275 18271 18268
      |      |                                                |18295 18292 18285 18282
      |      |                                                |18308 18305 18301 18298
      |      |                                                |18325 18322 18315 18312
      |      |                                                |18340 18337 18334 18328
      |      |                                                |18583 18560 18537 18514
      |      |                                                |19165 19154 19141 19083
      |      |                                                |19206 19195 19182 19174
      |      |                                                |19247 19236 19223 19215
      |      |                                                |19289 19278 19265 19257
      |      |                                                |24648 24643 24638 19299
      |      |                                                |24668 24663 24658 24653
      |      |                                                |24683 24678 24673
      |      |                                                |  temporary  01
      |      *----------------------------[DECO D78    D401   K5    ]*16212
      |      |                           M-CODE                    |
      |      |                           3226                      |
      |      |                                      K8     |  DECODE TEMP. 00
      |      *-----------------------------------[DMOV D82    M1460 ]*16216 16223
      |      |                                     MC1#3        |
      |      |                                                  |
      |      |                                                  |  M DECODE OUT
      |      *-----------------------------------------[CALL P183  ]*16223 16218
      |      |                                                  |
      |      |                                                  |
      |     |M1279                                              |  M IN/OUT CHECK
 16219*--| |-----------------------------------------[CALL P184  ]*16448 16221
      |     |ON                                                 |
      |     |585                                                |
      |     |                                                   |
 16222*-----------------------------------------------------[RET ]*
      |     |                                                   |
      |     |                                                   |
P183  |M1460                                    K8             |  temporary  00
 16223*--| |-*-----------------------------------[DOR  M2000  D400  ]*16205 16226 16228 16233
      |     |TMP.00|                              0M             |16235 16240 16242 16247
      |     |16216 |                              16229          |16249 16254 16256 16261
      |      |      |                                            |16275 16270 16268 16263
      |      |      |                                            |16289 16284 16282 16277
      |      |      |                                            |16303 16298 16296 16291
      |      |      |                                            |16317 16312 16310 16305
      |      |      |                                            |16331 16326 16324 16319
      |      |      |                                            |16345 16340 16338 16333
      |      |      |                                            |16359 16354 16352 16347
      |      |      |                                            |16373 16368 16366 16361
      |      |      |                                            |16387 16382 16380 16375
      |      |      |                                            |16401 16396 16394 16389
      |      |      |                                            |16415 16410 16408 16403
      |      |      |                                            |16429 16424 16422 16417
      |      |      |                                            |16443 16438 16436 16431
      |      |      |                                            |16450 16445
      |      |      |                                            |
      |      |      |                                            |
      |      |      |                                   K8       |  PROGRAM STOP
      |      *-----------------------------------[DMOV D400   M2000 ]*16229 16225
      |      |                                     temp00         |
      |      |                                     16205          |
     |M1461                                       K8             |  temporary  00
16230*--| |-*-----------------------------------[DOR  M2032  D400  ]*16205 16226 16228 16233
      |     |TMP.01|                               32M            |16235 16240 16242 16247
      |     |      |                               16236          |16249 16254 16256 16261
      |      |      |                                            |16275 16270 16268 16263
      |      |      |                                            |16289 16284 16282 16277
      |      |      |                                            |16303 16298 16296 16291
      |      |      |                                            |16317 16312 16310 16305
      |      |      |                                            |16331 16326 16324 16319
      |      |      |                                            |16345 16340 16338 16333
      |      |      |                                            |16359 16354 16352 16347
      |      |      |                                            |16373 16368 16366 16361
      |      |      |                                            |16387 16382 16380 16375
      |      |      |                                            |16401 16396 16394 16389
      |      |      |                                            |16415 16410 16408 16403
      |      |      |                                            |16429 16424 16422 16417
      |      |      |                                            |16443 16438 16436 16431
      |      |      |                                            |16450 16445
      |      |      |                                            |
      |      |      |                                            |
      |      |      |                                   K8       |  TAIL SLEEVE REV.
      |      *-----------------------------------[DMOV D400   M2032 ]*16236 16232
      |      |                                     temp00         |
      |      |                                     16205          |
     |M1462                                       K8             |  temporary  00
16237*--| |-*-----------------------------------[DOR  M2064  D400  ]*16205 16226 16228 16233
      |     |TMP.02|                                            |16235 16240 16242 16247
      |     |      |                               16243          |16249 16254 16256 16261
      |      |      |                                            |16275 16270 16268 16263
      |      |      |                                            |16289 16284 16282 16277
      |      |      |                                            |16303 16298 16296 16291
      |      |      |                                            |16317 16312 16310 16305
      |      |      |                                            |16331 16326 16324 16319
      |      |      |                                            |16345 16340 16338 16333
      |      |      |                                            |16359 16354 16352 16347
      |      |      |                                            |16373 16368 16366 16361
      |      |      |                                            |16387 16382 16380 16375
      |      |      |                                            |16401 16396 16394 16389
      |      |      |                                            |16415 16410 16408 16403
      |      |      |                                            |16429 16424 16422 16417
      |      |      |                                   K8       |
      |      *-----------------------------------[DMOV D400   M2064 ]*16243 16239
      |      |                                     temp00         |
      |      |                                     16205          |
     |M1463                                       K8             |  temporary  00
16244*--| |-*-----------------------------------[DOR  M2096  D400  ]*16205 16226 16228 16233
      |     |TMP.03|                                            |16235 16240 16242 16247
      |     |      |                               16250          |16249 16254 16256 16261
      |      |      |                                            |16275 16270 16268 16263
      |      |      |                                            |16289 16284 16282 16277
      |      |      |                                            |16303 16298 16296 16291
      |      |      |                                            |16317 16312 16310 16305
      |      |      |                                            |16331 16326 16324 16319
      |      |      |                                            |16345 16340 16338 16333
      |      |      |                                            |16359 16354 16352 16347
      |      |      |                                            |16373 16368 16366 16361
      |      |      |                                            |16387 16382 16380 16375
      |      |      |                                            |16401 16396 16394 16389
      |      |      |                                            |16415 16410 16408 16403
      |      |      |                                            |16429 16424 16422 16417
      |      |      |                                            |16443 16438 16436 16431
      |      |      |                                            |16450 16445
      |      |      |                                            |
      |      |      |                                            |
```

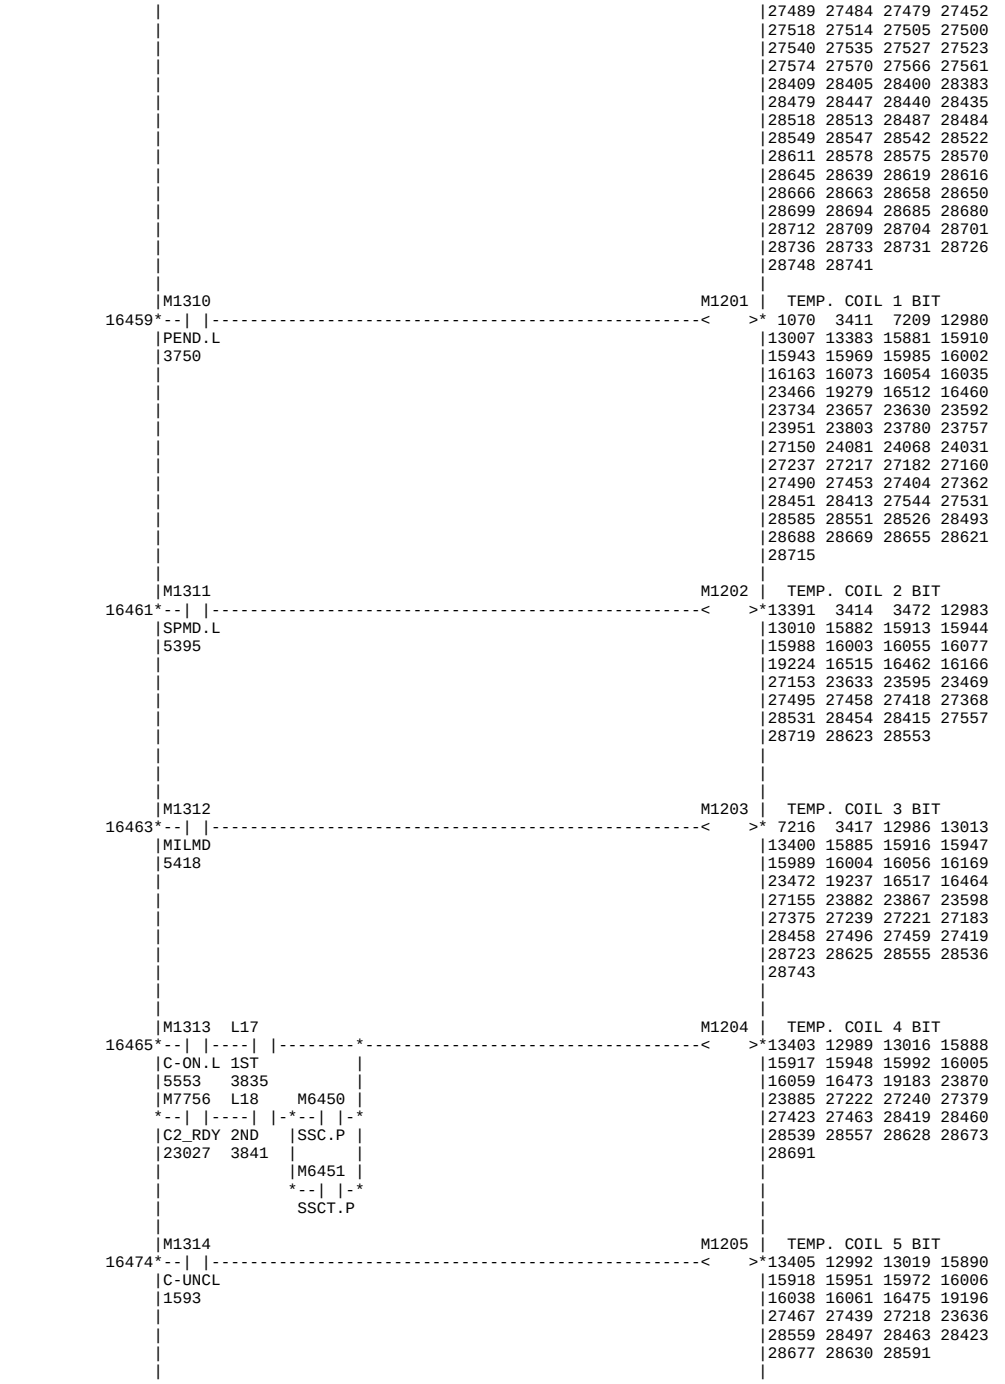

K8
[DMOV D400 M2096]*16250 16246
temp00
16205
M1464
K8
temporary 00
16251*--| |-*[DOR M2128 D400]*16205 16226 16228 16233
TMP.04
16257
16235 16240 16242 16247
16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2128]*16257 16253
temp00
16205
M1265
K8
temporary 00
16258*--| |-*[DOR M2160 D400]*16205 16226 16228 16233
YSMPSC
16264
16235 16240 16242 16247
16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2160]*16264 16260
temp00
16205
M1466
K8
temporary 00
16265*--| |-*[DOR M2192 D400]*16205 16226 16228 16233
TMP.06
16271
16235 16240 16242 16247
16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2192]*16271 16267
temp00
16205
M1467
K8
temporary 00
16272*--| |-*[DOR M2224 D400]*16205 16226 16228 16233
TMP.07
16278
16235 16240 16242 16247
16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2224]*16278 16274
temp00
16205
M1468
K8
temporary 00
16279*--| |-*[DOR M2256 D400]*16205 16226 16228 16233
TMP.08
16285
16235 16240 16242 16247
16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2256]*16285 16281
temp00
16205
M1469
K8
temporary 00
16286*--| |-*[DOR M2288 D400]*16205 16226 16228 16233
TMP.09
16292
16235 16240 16242 16247
16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2288]*16292 16288
temp00
16205
M1470
K8
temporary 00
16293*--| |-*[DOR M2320 D400]*16205 16226 16228 16233
TMP.0A
320M
16299
16235 16240 16242 16247
16249 16254 16256 16261

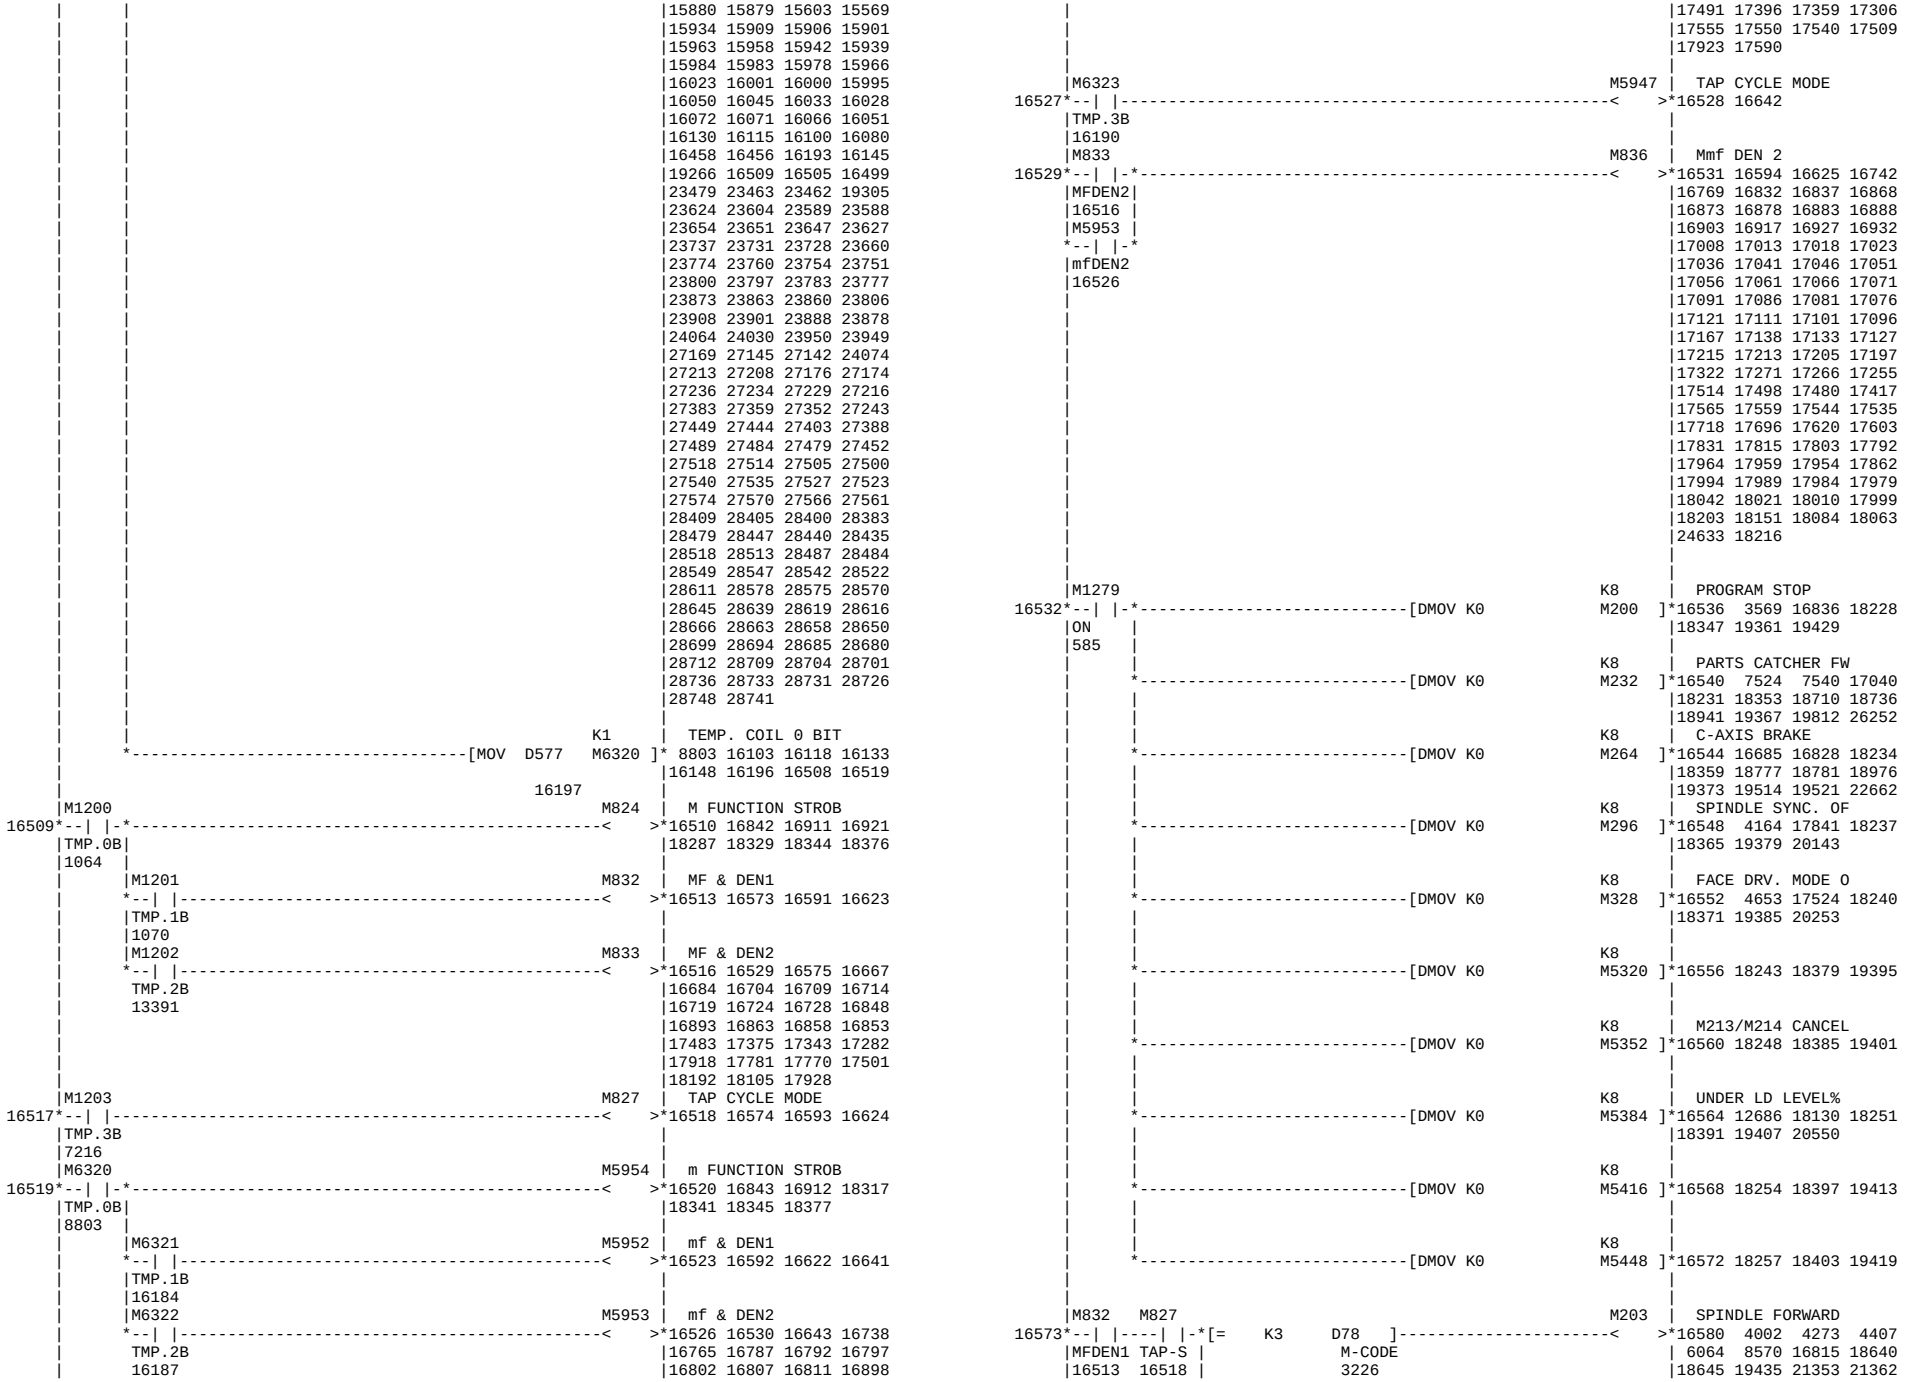

|16275 16270 16268 16263
|16289 16284 16282 16277
|16303 16298 16296 16291
|16317 16312 16310 16305
|16331 16326 16324 16319
|16345 16340 16338 16333
|16359 16354 16352 16347
|16373 16368 16366 16361
|16387 16382 16380 16375
|16401 16396 16394 16389
|16415 16410 16408 16403
|16429 16424 16422 16417
|16443 16438 16436 16431
|16450 16445
K8
| PARTS CAT.ON MAI
*----------[DMOV D400 M2320]*16299 16295
temp00
16205
|M1471
K8
| temporary 00
16300*--| |-*----------[DOR M2352 D400]*16205 16226 16228 16233
|TMP.0B|
352M
16306
|16235 16240 16242 16247
|16249 16254 16256 16261
|16275 16270 16268 16263
|16289 16284 16282 16277
|16303 16298 16296 16291
|16317 16312 16310 16305
|16331 16326 16324 16319
|16345 16340 16338 16333
|16359 16354 16352 16347
|16373 16368 16366 16361
|16387 16382 16380 16375
|16401 16396 16394 16389
|16415 16410 16408 16403
|16429 16424 16422 16417
|16443 16438 16436 16431
|16450 16445
K8
| SP SPEED CHECK C
*----------[DMOV D400 M2352]*16306 16302
temp00
16205
|M1472
K8
| temporary 00
16307*--| |-*----------[DOR M2384 D400]*16205 16226 16228 16233
|TMP.0C|
16313
|16235 16240 16242 16247
|16249 16254 16256 16261
|16275 16270 16268 16263
|16289 16284 16282 16277
|16303 16298 16296 16291
|16317 16312 16310 16305
|16331 16326 16324 16319
|16345 16340 16338 16333
|16359 16354 16352 16347
|16373 16368 16366 16361
|16387 16382 16380 16375
|16401 16396 16394 16389
|16415 16410 16408 16403
|16429 16424 16422 16417
|16443 16438 16436 16431
|16450 16445
K8
*----------[DMOV D400 M2384]*16313 16309
temp00
16205
|M1473
K8
| temporary 00
16314*--| |-*----------[DOR M2416 D400]*16205 16226 16228 16233
|TMP.0D|
16320
|16235 16240 16242 16247
|16249 16254 16256 16261
|16275 16270 16268 16263
|16289 16284 16282 16277
|16303 16298 16296 16291
|16317 16312 16310 16305
|16331 16326 16324 16319
|16345 16340 16338 16333
|16359 16354 16352 16347
|16373 16368 16366 16361
|16387 16382 16380 16375
|16401 16396 16394 16389
|16415 16410 16408 16403
|16429 16424 16422 16417
|16443 16438 16436 16431
|16450 16445
K8
*----------[DMOV D400 M2416]*16320 16316
temp00
16205
|M1474
K8
| temporary 00
16321*--| |-*----------[DOR M2448 D400]*16205 16226 16228 16233
|TMP.0E|
16327
|16235 16240 16242 16247
|16249 16254 16256 16261
|16275 16270 16268 16263
|16289 16284 16282 16277
|16303 16298 16296 16291
|16317 16312 16310 16305
|16331 16326 16324 16319
|16345 16340 16338 16333
|16359 16354 16352 16347
|16373 16368 16366 16361
|16387 16382 16380 16375
|16401 16396 16394 16389
|16415 16410 16408 16403
|16429 16424 16422 16417
|16443 16438 16436 16431
|16450 16445
K8
*----------[DMOV D400 M2448]*16327 16323
temp00
16205
|M1475
K8
| temporary 00
16328*--| |-*----------[DOR M2480 D400]*16205 16226 16228 16233
|TMP.0F|
16334
|16235 16240 16242 16247
|16249 16254 16256 16261
|16275 16270 16268 16263
|16289 16284 16282 16277
|16303 16298 16296 16291
|16317 16312 16310 16305
|16331 16326 16324 16319
|16345 16340 16338 16333
|16359 16354 16352 16347
|16373 16368 16366 16361
|16387 16382 16380 16375
|16401 16396 16394 16389
|16415 16410 16408 16403
|16429 16424 16422 16417
|16443 16438 16436 16431
|16450 16445
K8
*----------[DMOV D400 M2480]*16334 16330
temp00
16205
|M1476
K8
| temporary 00
16335*--| |-*----------[DOR M2512 D400]*16205 16226 16228 16233
|TMP.10|
512M
16341
|16235 16240 16242 16247
|16249 16254 16256 16261
|16275 16270 16268 16263
|16289 16284 16282 16277
|16303 16298 16296 16291
|16317 16312 16310 16305
|16331 16326 16324 16319
|16345 16340 16338 16333
|16359 16354 16352 16347
|16373 16368 16366 16361

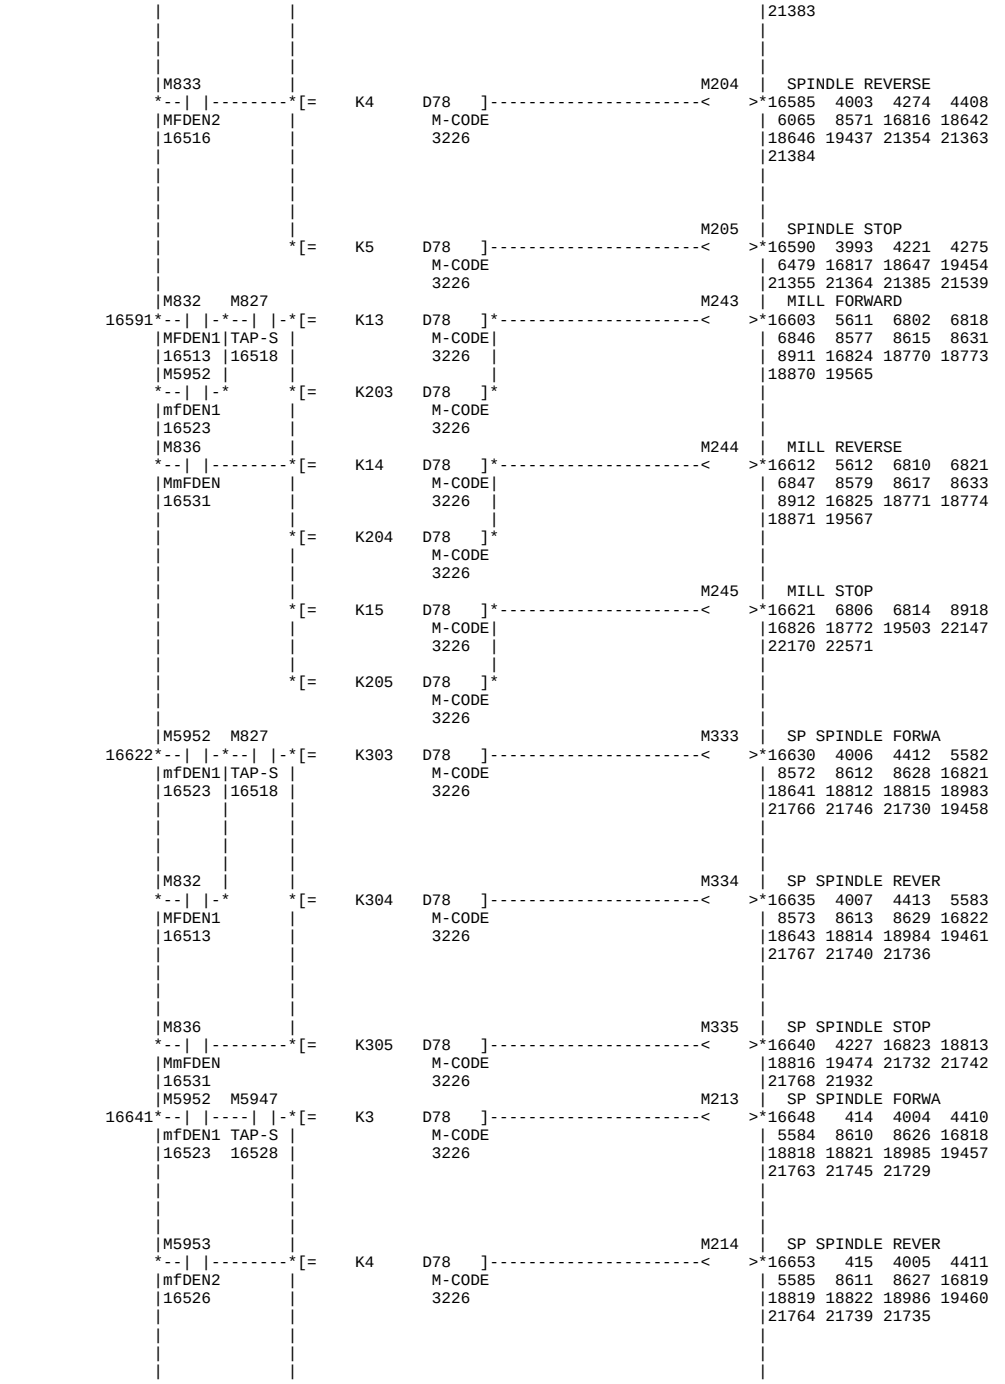

K8
M511 CANCEL
temp00
16205
temporary 00
K8
SEP-SWISS START
temp00
16205
temporary 00
K8
temp00
16205
temporary 00
K8
temp00
16205
temporary 00
K8
temp00
16205
temporary 00
K8
temp00
16205
temporary 00

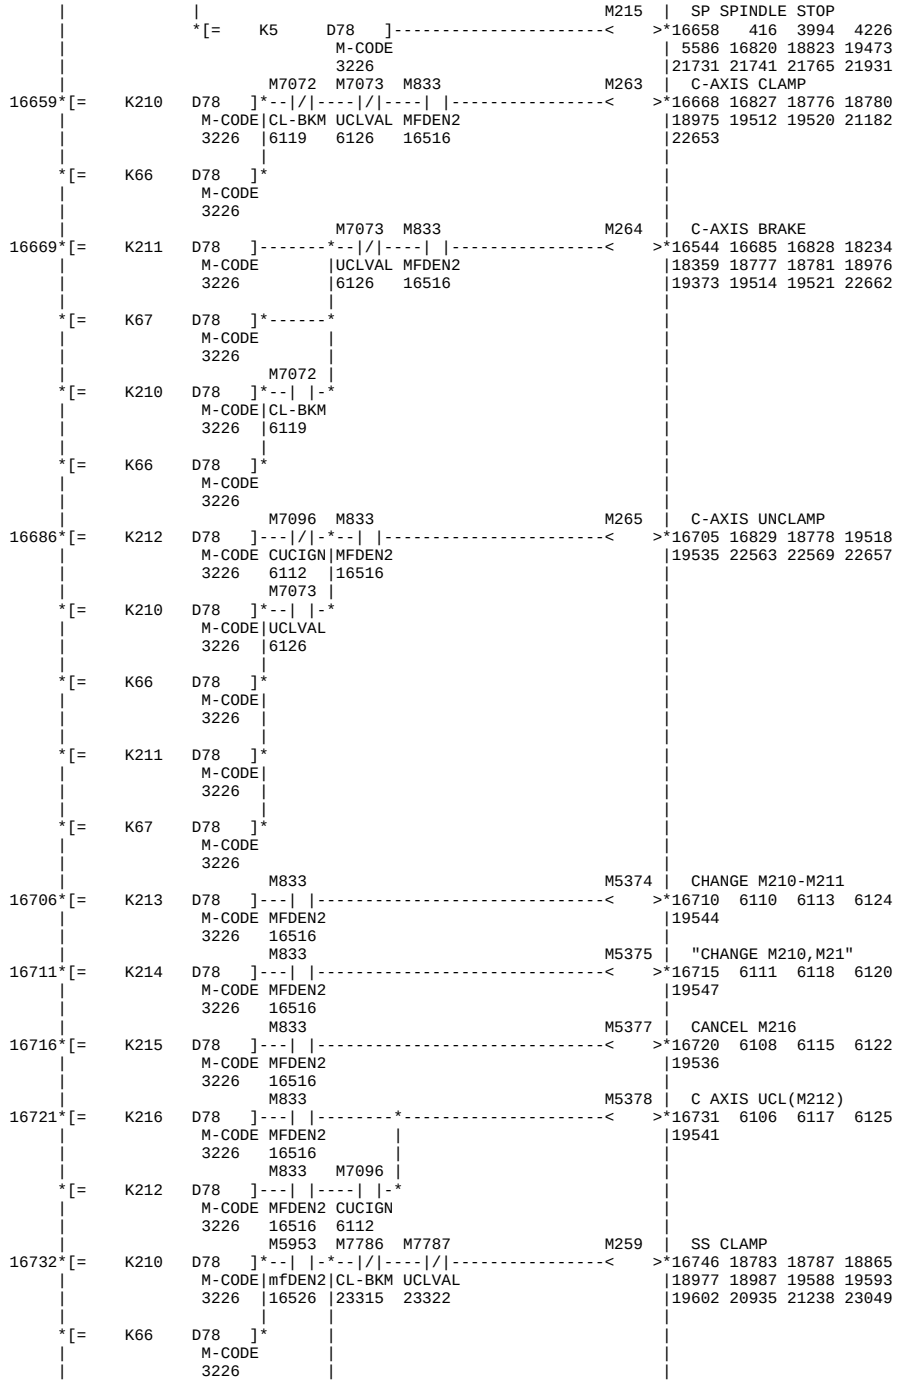

K8 | PUSH ROD R END
[DMOV D400 M2704]*16383 16379
temp00
16205
M1483
K8 | temporary 00
16384*--| |-*[DOR M2736 D400]*16205 16226 16228 16233
TMP.17 16235 16240 16242 16247
16390 16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2736]*16390 16386
temp00
16205
M1484
K8 | temporary 00
16391*--| |-*[DOR M2768 D400]*16205 16226 16228 16233
TMP.18 16235 16240 16242 16247
16397 16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2768]*16397 16393
temp00
16205
M1485
K8 | temporary 00
16398*--| |-*[DOR M2800 D400]*16205 16226 16228 16233
TMP.19 16235 16240 16242 16247
16404 16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2800]*16404 16400
temp00
16205
M1486
K8 | temporary 00
16405*--| |-*[DOR M2832 D400]*16205 16226 16228 16233
TMP.1A 16235 16240 16242 16247
16411 16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2832]*16411 16407
temp00
16205
M1487
K8 | temporary 00
16412*--| |-*[DOR M2864 D400]*16205 16226 16228 16233
TMP.1B 16235 16240 16242 16247
16418 16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2864]*16418 16414
temp00
16205
M1488
K8 | temporary 00
16419*--| |-*[DOR M2896 D400]*16205 16226 16228 16233
TMP.1C 16235 16240 16242 16247
16425 16249 16254 16256 16261
16275 16270 16268 16263
16289 16284 16282 16277
16303 16298 16296 16291
16317 16312 16310 16305
16331 16326 16324 16319
16345 16340 16338 16333
16359 16354 16352 16347
16373 16368 16366 16361
16387 16382 16380 16375
16401 16396 16394 16389
16415 16410 16408 16403
16429 16424 16422 16417
16443 16438 16436 16431
16450 16445
K8
[DMOV D400 M2896]*16425 16421
temp00
16205
M1489
K8 | temporary 00
16426*--| |-*[DOR M2928 D400]*16205 16226 16228 16233
TMP.1D 16235 16240 16242 16247
16432 16249 16254 16256 16261

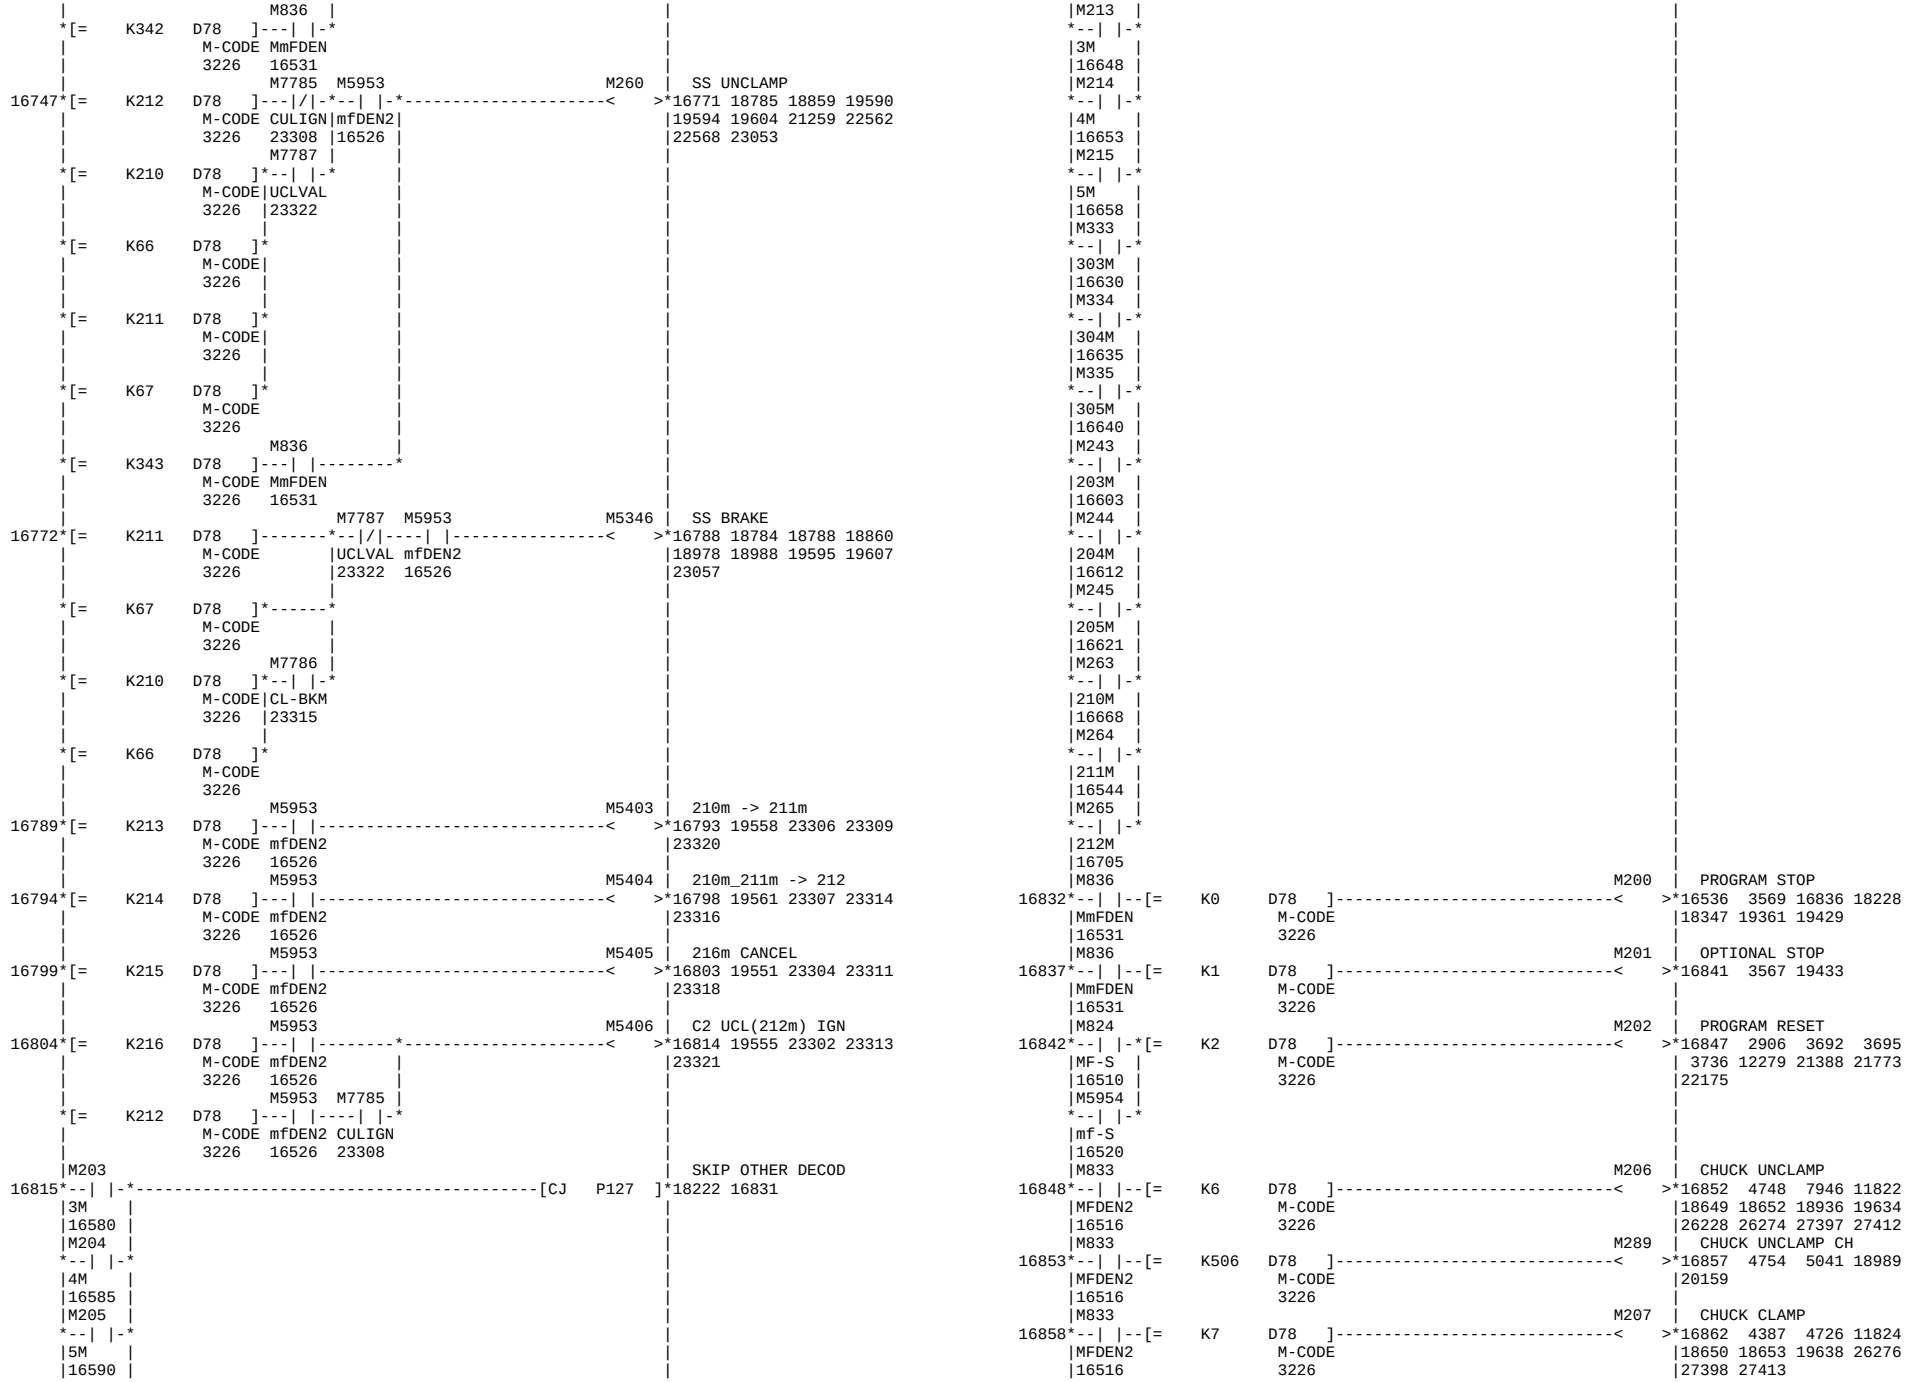



|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
|M1310 M1201 | TEMP. COIL 1 BIT
16459*--| |----------<
|PEND.L
|3750
|* 1070 3411 7209 12980
|13007 13383 15881 15910
|15943 15969 15985 16002
|16163 16073 16054 16035
|23466 19279 16512 16460
|23734 23657 23630 23592
|23951 23803 23780 23757
|27150 24081 24068 24031
|27237 27217 27182 27160
|27490 27453 27404 27362
|28451 28413 27544 27531
|28585 28551 28526 28493
|28688 28669 28655 28621
|28715
|M1311 M1202 | TEMP. COIL 2 BIT
16461*--| |----------<
|SPMD.L
|5395
|*13391 3414 3472 12983
|13010 15882 15913 15944
|15988 16003 16055 16077
|19224 16515 16462 16166
|27153 23633 23595 23469
|27495 27458 27418 27368
|28531 28454 28415 27557
|28719 28623 28553
|M1312 M1203 | TEMP. COIL 3 BIT
16463*--| |----------<
|MILMD
|5418
|* 7216 3417 12986 13013
|13400 15885 15916 15947
|15989 16004 16056 16169
|23472 19237 16517 16464
|27155 23882 23867 23598
|27375 27239 27221 27183
|28458 27496 27459 27419
|28723 28625 28555 28536
|28743
|M1313 L17 M1204 | TEMP. COIL 4 BIT
16465*--| |----| |--------*----------<
|C-ON.L 1ST |
|5553 3835 |
|M7756 L18 M6450 |
--| |----| |---| |-*
|C2_RDY 2ND |SSC.P |
|23027 3841 | |
|M6451 |
--| |-
SSCT.P
|*13403 12989 13016 15888
|15917 15948 15992 16005
|16059 16473 19183 23870
|23885 27222 27240 27379
|27423 27463 28419 28460
|28539 28557 28628 28673
|28691
|M1314 M1205 | TEMP. COIL 5 BIT
16474*--| |----------<
|C-UNCL
|1593
|*13405 12992 13019 15890
|15918 15951 15972 16006
|16038 16061 16475 19196
|27467 27439 27218 23636
|28559 28497 28463 28423
|28677 28630 28591
|M1315 M1206 | TEMP. COIL 6 BIT
16476*--| |----------<
|C-CLMP
|1611
|*13406 3465 3474 12995
|13022 15895 15921 15952
|15973 16007 16040 16062
|27219 23644 19142 16477
|28466 28388 27471 27440
|28632 28597 28561 28501
|28745
|M1316 M1207 | TEMP. COIL 7 BIT
16478*--| |----------<
|C-BRAK
|1628
|*13407 12998 13025 15896
|15924 15953 15974 16012
|16041 16479 19155 27177
|28427 28393 27475 27225
|28603 28563 28505 28469
|M1275 M1208 | TEMP. COIL 8 BIT
16480*--| |----------<
|OFF
|615
|*15575 13001 13028 15898
|15927 15954 15975 16017
|16042 16063 16481 23476
|27226 27178 27157 23601
|28565 28510 28472 28429
|28634 28608
|M1275 M1209 | TEMP. COIL 9 BIT
16482*--| |----------<
|OFF
|615
|*15579 15899 15931 15955
|16020 16064 16483 27159
|27191 28397 28432 28476
|28636 28567
|M1317 M1210 | TEMP. COIL A BIT
16484*--| |----------<
|UCH.L
|4928
|*15584 16485 27202
|M1318 M1211 | TEMP. COIL B BIT
16486*--| |----------<
|CHK.L
|4961
|*15587 16487 27205
|M1319 M1212 | TEMP. COIL C BIT
16488*--| |----------<
|2SUCHL
|5217
|*15590 16489 27186
|M1320 M1213 | TEMP. COIL D BIT
16490*--| |----------<
|2SCCHL
|5246
|X218
|*15599 16491 27194
|M1214 | TEMP. COIL E BIT
16492*--| |-*----------<
|MSOK.N|
| |
|M492 |
--| |-
|81MX
|8017
|* 1124 12412 12413 15600
|16494 23903 27163 27195
|M1275 M1215 | TEMP. COIL F BIT
16495*--| |----------<
|OFF
|615
|* 1119 1123 1125 1127
| 3055 3056 6583 6585
| 6591 6601 6605 14461
|23670 16496 15597 14471
|23936 23931 23905 23671
|27196 27166 23937
|M1279 K4
16497*--| |----------[MOV M1200 R8102]*16500
|ON TMP.0B
|585 1064
16501*----------[RET]*
P132 |M1279 K1 | TEMP. COIL 0 BIT
16502*--| |-*----------[MOV D77 M1200]* 1064 1067 1073 3407
|ON | MF-DEN | 3408 7202 7204 7219
|585 | 16194 |12729 12929 13374 13411

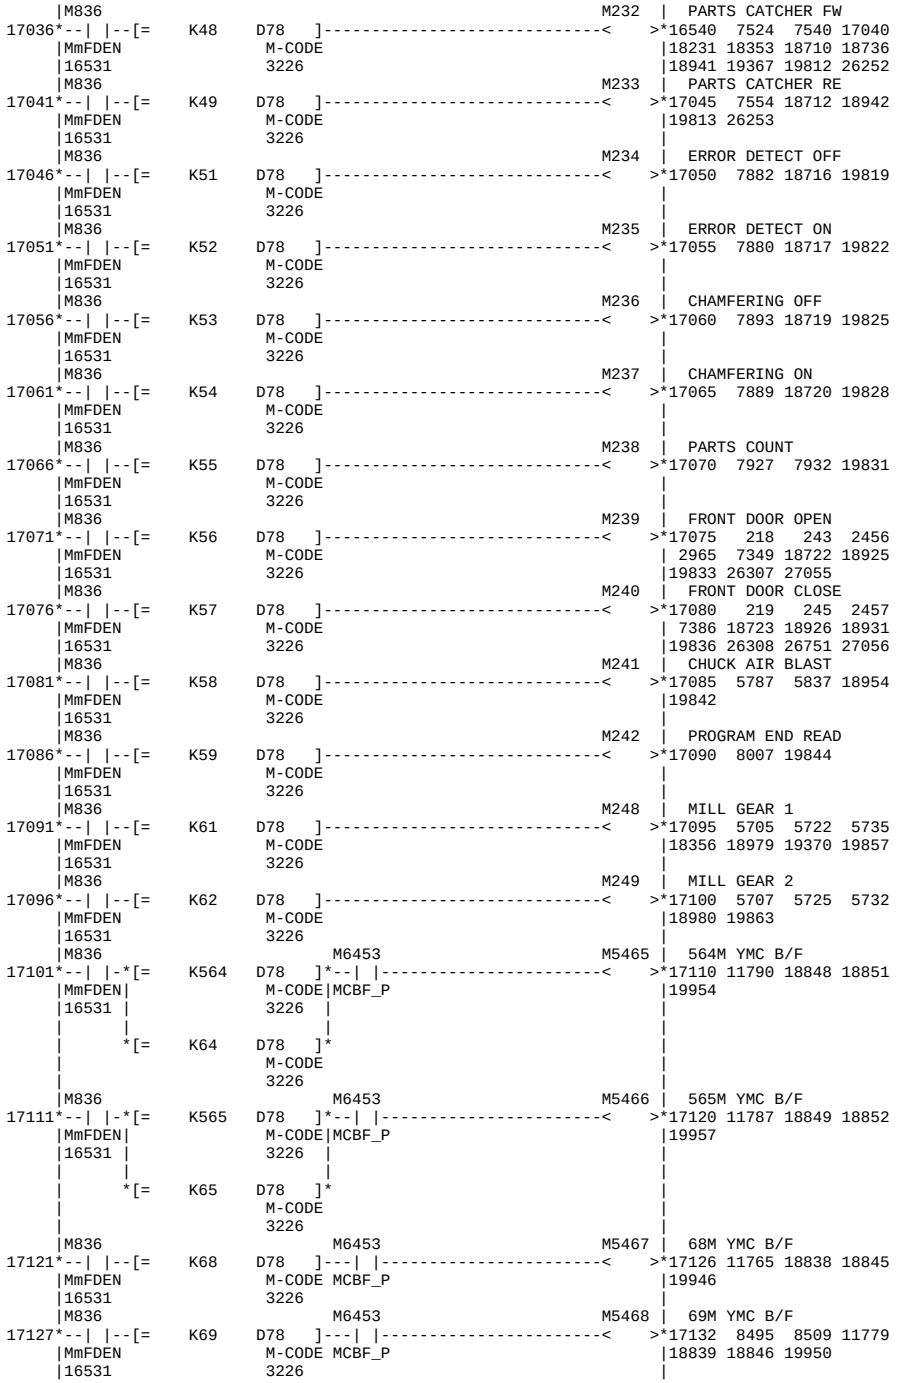

K1
TEMP. COIL 0 BIT
M824
M Function Strob
M832
MF & DEN1
M833
MF & DEN2
M827
TAP CYCLE MODE
M5954
m Function Strob
M5952
mf & DEN1
M5953
mf & DEN2
M5947
TAP CYCLE MODE
M836
Mmf DEN 2
K8
PROGRAM STOP
K8
PARTS CATCHER FW
K8
C-AXIS BRAKE
K8
SPINDLE SYNC. OF
K8
FACE DRV. MODE O
K8
M213/M214 CANCEL
K8
UNDER LD LEVEL%
K8
SPINDLE FORWARD
M-CODE

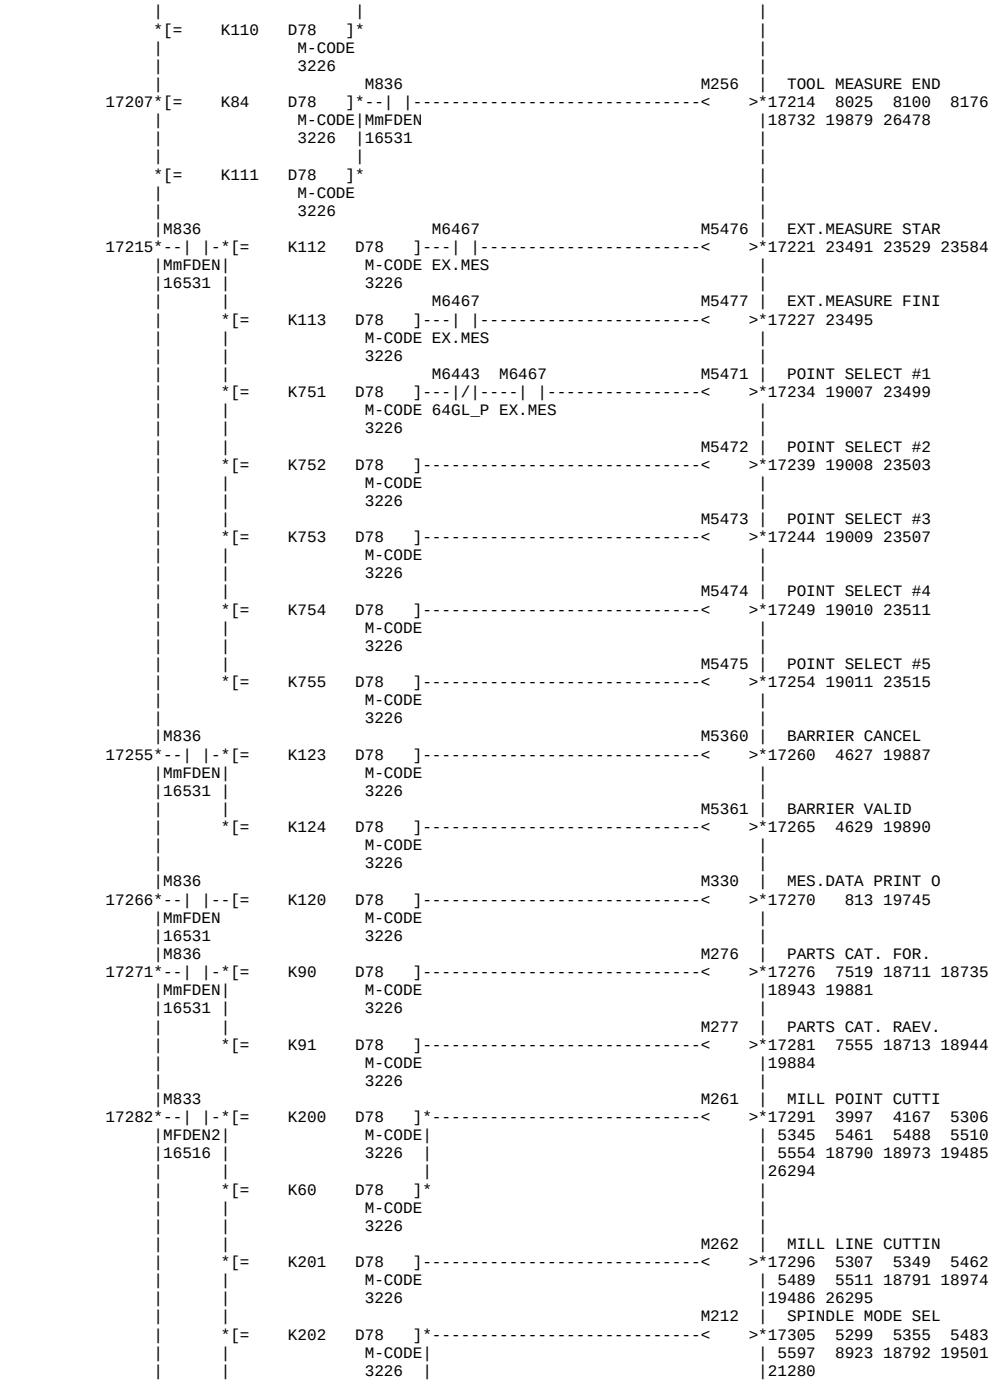

M833
MFDEN2
16516
M832 M827
MFDEN1 TAP-S
16513 16518
M5952
MFDEN1
16523
M836
MmFDEN
16531
M5952 M827
MFDEN1 TAP-S
16523 16518
M832
MFDEN1
16513
M836
MmFDEN
16531
M5952 M5947
MFDEN1 TAP-S
16523 16528
M5953
MFDEN2
16526
K4 D78 M-CODE 3226
K5 D78 M-CODE 3226
K13 D78 M-CODE 3226
K203 D78 M-CODE 3226
K14 D78 M-CODE 3226
K204 D78 M-CODE 3226
K15 D78 M-CODE 3226
K205 D78 M-CODE 3226
K303 D78 M-CODE 3226
K304 D78 M-CODE 3226
K305 D78 M-CODE 3226
K3 D78 M-CODE 3226
K4 D78 M-CODE 3226
M204 | SPINDLE REVERSE
M205 | SPINDLE STOP
M243 | MILL FORWARD
M244 | MILL REVERSE
M245 | MILL STOP
M333 | SP SPINDLE FORWA
M334 | SP SPINDLE REVER
M335 | SP SPINDLE STOP
M213 | SP SPINDLE FORWA
M214 | SP SPINDLE REVER
16585 4003 4274 4408
6065 8571 16816 18642
18646 19437 21354 21363
21384
16590 3993 4221 4275
6479 16817 18647 19454
21355 21364 21385 21539
16603 5611 6802 6818
6846 8577 8615 8631
8911 16824 18770 18773
18870 19565
16612 5612 6810 6821
6847 8579 8617 8633
8912 16825 18771 18774
18871 19567
16621 6806 6814 8918
16826 18772 19503 22147
22170 22571
16630 4006 4412 5582
8572 8612 8628 16821
18641 18812 18815 18983
21766 21746 21730 19458
16635 4007 4413 5583
8573 8613 8629 16822
18643 18814 18984 19461
21767 21740 21736
16640 4227 16823 18813
18816 19474 21732 21742
21768 21932
16648 414 4004 4410
5584 8610 8626 16818
18818 18821 18985 19457
21763 21745 21729
16653 415 4005 4411
5585 8611 8627 16819
18819 18822 18986 19460
21764 21739 21735
21383

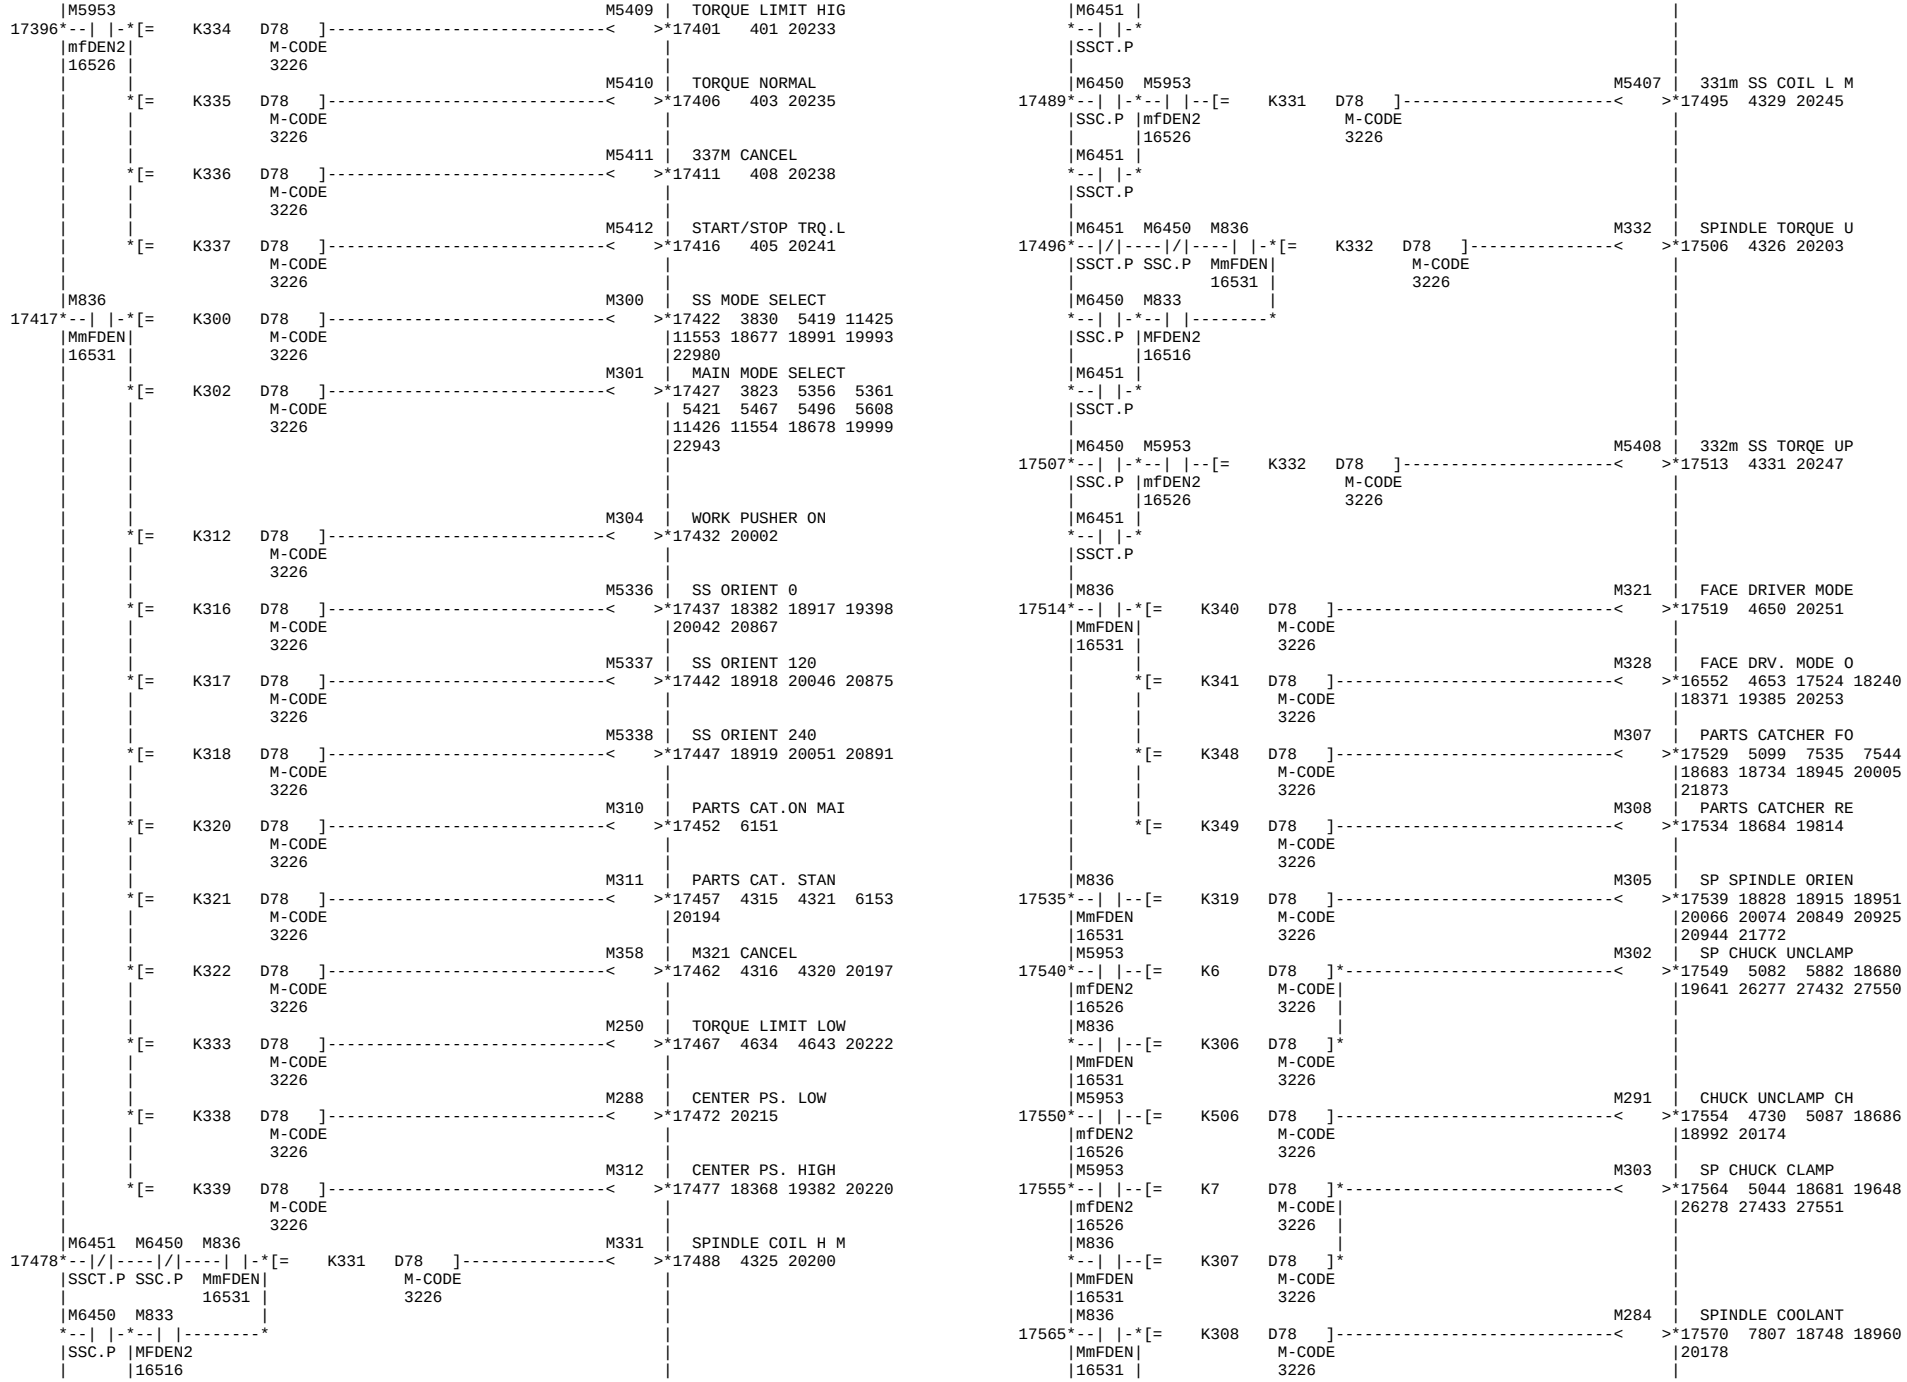

K5 D78 M-CODE 3226
K210 D78 M-CODE CL-BKM 3226 6119 6126 16516
K66 D78 M-CODE 3226
K211 D78 M-CODE UCLVAL 3226 6126 MFDEN2 16516
K67 D78 M-CODE 3226
K212 D78 M-CODE CUCIGN 3226 6112 MFDEN2 16516
K213 D78 M-CODE MFDEN2 3226 16516
K214 D78 M-CODE MFDEN2 3226 16516
K215 D78 M-CODE MFDEN2 3226 16516
K216 D78 M-CODE MFDEN2 3226 16516 M7096
K212 D78 M-CODE MFDEN2 CUCIGN 3226 16516 6112
M7072 M7073 M833
M7073 M833
M7072 M7073 M833
M7096 M833
M833
M833
M833
M5953 M7786 M7787
M215 | SP SPINDLE STOP
M263 | C-AXIS CLAMP
M264 | C-AXIS BRAKE
M265 | C-AXIS UNCLAMP
M5374 | CHANGE M210-M211
M5375 | "CHANGE M210,M21"
M5377 | CANCEL M216
M5378 | C AXIS UCL(M212)
M259 | SS CLAMP
16658 416 3994 4226
5586 16820 18823 19473
21731 21741 21765 21931
16668 16827 18776 18780
18975 19512 19520 21182
22653
16544 16685 16828 18234
18359 18777 18781 18976
19373 19514 19521 22662
16705 16829 18778 19518
19535 22563 22569 22657
16710 6110 6113 6124
19544
16715 6111 6118 6120
19547
16720 6108 6115 6122
19536
16731 6106 6117 6125
19541
16746 18783 18787 18865
18977 18987 19588 19593
19602 20935 21238 23049

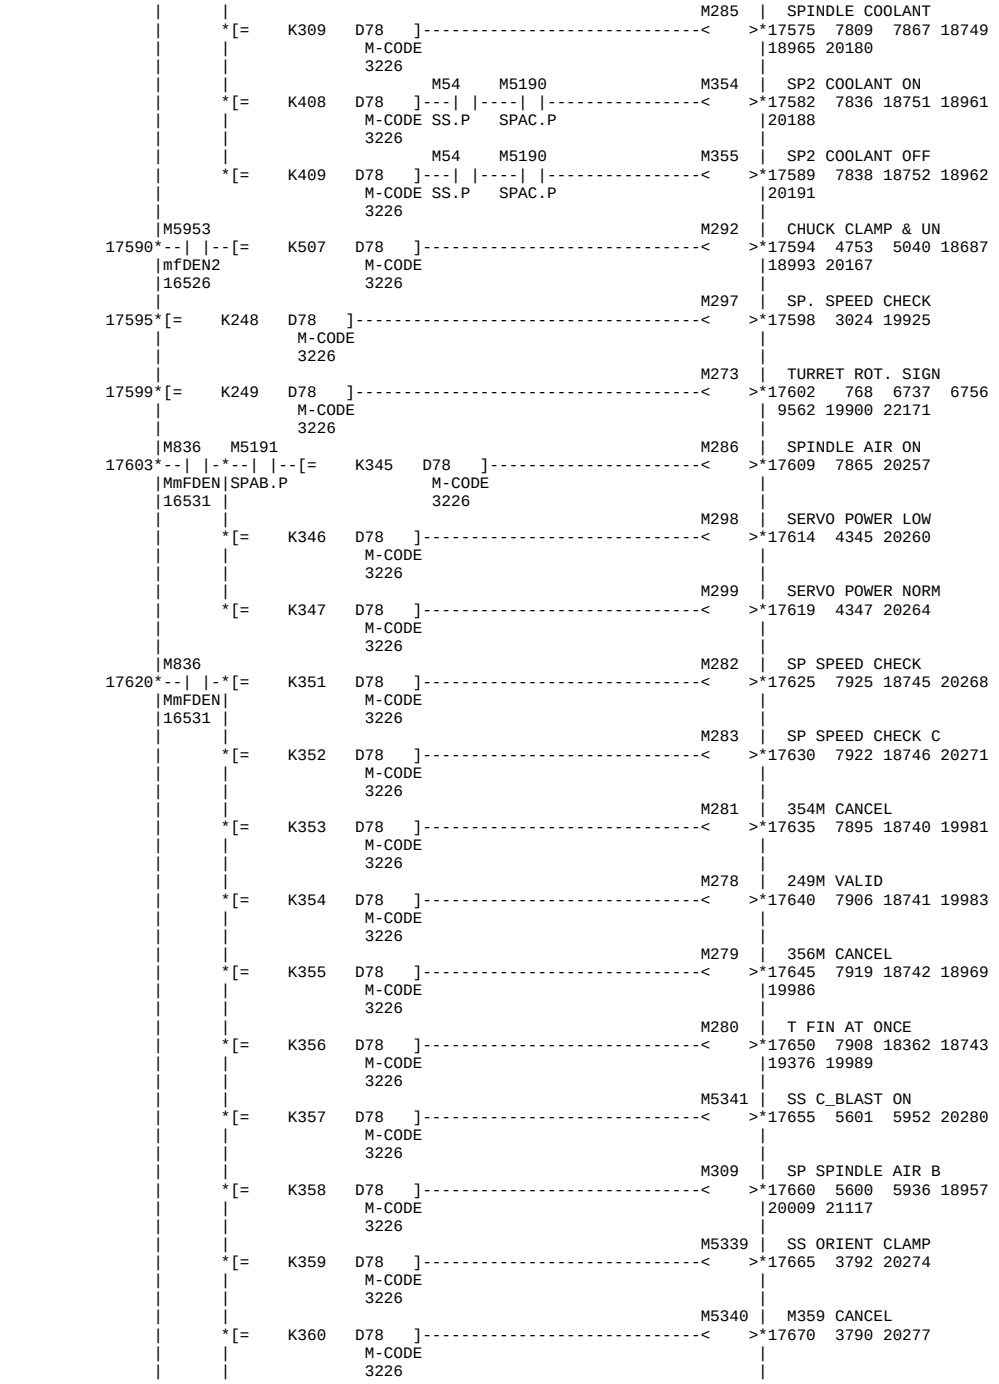

M836
K342 D78 M-CODE MmFDEN 3226 16531
M7785 M5953 M260 SS UNCLAMP
16747 K212 D78 M-CODE CULIGN|mfDEN2| 3226 23308 |16526 |
M7787
K210 D78 M-CODE|UCLVAL 3226 |23322
K66 D78 M-CODE 3226
K211 D78 M-CODE 3226
K67 D78 M-CODE 3226
M836
K343 D78 M-CODE MmFDEN 3226 16531
M7787 M5953 M5346 SS BRAKE
16772 K211 D78 M-CODE |UCLVAL mfDEN2 3226 |23322 16526
K67 D78 M-CODE 3226
M7786
K210 D78 M-CODE|CL-BKM 3226 |23315
K66 D78 M-CODE 3226
M5953 M5403 210m -> 211m
16789 K213 D78 M-CODE mfDEN2 3226 16526
M5953 M5404 210m_211m -> 212
16794 K214 D78 M-CODE mfDEN2 3226 16526
M5953 M5405 216m CANCEL
16799 K215 D78 M-CODE mfDEN2 3226 16526
M5953 M5406 C2 UCL(212m) IGN
16804 K216 D78 M-CODE mfDEN2 3226 16526
M5953 M7785
K212 D78 M-CODE mfDEN2 CULIGN 3226 16526 23308
M203 SKIP OTHER DECOD
16815 CJ P127 18222 16831
3M 16580
M204
4M 16585
M205
5M 16590
M213
3M 16648
M214
4M 16653
M215
5M 16658
M333
303M 16630
M334
304M 16635
M335
305M 16640
M243
203M 16603
M244
204M 16612
M245
205M 16621
M263
210M 16668
M264
211M 16544
M265
212M 16705
M836 M200 PROGRAM STOP
16832 K0 D78 MmFDEN 16531 3226
M836 M201 OPTIONAL STOP
16837 K1 D78 MmFDEN 16531 3226
M824 M202 PROGRAM RESET
16842 K2 D78 MF-S 16510 M5954 3226
mf-S 16520
M833 M206 CHUCK UNCLAMP
16848 K6 D78 MFDEN2 16516 3226
M833 M289 CHUCK UNCLAMP CH
16853 K506 D78 MFDEN2 16516 3226
M833 M207 CHUCK CLAMP
16858 K7 D78 MFDEN2 16516 3226
16536 3569 16836 18228 18347 19361 19429
16841 3567 19433
16847 2906 3692 3695 3736 12279 21388 21773 22175
16852 4748 7946 11822 18649 18652 18936 19634 26228 26274 27397 27412
16857 4754 5041 18989 20159
16862 4387 4726 11824 18650 18653 19638 26276 27398 27413
16771 18785 18859 19590 19594 19604 21259 22562 22568 23053
16788 18784 18788 18860 18978 18988 19595 19607 23057
16798 19561 23307 23314 23316
16803 19551 23304 23311 23318
16814 19555 23302 23313 23321

```
     |M833                                                M290  |  CHUCK CLAMP & UN
16863*--| |--[=    K507   D78   ]----------------------------<    >*16867  4729  5086  5880
     |MFDEN2               M-CODE                              |18990 20151
     |16516                3226                                |
     |M836                                                M208  |  COOLANT ON
16868*--| |--[=    K8     D78   ]----------------------------<    >*16872  7686  7791 18656
     |MmFDEN               M-CODE                              |18668 18671 19653 28254
     |16531                3226                                |
     |M836                                                M209  |  COOLANT OFF
16873*--| |--[=    K9     D78   ]----------------------------<    >*16877  7693  7700  7792
     |MmFDEN               M-CODE                              |18666 19659 28163 28176
     |16531                3226                                |28189 28202 28215 28228
     |                                                         |28253 28241
     |                                                         |
     |                                                         |
     |                                                         |
     |M836                                                M216  |  ORIENT 0
16878*--| |--[=    K16    D78   ]----------------------------<    >*16882 18350 18690 18693
     |MmFDEN               M-CODE                              |18696 18906 19364 19673
     |16531                3226                                |20595 20616
     |M836                                                M217  |  ORIENT 120
16883*--| |--[=    K17    D78   ]----------------------------<    >*16887 18691 18694 18697
     |MmFDEN               M-CODE                              |18907 19677 20596 20624
     |16531                3226                                |
     |M836                                                M218  |  ORIENT 240
16888*--| |--[=    K18    D78   ]----------------------------<    >*16892 18692 18698 18908
     |MmFDEN               M-CODE                              |19682 20597 20640
     |16531                3226                                |
     |M833                                                M219  |  SP-ORIENT
16893*--| |--[=    K19    D78   ]----------------------------<    >*16897  8824 18699 18825
     |MFDEN2               M-CODE                              |18909 19687 19701 20598
     |16516                3226                                |20668 20676 21387
     |M5953                                               M5420 |  SS ORIENT
16898*--| |--[=    K19    D78   ]----------------------------<    >*16902 18829 18916 20067
     |mfDEN2               M-CODE                              |20075 20850 20926 20945
     |16526                3226                                |21771
     |M836                                                M344  |  ROBOT CALL
16903*--| |--[<    K19    D78   ]-[>    K30    D78   ]--------<    >*16910 18374 18409 19388
     |MmFDEN               M-CODE              M-CODE          |
     |16531                3226                3226            |
     |M824                                                M220  |  RESET & REWIND
16911*--| |-*[=    K30    D78   ]----------------------------<    >*16916  2905  3693  3702
     |MF-S  |              M-CODE                              | 3735  8922 12017 21389
     |16510 |              3226                                |21774 22176
     |M5954 |                                                  |
     *--| |-*                                                  |
     |mf-S                                                     |
     |16520                                                    |
     |M836                                                M221  |  TAIL SLEEVE FWD.
16917*--| |--[=    K31    D78   ]*---------------------------<    >*16926  7232  7235  7248
     |MmFDEN               M-CODE|                             |10580 10698 10718 10752
     |16531                3226  |                             |10765 10791 10813 10831
     |M824                       |                             |10876 10878 10914 18704
     *--| |--[=    K344   D78   ]*                             |19722 26661 26670 27114
     |MF-S                 M-CODE                              |
     |16510                3226                                |
     |M836                                                M222  |  TAIL SLEEVE REV.
16927*--| |--[=    K32    D78   ]----------------------------<    >*16931  7237  7255 10695
     |MmFDEN               M-CODE                              |10766 18705 19728 26671
     |16531                3226                                |
     |M836                                                M5433 |  731M TAIL PRES.1
16932*--| |-*[=    K731   D78   ]----------------------------<    >*16937  9779 19029 19749
     |MmFDEN|              M-CODE                              |
     |16531 |              3226                                |
     |      |                                                  |
     |      *[=    K732   D78   ]----------------------------<    >*16942  9803 19030 19751
     |      |              M-CODE                              |
     |      |              3226                                |
     |      |                                                 M5435 |  733M TAIL PRES.3
     |      *[=    K733   D78   ]----------------------------<    >*16947  9827 19031 19754
     |      |              M-CODE                              |
     |      |              3226                                |
     |      |                                                 M5436 |  734M TAIL PRES.4
     |      *[=    K734   D78   ]----------------------------<    >*16952  9851 19032 19757
     |      |              M-CODE                              |
     |      |              3226                                |
     |      |                                                  |      |                                                 M5437 |  735M TAIL PRES.5
     |      *[=    K735   D78   ]----------------------------<    >*16957  9875 19033 19760
     |      |              M-CODE                              |      |
     |      |              3226                                |      |
     |      |                                                  |      |                                                 M5438 |  736M TAIL PRES.6
     |      *[=    K736   D78   ]----------------------------<    >*16962  9899 19034 19763
     |      |              M-CODE                              |      |
     |      |              3226                                |      |
     |      |                                                  |      |                                                 M5439 |  737M TAIL PRES.7
     |      *[=    K737   D78   ]----------------------------<    >*16967  9923 19035 19766
     |      |              M-CODE                              |      |
     |      |              3226                                |      |
     |      |                                                  |      |                                                 M5440 |  738M TAIL PRES.8
     |      *[=    K738   D78   ]----------------------------<    >*16972  9947 19018 19769
     |      |              M-CODE                              |      |
     |      |              3226                                |      |
     |      |                                                  |      |                                                 M5441 |  739M TAIL PRES.9
     |      *[=    K739   D78   ]----------------------------<    >*16977  9966 19019 19772
     |      |              M-CODE                              |      |
     |      |              3226                                |      |
     |      |                                                  |      |                                                 M5442 |  740M TAIL PRES.1
     |      *[=    K740   D78   ]----------------------------<    >*16982  9985 19024 19775
     |      |              M-CODE                              |      |
     |      |              3226                                |      |
     |      |                                                  |      |                                                 M5443 |  741M TAIL POS.1
     |      *[=    K741   D78   ]----------------------------<    >*16987 10577 10668 10697
     |      |              M-CODE                              |      |                                                 |10714 10733 10745 10767
     |      |              3226                                |      |                                                 |10789 10811 10829 10867
     |      |                                                  |      |                                                 |19779 19036 10912 10879
     |      |                                                  |      |                                                 |27112 26672 26662
     |      |                                                  |      |                                                 |
     |      |                                                  |      |                                                 |
     |      |                                                  |      |                                                 M5444 |  742M TAIL POS.2
     |      *[=    K742   D78   ]----------------------------<    >*16992 10578 10672 10701
     |      |              M-CODE                              |      |                                                 |10715 10739 10756 10768
     |      |              3226                                |      |                                                 |10794 10816 10843 10868
     |      |                                                  |      |                                                 |19787 19037 10921 10882
     |      |                                                  |      |                                                 |27124 26673 26663
     |      |                                                  |      |                                                 |
     |      |                                                  |      |                                                 |
     |      |                                                  |      |                                                 M5445 |  743M TAIL REV.
     |      *[=    K743   D78   ]----------------------------<    >*16997   208 10583 10676
     |      |              M-CODE                              |      |                                                 |10716 10769 10797 10854
     |      |              3226                                |      |                                                 |10928 19038 19797 26674
     |      |                                                  |      |                                                 M5455 |  744M SP.ROT.OK
     |      *[=    K744   D78   ]----------------------------<    >*17002 18884 19039 19802
     |      |              M-CODE                              |      |                                                 |25712
     |      |              3226                                |      |                                                 |
     |      |                                                  |      |                                                 M5456 |  745M CANCEL 744M
     |      *[=    K745   D78   ]----------------------------<    >*17007 18885 19040 19805
     |      |              M-CODE                              |      |                                                 |25714
     |      |              3226                                |      |                                                 |
     |M836                                                M223  |  CHUCK PRESSURE L
17008*--| |--[=    K33    D78   ]----------------------------<    >*17012  4432 18701 18911
     |MmFDEN               M-CODE                              |      |                                                 |19731
     |16531                3226                                |      |                                                 |
     |M836                                                M224  |  CHUCK PRESSURE H
17013*--| |--[=    K34    D78   ]----------------------------<    >*17017  4437 18702 18912
     |MmFDEN               M-CODE                              |      |                                                 |19734
     |16531                3226                                |      |                                                 |
     |M836                                                M226  |  SP-GEAR 1
17018*--| |--[=    K37    D78   ]----------------------------<    >*17022 19902
     |MmFDEN               M-CODE                              |      |                                                 |
     |16531                3226                                |      |                                                 |
     |M836                                                M229  |  AIR COOLANT ON
17023*--| |--[=    K45    D78   ]----------------------------<    >*17027  7694  7789 18657
     |MmFDEN               M-CODE                              |      |                                                 |18669 18922 19737
     |16531                3226                                |      |                                                 |
     |                                                    M230  |  TURRET ROT. FWD.
17028*[=    K46    D78   ]-----------------------------------<    >*17031  6556 18708 19740
     |                    M-CODE                              |      |                                                 |
     |                    3226                                |      |                                                 |
     |                                                    M231  |  TURRET ROT. SHOR
17032*[=    K47    D78   ]-----------------------------------<    >*17035  6558 18709 19743
     |                    M-CODE                              |      |                                                 |
     |                    3226                                |      |                                                 |
```

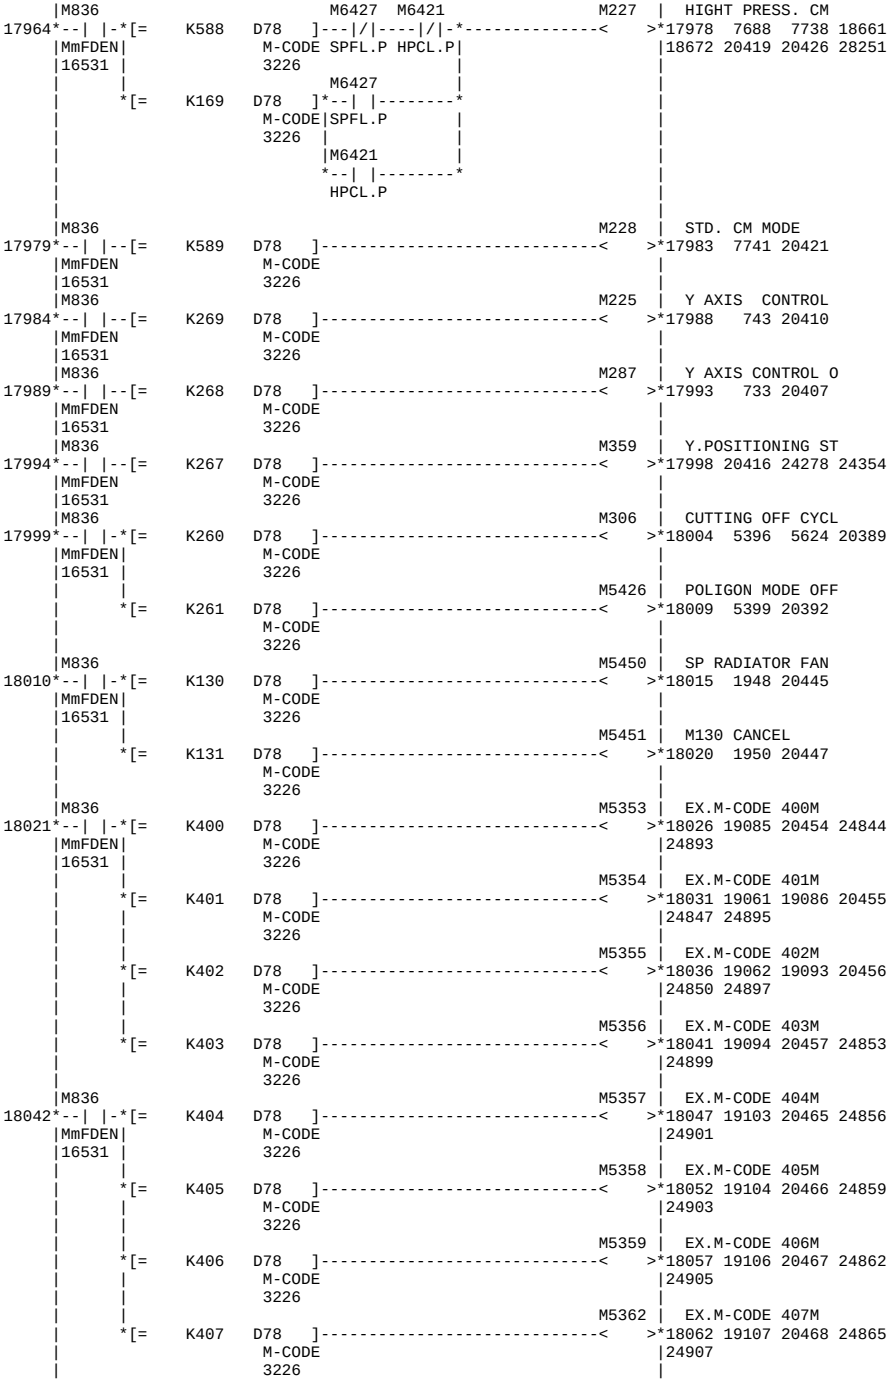

M836
M232 | PARTS CATCHER FW
17036*--| |--[= K48 D78]----------<
>*16540 7524 7540 17040
M-CODE
18231 18353 18710 18736
MmFDEN
16531
3226
18941 19367 19812 26252
M836
M233 | PARTS CATCHER RE
17041*--| |--[= K49 D78]----------<
>*17045 7554 18712 18942
MmFDEN
M-CODE
19813 26253
16531
3226
M836
M234 | ERROR DETECT OFF
17046*--| |--[= K51 D78]----------<
>*17050 7882 18716 19819
MmFDEN
M-CODE
16531
3226
M836
M235 | ERROR DETECT ON
17051*--| |--[= K52 D78]----------<
>*17055 7880 18717 19822
MmFDEN
M-CODE
16531
3226
M836
M236 | CHAMFERING OFF
17056*--| |--[= K53 D78]----------<
>*17060 7893 18719 19825
MmFDEN
M-CODE
16531
3226
M836
M237 | CHAMFERING ON
17061*--| |--[= K54 D78]----------<
>*17065 7889 18720 19828
MmFDEN
M-CODE
16531
3226
M836
M238 | PARTS COUNT
17066*--| |--[= K55 D78]----------<
>*17070 7927 7932 19831
MmFDEN
M-CODE
16531
3226
M836
M239 | FRONT DOOR OPEN
17071*--| |--[= K56 D78]----------<
>*17075 218 243 2456
MmFDEN
M-CODE
2965 7349 18722 18925
16531
3226
19833 26307 27055
M836
M240 | FRONT DOOR CLOSE
17076*--| |--[= K57 D78]----------<
>*17080 219 245 2457
MmFDEN
M-CODE
7386 18723 18926 18931
16531
3226
19836 26308 26751 27056
M836
M241 | CHUCK AIR BLAST
17081*--| |--[= K58 D78]----------<
>*17085 5787 5837 18954
MmFDEN
M-CODE
19842
16531
3226
M836
M242 | PROGRAM END READ
17086*--| |--[= K59 D78]----------<
>*17090 8007 19844
MmFDEN
M-CODE
16531
3226
M836
M248 | MILL GEAR 1
17091*--| |--[= K61 D78]----------<
>*17095 5705 5722 5735
MmFDEN
M-CODE
18356 18979 19370 19857
16531
3226
M836
M249 | MILL GEAR 2
17096*--| |--[= K62 D78]----------<
>*17100 5707 5725 5732
MmFDEN
M-CODE
18980 19863
16531
3226
M836
M6453
M5465 | 564M YMC B/F
17101*--| |-*[= K564 D78]*--| |----------<
>*17110 11790 18848 18851
MmFDEN
M-CODE MCBF_P
19954
16531
3226
[= K64 D78]
M-CODE
3226
M836
M6453
M5466 | 565M YMC B/F
17111*--| |-*[= K565 D78]*--| |----------<
>*17120 11787 18849 18852
MmFDEN
M-CODE MCBF_P
19957
16531
3226
[= K65 D78]
M-CODE
3226
M836
M6453
M5467 | 68M YMC B/F
17121*--| |--[= K68 D78]---| |----------<
>*17126 11765 18838 18845
MmFDEN
M-CODE MCBF_P
19946
16531
3226
M836
M6453
M5468 | 69M YMC B/F
17127*--| |--[= K69 D78]---| |----------<
>*17132 8495 8509 11779
MmFDEN
M-CODE MCBF_P
18839 18846 19950
16531
3226
M836
M246 | CHUCK INT. SELEC
17133*--| |--[= K72 D78]----------<
>*17137 4479 4484 4511
MmFDEN
M-CODE
4516 4537 4616 18726
16531
3226
18947 19847
M836
M247 | CHUCK EXT. SELEC
17138*--| |--[= K73 D78]----------<
>*17142 4481 4485 4507
MmFDEN
M-CODE
4520 4548 4618 18727
16531
3226
18948 19849
M836
M253 | WORK MEASURE STA
17143*[= K81 D78]*--| |-*----------<
>*17168 6050 8013 18728
M-CODE
MmFDEN
19870
3226
16531
M329 | BARRIER CANSEL
[= K100 D78] *[= K108 D78]--------<
>*17172
M-CODE
M-CODE
3226
3226
[= K102 D78]
M-CODE
3226
[= K104 D78]
M-CODE
3226
[= K106 D78]
M-CODE
3226
[= K108 D78]
M-CODE
3226
[= K114 D78]
M-CODE
3226
[= K116 D78]
M-CODE
3226
M836
M254 | WORK MEASURE END
17173*[= K82 D78]*--| |----------<
>*17198 7213 8015 18729
M-CODE
MmFDEN
19873
3226
16531
[= K101 D78]
M-CODE
3226
[= K103 D78]
M-CODE
3226
[= K105 D78]
M-CODE
3226
[= K107 D78]
M-CODE
3226
[= K109 D78]
M-CODE
3226
[= K115 D78]
M-CODE
3226
[= K117 D78]
M-CODE
3226
M836
M255 | TOOL MEASUER STA
17199*[= K83 D78]*--| |----------<
>*17206 6051 7227 8023
M-CODE
MmFDEN
8088 8175 18731 18737
3226
16531
19875 24451 24464 26653

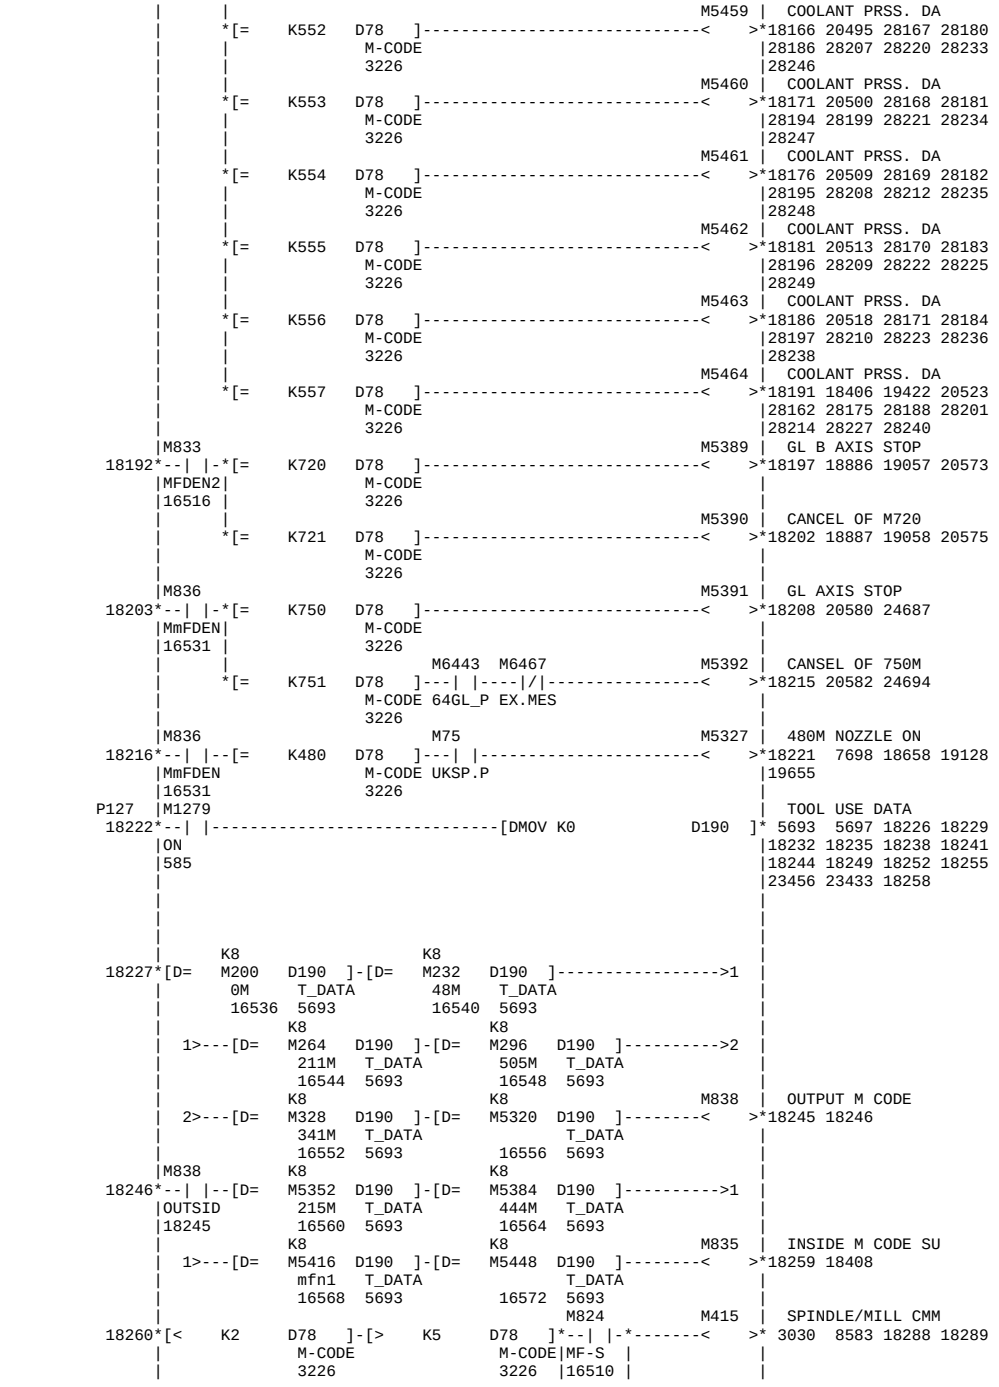

[= K110 D78]
M-CODE
3226
M836 M256 | TOOL MEASURE END
17207*[= K84 D78]*--| |----------<
M-CODE|MmFDEN
3226 |16531
[= K111 D78]
M-CODE
3226
|M836 M6467 M5476 | EXT.MEASURE STAR
17215*--| |-*[= K112 D78]---| |----------<
|MmFDEN| M-CODE EX.MES
|16531 | 3226
M6467 M5477 | EXT.MEASURE FINI
*[= K113 D78]---| |----------<
M-CODE EX.MES
3226
M6443 M6467 M5471 | POINT SELECT #1
*[= K751 D78]---|/|----| |----------<
M-CODE 64GL_P EX.MES
3226
M5472 | POINT SELECT #2
*[= K752 D78]----------<
M-CODE
3226
M5473 | POINT SELECT #3
*[= K753 D78]----------<
M-CODE
3226
M5474 | POINT SELECT #4
*[= K754 D78]----------<
M-CODE
3226
M5475 | POINT SELECT #5
*[= K755 D78]----------<
M-CODE
3226
|M836 M5360 | BARRIER CANCEL
17255*--| |-*[= K123 D78]----------<
|MmFDEN| M-CODE
|16531 | 3226
M5361 | BARRIER VALID
*[= K124 D78]----------<
M-CODE
3226
|M836 M330 | MES.DATA PRINT O
17266*--| |--[= K120 D78]----------<
|MmFDEN M-CODE
|16531 3226
|M836 M276 | PARTS CAT. FOR.
17271*--| |-*[= K90 D78]----------<
|MmFDEN| M-CODE
|16531 | 3226
M277 | PARTS CAT. RAEV.
*[= K91 D78]----------<
M-CODE
3226
|M833 M261 | MILL POINT CUTTI
17282*--| |-*[= K200 D78]*----------<
|MFDEN2| M-CODE|
|16516 | 3226 |
[= K60 D78]
M-CODE
3226
M262 | MILL LINE CUTTIN
*[= K201 D78]----------<
M-CODE
3226
M212 | SPINDLE MODE SEL
[= K202 D78]----------<
M-CODE|
3226 |
[= K12 D78]
M-CODE
3226
|M5953 M5400 | 200m MILL POINT
17306*--| |-*[= K200 D78]----------<
|mfDEN2| M-CODE
|16526 | 3226
*[= K201 D78]----------<
M-CODE
3226
M5401 | 201m MILL LINE C
*[= K202 D78]----------<
M-CODE
3226
M5402 | 202m SPINDLE MOD
*[= K219 D78]----------<
M-CODE
3226
|M836 M266 | MILL ORIENT
17322*--| |-*[= K219 D78]----------<
|MmFDEN| M-CODE
|16531 | 3226
M274 | TAIL REVERSE VAR
*[= K231 D78]----------<
M-CODE
3226
M275 | M231 CANCEL
*[= K232 D78]----------<
M-CODE
3226
M268 | CHUCK OPEN AT SR
*[= K236 D78]----------<
M-CODE
3226
|M833 M269 | M 236 CANCEL
17343*--| |-*[= K237 D78]----------<
|MFDEN2| M-CODE
|16516 | 3226
M270 | C-GAIN M
*[= K238 D78]----------<
M-CODE
3226
M271 | C-GAIN H
*[= K239 D78]----------<
M-CODE
3226
|M5953 M5413 | C GAIN NORMAL
17359*--| |-*[= K237 D78]----------<
|mfDEN2| M-CODE
|16526 | 3226
M5414 | C GAIN FOR FINIS
*[= K238 D78]----------<
M-CODE
3226
M5415 | C GAIN FOR HEAVY
*[= K239 D78]----------<
M-CODE
3226
|M833 M251 | TORQUE LIMIT HIG
17375*--| |-*[= K334 D78]----------<
|MFDEN2| M-CODE
|16516 | 3226
M252 | TORQUE NORMAL
*[= K335 D78]----------<
M-CODE
3226
M267 | M337 CANSEL
*[= K336 D78]----------<
M-CODE
3226
M272 | START STOP TRQ.L
*[= K337 D78]----------<
M-CODE
3226

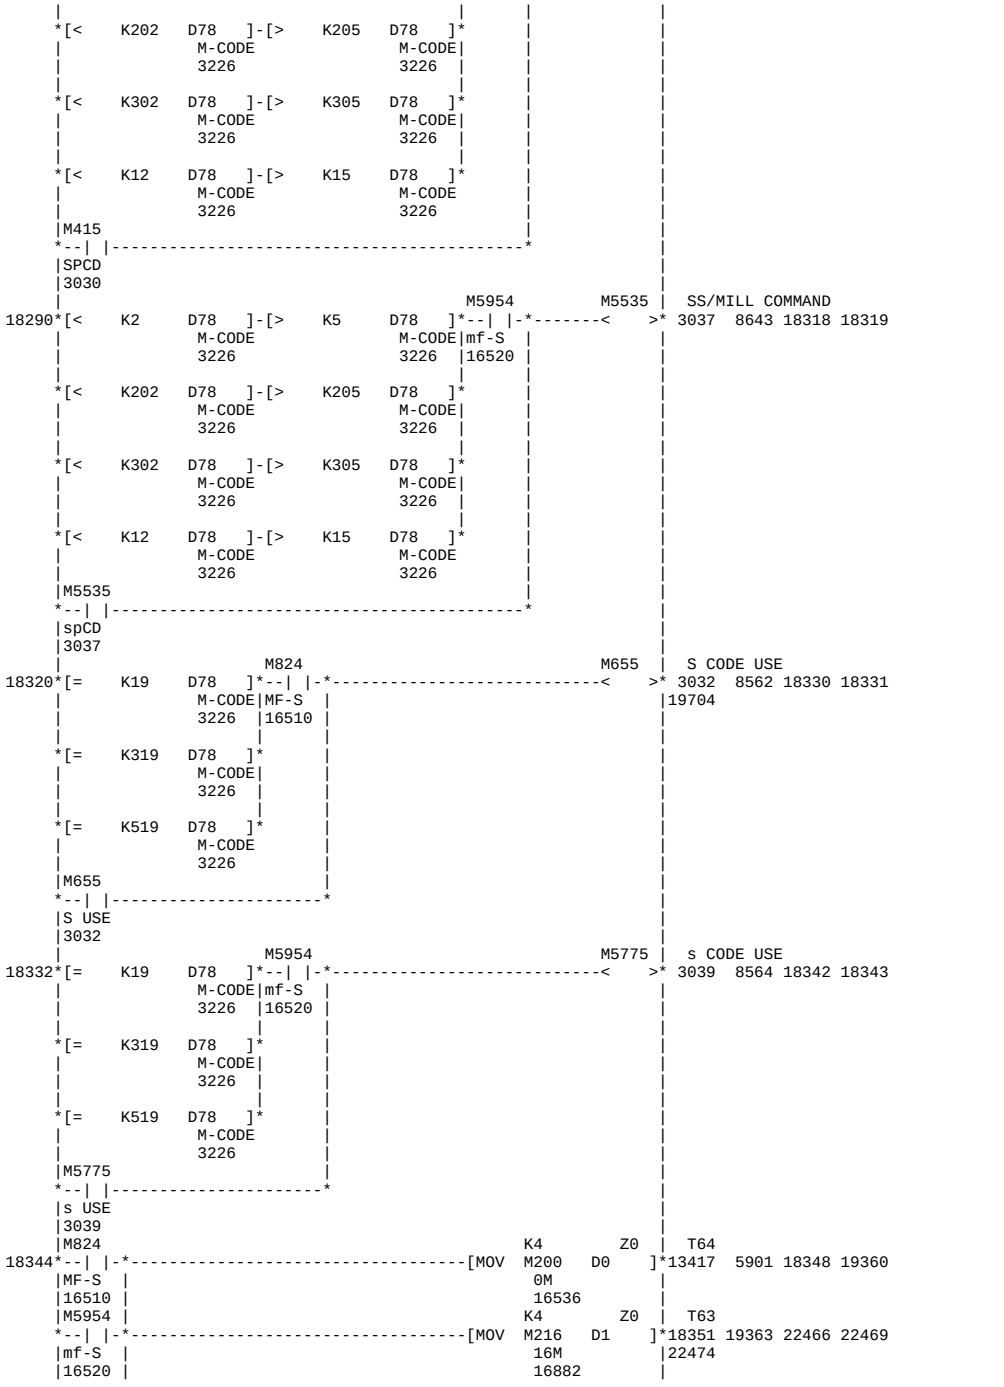

M5953
M5409 | TORQUE LIMIT HIG
17396*--| |-*[= K334 D78]----------<
>*17401 401 20233
mfDEN2
16526
M-CODE
3226
M5410 | TORQUE NORMAL
*[= K335 D78]----------<
>*17406 403 20235
M-CODE
3226
M5411 | 337M CANCEL
*[= K336 D78]----------<
>*17411 408 20238
M-CODE
3226
M5412 | START/STOP TRQ.L
*[= K337 D78]----------<
>*17416 405 20241
M-CODE
3226
M836
M300 | SS MODE SELECT
17417*--| |-*[= K300 D78]----------<
>*17422 3830 5419 11425
MmFDEN
16531
M-CODE
3226
11553 18677 18991 19993
22980
M301 | MAIN MODE SELECT
*[= K302 D78]----------<
>*17427 3823 5356 5361
M-CODE
3226
5421 5467 5496 5608
11426 11554 18678 19999
22943
M304 | WORK PUSHER ON
*[= K312 D78]----------<
>*17432 20002
M-CODE
3226
M5336 | SS ORIENT 0
*[= K316 D78]----------<
>*17437 18382 18917 19398
M-CODE
3226
20042 20867
M5337 | SS ORIENT 120
*[= K317 D78]----------<
>*17442 18918 20046 20875
M-CODE
3226
M5338 | SS ORIENT 240
*[= K318 D78]----------<
>*17447 18919 20051 20891
M-CODE
3226
M310 | PARTS CAT.ON MAI
*[= K320 D78]----------<
>*17452 6151
M-CODE
3226
M311 | PARTS CAT. STAN
*[= K321 D78]----------<
>*17457 4315 4321 6153
M-CODE
3226
20194
M358 | M321 CANCEL
*[= K322 D78]----------<
>*17462 4316 4320 20197
M-CODE
3226
M250 | TORQUE LIMIT LOW
*[= K333 D78]----------<
>*17467 4634 4643 20222
M-CODE
3226
M288 | CENTER PS. LOW
*[= K338 D78]----------<
>*17472 20215
M-CODE
3226
M312 | CENTER PS. HIGH
*[= K339 D78]----------<
>*17477 18368 19382 20220
M-CODE
3226
M6451 M6450 M836
M331 | SPINDLE COIL H M
17478*--|/|----|/|----| |-*[= K331 D78]----------<
>*17488 4325 20200
SSCT.P SSC.P MmFDEN
16531
M-CODE
3226
M6450 M833
--| |---| |--------*
SSC.P MFDEN2
16516
M6451 |
--| |-
SSCT.P
M6450 M5953
M5407 | 331m SS COIL L M
17489*--| |-*--| |--[= K331 D78]----------<
>*17495 4329 20245
SSC.P mfDEN2
16526
M-CODE
3226
M6451 |
--| |-
SSCT.P
M6451 M6450 M836
M332 | SPINDLE TORQUE U
17496*--|/|----|/|----| |-*[= K332 D78]----------<
>*17506 4326 20203
SSCT.P SSC.P MmFDEN
16531
M-CODE
3226
M6450 M833
--| |---| |--------*
SSC.P MFDEN2
16516
M6451 |
--| |-
SSCT.P
M6450 M5953
M5408 | 332m SS TORQE UP
17507*--| |-*--| |--[= K332 D78]----------<
>*17513 4331 20247
SSC.P mfDEN2
16526
M-CODE
3226
M6451 |
--| |-
SSCT.P
M836
M321 | FACE DRIVER MODE
17514*--| |-*[= K340 D78]----------<
>*17519 4650 20251
MmFDEN
16531
M-CODE
3226
M328 | FACE DRV. MODE O
*[= K341 D78]----------<
>*16552 4653 17524 18240
M-CODE
3226
18371 19385 20253
M307 | PARTS CATCHER FO
*[= K348 D78]----------<
>*17529 5099 7535 7544
M-CODE
3226
18683 18734 18945 20005
21873
M308 | PARTS CATCHER RE
*[= K349 D78]----------<
>*17534 18684 19814
M-CODE
3226
M836
M305 | SP SPINDLE ORIEN
17535*--| |--[= K319 D78]----------<
>*17539 18828 18915 18951
MmFDEN
16531
M-CODE
3226
20066 20074 20849 20925
20944 21772
M5953
M302 | SP CHUCK UNCLAMP
17540*--| |--[= K6 D78]*----------<
>*17549 5082 5882 18680
mfDEN2
16526
M836
M-CODE
3226
19641 26277 27432 27550
--| |--[= K306 D78]
MmFDEN
16531
M-CODE
3226
M5953
M291 | CHUCK UNCLAMP CH
17550*--| |--[= K506 D78]----------<
>*17554 4730 5087 18686
mfDEN2
16526
M-CODE
3226
18992 20174
M5953
M303 | SP CHUCK CLAMP
17555*--| |--[= K7 D78]*----------<
>*17564 5044 18681 19648
mfDEN2
16526
M836
M-CODE
3226
26278 27433 27551
--| |--[= K307 D78]
MmFDEN
16531
M-CODE
3226
M836
M284 | SPINDLE COOLANT
17565*--| |-*[= K308 D78]----------<
>*17570 7807 18748 18960
MmFDEN
16531
M-CODE
3226
20178

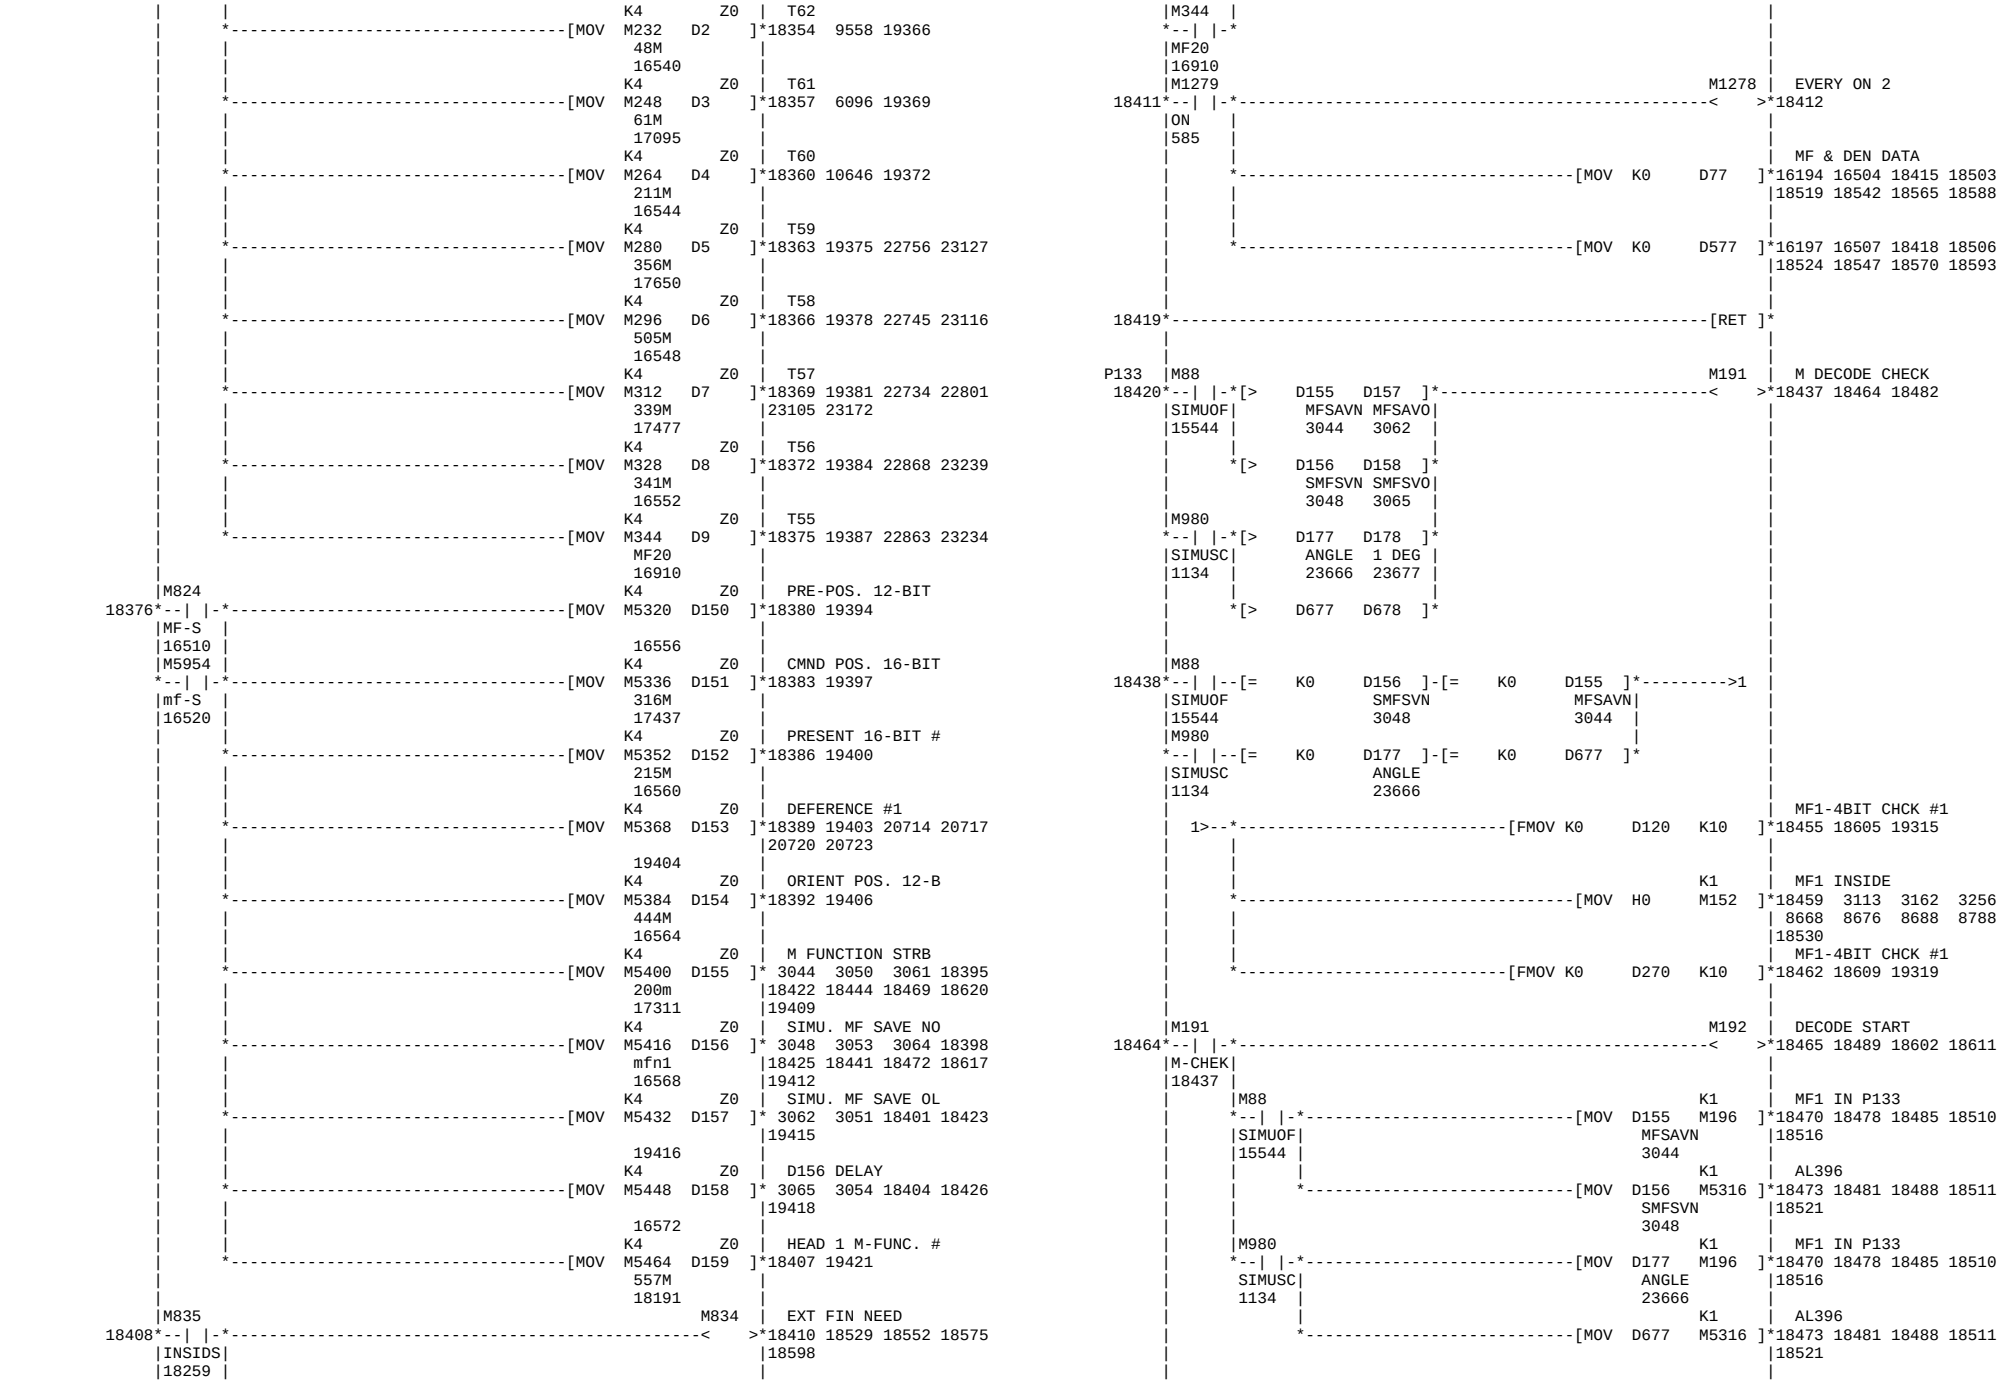

M285 | SPINDLE COOLANT
*[= K309 D78]----------<
M-CODE
3226
>*17575 7809 7867 18749
18965 20180
M54 M5190 M354 | SP2 COOLANT ON
*[= K408 D78]---| |----| |----------<
M-CODE SS.P SPAC.P
3226
>*17582 7836 18751 18961
20188
M54 M5190 M355 | SP2 COOLANT OFF
*[= K409 D78]---| |----| |----------<
M-CODE SS.P SPAC.P
3226
>*17589 7838 18752 18962
20191
M5953 M292 | CHUCK CLAMP & UN
17590*--| |--[= K507 D78]----------<
mfDEN2
16526
M-CODE
3226
>*17594 4753 5040 18687
18993 20167
M297 | SP. SPEED CHECK
17595*[= K248 D78]----------<
M-CODE
3226
>*17598 3024 19925
M273 | TURRET ROT. SIGN
17599*[= K249 D78]----------<
M-CODE
3226
>*17602 768 6737 6756
9562 19900 22171
M836 M5191 M286 | SPINDLE AIR ON
17603*--| |-*--| |--[= K345 D78]----------<
MmFDEN|SPAB.P
16531 |
M-CODE
3226
>*17609 7865 20257
M298 | SERVO POWER LOW
*[= K346 D78]----------<
M-CODE
3226
>*17614 4345 20260
M299 | SERVO POWER NORM
*[= K347 D78]----------<
M-CODE
3226
>*17619 4347 20264
M836 M282 | SP SPEED CHECK
17620*--| |-*[= K351 D78]----------<
MmFDEN|
16531 |
M-CODE
3226
>*17625 7925 18745 20268
M283 | SP SPEED CHECK C
*[= K352 D78]----------<
M-CODE
3226
>*17630 7922 18746 20271
M281 | 354M CANCEL
*[= K353 D78]----------<
M-CODE
3226
>*17635 7895 18740 19981
M278 | 249M VALID
*[= K354 D78]----------<
M-CODE
3226
>*17640 7906 18741 19983
M279 | 356M CANCEL
*[= K355 D78]----------<
M-CODE
3226
>*17645 7919 18742 18969
19986
M280 | T FIN AT ONCE
*[= K356 D78]----------<
M-CODE
3226
>*17650 7908 18362 18743
19376 19989
M5341 | SS C_BLAST ON
*[= K357 D78]----------<
M-CODE
3226
>*17655 5601 5952 20280
M309 | SP SPINDLE AIR B
*[= K358 D78]----------<
M-CODE
3226
>*17660 5600 5936 18957
20009 21117
M5339 | SS ORIENT CLAMP
*[= K359 D78]----------<
M-CODE
3226
>*17665 3792 20274
M5340 | M359 CANCEL
*[= K360 D78]----------<
M-CODE
3226
>*17670 3790 20277
M5342 | TRS CH.CL->UCL
*[= K361 D78]----------<
M-CODE
3226
>*17675 3797 20283
M5343 | TRS CHUCK SAME T
*[= K362 D78]----------<
M-CODE
3226
>*17680 3795 20286
M5344 | TRS SPN-FIN NORM
*[= K363 D78]----------<
M-CODE
3226
>*17685 3802 20289
M5345 | TRS SPN-FIN FAST
*[= K364 D78]----------<
M-CODE
3226
>*17690 3800 20292
M5470 | SPARE FWD SIGNAL
*[= K368 D78]----------<
M-CODE
3226
>*17695 9274 9279 18654
18998 20451
M836 M5369 | WORK REST JOINT
17696*--| |-*[= K74 D78]----------<
MmFDEN|
16531 |
M-CODE
3226
>*17701 18878 19048 20026
27089 27093 27711 27730
M5370 | WORK REST JOINT
*[= K75 D78]----------<
M-CODE
3226
>*17706 18879 19049 20027
27090 27725 27732
M5371 | WORK REST UNCLAM
*[= K86 D78]----------<
M-CODE
3226
>*17711 18880 19043 20020
27624 27660
M5372 | WORK REST CLAMP
*[= K87 D78]----------<
M-CODE
3226
>*17716 18881 19044 20022
27103 27631 27650
M36 M836 M342 | OVER LOAD CANCEL
17717*--| |----| |-*[= K370 D78]----------<
OVLD.P MmFDEN|
16531 |
M-CODE
3226
>*17723 12903 13005 13032
13042 20296
M343 | OVER LOAD CHECK
*[= K371 D78]----------<
M-CODE
3226
>*17728 12902 12966 13003
13030 13041 20301
M345 | OVER LOAD CHK HO
*[= K372 D78]----------<
M-CODE
3226
>*17733 13038 20327
M346 | O.L. CHECK RESTA
*[= K373 D78]----------<
M-CODE
3226
>*17738 13040 20330
M336 | O.L.AL-> NC FEED
*[= K374 D78]----------<
M-CODE
3226
>*17743 13045 20333
M337 | O.L.AL->SP STOP
*[= K375 D78]----------<
M-CODE
3226
>*17748 13047 20336
M339 | OL % SET
*[= K376 D78]----------<
M-CODE
3226
>*17753 12889 20312
M340 | OL T*100 msec
*[= K377 D78]----------<
M-CODE
3226
>*17758 12893 20317
M341 | OL max%SET
*[= K378 D78]----------<
M-CODE
3226
>*17763 12897 20322
M338 | OL DATA REGISTRY
*[= K379 D78]----------<
M-CODE
3226
>*17768 12901 12955 20309

```
     |M66    M833                                        M5427 |  MIST COLLECTOR O
17769*--| |----| |-*[=    K398   D78   ]----------------------<    >*17775  3502 18832 19053
     |MSCL.P MFDEN2|             M-CODE                          |20394
     |       16516 |             3226                           |
     |             |                                            |
     |             *[=    K399   D78   ]----------------------<    >*17780  3500  3505 18833
     |                           M-CODE                         |19054 20397
     |                           3226                           |
     |M833                                               M5446 |  640M MISTCOOL ON
17781*--| |-*[=    K640   D78   ]----------------------------<    >*17786  3510 18835 19014
     |MFDEN2|              M-CODE                               |20400
     |16516 |              3226                                 |
     |      |                                            M5447 |  641M MISTCOOL OF
     |      *[=    K641   D78   ]----------------------------<    >*17791  3512 18836 19015
     |                    M-CODE                                |20403
     |                    3226                                  |
     |M836                                               M349  |  X MEASURE MODE
17792*--| |-*[=    K760   D78   ]----------------------------<    >*17797  8267  8275 20013
     |MmFDEN|              M-CODE                               |23517 23525
     |16531 |              3226                                 |
     |      |                                            M350  |  Z MEASURE MODE
     |      *[=    K761   D78   ]----------------------------<    >*17802  8269  8273 20016
     |                    M-CODE                                |23519 23523
     |                    3226                                  |
     |M836                                               M257  |  CHUCK IL. CANCEL
17803*--| |-*[=    K500   D78   ]----------------------------<    >*17808  4260 18801 20107
     |MmFDEN|              M-CODE                               |
     |16531 |              3226                                 |
     |      |                                            M258  |  CHUCK IL. ENABLE
     |      *[=    K501   D78   ]----------------------------<    >*17813  4262 18802 20127
     |                    M-CODE                                |
     |                    3226                                  |
     |M5180  M836                                        M5349 |  B.PUSH DATA SET
17814*--| |----| |-*[=    K387   D78   ]----------------------<    >*17820  8825  8832 20370
     |F-DR.P MmFDEN|            M-CODE                          |
     |       16531 |            3226                           |
     |             |                                           |  M5347 |  B AXIS PUSH STAR
     |             *[=    K388   D78   ]----------------------<    >*17825  8891 20372
     |                           M-CODE                         |
     |                           3226                           |
     |                                                      M5348 |  B AXIS PUSH CANC
     |             *[=    K389   D78   ]----------------------<    >*17830  8893 20375
     |                           M-CODE                         |
     |                           3226                           |
     |M836                                               M295  |  SPINDLE SYNC. ON
17831*--| |-*[=    K502   D78   ]----------------------------<    >*17836  4122  5484 18994
     |MmFDEN|              M-CODE                               |20140 22968
     |16531 |              3226                                 |
     |      |                                            M296  |  SPINDLE SYNC. OF
     |      *[=    K505   D78   ]----------------------------<    >*16548  4164 17841 18237
     |      |             M-CODE                                |18365 19379 20143
     |      |             3226                                  |
     |      |                                            M324  |  WORK PRESS MODE
     |      *[=    K508   D78   ]----------------------------<    >*17846  3954 20082
     |      |             M-CODE                                |
     |      |             3226                                  |
     |      |                                            M325  |  M508 CANCEL
     |      *[=    K509   D78   ]----------------------------<    >*17851  3964 20084
     |      |             M-CODE                                |
     |      |             3226                                  |
     |      |                                            M313  |  MN & SP SYNC
     |      *[=    K511   D78   ]----------------------------<    >*17856  4039  4121  4222
     |      |             M-CODE                                | 4229  5485 18754 18995
     |      |             3226                                  |20089 21356 21365 21386
     |      |                                                   |22969 21770 21743 21733
     |      |                                                   |
     |      |                                                   |
     |      |                                                   |
     |      |                                            M314  |  M511 CANCEL
     |      *[=    K512   D78   ]----------------------------<    >*17861  4016  4026  4113
     |                    M-CODE                                | 4163 18755 20096
     |                    3226                                  |
     |M836                                               M347  |  WORK CHECK
17862*--| |-*[=    K527   D78   ]----------------------------<    >*17867  4388  4764 20340
     |MmFDEN|              M-CODE                               |
     |16531 |              3226                                 |
     |      |                                                   |  M348  |  WORK CHECK MODE
     |      *[=    K528   D78   ]----------------------------<    >*17872  4375 20345
     |      |             M-CODE                                |
     |      |             3226                                  |
     |      |                                            M315  |  TRS-CHK MODE STA
     |      *[=    K540   D78   ]----------------------------<    >*17877  4231  4241  4248
     |      |             M-CODE                                |18757 20099
     |      |             3226                                  |
     |      |                                            M316  |  TRS-CHK MODE END
     |      *[=    K541   D78   ]----------------------------<    >*17882  4027  4105  4219
     |      |             M-CODE                                | 4224  4233 18758 20119
     |      |             3226                                  |
     |      |                                            M317  |  TRS-BAR MODE STA
     |      *[=    K542   D78   ]----------------------------<    >*17887  4234  4238  4249
     |      |             M-CODE                                |18760 20101
     |      |             3226                                  |
     |      |                                            M318  |  TRS-BAR MODE END
     |      *[=    K543   D78   ]----------------------------<    >*17892  4028  4110  4240
     |      |             M-CODE                                |18761 20121
     |      |             3226                                  |
     |      |                                            M293  |  SEP-SWISS START
     |      *[=    K544   D78   ]----------------------------<    >*17897  4252 20114
     |      |             M-CODE                                |
     |      |             3226                                  |
     |      |                                            M294  |  SEP-SWISS END
     |      *[=    K545   D78   ]----------------------------<    >*17902  4254 20133
     |      |             M-CODE                                |
     |      |             3226                                  |
     |      |                                            M319  |  TRS-MOV MODE STA
     |      *[=    K546   D78   ]----------------------------<    >*17907  4235  4242  4245
     |      |             M-CODE                                |18763 20104
     |      |             3226                                  |
     |      |                                            M320  |  TRS-MOV MODE END
     |      *[=    K547   D78   ]----------------------------<    >*17912  4247 18764 20124
     |      |             M-CODE                                |
     |      |             3226                                  |
     |      |                                            M323  |  CUTTING CYCLE FI
     |      *[=    K518   D78   ]----------------------------<    >*17917  5266 20012
     |                    M-CODE                                |
     |                    3226                                  |
     |M833                                               M326  |  SPINDLE ORIENT T
17918*--| |--[=    K519   D78   ]----------------------------<    >*17922  3995  4276  5495
     |MFDEN2               M-CODE                               |19688 19702 20669 20677
     |16516                3226                                 |21540 22979
     |M5953                                              M327  |  SS ORIENT TRF.
17923*--| |--[=    K519   D78   ]----------------------------<    >*17927  3996 20077 20842
     |mfDEN2               M-CODE                               |20851 20931 20949 21000
     |16526                3226                                 |21237 21933
     |M833                                               M351  |  PUSH ROD FORWAED
17928*--| |-*[=    K701   D78   ]----------------------------<    >*17933  3724 11883 11925
     |MFDEN2|              M-CODE                               |20348 25561 26229
     |16516 |              3226                                 |
     |      |                                            M352  |  PUSH ROD R WEIT
     |      *[=    K703   D78   ]----------------------------<    >*17938  4706  4767  5895
     |      |             M-CODE                                | 8963 11889 11926 20352
     |      |             3226                                  |20365 25562 26232
     |      |                                            M353  |  PUSH ROD R END
     |      *[=    K704   D78   ]----------------------------<    >*17943  4707  4768  5896
     |      |             M-CODE                                |11892 11927 20353 25563
     |      |             3226                                  |26233
     |      |                                            M5429 |  PULLER FORWARD
     |      *[=    K711   D78   ]----------------------------<    >*17948 11917 11922 11928
     |      |             M-CODE                                |20358 26237
     |      |             3226                                  |
     |      |                                            M5430 |  PULLER REVERSE
     |      *[=    K712   D78   ]----------------------------<    >*17953 11918 11921 11929
     |                    M-CODE                                |20360 26240
     |                    3226                                  |
     |M836                                               M356  |  SP. SYNC. MODE O
17954*--| |--[=    K380   D78   ]----------------------------<    >*17958  4023  4038  5486
     |MmFDEN               M-CODE                               |20382 22970
     |16531                3226                                 |
     |M836                                               M357  |  SP. SYNC. MODE O
17959*--| |--[=    K381   D78   ]----------------------------<    >*17963  4025  4032 20385
     |MmFDEN               M-CODE                               |
     |16531                3226                                 |
```

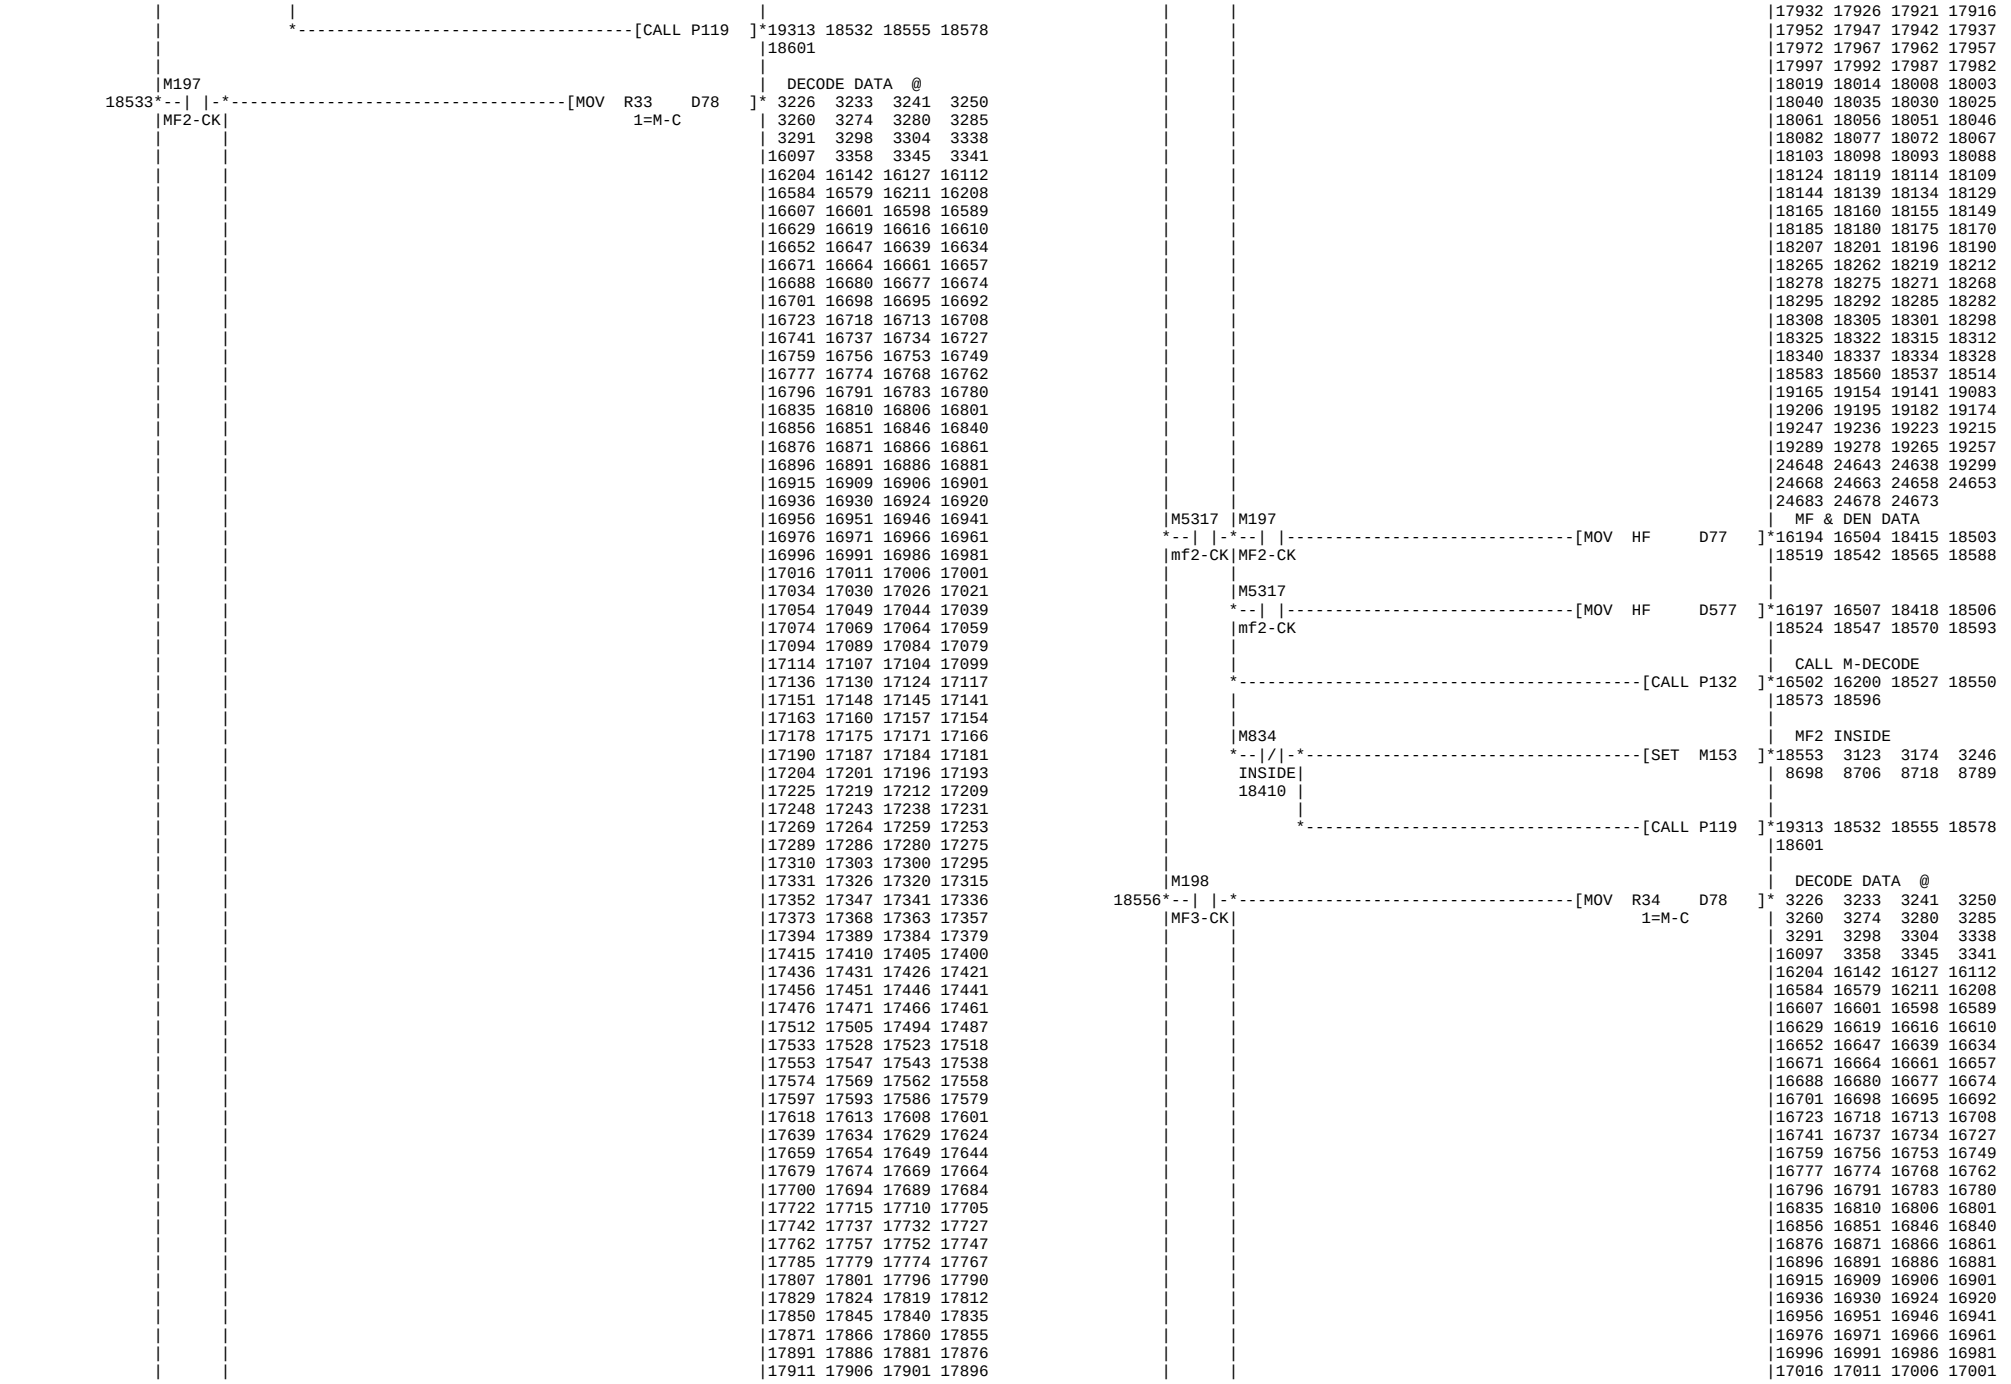

M6427 M6421
M227 | HIGHT PRESS. CM
17964 K588 D78]---|/|----|/|-*----------< >*17978 7688 7738 18661
MmFDEN| M-CODE SPFL.P HPCL.P| |18672 20419 20426 28251
16531 | 3226 |
M6427 |
K169 D78]*--| |--------* |
M-CODE|SPFL.P |
3226 | |
|M6421 |
--| |--------
HPCL.P
M228 | STD. CM MODE
17979 K589 D78]----------< >*17983 7741 20421
MmFDEN M-CODE
16531 3226
M225 | Y AXIS CONTROL
17984 K269 D78]----------< >*17988 743 20410
MmFDEN M-CODE
16531 3226
M287 | Y AXIS CONTROL O
17989 K268 D78]----------< >*17993 733 20407
MmFDEN M-CODE
16531 3226
M359 | Y.POSITIONING ST
17994 K267 D78]----------< >*17998 20416 24278 24354
MmFDEN M-CODE
16531 3226
M306 | CUTTING OFF CYCL
17999 K260 D78]----------< >*18004 5396 5624 20389
MmFDEN| M-CODE
16531 | 3226
M5426 | POLIGON MODE OFF
K261 D78]----------< >*18009 5399 20392
M-CODE
3226
M5450 | SP RADIATOR FAN
18010 K130 D78]----------< >*18015 1948 20445
MmFDEN| M-CODE
16531 | 3226
M5451 | M130 CANCEL
K131 D78]----------< >*18020 1950 20447
M-CODE
3226
M5353 | EX.M-CODE 400M
18021 K400 D78]----------< >*18026 19085 20454 24844
MmFDEN| M-CODE |24893
16531 | 3226
M5354 | EX.M-CODE 401M
K401 D78]----------< >*18031 19061 19086 20455
M-CODE |24847 24895
3226
M5355 | EX.M-CODE 402M
K402 D78]----------< >*18036 19062 19093 20456
M-CODE |24850 24897
3226
M5356 | EX.M-CODE 403M
K403 D78]----------< >*18041 19094 20457 24853
M-CODE |24899
3226
M5357 | EX.M-CODE 404M
18042 K404 D78]----------< >*18047 19103 20465 24856
MmFDEN| M-CODE |24901
16531 | 3226
M5358 | EX.M-CODE 405M
K405 D78]----------< >*18052 19104 20466 24859
M-CODE |24903
3226
M5359 | EX.M-CODE 406M
K406 D78]----------< >*18057 19106 20467 24862
M-CODE |24905
3226
M5362 | EX.M-CODE 407M
K407 D78]----------< >*18062 19107 20468 24865
M-CODE |24907
3226
M5363 | EX.M-CODE 408M
18063 K408 D78]----------< >*18068 19110 20472 24868
MmFDEN| M-CODE |24909
16531 | 3226
M5364 | EX.M-CODE 409M
K409 D78]----------< >*18073 19111 20473 24871
M-CODE |24911
3226
M5365 | EX.M-CODE 410M
K410 D78]----------< >*18078 19114 20474 24874
M-CODE |24913
3226
M5366 | EX.M-CODE 411M
K411 D78]----------< >*18083 19115 20475 24877
M-CODE |24915
3226
M5367 | EX.M-CODE 412M
18084 K412 D78]----------< >*18089 19118 20479 24880
MmFDEN| M-CODE |24917
16531 | 3226
M5452 | EX.M-CODE 413M
K413 D78]----------< >*18094 19119 20480 24883
M-CODE |24919
3226
M5453 | EX.M-CODE 414M
K414 D78]----------< >*18099 19122 20481 24886
M-CODE |24921
3226
M5454 | EX.M-CODE 415M
K415 D78]----------< >*18104 19123 20482 24889
M-CODE |24923
3226
M833 M5380 | BUSH LOAD CANCEL
18105 K440 D78]----------< >*18110 12701 12795 12799
MFDEN2| M-CODE |20532 24685
16516 | 3226
M5381 | BUSH LOAD CHECK
K441 D78]----------< >*18115 12702 12772 12793
M-CODE |12797 20534 24691
3226
M5382 | PEAK LEVEL% SET
K442 D78]----------< >*18120 12678 20540
M-CODE
3226
M5383 | OVER LD LEVEL%
K443 D78]----------< >*18125 12682 20545
M-CODE
3226
M5384 | UNDER LD LEVEL%
K444 D78]----------< >*16564 12686 18130 18251
M-CODE |18391 19407 20550
3226
M5385 | OVER LD TIME
K445 D78]----------< >*18135 12690 20555
M-CODE
3226
M5386 | UNDER LD TIME
K446 D78]----------< >*18140 12694 20560
M-CODE
3226
M5387 | DATA REGISTRY
K447 D78]----------< >*18145 12703 12755 20565
M-CODE
3226
M5388 | LD DET.CHECK COM
K448 D78]----------< >*18150 12830 12853 12859
M-CODE |20568
3226
M836 M5457 | COOLANT PRSS. DA
18151 K550 D78]----------< >*18156 18893 19069 20486
MmFDEN| M-CODE |28160 28179 28192 28205
16531 | 3226 |28218 28231 28244
M5458 | COOLANT PRSS. DA
K551 D78]----------< >*18161 20490 28166 28173
M-CODE |28193 28206 28219 28232
3226 |28245

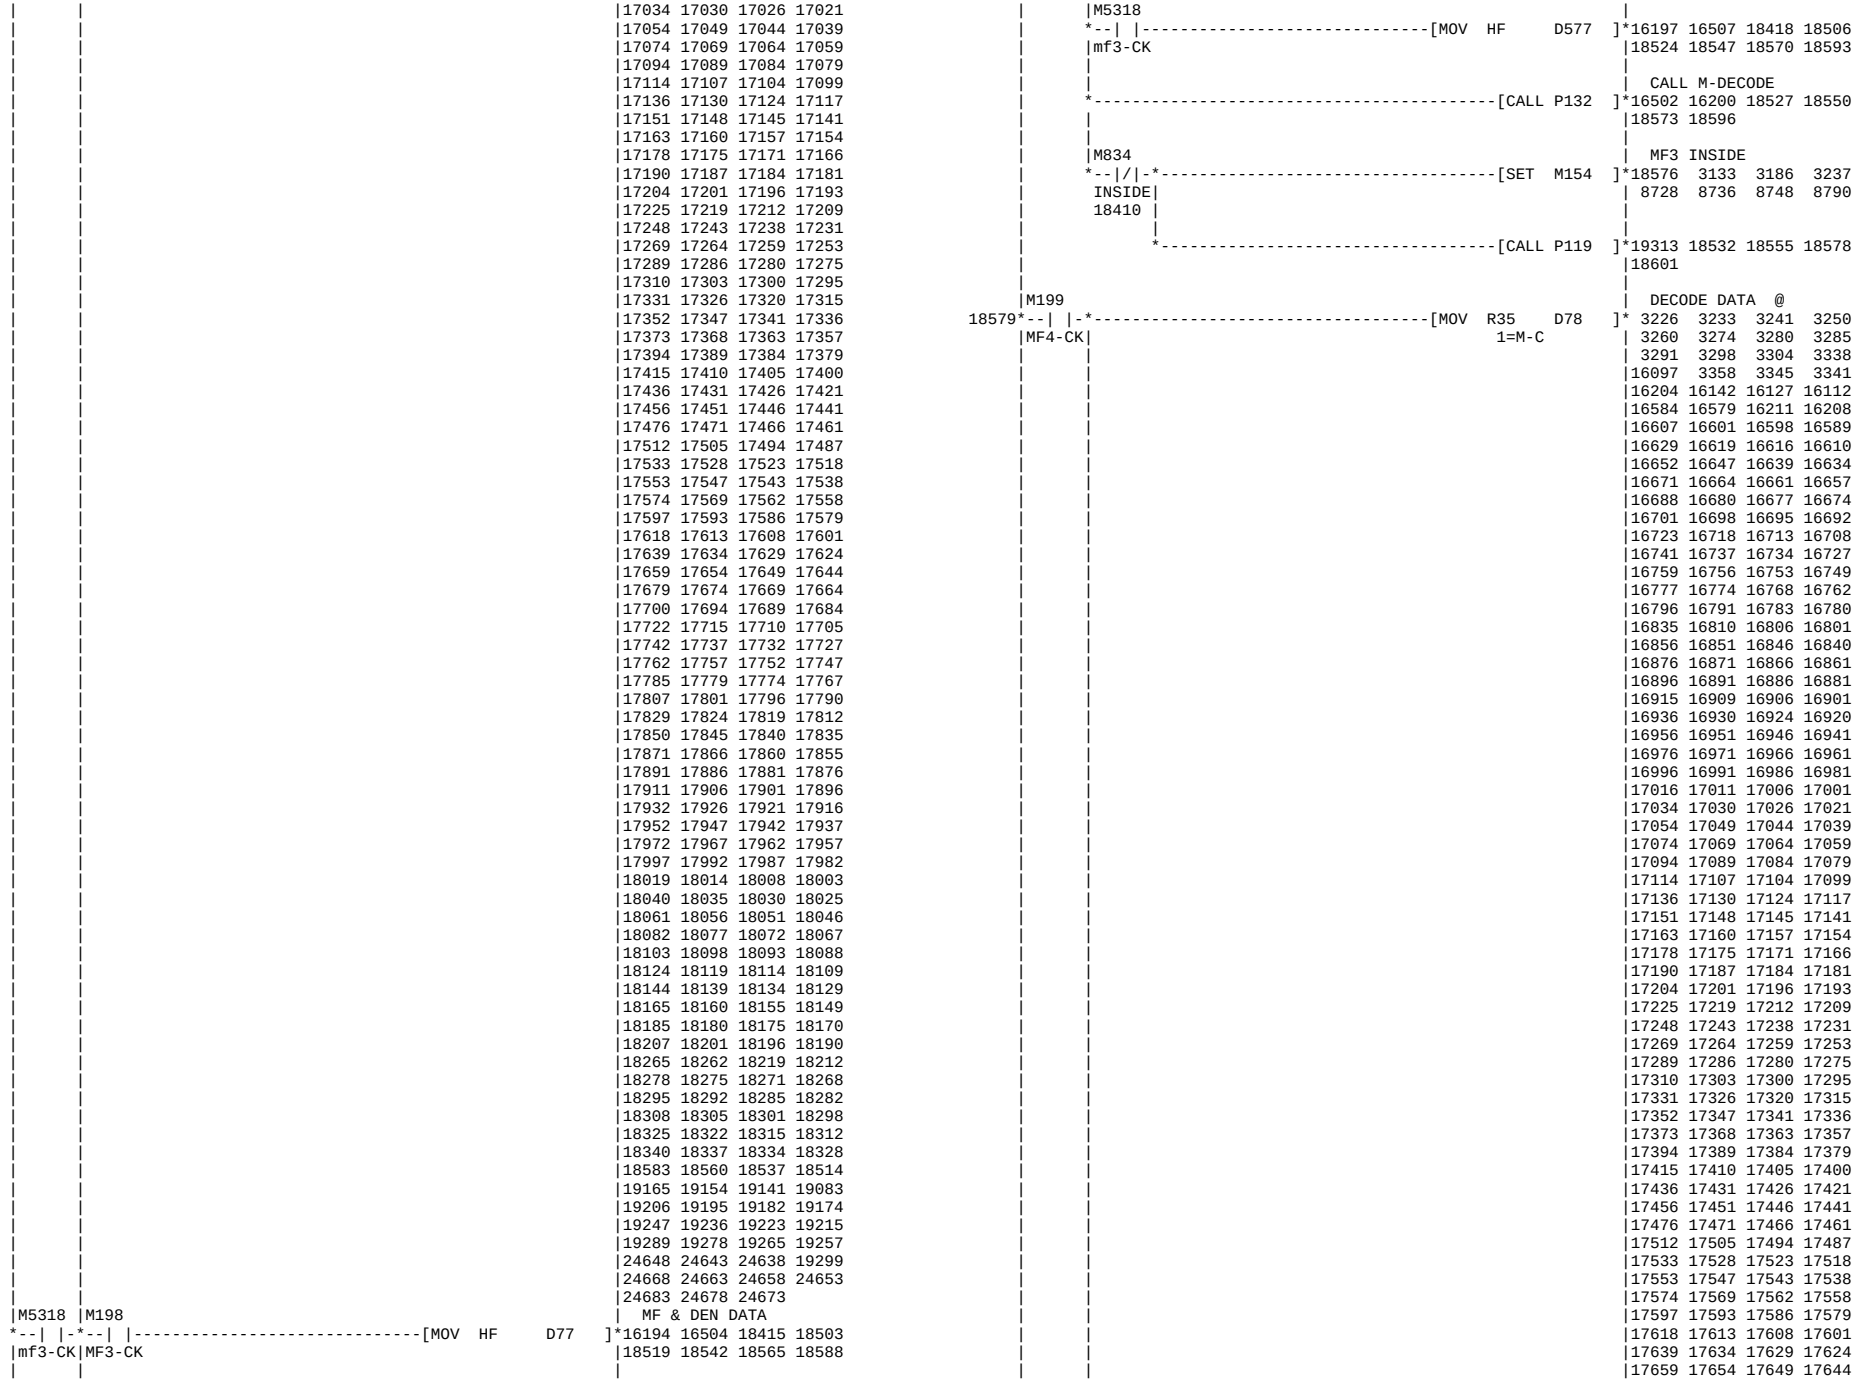

M5459 | COOLANT PRSS. DA
K552 D78]
M-CODE
3226
>*18166 20495 28167 28180
|28186 28207 28220 28233
|28246
M5460 | COOLANT PRSS. DA
K553 D78]
M-CODE
3226
>*18171 20500 28168 28181
|28194 28199 28221 28234
|28247
M5461 | COOLANT PRSS. DA
K554 D78]
M-CODE
3226
>*18176 20509 28169 28182
|28195 28208 28212 28235
|28248
M5462 | COOLANT PRSS. DA
K555 D78]
M-CODE
3226
>*18181 20513 28170 28183
|28196 28209 28222 28225
|28249
M5463 | COOLANT PRSS. DA
K556 D78]
M-CODE
3226
>*18186 20518 28171 28184
|28197 28210 28223 28236
|28238
M5464 | COOLANT PRSS. DA
K557 D78]
M-CODE
3226
>*18191 18406 19422 20523
|28162 28175 28188 28201
|28214 28227 28240
M833
M5389 | GL B AXIS STOP
18192*--| |-*[= K720 D78]
MFDEN2
16516
M-CODE
3226
>*18197 18886 19057 20573
M5390 | CANCEL OF M720
K721 D78]
M-CODE
3226
>*18202 18887 19058 20575
M836
M5391 | GL AXIS STOP
18203*--| |-*[= K750 D78]
MmFDEN
16531
M-CODE
3226
>*18208 20580 24687
M6443 M6467
M5392 | CANSEL OF 750M
K751 D78]---| |----|/|----------<
M-CODE 64GL_P EX.MES
3226
>*18215 20582 24694
M836
M75
M5327 | 480M NOZZLE ON
18216*--| |--[= K480 D78]---| |----------<
MmFDEN
16531
M-CODE UKSP.P
3226
>*18221 7698 18658 19128
|19655
P127 |M1279
| TOOL USE DATA
18222*--| |-----------[DMOV K0 D190]* 5693 5697 18226 18229
ON
585
|18232 18235 18238 18241
|18244 18249 18252 18255
|23456 23433 18258
K8 K8
18227*[D= M200 D190]-[D= M232 D190]----------->1
0M T_DATA 48M T_DATA
16536 5693 16540 5693
K8 K8
1>---[D= M264 D190]-[D= M296 D190]---------->2
211M T_DATA 505M T_DATA
16544 5693 16548 5693
K8 K8 M838 | OUTPUT M CODE
2>---[D= M328 D190]-[D= M5320 D190]--------<
341M T_DATA T_DATA
16552 5693 16556 5693
>*18245 18246
M838 K8 K8
18246*--| |--[D= M5352 D190]-[D= M5384 D190]---------->1
OUTSID 215M T_DATA 444M T_DATA
18245 16560 5693 16564 5693
K8 K8 M835 | INSIDE M CODE SU
1>---[D= M5416 D190]-[D= M5448 D190]--------<
mfn1 T_DATA T_DATA
16568 5693 16572 5693
>*18259 18408
M824 M415 | SPINDLE/MILL CMM
18260*[< K2 D78]-[> K5 D78]*--| |-*-------<
M-CODE M-CODE|MF-S |
3226 3226 |16510 |
>* 3030 8583 18288 18289

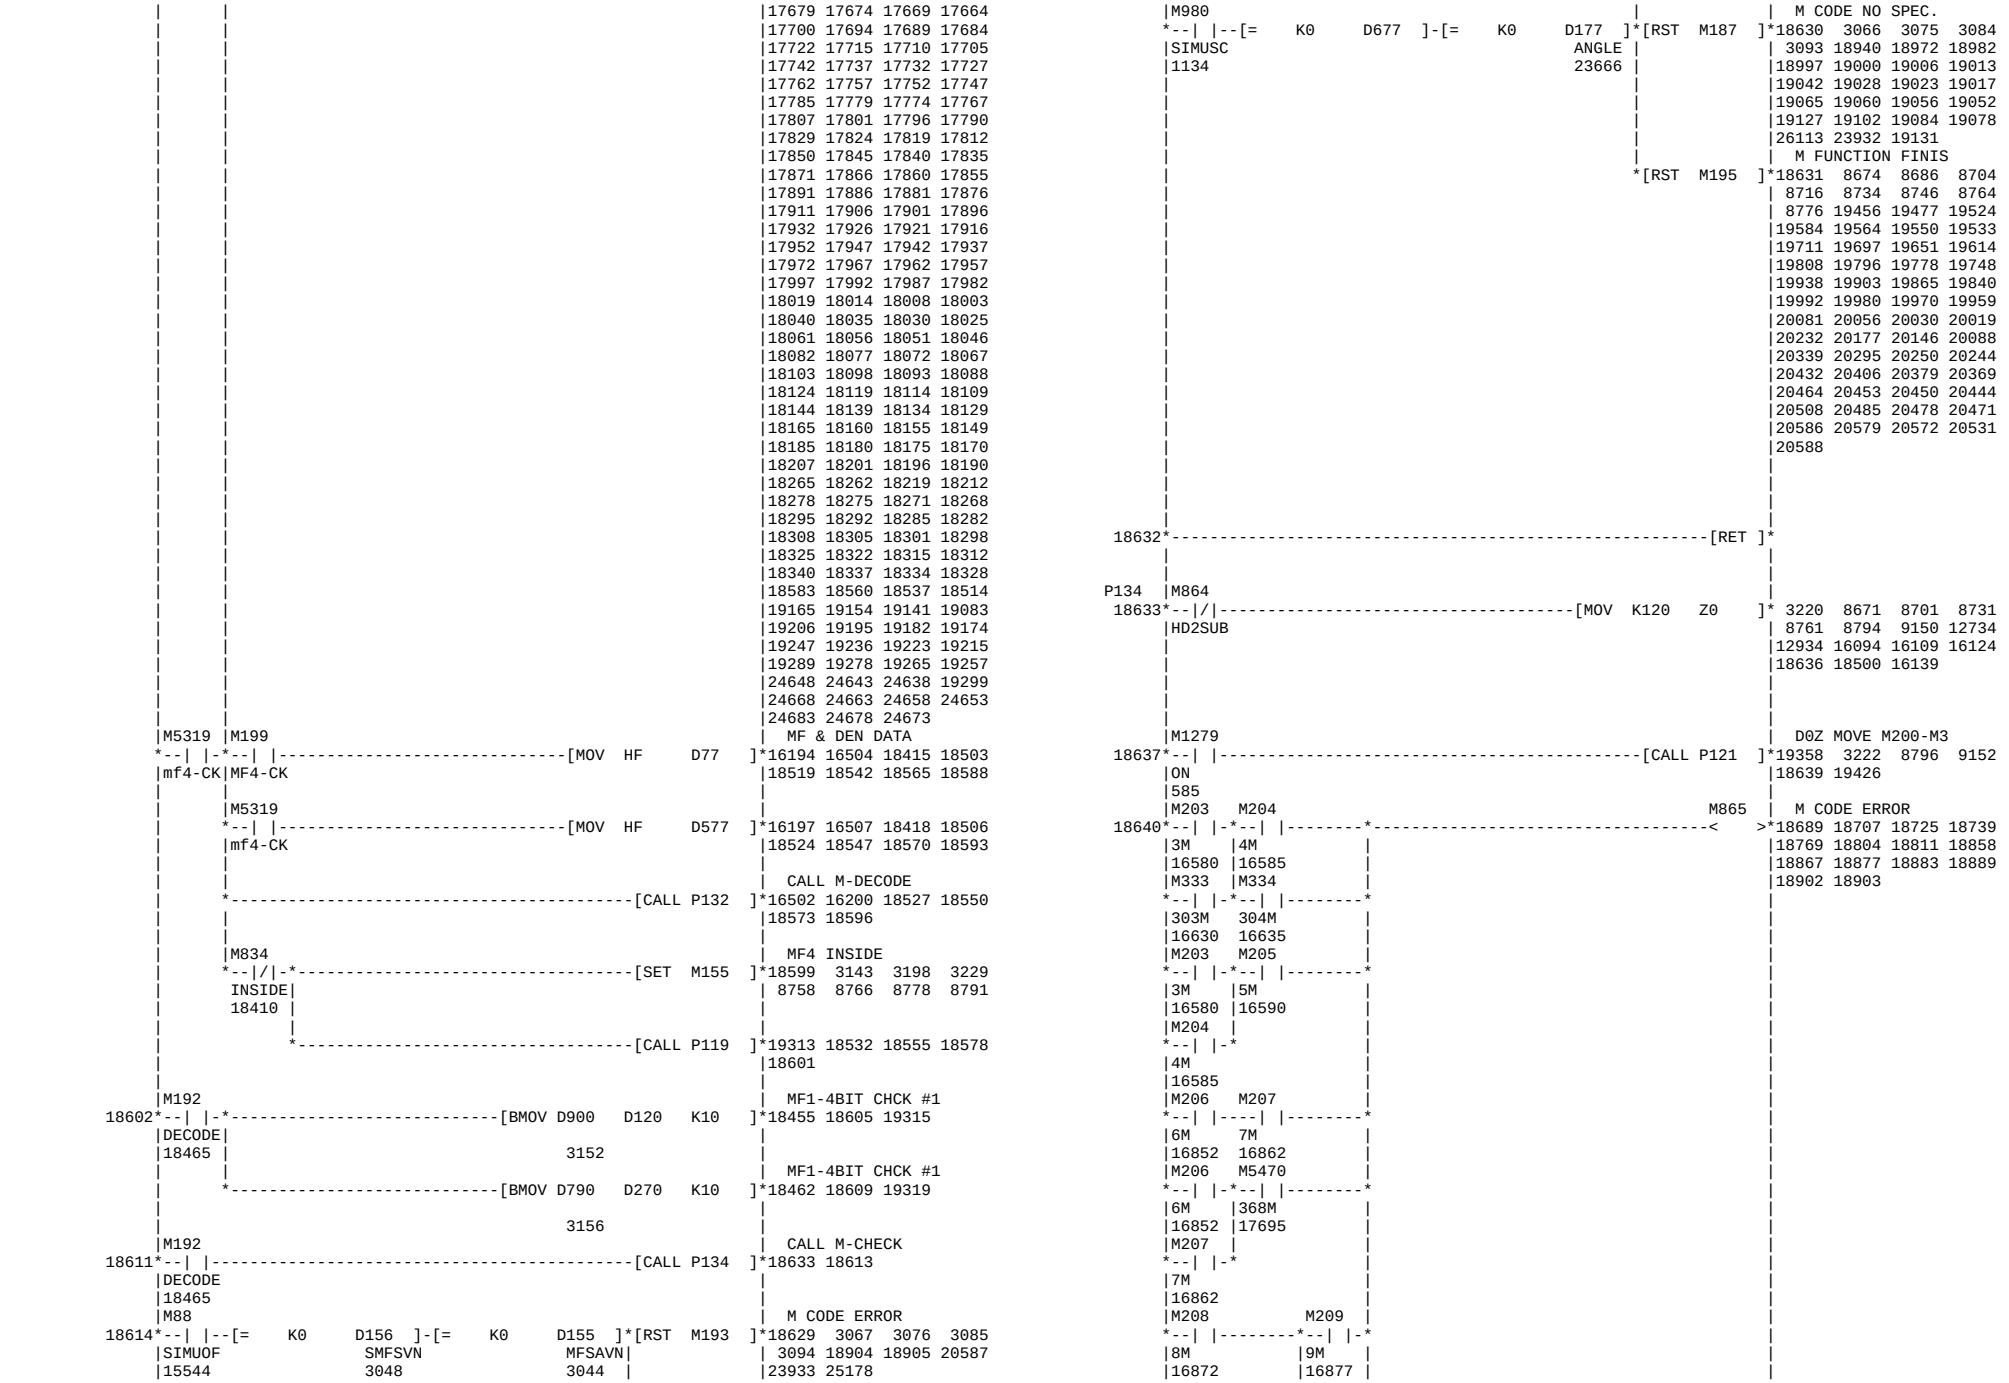

[< K202 D78]-[> K205 D78]
M-CODE M-CODE|
3226 3226 |
[< K302 D78]-[> K305 D78]
M-CODE M-CODE|
3226 3226 |
[< K12 D78]-[> K15 D78]
M-CODE M-CODE
3226 3226
M415
--| |-----------
SPCD
3030
M5954 M5535 | SS/MILL COMMAND
18290*[< K2 D78]-[> K5 D78]*--| |-*-------< >* 3037 8643 18318 18319
M-CODE M-CODE|mf-S
3226 3226 |16520
[< K202 D78]-[> K205 D78]
M-CODE M-CODE|
3226 3226 |
[< K302 D78]-[> K305 D78]
M-CODE M-CODE|
3226 3226 |
[< K12 D78]-[> K15 D78]
M-CODE M-CODE
3226 3226
M5535
--| |-----------
spCD
3037
M824 M655 | S CODE USE
18320*[= K19 D78]*--| |-*----------<
M-CODE|MF-S |
3226 |16510 |
>* 3032 8562 18330 18331
|19704
[= K319 D78]
M-CODE|
3226 |
[= K519 D78]
M-CODE
3226
M655
--| |----------
S USE
3032
M5954 M5775 | s CODE USE
18332*[= K19 D78]*--| |-*----------< >* 3039 8564 18342 18343
M-CODE|mf-S
3226 |16520
[= K319 D78]
M-CODE|
3226 |
[= K519 D78]
M-CODE
3226
M5775
--| |----------
s USE
3039
M824 K4 Z0 | T64
18344*--| |-*----------[MOV M200 D0]*13417 5901 18348 19360
MF-S | 0M
16510 | 16536
M5954 | K4 Z0 | T63
--| |-----------[MOV M216 D1]*18351 19363 22466 22469
mf-S | 16M |22474
16520 | 16882

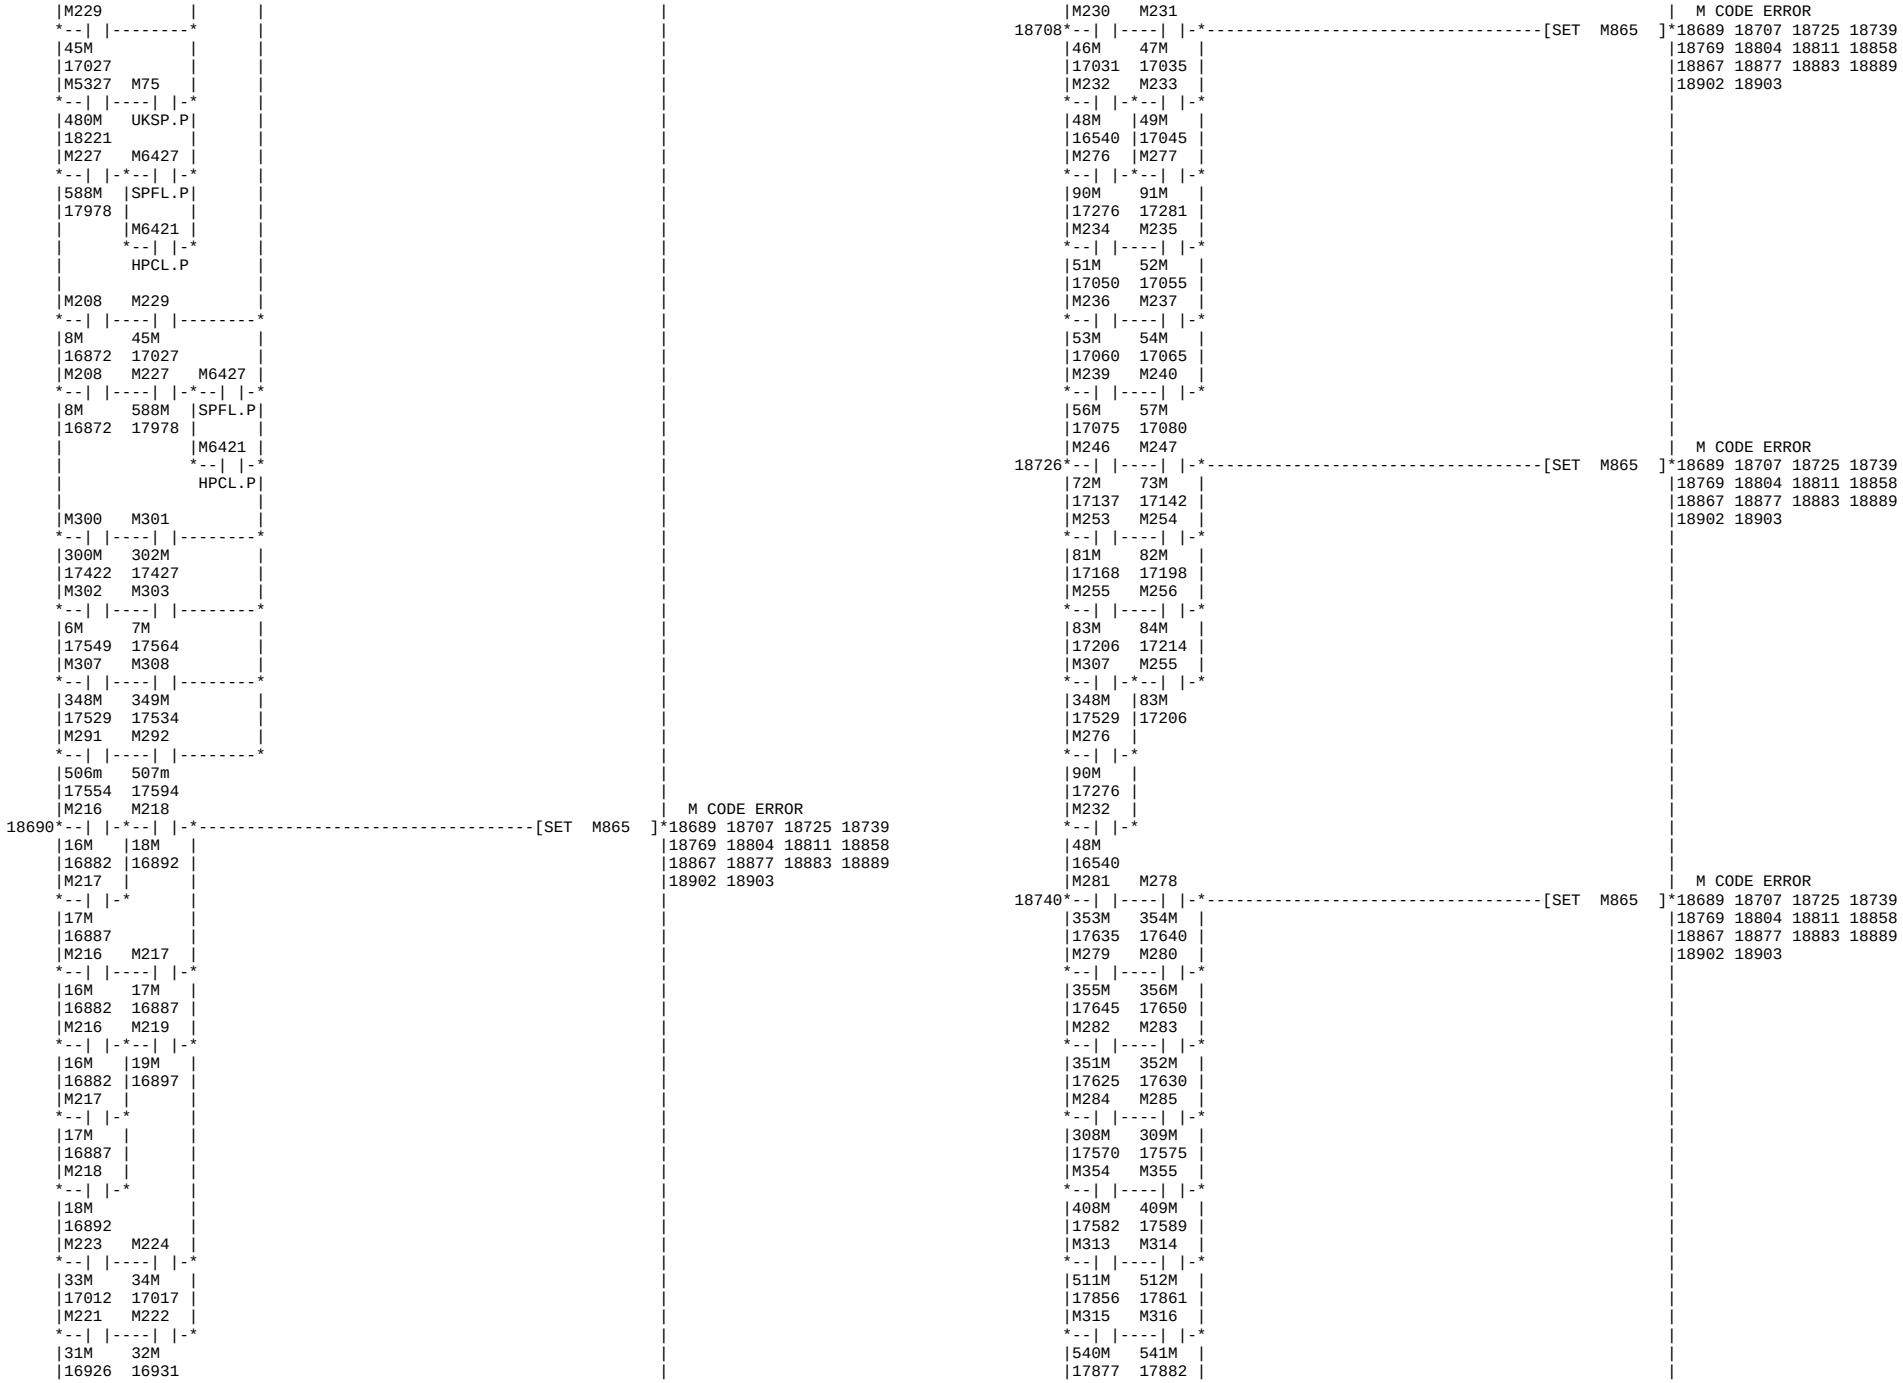

K4 Z0 | T62
[MOV M232 D2]*18354 9558 19366
48M
16540
K4 Z0 | T61
[MOV M248 D3]*18357 6096 19369
61M
17095
K4 Z0 | T60
[MOV M264 D4]*18360 10646 19372
211M
16544
K4 Z0 | T59
[MOV M280 D5]*18363 19375 22756 23127
356M
17650
K4 Z0 | T58
[MOV M296 D6]*18366 19378 22745 23116
505M
16548
K4 Z0 | T57
[MOV M312 D7]*18369 19381 22734 22801
339M
17477
K4 Z0 | T56
[MOV M328 D8]*18372 19384 22868 23239
341M
16552
K4 Z0 | T55
[MOV M344 D9]*18375 19387 22863 23234
MF20
16910
M824
K4 Z0 | PRE-POS. 12-BIT
18376*--| |-*[MOV M5320 D150]*18380 19394
MF-S
16510
M5954
K4 Z0 | CMND POS. 16-BIT
[MOV M5336 D151]*18383 19397
mf-S
16520
316M
17437
K4 Z0 | PRESENT 16-BIT #
[MOV M5352 D152]*18386 19400
215M
16560
K4 Z0 | DEFERENCE #1
[MOV M5368 D153]*18389 19403 20714 20717
20720 20723
19404
K4 Z0 | ORIENT POS. 12-B
[MOV M5384 D154]*18392 19406
444M
16564
K4 Z0 | M FUNCTION STRB
[MOV M5400 D155]* 3044 3050 3061 18395
200m
18422 18444 18469 18620
17311
19409
K4 Z0 | SIMU. MF SAVE NO
[MOV M5416 D156]* 3048 3053 3064 18398
mfn1
18425 18441 18472 18617
16568
19412
K4 Z0 | SIMU. MF SAVE OL
[MOV M5432 D157]* 3062 3051 18401 18423
19415
19416
K4 Z0 | D156 DELAY
[MOV M5448 D158]* 3065 3054 18404 18426
19418
16572
K4 Z0 | HEAD 1 M-FUNC. #
[MOV M5464 D159]*18407 19421
557M
18191
M835
M834 | EXT FIN NEED
18408*--| |-*<>*18410 18529 18552 18575
INSIDS
18259
18598
M344
--| |-
MF20
16910
M1279
M1278 | EVERY ON 2
18411*--| |-*<>*18412
ON
585
MF & DEN DATA
[MOV K0 D77]*16194 16504 18415 18503
18519 18542 18565 18588
[MOV K0 D577]*16197 16507 18418 18506
18524 18547 18570 18593
18419*[RET]*
P133 M88
M191 | M DECODE CHECK
18420*--| |-*[> D155 D157]*<>*18437 18464 18482
SIMUOF| MFSAVN MFSAVO|
15544 | 3044 3062 |
[> D156 D158]
SMFSVN SMFSVO|
3048 3065 |
M980
--| |-[> D177 D178]*
SIMUSC| ANGLE 1 DEG |
1134 | 23666 23677 |
[> D677 D678]
M88
18438*--| |--[= K0 D156]-[= K0 D155]*--------->1
SIMUOF SMFSVN MFSAVN|
15544 3048 3044 |
M980
--| |--[= K0 D177]-[= K0 D677]
SIMUSC ANGLE
1134 23666
MF1-4BIT CHCK #1
1>--*[FMOV K0 D120 K10]*18455 18605 19315
K1 | MF1 INSIDE
[MOV H0 M152]*18459 3113 3162 3256
8668 8676 8688 8788
18530
MF1-4BIT CHCK #1
[FMOV K0 D270 K10]*18462 18609 19319
M191
M192 | DECODE START
18464*--| |-*<>*18465 18489 18602 18611
M-CHEK|
18437 |
M88
K1 | MF1 IN P133
[MOV D155 M196]*18470 18478 18485 18510
SIMUOF| MFSAVN 18516
15544 | 3044
K1 | AL396
[MOV D156 M5316]*18473 18481 18488 18511
SMFSVN 18521
3048
M980
K1 | MF1 IN P133
--| |-[MOV D177 M196]*18470 18478 18485 18510
SIMUSC| ANGLE 18516
1134 | 23666
K1 | AL396
[MOV D677 M5316]*18473 18481 18488 18511
18521

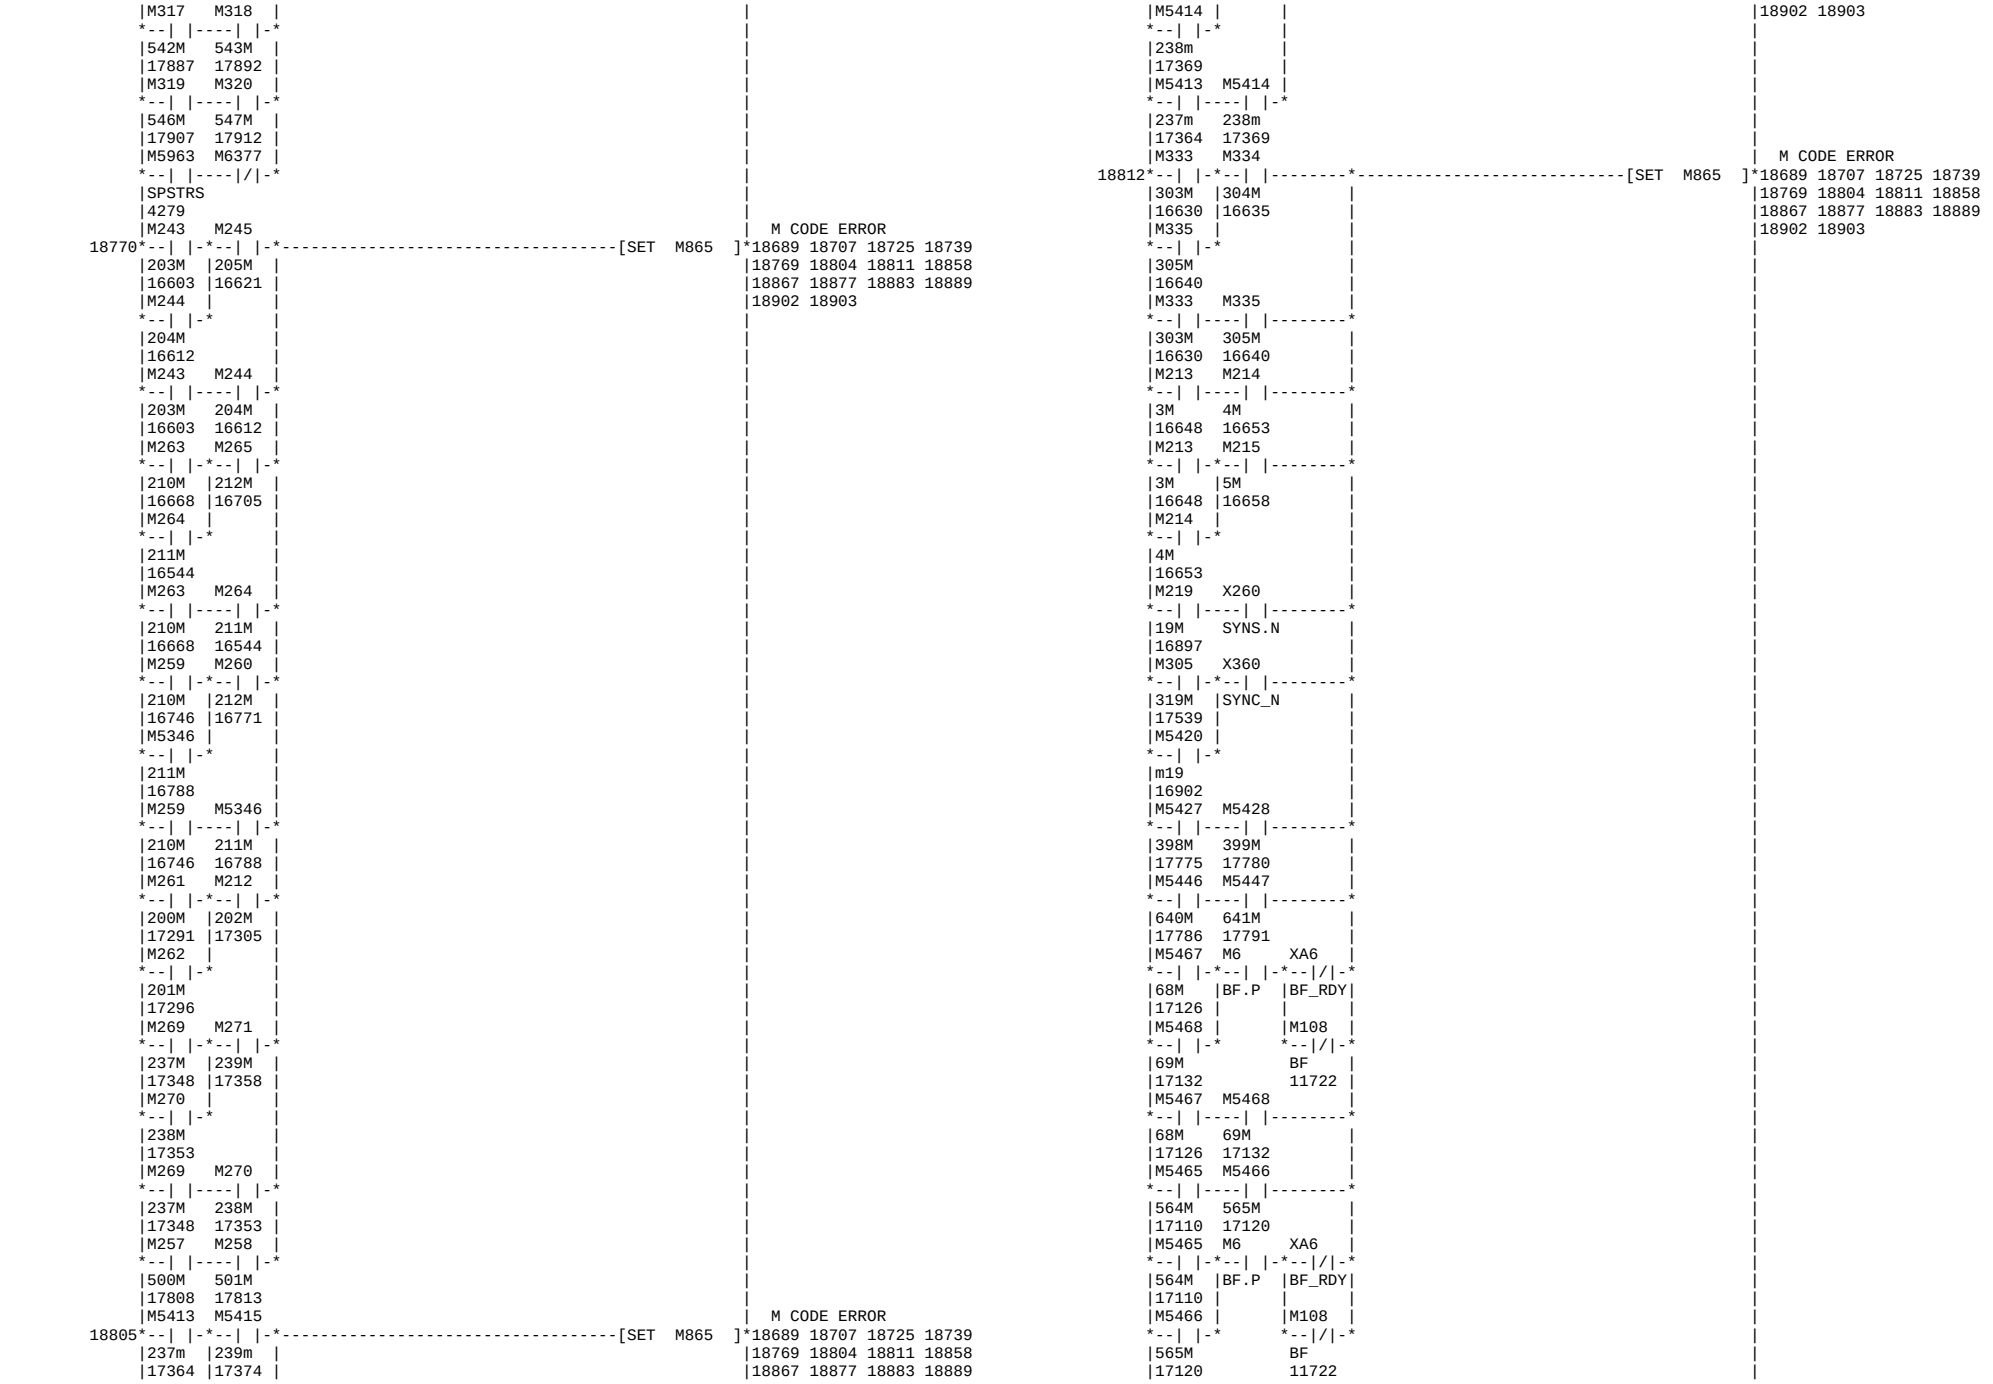
```
     |M191                                          K1     |  MF1 IN P133
18482*--|/|-*-----------------------------------[MOV  K0     M196  ]*18470 18478 18485 18510
     |M-CHEK|                                                |18516
     |18437 |                                                |
     |      |                                          K1    |  AL396
     |      *-----------------------------------[MOV  K0     M5316 ]*18473 18481 18488 18511
     |                                                       |18521
     |                                                       |
     |M192                                                   |  M CODE DATA_OUT*
18489*--| |-*---------------------------[FMOV K0     D900   K10   ]* 3152  3211 18492 18604
     |DECODE|                                                |19325
     |18465 |                                                |
     |      |                                                |  SP.LOAD AVERAGE
     |      *---------------------------[FMOV K0     D790   K10   ]* 3156  3215 18496 18608
     |      |                                                |19340
     |      |                                                |
     |      |                                                |
     |      *-----------------------------------[MOV  K120   Z0    ]* 3220  8671  8701  8731
     |      |                                                | 8761  8794  9150 12734
     |      |                                                |12934 16094 16109 16124
     |      |                                                |18636 18500 16139
     |      |                                                |
     |      |                                                |
     |      |                                                |
     |      |                                                |  MF & DEN DATA
     |      *-----------------------------------[MOV  K0     D77   ]*16194 16504 18415 18503
     |      |                                                |18519 18542 18565 18588
     |      |                                                |
     |      |                                                |
     |      *-----------------------------------[MOV  K0     D577  ]*16197 16507 18418 18506
     |      |                                                |18524 18547 18570 18593
     |      |                                                |
     |      |                                                |  SPECIAL M TRANS
     |      *-----------------------------------[MOV  K0     D882  ]* 3160 18509 19354 19356
     |                                                       |19390
     |                                                       |
     |M196                                                   |  DECODE DATA  @
18510*--| |-*-----------------------------------[MOV  R32    D78   ]* 3226  3233  3241  3250
     |MF1-CK|                                    1=M-C      | 3260  3274  3280  3285
     |18470 |                                               | 3291  3298  3304  3338
     |      |                                               |16097  3358  3345  3341
     |      |                                               |16204 16142 16127 16112
     |      |                                               |16584 16579 16211 16208
     |      |                                               |16607 16601 16598 16589
     |      |                                               |16629 16619 16616 16610
     |      |                                               |16652 16647 16639 16634
     |      |                                               |16671 16664 16661 16657
     |      |                                               |16688 16680 16677 16674
     |      |                                               |16701 16698 16695 16692
     |      |                                               |16723 16718 16713 16708
     |      |                                               |16741 16737 16734 16727
     |      |                                               |16759 16756 16753 16749
     |      |                                               |16777 16774 16768 16762
     |      |                                               |16796 16791 16783 16780
     |      |                                               |16835 16810 16806 16801
     |      |                                               |16856 16851 16846 16840
     |      |                                               |16876 16871 16866 16861
     |      |                                               |16896 16891 16886 16881
     |      |                                               |16915 16909 16906 16901
     |      |                                               |16936 16930 16924 16920
     |      |                                               |16956 16951 16946 16941
     |      |                                               |16976 16971 16966 16961
     |      |                                               |16996 16991 16986 16981
     |      |                                               |17016 17011 17006 17001
     |      |                                               |17034 17030 17026 17021
     |      |                                               |17054 17049 17044 17039
     |      |                                               |17074 17069 17064 17059
     |      |                                               |17094 17089 17084 17079
     |      |                                               |17114 17107 17104 17099
     |      |                                               |17136 17130 17124 17117
     |      |                                               |17151 17148 17145 17141
     |      |                                               |17163 17160 17157 17154
     |      |                                               |17178 17175 17171 17166
     |      |                                               |17190 17187 17184 17181
     |      |                                               |17204 17201 17196 17193
     |      |                                               |17225 17219 17212 17209
     |      |                                               |17248 17243 17238 17231
     |      |                                               |17269 17264 17259 17253
     |      |                                               |17289 17286 17280 17275
     |      |                                               |17310 17303 17300 17295
     |      |                                               |17331 17326 17320 17315
     |      |                                               |17352 17347 17341 17336
     |      |                                               |17373 17368 17363 17357
     |      |                                               |17394 17389 17384 17379
     |      |                                               |17415 17410 17405 17400
     |      |                                               |17436 17431 17426 17421
     |      |                                               |17456 17451 17446 17441
     |      |                                               |17476 17471 17466 17461
     |      |                                               |17512 17505 17494 17487
     |      |                                               |17533 17528 17523 17518
     |      |                                               |17553 17547 17543 17538
     |      |                                               |17574 17569 17562 17558
     |      |                                               |17597 17593 17586 17579
     |      |                                               |17618 17613 17608 17601
     |      |                                               |17639 17634 17629 17624
     |      |                                               |17659 17654 17649 17644
     |      |                                               |17679 17674 17669 17664
     |      |                                               |17700 17694 17689 17684
     |      |                                               |17722 17715 17710 17705
     |      |                                               |17742 17737 17732 17727
     |      |                                               |17762 17757 17752 17747
     |      |                                               |17785 17779 17774 17767
     |      |                                               |17807 17801 17796 17790
     |      |                                               |17829 17824 17819 17812
     |      |                                               |17850 17845 17840 17835
     |      |                                               |17871 17866 17860 17855
     |      |                                               |17891 17886 17881 17876
     |      |                                               |17911 17906 17901 17896
     |      |                                               |17932 17926 17921 17916
     |      |                                               |17952 17947 17942 17937
     |      |                                               |17972 17967 17962 17957
     |      |                                               |17997 17992 17987 17982
     |      |                                               |18019 18014 18008 18003
     |      |                                               |18040 18035 18030 18025
     |      |                                               |18061 18056 18051 18046
     |      |                                               |18082 18077 18072 18067
     |      |                                               |18103 18098 18093 18088
     |      |                                               |18124 18119 18114 18109
     |      |                                               |18144 18139 18134 18129
     |      |                                               |18165 18160 18155 18149
     |      |                                               |18185 18180 18175 18170
     |      |                                               |18207 18201 18196 18190
     |      |                                               |18265 18262 18219 18212
     |      |                                               |18278 18275 18271 18268
     |      |                                               |18295 18292 18285 18282
     |      |                                               |18308 18305 18301 18298
     |      |                                               |18325 18322 18315 18312
     |      |                                               |18340 18337 18334 18328
     |      |                                               |18583 18560 18537 18514
     |      |                                               |19165 19154 19141 19083
     |      |                                               |19206 19195 19182 19174
     |      |                                               |19247 19236 19223 19215
     |      |                                               |19289 19278 19265 19257
     |      |                                               |24648 24643 24638 19299
     |      |                                               |24668 24663 24658 24653
     |      |                                               |24683 24678 24673
     |M5316 |M196                                           |  MF & DEN DATA
     *--| |-*--| |-----------------------------[MOV  HF     D77   ]*16194 16504 18415 18503
     |mf1-CK|MF1-CK                                         |18519 18542 18565 18588
     |18473 |18470                                          |
     |      |M5316                                          |
     |      *--| |-----------------------------[MOV  HF     D577  ]*16197 16507 18418 18506
     |      |mf1-CK                                         |18524 18547 18570 18593
     |      |18473                                          |
     |      |                                               |  CALL M-DECODE
     |      *---------------------------------------[CALL P132  ]*16502 16200 18527 18550
     |      |                                               |18573 18596
     |      |                                               |
     |      |M834                                           |  MF1 INSIDE
     |      *--|/|-*-----------------------------------[SET  M152  ]*18459  3113  3162  3256
     |       INSIDE|                                        | 8668  8676  8688  8788
     |       18410 |                                        |18530
```

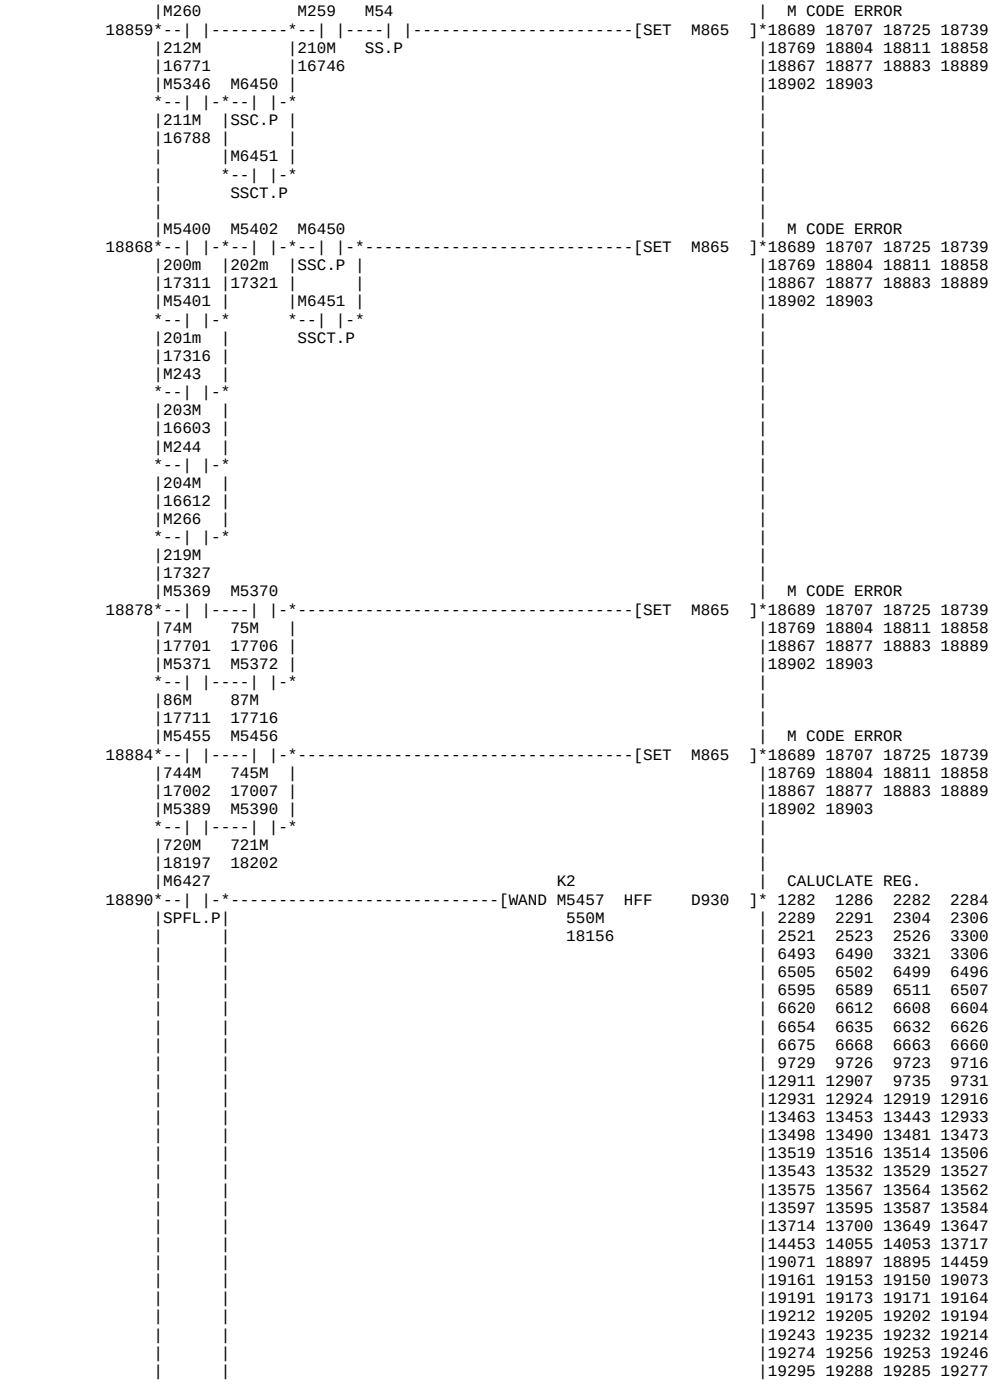

M197
MF2-CK
[MOV R33 D78]
1=M-C
[CALL P119]
DECODE DATA @
M5317
M197
mf2-CK
MF2-CK
[MOV HF D77]
[MOV HF D577]
[CALL P132]
CALL M-DECODE
M834
[SET M153]
INSIDE
M198
MF3-CK
[MOV R34 D78]
MF & DEN DATA
MF2 INSIDE

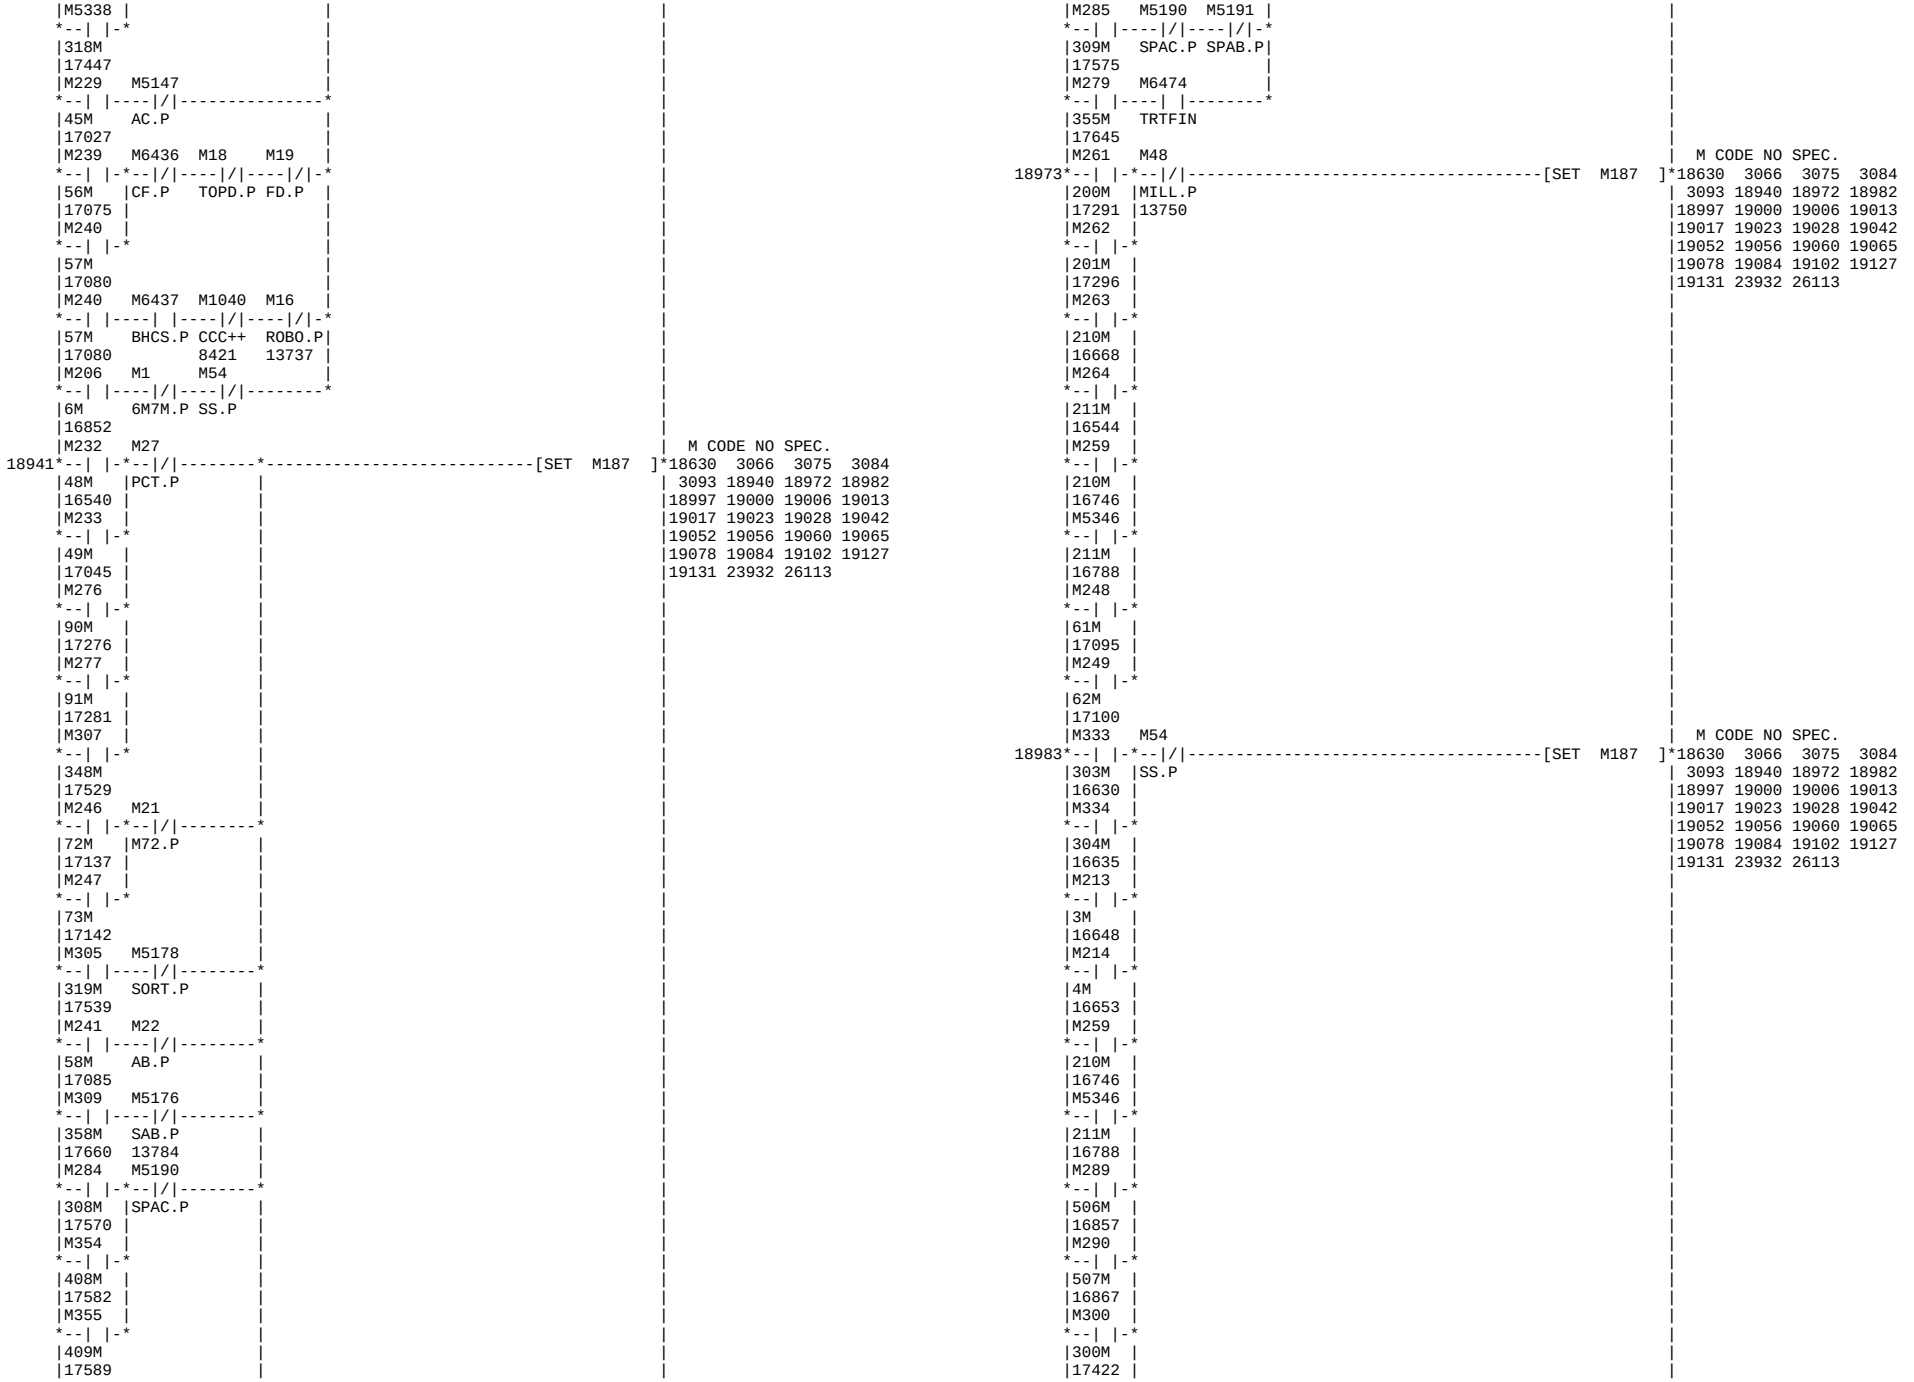


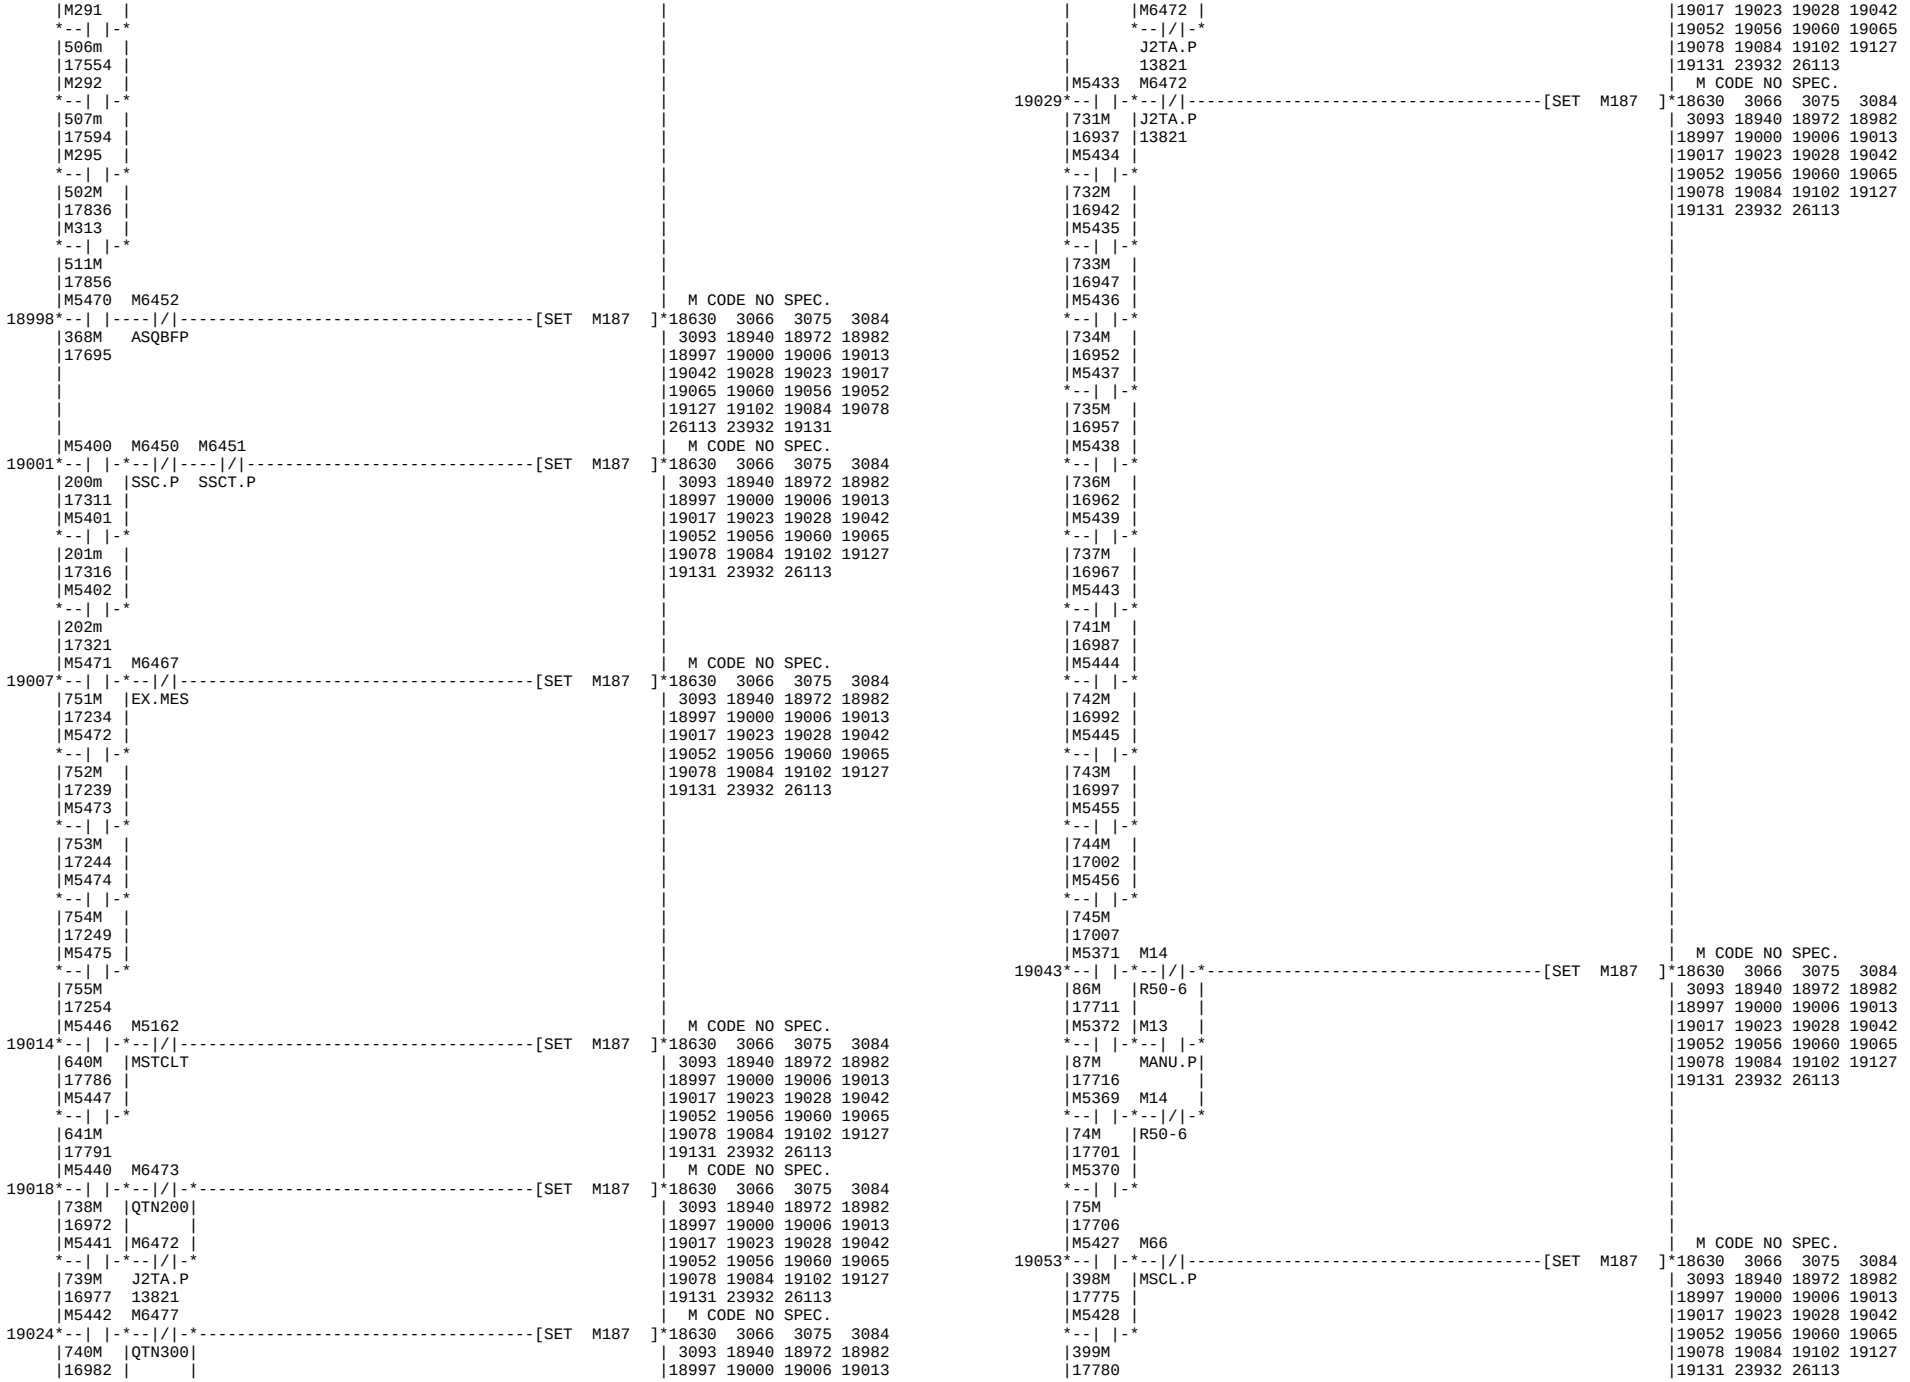


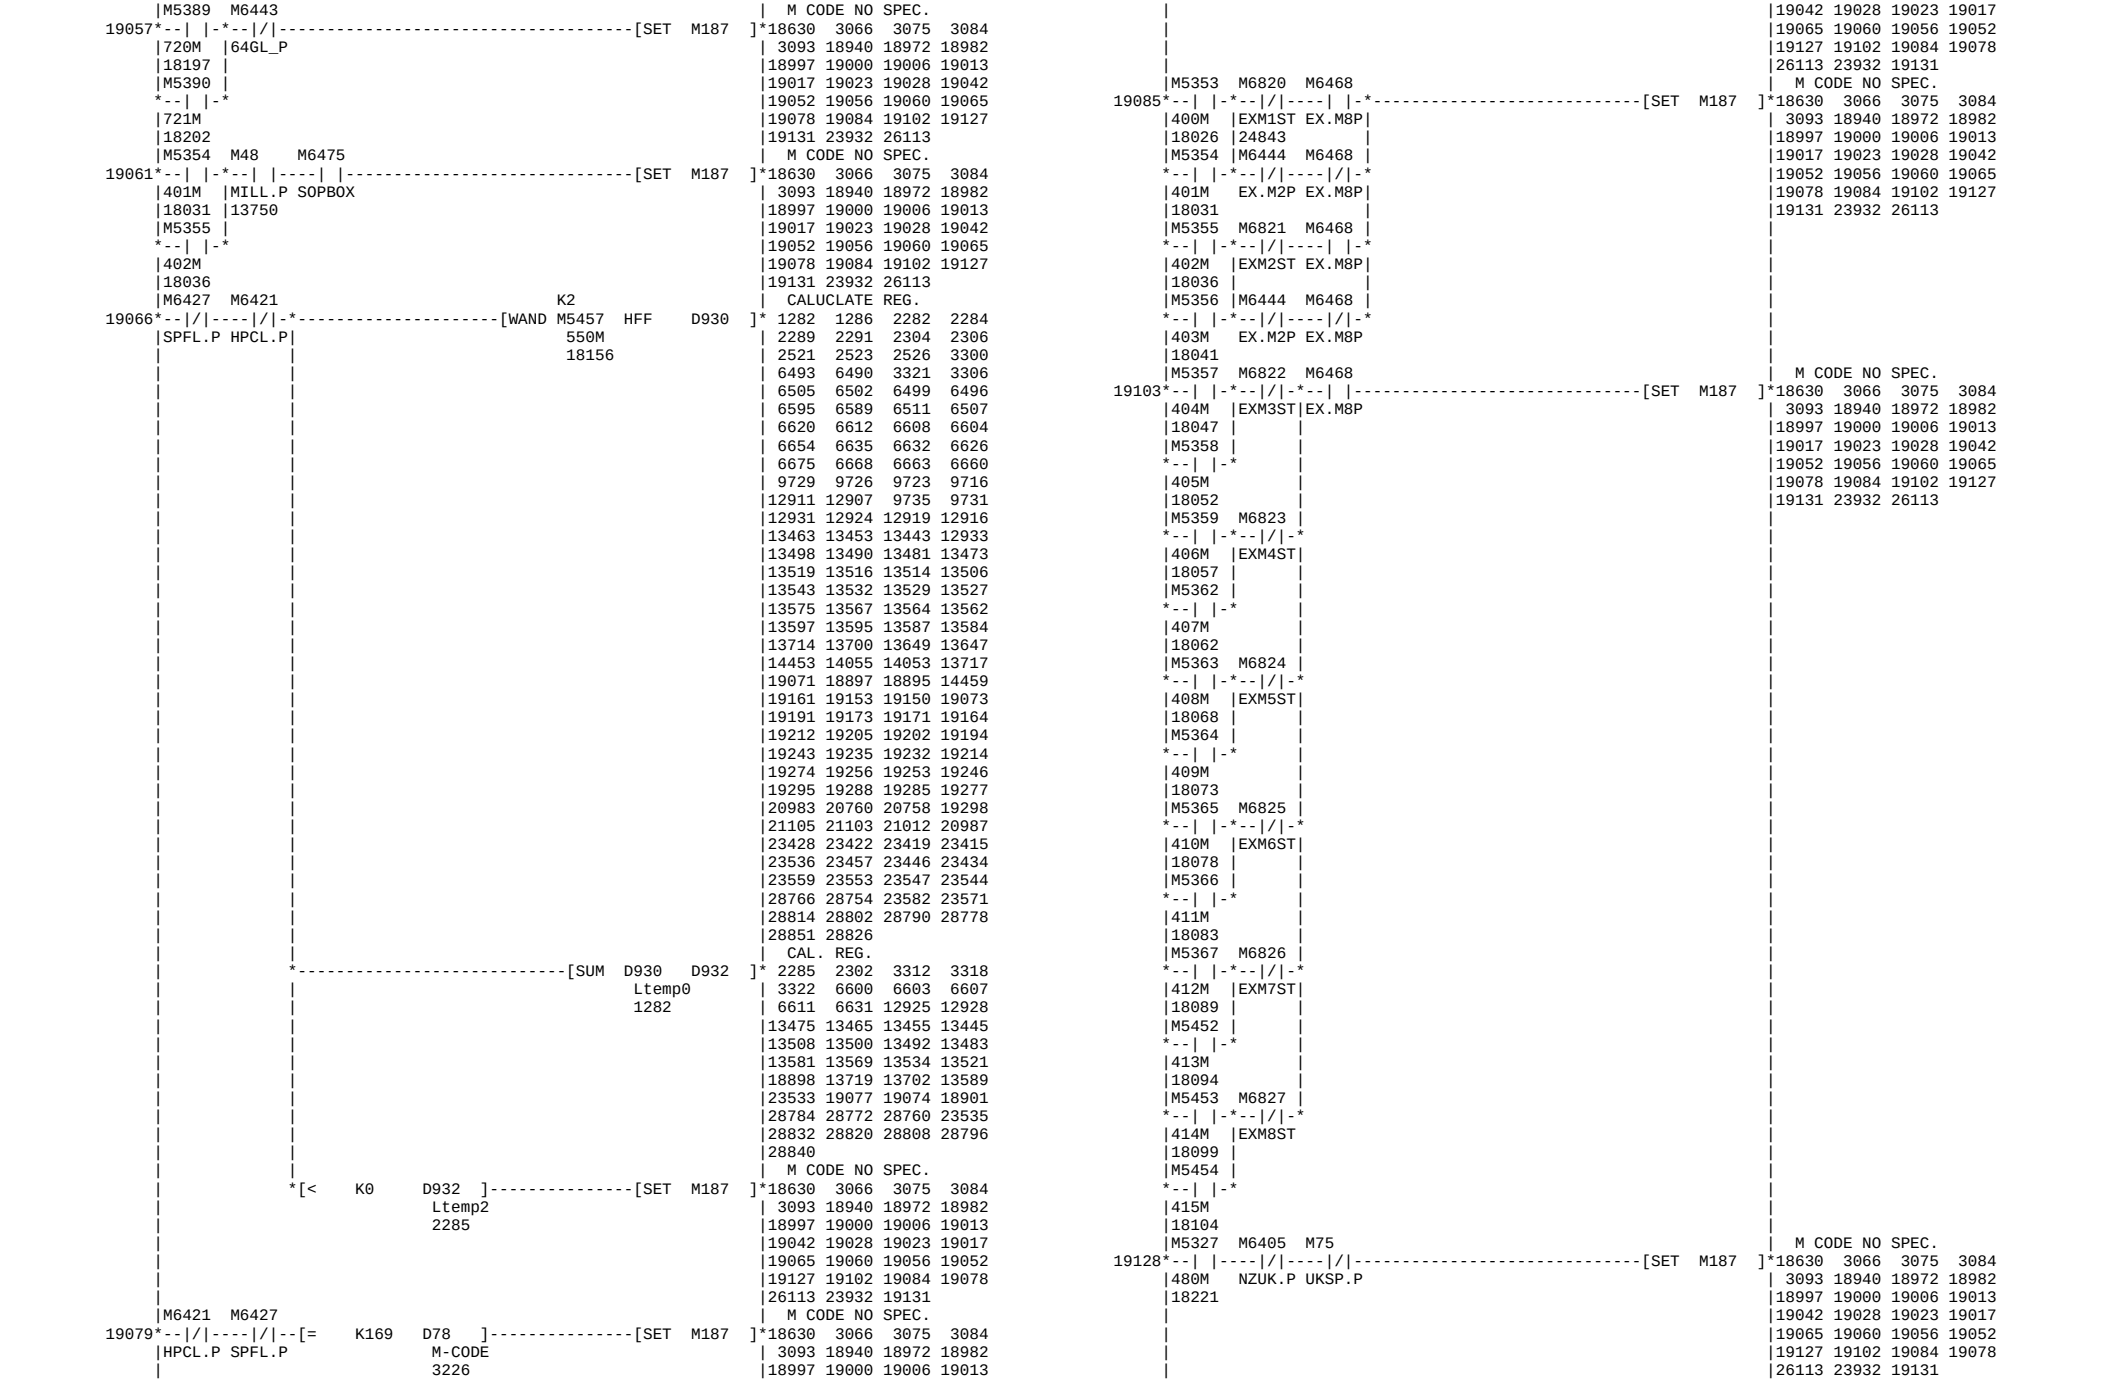

|M229 |
--| |--------
|45M |
|17027 |
|M5327 M75 |
--| |----| |-
|480M UKSP.P|
|18221 |
|M227 M6427 |
--| |---| |-*
588M	SPFL.P
17978	
	M6421
*--		-*
HPCL.P
M208 M229
*--		----		--------*
8M 45M
16872 17027
M208 M227 M6427
--| |----| |---| |-*
8M 588M	SPFL.P
16872 17978	
	M6421
*--		-*
HPCL.P
M300 M301
*--		----		--------*
300M 302M
17422 17427
M302 M303
*--		----		--------*
6M 7M
17549 17564
M307 M308
*--		----		--------*
348M 349M
17529 17534
M291 M292
*--		----		--------*
506m 507m
17554 17594
M216 M218
18690*--		-*--		-*----------[SET M865]*18689 18707 18725 18739
16M |18M	|18769 18804 18811 18858
16882	16892		18867 18877 18883 18889
M217			18902 18903
*--		-*
17M
16887
M216 M217
*--		----		-*
16M 17M
16882 16887
M216 M219
*--		-*--		-*
16M	19M
16882	16897
M217	
*--		-*
17M	
16887	
M218	
*--		-*
18M
16892
M223 M224
*--		----		-*
33M 34M
17012 17017
M221 M222
*--		----		-*
31M 32M
16926 16931
M230 M231	M CODE ERROR
18708*--		----		-*----------[SET M865]*18689 18707 18725 18739
46M 47M	|18769 18804 18811 18858
17031 17035		18867 18877 18883 18889
M232 M233	|18902 18903
*--		-*--		-*
48M |49M	
16540	17045	
M276 |M277	
*--		-*--		-*
90M 91M	
17276 17281	
M234 M235	
*--		----		-*
51M 52M	
17050 17055	
M236 M237	
*--		----		-*
53M 54M	
17060 17065	
M239 M240	
*--		----		-*
56M 57M
17075 17080
M246 M247	M CODE ERROR
18726*--		----		-*----------[SET M865]*18689 18707 18725 18739
72M 73M	|18769 18804 18811 18858
17137 17142		18867 18877 18883 18889
M253 M254	|18902 18903
*--		----		-*
81M 82M	
17168 17198	
M255 M256	
*--		----		-*
83M 84M	
17206 17214	
M307 M255	
*--		-*--		-*
348M	83M
17529	17206
M276	
*--		-*
90M	
17276	
M232	
*--		-*
48M
16540
M281 M278	M CODE ERROR
18740*--		----		-*----------[SET M865]*18689 18707 18725 18739
353M 354M	|18769 18804 18811 18858
17635 17640		18867 18877 18883 18889
M279 M280	|18902 18903
*--		----		-*
355M 356M	
17645 17650	
M282 M283	
*--		----		-*
351M 352M	
17625 17630	
M284 M285	
*--		----		-*
308M 309M	
17570 17575	
M354 M355	
*--		----		-*
408M 409M	
17582 17589	
M313 M314	
*--		----		-*
511M 512M	
17856 17861	
M315 M316	
*--		----		-*
540M 541M	
17877 17882	

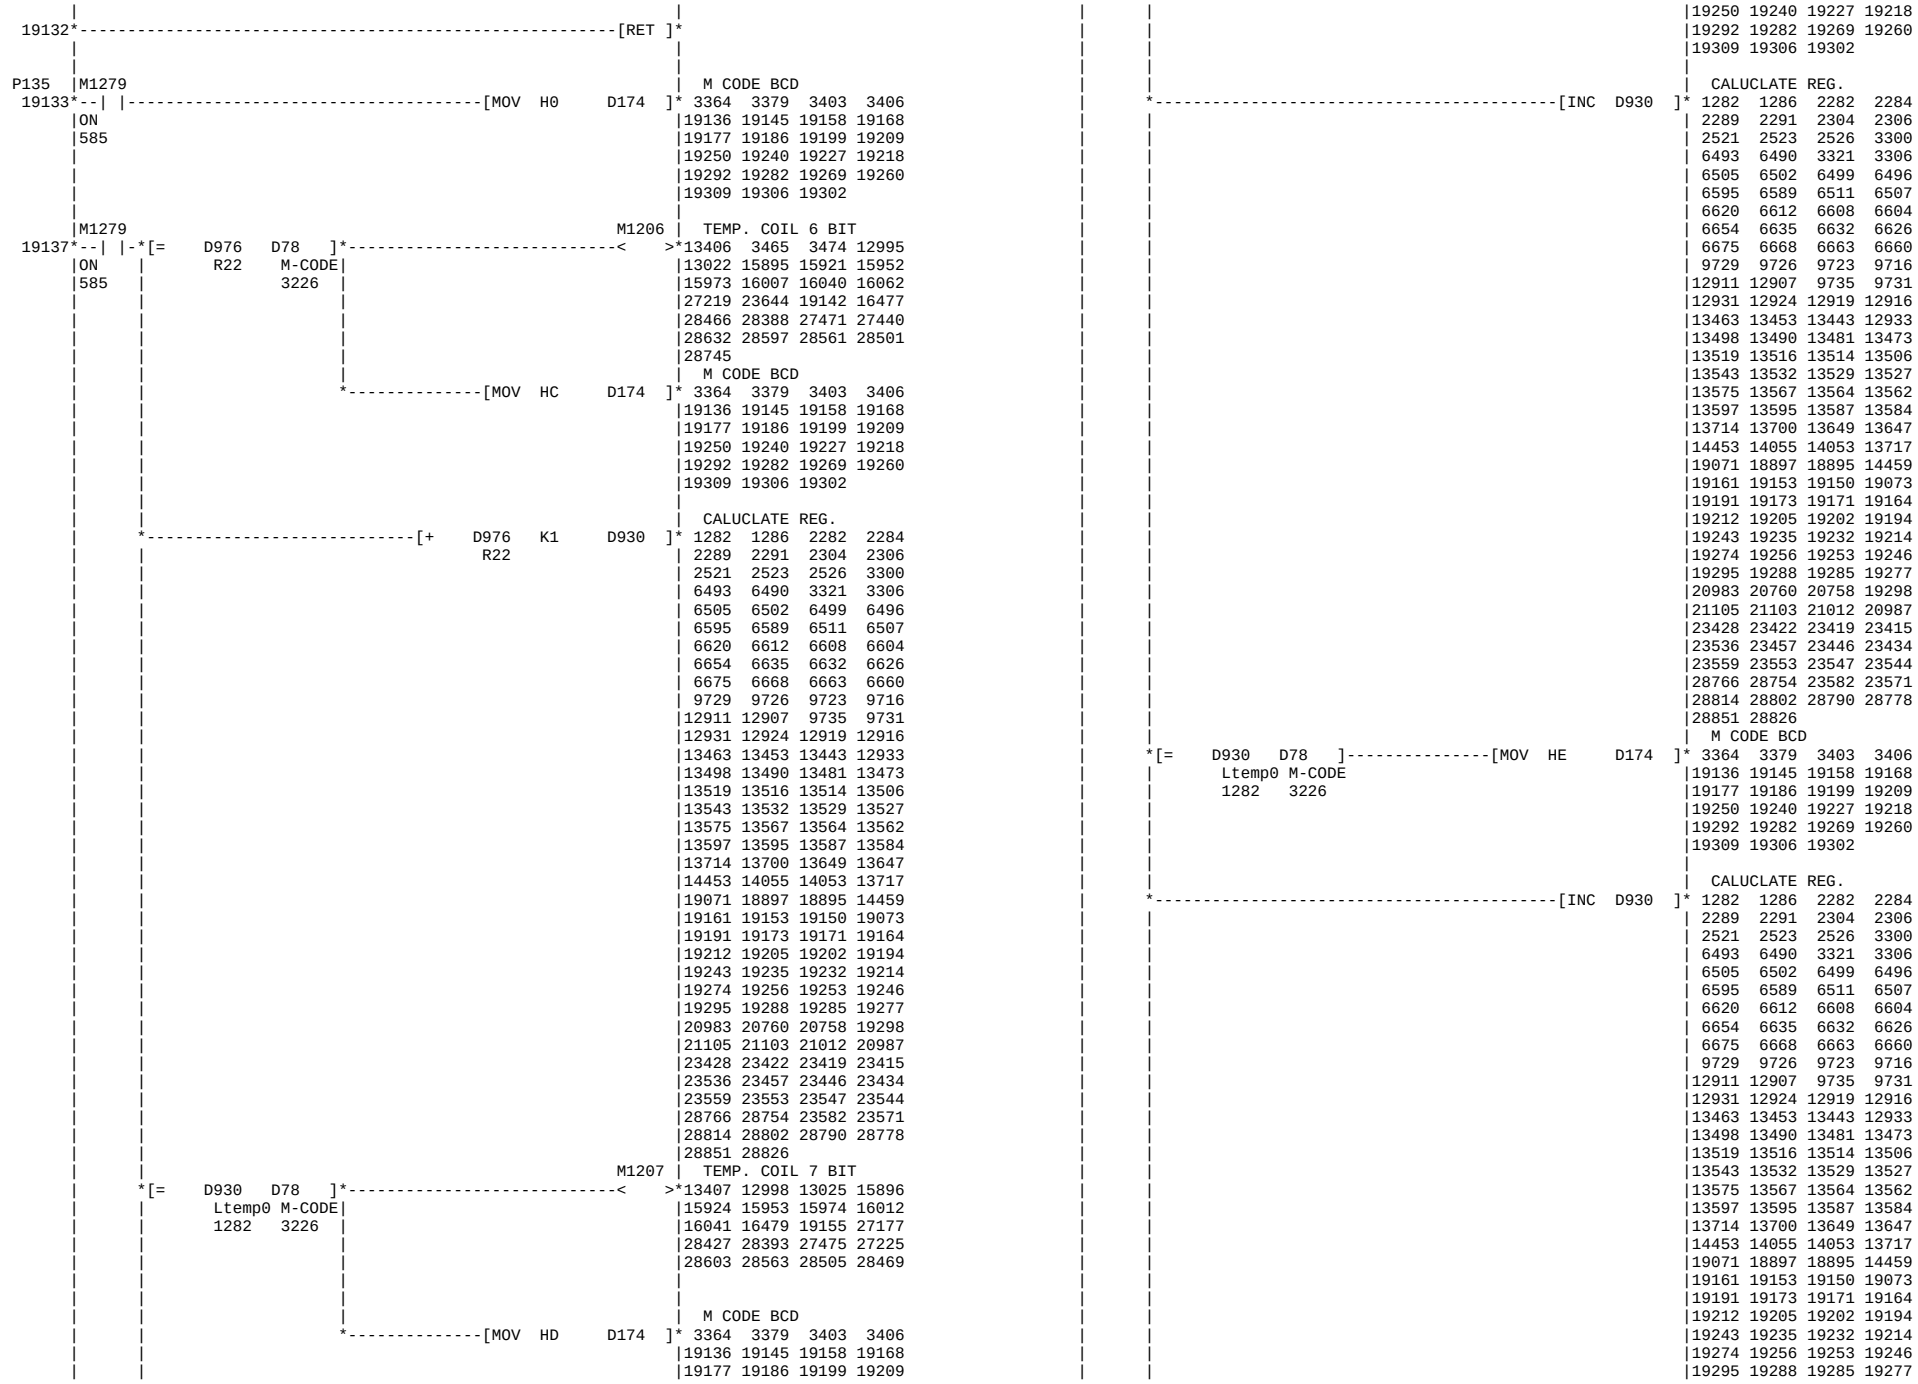

|M317 M318 |
--| |----| |-
|542M 543M |
|17887 17892 |
|M319 M320 |
--| |----| |-
|546M 547M |
|17907 17912 |
|M5963 M6377 |
--| |----|/|-
|SPSTRS
|4279
|M243 M245
18770*--| |-*--| |-*----------[SET M865]*18689 18707 18725 18739
|203M |205M | |18769 18804 18811 18858
|16603 |16621 | |18867 18877 18883 18889
|M244 | | |18902 18903
--| |- |
|204M |
|16612 |
|M243 M244 |
--| |----| |-
|203M 204M |
|16603 16612 |
|M263 M265 |
--| |---| |-*
210M	212M
16668	16705
M264	
*--		-*
211M
16544
M263 M264
--| |----| |-
210M 211M
16668 16544
M259 M260
--| |---| |-*
210M	212M
16746	16771
M5346	
*--		-*
211M
16788
M259 M5346
--| |----| |-
210M 211M
16746 16788
M261 M212
--| |---| |-*
200M	202M
17291	17305
M262	
*--		-*
201M
17296
M269 M271
--| |---| |-*
237M	239M
17348	17358
M270	
*--		-*
238M
17353
M269 M270
--| |----| |-
237M 238M
17348 17353
M257 M258
--| |----| |-
500M 501M
17808 17813
M5413 M5415
18805*--| |-*--| |-*----------[SET M865]*18689 18707 18725 18739
237m |239m	|18769 18804 18811 18858
17364	17374		18867 18877 18883 18889
M CODE ERROR
M CODE ERROR
M5414	
*--		-*
238m
17369
M5413 M5414
--| |----| |-
237m 238m
17364 17369
M333 M334
18812*--| |-*--| |--------*----------[SET M865]*18689 18707 18725 18739
303M |304M	|18769 18804 18811 18858
16630	16635		18867 18877 18883 18889
M335			18902 18903
*--		-*
305M
16640
M333 M335
--| |----| |--------
303M 305M
16630 16640
M213 M214
--| |----| |--------
3M 4M
16648 16653
M213 M215
--| |---| |--------*
3M	5M
16648	16658
M214	
*--		-*
4M
16653
M219 X260
--| |----| |--------
19M SYNS.N
16897
M305 X360
--| |---| |--------*
319M	SYNC_N
17539	
M5420	
*--		-*
m19
16902
M5427 M5428
--| |----| |--------
398M 399M
17775 17780
M5446 M5447
--| |----| |--------
640M 641M
17786 17791
M5467 M6 XA6
--| |---| |-*--|/|-*
68M	BF.P	BF_RDY
17126		
M5468	|M108
--| |- *--|/|-*
69M BF
17132 11722
M5467 M5468
--| |----| |--------
68M 69M
17126 17132
M5465 M5466
--| |----| |--------
564M 565M
17110 17120
M5465 M6 XA6
--| |---| |-*--|/|-*
564M	BF.P	BF_RDY
17110		
M5466	|M108
--| |- *--|/|-*
565M BF
17120 11722
18902 18903
M CODE ERROR
18902 18903
18769 18804 18811 18858
18867 18877 18883 18889
18902 18903

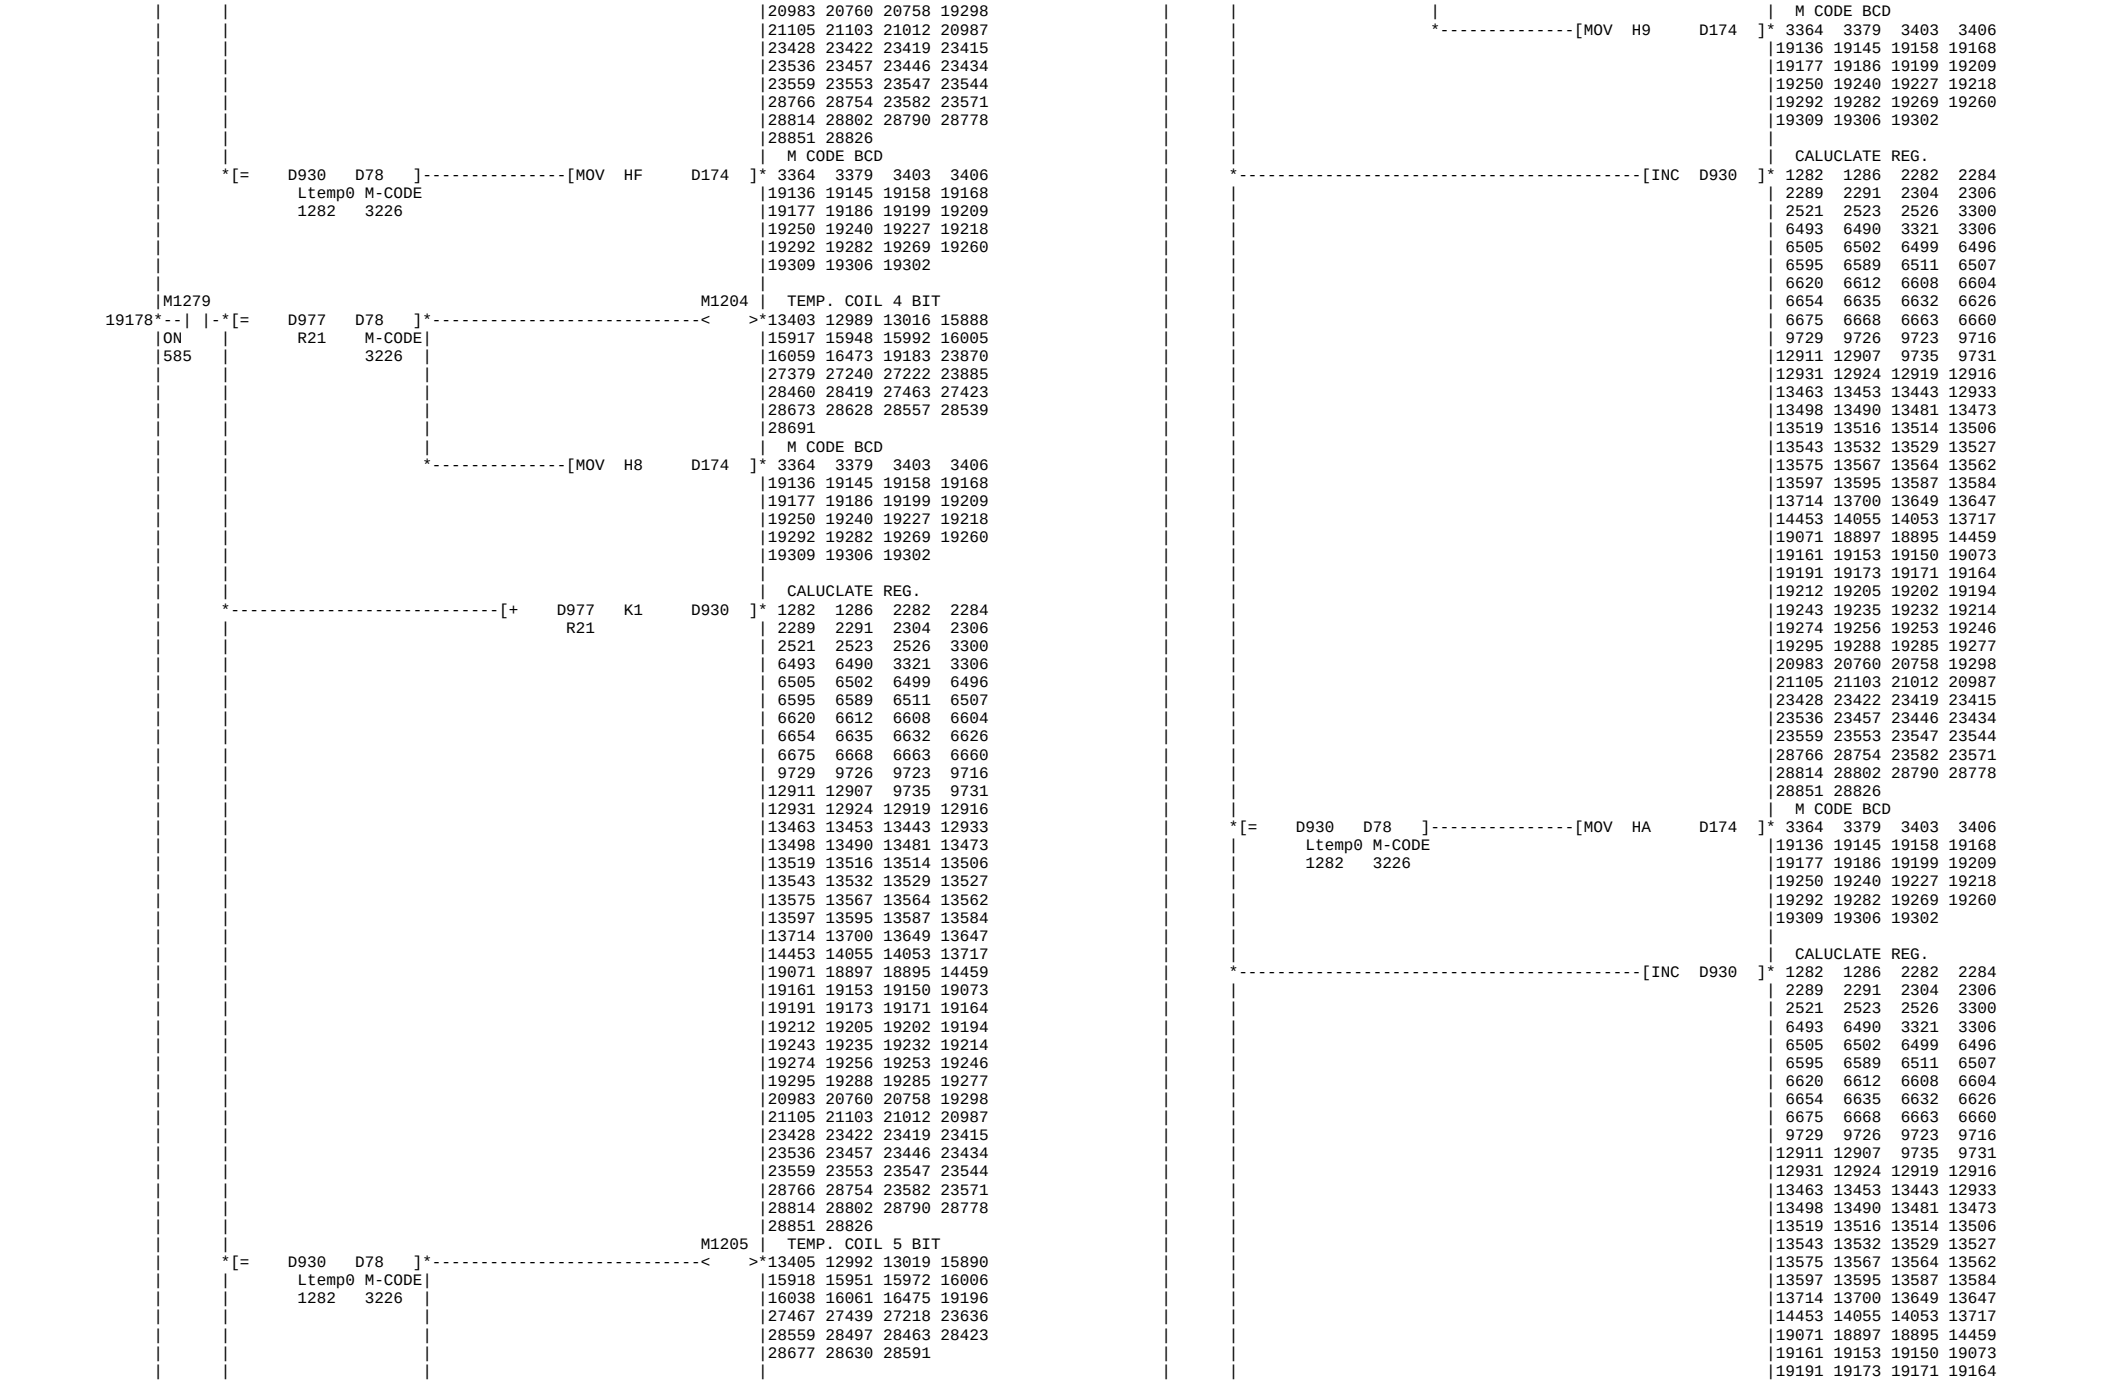

M260 M259 M54
M6450
M6451
SSC.P
SSCT.P
M5400 M5402 M6450
M5369 M5370
M5455 M5456
M6427
K2
WAND M5457 HFF D930
SPFL.P
550M
18156
M5178
SORT.P
CHPS.P
ORT.P
M5336
M5337
M5420
M5486
M5487
M5488
M5489
M5490
M5491
M5492
M5493
M5494
M5495
M5496
M5497
M5498
M5499
M5500
M5501
M5502
M5503
M5504
M5505
M5506
M5507
M5508
M5509
M5510
M5511
M5512
M5513
M5514
M5515
M5516
M5517
M5518
M5519
M5520
M5521
M5522
M5523
M5524
M5525

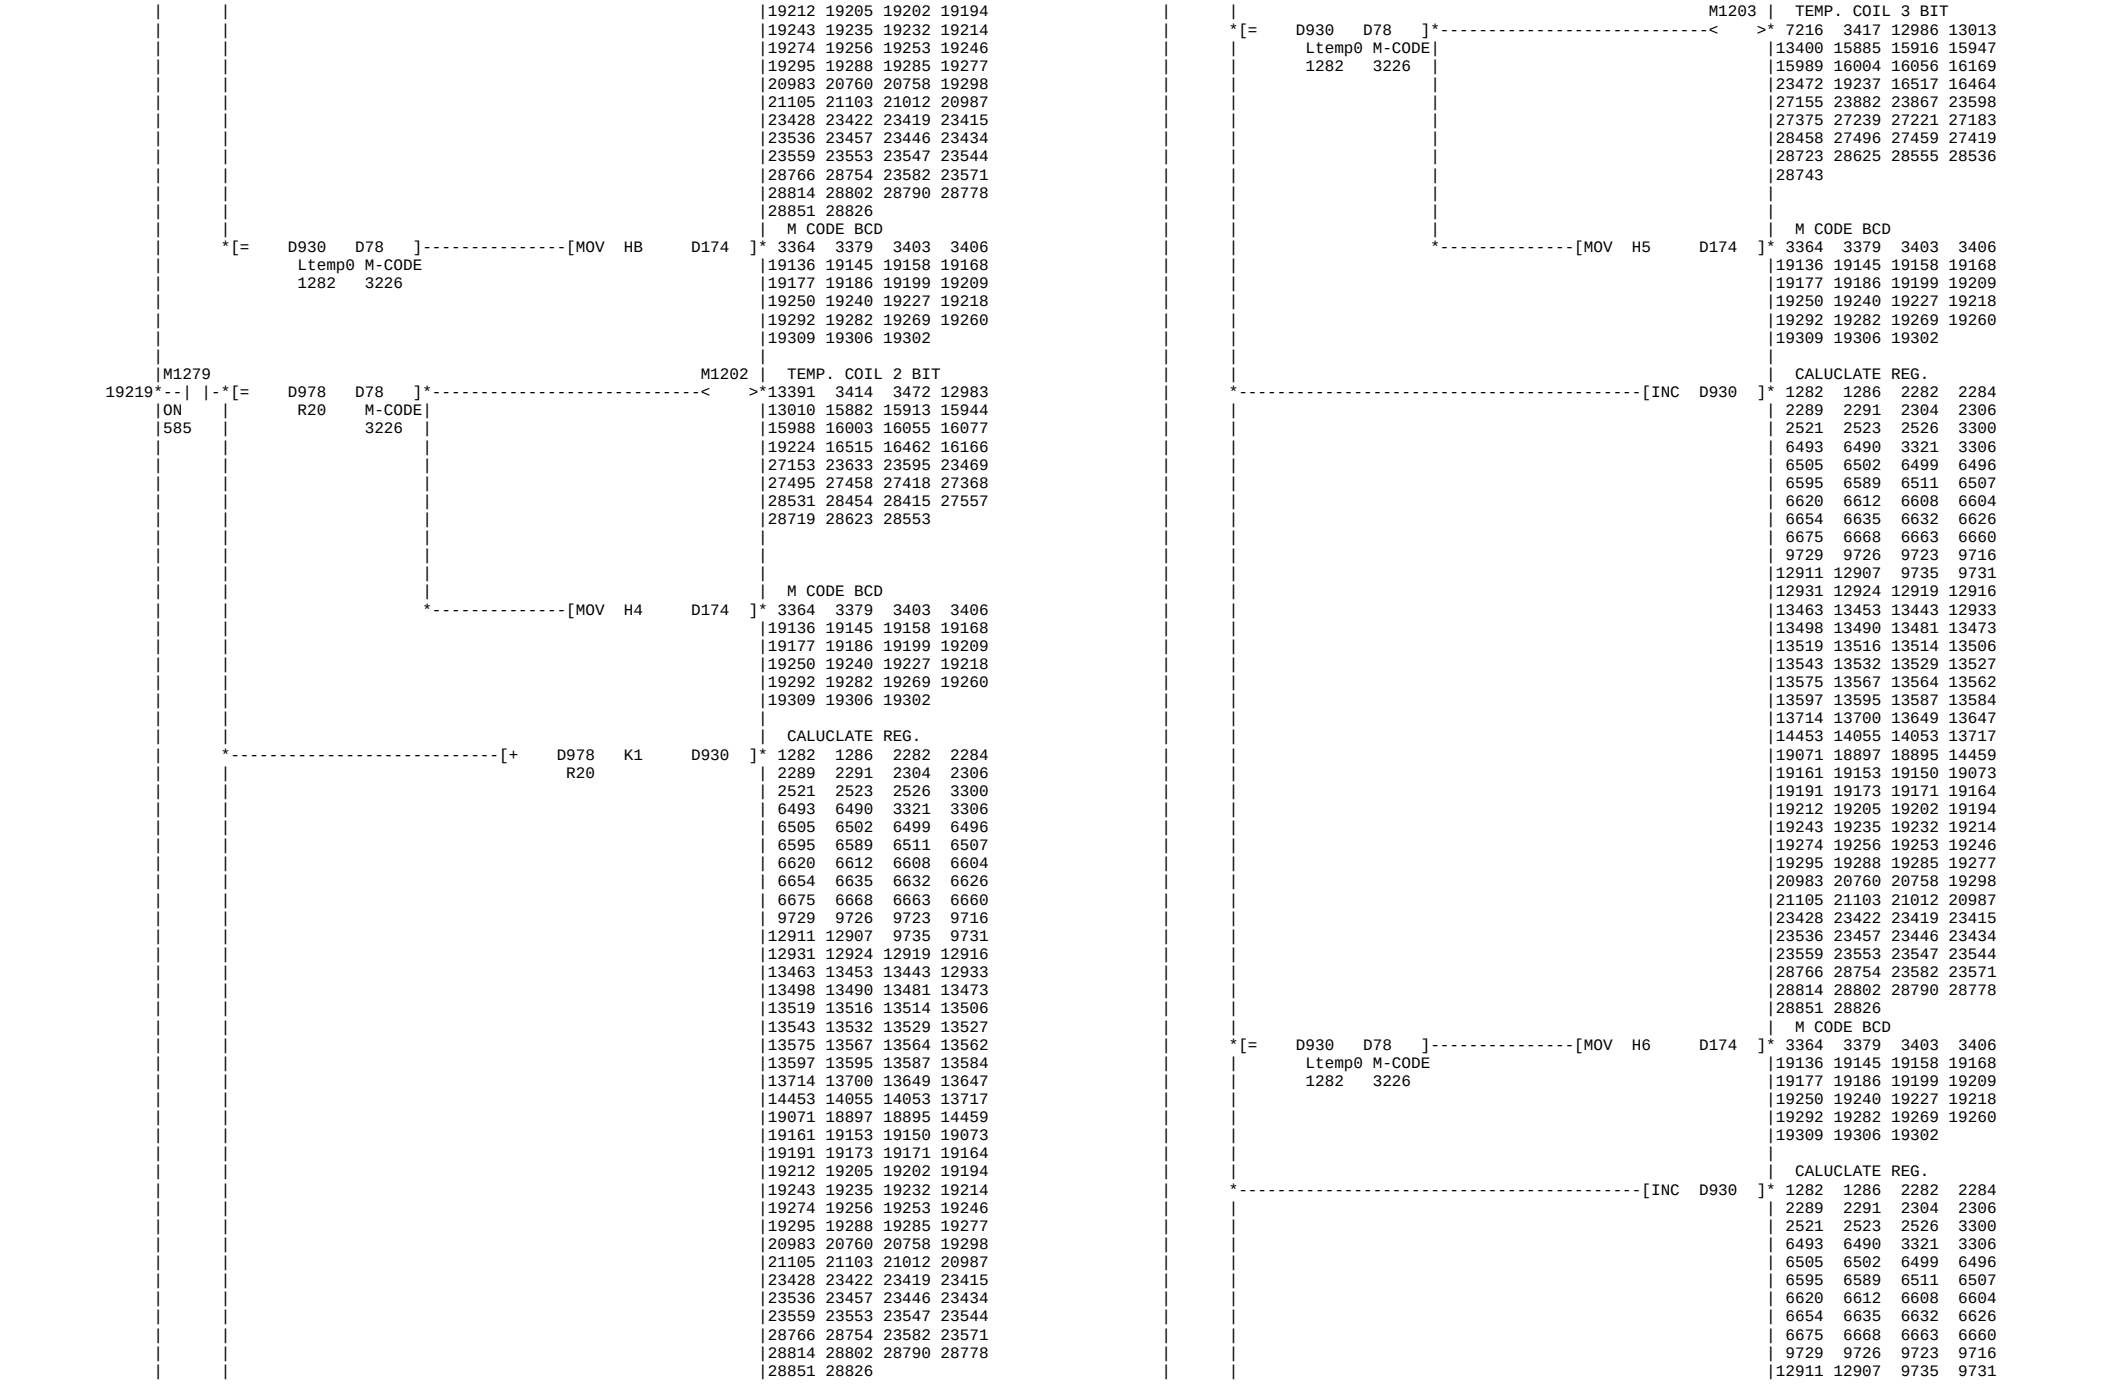

M5338
318M
17447
M229 M5147
45M AC.P
17027
M239 M6436 M18 M19
56M CF.P TOPD.P FD.P
17075
M240
57M
17080
M240 M6437 M1040 M16
57M BHCS.P CCC++ ROBO.P
17080 8421 13737
M206 M1 M54
6M 6M7M.P SS.P
16852
M232 M27
18941
48M PCT.P
16540
M233
49M
17045
M276
90M
17276
M277
91M
17281
M307
348M
17529
M246 M21
72M M72.P
17137
M247
73M
17142
M305 M5178
319M SORT.P
17539
M241 M22
58M AB.P
17085
M309 M5176
358M SAB.P
17660 13784
M284 M5190
308M SPAC.P
17570
M354
408M
17582
M355
409M
17589
M285 M5190 M5191
309M SPAC.P SPAB.P
17575
M279 M6474
355M TRTFIN
17645
M261 M48
18973
200M MILL.P
17291 13750
M262
201M
17296
M263
210M
16668
M264
211M
16544
M259
210M
16746
M5346
211M
16788
M248
61M
17095
M249
62M
17100
M333 M54
18983
303M SS.P
16630
M334
304M
16635
M213
3M
16648
M214
4M
16653
M259
210M
16746
M5346
211M
16788
M289
506M
16857
M290
507M
16867
M300
300M
17422
SET M187
M CODE NO SPEC.
18630 3066 3075 3084
3093 18940 18972 18982
18997 19000 19006 19013
19017 19023 19028 19042
19052 19056 19060 19065
19078 19084 19102 19127
19131 23932 26113

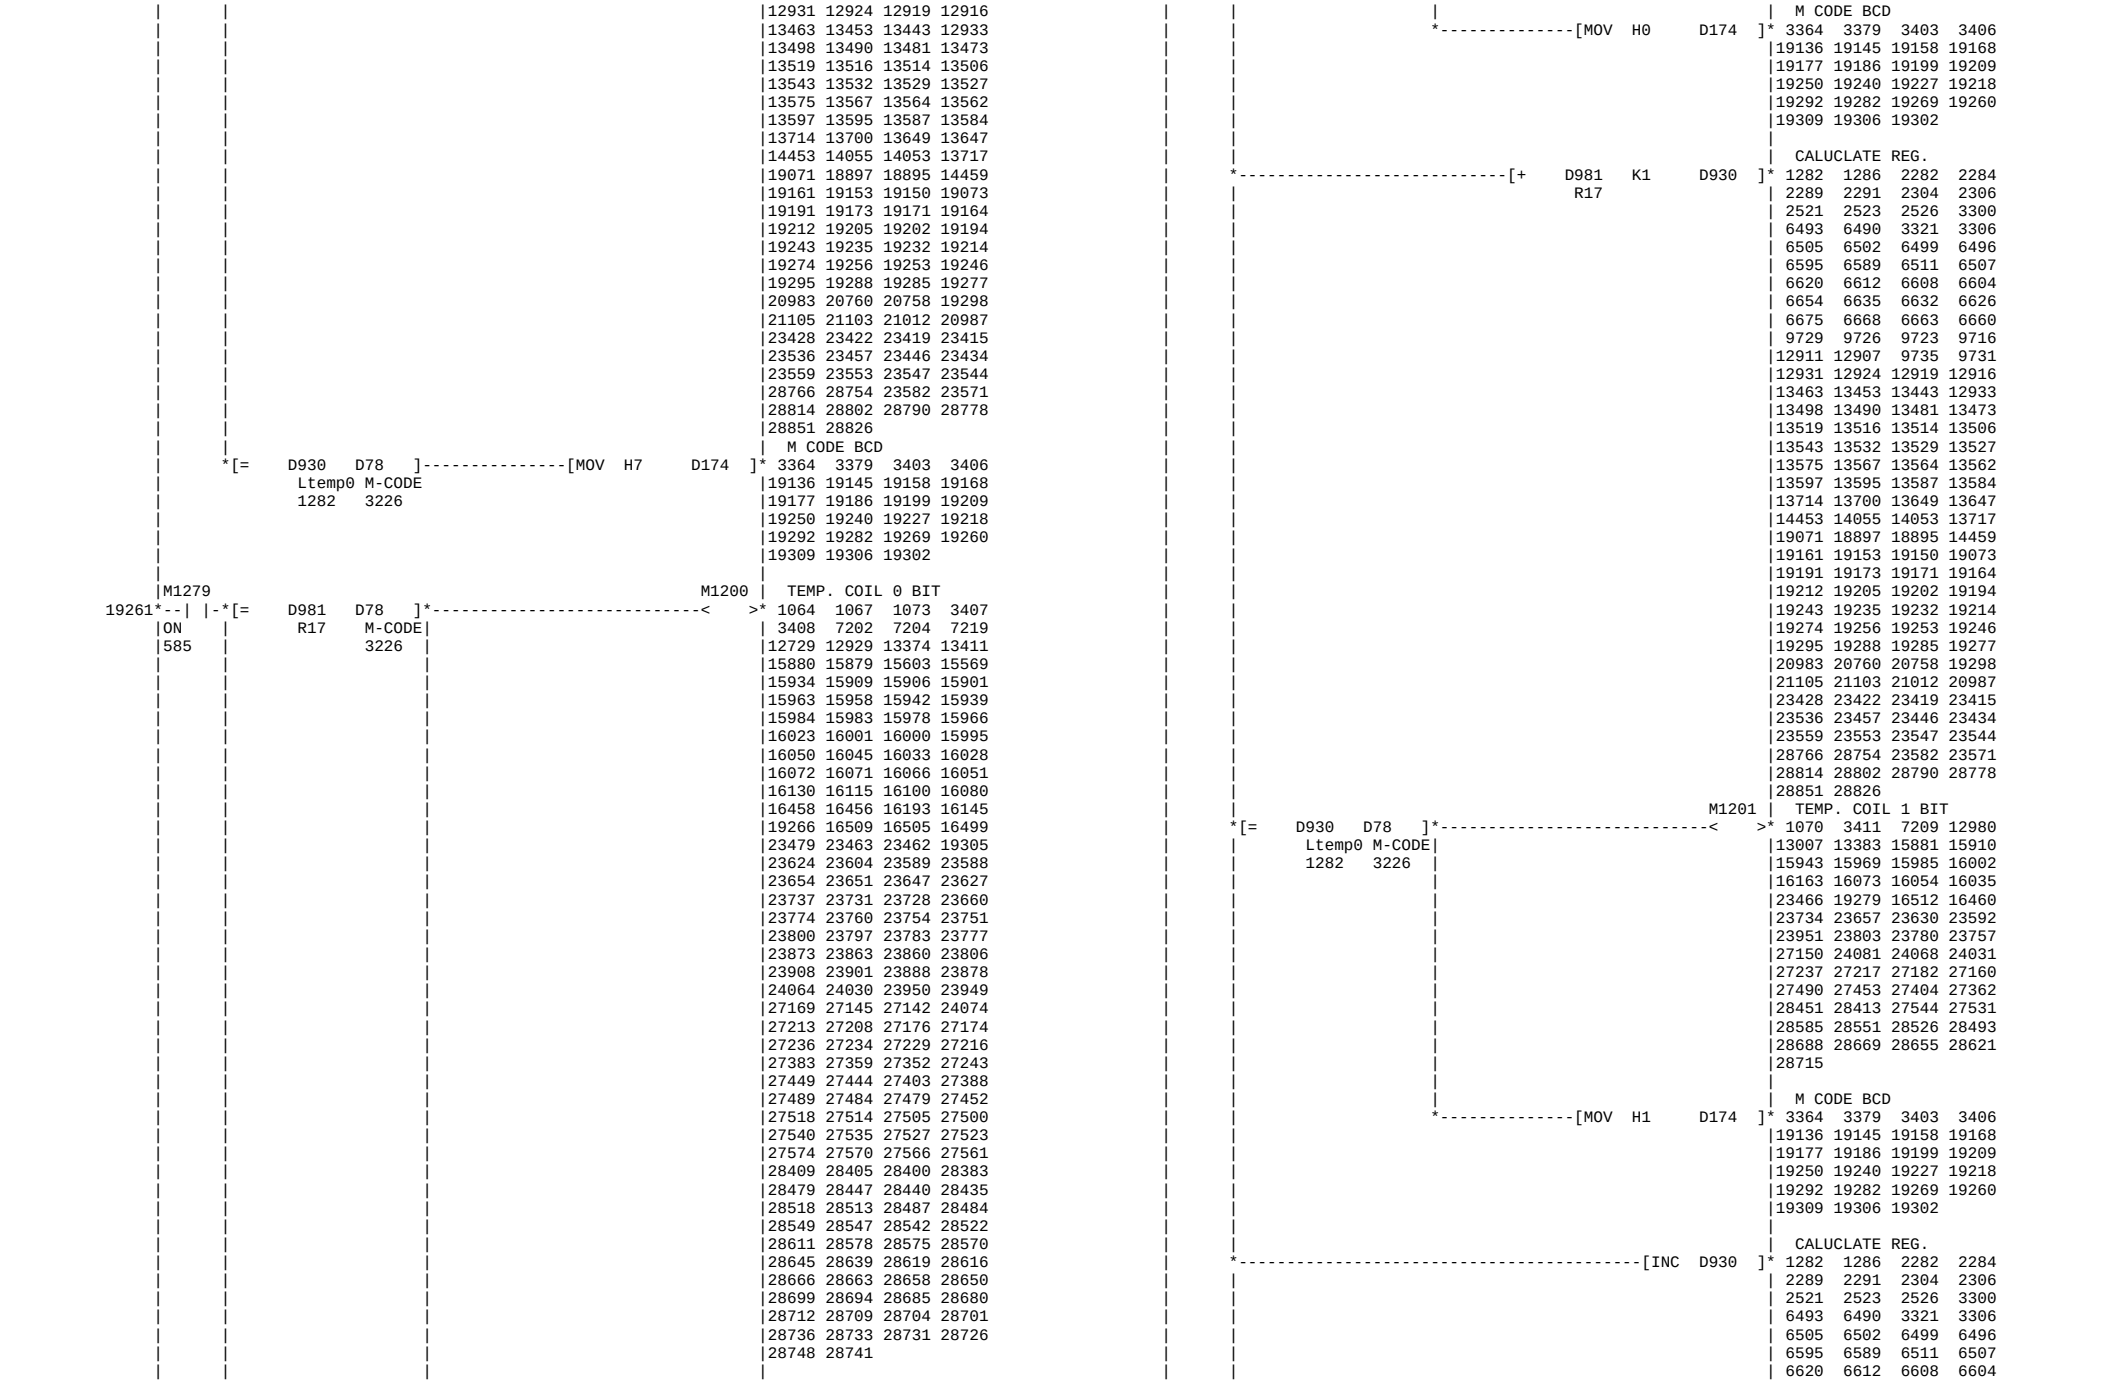

|M291 |
--| |-
|506m |
|17554 |
|M292 |
--| |-
|507m |
|17594 |
|M295 |
--| |-
|502M |
|17836 |
|M313 |
--| |-
|511M
|17856
|M5470 M6452
18998*--| |----|/|-----------[SET M187]*18630 3066 3075 3084
|368M ASQBFP | 3093 18940 18972 18982
|17695 |18997 19000 19006 19013
| |19042 19028 19023 19017
| |19065 19060 19056 19052
| |19127 19102 19084 19078
| |26113 23932 19131
|M5400 M6450 M6451 | M CODE NO SPEC.
19001*--| |-*--|/|----|/|-----------[SET M187]*18630 3066 3075 3084
|200m |SSC.P SSCT.P | 3093 18940 18972 18982
|17311 |18997 19000 19006 19013
|M5401 |19017 19023 19028 19042
--| |-|19052 19056 19060 19065
|201m |19078 19084 19102 19127
|17316 |19131 23932 26113
|M5402 |
--| |-
|202m
|17321
|M5471 M6467 | M CODE NO SPEC.
19007*--| |-*--|/|-----------[SET M187]*18630 3066 3075 3084
|751M |EX.MES | 3093 18940 18972 18982
|17234 |18997 19000 19006 19013
|M5472 |19017 19023 19028 19042
--| |-|19052 19056 19060 19065
|752M |19078 19084 19102 19127
|17239 |19131 23932 26113
|M5473 |
--| |-
|753M |
|17244 |
|M5474 |
--| |-
|754M |
|17249 |
|M5475 |
--| |-
|755M
|17254
|M5446 M5162 | M CODE NO SPEC.
19014*--| |-*--|/|-----------[SET M187]*18630 3066 3075 3084
|640M |MSTCLT | 3093 18940 18972 18982
|17786 |18997 19000 19006 19013
|M5447 |19017 19023 19028 19042
--| |-|19052 19056 19060 19065
|641M |19078 19084 19102 19127
|17791 |19131 23932 26113
|M5440 M6473 | M CODE NO SPEC.
19018*--| |-*--|/|-*---------[SET M187]*18630 3066 3075 3084
|738M |QTN200| | 3093 18940 18972 18982
|16972 | |18997 19000 19006 19013
|M5441 |M6472 |19017 19023 19028 19042
--| |---|/|-*|19052 19056 19060 19065
|739M J2TA.P |19078 19084 19102 19127
|16977 13821 |19131 23932 26113
|M5442 M6477 | M CODE NO SPEC.
19024*--| |-*--|/|-*---------[SET M187]*18630 3066 3075 3084
|740M |QTN300| | 3093 18940 18972 18982
|16982 | |18997 19000 19006 19013
| |M6472 |19017 19023 19028 19042
| *--|/|-* |19052 19056 19060 19065
| J2TA.P |19078 19084 19102 19127
| 13821 |19131 23932 26113
|M5433 M6472 | M CODE NO SPEC.
19029*--| |-*--|/|-----------[SET M187]*18630 3066 3075 3084
|731M |J2TA.P | 3093 18940 18972 18982
|16937 |13821 |18997 19000 19006 19013
|M5434 |19017 19023 19028 19042
--| |-|19052 19056 19060 19065
|732M |19078 19084 19102 19127
|16942 |19131 23932 26113
|M5435 |
--| |-
|733M |
|16947 |
|M5436 |
--| |-
|734M |
|16952 |
|M5437 |
--| |-
|735M |
|16957 |
|M5438 |
--| |-
|736M |
|16962 |
|M5439 |
--| |-
|737M |
|16967 |
|M5443 |
--| |-
|741M |
|16987 |
|M5444 |
--| |-
|742M |
|16992 |
|M5445 |
--| |-
|743M |
|16997 |
|M5455 |
--| |-
|744M |
|17002 |
|M5456 |
--| |-
|745M
|17007
|M5371 M14 | M CODE NO SPEC.
19043*--| |-*--|/|-*----------[SET M187]*18630 3066 3075 3084
|86M |R50-6 | | 3093 18940 18972 18982
|17711 | | |18997 19000 19006 19013
|M5372 |M13 | |19017 19023 19028 19042
--| |---| |-*|19052 19056 19060 19065
|87M MANU.P| |19078 19084 19102 19127
|17716 | |19131 23932 26113
|M5369 M14 |
--| |---|/|-*
|74M |R50-6
|17701 |
|M5370 |
--| |-
|75M
|17706
|M5427 M66 | M CODE NO SPEC.
19053*--| |-*--|/|-----------[SET M187]*18630 3066 3075 3084
|398M |MSCL.P | 3093 18940 18972 18982
|17775 |18997 19000 19006 19013
|M5428 |19017 19023 19028 19042
--| |-|19052 19056 19060 19065
|399M |19078 19084 19102 19127
|17780 |19131 23932 26113

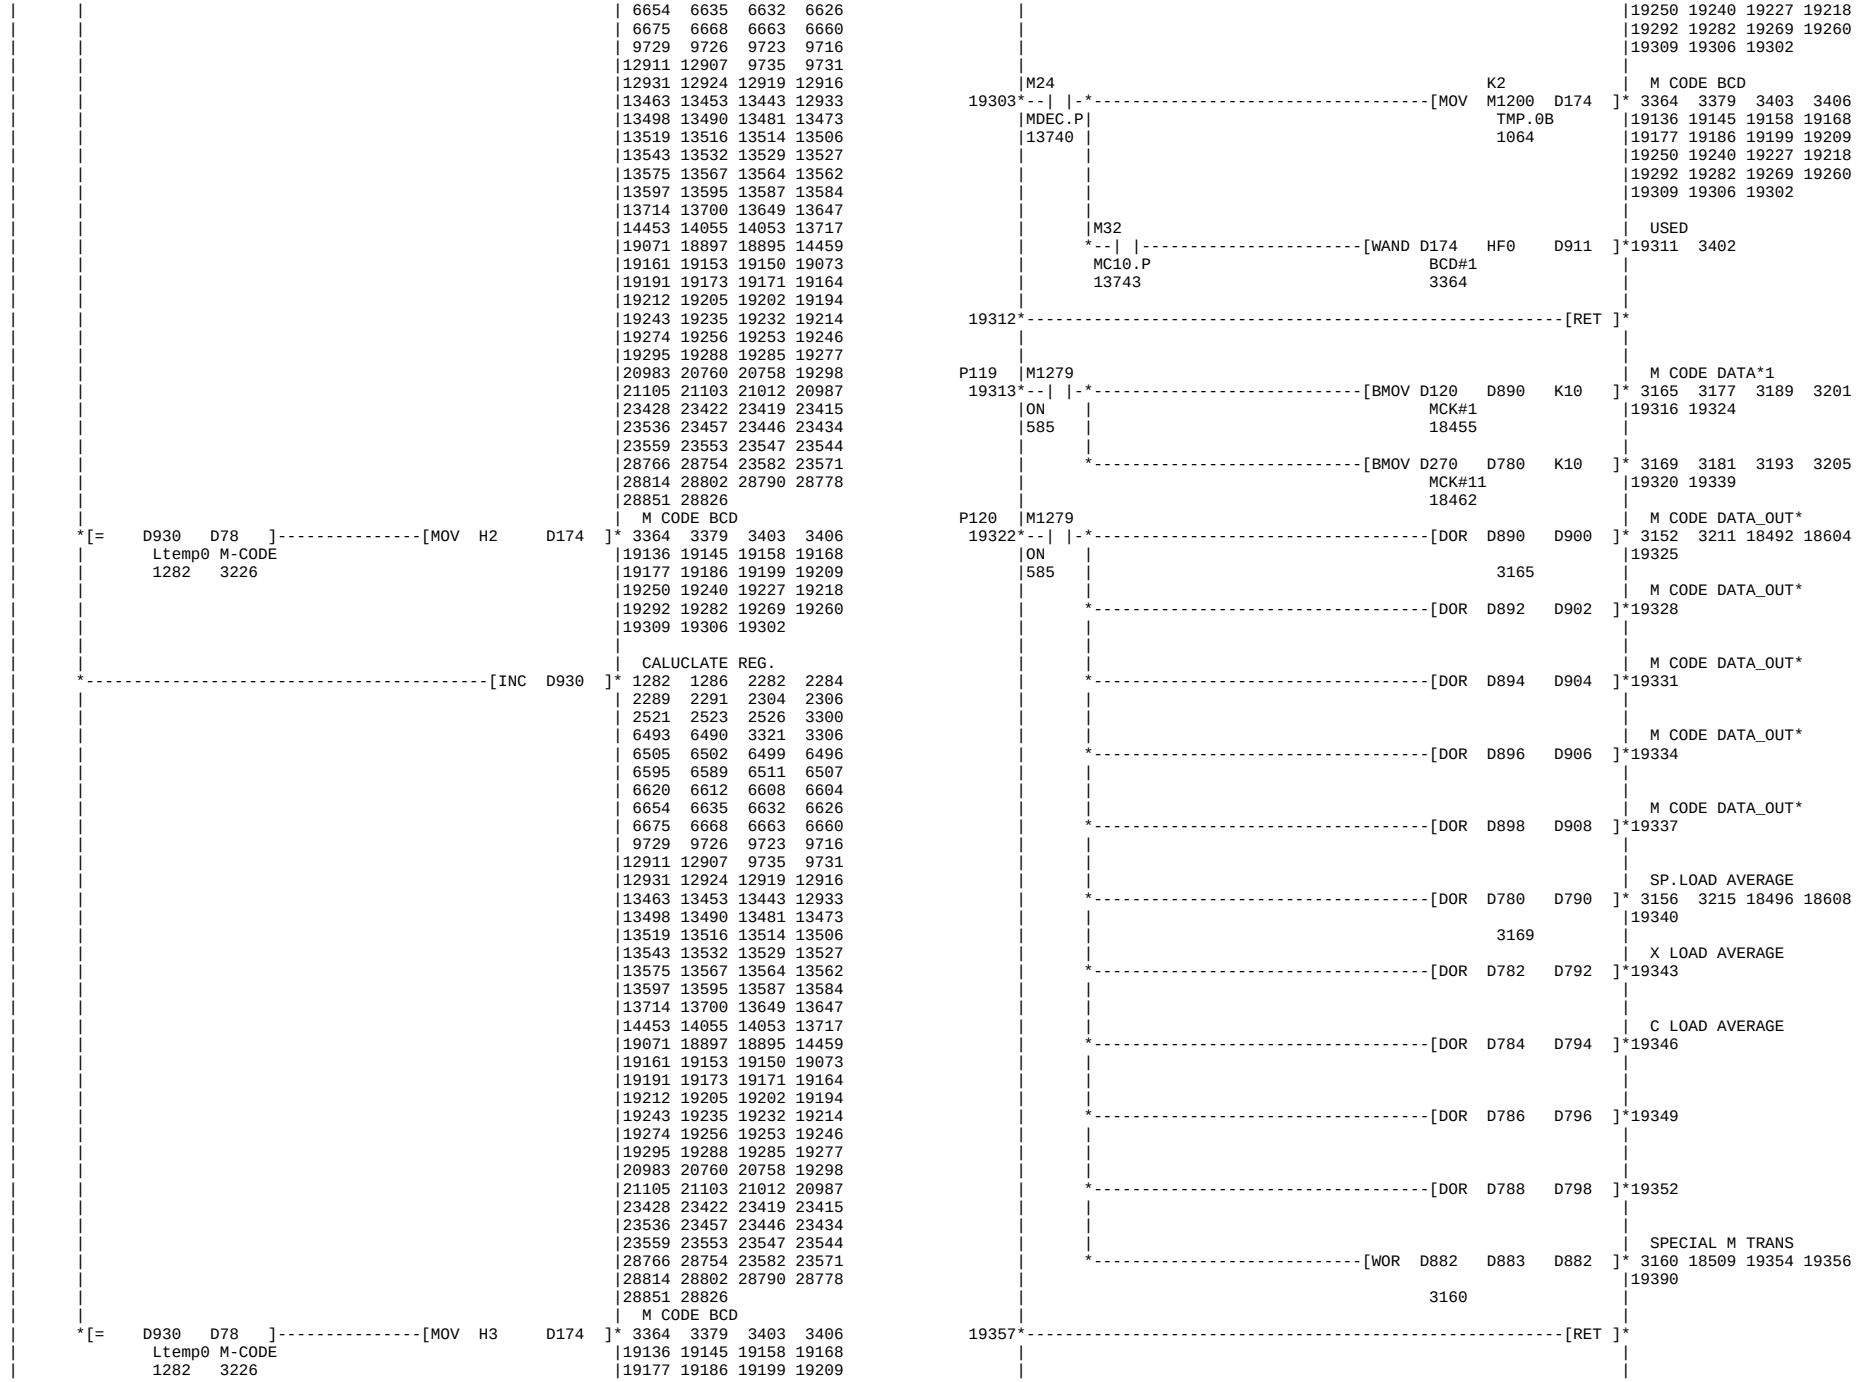

|M5389 M6443
19057*--| |-*--|/|----------[SET M187]
|720M |64GL_P
|18197 |
|M5390 |
--| |-
|721M
|18202
|M5354 M48 M6475
19061*--| |-*--| |----| |----------[SET M187]
|401M |MILL.P SOPBOX
|18031 |13750
|M5355 |
--| |-
|402M
|18036
|M6427 M6421 K2
19066*--|/|----|/|-*----------[WAND M5457 HFF D930]
|SPFL.P HPCL.P| 550M
| | 18156
| |
| |
| |

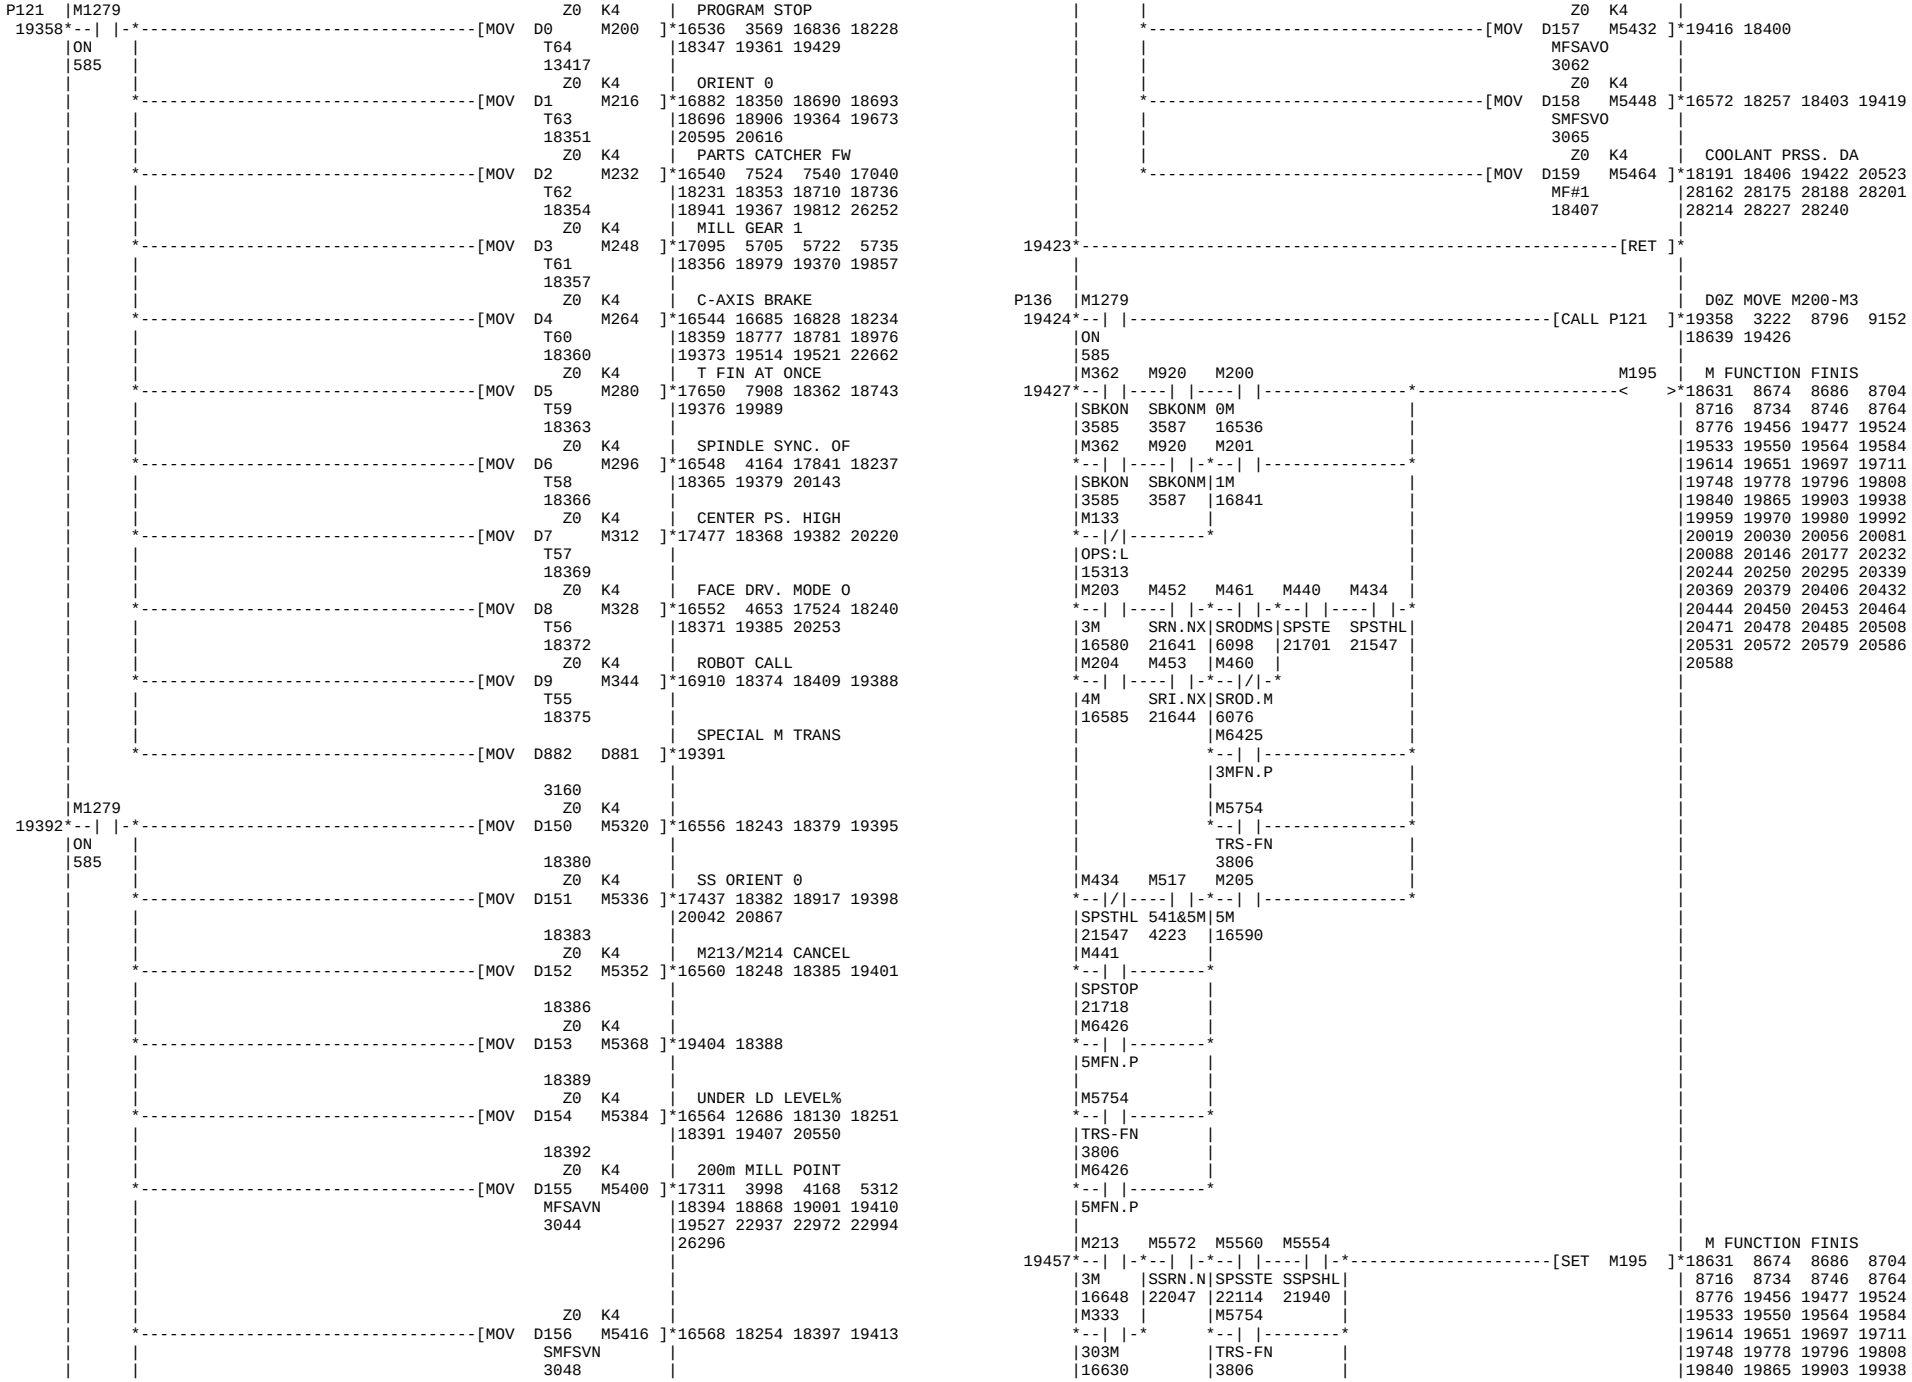

19132 [RET]
P135 M1279
19133 [MOV H0 D174]
ON
585
M1279 M1206
19137 [= D976 D78]
ON R22 M-CODE
585 3226
[MOV HC D174]
[+ D976 K1 D930]
R22
M1207
[= D930 D78]
Ltemp0 M-CODE
1282 3226
[MOV HD D174]
M CODE BCD
TEMP. COIL 6 BIT
TEMP. COIL 7 BIT
CALUCLATE REG.
3364 3379 3403 3406
19136 19145 19158 19168
19177 19186 19199 19209
19250 19240 19227 19218
19292 19282 19269 19260
19309 19306 19302
13406 3465 3474 12995
13022 15895 15921 15952
15973 16007 16040 16062
27219 23644 19142 16477
28466 28388 27471 27440
28632 28597 28561 28501
28745
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
13407 12998 13025 15896
15924 15953 15974 16012
16041 16479 19155 27177
28427 28393 27475 27225
28603 28563 28505 28469
[INC D930]
[= D930 D78]
[MOV HE D174]

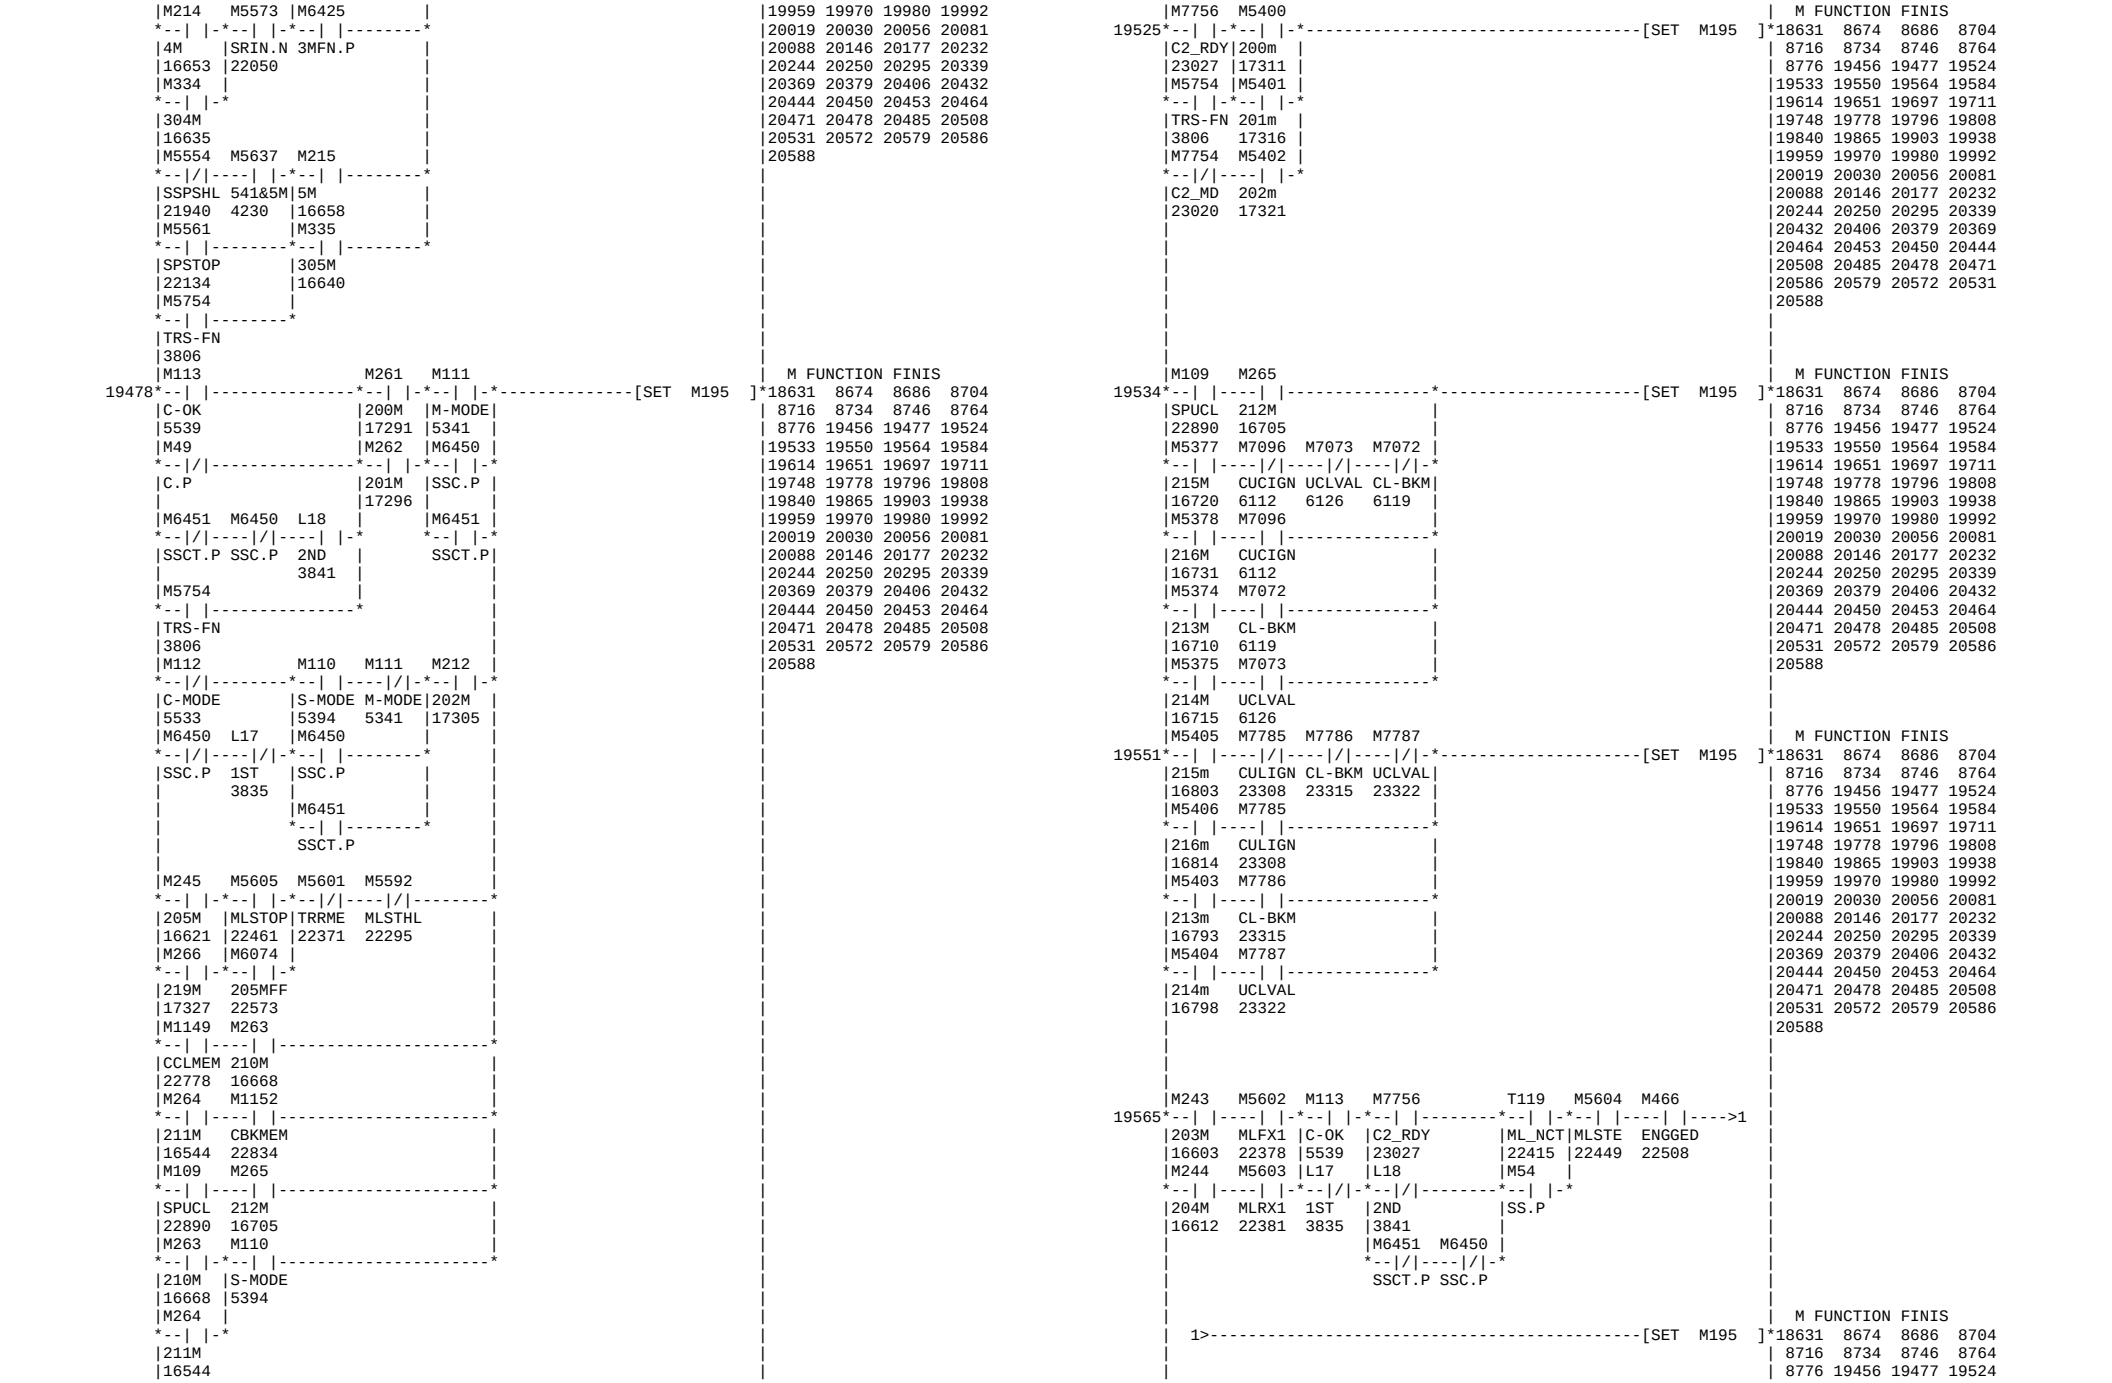

M1279
ON
585
19178
D930 D78
Ltemp0 M-CODE
1282 3226
MOV HF D174
M CODE BCD
3364 3379 3403 3406
19136 19145 19158 19168
19177 19186 19199 19209
19250 19240 19227 19218
19292 19282 19269 19260
19309 19306 19302
M1204
TEMP. COIL 4 BIT
D977 D78
R21 M-CODE
3226
13403 12989 13016 15888
15917 15948 15992 16005
16059 16473 19183 23870
27379 27240 27222 23885
28460 28419 27463 27423
28673 28628 28557 28539
28691
MOV H8 D174
D977 K1 D930
R21
CALUCLATE REG.
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
M1205
TEMP. COIL 5 BIT
13405 12992 13019 15890
15918 15951 15972 16006
16038 16061 16475 19196
27467 27439 27218 23636
28559 28497 28463 28423
28677 28630 28591
MOV H9 D174
INC D930
MOV HA D174

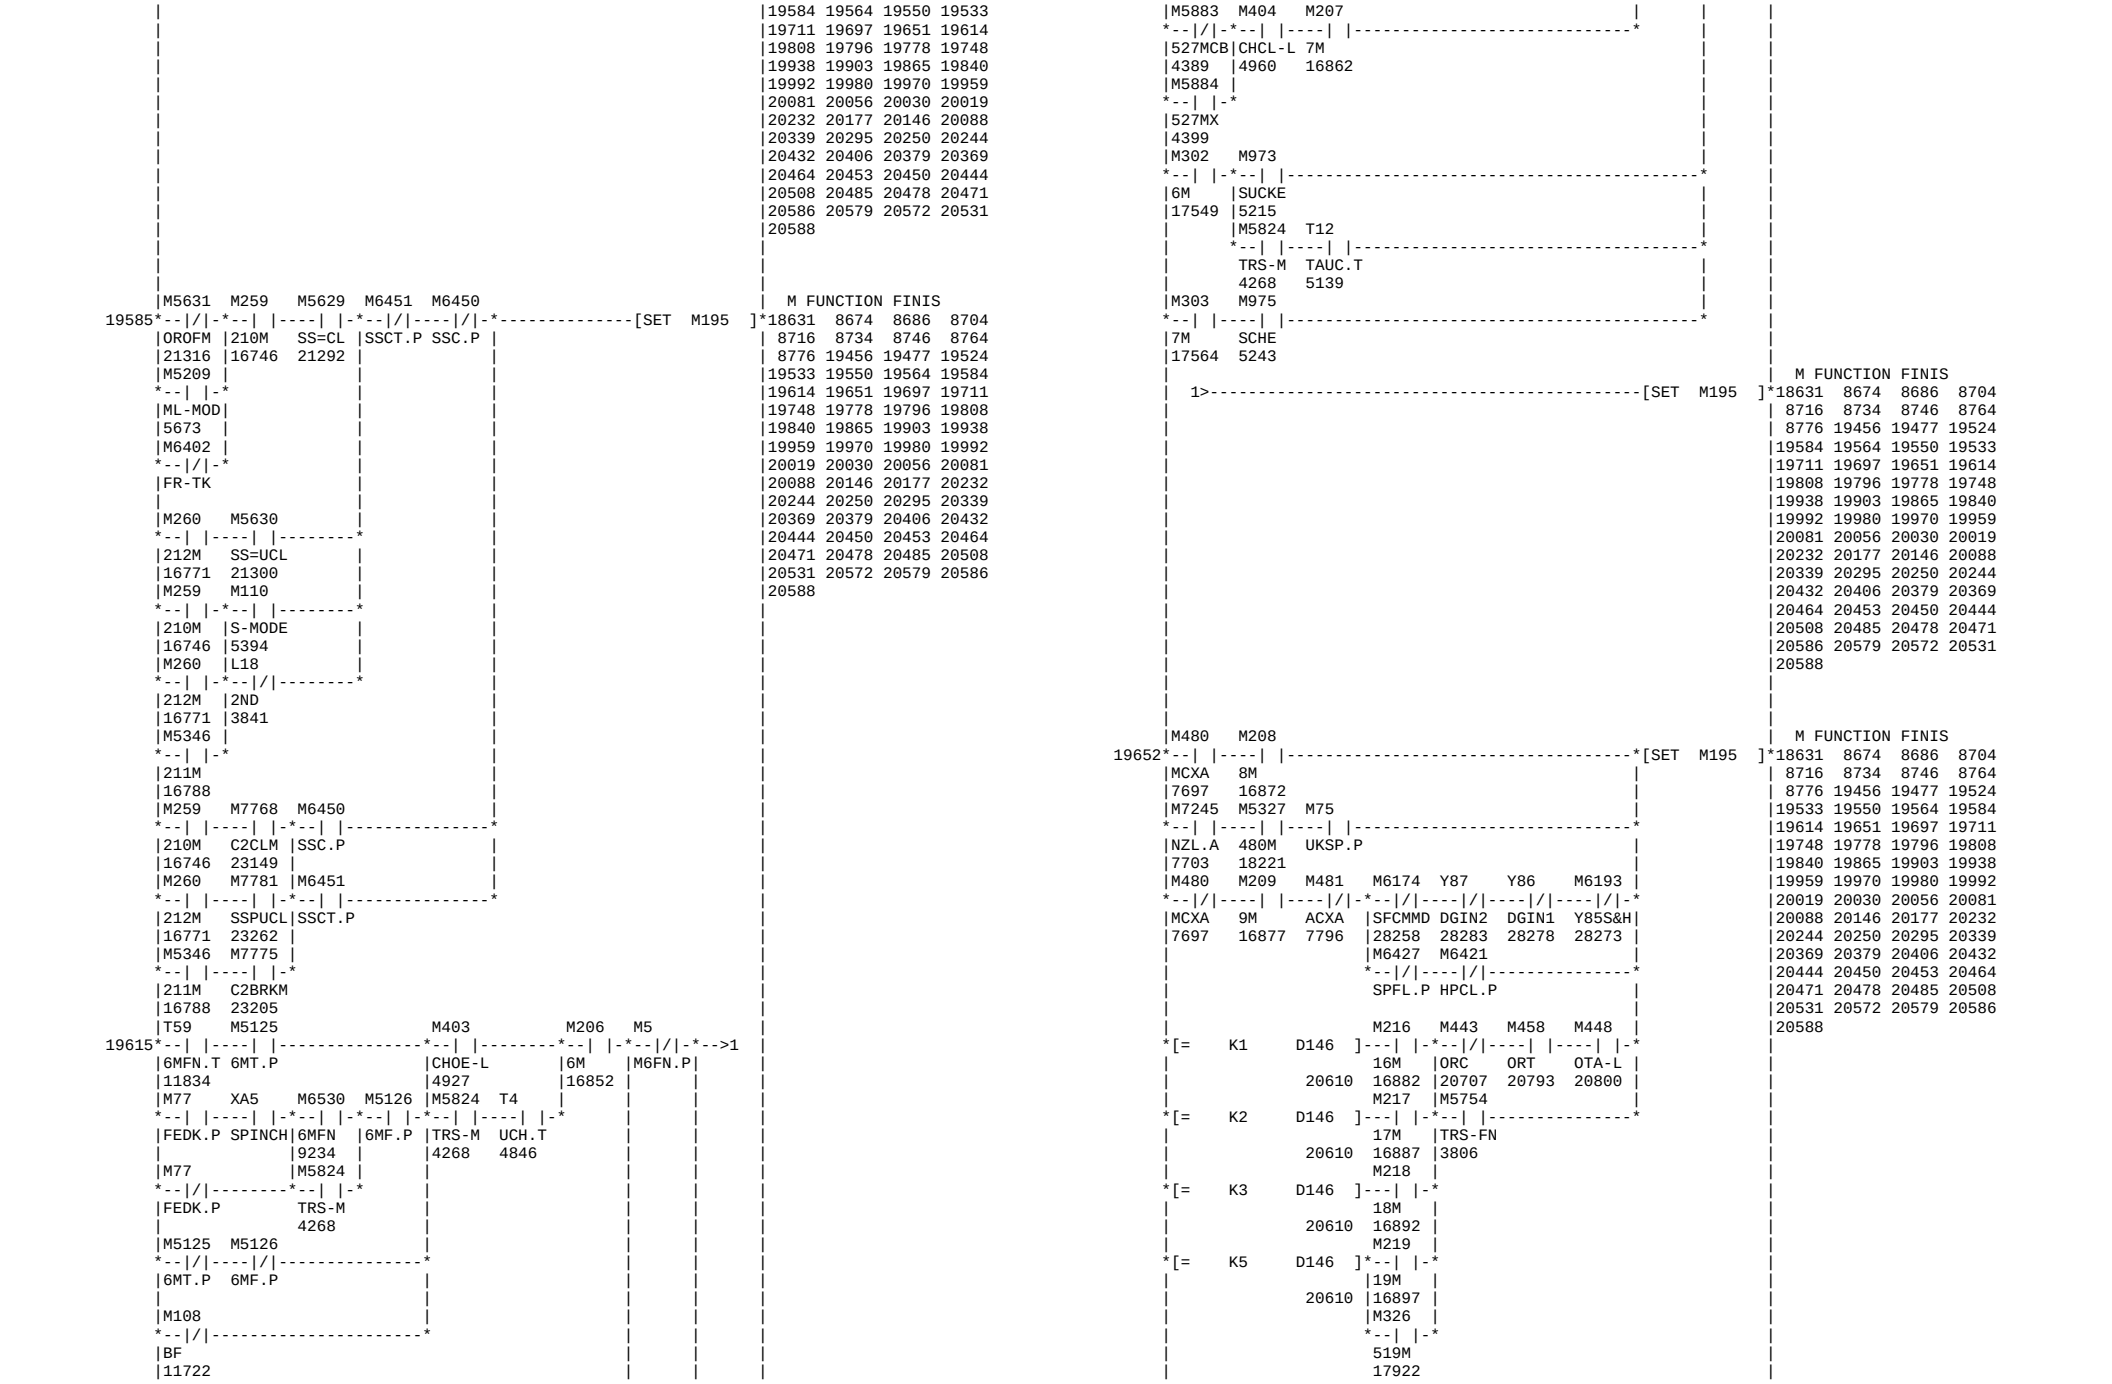

M1279
M1202
TEMP. COIL 2 BIT
M1203
TEMP. COIL 3 BIT
ON
585
D930 D78
Ltemp0 M-CODE
1282 3226
R20
M-CODE
MOV HB D174
MOV H4 D174
MOV H5 D174
MOV H6 D174
INC D930
CALUCLATE REG.
M CODE BCD
19219
13391 3414 3472 12983
13010 15882 15913 15944
15988 16003 16055 16077
19224 16515 16462 16166
27153 23633 23595 23469
27495 27458 27418 27368
28531 28454 28415 27557
28719 28623 28553
3364 3379 3403 3406
19136 19145 19158 19168
19177 19186 19199 19209
19250 19240 19227 19218
19292 19282 19269 19260
19309 19306 19302
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
7216 3417 12986 13013
13400 15885 15916 15947
15989 16004 16056 16169
23472 19237 16517 16464
27155 23882 23867 23598
27375 27239 27221 27183
28458 27496 27459 27419
28723 28625 28555 28536
28743

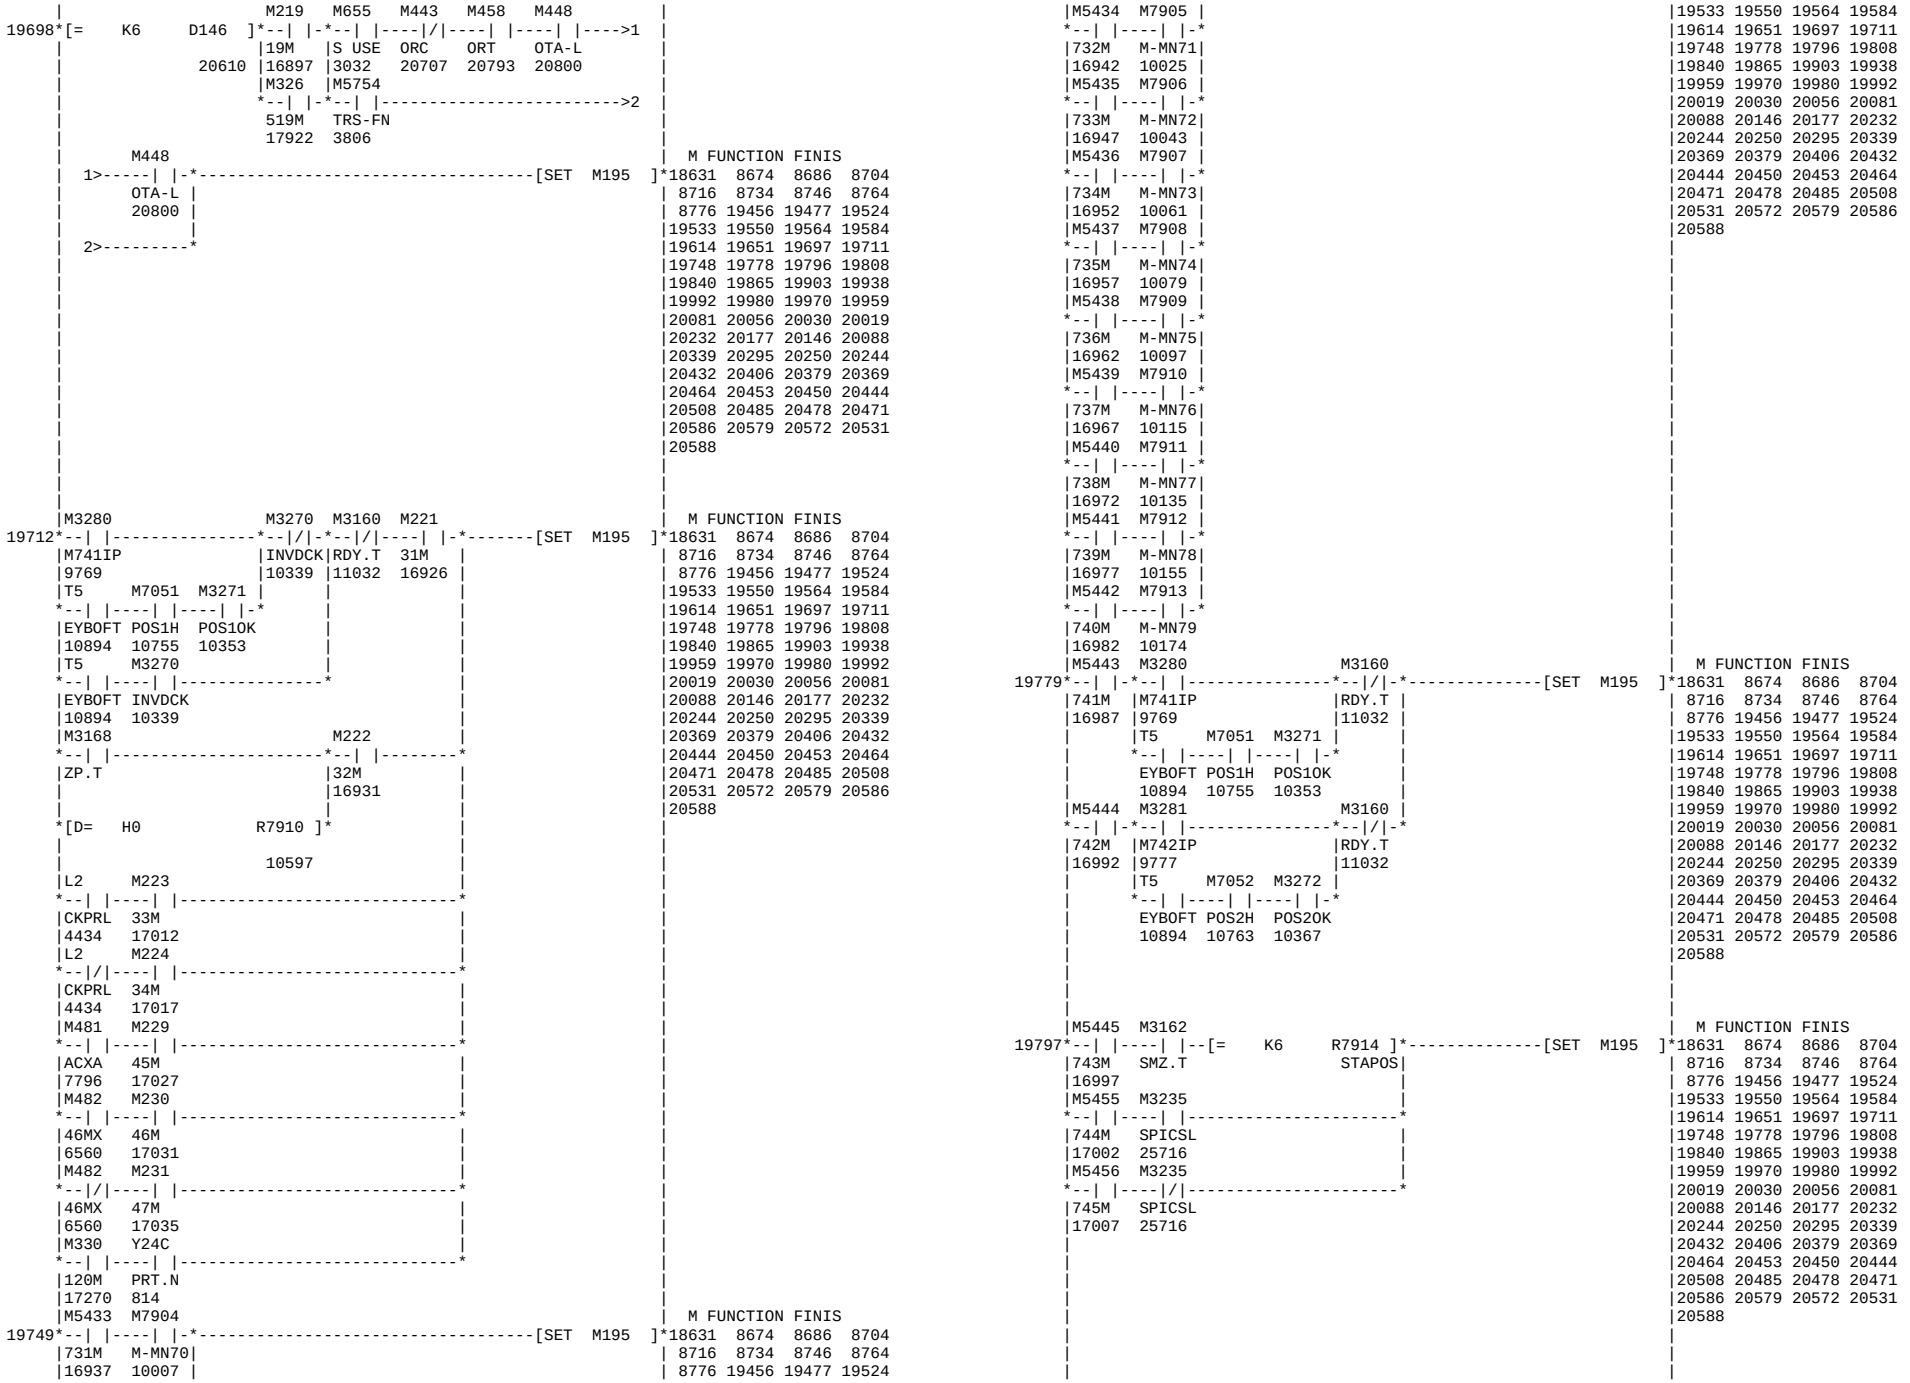

D930 D78
Ltemp0 M-CODE
1282 3226
MOV H7 D174
M CODE BCD
M1279
M1200
TEMP. COIL 0 BIT
19261
ON
585
D981 D78
R17 M-CODE
3226
M1201
TEMP. COIL 1 BIT
D981 K1 D930
R17
CALUCLATE REG.
MOV H0 D174
MOV H1 D174
INC D930

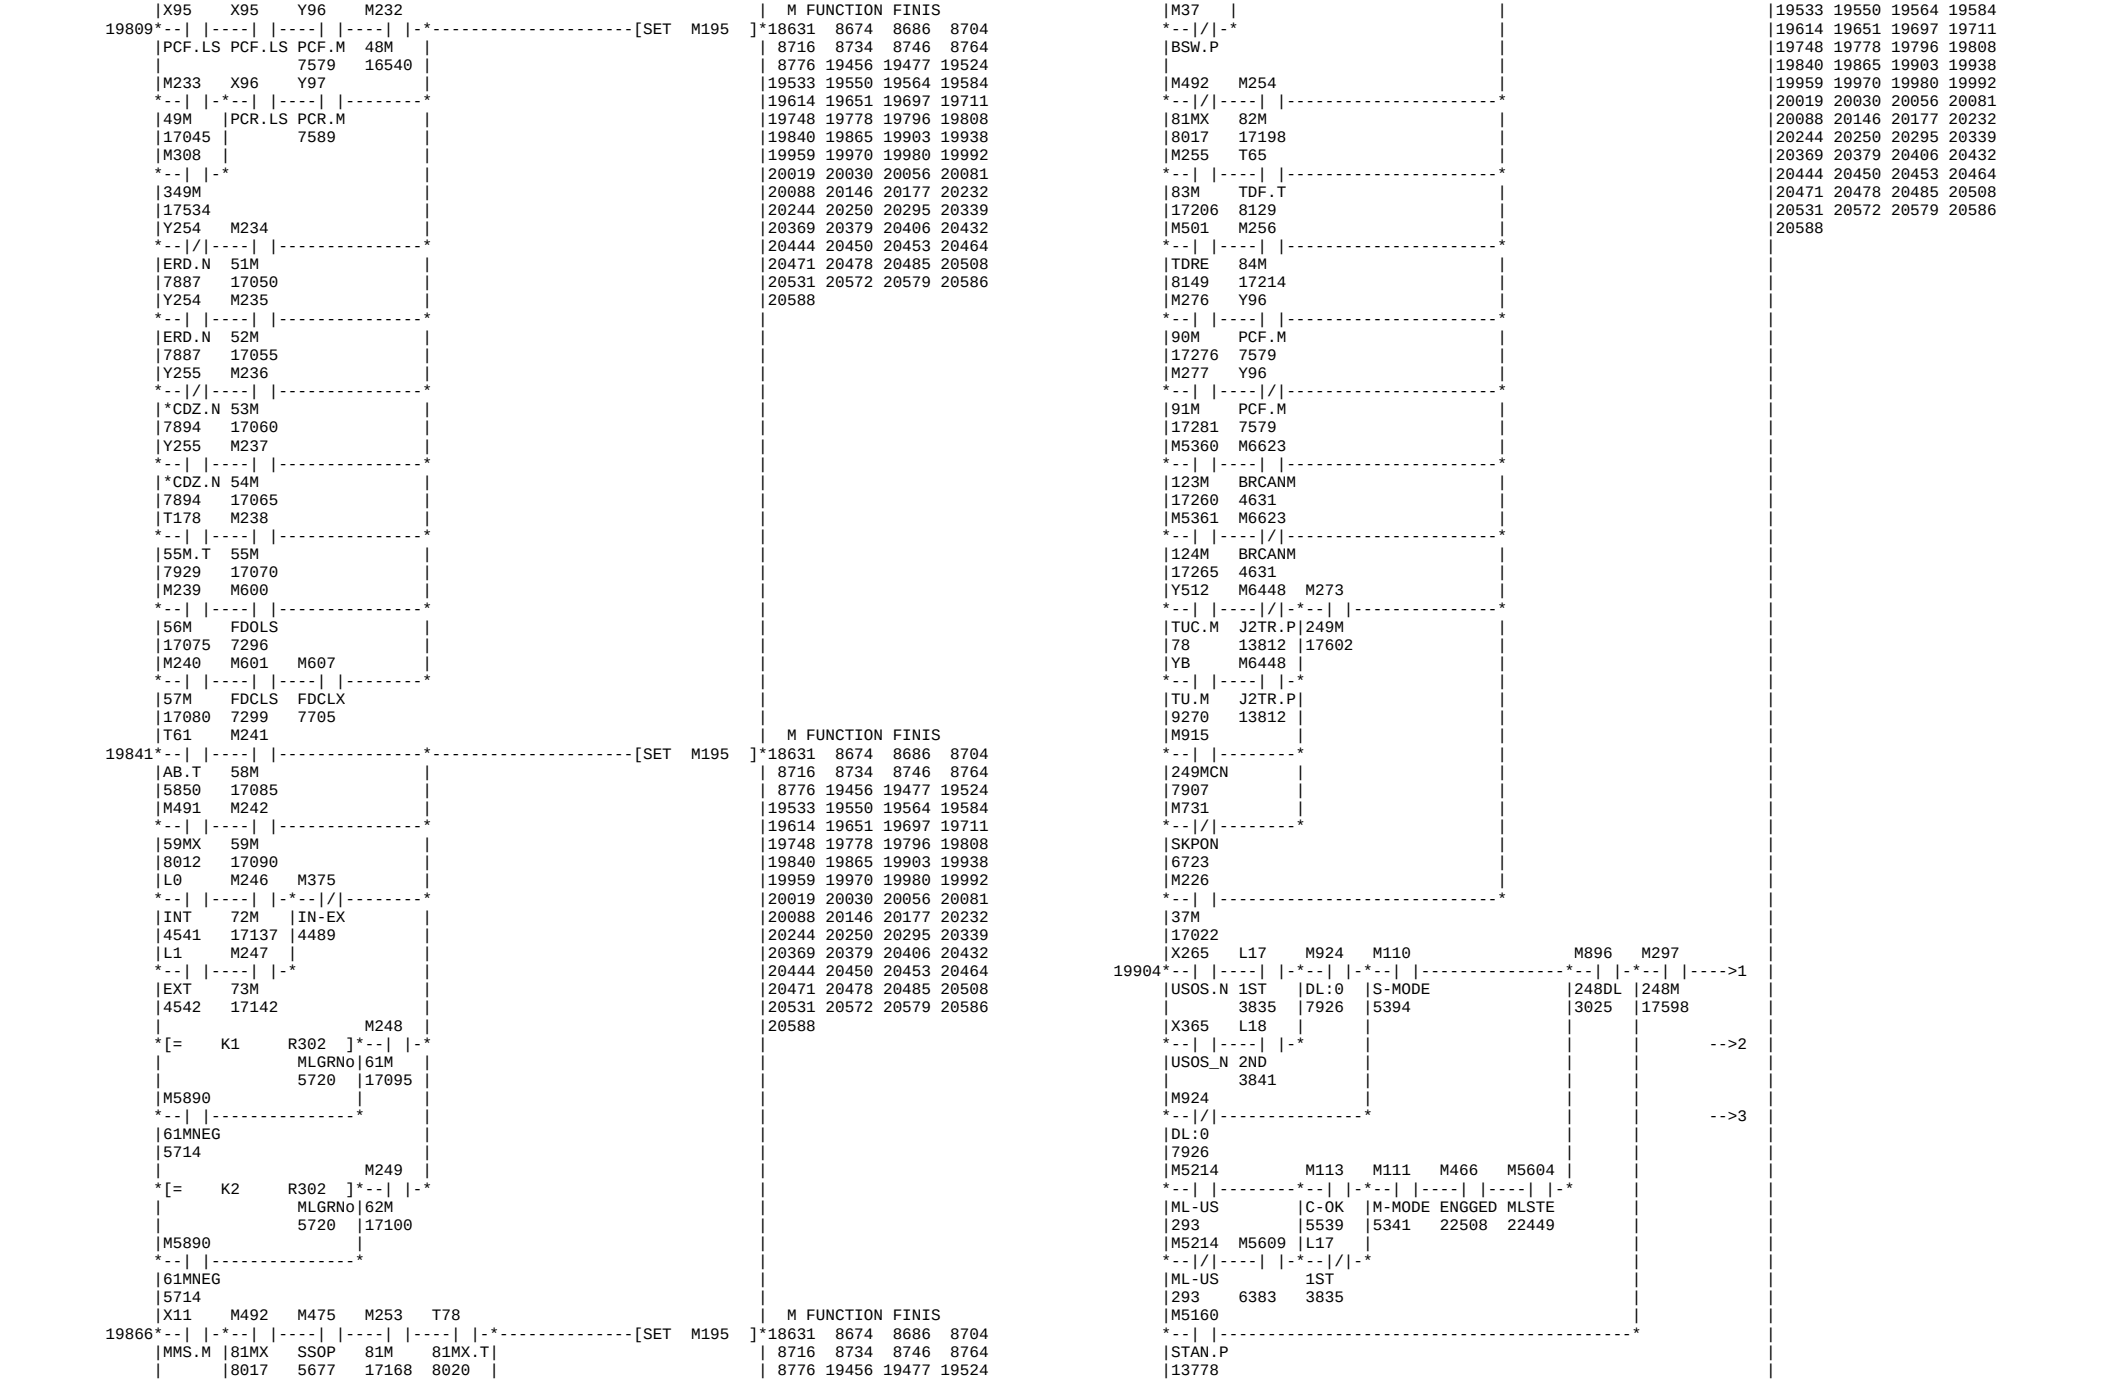

| 6654 6635 6632 6626
| 6675 6668 6663 6660
| 9729 9726 9723 9716
|12911 12907 9735 9731
|12931 12924 12919 12916
|13463 13453 13443 12933
|13498 13490 13481 13473
|13519 13516 13514 13506
|13543 13532 13529 13527
|13575 13567 13564 13562
|13597 13595 13587 13584
|13714 13700 13649 13647
|14453 14055 14053 13717
|19071 18897 18895 14459
|19161 19153 19150 19073
|19191 19173 19171 19164
|19212 19205 19202 19194
|19243 19235 19232 19214
|19274 19256 19253 19246
|19295 19288 19285 19277
|20983 20760 20758 19298
|21105 21103 21012 20987
|23428 23422 23419 23415
|23536 23457 23446 23434
|23559 23553 23547 23544
|28766 28754 23582 23571
|28814 28802 28790 28778
|28851 28826
| M CODE BCD
[= D930 D78]---------------[MOV H2 D174] 3364 3379 3403 3406
Ltemp0 M-CODE |19136 19145 19158 19168
1282 3226 |19177 19186 19199 19209
|19250 19240 19227 19218
|19292 19282 19269 19260
|19309 19306 19302
|
| CALUCLATE REG.
---[INC D930] 1282 1286 2282 2284
| 2289 2291 2304 2306
| 2521 2523 2526 3300
| 6493 6490 3321 3306
| 6505 6502 6499 6496
| 6595 6589 6511 6507
| 6620 6612 6608 6604
| 6654 6635 6632 6626
| 6675 6668 6663 6660
| 9729 9726 9723 9716
|12911 12907 9735 9731
|12931 12924 12919 12916
|13463 13453 13443 12933
|13498 13490 13481 13473
|13519 13516 13514 13506
|13543 13532 13529 13527
|13575 13567 13564 13562
|13597 13595 13587 13584
|13714 13700 13649 13647
|14453 14055 14053 13717
|19071 18897 18895 14459
|19161 19153 19150 19073
|19191 19173 19171 19164
|19212 19205 19202 19194
|19243 19235 19232 19214
|19274 19256 19253 19246
|19295 19288 19285 19277
|20983 20760 20758 19298
|21105 21103 21012 20987
|23428 23422 23419 23415
|23536 23457 23446 23434
|23559 23553 23547 23544
|28766 28754 23582 23571
|28814 28802 28790 28778
|28851 28826
| M CODE BCD
[= D930 D78]---------------[MOV H3 D174] 3364 3379 3403 3406
Ltemp0 M-CODE |19136 19145 19158 19168
1282 3226 |19177 19186 19199 19209
|19250 19240 19227 19218
|19292 19282 19269 19260
|19309 19306 19302
|M24 K2 | M CODE BCD
19303*--| |-*----------[MOV M1200 D174]* 3364 3379 3403 3406
|MDEC.P| TMP.0B |19136 19145 19158 19168
|13740 | 1064 |19177 19186 19199 19209
| | |19250 19240 19227 19218
| | |19292 19282 19269 19260
| | |19309 19306 19302
| |M32 | USED
| *--| |----------[WAND D174 HF0 D911]*19311 3402
| MC10.P BCD#1 |
| 13743 3364 |
| |
19312*----------[RET]*
| |
| |
P119 |M1279 | M CODE DATA*1
19313*--| |-*----------[BMOV D120 D890 K10]* 3165 3177 3189 3201
|ON | MCK#1 |19316 19324
|585 | 18455 |
| | |
| *----------[BMOV D270 D780 K10]* 3169 3181 3193 3205
| MCK#11 |19320 19339
| 18462 |
P120 |M1279 | M CODE DATA_OUT*
19322*--| |-*----------[DOR D890 D900]* 3152 3211 18492 18604
|ON | |19325
|585 | 3165 |
| | | M CODE DATA_OUT*
| *----------[DOR D892 D902]*19328
| | |
| | | M CODE DATA_OUT*
| *----------[DOR D894 D904]*19331
| | |
| | | M CODE DATA_OUT*
| *----------[DOR D896 D906]*19334
| | |
| | | M CODE DATA_OUT*
| *----------[DOR D898 D908]*19337
| | |
| | | SP.LOAD AVERAGE
| *----------[DOR D780 D790]* 3156 3215 18496 18608
| | |19340
| | 3169 |
| | | X LOAD AVERAGE
| *----------[DOR D782 D792]*19343
| | |
| | | C LOAD AVERAGE
| *----------[DOR D784 D794]*19346
| | |
| | |
| *----------[DOR D786 D796]*19349
| | |
| | |
| *----------[DOR D788 D798]*19352
| | |
| | | SPECIAL M TRANS
| *----------[WOR D882 D883 D882]* 3160 18509 19354 19356
| |19390
| 3160 |
| |
19357*----------[RET]*
| |
| |

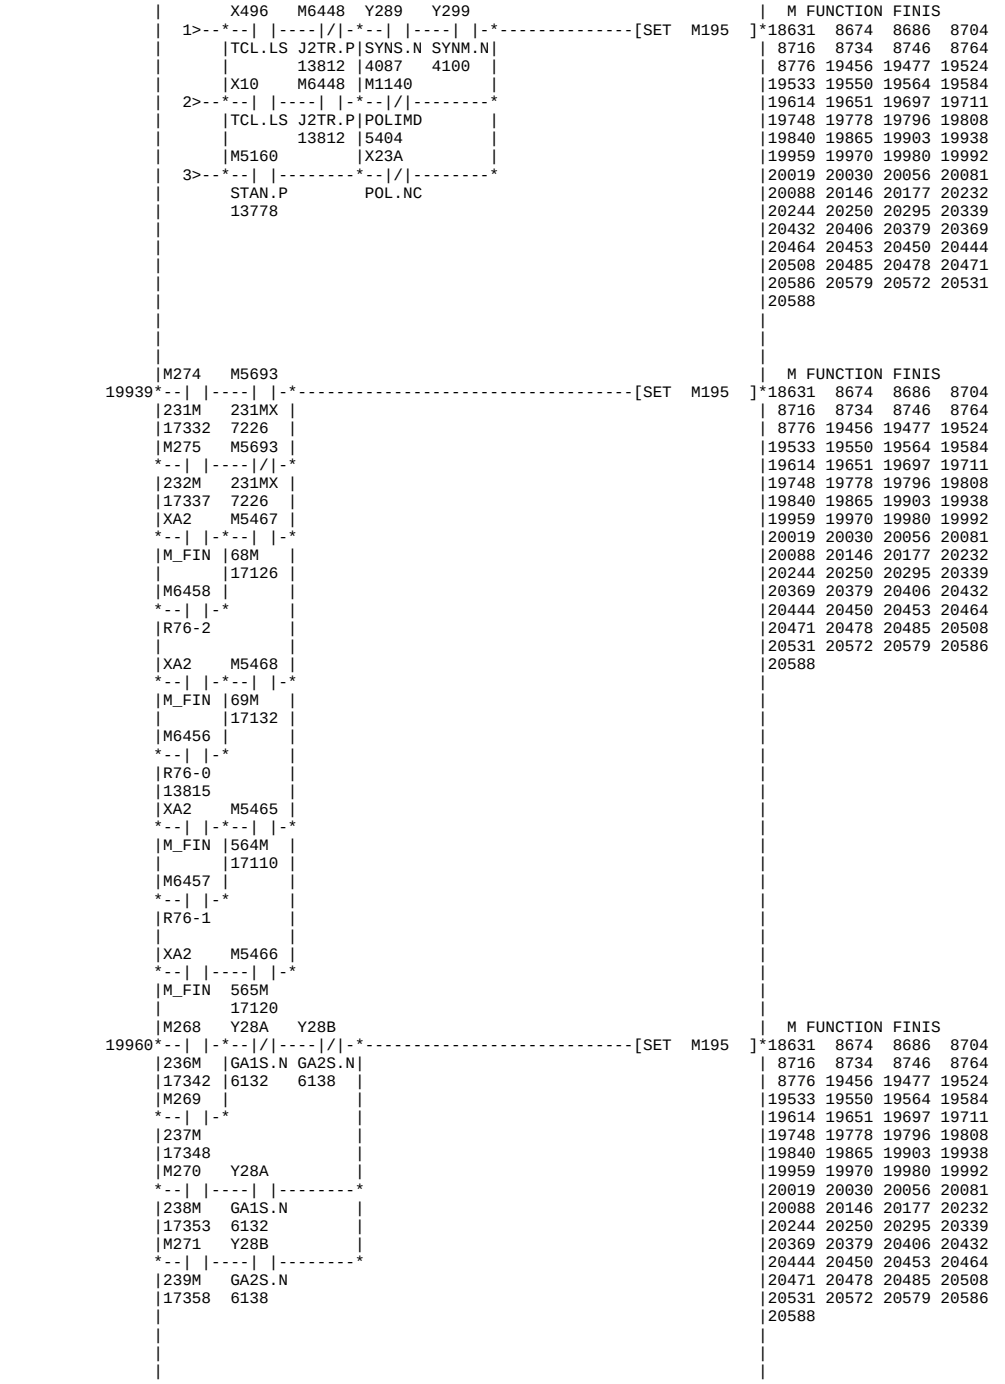

P121 |M1279 Z0 K4 | PROGRAM STOP
19358*--| |-*[MOV D0 M200]*16536 3569 16836 18228
|ON | T64 |18347 19361 19429
|585 | 13417 |
| | Z0 K4 | ORIENT 0
| *[MOV D1 M216]*16882 18350 18690 18693
| | T63 |18696 18906 19364 19673
| | 18351 |20595 20616
| | Z0 K4 | PARTS CATCHER FW
| *[MOV D2 M232]*16540 7524 7540 17040
| | T62 |18231 18353 18710 18736
| | 18354 |18941 19367 19812 26252
| | Z0 K4 | MILL GEAR 1
| *[MOV D3 M248]*17095 5705 5722 5735
| | T61 |18356 18979 19370 19857
| | 18357 |
| | Z0 K4 | C-AXIS BRAKE
| *[MOV D4 M264]*16544 16685 16828 18234
| | T60 |18359 18777 18781 18976
| | 18360 |19373 19514 19521 22662
| | Z0 K4 | T FIN AT ONCE
| *[MOV D5 M280]*17650 7908 18362 18743
| | T59 |19376 19989
| | 18363 |
| | Z0 K4 | SPINDLE SYNC. OF
| *[MOV D6 M296]*16548 4164 17841 18237
| | T58 |18365 19379 20143
| | 18366 |
| | Z0 K4 | CENTER PS. HIGH
| *[MOV D7 M312]*17477 18368 19382 20220
| | T57 |
| | 18369 |
| | Z0 K4 | FACE DRV. MODE O
| *[MOV D8 M328]*16552 4653 17524 18240
| | T56 |18371 19385 20253
| | 18372 |
| | Z0 K4 | ROBOT CALL
| *[MOV D9 M344]*16910 18374 18409 19388
| | T55 |
| | 18375 |
| | | SPECIAL M TRANS
| *[MOV D882 D881]*19391
| | |
| | 3160 |
|M1279 Z0 K4 |
19392*--| |-*[MOV D150 M5320]*16556 18243 18379 19395
|ON | |
|585 | 18380 |
| | Z0 K4 | SS ORIENT 0
| *[MOV D151 M5336]*17437 18382 18917 19398
| | |20042 20867
| | 18383 |
| | Z0 K4 | M213/M214 CANCEL
| *[MOV D152 M5352]*16560 18248 18385 19401
	18386
	Z0 K4
*[MOV D153 M5368]*19404 18388
	18389
	Z0 K4	UNDER LD LEVEL%
*[MOV D154 M5384]*16564 12686 18130 18251
		18391 19407 20550
	18392
	Z0 K4	200m MILL POINT
*[MOV D155 M5400]*17311 3998 4168 5312
	MFSAVN |18394 18868 19001 19410
	3044	19527 22937 22972 22994
		26296
	Z0 K4
*[MOV D156 M5416]*16568 18254 18397 19413
	SMFSVN
	3048
	Z0 K4
*[MOV D157 M5432]*19416 18400
	MFSAVO
	3062
	Z0 K4
*[MOV D158 M5448]*16572 18257 18403 19419
	SMFSVO
	3065
	Z0 K4	COOLANT PRSS. DA
*[MOV D159 M5464]*18191 18406 19422 20523
	MF#1 |28162 28175 28188 28201
	18407	28214 28227 28240
19423*---[RET]*
P136 |M1279	D0Z MOVE M200-M3
19424*--| |---[CALL P121]*19358 3222 8796 9152
ON	18639 19426
585
M362 M920 M200 M195	M FUNCTION FINIS
19427*--| |----| |----| |---------------*--------------------< >*18631 8674 8686 8704
SBKON SBKONM 0M		8716 8734 8746 8764
3585 3587 16536		8776 19456 19477 19524
M362 M920 M201	|19533 19550 19564 19584
--| |----| |---| |---------------* |19614 19651 19697 19711
SBKON SBKONM|1M	|19748 19778 19796 19808
3585 3587	16841		19840 19865 19903 19938
M133			19959 19970 19980 19992
--|/|--------	|20019 20030 20056 20081
OPS:L	|20088 20146 20177 20232
15313		20244 20250 20295 20339
M203 M452 M461 M440 M434	|20369 20379 20406 20432
--| |----| |---| |-*--| |----| |-* |20444 20450 20453 20464
3M SRN.NX	SRODMS	SPSTE SPSTHL		20471 20478 20485 20508
16580 21641	6098	21701 21547		20531 20572 20579 20586
M204 M453	M460			20588
*--		----		-*--	/	-*
4M SRI.NX	SROD.M
16585 21644	6076
	M6425
*--		---------------*
	3MFN.P
	M5754
*--		---------------*
TRS-FN	
3806	
M434 M517 M205	
*--	/	----		-*--		---------------*
SPSTHL 541&5M	5M
21547 4223	16590
M441	
*--		--------*
SPSTOP	
21718	
M6426	
*--		--------*
5MFN.P	
M5754	
*--		--------*
TRS-FN	
3806	
M6426	
*--		--------*
5MFN.P
M213 M5572 M5560 M5554	M FUNCTION FINIS
19457*--| |-*--| |-*--| |----| |-*--------------------[SET M195]*18631 8674 8686 8704
3M |SSRN.N|SPSSTE SSPSHL|	8716 8734 8746 8764
16648	22047	22114 21940		8776 19456 19477 19524
M333		M5754		19533 19550 19564 19584
--| |- *--| |--------* |19614 19651 19697 19711
303M |TRS-FN	|19748 19778 19796 19808
16630	3806		19840 19865 19903 19938

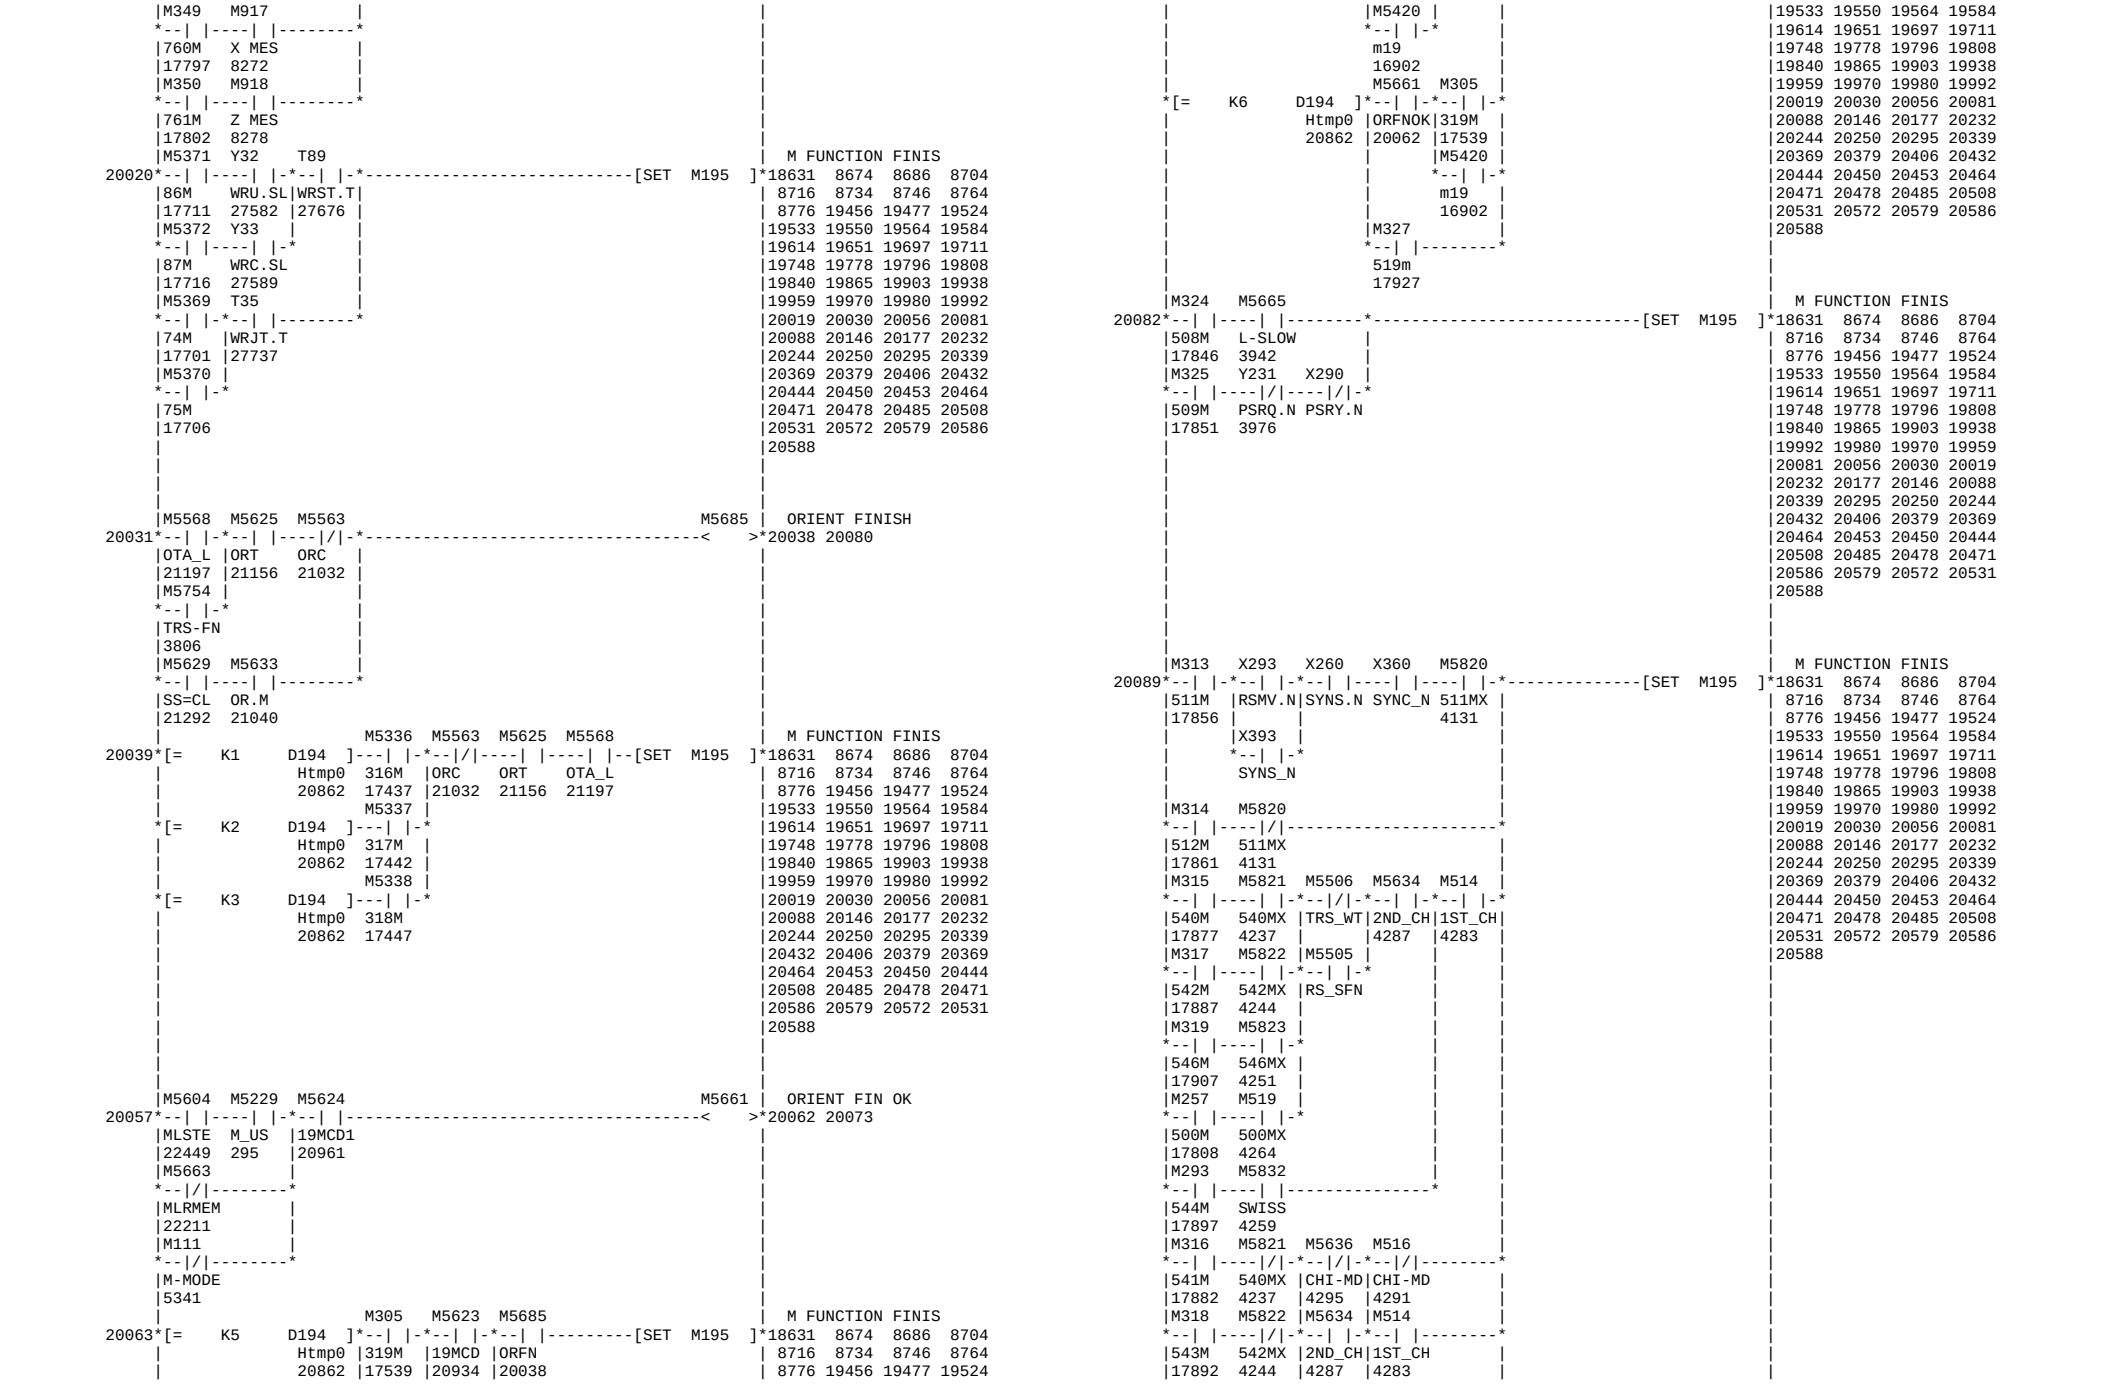

M214 M5573 M6425
4M SRIN.N 3MFN.P
16653 22050
M334
304M
16635
M5554 M5637 M215
SSPSHL 541&5M 5M
21940 4230 16658
M5561 M335
SPSTOP 305M
22134 16640
M5754
TRS-FN
3806
M113 M261 M111
C-OK 200M M-MODE
5539 17291 5341
M49 M262 M6450
C.P 201M SSC.P
17296
M6451 M6450 L18 M6451
SSCT.P SSC.P 2ND SSCT.P
3841
M5754
TRS-FN
3806
M112 M110 M111 M212
C-MODE S-MODE M-MODE 202M
5533 5394 5341 17305
M6450 L17 M6450
SSC.P 1ST SSC.P
3835
M6451
SSCT.P
M245 M5605 M5601 M5592
205M MLSTOP TRRME MLSTHL
16621 22461 22371 22295
M266 M6074
219M 205MFF
17327 22573
M1149 M263
CCLMEM 210M
22778 16668
M264 M1152
211M CBKMEM
16544 22834
M109 M265
SPUCL 212M
22890 16705
M263 M110
210M S-MODE
16668 5394
M264
211M
16544
19959 19970 19980 19992
20019 20030 20056 20081
20088 20146 20177 20232
20244 20250 20295 20339
20369 20379 20406 20432
20444 20450 20453 20464
20471 20478 20485 20508
20531 20572 20579 20586
20588
M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19959 19970 19980 19992
20019 20030 20056 20081
20088 20146 20177 20232
20244 20250 20295 20339
20369 20379 20406 20432
20444 20450 20453 20464
20471 20478 20485 20508
20531 20572 20579 20586
20588
M7756 M5400
C2_RDY 200m
23027 17311
M5754 M5401
TRS-FN 201m
3806 17316
M7754 M5402
C2_MD 202m
23020 17321
M109 M265
SPUCL 212M
22890 16705
M5377 M7096 M7073 M7072
215M CUCIGN UCLVAL CL-BKM
16720 6112 6126 6119
M5378 M7096
216M CUCIGN
16731 6112
M5374 M7072
213M CL-BKM
16710 6119
M5375 M7073
214M UCLVAL
16715 6126
M5405 M7785 M7786 M7787
215m CULIGN CL-BKM UCLVAL
16803 23308 23315 23322
M5406 M7785
216m CULIGN
16814 23308
M5403 M7786
213m CL-BKM
16793 23315
M5404 M7787
214m UCLVAL
16798 23322
M243 M5602 M113 M7756 T119 M5604 M466
203M MLFX1 C-OK C2_RDY ML_NCT MLSTE ENGGED
16603 22378 5539 23027 22415 22449 22508
M244 M5603 L17 L18 M54
204M MLRX1 1ST 2ND SS.P
16612 22381 3835 3841
M6451 M6450
SSCT.P SSC.P
1>
M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19959 19970 19980 19992
20019 20030 20056 20081
20088 20146 20177 20232
20244 20250 20295 20339
20369 20379 20406 20432
20444 20450 20453 20464
20471 20478 20485 20508
20531 20572 20579 20586
20588

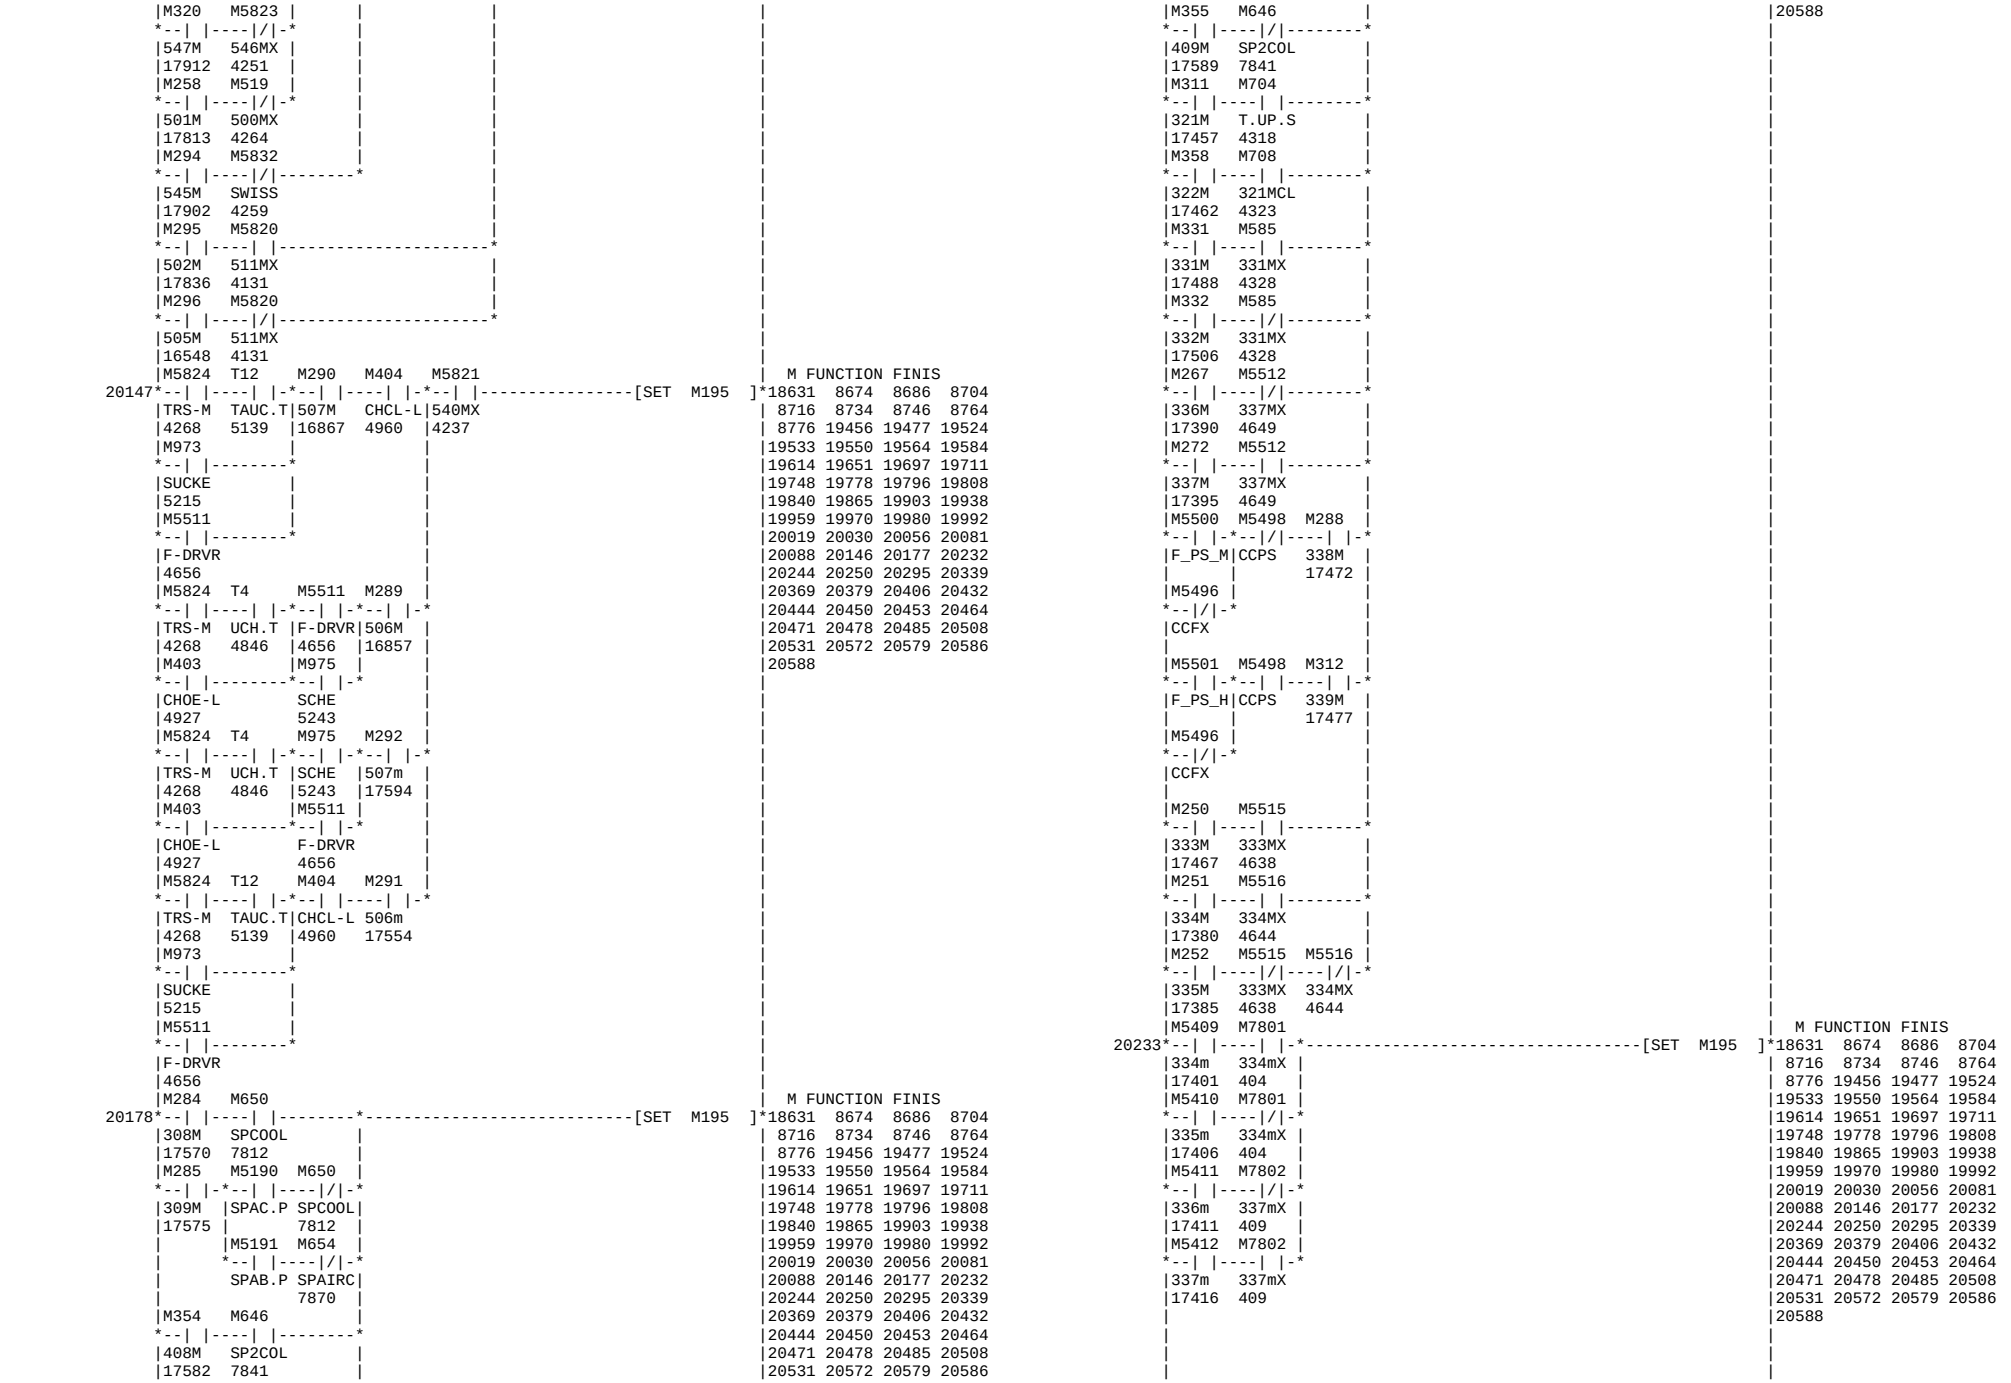

M5631 M259 M5629 M6451 M6450
19585
OROFM 210M SS=CL SSCT.P SSC.P
21316 16746 21292
M5209
ML-MOD
5673
M6402
FR-TK
M260 M5630
212M SS=UCL
16771 21300
M259 M110
210M S-MODE
16746 5394
M260 L18
212M 2ND
16771 3841
M5346
211M
16788
M259 M7768 M6450
210M C2CLM SSC.P
16746 23149
M260 M7781 M6451
212M SSPUCL SSCT.P
16771 23262
M5346 M7775
211M C2BRKM
16788 23205
T59 M5125 M403 M206 M5
19615
6MFN.T 6MT.P CHOE-L 6M M6FN.P
11834 4927 16852
M77 XA5 M6530 M5126 M5824 T4
FEDK.P SPINCH 6MFN 6MF.P TRS-M UCH.T
9234 4268 4846
M77 M5824
FEDK.P TRS-M
4268
M5125 M5126
6MT.P 6MF.P
M108
BF
11722
19584 19564 19550 19533
19711 19697 19651 19614
19808 19796 19778 19748
19938 19903 19865 19840
19992 19980 19970 19959
20081 20056 20030 20019
20232 20177 20146 20088
20339 20295 20250 20244
20432 20406 20379 20369
20464 20453 20450 20444
20508 20485 20478 20471
20586 20579 20572 20531
20588
M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19959 19970 19980 19992
20019 20030 20056 20081
20088 20146 20177 20232
20244 20250 20295 20339
20369 20379 20406 20432
20444 20450 20453 20464
20471 20478 20485 20508
20531 20572 20579 20586
20588
M5883 M404 M207
527MCB CHCL-L 7M
4389 4960 16862
M5884
527MX
4399
M302 M973
6M SUCKE
17549 5215
M5824 T12
TRS-M TAUC.T
4268 5139
M303 M975
7M SCHE
17564 5243
1>
SET M195
M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19584 19564 19550 19533
19711 19697 19651 19614
19808 19796 19778 19748
19938 19903 19865 19840
19992 19980 19970 19959
20081 20056 20030 20019
20232 20177 20146 20088
20339 20295 20250 20244
20432 20406 20379 20369
20464 20453 20450 20444
20508 20485 20478 20471
20586 20579 20572 20531
20588
M480 M208
19652
MCXA 8M
7697 16872
M7245 M5327 M75
NZL.A 480M UKSP.P
7703 18221
M480 M209 M481 M6174 Y87 Y86 M6193
MCXA 9M ACXA SFCMMD DGIN2 DGIN1 Y85S&H
7697 16877 7796 28258 28283 28278 28273
M6427 M6421
SPFL.P HPCL.P
M216 M443 M458 M448
K1 D146
16M ORC ORT OTA-L
20610 16882 20707 20793 20800
M217 M5754
K2 D146
17M TRS-FN
20610 16887 3806
M218
K3 D146
18M
20610 16892
M219
K5 D146
19M
20610 16897
M326
519M
17922
M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19959 19970 19980 19992
20019 20030 20056 20081
20088 20146 20177 20232
20244 20250 20295 20339
20369 20379 20406 20432
20444 20450 20453 20464
20471 20478 20485 20508
20531 20572 20579 20586
20588


M219 M655 M443 M458 M448
19698*[= K6 D146]*--| |-*--| |----|/|----| |----| |---->1
19M |S USE ORC ORT OTA-L
20610 |16897 |3032 20707 20793 20800
M326 |M5754
--| |---| |----------->2
519M TRS-FN
17922 3806
M448
1>-----| |-*----------[SET M195]*18631 8674 8686 8704
OTA-L | 8716 8734 8746 8764
20800 | 8776 19456 19477 19524
2>---------* 19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19992 19980 19970 19959
20081 20056 20030 20019
20232 20177 20146 20088
20339 20295 20250 20244
20432 20406 20379 20369
20464 20453 20450 20444
20508 20485 20478 20471
20586 20579 20572 20531
20588
M3280 M3270 M3160 M221
19712*--| |----------*--|/|-*--|/|----| |-*-------[SET M195]*18631 8674 8686 8704
M741IP |INVDCK|RDY.T 31M | 8716 8734 8746 8764
9769 |10339 |11032 16926 | 8776 19456 19477 19524
T5 M7051 M3271 | | | 19533 19550 19564 19584
--| |----| |----| |- | | 19614 19651 19697 19711
EYBOFT POS1H POS1OK | | 19748 19778 19796 19808
10894 10755 10353 | | 19840 19865 19903 19938
T5 M3270 | | 19959 19970 19980 19992
--| |----| |---------- | 20019 20030 20056 20081
EYBOFT INVDCK | 20088 20146 20177 20232
10894 10339 | 20244 20250 20295 20339
M3168 M222 | 20369 20379 20406 20432
--| |------------| |-------* 20444 20450 20453 20464
ZP.T |32M | 20471 20478 20485 20508
|16931 | 20531 20572 20579 20586
| | 20588
[D= H0 R7910] |
10597 |
L2 M223 |
--| |----| |---------- |
CKPRL 33M |
4434 17012 |
L2 M224 |
--|/|----| |---------- |
CKPRL 34M |
4434 17017 |
M481 M229 |
--| |----| |---------- |
ACXA 45M |
7796 17027 |
M482 M230 |
--| |----| |---------- |
46MX 46M |
6560 17031 |
M482 M231 |
--|/|----| |---------- |
46MX 47M |
6560 17035 |
M330 Y24C |
--| |----| |---------- |
120M PRT.N |
17270 814 |
M5433 M7904 | M FUNCTION FINIS
19749*--| |----| |-*----------[SET M195]*18631 8674 8686 8704
731M M-MN70| | 8716 8734 8746 8764
16937 10007 | | 8776 19456 19477 19524
M5434 M7905 | |19533 19550 19564 19584
--| |----| |- |19614 19651 19697 19711
732M M-MN71| |19748 19778 19796 19808
16942 10025 | |19840 19865 19903 19938
M5435 M7906 | |19959 19970 19980 19992
--| |----| |- |20019 20030 20056 20081
733M M-MN72| |20088 20146 20177 20232
16947 10043 | |20244 20250 20295 20339
M5436 M7907 | |20369 20379 20406 20432
--| |----| |- |20444 20450 20453 20464
734M M-MN73| |20471 20478 20485 20508
16952 10061 | |20531 20572 20579 20586
M5437 M7908 | |20588
--| |----| |-
735M M-MN74|
16957 10079 |
M5438 M7909 |
--| |----| |-
736M M-MN75|
16962 10097 |
M5439 M7910 |
--| |----| |-
737M M-MN76|
16967 10115 |
M5440 M7911 |
--| |----| |-
738M M-MN77|
16972 10135 |
M5441 M7912 |
--| |----| |-
739M M-MN78|
16977 10155 |
M5442 M7913 |
--| |----| |-
740M M-MN79
16982 10174
M5443 M3280 M3160 | M FUNCTION FINIS
19779*--| |-*--| |----------*--|/|-*----------[SET M195]*18631 8674 8686 8704
741M |M741IP |RDY.T | 8716 8734 8746 8764
16987 |9769 |11032 | 8776 19456 19477 19524
|T5 M7051 M3271 | |19533 19550 19564 19584
--| |----| |----| |- |19614 19651 19697 19711
EYBOFT POS1H POS1OK |19748 19778 19796 19808
10894 10755 10353 |19840 19865 19903 19938
M5444 M3281 M3160 |19959 19970 19980 19992
--| |---| |----------*--|/|-* |20019 20030 20056 20081
742M |M742IP |RDY.T |20088 20146 20177 20232
16992 |9777 |11032 |20244 20250 20295 20339
|T5 M7052 M3272 | |20369 20379 20406 20432
--| |----| |----| |- |20444 20450 20453 20464
EYBOFT POS2H POS2OK |20471 20478 20485 20508
10894 10763 10367 |20531 20572 20579 20586
|20588
M5445 M3162 | M FUNCTION FINIS
19797*--| |----| |--[= K6 R7914]*----------[SET M195]*18631 8674 8686 8704
743M SMZ.T STAPOS| | 8716 8734 8746 8764
16997 | 8776 19456 19477 19524
M5455 M3235 |19533 19550 19564 19584
--| |----| |---------- |19614 19651 19697 19711
744M SPICSL |19748 19778 19796 19808
17002 25716 |19840 19865 19903 19938
M5456 M3235 |19959 19970 19980 19992
--| |----|/|---------- |20019 20030 20056 20081
745M SPICSL |20088 20146 20177 20232
17007 25716 |20244 20250 20295 20339
|20432 20406 20379 20369
|20464 20453 20450 20444
|20508 20485 20478 20471
|20586 20579 20572 20531
|20588


|X95 X95 Y96 M232
19809*--| |----| |----| |----| |-*
|PCF.LS PCF.LS PCF.M 48M
| 7579 16540
|M233 X96 Y97
--| |---| |----| |--------*
|49M |PCR.LS PCR.M
|17045 | 7589
|M308 |
--| |-
|349M
|17534
|Y254 M234
--|/|----| |---------------
|ERD.N 51M
|7887 17050
|Y254 M235
--| |----| |---------------
|ERD.N 52M
|7887 17055
|Y255 M236
--|/|----| |---------------
|*CDZ.N 53M
|7894 17060
|Y255 M237
--| |----| |---------------
|*CDZ.N 54M
|7894 17065
|T178 M238
--| |----| |---------------
|55M.T 55M
|7929 17070
|M239 M600
--| |----| |---------------
|56M FDOLS
|17075 7296
|M240 M601 M607
--| |----| |----| |--------
|57M FDCLS FDCLX
|17080 7299 7705
|T61 M241
19841*--| |----| |---------------*
|AB.T 58M
|5850 17085
|M491 M242
--| |----| |---------------
|59MX 59M
|8012 17090
|L0 M246 M375
--| |----| |---|/|--------*
|INT 72M |IN-EX
|4541 17137 |4489
|L1 M247 |
--| |----| |-
|EXT 73M
|4542 17142
| M248
[= K1 R302]--| |-*
| MLGRNo|61M
| 5720 |17095
|M5890 | |
--| |--------------- |
|61MNEG
|5714
| M249
[= K2 R302]--| |-*
| MLGRNo|62M
| 5720 |17100
|M5890 |
--| |---------------
|61MNEG
|5714
|X11 M492 M475 M253 T78
19866*--| |-*--| |----| |----| |----| |-*
|MMS.M |81MX SSOP 81M 81MX.T|
| |8017 5677 17168 8020 |
| M FUNCTION FINIS
]*18631 8674 8686 8704
| 8716 8734 8746 8764
| 8776 19456 19477 19524
|19533 19550 19564 19584
|19614 19651 19697 19711
|19748 19778 19796 19808
|19840 19865 19903 19938
|19959 19970 19980 19992
|20019 20030 20056 20081
|20088 20146 20177 20232
|20244 20250 20295 20339
|20369 20379 20406 20432
|20444 20450 20453 20464
|20471 20478 20485 20508
|20531 20572 20579 20586
|20588
| M FUNCTION FINIS
]*18631 8674 8686 8704
| 8716 8734 8746 8764
| 8776 19456 19477 19524
|19533 19550 19564 19584
|19614 19651 19697 19711
|19748 19778 19796 19808
|19840 19865 19903 19938
|19959 19970 19980 19992
|20019 20030 20056 20081
|20088 20146 20177 20232
|20244 20250 20295 20339
|20369 20379 20406 20432
|20444 20450 20453 20464
|20471 20478 20485 20508
|20531 20572 20579 20586
|20588
| M FUNCTION FINIS
]*18631 8674 8686 8704
| 8716 8734 8746 8764
| 8776 19456 19477 19524
|19533 19550 19564 19584
|19614 19651 19697 19711
|19748 19778 19796 19808
|19840 19865 19903 19938
|19959 19970 19980 19992
|20019 20030 20056 20081
|20088 20146 20177 20232
|20244 20250 20295 20339
|20369 20379 20406 20432
|20444 20450 20453 20464
|20471 20478 20485 20508
|20531 20572 20579 20586
|20588
| M FUNCTION FINIS
]*18631 8674 8686 8704
| 8716 8734 8746 8764
| 8776 19456 19477 19524
|19533 19550 19564 19584
|19614 19651 19697 19711
|19748 19778 19796 19808
|19840 19865 19903 19938
|19959 19970 19980 19992
|20019 20030 20056 20081
|20088 20146 20177 20232
|20244 20250 20295 20339
|20369 20379 20406 20432
|20444 20450 20453 20464
|20471 20478 20485 20508
|20531 20572 20579 20586
|20588
|M37 |
--|/|-
|BSW.P
|
|M492 M254
--|/|----| |----------------------
|81MX 82M
|8017 17198
|M255 T65
--| |----| |----------------------
|83M TDF.T
|17206 8129
|M501 M256
--| |----| |----------------------
|TDRE 84M
|8149 17214
|M276 Y96
--| |----| |----------------------
|90M PCF.M
|17276 7579
|M277 Y96
--| |----|/|----------------------
|91M PCF.M
|17281 7579
|M5360 M6623
--| |----| |----------------------
|123M BRCANM
|17260 4631
|M5361 M6623
--| |----|/|----------------------
|124M BRCANM
|17265 4631
|Y512 M6448 M273
--| |----|/|---| |---------------*
|TUC.M J2TR.P|249M
|78 13812 |17602
|YB M6448 |
--| |----| |-
|TU.M J2TR.P|
|9270 13812 |
|M915 |
--| |--------
|249MCN |
|7907 |
|M731 |
--|/|--------
|SKPON
|6723
|M226
--| |------------------------------
|37M
|17022
|X265 L17 M924 M110 M896 M297
19904*--| |----| |-*--| |-*--| |---------------*--| |-*--| |----->1
|USOS.N 1ST |DL:0 |S-MODE |248DL |248M
| 3835 |7926 |5394 |3025 |17598
|X365 L18 | | | | |
--| |----| |- | | | -->2
USOS_N 2ND				
3841				
M924				
--|/|---------------			-->3
DL:0			
7926			
M5214 M113 M111 M466 M5604		
--| |----------| |-*--| |----| |----| |-*	
ML-US	C-OK	M-MODE ENGGED MLSTE	
293	5539	5341 22508 22449	
M5214 M5609	L17		
--|/|----| |---|/|-*	
ML-US 1ST	
293 6383 3835	
M5160	
*--		---*
STAN.P
13778
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19959 19970 19980 19992
20019 20030 20056 20081
20088 20146 20177 20232
20244 20250 20295 20339
20369 20379 20406 20432
20444 20450 20453 20464
20471 20478 20485 20508
20531 20572 20579 20586
20588

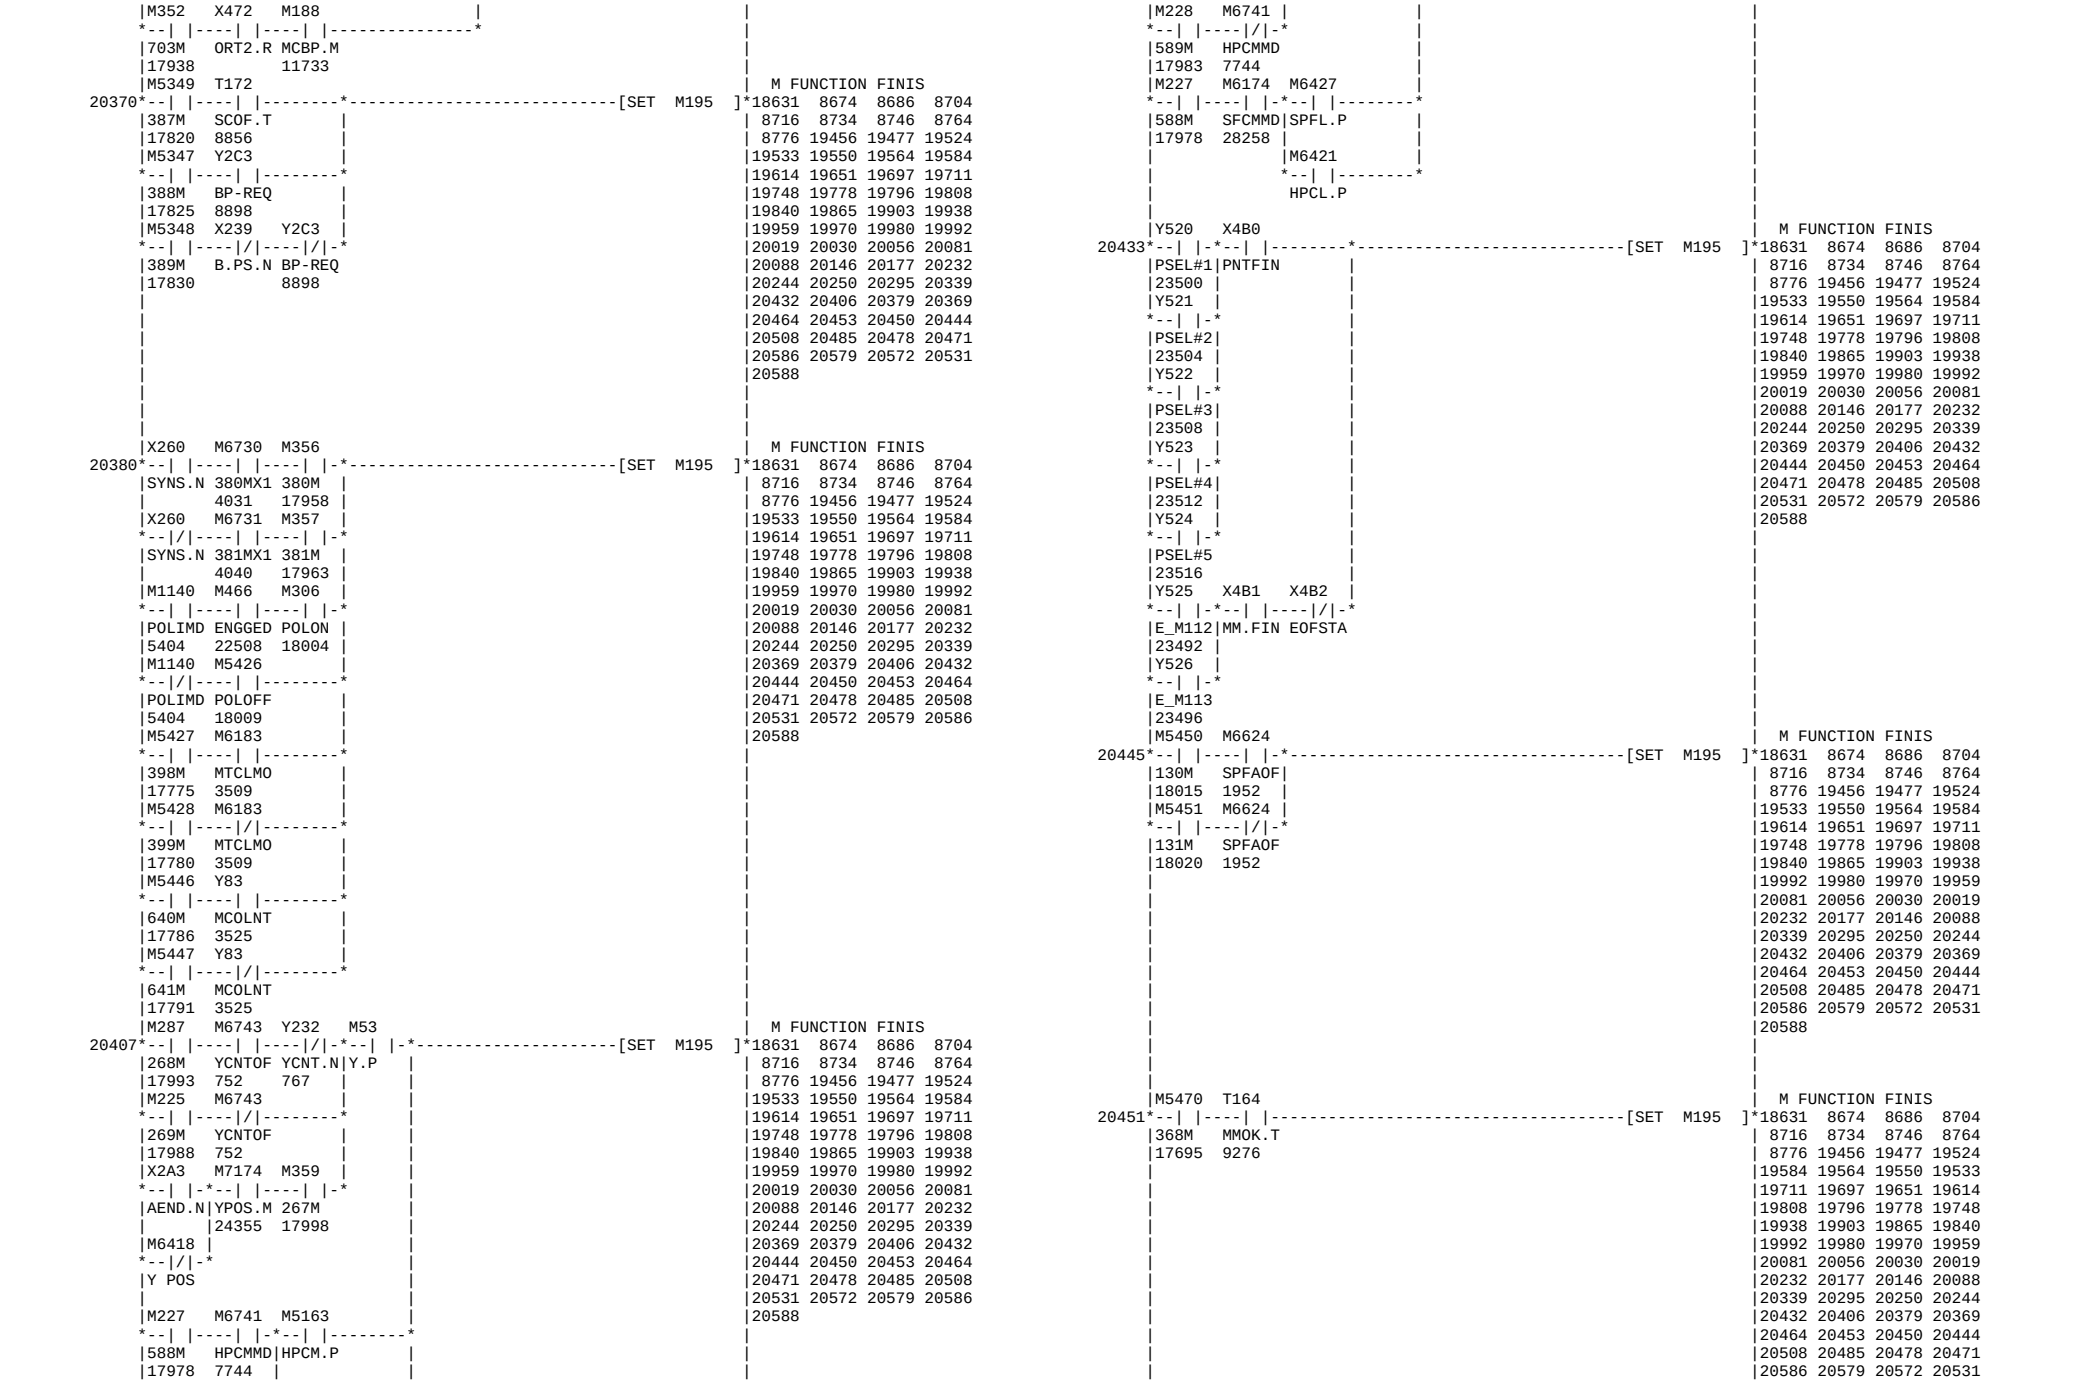

X496 M6448 Y289 Y299
1>--*--| |----|/|-*--| |----| |-*----------[SET M195]*
TCL.LS J2TR.P SYNS.N SYNM.N
13812 4087 4100
X10 M6448 M1140
2>--*--| |----| |-*--|/|--------*
TCL.LS J2TR.P POLIMD
13812 5404
M5160 X23A
3>--*--| |--------*--|/|--------*
STAN.P POL.NC
13778
M274 M5693
19939*--| |----| |-*----------[SET M195]*
231M 231MX
17332 7226
M275 M5693
232M 231MX
17337 7226
XA2 M5467
M_FIN 68M
17126
M6458
R76-2
XA2 M5468
M_FIN 69M
17132
M6456
R76-0
13815
XA2 M5465
M_FIN 564M
17110
M6457
R76-1
XA2 M5466
M_FIN 565M
17120
M268 Y28A Y28B
19960*--| |-*--|/|----|/|-*----------[SET M195]*
236M GA1S.N GA2S.N
17342 6132 6138
M269
237M
17348
M270 Y28A
238M GA1S.N
17353 6132
M271 Y28B
239M GA2S.N
17358 6138
M5413 Y38A Y38B
19971*--| |----|/|----|/|-*----------[SET M195]*
237m
17364 6144 6150
M5414 Y38A
238m
17369 6144
M5415 Y38B
239m
17374 6150
M281 M915
19981*--| |----| |-*----------[SET M195]*
353M 249MCN
17635 7907
M278 M915
354M 249MCN
17640 7907
M279 M916
355M TFNFST
17645 7921
M280 M916
356M TFNFST
17650 7921
M300 L18
19993*--| |----| |--------*----------[SET M195]*
300M 2ND
17422 3841
M111 M301 L17
M-MODE 302M 1ST
5341 17427 3835
M113
C-OK
5539
M6450
SSC.P
M6451
SSCT.P
M304 T213
312M MCFD.T
17432 1943
M307 Y96 M622
348M PCF.M 348MX
17529 7579 7536
M309 T77
358M SAB.T
17660 5949
M323
518M
17917
M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19959 19970 19980 19992
20019 20030 20056 20081
20088 20146 20177 20232
20244 20250 20295 20339
20369 20379 20406 20432
20444 20450 20453 20464
20471 20478 20485 20508
20531 20572 20579 20586
20588

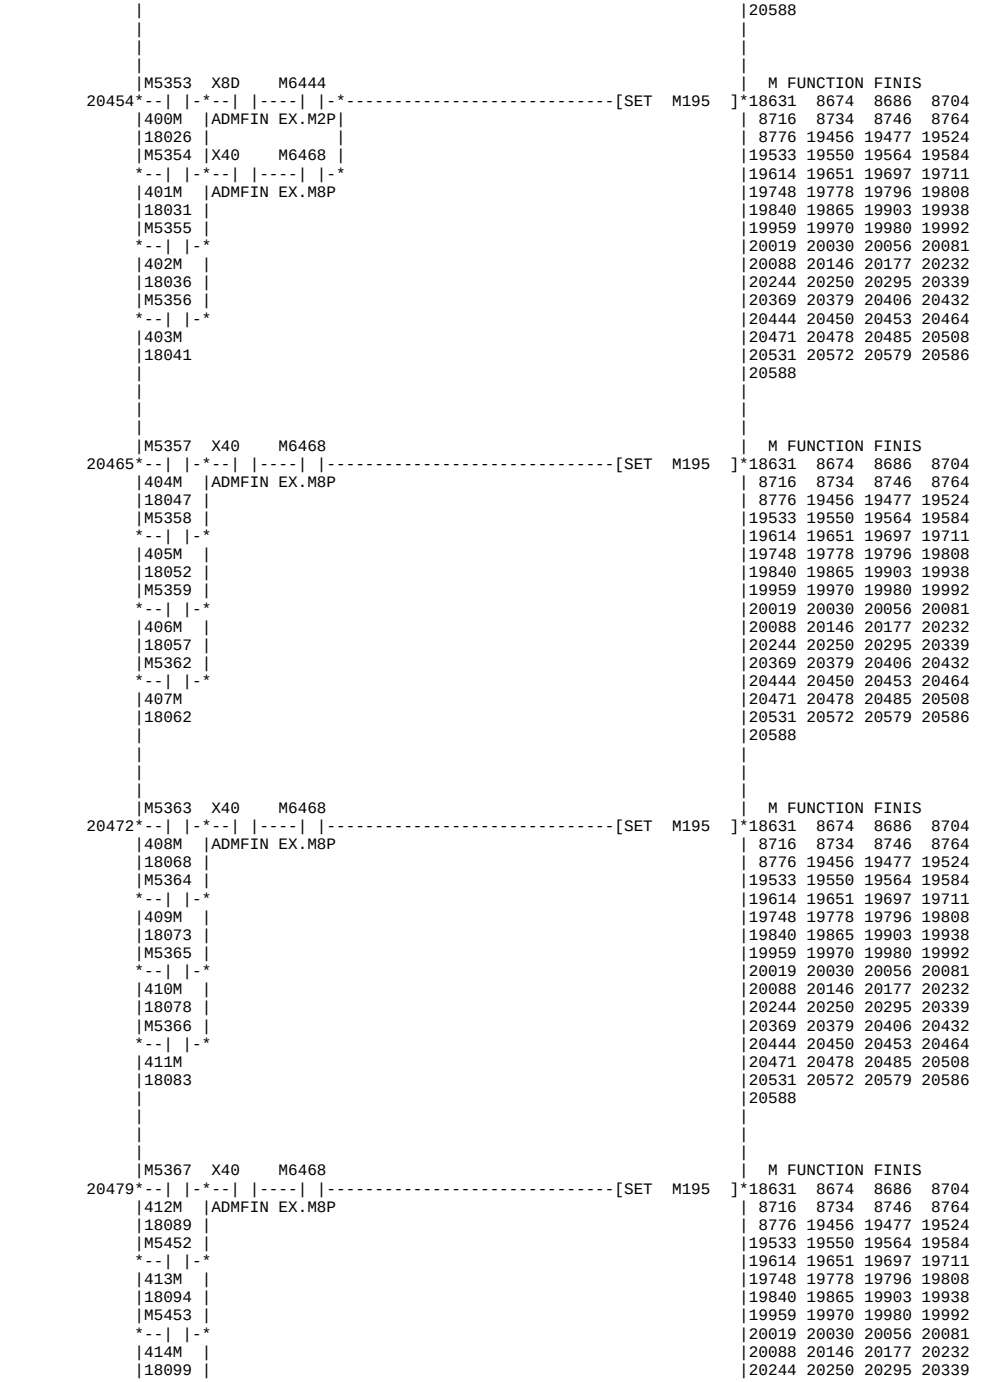

|M349 M917 |
--| |----| |--------
|760M X MES |
|17797 8272 |
|M350 M918 |
--| |----| |--------
|761M Z MES
|17802 8278
|M5371 Y32 T89
20020*--| |----| |-*--| |-*----------[SET M195]*18631 8674 8686 8704
|86M WRU.SL|WRST.T| | 8716 8734 8746 8764
|17711 27582 |27676 | | 8776 19456 19477 19524
|M5372 Y33 | | |19533 19550 19564 19584
--| |----| |- | |19614 19651 19697 19711
|87M WRC.SL | |19748 19778 19796 19808
|17716 27589 | |19840 19865 19903 19938
|M5369 T35 | |19959 19970 19980 19992
--| |---| |--------* |20019 20030 20056 20081
|74M |WRJT.T |20088 20146 20177 20232
|17701 |27737 |20244 20250 20295 20339
|M5370 | |20369 20379 20406 20432
--| |- |20444 20450 20453 20464
|75M |20471 20478 20485 20508
|17706 |20531 20572 20579 20586
| |20588
| |
| |
| |
|M5568 M5625 M5563 M5685 | ORIENT FINISH
20031*--| |-*--| |----|/|-*----------< >*20038 20080
OTA_L	ORT ORC	
21197	21156 21032	
M5754	
*--		-*
TRS-FN
3806
M5629 M5633
*--		----		--------*
SS=CL OR.M
21292 21040
M5336 M5563 M5625 M5568	M FUNCTION FINIS
20039*[= K1 D194]---| |-*--|/|----| |----| |--[SET M195]*18631 8674 8686 8704
Htmp0 316M	ORC ORT OTA_L	8716 8734 8746 8764
20862 17437	21032 21156 21197	8776 19456 19477 19524
M5337		19533 19550 19564 19584
[= K2 D194]---| |- |19614 19651 19697 19711
Htmp0 317M		19748 19778 19796 19808
20862 17442		19840 19865 19903 19938
M5338		19959 19970 19980 19992
[= K3 D194]---| |- |20019 20030 20056 20081
Htmp0 318M	20088 20146 20177 20232
20862 17447	20244 20250 20295 20339
	20432 20406 20379 20369
	20464 20453 20450 20444
	20508 20485 20478 20471
	20586 20579 20572 20531
	20588
M5604 M5229 M5624 M5661	ORIENT FIN OK
20057*--| |----| |-*--| |----------< >*20062 20073
MLSTE M_US	19MCD1
22449 295	20961
M5663	
*--	/	--------*
MLRMEM	
22211	
M111	
*--	/	--------*
M-MODE
5341
M305 M5623 M5685	M FUNCTION FINIS
20063*[= K5 D194]*--| |-*--| |-*--| |---------[SET M195]*18631 8674 8686 8704
Htmp0	319M	19MCD	ORFN	8716 8734 8746 8764
20862	17539	20934	20038	8776 19456 19477 19524
|M5420		|19533 19550 19564 19584
	*--		-*		19614 19651 19697 19711
m19		19748 19778 19796 19808
16902		19840 19865 19903 19938
M5661 M305		19959 19970 19980 19992
[= K6 D194]--| |-*--| |-* |20019 20030 20056 20081
Htmp0	ORFNOK	319M		20088 20146 20177 20232
20862	20062	17539		20244 20250 20295 20339
	M5420		20369 20379 20406 20432
	*--		-*	20444 20450 20453 20464
m19		20471 20478 20485 20508
16902		20531 20572 20579 20586
M327		20588
*--		--------*
519m
17927
M324 M5665	M FUNCTION FINIS
20082*--| |----| |--------*----------[SET M195]*18631 8674 8686 8704
508M L-SLOW		8716 8734 8746 8764
17846 3942		8776 19456 19477 19524
M325 Y231 X290		19533 19550 19564 19584
--| |----|/|----|/|- |19614 19651 19697 19711
509M PSRQ.N PSRY.N	19748 19778 19796 19808
17851 3976	19840 19865 19903 19938
	19992 19980 19970 19959
	20081 20056 20030 20019
	20232 20177 20146 20088
	20339 20295 20250 20244
	20432 20406 20379 20369
	20464 20453 20450 20444
	20508 20485 20478 20471
	20586 20579 20572 20531
	20588
M313 X293 X260 X360 M5820	M FUNCTION FINIS
20089*--| |-*--| |-*--| |----| |----| |-*----------[SET M195]*18631 8674 8686 8704
511M |RSMV.N|SYNS.N SYNC_N 511MX		8716 8734 8746 8764
17856		4131		8776 19456 19477 19524
	X393		19533 19550 19564 19584
*--		-*	19614 19651 19697 19711
SYNS_N	19748 19778 19796 19808
	19840 19865 19903 19938
M314 M5820	19959 19970 19980 19992
--| |----|/|---------- |20019 20030 20056 20081
512M 511MX	20088 20146 20177 20232
17861 4131	20244 20250 20295 20339
M315 M5821 M5506 M5634 M514	20369 20379 20406 20432
--| |----| |---|/|-*--| |-*--| |-*|20444 20450 20453 20464
540M 540MX	TRS_WT	2ND_CH	1ST_CH	20471 20478 20485 20508
17877 4237		4287	4283	20531 20572 20579 20586
M317 M5822	M5505				20588
--| |----| |---| |-*		
542M 542MX	RS_SFN			
17887 4244				
M319 M5823				
--| |----| |-			
546M 546MX				
17907 4251				
M257 M519				
--| |----| |-			
500M 500MX				
17808 4264				
M293 M5832				
--| |----| |---------------		
544M SWISS			
17897 4259			
M316 M5821 M5636 M516			
--| |----|/|---|/|-*--|/|--------*		
541M 540MX	CHI-MD	CHI-MD			
17882 4237	4295	4291			
M318 M5822	M5634	M514			
--| |----|/|---| |-*--| |--------*		
543M 542MX	2ND_CH	1ST_CH			
17892 4244	4287	4283			

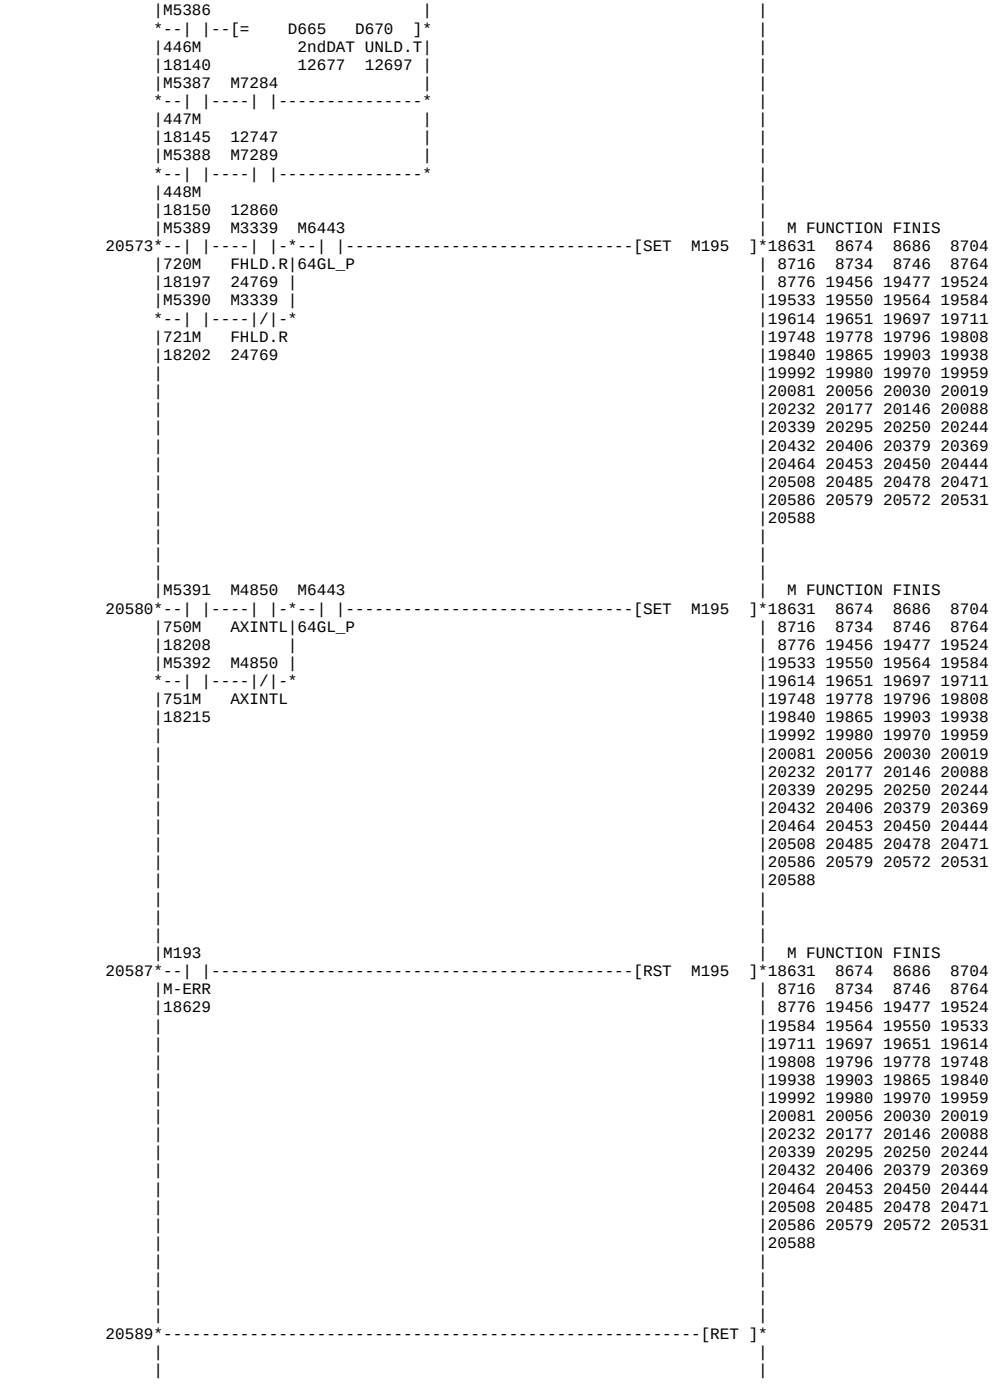

|M320 M5823 |
--| |----|/|-
|547M 546MX |
|17912 4251 |
|M258 M519 |
--| |----|/|-
|501M 500MX
|17813 4264
|M294 M5832
--| |----|/|--------
|545M SWISS
|17902 4259
|M295 M5820
--| |----| |----------
|502M 511MX
|17836 4131
|M296 M5820
--| |----|/|----------
|505M 511MX
|16548 4131
|M5824 T12 M290 M404 M5821
20147*--| |----| |-*--| |----| |-*--| |----------[SET M195]*
|TRS-M TAUC.T|507M CHCL-L|540MX
|4268 5139 |16867 4960 |4237
|M973 |
--| |-------- |
|SUCKE |
|5215 |
|M5511 |
--| |-------- |
|F-DRVR |
|4656 |
|M5824 T4 M5511 M289 |
--| |----| |---| |-*--| |-*
TRS-M UCH.T	F-DRVR	506M
4268 4846	4656	16857
M403	M975	
--| |----------| |-*
CHOE-L SCHE
4927 5243
M5824 T4 M975 M292
--| |----| |---| |-*--| |-*
TRS-M UCH.T	SCHE	507m
4268 4846	5243	17594
M403	M5511	
--| |----------| |-*
CHOE-L F-DRVR
4927 4656
M5824 T12 M404 M291
--| |----| |---| |----| |-*
TRS-M TAUC.T	CHCL-L 506m
4268 5139	4960 17554
M973
--| |--------
SUCKE
5215
M5511
--| |--------
F-DRVR
4656
M284 M650
20178*--| |----| |--------*----------[SET M195]*
308M SPCOOL
17570 7812
M285 M5190 M650
--| |---| |----|/|-*
309M	SPAC.P SPCOOL
17575	7812
	M5191 M654
--| |----|/|-
SPAB.P SPAIRC
7870
M354 M646
--| |----| |--------
408M SP2COL
17582 7841
M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19959 19970 19980 19992
20019 20030 20056 20081
20088 20146 20177 20232
20244 20250 20295 20339
20369 20379 20406 20432
20444 20450 20453 20464
20471 20478 20485 20508
20531 20572 20579 20586
20588
M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19959 19970 19980 19992
20019 20030 20056 20081
20088 20146 20177 20232
20244 20250 20295 20339
20369 20379 20406 20432
20444 20450 20453 20464
20471 20478 20485 20508
20531 20572 20579 20586
M355 M646
--| |----|/|--------
409M SP2COL
17589 7841
M311 M704
--| |----| |--------
321M T.UP.S
17457 4318
M358 M708
--| |----| |--------
322M 321MCL
17462 4323
M331 M585
--| |----| |--------
331M 331MX
17488 4328
M332 M585
--| |----|/|--------
332M 331MX
17506 4328
M267 M5512
--| |----|/|--------
336M 337MX
17390 4649
M272 M5512
--| |----| |--------
337M 337MX
17395 4649
M5500 M5498 M288
--| |---|/|----| |-*
F_PS_M	CCPS 338M
	17472
M5496
*--	/	-*
CCFX
M5501 M5498 M312
--| |---| |----| |-*
F_PS_H	CCPS 339M
	17477
M5496
*--	/	-*
CCFX
M250 M5515
--| |----| |--------
333M 333MX
17467 4638
M251 M5516
--| |----| |--------
334M 334MX
17380 4644
M252 M5515 M5516
--| |----|/|----|/|-
335M 333MX 334MX
17385 4638 4644
M5409 M7801
20233*--| |----| |-*----------[SET M195]*
334m 334mX
17401 404
M5410 M7801
--| |----|/|-
335m 334mX
17406 404
M5411 M7802
--| |----|/|-
336m 337mX
17411 409
M5412 M7802
--| |----| |-
337m 337mX
17416 409
20588
M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19959 19970 19980 19992
20019 20030 20056 20081
20088 20146 20177 20232
20244 20250 20295 20339
20369 20379 20406 20432
20444 20450 20453 20464
20471 20478 20485 20508
20531 20572 20579 20586
20588

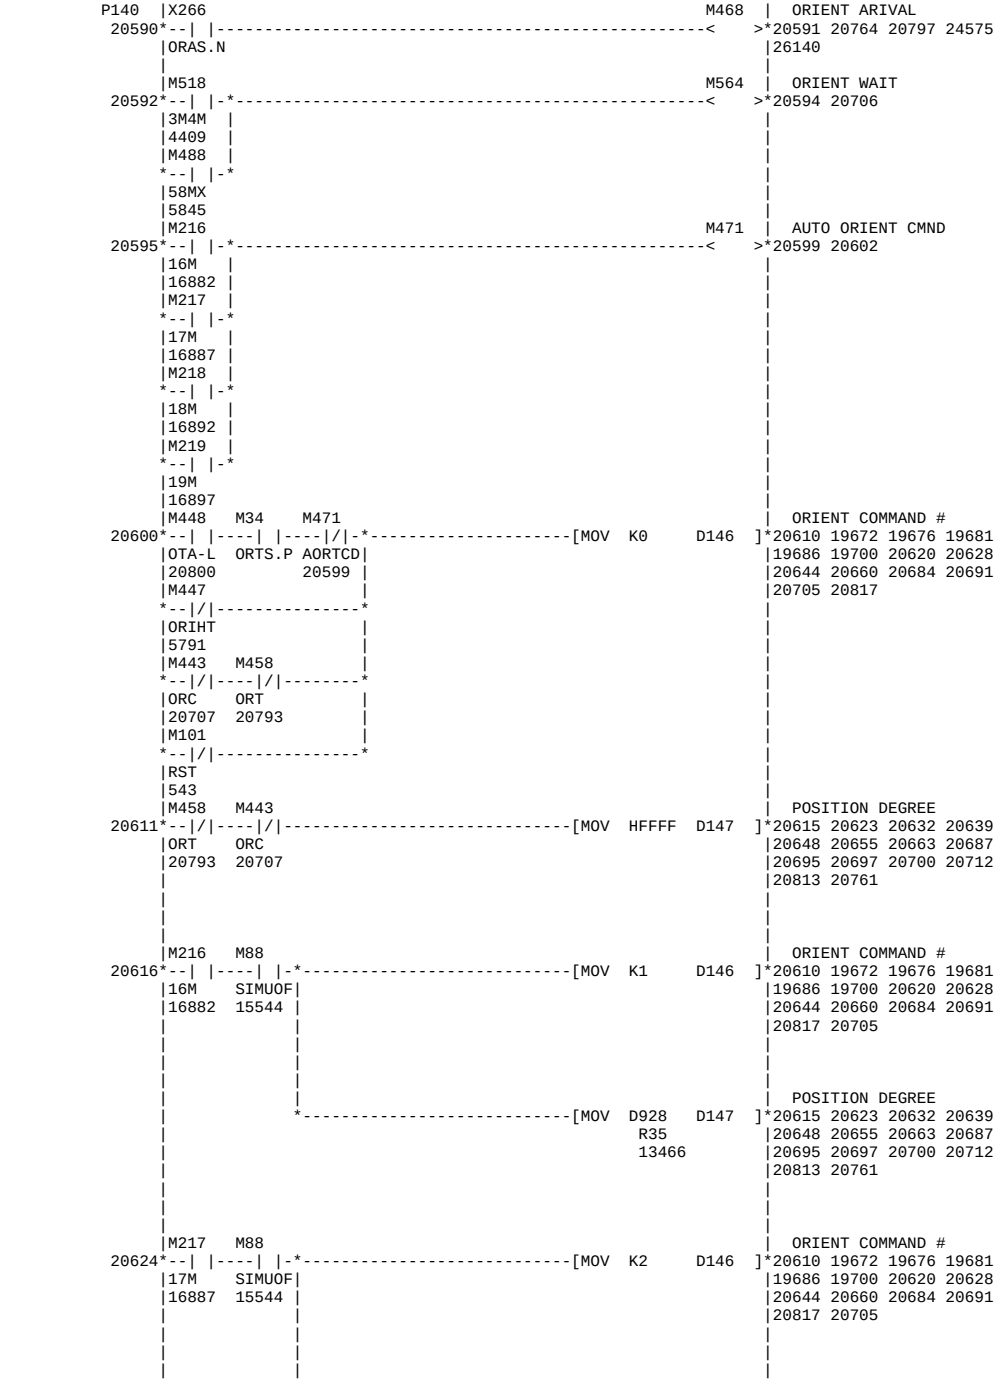
```
     |M5407  M7800                                                |  M FUNCTION FINIS
20245*--| |----| |-*----------------------------------[SET  M195  ]*18631  8674  8686  8704
     |331m   331mMX|                                               | 8716  8734  8746  8764
     |17495  4336  |                                               | 8776 19456 19477 19524
     |M5408  M7800 |                                              |19533 19550 19564 19584
     *--| |----|/|-*                                              |19614 19651 19697 19711
     |332m   331mMX                                               |19748 19778 19796 19808
     |17513  4336                                                 |19840 19865 19903 19938
     |                                                            |19992 19980 19970 19959
     |                                                            |20081 20056 20030 20019
     |                                                            |20232 20177 20146 20088
     |                                                            |20339 20295 20250 20244
     |                                                            |20432 20406 20379 20369
     |                                                            |20464 20453 20450 20444
     |                                                            |20508 20485 20478 20471
     |                                                            |20586 20579 20572 20531
     |                                                            |20588
     |                                                            |
     |                                                            |
     |                                                            |
     |M321   M5511  M5180                                         |  M FUNCTION FINIS
20251*--| |----| |-*--| |-*----------------------------[SET  M195  ]*18631  8674  8686  8704
     |340M   F-DRVR|F-DR.P|                                       | 8716  8734  8746  8764
     |17519  4656  |      |                                       | 8776 19456 19477 19524
     |M328   M5511 |      |                                      |19533 19550 19564 19584
     *--| |----|/|-*     |                                      |19614 19651 19697 19711
     |341M   F-DRVR       |                                      |19748 19778 19796 19808
     |16552  4656         |                                      |19840 19865 19903 19938
     |M286   M654         |                                      |19959 19970 19980 19992
     *--| |----| |--------*                                      |20019 20030 20056 20081
     |345M   SPAIRC       |                                      |20088 20146 20177 20232
     |17609  7870         |                                      |20244 20250 20295 20339
     |M298   M587   X296  |                                      |20369 20379 20406 20432
     *--| |----| |----| |-*                                     |20444 20450 20453 20464
     |346M   346MX  SHCK.N|                                      |20471 20478 20485 20508
     |17614  4352         |                                      |20531 20572 20579 20586
     |M299   M587   X296  |                                      |20588
     *--| |----|/|----|/|-*                                     |
     |347M   346MX  SHCK.N|                                      |
     |17619  4352         |                                      |
     |M282   M924         |                                      |
     *--| |----|/|--------*                                      |
     |351M   DL:0         |                                      |
     |17625  7926         |                                      |
     |M283   M924         |                                      |
     *--| |----| |--------*                                      |
     |352M   DL:0         |                                      |
     |17630  7926         |                                      |
     |M5339  M5682        |                                      |
     *--| |----|/|--------*                                      |
     |359M   360MX        |                                      |
     |17665  3794         |                                      |
     |M5340  M5682        |                                      |
     *--| |----| |--------*                                      |
     |360M   360MX        |                                      |
     |17670  3794         |                                      |
     |M5341  M5683        |                                      |
     *--| |----| |--------*                                      |
     |357M   357MX        |                                      |
     |17655  5959         |                                      |
     |M5342  M5751        |                                      |
     *--| |----|/|--------*                                      |
     |361M   362MX        |                                      |
     |17675  3799         |                                      |
     |M5343  M5751        |                                      |
     *--| |----| |--------*                                      |
     |362M   362MX        |                                      |
     |17680  3799         |                                      |
     |M5344  M5752        |                                      |
     *--| |----|/|--------*                                      |
     |363M   364MX        |                                      |
     |17685  3804         |                                      |
     |M5345  M5752        |                                      |
     *--| |----| |--------*                                      |
     |364M   364MX                                               |
     |17690  3804                                                |
```

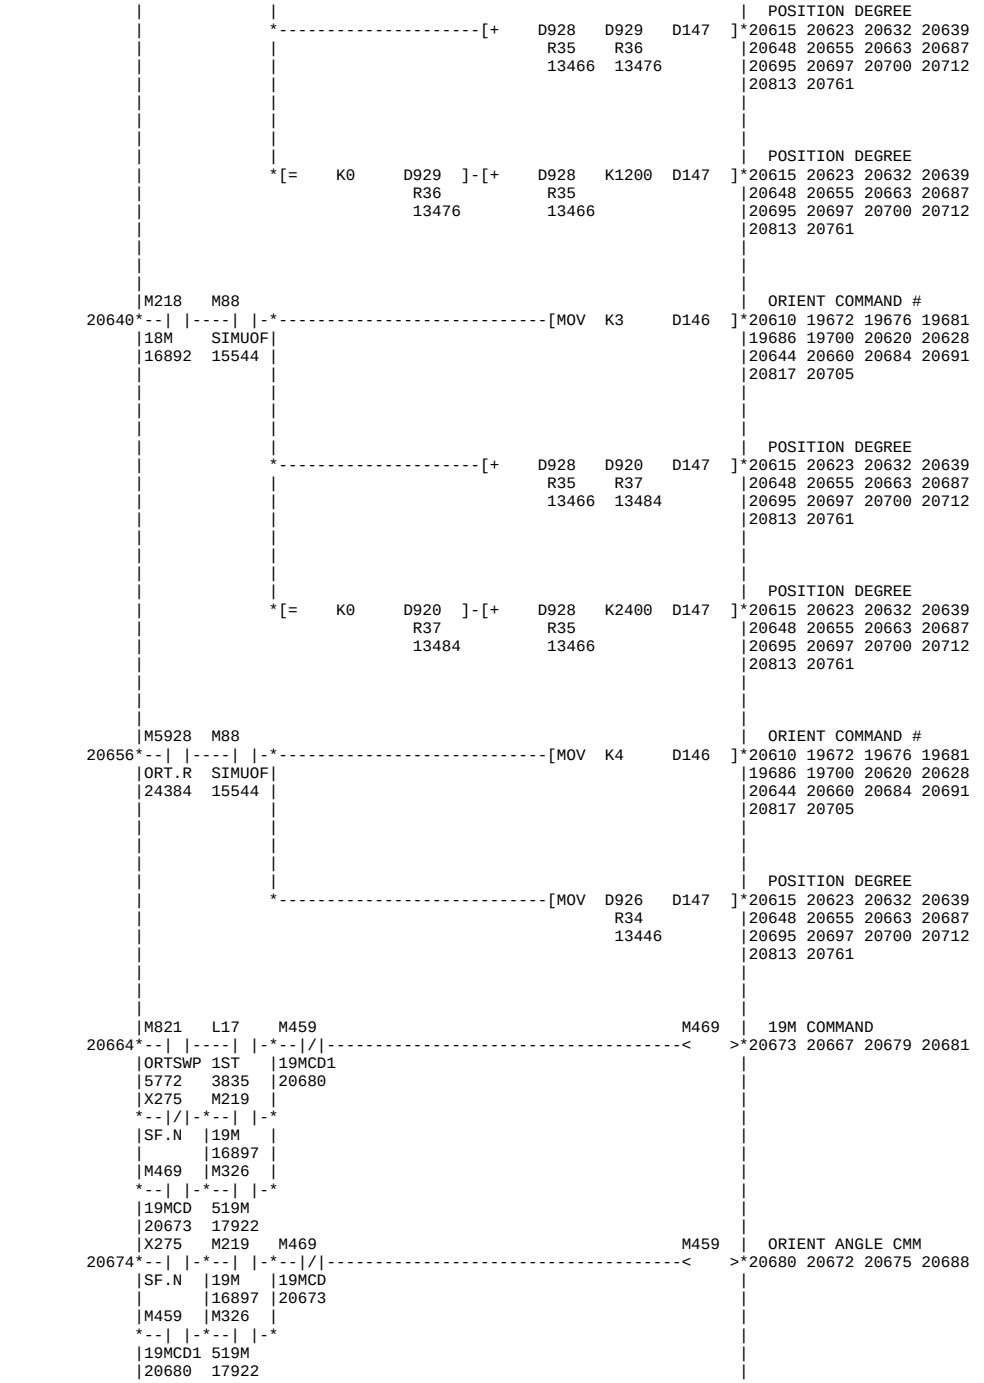
```
     |M342   M1260  M1258                                                 |  M FUNCTION FINIS
20296*--| |-*--| |-*--| |--------*--------------------[SET  M195  ]*18631  8674  8686  8704
     |370M  |ALLAXS|CANCEL       |                                       | 8716  8734  8746  8764
     |17723 |12912 |12939        |                                       | 8776 19456 19477 19524
     |      |M1261 |             |                                       |19533 19550 19564 19584
     |      *--| |-*             |                                       |19614 19651 19697 19711
     |       AXSOK                |                                       |19748 19778 19796 19808
     |       12920                |                                       |19840 19865 19903 19938
     |M343   M1260  M1258         |                                       |19959 19970 19980 19992
     *--| |-*--| |-*--| |--------*                                       |20019 20030 20056 20081
     |371M  |ALLAXS|CANCEL       |                                       |20088 20146 20177 20232
     |17728 |12912 |12939        |                                       |20244 20250 20295 20339
     |      |M1261 |M1259        |                                       |20369 20379 20406 20432
     |      *--| |-*--| |--------*                                       |20444 20450 20453 20464
     |       AXSOK  SETOK         |                                       |20471 20478 20485 20508
     |       12920  12947         |                                       |20531 20572 20579 20586
     |M338   M1259                |                                       |20588
     *--| |----| |---------------*                                       |
     |379M   SETOK                |                                       |
     |17768  12947                |                                       |
     |M339                        |                                       |
     *--| |--[=    D328   D329  ]*                                       |
     |376M          B data OL %  |                                       |
     |17753         12888  12892 |                                       |
     |M340                        |                                       |
     *--| |--[=    D328   D338  ]*                                       |
     |377M          B data OLtime|                                       |
     |17758         12888  12896 |                                       |
     |M341                        |                                       |
     *--| |--[=    D328   D339  ]*                                       |
     |378M          B data L max%|                                       |
     |17763         12888  12900 |                                       |
     |M345   M1241                |                                       |
     *--| |----| |---------------*                                       |
     |372M   OLHOLD               |                                       |
     |17733  13044                |                                       |
     |M346   M1241                |                                       |
     *--| |----|/|---------------*                                       |
     |373M   OLHOLD               |                                       |
     |17738  13044                |                                       |
     |M336   M1242                |                                       |
     *--| |----| |---------------*                                       |
     |374M   OLALTY               |                                       |
     |17743  13049                |                                       |
     |M337   M1242                |                                       |
     *--| |----|/|---------------*                                       |
     |375M   OLALTY                                                       |
     |17748  13049                                                        |
     |M347   M5884  M403   M5885  M382                                    |  M FUNCTION FINIS
20340*--| |----| |----| |----|/|----|/|-*--------------[SET  M195  ]*18631  8674  8686  8704
     |527M   527MX  CHOE-L MIS-MX MISCAN|                               | 8716  8734  8746  8764
     |17867  4399   4927   4404   4626  |                               | 8776 19456 19477 19524
     |M348   M5882                      |                              |19533 19550 19564 19584
     *--| |----| |----------------------*                              |19614 19651 19697 19711
     |528M   528MX                      |                              |19748 19778 19796 19808
     |17872  4381                       |                              |19840 19865 19903 19938
     |M351   M750   M748                |                              |19959 19970 19980 19992
     *--| |----| |----| |---------------*                              |20019 20030 20056 20081
     |701M   701F.M 701M.M              |                               |20088 20146 20177 20232
     |17933  629    11884               |                               |20244 20250 20295 20339
     |M352   M754   M404   M751         |                               |20369 20379 20406 20432
     *--| |-*--| |----| |----|/|--------*                               |20444 20450 20453 20464
     |703M  |703MX  CHCL-L PRFE.M       |                               |20471 20478 20485 20508
     |17938 |4712   4960   632          |                               |20531 20572 20579 20586
     |M353  |                           |                               |20588
     *--| |-*                           |                               |
     |704M                              |                               |
     |17943                             |                               |
     |M5429  M1290  M6401               |                               |
     *--| |----| |-*--| |---------------*                               |
     |711M   PFE.M |BARS.P              |                               |
     |17948        |                    |                               |
     |M5430  M1291 |                    |                               |
     *--| |----| |-*                     |                               |
     |712M   PRE.M                      |                               |
     |17953                             |                               |
```

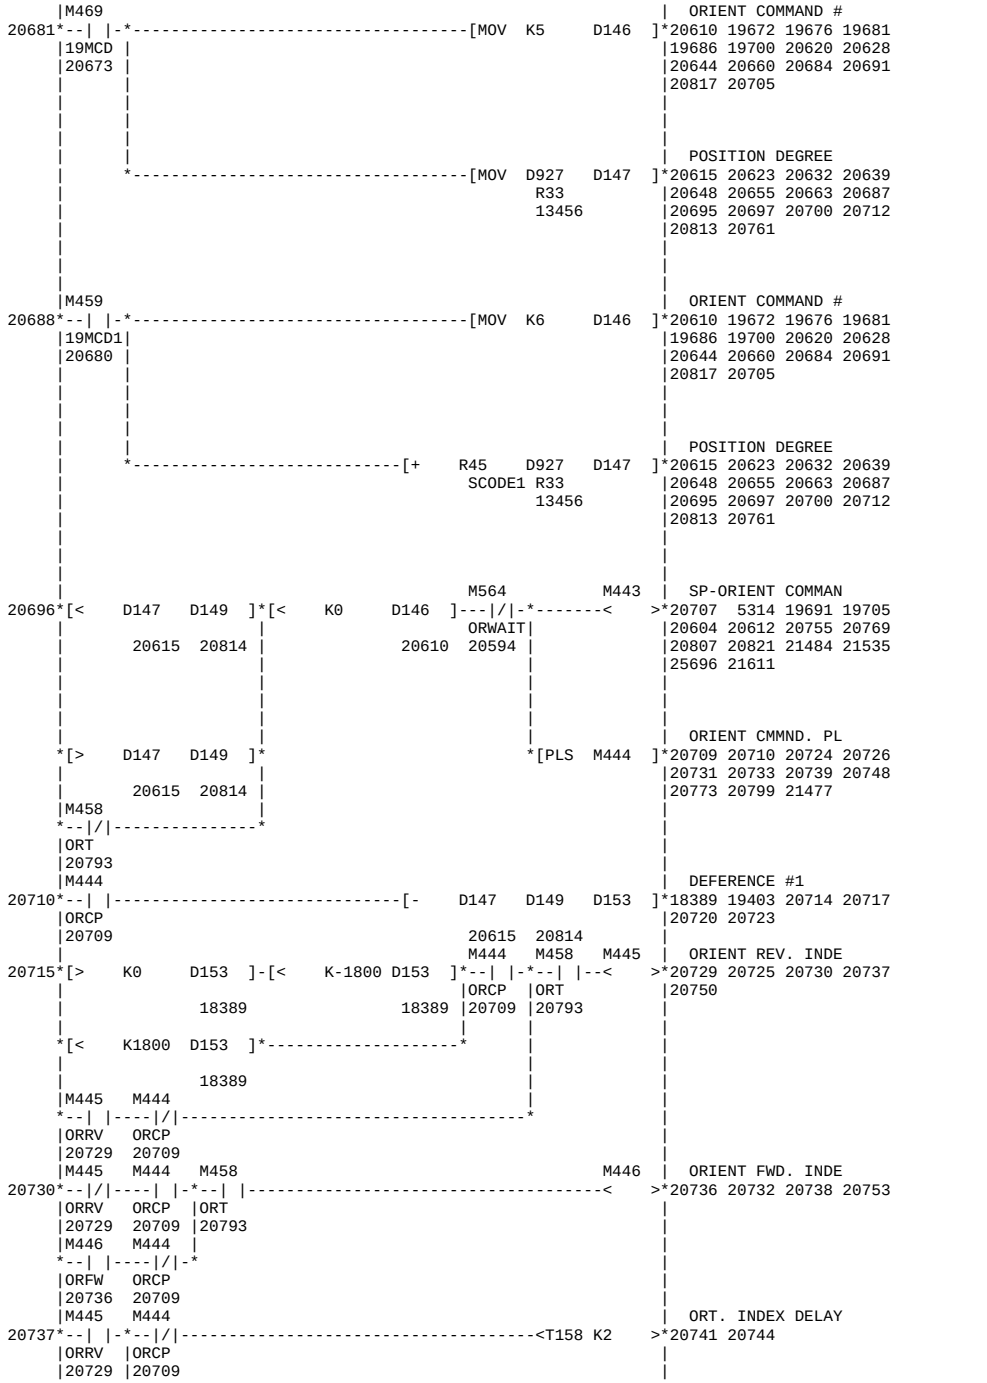

|M352 X472 M188 |
--| |----| |----| |---------------
|703M ORT2.R MCBP.M
|17938 11733
|M5349 T172
20370*--| |----| |--------*----------[SET M195]*18631 8674 8686 8704
|387M SCOF.T |
|17820 8856 |
|M5347 Y2C3 |
--| |----| |--------
|388M BP-REQ |
|17825 8898 |
|M5348 X239 Y2C3 |
--| |----|/|----|/|-
|389M B.PS.N BP-REQ
|17830 8898
|X260 M6730 M356
20380*--| |----| |----| |-*----------[SET M195]*18631 8674 8686 8704
|SYNS.N 380MX1 380M |
| 4031 17958 |
|X260 M6731 M357 |
--|/|----| |----| |-
|SYNS.N 381MX1 381M |
| 4040 17963 |
|M1140 M466 M306 |
--| |----| |----| |-
|POLIMD ENGGED POLON |
|5404 22508 18004 |
|M1140 M5426 |
--|/|----| |--------
|POLIMD POLOFF |
|5404 18009 |
|M5427 M6183 |
--| |----| |--------
|398M MTCLMO |
|17775 3509 |
|M5428 M6183 |
--| |----|/|--------
|399M MTCLMO |
|17780 3509 |
|M5446 Y83 |
--| |----| |--------
|640M MCOLNT |
|17786 3525 |
|M5447 Y83 |
--| |----|/|--------
|641M MCOLNT
|17791 3525
|M287 M6743 Y232 M53
20407*--| |----| |----|/|-*--| |-*----------[SET M195]*18631 8674 8686 8704
268M YCNTOF YCNT.N	Y.P
17993 752 767	
M225 M6743	
--| |----|/|--------
269M YCNTOF	
17988 752	
X2A3 M7174 M359	
--| |---| |----| |-*
AEND.N	YPOS.M 267M
	24355 17998
M6418	
--|/|-
Y POS
M227 M6741 M5163
--| |----| |---| |--------*
588M HPCMMD	HPCM.P
17978 7744	
M228 M6741	
--| |----|/|-
589M HPCMMD
17983 7744
M227 M6174 M6427
--| |----| |---| |--------*
588M SFCMMD	SPFL.P
17978 28258	
	M6421
--| |--------
HPCL.P
Y520 X4B0
20433*--| |-*--| |--------*----------[SET M195]*18631 8674 8686 8704
PSEL#1	PNTFIN
23500	
Y521	
--| |-
PSEL#2	
23504	
Y522	
--| |-
PSEL#3	
23508	
Y523	
--| |-
PSEL#4	
23512	
Y524	
--| |-
PSEL#5
23516
Y525 X4B1 X4B2
--| |---| |----|/|-*
E_M112	MM.FIN EOFSTA
23492
Y526
--| |-
E_M113
23496
M5450 M6624
20445*--| |----| |-*----------[SET M195]*18631 8674 8686 8704
130M SPFAOF
18015 1952
M5451 M6624
--| |----|/|-
131M SPFAOF
18020 1952
M5470 T164
20451*--| |----| |----------[SET M195]*18631 8674 8686 8704
368M MMOK.T
17695 9276

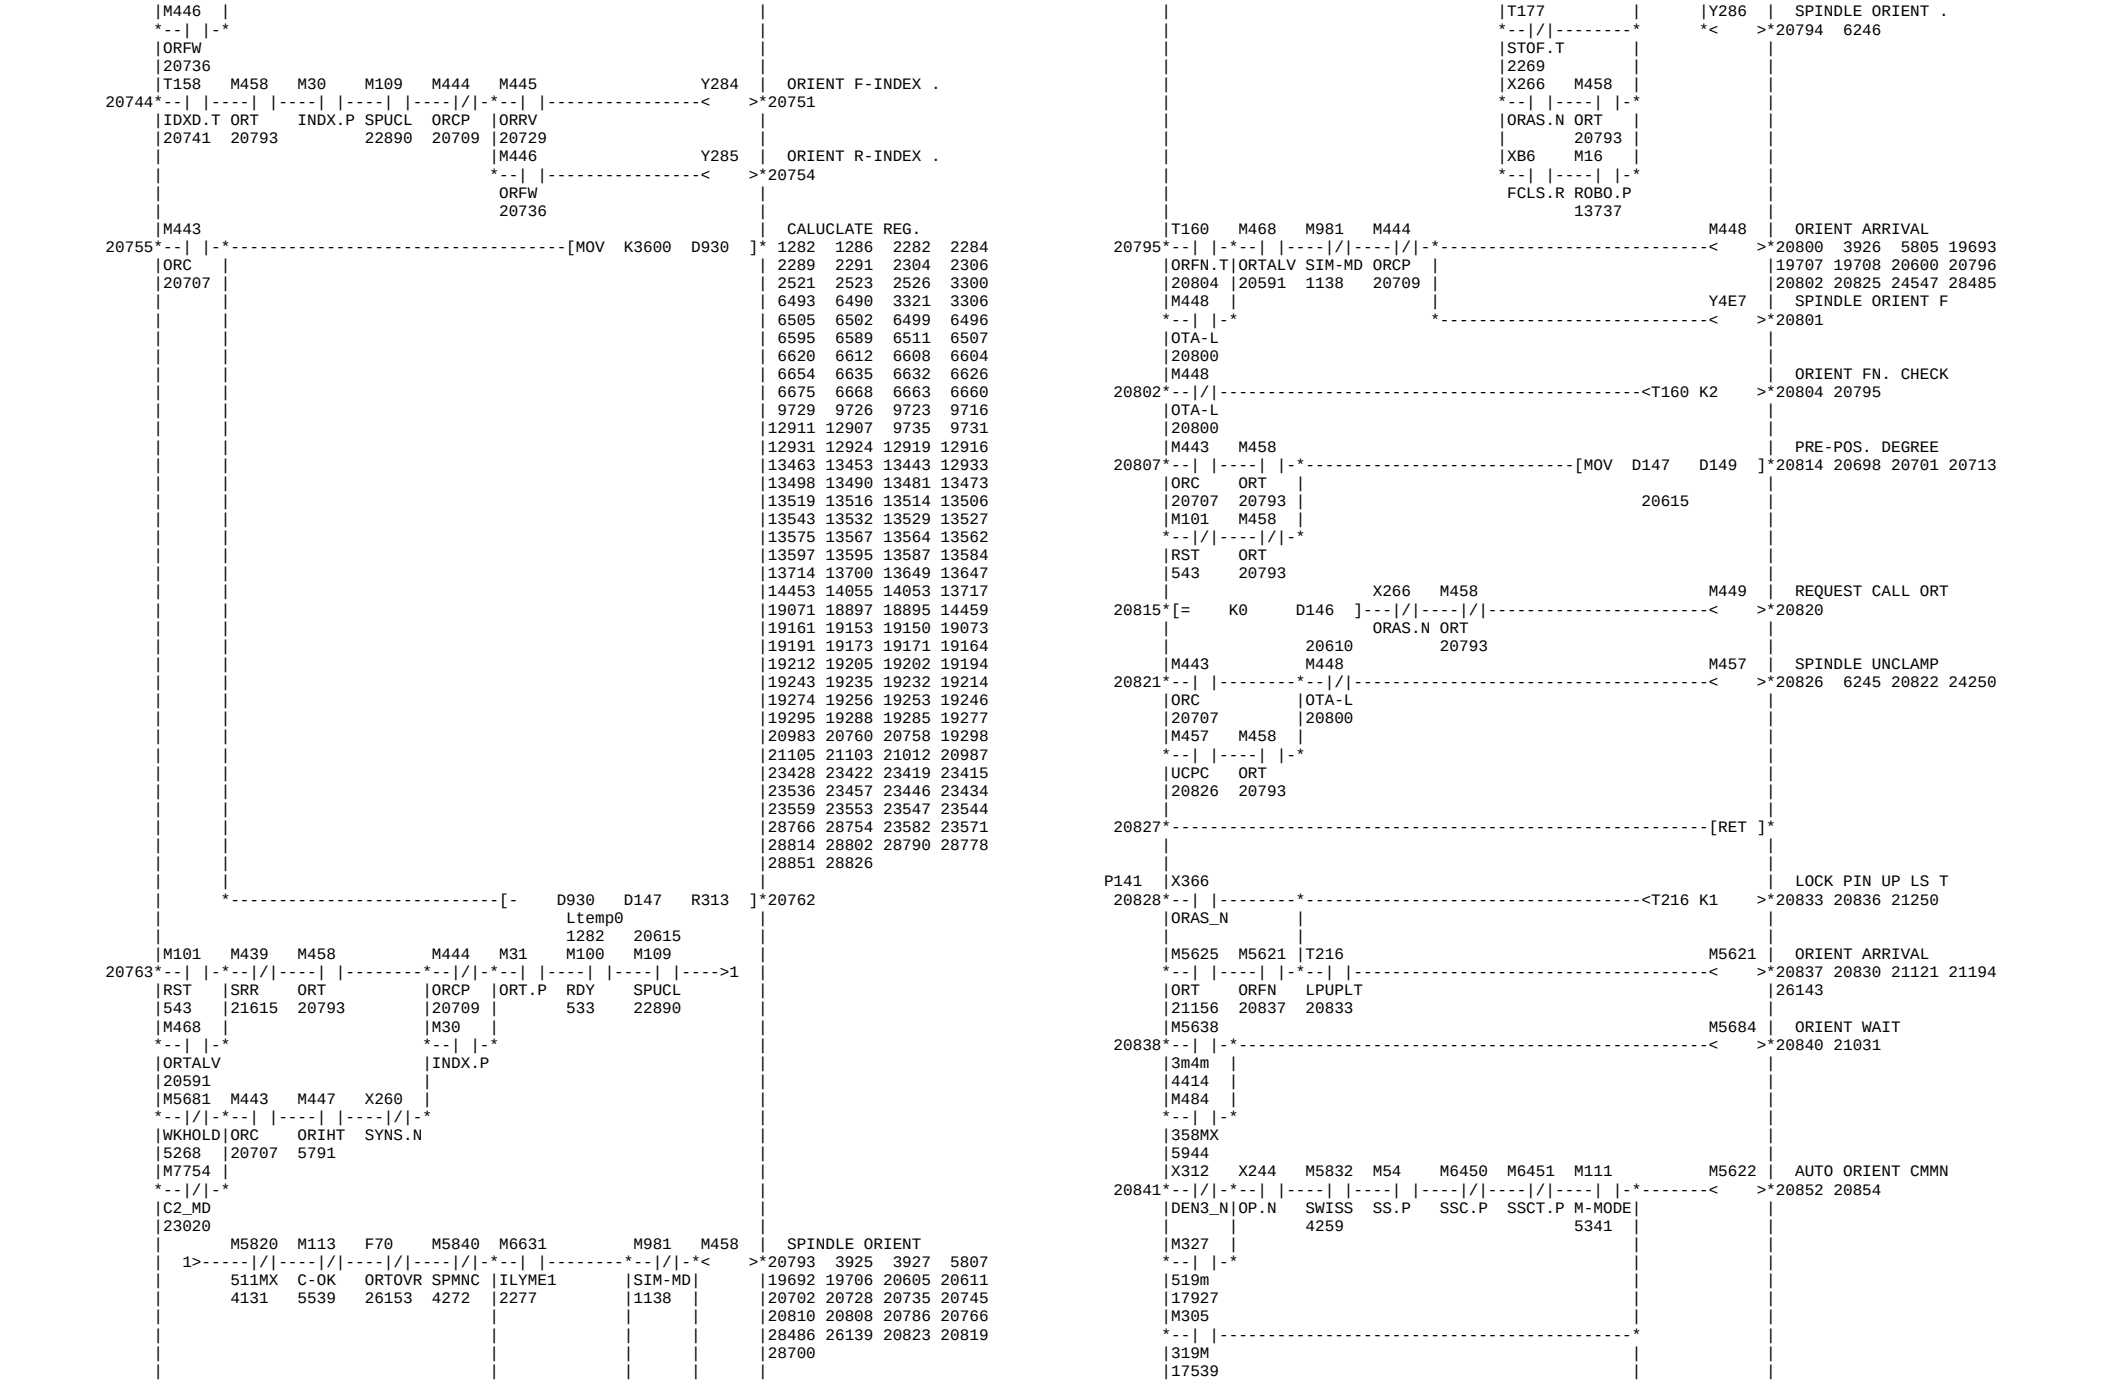

|M5353 X8D M6444
20454*--| |-*--| |----| |-*----------[SET M195]*18631 8674 8686 8704
|400M |ADMFIN EX.M2P| | 8716 8734 8746 8764
|18026 | | 8776 19456 19477 19524
|M5354 |X40 M6468 | 19533 19550 19564 19584
--| |---| |----| |-* 19614 19651 19697 19711
|401M |ADMFIN EX.M8P 19748 19778 19796 19808
|18031 | 19840 19865 19903 19938
|M5355 | 19959 19970 19980 19992
--| |- 20019 20030 20056 20081
|402M | 20088 20146 20177 20232
|18036 | 20244 20250 20295 20339
|M5356 | 20369 20379 20406 20432
--| |- 20444 20450 20453 20464
|403M 20471 20478 20485 20508
|18041 20531 20572 20579 20586
20588
M FUNCTION FINIS
|M5357 X40 M6468
20465*--| |-*--| |----| |----------[SET M195]*18631 8674 8686 8704
|404M |ADMFIN EX.M8P | 8716 8734 8746 8764
|18047 | 8776 19456 19477 19524
|M5358 | 19533 19550 19564 19584
--| |- 19614 19651 19697 19711
|405M | 19748 19778 19796 19808
|18052 | 19840 19865 19903 19938
|M5359 | 19959 19970 19980 19992
--| |- 20019 20030 20056 20081
|406M | 20088 20146 20177 20232
|18057 | 20244 20250 20295 20339
|M5362 | 20369 20379 20406 20432
--| |- 20444 20450 20453 20464
|407M 20471 20478 20485 20508
|18062 20531 20572 20579 20586
20588
M FUNCTION FINIS
|M5363 X40 M6468
20472*--| |-*--| |----| |----------[SET M195]*18631 8674 8686 8704
|408M |ADMFIN EX.M8P | 8716 8734 8746 8764
|18068 | 8776 19456 19477 19524
|M5364 | 19533 19550 19564 19584
--| |- 19614 19651 19697 19711
|409M | 19748 19778 19796 19808
|18073 | 19840 19865 19903 19938
|M5365 | 19959 19970 19980 19992
--| |- 20019 20030 20056 20081
|410M | 20088 20146 20177 20232
|18078 | 20244 20250 20295 20339
|M5366 | 20369 20379 20406 20432
--| |- 20444 20450 20453 20464
|411M 20471 20478 20485 20508
|18083 20531 20572 20579 20586
20588
M FUNCTION FINIS
|M5367 X40 M6468
20479*--| |-*--| |----| |----------[SET M195]*18631 8674 8686 8704
|412M |ADMFIN EX.M8P | 8716 8734 8746 8764
|18089 | 8776 19456 19477 19524
|M5452 | 19533 19550 19564 19584
--| |- 19614 19651 19697 19711
|413M | 19748 19778 19796 19808
|18094 | 19840 19865 19903 19938
|M5453 | 19959 19970 19980 19992
--| |- 20019 20030 20056 20081
|414M | 20088 20146 20177 20232
|18099 | 20244 20250 20295 20339
|20588
|M5454 | 20369 20379 20406 20432
--| |- 20444 20450 20453 20464
|415M 20471 20478 20485 20508
|18104 20531 20572 20579 20586
20588
|M5457 Y87 Y86 M6193 M6427
20486*--| |----|/|----|/|----| |-*--| |-*--------------[SET M195]*18631 8674 8686 8704
|550M DGIN2 DGIN1 Y85S&H|SPFL.P| | 8716 8734 8746 8764
|18156 28283 28278 28273 | | | 8776 19456 19477 19524
|M5458 Y87 Y86 M6193 |M6421 | 19533 19550 19564 19584
--| |----|/|----| |----|/|---| |-* 19614 19651 19697 19711
|551M DGIN2 DGIN1 Y85S&H|HPCL.P 19748 19778 19796 19808
|18161 28283 28278 28273 | 19840 19865 19903 19938
|M5459 Y87 Y86 M6193 | 19959 19970 19980 19992
--| |----|/|----| |----| |- 20019 20030 20056 20081
|552M DGIN2 DGIN1 Y85S&H| 20088 20146 20177 20232
|18166 28283 28278 28273 | 20244 20250 20295 20339
|M5460 Y87 Y86 M6193 | 20369 20379 20406 20432
--| |----| |----|/|----|/|- 20444 20450 20453 20464
|553M DGIN2 DGIN1 Y85S&H 20471 20478 20485 20508
|18171 28283 28278 28273 20531 20572 20579 20586
20588
M FUNCTION FINIS
|M5461 Y87 Y86 M6193 M6427
20509*--| |----| |----|/|----| |-*--| |-*--------------[SET M195]*18631 8674 8686 8704
|554M DGIN2 DGIN1 Y85S&H|SPFL.P| | 8716 8734 8746 8764
|18176 28283 28278 28273 | | | 8776 19456 19477 19524
|M5462 Y87 Y86 M6193 |M6421 | 19533 19550 19564 19584
--| |----| |----| |----|/|---| |-* 19614 19651 19697 19711
|555M DGIN2 DGIN1 Y85S&H|HPCL.P 19748 19778 19796 19808
|18181 28283 28278 28273 | 19840 19865 19903 19938
|M5463 Y87 Y86 M6193 | 19959 19970 19980 19992
--| |----| |----| |----| |- 20019 20030 20056 20081
|556M DGIN2 DGIN1 Y85S&H| 20088 20146 20177 20232
|18186 28283 28278 28273 | 20244 20250 20295 20339
|M5464 Y87 Y86 M6193 | 20369 20379 20406 20432
--| |----|/|----|/|----|/|- 20444 20450 20453 20464
|557M DGIN2 DGIN1 Y85S&H 20471 20478 20485 20508
|18191 28283 28278 28273 20531 20572 20579 20586
20588
M FUNCTION FINIS
|M5380 M7283 M7280 M6403
20532*--| |----| |-*--| |--------*--| |----------------[SET M195]*18631 8674 8686 8704
|440M | |B-LD.P | 8716 8734 8746 8764
|18110 12739 |12700 | | 8776 19456 19477 19524
|M5381 M7283 | | 19533 19550 19564 19584
--| |---| |-* | 19614 19651 19697 19711
|441M | | | 19748 19778 19796 19808
|18115 |12739 | | 19840 19865 19903 19938
| |M7284 | | 19959 19970 19980 19992
| *--| |-* | 20019 20030 20056 20081
| | 20088 20146 20177 20232
| 12747 | 20244 20250 20295 20339
|M5382 | 20369 20379 20406 20432
--| |--[= D665 D666] 20444 20450 20453 20464
|442M 2ndDAT PKLD% | 20471 20478 20485 20508
|18120 12677 12681 | 20531 20572 20579 20586
|M5383 | 20588
--| |--[= D665 D667]
|443M 2ndDAT OVLD%
|18125 12677 12685
|M5384
--| |--[= D665 D668]
|444M 2ndDAT UNLD%
|16564 12677 12689
|M5385
--| |--[= D665 D669]
|445M 2ndDAT OVLD.T
|18135 12677 12693

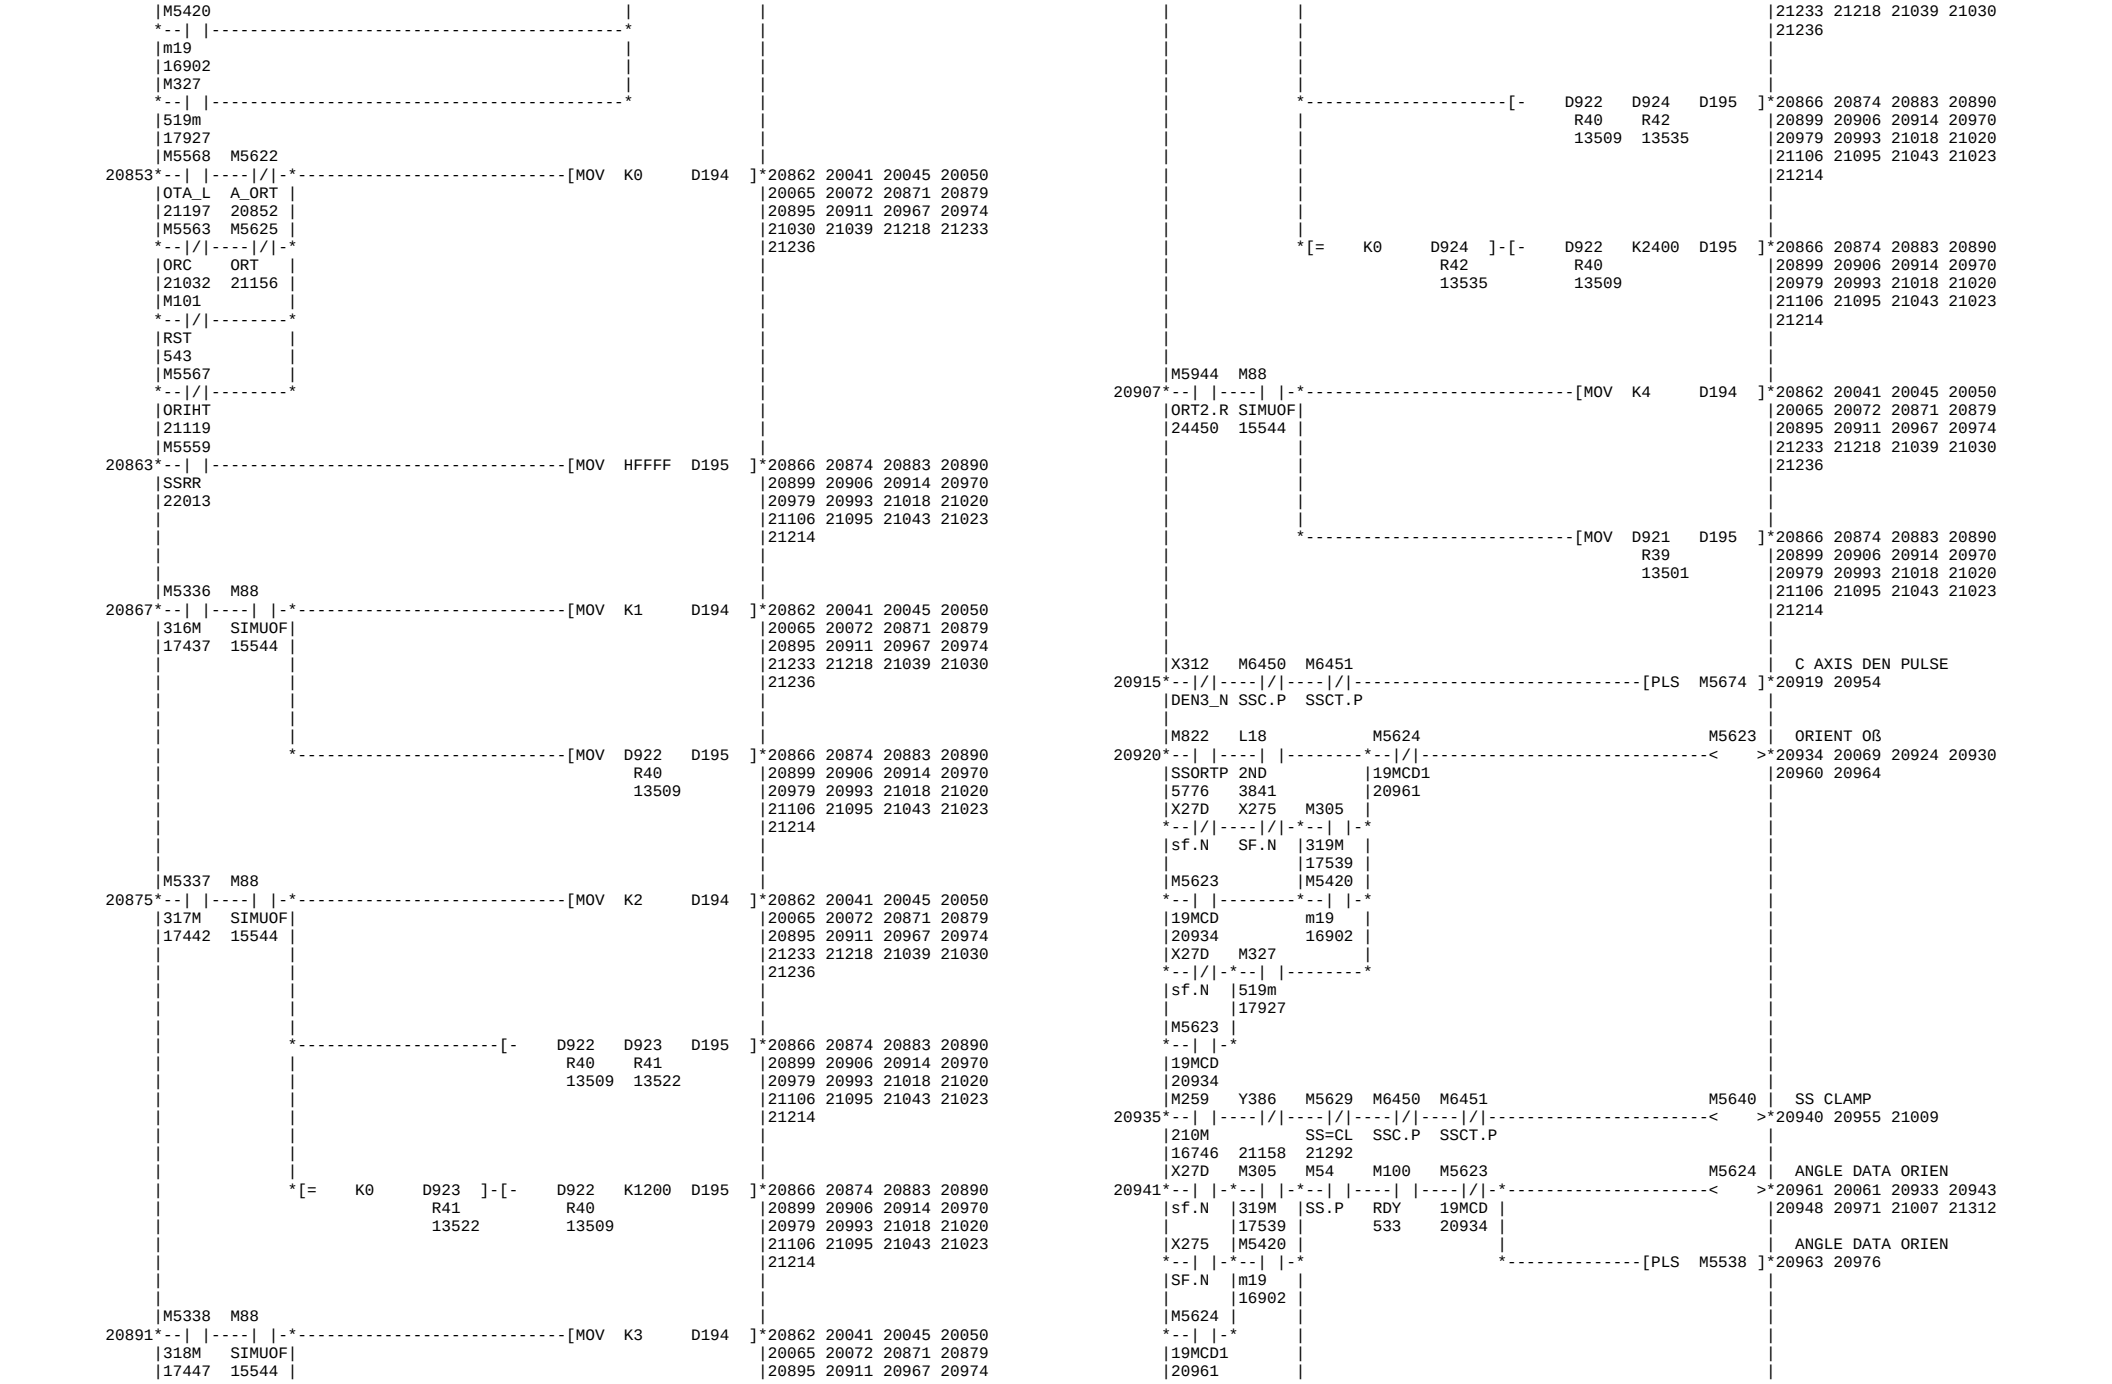

|M5386 |
--| |--[= D665 D670]
|446M 2ndDAT UNLD.T|
|18140 12677 12697 |
|M5387 M7284 |
--| |----| |---------------
|447M |
|18145 12747 |
|M5388 M7289 |
--| |----| |---------------
|448M
|18150 12860
|M5389 M3339 M6443
20573*--| |----| |-*--| |----------[SET M195]*
|720M FHLD.R|64GL_P
|18197 24769 |
|M5390 M3339 |
--| |----|/|-
|721M FHLD.R
|18202 24769
|M5391 M4850 M6443
20580*--| |----| |-*--| |----------[SET M195]*
|750M AXINTL|64GL_P
|18208 |
|M5392 M4850 |
--| |----|/|-
|751M AXINTL
|18215
|M193
20587*--| |----------[RST M195]*
|M-ERR
|18629
20589*----------[RET]*
| M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19992 19980 19970 19959
20081 20056 20030 20019
20232 20177 20146 20088
20339 20295 20250 20244
20432 20406 20379 20369
20464 20453 20450 20444
20508 20485 20478 20471
20586 20579 20572 20531
20588

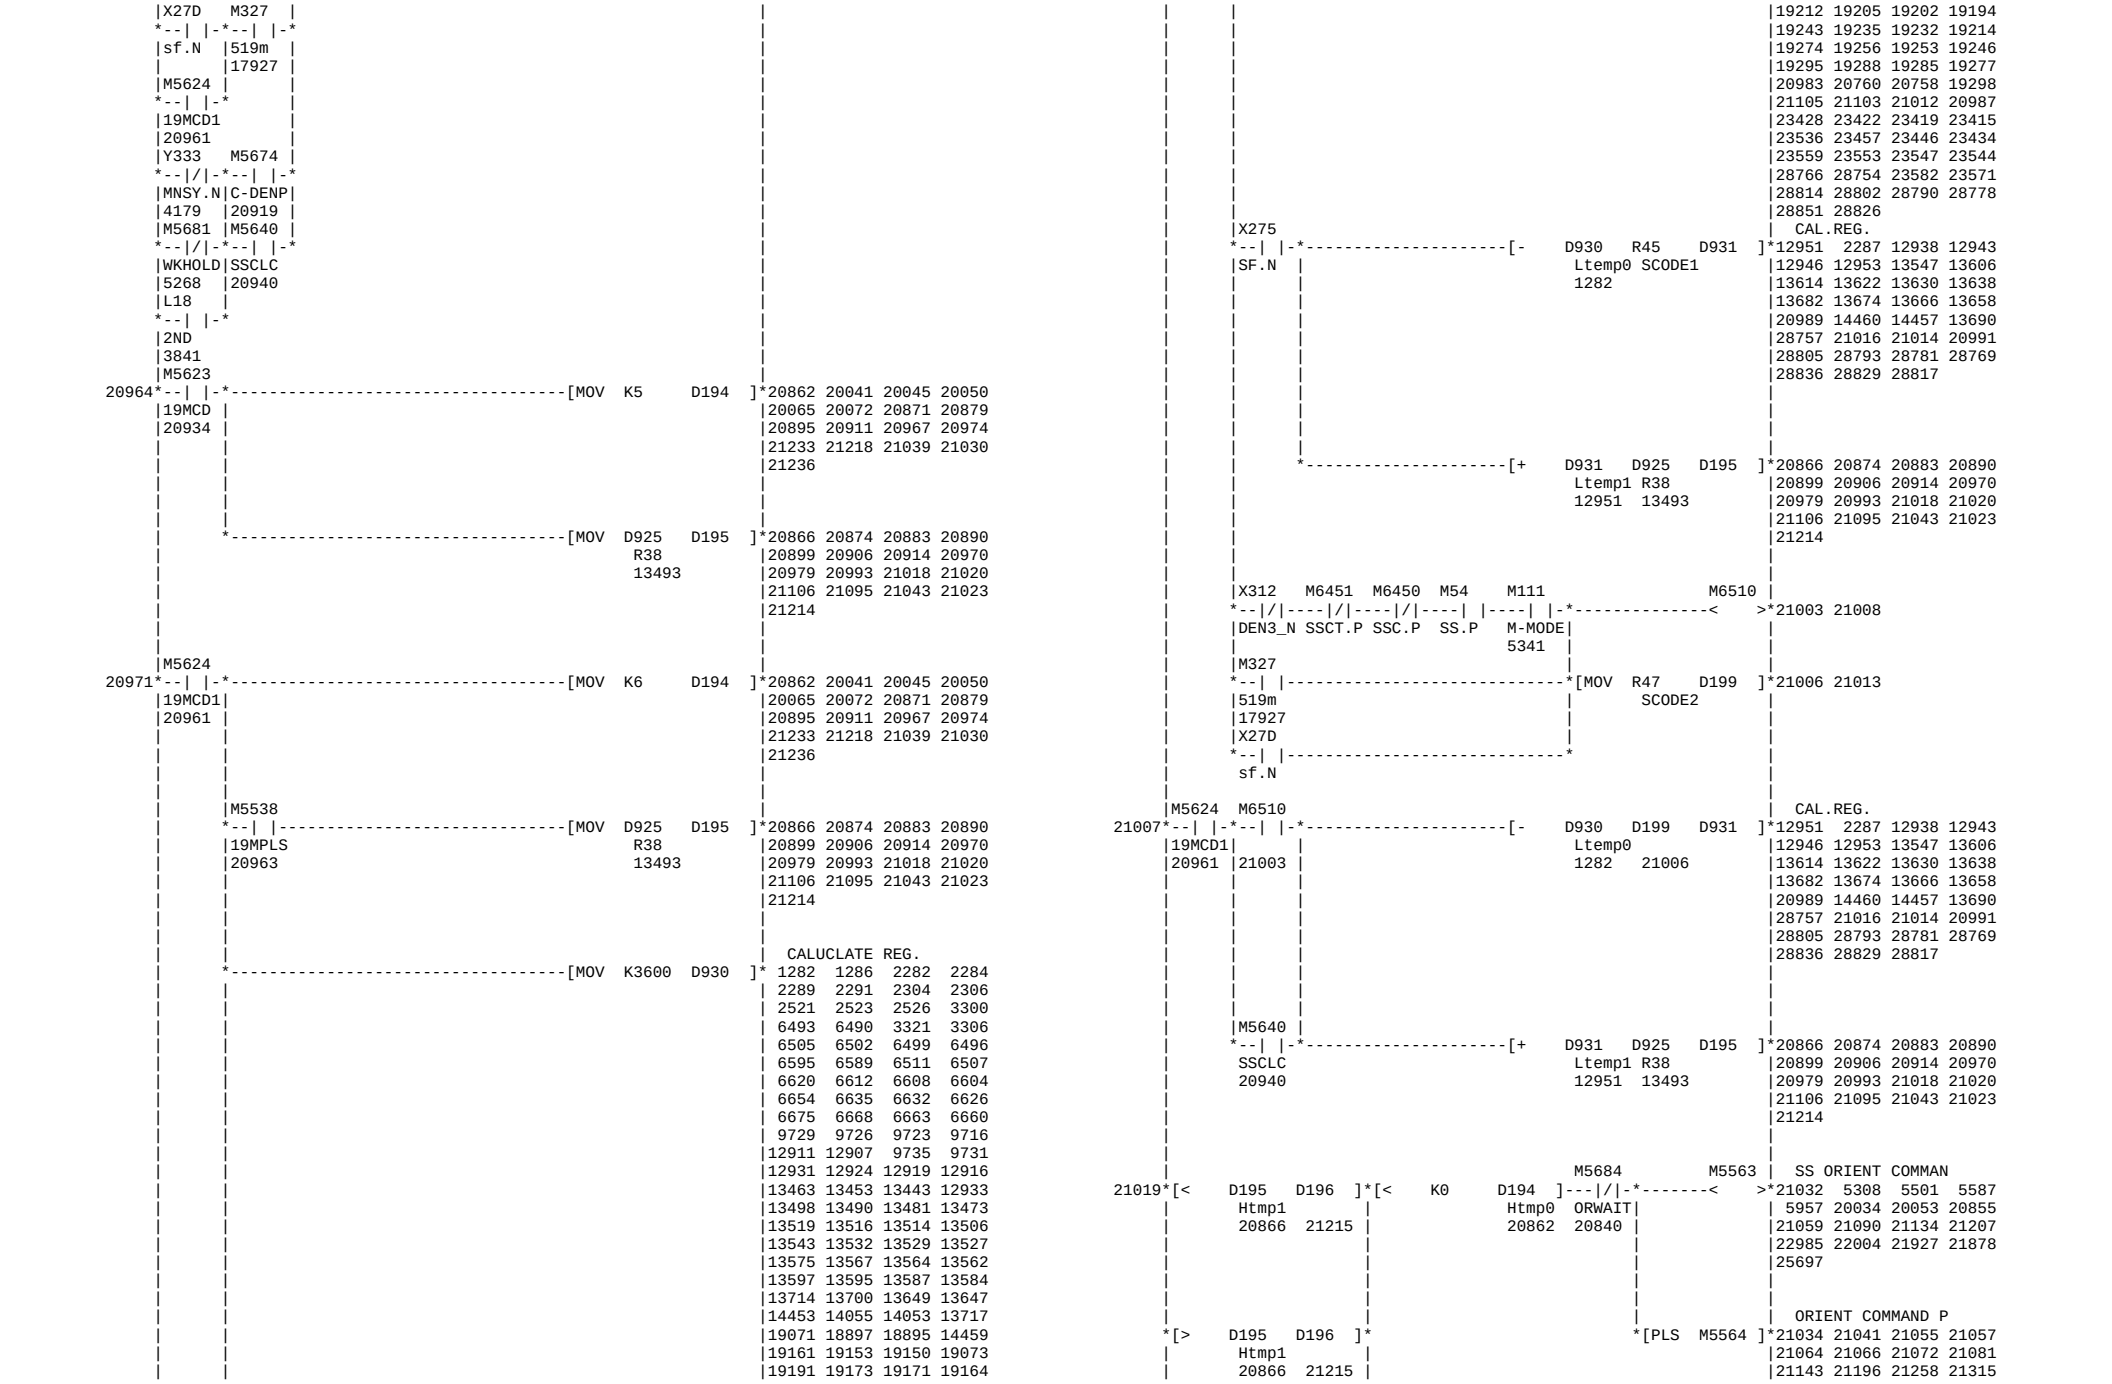

P140 |X266 M468 | ORIENT ARIVAL
20590*--| |----------<
|ORAS.N
|M518 M564 | ORIENT WAIT
20592*--| |-*----------<
|3M4M |
|4409 |
|M488 |
--| |-
|58MX
|5845
|M216 M471 | AUTO ORIENT CMND
20595*--| |-*----------<
|16M |
|16882 |
|M217 |
--| |-
|17M |
|16887 |
|M218 |
--| |-
|18M |
|16892 |
|M219 |
--| |-
|19M
|16897
|M448 M34 M471 | ORIENT COMMAND #
20600*--| |----| |----|/|-*----------[MOV K0 D146]*
|OTA-L ORTS.P AORTCD|
|20800 20599 |
|M447 |
--|/|---------------
|ORIHT |
|5791 |
|M443 M458 |
--|/|----|/|--------
|ORC ORT |
|20707 20793 |
|M101 |
--|/|---------------
|RST
|543
|M458 M443 | POSITION DEGREE
20611*--|/|----|/|----------[MOV HFFFF D147]*
|ORT ORC
|20793 20707
|M216 M88 | ORIENT COMMAND #
20616*--| |----| |-*----------[MOV K1 D146]*
|16M SIMUOF|
|16882 15544 |
----------[MOV D928 D147]
R35
13466
|M217 M88 | ORIENT COMMAND #
20624*--| |----| |-*----------[MOV K2 D146]*
|17M SIMUOF|
|16887 15544 |
| M FUNCTION FINIS
18631 8674 8686 8704
8716 8734 8746 8764
8776 19456 19477 19524
19533 19550 19564 19584
19614 19651 19697 19711
19748 19778 19796 19808
19840 19865 19903 19938
19992 19980 19970 19959
20081 20056 20030 20019
20232 20177 20146 20088
20339 20295 20250 20244
20432 20406 20379 20369
20464 20453 20450 20444
20508 20485 20478 20471
20586 20579 20572 20531
20588
20591 20764 20797 24575
26140
20594 20706
20599 20602
20610 19672 19676 19681
19686 19700 20620 20628
20644 20660 20684 20691
20705 20817
20615 20623 20632 20639
20648 20655 20663 20687
20695 20697 20700 20712
20813 20761
20610 19672 19676 19681
19686 19700 20620 20628
20644 20660 20684 20691
20817 20705
20615 20623 20632 20639
20648 20655 20663 20687
20695 20697 20700 20712
20813 20761
20610 19672 19676 19681
19686 19700 20620 20628
20644 20660 20684 20691
20817 20705

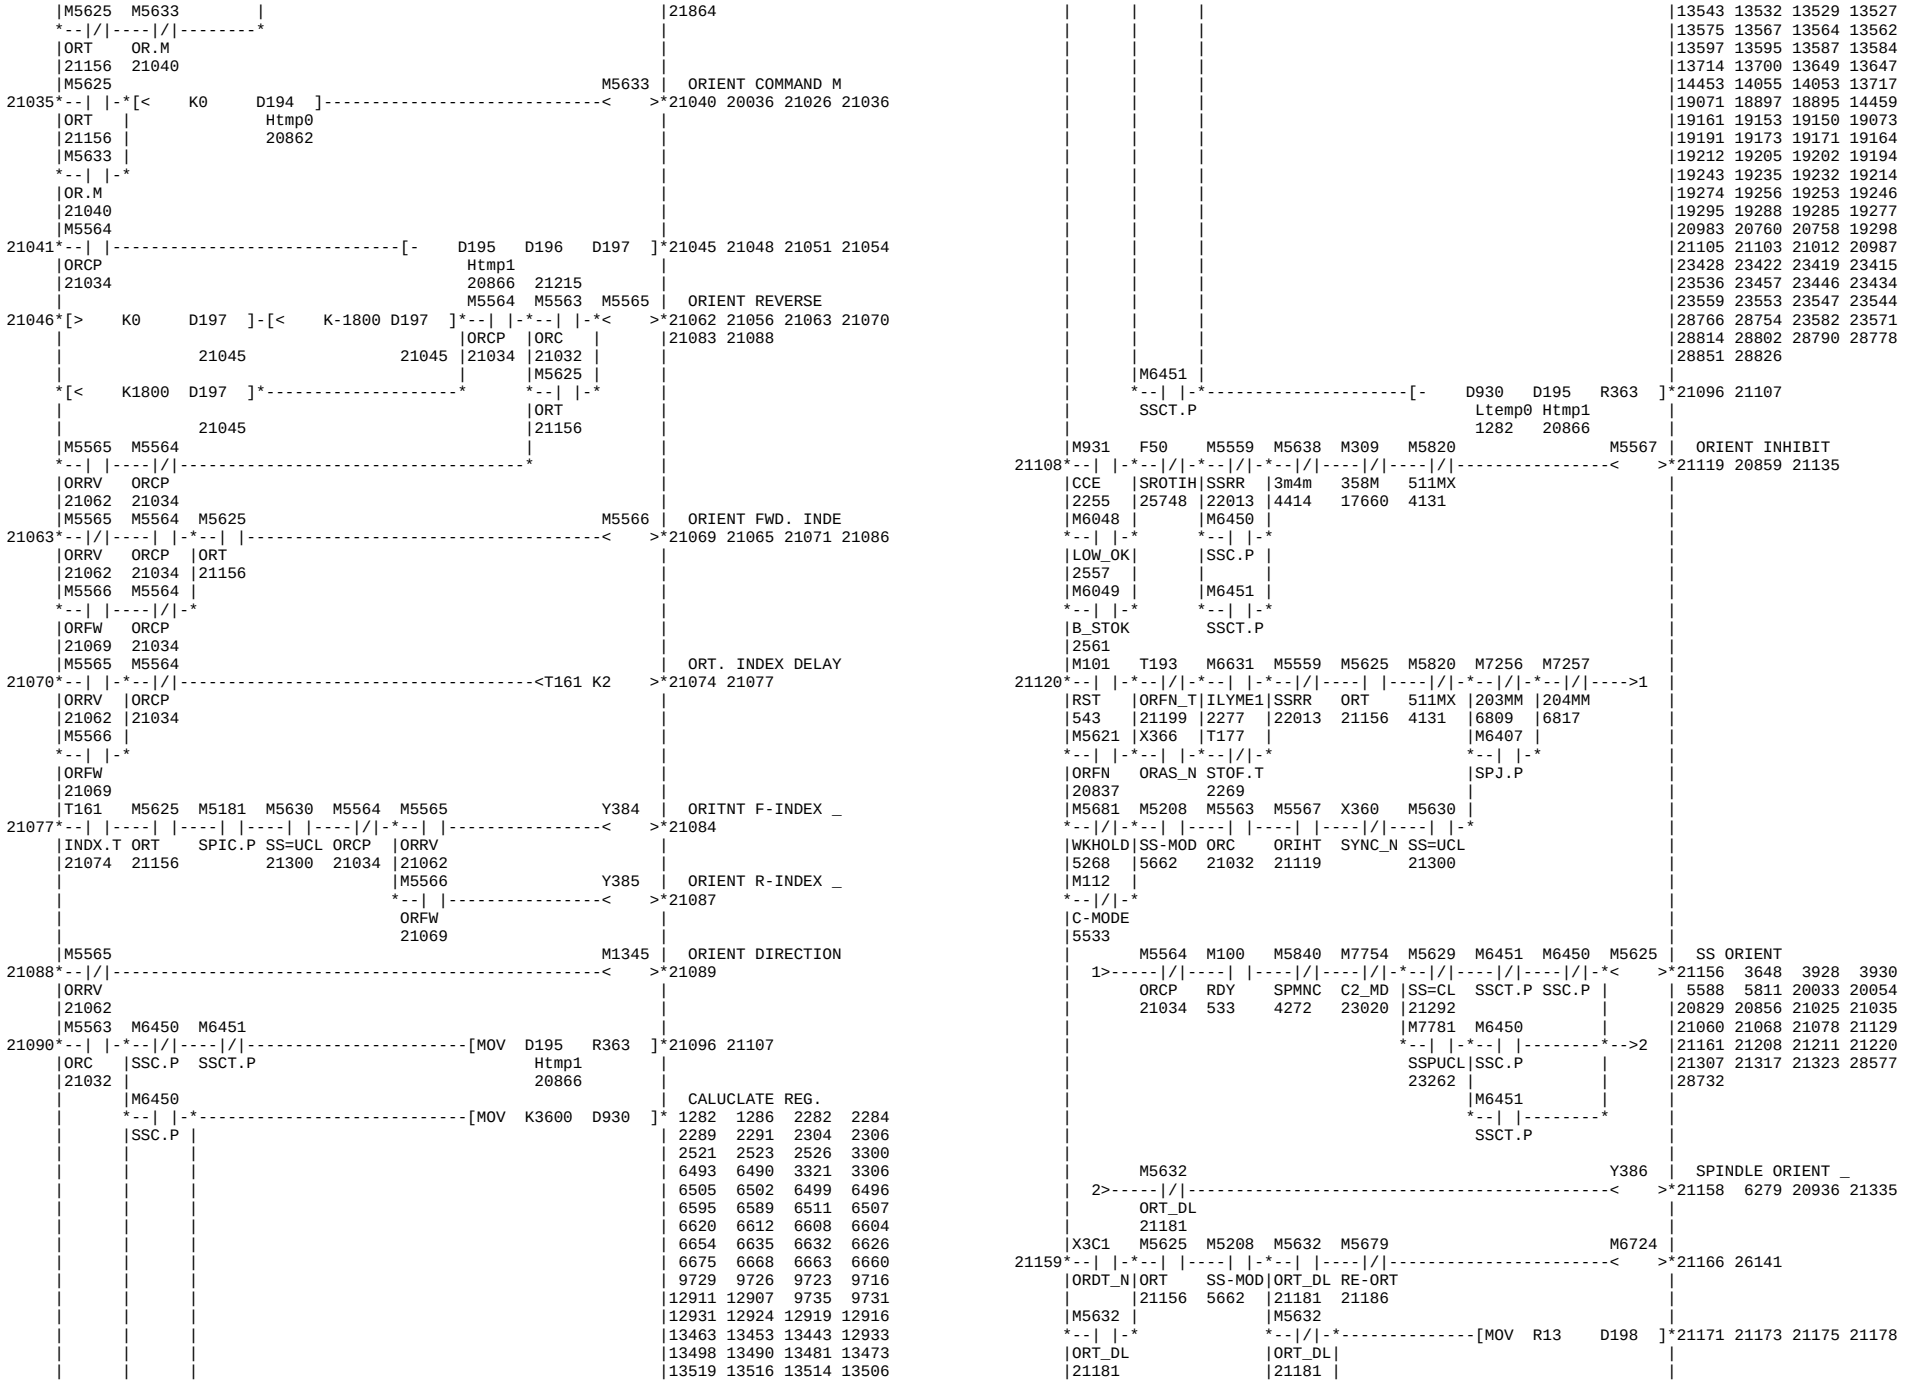

POSITION DEGREE
D928 D929 D147
R35 R36
13466 13476
20615 20623 20632 20639
20648 20655 20663 20687
20695 20697 20700 20712
20813 20761
POSITION DEGREE
K0 D929 D928 K1200 D147
R36 R35
13476 13466
ORIENT COMMAND #
M218 M88
18M SIMUOF
16892 15544
MOV K3 D146
20610 19672 19676 19681
19686 19700 20620 20628
20644 20660 20684 20691
20817 20705
POSITION DEGREE
D928 D920 D147
R35 R37
13466 13484
K0 D920 D928 K2400 D147
R37 R35
13484 13466
ORIENT COMMAND #
M5928 M88
ORT.R SIMUOF
24384 15544
MOV D926 D147
R34
13446
POSITION DEGREE
M821 L17 M459 M469
ORTSWP 1ST 19MCD1
5772 3835 20680
X275 M219
SF.N 19M
16897
M469 M326
19MCD 519M
20673 17922
X275 M219 M469 M459
ORIENT ANGLE CMM
SF.N 19M 19MCD
16897 20673
M459 M326
19MCD1 519M
20680 17922
20673 20667 20679 20681
20674
20680 20672 20675 20688

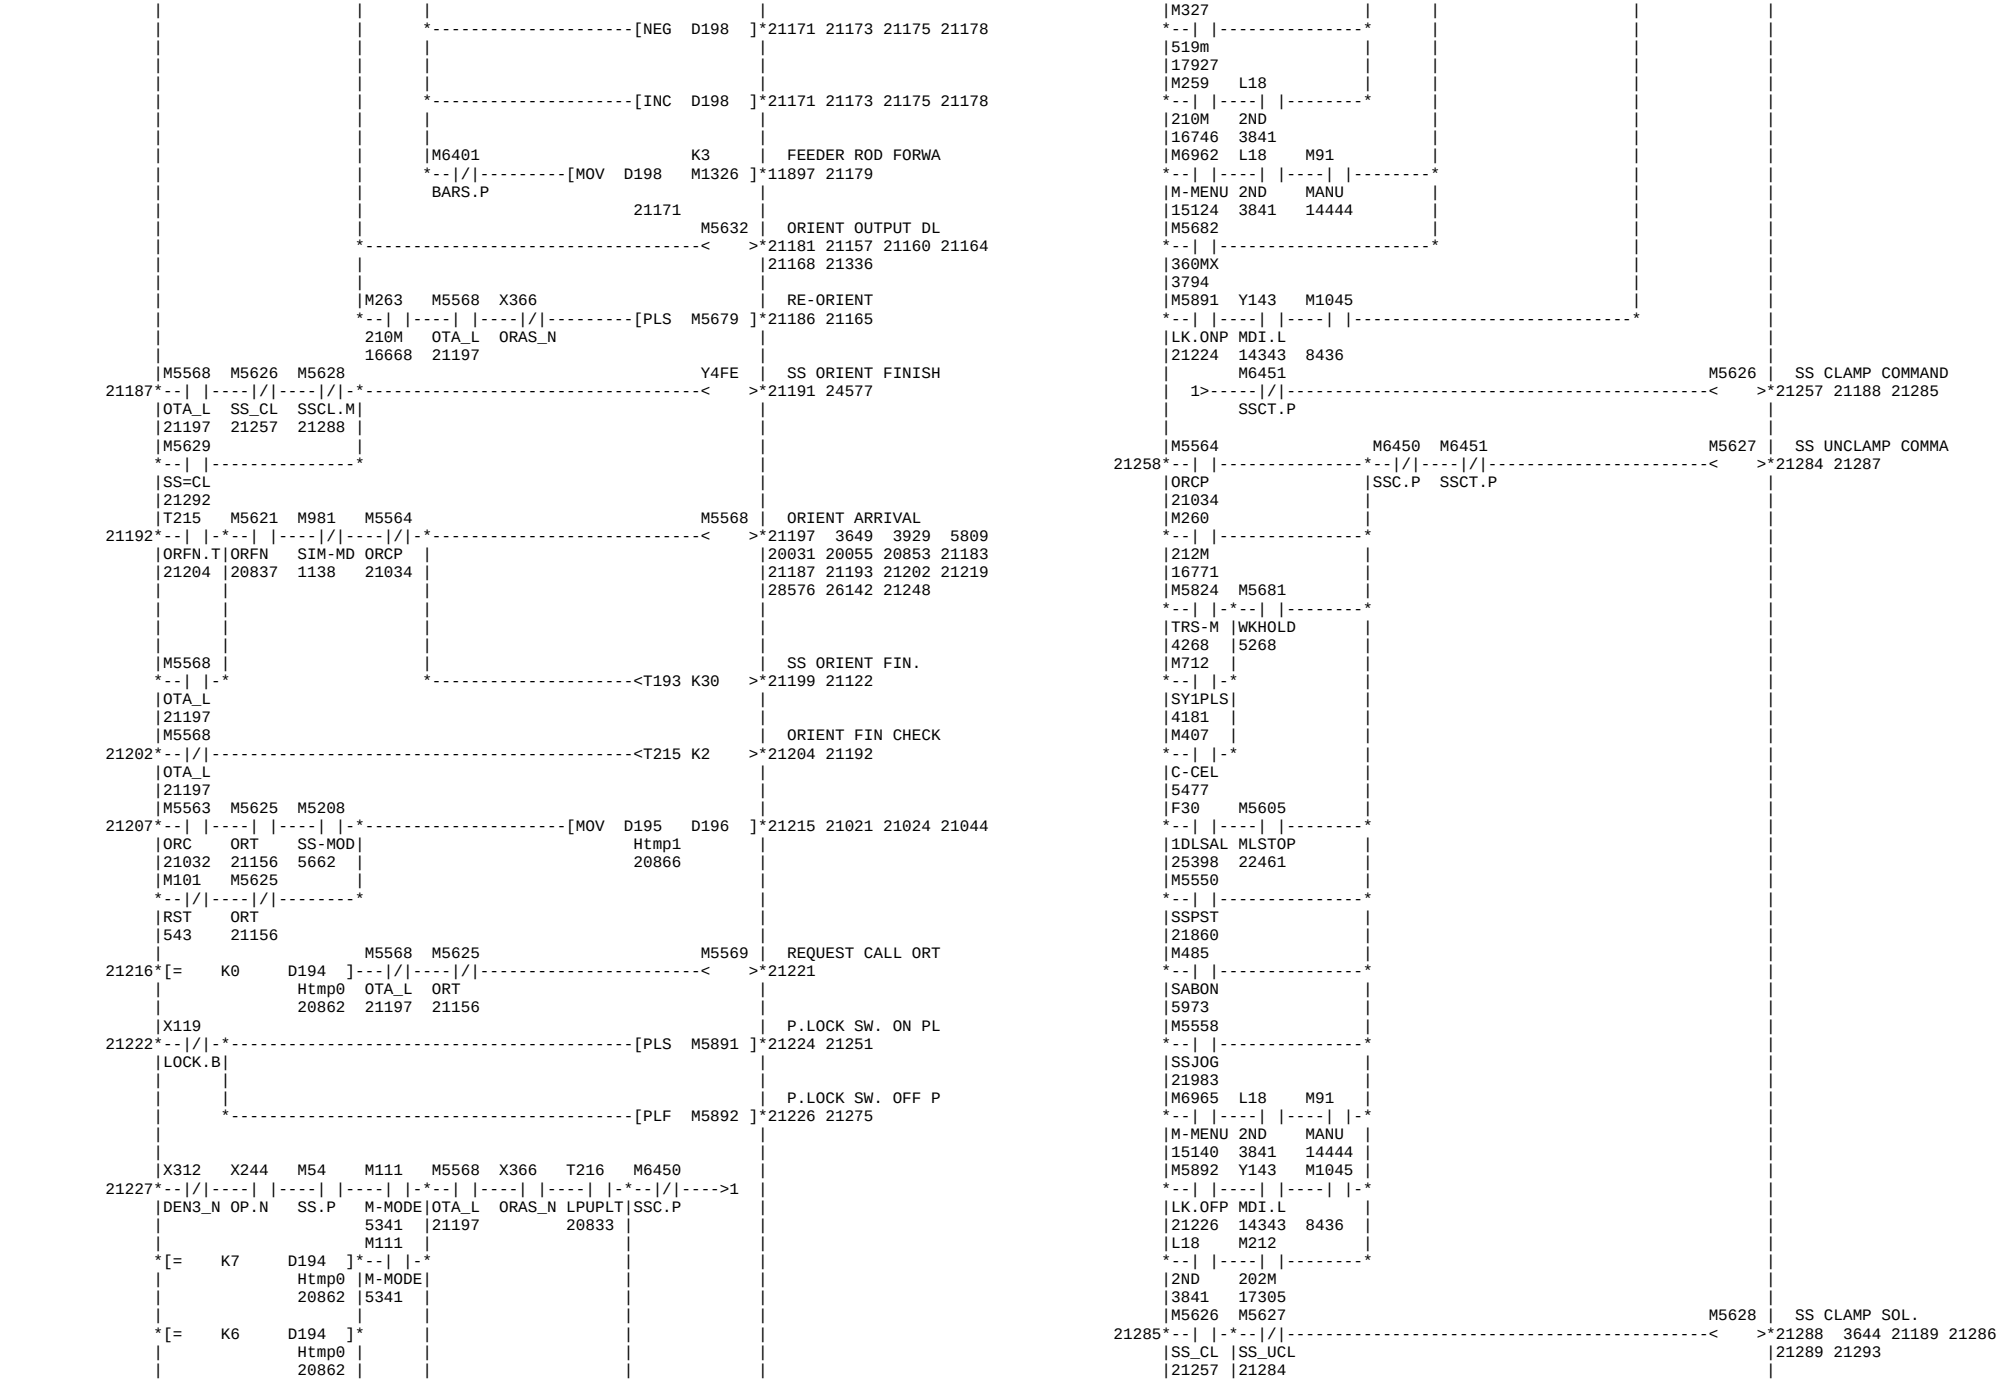

M469
19MCD
20673
ORIENT COMMAND #
MOV K5 D146
20610 19672 19676 19681
19686 19700 20620 20628
20644 20660 20684 20691
20817 20705
POSITION DEGREE
MOV D927 D147
R33
13456
20681
20615 20623 20632 20639
20648 20655 20663 20687
20695 20697 20700 20712
20813 20761
M459
19MCD1
20680
ORIENT COMMAND #
MOV K6 D146
20610 19672 19676 19681
19686 19700 20620 20628
20644 20660 20684 20691
20817 20705
POSITION DEGREE
R45 D927 D147
SCODE1 R33
13456
20688
20615 20623 20632 20639
20648 20655 20663 20687
20695 20697 20700 20712
20813 20761
M564 M443
SP-ORIENT COMMAN
D147 D149 K0 D146
20615 20814
20610 20594
ORWAIT
20696
20707 5314 19691 19705
20604 20612 20755 20769
20807 20821 21484 21535
25696 21611
ORIENT CMMND. PL
PLS M444
20709 20710 20724 20726
20731 20733 20739 20748
20773 20799 21477
M458
ORT
20793
M444
DEFERENCE #1
D147 D149 D153
20615 20814
M444 M458 M445
20710
18389 20714 20717
20720 20723
ORIENT REV. INDE
K0 D153 K-1800 D153
ORCP ORT
20709 20793
20715
20729 20725 20730 20737
20750
K1800 D153
18389
M445 M444
ORRV ORCP
20729 20709
M445 M444 M458 M446
ORIENT FWD. INDE
ORRV ORCP ORT
20729 20709 20793
M446 M444
ORFW ORCP
20736 20709
M445 M444
ORT. INDEX DELAY
T158 K2
ORRV ORCP
20729 20709
20730
20736 20732 20738 20753
20737
20741 20744

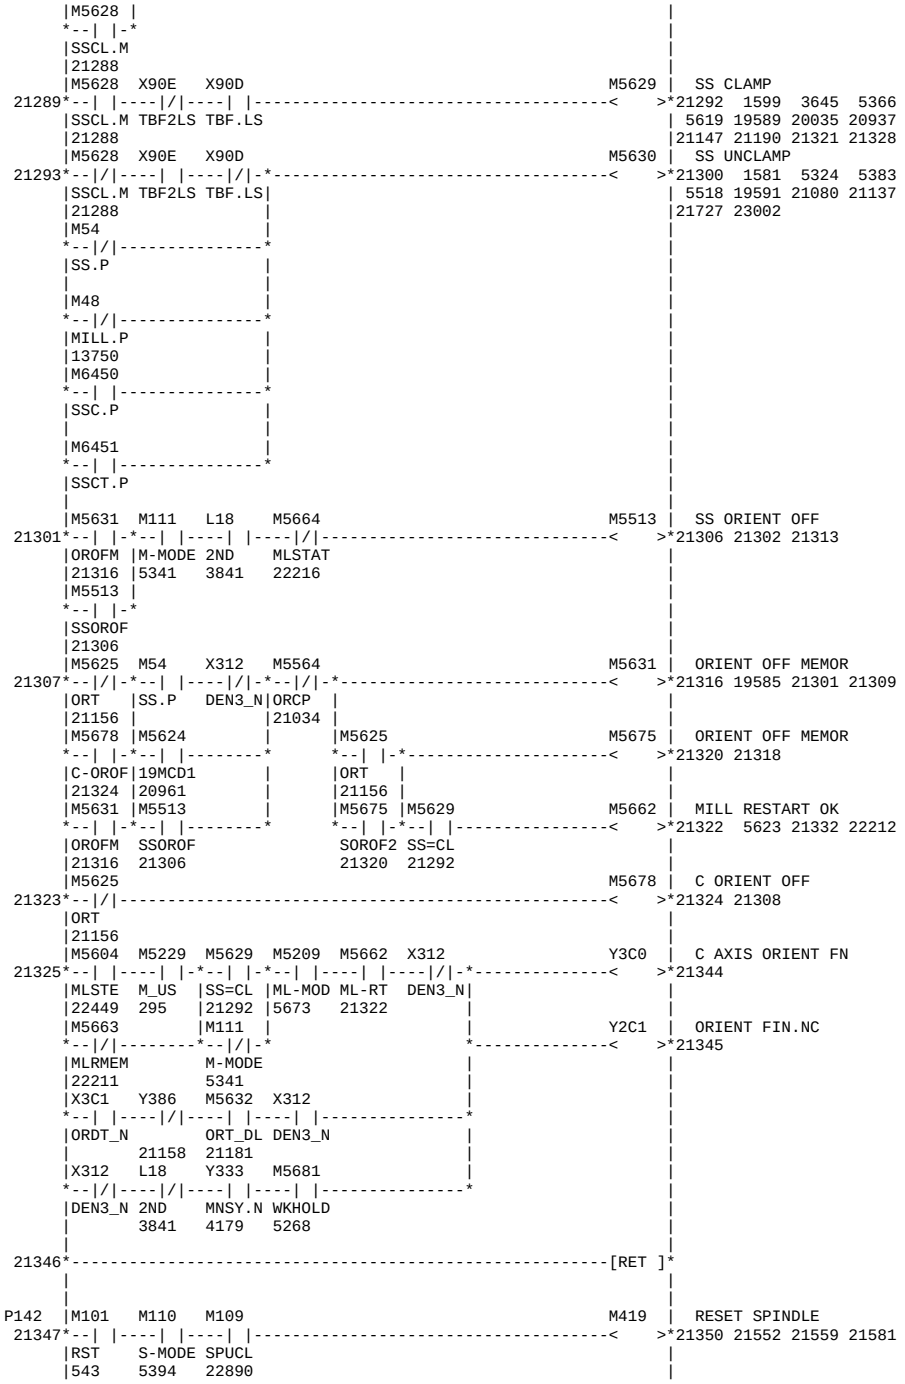

M446
ORFW
20736
T158 M458 M30 M109 M444 M445 Y284
IDXD.T ORT INDX.P SPUCL ORCP
20741 20793 22890 20709
ORRV
20729
M446 Y285
ORFW
20736
M443
ORC
20707
D930 K3600 D930
M101 M439 M458 M444 M31 M100 M109
RST SRR ORT ORCP ORT.P RDY SPUCL
543 21615 20793 20709 533 22890
M468
M30
ORTALV
20591
M5681 M443 M447 X260
WKHOLD ORC ORIHT SYNS.N
5268 20707 5791
M7754
C2_MD
23020
M5820 M113 F70 M5840 M6631 M981 M458
511MX C-OK ORTOVR SPMNC ILYME1 SIM-MD
4131 5539 26153 4272 2277 1138
D930 D147 R313
Ltemp0
1282 20615
INDX.P
T177 Y286
STOF.T
2269
X266 M458
ORAS.N ORT
20793
XB6 M16
FCLS.R ROBO.P
13737
T160 M468 M981 M444 M448
ORFN.T ORTALV SIM-MD ORCP
20804 20591 1138 20709
M448 Y4E7
OTA-L
20800
M448
OTA-L
20800
M443 M458
ORC ORT
20707 20793
M101 M458
RST ORT
543 20793
X266 M458 M449
ORAS.N ORT
20610 20793
M443 M448 M457
ORC OTA-L
20707 20800
M457 M458
UCPC ORT
20826 20793
T216 K1
ORAS_N
M5625 M5621 T216 M5621
ORT ORFN LPUPLT
21156 20837 20833
M5638 M5684
3m4m
4414
M484
358MX
5944
X312 X244 M5832 M54 M6450 M6451 M111 M5622
DEN3_N OP.N SWISS SS.P SSC.P SSCT.P M-MODE
4259 5341
M327
519m
17927
M305
319M
17539
SPINDLE ORIENT .
ORIENT F-INDEX .
ORIENT R-INDEX .
CALUCLATE REG.
SPINDLE ORIENT
ORIENT ARRIVAL
SPINDLE ORIENT F
ORIENT FN. CHECK
PRE-POS. DEGREE
REQUEST CALL ORT
SPINDLE UNCLAMP
ORIENT ARRIVAL
ORIENT WAIT
AUTO ORIENT CMMN
LOCK PIN UP LS T
20744
20751
20754
20755
20762
20763
20793 3925 3927 5807
20692 19706 20605 20611
20702 20728 20735 20745
20810 20808 20786 20766
28486 26139 20823 20819
28700
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
20795
20802
20807
20815
20821
20827
20828
20837 20830 21121 21194
26143
20838
20840 21031
20841
20852 20854
20800 3926 5805 19693
19707 19708 20600 20796
20802 20825 24547 28485
20801
20804 20795
20814 20698 20701 20713
20820
20826 6245 20822 24250
20833 20836 21250
20684 20688 20691 20693
20695 20697 20699 20700
20702 20703 20705 20706
20708 20709 20710 20711
20712 20713 20714 20715
20716 20717 20718 20719
20720 20721 20722 20723
20724 20725 20726 20727
20728 20729 20730 20731
20732 20733 20734 20735
20736 20737 20738 20739
20740 20741 20742 20743
20744 20745 20746 20747

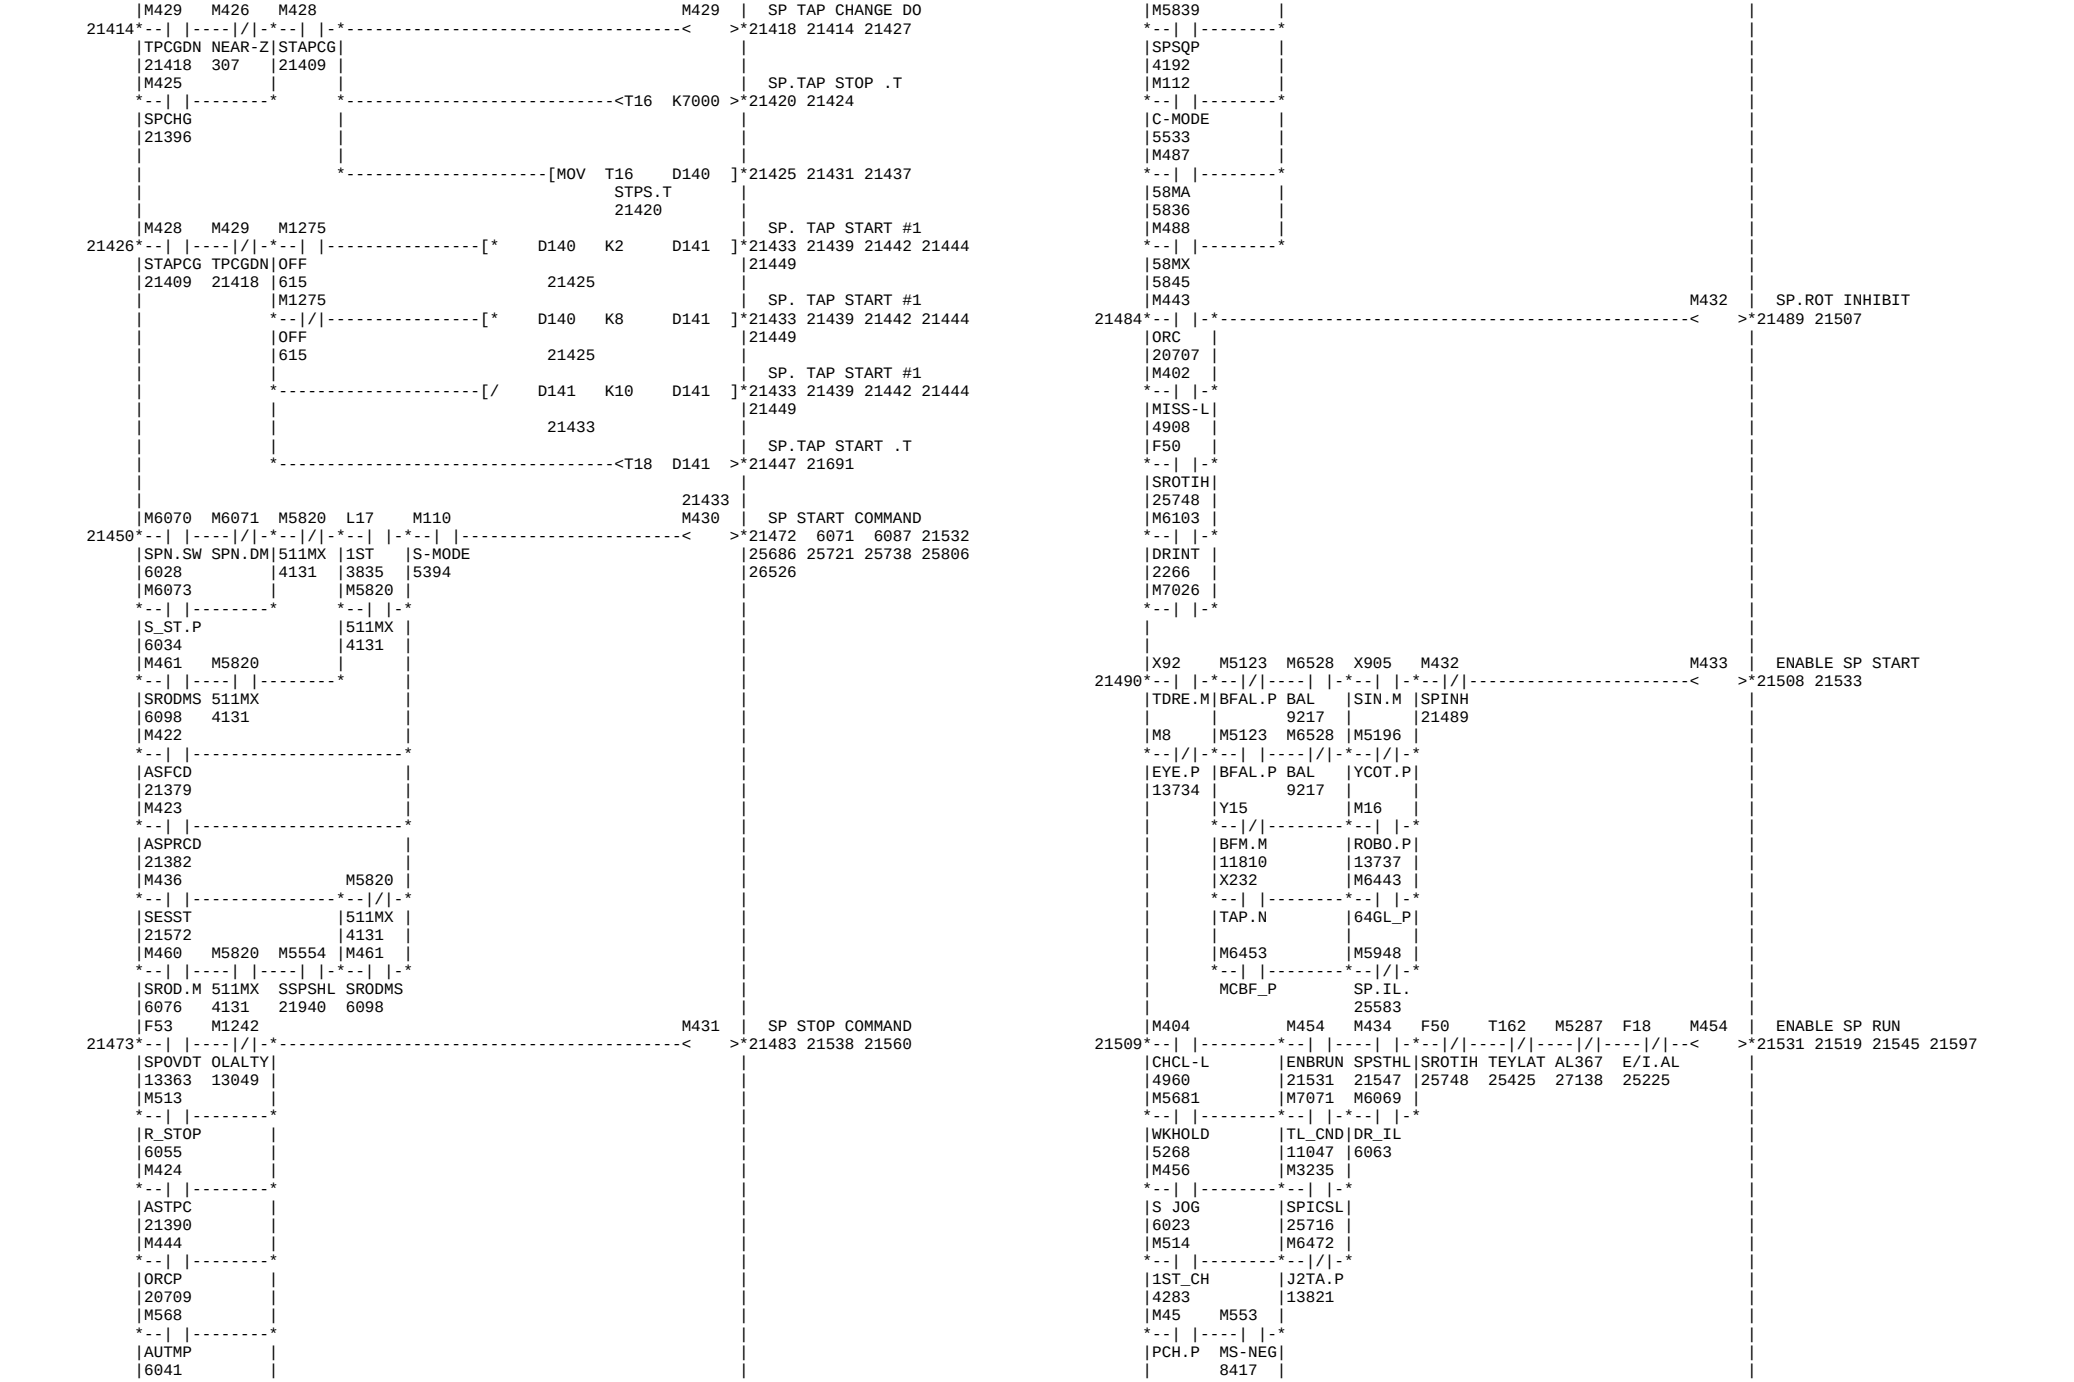

M5420
m19
16902
M327
519m
17927
M5568 M5622
20853 MOV K0 D194
OTA_L A_ORT
21197 20852
M5563 M5625
ORC ORT
21032 21156
M101
RST
543
M5567
ORIHT
21119
M5559
20863 MOV HFFFF D195
SSRR
22013
M5336 M88
20867 MOV K1 D194
316M SIMUOF
17437 15544
MOV D922 D195
R40
13509
M5337 M88
20875 MOV K2 D194
317M SIMUOF
17442 15544
D922 D923 D195
R40 R41
13509 13522
K0 D923 D922 K1200 D195
R41 R40
13522 13509
M5338 M88
20891 MOV K3 D194
318M SIMUOF
17447 15544
20862 20041 20045 20050
20065 20072 20871 20879
20895 20911 20967 20974
21030 21039 21218 21233
21236
20866 20874 20883 20890
20899 20906 20914 20970
20979 20993 21018 21020
21106 21095 21043 21023
21214
20862 20041 20045 20050
20065 20072 20871 20879
20895 20911 20967 20974
21233 21218 21039 21030
21236
20866 20874 20883 20890
20899 20906 20914 20970
20979 20993 21018 21020
21106 21095 21043 21023
21214
20866 20874 20883 20890
20899 20906 20914 20970
20979 20993 21018 21020
21106 21095 21043 21023
21214
20862 20041 20045 20050
20065 20072 20871 20879
20895 20911 20967 20974
21233 21218 21039 21030
21236
20866 20874 20883 20890
20899 20906 20914 20970
20979 20993 21018 21020
21106 21095 21043 21023
21214
20862 20041 20045 20050
20065 20072 20871 20879
20895 20911 20967 20974
21233 21218 21039 21030
21236
20866 20874 20883 20890
20899 20906 20914 20970
20979 20993 21018 21020
21106 21095 21043 21023
21214
20862 20041 20045 20050
20065 20072 20871 20879
20895 20911 20967 20974
21233 21218 21039 21030
21236
20866 20874 20883 20890
20899 20906 20914 20970
20979 20993 21018 21020
21106 21095 21043 21023
21214
M5944 M88
20907 MOV K4 D194
ORT2.R SIMUOF
24450 15544
MOV D921 D195
R39
13501
X312 M6450 M6451
C AXIS DEN PULSE
20915 PLS M5674
DEN3_N SSC.P SSCT.P
M822 L18 M5624 M5623
ORIENT Oß
20920
SSORTP 2ND 19MCD1
5776 3841 20961
X27D X275 M305
sf.N SF.N 319M
17539
M5623 M5420
19MCD m19
20934 16902
X27D M327
sf.N 519m
17927
M5623
19MCD
20934
M259 Y386 M5629 M6450 M6451 M5640
SS CLAMP
20935
20940 20955 21009
210M SS=CL SSC.P SSCT.P
16746 21158 21292
X27D M305 M54 M100 M5623 M5624
ANGLE DATA ORIEN
20941
20961 20061 20933 20943
SS.P RDY 19MCD
533 20934
20948 20971 21007 21312
X275 M5420
SF.N m19
16902
M5624
19MCD1
20961
ANGLE DATA ORIEN
20963 20976
PLS M5538

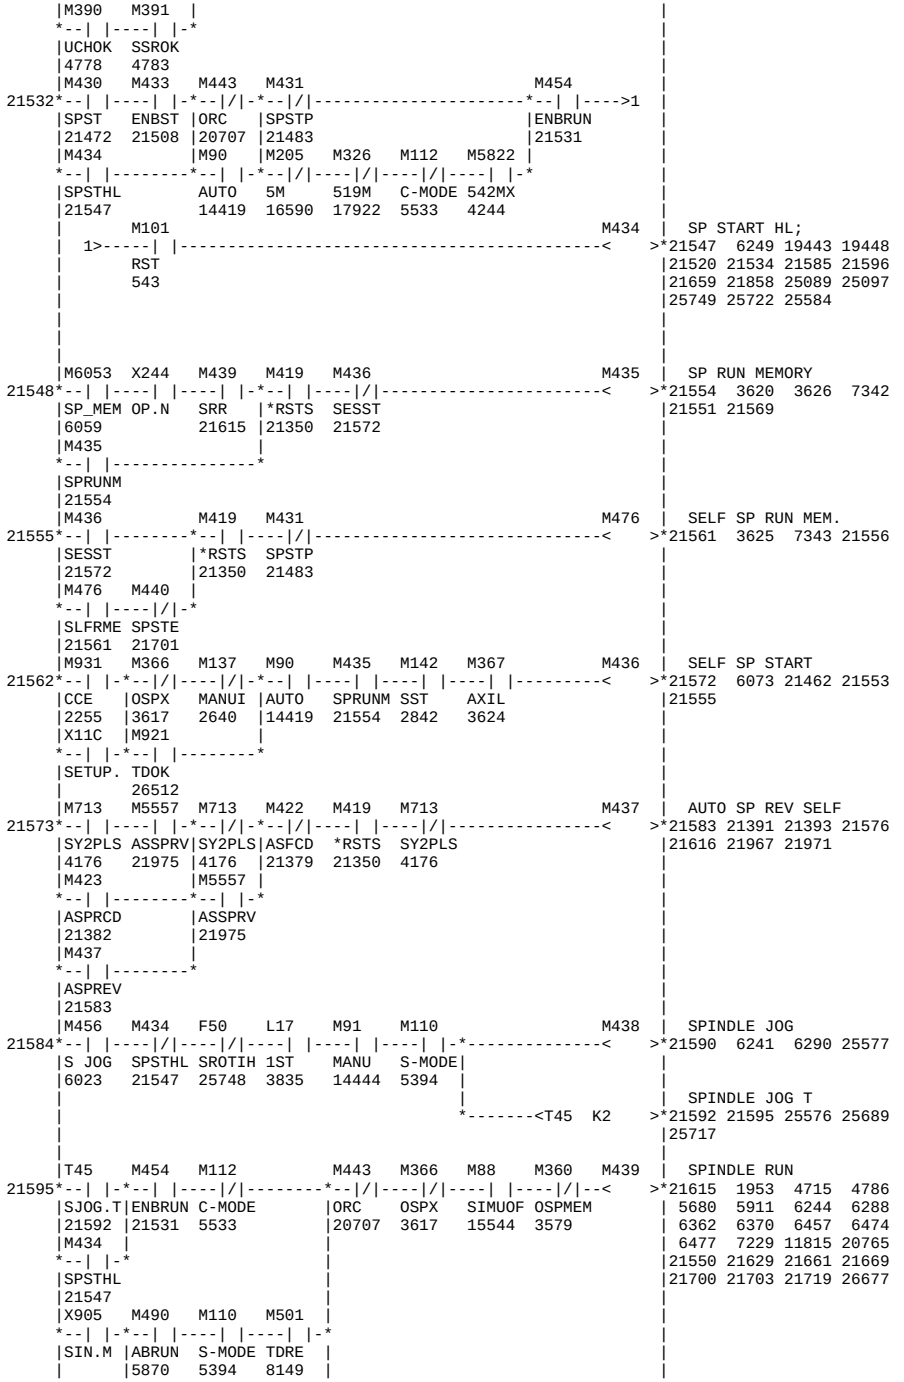

|X27D M327 |
--| |---| |-*
sf.N	519m
	17927
M5624	
*--		-*
19MCD1
20961
Y333 M5674
--|/|---| |-*
MNSY.N	C-DENP
4179	20919
M5681	M5640
--|/|---| |-*
WKHOLD	SSCLC
5268	20940
L18
--| |-
2ND
3841
M5623
20964*--| |-*----------[MOV K5 D194]*20862 20041 20045 20050
19MCD	|20065 20072 20871 20879
20934		20895 20911 20967 20974
		21233 21218 21039 21030
		21236
*----------[MOV D925 D195]*20866 20874 20883 20890
R38	20899 20906 20914 20970
13493	20979 20993 21018 21020
	21106 21095 21043 21023
	21214
M5624
20971*--| |-*----------[MOV K6 D194]*20862 20041 20045 20050
19MCD1		20065 20072 20871 20879
20961		20895 20911 20967 20974
		21233 21218 21039 21030
		21236
	M5538
*--		----------[MOV D925 D195]*20866 20874 20883 20890
	19MPLS R38	20899 20906 20914 20970
	20963 13493	20979 20993 21018 21020
		21106 21095 21043 21023
		21214
		CALUCLATE REG.
----------[MOV K3600 D930] 1282 1286 2282 2284
		2289 2291 2304 2306
		2521 2523 2526 3300
		6493 6490 3321 3306
		6505 6502 6499 6496
		6595 6589 6511 6507
		6620 6612 6608 6604
		6654 6635 6632 6626
		6675 6668 6663 6660
		9729 9726 9723 9716
		12911 12907 9735 9731
		12931 12924 12919 12916
		13463 13453 13443 12933
		13498 13490 13481 13473
		13519 13516 13514 13506
		13543 13532 13529 13527
		13575 13567 13564 13562
		13597 13595 13587 13584
		13714 13700 13649 13647
		14453 14055 14053 13717
		19071 18897 18895 14459
		19161 19153 19150 19073
		19191 19173 19171 19164
		19212 19205 19202 19194
		19243 19235 19232 19214
		19274 19256 19253 19246
		19295 19288 19285 19277
		20983 20760 20758 19298
		21105 21103 21012 20987
		23428 23422 23419 23415
		23536 23457 23446 23434
		23559 23553 23547 23544
		28766 28754 23582 23571
		28814 28802 28790 28778
		28851 28826
|X275	CAL.REG.
*--		-*----------[- D930 R45 D931]*12951 2287 12938 12943
|SF.N	Ltemp0 SCODE1 |12946 12953 13547 13606
		1282	13614 13622 13630 13638
			13682 13674 13666 13658
			20989 14460 14457 13690
			28757 21016 21014 20991
			28805 28793 28781 28769
			28836 28829 28817
	*----------[+ D931 D925 D195]*20866 20874 20883 20890
	Ltemp1 R38 |20899 20906 20914 20970
	12951 13493	20979 20993 21018 21020
		21106 21095 21043 21023
		21214
	X312 M6451 M6450 M54 M111 M6510
--|/|----|/|----|/|----| |----| |-----------< >*21003 21008
	DEN3_N SSCT.P SSC.P SS.P M-MODE	
	5341	
|M327	
*--		----------*[MOV R47 D199]*21006 21013
|519m	SCODE2
	17927	
|X27D	
*--		----------*
sf.N
M5624 M6510	CAL.REG.
21007*--| |-*--| |-*----------[- D930 D199 D931]*12951 2287 12938 12943
19MCD1|	Ltemp0 |12946 12953 13547 13606
20961	21003	1282 21006	13614 13622 13630 13638
			13682 13674 13666 13658
			20989 14460 14457 13690
			28757 21016 21014 20991
			28805 28793 28781 28769
			28836 28829 28817
|M5640	
*--		-*----------[+ D931 D925 D195]*20866 20874 20883 20890
SSCLC	Ltemp1 R38 |20899 20906 20914 20970
20940	12951 13493	20979 20993 21018 21020
		21106 21095 21043 21023
		21214
	M5684 M5563	SS ORIENT COMMAN
21019*[< D195 D196]*[< K0 D194]---|/|-*-------< >*21032 5308 5501 5587
Htmp1	Htmp0 ORWAIT		5957 20034 20053 20855
20866 21215	20862 20840		21059 21090 21134 21207
			22985 22004 21927 21878
			25697
			ORIENT COMMAND P
[> D195 D196] *[PLS M5564]*21034 21041 21055 21057
Htmp1	|21064 21066 21072 21081
20866 21215		21143 21196 21258 21315

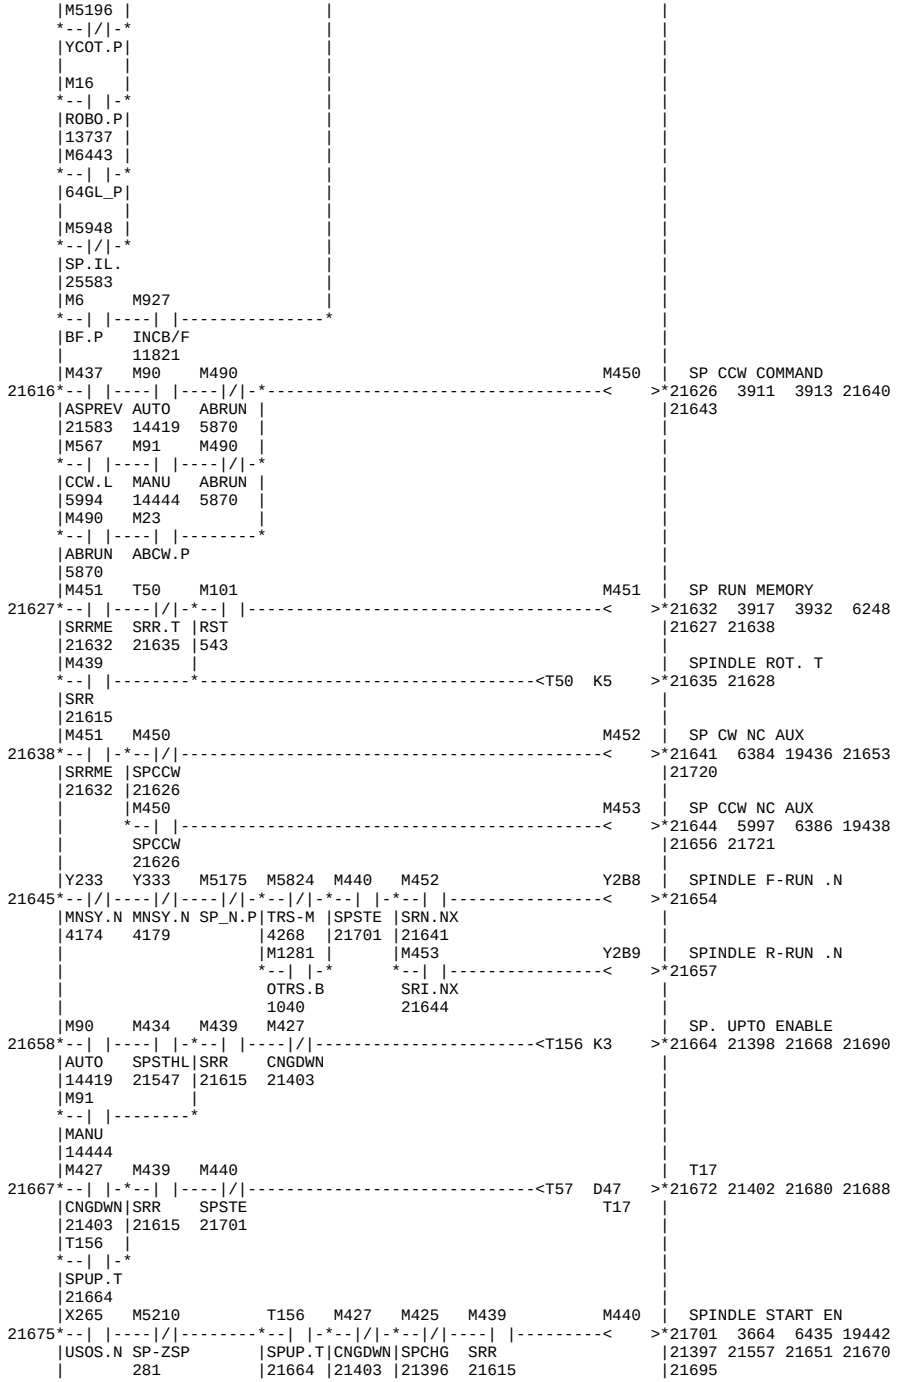

M5625 M5633
ORT OR.M
21156 21040
M5625
M5633 | ORIENT COMMAND M
K0 D194
Htmp0
20862
OR.M
21040
M5564
D195 D196 D197
Htmp1
20866 21215
M5563 M5565 | ORIENT REVERSE
K0 D197 K-1800 D197
ORCP ORC
M5625
21045 21045 21034 21032
K1800 D197
ORT
21156
M5565 M5564
ORRV ORCP
21062 21034
M5565 M5564 M5625
M5566 | ORIENT FWD. INDE
ORRV ORCP ORT
21062 21034 21156
M5566 M5564
ORFW ORCP
21069 21034
M5565 M5564
ORRV ORCP
21062 21034
M5566
ORFW
21069
T161 M5625 M5181 M5630 M5564 M5565
Y384 | ORITNT F-INDEX _
INDX.T ORT SPIC.P SS=UCL ORCP ORRV
21074 21156 21300 21034 21062
M5566
Y385 | ORIENT R-INDEX _
ORFW
21069
M5565
M1345 | ORIENT DIRECTION
ORRV
21062
M5563 M6450 M6451
ORC SSC.P SSCT.P
Htmp1
20866
M6450 | CALUCLATE REG.
MOV K3600 D930
SSC.P
21864
21084
21087
21089
21096 21107
1282 1286 2282 2284
2289 2291 2304 2306
2521 2523 2526 3300
6493 6490 3321 3306
6505 6502 6499 6496
6595 6589 6511 6507
6620 6612 6608 6604
6654 6635 6632 6626
6675 6668 6663 6660
9729 9726 9723 9716
12911 12907 9735 9731
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
21040 20036 21026 21036
21045 21048 21051 21054
21062 21056 21063 21070
21083 21088
21069 21065 21071 21086
21074 21077
21085
21119 20859 21135
21158 6279 20936 21335
21166 26141
21171 21173 21175 21178
M6451
SSCT.P
D930 D195 R363
Ltemp0 Htmp1
1282 20866
M931 F50 M5559 M5638 M309 M5820
M5567 | ORIENT INHIBIT
CCE SROTIH SSRR 3m4m 358M 511MX
2255 25748 22013 4414 17660 4131
M6048 M6450
LOW_OK SSC.P
2557
M6049 M6451
B_STOK SSCT.P
2561
M101 T193 M6631 M5559 M5625 M5820 M7256 M7257
RST ORFN_T ILYME1 SSRR ORT 511MX 203MM 204MM
543 21199 2277 22013 21156 4131 6809 6817
M5621 X366 T177
M6407
ORFN ORAS_N STOF.T
SPJ.P
20837 2269
M5681 M5208 M5563 M5567 X360 M5630
WKHOLD SS-MOD ORC ORIHT SYNC_N SS=UCL
5268 5662 21032 21119 21300
M112
C-MODE
5533
M5564 M100 M5840 M7754 M5629 M6451 M6450 M5625 | SS ORIENT
1>
ORCP RDY SPMNC C2_MD SS=CL SSCT.P SSC.P
21034 533 4272 23020 21292
M7781 M6450
SSPUCL SSC.P
23262
M6451
SSCT.P
M5632
Y386 | SPINDLE ORIENT _
2>
ORT_DL
21181
X3C1 M5625 M5208 M5632 M5679
M6724
ORDT_N ORT SS-MOD ORT_DL RE-ORT
21156 5662 21181 21186
M5632
MOV R13 D198
ORT_DL
21181
21108 21120 21159
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
21096 21107
21120
21156 3648 3928 3930
5588 5811 20033 20054
20829 20856 21025 21035
21060 21068 21078 21129
21161 21208 21211 21220
21307 21317 21323 28577
28732
21158 6279 20936 21335
21166 26141
21171 21173 21175 21178

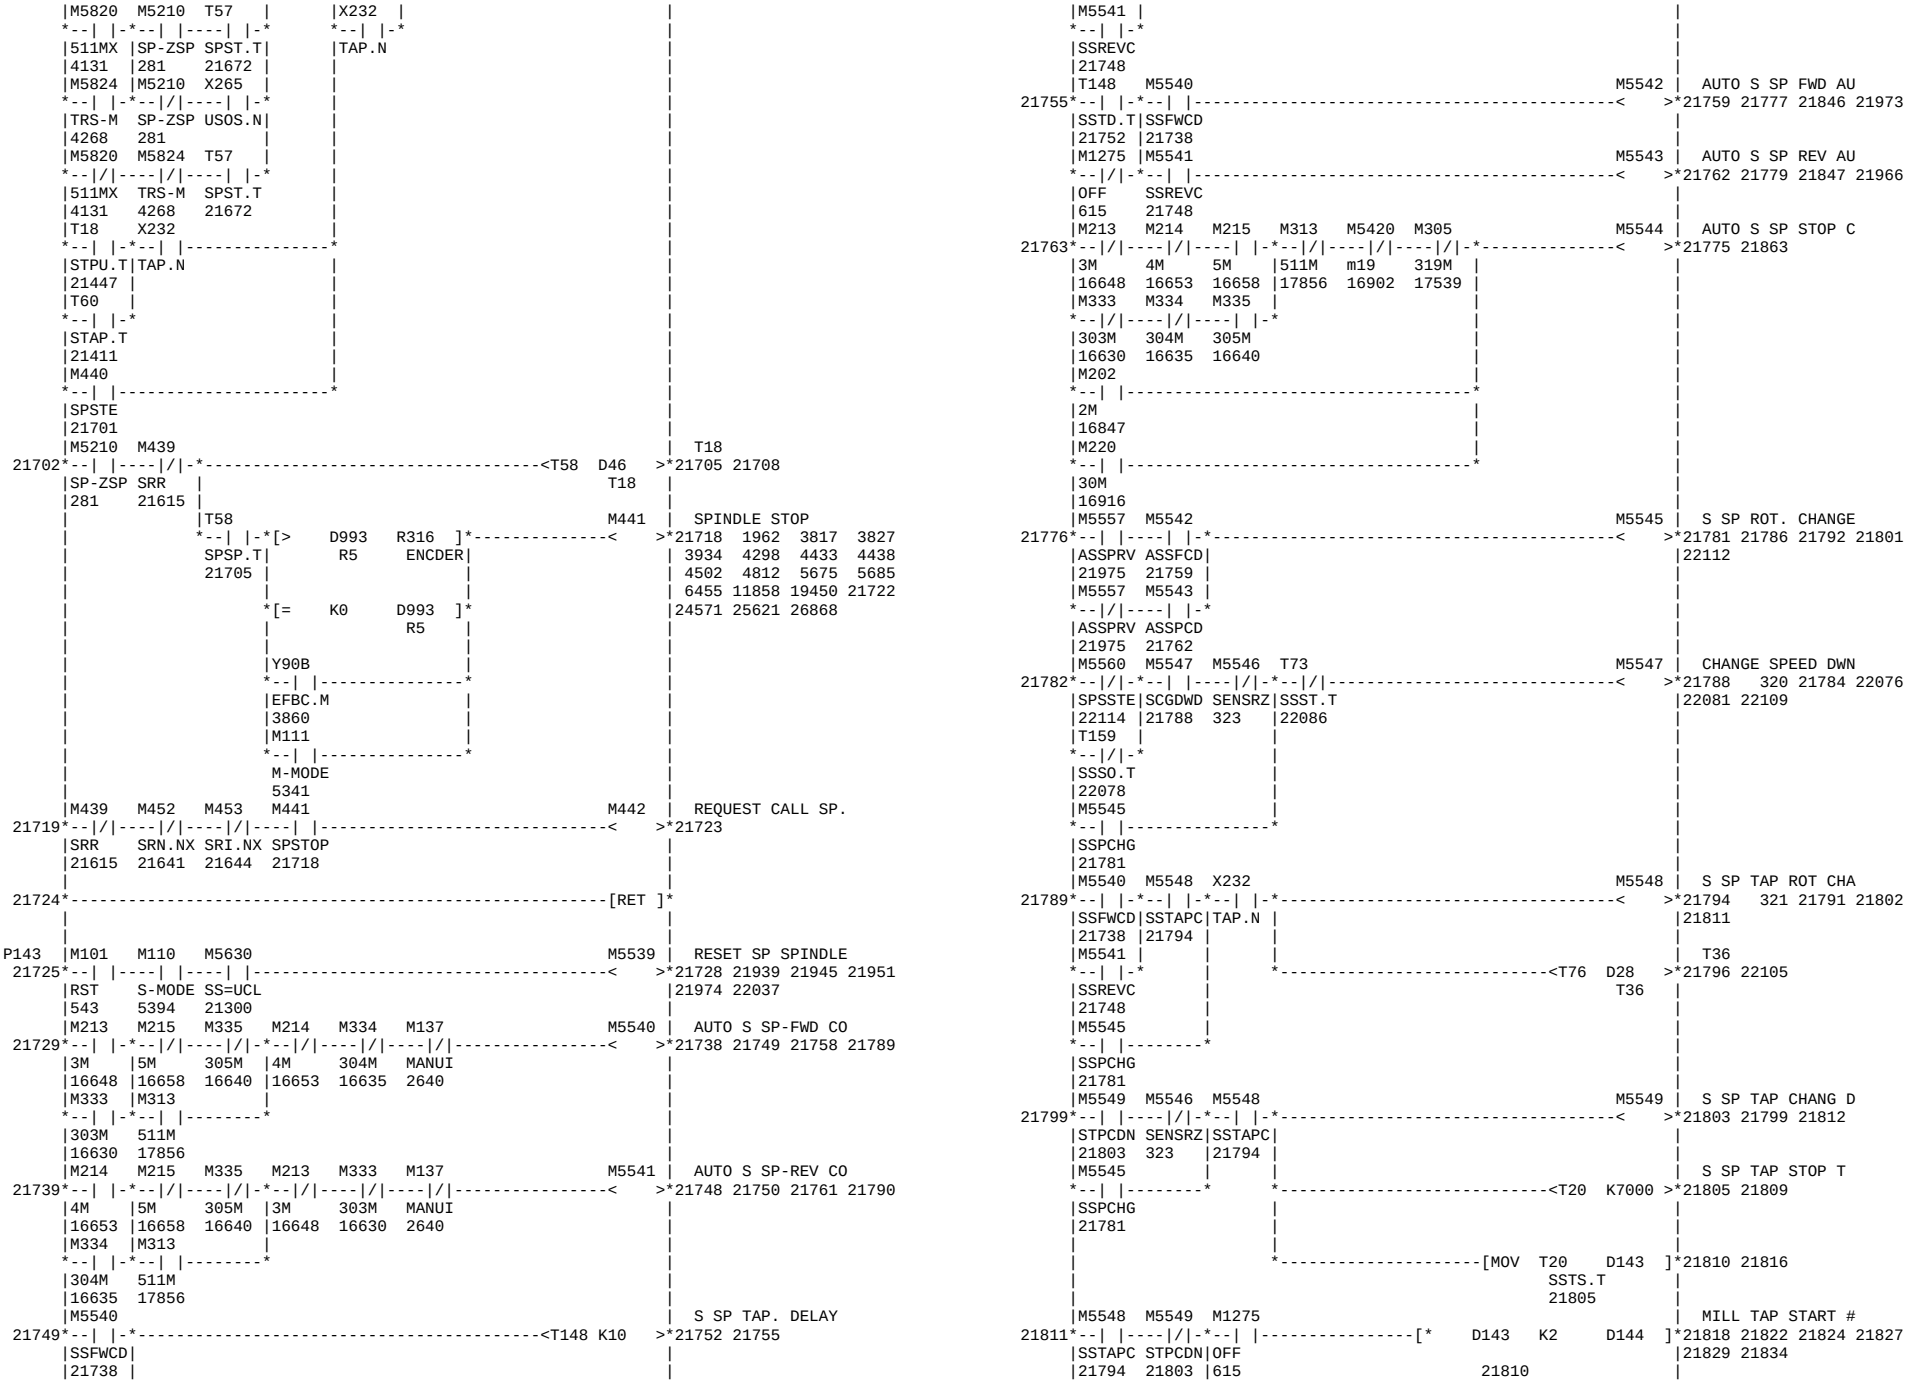

*--------------------[NEG D198]*21171 21173 21175 21178
*--------------------[INC D198]*21171 21173 21175 21178
M6401 K3 | FEEDER ROD FORWA
*--|/|---------[MOV D198 M1326]*11897 21179
BARS.P
21171
M5632 | ORIENT OUTPUT DL
*----------<> >*21181 21157 21160 21164
21168 21336
M263 M5568 X366 | RE-ORIENT
*--| |----| |----|/|---------[PLS M5679]*21186 21165
210M OTA_L ORAS_N
16668 21197
M5568 M5626 M5628 Y4FE | SS ORIENT FINISH
21187*--| |----|/|----|/|-*----------<> >*21191 24577
OTA_L SS_CL SSCL.M
21197 21257 21288
M5629
--| |---------------
SS=CL
21292
T215 M5621 M981 M5564 M5568 | ORIENT ARRIVAL
21192*--| |-*--| |----|/|----|/|-*----------<> >*21197 3649 3929 5809
ORFN.T ORFN SIM-MD ORCP 20031 20055 20853 21183
21204 20837 1138 21034 21187 21193 21202 21219
28576 26142 21248
M5568 | SS ORIENT FIN.
--| |- *----------<T193 K30 >*21199 21122
OTA_L
21197
M5568 | ORIENT FIN CHECK
21202*--|/|----------<T215 K2 >*21204 21192
OTA_L
21197
M5563 M5625 M5208
21207*--| |----| |----| |-*----------[MOV D195 D196]*21215 21021 21024 21044
ORC ORT SS-MOD| Htmp1
21032 21156 5662 | 20866
M101 M5625 |
--|/|----|/|--------
RST ORT
543 21156
M5568 M5625 M5569 | REQUEST CALL ORT
21216*[= K0 D194]---|/|----|/|----------<> >*21221
Htmp0 OTA_L ORT
20862 21197 21156
X119 | P.LOCK SW. ON PL
21222*--|/|-*----------[PLS M5891]*21224 21251
LOCK.B|
| P.LOCK SW. OFF P
*----------[PLF M5892]*21226 21275
X312 X244 M54 M111 M5568 X366 T216 M6450
21227*--|/|----| |----| |----| |-*--| |----| |----| |-*--|/|---->1
DEN3_N OP.N SS.P M-MODE|OTA_L ORAS_N LPUPLT|SSC.P
5341 |21197 20833 |
M111 | |
[= K7 D194]--| |-* |
Htmp0 |M-MODE| |
20862 |5341 | |
| | |
[= K6 D194] | |
Htmp0 | | |
20862 | | |
M327 | | |
--| |--------------- | |
519m | | |
17927 | | |
M259 L18 | | |
--| |----| |-------- | |
210M 2ND | | |
16746 3841 | | |
M6962 L18 M91 | | |
--| |----| |----| |-------- | |
M-MENU 2ND MANU | | |
15124 3841 14444 | | |
M5682 | | |
--| |---------- | |
360MX | |
3794 | |
M5891 Y143 M1045 | |
--| |----| |----| |---------- |
LK.ONP MDI.L |
21224 14343 8436 |
M6451 M5626 | SS CLAMP COMMAND
1>-----|/|----------<> >*21257 21188 21285
SSCT.P
M5564 M6450 M6451 M5627 | SS UNCLAMP COMMA
21258*--| |---------------*--|/|----|/|----------<> >*21284 21287
ORCP SSC.P SSCT.P
21034
M260
--| |---------------
212M
16771
M5824 M5681
--| |---| |--------*
TRS-M WKHOLD
4268 5268
M712 |
--| |-
SY1PLS|
4181 |
M407 |
--| |-
C-CEL
5477
F30 M5605
--| |----| |--------
1DLSAL MLSTOP
25398 22461
M5550
--| |---------------
SSPST
21860
M485
--| |---------------
SABON
5973
M5558
--| |---------------
SSJOG
21983
M6965 L18 M91
--| |----| |----| |-
M-MENU 2ND MANU
15140 3841 14444
M5892 Y143 M1045
--| |----| |----| |-
LK.OFP MDI.L
21226 14343 8436
L18 M212
--| |----| |--------
2ND 202M
3841 17305
M5626 M5627 M5628 | SS CLAMP SOL.
21285*--| |-*--|/|----------<> >*21288 3644 21189 21286
SS_CL |SS_UCL 21289 21293
21257 |21284

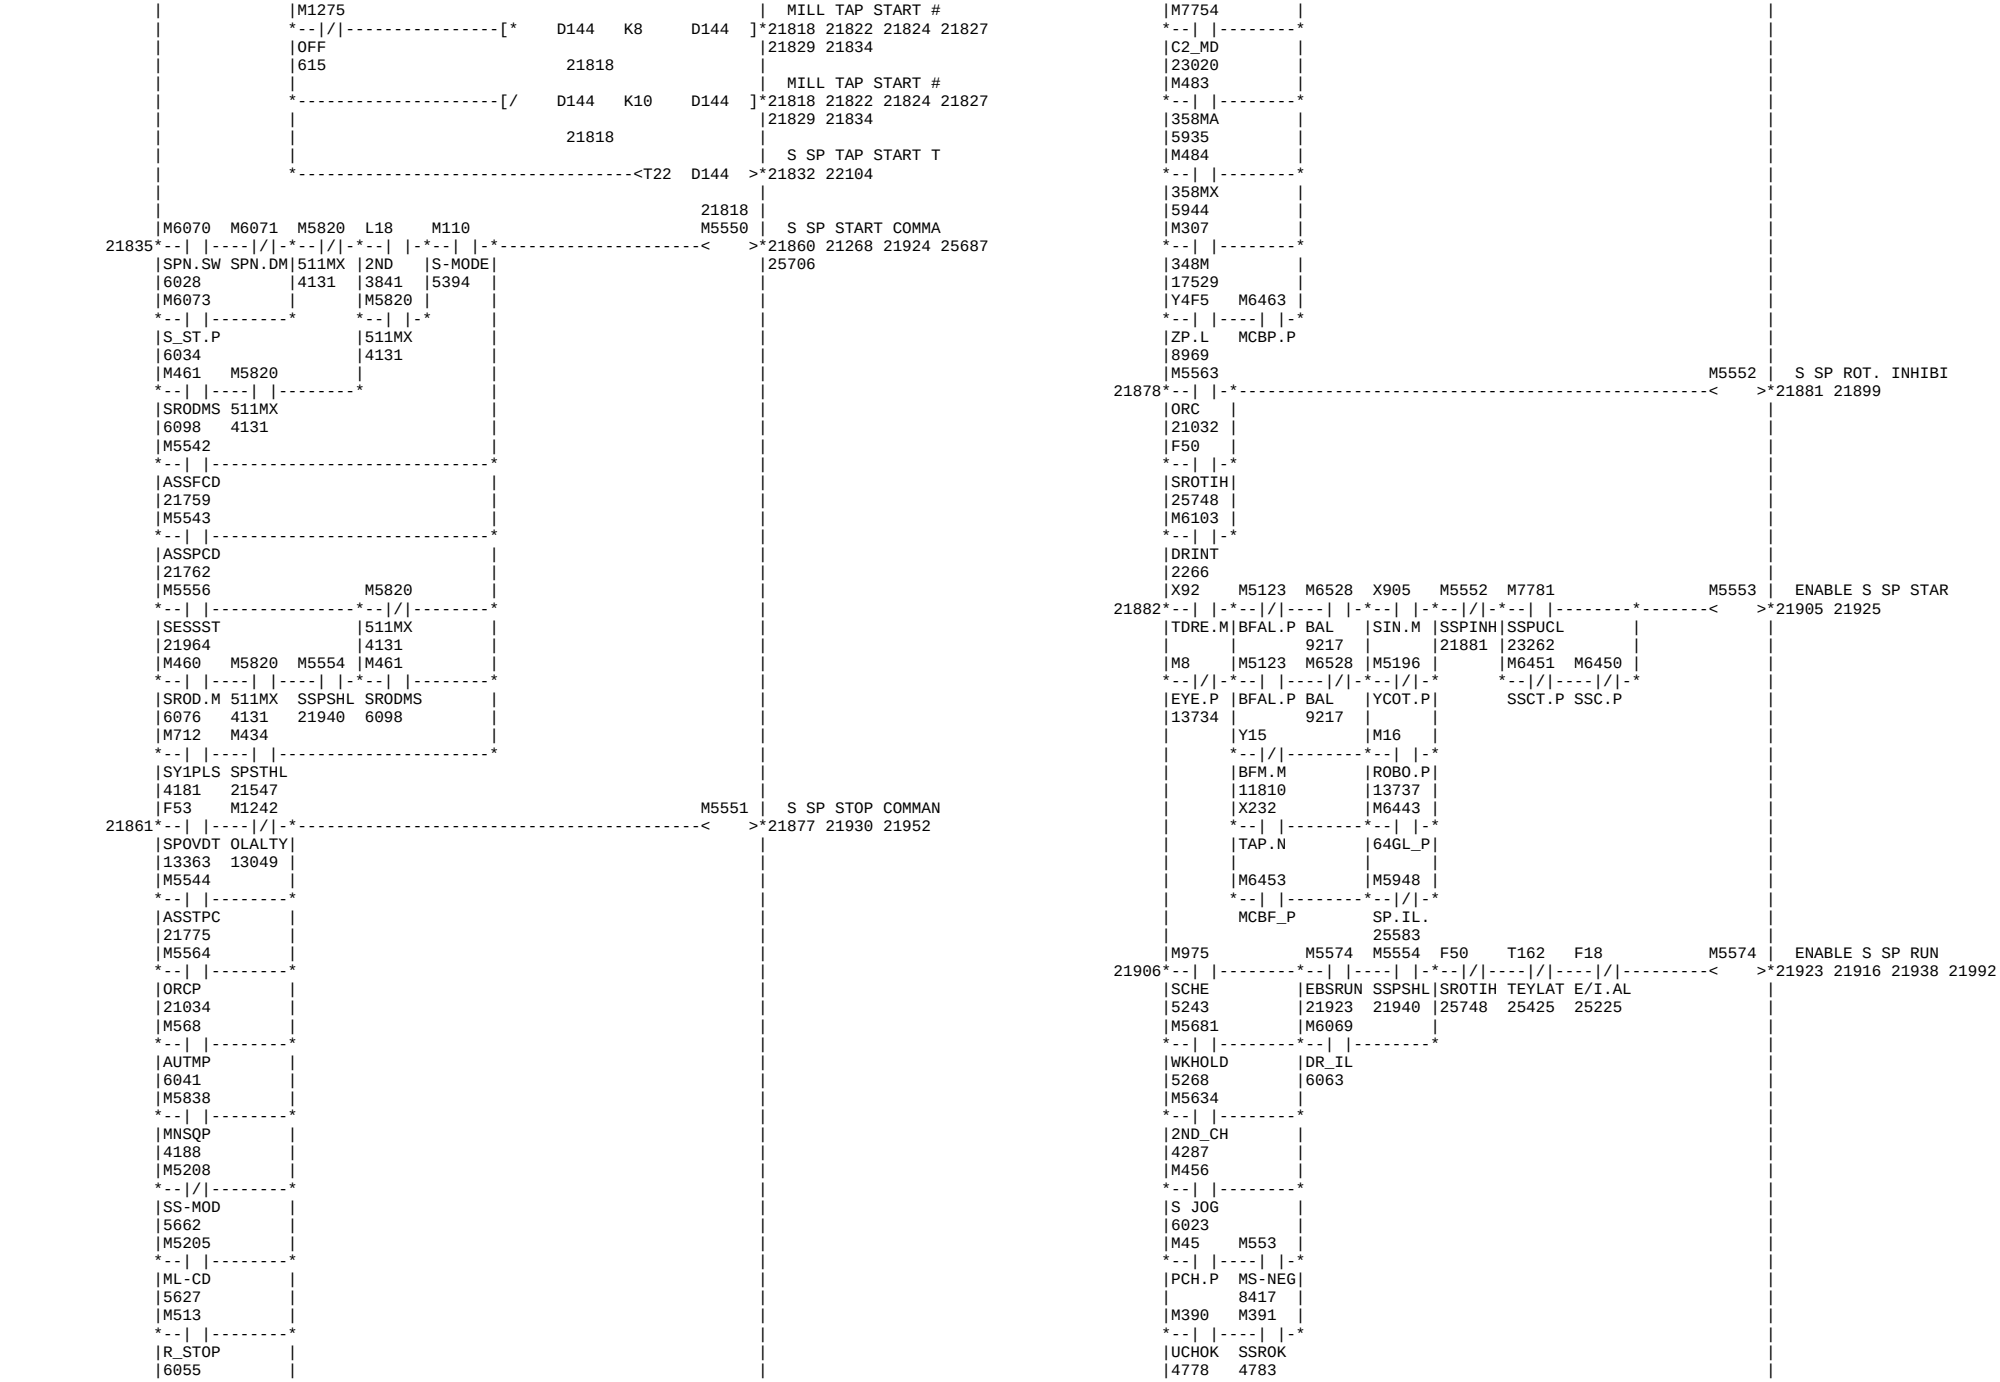

|M5628 |
--| |-
|SSCL.M
|21288
|M5628 X90E X90D M5629 | SS CLAMP
21289*--| |----|/|----| |-----------------------------------< >*21292 1599 3645 5366
|SSCL.M TBF2LS TBF.LS | 5619 19589 20035 20937
|21288 |21147 21190 21321 21328
|M5628 X90E X90D M5630 | SS UNCLAMP
21293*--|/|----| |----|/|-*-----------------------------------< >*21300 1581 5324 5383
|SSCL.M TBF2LS TBF.LS| | 5518 19591 21080 21137
|21288 | |21727 23002
|M54 |
--|/|---------------
|SS.P |
| |
|M48 |
--|/|---------------
|MILL.P |
|13750 |
|M6450 |
--| |---------------
|SSC.P |
| |
|M6451 |
--| |---------------
|SSCT.P
|
|M5631 M111 L18 M5664 M5513 | SS ORIENT OFF
21301*--| |-*--| |----| |----|/|-----------------------------< >*21306 21302 21313
|OROFM |M-MODE 2ND MLSTAT
|21316 |5341 3841 22216
|M5513 |
--| |-
|SSOROF
|21306
|M5625 M54 X312 M5564 M5631 | ORIENT OFF MEMOR
21307*--|/|-*--| |----|/|-*--|/|-*---------------------------< >*21316 19585 21301 21309
|ORT |SS.P DEN3_N|ORCP |
|21156 | |21034 |
|M5678 |M5624 | |M5625 M5675 | ORIENT OFF MEMOR
--| |---| |--------* *--| |-*---------------------< >*21320 21318
|C-OROF|19MCD1 | |ORT |
|21324 |20961 | |21156 |
|M5631 |M5513 | |M5675 |M5629 M5662 | MILL RESTART OK
--| |---| |--------* *--| |-*--| |----------------< >*21322 5623 21332 22212
|OROFM SSOROF SOROF2 SS=CL
|21316 21306 21320 21292
|M5625 M5678 | C ORIENT OFF
21323*--|/|---< >*21324 21308
|ORT
|21156
|M5604 M5229 M5629 M5209 M5662 X312 Y3C0 | C AXIS ORIENT FN
21325*--| |----| |-*--| |-*--| |----| |----|/|-*-------------< >*21344
|MLSTE M_US |SS=CL |ML-MOD ML-RT DEN3_N|
|22449 295 |21292 |5673 21322 |
|M5663 |M111 | Y2C1 | ORIENT FIN.NC
--|/|----------|/|-* *--------------< >*21345
|MLRMEM M-MODE |
|22211 5341 |
|X3C1 Y386 M5632 X312 |
--| |----|/|----| |----| |---------------
|ORDT_N ORT_DL DEN3_N |
| 21158 21181 |
|X312 L18 Y333 M5681 |
--|/|----|/|----| |----| |---------------
|DEN3_N 2ND MNSY.N WKHOLD
| 3841 4179 5268
|
21346*---[RET]*
|
|
P142 |M101 M110 M109 M419 | RESET SPINDLE
21347*--| |----| |----| |-----------------------------------< >*21350 21552 21559 21581
|RST S-MODE SPUCL
|543 5394 22890
|M461 M203 M204 M205 M137 M420 | AUTO SP FWD COM
21351*--| |-*--| |----|/|-*--|/|-*--|/|-----------------------< >*21359 21369 21378 21404
|SRODMS|3M 4M |5M |MANUI
|6098 |16580 16585 |16590 |2640
|M5820 | |M313 |
--|/|- *--| |-*
|511MX 511M
|4131 17856
|M461 M203 M204 M205 M137 M421 | AUTO SP REV COM
21360*--| |-*--|/|----| |-*--|/|-*--|/|-----------------------< >*21368 21370 21381 21405
|SRODMS|3M 4M |5M |MANUI
|6098 |16580 16585 |16590 |2640
|M5820 | |M313 |
--|/|- *--| |-*
|511MX 511M
|4131 17856
|M420 | SP. TAPPER DELAY
21369*--| |-*---<T146 K10 >*21372 21375
|SFWDC |
|21359 |
|M421 |
--| |-
|SREVC
|21368
|T146 M420 M422 | AUTO SP FWD AUX
21375*--| |-*--| |---< >*21379 21392 21460 21580
|STPD.T|SFWDC
|21372 |21359
|M1275 |M421 M423 | AUTO SP REV AUX
--|/|---| |---< >*21382 21394 21461 21575
|OFF SREVC
|615 21368
|M203 M204 M205 M313 M219 M424 | AUTO SP STOP COM
21383*--|/|----|/|----| |----|/|----|/|-*-------------------< >*21390 21476
|3M 4M 5M 511M 19M |
|16580 16585 16590 17856 16897 |
|M202 |
--| |-----------------------------
|2M |
|16847 |
|M220 |
--| |-----------------------------
|30M
|16916
|M437 M422 M425 | SP ROTATION CHAN
21391*--| |----| |-*---< >*21396 21401 21407 21416
|ASPREV ASFCD | |21699
|21583 21379 |
|M437 M423 |
--|/|----| |-
|ASPREV ASPRCD
|21583 21382
|M440 M427 M426 T57 M427 | CHANGE SPEED DOW
21397*--|/|-*--| |----|/|-*--|/|-----------------------------< >*21403 304 21399 21662
|SPSTE |CNGDWN NEAR-Z|SPST.T |21667 21696
|21701 |21403 307 |21672 |
|T156 | | |
--|/|- |
|SPUP.T |
|21664 |
|M425 |
--| |---------------
|SPCHG
|21396
|M420 M428 X232 M428 | SP TAP ROT CHANG
21404*--| |-*--| |-*--| |-*-----------------------------------< >*21409 305 21406 21417
|SFWDC |STAPCG|TAP.N | |21426
|21359 |21409 | | |
|M421 | | | | T20
--| |- | *----------------------------<T60 D44 >*21411 21692
SREVC	T20
21368	
M425	
--| |--------
SPCHG
21396

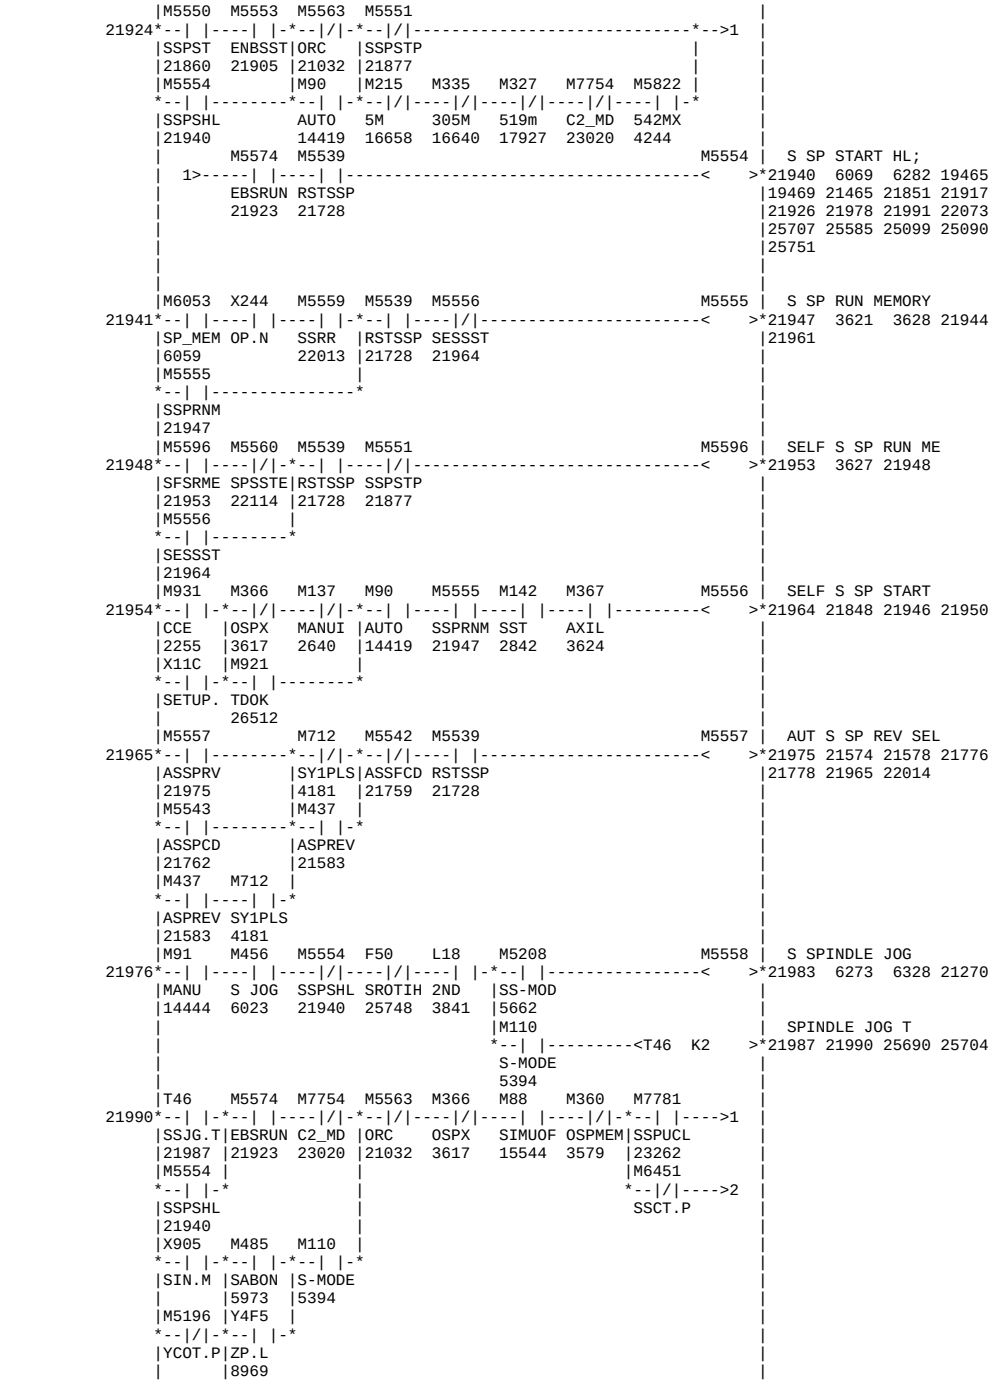

M429 M426 M428 M429 | SP TAP CHANGE DO
21414 21418 21414 21427
TPCGDN NEAR-Z STAPCG
21418 307 21409
M425 SP.TAP STOP .T
SPCHG T16 K7000 21420 21424
21396
MOV T16 D140 21425 21431 21437
STPS.T
21420
M428 M429 M1275 SP. TAP START #1
21426 D140 K2 D141 21433 21439 21442 21444
STAPCG TPCGDN OFF 21449
21409 21418 615 21425
M1275 SP. TAP START #1
D140 K8 D141 21433 21439 21442 21444
OFF 21449
615 21425
SP. TAP START #1
D141 K10 D141 21433 21439 21442 21444
21449
21433
SP.TAP START .T
T18 D141 21447 21691
21433
M6070 M6071 M5820 L17 M110 M430 | SP START COMMAND
21450 21472 6071 6087 21532
SPN.SW SPN.DM 511MX 1ST S-MODE 25686 25721 25738 25806
6028 4131 3835 5394 26526
M6073 M5820
S_ST.P 511MX
6034 4131
M461 M5820
SRODMS 511MX
6098 4131
M422
ASFCD
21379
M423
ASPRCD
21382
M436 M5820
SESST 511MX
21572 4131
M460 M5820 M5554 M461
SROD.M 511MX SSPSHL SRODMS
6076 4131 21940 6098
F53 M1242 M431 | SP STOP COMMAND
21473 21483 21538 21560
SPOVDT OLALTY
13363 13049
M513
R_STOP
6055
M424
ASTPC
21390
M444
ORCP
20709
M568
AUTMP
6041
M5839
SPSQP
4192
M112 SP.TAP STOP .T
21420 21424
C-MODE
5533
M487
58MA
5836
M488
21433 21439 21442 21444
58MX
5845
M443 M432 | SP.ROT INHIBIT
21484 21489 21507
ORC
20707
M402
MISS-L
4908
F50
SROTIH
25748
M6103
DRINT
2266
M7026
X92 M5123 M6528 X905 M432 M433 | ENABLE SP START
21490 21508 21533
TDRE.M BFAL.P BAL SIN.M SPINH
9217 21489
M8 M5123 M6528 M5196
EYE.P BFAL.P BAL YCOT.P
13734 9217
Y15 M16
BFM.M ROBO.P
11810 13737
X232 M6443
TAP.N 64GL_P
M6453 M5948
MCBF_P SP.IL.
25583
M404 M454 M434 F50 T162 M5287 F18 M454 | ENABLE SP RUN
21509 21531 21519 21545 21597
CHCL-L ENBRUN SPSTHL SROTIH TEYLAT AL367 E/I.AL
4960 21531 21547 25748 25425 27138 25225
M5681 M7071 M6069
WKHOLD TL_CND DR_IL
5268 11047 6063
M456 M3235
S JOG SPICSL
6023 25716
M514 M6472
1ST_CH J2TA.P
4283 13821
M45 M553
PCH.P MS-NEG
8417

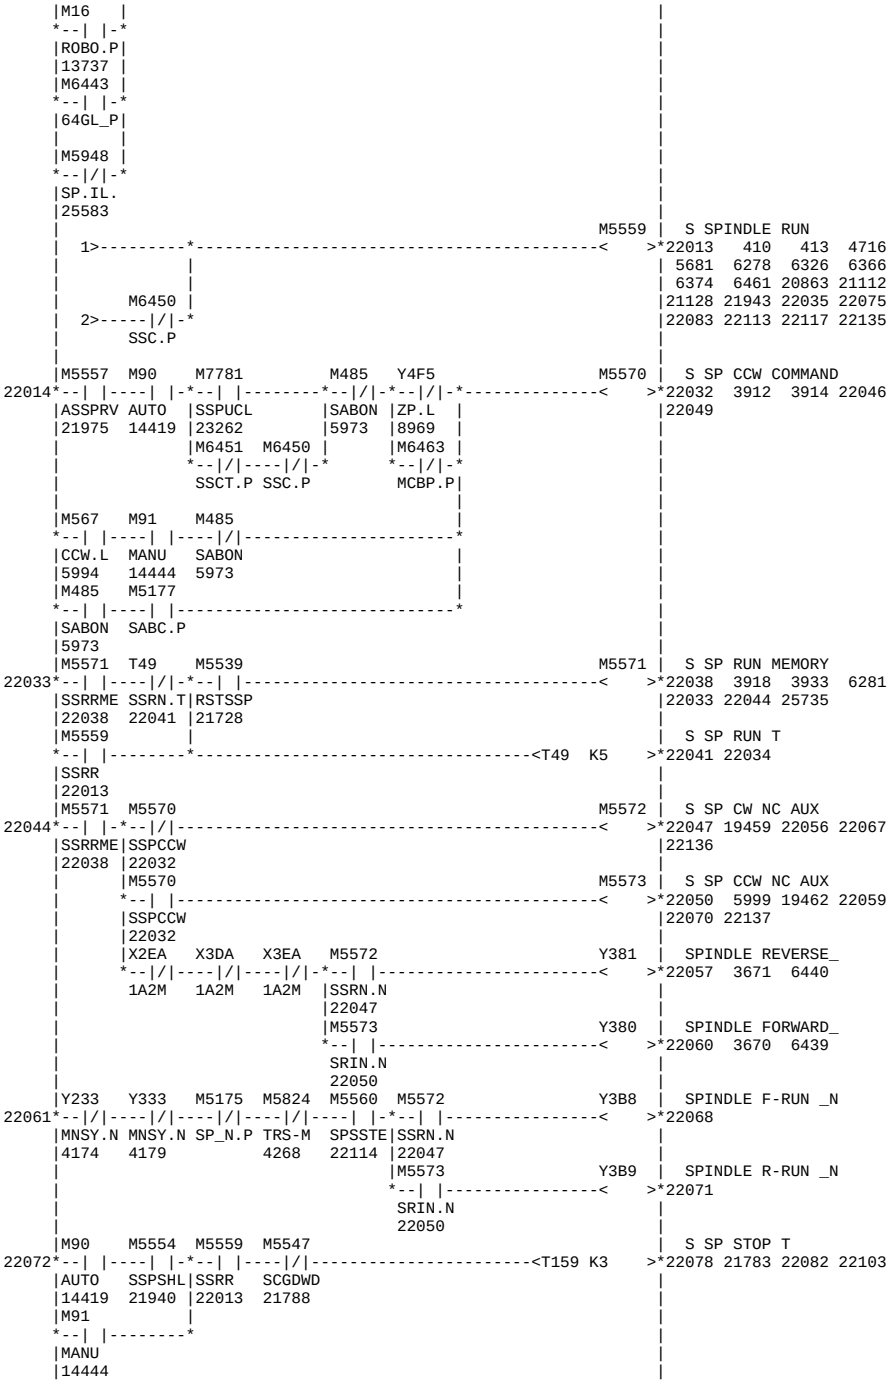

M390 M391
UCHOK SSROK
4778 4783
M430 M433 M443 M431 M454
SPST ENBST ORC SPSTP ENBRUN
21472 21508 20707 21483 21531
M434 M90 M205 M326 M112 M5822
SPSTHL AUTO 5M 519M C-MODE 542MX
21547 14419 16590 17922 5533 4244
M101 M434 SP START HL;
1> RST 543
M6053 X244 M439 M419 M436 M435 SP RUN MEMORY
SP_MEM OP.N SRR *RSTS SESST
6059 21615 21350 21572
M435
SPRUNM
21554
M436 M419 M431 M476 SELF SP RUN MEM.
SESST *RSTS SPSTP
21572 21350 21483
M476 M440
SLFRME SPSTE
21561 21701
M931 M366 M137 M90 M435 M142 M367 M436 SELF SP START
CCE OSPX MANUI AUTO SPRUNM SST AXIL
2255 3617 2640 14419 21554 2842 3624
X11C M921
SETUP. TDOK
26512
M713 M5557 M713 M422 M419 M713 M437 AUTO SP REV SELF
SY2PLS ASSPRV SY2PLS ASFCD *RSTS SY2PLS
4176 21975 4176 21379 21350 4176
M423 M5557
ASPRCD ASSPRV
21382 21975
M437
ASPREV
21583
M456 M434 F50 L17 M91 M110 M438 SPINDLE JOG
S JOG SPSTHL SROTIH 1ST MANU S-MODE
6023 21547 25748 3835 14444 5394
SPINDLE JOG T
T45 M454 M112 M443 M366 M88 M360 M439 SPINDLE RUN
SJOG.T ENBRUN C-MODE ORC OSPX SIMUOF OSPMEM
21592 21531 5533 20707 3617 15544 3579
M434
SPSTHL
21547
X905 M490 M110 M501
SIN.M ABRUN S-MODE TDRE
5870 5394 8149
T45 K2
21584 21590 6241 6290 25577
21592 21595 25576 25689 25717
21595 21615 1953 4715 4786 5680 5911 6244 6288 6362 6370 6457 6474 6477 7229 11815 20765 21550 21629 21661 21669 21700 21703 21719 26677
21548 21554 3620 3626 7342 21551 21569
21555
21558 21562 6073 21462 21553 21572
21573 21576 21583 21391 21393 21616 21967 21971
21584 21590 6241 6290 25577
21598 21615 1953 4715 4786 5680 5911 6244 6288 6362 6370 6457 6474 6477 7229 11815 20765 21550 21629 21661 21669 21700 21703 21719 26677
21532 21539 21547 6249 19443 19448 21520 21534 21585 21596 21659 21858 25089 25097 25749 25722 25584
21548 21554 3620 3626 7342 21551 21569
21555 21558 6073 21462 21553 21572
21562 21565 21575 21579 21583 21391 21393 21616 21967 21971
21573 21576
21584 21590 6241 6290 25577
21592 21595 25576 25689 25717
21595 21598 21615 1953 4715 4786 5680 5911 6244 6288 6362 6370 6457 6474 6477 7229 11815 20765 21550 21629 21661 21669 21700 21703 21719 26677

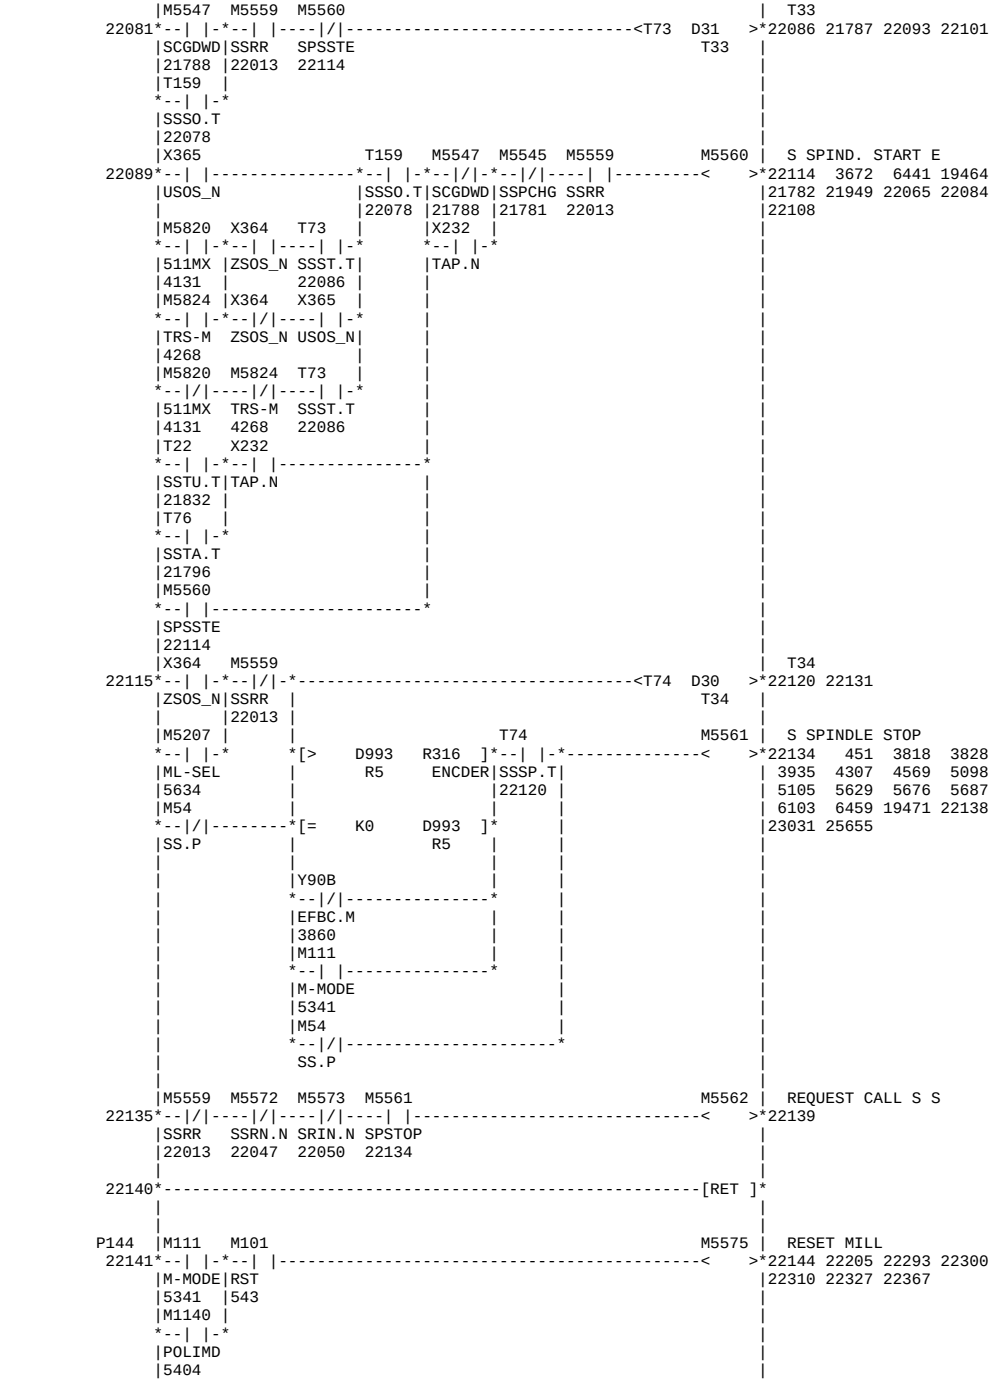

M5196
YCOT.P
M16
ROBO.P
13737
M6443
64GL_P
M5948
SP.IL.
25583
M6 M927
BF.P INCB/F
11821
M437 M90 M490 M450 SP CCW COMMAND
ASPREV AUTO ABRUN
21583 14419 5870
M567 M91 M490
CCW.L MANU ABRUN
5994 14444 5870
M490 M23
ABRUN ABCW.P
5870
M451 T50 M101 M451 SP RUN MEMORY
SRRME SRR.T RST
21632 21635 543
M439 SPINDLE ROT. T
SRR
21615
M451 M450 M452 SP CW NC AUX
SRRME SPCCW
21632 21626
M450 M453 SP CCW NC AUX
SPCCW
21626
Y233 Y333 M5175 M5824 M440 M452 Y2B8 SPINDLE F-RUN .N
MNSY.N MNSY.N SP_N.P TRS-M SPSTE SRN.NX
4174 4179 4268 21701 21641
M1281 M453 Y2B9 SPINDLE R-RUN .N
OTRS.B SRI.NX
1040 21644
M90 M434 M439 M427 SP. UPTO ENABLE
AUTO SPSTHL SRR CNGDWN
14419 21547 21615 21403
M91
MANU
14444
M427 M439 M440 T17
CNGDWN SRR SPSTE T17
21403 21615 21701
T156
SPUP.T
21664
X265 M5210 T156 M427 M425 M439 M440 SPINDLE START EN
USOS.N SP-ZSP SPUP.T CNGDWN SPCHG SRR
281 21664 21403 21396 21615
T50 K5
T156 K3
T57 D47
21616 21626 3911 3913 21640 21643
21627 21632 3917 3932 6248 21627 21638
21635 21628
21638 21641 6384 19436 21653 21720
21645 21654
21658 21664 21398 21668 21690
21667 21672 21402 21680 21688
21675 21701 3664 6435 19442 21397 21557 21651 21670 21695

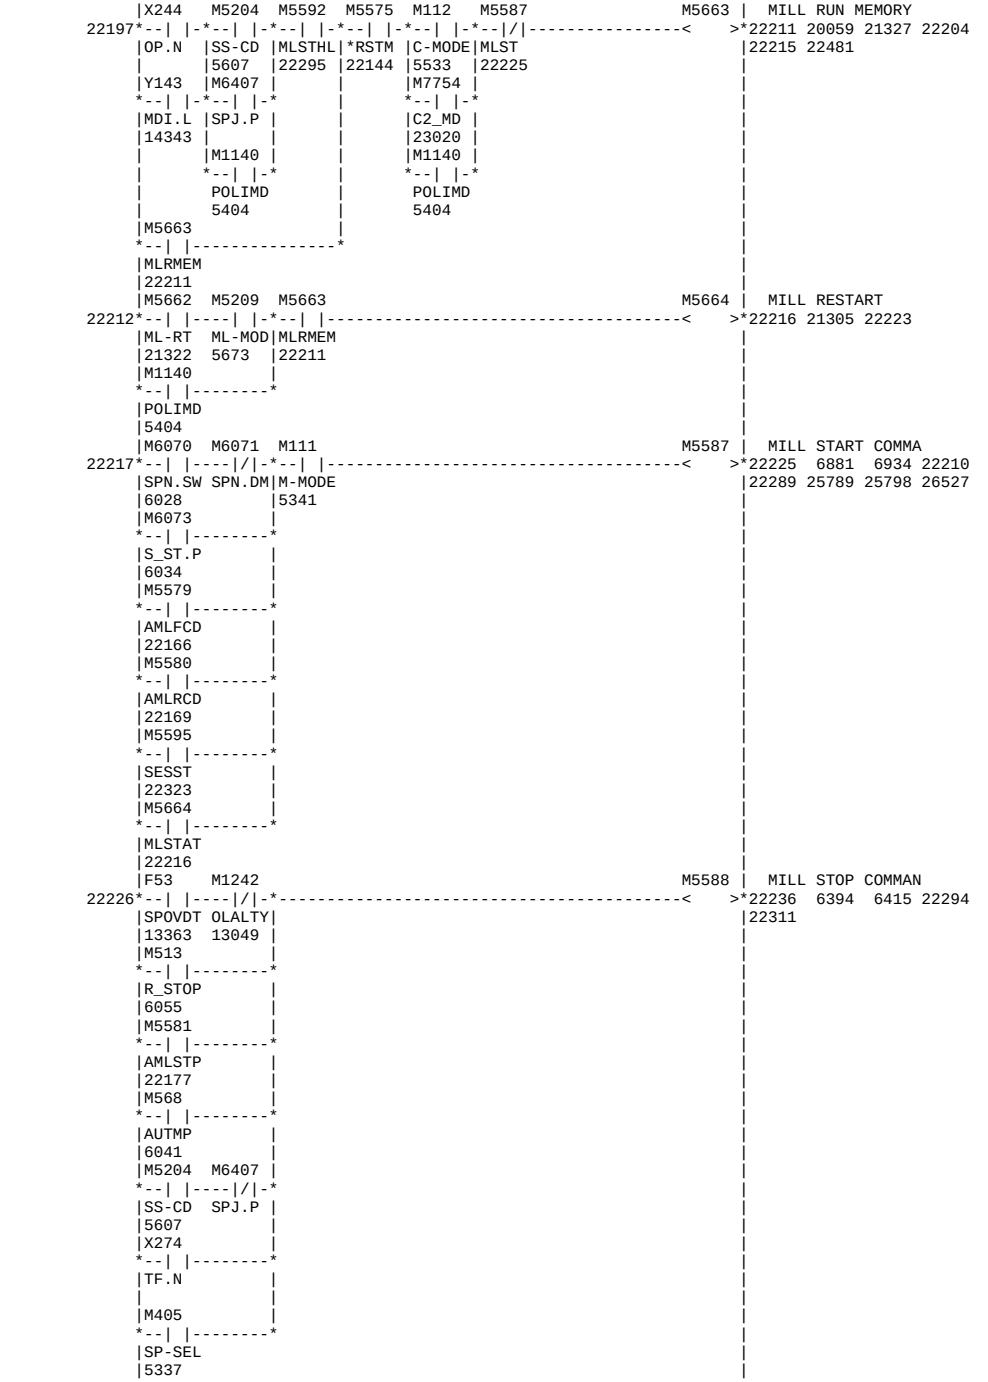

|M5820 M5210 T57 | |X232 |
--| |---| |----| |-* *--| |-*
|511MX |SP-ZSP SPST.T| |TAP.N
|4131 |281 21672 | |
|M5824 |M5210 X265 | |
--| |---|/|----| |-*
|TRS-M SP-ZSP USOS.N|
|4268 281 |
|M5820 M5824 T57 |
--|/|----|/|----| |-
|511MX TRS-M SPST.T
|4131 4268 21672
|T18 X232
--| |---| |---------------*
|STPU.T|TAP.N
|21447 |
|T60 |
--| |-
|STAP.T
|21411
|M440
--| |----------------------
|SPSTE
|21701
|M5210 M439 | T18
21702*--| |----|/|-*----------<T58 D46 >*21705 21708
|SP-ZSP SRR | T18 |
|281 21615 | |
| |T58 M441 | SPINDLE STOP
| *--| |-*[> D993 R316]*----------< >*21718 1962 3817 3827
| SPSP.T| R5 ENCDER| | 3934 4298 4433 4438
| 21705 | | | 4502 4812 5675 5685
| | | | 6455 11858 19450 21722
| *[= K0 D993]* |24571 25621 26868
	R5	
	Y90B	
*--		---------------*
	EFBC.M	
	3860	
	M111	
*--		---------------*
M-MODE
5341
M439 M452 M453 M441 M442	REQUEST CALL SP.
21719*--|/|----|/|----|/|----| |----------<
SRR SRN.NX SRI.NX SPSTOP
21615 21641 21644 21718
21724*----------[RET]*
P143	M101 M110 M5630 M5539	RESET SP SPINDLE
21725*--| |----| |----| |----------<
RST S-MODE SS=UCL	21974 22037
543 5394 21300
M213 M215 M335 M214 M334 M137 M5540	AUTO S SP-FWD CO
21729*--| |-*--|/|----|/|-*--|/|----|/|----|/|----------<
3M	5M 305M	4M 304M MANUI
16648	16658 16640	16653 16635 2640
M333	M313
--| |---| |--------*
303M 511M
16630 17856
M214 M215 M335 M213 M333 M137 M5541	AUTO S SP-REV CO
21739*--| |-*--|/|----|/|-*--|/|----|/|----|/|----------<
4M	5M 305M	3M 303M MANUI
16653	16658 16640	16648 16630 2640
M334	M313
--| |---| |--------*
304M 511M
16635 17856
M5540	S SP TAP. DELAY
21749*--| |-*----------<T148 K10 >*21752 21755
SSFWCD
21738
M5541
--| |-
SSREVC
21748
T148 M5540 M5542	AUTO S SP FWD AU
21755*--| |-*--| |----------< >*21759 21777 21846 21973
SSTD.T	SSFWCD
21752	21738
M1275	M5541 M5543	AUTO S SP REV AU
--|/|---| |----------< >*21762 21779 21847 21966
OFF SSREVC
615 21748
M213 M214 M215 M313 M5420 M305 M5544	AUTO S SP STOP C
21763*--|/|----|/|----| |-*--|/|----|/|----|/|-*----------< >*21775 21863
3M 4M 5M	511M m19 319M
16648 16653 16658	17856 16902 17539
M333 M334 M335	
--|/|----|/|----| |-
303M 304M 305M
16630 16635 16640
M202
--| |----------
2M
16847
M220
--| |----------
30M
16916
M5557 M5542 M5545	S SP ROT. CHANGE
21776*--| |----| |-*----------< >*21781 21786 21792 21801
ASSPRV ASSFCD		22112
21975 21759
M5557 M5543
--|/|----| |-
ASSPRV ASSPCD
21975 21762
M5560 M5547 M5546 T73 M5547	CHANGE SPEED DWN
21782*--|/|-*--| |----|/|-*--|/|----------< >*21788 320 21784 22076
SPSSTE	SCGDWD SENSRZ	SSST.T	22081 22109
22114	21788 323	22086
T159	
*--	/	-*
SSSO.T
22078
M5545
--| |---------------
SSPCHG
21781
M5540 M5548 X232 M5548	S SP TAP ROT CHA
21789*--| |-*--| |-*--| |-*----------< >*21794 321 21791 21802
SSFWCD	SSTAPC	TAP.N		21811
21738	21794	
M5541			T36
*--		-*	*----------<T76 D28 >*21796 22105
SSREVC	T36
21748
M5545
--| |--------
SSPCHG
21781
M5549 M5546 M5548 M5549	S SP TAP CHANG D
21799*--| |----|/|-*--| |-*----------< >*21803 21799 21812
STPCDN SENSRZ	SSTAPC	
21803 323	21794	
M5545			S SP TAP STOP T
--| |-------- *----------<T20 K7000 >*21805 21809
SSPCHG
21781
*----------[MOV T20 D143]*21810 21816
SSTS.T
21805
M5548 M5549 M1275	MILL TAP START #
21811*--| |----|/|-*--| |----------[* D143 K2 D144]*21818 21822 21824 21827
SSTAPC STPCDN	OFF	21829 21834
21794 21803	615 21810

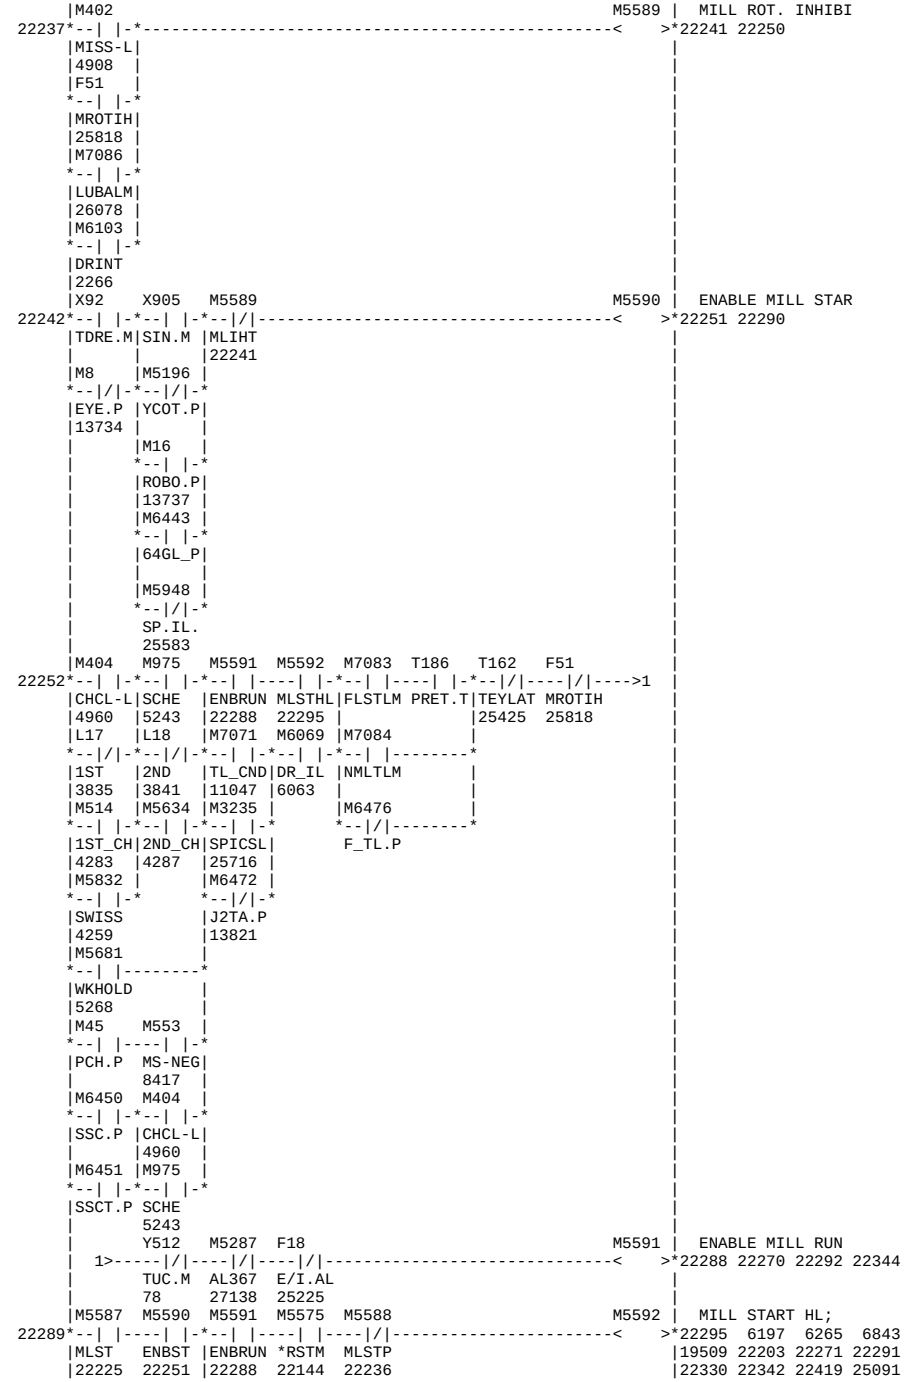

M1275
MILL TAP START #
OFF
615
21818
21818
21829 21834
MILL TAP START #
21818 21822 21824 21827
21829 21834
S SP TAP START T
21832 22104
M6070 M6071 M5820 L18 M110
M5550
S SP START COMMA
21835
21860 21268 21924 25687
25706
SPN.SW SPN.DM 511MX 2ND S-MODE
6028 4131 3841 5394
M6073 M5820
S_ST.P 511MX
6034 4131
M461 M5820
SRODMS 511MX
6098 4131
M5542
ASSFCD
21759
M5543
ASSPCD
21762
M5556 M5820
SESSST 511MX
21964 4131
M460 M5820 M5554 M461
SROD.M 511MX SSPSHL SRODMS
6076 4131 21940 6098
M712 M434
SY1PLS SPSTHL
4181 21547
F53 M1242
M5551
S SP STOP COMMAN
21861
21877 21930 21952
SPOVDT OLALTY
13363 13049
M5544
ASSTPC
21775
M5564
ORCP
21034
M568
AUTMP
6041
M5838
MNSQP
4188
M5208
SS-MOD
5662
M5205
ML-CD
5627
M513
R_STOP
6055
M7754
C2_MD
23020
M483
358MA
5935
M484
358MX
5944
M307
348M
17529
Y4F5 M6463
ZP.L MCBP.P
8969
M5563
M5552
S SP ROT. INHIBI
21878
21881 21899
ORC
21032
F50
SROTIH
25748
M6103
DRINT
2266
X92 M5123 M6528 X905 M5552 M7781
M5553
ENABLE S SP STAR
21882
21905 21925
TDRE.M BFAL.P BAL SIN.M SSPINH SSPUCL
9217 21881 23262
M8 M5123 M6528 M5196 M6451 M6450
EYE.P BFAL.P BAL YCOT.P SSCT.P SSC.P
13734 9217
Y15 M16
BFM.M ROBO.P
11810 13737
X232 M6443
TAP.N 64GL_P
M6453 M5948
MCBF_P SP.IL.
25583
M975 M5574 M5554 F50 T162 F18
M5574
ENABLE S SP RUN
21906
21923 21916 21938 21992
SCHE EBSRUN SSPSHL SROTIH TEYLAT E/I.AL
5243 21923 21940 25748 25425 25225
M5681 M6069
WKHOLD DR_IL
5268 6063
M5634
2ND_CH
4287
M456
S JOG
6023
M45 M553
PCH.P MS-NEG
8417
M390 M391
UCHOK SSROK
4778 4783

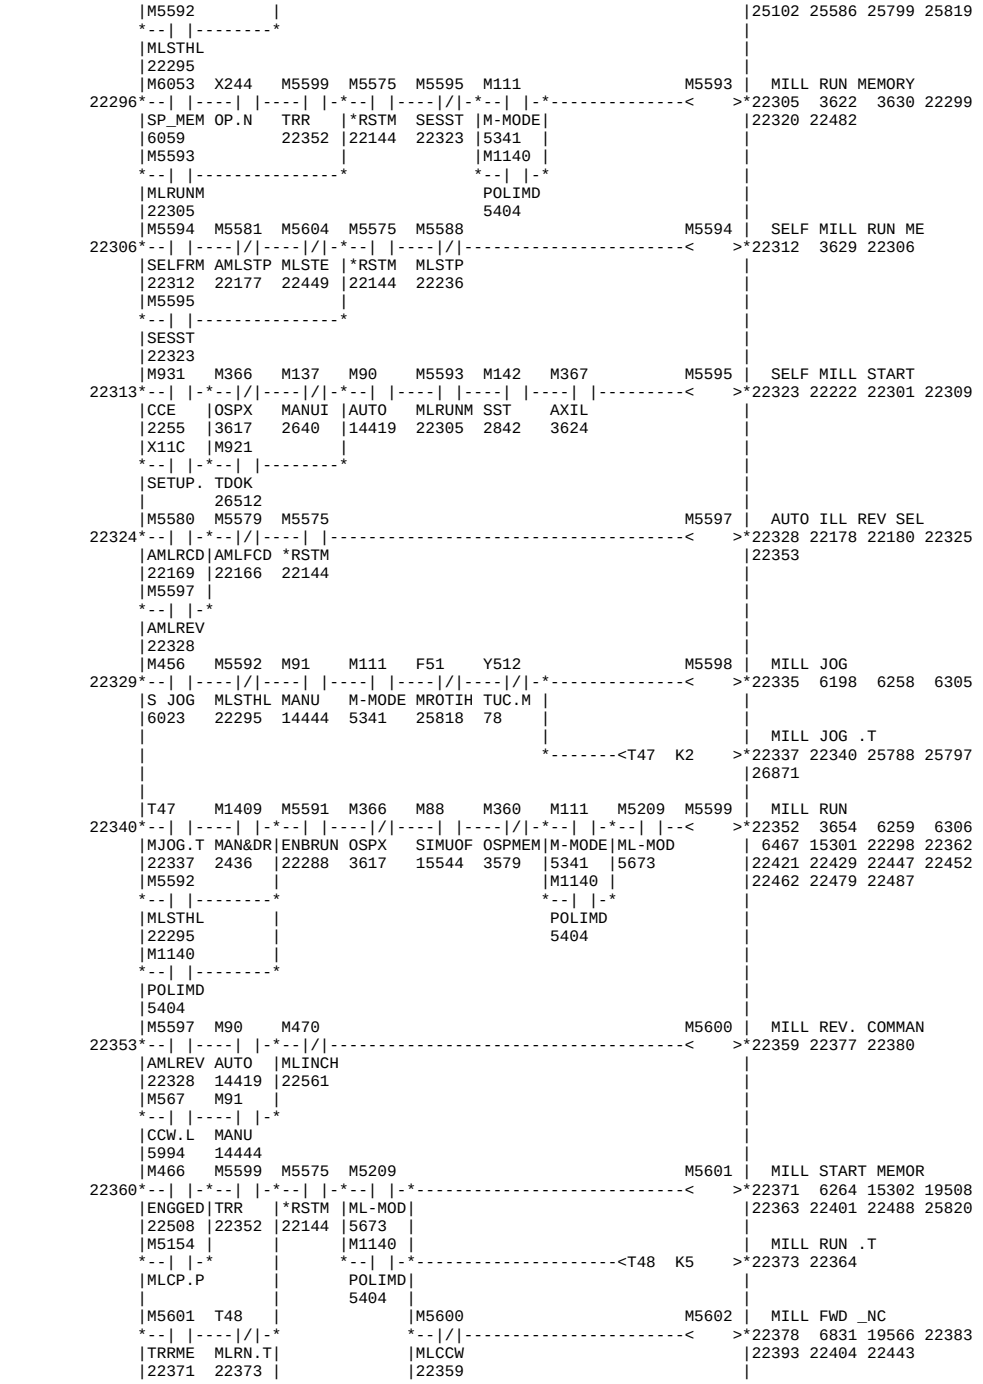

M5550 M5553 M5563 M5551
21924
SSPST ENBSST ORC SSPSTP
21860 21905 21032 21877
M5554 M90 M215 M335 M327 M7754 M5822
SSPSHL AUTO 5M 305M 519m C2_MD 542MX
21940 14419 16658 16640 17927 23020 4244
M5574 M5539 M5554 S SP START HL;
1>
EBSRUN RSTSSP
21923 21728
>*21940 6069 6282 19465
19469 21465 21851 21917
21926 21978 21991 22073
25707 25585 25099 25090
25751
M6053 X244 M5559 M5539 M5556 M5555 S SP RUN MEMORY
21941
SP_MEM OP.N SSRR RSTSSP SESSST
6059 22013 21728 21964
M5555
>*21947 3621 3628 21944
21961
SSPRNM
21947
M5596 M5560 M5539 M5551 M5596 SELF S SP RUN ME
21948
SFSRME SPSSTE RSTSSP SSPSTP
21953 22114 21728 21877
M5556
>*21953 3627 21948
SESSST
21964
M931 M366 M137 M90 M5555 M142 M367 M5556 SELF S SP START
21954
CCE OSPX MANUI AUTO SSPRNM SST AXIL
2255 3617 2640 14419 21947 2842 3624
X11C M921
>*21964 21848 21946 21950
SETUP. TDOK
26512
M5557 M712 M5542 M5539 M5557 AUT S SP REV SEL
21965
ASSPRV SY1PLS ASSFCD RSTSSP
21975 4181 21759 21728
M5543 M437
>*21975 21574 21578 21776
21778 21965 22014
ASSPCD ASPREV
21762 21583
M437 M712
ASPREV SY1PLS
21583 4181
M91 M456 M5554 F50 L18 M5208 M5558 S SPINDLE JOG
21976
MANU S JOG SSPSHL SROTIH 2ND SS-MOD
14444 6023 21940 25748 3841 5662
M110 SPINDLE JOG T
S-MODE
5394
>*21983 6273 6328 21270
T46 M5574 M7754 M5563 M366 M88 M360 M7781
21990
SSJG.T EBSRUN C2_MD ORC OSPX SIMUOF OSPMEM SSPUCL
21987 21923 23020 21032 3617 15544 3579 23262
M5554 M6451
SSPSHL SSCT.P
21940
X905 M485 M110
SIN.M SABON S-MODE
5973 5394
M5196 Y4F5
YCOT.P ZP.L
8969
T46 K2
>*21987 21990 25690 25704
>1
>2

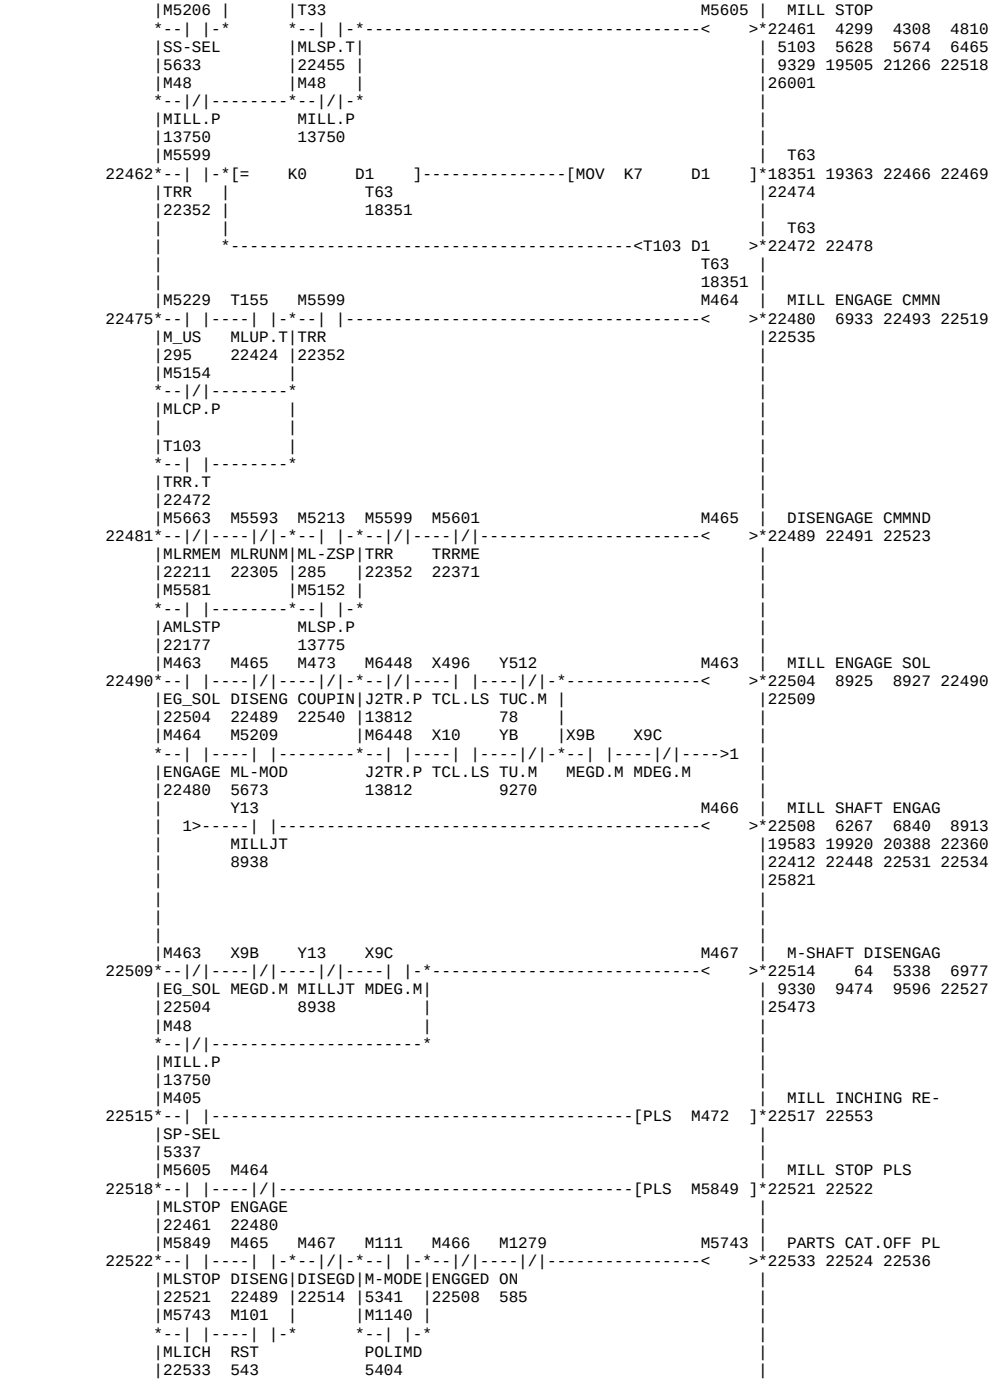

M16
ROBO.P
13737
M6443
64GL_P
M5948
SP.IL.
25583
M5559 S SPINDLE RUN
1>
M6450
2>
SSC.P
>*22013 410 413 4716
5681 6278 6326 6366
6374 6461 20863 21112
21128 21943 22035 22075
22083 22113 22117 22135
M5557 M90 M7781 M485 Y4F5 M5570 S SP CCW COMMAND
22014
ASSPRV AUTO SSPUCL SABON ZP.L
21975 14419 23262 5973 8969
M6451 M6450 M6463
SSCT.P SSC.P MCBP.P
>*22032 3912 3914 22046
22049
M567 M91 M485
CCW.L MANU SABON
5994 14444 5973
M485 M5177
SABON SABC.P
5973
M5571 T49 M5539 M5571 S SP RUN MEMORY
22033
SSRRME SSRN.T RSTSSP
22038 22041 21728
M5559
>*22038 3918 3933 6281
22033 22044 25735
S SP RUN T
<T49 K5
>*22041 22034
SSRR
22013
M5571 M5570 M5572 S SP CW NC AUX
22044
SSRRME SSPCCW
22038 22032
M5570
>*22047 19459 22056 22067
22136
M5573 S SP CCW NC AUX
SSPCCW
22032
X2EA X3DA X3EA M5572 Y381 SPINDLE REVERSE_
1A2M 1A2M 1A2M SSRN.N
22047
M5573 Y380 SPINDLE FORWARD_
SRIN.N
22050
>*22050 5999 19462 22059
22070 22137
>*22057 3671 6440
>*22060 3670 6439
Y233 Y333 M5175 M5824 M5560 M5572 Y3B8 SPINDLE F-RUN _N
22061
MNSY.N MNSY.N SP_N.P TRS-M SPSSTE SSRN.N
4174 4179 4268 22114 22047
M5573 Y3B9 SPINDLE R-RUN _N
SRIN.N
22050
>*22068
>*22071
M90 M5554 M5559 M5547 S SP STOP T
22072
AUTO SSPSHL SSRR SCGDWD
14419 21940 22013 21788
M91
MANU
14444
<T159 K3
>*22078 21783 22082 22103

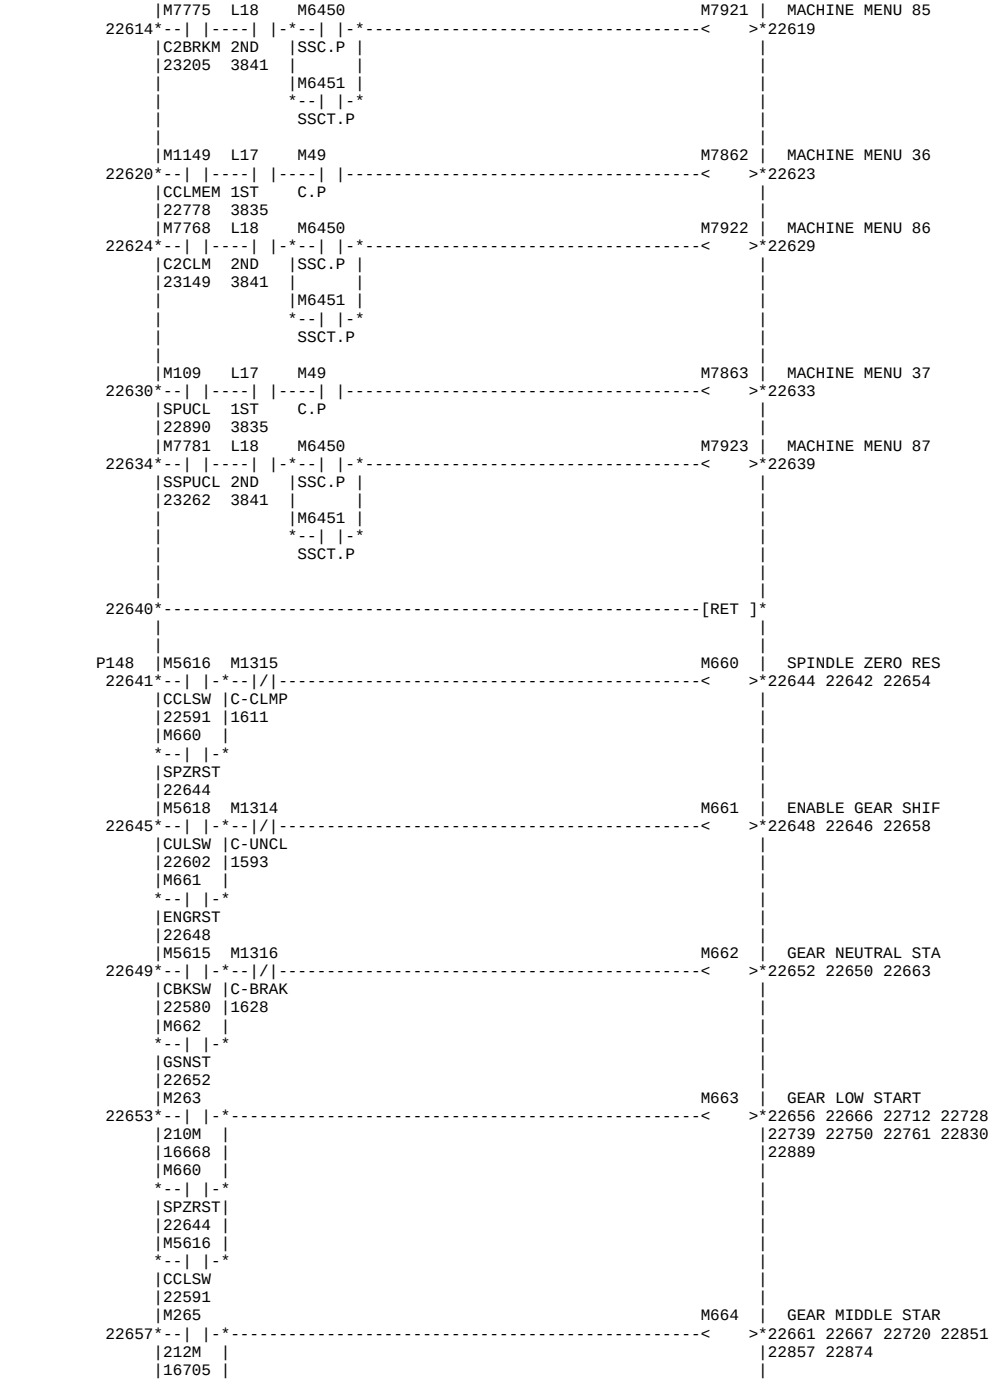

|M5547 M5559 M5560 | T33
22081*--| |-*--| |----|/|----------<T73 D31 >*22086 21787 22093 22101
SCGDWD	SSRR SPSSTE T33
21788	22013 22114
T159	
*--		-*
SSSO.T
22078
X365 T159 M5547 M5545 M5559 M5560	S SPIND. START E
22089*--| |---------*--| |-*--|/|-*--|/|----| |---------< >*22114 3672 6441 19464
USOS_N	SSSO.T	SCGDWD	SSPCHG SSRR	21782 21949 22065 22084
	22078	21788	21781 22013	22108
M5820 X364 T73		X232	
--| |---| |----| |-* *--| |-*
511MX	ZSOS_N SSST.T		TAP.N
4131	22086		
M5824	X364 X365		
--| |---|/|----| |-*	
TRS-M ZSOS_N USOS_N|	
4268		
M5820 M5824 T73		
--|/|----|/|----| |-	
511MX TRS-M SSST.T	
4131 4268 22086	
T22 X232	
*--		-*--		---------*
SSTU.T|TAP.N	
21832		
T76		
--| |-	
SSTA.T	
21796	
M5560	
*--		----------*
SPSSTE
22114
X364 M5559	T34
22115*--| |-*--|/|-*----------<T74 D30 >*22120 22131
ZSOS_N|SSRR	T34
	22013	
M5207		T74 M5561	S SPINDLE STOP
--| |- *[> D993 R316]*--| |-*----------< >*22134 451 3818 3828
ML-SEL	R5 ENCDER	SSSP.T		3935 4307 4569 5098
5634		22120		5105 5629 5676 5687
M54			6103 6459 19471 22138
--|/|--------[= K0 D993]* |23031 25655
SS.P	R5		
	Y90B		
--|/|---------	
	EFBC.M		
	3860		
	M111		
--| |---------	
|M-MODE	
	5341	
|M54	
*--	/	----------*
SS.P
M5559 M5572 M5573 M5561 M5562	REQUEST CALL S S
22135*--|/|----|/|----|/|----| |----------< >*22139
SSRR SSRN.N SRIN.N SPSTOP
22013 22047 22050 22134
22140*----------[RET]*
P144 |M111 M101 M5575	RESET MILL
22141*--| |-*--| |----------< >*22144 22205 22293 22300
M-MODE	RST	22310 22327 22367
5341	543
M1140	
*--		-*
POLIMD
5404
M137 M266 M245 M7257 M7256 M5576	AUTO MILL FWD CO
22145*--|/|----|/|----|/|-*--|/|----| |----------< >*22151 22156 22165 22191
MANUI 219M 205M	204MM 203MM
2640 17327 16621	6817 6809
|M7256 M7257 M5577	AUTO MILL REV CO
*--	/	----		----------< >*22155 22157 22168 22192
203MM 204MM
6809 6817
M5576	MILL FWD/REV T
22156*--| |-*----------<T147 K10 >*22159 22162
MLFWDC
22151
M5577
--| |-
MLRVCD
22155
T147 M5576 M5579	AUTO MILL FWD AU
22162*--| |-*--| |----------< >*22166 22179 22220 22326
MF/R.T	MLFWDC
22159	22151
M5578 |M5577 M5580	AUTO MILL REV AU
--|/|---| |----------< >*22169 22181 22221 22324
533MX MLRVCD
6155 22155
M245 M7256 M7257 M5581	AOTO MILL STOP C
22170*--| |-*--|/|----|/|-*----------< >*22177 22229 22307 22483
205M	203MM 204MM
16621	6809 6817
M273	
*--		-*
249M	
17602	
M743	
*--		-*
TF
6563
M202
*--		----------*
2M
16847
M220
*--		----------*
30M
16916
M5597 M5579 M5582	MILL ROTATION CH
22178*--| |----| |-*----------< >*22183 22188 22194 22446
AMLREV AMLFCD
22328 22166
M5597 M5580
--|/|----| |-
AMLREV AMLRCD
22328 22169
M5604 M5584 M5583 T82 M5584	CHANGE SPEED DOW
22184*--|/|-*--| |----|/|-*--|/|----------< >*22190 310 22186 22422
MLSTE	CHGDWN MLNE-Z	MLST.T	22427 22440
22449	22190 311	22432
T155		
--|/|-	
MLUP.T	
22424	
M5582	
*--		----------*
MLCHG
22183
M5576 M5585 X232 M5585	MILL TAP ROT.CHN
22191*--| |-*--| |-*--| |----------< >*22196 22193 22438
MLFWDC	MTAPCG	TAP.N
22151	22196	
M5577		
--| |-	
MLRVCD	
22155	
M5582	
*--		--------*
MLCHG
22183

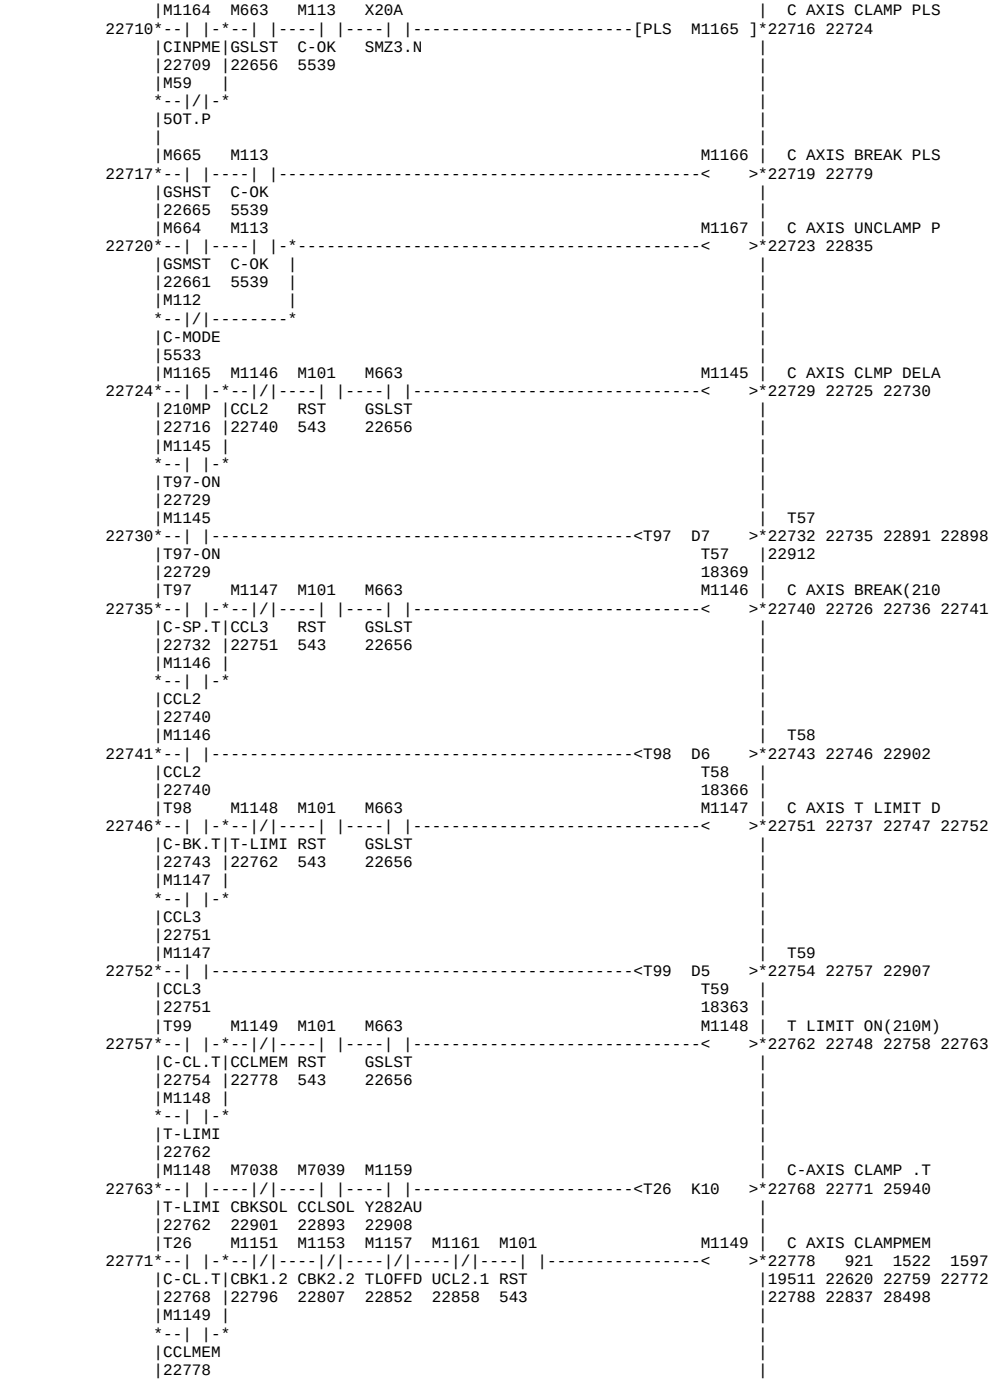

|X244 M5204 M5592 M5575 M112 M5587 M5663 | MILL RUN MEMORY
22197*--| |-*--| |-*--| |-*--| |-*--| |-*--|/|----------<
|OP.N |SS-CD |MLSTHL|*RSTM |C-MODE|MLST
|Y143 |M6407 | |5607 |22295 |22144 |5533 |22225
MDI.L	SPJ.P		M7754
14343			C2_MD
M1140		23020
POLIMD	M1140
5404	POLIMD
M5663	5404
MLRMEM
22211
M5662 M5209 M5663 M5664	MILL RESTART
22212*--| |----| |-*--| |----------<
ML-RT ML-MOD	MLRMEM
21322 5673	22211
M1140
POLIMD
5404
M6070 M6071 M111 M5587	MILL START COMMA
22217*--| |----|/|-*--| |----------<
SPN.SW SPN.DM	M-MODE
6028	5341
M6073
S_ST.P
6034
M5579
AMLFCD
22166
M5580
AMLRCD
22169
M5595
SESST
22323
M5664
MLSTAT
22216
F53 M1242 M5588	MILL STOP COMMAN
22226*--| |----|/|-*----------<
SPOVDT OLALTY
13363 13049
M513
R_STOP
6055
M5581
AMLSTP
22177
M568
AUTMP
6041
M5204 M6407
SS-CD SPJ.P
5607
X274
TF.N
M405
SP-SEL
5337
>*22211 20059 21327 22204
22215 22481
>*22216 21305 22223
>*22225 6881 6934 22210
22289 25789 25798 26527
>*22236 6394 6415 22294
22311

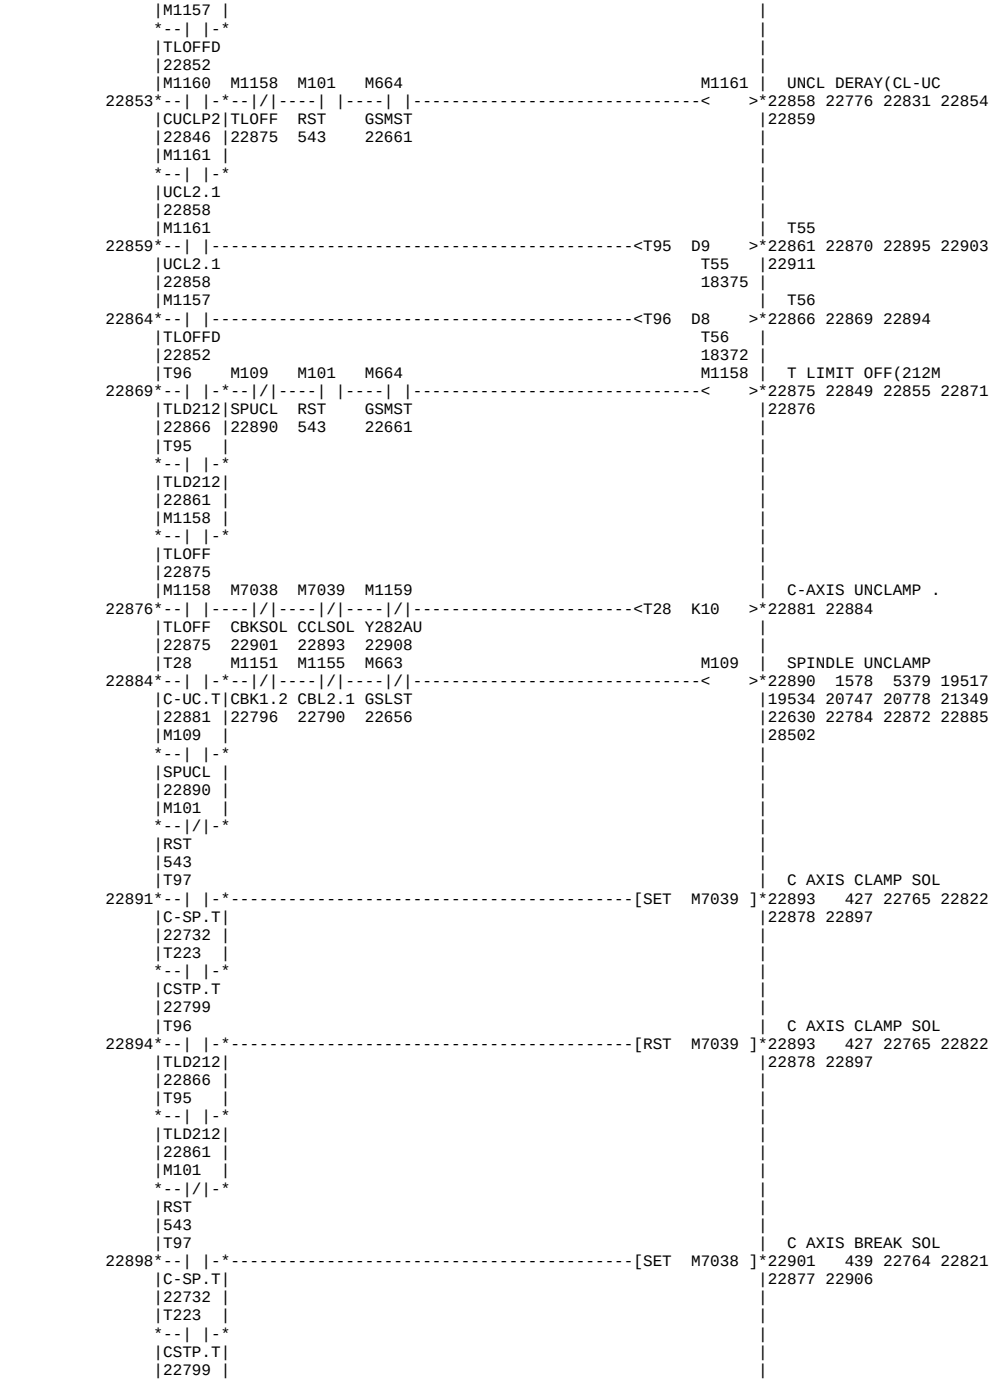

|M402 M5589 | MILL ROT. INHIBI
22237*--| |-*----------<
|MISS-L|
|4908 |
|F51 |
|MROTIH|
|25818 |
|M7086 |
|LUBALM|
|26078 |
|M6103 |
|DRINT
|2266
|X92 X905 M5589 M5590 | ENABLE MILL STAR
22242*--| |-*--| |-*--|/|----------<
|TDRE.M|SIN.M |MLIHT
|22241
|M8 |M5196 |
|EYE.P |YCOT.P|
|13734 |
|M16 |
|ROBO.P|
|13737 |
|M6443 |
|64GL_P|
|M5948 |
|SP.IL.
|25583
|M404 M975 M5591 M5592 M7083 T186 T162 F51
22252*--| |-*--| |-*--| |----| |-*--| |----| |-*--|/|----|/|---->1
|CHCL-L|SCHE |ENBRUN MLSTHL|FLSTLM PRET.T|TEYLAT MROTIH
|4960 |5243 |22288 22295 | |25425 25818
L17	L18	M7071 M6069	M7084
1ST	2ND	TL_CND	DR_IL	NMLTLM
3835	3841	11047	6063
M514	M5634	M3235		M6476
1ST_CH	2ND_CH	SPICSL	F_TL.P
4283	4287	25716
M5832		M6472
SWISS	J2TA.P
4259	13821
M5681
WKHOLD
5268
M45 M553
PCH.P MS-NEG
8417
M6450 M404
SSC.P	CHCL-L
4960
M6451	M975
SSCT.P SCHE
5243
Y512 M5287 F18 M5591	ENABLE MILL RUN
1>-----|/|----|/|----|/|----------<
TUC.M AL367 E/I.AL
78 27138 25225
M5587 M5590 M5591 M5575 M5588 M5592	MILL START HL;
22289*--| |----| |-*--| |----| |----|/|----------<
MLST ENBST	ENBRUN *RSTM MLSTP
22225 22251	22288 22144 22236
>*22241 22250
>*22251 22290
>*22288 22270 22292 22344
>*22295 6197 6265 6843
19509 22203 22271 22291
22330 22342 22419 25091

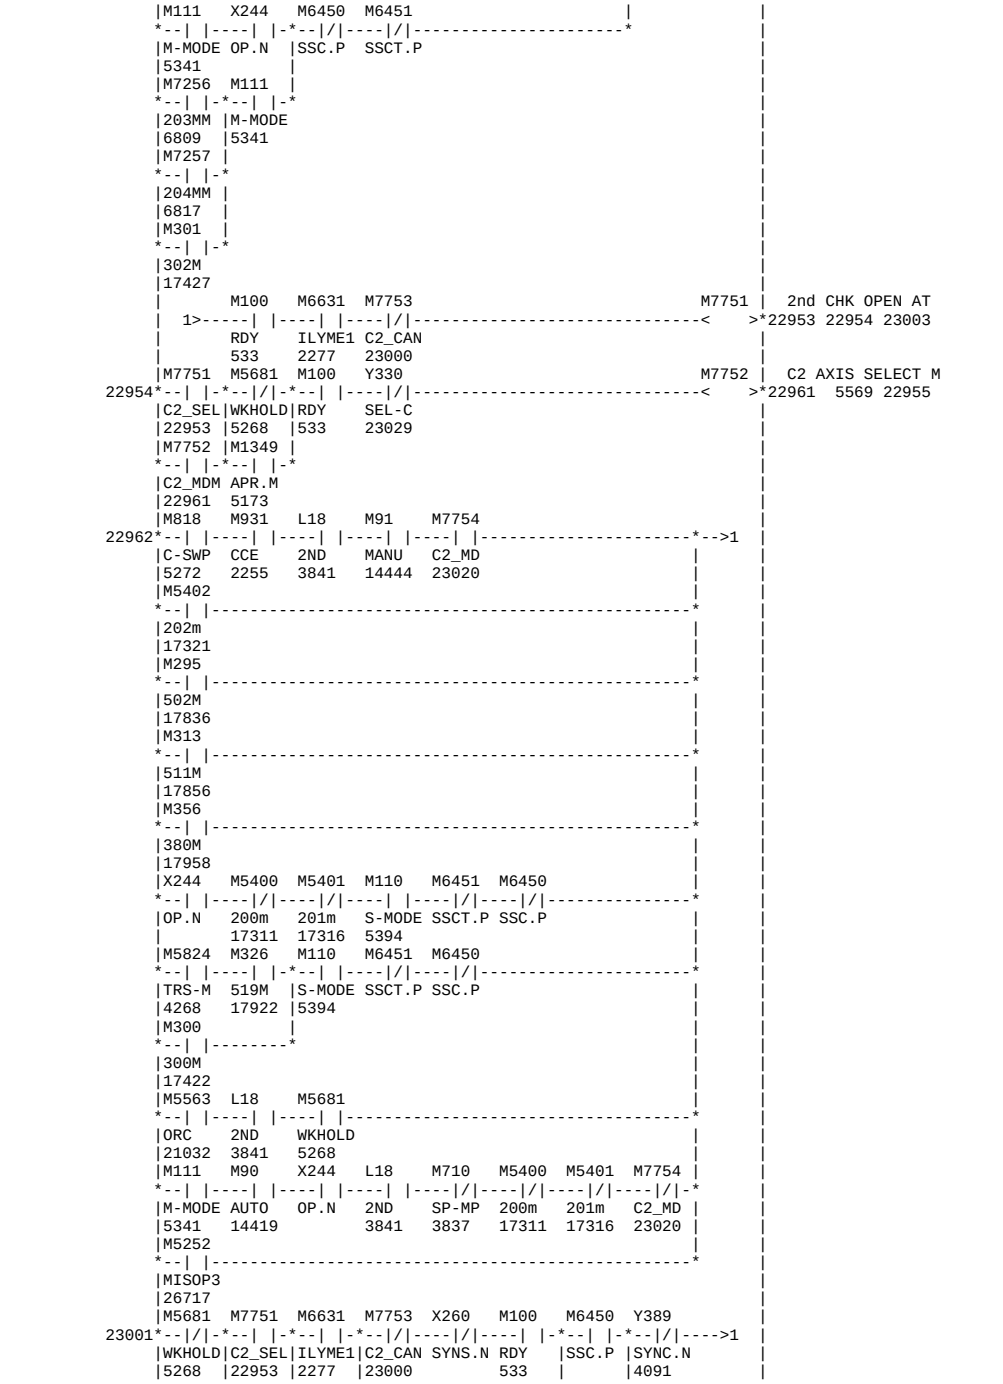

M5592
25102 25586 25799 25819
MLSTHL
22295
M6053 X244 M5599 M5575 M5595 M111 M5593 | MILL RUN MEMORY
22296 22305 3622 3630 22299
SP_MEM OP.N TRR *RSTM SESST M-MODE
6059 22352 22144 22323 5341
M5593 M1140
22320 22482
MLRUNM
22305
POLIMD
5404
M5594 M5581 M5604 M5575 M5588 M5594 | SELF MILL RUN ME
22306 22312 3629 22306
SELFRM AMLSTP MLSTE *RSTM MLSTP
22312 22177 22449 22144 22236
M5595
SESST
22323
M931 M366 M137 M90 M5593 M142 M367 M5595 | SELF MILL START
22313 22323 22222 22301 22309
CCE OSPX MANUI AUTO MLRUNM SST AXIL
2255 3617 2640 14419 22305 2842 3624
X11C M921
SETUP. TDOK
26512
M5580 M5579 M5575 M5597 | AUTO ILL REV SEL
22324 22328 22178 22180 22325
AMLRCD AMLFCD *RSTM
22169 22166 22144
22353
M5597
AMLREV
22328
M456 M5592 M91 M111 F51 Y512 M5598 | MILL JOG
22329 22335 6198 6258 6305
S JOG MLSTHL MANU M-MODE MROTIH TUC.M
6023 22295 14444 5341 25818 78
MILL JOG .T
T47 22337 22340 25788 25797
26871
T47 M1409 M5591 M366 M88 M360 M111 M5209 M5599 | MILL RUN
22340 22352 3654 6259 6306
MJOG.T MAN&DR ENBRUN OSPX SIMUOF OSPMEM M-MODE ML-MOD
6467 15301 22298 22362
22337 2436 22288 3617 15544 3579 5341 5673
22421 22429 22447 22452
M5592 M1140
22462 22479 22487
MLSTHL
22295
M1140
POLIMD
5404
M5597 M90 M470 M5600 | MILL REV. COMMAN
22353 22359 22377 22380
AMLREV AUTO MLINCH
22328 14419 22561
M567 M91
CCW.L MANU
5994 14444
M466 M5599 M5575 M5209 M5601 | MILL START MEMOR
22360 22371 6264 15302 19508
ENGGED TRR *RSTM ML-MOD
22508 22352 22144 5673
22363 22401 22488 25820
M5154
MILL RUN .T
T48 K5 22373 22364
MLCP.P
POLIMD
5404
M5601 T48 M5600 M5602 | MILL FWD _NC
22378 6831 19566 22383
TRRME MLRN.T MLCCW
22371 22373 22359
22393 22404 22443
M470
M5600 M5603 | MILL REV. _NC
22381 6003 6833 19568
MLINCH MLCCW
22561
22385 22391 22408 22444
22359
M5602 M5606 M5607 | MILL MOTOR FWD._
22389 6388 6424 6447
MLFX1 MLT-RV
22378
M5603 M5606
MLRX1 MLT-RV
22381
M5603 M5606 M5608 | MILL MOTOR REV._
22397 6403 6409 6448
MLRX1 MLT-RV
22381
M5602 M5606
MLFX1 MLT-RV
22378
T119 M5601 M5604 M5602 Y2BA | MILL F-RUN .NC
22398 22405
ML_NCT TRRME MLSTE MLFX1
22415 22371 22449 22378
M54 Y3BA | MILL F-RUN _NC
22406
SS.P
M52 M5603 Y2BB | MILL R-RUN .NC
22409
SYML.P MLRX1
22381
Y3BB | MILL R-RUN _NC
22410
Y297 M466 M111 | MILL DATA NC MOD
22411 T119 K5 22415 8653 19579 22398
MLEX.N ENGGED M-MODE
6271 22508 5341
M90 M5592 M5599 M5584 | MILL UPTO ENABLE
22418 T155 K3 22424 22185 22428 22437
AUTO MLSTHL TRR CHGDWN
14419 22295 22352 22190
22476
M91
MANU
14444
M5584 M5599 M5604 | T42
22427 T82 D22 22432 22189 22436
CHGDWN TRR MLSTE T42
22190 22352 22449
T155
MLUP.T
22424
M5229 T155 M5584 M5602 M5582 M5599 M466 M5604 | MILL START END
22435 22449 3655 6449 6839
M_US MLUP.T CHGDWN MLFX1 MLCHG TRR ENGGED
295 22424 22190 22378 22183 22352 22508
19582 19921 20057 21325
T82 X232 M5603
22184 22308 22402 22430
22439
MLST.T TAP.N MLRX1
22432 22381
M5585
MTAPCG
22196
M5604
MLSTE
22449
M5213 M5599 | MILL SPINDLE STO
22450 T33 K20 22455 22458
ML-ZSP TRR
285 22352

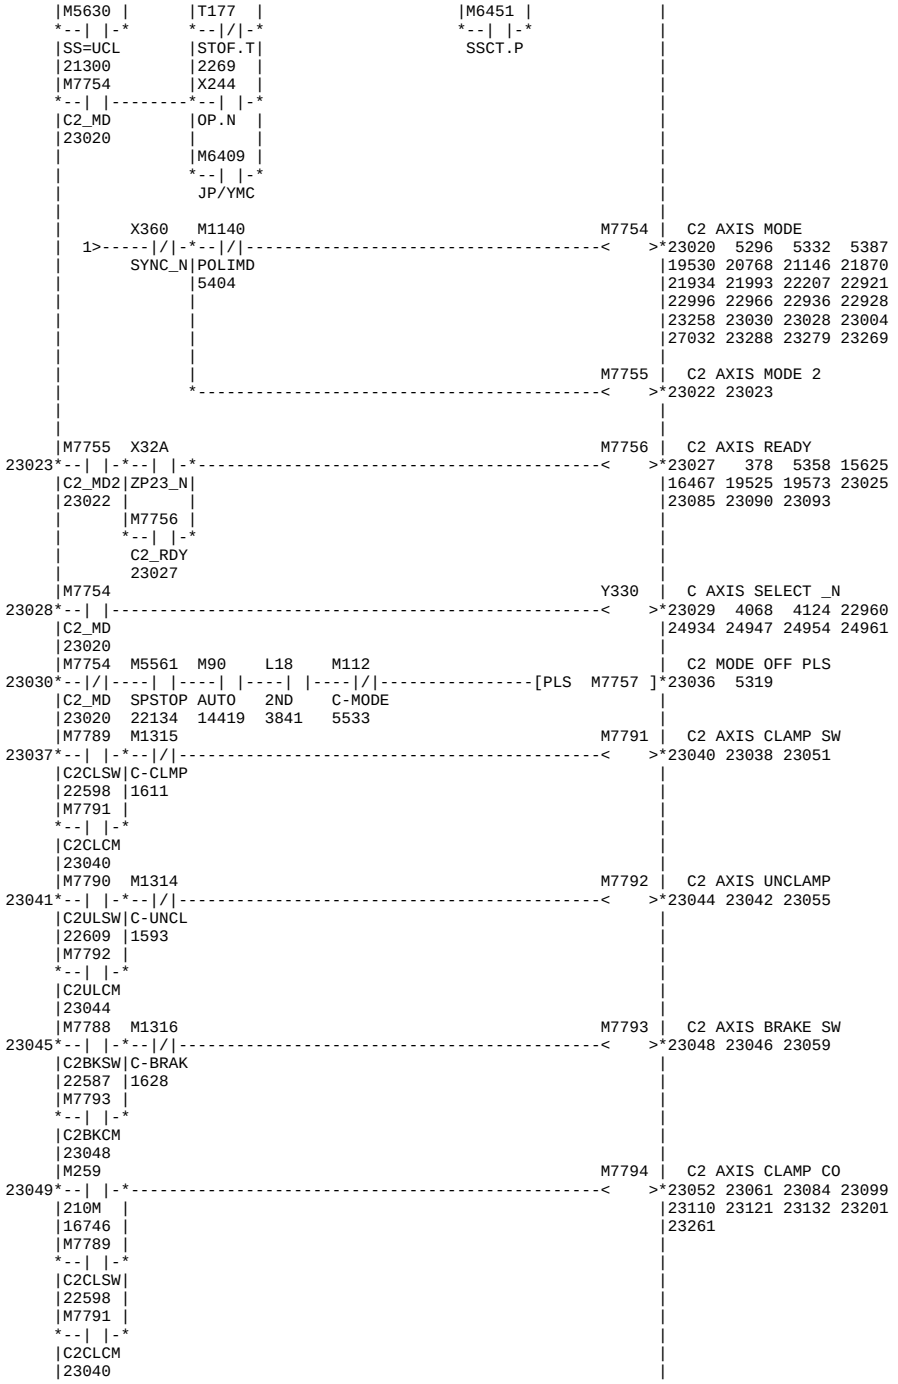

|M5206 | |T33 M5605 | MILL STOP
--| |- *--| |-*<
|SS-SEL |MLSP.T| | 5103 5628 5674 6465
|5633 |22455 | | 9329 19505 21266 22518
|M48 |M48 | |26001
--|/|----------|/|-*
|MILL.P MILL.P
|13750 13750
|M5599 | T63
22462*--| |-*[= K0 D1]---------------[MOV K7 D1]*18351 19363 22466 22469
|TRR | T63 |22474
|22352 | 18351
| | | T63
| *<T103 D1 >*22472 22478
| T63
| 18351
|M5229 T155 M5599 M464 | MILL ENGAGE CMMN
22475*--| |----| |-*--| |<>*22480 6933 22493 22519
|M_US MLUP.T|TRR |22535
|295 22424 |22352
|M5154 |
--|/|--------
|MLCP.P |
| |
|T103 |
--| |--------
|TRR.T
|22472
|M5663 M5593 M5213 M5599 M5601 M465 | DISENGAGE CMMND
22481*--|/|----|/|-*--| |-*--|/|----|/|-----------------------<>*22489 22491 22523
|MLRMEM MLRUNM|ML-ZSP|TRR TRRME
|22211 22305 |285 |22352 22371
|M5581 |M5152 |
--| |----------| |-*
|AMLSTP MLSP.P
|22177 13775
|M463 M465 M473 M6448 X496 Y512 M463 | MILL ENGAGE SOL
22490*--| |----|/|----|/|-*--|/|----| |----|/|-*--------------<>*22504 8925 8927 22490
|EG_SOL DISENG COUPIN|J2TR.P TCL.LS TUC.M | |22509
|22504 22489 22540 |13812 78 |
|M464 M5209 |M6448 X10 YB |X9B X9C |
--| |----| |----------| |----| |----|/|-*--| |----|/|----->1 |
|ENGAGE ML-MOD J2TR.P TCL.LS TU.M MEGD.M MDEG.M |
|22480 5673 13812 9270 |
| Y13 M466 | MILL SHAFT ENGAG
| 1>-----| |---<>*22508 6267 6840 8913
| MILLJT |19583 19920 20388 22360
| 8938 |22412 22448 22531 22534
| |25821
|M463 X9B Y13 X9C M467 | M-SHAFT DISENGAG
22509*--|/|----|/|----|/|----| |-*----------------------------<>*22514 64 5338 6977
|EG_SOL MEGD.M MILLJT MDEG.M| | 9330 9474 9596 22527
|22504 8938 | |25473
|M48 |
--|/|----------------------
|MILL.P
|13750
|M405 | MILL INCHING RE-
22515*--| |---[PLS M472]*22517 22553
|SP-SEL |
|5337 |
|M5605 M464 | MILL STOP PLS
22518*--| |----|/|-------------------------------------[PLS M5849]*22521 22522
|MLSTOP ENGAGE |
|22461 22480 |
|M5849 M465 M467 M111 M466 M1279 M5743 | PARTS CAT.OFF PL
22522*--| |----| |-*--|/|-*--| |-*--|/|----|/|----------------<>*22533 22524 22536
MLSTOP DISENG	DISEGD	M-MODE	ENGGED ON
22521 22489	22514	5341	22508 585
M5743 M101		M1140
--| |----| |- *--| |-*
MLICH RST POLIMD
22533 543 5404
M466 M464 M111 M473	MILL INCHING MOD
22534*--|/|----| |-*--| |-*----------------------------------<>*22540 6253 6260 6315
ENGGED ENGAGE	M-MODE		22492
22508 22480	5341	
M5743	M1140	T112	M INCH CYCLE TM
--| |----------| |-*--|/|-*---------------------<T111 D970 >*22544 8928 22547
MLICH POLIMD	MIC2.T	R28
22533 5404	22549	
	T111	M INCH CYCLE TM
*--		----------------<T112 D970 >*22549 22542
MIC1.T R28
22544
M472	INCHING TIMEOVER
*--|/|----------------------<T174 K300 >*22555 22559 25494
RTLYP
22517
T174 T86 M470	MILL INCHING
*--|/|----| |----------------------<>*22561 8926 8929 22358
ICTOVT MRTD.T |22366
22555 6255
M260 M265	212M OFF TIMER
22562*--|/|----|/|-----------------------------------<T224 K5 >*22565 22570
212M 212M
16771 16705
M260 M245 M6428 M6074	205M FIN INSTANT
22568*--| |-*--| |----| |----------------------------------<>*22573 19506
212M	205M 205M.P
16771	16621
M265
--| |-
212M
16705
T224
--|/|-
212MOF
22565
M931 M91 X244 M6954 L17 M5615	C AXIS BRAKE SW
22574*--| |----| |----|/|-*--| |----| |----------------------<>*22580 22649 22664 26900
CCE MANU OP.N	M-MENU 1ST
2255 14444	14987 3835
M6947 L18 M6450 M7788	C2 AXIS BRAKE SW
--| |----| |---| |-*--------------<>*22587 23045 23058 26903
2ND	SSC.P
15114 3841	
M6451
--| |-
SSCT.P
M6960 L17 M5616	C AXIS CLAMP SW
*--| |----| |----------------------<>*22591 22641 22655 26901
M-MENU 1ST
14994 3835
M6948 L18 M6450 M7789	C2 AXIS CLAMP SW
--| |----| |---| |-*--------------<>*22598 23037 23050 26904
2ND	SSC.P
15130 3841	
M6451
--| |-
SSCT.P
M6964 L17 M5618	C AXIS UNCLAMP S
*--| |----| |----------------------<>*22602 22645 22659 26902
M-MENU 1ST
15001 3835
M6949 L18 M6450 M7790	C2 AXIS UNCLAMP
--| |----| |---| |-*--------------<>*22609 23041 23054 26905
2ND	SSC.P
15146 3841	
M6451
--| |-
SSCT.P
M1152 L17 M49 M7861	MACHINE MENU 35
22610*--| |----| |----| |----------------------------------<>*22613
CBKMEM 1ST C.P
22834 3835

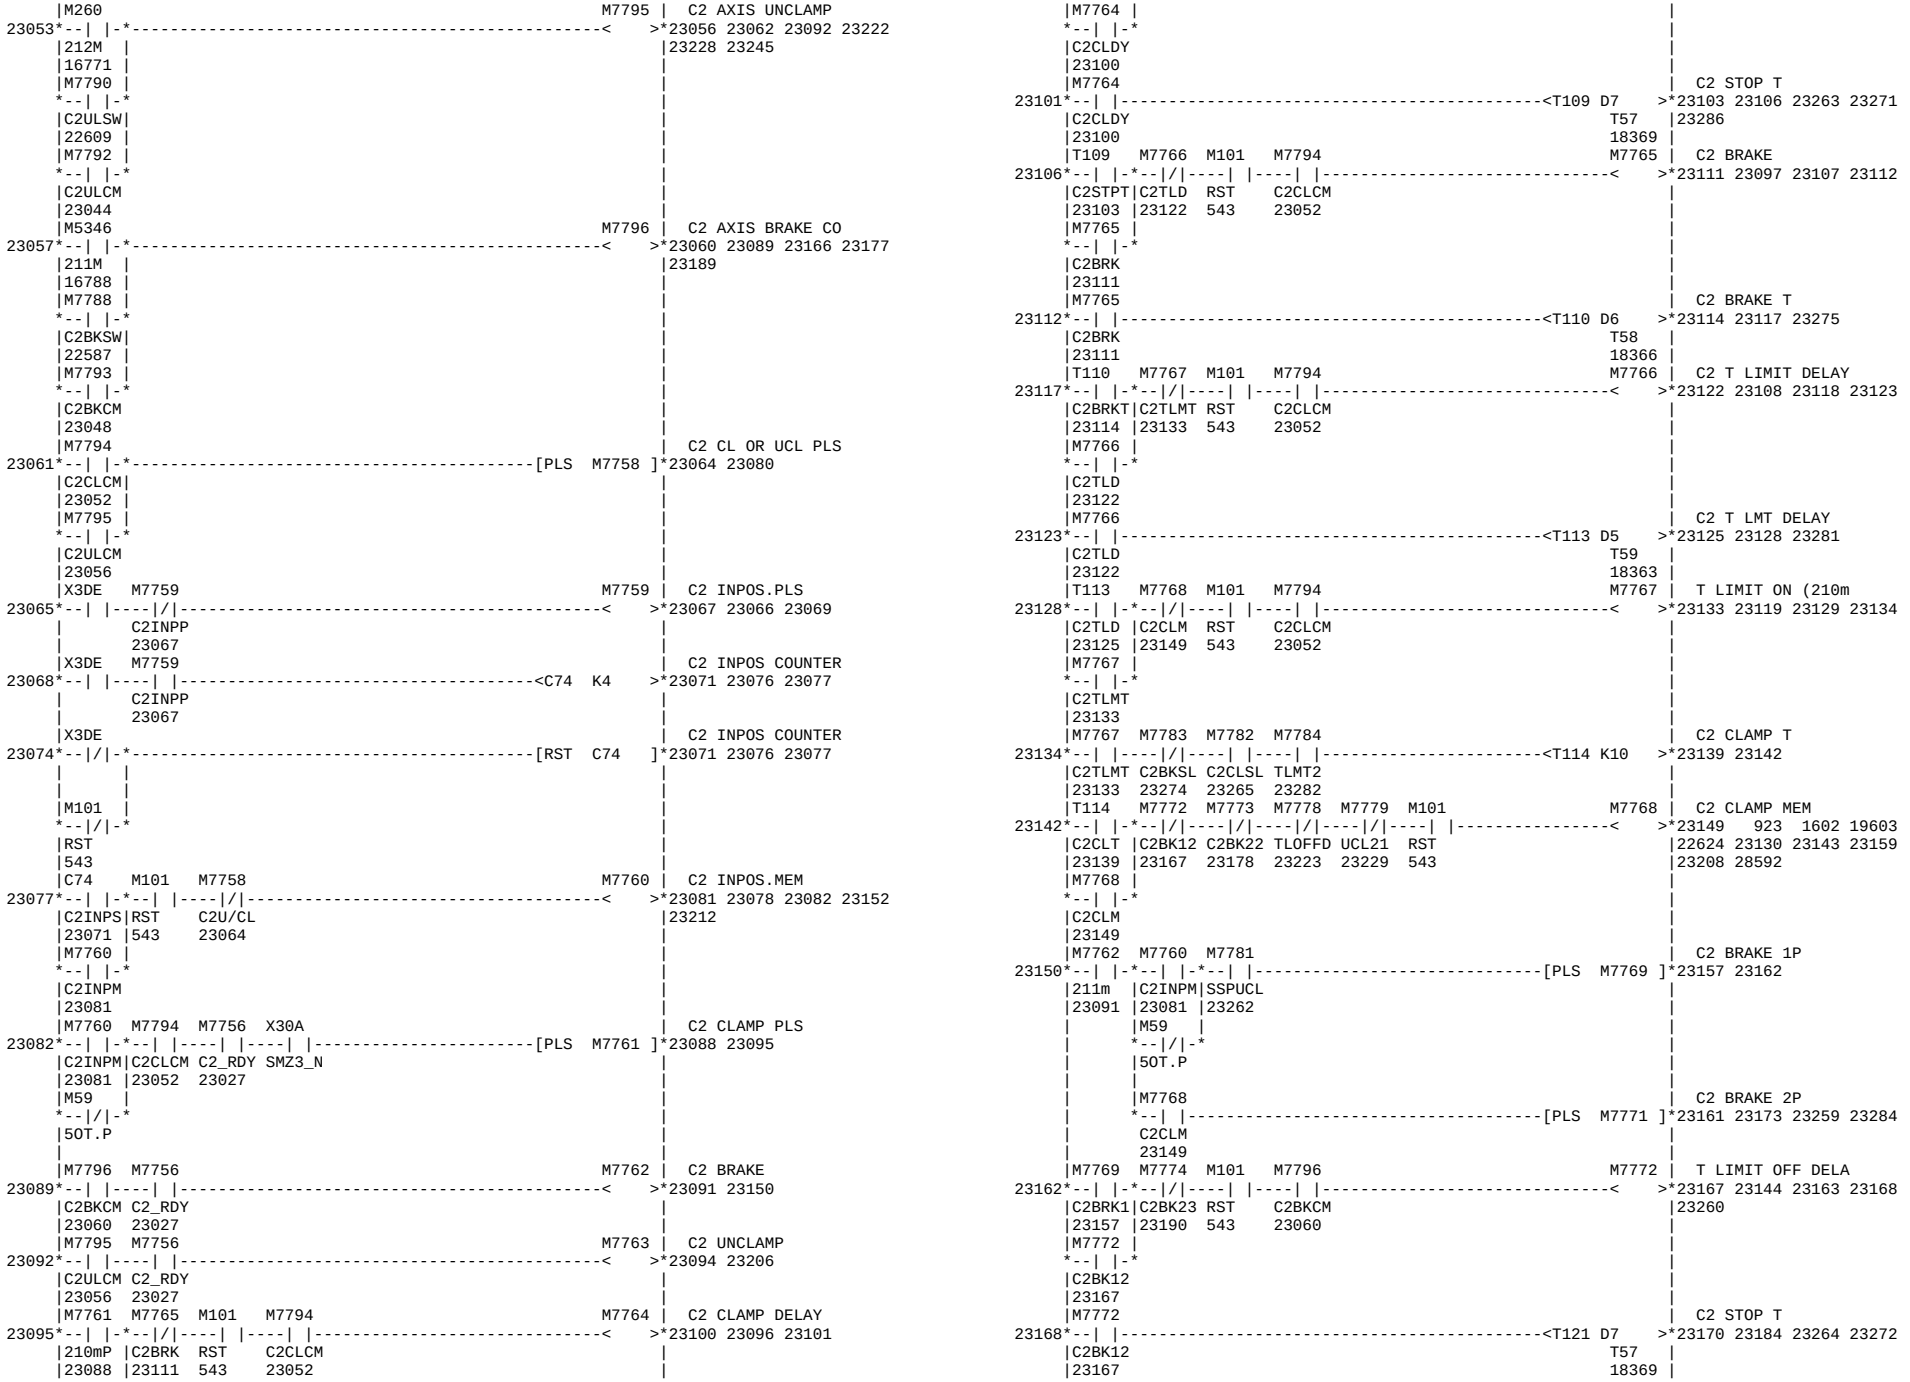

|M7775 L18 M6450 M7921 | MACHINE MENU 85
22614*--| |----| |-*--| |-*----------<>*22619
C2BRKM 2ND	SSC.P
23205 3841	
	M6451
*--		-*
SSCT.P
M1149 L17 M49 M7862	MACHINE MENU 36
22620*--| |----| |----| |----------<>*22623
CCLMEM 1ST C.P
22778 3835
M7768 L18 M6450 M7922	MACHINE MENU 86
22624*--| |----| |-*--| |-*----------<>*22629
C2CLM 2ND	SSC.P
23149 3841	
	M6451
*--		-*
SSCT.P
M109 L17 M49 M7863	MACHINE MENU 37
22630*--| |----| |----| |----------<>*22633
SPUCL 1ST C.P
22890 3835
M7781 L18 M6450 M7923	MACHINE MENU 87
22634*--| |----| |-*--| |-*----------<>*22639
SSPUCL 2ND	SSC.P
23262 3841	
	M6451
*--		-*
SSCT.P
22640*----------[RET]*
P148 |M5616 M1315 M660	SPINDLE ZERO RES
22641*--| |-*--|/|----------<>*22644 22642 22654
CCLSW	C-CLMP
22591	1611
M660
--| |-
SPZRST
22644
M5618 M1314 M661	ENABLE GEAR SHIF
22645*--| |-*--|/|----------<>*22648 22646 22658
CULSW	C-UNCL
22602	1593
M661
--| |-
ENGRST
22648
M5615 M1316 M662	GEAR NEUTRAL STA
22649*--| |-*--|/|----------<>*22652 22650 22663
CBKSW	C-BRAK
22580	1628
M662
--| |-
GSNST
22652
M263 M663	GEAR LOW START
22653*--| |-*----------<>*22656 22666 22712 22728
210M	|22739 22750 22761 22830
16668		22889
M660
--| |-
SPZRST
22644
M5616
--| |-
CCLSW
22591
M265 M664	GEAR MIDDLE STAR
22657*--| |-*----------<>*22661 22667 22720 22851
212M	|22857 22874
16705
M661
--| |-
ENGRST
22648
M5618
--| |-
CULSW
22602
M112
--|/|-
C-MODE
5533
M264 M665	GEAR HIGH START
22662*--| |-*----------<>*22665 22717 22795 22806
211M	|22818
16544
M662
--| |-
GSNST
22652
M5615
--| |-
CBKSW
22580
M663	C CL or UCL PLS
22666*--| |-*----------[PLS M1162]*22669 22708
GSLST
22656
M664
--| |-
GSMST
22661
M1279
22670*--| |----------[MOV K0 D933]*22673 22676 22678 22681
ON	22683 22686 22688 22691
585
M61
22674*--| |----------[WOR D933 H8000 D933]*22673 22676 22678 22681
4RF.P Ltemp3	22683 22686 22688 22691
22673
M6451
22679*--| |----------[WOR D933 H1000 D933]*22673 22676 22678 22681
SSCT.P Ltemp3	22683 22686 22688 22691
22673
M6450
22684*--| |----------[WOR D933 H800 D933]*22673 22676 22678 22681
SSC.P Ltemp3	22683 22686 22688 22691
22673
M1279	MACHINE CODE DAT
22689*--| |----------[MOV D933 R393]*22692
ON Ltemp3
585 22673
X2DE M1163 M1163	C INPOS PLS
22693*--| |----|/|----------<>*22695 22694 22697
CINPPL
22695
X2DE M1163	C INPOS COUNTER(
22696*--| |----| |----------<C73 K4 >*22699 22704 22705
CINPPL
22695
X2DE	C INPOS COUNTER(
22702*--|/|-*----------[RST C73]*22699 22704 22705
M101
--|/|-
RST
543
C73 M101 M1162 M1164	C INPOS MEM
22705*--| |-*--| |----|/|----------<>*22709 22706 22710 22781
CINPOS	RST U/CLPL	22841
22699	543 22669
M1164
--| |-
CINPME
22709

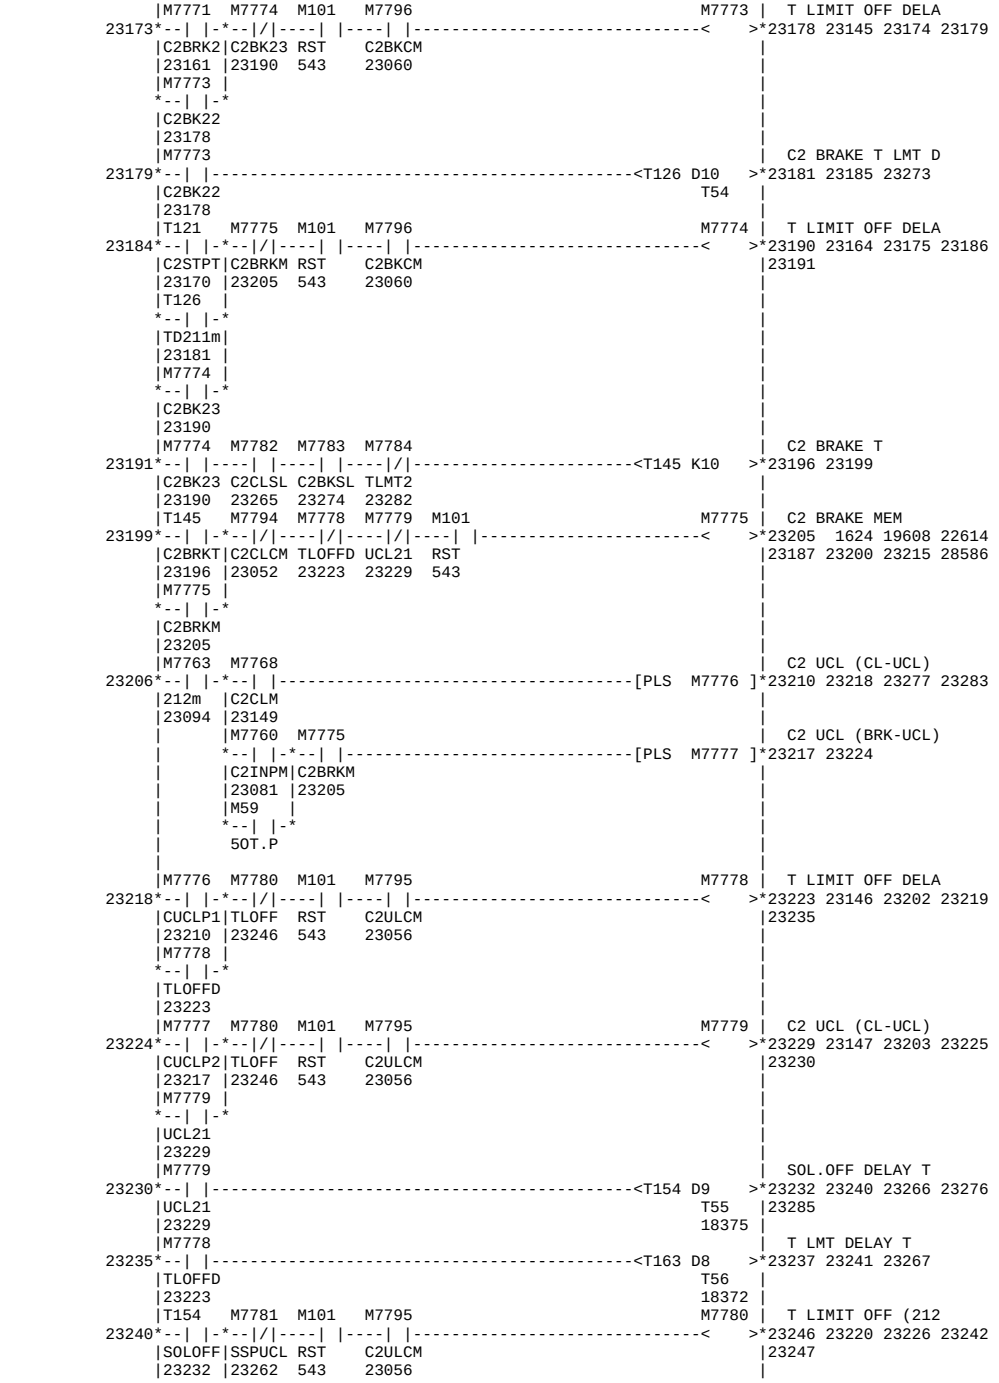

|M1164 M663 M113 X20A | C AXIS CLAMP PLS
22710*--| |-*--| |----| |----| |----------[PLS M1165]*22716 22724
CINPME	GSLST C-OK SMZ3.N
22709	22656 5539
M59	
*--	/	-*
5OT.P
M665 M113 M1166	C AXIS BREAK PLS
22717*--| |----| |----------<>*22719 22779
GSHST C-OK
22665 5539
M664 M113 M1167	C AXIS UNCLAMP P
22720*--| |----| |-*----------<>*22723 22835
GSMST C-OK
22661 5539
M112
*--	/	--------*
C-MODE
5533
M1165 M1146 M101 M663 M1145	C AXIS CLMP DELA
22724*--| |-*--|/|----| |----| |----------<>*22729 22725 22730
210MP	CCL2 RST GSLST
22716	22740 543 22656
M1145	
*--		-*
T97-ON
22729
M1145	T57
22730*--| |----------<T97 D7 >*22732 22735 22891 22898
T97-ON T57	22912
22729 18369
T97 M1147 M101 M663 M1146	C AXIS BREAK(210
22735*--| |-*--|/|----| |----| |----------<>*22740 22726 22736 22741
C-SP.T	CCL3 RST GSLST
22732	22751 543 22656
M1146	
*--		-*
CCL2
22740
M1146	T58
22741*--| |----------<T98 D6 >*22743 22746 22902
CCL2 T58
22740 18366
T98 M1148 M101 M663 M1147	C AXIS T LIMIT D
22746*--| |-*--|/|----| |----| |----------<>*22751 22737 22747 22752
C-BK.T	T-LIMI RST GSLST
22743	22762 543 22656
M1147	
*--		-*
CCL3
22751
M1147	T59
22752*--| |----------<T99 D5 >*22754 22757 22907
CCL3 T59
22751 18363
T99 M1149 M101 M663 M1148	T LIMIT ON(210M)
22757*--| |-*--|/|----| |----| |----------<>*22762 22748 22758 22763
C-CL.T	CCLMEM RST GSLST
22754	22778 543 22656
M1148	
*--		-*
T-LIMI
22762
M1148 M7038 M7039 M1159	C-AXIS CLAMP .T
22763*--| |----|/|----| |----| |----------<T26 K10 >*22768 22771 25940
T-LIMI CBKSOL CCLSOL Y282AU
22762 22901 22893 22908
T26 M1151 M1153 M1157 M1161 M101 M1149	C AXIS CLAMPMEM
22771*--| |-*--|/|----|/|----|/|----|/|----| |----------<>*22778 921 1522 1597
C-CL.T	CBK1.2 CBK2.2 TLOFFD UCL2.1 RST	19511 22620 22759 22772
22768	22796 22807 22852 22858 543	22788 22837 28498
M1149	
*--		-*
CCLMEM
22778
M1166 M1164 M109	C BREAK1P(UCL-BR
22779*--| |-*--| |-*--| |----------[PLS M1150]*22786 22791
211MP	CINPME	SPUCL
22719	22709	22890
|M59	
*--	/	-*
	5OT.P
|M1149	C BREAK2P(CL-BRK
*--		----------[PLS M1155]*22790 22802 22888 22909
CCLMEM
22778
M1150 M1154 M101 M665 M1151	T LIMIT OFF DELA
22791*--| |-*--|/|----| |----| |----------<>*22796 22773 22792 22797
CBK1.1	CBK2.3 RST GSHST	22887
22786	22819 543 22665
M1151	
*--		-*
CBK1.2
22796
M1151	C-AXIS STOP T
22797*--| |----------<T223 D7 >*22799 22814 22892 22899
CBK1.2 T57
22796 18369
M1155 M1154 M101 M665 M1153	T LIMIT OFF DELA
22802*--| |-*--|/|----| |----| |----------<>*22807 22774 22803 22808
CBL2.1	CBK2.3 RST GSHST
22790	22819 543 22665
M1153	
*--		-*
CBK2.2
22807
M1153	T54
22808*--| |----------<T94 D10 >*22810 22813 22900
CBK2.2 T54
22807
T94 M1152 M101 M665 M1154	T LIMIT OFF DELA
22813*--| |-*--|/|----| |----| |----------<>*22819 22793 22804 22815
TLD211	CBKMEM RST GSHST	22820
22810	22834 543 22665
T223	
*--		-*
CSTP.T	
22799	
M1154	
*--		-*
CBK2.3
22819
M1154 M7038 M7039 M1159	C-AXIS BRAKE .T
22820*--| |----| |----| |----|/|----------<T27 K10 >*22825 22828
CBK2.3 CBKSOL CCLSOL Y282AU
22819 22901 22893 22908
T27 M663 M1161 M1157 M101 M1152	C AXIS BREAK MEM
22828*--| |-*--|/|----|/|----|/|----| |----------<>*22834 1615 19515 22610
C-BK/T	GSLST UCL2.1 TLOFFD RST	22816 22829 22844 28494
22825	22656 22858 22852 543
M1152	
*--		-*
CBKMEM
22834
M1167 M1149	C UNCLAMP(CL-UCL
22835*--| |-*--| |----------[PLS M1156]*22839 22847 22904 22910
212MP	CCLMEM
22723	22778
|M1164 M1152	C UNCLAMP(BK-UCL
--| |---| |----------[PLS M1160]*22846 22853
	CINPME	CBKMEM
	22709	22834
|M59	
*--		-*
5OT.P
M1156 M1158 M101 M664 M1157	T LIMIT OFF DERA
22847*--| |-*--|/|----| |----| |----------<>*22852 22775 22832 22848
CUCLP1	TLOFF RST GSMST	22864
22839	22875 543 22661

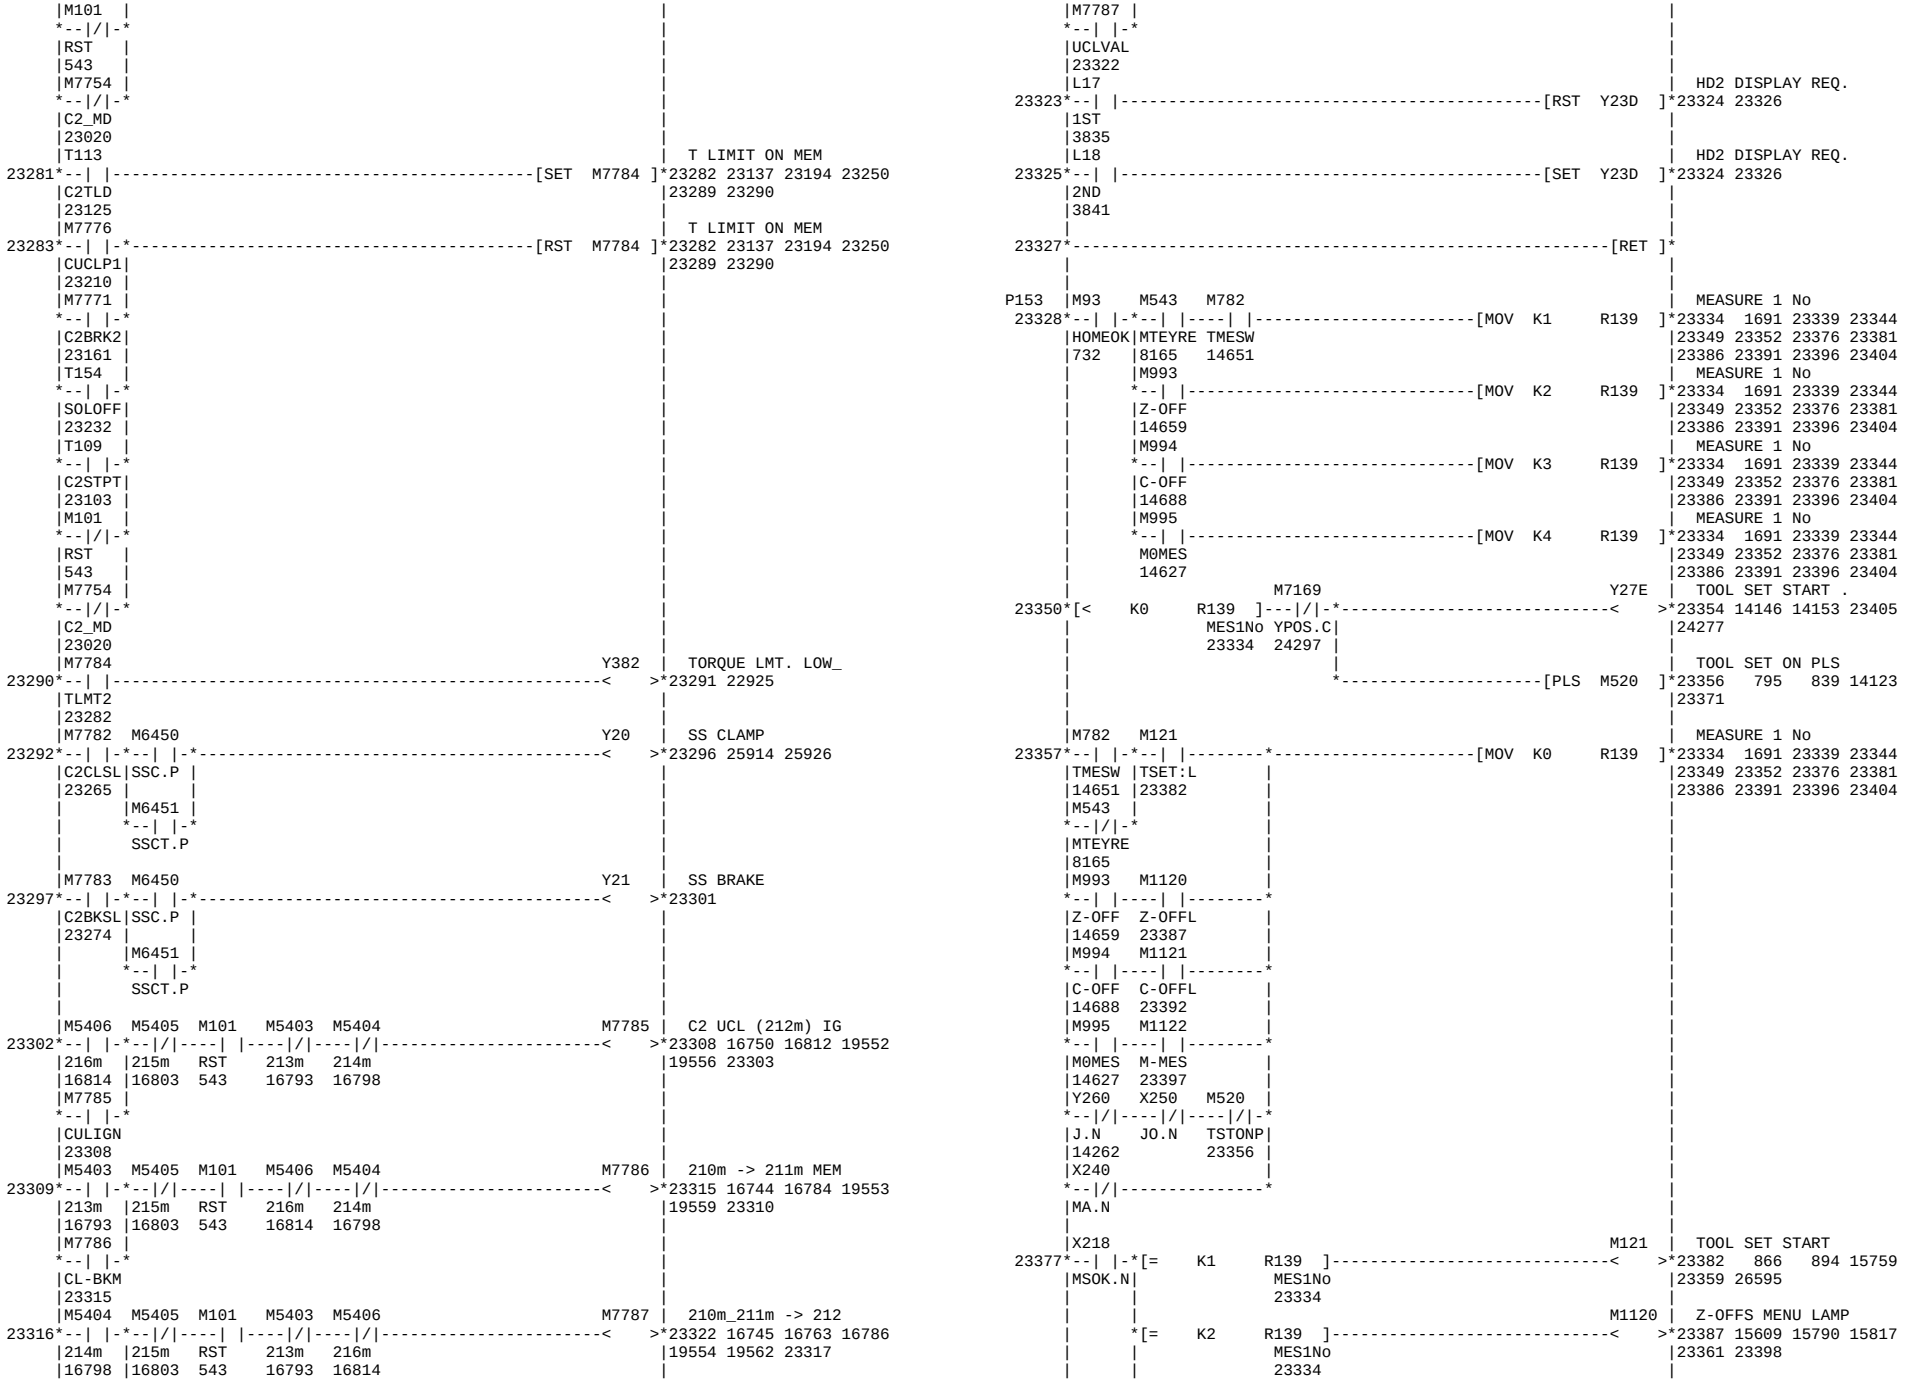

|M1157 |
--| |-
|TLOFFD
|22852
|M1160 M1158 M101 M664 M1161 | UNCL DERAY(CL-UC
22853*--| |-*--|/|----| |----| |----------<> *22858 22776 22831 22854
|CUCLP2|TLOFF RST GSMST |22859
|22846 |22875 543 22661
|M1161 |
--| |-
|UCL2.1
|22858
|M1161 | T55
22859*--| |----------<T95 D9 >*22861 22870 22895 22903
|UCL2.1 T55 |22911
|22858 18375 |
|M1157 | T56
22864*--| |----------<T96 D8 >*22866 22869 22894
|TLOFFD T56 |
|22852 18372 |
|T96 M109 M101 M664 M1158 | T LIMIT OFF(212M
22869*--| |-*--|/|----| |----| |----------<> *22875 22849 22855 22871
|TLD212|SPUCL RST GSMST |22876
|22866 |22890 543 22661
|T95 |
--| |-
|TLD212|
|22861 |
|M1158 |
--| |-
|TLOFF
|22875
|M1158 M7038 M7039 M1159 | C-AXIS UNCLAMP .
22876*--| |----|/|----|/|----|/|----------<T28 K10 >*22881 22884
|TLOFF CBKSOL CCLSOL Y282AU |
|22875 22901 22893 22908 |
|T28 M1151 M1155 M663 M109 | SPINDLE UNCLAMP
22884*--| |-*--|/|----|/|----|/|----------<> *22890 1578 5379 19517
|C-UC.T|CBK1.2 CBL2.1 GSLST |19534 20747 20778 21349
|22881 |22796 22790 22656 |22630 22784 22872 22885
|M109 | |28502
--| |-
|SPUCL |
|22890 |
|M101 |
--|/|-
|RST
|543
|T97 | C AXIS CLAMP SOL
22891*--| |-*----------[SET M7039]*22893 427 22765 22822
|C-SP.T| |22878 22897
|22732 |
|T223 |
--| |-
|CSTP.T
|22799
|T96 | C AXIS CLAMP SOL
22894*--| |-*----------[RST M7039]*22893 427 22765 22822
|TLD212| |22878 22897
|22866 |
|T95 |
--| |-
|TLD212|
|22861 |
|M101 |
--|/|-
|RST
|543
|T97 | C AXIS BREAK SOL
22898*--| |-*----------[SET M7038]*22901 439 22764 22821
|C-SP.T| |22877 22906
|22732 |
|T223 |
--| |-
|CSTP.T|
|22799 |
|T94 |
--| |-
|TLD211
|22810
|T98 | C AXIS BREAK SOL
22902*--| |-*----------[RST M7038]*22901 439 22764 22821
|C-BK.T| |22877 22906
|22743 |
|T95 |
--| |-
|TLD212|
|22861 |
|M1156 |
--| |-
|CUCLP1|
|22839 |
|M101 |
--|/|-
|RST
|543
|T99 | T LIMIT ON MEM
22907*--| |----------[SET M1159]*22908 393 22766 22823
|C-CL.T |22879 22914
|22754
|M1155 | T LIMIT ON MEM
22909*--| |-*----------[RST M1159]*22908 393 22766 22823
|CBL2.1| |22879 22914
|22790 |
|M1156 |
--| |-
|CUCLP1|
|22839 |
|T95 |
--| |-
|TLD212|
|22861 |
|T97 |
--| |-
|C-SP.T|
|22732 |
|M101 |
--|/|-
|RST
|543
22915*----------[RET]*
P151 | Y38D M7754 M7750 | C2 AXIS REQUEST
22916*[> K500 R366]---| |-*--| |----------<> *22922 419 22920 22923
COIL.N|C2_MD
382 |23020
|M7750 |
--| |----------
|C2_REQ
|22922
|M7750 T181 Y382 Y383 M7754 Y30A | SERVO ON C _NC
22923*--| |----| |----|/|----|/|-*--| |----------<> *22929 379 22927
|C2_REQ COIL_T TL1 |C2_MD
|22922 390 23291 |23020
|Y30A |
--| |----------
|*SVF3
|22929
|M931 M818 M1409 M91 L18 M502 M7754 M49
22930*--| |----| |----| |----| |----| |----| |----|/|-*--| |---->1
|CCE C-SWP MAN&DR MANU 2ND TDIL C2_MD |C.P
|2255 5272 2436 14444 3841 8169 23020 |
|M5400 |
--| |----------
|200m |
|17311 |
|M5401 |
--| |----------
|201m |
|17316 |

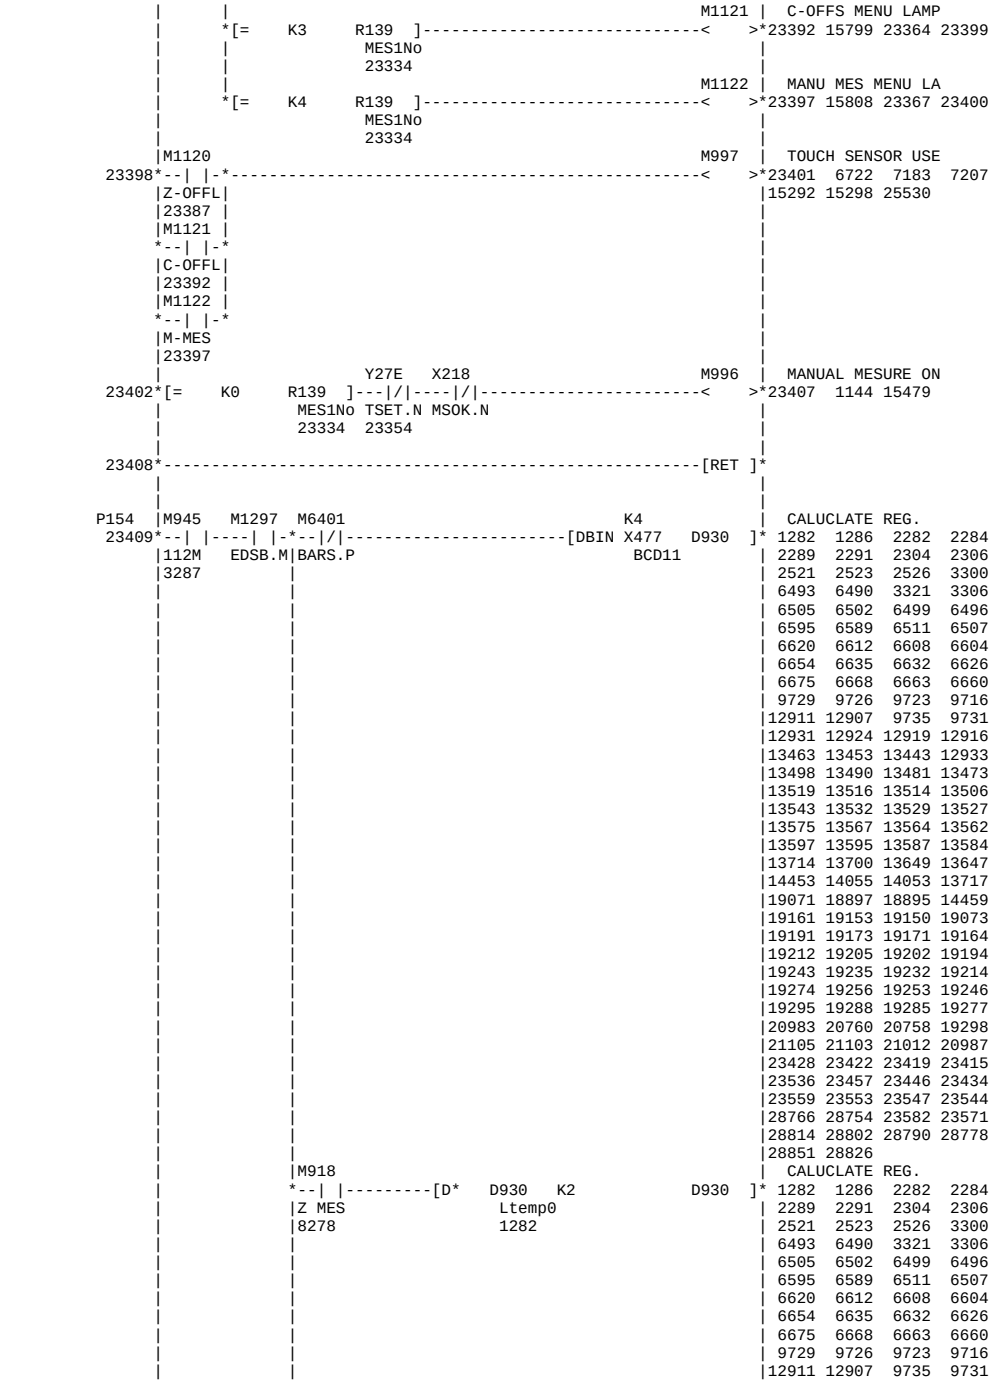

|M111 X244 M6450 M6451 |
|M-MODE OP.N |SSC.P SSCT.P
|5341 |
|M7256 M111 |
|203MM |M-MODE
|6809 |5341
|M7257 |
|204MM |
|6817 |
|M301 |
|302M
|17427
| M100 M6631 M7753 M7751 | 2nd CHK OPEN AT
| 1>-----| |----| |----|/|----------<
| RDY ILYME1 C2_CAN
| 533 2277 23000
|M7751 M5681 M100 Y330 M7752 | C2 AXIS SELECT M
22954*--| |-*--|/|-*--| |----|/|----------<
|C2_SEL|WKHOLD|RDY SEL-C
|22953 |5268 |533 23029
|M7752 |M1349 |
|C2_MDM APR.M
|22961 5173
|M818 M931 L18 M91 M7754
22962*--| |----| |----| |----| |----| |----------*-->1
|C-SWP CCE 2ND MANU C2_MD
|5272 2255 3841 14444 23020
|M5402
|202m
|17321
|M295
|502M
|17836
|M313
|511M
|17856
|M356
|380M
|17958
|X244 M5400 M5401 M110 M6451 M6450
|OP.N 200m 201m S-MODE SSCT.P SSC.P
| 17311 17316 5394
|M5824 M326 M110 M6451 M6450
|TRS-M 519M |S-MODE SSCT.P SSC.P
|4268 17922 |5394
|M300 |
|300M
|17422
|M5563 L18 M5681
|ORC 2ND WKHOLD
|21032 3841 5268
|M111 M90 X244 L18 M710 M5400 M5401 M7754 |
|M-MODE AUTO OP.N 2ND SP-MP 200m 201m C2_MD |
|5341 14419 3841 3837 17311 17316 23020 |
|M5252
|MISOP3
|26717
|M5681 M7751 M6631 M7753 X260 M100 M6450 Y389
23001*--|/|-*--| |-*--| |-*--|/|----|/|----| |-*--| |-*--|/|----->1
|WKHOLD|C2_SEL|ILYME1|C2_CAN SYNS.N RDY |SSC.P |SYNC.N
|5268 |22953 |2277 |23000 533 | |4091

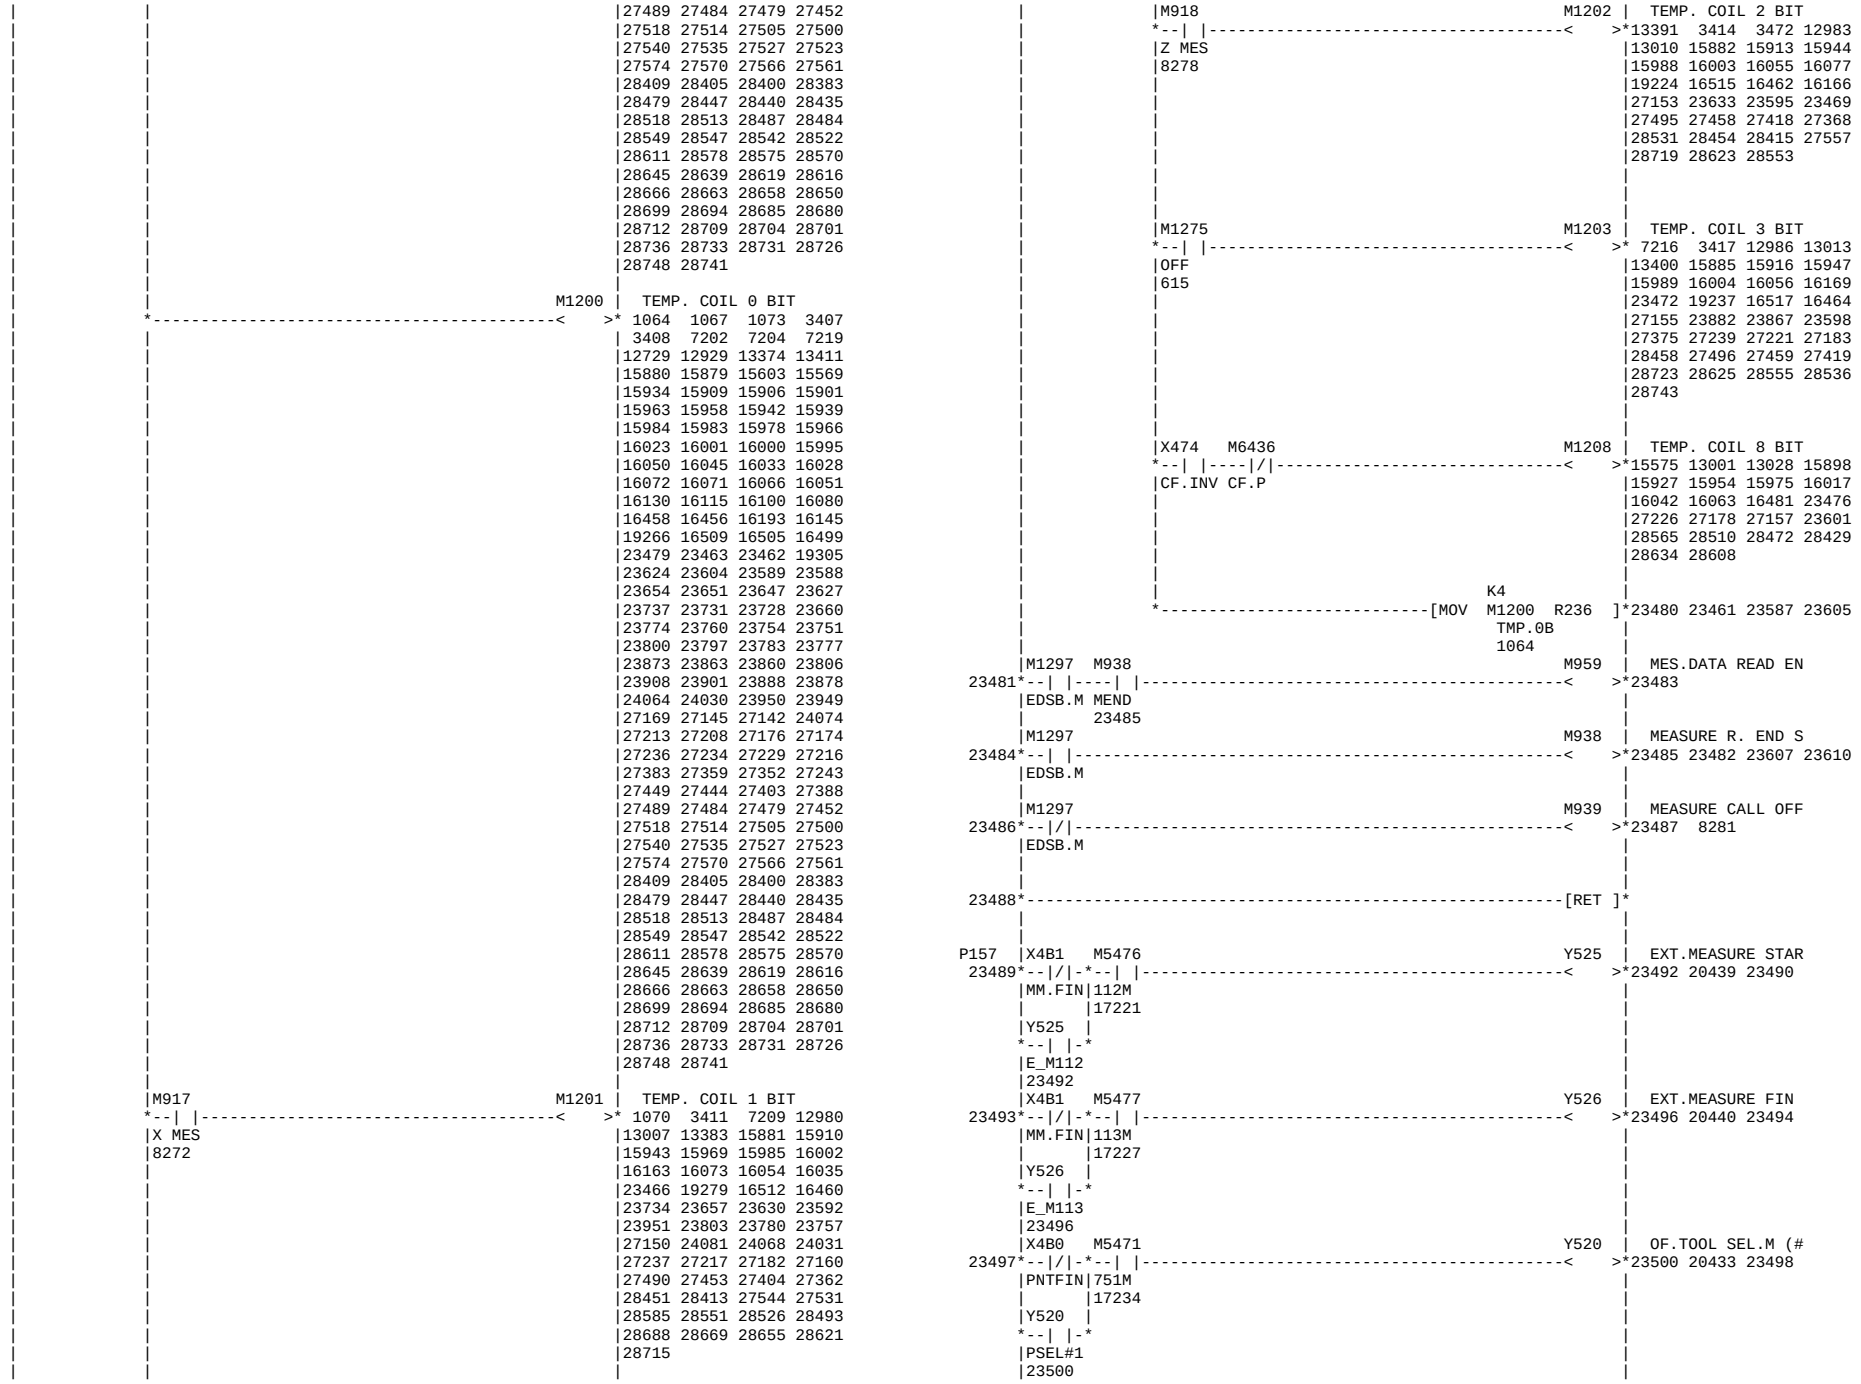

|M5630 | |T177 | |M6451 |
|SS=UCL |STOF.T| SSCT.P
21300	2269
M7754	X244
C2_MD	OP.N
23020	
M6409
JP/YMC
X360 M1140 M7754	C2 AXIS MODE
1>-----|/|-*--|/|----------<
SYNC_N	POLIMD
5404
23020 5296 5332 5387
19530 20768 21146 21870
21934 21993 22207 22921
22996 22966 22936 22928
23258 23030 23028 23004
27032 23288 23279 23269
M7755	C2 AXIS MODE 2
*----------<
>*23022 23023
M7755 X32A M7756	C2 AXIS READY
23023*--| |-*--| |-*----------<
C2_MD2	ZP23_N
23022	
	M7756
--| |-
C2_RDY
23027
M7754 Y330	C AXIS SELECT _N
23028*--| |----------<
C2_MD
23020
M7754 M5561 M90 L18 M112	C2 MODE OFF PLS
23030*--|/|----| |----| |----| |----|/|----------[PLS M7757]
C2_MD SPSTOP AUTO 2ND C-MODE
23020 22134 14419 3841 5533
M7789 M1315 M7791	C2 AXIS CLAMP SW
23037*--| |-*--|/|----------<
C2CLSW	C-CLMP
22598	1611
M7791
C2CLCM
23040
M7790 M1314 M7792	C2 AXIS UNCLAMP
23041*--| |-*--|/|----------<
C2ULSW	C-UNCL
22609	1593
M7792
C2ULCM
23044
M7788 M1316 M7793	C2 AXIS BRAKE SW
23045*--| |-*--|/|----------<
C2BKSW	C-BRAK
22587	1628
M7793
C2BKCM
23048
M259 M7794	C2 AXIS CLAMP CO
23049*--| |-*----------<
210M
16746
M7789
C2CLSW
22598
M7791
C2CLCM
23040
>*23020 5296 5332 5387
>*23027 378 5358 15625
>*23029 4068 4124 22960
>*23034 5319
>*23036 5319
>*23040 23038 23051
>*23044 23042 23055
>*23048 23046 23059
>*23052 23061 23084 23099
16467 19525 19573 23025
23085 23090 23093
24934 24947 24954 24961
23110 23121 23132 23201
23261

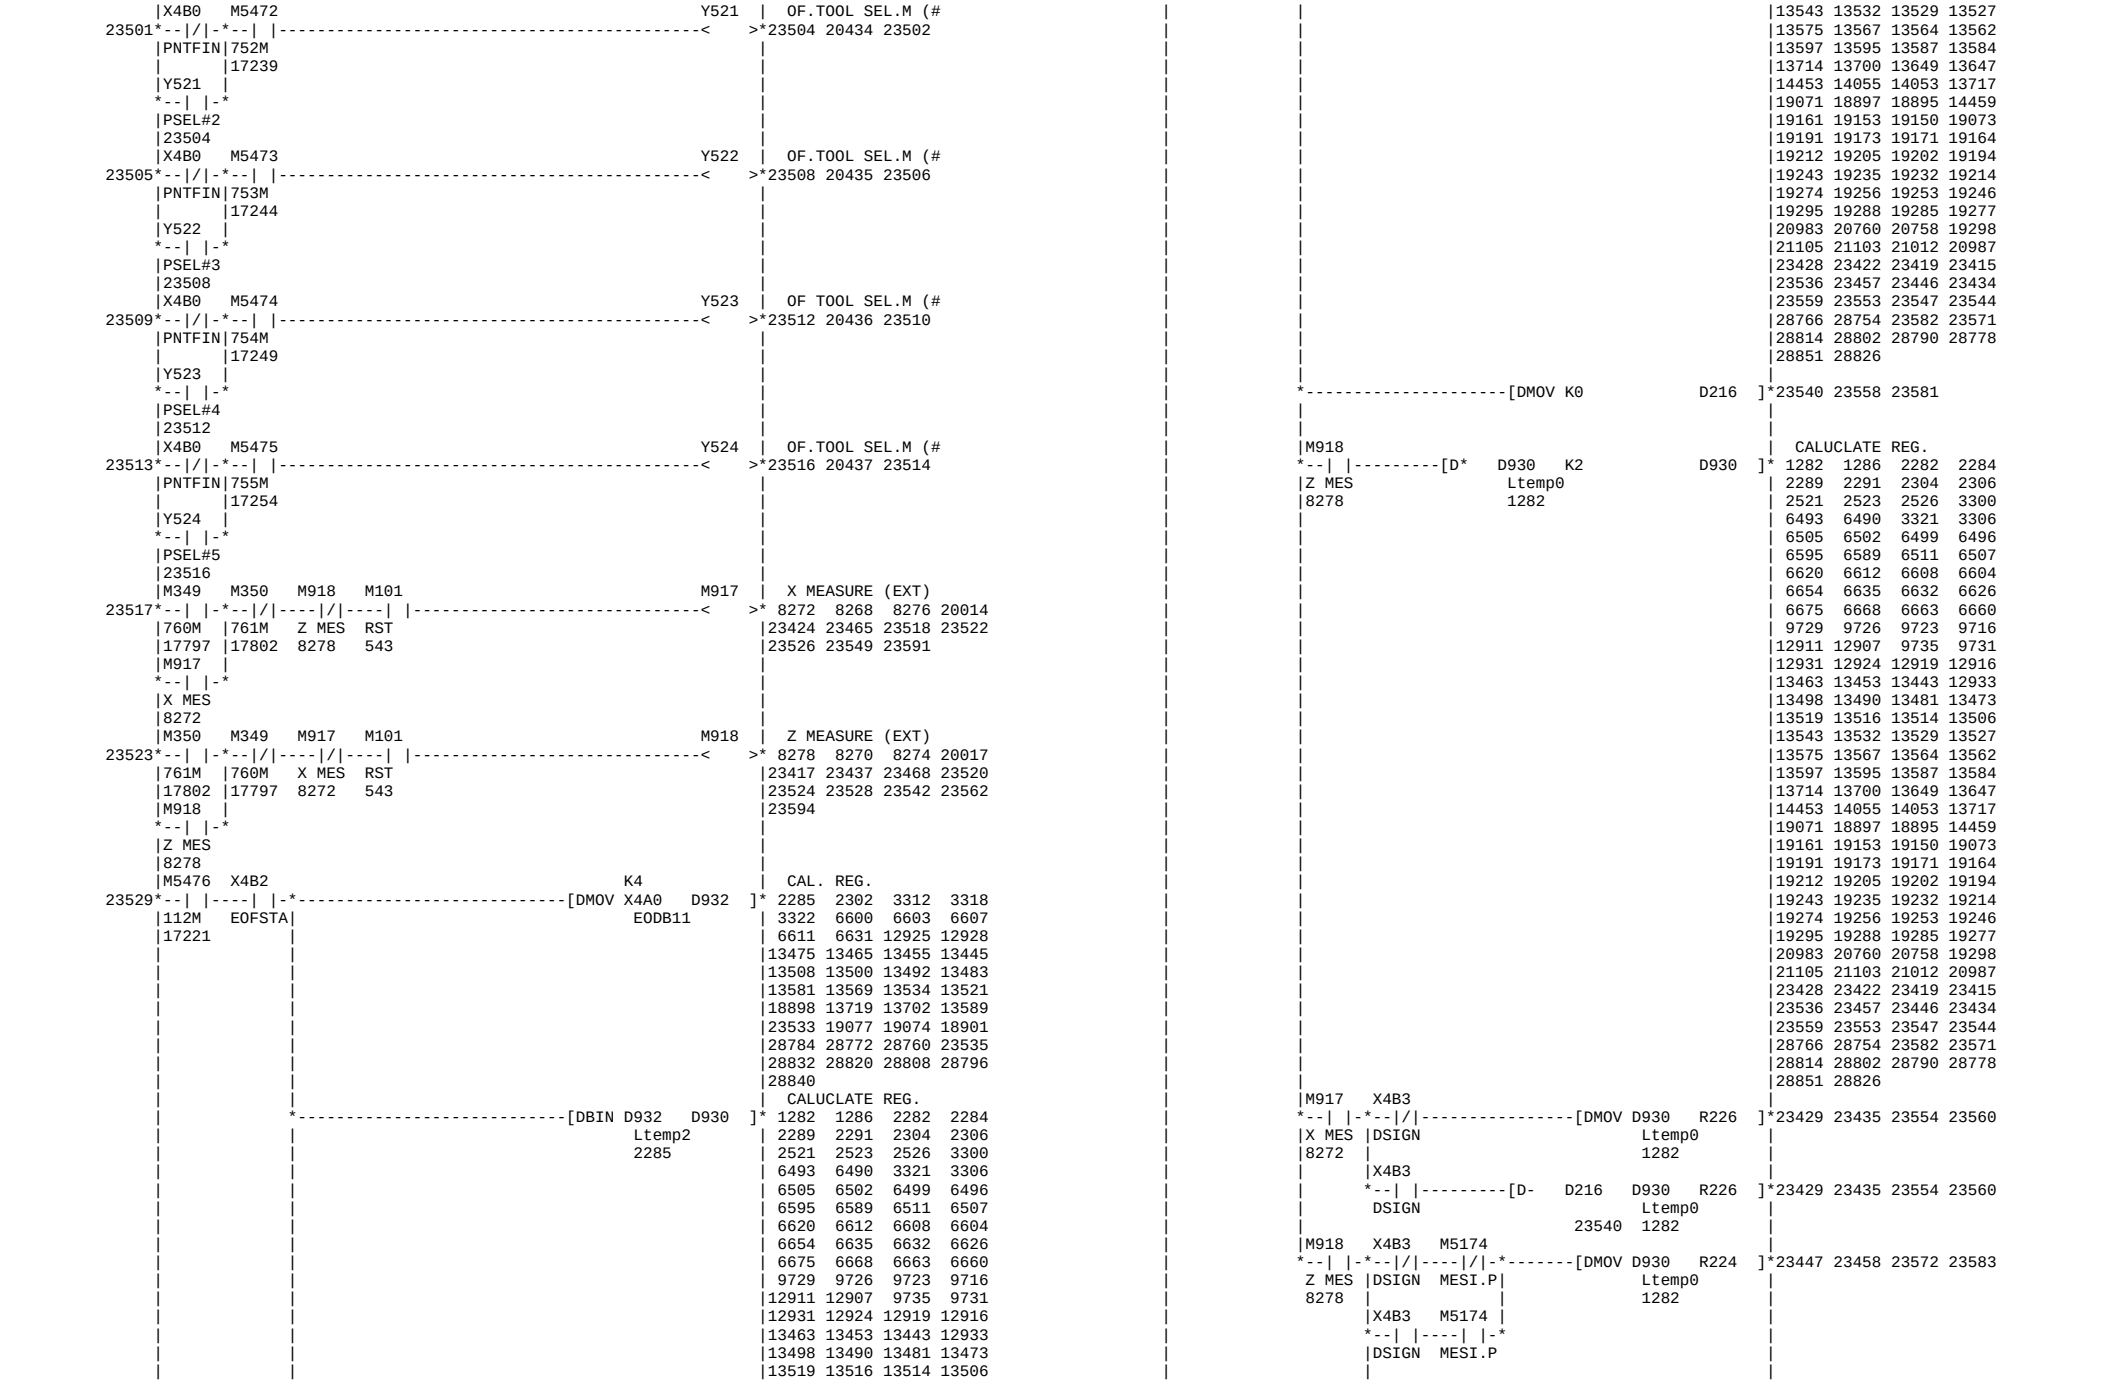

|M260 M7795 | C2 AXIS UNCLAMP
23053*--| |-*<
>*23056 23062 23092 23222
|212M | |23228 23245
|16771 |
|M7790 |
--| |-
|C2ULSW|
|22609 |
|M7792 |
--| |-
|C2ULCM
|23044
|M5346 M7796 | C2 AXIS BRAKE CO
23057*--| |-*<
>*23060 23089 23166 23177
|211M | |23189
|16788 |
|M7788 |
--| |-
|C2BKSW|
|22587 |
|M7793 |
--| |-
|C2BKCM
|23048
|M7794 | C2 CL OR UCL PLS
23061*--| |-*[PLS M7758]*23064 23080
|C2CLCM|
|23052 |
|M7795 |
--| |-
|C2ULCM
|23056
|X3DE M7759 M7759 | C2 INPOS.PLS
23065*--| |----|/|<
>*23067 23066 23069
| C2INPP
| 23067
|X3DE M7759 | C2 INPOS COUNTER
23068*--| |----| |<C74 K4 >*23071 23076 23077
| C2INPP
| 23067
|X3DE | C2 INPOS COUNTER
23074*--|/|-*[RST C74]*23071 23076 23077
| |
| |
|M101 |
--|/|-
|RST
|543
|C74 M101 M7758 M7760 | C2 INPOS.MEM
23077*--| |-*--| |----|/|<
>*23081 23078 23082 23152
|C2INPS|RST C2U/CL |23212
|23071 |543 23064
|M7760 |
--| |-
|C2INPM
|23081
|M7760 M7794 M7756 X30A | C2 CLAMP PLS
23082*--| |-*--| |----| |----| |[PLS M7761]*23088 23095
|C2INPM|C2CLCM C2_RDY SMZ3_N
|23081 |23052 23027
|M59 |
--|/|-
|5OT.P
|
|M7796 M7756 M7762 | C2 BRAKE
23089*--| |----| |<
>*23091 23150
|C2BKCM C2_RDY
|23060 23027
|M7795 M7756 M7763 | C2 UNCLAMP
23092*--| |----| |<
>*23094 23206
|C2ULCM C2_RDY
|23056 23027
|M7761 M7765 M101 M7794 M7764 | C2 CLAMP DELAY
23095*--| |-*--|/|----| |----| |<
>*23100 23096 23101
|210mP |C2BRK RST C2CLCM
|23088 |23111 543 23052
|M7764 |
--| |-
|C2CLDY
|23100
|M7764 | C2 STOP T
23101*--| |<T109 D7 >*23103 23106 23263 23271
|C2CLDY T57 |23286
|23100 18369 |
|T109 M7766 M101 M7794 M7765 | C2 BRAKE
23106*--| |-*--|/|----| |----| |<
>*23111 23097 23107 23112
|C2STPT|C2TLD RST C2CLCM
|23103 |23122 543 23052
|M7765 |
--| |-
|C2BRK
|23111
|M7765 | C2 BRAKE T
23112*--| |<T110 D6 >*23114 23117 23275
|C2BRK T58 |
|23111 18366 |
|T110 M7767 M101 M7794 M7766 | C2 T LIMIT DELAY
23117*--| |-*--|/|----| |----| |<
>*23122 23108 23118 23123
|C2BRKT|C2TLMT RST C2CLCM
|23114 |23133 543 23052
|M7766 |
--| |-
|C2TLD
|23122
|M7766 | C2 T LMT DELAY
23123*--| |<T113 D5 >*23125 23128 23281
|C2TLD T59 |
|23122 18363 |
|T113 M7768 M101 M7794 M7767 | T LIMIT ON (210m
23128*--| |-*--|/|----| |----| |<
>*23133 23119 23129 23134
|C2TLD |C2CLM RST C2CLCM
|23125 |23149 543 23052
|M7767 |
--| |-
|C2TLMT
|23133
|M7767 M7783 M7782 M7784 | C2 CLAMP T
23134*--| |----|/|----| |----| |<T114 K10 >*23139 23142
|C2TLMT C2BKSL C2CLSL TLMT2
|23133 23274 23265 23282
|T114 M7772 M7773 M7778 M7779 M101 M7768 | C2 CLAMP MEM
23142*--| |-*--|/|----|/|----|/|----|/|----| |<
>*23149 923 1602 19603
|C2CLT |C2BK12 C2BK22 TLOFFD UCL21 RST |22624 23130 23143 23159
|23139 |23167 23178 23223 23229 543 |23208 28592
|M7768 |
--| |-
|C2CLM
|23149
|M7762 M7760 M7781 | C2 BRAKE 1P
23150*--| |-*--| |-*--| |[PLS M7769]*23157 23162
|211m |C2INPM|SSPUCL
|23091 |23081 |23262
| |M59 |
| *--|/|-*
| |5OT.P
| |
| |M7768 | C2 BRAKE 2P
| *--| |[PLS M7771]*23161 23173 23259 23284
| C2CLM
| 23149
|M7769 M7774 M101 M7796 M7772 | T LIMIT OFF DELA
23162*--| |-*--|/|----| |----| |<
>*23167 23144 23163 23168
|C2BRK1|C2BK23 RST C2BKCM |23260
|23157 |23190 543 23060
|M7772 |
--| |-
|C2BK12
|23167
|M7772 | C2 STOP T
23168*--| |<T121 D7 >*23170 23184 23264 23272
|C2BK12 T57 |
|23167 18369 |

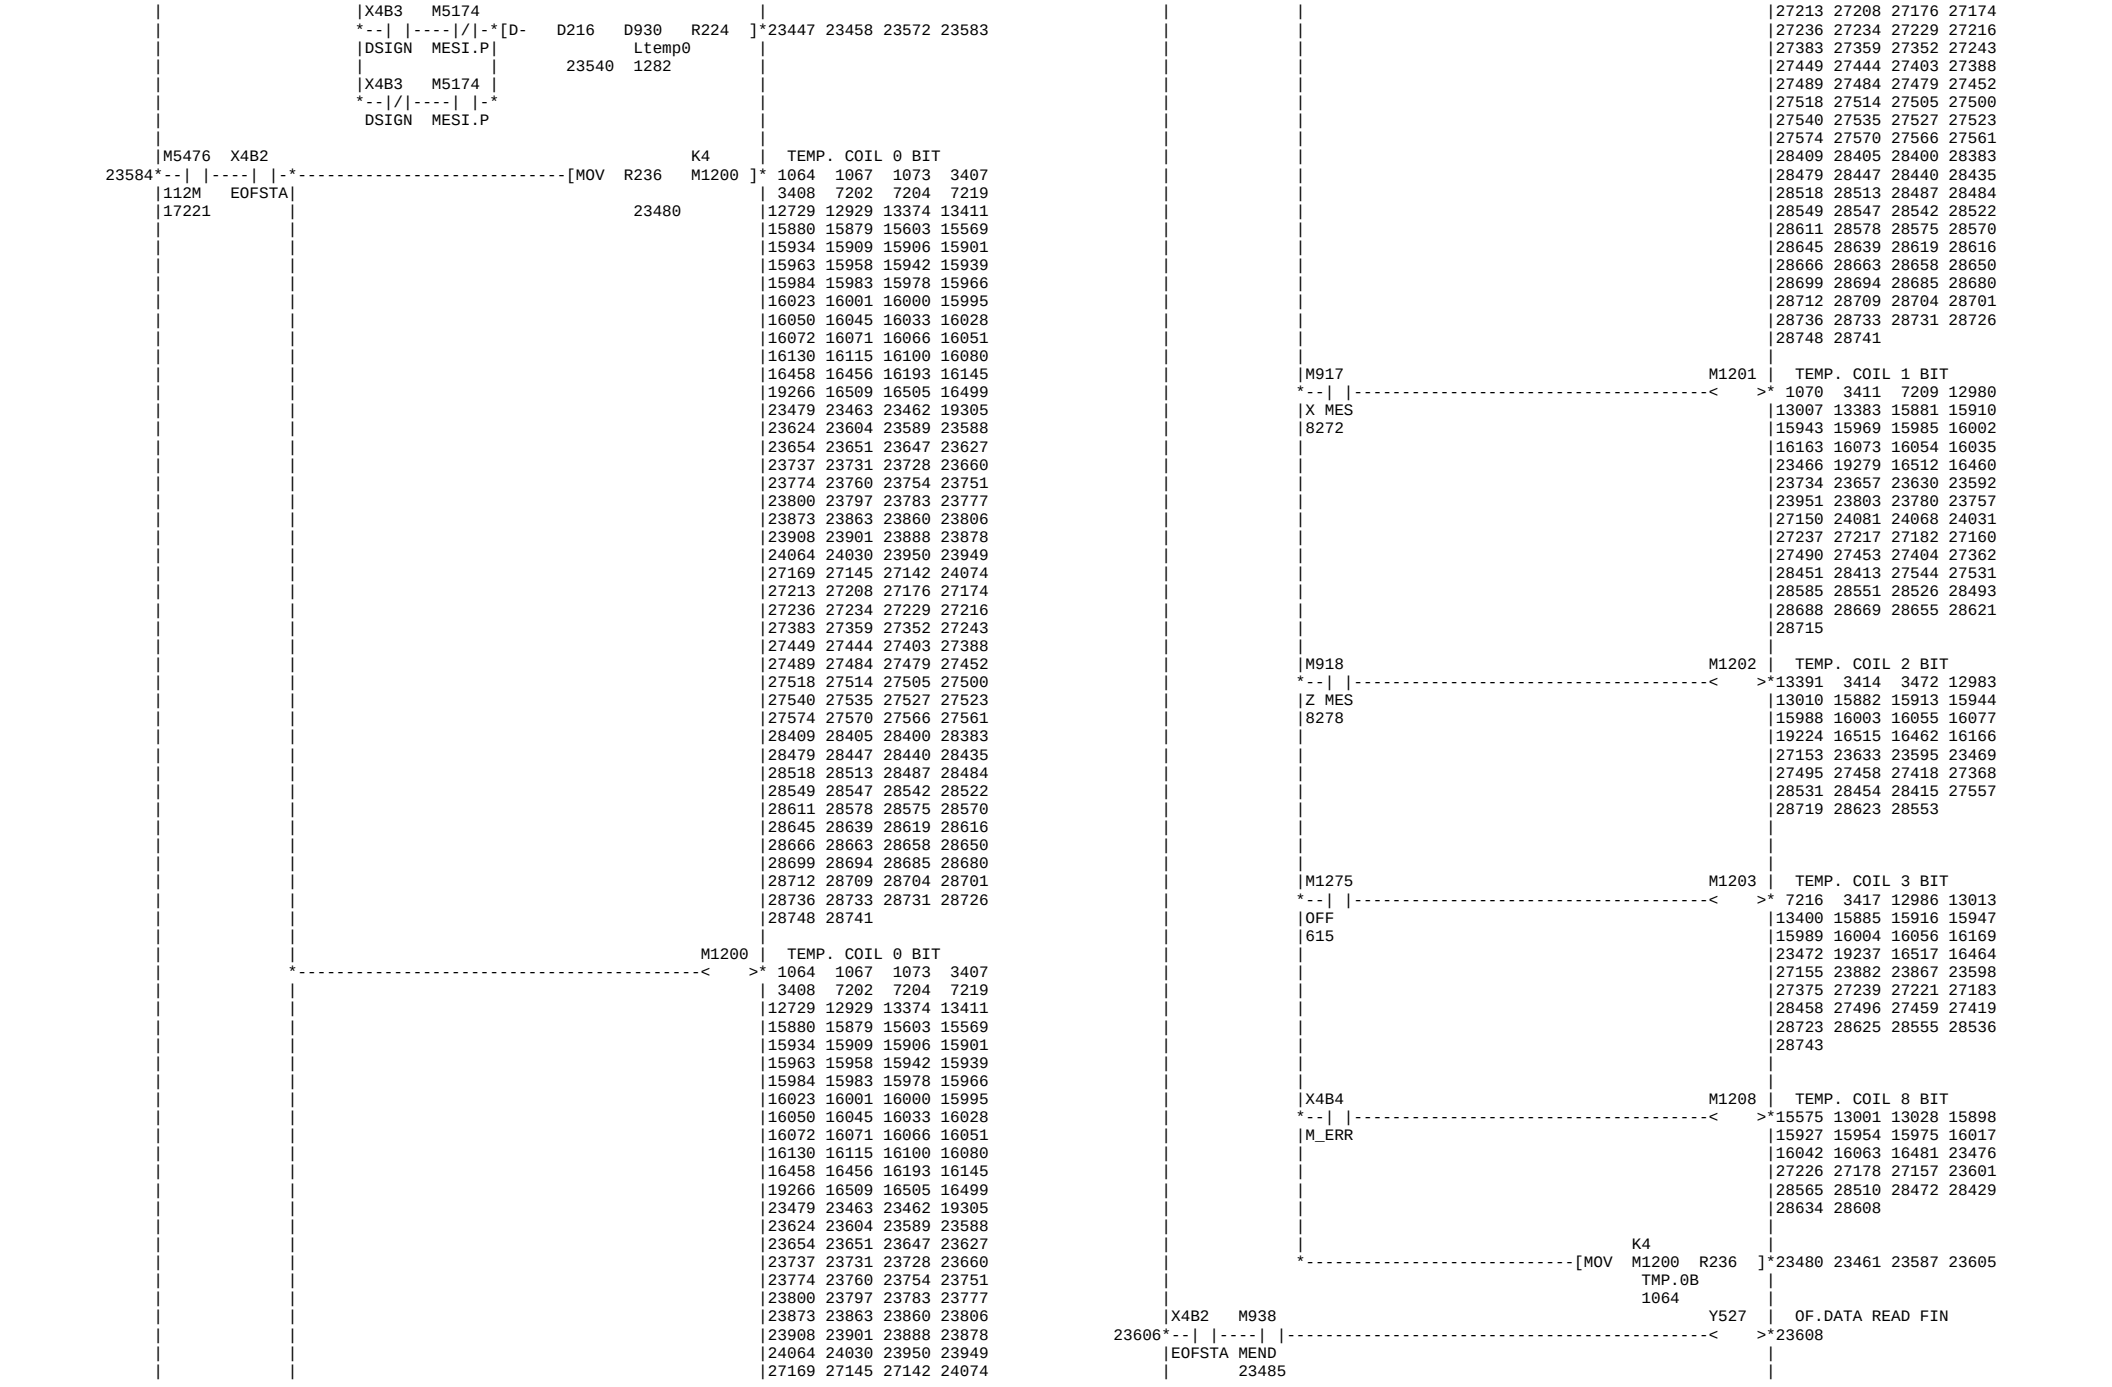

|M7771 M7774 M101 M7796 M7773 | T LIMIT OFF DELA
23173*--| |-*--|/|----| |----| |----------<> *23178 23145 23174 23179
C2BRK2	C2BK23 RST C2BKCM
23161	23190 543 23060
M7773	
*--		-*
C2BK22
23178
M7773	C2 BRAKE T LMT D
23179*--| |----------<T126 D10 >*23181 23185 23273
C2BK22 T54
23178
T121 M7775 M101 M7796 M7774	T LIMIT OFF DELA
23184*--| |-*--|/|----| |----| |----------<> *23190 23164 23175 23186
C2STPT	C2BRKM RST C2BKCM	23191
23170	23205 543 23060
T126	
*--		-*
TD211m	
23181	
M7774	
*--		-*
C2BK23
23190
M7774 M7782 M7783 M7784	C2 BRAKE T
23191*--| |----| |----| |----|/|----------<T145 K10 >*23196 23199
C2BK23 C2CLSL C2BKSL TLMT2
23190 23265 23274 23282
T145 M7794 M7778 M7779 M101 M7775	C2 BRAKE MEM
23199*--| |-*--|/|----|/|----|/|----| |----------<> *23205 1624 19608 22614
C2BRKT	C2CLCM TLOFFD UCL21 RST	23187 23200 23215 28586
23196	23052 23223 23229 543
M7775	
*--		-*
C2BRKM
23205
M7763 M7768	C2 UCL (CL-UCL)
23206*--| |-*--| |----------[PLS M7776]*23210 23218 23277 23283
212m	C2CLM
23094	23149
|M7760 M7775	C2 UCL (BRK-UCL)
--| |---| |----------[PLS M7777]*23217 23224
	C2INPM	C2BRKM
	23081	23205
|M59	
*--		-*
5OT.P
M7776 M7780 M101 M7795 M7778	T LIMIT OFF DELA
23218*--| |-*--|/|----| |----| |----------<> *23223 23146 23202 23219
CUCLP1	TLOFF RST C2ULCM	23235
23210	23246 543 23056
M7778	
*--		-*
TLOFFD
23223
M7777 M7780 M101 M7795 M7779	C2 UCL (CL-UCL)
23224*--| |-*--|/|----| |----| |----------<> *23229 23147 23203 23225
CUCLP2	TLOFF RST C2ULCM	23230
23217	23246 543 23056
M7779	
*--		-*
UCL21
23229
M7779	SOL.OFF DELAY T
23230*--| |----------<T154 D9 >*23232 23240 23266 23276
UCL21 T55	23285
23229 18375
M7778	T LMT DELAY T
23235*--| |----------<T163 D8 >*23237 23241 23267
TLOFFD T56
23223 18372
T154 M7781 M101 M7795 M7780	T LIMIT OFF (212
23240*--| |-*--|/|----| |----| |----------<> *23246 23220 23226 23242
SOLOFF	SSPUCL RST C2ULCM	23247
23232	23262 543 23056
T163	
*--		-*
TD212m	
23237	
M7780	
*--		-*
TLOFF
23246
M7780 M7782 M7783 M7784	C2 UNCLAMP T
23247*--| |----|/|----|/|----|/|----------<T173 K10 >*23252 23255
TLOFF C2CLSL C2BKSL TLMT2
23246 23265 23274 23282
T173 M7771 M7772 M7794 M7781	S SPINDLE UNCLAM
23255*--| |-*--|/|----|/|----|/|----------<> *23262 1584 5386 19605
C2UCLT	C2BRK2 C2BK12 C2CLCM	21150 21900 22008 22016
23252	23161 23167 23052	22634 23155 23243 23256
M7781	|28598
*--		-*
SSPUCL	
23262	
M101	
*--	/	-*
RST	
543	
M7754	
*--	/	-*
C2_MD
23020
T109	C2 CLAMP SOL.
23263*--| |-*----------[SET M7782]*23265 23136 23192 23248
C2STPT		23270 23292
23103	
T121	
*--		-*
C2STPT
23170
T154	C2 CLAMP SOL.
23266*--| |-*----------[RST M7782]*23265 23136 23192 23248
SOLOFF		23270 23292
23232	
T163	
*--		-*
TD212m	
23237	
M101	
*--	/	-*
RST	
543	
M7754	
*--	/	-*
C2_MD
23020
T109	C2 BRAKE SOL.
23271*--| |-*----------[SET M7783]*23274 23135 23193 23249
C2STPT		23280 23297
23103	
T121	
*--		-*
C2STPT	
23170	
T126	
*--		-*
TD211m
23181
T110	C2 BRAKE SOL.
23275*--| |-*----------[RST M7783]*23274 23135 23193 23249
C2BRKT		23280 23297
23114	
T154	
*--		-*
SOLOFF	
23232	
M7776	
*--		-*
CUCLP1	
23210	

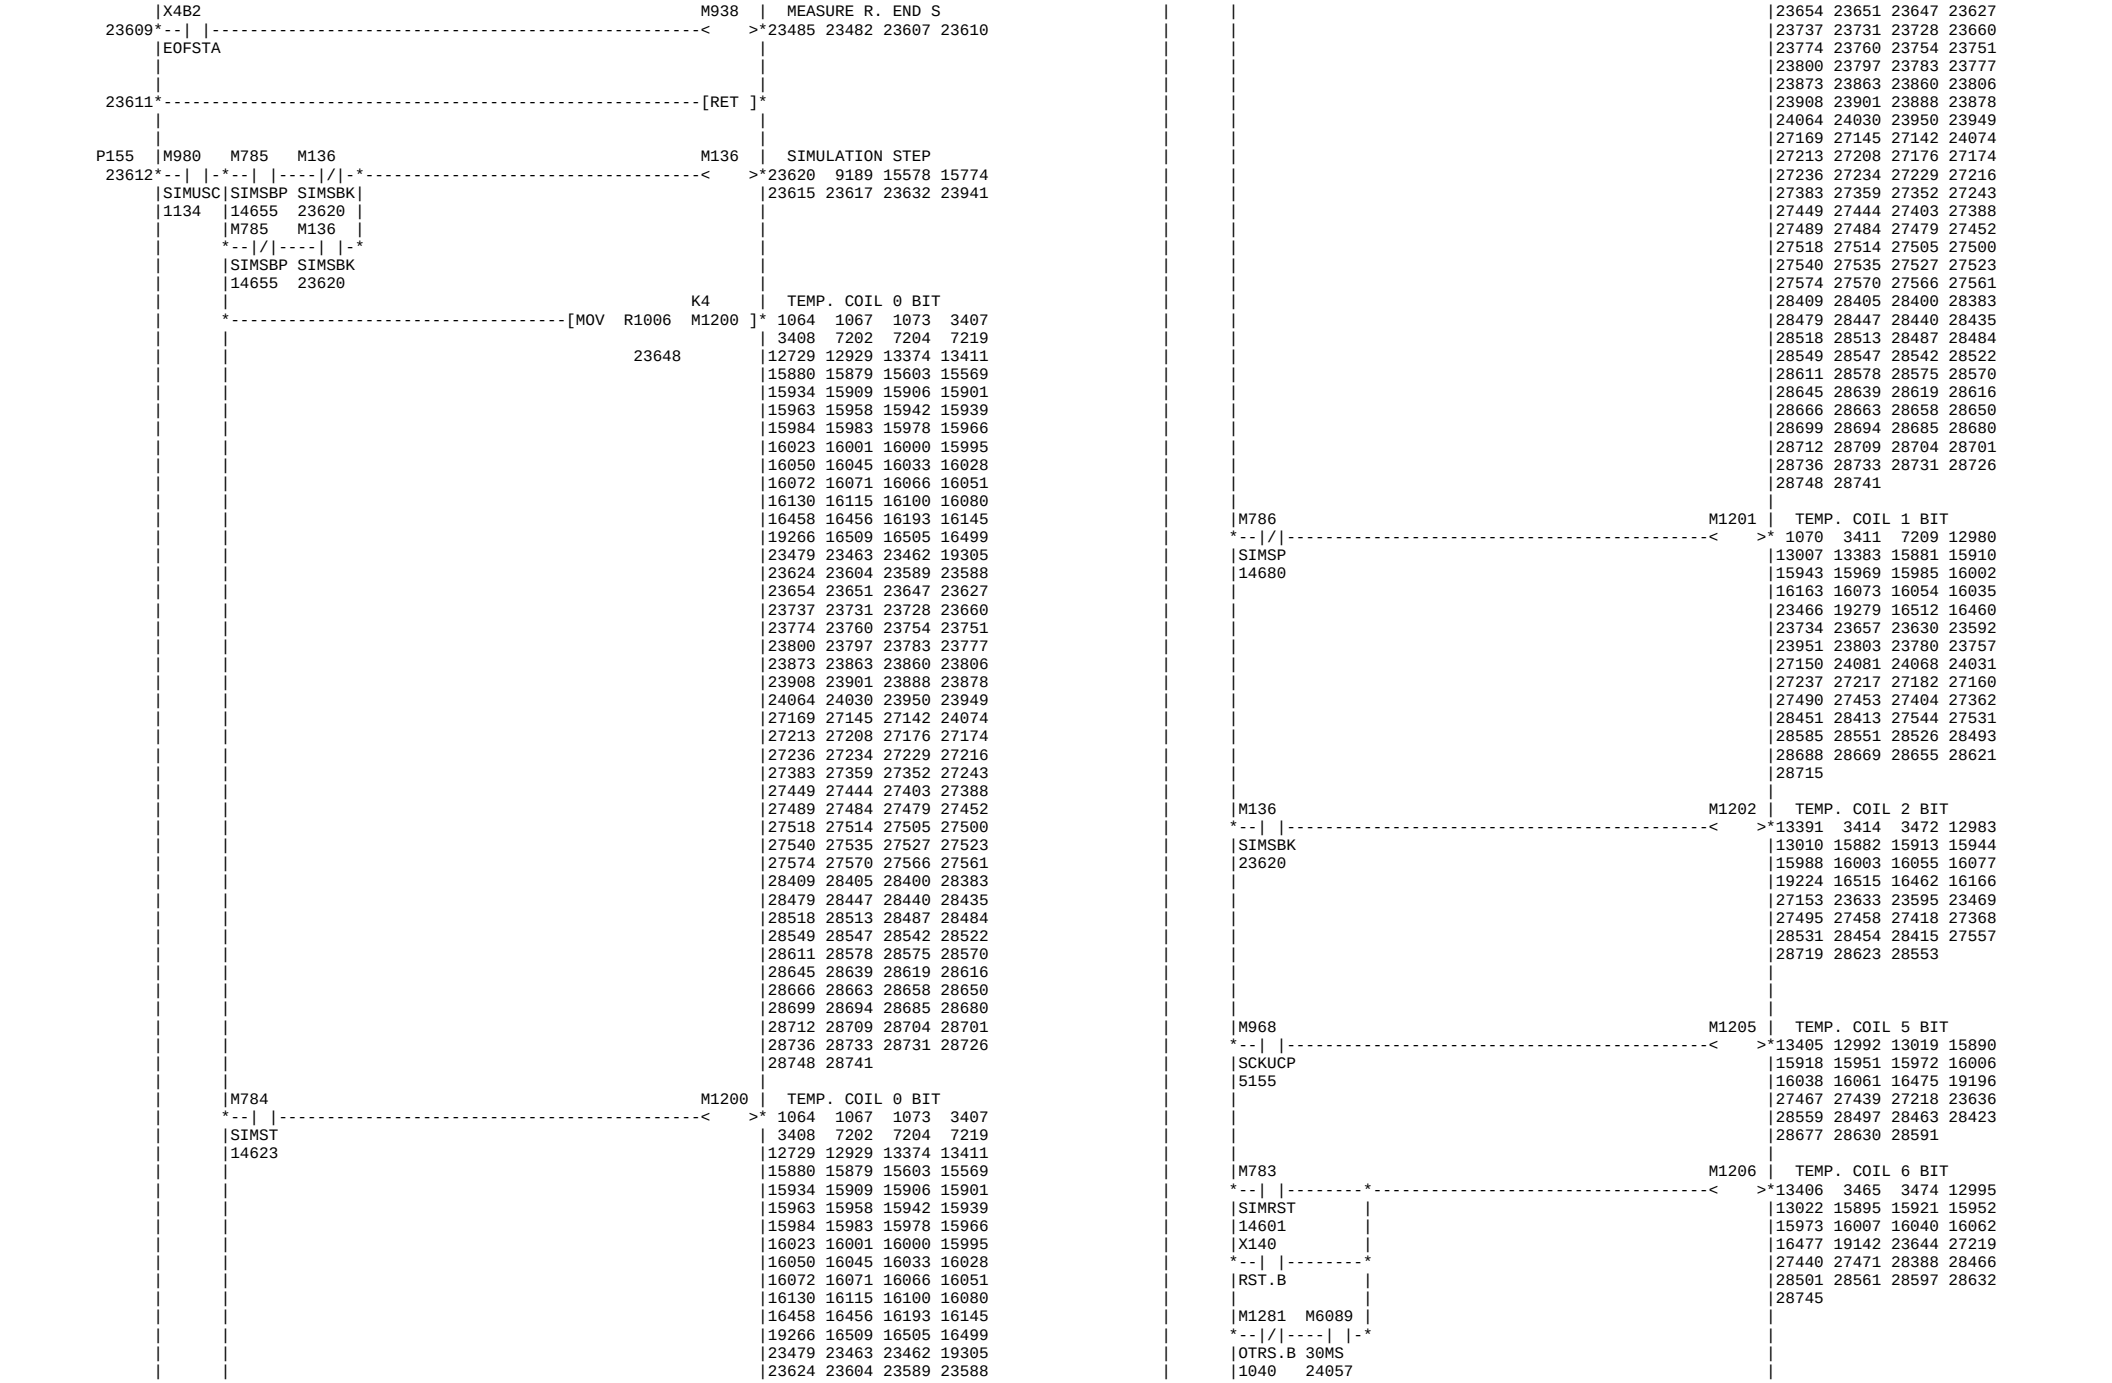

M101
RST
543
M7754
C2_MD
23020
T113
T LIMIT ON MEM
SET M7784
23281 23282 23137 23194 23250
23289 23290
C2TLD
23125
M7776
T LIMIT ON MEM
RST M7784
23283 23282 23137 23194 23250
23289 23290
CUCLP1
23210
M7771
C2BRK2
23161
T154
SOLOFF
23232
T109
C2STPT
23103
M101
RST
543
M7754
C2_MD
23020
M7784
Y382
TORQUE LMT. LOW_
23290 23291 22925
TLMT2
23282
M7782 M6450
Y20
SS CLAMP
23292 23296 25914 25926
C2CLSL
SSC.P
23265
M6451
SSCT.P
M7783 M6450
Y21
SS BRAKE
23297 23301
C2BKSL
SSC.P
23274
M6451
SSCT.P
M5406 M5405 M101 M5403 M5404
M7785
C2 UCL (212m) IG
23302 23308 16750 16812 19552
19556 23303
216m 215m RST 213m 214m
16814 16803 543 16793 16798
M7785
CULIGN
23308
M5403 M5405 M101 M5406 M5404
M7786
210m -> 211m MEM
23309 23315 16744 16784 19553
19559 23310
213m 215m RST 216m 214m
16793 16803 543 16814 16798
M7786
CL-BKM
23315
M5404 M5405 M101 M5403 M5406
M7787
210m_211m -> 212
23316 23322 16745 16763 16786
19554 19562 23317
214m 215m RST 213m 216m
16798 16803 543 16793 16814
M7787
UCLVAL
23322
L17
HD2 DISPLAY REQ.
23323 23324 23326
1ST
3835
L18
HD2 DISPLAY REQ.
23325 23324 23326
2ND
3841
23327
RET
P153
M93 M543 M782
MEASURE 1 No
23328 23334 1691 23339 23344
23349 23352 23376 23381
23386 23391 23396 23404
HOMEOK
MTEYRE TMESW
732 8165 14651
M993
MOV K1 R139
MOV K2 R139
MOV K3 R139
MOV K4 R139
Z-OFF
14659
M994
C-OFF
14688
M995
M0MES
14627
M7169
Y27E
TOOL SET START .
23350 23354 14146 14153 23405
24277
K0 R139
MES1No YPOS.C
23334 24297
TOOL SET ON PLS
PLS M520
23356 795 839 14123
23371
M782 M121
MEASURE 1 No
23357 23334 1691 23339 23344
23349 23352 23376 23381
23386 23391 23396 23404
MOV K0 R139
TMESW TSET:L
14651 23382
M543
MTEYRE
8165
M993 M1120
Z-OFF Z-OFFL
14659 23387
M994 M1121
C-OFF C-OFFL
14688 23392
M995 M1122
M0MES M-MES
14627 23397
Y260 X250 M520
J.N JO.N TSTONP
14262 23356
X240
MA.N
X218
M121
TOOL SET START
23377 23382 866 894 15759
23359 26595
MSOK.N
MES1No
23334
M1120
Z-OFFS MENU LAMP
23387 15609 15790 15817
23361 23398
K1 R139
K2 R139
MES1No
23334

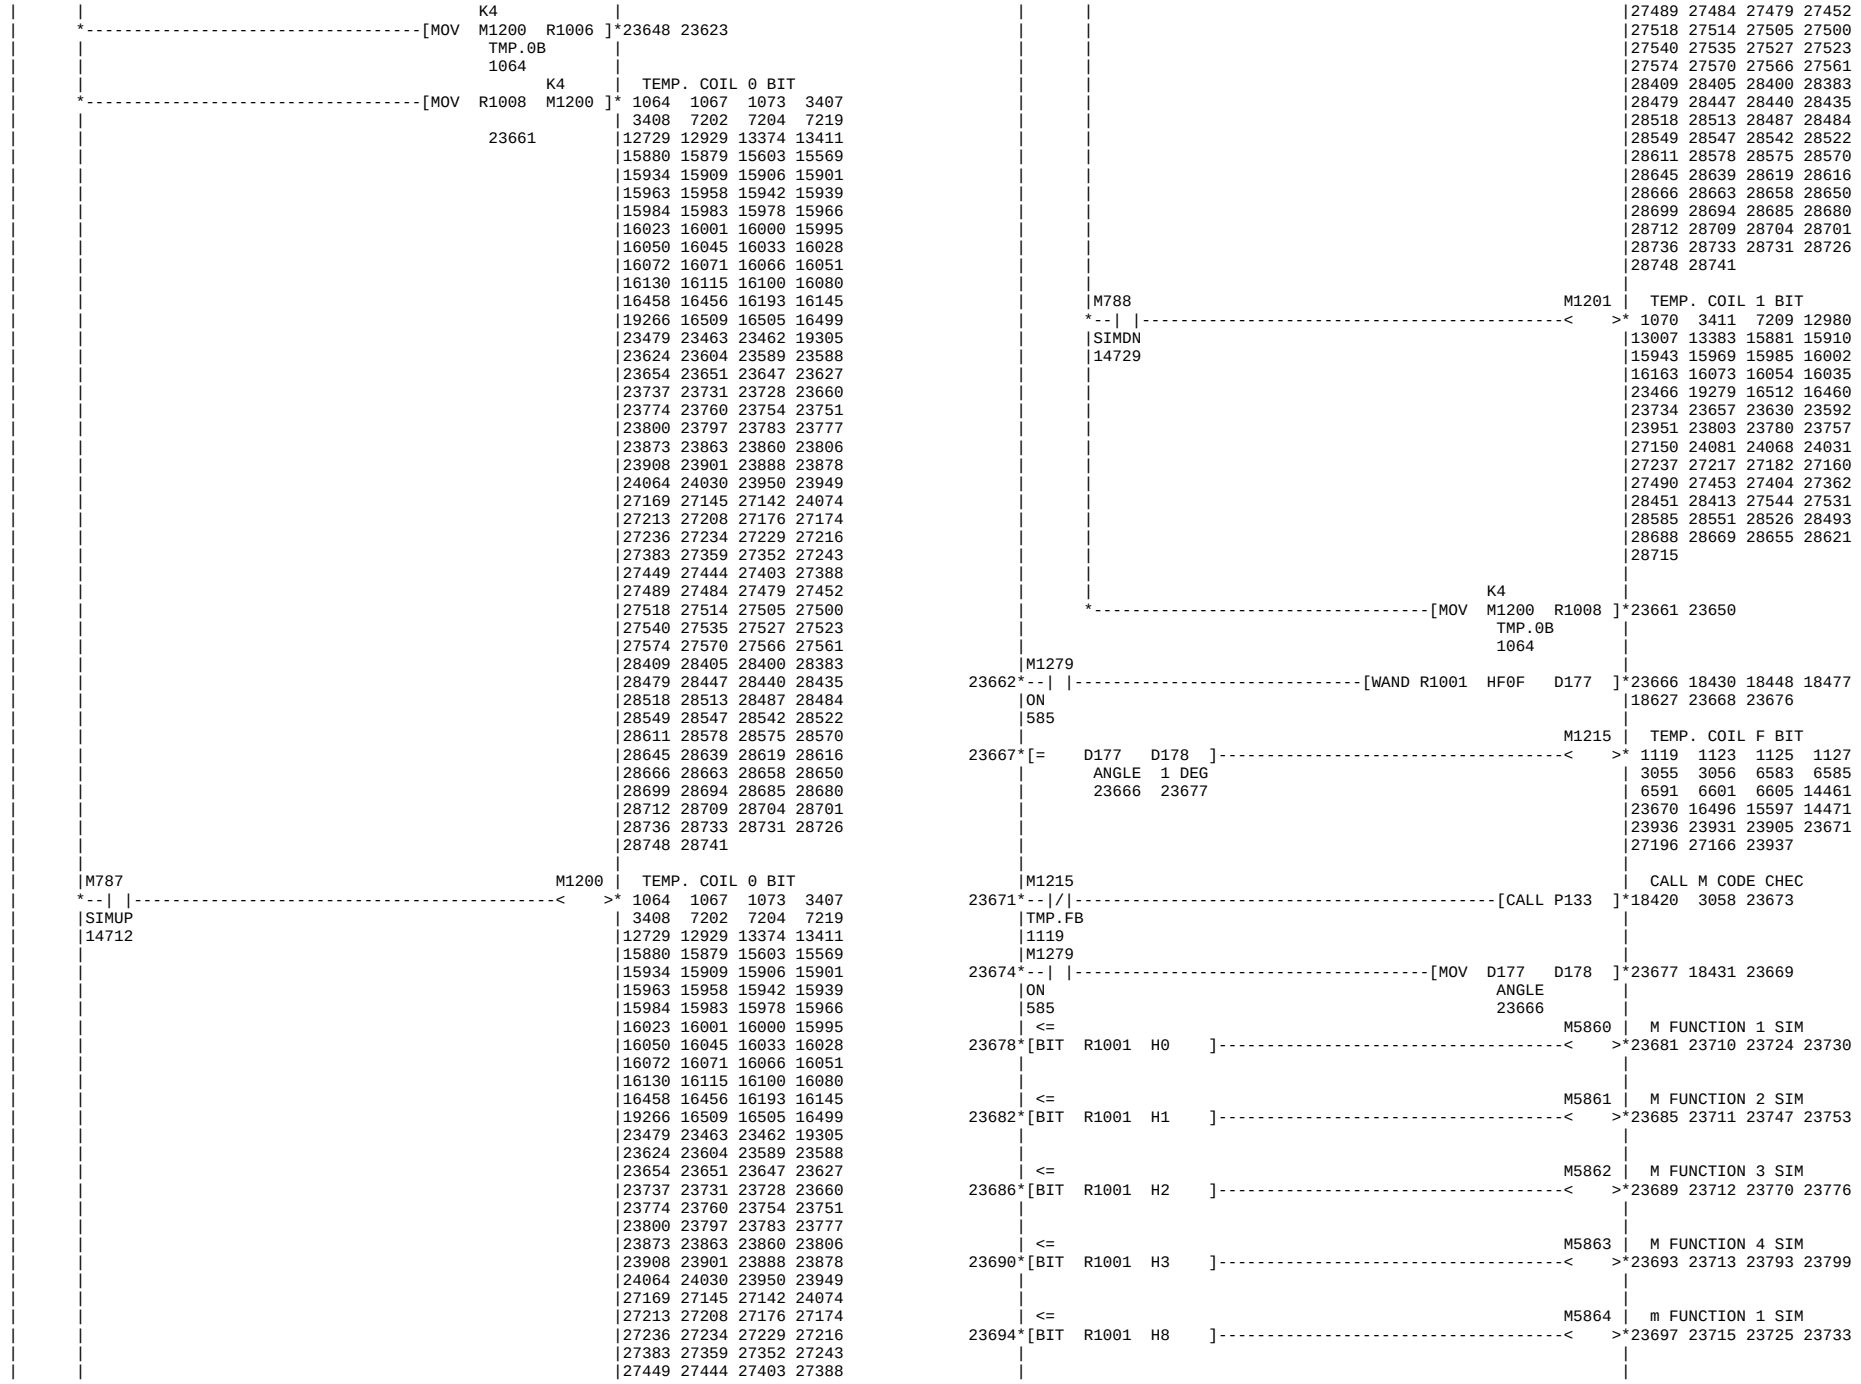

M1121 | C-OFFS MENU LAMP
*[= K3 R139]----------<
MES1No
23334
M1122 | MANU MES MENU LA
*[= K4 R139]----------<
MES1No
23334
M1120
M997 | TOUCH SENSOR USE
23398*--| |-*----------<
Z-OFFL|
23387 |
M1121 |
--| |-
C-OFFL|
23392 |
M1122 |
--| |-
M-MES
23397
Y27E X218
M996 | MANUAL MESURE ON
23402*[= K0 R139]---|/|---|/|----------<
MES1No TSET.N MSOK.N
23334 23354
23408*----------[RET]*
P154 |M945 M1297 M6401 K4 | CALUCLATE REG.
23409*--| |----| |-*--|/|----------[DBIN X477 D930]*
|112M EDSB.M|BARS.P BCD11
|3287
M918
--| |---------[D D930 K2 D930]*
Z MES Ltemp0
8278 1282
23424 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
M917 M1295
--| |---|/|----------[DMOV D930 R226]*
X MES |EXM(-) Ltemp0
8272 | 1282
M1295
--| |---------[D- D190 D930 R226]
EXM(-) T_DATA Ltemp0
5693 1282
M918 M1295 M5174
--| |---|/|----|/|-*-------[DMOV D930 R224]*
Z MES |EXM(-) MESI.P| Ltemp0
8278 | | 1282
M1295 M5174 |
--| |----| |-
EXM(-) MESI.P
M1295 M5174
--| |----|/|-[D- D190 D930 R224]*
EXM(-) MESI.P| T_DATA Ltemp0
| 5693 1282
M1295 M5174 |
--|/|----| |-
EXM(-) MESI.P
K4 | TEMP. COIL 0 BIT
----------[MOV R236 M1200]
23480
12931 12924 12919 12916
13463 13453 13443 12933
13498 13490 13481 13473
13519 13516 13514 13506
13543 13532 13529 13527
13575 13567 13564 13562
13597 13595 13587 13584
13714 13700 13649 13647
14453 14055 14053 13717
19071 18897 18895 14459
19161 19153 19150 19073
19191 19173 19171 19164
19212 19205 19202 19194
19243 19235 19232 19214
19274 19256 19253 19246
19295 19288 19285 19277
20983 20760 20758 19298
21105 21103 21012 20987
23428 23422 23419 23415
23536 23457 23446 23434
23559 23553 23547 23544
28766 28754 23582 23571
28814 28802 28790 28778
28851 28826
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388

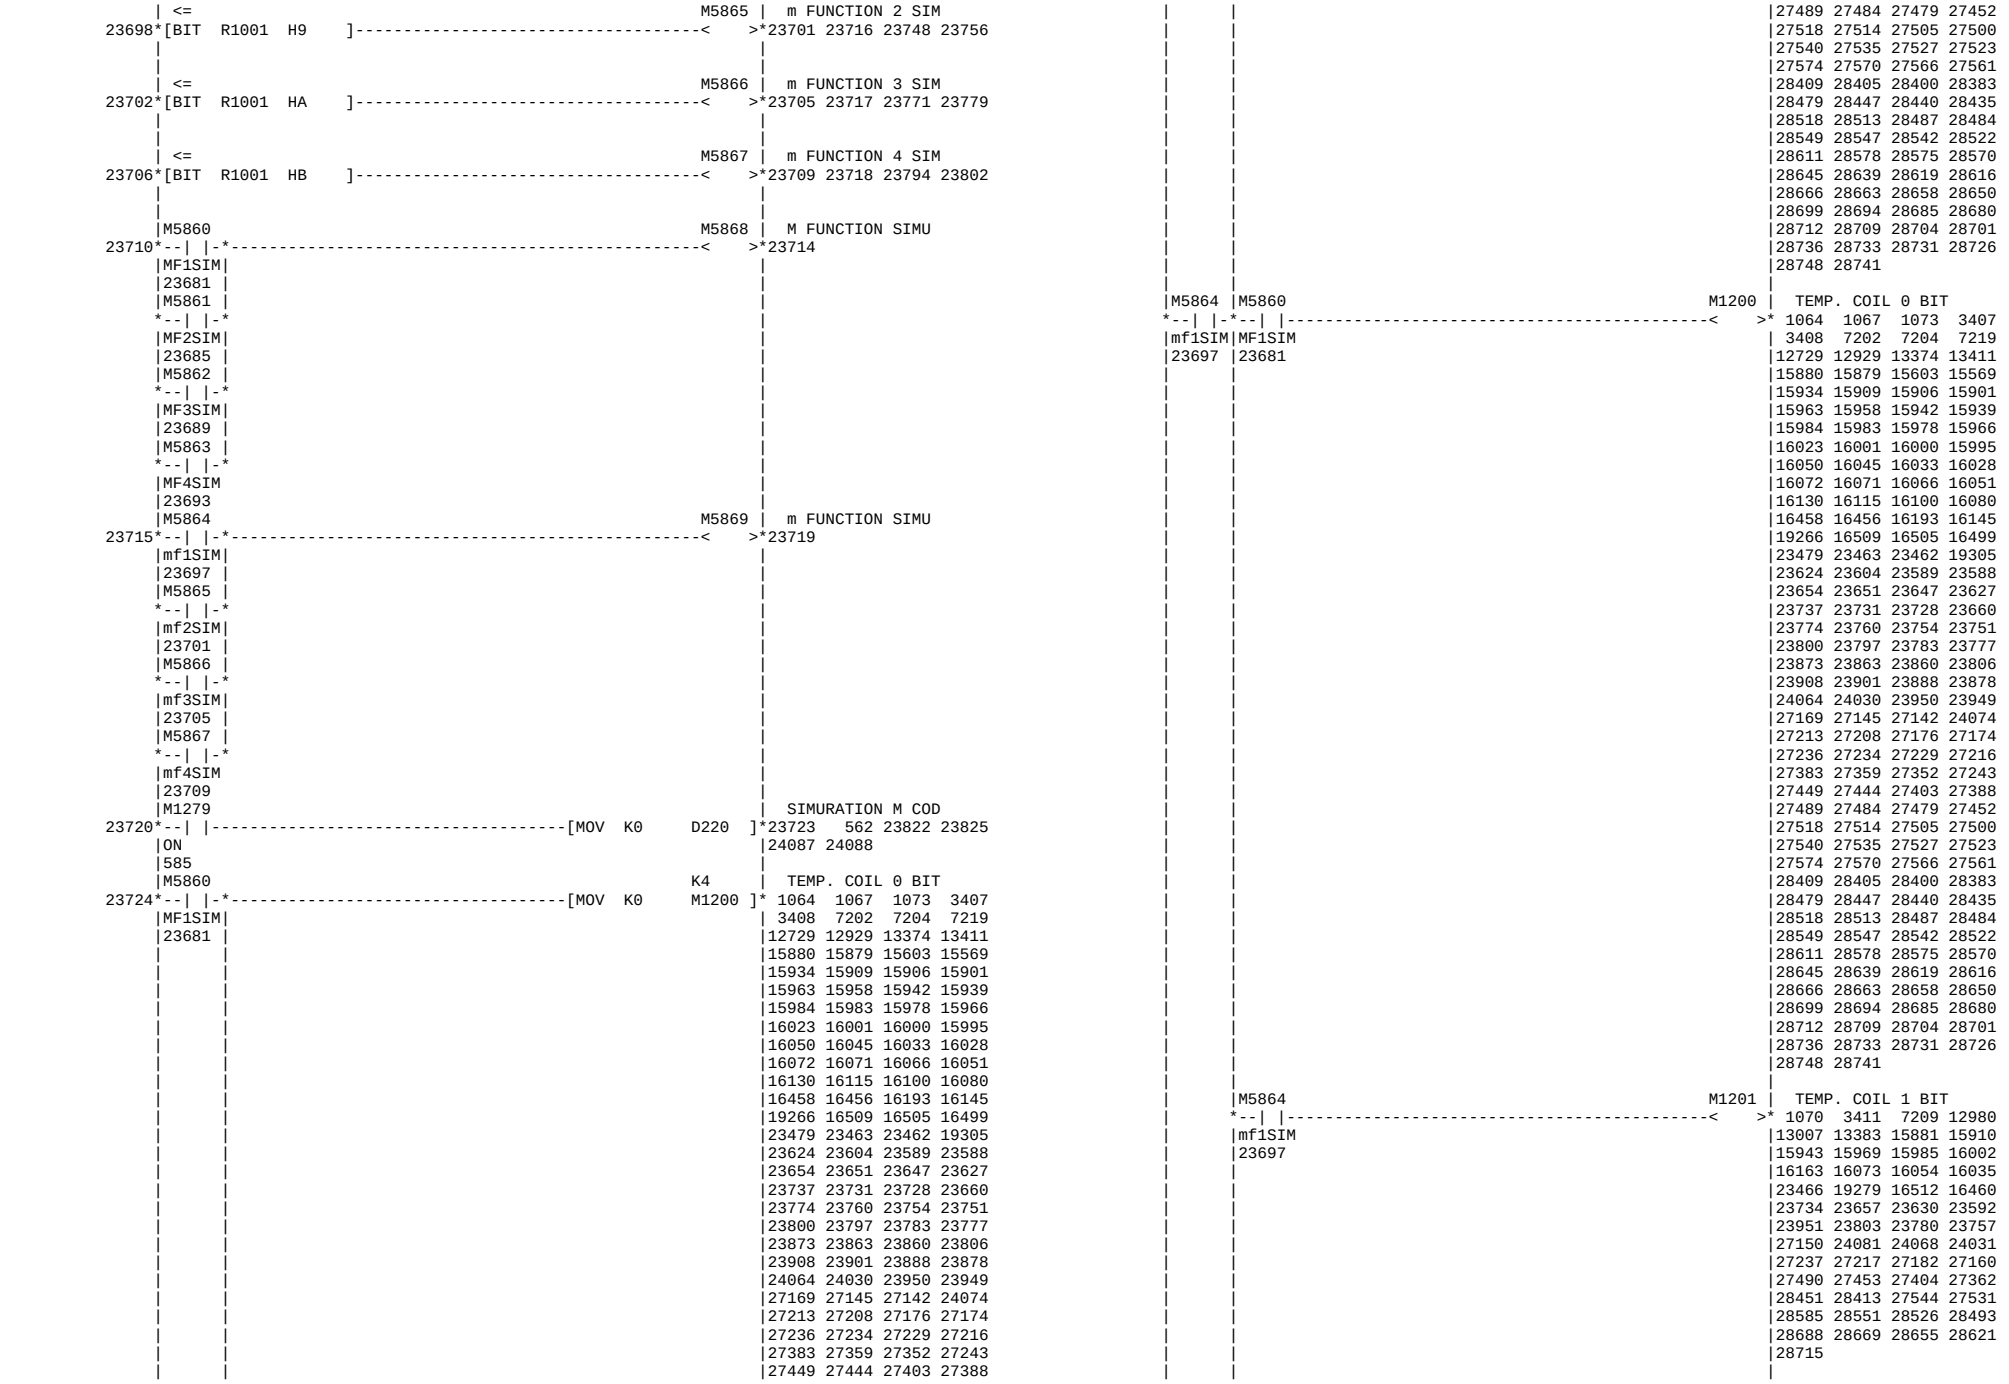

M1200 | TEMP. COIL 0 BIT
M1201 | TEMP. COIL 1 BIT
M1202 | TEMP. COIL 2 BIT
M1203 | TEMP. COIL 3 BIT
M1208 | TEMP. COIL 8 BIT
M1297 M938
M959 | MES.DATA READ EN
EDSB.M MEND
23485
M1297
M938 | MEASURE R. END S
EDSB.M
M1297
M939 | MEASURE CALL OFF
EDSB.M
[RET]
M1275
OFF
615
M1297 M5476
Y525 | EXT.MEASURE STAR
MM.FIN|112M
17221
Y525
E_M112
23492
M1297 M5477
Y526 | EXT.MEASURE FIN
MM.FIN|113M
17227
Y526
E_M113
23496
M1297 M5471
Y520 | OF.TOOL SEL.M (#
PNTFIN|751M
17234
Y520
PSEL#1
23500
M918
Z MES
8272
X474 M6436
CF.INV CF.P
K4
[MOV M1200 R236]
TMP.0B
1064
M917
X MES
8272

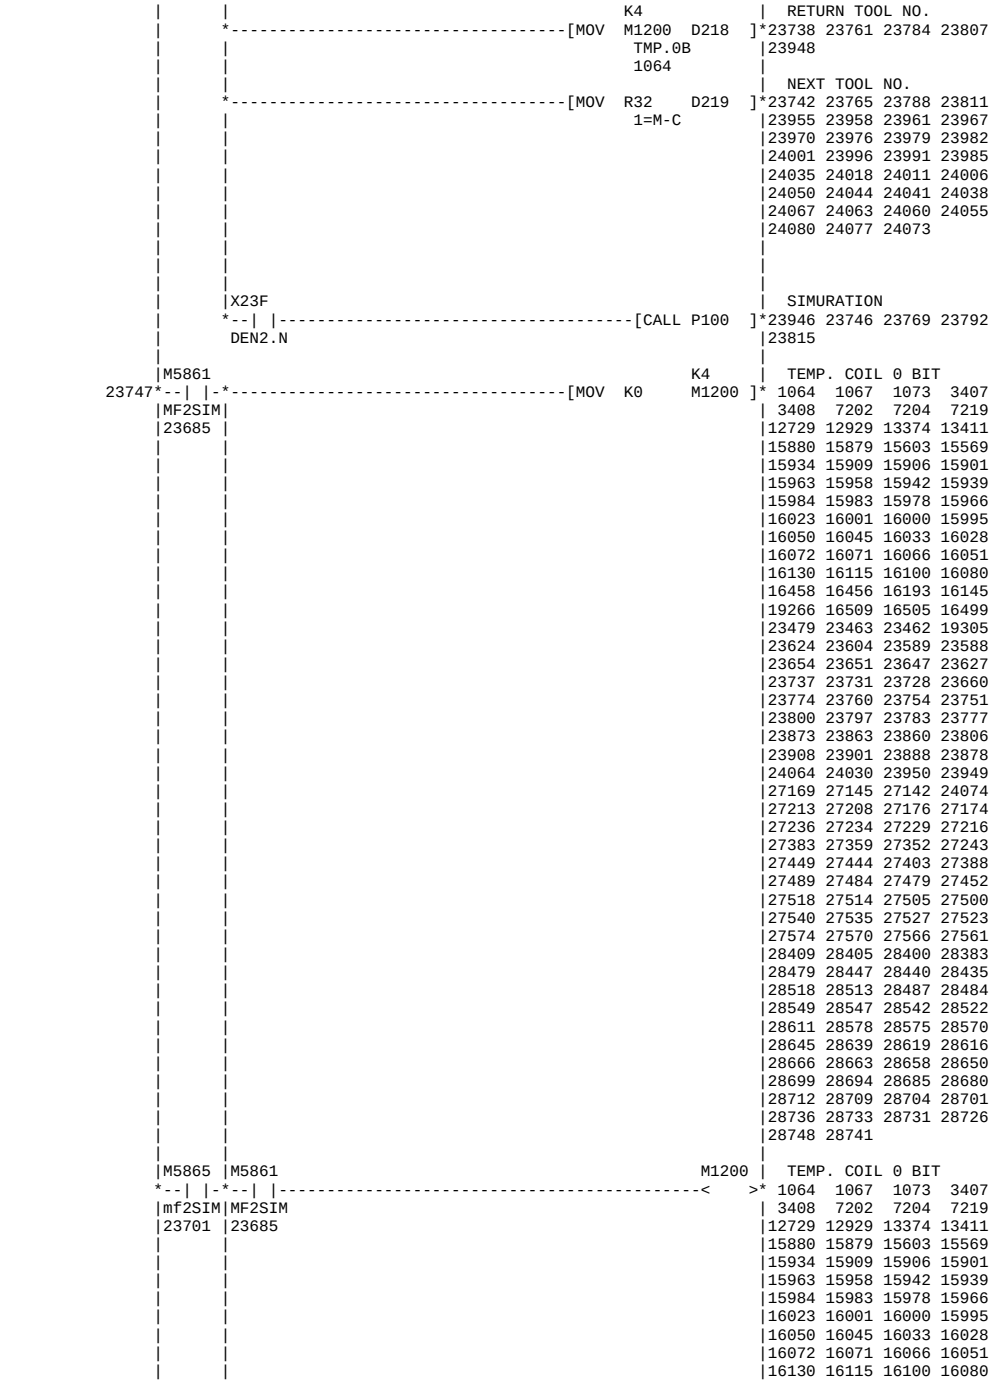

|X4B0 M5472 Y521 | OF.TOOL SEL.M (#
23501*--|/|-*--| |<
>*23504 20434 23502
|PNTFIN|752M
| |17239
|Y521 |
--| |-
|PSEL#2
|23504
|X4B0 M5473 Y522 | OF.TOOL SEL.M (#
23505*--|/|-*--| |<
>*23508 20435 23506
|PNTFIN|753M
| |17244
|Y522 |
--| |-
|PSEL#3
|23508
|X4B0 M5474 Y523 | OF TOOL SEL.M (#
23509*--|/|-*--| |<
>*23512 20436 23510
|PNTFIN|754M
| |17249
|Y523 |
--| |-
|PSEL#4
|23512
|X4B0 M5475 Y524 | OF.TOOL SEL.M (#
23513*--|/|-*--| |<
>*23516 20437 23514
|PNTFIN|755M
| |17254
|Y524 |
--| |-
|PSEL#5
|23516
|M349 M350 M918 M101 M917 | X MEASURE (EXT)
23517*--| |-*--|/|----|/|----| |<
>* 8272 8268 8276 20014
|760M |761M Z MES RST |23424 23465 23518 23522
|17797 |17802 8278 543 |23526 23549 23591
|M917 |
--| |-
|X MES
|8272
|M350 M349 M917 M101 M918 | Z MEASURE (EXT)
23523*--| |-*--|/|----|/|----| |<
>* 8278 8270 8274 20017
|761M |760M X MES RST |23417 23437 23468 23520
|17802 |17797 8272 543 |23524 23528 23542 23562
|M918 |23594
--| |-
|Z MES
|8278
|M5476 X4B2 K4 | CAL. REG.
23529*--| |----| |-*----------[DMOV X4A0 D932]* 2285 2302 3312 3318
|112M EOFSTA| EODB11 | 3322 6600 6603 6607
|17221 | | 6611 6631 12925 12928
| | |13475 13465 13455 13445
| | |13508 13500 13492 13483
| | |13581 13569 13534 13521
| | |18898 13719 13702 13589
| | |23533 19077 19074 18901
| | |28784 28772 28760 23535
| | |28832 28820 28808 28796
| | |28840
| | | CALUCLATE REG.
| *----------[DBIN D932 D930]* 1282 1286 2282 2284
| | Ltemp2 | 2289 2291 2304 2306
| | 2285 | 2521 2523 2526 3300
| | | 6493 6490 3321 3306
| | | 6505 6502 6499 6496
| | | 6595 6589 6511 6507
| | | 6620 6612 6608 6604
| | | 6654 6635 6632 6626
| | | 6675 6668 6663 6660
| | | 9729 9726 9723 9716
| | |12911 12907 9735 9731
| | |12931 12924 12919 12916
| | |13463 13453 13443 12933
| | |13498 13490 13481 13473
| | |13519 13516 13514 13506
| | |13543 13532 13529 13527
| | |13575 13567 13564 13562
| | |13597 13595 13587 13584
| | |13714 13700 13649 13647
| | |14453 14055 14053 13717
| | |19071 18897 18895 14459
| | |19161 19153 19150 19073
| | |19191 19173 19171 19164
| | |19212 19205 19202 19194
| | |19243 19235 19232 19214
| | |19274 19256 19253 19246
| | |19295 19288 19285 19277
| | |20983 20760 20758 19298
| | |21105 21103 21012 20987
| | |23428 23422 23419 23415
| | |23536 23457 23446 23434
| | |23559 23553 23547 23544
| | |28766 28754 23582 23571
| | |28814 28802 28790 28778
| | |28851 28826
| | |
| *----------[DMOV K0 D216]*23540 23558 23581
| | |
| | |
|M918 | CALUCLATE REG.
--| |---------[D D930 K2 D930]* 1282 1286 2282 2284
|Z MES Ltemp0 | 2289 2291 2304 2306
|8278 1282 | 2521 2523 2526 3300
| | 6493 6490 3321 3306
| | 6505 6502 6499 6496
| | 6595 6589 6511 6507
| | 6620 6612 6608 6604
| | 6654 6635 6632 6626
| | 6675 6668 6663 6660
| | 9729 9726 9723 9716
| |12911 12907 9735 9731
| |12931 12924 12919 12916
| |13463 13453 13443 12933
| |13498 13490 13481 13473
| |13519 13516 13514 13506
| |13543 13532 13529 13527
| |13575 13567 13564 13562
| |13597 13595 13587 13584
| |13714 13700 13649 13647
| |14453 14055 14053 13717
| |19071 18897 18895 14459
| |19161 19153 19150 19073
| |19191 19173 19171 19164
| |19212 19205 19202 19194
| |19243 19235 19232 19214
| |19274 19256 19253 19246
| |19295 19288 19285 19277
| |20983 20760 20758 19298
| |21105 21103 21012 20987
| |23428 23422 23419 23415
| |23536 23457 23446 23434
| |23559 23553 23547 23544
| |28766 28754 23582 23571
| |28814 28802 28790 28778
| |28851 28826
| |
|M917 X4B3
--| |---|/|----------[DMOV D930 R226]*23429 23435 23554 23560
X MES	DSIGN Ltemp0
8272	1282
	X4B3
*--		---------[D- D216 D930 R226]*23429 23435 23554 23560
DSIGN Ltemp0
23540 1282
M918 X4B3 M5174
--| |---|/|----|/|-*-------[DMOV D930 R224]*23447 23458 23572 23583
Z MES	DSIGN MESI.P	Ltemp0
8278		1282
X4B3 M5174
--| |----| |-
DSIGN MESI.P

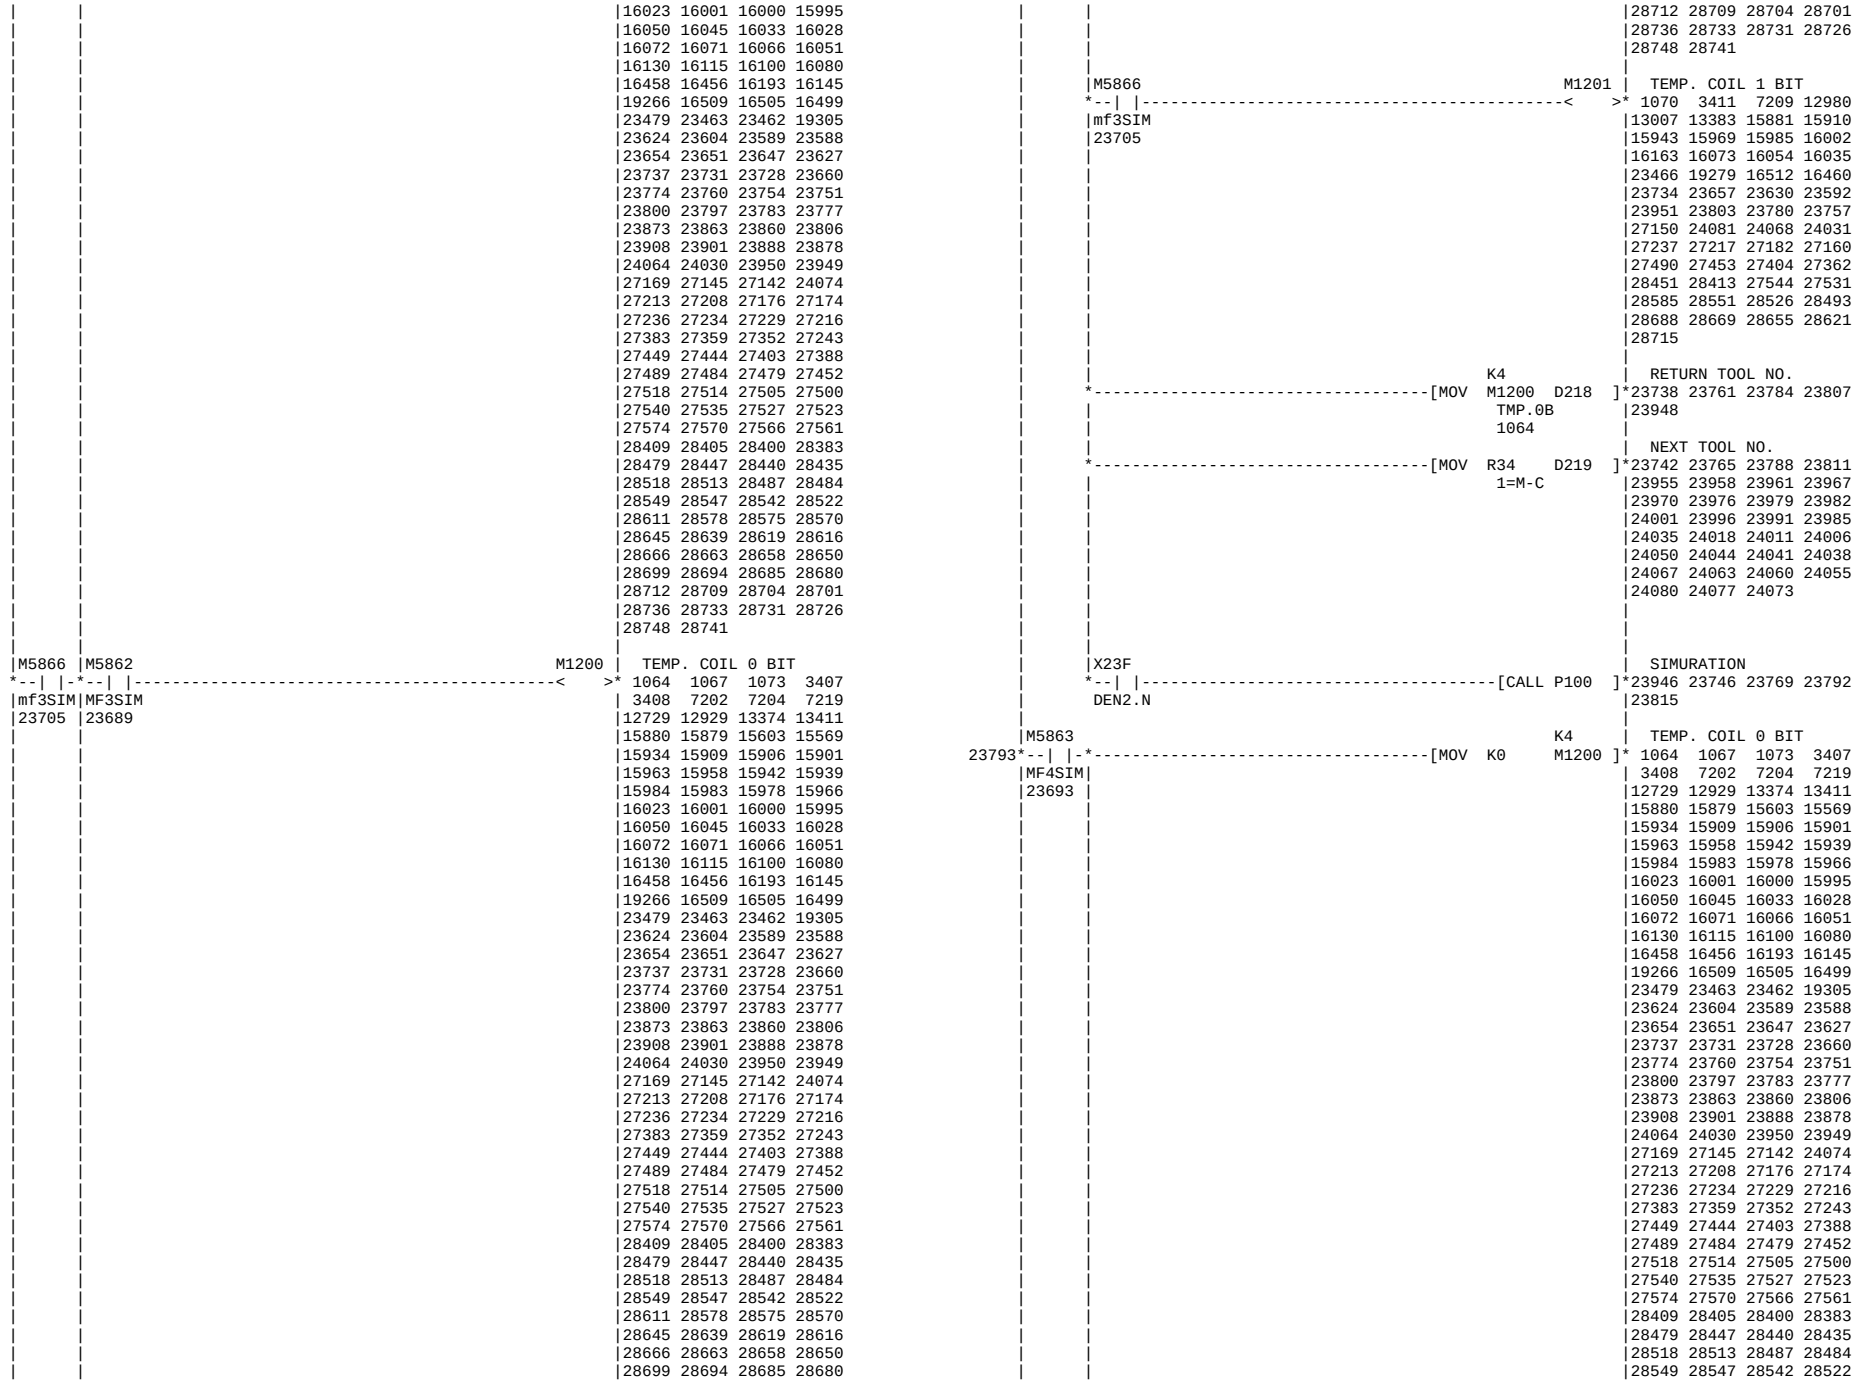

X4B3 M5174
DSIGN MESI.P
Ltemp0
23540 1282
X4B3 M5174
DSIGN MESI.P
M5476 X4B2
K4
TEMP. COIL 0 BIT
MOV R236 M1200
112M EOFSTA
17221
23480
M1200
TEMP. COIL 0 BIT
M917
M1201
TEMP. COIL 1 BIT
X MES
8272
M918
M1202
TEMP. COIL 2 BIT
Z MES
8278
M1275
M1203
TEMP. COIL 3 BIT
OFF
615
X4B4
M1208
TEMP. COIL 8 BIT
M_ERR
K4
MOV M1200 R236
TMP.0B
1064
X4B2 M938
Y527
OF.DATA READ FIN
EOFSTA MEND
23485

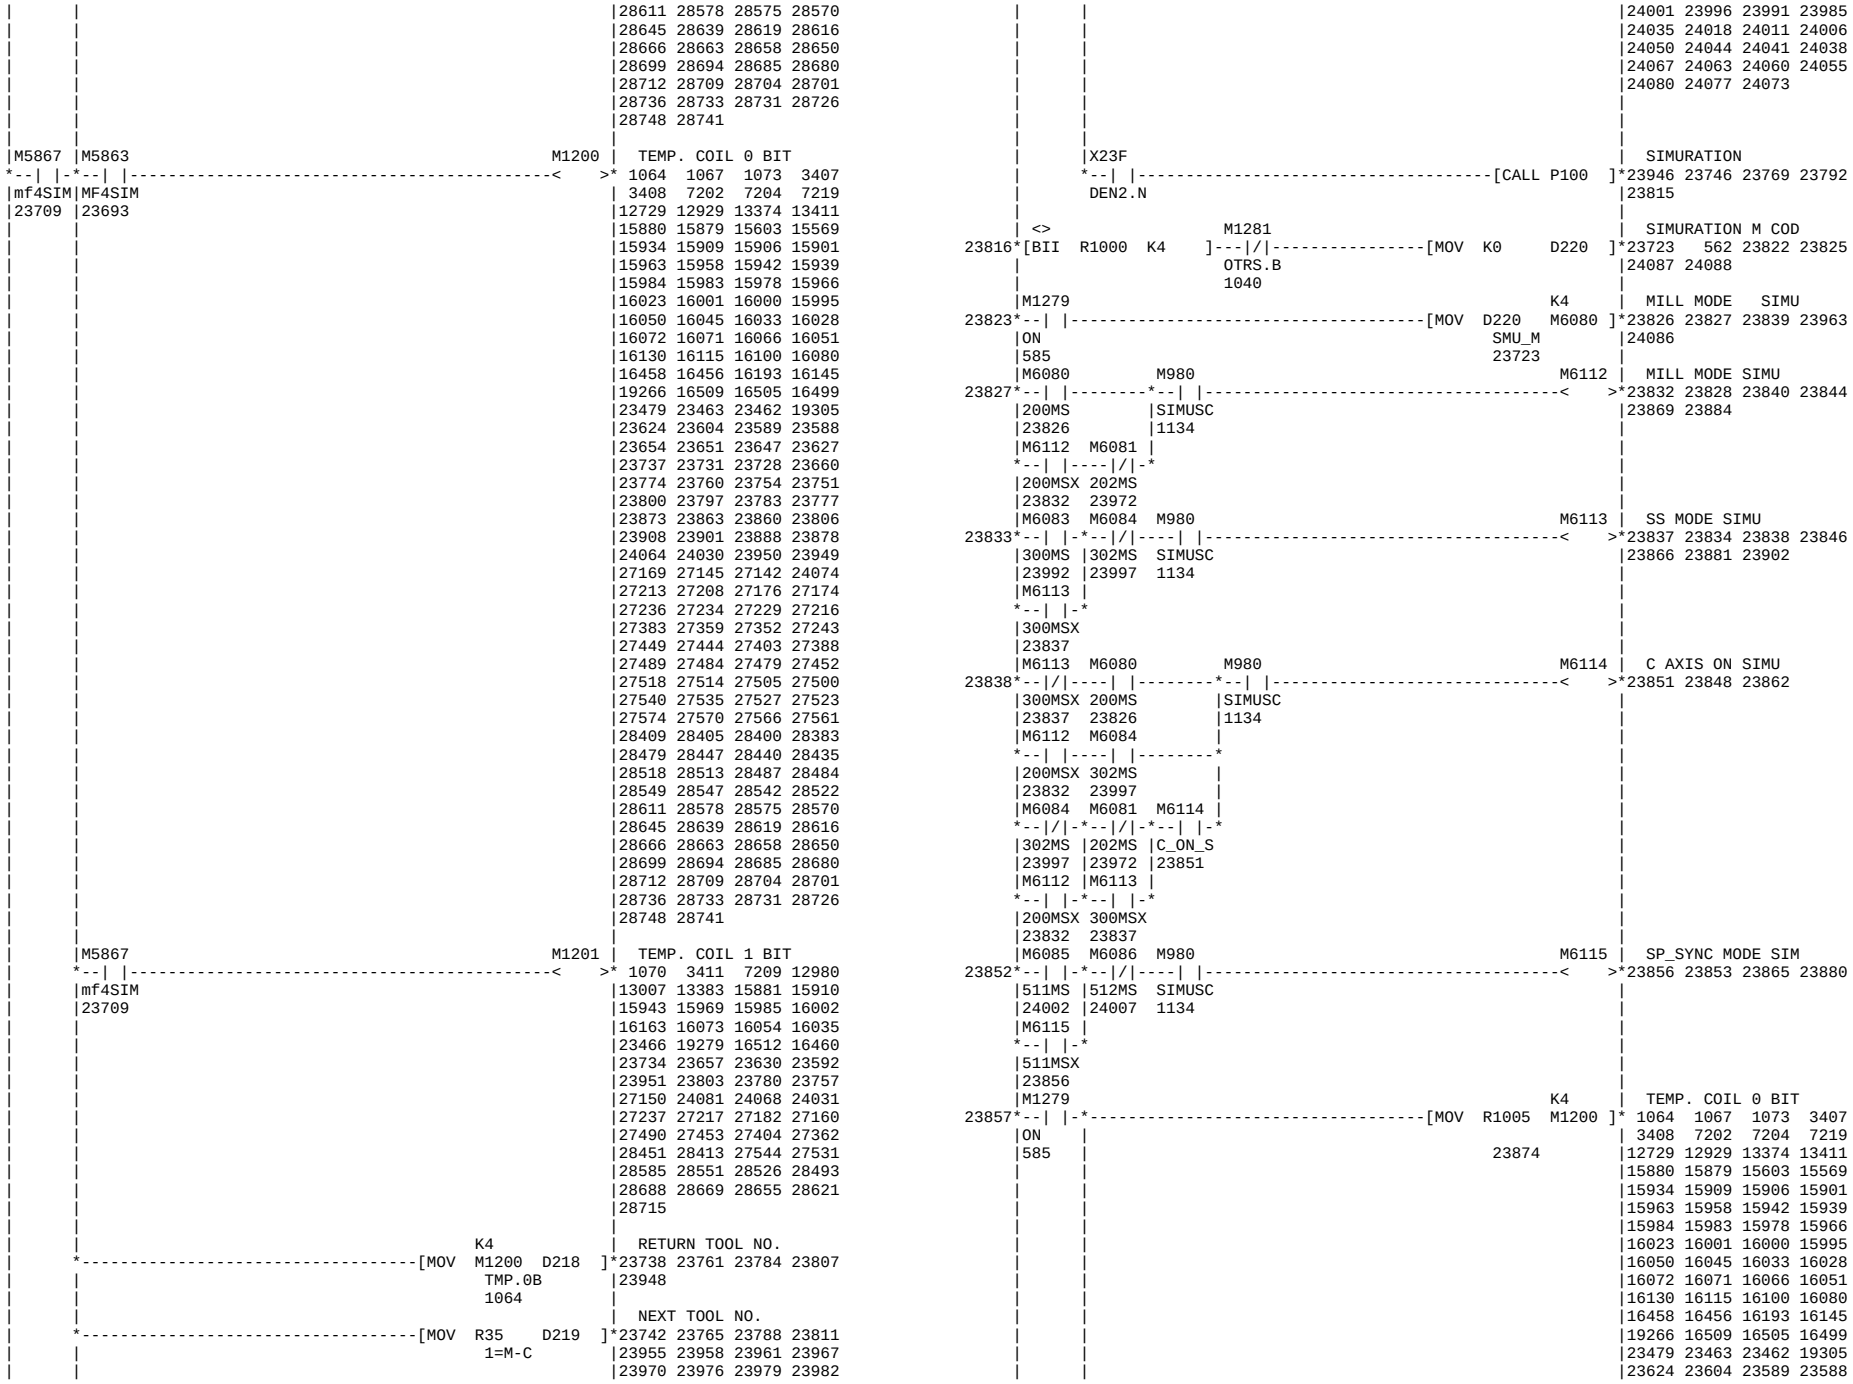

X4B2
M938
MEASURE R. END S
23609
23485 23482 23607 23610
EOFSTA
23611
RET
P155
M980 M785 M136
M136
SIMULATION STEP
23612
23620 9189 15578 15774
23615 23617 23632 23941
SIMUSC SIMSBP SIMSBK
1134 14655 23620
M785 M136
SIMSBP SIMSBK
14655 23620
K4
TEMP. COIL 0 BIT
MOV R1006 M1200
1064 1067 1073 3407
3408 7202 7204 7219
23648
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M784
M1200
TEMP. COIL 0 BIT
1064 1067 1073 3407
SIMST
14623
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M786
M1201
TEMP. COIL 1 BIT
SIMSP
14680
1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
M136
M1202
TEMP. COIL 2 BIT
SIMSBK
23620
13391 3414 3472 12983
13010 15882 15913 15944
15988 16003 16055 16077
19224 16515 16462 16166
27153 23633 23595 23469
27495 27458 27418 27368
28531 28454 28415 27557
28719 28623 28553
M968
M1205
TEMP. COIL 5 BIT
SCKUCP
5155
13405 12992 13019 15890
15918 15951 15972 16006
16038 16061 16475 19196
27467 27439 27218 23636
28559 28497 28463 28423
28677 28630 28591
M783
M1206
TEMP. COIL 6 BIT
SIMRST
14601
X140
RST.B
13406 3465 3474 12995
13022 15895 15921 15952
15973 16007 16040 16062
16477 19142 23644 27219
27440 27471 28388 28466
28501 28561 28597 28632
28745
M1281 M6089
OTRS.B 30MS
1040 24057

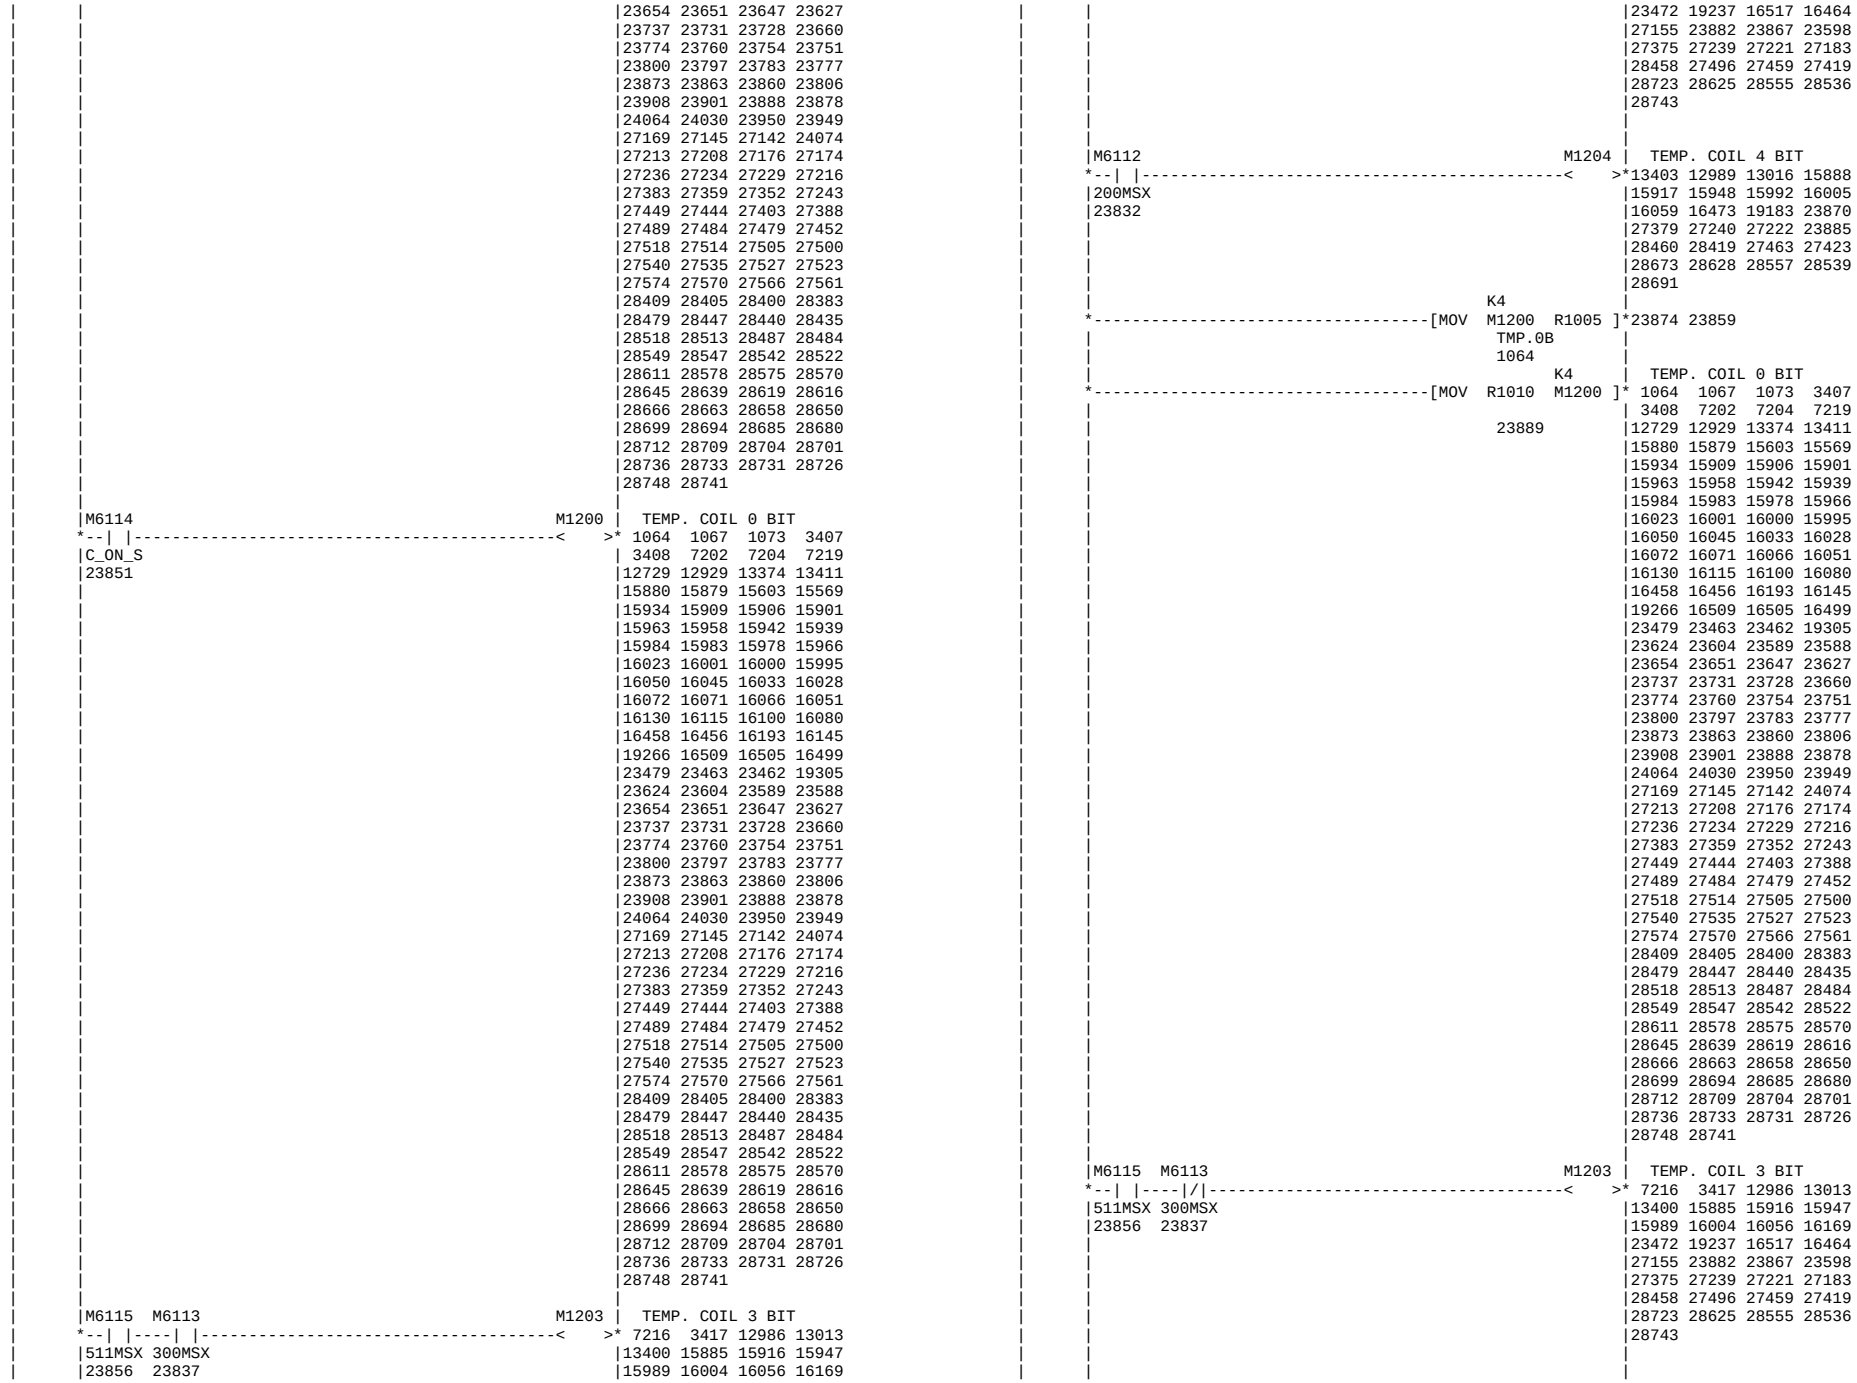

K4
M1200 R1006
TMP.0B
1064
K4
R1008 M1200
23661
M787
M1200
SIMUP
14712
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
23648 23623
M788
M1201
SIMDN
14729
TEMP. COIL 1 BIT
1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
K4
M1200 R1008
TMP.0B
1064
23661 23650
M1279
ON
585
M1215
TEMP. COIL F BIT
1119 1123 1125 1127
3055 3056 6583 6585
6591 6601 6605 14461
23670 16496 15597 14471
23936 23931 23905 23671
27196 27166 23937
D177 D178
ANGLE 1 DEG
23666 23677
WAND R1001 HF0F D177
23666 18430 18448 18477
18627 23668 23676
M1215
CALL M CODE CHEC
CALL P133
18420 3058 23673
TMP.FB
1119
M1279
MOV D177 D178
ANGLE
23666
23677 18431 23669
M5860
M FUNCTION 1 SIM
BIT R1001 H0
23681 23710 23724 23730
M5861
M FUNCTION 2 SIM
BIT R1001 H1
23685 23711 23747 23753
M5862
M FUNCTION 3 SIM
BIT R1001 H2
23689 23712 23770 23776
M5863
M FUNCTION 4 SIM
BIT R1001 H3
23693 23713 23793 23799
M5864
m FUNCTION 1 SIM
BIT R1001 H8
23697 23715 23725 23733

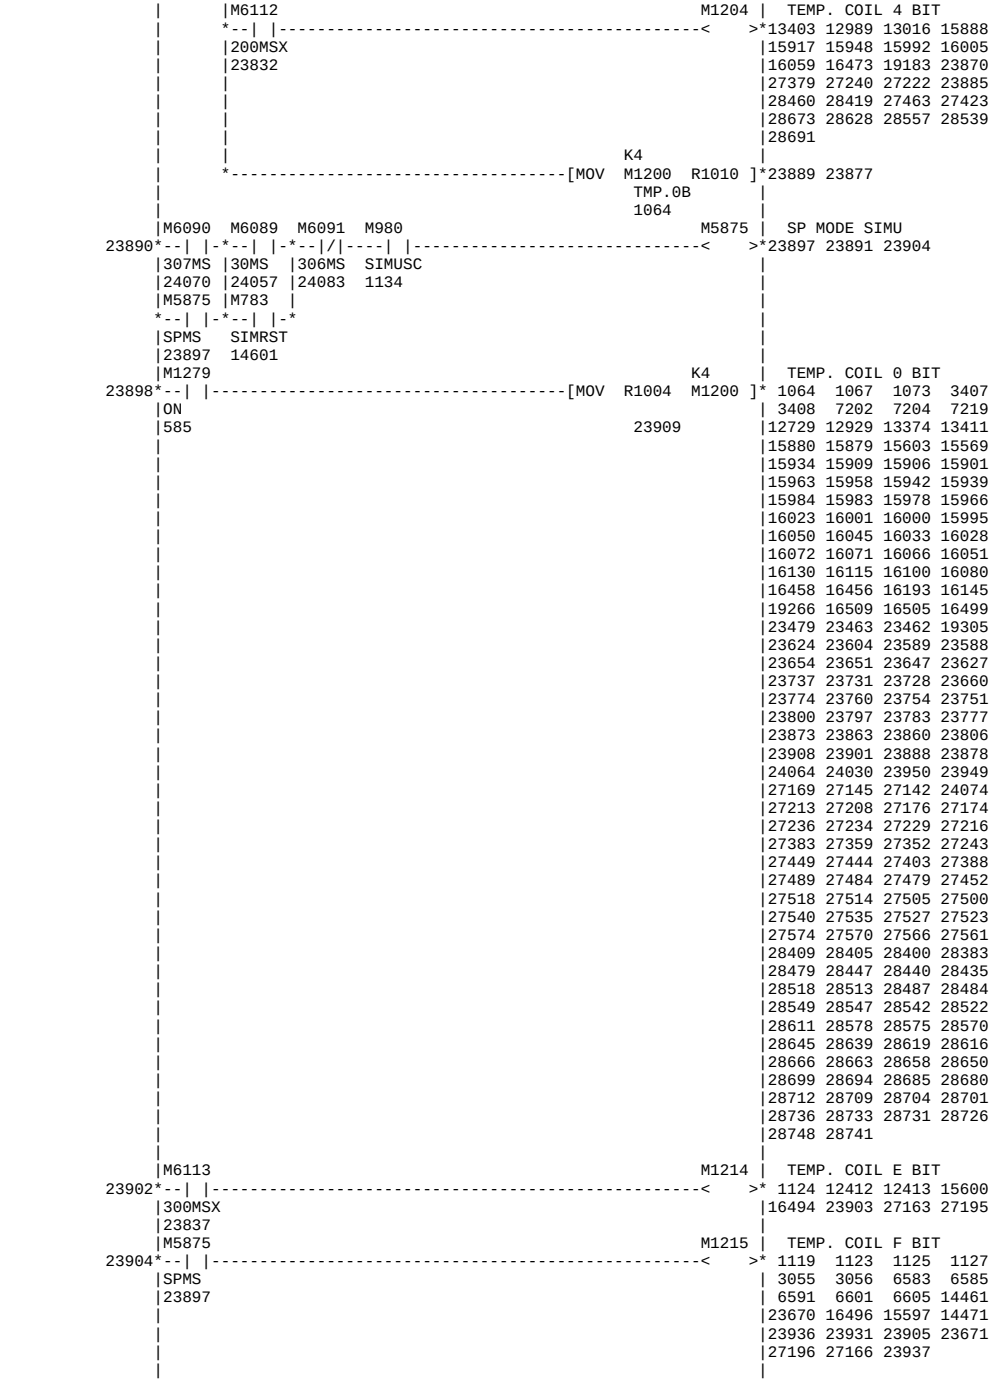

| <= M5865 | m FUNCTION 2 SIM
23698*[BIT R1001 H9]----------<> *23701 23716 23748 23756
| <= M5866 | m FUNCTION 3 SIM
23702*[BIT R1001 HA]----------<> *23705 23717 23771 23779
| <= M5867 | m FUNCTION 4 SIM
23706*[BIT R1001 HB]----------<> *23709 23718 23794 23802
|M5860 M5868 | M FUNCTION SIMU
23710*--| |-*----------<> *23714
|MF1SIM|
|23681 |
|M5861 |
--| |-
|MF2SIM|
|23685 |
|M5862 |
--| |-
|MF3SIM|
|23689 |
|M5863 |
--| |-
|MF4SIM
|23693
|M5864 M5869 | m FUNCTION SIMU
23715*--| |-*----------<> *23719
|mf1SIM|
|23697 |
|M5865 |
--| |-
|mf2SIM|
|23701 |
|M5866 |
--| |-
|mf3SIM|
|23705 |
|M5867 |
--| |-
|mf4SIM
|23709
|M1279 | SIMURATION M COD
23720*--| |----------[MOV K0 D220]*23723 562 23822 23825
|ON |24087 24088
|585
|M5860 K4 | TEMP. COIL 0 BIT
23724*--| |-*----------[MOV K0 M1200]* 1064 1067 1073 3407
|MF1SIM| | 3408 7202 7204 7219
|23681 | |12729 12929 13374 13411
| | |15880 15879 15603 15569
| | |15934 15909 15906 15901
| | |15963 15958 15942 15939
| | |15984 15983 15978 15966
| | |16023 16001 16000 15995
| | |16050 16045 16033 16028
| | |16072 16071 16066 16051
| | |16130 16115 16100 16080
| | |16458 16456 16193 16145
| | |19266 16509 16505 16499
| | |23479 23463 23462 19305
| | |23624 23604 23589 23588
| | |23654 23651 23647 23627
| | |23737 23731 23728 23660
| | |23774 23760 23754 23751
| | |23800 23797 23783 23777
| | |23873 23863 23860 23806
| | |23908 23901 23888 23878
| | |24064 24030 23950 23949
| | |27169 27145 27142 24074
| | |27213 27208 27176 27174
| | |27236 27234 27229 27216
| | |27383 27359 27352 27243
| | |27449 27444 27403 27388
| | |27489 27484 27479 27452
| | |27518 27514 27505 27500
| | |27540 27535 27527 27523
| | |27574 27570 27566 27561
| | |28409 28405 28400 28383
| | |28479 28447 28440 28435
| | |28518 28513 28487 28484
| | |28549 28547 28542 28522
| | |28611 28578 28575 28570
| | |28645 28639 28619 28616
| | |28666 28663 28658 28650
| | |28699 28694 28685 28680
| | |28712 28709 28704 28701
| | |28736 28733 28731 28726
| | |28748 28741
| |
|M5864 |M5860 M1200 | TEMP. COIL 0 BIT
--| |---| |----------<> * 1064 1067 1073 3407
|mf1SIM|MF1SIM | 3408 7202 7204 7219
|23697 |23681 |12729 12929 13374 13411
| | |15880 15879 15603 15569
| | |15934 15909 15906 15901
| | |15963 15958 15942 15939
| | |15984 15983 15978 15966
| | |16023 16001 16000 15995
| | |16050 16045 16033 16028
| | |16072 16071 16066 16051
| | |16130 16115 16100 16080
| | |16458 16456 16193 16145
| | |19266 16509 16505 16499
| | |23479 23463 23462 19305
| | |23624 23604 23589 23588
| | |23654 23651 23647 23627
| | |23737 23731 23728 23660
| | |23774 23760 23754 23751
| | |23800 23797 23783 23777
| | |23873 23863 23860 23806
| | |23908 23901 23888 23878
| | |24064 24030 23950 23949
| | |27169 27145 27142 24074
| | |27213 27208 27176 27174
| | |27236 27234 27229 27216
| | |27383 27359 27352 27243
| | |27449 27444 27403 27388
| | |27489 27484 27479 27452
| | |27518 27514 27505 27500
| | |27540 27535 27527 27523
| | |27574 27570 27566 27561
| | |28409 28405 28400 28383
| | |28479 28447 28440 28435
| | |28518 28513 28487 28484
| | |28549 28547 28542 28522
| | |28611 28578 28575 28570
| | |28645 28639 28619 28616
| | |28666 28663 28658 28650
| | |28699 28694 28685 28680
| | |28712 28709 28704 28701
| | |28736 28733 28731 28726
| | |28748 28741
| |
| |M5864 M1201 | TEMP. COIL 1 BIT
| *--| |----------<> * 1070 3411 7209 12980
| |mf1SIM |13007 13383 15881 15910
| |23697 |15943 15969 15985 16002
| | |16163 16073 16054 16035
| | |23466 19279 16512 16460
| | |23734 23657 23630 23592
| | |23951 23803 23780 23757
| | |27150 24081 24068 24031
| | |27237 27217 27182 27160
| | |27490 27453 27404 27362
| | |28451 28413 27544 27531
| | |28585 28551 28526 28493
| | |28688 28669 28655 28621
| | |28715
| |

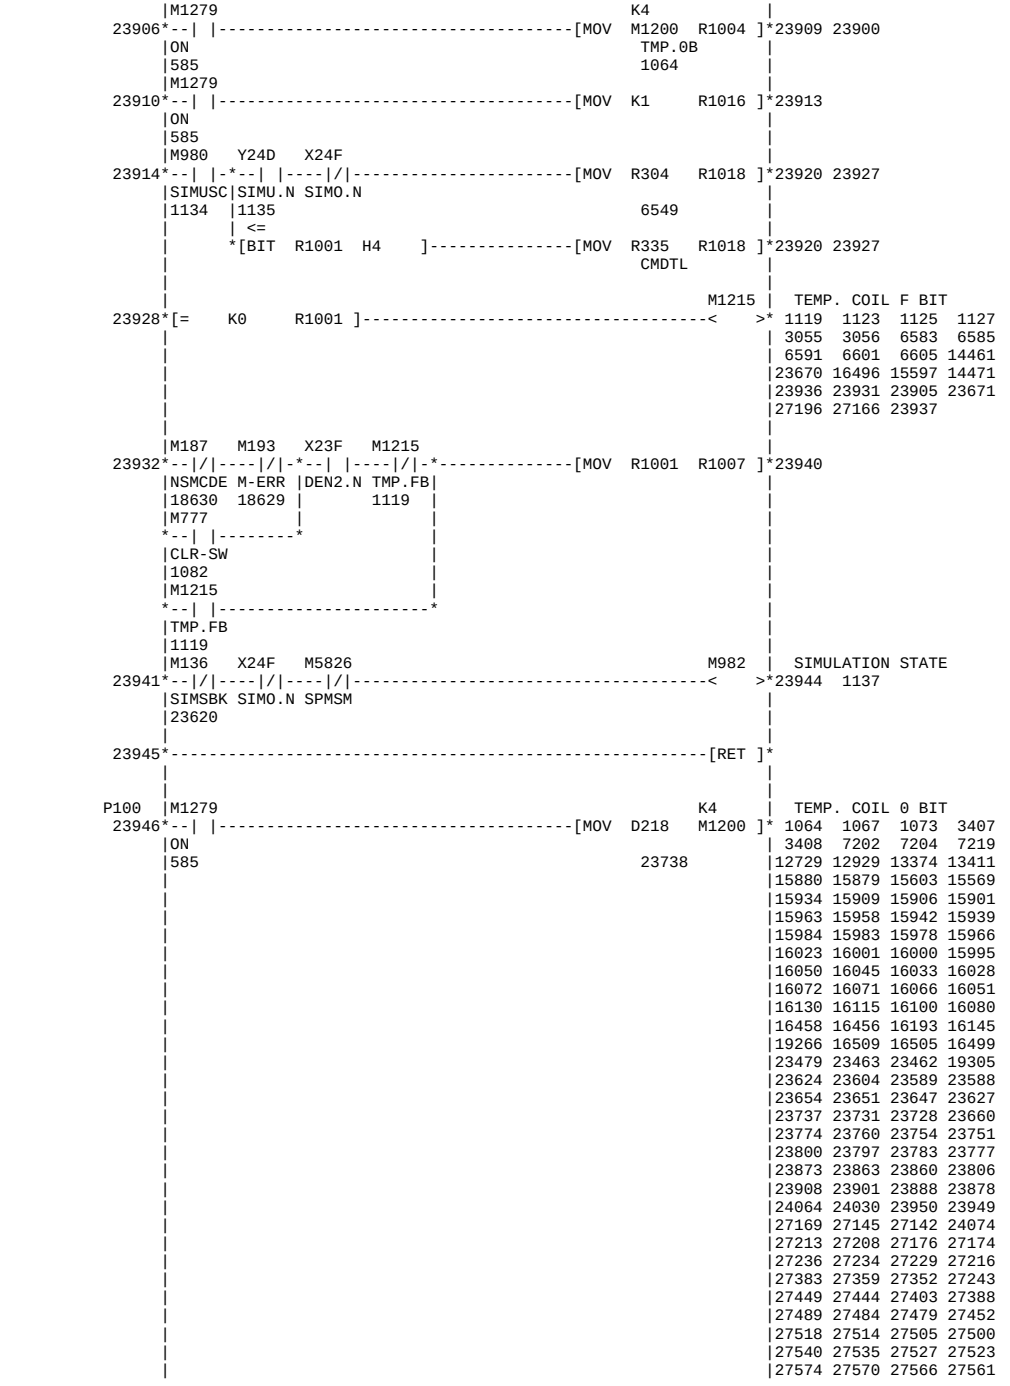

K4
M1200 D218
TMP.0B
1064
MOV
RETURN TOOL NO.
23738 23761 23784 23807
23948
R32 D219
1=M-C
NEXT TOOL NO.
23742 23765 23788 23811
23955 23958 23961 23967
23970 23976 23979 23982
24001 23996 23991 23985
24035 24018 24011 24006
24050 24044 24041 24038
24067 24063 24060 24055
24080 24077 24073
X23F
DEN2.N
CALL P100
SIMURATION
23946 23746 23769 23792
23815
M5861
K4
K0 M1200
TEMP. COIL 0 BIT
23747
1064 1067 1073 3407
MF2SIM
23685
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M5865
M5861
M1200
TEMP. COIL 0 BIT
1064 1067 1073 3407
mf2sim
23701
MF2SIM
23685
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M5865
M1201
TEMP. COIL 1 BIT
1070 3411 7209 12980
mf2SIM
23701
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
K4
M1200 D218
TMP.0B
1064
MOV
RETURN TOOL NO.
23738 23761 23784 23807
23948
R33 D219
1=M-C
NEXT TOOL NO.
23742 23765 23788 23811
23955 23958 23961 23967
23970 23976 23979 23982
24001 23996 23991 23985
24035 24018 24011 24006
24050 24044 24041 24038
24067 24063 24060 24055
24080 24077 24073
X23F
DEN2.N
CALL P100
SIMURATION
23946 23746 23769 23792
23815
M5862
K4
K0 M1200
TEMP. COIL 0 BIT
23770
1064 1067 1073 3407
MF3SIM
23689
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966

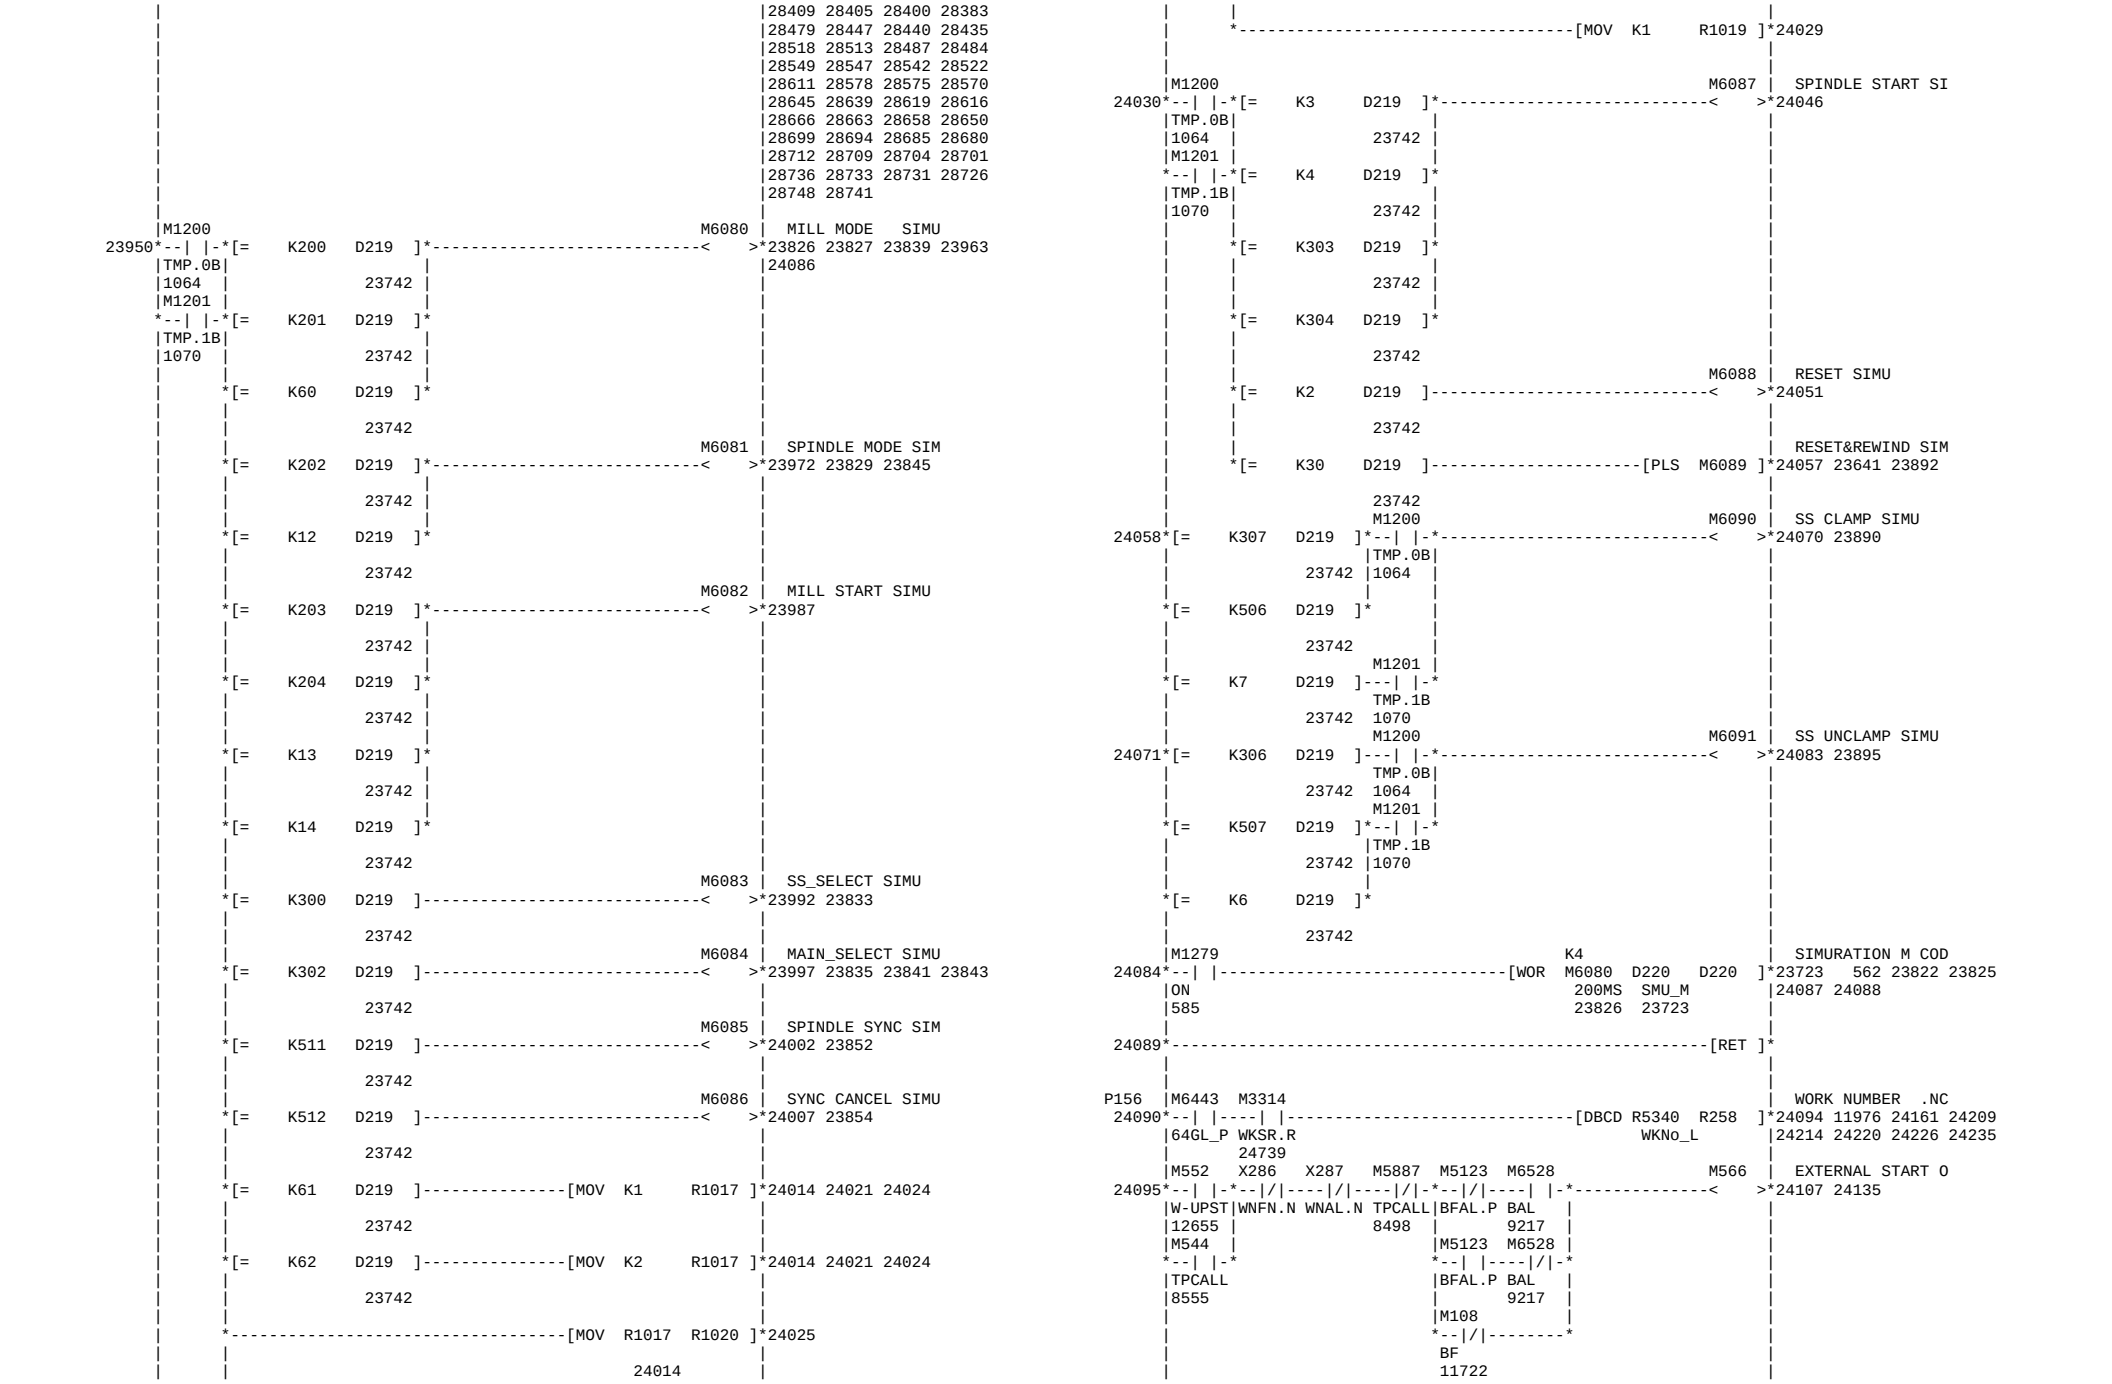

M5866
M5862
M1200
TEMP. COIL 0 BIT
mf3SIM
23705
MF3SIM
23689
M5866
M1201
TEMP. COIL 1 BIT
mf3SIM
23705
K4
M1200 D218
TMP.0B
1064
RETURN TOOL NO.
23738 23761 23784 23807
23948
R34 D219
1=M-C
NEXT TOOL NO.
23742 23765 23788 23811
X23F
CALL P100
DEN2.N
SIMURATION
23946 23746 23769 23792
23815
M5863
K4
M1200
TEMP. COIL 0 BIT
23793
MF4SIM
23693
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
23955 23958 23961 23967
23970 23976 23979 23982
24001 23996 23991 23985
24035 24018 24011 24006
24050 24044 24041 24038
24067 24063 24060 24055
24080 24077 24073

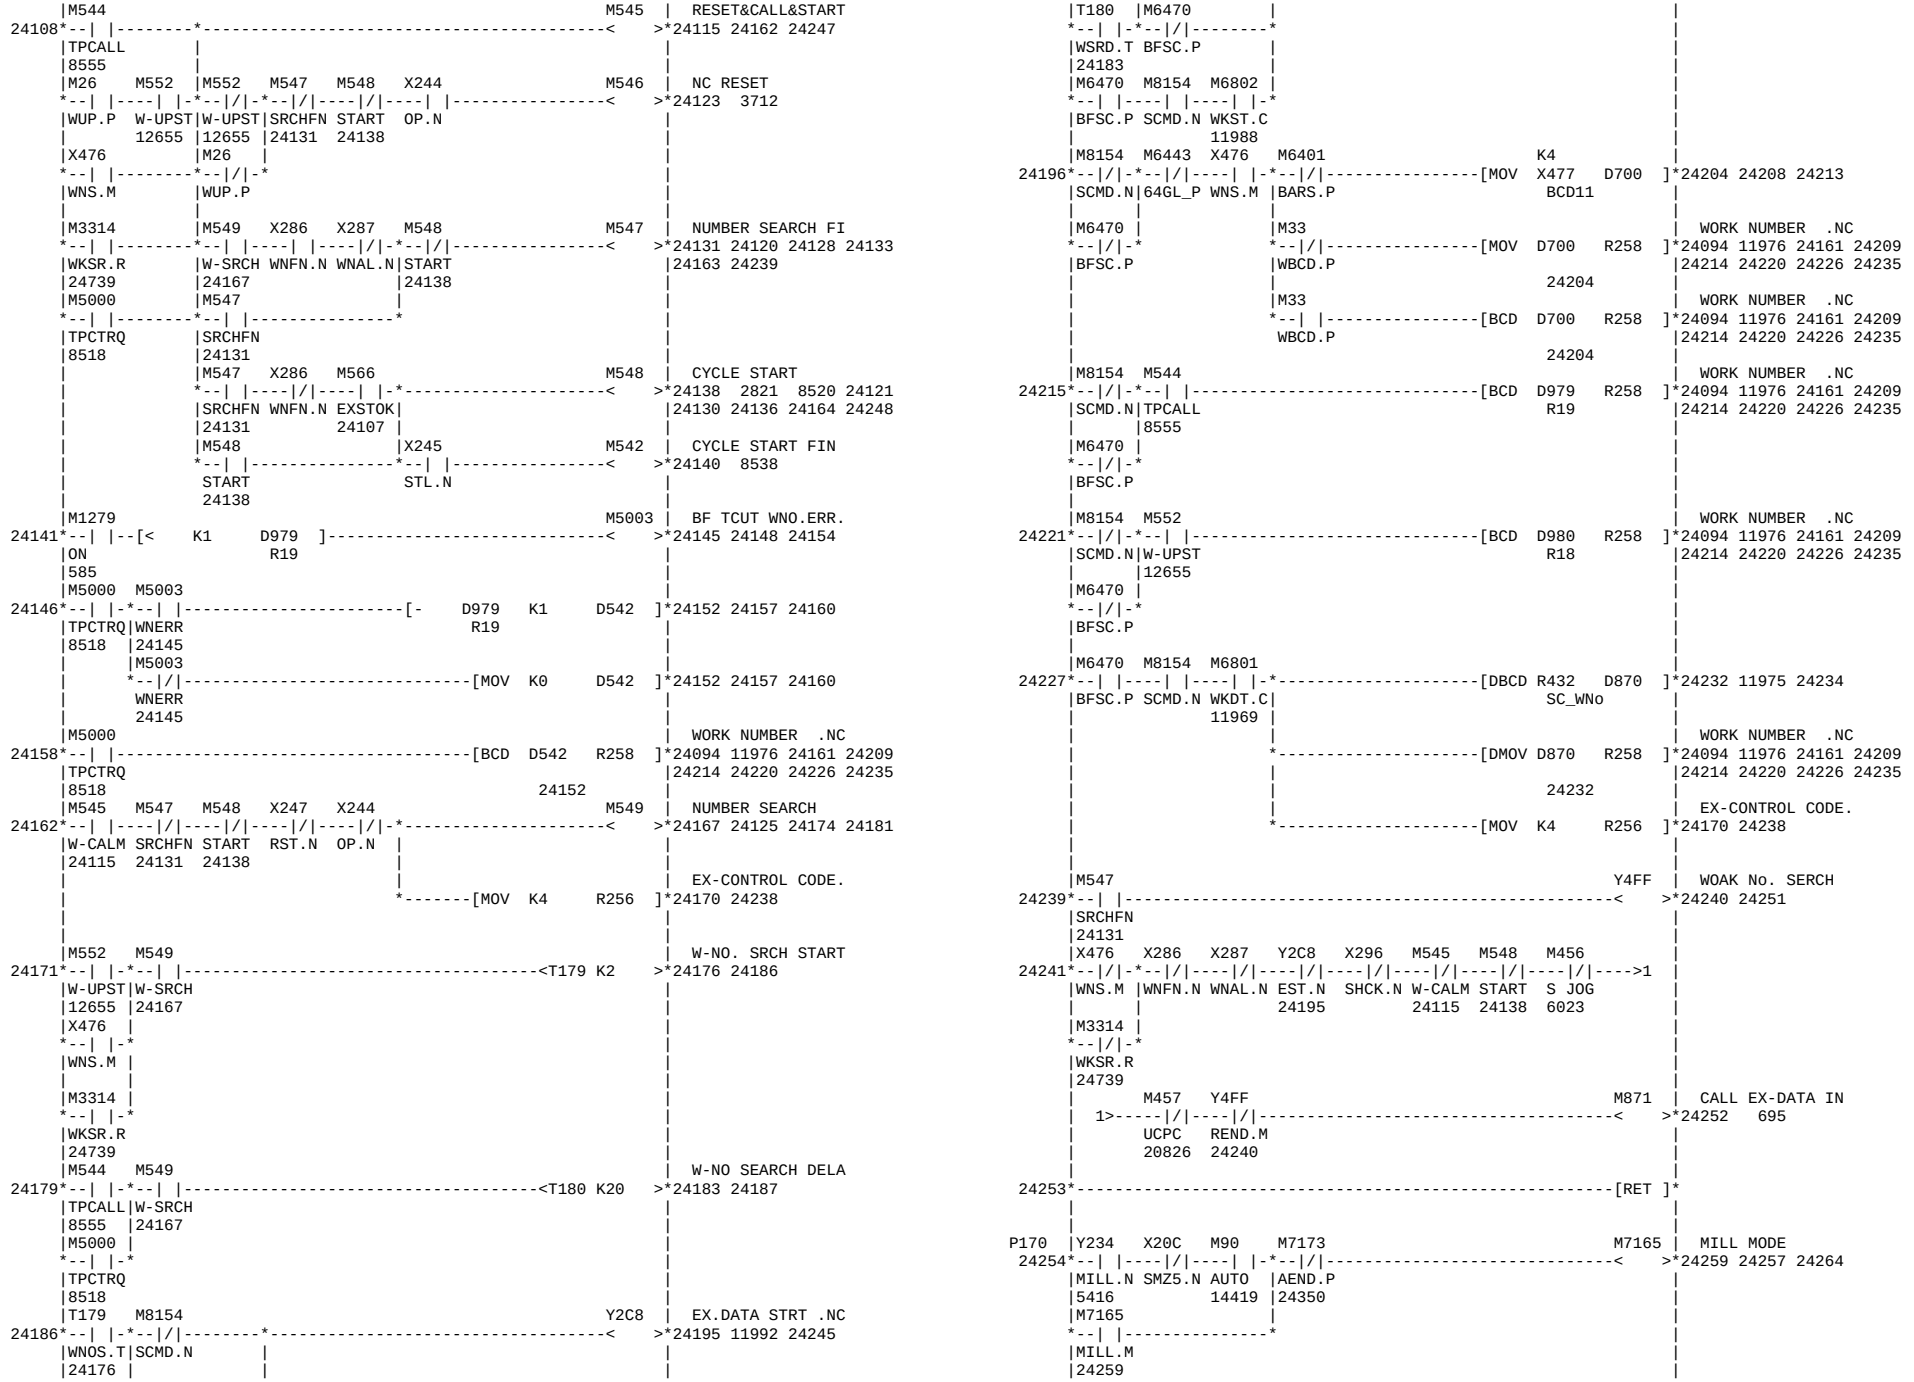

M5867 M5863 M1200 TEMP. COIL 0 BIT
mf4SIM MF4SIM
23709 23693
M5867 M1201 TEMP. COIL 1 BIT
mf4SIM
23709
K4 RETURN TOOL NO.
MOV M1200 D218
TMP.0B
1064
NEXT TOOL NO.
MOV R35 D219
1=M-C
X23F
DEN2.N
CALL P100
M1281
OTRS.B
1040
M1279
MOV K0 D220
MOV D220 M6080
SMU_M
23723
SIMUSC
1134
M6112 MILL MODE SIMU
M6113 SS MODE SIMU
M6114 C AXIS ON SIMU
M6115 SP_SYNC MODE SIM
C_ON_S
SIMURATION
SIMURATION M COD
MILL MODE SIMU
MOV R1005 M1200
23874

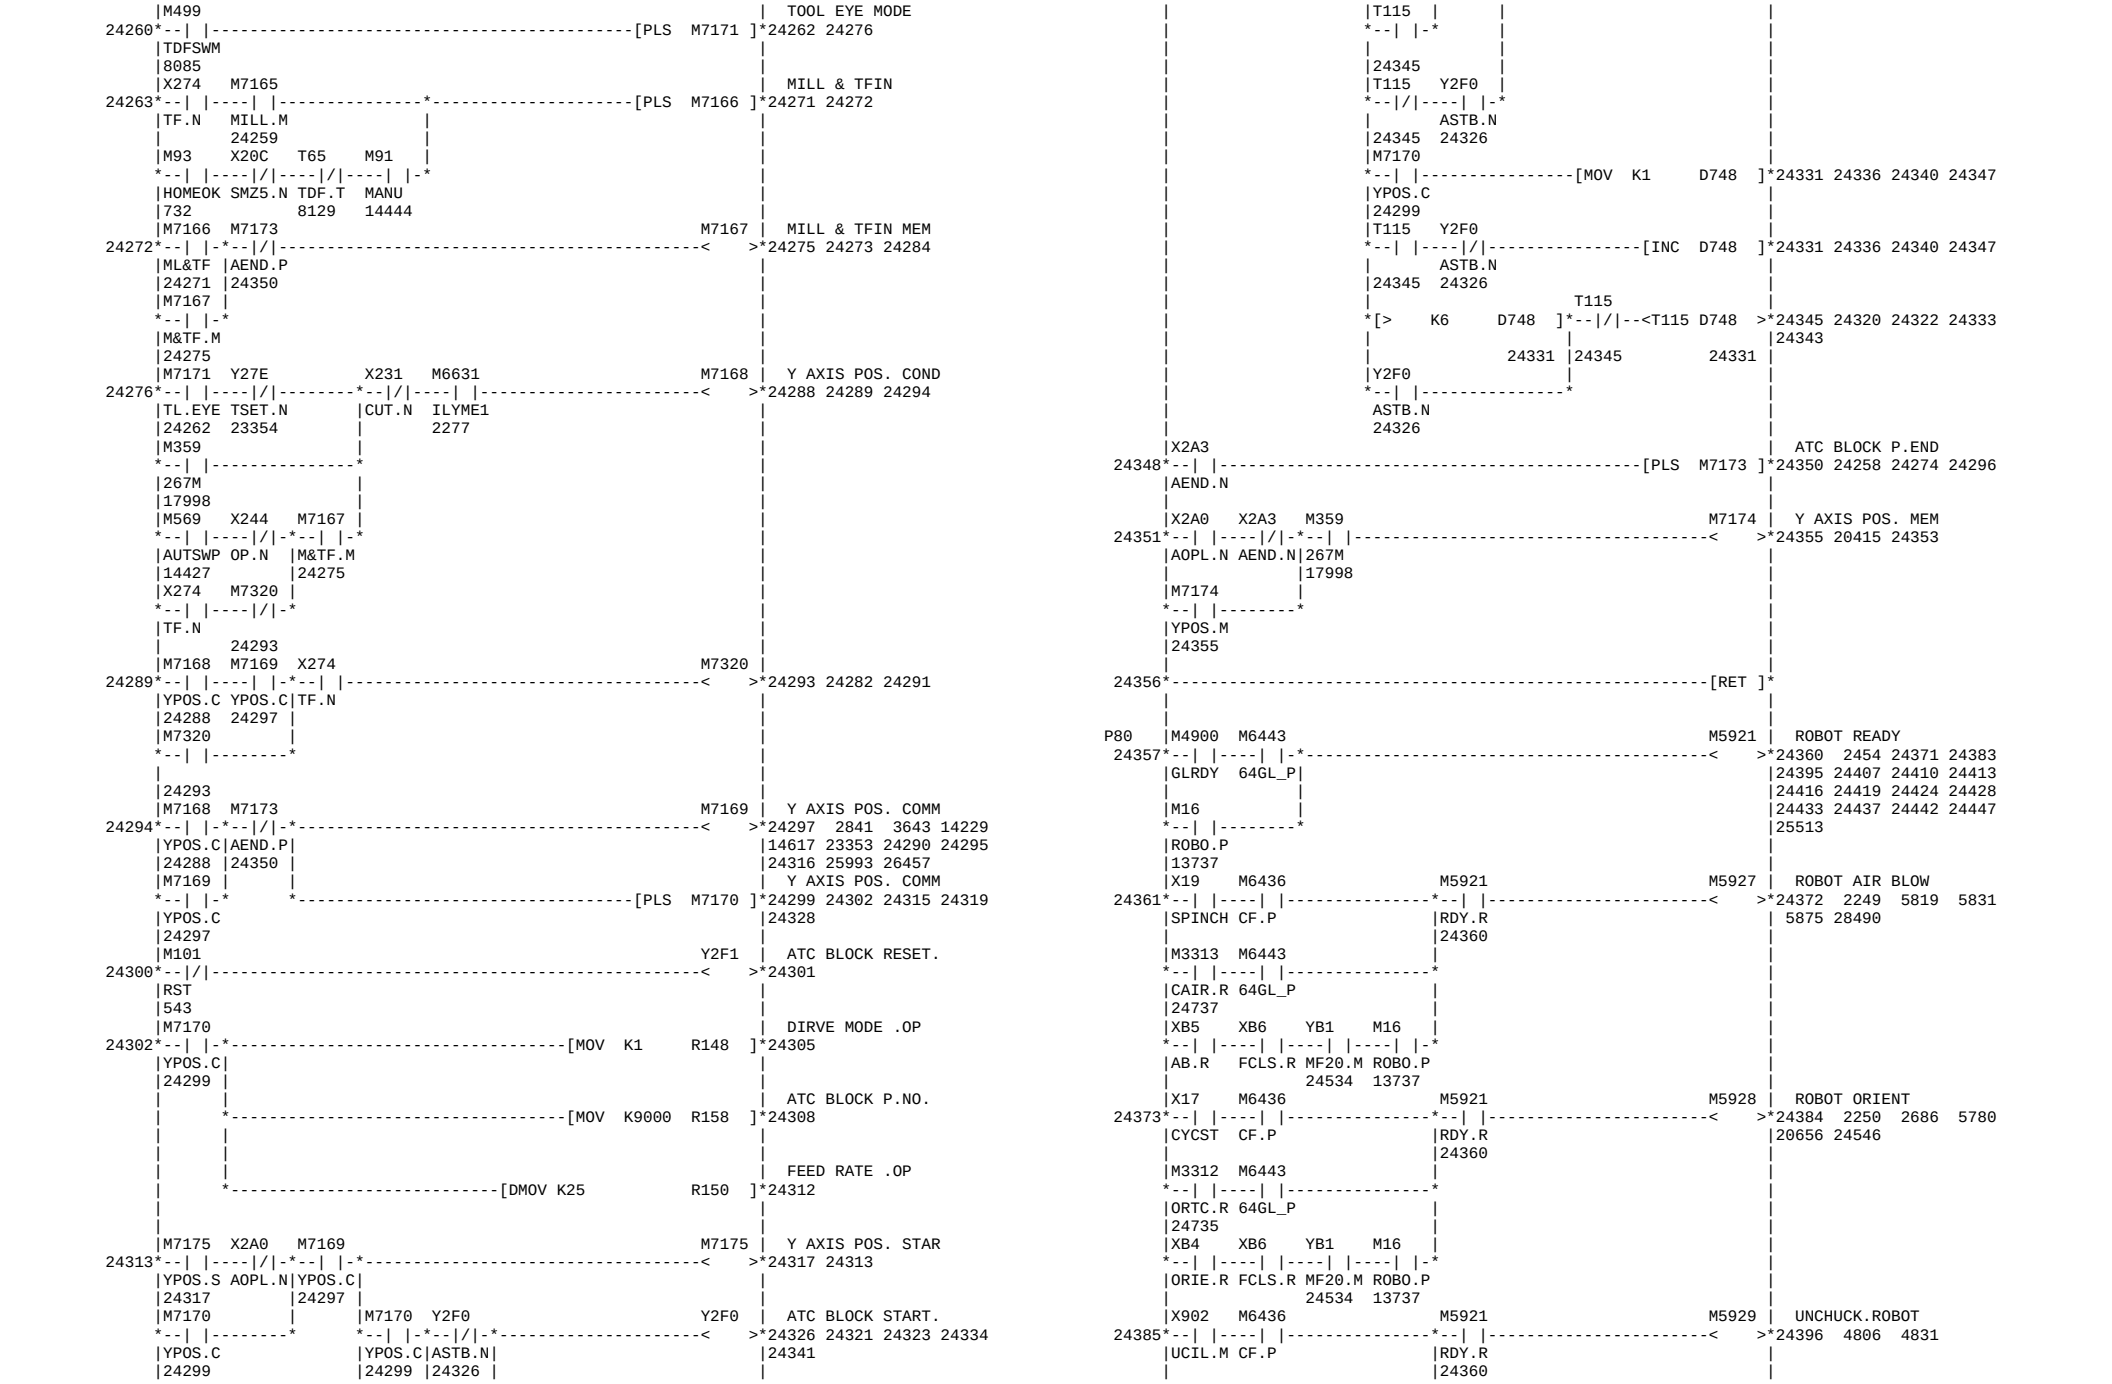

|M6114 M1200 | TEMP. COIL 0 BIT
|C_ON_S
|23851
|M6115 M6113 M1203 | TEMP. COIL 3 BIT
|511MSX 300MSX
|23856 23837
|M6112 M1204 | TEMP. COIL 4 BIT
|200MSX
|23832
K4
[MOV M1200 R1005]
TMP.0B
1064
K4
[MOV R1010 M1200]
23889
|M6115 M6113 M1203 | TEMP. COIL 3 BIT
|511MSX 300MSX
|23856 23837
* 1064 1067 1073 3407
| 3408 7202 7204 7219
|12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
* 7216 3417 12986 13013
|13400 15885 15916 15947
|15989 16004 16056 16169
|23472 19237 16517 16464
|27155 23882 23867 23598
|27375 27239 27221 27183
|28458 27496 27459 27419
|28723 28625 28555 28536
|28743
* 1064 1067 1073 3407
| 3408 7202 7204 7219
|12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
* 13403 12989 13016 15888
|15917 15948 15992 16005
|16059 16473 19183 23870
|27379 27240 27222 23885
|28460 28419 27463 27423
|28673 28628 28557 28539
|28691
* 23874 23859
* 1064 1067 1073 3407
| 3408 7202 7204 7219
|12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
* 7216 3417 12986 13013
|13400 15885 15916 15947
|15989 16004 16056 16169
|23472 19237 16517 16464
|27155 23882 23867 23598
|27375 27239 27221 27183
|28458 27496 27459 27419
|28723 28625 28555 28536
|28743

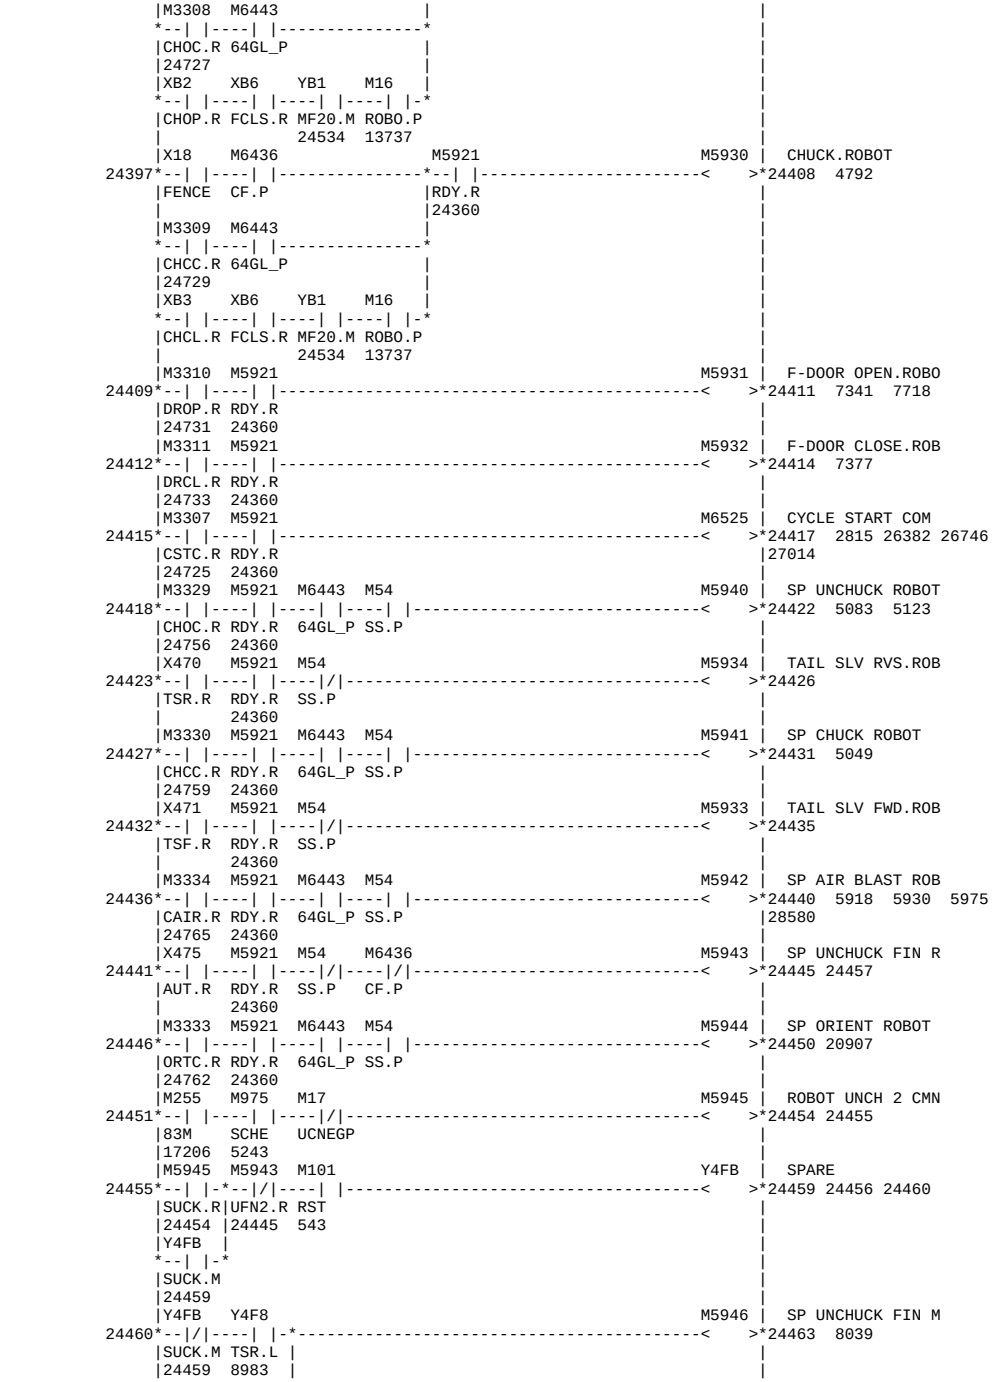

|M6112 M1204 | TEMP. COIL 4 BIT
*--| |----------<
|200MSX
|23832
K4
*----------[MOV M1200 R1010]*23889 23877
TMP.0B
1064
|M6090 M6089 M6091 M980 M5875 | SP MODE SIMU
23890*--| |-*--| |-*--|/|----| |----------<
|307MS |30MS |306MS SIMUSC
|24070 |24057 |24083 1134
|M5875 |M783 |
--| |---| |-*
|SPMS SIMRST
|23897 14601
|M1279 K4 | TEMP. COIL 0 BIT
23898*--| |----------[MOV R1004 M1200]* 1064 1067 1073 3407
|ON | 3408 7202 7204 7219
|585 23909 |12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
|M6113 M1214 | TEMP. COIL E BIT
23902*--| |----------<
|300MSX |16494 23903 27163 27195
|23837
|M5875 M1215 | TEMP. COIL F BIT
23904*--| |----------<
|SPMS | 3055 3056 6583 6585
|23897 | 6591 6601 6605 14461
|23670 16496 15597 14471
|23936 23931 23905 23671
|27196 27166 23937

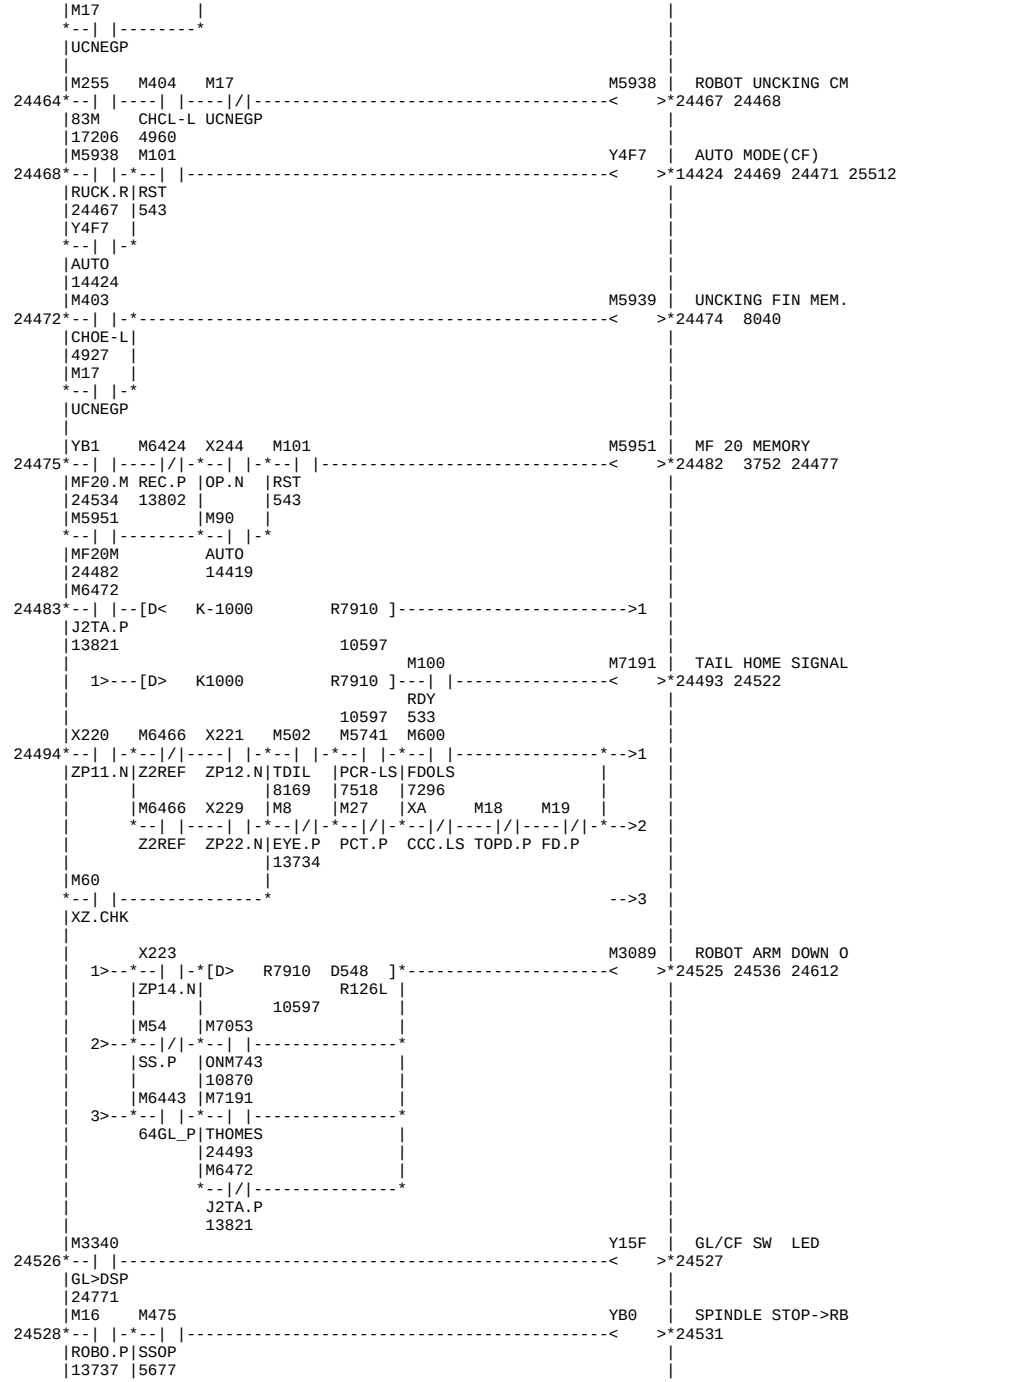

|M1279 K4
23906*--| |----------[MOV M1200 R1004]*23909 23900
|ON TMP.0B
|585 1064
|M1279
23910*--| |----------[MOV K1 R1016]*23913
|ON
|585
|M980 Y24D X24F
23914*--| |-*--| |----|/|----------[MOV R304 R1018]*23920 23927
|SIMUSC|SIMU.N SIMO.N
|1134 |1135 6549
| | <=
*[BIT R1001 H4]----------[MOV R335 R1018]*23920 23927
CMDTL
M1215 | TEMP. COIL F BIT
23928*[= K0 R1001]----------<
| 3055 3056 6583 6585
| 6591 6601 6605 14461
|23670 16496 15597 14471
|23936 23931 23905 23671
|27196 27166 23937
|M187 M193 X23F M1215
23932*--|/|----|/|-*--| |----|/|-*----------[MOV R1001 R1007]*23940
NSMCDE M-ERR	DEN2.N TMP.FB
18630 18629	1119
M777	
--| |--------
CLR-SW
1082
M1215
--| |----------
TMP.FB
1119
M136 X24F M5826 M982	SIMULATION STATE
23941*--|/|----|/|----|/|----------<
SIMSBK SIMO.N SPMSM
23620
23945*----------[RET]*
P100 |M1279 K4	TEMP. COIL 0 BIT
23946*--| |----------[MOV D218 M1200]* 1064 1067 1073 3407
ON	3408 7202 7204 7219
585 23738	12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561

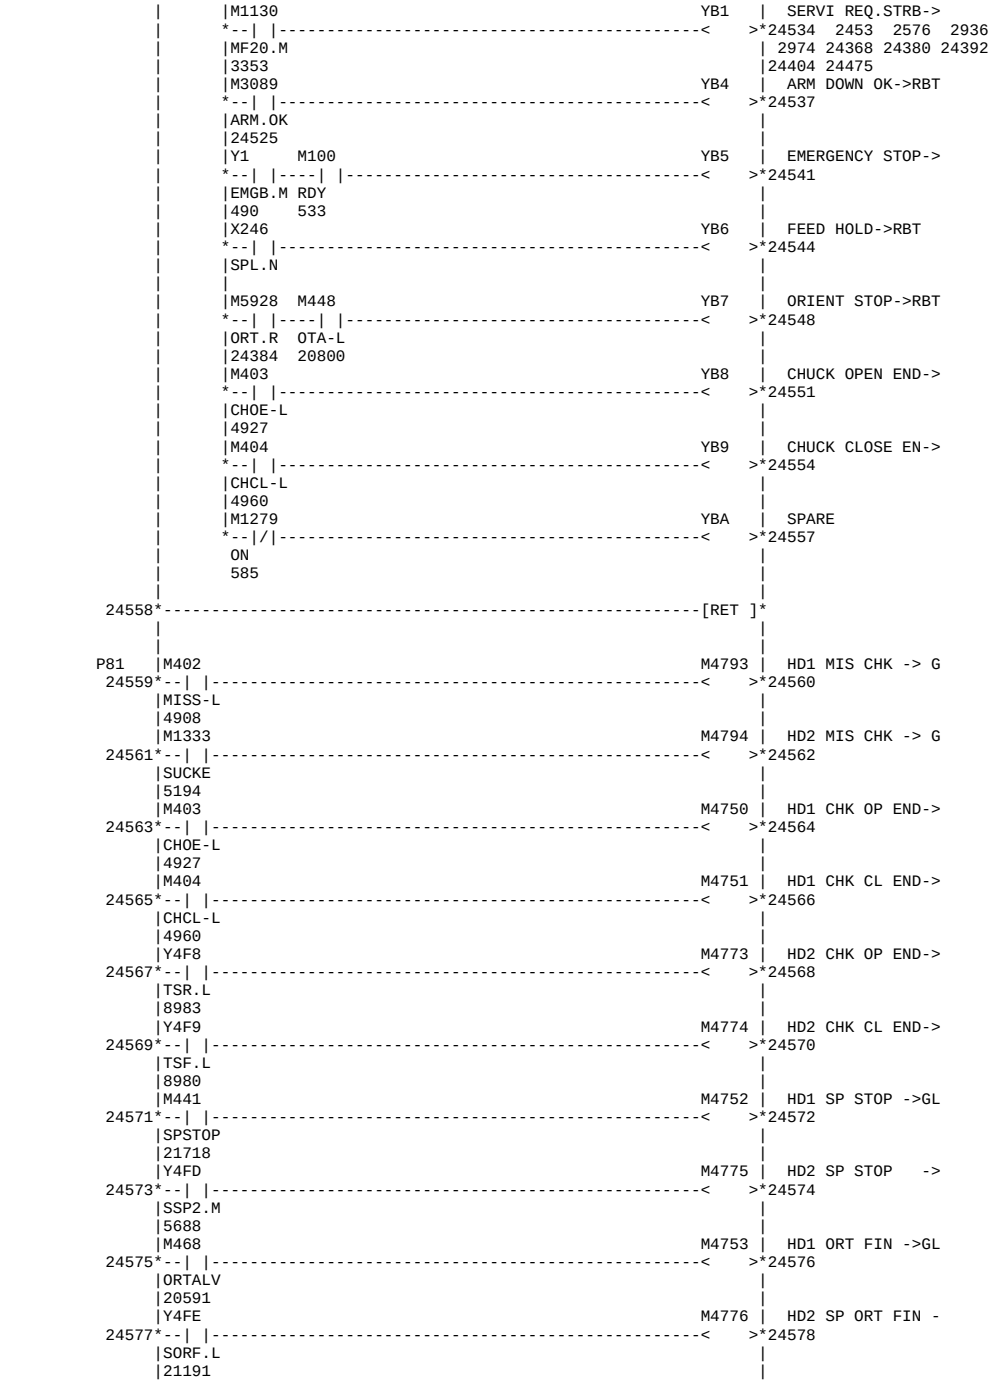

M1200
TMP.0B
1064
M1201
TMP.1B
1070
K200 D219
K201 D219
K60 D219
K202 D219
K12 D219
K203 D219
K204 D219
K13 D219
K14 D219
K300 D219
K302 D219
K511 D219
K512 D219
K61 D219
K62 D219
MOV K1 R1017
MOV K2 R1017
MOV R1017 R1020
24014
M6080 MILL MODE SIMU
M6081 SPINDLE MODE SIM
M6082 MILL START SIMU
M6083 SS_SELECT SIMU
M6084 MAIN_SELECT SIMU
M6085 SPINDLE SYNC SIM
M6086 SYNC CANCEL SIMU
23950
23742
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
23826 23827 23839 23963
24086
23972 23829 23845
23987
23992 23833
23997 23835 23841 23843
24002 23852
24007 23854
24014 24021 24024
24014 24021 24024
24025
M6087 SPINDLE START SI
M6088 RESET SIMU
M6089 RESET&REWIND SIM
M6090 SS CLAMP SIMU
M6091 SS UNCLAMP SIMU
24030
K3 D219
K4 D219
K303 D219
K304 D219
K2 D219
K30 D219
PLS M6089
24046
24029
24051
24057 23641 23892
24058
K307 D219
K506 D219
K7 D219
K306 D219
K507 D219
K6 D219
24070 23890
24083 23895
24071
24084
24089
RET
M1279
K4
M6080 D220 D220
200MS SMU_M
23826 23723
23723 562 23822 23825
24087 24088
P156
24090
M6443 M3314
64GL_P WKSR.R
24739
WKNo_L
DBCD R5340 R258
24094 11976 24161 24209
24214 24220 24226 24235
24095
M552 X286 X287 M5887 M5123 M6528
W-UPST WNFN.N WNAL.N TPCALL BFAL.P BAL
12655 8498 9217
M544 M5123 M6528
TPCALL BFAL.P BAL
8555 9217
M108
BF
11722
M566 EXTERNAL START O
24107 24135
WORK NUMBER .NC
SIMURATION M COD

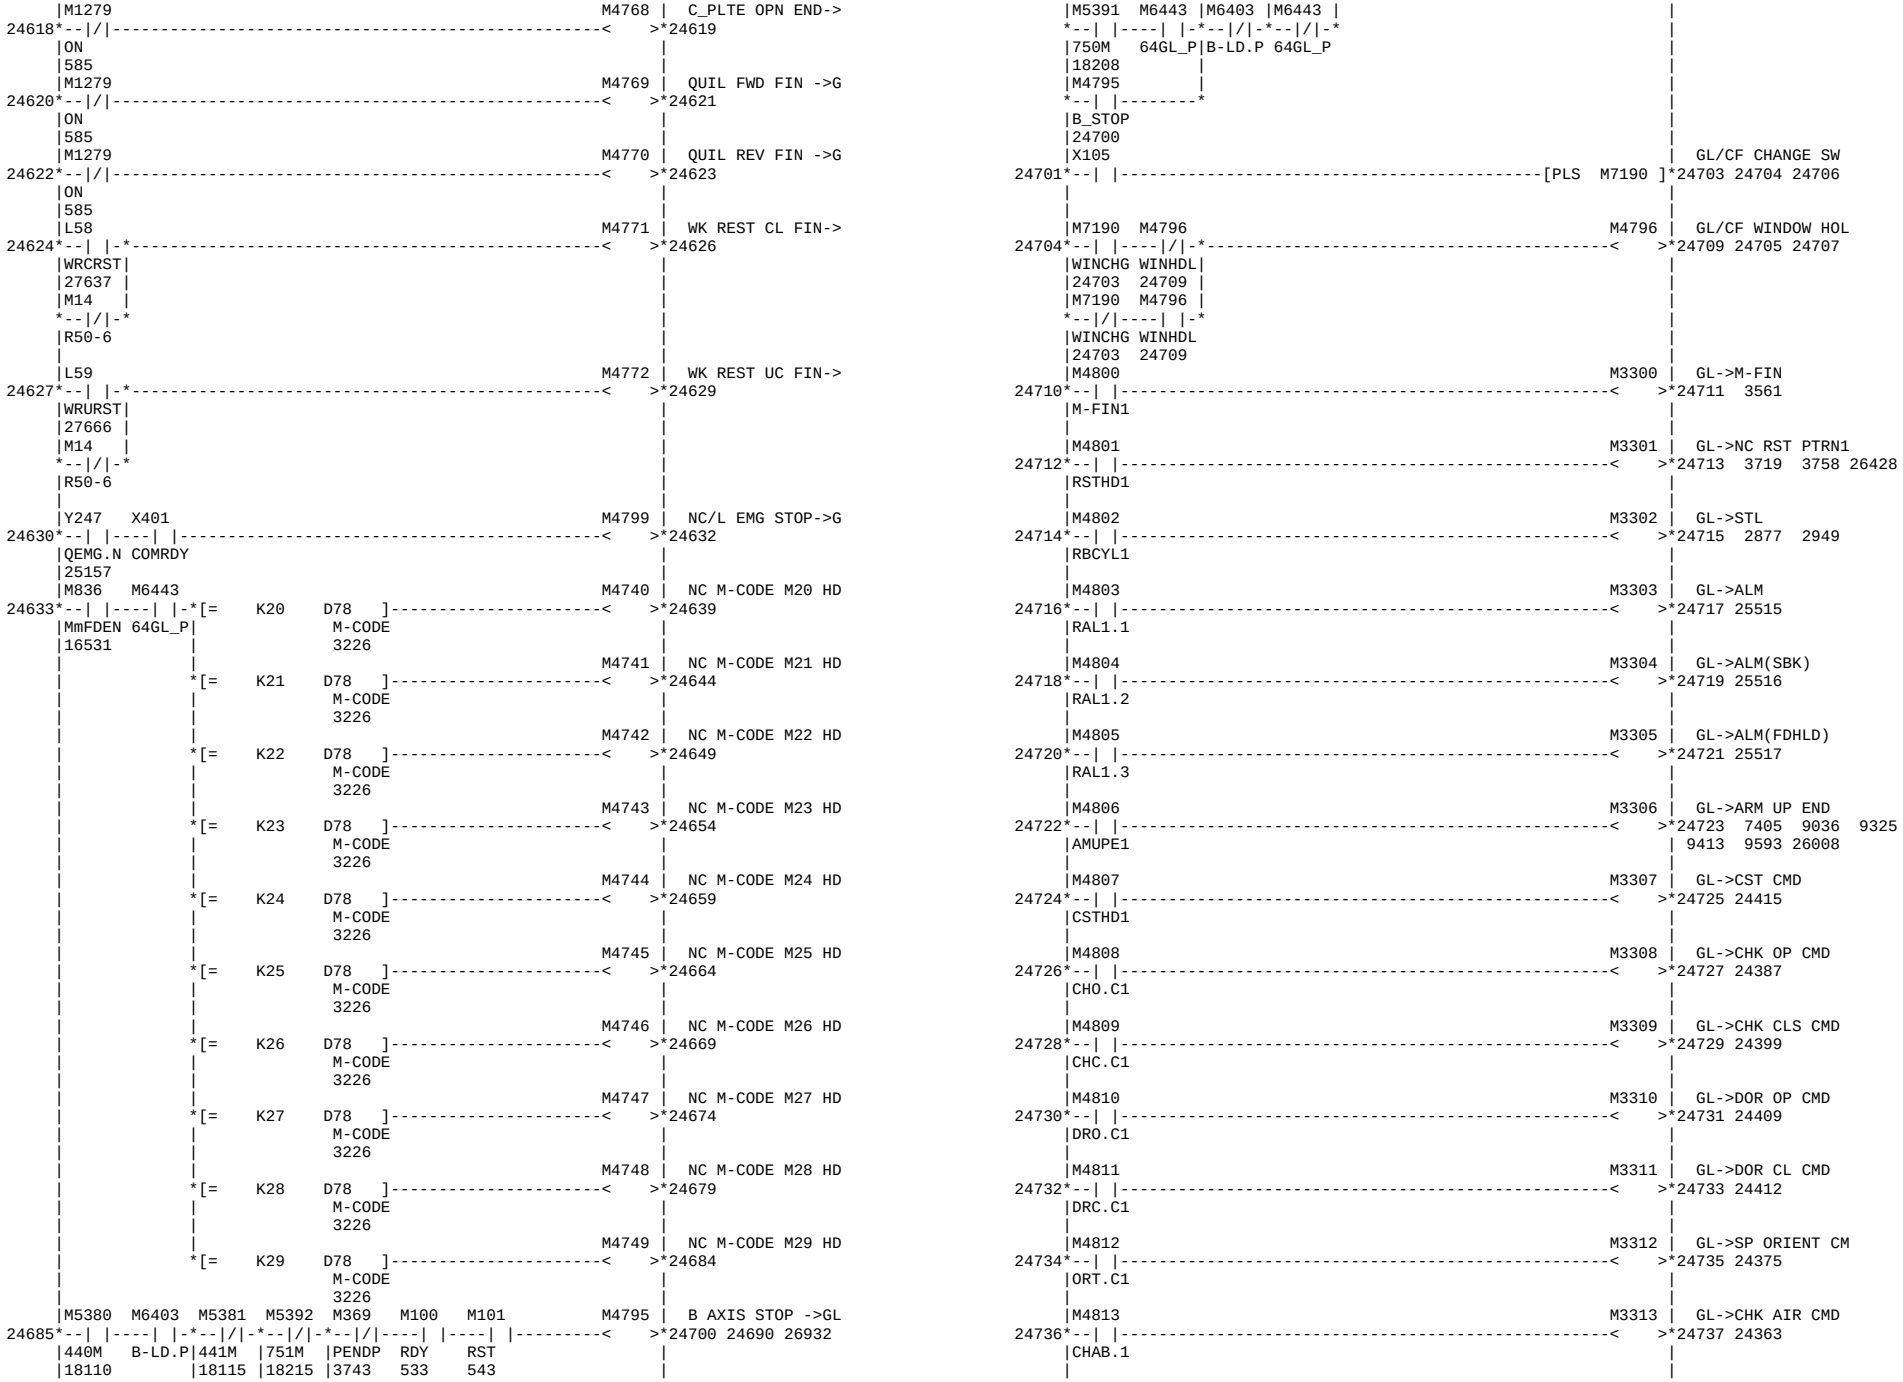

M544
M545 | RESET&CALL&START
24108 24115 24162 24247
TPCALL
8555
M26 M552 M552 M547 M548 X244
M546 | NC RESET
24123 3712
WUP.P W-UPST W-UPST SRCHFN START OP.N
12655 12655 24131 24138
X476 M26
WNS.M WUP.P
M3314 M549 X286 X287 M548
M547 | NUMBER SEARCH FI
24131 24120 24128 24133
WKSR.R W-SRCH WNFN.N WNAL.N START
24163 24239
24739 24167 24138
M5000 M547
TPCTRQ SRCHFN
8518 24131
M547 X286 M566
M548 | CYCLE START
24138 2821 8520 24121
SRCHFN WNFN.N EXSTOK
24130 24136 24164 24248
24131 24107
M548 X245
M542 | CYCLE START FIN
24140 8538
START STL.N
24138
M1279
M5003 | BF TCUT WNO.ERR.
24141 24145 24148 24154
K1 D979 R19
ON
585
M5000 M5003
24146 24152 24157 24160
TPCTRQ WNERR D979 K1 D542 R19
8518 24145
M5003
WNERR
24145
24152 24157 24160
M5000
M5000 | WORK NUMBER .NC
24158 24094 11976 24161 24209
TPCTRQ
8518
24214 24220 24226 24235
24152
M545 M547 M548 X247 X244
M549 | NUMBER SEARCH
24162 24167 24125 24174 24181
W-CALM SRCHFN START RST.N OP.N
24115 24131 24138
EX-CONTROL CODE.
24170 24238
M552 M549
W-NO. SRCH START
24171 24176 24186
W-UPST W-SRCH
12655 24167
X476
WNS.M
M3314
WKSR.R
24739
M544 M549
W-NO SEARCH DELA
24179 24183 24187
TPCALL W-SRCH
8555 24167
M5000
TPCTRQ
8518
T179 M8154
Y2C8 | EX.DATA STRT .NC
24186 24195 11992 24245
WNOS.T SCMD.N
24176
T180 M6470
WSRD.T BFSC.P
24183
M6470 M8154 M6802
BFSC.P SCMD.N WKST.C
11988
M8154 M6443 X476 M6401
K4
24196 24204 24208 24213
SCMD.N 64GL_P WNS.M BARS.P
BCD11
M6470
M33
WORK NUMBER .NC
24094 11976 24161 24209
BFSC.P WBCD.P
24214 24220 24226 24235
24204
M33
WORK NUMBER .NC
24094 11976 24161 24209
WBCD.P
24214 24220 24226 24235
24204
M8154 M544
WORK NUMBER .NC
24215 24094 11976 24161 24209
SCMD.N TPCALL
24214 24220 24226 24235
8555
M6470
BFSC.P
M8154 M552
WORK NUMBER .NC
24221 24094 11976 24161 24209
SCMD.N W-UPST
24214 24220 24226 24235
12655
M6470
BFSC.P
M6470 M8154 M6801
24227 24232 11975 24234
BFSC.P SCMD.N WKDT.C
11969
SC_WNo
WORK NUMBER .NC
24094 11976 24161 24209
24214 24220 24226 24235
24232
EX-CONTROL CODE.
24170 24238
M547
Y4FF | WOAK No. SERCH
24239 24240 24251
SRCHFN
24131
X476 X286 X287 Y2C8 X296 M545 M548 M456
24241
WNS.M WNFN.N WNAL.N EST.N SHCK.N W-CALM START S JOG
24195 24115 24138 6023
M3314
WKSR.R
24739
M457 Y4FF
M871 | CALL EX-DATA IN
1 24252 695
UCPC REND.M
20826 24240
24253 [RET
P170 Y234 X20C M90 M7173
M7165 | MILL MODE
24254 24259 24257 24264
MILL.N SMZ5.N AUTO AEND.P
5416 14419 24350
M7165
MILL.M
24259


TOOL EYE MODE
MILL & TFIN
MILL & TFIN MEM
Y AXIS POS. COND
Y AXIS POS. COMM
Y AXIS POS. COMM
ATC BLOCK RESET.
DIRVE MODE .OP
ATC BLOCK P.NO.
FEED RATE .OP
Y AXIS POS. STAR
ATC BLOCK START.
ATC BLOCK P.END
Y AXIS POS. MEM
ROBOT READY
ROBOT AIR BLOW
ROBOT ORIENT
UNCHUCK.ROBOT

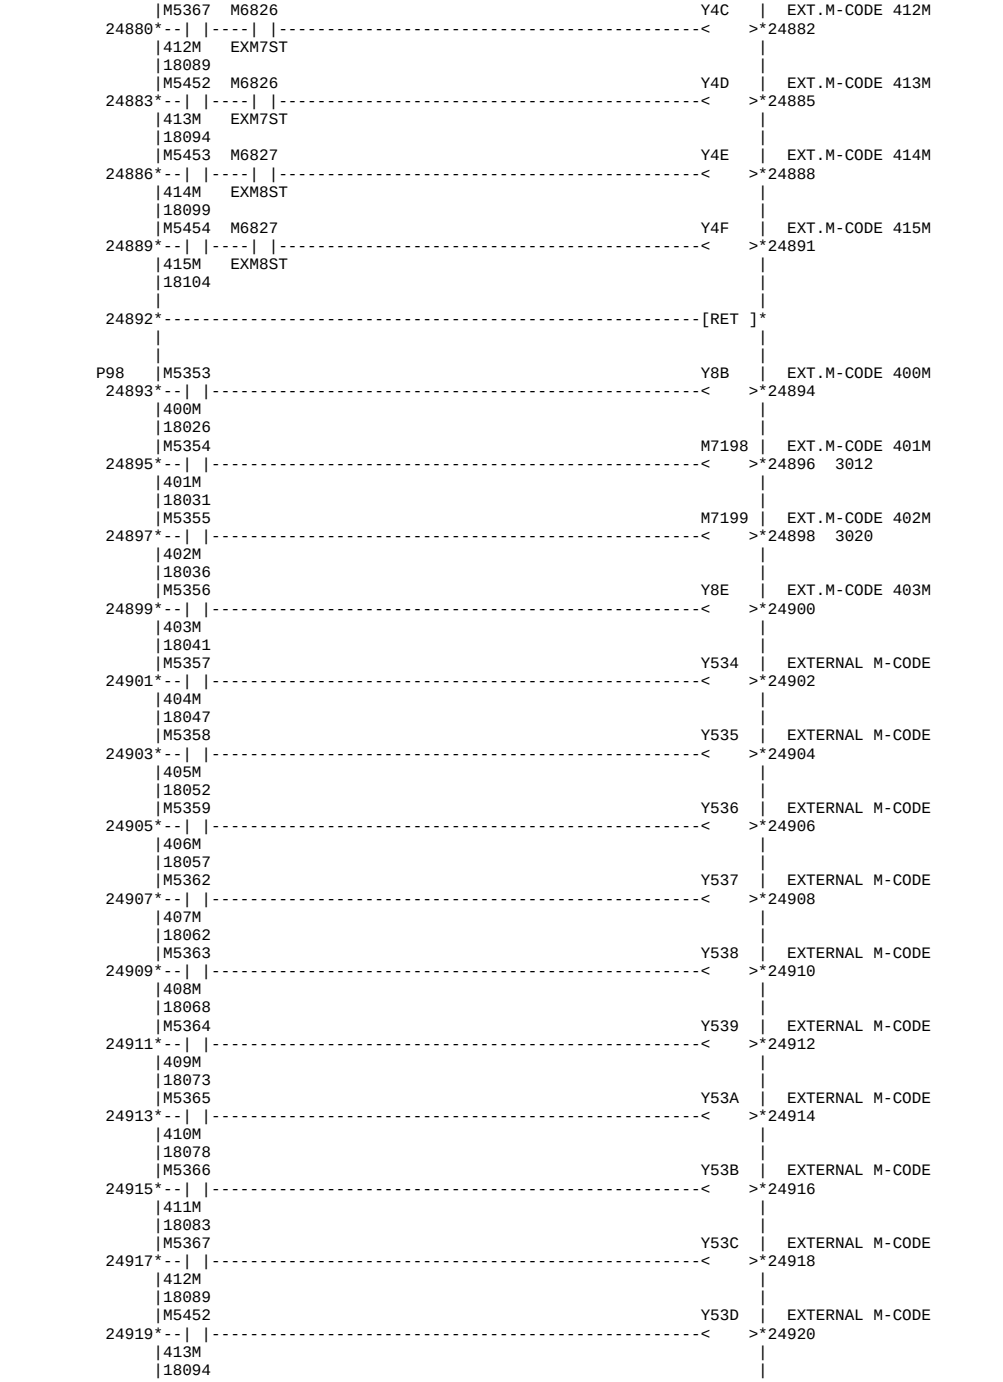

|M3308 M6443 |
--| |----| |---------------
|CHOC.R 64GL_P |
|24727 |
|XB2 XB6 YB1 M16 |
--| |----| |----| |----| |-
|CHOP.R FCLS.R MF20.M ROBO.P
| 24534 13737
|X18 M6436 M5921 M5930 | CHUCK.ROBOT
24397*--| |----| |---------------*--| |-----------------------< >*24408 4792
|FENCE CF.P |RDY.R |
| |24360 |
|M3309 M6443 |
--| |----| |---------------
|CHCC.R 64GL_P |
|24729 |
|XB3 XB6 YB1 M16 |
--| |----| |----| |----| |-
|CHCL.R FCLS.R MF20.M ROBO.P
| 24534 13737
|M3310 M5921 M5931 | F-DOOR OPEN.ROBO
24409*--| |----| |---< >*24411 7341 7718
|DROP.R RDY.R |
|24731 24360 |
|M3311 M5921 M5932 | F-DOOR CLOSE.ROB
24412*--| |----| |---< >*24414 7377
|DRCL.R RDY.R |
|24733 24360 |
|M3307 M5921 M6525 | CYCLE START COM
24415*--| |----| |---< >*24417 2815 26382 26746
|CSTC.R RDY.R |27014
|24725 24360 |
|M3329 M5921 M6443 M54 M5940 | SP UNCHUCK ROBOT
24418*--| |----| |----| |----| |-----------------------------< >*24422 5083 5123
|CHOC.R RDY.R 64GL_P SS.P |
|24756 24360 |
|X470 M5921 M54 M5934 | TAIL SLV RVS.ROB
24423*--| |----| |----|/|-------------------------------------< >*24426
|TSR.R RDY.R SS.P |
| 24360 |
|M3330 M5921 M6443 M54 M5941 | SP CHUCK ROBOT
24427*--| |----| |----| |----| |-----------------------------< >*24431 5049
|CHCC.R RDY.R 64GL_P SS.P |
|24759 24360 |
|X471 M5921 M54 M5933 | TAIL SLV FWD.ROB
24432*--| |----| |----|/|-------------------------------------< >*24435
|TSF.R RDY.R SS.P |
| 24360 |
|M3334 M5921 M6443 M54 M5942 | SP AIR BLAST ROB
24436*--| |----| |----| |----| |-----------------------------< >*24440 5918 5930 5975
|CAIR.R RDY.R 64GL_P SS.P |28580
|24765 24360 |
|X475 M5921 M54 M6436 M5943 | SP UNCHUCK FIN R
24441*--| |----| |----|/|----|/|-----------------------------< >*24445 24457
|AUT.R RDY.R SS.P CF.P |
| 24360 |
|M3333 M5921 M6443 M54 M5944 | SP ORIENT ROBOT
24446*--| |----| |----| |----| |-----------------------------< >*24450 20907
|ORTC.R RDY.R 64GL_P SS.P |
|24762 24360 |
|M255 M975 M17 M5945 | ROBOT UNCH 2 CMN
24451*--| |----| |----|/|-------------------------------------< >*24454 24455
|83M SCHE UCNEGP |
|17206 5243 |
|M5945 M5943 M101 Y4FB | SPARE
24455*--| |-*--|/|----| |-------------------------------------< >*24459 24456 24460
SUCK.R	UFN2.R RST
24454	24445 543
Y4FB	
--| |-
SUCK.M
24459
Y4FB Y4F8 M5946	SP UNCHUCK FIN M
24460*--|/|----| |-*---< >*24463 8039
SUCK.M TSR.L
24459 8983

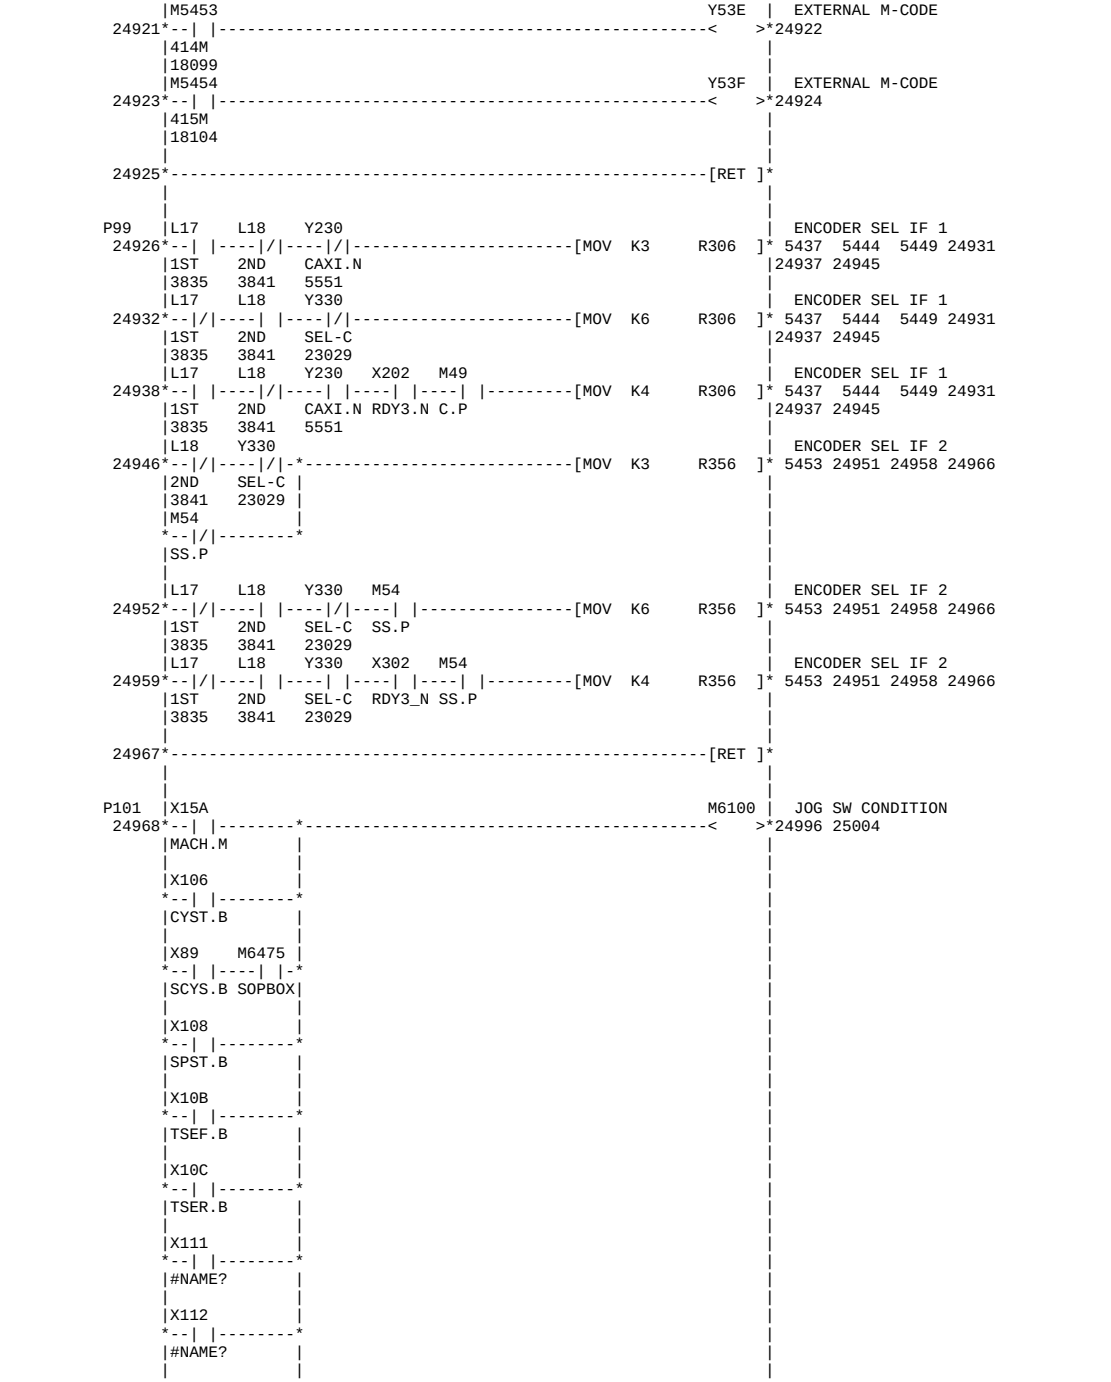

|M17 |
--| |--------
|UCNEGP
|
|M255 M404 M17 M5938 | ROBOT UNCKING CM
24464*--| |----| |----|/|-------------------------------------< >*24467 24468
|83M CHCL-L UCNEGP |
|17206 4960 |
|M5938 M101 Y4F7 | AUTO MODE(CF)
24468*--| |-*--| |---< >*14424 24469 24471 25512
RUCK.R	RST
24467	543
Y4F7	
*--		-*
AUTO
14424
M403 M5939	UNCKING FIN MEM.
24472*--| |-*---< >*24474 8040
CHOE-L	
4927	
M17	
*--		-*
UCNEGP
YB1 M6424 X244 M101 M5951	MF 20 MEMORY
24475*--| |----|/|-*--| |-*--| |-----------------------------< >*24482 3752 24477
MF20.M REC.P	OP.N	RST
24534 13802		543
M5951 |M90	
*--		--------*--		-*
MF20M AUTO
24482 14419
M6472
24483*--		--[D< K-1000 R7910]------------------------>1
J2TA.P
13821 10597
M100 M7191	TAIL HOME SIGNAL
1>---[D> K1000 R7910]---		----------------< >*24493 24522
RDY
10597 533
X220 M6466 X221 M502 M5741 M600
24494*--| |-*--|/|----| |-*--| |-*--| |-*--| |---------------*-->1
ZP11.N|Z2REF ZP12.N|TDIL |PCR-LS|FDOLS	
		8169	7518	7296	
|M6466 X229 |M8 |M27 |XA M18 M19	
--| |----| |---|/|-*--|/|-*--|/|----|/|----|/|-*-->2
Z2REF ZP22.N	EYE.P PCT.P CCC.LS TOPD.P FD.P
	13734
M60
*--		---------------* -->3
XZ.CHK
X223 M3089	ROBOT ARM DOWN O
1>--*--		-*[D> R7910 D548]*----------------------< >*24525 24536 24612
|ZP14.N| R126L	
	10597	
|M54 |M7053	
2>--*--	/	-*--		---------------*
|SS.P |ONM743	
		10870	
|M6443 |M7191	
3>--*--		-*--		---------------*
64GL_P|THOMES	
	24493	
|M6472	
*--	/	---------------*
J2TA.P
13821
M3340 Y15F	GL/CF SW LED
24526*--| |---< >*24527
GL>DSP
24771
M16 M475 YB0	SPINDLE STOP->RB
24528*--| |-*--| |---< >*24531
ROBO.P	SSOP
13737	5677

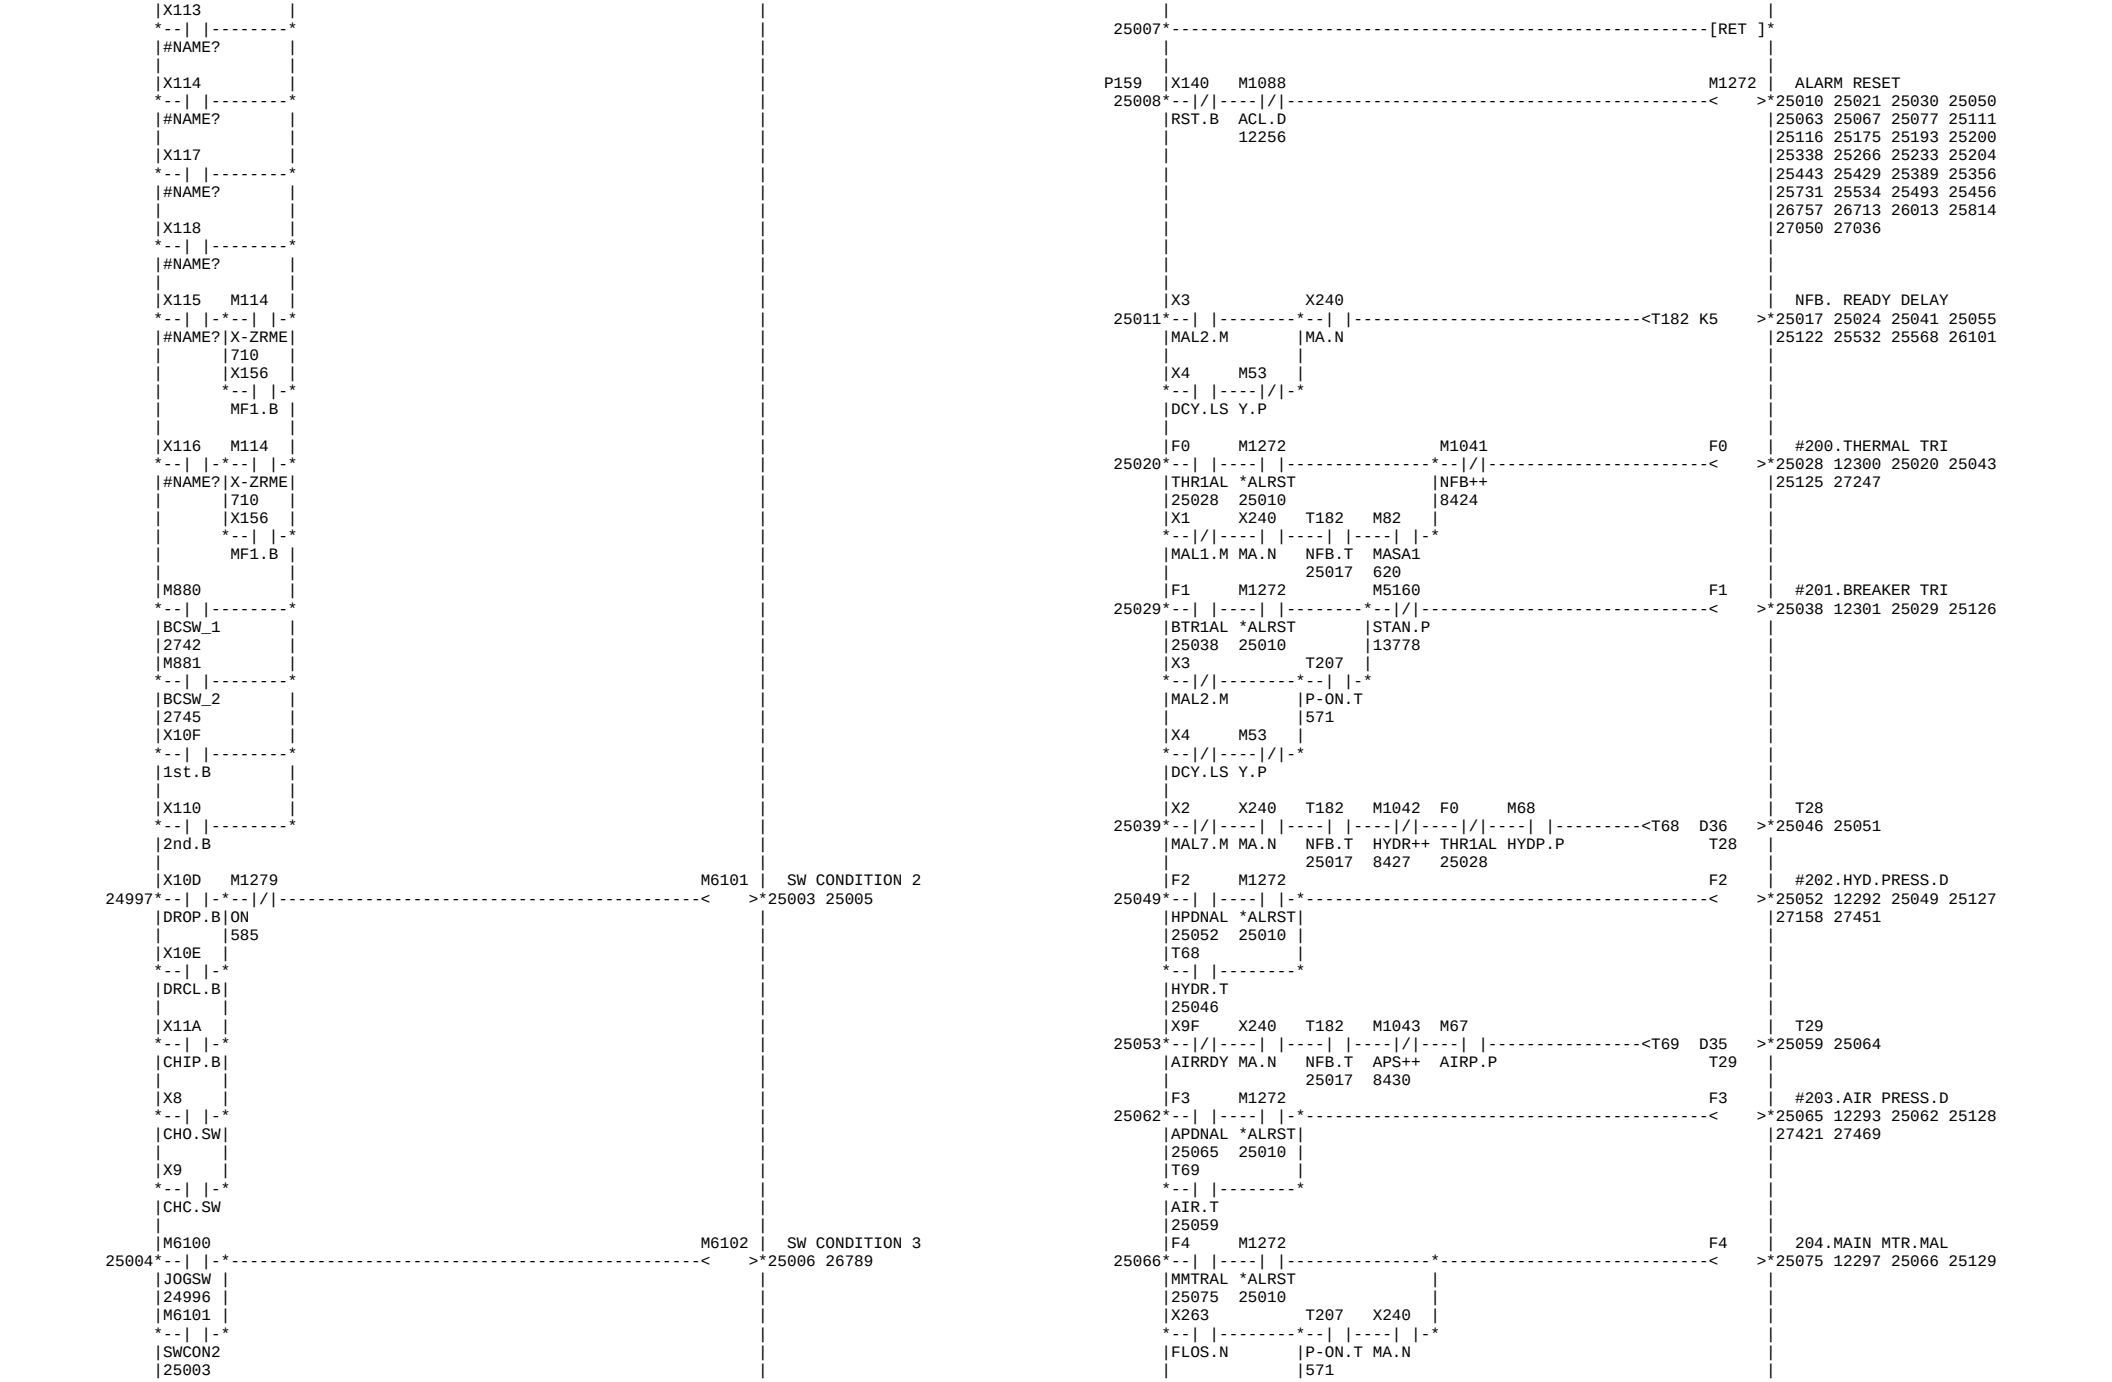

|M1130 YB1 | SERVI REQ.STRB->
*--| |----------<>*24534 2453 2576 2936
|MF20.M | 2974 24368 24380 24392
|3353 |24404 24475
|M3089 YB4 | ARM DOWN OK->RBT
*--| |----------<>*24537
|ARM.OK |
|24525 |
|Y1 M100 YB5 | EMERGENCY STOP->
*--| |----| |----------<>*24541
|EMGB.M RDY |
|490 533 |
|X246 YB6 | FEED HOLD->RBT
*--| |----------<>*24544
|SPL.N |
| |
|M5928 M448 YB7 | ORIENT STOP->RBT
*--| |----| |----------<>*24548
|ORT.R OTA-L |
|24384 20800 |
|M403 YB8 | CHUCK OPEN END->
*--| |----------<>*24551
|CHOE-L |
|4927 |
|M404 YB9 | CHUCK CLOSE EN->
*--| |----------<>*24554
|CHCL-L |
|4960 |
|M1279 YBA | SPARE
*--|/|----------<>*24557
ON |
585 |
|
24558*----------[RET]*
|
|
P81 |M402 M4793 | HD1 MIS CHK -> G
24559*--| |----------<>*24560
|MISS-L |
|4908 |
|M1333 M4794 | HD2 MIS CHK -> G
24561*--| |----------<>*24562
|SUCKE |
|5194 |
|M403 M4750 | HD1 CHK OP END->
24563*--| |----------<>*24564
|CHOE-L |
|4927 |
|M404 M4751 | HD1 CHK CL END->
24565*--| |----------<>*24566
|CHCL-L |
|4960 |
|Y4F8 M4773 | HD2 CHK OP END->
24567*--| |----------<>*24568
|TSR.L |
|8983 |
|Y4F9 M4774 | HD2 CHK CL END->
24569*--| |----------<>*24570
|TSF.L |
|8980 |
|M441 M4752 | HD1 SP STOP ->GL
24571*--| |----------<>*24572
|SPSTOP |
|21718 |
|Y4FD M4775 | HD2 SP STOP ->
24573*--| |----------<>*24574
|SSP2.M |
|5688 |
|M468 M4753 | HD1 ORT FIN ->GL
24575*--| |----------<>*24576
|ORTALV |
|20591 |
|Y4FE M4776 | HD2 SP ORT FIN -
24577*--| |----------<>*24578
|SORF.L |
|21191 |
|M600 M4754 | HD1 DOOR OPEN ->
24579*--| |----------<>*24580
|FDOLS |
|7296 |
|M601 M4755 | HD1 DOOR CLSE ->
24581*--| |----------<>*24582
|FDCLS |
|7299 |
|M90 M4756 | HD1 AUTO MD ->GL
24583*--| |-*----------<>*24584
|AUTO | |
|14419 | |
| |M54 M4779 | HD2 AUTO MD ->
| *--| |----------<>*24586
| SS.P |
| |
|M7160 M4757 | HD1 ALARM ->GL
24587*--| |----------<>*24588
|AL-GL |
|1563 |
|X244 M4758 | HD1 STL ->G
24589*--| |----------<>*24590
|OP.N |
| |
|X140 M4759 | HD1 RESET SW ->G
24591*--| |----------<>*24592
|RST.B |
| |
|X246 M4760 | HD1 FD_HOLD ->GL
24593*--| |----------<>*24594
|SPL.N |
| |
|X106 M90 M4791 | HD1 CST SW -> GL
24595*--| |----| |----------<>*24597
|CYST.B AUTO |
| 14419 |
|X220 M4761 | HD1 X HOME ->GL
24598*--| |----------<>*24599
|ZP11.N |
| |
|X221 M6466 M4762 | HD1 Z HOME ->GL
24600*--| |----|/|-*----------<>*24605
ZP12.N Z2REF	
X229 M6466	
--| |----| |-
ZP22.N Z2REF
X224 M4763	HD1 Y HOME ->GL
24606*--| |-*----------<>*24608
ZP15.N	
M53	
--|/|-
Y.P
X223 M4764	HD1 N HOME ->GL
24609*--| |-*----------<>*24611
ZP14.N	
M54	
--|/|-
SS.P
M3089 M4765	HD1 ARM DWN OK->
24612*--| |----------<>*24613
ARM.OK
24525
X286 M4766	HD1 WKNSRH FIN->
24614*--| |----------<>*24615
WNFN.N
M1279 M4767	HD1 UCH REQ ->
24616*--|/|----------<>*24617
ON
585

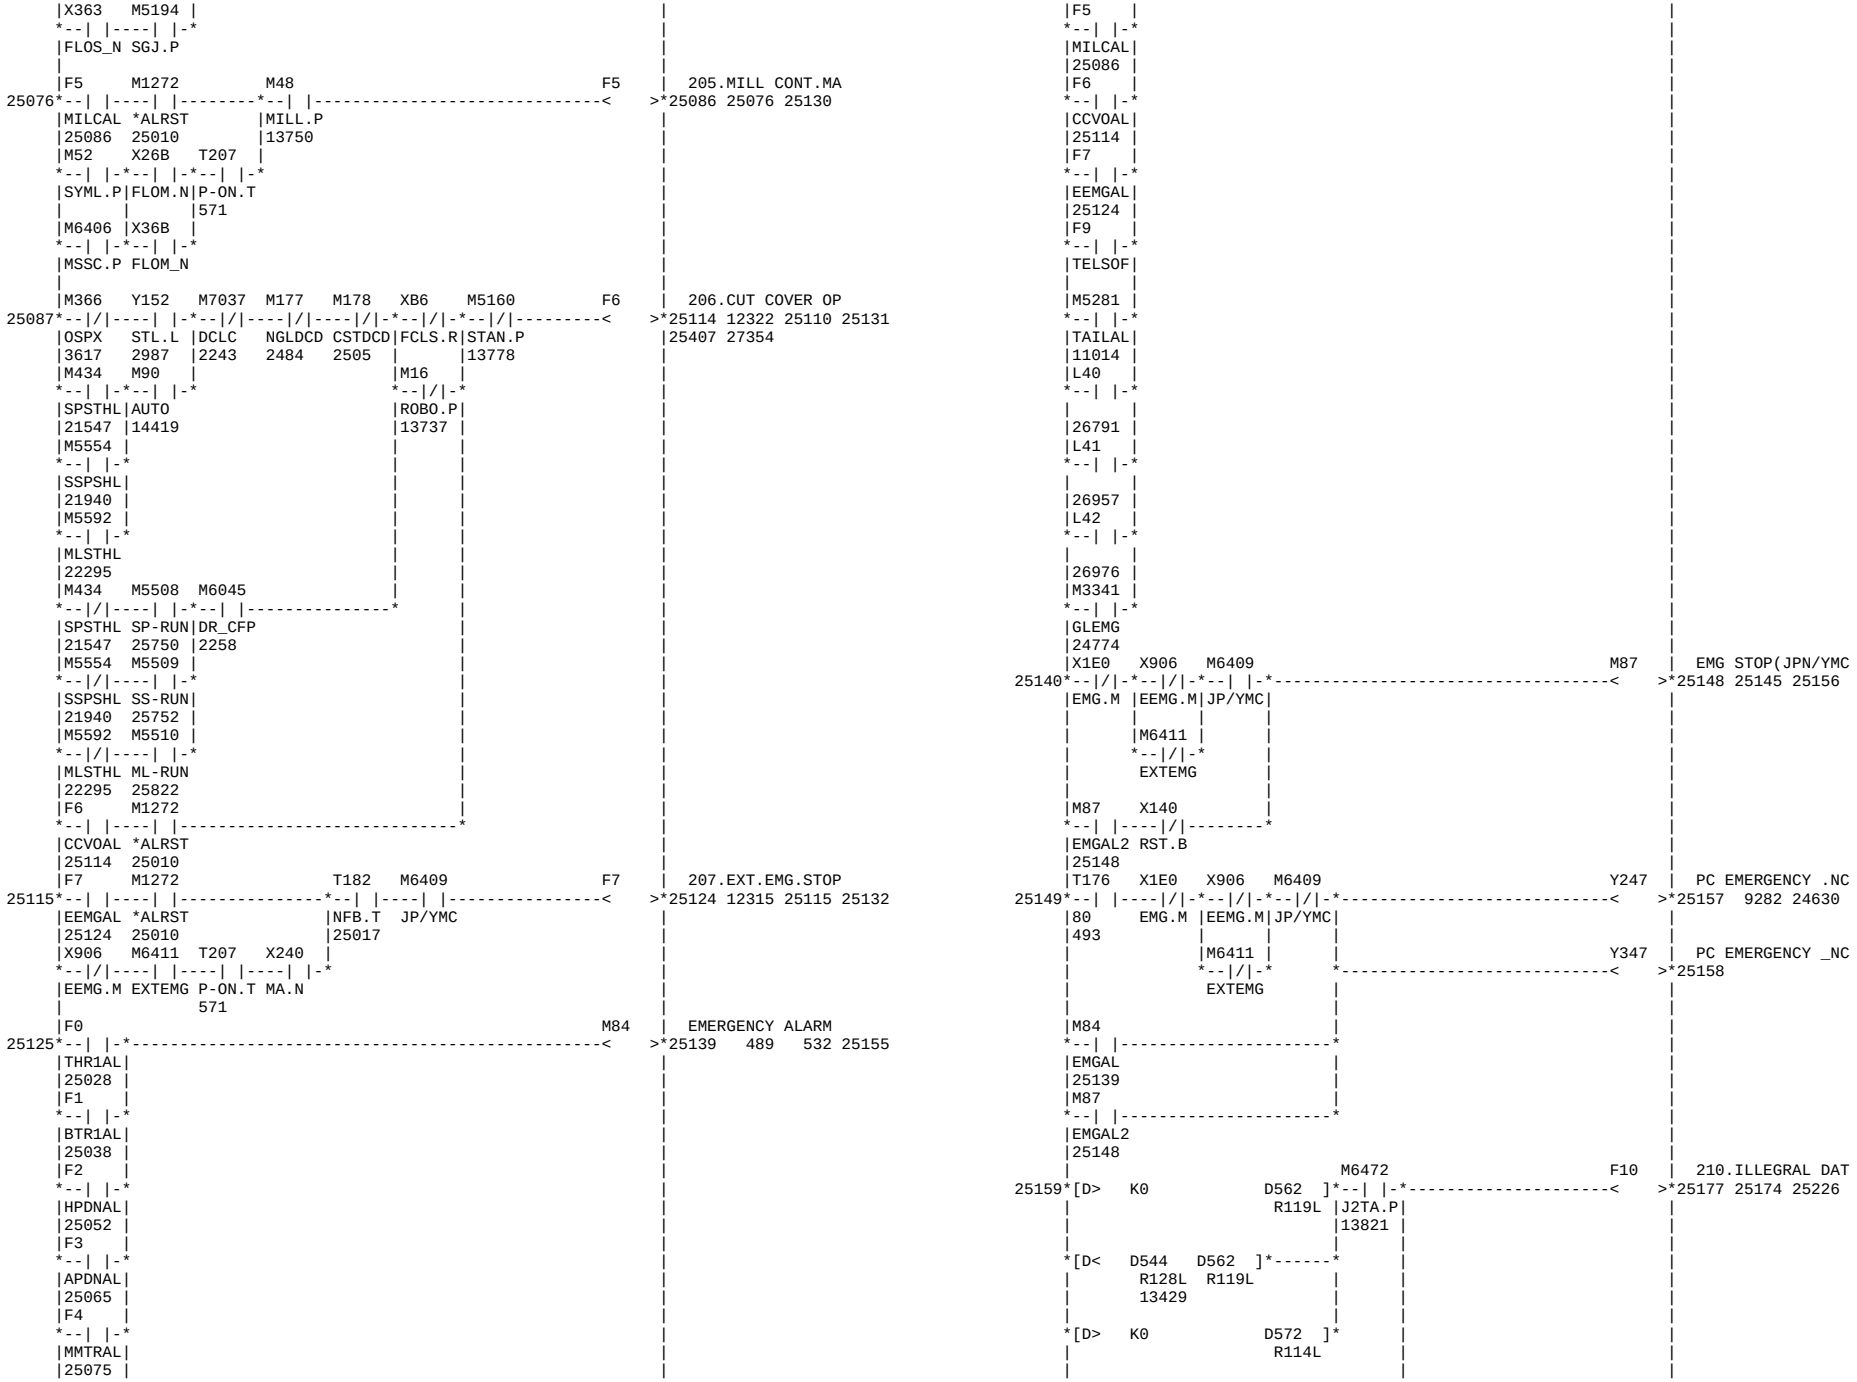

|M1279 M4768 | C_PLTE OPN END->
24618*--|/|----------< >*24619
|ON
|585
|M1279 M4769 | QUIL FWD FIN ->G
24620*--|/|----------< >*24621
|ON
|585
|M1279 M4770 | QUIL REV FIN ->G
24622*--|/|----------< >*24623
|ON
|585
|L58 M4771 | WK REST CL FIN->
24624*--| |-*----------< >*24626
|WRCRST|
|27637 |
|M14 |
--|/|-
|R50-6
|
|L59 M4772 | WK REST UC FIN->
24627*--| |-*----------< >*24629
|WRURST|
|27666 |
|M14 |
--|/|-
|R50-6
|
|Y247 X401 M4799 | NC/L EMG STOP->G
24630*--| |----| |----------< >*24632
|QEMG.N COMRDY
|25157
|M836 M6443 M4740 | NC M-CODE M20 HD
24633*--| |----| |-*[= K20 D78]----------< >*24639
|MmFDEN 64GL_P| M-CODE
|16531 | 3226
| | M4741 | NC M-CODE M21 HD
| *[= K21 D78]----------< >*24644
| M-CODE
| 3226
| M4742 | NC M-CODE M22 HD
| *[= K22 D78]----------< >*24649
| M-CODE
| 3226
| M4743 | NC M-CODE M23 HD
| *[= K23 D78]----------< >*24654
| M-CODE
| 3226
| M4744 | NC M-CODE M24 HD
| *[= K24 D78]----------< >*24659
| M-CODE
| 3226
| M4745 | NC M-CODE M25 HD
| *[= K25 D78]----------< >*24664
| M-CODE
| 3226
| M4746 | NC M-CODE M26 HD
| *[= K26 D78]----------< >*24669
| M-CODE
| 3226
| M4747 | NC M-CODE M27 HD
| *[= K27 D78]----------< >*24674
| M-CODE
| 3226
| M4748 | NC M-CODE M28 HD
| *[= K28 D78]----------< >*24679
| M-CODE
| 3226
| M4749 | NC M-CODE M29 HD
| *[= K29 D78]----------< >*24684
| M-CODE
| 3226
|M5380 M6403 M5381 M5392 M369 M100 M101 M4795 | B AXIS STOP ->GL
24685*--| |----| |-*--|/|-*--|/|-*--|/|----| |----| |---------< >*24700 24690 26932
440M B-LD.P	441M	751M	PENDP RDY RST
18110	18115	18215	3743 533 543
M5391 M6443	M6403	M6443
--| |----| |---|/|-*--|/|-*
750M 64GL_P	B-LD.P 64GL_P
18208
M4795
--| |--------
B_STOP
24700
X105	GL/CF CHANGE SW
24701*--| |----------[PLS M7190]*24703 24704 24706
M7190 M4796 M4796	GL/CF WINDOW HOL
24704*--| |----|/|-*----------< >*24709 24705 24707
WINCHG WINHDL
24703 24709
M7190 M4796
--|/|----| |-
WINCHG WINHDL
24703 24709
M4800 M3300	GL->M-FIN
24710*--| |----------< >*24711 3561
M-FIN1
M4801 M3301	GL->NC RST PTRN1
24712*--| |----------< >*24713 3719 3758 26428
RSTHD1
M4802 M3302	GL->STL
24714*--| |----------< >*24715 2877 2949
RBCYL1
M4803 M3303	GL->ALM
24716*--| |----------< >*24717 25515
RAL1.1
M4804 M3304	GL->ALM(SBK)
24718*--| |----------< >*24719 25516
RAL1.2
M4805 M3305	GL->ALM(FDHLD)
24720*--| |----------< >*24721 25517
RAL1.3
M4806 M3306	GL->ARM UP END
24722*--| |----------< >*24723 7405 9036 9325
AMUPE1	9413 9593 26008
M4807 M3307	GL->CST CMD
24724*--| |----------< >*24725 24415
CSTHD1
M4808 M3308	GL->CHK OP CMD
24726*--| |----------< >*24727 24387
CHO.C1
M4809 M3309	GL->CHK CLS CMD
24728*--| |----------< >*24729 24399
CHC.C1
M4810 M3310	GL->DOR OP CMD
24730*--| |----------< >*24731 24409
DRO.C1
M4811 M3311	GL->DOR CL CMD
24732*--| |----------< >*24733 24412
DRC.C1
M4812 M3312	GL->SP ORIENT CM
24734*--| |----------< >*24735 24375
ORT.C1
M4813 M3313	GL->CHK AIR CMD
24736*--| |----------< >*24737 24363
CHAB.1

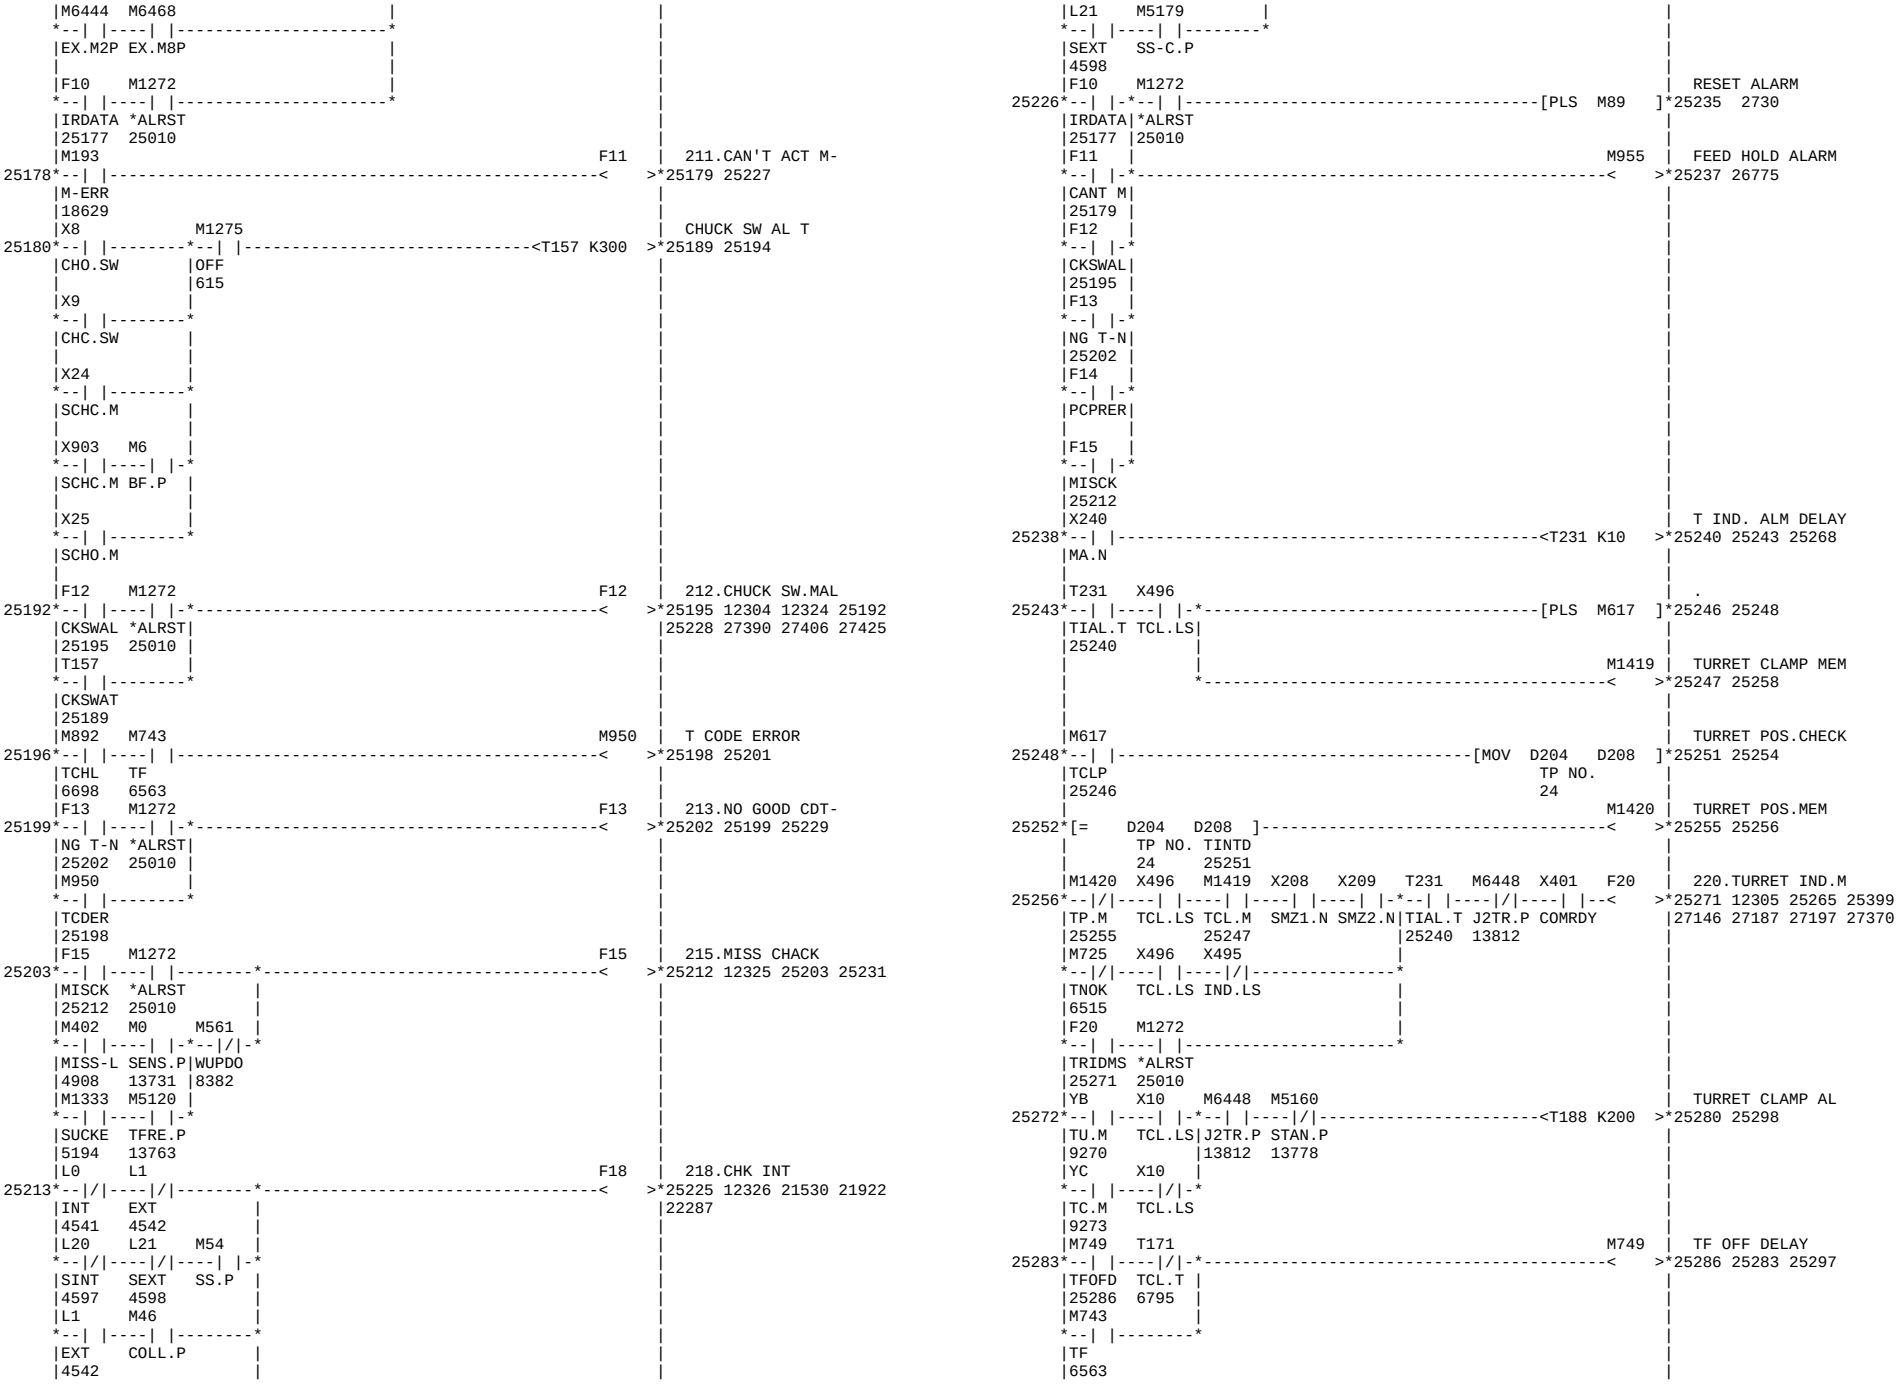
```
     |M4814                                                M3314 |  GL->WRKNo SRCH C
 24738*--| |-------------------------------------------------<    >*24739   693 24091 24113
     |SRCHC1                                                      |24173 24242
     |                                                            |
     |M4815                                                M3315 |  GL->UCH REQ FIN
 24740*--| |-------------------------------------------------<    >*24741
     |URQFN1                                                      |
     |                                                            |
     |M4816                                                M3316 |  GL->CHK COOL ON
 24742*--| |-------------------------------------------------<    >*24743
     |CHCOL1                                                      |
     |                                                            |
     |M4817  M1279                                         M3317 |  GL->QUIL FWD CMD
 24744*--| |----|/|-----------------------------------------<    >*24746  7233  7236  7249
     |QF_CM1 ON                                                   |
     |       585                                                  |
     |M4818  M1279                                         M3318 |  GL->QUIL REV CMD
 24747*--| |----|/|-----------------------------------------<    >*24749  7238  7256
     |QR_CM1 ON                                                   |
     |       585                                                  |
     |M4819                                                M3319 |  GL->WK_REST CLMP
 24750*--| |-------------------------------------------------<    >*24751
     |WKRC_C                                                      |
     |                                                            |
     |M4820                                                M3320 |  GL->WK_REST UNCL
 24752*--| |-------------------------------------------------<    >*24753
     |WKRU_C                                                      |
     |                                                            |
     |M4829  M54                                           M3329 |  GL->CHK OP CMD H
 24754*--| |----| |-----------------------------------------<    >*24756 24418
     |CHO.C2 SS.P                                                 |
     |                                                            |
     |M4830  M54                                           M3330 |  GL->CHK CLS CMD
 24757*--| |----| |-----------------------------------------<    >*24759 24427
     |CHC.C2 SS.P                                                 |
     |                                                            |
     |M4833  M54                                           M3333 |  GL->SP ORIENT CM
 24760*--| |----| |-----------------------------------------<    >*24762 24446
     |ORT.C2 SS.P                                                 |
     |                                                            |
     |M4834  M54                                           M3334 |  GL->CHK AIR CMD
 24763*--| |----| |-----------------------------------------<    >*24765 24436
     |CHAB.2 SS.P                                                 |
     |                                                            |
     |M4838                                                M3338 |  GL->AUTO POWER O
 24766*--| |-------------------------------------------------<    >*24767  3759
     |APOFF                                                       |
     |                                                            |
     |M4839                                                M3339 |  GL->GL FEED HOLD
 24768*--| |-------------------------------------------------<    >*24769 20574 20576
     |FDHOLD                                                      |
     |                                                            |
     |M4840                                                M3340 |  GL->DISP SELECT
 24770*--| |-------------------------------------------------<    >*24771  2793  2981  2983
     |GL_DIS                                                      | 2991  2993  9170 24526
     |                                                            |
     |M4841  T176                                          M3341 |  GL->EMG STOP
 24772*--| |----| |-----------------------------------------<    >*24774 25138
     |GL>EMG 80                                                   |
     |       493                                                  |
     |                                                            |
 24775*-------------------------------------------------------[RET ]*
     |                                                            |
     |                                                            |
P97  |M6468                                                       |
 24776*--| |-*[=    K0     D982  ]--------------[MOV  K3     D747  ]*24783 24790 24797 24804
     |EX.M8P|              R16                                     |24811 24818 24825 24832
     |      |                                                     |24839 24842
     |      |                                                     |
     |      *[=    K1     D982  ]--------------[MOV  K1     D747  ]*24783 24790 24797 24804
     |      |              R16                                     |24811 24818 24825 24832
     |      |                                                     |24839 24842
     |      |                                                     |
     |      *[=    K2     D982  ]--------------[MOV  K3     D747  ]*24783 24790 24797 24804
     |      |              R16                                     |24811 24818 24825 24832
     |      |                                                     |24839 24842
     |      |                                                     |
     |      *[=    K3     D982  ]--------------[MOV  K7     D747  ]*24783 24790 24797 24804
     |      |              R16                                     |24811 24818 24825 24832
     |      |                                                     |24839 24842
     |      |                                                     |
     |      *[=    K4     D982  ]--------------[MOV  K15    D747  ]*24783 24790 24797 24804
     |      |              R16                                     |24811 24818 24825 24832
     |      |                                                     |24839 24842
     |      |                                                     |
     |      *[=    K5     D982  ]--------------[MOV  K31    D747  ]*24783 24790 24797 24804
     |      |              R16                                     |24811 24818 24825 24832
     |      |                                                     |24839 24842
     |      |                                                     |
     |      *[=    K6     D982  ]--------------[MOV  K63    D747  ]*24783 24790 24797 24804
     |      |              R16                                     |24811 24818 24825 24832
     |      |                                                     |24839 24842
     |      |                                                     |
     |      *[=    K7     D982  ]--------------[MOV  K127   D747  ]*24783 24790 24797 24804
     |      |              R16                                     |24811 24818 24825 24832
     |      |                                                     |24839 24842
     |      |                                                     |
     |      *[=    K8     D982  ]--------------[MOV  K255   D747  ]*24783 24790 24797 24804
     |      |              R16                                     |24811 24818 24825 24832
     |      |                                                     |24839 24842
     |      |                                              K4     |  EXT.M-CODE 1SET
     |      *-------------------------------------[MOV  D747   M6820 ]*24843 19087 24845 24848
     |                                                            |
     |                                                 24783      |
     |M5353  M6820                                          Y40   |  EXT.M-CODE 400M
24844*--| |----| |-----------------------------------------<    >*24846
     |400M   EXM1ST                                               |
     |18026  24843                                                |
     |M5354  M6820                                          Y41   |  EXT.M-CODE 401M
24847*--| |----| |-----------------------------------------<    >*24849
     |401M   EXM1ST                                               |
     |18031  24843                                                |
     |M5355  M6821                                          Y42   |  EXT.M-CODE 402M
24850*--| |----| |-----------------------------------------<    >*24852
     |402M   EXM2ST                                               |
     |18036                                                       |
     |M5356  M6821                                          Y43   |  EXT.M-CODE 403M
24853*--| |----| |-----------------------------------------<    >*24855
     |403M   EXM2ST                                               |
     |18041                                                       |
     |M5357  M6822                                          Y44   |  EXT.M-CODE 404M
24856*--| |----| |-----------------------------------------<    >*24858
     |404M   EXM3ST                                               |
     |18047                                                       |
     |M5358  M6822                                          Y45   |  EXT.M-CODE 405M
24859*--| |----| |-----------------------------------------<    >*24861
     |405M   EXM3ST                                               |
     |18052                                                       |
     |M5359  M6823                                          Y46   |  EXT.M-CODE 406M
24862*--| |----| |-----------------------------------------<    >*24864
     |406M   EXM4ST                                               |
     |18057                                                       |
     |M5362  M6823                                          Y47   |  EXT.M-CODE 407M
24865*--| |----| |-----------------------------------------<    >*24867
     |407M   EXM4ST                                               |
     |18062                                                       |
     |M5363  M6824                                          Y48   |  EXT.M-CODE 408M
24868*--| |----| |-----------------------------------------<    >*24870
     |408M   EXM5ST                                               |
     |18068                                                       |
     |M5364  M6824                                          Y49   |  EXT.M-CODE 409M
24871*--| |----| |-----------------------------------------<    >*24873
     |409M   EXM5ST                                               |
     |18073                                                       |
     |M5365  M6825                                          Y4A   |  EXT.M-CODE 410M
24874*--| |----| |-----------------------------------------<    >*24876
     |410M   EXM6ST                                               |
     |18078                                                       |
     |M5366  M6825                                          Y4B   |  EXT.M-CODE 411M
24877*--| |----| |-----------------------------------------<    >*24879
     |411M   EXM6ST                                               |
     |18083                                                       |
```

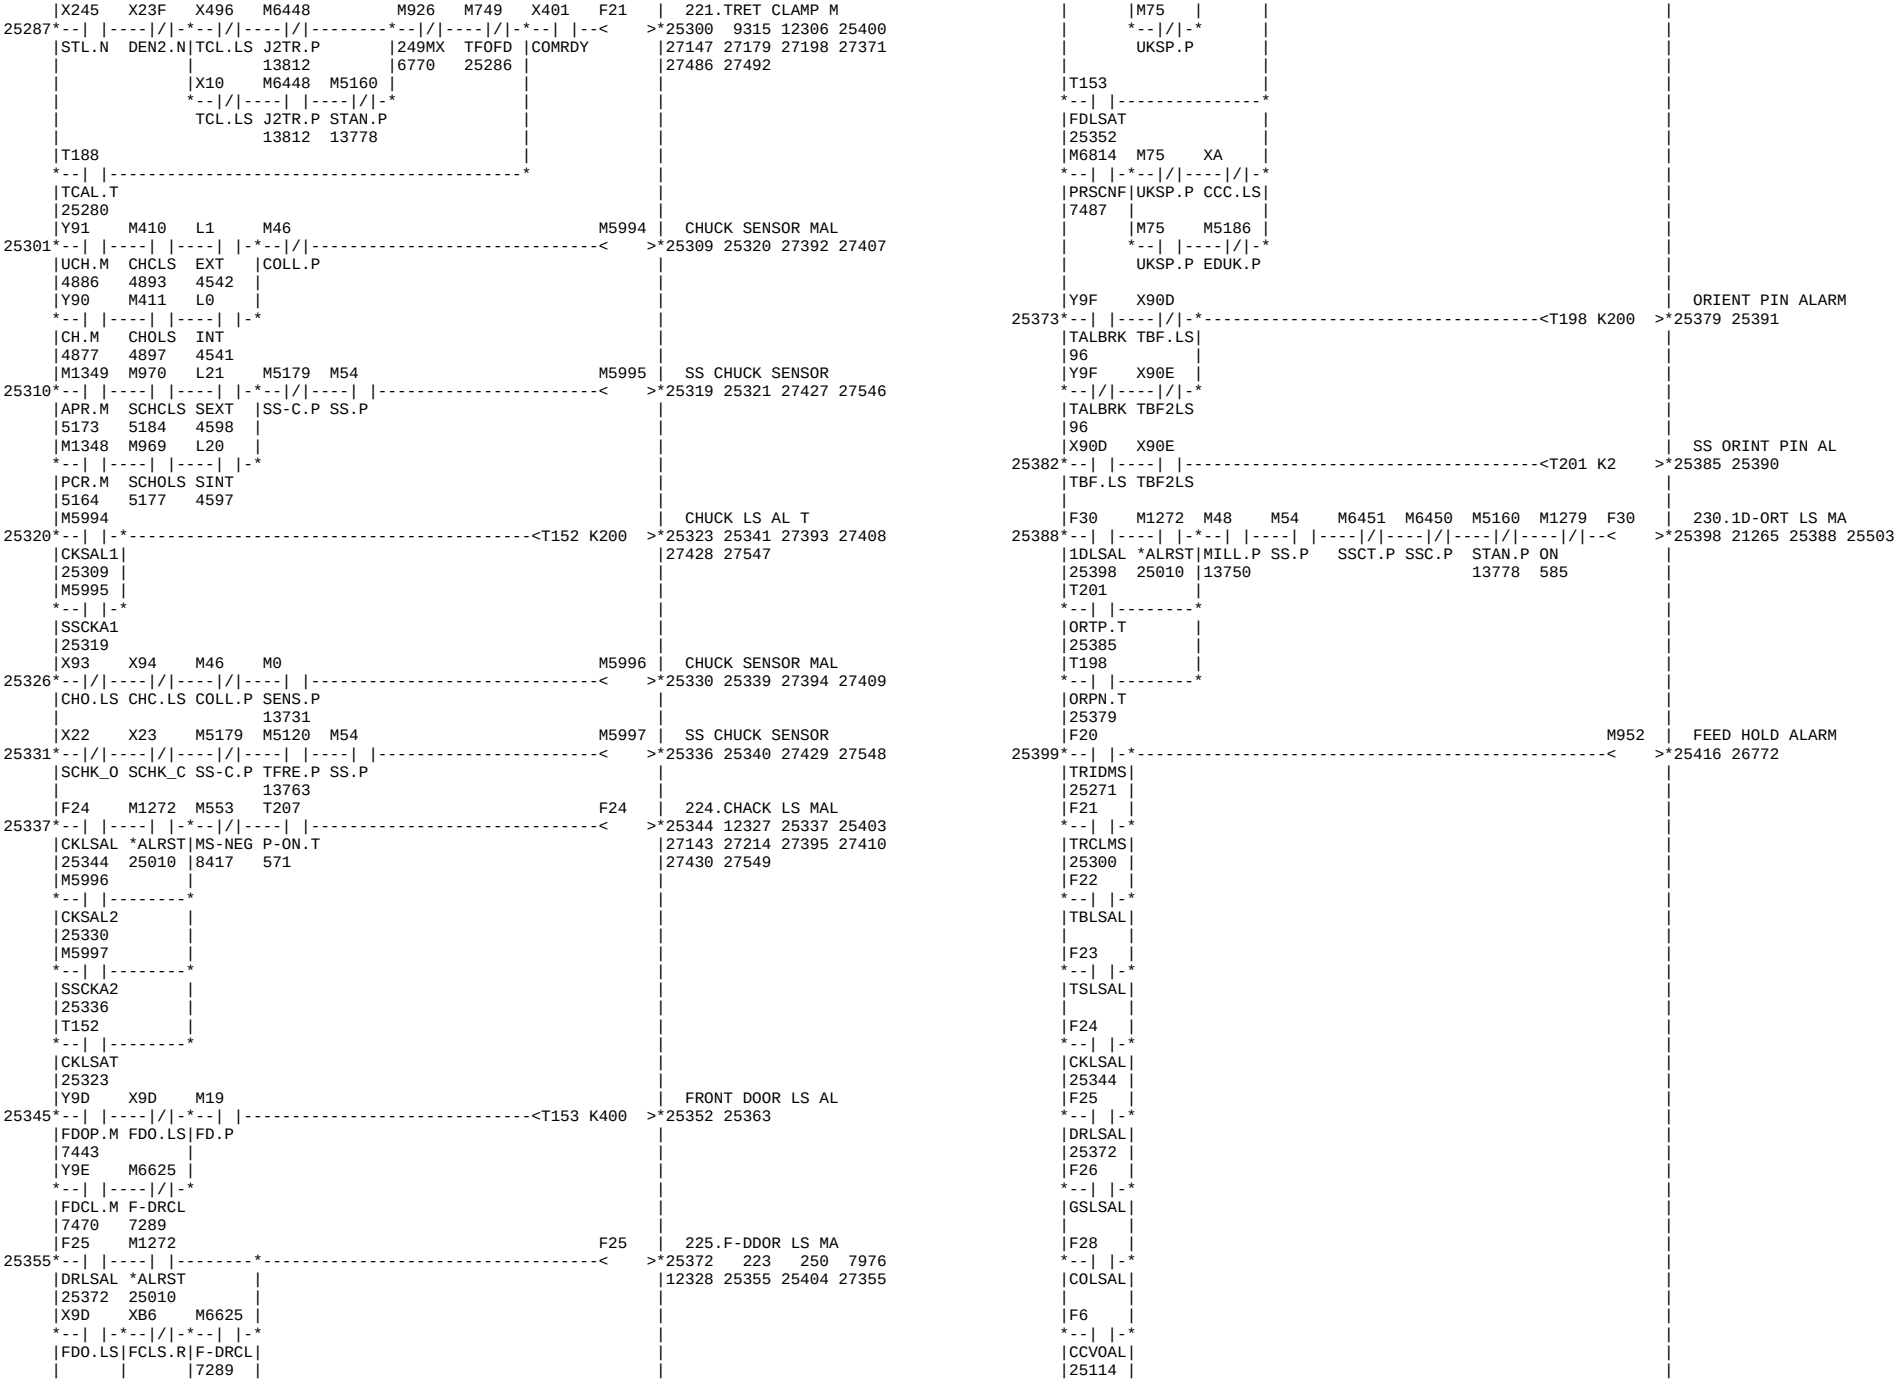

M5367 M6826 Y4C EXT.M-CODE 412M
24880 24882
412M EXM7ST
18089
M5452 M6826 Y4D EXT.M-CODE 413M
24883 24885
413M EXM7ST
18094
M5453 M6827 Y4E EXT.M-CODE 414M
24886 24888
414M EXM8ST
18099
M5454 M6827 Y4F EXT.M-CODE 415M
24889 24891
415M EXM8ST
18104
24892 [RET]
P98 M5353 Y8B EXT.M-CODE 400M
24893 24894
400M
18026
M5354 M7198 EXT.M-CODE 401M
24895 24896 3012
401M
18031
M5355 M7199 EXT.M-CODE 402M
24897 24898 3020
402M
18036
M5356 Y8E EXT.M-CODE 403M
24899 24900
403M
18041
M5357 Y534 EXTERNAL M-CODE
24901 24902
404M
18047
M5358 Y535 EXTERNAL M-CODE
24903 24904
405M
18052
M5359 Y536 EXTERNAL M-CODE
24905 24906
406M
18057
M5362 Y537 EXTERNAL M-CODE
24907 24908
407M
18062
M5363 Y538 EXTERNAL M-CODE
24909 24910
408M
18068
M5364 Y539 EXTERNAL M-CODE
24911 24912
409M
18073
M5365 Y53A EXTERNAL M-CODE
24913 24914
410M
18078
M5366 Y53B EXTERNAL M-CODE
24915 24916
411M
18083
M5367 Y53C EXTERNAL M-CODE
24917 24918
412M
18089
M5452 Y53D EXTERNAL M-CODE
24919 24920
413M
18094

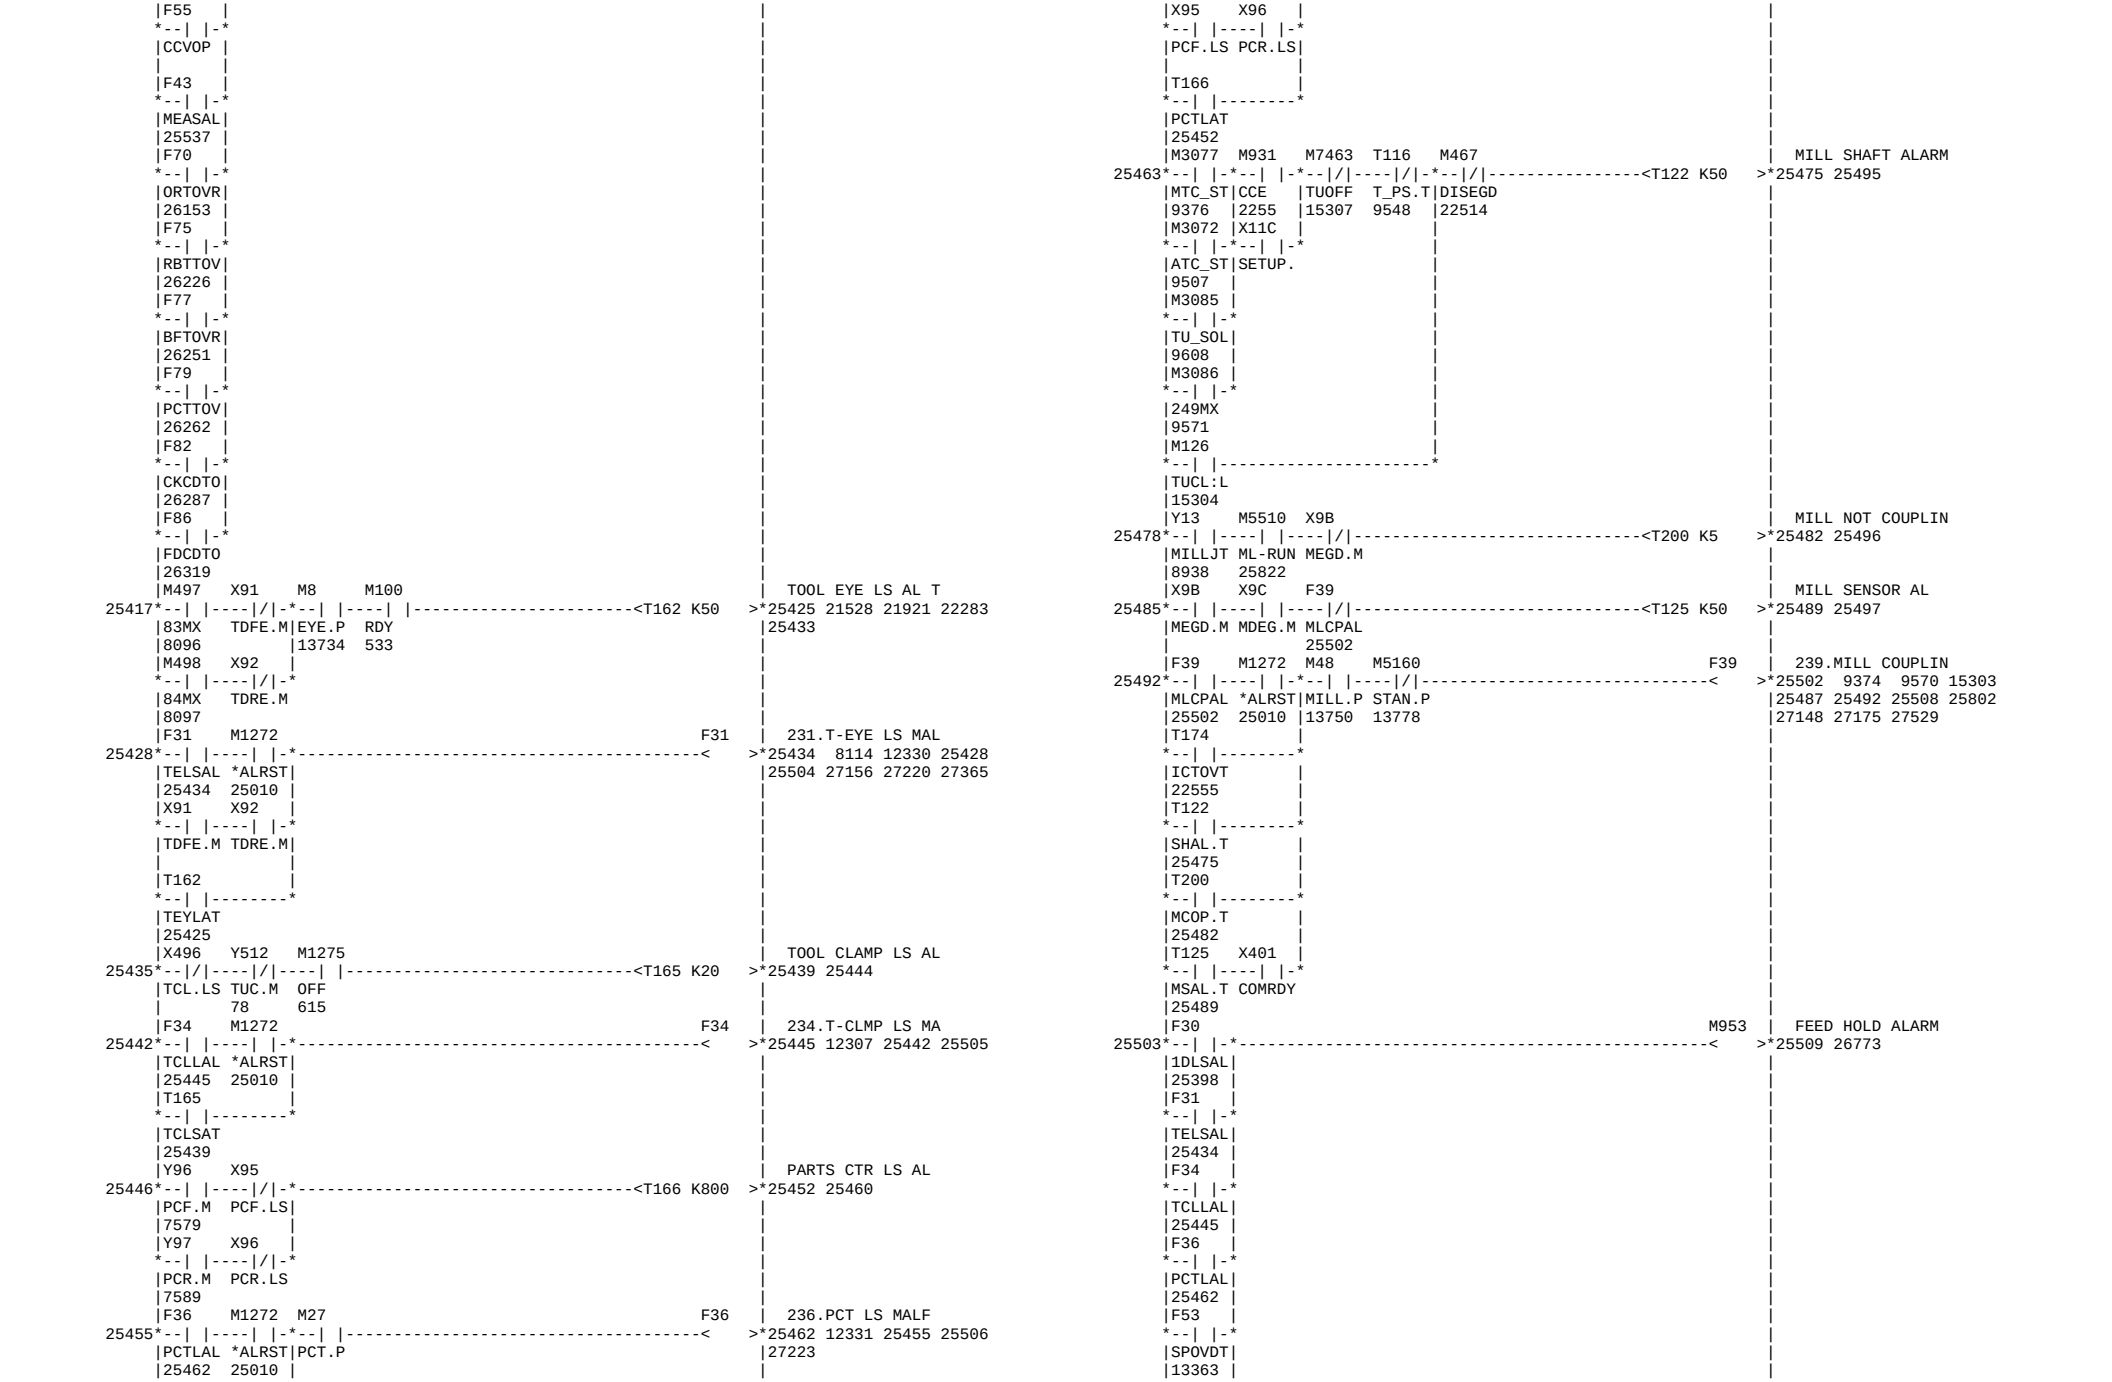

M5453 Y53E EXTERNAL M-CODE
24921 24922
414M
18099
M5454 Y53F EXTERNAL M-CODE
24923 24924
415M
18104
24925 [RET]
P99 L17 L18 Y230 ENCODER SEL IF 1
24926 MOV K3 R306 5437 5444 5449 24931
1ST 2ND CAXI.N 24937 24945
3835 3841 5551
L17 L18 Y330 ENCODER SEL IF 1
24932 MOV K6 R306 5437 5444 5449 24931
1ST 2ND SEL-C 24937 24945
3835 3841 23029
L17 L18 Y230 X202 M49 ENCODER SEL IF 1
24938 MOV K4 R306 5437 5444 5449 24931
1ST 2ND CAXI.N RDY3.N C.P 24937 24945
3835 3841 5551
L18 Y330 ENCODER SEL IF 2
24946 MOV K3 R356 5453 24951 24958 24966
2ND SEL-C
3841 23029
M54
SS.P
L17 L18 Y330 M54 ENCODER SEL IF 2
24952 MOV K6 R356 5453 24951 24958 24966
1ST 2ND SEL-C SS.P
3835 3841 23029
L17 L18 Y330 X302 M54 ENCODER SEL IF 2
24959 MOV K4 R356 5453 24951 24958 24966
1ST 2ND SEL-C RDY3_N SS.P
3835 3841 23029
24967 [RET]
P101 X15A M6100 JOG SW CONDITION
24968 24996 25004
MACH.M
X106
CYST.B
X89 M6475
SCYS.B SOPBOX
X108
SPST.B
X10B
TSEF.B
X10C
TSER.B
X111
#NAME?
X112
#NAME?

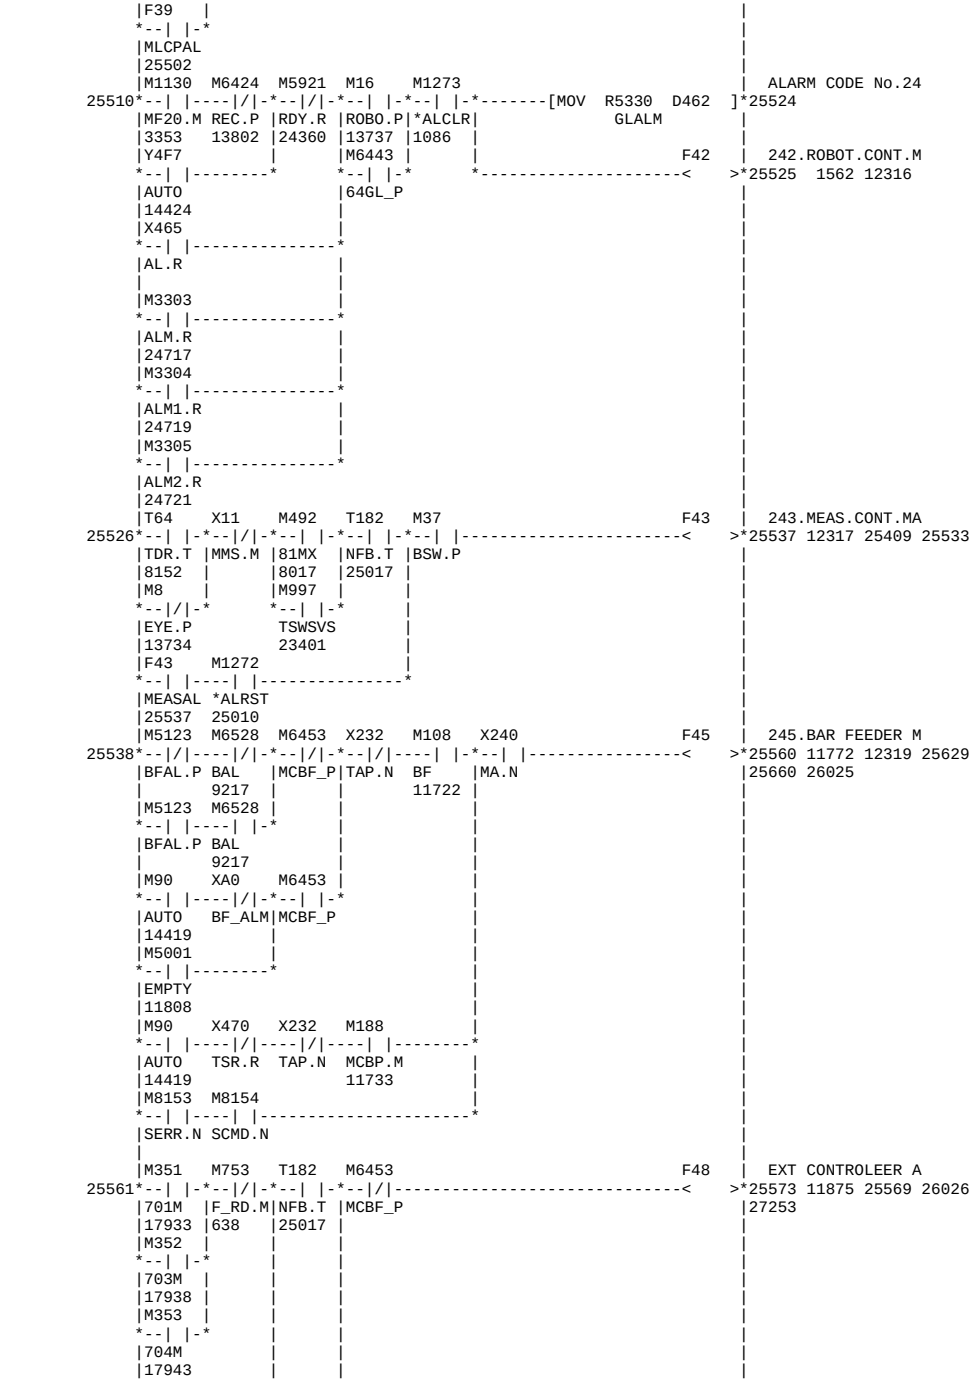

|X113 |
--| |--------
|#NAME? |
|X114 |
--| |--------
|#NAME? |
|X117 |
--| |--------
|#NAME? |
|X118 |
--| |--------
|#NAME? |
|X115 M114 |
--| |---| |-*
#NAME?	X-ZRME
	710
	X156
--| |-
MF1.B
X116 M114
--| |---| |-*
#NAME?	X-ZRME
	710
	X156
--| |-
MF1.B
M880
--| |--------
BCSW_1
2742
M881
--| |--------
BCSW_2
2745
X10F
--| |--------
1st.B
X110
--| |--------
2nd.B
X10D M1279 M6101	SW CONDITION 2
24997*--| |-*--|/|----------<>*25003 25005
DROP.B	ON
	585
X10E
--| |-
DRCL.B
X11A
--| |-
CHIP.B
X8
--| |-
CHO.SW
X9
--| |-
CHC.SW
M6100 M6102	SW CONDITION 3
25004*--| |-*----------<>*25006 26789
JOGSW
24996
M6101
--| |-
SWCON2
25003
25007*----------[RET]*
P159 |X140 M1088 M1272	ALARM RESET
25008*--|/|----|/|----------<>*25010 25021 25030 25050
RST.B ACL.D	25063 25067 25077 25111
12256	25116 25175 25193 25200
	25338 25266 25233 25204
	25443 25429 25389 25356
	25731 25534 25493 25456
	26757 26713 26013 25814
	27050 27036
X3 X240	NFB. READY DELAY
25011*--| |--------*--| |----------<T182 K5 >*25017 25024 25041 25055
MAL2.M |MA.N |25122 25532 25568 26101
X4 M53
--| |----|/|-
DCY.LS Y.P
F0 M1272 M1041 F0	#200.THERMAL TRI
25020*--| |----| |----------*--|/|----------<>*25028 12300 25020 25043
THR1AL *ALRST |NFB++ |25125 27247
25028 25010	8424
X1 X240 T182 M82
--|/|----| |----| |----| |-
MAL1.M MA.N NFB.T MASA1
25017 620
F1 M1272 M5160 F1	#201.BREAKER TRI
25029*--| |----| |--------*--|/|----------<>*25038 12301 25029 25126
BTR1AL *ALRST	STAN.P
25038 25010	13778
X3 T207
--|/|----------| |-*
MAL2.M	P-ON.T
	571
X4 M53
--|/|----|/|-
DCY.LS Y.P
X2 X240 T182 M1042 F0 M68	T28
25039*--|/|----| |----| |----|/|----|/|----| |---------<T68 D36 >*25046 25051
MAL7.M MA.N NFB.T HYDR++ THR1AL HYDP.P T28
25017 8427 25028
F2 M1272 F2	#202.HYD.PRESS.D
25049*--| |----| |-*----------<>*25052 12292 25049 25127
HPDNAL *ALRST| |27158 27451
25052 25010
T68
--| |--------
HYDR.T
25046
X9F X240 T182 M1043 M67	T29
25053*--|/|----| |----| |----|/|----| |----------<T69 D35 >*25059 25064
AIRRDY MA.N NFB.T APS++ AIRP.P T29
25017 8430
F3 M1272 F3	#203.AIR PRESS.D
25062*--| |----| |-*----------<>*25065 12293 25062 25128
APDNAL *ALRST| |27421 27469
25065 25010
T69
--| |--------
AIR.T
25059
F4 M1272 F4	204.MAIN MTR.MAL
25066*--| |----| |----------*----------<>*25075 12297 25066 25129
MMTRAL *ALRST
25075 25010
X263 T207 X240
--| |----------| |----| |-*
FLOS.N	P-ON.T MA.N
	571

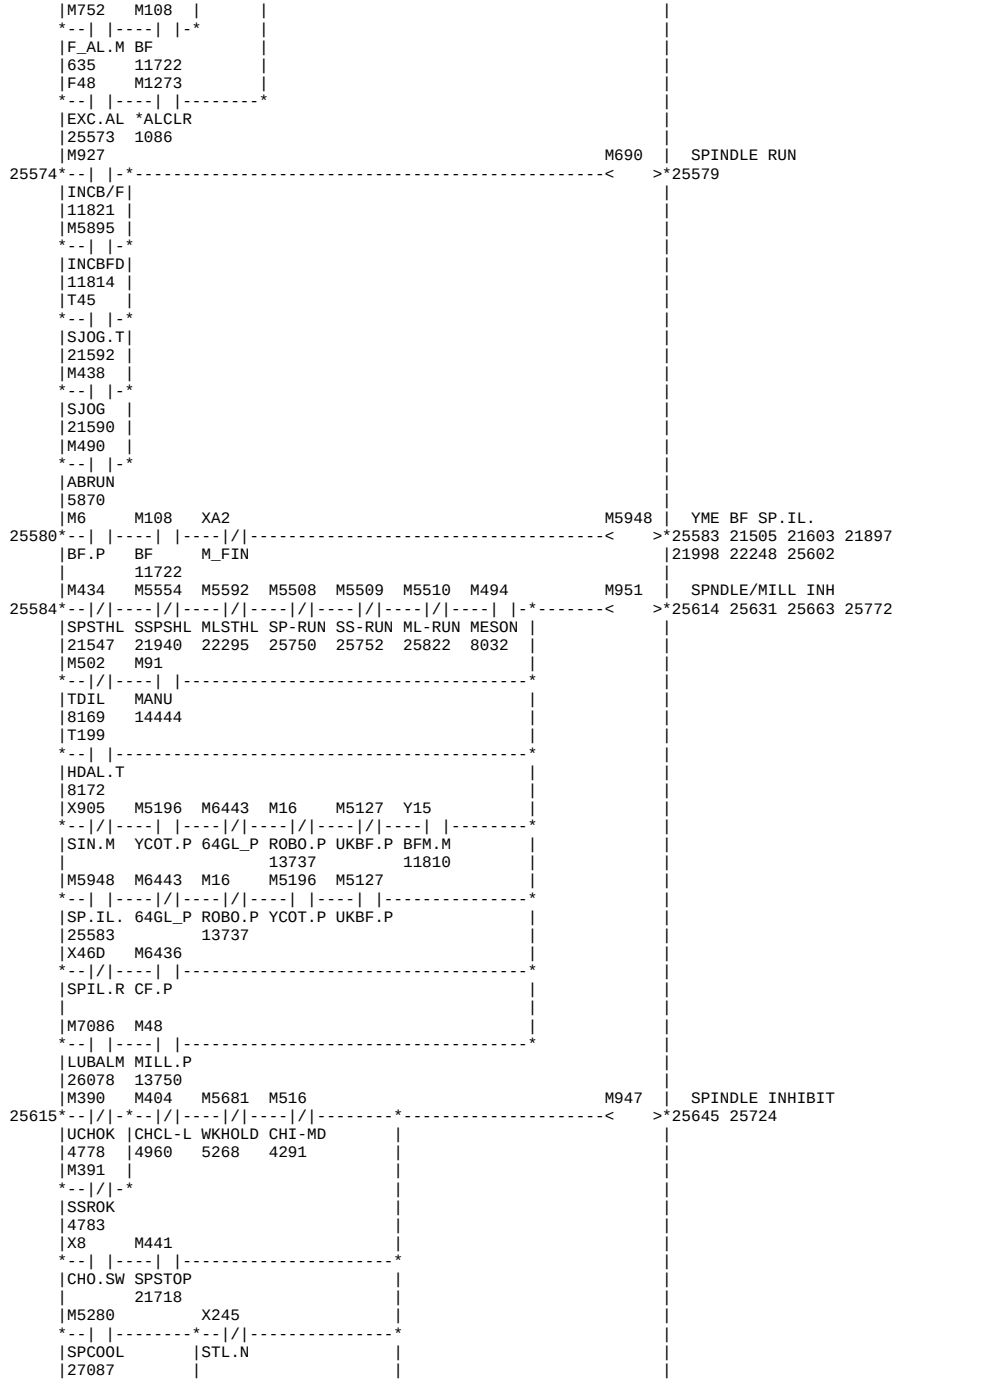

|X363 M5194 |
--| |----| |-
|FLOS_N SGJ.P
|F5 M1272 M48 F5
25076*--| |----| |--------*--| |------------------------------<
|MILCAL *ALRST |MILL.P
|25086 25010 |13750
|M52 X26B T207 |
--| |---| |-*--| |-*
|SYML.P|FLOM.N|P-ON.T
| | |571
|M6406 |X36B |
--| |---| |-*
|MSSC.P FLOM_N
|M366 Y152 M7037 M177 M178 XB6 M5160 F6
25087*--|/|----| |-*--|/|----|/|----|/|-*--|/|-*--|/|---------<
|OSPX STL.L |DCLC NGLDCD CSTDCD|FCLS.R|STAN.P
|3617 2987 |2243 2484 2505 | |13778
|M434 M90 | |M16 |
--| |---| |-* *--|/|-*
SPSTHL	AUTO	ROBO.P
21547	14419	13737
M5554		
--| |-	
SSPSHL		
21940		
M5592		
--| |-	
MLSTHL	
22295	
M434 M5508 M6045
--|/|----| |---| |---------------*
SPSTHL SP-RUN	DR_CFP
21547 25750	2258
M5554 M5509
--|/|----| |-
SSPSHL SS-RUN
21940 25752
M5592 M5510
--|/|----| |-
MLSTHL ML-RUN
22295 25822
F6 M1272
--| |----| |------------------------------
CCVOAL *ALRST
25114 25010
F7 M1272 T182 M6409 F7
25115*--| |----| |---------------*--| |----| |-----------------<
EEMGAL *ALRST	NFB.T JP/YMC
25124 25010	25017
X906 M6411 T207 X240
--|/|----| |----| |----| |-
EEMG.M EXTEMG P-ON.T MA.N
571
F0 M84
25125*--		-*---<
THR1AL
25028
F1
*--		-*
BTR1AL
25038
F2
*--		-*
HPDNAL
25052
F3
*--		-*
APDNAL
25065
F4
*--		-*
MMTRAL
25075
205.MILL CONT.MA
>*25086 25076 25130
206.CUT COVER OP
>*25114 12322 25110 25131
25407 27354
207.EXT.EMG.STOP
>*25124 12315 25115 25132
EMERGENCY ALARM
>*25139 489 532 25155
F5
*--		-*
MILCAL
25086
F6
*--		-*
CCVOAL
25114
F7
*--		-*
EEMGAL
25124
F9
*--		-*
TELSOF
M5281
*--		-*
TAILAL
11014
L40
*--		-*
26791
L41
*--		-*
26957
L42
*--		-*
26976
M3341
*--		-*
GLEMG
24774
X1E0 X906 M6409 M87
25140*--|/|-*--|/|-*--| |-*-----------------------------------<
EMG.M	EEMG.M	JP/YMC
	M6411	
*--	/	-*
EXTEMG
M87 X140
--| |----|/|--------
EMGAL2 RST.B
25148
T176 X1E0 X906 M6409 Y247
25149*--| |----|/|-*--|/|-*--|/|-*----------------------------<
80 EMG.M	EEMG.M	JP/YMC
493		
	M6411	
*--	/	-* *----------------------------<
EXTEMG
M84
*--		----------------------*
EMGAL
25139
M87
*--		----------------------*
EMGAL2
25148
M6472 F10
25159*[D> K0 D562]*--		-*---------------------<
R119L	J2TA.P
	13821
[D< D544 D562]------*
R128L R119L	
13429	
[D> K0 D572]
R114L
M87	EMG STOP(JPN/YMC
>*25148 25145 25156
Y247	PC EMERGENCY .NC
>*25157 9282 24630
Y347	PC EMERGENCY _NC
>*25158
210.ILLEGRAL DAT
>*25177 25174 25226

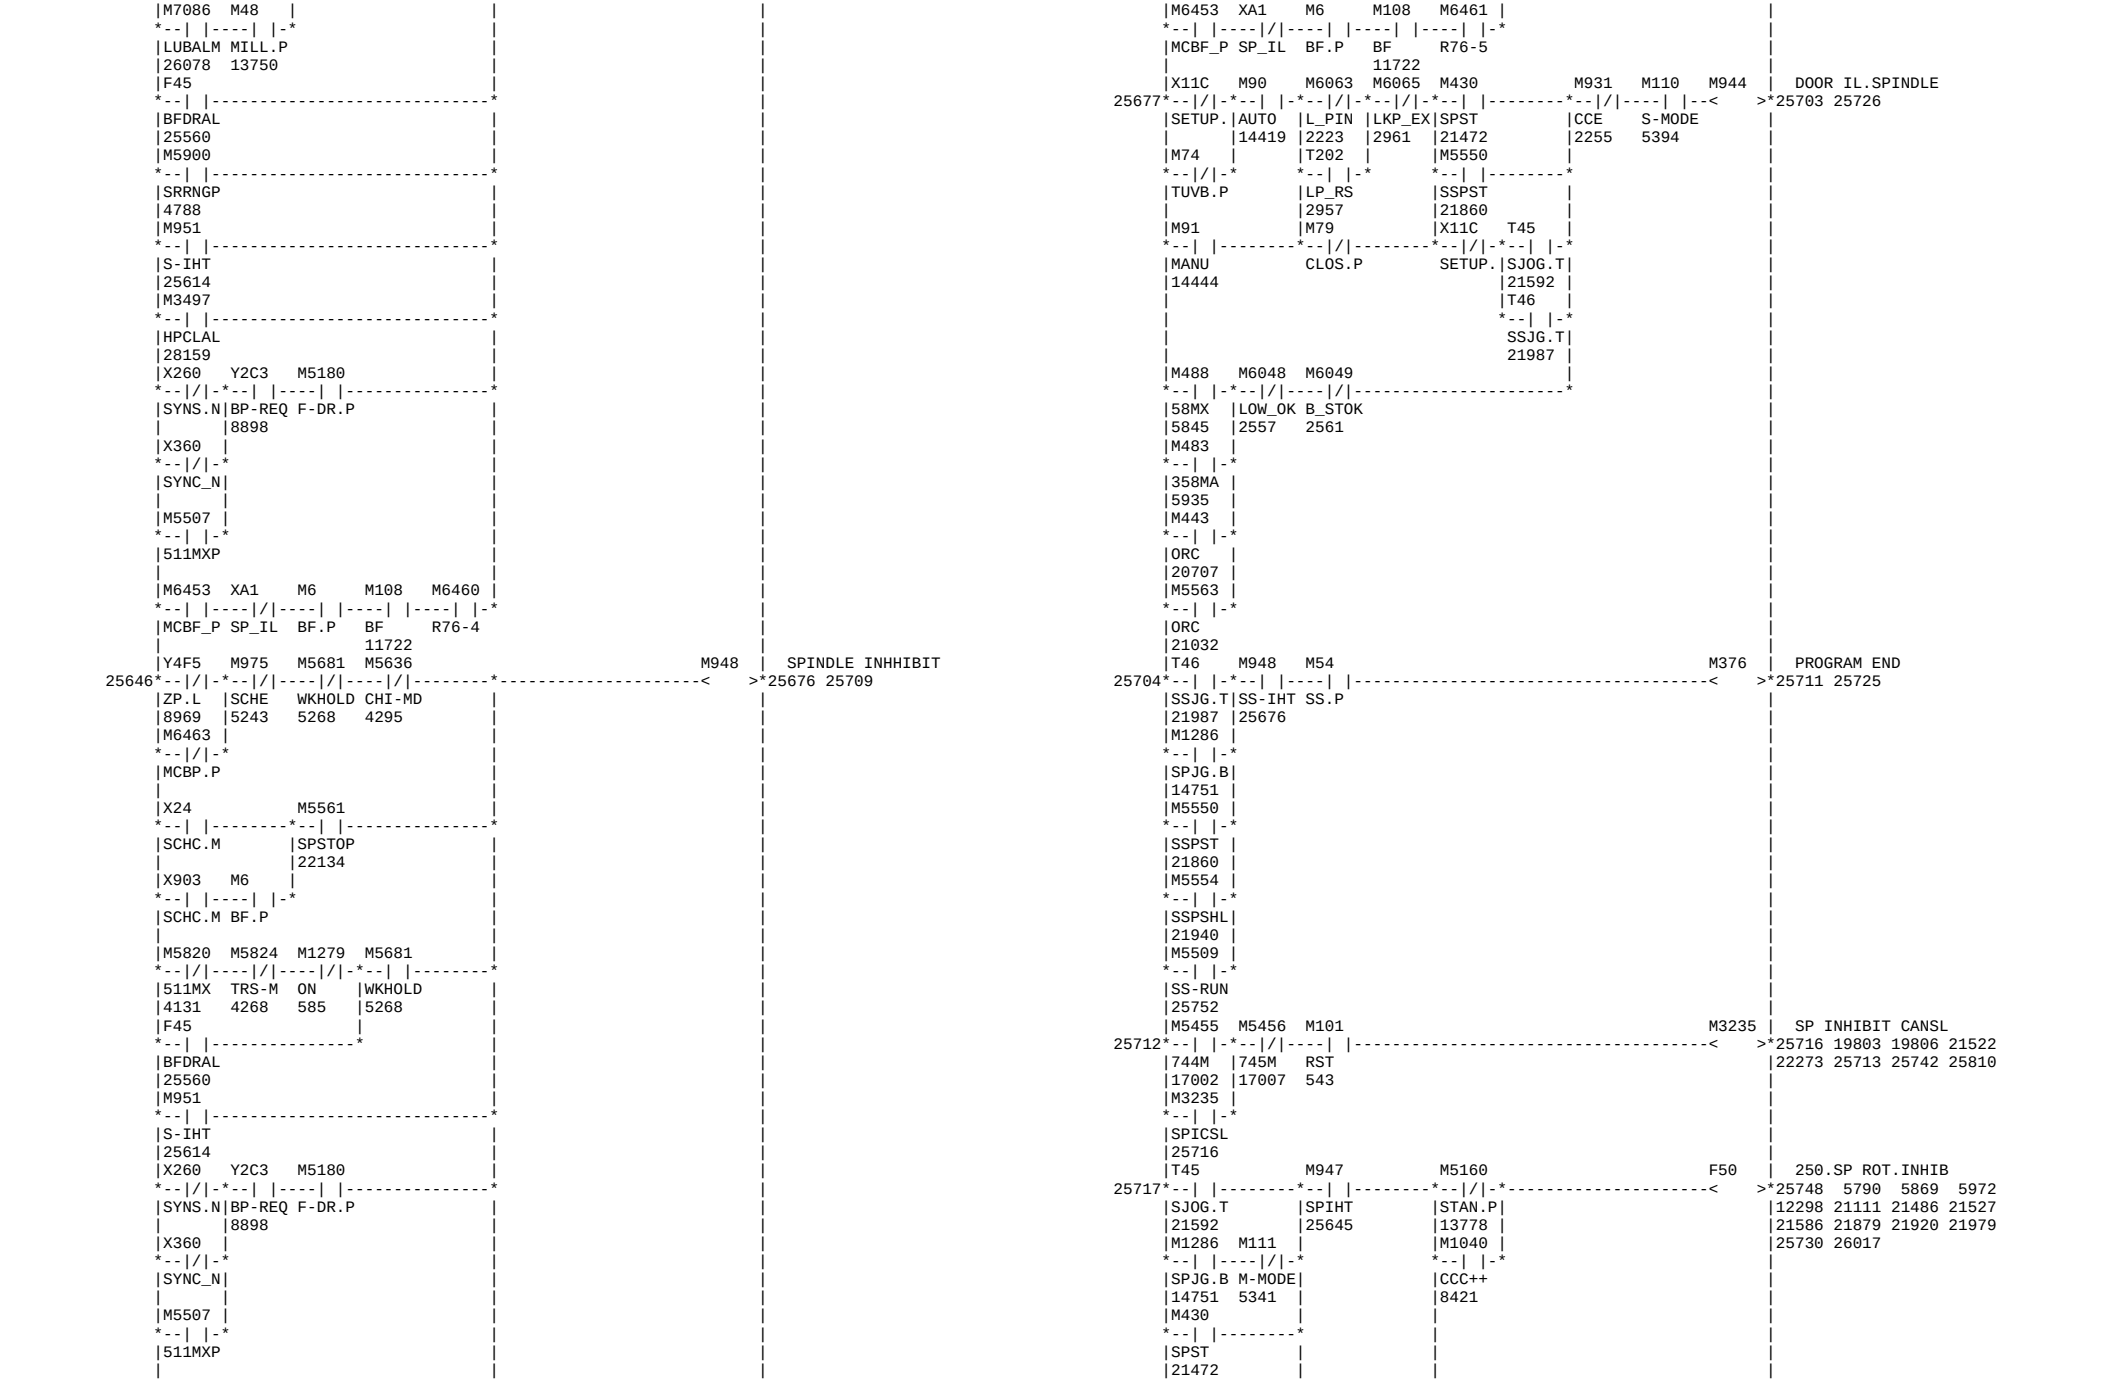

|M6444 M6468 |
--| |----| |----------
|EX.M2P EX.M8P |
|F10 M1272 |
--| |----| |----------
|IRDATA *ALRST
|25177 25010
|M193 F11 | 211.CAN'T ACT M-
25178*--| |----------<
|M-ERR
|18629
|X8 M1275 | CHUCK SW AL T
25180*--| |--------*--| |----------<T157 K300 >*25189 25194
|CHO.SW |OFF
| |615
|X9 |
--| |--------
|CHC.SW |
| |
|X24 |
--| |--------
|SCHC.M |
| |
|X903 M6 |
--| |----| |-
|SCHC.M BF.P |
| |
|X25 |
--| |--------
|SCHO.M
|
|F12 M1272 F12 | 212.CHUCK SW.MAL
25192*--| |----| |-*----------<
|CKSWAL *ALRST| |25228 27390 27406 27425
|25195 25010 |
|T157 |
--| |--------
|CKSWAT
|25189
|M892 M743 M950 | T CODE ERROR
25196*--| |----| |----------<
|TCHL TF
|6698 6563
|F13 M1272 F13 | 213.NO GOOD CDT-
25199*--| |----| |-*----------<
|NG T-N *ALRST|
|25202 25010 |
|M950 |
--| |--------
|TCDER
|25198
|F15 M1272 F15 | 215.MISS CHACK
25203*--| |----| |--------*----------<
|MISCK *ALRST |
|25212 25010 |
|M402 M0 M561 |
--| |----| |---|/|-*
|MISS-L SENS.P|WUPDO
|4908 13731 |8382
|M1333 M5120 |
--| |----| |-
|SUCKE TFRE.P
|5194 13763
|L0 L1 F18 | 218.CHK INT
25213*--|/|----|/|--------*----------<
|INT EXT |22287
|4541 4542 |
|L20 L21 M54 |
--|/|----|/|----| |-
|SINT SEXT SS.P |
|4597 4598 |
|L1 M46 |
--| |----| |--------
|EXT COLL.P |
|4542 |
|L21 M5179 |
--| |----| |--------
|SEXT SS-C.P
|4598
|F10 M1272 | RESET ALARM
25226*--| |-*--| |----------[PLS M89]*25235 2730
|IRDATA|*ALRST
|25177 |25010
|F11 | M955 | FEED HOLD ALARM
--| |-----------<
|CANT M|
|25179 |
|F12 |
--| |-
|CKSWAL|
|25195 |
|F13 |
--| |-
|NG T-N|
|25202 |
|F14 |
--| |-
|PCPRER|
| |
|F15 |
--| |-
|MISCK
|25212
|X240 | T IND. ALM DELAY
25238*--| |----------<T231 K10 >*25240 25243 25268
|MA.N
|
|T231 X496 | .
25243*--| |----| |-*----------[PLS M617]*25246 25248
|TIAL.T TCL.LS|
|25240 |
| | M1419 | TURRET CLAMP MEM
| *----------<
|
|M617 | TURRET POS.CHECK
25248*--| |----------[MOV D204 D208]*25251 25254
|TCLP TP NO.
|25246 24
| M1420 | TURRET POS.MEM
25252*[= D204 D208]----------<
| TP NO. TINTD
| 24 25251
|M1420 X496 M1419 X208 X209 T231 M6448 X401 F20 | 220.TURRET IND.M
25256*--|/|----| |----| |----| |----| |-*--| |----|/|----| |--<
|TP.M TCL.LS TCL.M SMZ1.N SMZ2.N|TIAL.T J2TR.P COMRDY |27146 27187 27197 27370
|25255 25247 |25240 13812 |
|M725 X496 X495 |
--|/|----| |----|/|----------
|TNOK TCL.LS IND.LS |
|6515 |
|F20 M1272 |
--| |----| |----------
|TRIDMS *ALRST
|25271 25010
|YB X10 M6448 M5160 | TURRET CLAMP AL
25272*--| |----| |-*--| |----|/|----------<T188 K200 >*25280 25298
|TU.M TCL.LS|J2TR.P STAN.P
|9270 |13812 13778
|YC X10 |
--| |----|/|-
|TC.M TCL.LS
|9273
|M749 T171 M749 | TF OFF DELAY
25283*--| |----|/|-*----------<
|TFOFD TCL.T |
|25286 6795 |
|M743 |
--| |--------
|TF
|6563

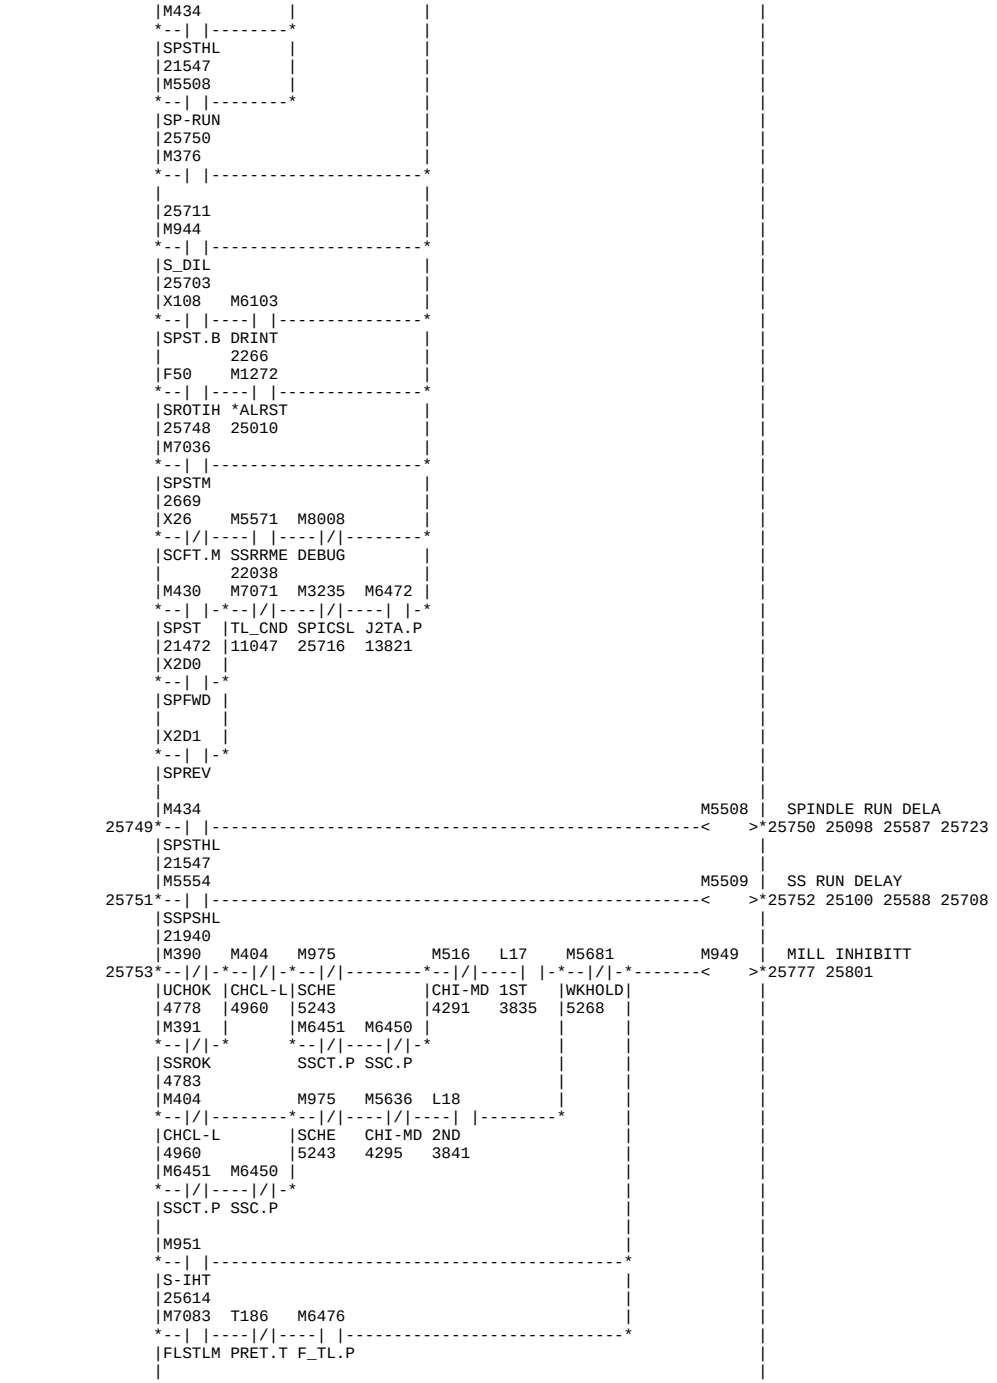

|X245 X23F X496 M6448 M926 M749 X401 F21 | 221.TRET CLAMP M
25287*--| |----|/|-*--|/|----|/|--------*--|/|----|/|-*--| |--< >*25300 9315 12306 25400
|STL.N DEN2.N|TCL.LS J2TR.P |249MX TFOFD |COMRDY |27147 27179 27198 27371
| | 13812 |6770 25286 | |27486 27492
	X10 M6448 M5160		
--|/|----| |----|/|-	
TCL.LS J2TR.P STAN.P	
13812 13778	
T188	
*--		---*
TCAL.T
25280
Y91 M410 L1 M46 M5994	CHUCK SENSOR MAL
25301*--| |----| |----| |-*--|/|-----------------------------< >*25309 25320 27392 27407
UCH.M CHCLS EXT	COLL.P
4886 4893 4542	
Y90 M411 L0	
--| |----| |----| |-
CH.M CHOLS INT
4877 4897 4541
M1349 M970 L21 M5179 M54 M5995	SS CHUCK SENSOR
25310*--| |----| |----| |-*--|/|----| |-----------------------< >*25319 25321 27427 27546
APR.M SCHCLS SEXT	SS-C.P SS.P
5173 5184 4598	
M1348 M969 L20	
--| |----| |----| |-
PCR.M SCHOLS SINT
5164 5177 4597
M5994	CHUCK LS AL T
25320*--| |-*---<T152 K200 >*25323 25341 27393 27408
CKSAL1		27428 27547
25309	
M5995	
*--		-*
SSCKA1
25319
X93 X94 M46 M0 M5996	CHUCK SENSOR MAL
25326*--|/|----|/|----|/|----| |-----------------------------< >*25330 25339 27394 27409
CHO.LS CHC.LS COLL.P SENS.P
13731
X22 X23 M5179 M5120 M54 M5997	SS CHUCK SENSOR
25331*--|/|----|/|----|/|----| |----| |-----------------------< >*25336 25340 27429 27548
SCHK_O SCHK_C SS-C.P TFRE.P SS.P
13763
F24 M1272 M553 T207 F24	224.CHACK LS MAL
25337*--| |----| |-*--|/|----| |-----------------------------< >*25344 12327 25337 25403
CKLSAL *ALRST	MS-NEG P-ON.T	27143 27214 27395 27410
25344 25010	8417 571	27430 27549
M5996	
*--		--------*
CKSAL2	
25330	
M5997	
*--		--------*
SSCKA2	
25336	
T152	
*--		--------*
CKLSAT
25323
Y9D X9D M19	FRONT DOOR LS AL
25345*--| |----|/|-*--| |-----------------------------<T153 K400 >*25352 25363
FDOP.M FDO.LS	FD.P
7443	
Y9E M6625	
*--		----	/	-*
FDCL.M F-DRCL
7470 7289
F25 M1272 F25	225.F-DDOR LS MA
25355*--| |----| |--------*-----------------------------------< >*25372 223 250 7976
DRLSAL *ALRST		12328 25355 25404 27355
25372 25010	
X9D XB6 M6625	
--| |---|/|-*--| |-*
FDO.LS	FCLS.R	F-DRCL	
		7289	
	M75		
*--	/	-*	
UKSP.P	
T153	
*--		---------------*
FDLSAT	
25352	
M6814 M75 XA	
--| |---|/|----|/|-*
PRSCNF	UKSP.P CCC.LS	
7487		
	M75 M5186	
*--		----	/	-*
UKSP.P EDUK.P
Y9F X90D	ORIENT PIN ALARM
25373*--| |----|/|-*-----------------------------------<T198 K200 >*25379 25391
TALBRK TBF.LS	
96	
Y9F X90E	
*--	/	----	/	-*
TALBRK TBF2LS
96
X90D X90E	SS ORINT PIN AL
25382*--| |----| |-----------------------------------<T201 K2 >*25385 25390
TBF.LS TBF2LS
F30 M1272 M48 M54 M6451 M6450 M5160 M1279 F30	230.1D-ORT LS MA
25388*--| |----| |-*--| |----| |----|/|----|/|----|/|----|/|--< >*25398 21265 25388 25503
1DLSAL *ALRST	MILL.P SS.P SSCT.P SSC.P STAN.P ON
25398 25010	13750 13778 585
T201	
*--		--------*
ORTP.T	
25385	
T198	
*--		--------*
ORPN.T
25379
F20 M952	FEED HOLD ALARM
25399*--| |-*---< >*25416 26772
TRIDMS	
25271	
F21	
*--		-*
TRCLMS	
25300	
F22	
*--		-*
TBLSAL	
F23	
*--		-*
TSLSAL	
F24	
*--		-*
CKLSAL	
25344	
F25	
*--		-*
DRLSAL	
25372	
F26	
*--		-*
GSLSAL	
F28	
*--		-*
COLSAL	
F6	
*--		-*
CCVOAL	
25114	

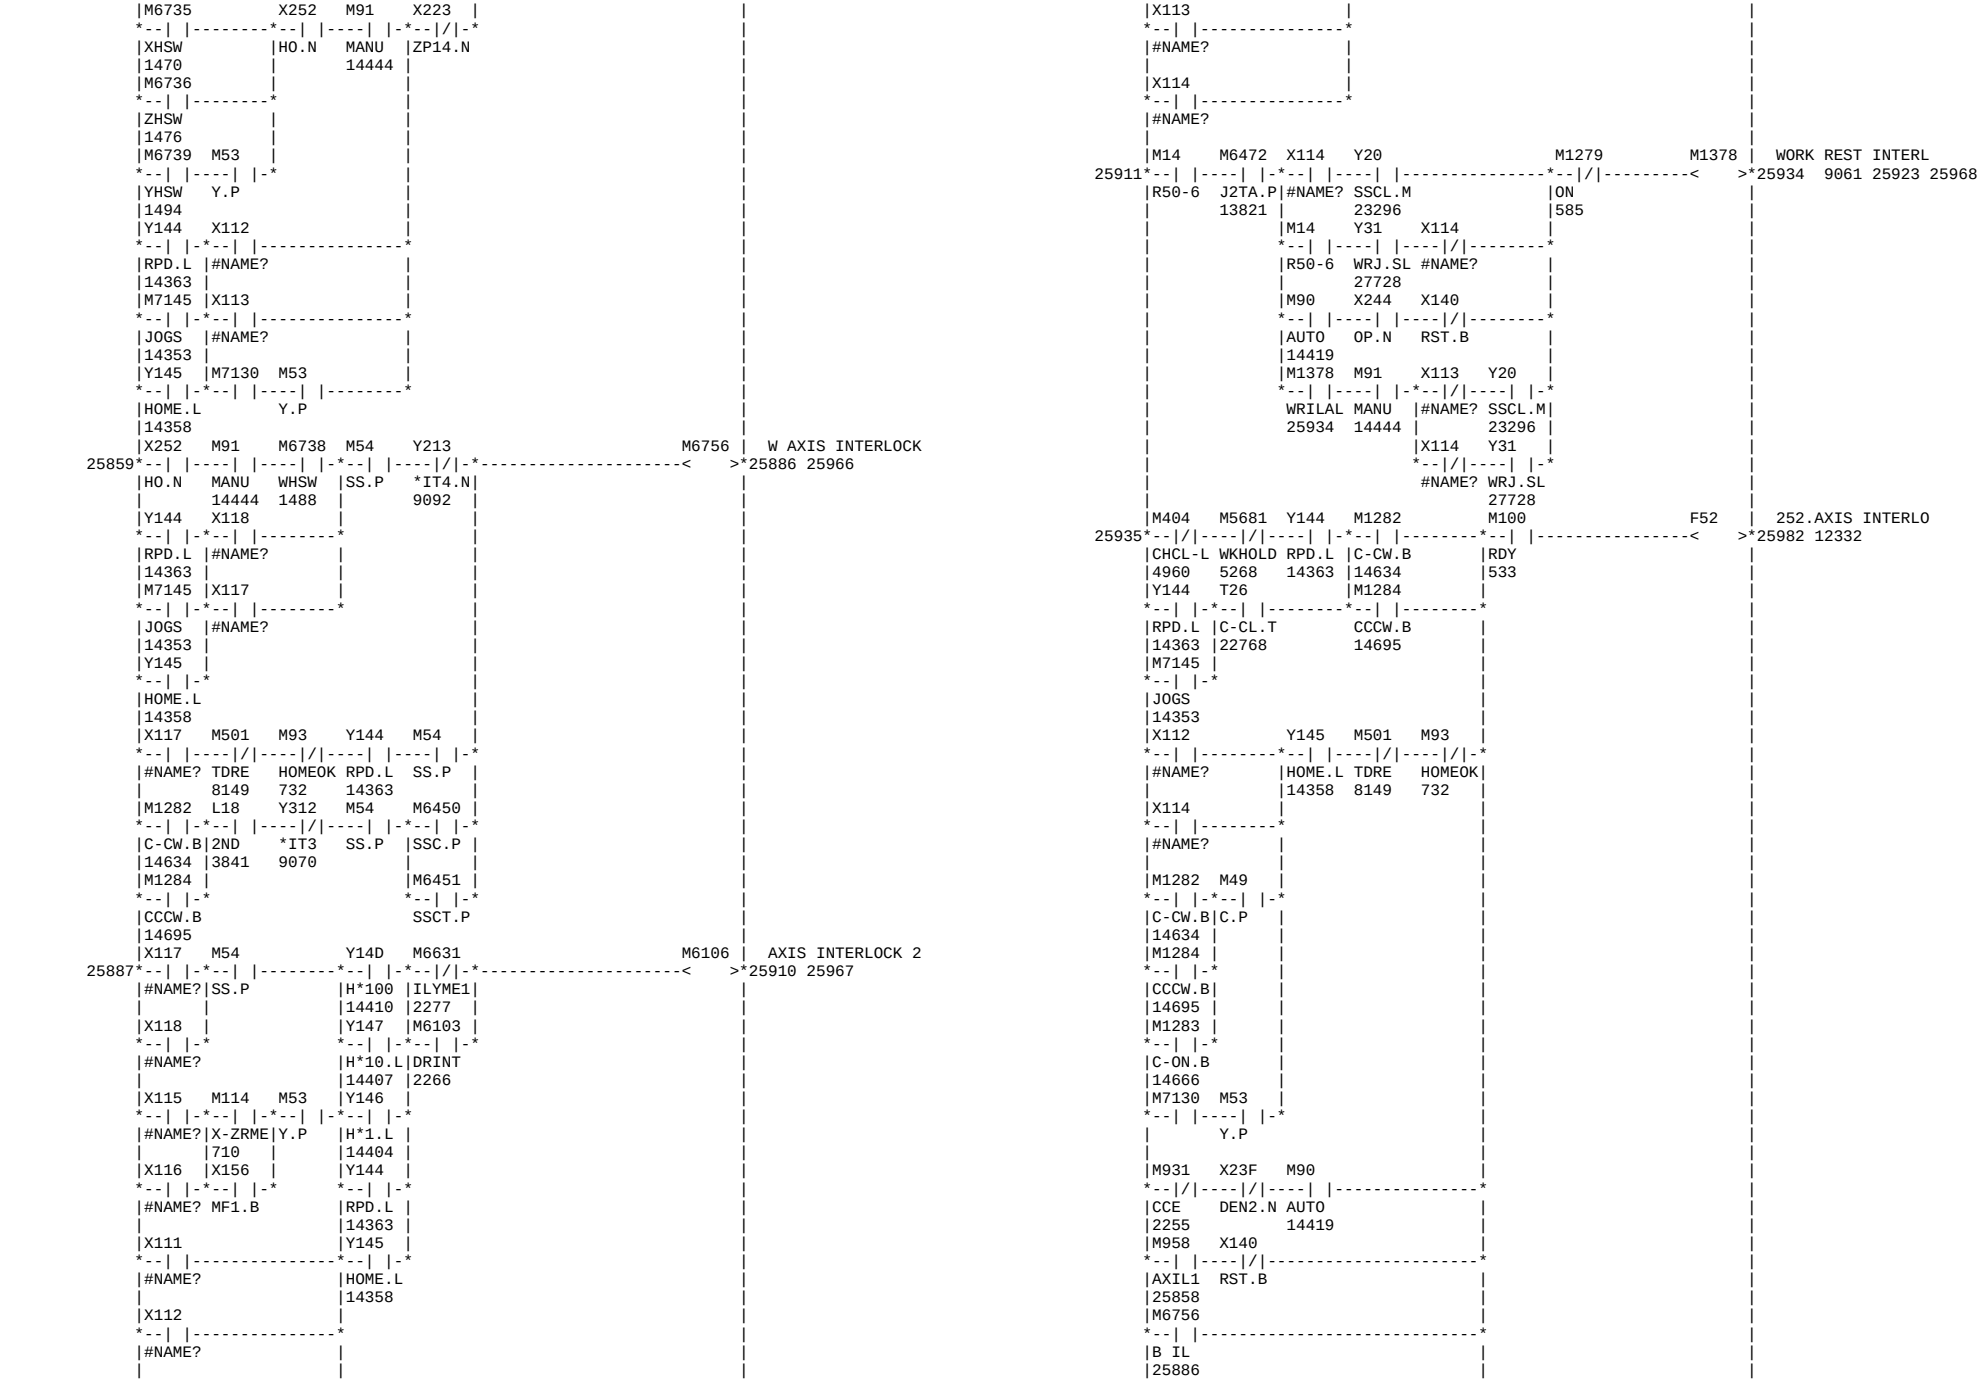

|F55 |
--| |-
|CCVOP |
| |
|F43 |
--| |-
|MEASAL|
|25537 |
|F70 |
--| |-
|ORTOVR|
|26153 |
|F75 |
--| |-
|RBTTOV|
|26226 |
|F77 |
--| |-
|BFTOVR|
|26251 |
|F79 |
--| |-
|PCTTOV|
|26262 |
|F82 |
--| |-
|CKCDTO|
|26287 |
|F86 |
--| |-
|FDCDTO
|26319
|M497 X91 M8 M100 | TOOL EYE LS AL T
25417*--| |---|/|-*--| |----| |----------<T162 K50 >*25425 21528 21921 22283
|83MX TDFE.M|EYE.P RDY |25433
|8096 |13734 533 |
|M498 X92 | |
--| |----|/|- |
|84MX TDRE.M |
|8097 |
|F31 M1272 F31 | 231.T-EYE LS MAL
25428*--| |----| |-*----------<* >*25434 8114 12330 25428
|TELSAL *ALRST| |25504 27156 27220 27365
|25434 25010 | |
|X91 X92 | |
--| |----| |- |
TDFE.M TDRE.M	
T162	
*--		--------*
TEYLAT
25425
X496 Y512 M1275	TOOL CLAMP LS AL
25435*--|/|----|/|----| |----------<T165 K20 >*25439 25444
TCL.LS TUC.M OFF
78 615
F34 M1272 F34	234.T-CLMP LS MA
25442*--| |----| |-*----------<* >*25445 12307 25442 25505
TCLLAL *ALRST	
25445 25010	
T165	
*--		--------*
TCLSAT
25439
Y96 X95	PARTS CTR LS AL
25446*--| |----|/|-*----------<T166 K800 >*25452 25460
PCF.M PCF.LS	
7579	
Y97 X96	
*--		----	/	-*
PCR.M PCR.LS
7589
F36 M1272 M27 F36	236.PCT LS MALF
25455*--| |----| |-*--| |----------<* >*25462 12331 25455 25506
PCTLAL *ALRST	PCT.P	27223
25462 25010	
X95 X96	
*--		----		-*
PCF.LS PCR.LS	
T166	
*--		--------*
PCTLAT
25452
M3077 M931 M7463 T116 M467	MILL SHAFT ALARM
25463*--| |-*--| |-*--|/|----|/|-*--|/|----------<T122 K50 >*25475 25495
MTC_ST	CCE	TUOFF T_PS.T	DISEGD
9376	2255	15307 9548	22514
M3072	X11C		
*--		-*--		-*
ATC_ST	SETUP.
9507	
M3085	
*--		-*
TU_SOL	
9608	
M3086	
*--		-*
249MX
9571
M126
*--		----------*
TUCL:L
15304
Y13 M5510 X9B	MILL NOT COUPLIN
25478*--| |----| |----|/|----------<T200 K5 >*25482 25496
MILLJT ML-RUN MEGD.M
8938 25822
X9B X9C F39	MILL SENSOR AL
25485*--| |----| |----|/|----------<T125 K50 >*25489 25497
MEGD.M MDEG.M MLCPAL
25502
F39 M1272 M48 M5160 F39	239.MILL COUPLIN
25492*--| |----| |-*--| |----|/|----------<* >*25502 9374 9570 15303
MLCPAL *ALRST	MILL.P STAN.P	25487 25492 25508 25802
25502 25010	13750 13778	27148 27175 27529
T174	
*--		--------*
ICTOVT	
22555	
T122	
*--		--------*
SHAL.T	
25475	
T200	
*--		--------*
MCOP.T	
25482	
T125 X401	
*--		----		-*
MSAL.T COMRDY
25489
F30 M953	FEED HOLD ALARM
25503*--| |-*----------<* >*25509 26773
1DLSAL	
25398	
F31	
*--		-*
TELSAL	
25434	
F34	
*--		-*
TCLLAL	
25445	
F36	
*--		-*
PCTLAL	
25462	
F53	
*--		-*
SPOVDT	
13363	

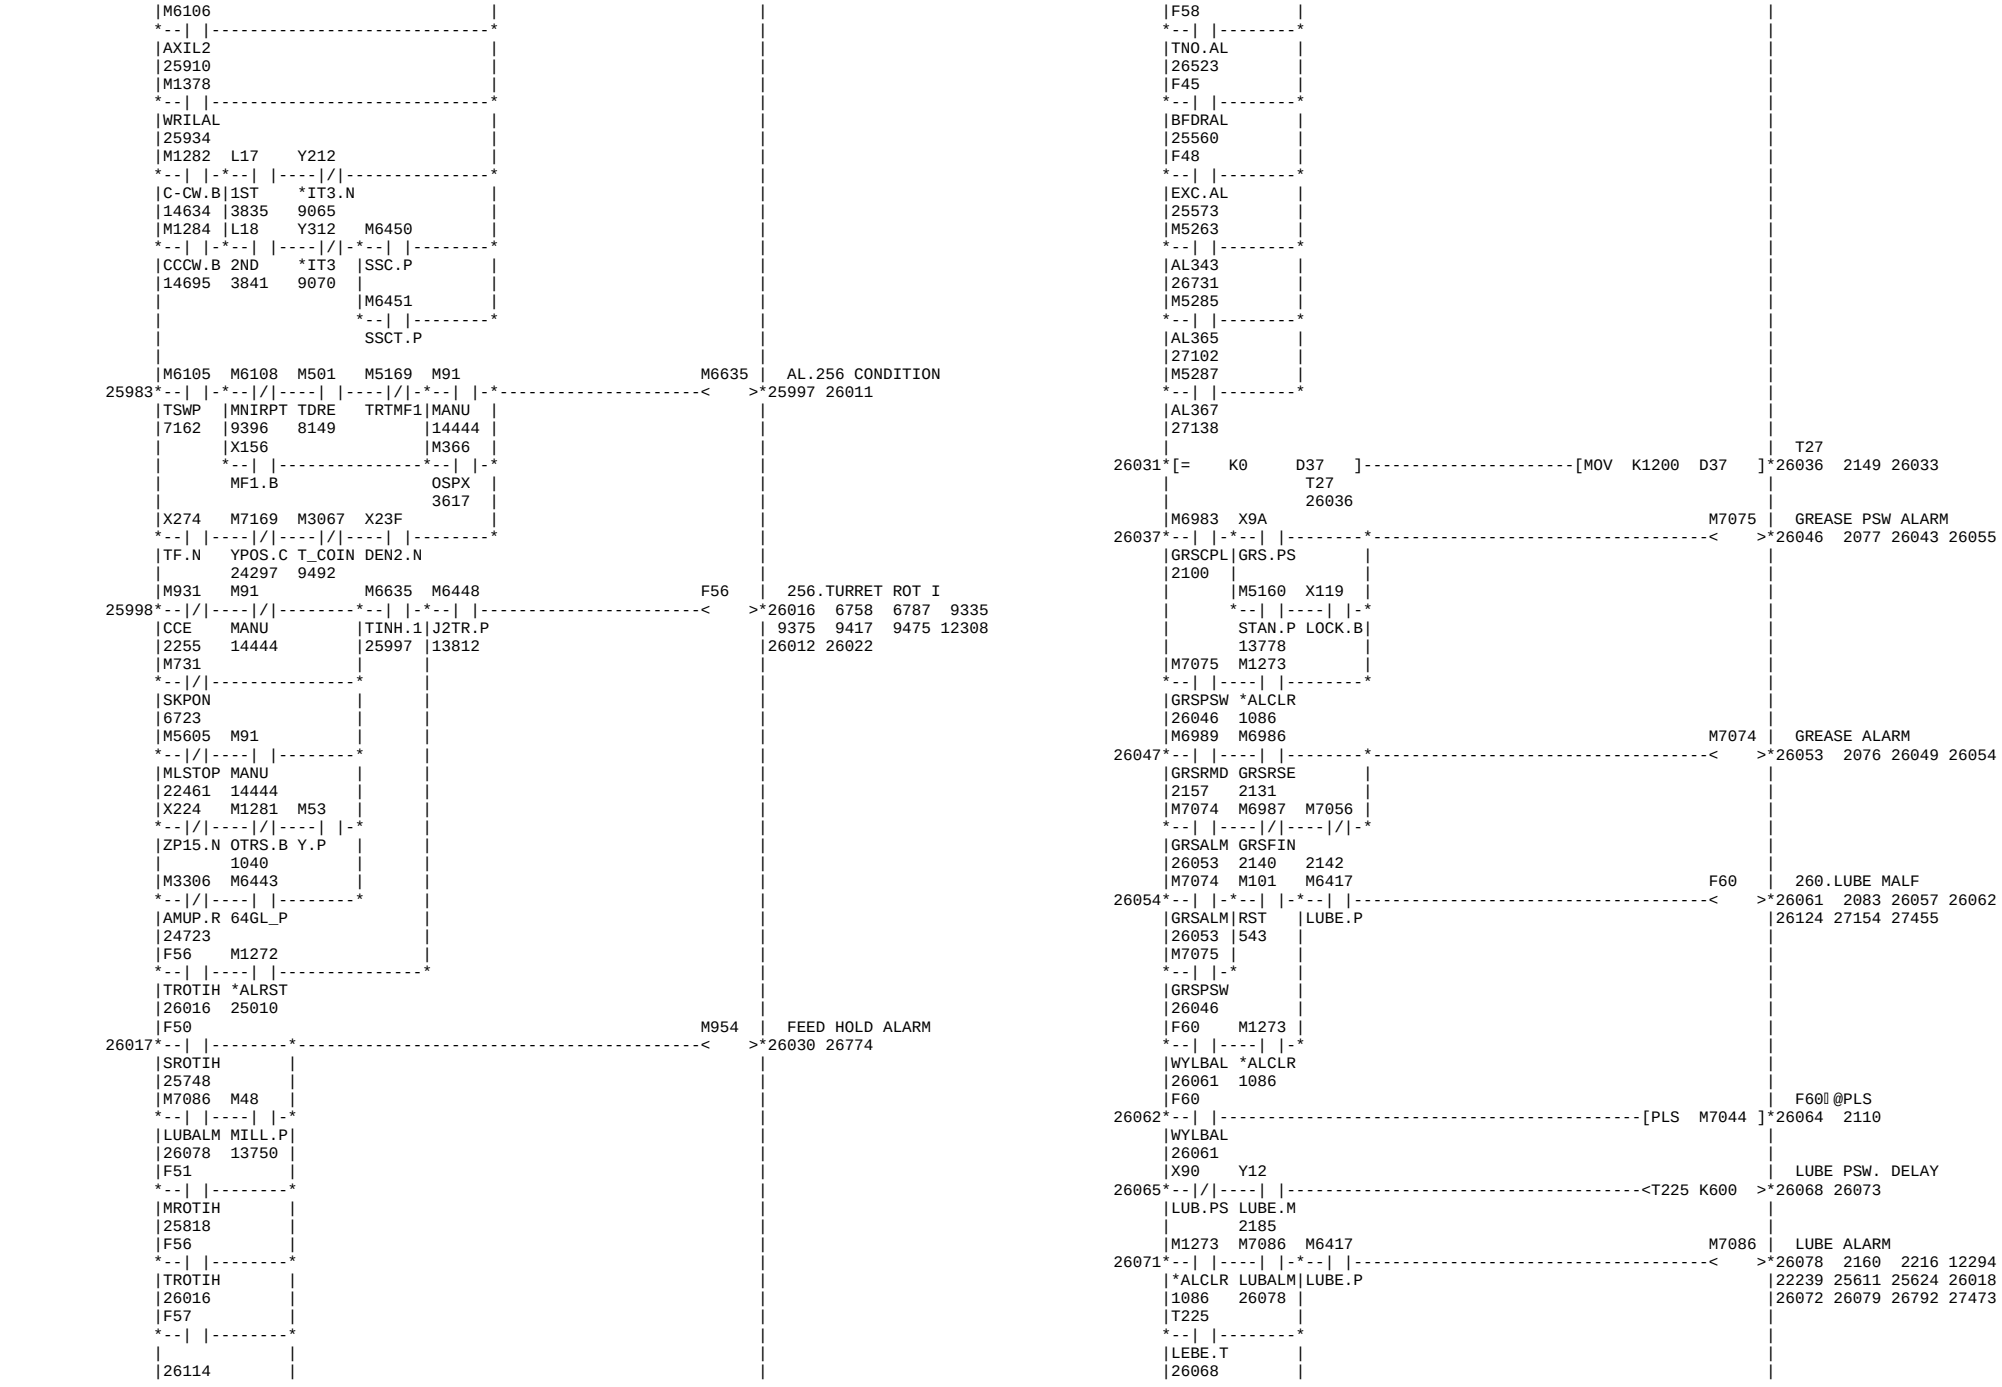

|F39 |
|MLCPAL
|25502
|M1130 M6424 M5921 M16 M1273
|MF20.M REC.P |RDY.R |ROBO.P|*ALCLR| GLALM
|3353 13802 |24360 |13737 |1086 |
|Y4F7 |M6443 | F42
|AUTO |64GL_P
|14424
|X465
|AL.R
|M3303
|ALM.R
|24717
|M3304
|ALM1.R
|24719
|M3305
|ALM2.R
|24721
|T64 X11 M492 T182 M37 F43
|TDR.T |MMS.M |81MX |NFB.T |BSW.P
|8152 | |8017 |25017 |
|M8 | |M997 | |
|EYE.P TSWSVS
|13734 23401
|F43 M1272
|MEASAL *ALRST
|25537 25010
|M5123 M6528 M6453 X232 M108 X240 F45
|BFAL.P BAL |MCBF_P|TAP.N BF |MA.N
|9217 | |11722 |
|M5123 M6528 |
|BFAL.P BAL
|9217
|M90 XA0 M6453
|AUTO BF_ALM|MCBF_P
|14419 |
|M5001 |
|EMPTY
|11808
|M90 X470 X232 M188
|AUTO TSR.R TAP.N MCBP.M
|14419 11733
|M8153 M8154
|SERR.N SCMD.N
|M351 M753 T182 M6453 F48
|701M |F_RD.M|NFB.T |MCBF_P
17933	638	25017
M352		
703M		
17938		
M353		
704M		
17943		
ALARM CODE No.24
242.ROBOT.CONT.M
243.MEAS.CONT.MA
245.BAR FEEDER M
EXT CONTROLEER A
25510
25524
25525 1562 12316
25526
25537 12317 25409 25533
25538
25560 11772 12319 25629
25660 26025
25561
25573 11875 25569 26026
27253

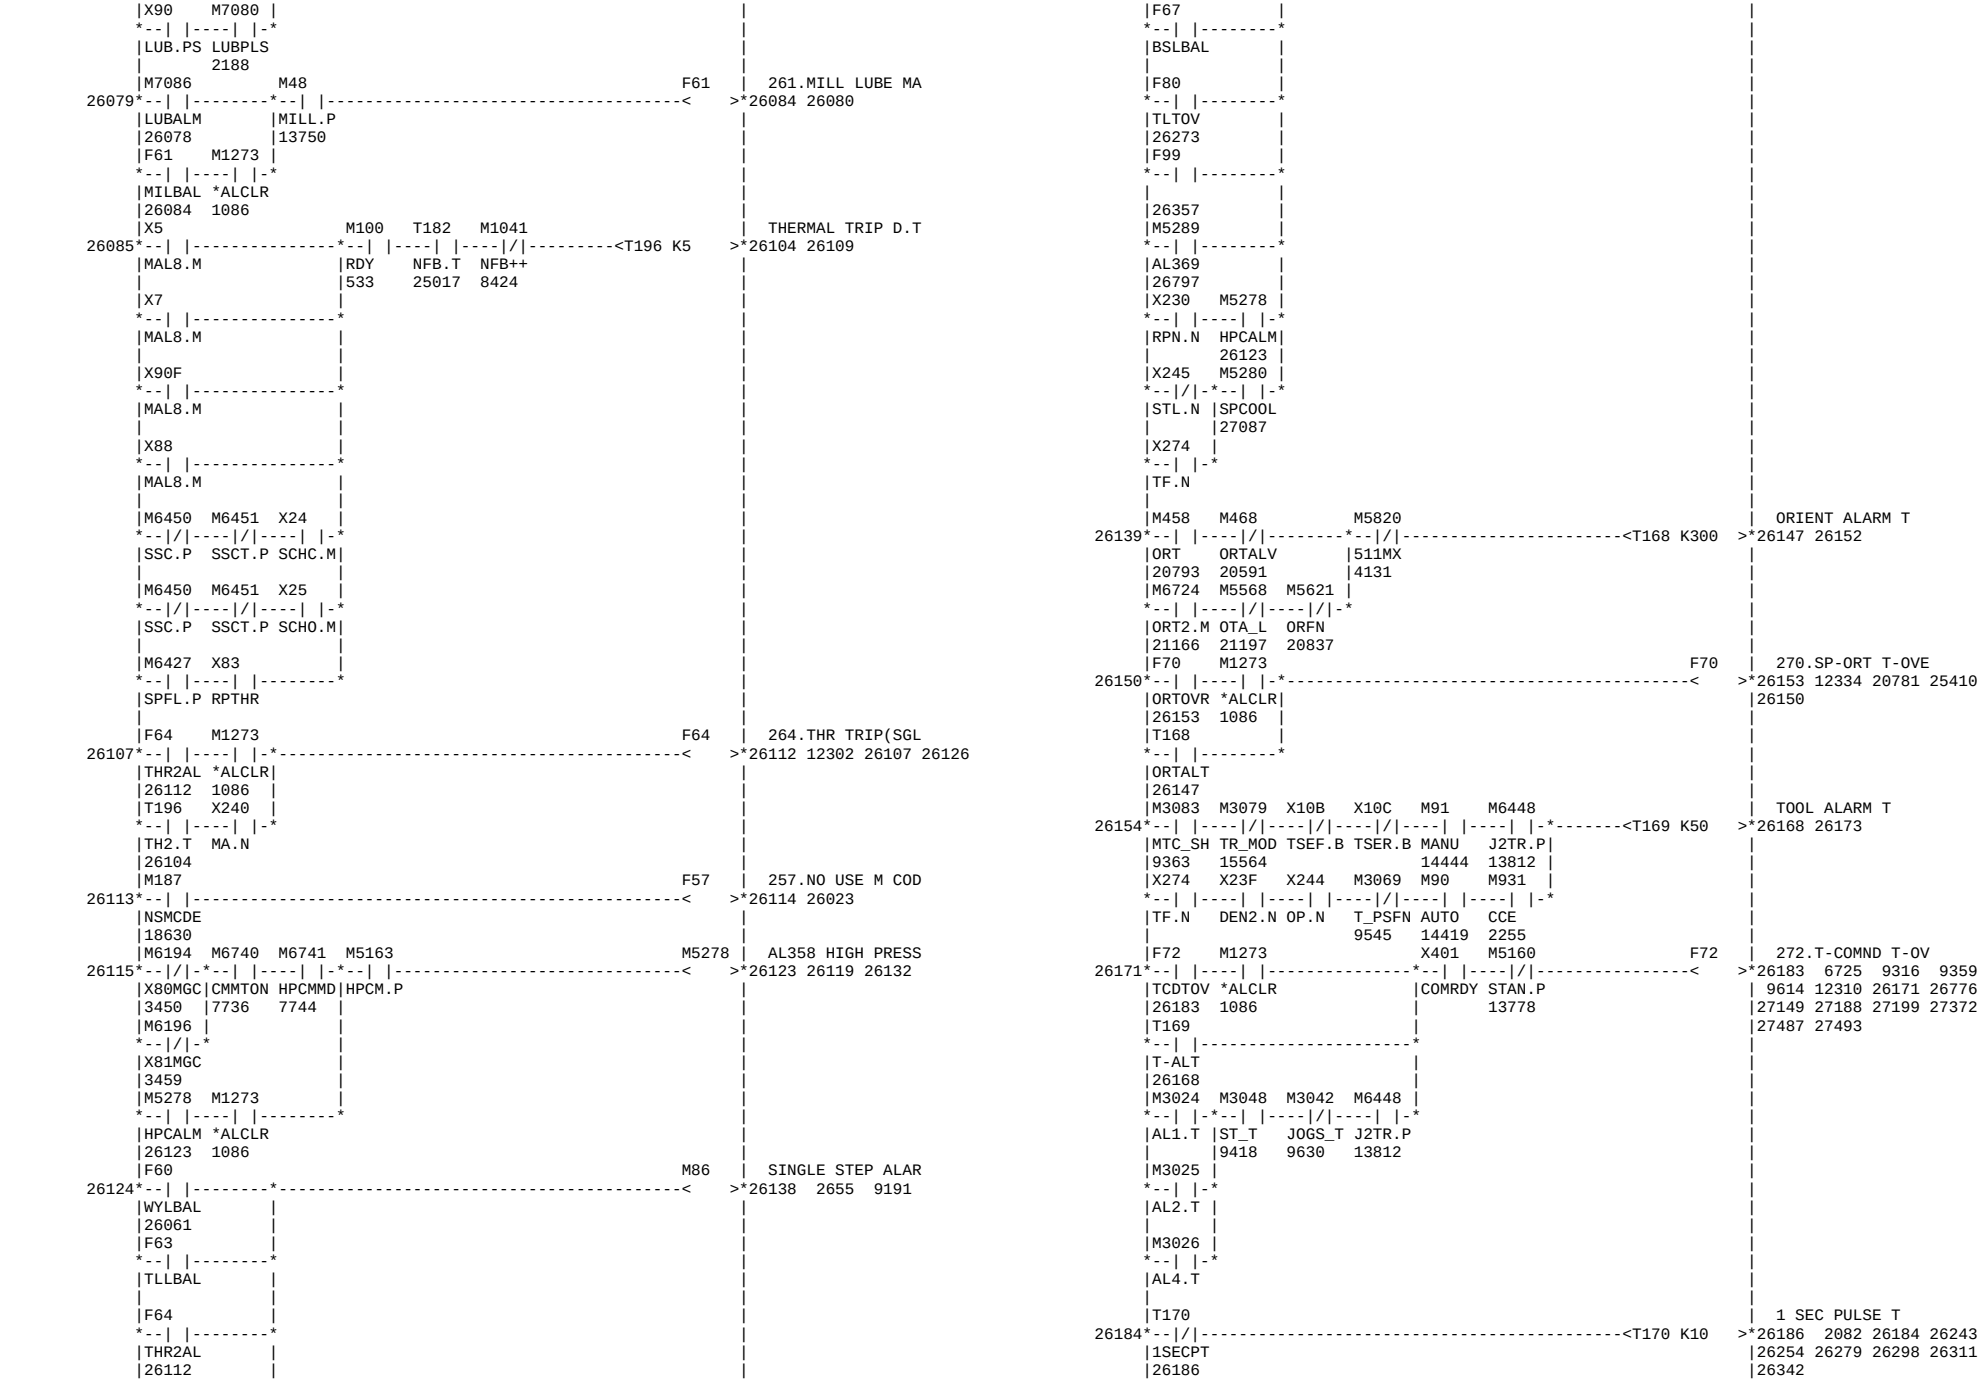

|M752 M108 |
|F_AL.M BF
|635 11722
|F48 M1273
|EXC.AL *ALCLR
|25573 1086
|M927 M690
|INCB/F|
|11821 |
|M5895 |
|INCBFD|
|11814 |
|T45 |
|SJOG.T|
|21592 |
|M438 |
|SJOG |
|21590 |
|M490 |
|ABRUN
|5870
|M6 M108 XA2 M5948
|BF.P BF M_FIN
|11722
|M434 M5554 M5592 M5508 M5509 M5510 M494 M951
|SPSTHL SSPSHL MLSTHL SP-RUN SS-RUN ML-RUN MESON |
|21547 21940 22295 25750 25752 25822 8032 |
|M502 M91
|TDIL MANU
|8169 14444
|T199
|HDAL.T
|8172
|X905 M5196 M6443 M16 M5127 Y15
|SIN.M YCOT.P 64GL_P ROBO.P UKBF.P BFM.M
|13737 11810
|M5948 M6443 M16 M5196 M5127
|SP.IL. 64GL_P ROBO.P YCOT.P UKBF.P
|25583 13737
|X46D M6436
|SPIL.R CF.P
|M7086 M48
|LUBALM MILL.P
|26078 13750
|M390 M404 M5681 M516 M947
|UCHOK |CHCL-L WKHOLD CHI-MD
|4778 |4960 5268 4291
|M391 |
|SSROK
|4783
|X8 M441
|CHO.SW SPSTOP
|21718
|M5280 X245
|SPCOOL |STL.N
|27087 |
|SPINDLE RUN
|YME BF SP.IL.
|SPNDLE/MILL INH
|SPINDLE INHIBIT
25574
25579
25580
25583 21505 21603 21897
21998 22248 25602
25584
25614 25631 25663 25772
25615
25645 25724

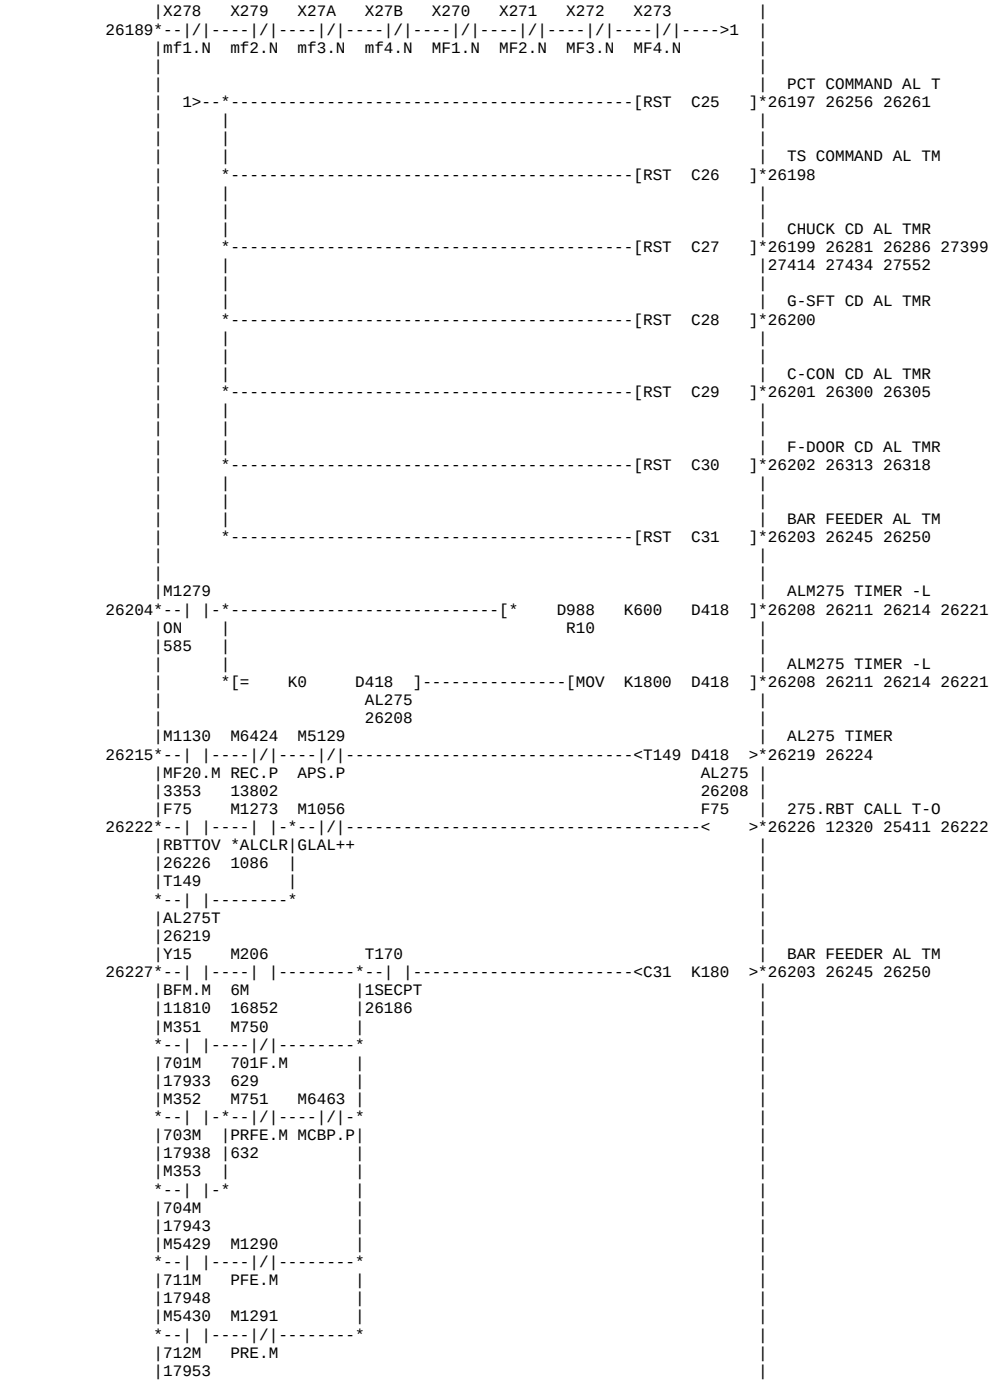

M7086 M48
LUBALM MILL.P
26078 13750
F45
BFDRAL
25560
M5900
SRRNGP
4788
M951
S-IHT
25614
M3497
HPCLAL
28159
X260 Y2C3 M5180
SYNS.N BP-REQ F-DR.P
8898
X360
SYNC_N
M5507
511MXP
M6453 XA1 M6 M108 M6460
MCBF_P SP_IL BF.P BF R76-4
11722
Y4F5 M975 M5681 M5636 M948
25646
ZP.L SCHE WKHOLD CHI-MD
8969 5243 5268 4295
M6463
MCBP.P
X24 M5561
SCHC.M SPSTOP
22134
X903 M6
SCHC.M BF.P
M5820 M5824 M1279 M5681
511MX TRS-M ON WKHOLD
4131 4268 585 5268
F45
BFDRAL
25560
M951
S-IHT
25614
X260 Y2C3 M5180
SYNS.N BP-REQ F-DR.P
8898
X360
SYNC_N
M5507
511MXP
M6453 XA1 M6 M108 M6461
MCBF_P SP_IL BF.P BF R76-5
11722
X11C M90 M6063 M6065 M430 M931 M110 M944
DOOR IL.SPINDLE
25677
SETUP. AUTO L_PIN LKP_EX SPST CCE S-MODE
14419 2223 2961 21472 2255 5394
M74 T202 M5550
TUVB.P LP_RS SSPST
2957 21860
M91 M79 X11C T45
MANU CLOS.P SETUP. SJOG.T
14444 21592
T46
SSJG.T
21987
M488 M6048 M6049
58MX LOW_OK B_STOK
5845 2557 2561
M483
358MA
5935
M443
ORC
20707
M5563
ORC
21032
T46 M948 M54 M376
PROGRAM END
25704
SSJG.T SS-IHT SS.P
21987 25676
M1286
SPJG.B
14751
M5550
SSPST
21860
M5554
SSPSHL
21940
M5509
SS-RUN
25752
M5455 M5456 M101 M3235
SP INHIBIT CANSL
25712
744M 745M RST
17002 17007 543
M3235
SPICSL
25716
T45 M947 M5160 F50
250.SP ROT.INHIB
25717
SJOG.T SPIHT STAN.P
21592 25645 13778
M1286 M111 M1040
SPJG.B M-MODE CCC++
14751 5341 8421
M430
SPST
21472

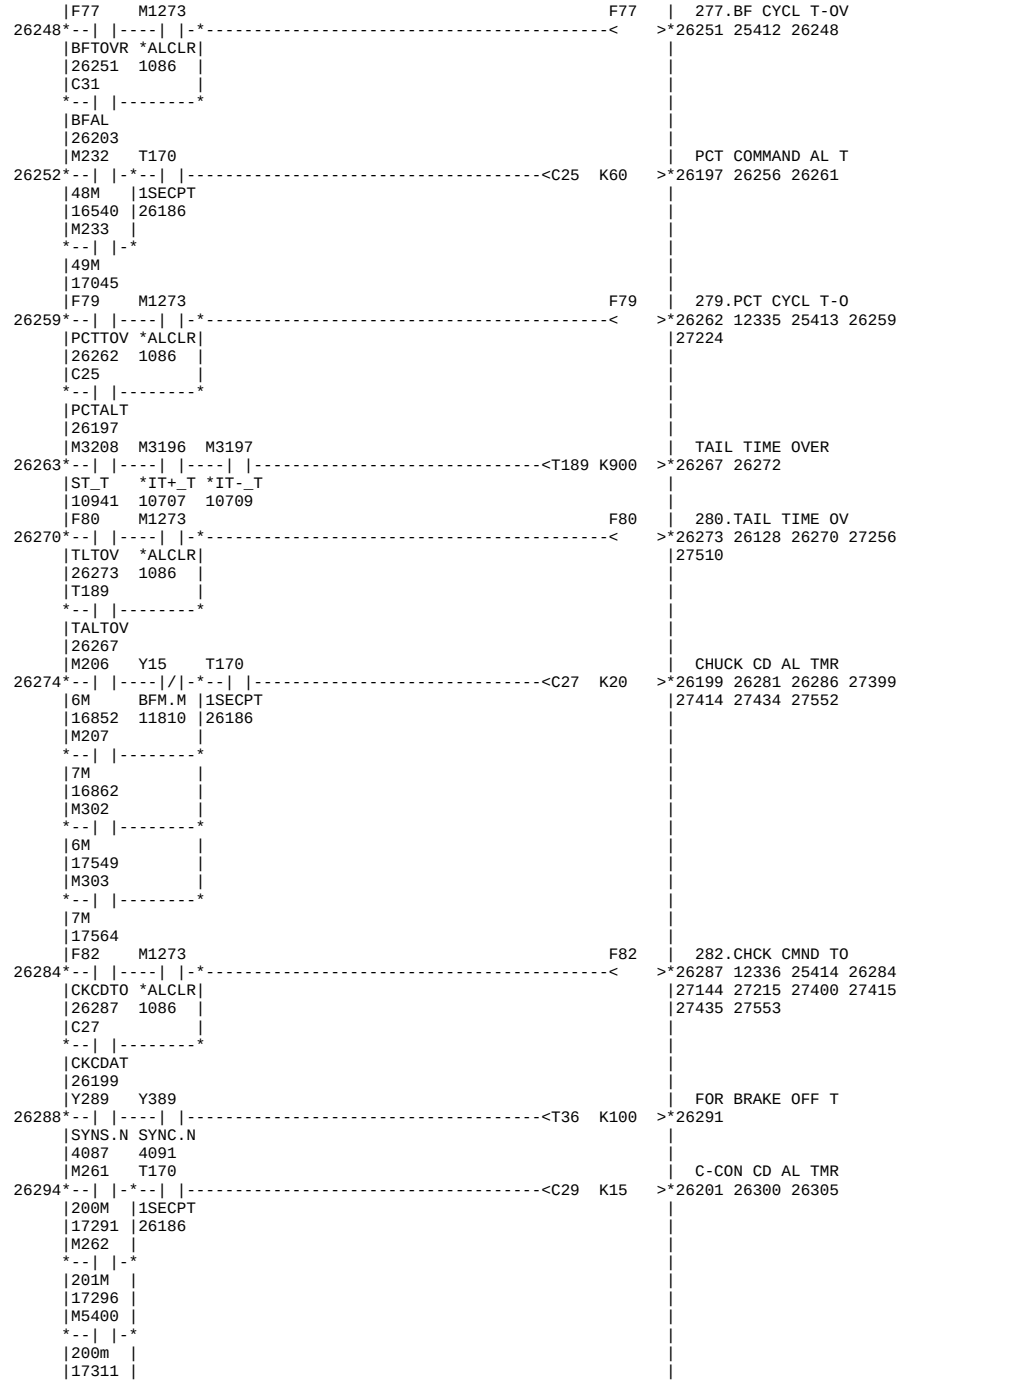

|M434 |
--| |--------
|SPSTHL |
|21547 |
|M5508 |
--| |--------
|SP-RUN
|25750
|M376
--| |----------------------
|
|25711
|M944
--| |----------------------
|S_DIL
|25703
|X108 M6103
--| |----| |---------------
|SPST.B DRINT
| 2266
|F50 M1272
--| |----| |---------------
|SROTIH *ALRST
|25748 25010
|M7036
--| |----------------------
|SPSTM
|2669
|X26 M5571 M8008
--|/|----| |----|/|--------
|SCFT.M SSRRME DEBUG
| 22038
|M430 M7071 M3235 M6472 |
--| |---|/|----|/|----| |-*
|SPST |TL_CND SPICSL J2TA.P
|21472 |11047 25716 13821
|X2D0 |
--| |-
|SPFWD |
| |
|X2D1 |
--| |-
|SPREV
|
|M434 M5508 | SPINDLE RUN DELA
25749*--| |--< >*25750 25098 25587 25723
|SPSTHL
|21547
|M5554 M5509 | SS RUN DELAY
25751*--| |--< >*25752 25100 25588 25708
|SSPSHL
|21940
|M390 M404 M975 M516 L17 M5681 M949 | MILL INHIBITT
25753*--|/|-*--|/|-*--|/|--------*--|/|----| |-*--|/|-*-------< >*25777 25801
UCHOK	CHCL-L	SCHE	CHI-MD 1ST	WKHOLD
4778	4960	5243	4291 3835	5268
M391		M6451 M6450		
*--	/	-* *--	/	----	/	-*	
SSROK SSCT.P SSC.P	
4783	
M404 M975 M5636 L18	
*--	/	--------*--	/	----	/	----		--------*
CHCL-L	SCHE CHI-MD 2ND
4960	5243 4295 3841
M6451 M6450
*--	/	----	/	-*
SSCT.P SSC.P
M951
*--		--*
S-IHT
25614
M7083 T186 M6476
*--		----	/	----		------------------------------*
FLSTLM PRET.T F_TL.P
X11C M90 M6063 M6065 X11C T47 M931 M6120	ML ROT.INHIBIT
25778*--|/|-*--| |-*--|/|-*--|/|-*--|/|----| |-*--|/|-*-------< >*25796 25805
SETUP.	AUTO	L_PIN	LKP_EX	SETUP. MJOG.T	CCE
	14419	2223	2961	22337	2255
M74		T202		M5587	
*--	/	-* *--		-* *--		--------*
TUVB.P	LP_RS	MLST
	2957	22225
M91	M79
*--		--------*--	/	--------*
MANU CLOS.P
14444
X108 M6103 M111
*--		----		----		------------------------------*
SPST.B DRINT M-MODE
2266 5341
T47 M949 M5160 M48 F51	251.ML ROT.INHIB
25797*--		-*--		---------------*--	/	----		----------------< >*25818 22238 22284 22333
MJOG.T	ML-IHT	STAN.P MILL.P	25813 26021
22337	25777	13778 13750
M5587	
*--		-*
MLST	
22225	
M5592	
*--		-*
MLSTHL	
22295	
M5510	
*--		-*
ML-RUN
25822
F39 X245
*--		----	/	---------------*
MLCPAL STL.N
25502
M6120
*--		----------------------*
ML INH
25796
M430 M7071 M3235 M6472
*--		-*--	/	----	/	----		-*
SPST	TL_CND SPICSL J2TA.P	
21472	11047 25716 13821	
X2E0	
*--		-*
MILFWD	
X2E1	
*--		-*
MILREV
F51 M1272
*--		----		---------------*
MROTIH *ALRST
25818 25010
M5592 M5601 M466 M5510	MILL RUN DELAY
25819*--		----		----		-------------------------------------< >*25822 25103 25479 25589
MLSTHL TRRME ENGGED	25800
22295 22371 22508
X252 M91 M6738 X220 M93 M578 M54 M958	AXIS INTERLOCK 1
25823*--| |----| |----| |-*--|/|--------*--| |----|/|----| |--< >*25858 25963
HO.N MANU WHSW	ZP11.N	HOMEOK F IL R SS.P
14444 1488		732 855
Y144 X118	X224 M53
*--		-*--		--------*--	/	----		-*
RPD.L	#NAME? ZP15.N Y.P
14363	
M7145	
*--		-*
JOGS	
14353	
Y145	
*--		-*
HOME.L
14358

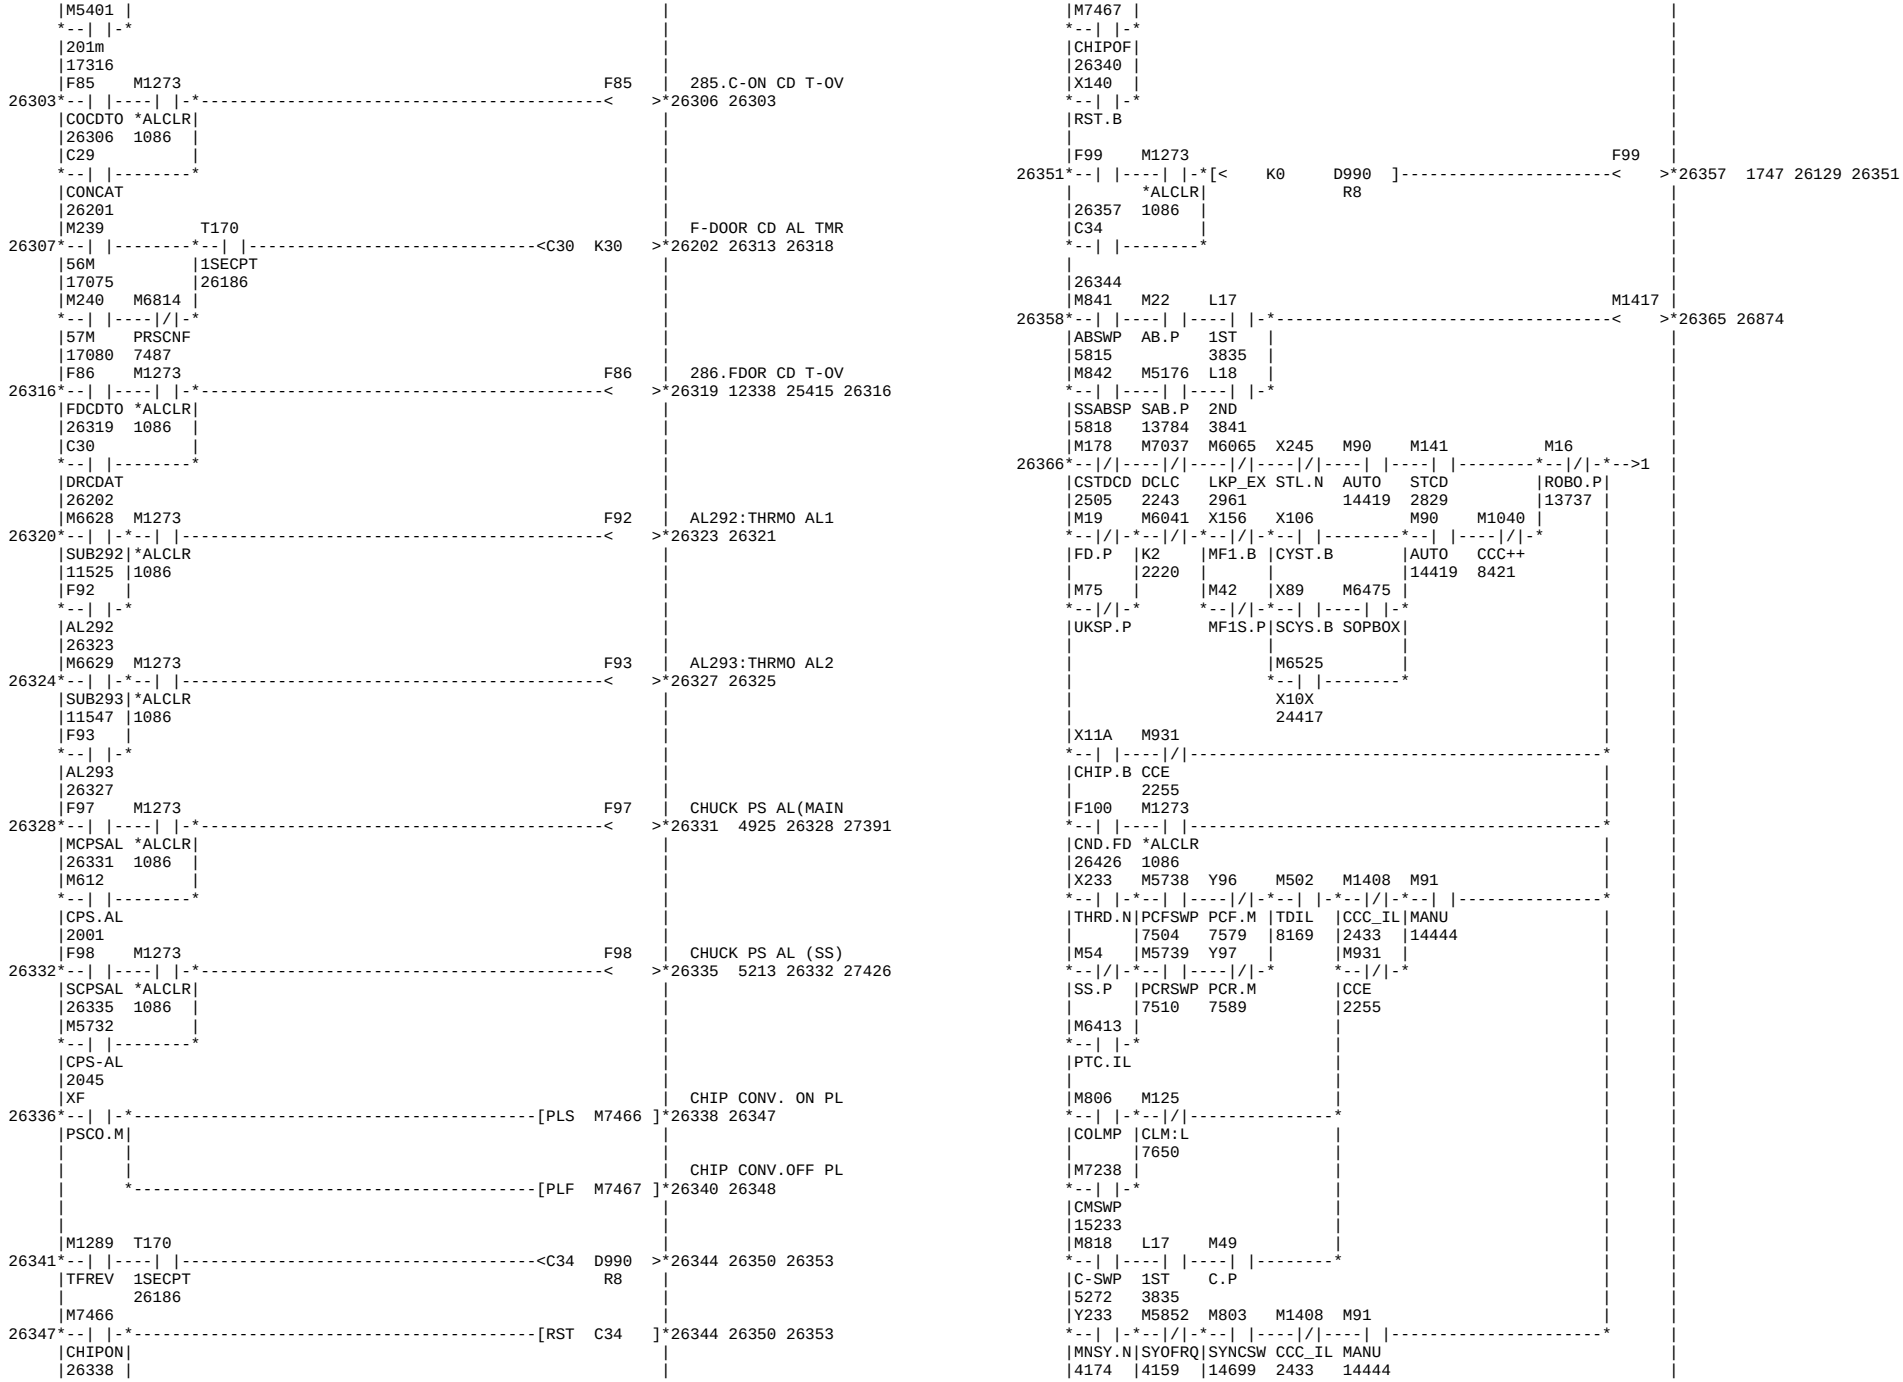

M6735 X252 M91 X223
XHSW HO.N MANU ZP14.N
1470 14444
M6736
ZHSW
1476
M6739 M53
YHSW Y.P
1494
Y144 X112
RPD.L #NAME?
14363
M7145 X113
JOGS #NAME?
14353
Y145 M7130 M53
HOME.L Y.P
14358
X252 M91 M6738 M54 Y213 M6756 W AXIS INTERLOCK
25859 25886 25966
HO.N MANU WHSW SS.P *IT4.N
14444 1488 9092
Y144 X118
RPD.L #NAME?
14363
M7145 X117
JOGS #NAME?
14353
Y145
HOME.L
14358
X117 M501 M93 Y144 M54
#NAME? TDRE HOMEOK RPD.L SS.P
8149 732 14363
M1282 L18 Y312 M54 M6450
C-CW.B 2ND *IT3 SS.P SSC.P
14634 3841 9070
M1284 M6451
SSCT.P
CCCW.B
14695
X117 M54 Y14D M6631 M6106 AXIS INTERLOCK 2
25887 25910 25967
#NAME? SS.P H*100 ILYME1
14410 2277
X118 Y147 M6103
#NAME? H*10.L DRINT
14407 2266
X115 M114 M53 Y146
#NAME? X-ZRME Y.P H*1.L
710 14404
X116 X156 Y144
#NAME? MF1.B RPD.L
14363
X111 Y145
#NAME? HOME.L
14358
X112
#NAME?
X113
#NAME?
X114
#NAME?
M14 M6472 X114 Y20 M1279 M1378 WORK REST INTERL
25911 25934 9061 25923 25968
R50-6 J2TA.P #NAME? SSCL.M ON
13821 23296 585
M14 Y31 X114
R50-6 WRJ.SL #NAME?
27728
M90 X244 X140
AUTO OP.N RST.B
14419
M1378 M91 X113 Y20
WRILAL MANU #NAME? SSCL.M
25934 14444 23296
X114 Y31
#NAME? WRJ.SL
27728
M404 M5681 Y144 M1282 M100 F52 252.AXIS INTERLO
25935 25982 12332
CHCL-L WKHOLD RPD.L C-CW.B RDY
4960 5268 14363 14634 533
Y144 T26 M1284
RPD.L C-CL.T CCCW.B
14363 22768 14695
M7145
JOGS
14353
X112 Y145 M501 M93
#NAME? HOME.L TDRE HOMEOK
14358 8149 732
X114
#NAME?
M1282 M49
C-CW.B C.P
14634
M1284
CCCW.B
14695
M1283
C-ON.B
14666
M7130 M53
Y.P
M931 X23F M90
CCE DEN2.N AUTO
2255 14419
M958 X140
AXIL1 RST.B
25858
M6756
B IL
25886

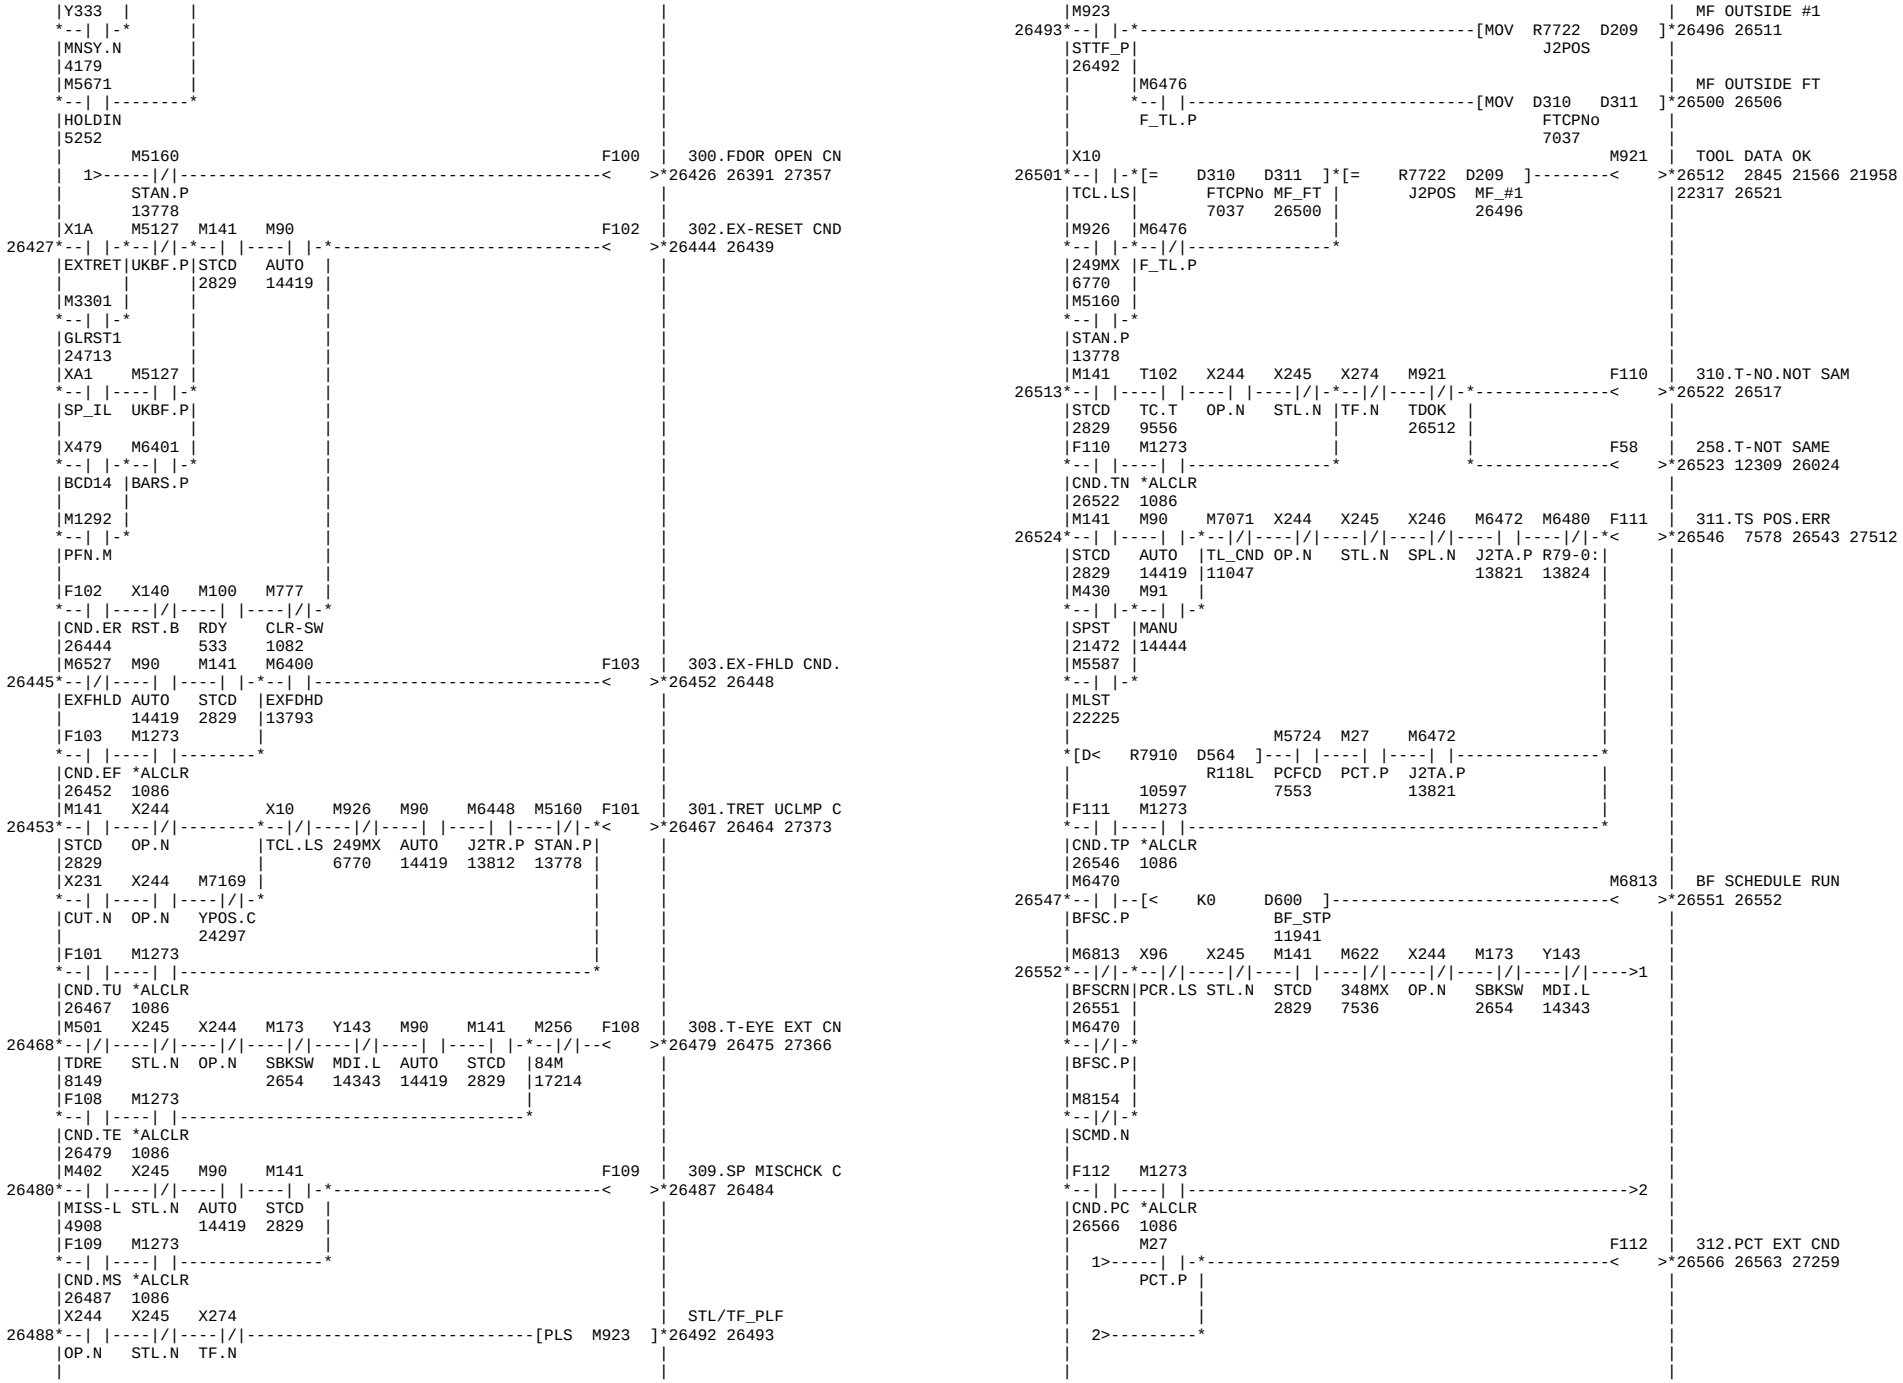

M6106
AXIL2
25910
M1378
WRILAL
25934
M1282 L17 Y212
C-CW.B 1ST *IT3.N
14634 3835 9065
M1284 L18 Y312 M6450
CCCW.B 2ND *IT3 SSC.P
14695 3841 9070
M6451
SSCT.P
M6105 M6108 M501 M5169 M91 M6635 AL.256 CONDITION
25983 25997 26011
TSWP MNIRPT TDRE TRTMF1 MANU
7162 9396 8149 14444
X156 M366
MF1.B OSPX
3617
X274 M7169 M3067 X23F
TF.N YPOS.C T_COIN DEN2.N
24297 9492
M931 M91 M6635 M6448 F56 256.TURRET ROT I
25998 26016 6758 6787 9335
CCE MANU TINH.1 J2TR.P 9375 9417 9475 12308
2255 14444 25997 13812 26012 26022
M731
SKPON
6723
M5605 M91
MLSTOP MANU
22461 14444
X224 M1281 M53
ZP15.N OTRS.B Y.P
1040
M3306 M6443
AMUP.R 64GL_P
24723
F56 M1272
TROTIH *ALRST
26016 25010
F50 M954 FEED HOLD ALARM
26017 26030 26774
SROTIH
25748
M7086 M48
LUBALM MILL.P
26078 13750
F51
MROTIH
25818
F56
TROTIH
26016
F57
26114
F58
TNO.AL
26523
F45
BFDRAL
25560
F48
EXC.AL
25573
M5263
AL343
26731
M5285
AL365
27102
M5287
AL367
27138
T27
26031 K0 D37 [MOV K1200 D37] 26036 2149 26033
T27
26036
M6983 X9A M7075 GREASE PSW ALARM
26037 26046 2077 26043 26055
GRSCPL GRS.PS
2100
M5160 X119
STAN.P LOCK.B
13778
M7075 M1273
GRSPSW *ALCLR
26046 1086
M6989 M6986 M7074 GREASE ALARM
26047 26053 2076 26049 26054
GRSRMD GRSRSE
2157 2131
M7074 M6987 M7056
GRSALM GRSFIN
26053 2140 2142
M7074 M101 M6417 F60 260.LUBE MALF
26054 26061 2083 26057 26062
GRSALM RST LUBE.P 26124 27154 27455
26053 543
M7075
GRSPSW
26046
F60 M1273
WYLBAL *ALCLR
26061 1086
F60 F60 @PLS
26062 [PLS M7044] 26064 2110
WYLBAL
26061
X90 Y12 LUBE PSW. DELAY
26065 T225 K600 26068 26073
LUB.PS LUBE.M
2185
M1273 M7086 M6417 M7086 LUBE ALARM
26071 26078 2160 2216 12294
*ALCLR LUBALM LUBE.P 22239 25611 25624 26018
1086 26078 26072 26079 26792 27473
T225
LEBE.T
26068

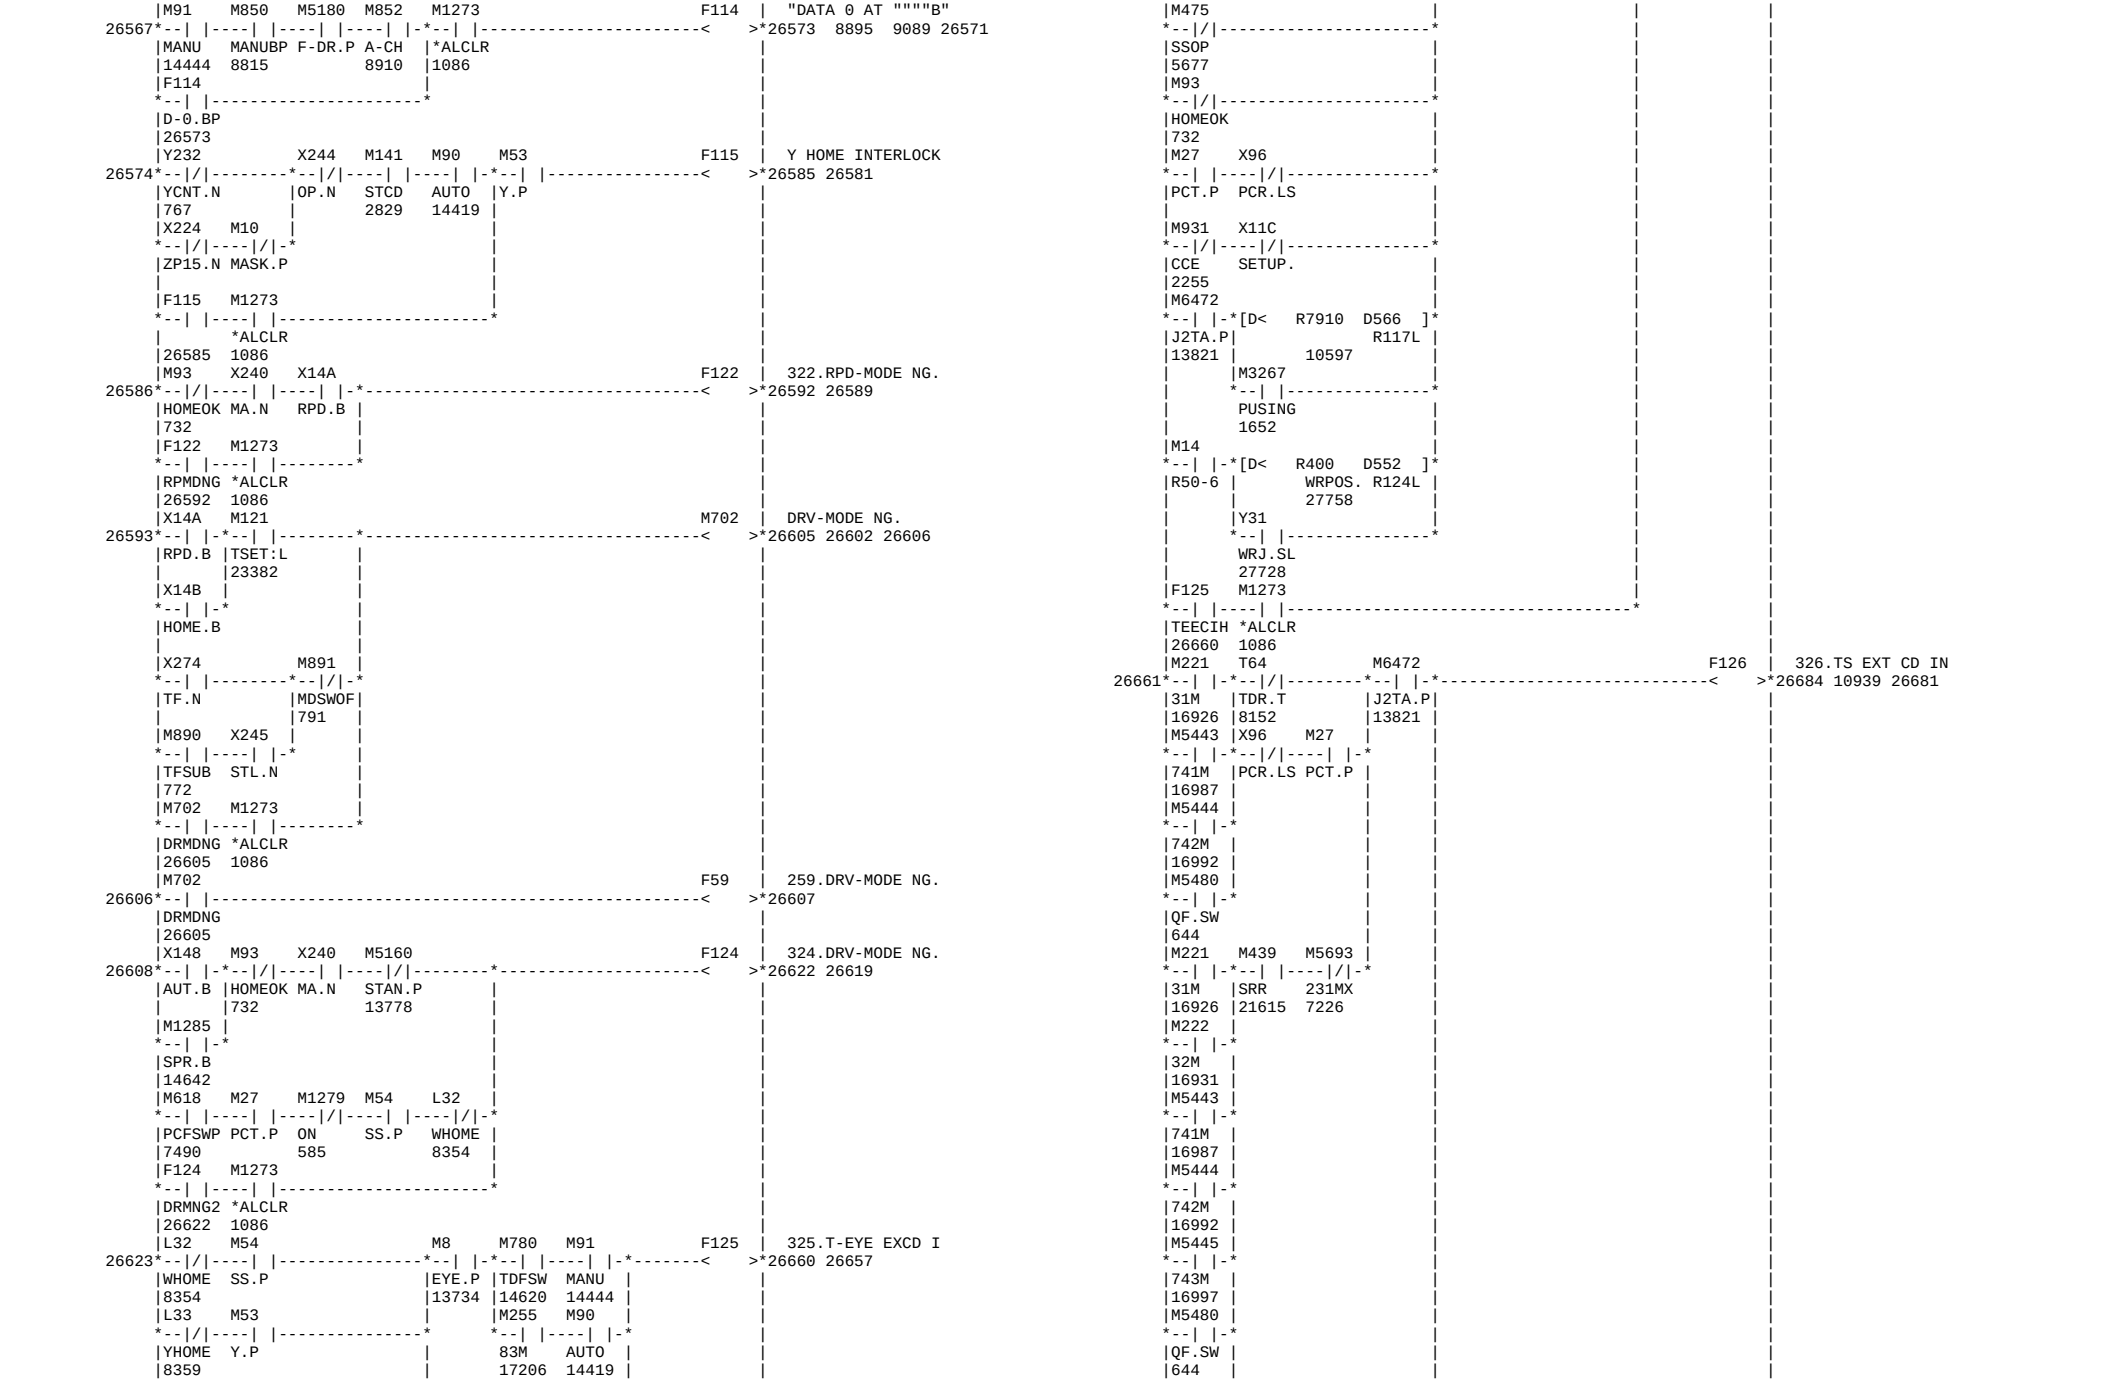

|X90 M7080 |
--| |----| |-
|LUB.PS LUBPLS
| 2188
|M7086 M48 F61 | 261.MILL LUBE MA
26079*--| |--------*--| |-------------------------------------< >*26084 26080
|LUBALM |MILL.P
|26078 |13750
|F61 M1273 |
--| |----| |-
|MILBAL *ALCLR
|26084 1086
|X5 M100 T182 M1041 | THERMAL TRIP D.T
26085*--| |---------------*--| |----| |----|/|---------<T196 K5 >*26104 26109
|MAL8.M |RDY NFB.T NFB++
| |533 25017 8424
|X7 |
--| |---------------
|MAL8.M |
| |
|X90F |
--| |---------------
|MAL8.M |
| |
|X88 |
--| |---------------
|MAL8.M |
| |
|M6450 M6451 X24 |
--|/|----|/|----| |-
|SSC.P SSCT.P SCHC.M|
| |
|M6450 M6451 X25 |
--|/|----|/|----| |-
|SSC.P SSCT.P SCHO.M|
| |
|M6427 X83 |
--| |----| |--------
|SPFL.P RPTHR
|
|F64 M1273 F64 | 264.THR TRIP(SGL
26107*--| |----| |-*---< >*26112 12302 26107 26126
|THR2AL *ALCLR|
|26112 1086 |
|T196 X240 |
--| |----| |-
|TH2.T MA.N
|26104
|M187 F57 | 257.NO USE M COD
26113*--| |---< >*26114 26023
|NSMCDE
|18630
|M6194 M6740 M6741 M5163 M5278 | AL358 HIGH PRESS
26115*--|/|-*--| |----| |-*--| |-----------------------------< >*26123 26119 26132
|X80MGC|CMMTON HPCMMD|HPCM.P
|3450 |7736 7744 |
|M6196 | |
--|/|- |
|X81MGC |
|3459 |
|M5278 M1273 |
--| |----| |--------
|HPCALM *ALCLR
|26123 1086
|F60 M86 | SINGLE STEP ALAR
26124*--| |--------*---< >*26138 2655 9191
|WYLBAL |
|26061 |
|F63 |
--| |--------
|TLLBAL |
| |
|F64 |
--| |--------
|THR2AL |
|26112 |
|F67 |
--| |--------
|BSLBAL |
| |
|F80 |
--| |--------
|TLTOV |
|26273 |
|F99 |
--| |--------
| |
|26357 |
|M5289 |
--| |--------
|AL369 |
|26797 |
|X230 M5278 |
--| |----| |-
|RPN.N HPCALM|
| 26123 |
|X245 M5280 |
--|/|---| |-*
|STL.N |SPCOOL
| |27087
|X274 |
--| |-
|TF.N
|
|M458 M468 M5820 | ORIENT ALARM T
26139*--| |----|/|--------*--|/|-----------------------<T168 K300 >*26147 26152
|ORT ORTALV |511MX
|20793 20591 |4131
|M6724 M5568 M5621 |
--| |----|/|----|/|-
|ORT2.M OTA_L ORFN
|21166 21197 20837
|F70 M1273 F70 | 270.SP-ORT T-OVE
26150*--| |----| |-*---< >*26153 12334 20781 25410
|ORTOVR *ALCLR| |26150
|26153 1086 |
|T168 |
--| |--------
|ORTALT
|26147
|M3083 M3079 X10B X10C M91 M6448 | TOOL ALARM T
26154*--| |----|/|----|/|----|/|----| |----| |-*-------<T169 K50 >*26168 26173
MTC_SH TR_MOD TSEF.B TSER.B MANU J2TR.P	
9363 15564 14444 13812	
X274 X23F X244 M3069 M90 M931	
--| |----| |----| |----|/|----| |----| |-
TF.N DEN2.N OP.N T_PSFN AUTO CCE	
9545 14419 2255	
F72 M1273 X401 M5160 F72	272.T-COMND T-OV
26171*--| |----| |---------------*--| |----|/|----------------< >*26183 6725 9316 9359
TCDTOV *ALCLR |COMRDY STAN.P	9614 12310 26171 26776
26183 1086	13778	27149 27188 27199 27372
T169	27487 27493
--| |----------------------
T-ALT
26168
M3024 M3048 M3042 M6448
--| |---| |----|/|----| |-*
AL1.T	ST_T JOGS_T J2TR.P
	9418 9630 13812
M3025
--| |-
AL2.T
M3026
--| |-
AL4.T
T170	1 SEC PULSE T
26184*--|/|---<T170 K10 >*26186 2082 26184 26243
1SECPT	26254 26279 26298 26311
26186	26342

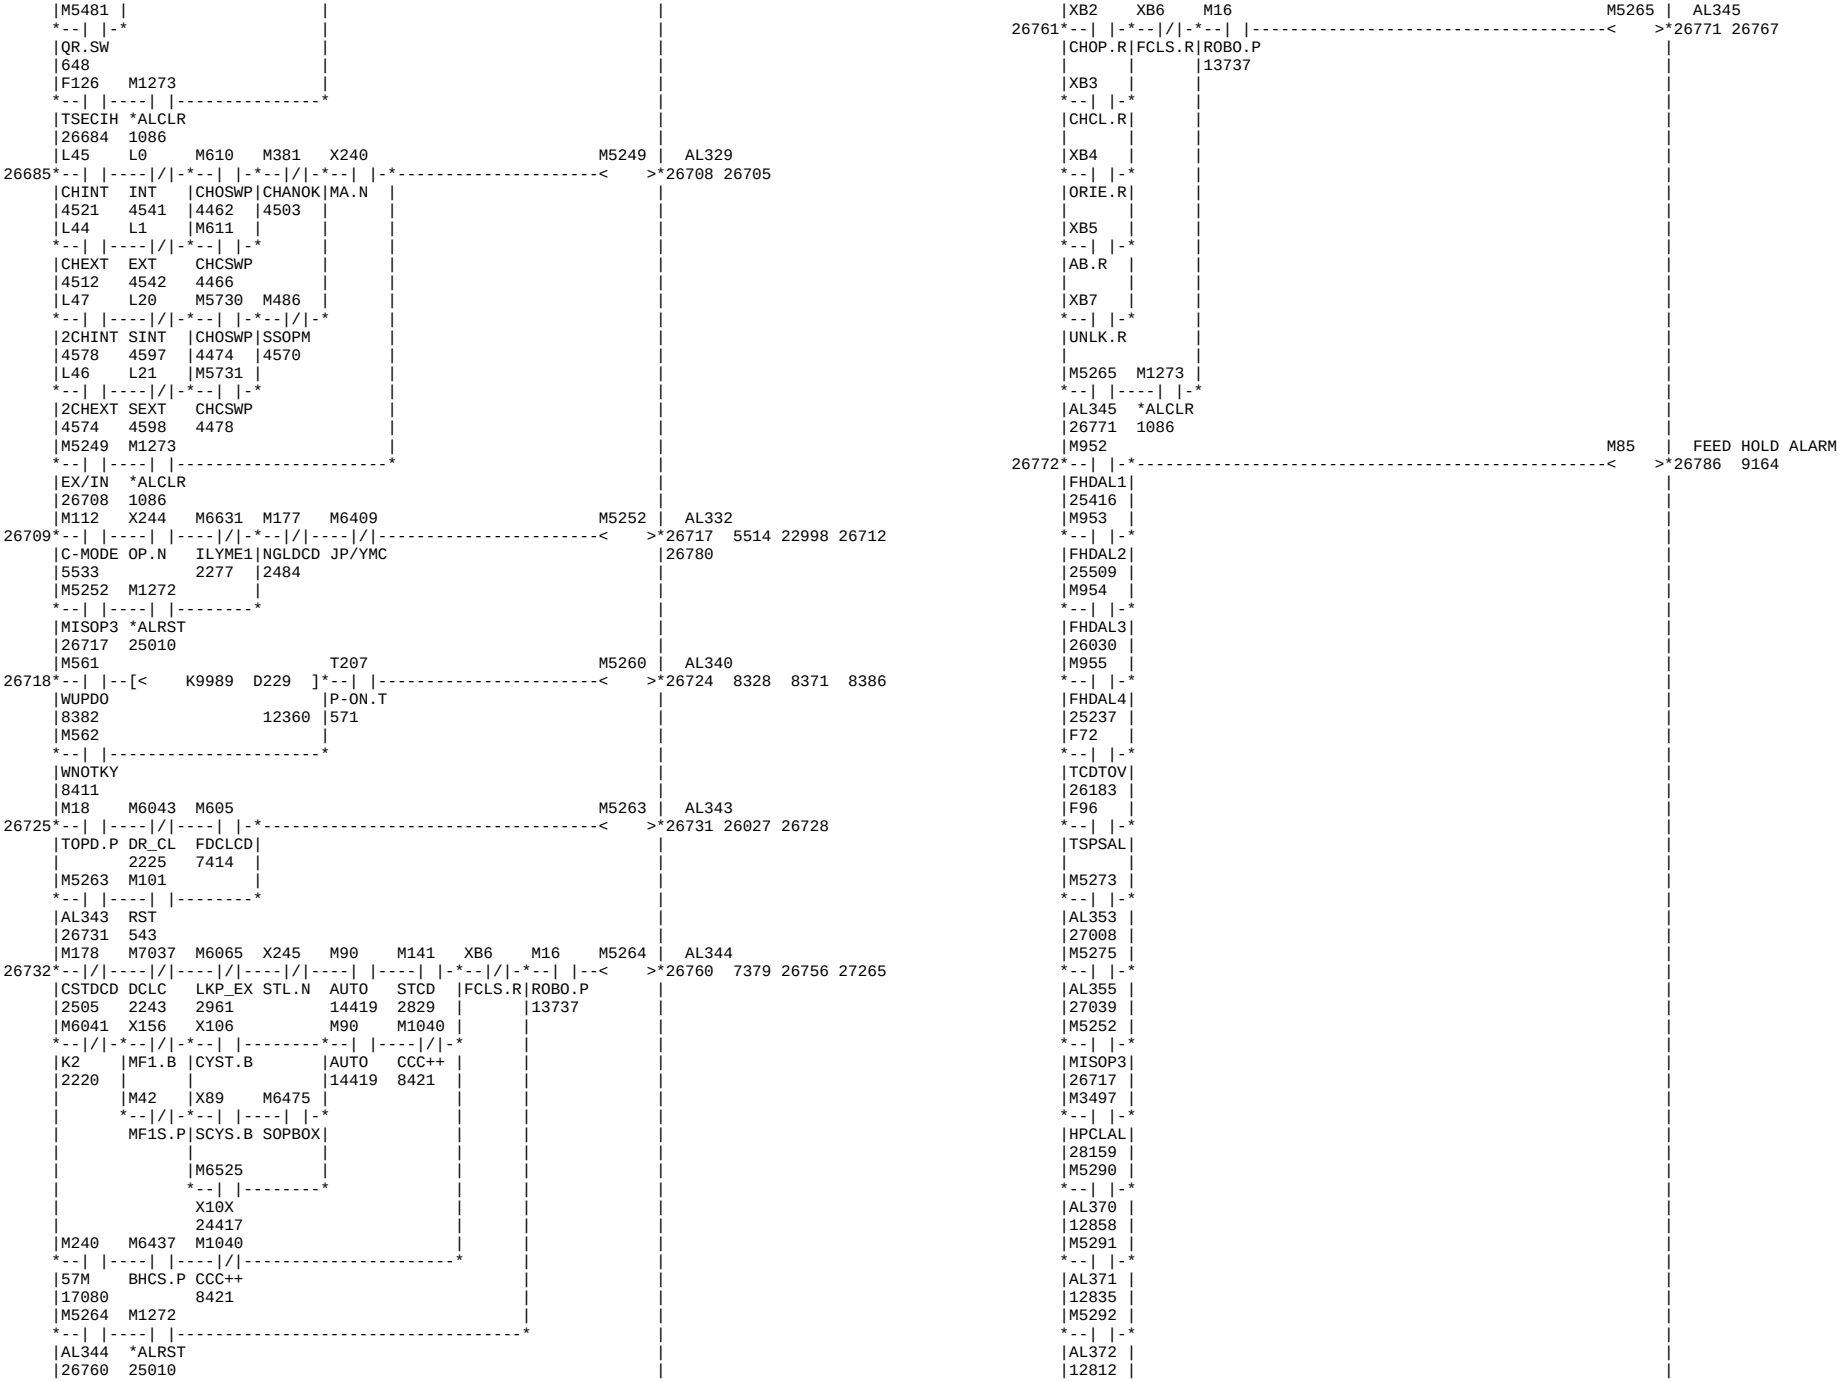

X278 X279 X27A X27B X270 X271 X272 X273
mf1.N mf2.N mf3.N mf4.N MF1.N MF2.N MF3.N MF4.N
PCT COMMAND AL T
TS COMMAND AL TM
CHUCK CD AL TMR
G-SFT CD AL TMR
C-CON CD AL TMR
F-DOOR CD AL TMR
BAR FEEDER AL TM
ALM275 TIMER -L
ALM275 TIMER -L
AL275 TIMER
BAR FEEDER AL TM

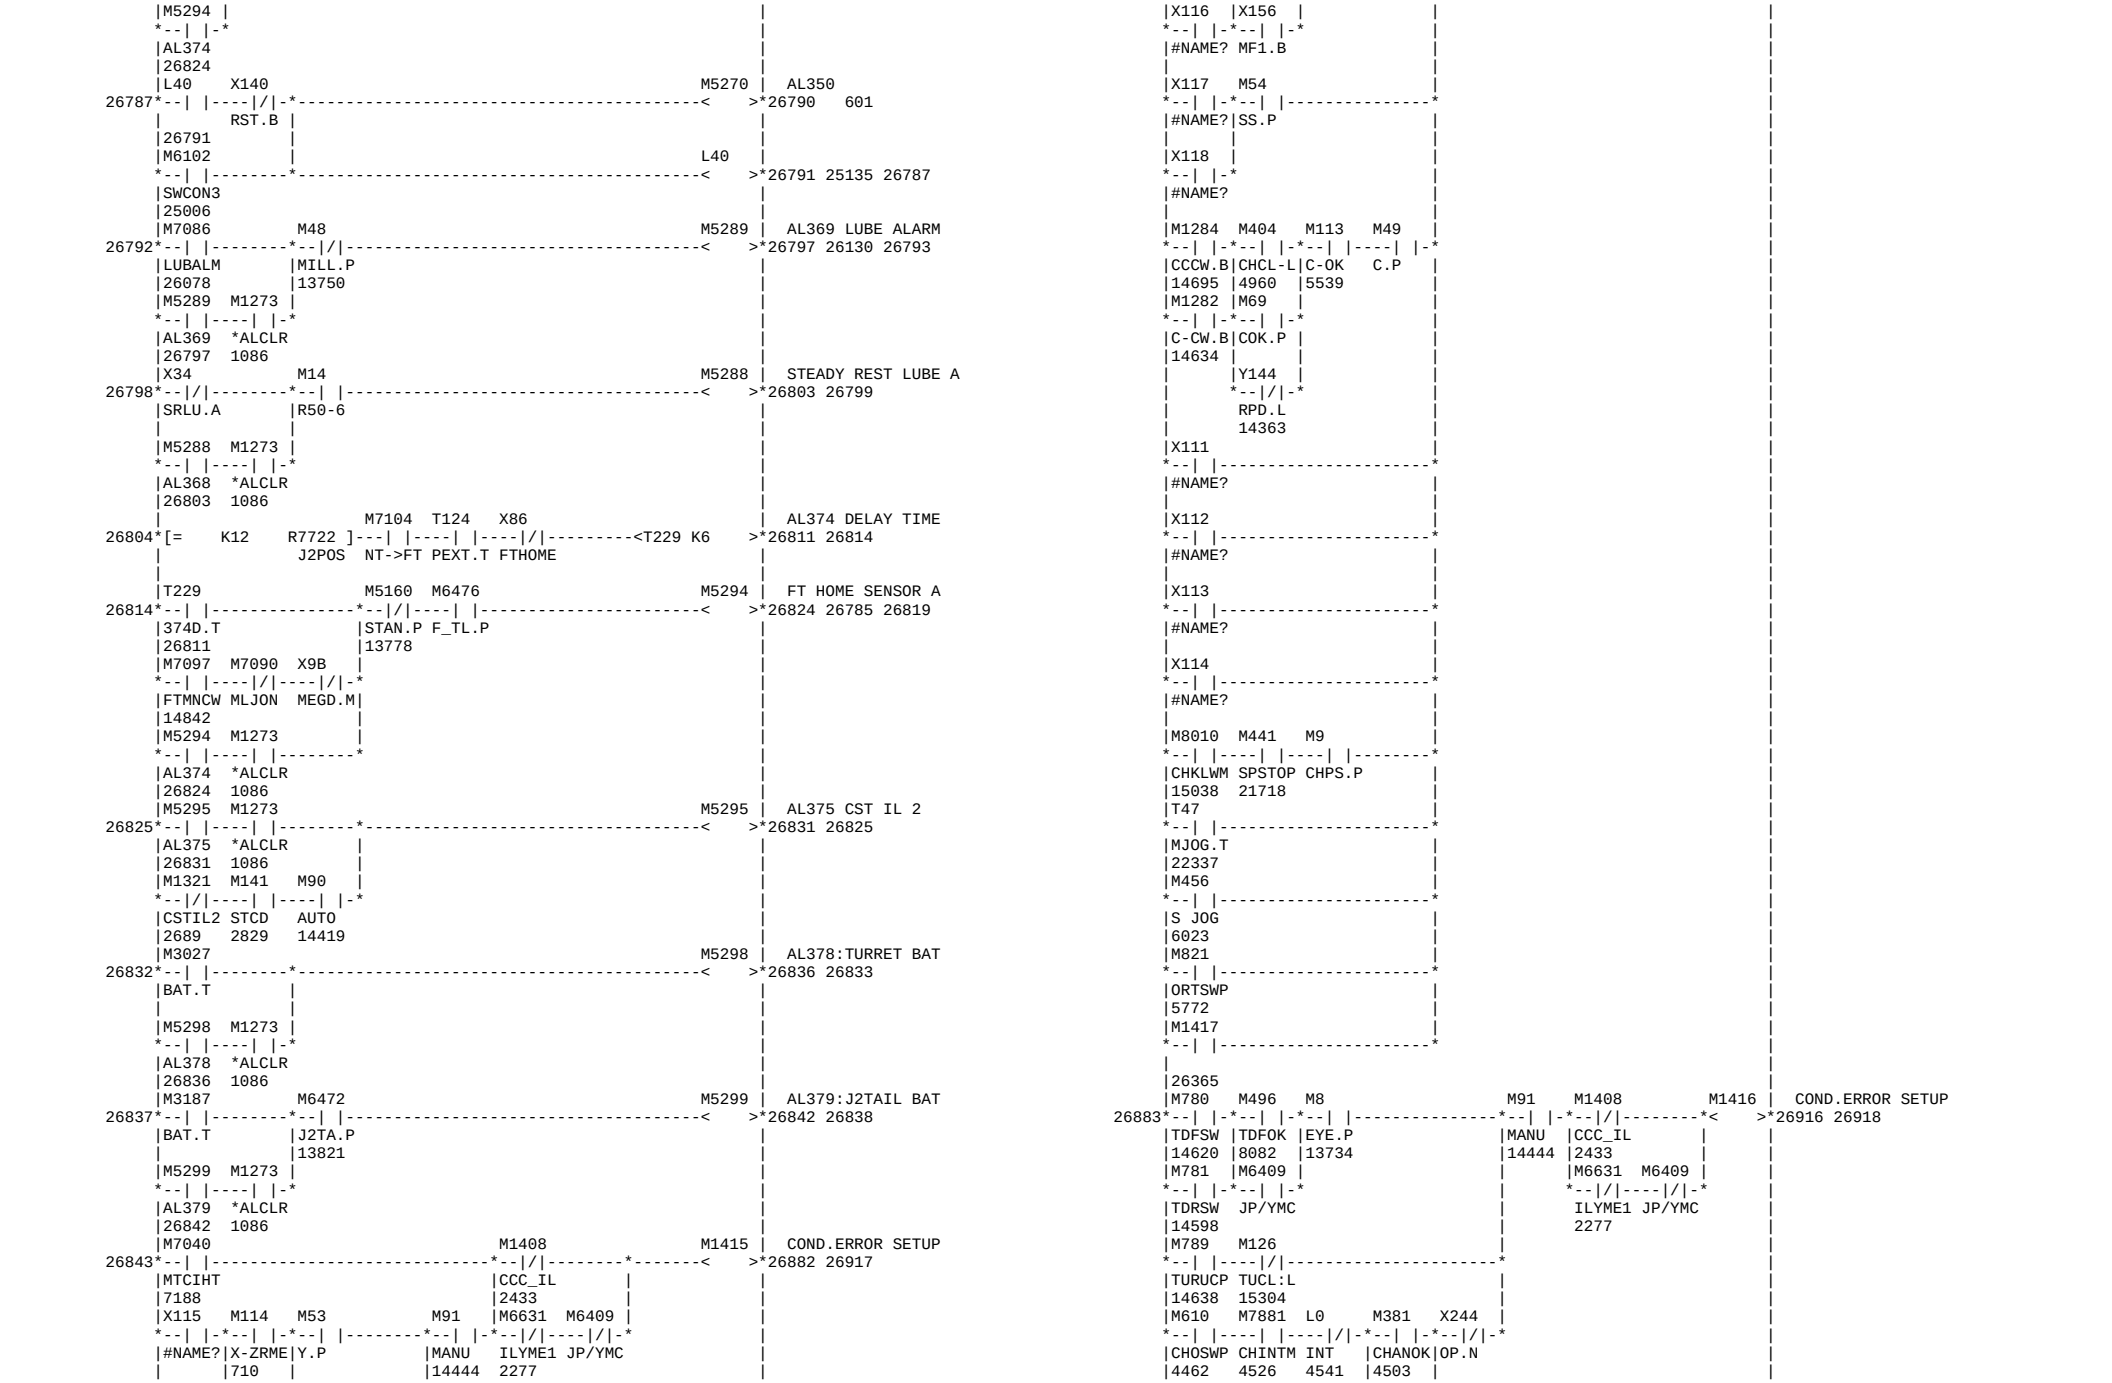

F77 M1273
F79 M1273
F80 M1273
F82 M1273
PCT COMMAND AL T
CHUCK CD AL TMR
TAIL TIME OVER
CHUCK CD AL TMR
C-CON CD AL TMR

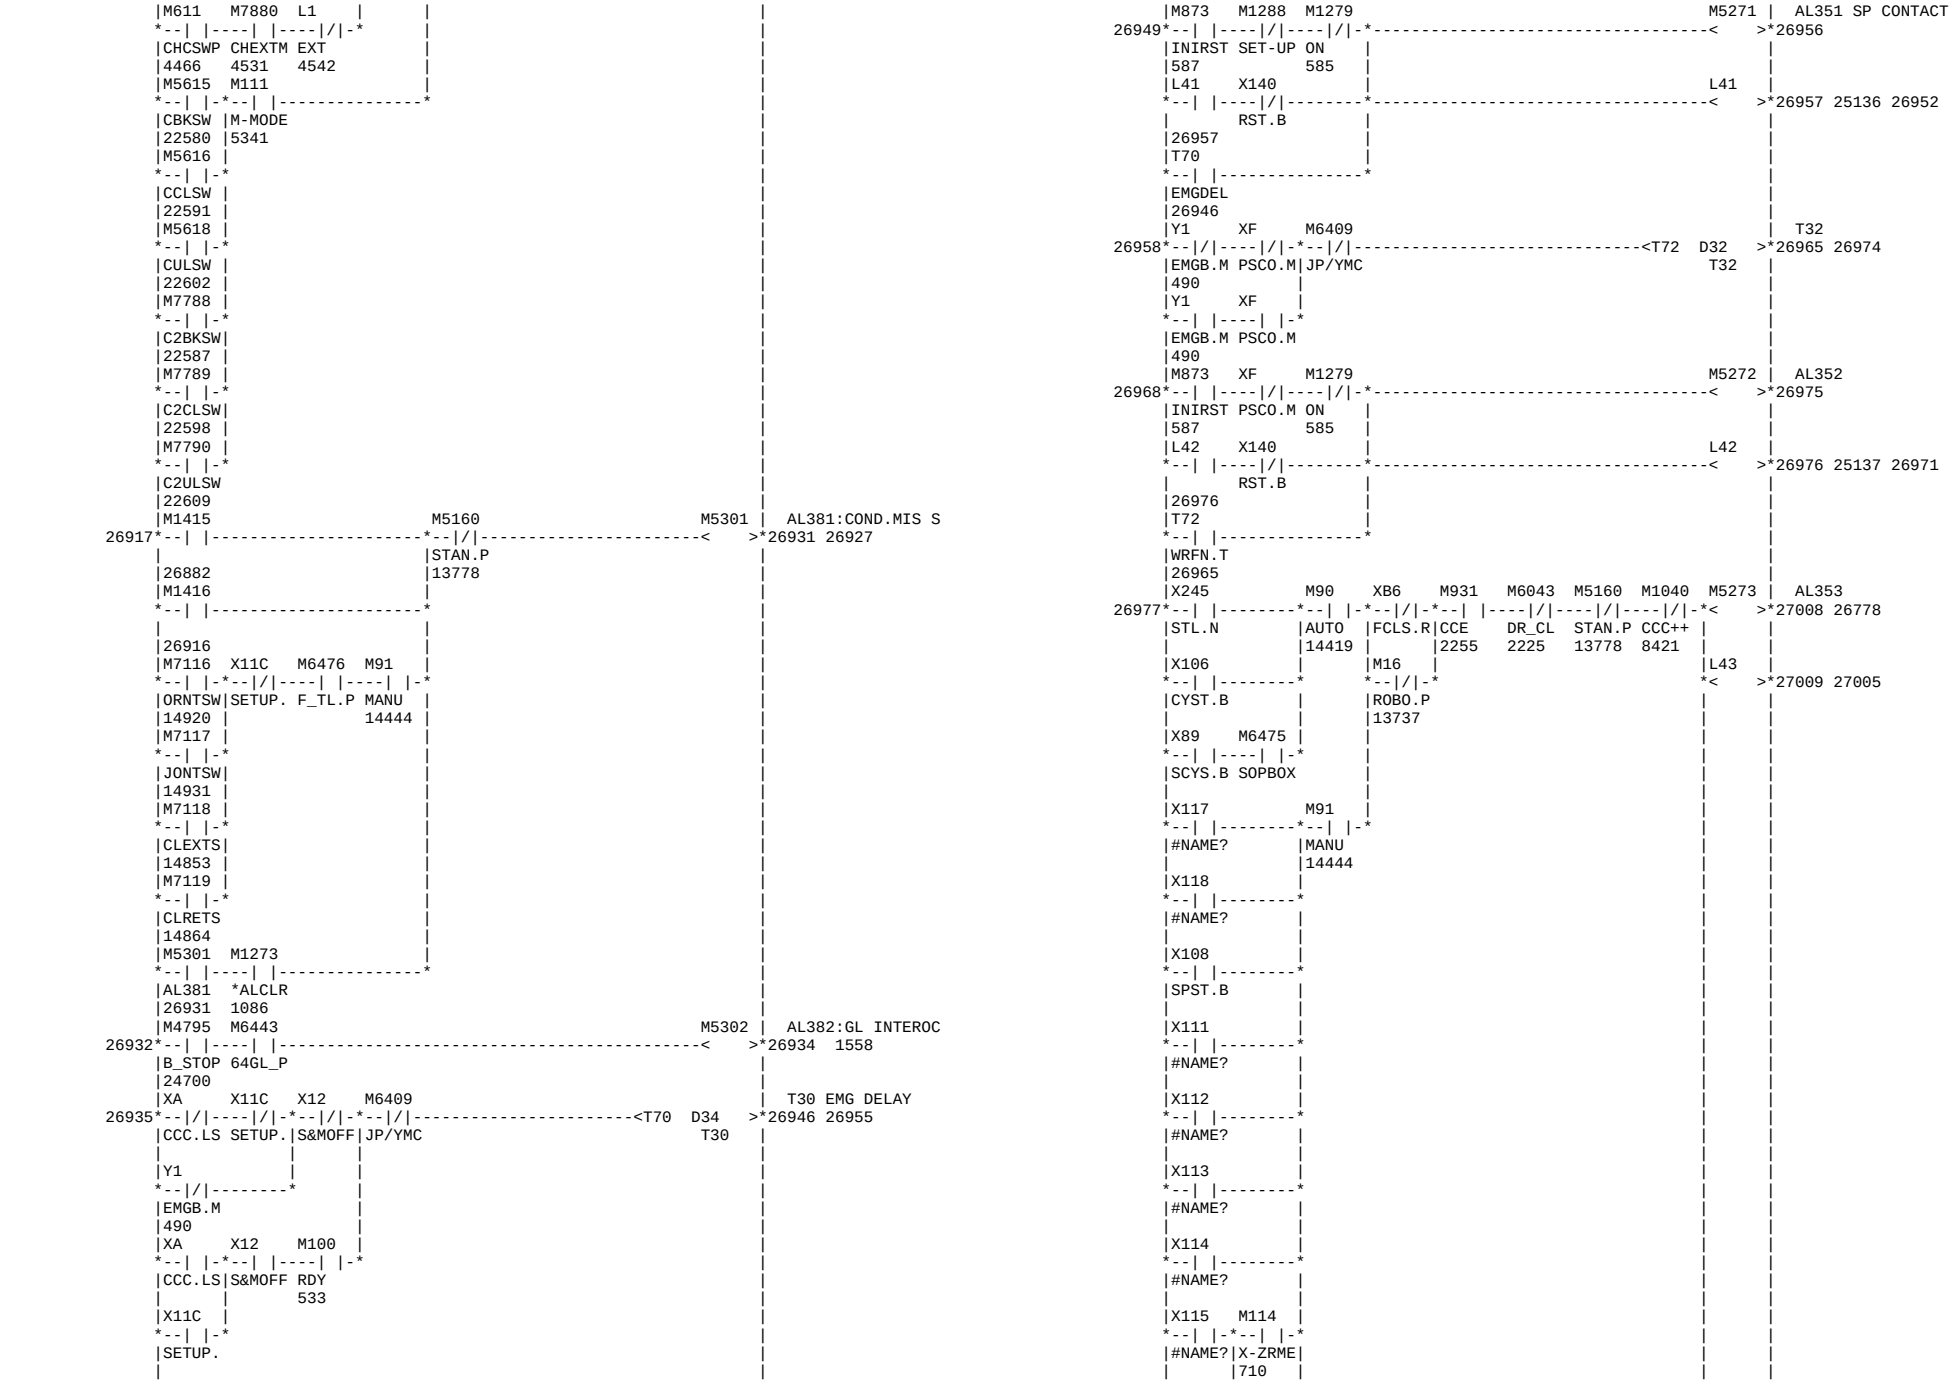

|M5401 |
--| |-
|201m
|17316
|F85 M1273 F85 | 285.C-ON CD T-OV
26303*--| |----| |-*<
>*26306 26303
|COCDTO *ALCLR|
|26306 1086 |
|C29 |
--| |--------
|CONCAT
|26201
|M239 T170 | F-DOOR CD AL TMR
26307*--| |--------*--| |----------<C30 K30 >*26202 26313 26318
|56M |1SECPT
|17075 |26186
|M240 M6814 |
--| |----|/|-
|57M PRSCNF
|17080 7487
|F86 M1273 F86 | 286.FDOR CD T-OV
26316*--| |----| |-*<
>*26319 12338 25415 26316
|FDCDTO *ALCLR|
|26319 1086 |
|C30 |
--| |--------
|DRCDAT
|26202
|M6628 M1273 F92 | AL292:THRMO AL1
26320*--| |-*--| |<
>*26323 26321
|SUB292|*ALCLR
|11525 |1086
|F92 |
--| |-
|AL292
|26323
|M6629 M1273 F93 | AL293:THRMO AL2
26324*--| |-*--| |<
>*26327 26325
|SUB293|*ALCLR
|11547 |1086
|F93 |
--| |-
|AL293
|26327
|F97 M1273 F97 | CHUCK PS AL(MAIN
26328*--| |----| |-*<
>*26331 4925 26328 27391
|MCPSAL *ALCLR|
|26331 1086 |
|M612 |
--| |--------
|CPS.AL
|2001
|F98 M1273 F98 | CHUCK PS AL (SS)
26332*--| |----| |-*<
>*26335 5213 26332 27426
|SCPSAL *ALCLR|
|26335 1086 |
|M5732 |
--| |--------
|CPS-AL
|2045
|XF | CHIP CONV. ON PL
26336*--| |-*----------[PLS M7466]*26338 26347
|PSCO.M|
| | | CHIP CONV.OFF PL
| *----------[PLF M7467]*26340 26348
|
|M1289 T170
26341*--| |----| |----------<C34 D990 >*26344 26350 26353
|TFREV 1SECPT R8 |
| 26186
|M7466
26347*--| |-*----------[RST C34]*26344 26350 26353
|CHIPON|
|26338 |
|M7467 |
--| |-
|CHIPOF|
|26340 |
|X140 |
--| |-
|RST.B
|
|F99 M1273 F99 |
26351*--| |----| |-*[< K0 D990]----------<
>*26357 1747 26129 26351
| *ALCLR| R8
|26357 1086 |
|C34 |
--| |--------
|
|26344
|M841 M22 L17 M1417 |
26358*--| |----| |----| |-*----------<
>*26365 26874
|ABSWP AB.P 1ST |
|5815 3835 |
|M842 M5176 L18 |
--| |----| |----| |-
|SSABSP SAB.P 2ND
|5818 13784 3841
|M178 M7037 M6065 X245 M90 M141 M16
26366*--|/|----|/|----|/|----|/|----| |----| |--------*--|/|-*-->1
CSTDCD DCLC LKP_EX STL.N AUTO STCD	ROBO.P
2505 2243 2961 14419 2829	13737
M19 M6041 X156 X106 M90 M1040	
--|/|---|/|-*--|/|-*--| |--------*--| |----|/|-*
FD.P	K2	MF1.B	CYST.B	AUTO CCC++
	2220			14419 8421
M75		M42	X89 M6475	
--|/|- *--|/|-*--| |----| |-*
UKSP.P MF1S.P	SCYS.B SOPBOX	
|M6525	
*--		--------*
X10X
24417
X11A M931
*--		----	/	----------*
CHIP.B CCE
2255
F100 M1273
*--		----		----------*
CND.FD *ALCLR
26426 1086
X233 M5738 Y96 M502 M1408 M91
--| |---| |----|/|-*--| |-*--|/|-*--| |----------*
THRD.N	PCFSWP PCF.M	TDIL	CCC_IL	MANU
	7504 7579	8169	2433	14444
M54	M5739 Y97		M931	
--|/|---| |----|/|-* *--|/|-*
SS.P	PCRSWP PCR.M	CCE
	7510 7589	2255
M6413	
*--		-*
PTC.IL
M806 M125
*--		-*--	/	----------*
COLMP	CLM:L
	7650
M7238
*--		-*
CMSWP
15233
M818 L17 M49
*--		----		----		--------*
C-SWP 1ST C.P
5272 3835
Y233 M5852 M803 M1408 M91
--| |---|/|-*--| |----|/|----| |----------*
MNSY.N	SYOFRQ	SYNCSW CCC_IL MANU
4174	4159	14699 2433 14444

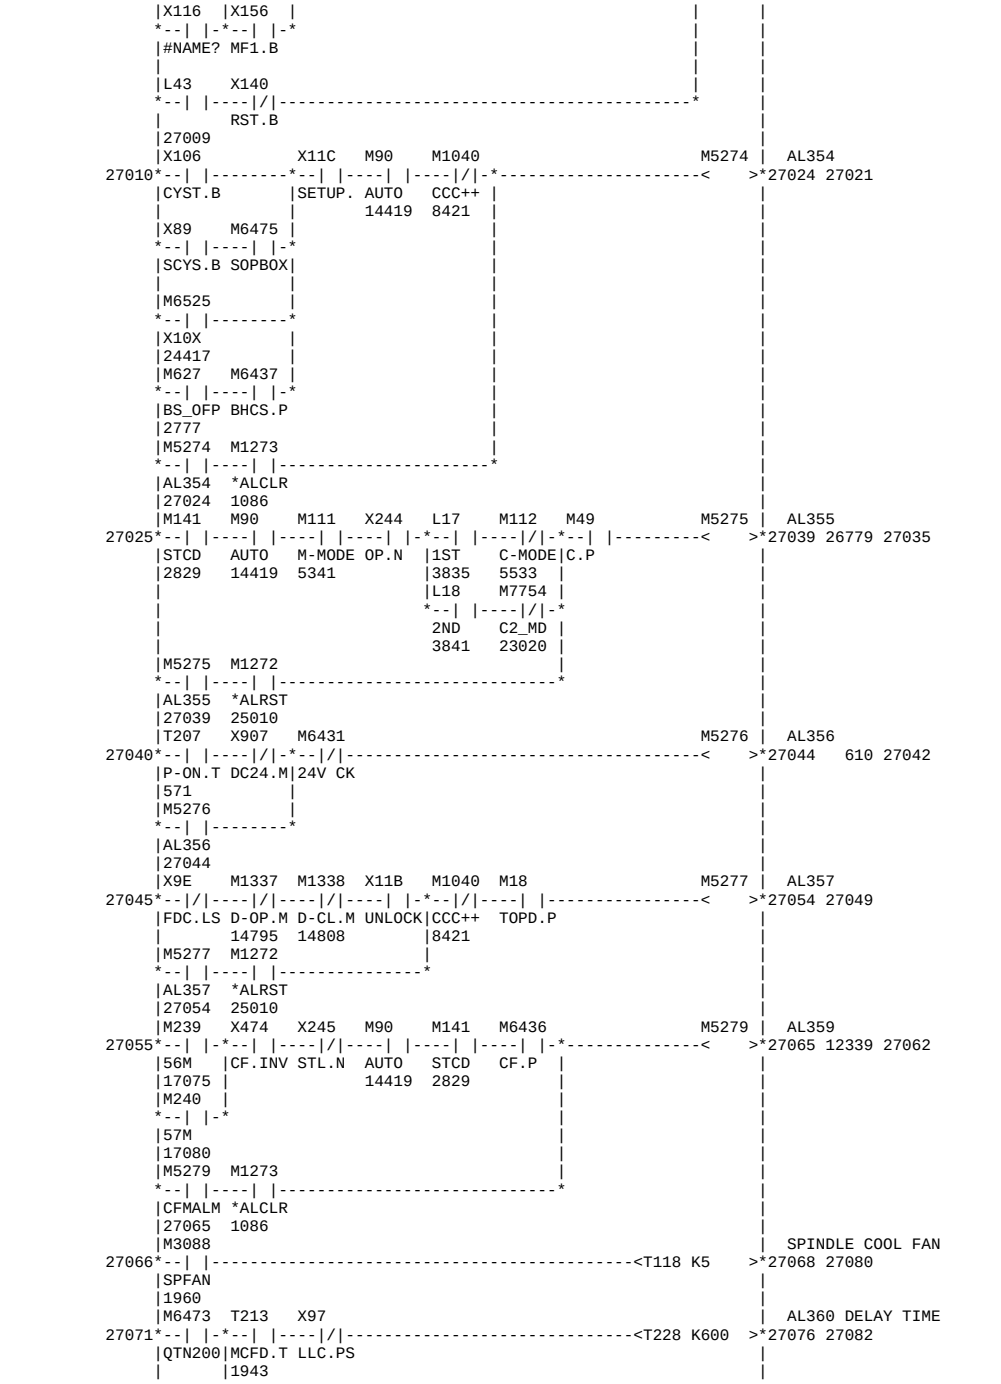

|Y333 | | |
--| |- | |
MNSY.N	
4179	
M5671	
*--		--------*
HOLDIN
5252
M5160 F100	300.FDOR OPEN CN
1>-----	/	----------<
STAN.P
13778
X1A M5127 M141 M90 F102	302.EX-RESET CND
26427*--| |-*--|/|-*--| |----| |-*----------<
EXTRET	UKBF.P	STCD AUTO
		2829 14419
M3301		
--| |-	
GLRST1	
24713	
XA1 M5127	
--| |----| |-
SP_IL UKBF.P	
X479 M6401	
--| |---| |-*
BCD14	BARS.P
M1292	
*--		-*
PFN.M
F102 X140 M100 M777
--| |----|/|----| |----|/|-
CND.ER RST.B RDY CLR-SW
26444 533 1082
M6527 M90 M141 M6400 F103	303.EX-FHLD CND.
26445*--|/|----| |----| |-*--| |----------<
EXFHLD AUTO STCD	EXFDHD
14419 2829	13793
F103 M1273
--| |----| |--------
CND.EF *ALCLR
26452 1086
M141 X244 X10 M926 M90 M6448 M5160 F101	301.TRET UCLMP C
26453*--| |----|/|--------*--|/|----|/|----| |----| |----|/|-*<
STCD OP.N	TCL.LS 249MX AUTO J2TR.P STAN.P	
2829	6770 14419 13812 13778	
X231 X244 M7169		
--| |----| |----|/|-	
CUT.N OP.N YPOS.C	
24297	
F101 M1273	
--| |----| |----------
CND.TU *ALCLR
26467 1086
M501 X245 X244 M173 Y143 M90 M141 M256 F108	308.T-EYE EXT CN
26468*--|/|----|/|----|/|----|/|----|/|----| |----| |-*--|/|--<
TDRE STL.N OP.N SBKSW MDI.L AUTO STCD	84M
8149 2654 14343 14419 2829	17214
F108 M1273
--| |----| |----------
CND.TE *ALCLR
26479 1086
M402 X245 M90 M141 F109	309.SP MISCHCK C
26480*--| |----|/|----| |----| |-*----------<
MISS-L STL.N AUTO STCD
4908 14419 2829
F109 M1273
--| |----| |----------
CND.MS *ALCLR
26487 1086
X244 X245 X274	STL/TF_PLF
26488*--| |----|/|----|/|----------[PLS M923]*
OP.N STL.N TF.N
M923	MF OUTSIDE #1
26493*--| |-*----------[MOV R7722 D209]*
STTF_P	J2POS
26492	
|M6476	MF OUTSIDE FT
*--		----------[MOV D310 D311]*
F_TL.P FTCPNo
7037
X10 M921	TOOL DATA OK
26501*--| |-*[= D310 D311]*[= R7722 D209]--------<
TCL.LS| FTCPNo MF_FT	J2POS MF_#1 |22317 26521
	7037 26500	26496
M926 |M6476	
--| |---|/|----------*
249MX	F_TL.P
6770	
M5160	
*--		-*
STAN.P
13778
M141 T102 X244 X245 X274 M921 F110	310.T-NO.NOT SAM
26513*--| |----| |----| |----|/|-*--|/|----|/|-*----------<
STCD TC.T OP.N STL.N |TF.N TDOK	
2829 9556	26512	
F110 M1273	F58	258.T-NOT SAME
--| |----| |---------- *----------<
CND.TN *ALCLR
26522 1086
M141 M90 M7071 X244 X245 X246 M6472 M6480 F111	311.TS POS.ERR
26524*--| |----| |-*--|/|----|/|----|/|----|/|----| |----|/|-*<
STCD AUTO	TL_CND OP.N STL.N SPL.N J2TA.P R79-0:	
2829 14419	11047 13821 13824	
M430 M91		
--| |---| |-*	
SPST |MANU	
21472	14444	
M5587		
--| |-	
MLST	
22225	
M5724 M27 M6472	
[D< R7910 D564]---| |----| |----| |----------
R118L PCFCD PCT.P J2TA.P	
10597 7553 13821	
F111 M1273	
--| |----| |----------
CND.TP *ALCLR
26546 1086
M6470 M6813	BF SCHEDULE RUN
26547*--| |--[< K0 D600]----------<
BFSC.P BF_STP
11941
M6813 X96 X245 M141 M622 X244 M173 Y143
26552*--|/|-*--|/|----|/|----| |----|/|----|/|----|/|----|/|---->1
BFSCRN	PCR.LS STL.N STCD 348MX OP.N SBKSW MDI.L
26551	2829 7536 2654 14343
M6470	
*--	/	-*
BFSC.P	
M8154	
*--	/	-*
SCMD.N
F112 M1273
*--| |----| |----------->2
CND.PC *ALCLR
26566 1086
M27 F112	312.PCT EXT CND
1>-----		-*----------<
PCT.P
2>---------*


M91 M850 M5180 M852 M1273 F114 "DATA 0 AT """"B"
26567 26573 8895 9089 26571
MANU MANUBP F-DR.P A-CH *ALCLR
14444 8815 8910 1086
F114
D-0.BP
26573
Y232 X244 M141 M90 M53 F115 Y HOME INTERLOCK
26574 26585 26581
YCNT.N OP.N STCD AUTO Y.P
767 2829 14419
X224 M10
ZP15.N MASK.P
F115 M1273
*ALCLR
26585 1086
M93 X240 X14A F122 322.RPD-MODE NG.
26586 26592 26589
HOMEOK MA.N RPD.B
732
F122 M1273
RPMDNG *ALCLR
26592 1086
X14A M121 M702 DRV-MODE NG.
26593 26605 26602 26606
RPD.B TSET:L
23382
X14B
HOME.B
X274 M891
TF.N MDSWOF
791
M890 X245
TFSUB STL.N
772
M702 M1273
DRMDNG *ALCLR
26605 1086
M702 F59 259.DRV-MODE NG.
26606 26607
DRMDNG
26605
X148 M93 X240 M5160 F124 324.DRV-MODE NG.
26608 26622 26619
AUT.B HOMEOK MA.N STAN.P
732 13778
M1285
SPR.B
14642
M618 M27 M1279 M54 L32
PCFSWP PCT.P ON SS.P WHOME
7490 585 8354
F124 M1273
DRMNG2 *ALCLR
26622 1086
L32 M54 M8 M780 M91 F125 325.T-EYE EXCD I
26623 26660 26657
WHOME SS.P EYE.P TDFSW MANU
8354 13734 14620 14444
L33 M53 M255 M90
YHOME Y.P 83M AUTO
8359 17206 14419
M475
SSOP
5677
M93
HOMEOK
732
M27 X96
PCT.P PCR.LS
M931 X11C
CCE SETUP.
2255
M6472
J2TA.P R117L
13821 10597
M3267
PUSING
1652
M14
R50-6 WRPOS. R124L
27758
Y31
WRJ.SL
27728
F125 M1273
TEECIH *ALCLR
26660 1086
M221 T64 M6472 F126 326.TS EXT CD IN
26661 26684 10939 26681
31M TDR.T J2TA.P
16926 8152 13821
M5443 X96 M27
741M PCR.LS PCT.P
16987
M5444
742M
16992
M5480
QF.SW
644
M221 M439 M5693
31M SRR 231MX
16926 21615 7226
M222
32M
16931
M5443
741M
16987
M5444
742M
16992
M5445
743M
16997
M5480
QF.SW
644

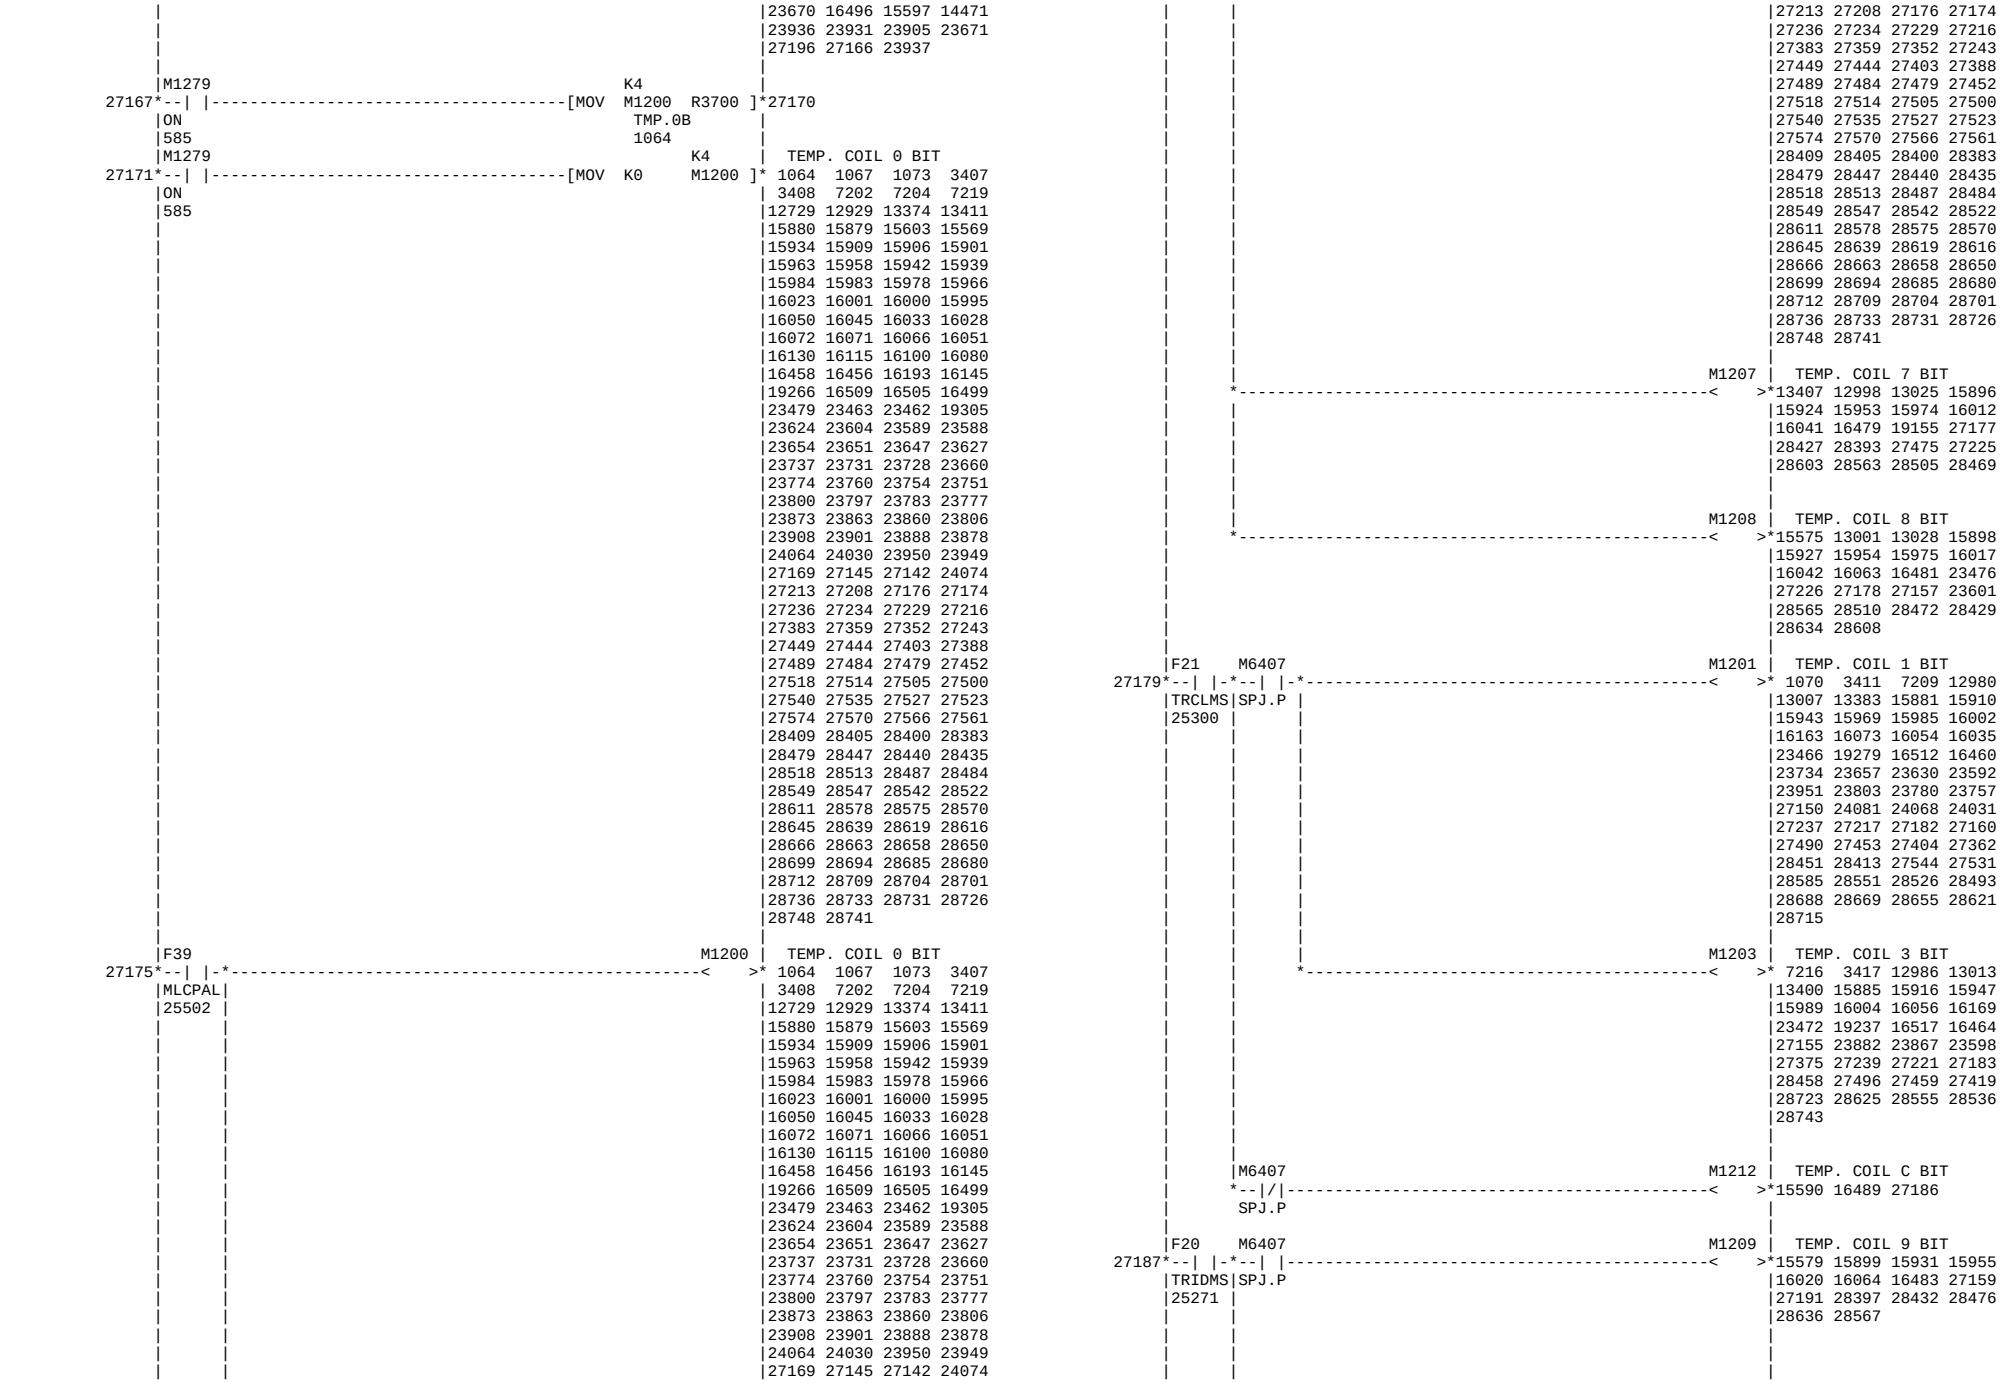

M5481
QR.SW
648
F126 M1273
TSECIH *ALCLR
26684 1086
L45 L0 M610 M381 X240 M5249 AL329
26685 26708 26705
CHINT INT CHOSWP CHANOK MA.N
4521 4541 4462 4503
L44 L1 M611
CHEXT EXT CHCSWP
4512 4542 4466
L47 L20 M5730 M486
2CHINT SINT CHOSWP SSOPM
4578 4597 4474 4570
L46 L21 M5731
2CHEXT SEXT CHCSWP
4574 4598 4478
M5249 M1273
EX/IN *ALCLR
26708 1086
M112 X244 M6631 M177 M6409 M5252 AL332
26709 26717 5514 22998 26712
C-MODE OP.N ILYME1 NGLDCD JP/YMC
26780
5533 2277 2484
M5252 M1272
MISOP3 *ALRST
26717 25010
M561 T207 M5260 AL340
26718 26724 8328 8371 8386
K9989 D229
WUPDO P-ON.T
8382 12360 571
M562
WNOTKY
8411
M18 M6043 M605 M5263 AL343
26725 26731 26027 26728
TOPD.P DR_CL FDCLCD
2225 7414
M5263 M101
AL343 RST
26731 543
M178 M7037 M6065 X245 M90 M141 XB6 M16 M5264 AL344
26732 26760 7379 26756 27265
CSTDCD DCLC LKP_EX STL.N AUTO STCD FCLS.R ROBO.P
2505 2243 2961 14419 2829 13737
M6041 X156 X106 M90 M1040
K2 MF1.B CYST.B AUTO CCC++
2220 14419 8421
M42 X89 M6475
MF1S.P SCYS.B SOPBOX
M6525
X10X
24417
M240 M6437 M1040
57M BHCS.P CCC++
17080 8421
M5264 M1272
AL344 *ALRST
26760 25010
XB2 XB6 M16 M5265 AL345
26761 26771 26767
CHOP.R FCLS.R ROBO.P
13737
XB3
CHCL.R
XB4
ORIE.R
XB5
AB.R
XB7
UNLK.R
M5265 M1273
AL345 *ALCLR
26771 1086
M952 M85 FEED HOLD ALARM
26772 26786 9164
FHDAL1
25416
M953
FHDAL2
25509
M954
FHDAL3
26030
M955
FHDAL4
25237
F72
TCDTOV
26183
F96
TSPSAL
M5273
AL353
27008
M5275
AL355
27039
M5252
MISOP3
26717
M3497
HPCLAL
28159
M5290
AL370
12858
M5291
AL371
12835
M5292
AL372
12812

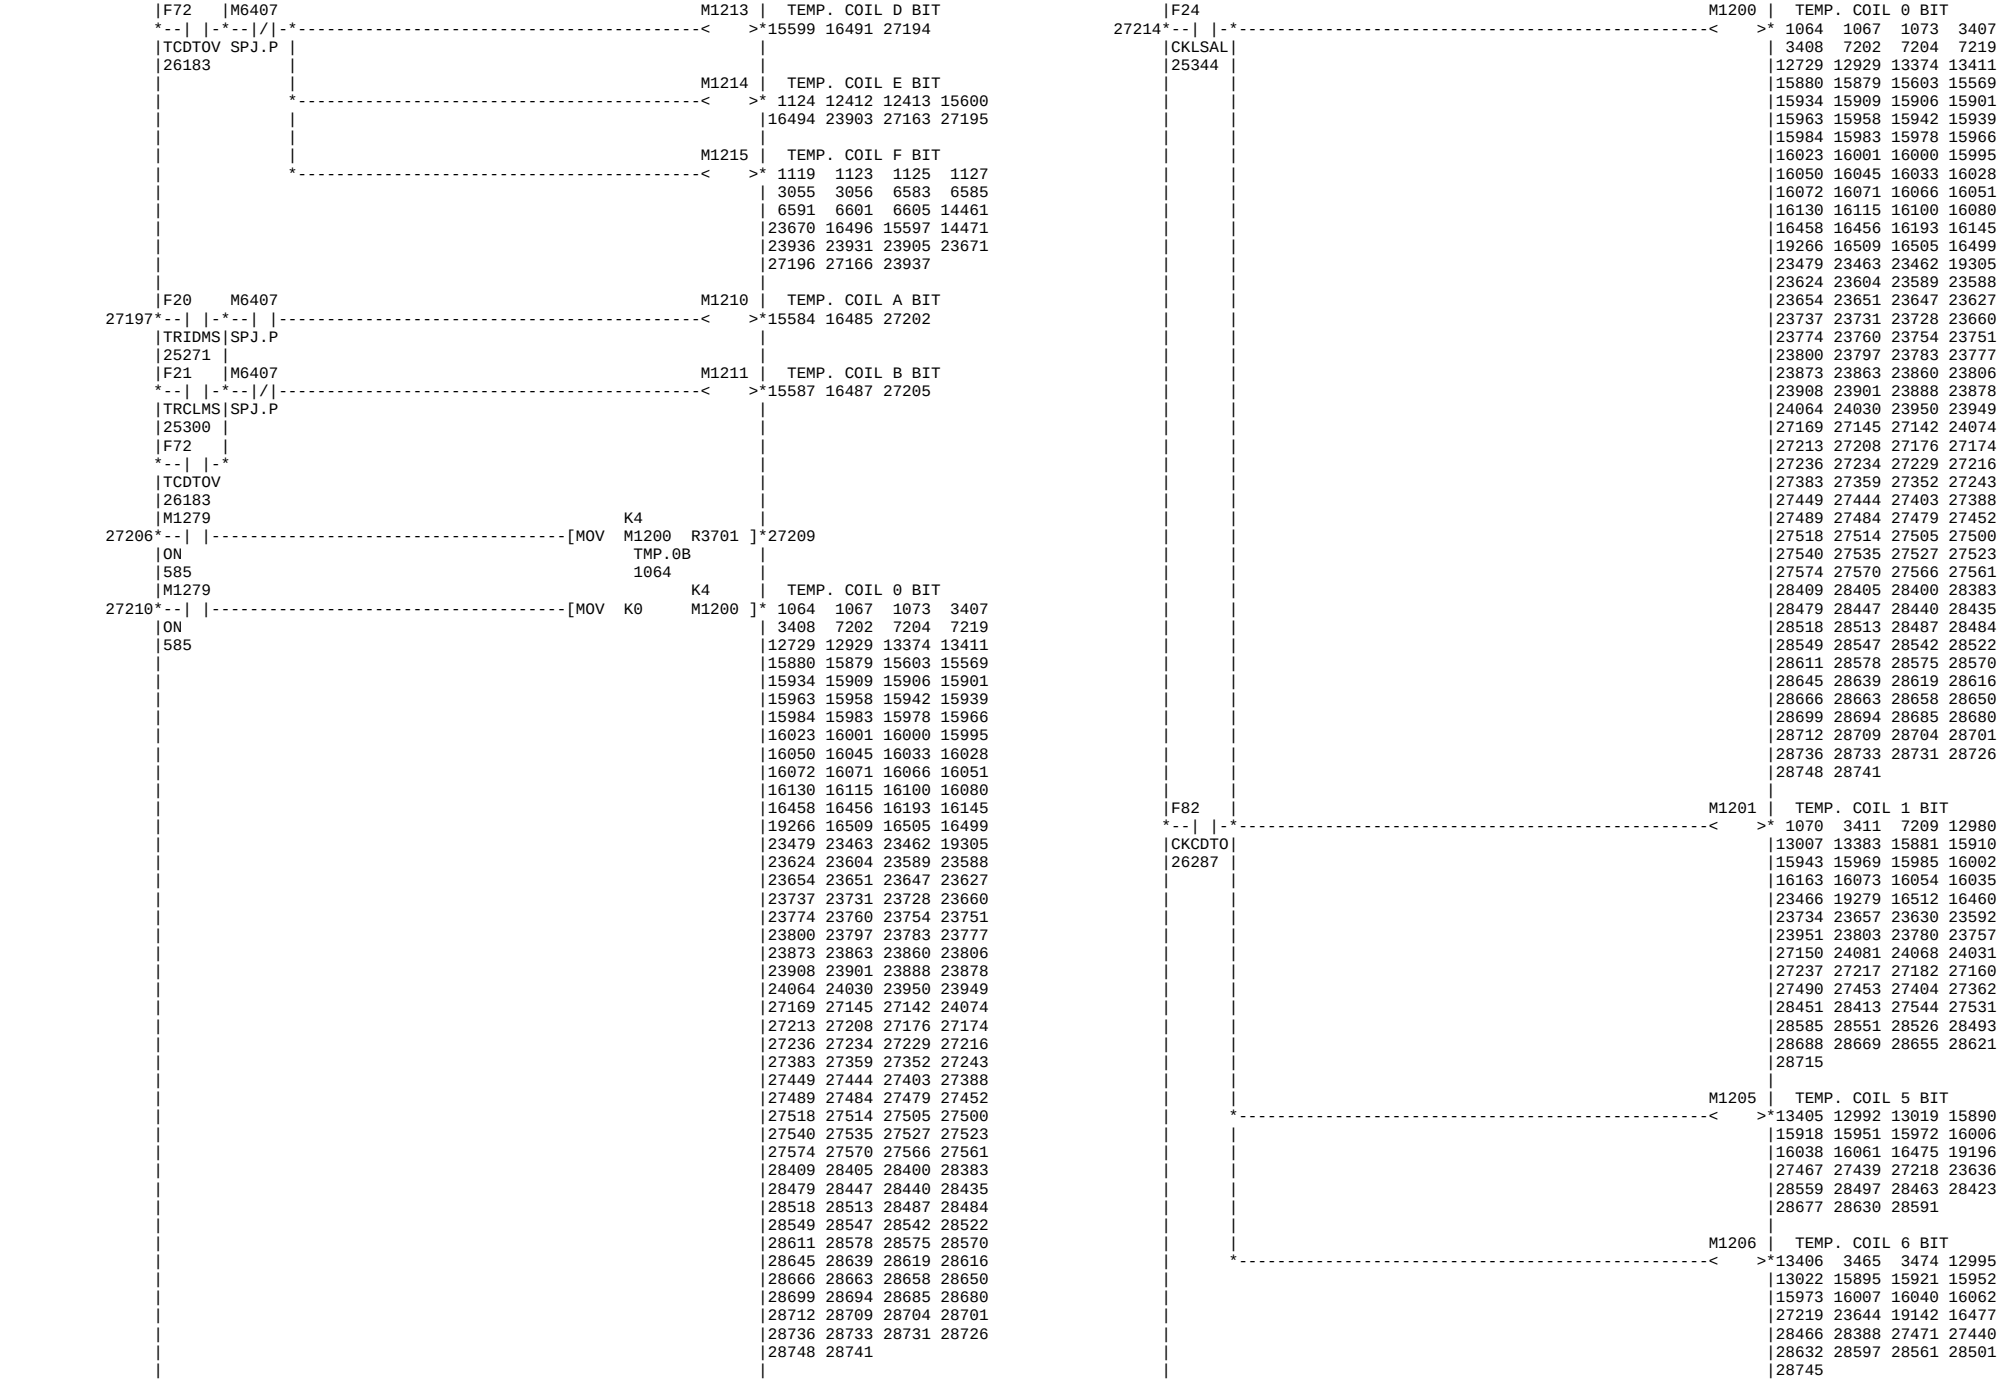


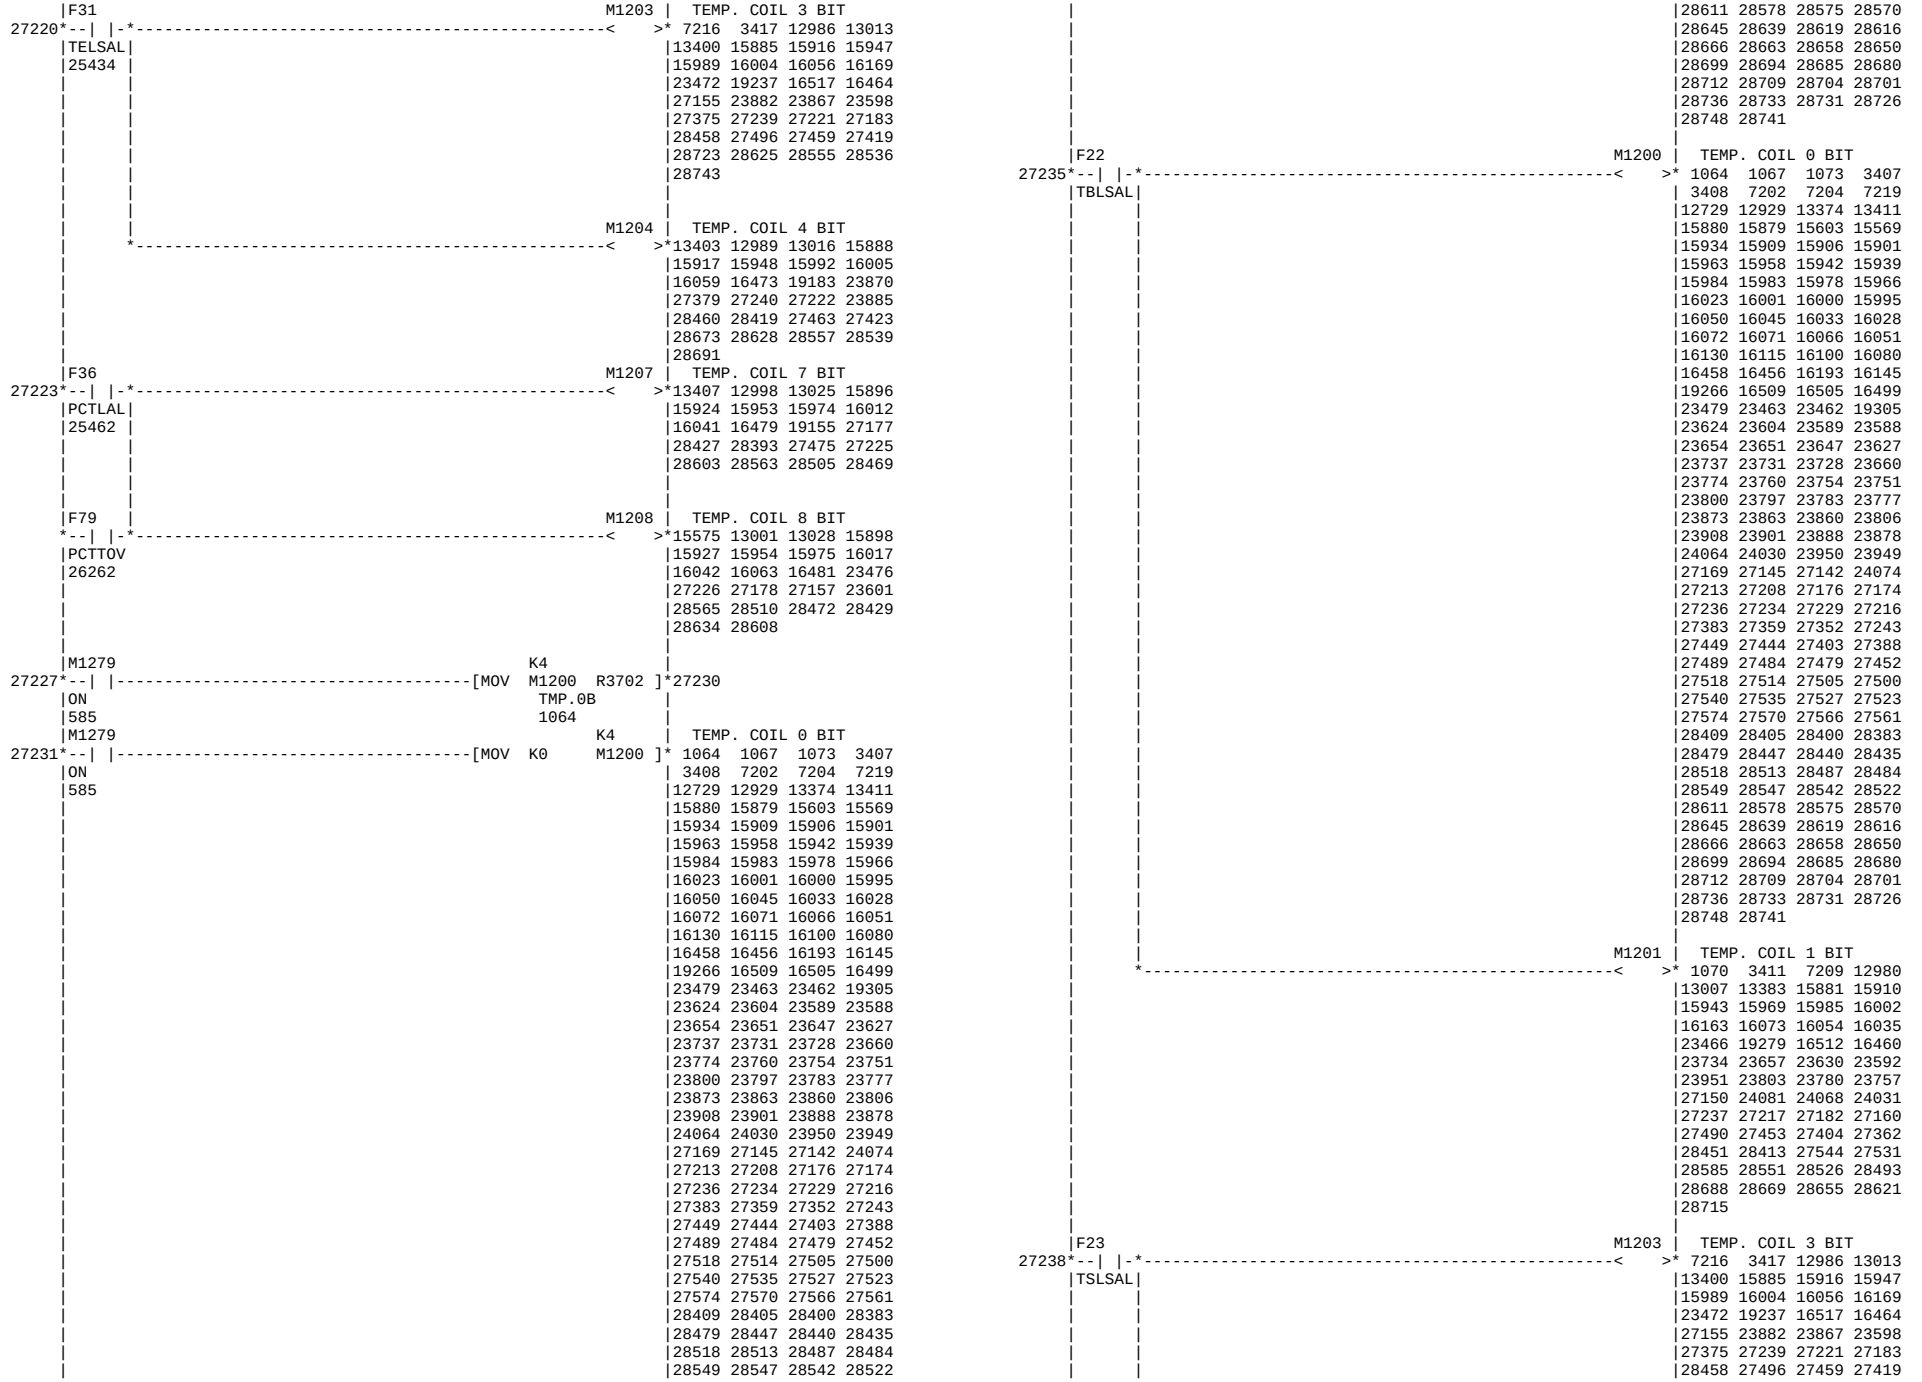

|M611 M7880 L1 |
--| |----| |----|/|-
|CHCSWP CHEXTM EXT
|4466 4531 4542
|M5615 M111
--| |---| |---------------*
|CBKSW |M-MODE
|22580 |5341
|M5616 |
--| |-
|CCLSW |
|22591 |
|M5618 |
--| |-
|CULSW |
|22602 |
|M7788 |
--| |-
|C2BKSW|
|22587 |
|M7789 |
--| |-
|C2CLSW|
|22598 |
|M7790 |
--| |-
|C2ULSW
|22609
|M1415
M5160
M5301 | AL381:COND.MIS S
26917*--| |----------*--|/|----------<
>*26931 26927
|STAN.P
|26882
|13778
|M1416
--| |----------
|26916
|M7116 X11C M6476 M91
--| |---|/|----| |----| |-*
|ORNTSW|SETUP. F_TL.P MANU
|14920 | 14444 |
|M7117 |
--| |-
|JONTSW|
|14931 |
|M7118 |
--| |-
|CLEXTS|
|14853 |
|M7119 |
--| |-
|CLRETS
|14864
|M5301 M1273
--| |----| |---------------
|AL381 *ALCLR
|26931 1086
|M4795 M6443
M5302 | AL382:GL INTEROC
26932*--| |----| |----------<
>*26934 1558
|B_STOP 64GL_P
|24700
|XA X11C X12 M6409
| T30 EMG DELAY
26935*--|/|----|/|-*--|/|-*--|/|----------<T70 D34
>*26946 26955
|CCC.LS SETUP.|S&MOFF|JP/YMC
T30 |
|Y1
--|/|--------
|EMGB.M
|490
|XA X12 M100 |
--| |---| |----| |-*
|CCC.LS|S&MOFF RDY
| | 533
|X11C |
--| |-
|SETUP.
|M873 M1288 M1279
M5271 | AL351 SP CONTACT
26949*--| |----|/|----|/|-*----------<
>*26956
|INIRST SET-UP ON
|587 585
|L41 X140
L41
--| |----|/|------------------<
>*26957 25136 26952
| RST.B
|26957
|T70
--| |---------------
|EMGDEL
|26946
|Y1 XF M6409
| T32
26958*--|/|----|/|-*--|/|----------<T72 D32
>*26965 26974
|EMGB.M PSCO.M|JP/YMC
T32 |
|490
|Y1 XF
--| |----| |-
|EMGB.M PSCO.M
|490
|M873 XF M1279
M5272 | AL352
26968*--| |----|/|----|/|-*----------<
>*26975
|INIRST PSCO.M ON
|587 585
|L42 X140
L42
--| |----|/|------------------<
>*26976 25137 26971
| RST.B
|26976
|T72
--| |---------------
|WRFN.T
|26965
|X245 M90 XB6 M931 M6043 M5160 M1040 M5273 | AL353
26977*--| |--------*--| |-*--|/|-*--| |----|/|----|/|----|/|-*<
>*27008 26778
STL.N	AUTO	FCLS.R	CCE DR_CL STAN.P CCC++
	14419		2255 2225 13778 8421
X106	|M16	|L43
--| |-------- *--|/|-* *< >*27009 27005
CYST.B		ROBO.P
		13737
X89 M6475	
*--		----		-*
SCYS.B SOPBOX
X117 M91
--| |----------| |-*
#NAME?	MANU
	14444
X118
--| |--------
#NAME?
X108
--| |--------
SPST.B
X111
--| |--------
#NAME?
X112
--| |--------
#NAME?
X113
--| |--------
#NAME?
X114
--| |--------
#NAME?
X115 M114
--| |---| |-*
#NAME?	X-ZRME
	710

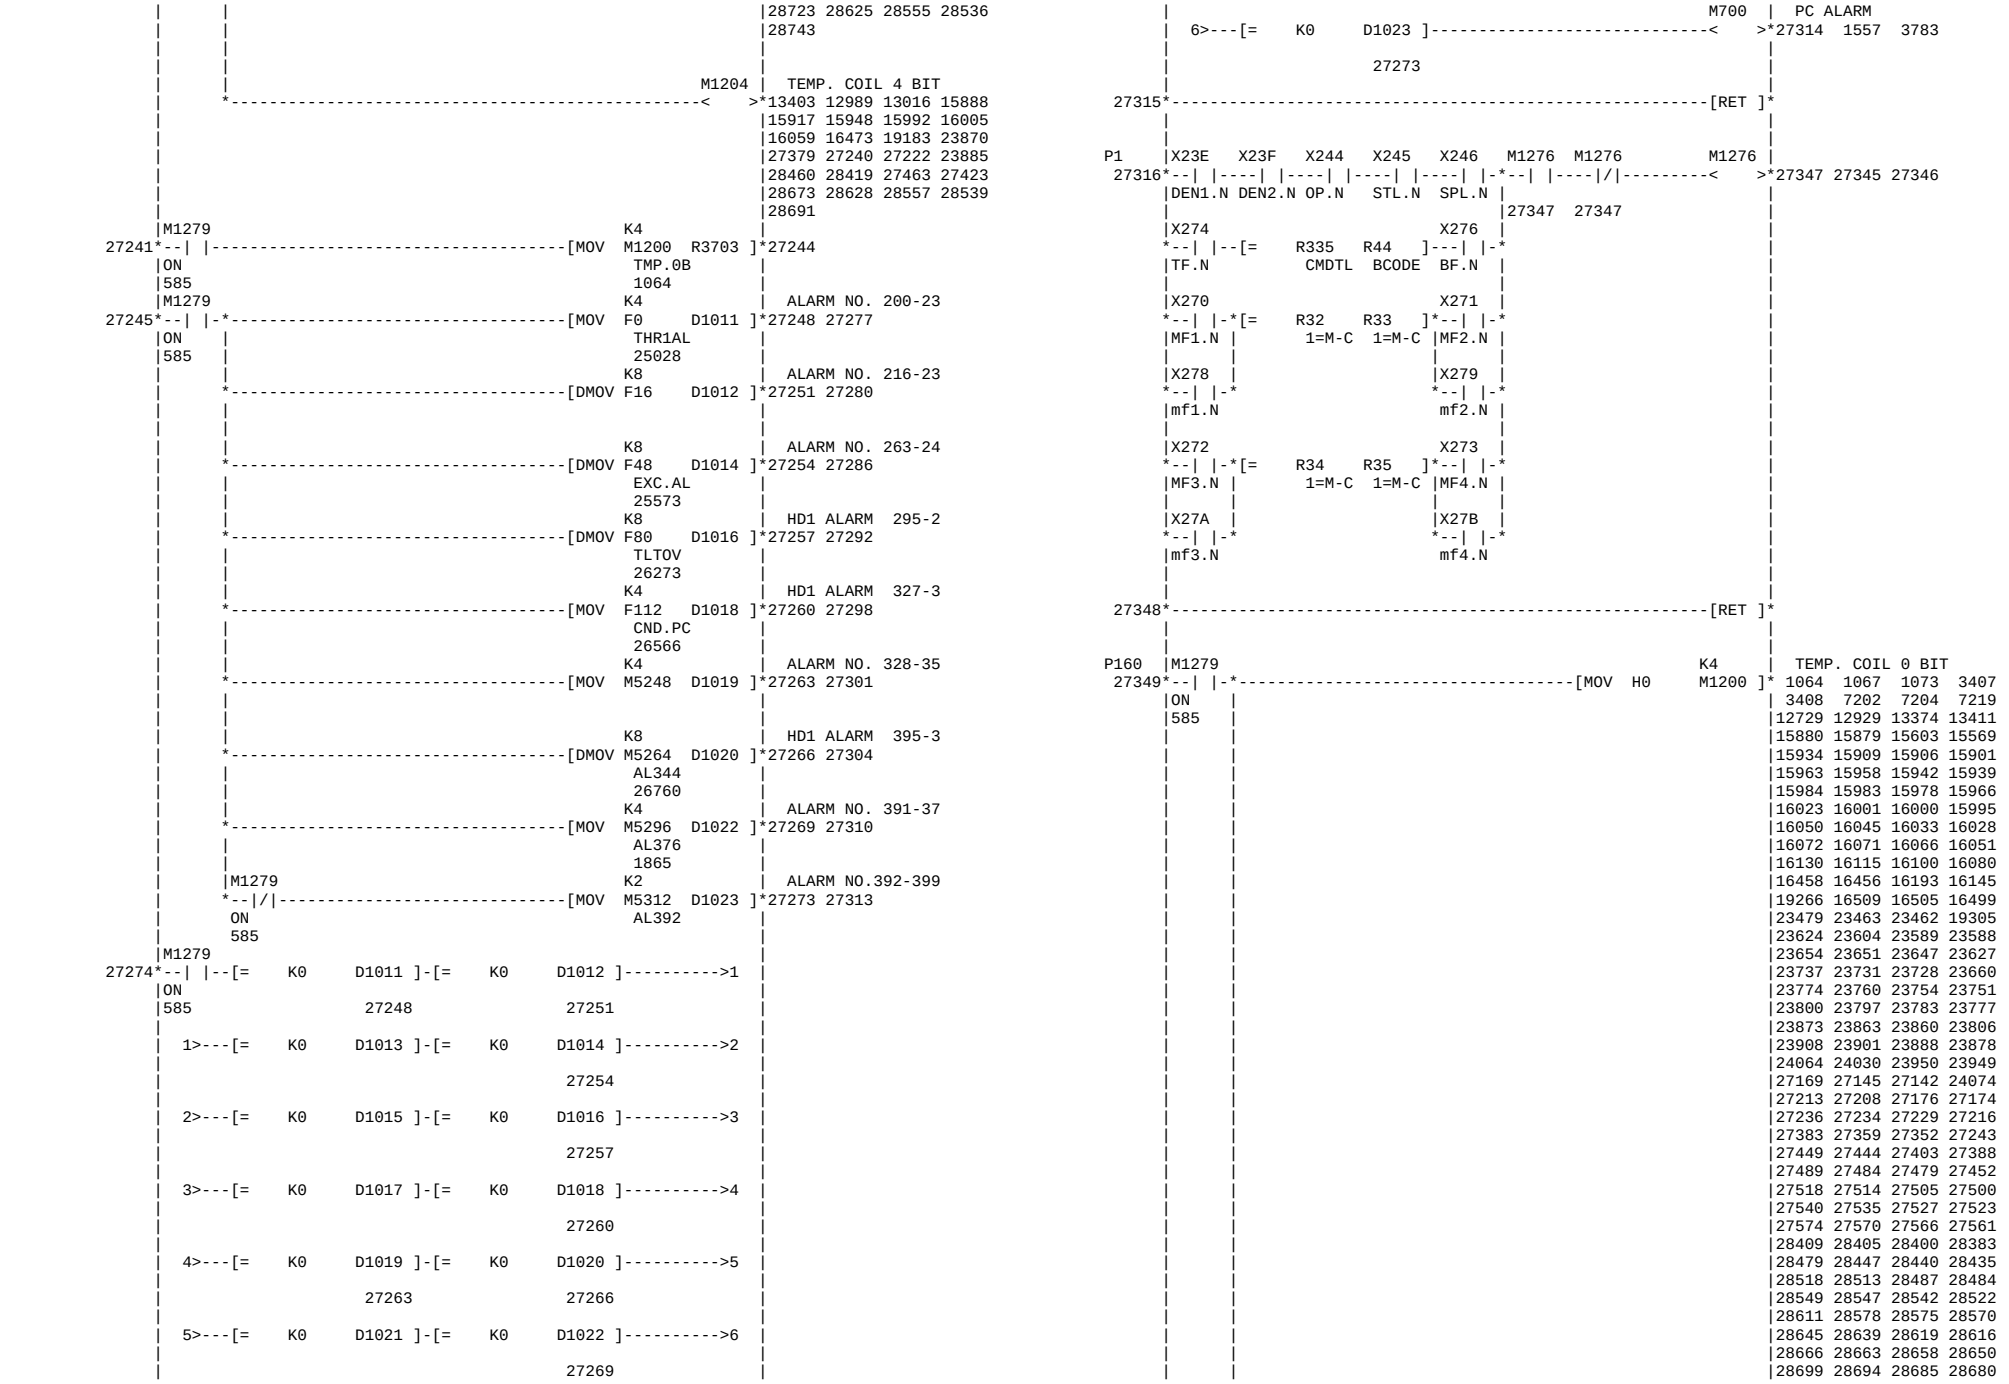

|X116 |X156 |
|#NAME? MF1.B
|L43 X140
|RST.B
|27009
|X106 X11C M90 M1040 M5274 | AL354
27010|CYST.B |SETUP. AUTO CCC++ | >|27024 27021
|14419 8421 |
|X89 M6475 |
|SCYS.B SOPBOX|
|M6525 |
|X10X |
|24417 |
|M627 M6437 |
|BS_OFP BHCS.P
|2777
|M5274 M1273
|AL354 *ALCLR
|27024 1086
|M141 M90 M111 X244 L17 M112 M49 M5275 | AL355
27025|STCD AUTO M-MODE OP.N |1ST C-MODE|C.P | >|27039 26779 27035
|2829 14419 5341 |3835 5533 |
|L18 M7754 |
|2ND C2_MD |
|3841 23020 |
|M5275 M1272
|AL355 *ALRST
|27039 25010
|T207 X907 M6431 M5276 | AL356
27040|P-ON.T DC24.M|24V CK | >|27044 610 27042
|571 |
|M5276 |
|AL356
|27044
|X9E M1337 M1338 X11B M1040 M18 M5277 | AL357
27045|FDC.LS D-OP.M D-CL.M UNLOCK|CCC++ TOPD.P | >|27054 27049
|14795 14808 |8421 |
|M5277 M1272 |
|AL357 *ALRST
|27054 25010
|M239 X474 X245 M90 M141 M6436 M5279 | AL359
27055|56M |CF.INV STL.N AUTO STCD CF.P | >|27065 12339 27062
|17075 | 14419 2829 |
|M240 |
|57M |
|17080 |
|M5279 M1273 |
|CFMALM *ALCLR
|27065 1086
|M3088 | SPINDLE COOL FAN
27066|SPFAN | >|27068 27080
|1960 |
|M6473 T213 X97 | AL360 DELAY TIME
27071|QTN200|MCFD.T LLC.PS | >|27076 27082
| |1943 |
|M6477 |
|QTN300
|M6473 T118 XE M5160 M5280 | AL360 SPINDLE CO
27079|T228 | >|27087 1959 12340 25623
|360D.T | 26136 27083
|27076 |
|M5280 M1273 |
|SPCOOL *ALCLR
|27087 1086
|Y31 X32 M14 M5285 | 365.WR UNCLAMP A
27088|WRJ.SL|WRJT.L|R50-6 | >|27102 26028 27099 27709
|27728 | | |27727
M5369	
74M	
17701	
M5370	
75M	
17706	
M6969 Y33	
WRJ.MN	WRC.SL	
14903	27589	
M5369 |M501	
74M TDRE
17701 8149
M5285 M101
AL365 RST
27102 543
M5372 Y31 M5286	366.WR COND. MIS
27103|87M |WRJ.SL	>|27111 27109 27652
17716	27728
M6172
WRCL.S
27603
M777 X140 M5286
CLR-SW	RST.B AL366
1082	27111
M90
AUTO
14419
M5443 M7051 M3271 T5 M6472 M5287	AL367 TAIL POS.M
27112|741M |POS1H POS1OK EYBOFT |J2TA.P	>|27138 1646 10892 21529
16987	10755 10353 10894	13821	22286 26029 27134
M3270 M221
INVDCK 31M TLST1L
10339 16926
M5444 M7052 M3272 T5
742M	POS2H POS2OK EYBOFT
16992	10763 10367 10894
[D= K0 R8092]------*
TLST2L
M5287 M1273
AL367 *ALCLR
27138 1086

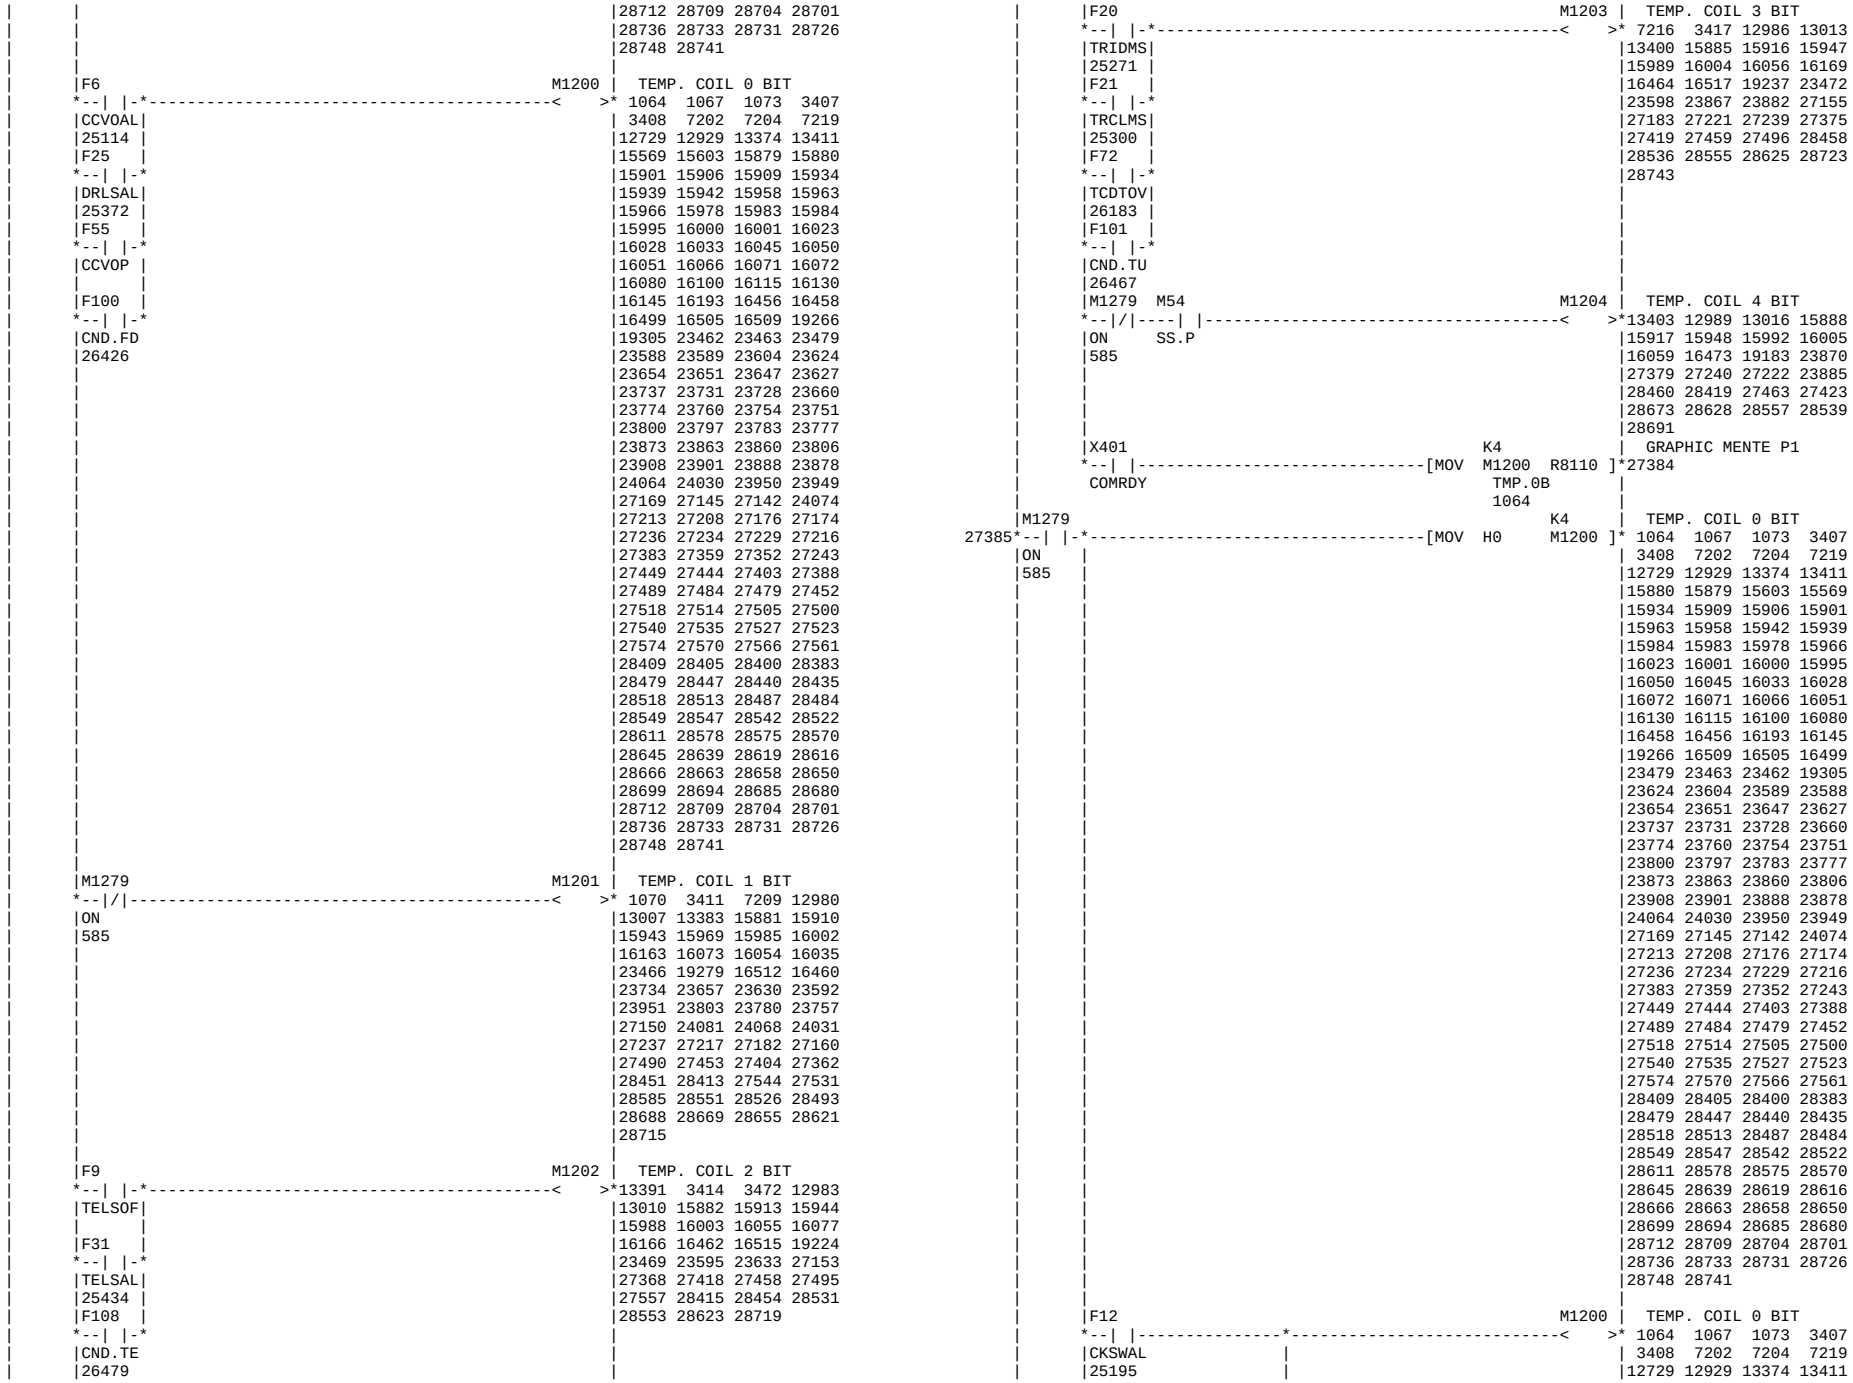
```
     |M1279                                          K4     |  TEMP. COIL 0 BIT
27139*--| |-----------------------------------[MOV  K0     M1200 ]* 1064  1067  1073  3407
     |ON                                                    | 3408  7202  7204  7219
     |585                                                   |12729 12929 13374 13411
     |                                                      |15880 15879 15603 15569
     |                                                      |15934 15909 15906 15901
     |                                                      |15963 15958 15942 15939
     |                                                      |15984 15983 15978 15966
     |                                                      |16023 16001 16000 15995
     |                                                      |16050 16045 16033 16028
     |                                                      |16072 16071 16066 16051
     |                                                      |16130 16115 16100 16080
     |                                                      |16458 16456 16193 16145
     |                                                      |19266 16509 16505 16499
     |                                                      |23479 23463 23462 19305
     |                                                      |23624 23604 23589 23588
     |                                                      |23654 23651 23647 23627
     |                                                      |23737 23731 23728 23660
     |                                                      |23774 23760 23754 23751
     |                                                      |23800 23797 23783 23777
     |                                                      |23873 23863 23860 23806
     |                                                      |23908 23901 23888 23878
     |                                                      |24064 24030 23950 23949
     |                                                      |27169 27145 27142 24074
     |                                                      |27213 27208 27176 27174
     |                                                      |27236 27234 27229 27216
     |                                                      |27383 27359 27352 27243
     |                                                      |27449 27444 27403 27388
     |                                                      |27489 27484 27479 27452
     |                                                      |27518 27514 27505 27500
     |                                                      |27540 27535 27527 27523
     |                                                      |27574 27570 27566 27561
     |                                                      |28409 28405 28400 28383
     |                                                      |28479 28447 28440 28435
     |                                                      |28518 28513 28487 28484
     |                                                      |28549 28547 28542 28522
     |                                                      |28611 28578 28575 28570
     |                                                      |28645 28639 28619 28616
     |                                                      |28666 28663 28658 28650
     |                                                      |28699 28694 28685 28680
     |                                                      |28712 28709 28704 28701
     |                                                      |28736 28733 28731 28726
     |                                                      |28748 28741
     |                                                      |
     |F24                                            M1200  |  TEMP. COIL 0 BIT
27143*--| |-*-------------------------------------------------<    >* 1064  1067  1073  3407
     |CKLSAL|                                               | 3408  7202  7204  7219
     |25344 |                                               |12729 12929 13374 13411
     |F82   |                                               |15569 15603 15879 15880
     *--| |-*                                               |15901 15906 15909 15934
     |CKCDTO                                                |15939 15942 15958 15963
     |26287                                                 |15966 15978 15983 15984
     |                                                      |16023 16001 16000 15995
     |                                                      |16050 16045 16033 16028
     |                                                      |16072 16071 16066 16051
     |                                                      |16130 16115 16100 16080
     |                                                      |16458 16456 16193 16145
     |                                                      |19266 16509 16505 16499
     |                                                      |23479 23463 23462 19305
     |                                                      |23624 23604 23589 23588
     |                                                      |23654 23651 23647 23627
     |                                                      |23737 23731 23728 23660
     |                                                      |23774 23760 23754 23751
     |                                                      |23800 23797 23783 23777
     |                                                      |23873 23863 23860 23806
     |                                                      |23908 23901 23888 23878
     |                                                      |24064 24030 23950 23949
     |                                                      |27169 27145 27142 24074
     |                                                      |27213 27208 27176 27174
     |                                                      |27236 27234 27229 27216
     |                                                      |27383 27359 27352 27243
     |                                                      |27449 27444 27403 27388
     |                                                      |27489 27484 27479 27452
     |                                                      |27518 27514 27505 27500
     |                                                      |27540 27535 27527 27523
     |                                                      |27574 27570 27566 27561
     |                                                      |28409 28405 28400 28383
     |                                                      |28479 28447 28440 28435
     |                                                      |28518 28513 28487 28484
     |                                                      |28549 28547 28542 28522
     |                                                      |28611 28578 28575 28570
     |                                                      |28645 28639 28619 28616
     |                                                      |28666 28663 28658 28650
     |                                                      |28699 28694 28685 28680
     |                                                      |28712 28709 28704 28701
     |                                                      |28736 28733 28731 28726
     |                                                      |28748 28741
     |                                                      |
     |F20                                            M1201  |  TEMP. COIL 1 BIT
27146*--| |-*-------------------------------------------------<    >* 1070  3411  7209 12980
     |TRIDMS|                                               |13007 13383 15881 15910
     |25271 |                                               |15943 15969 15985 16002
     |F21   |                                               |16035 16054 16073 16163
     *--| |-*                                               |16460 16512 19279 23466
     |TRCLMS|                                               |23592 23630 23657 23734
     |25300 |                                               |23757 23780 23803 23951
     |F39   |                                               |24031 24068 24081 27150
     *--| |-*                                               |27160 27182 27217 27237
     |MLCPAL|                                               |27362 27404 27453 27490
     |25502 |                                               |27531 27544 28413 28451
     |F72   |                                               |28493 28526 28551 28585
     *--| |-*                                               |28621 28655 28669 28688
     |TCDTOV                                                |28715
     |26183                                                 |
     |F22                                            M1202  |  TEMP. COIL 2 BIT
27151*--| |-*-------------------------------------------------<    >*13391  3414  3472 12983
     |TBLSAL|                                               |13010 15882 15913 15944
     |      |                                               |15988 16003 16055 16077
     |F23   |                                               |16166 16462 16515 19224
     *--| |-*                                               |23469 23595 23633 27153
     |TSLSAL                                                |27368 27418 27458 27495
     |                                                      |27557 28415 28454 28531
     |                                                      |28719 28623 28553
     |                                                      |
     |                                                      |
     |                                                      |
     |                                                      |
     |F60                                            M1203  |  TEMP. COIL 3 BIT
27154*--| |-------------------------------------------------<    >* 7216  3417 12986 13013
     |WYLBAL                                                |13400 15885 15916 15947
     |26061                                                 |15989 16004 16056 16169
     |                                                      |23472 19237 16517 16464
     |                                                      |27155 23882 23867 23598
     |                                                      |27375 27239 27221 27183
     |                                                      |28458 27496 27459 27419
     |                                                      |28723 28625 28555 28536
     |                                                      |28743
     |                                                      |
     |                                                      |
     |F31                                            M1208  |  TEMP. COIL 8 BIT
27156*--| |-------------------------------------------------<    >*15575 13001 13028 15898
     |TELSAL                                                |15927 15954 15975 16017
     |25434                                                 |16042 16063 16481 23476
     |                                                      |27226 27178 27157 23601
     |                                                      |28565 28510 28472 28429
     |                                                      |28634 28608
     |                                                      |
     |F2                                             M1209  |  TEMP. COIL 9 BIT
27158*--| |-------------------------------------------------<    >*15579 15899 15931 15955
     |HPDNAL                                                |16020 16064 16483 27159
     |25052                                                 |27191 28397 28432 28476
     |                                                      |28636 28567
     |                                                      |
     |                                                      |
     |                                                      |
     |M1201  M6407                                   M1214  |  TEMP. COIL E BIT
27160*--| |-*--| |-----------------------------------------<    >* 1124 12412 12413 15600
     |TMP.1B|SPJ.P                                          |16494 23903 27163 27195
     |1070  |                                               |
     |      |M6407                                   M1215  |  TEMP. COIL F BIT
     |      *--|/|-----------------------------------------<    >* 1119  1123  1125  1127
     |       SPJ.P                                          | 3055  3056  6583  6585
     |                                                      | 6591  6601  6605 14461
```

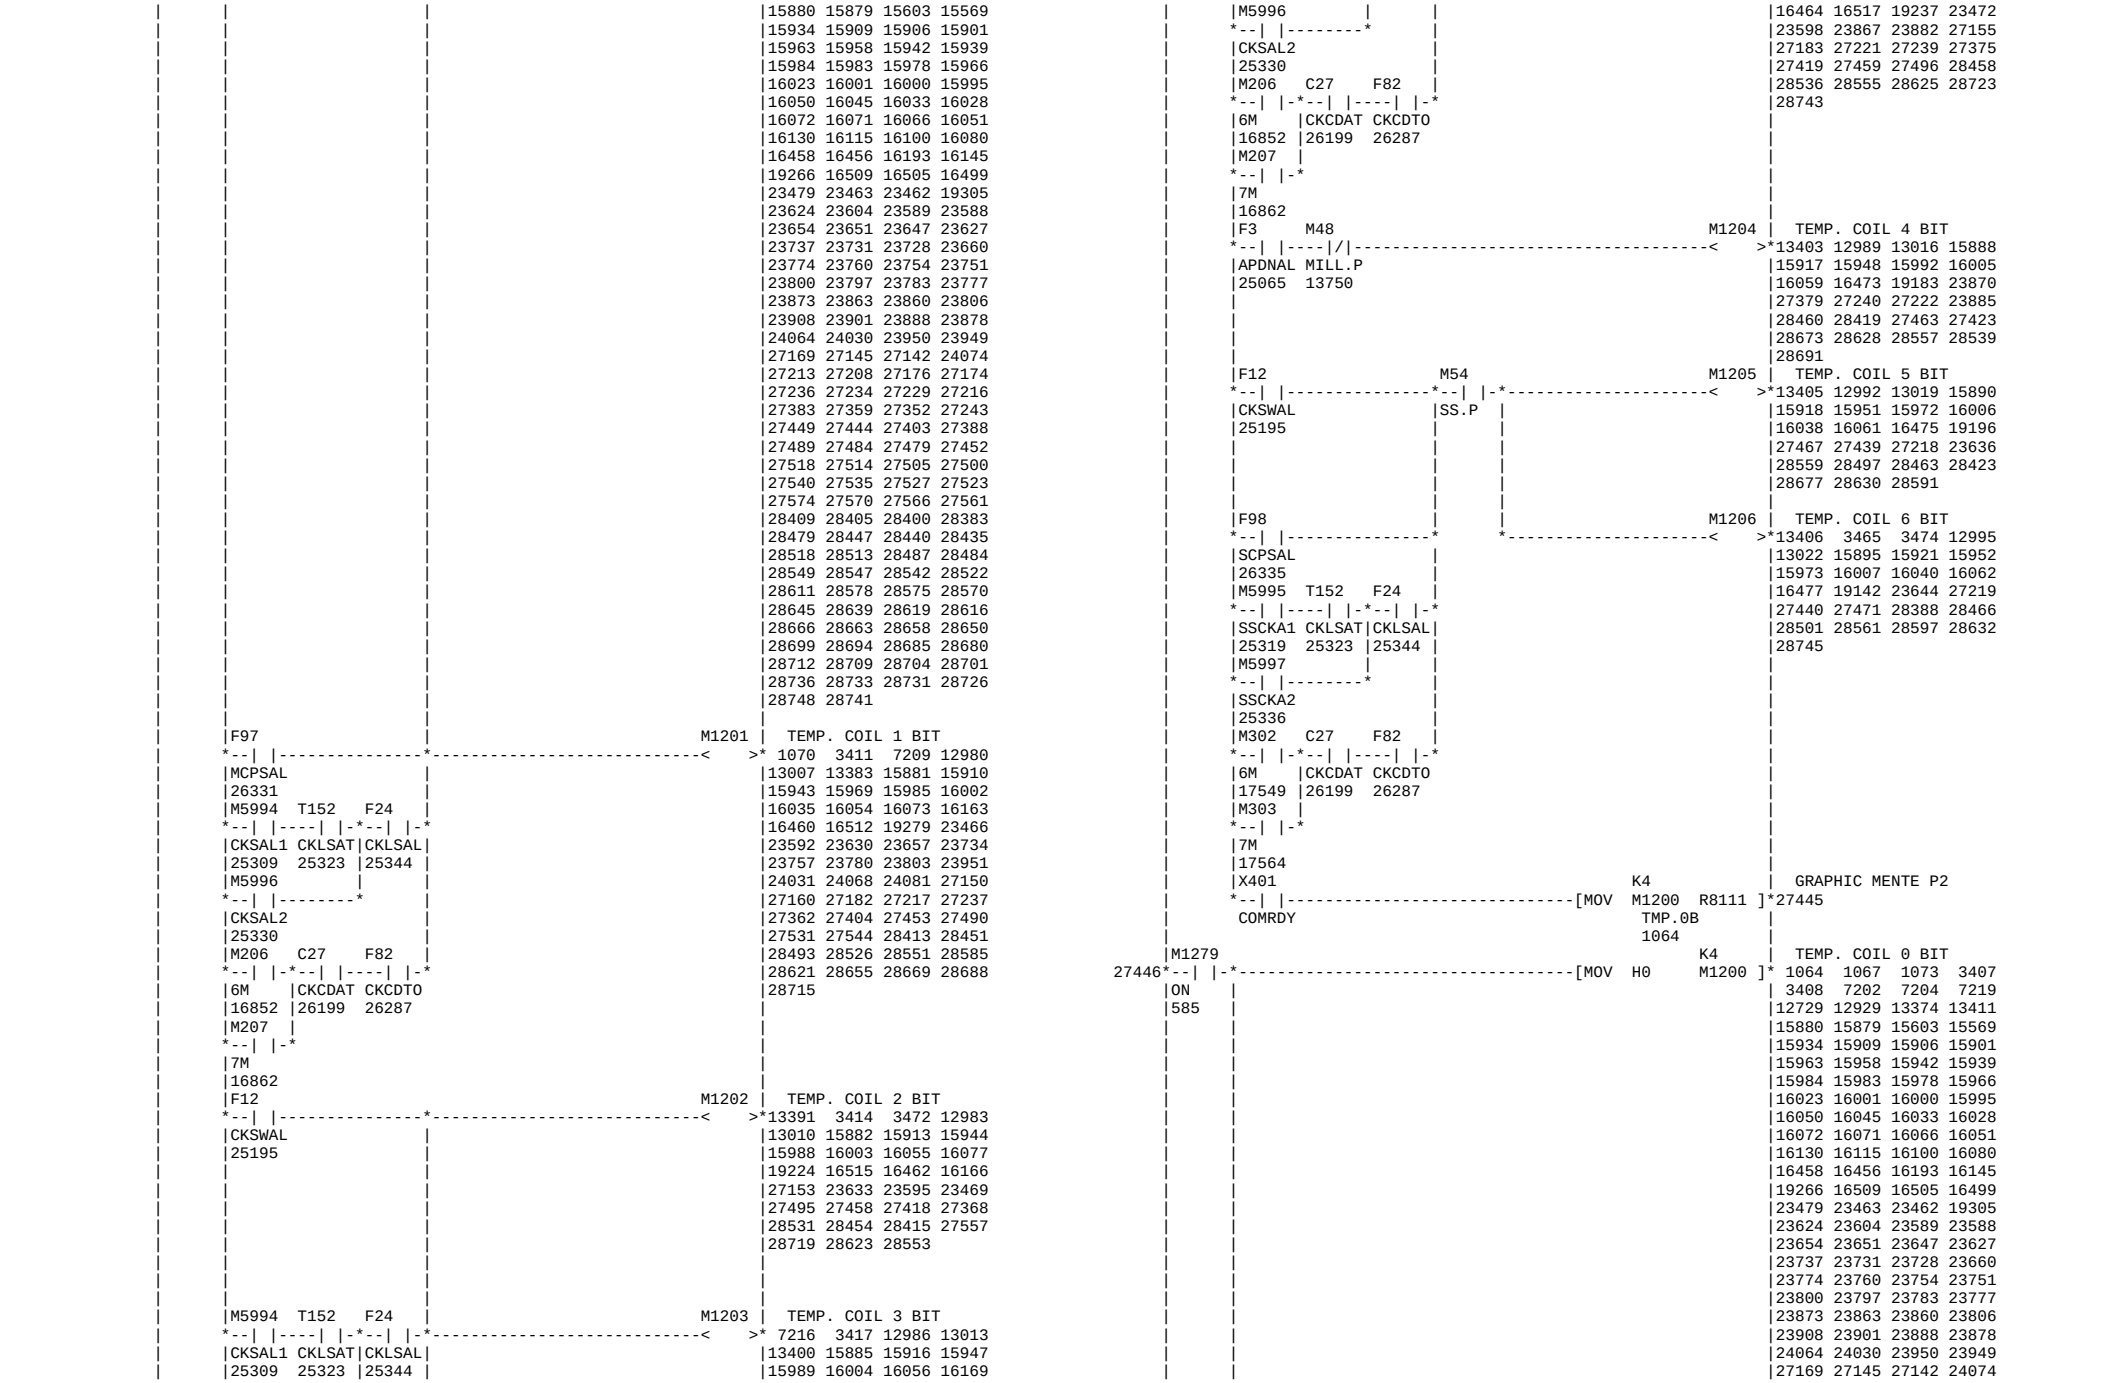

M1279
K4
27167 ON
MOV M1200 R3700
27170
TMP.0B
585
1064
M1279
K4
TEMP. COIL 0 BIT
27171 ON
MOV K0 M1200
1064 1067 1073 3407
3408 7202 7204 7219
585
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27175 MLCPAL
25502
F39
M1200
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
23670 16496 15597 14471
23936 23931 23905 23671
27196 27166 23937
27179 TRCLMS SPJ.P
25300
F21 M6407
27187 TRIDMS SPJ.P
25271
F20 M6407
M1207
TEMP. COIL 7 BIT
13407 12998 13025 15896
15924 15953 15974 16012
16041 16479 19155 27177
28427 28393 27475 27225
28603 28563 28505 28469
M1208
TEMP. COIL 8 BIT
15575 13001 13028 15898
15927 15954 15975 16017
16042 16063 16481 23476
27226 27178 27157 23601
28565 28510 28472 28429
28634 28608
M1201
TEMP. COIL 1 BIT
1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
M1203
TEMP. COIL 3 BIT
7216 3417 12986 13013
13400 15885 15916 15947
15989 16004 16056 16169
23472 19237 16517 16464
27155 23882 23867 23598
27375 27239 27221 27183
28458 27496 27459 27419
28723 28625 28555 28536
28743
M6407
M1212
TEMP. COIL C BIT
15590 16489 27186
SPJ.P
M1209
TEMP. COIL 9 BIT
15579 15899 15931 15955
16020 16064 16483 27159
27191 28397 28432 28476
28636 28567
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741

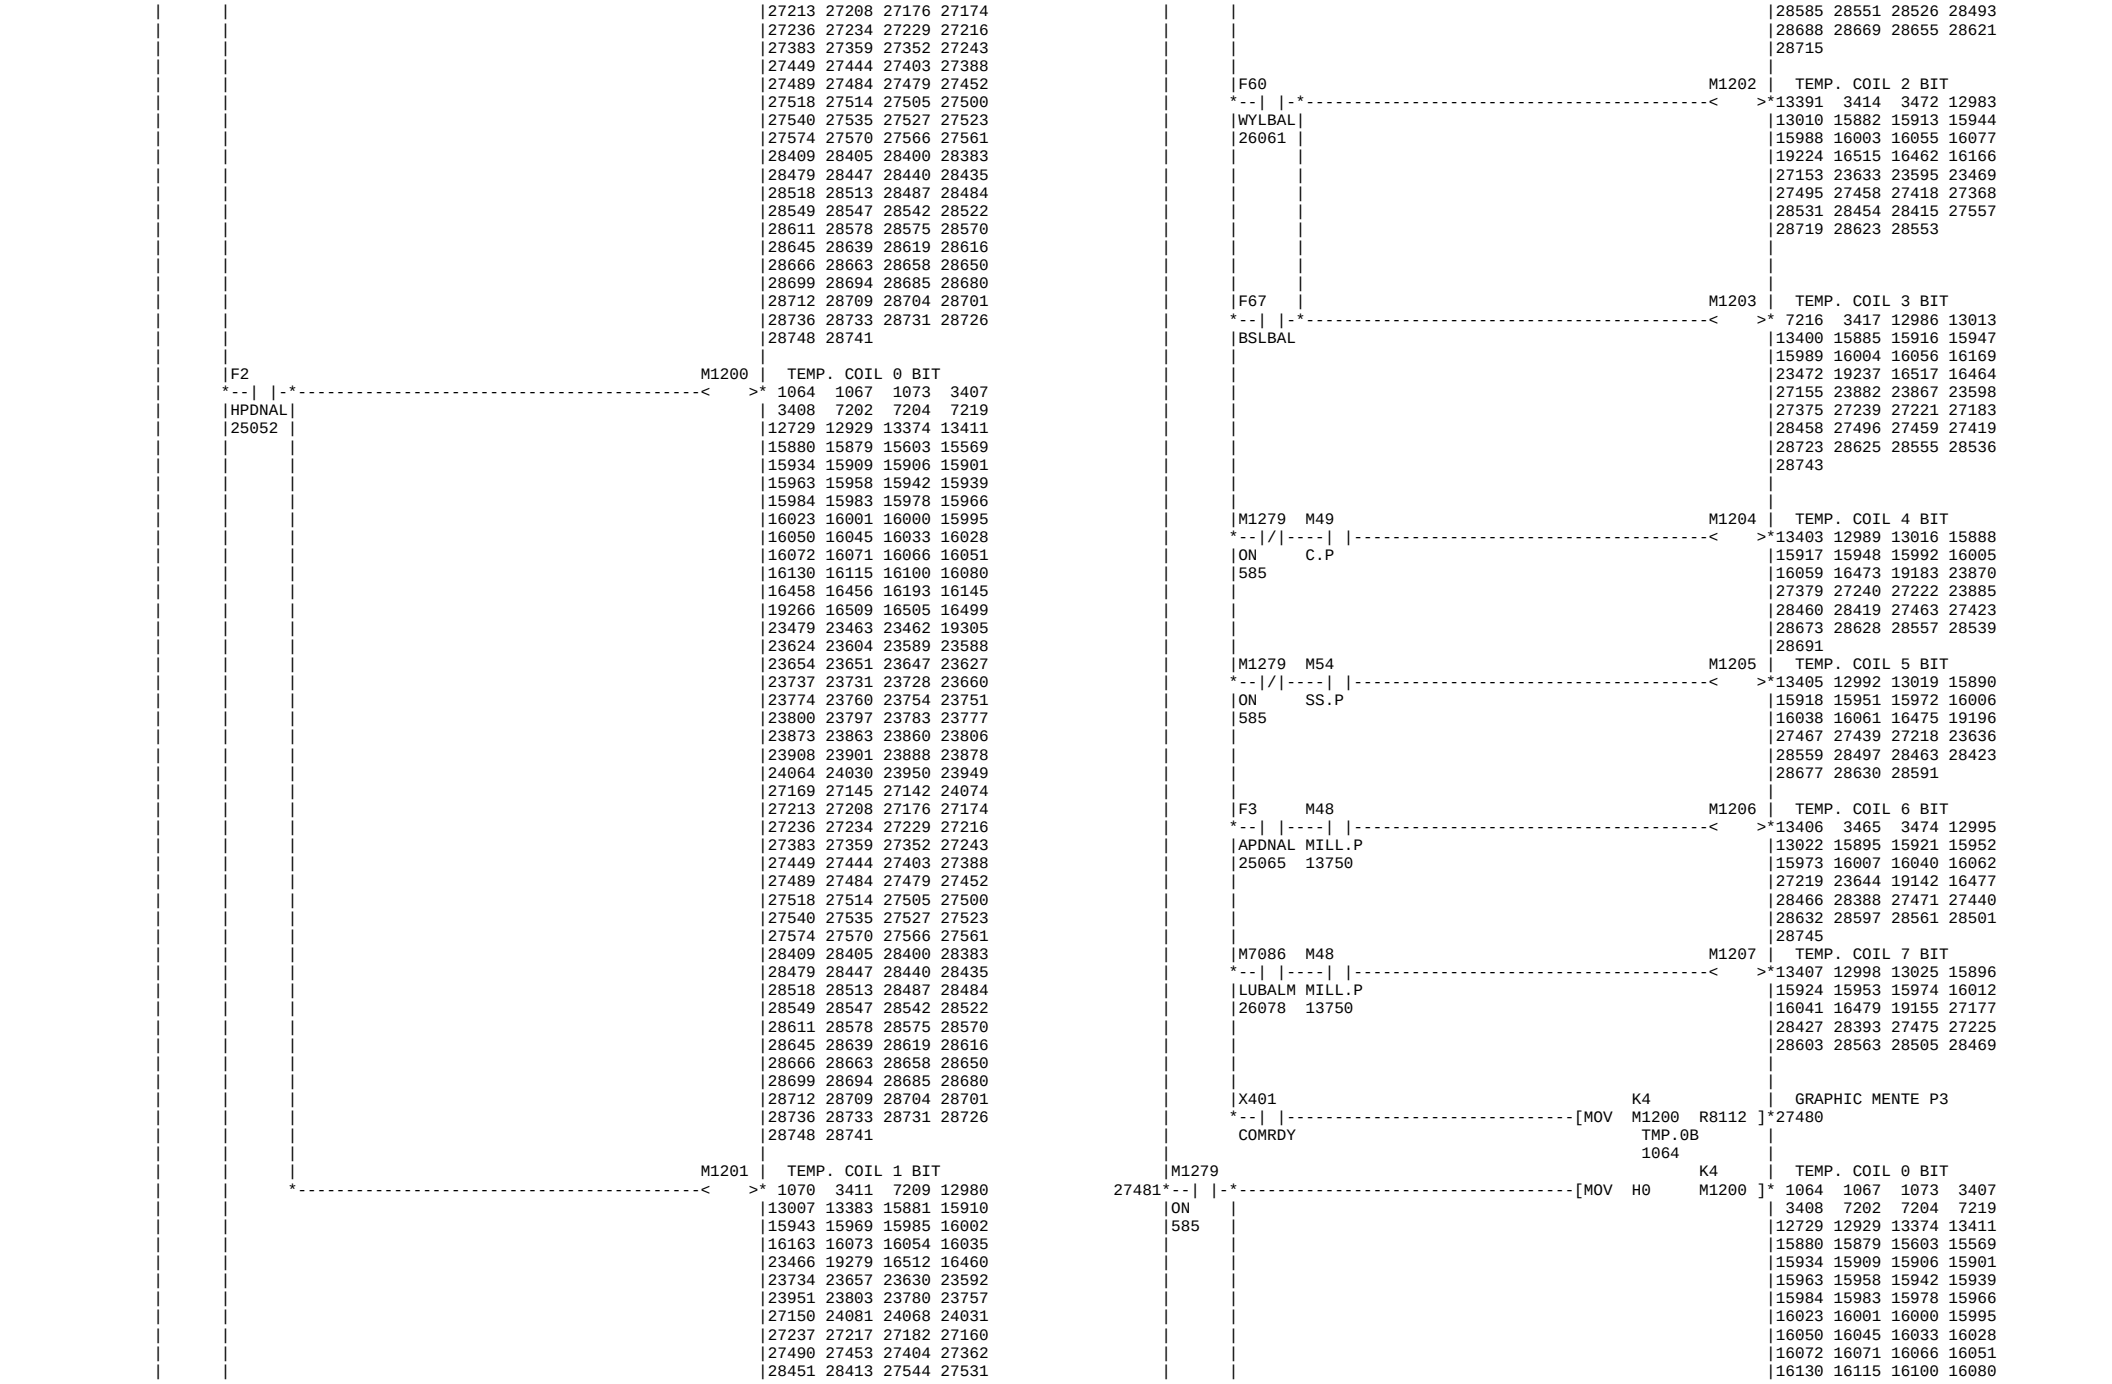

|F72 |M6407 M1213 | TEMP. COIL D BIT
--| |---|/|-*<
|TCDTOV SPJ.P |
|26183 |
M1214 | TEMP. COIL E BIT
*<
M1215 | TEMP. COIL F BIT
*<
|F20 M6407 M1210 | TEMP. COIL A BIT
27197*--| |-*--| |<
|TRIDMS|SPJ.P
|25271 |
|F21 |M6407 M1211 | TEMP. COIL B BIT
--| |---|/|<
|TRCLMS|SPJ.P
|25300 |
|F72 |
--| |-
|TCDTOV
|26183
|M1279 K4
27206*--| |[MOV M1200 R3701]*27209
|ON TMP.0B
|585 1064
|M1279 K4 | TEMP. COIL 0 BIT
27210*--| |[MOV K0 M1200]* 1064 1067 1073 3407
|ON | 3408 7202 7204 7219
|585 |12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
|F24 M1200 | TEMP. COIL 0 BIT
27214*--| |-*<
|CKLSAL| | 3408 7202 7204 7219
|25344 | |12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
|F82 | M1201 | TEMP. COIL 1 BIT
--| |-<
|CKCDTO| | 1070 3411 7209 12980
|26287 | |13007 13383 15881 15910
|15943 15969 15985 16002
|16163 16073 16054 16035
|23466 19279 16512 16460
|23734 23657 23630 23592
|23951 23803 23780 23757
|27150 24081 24068 24031
|27237 27217 27182 27160
|27490 27453 27404 27362
|28451 28413 27544 27531
|28585 28551 28526 28493
|28688 28669 28655 28621
|28715
M1205 | TEMP. COIL 5 BIT
*<
|13405 12992 13019 15890
|15918 15951 15972 16006
|16038 16061 16475 19196
|27467 27439 27218 23636
|28559 28497 28463 28423
|28677 28630 28591
M1206 | TEMP. COIL 6 BIT
*<
|13406 3465 3474 12995
|13022 15895 15921 15952
|15973 16007 16040 16062
|27219 23644 19142 16477
|28466 28388 27471 27440
|28632 28597 28561 28501
|28745


F31
M1203
TEMP. COIL 3 BIT
27220
TELSAL
25434
M1204
TEMP. COIL 4 BIT
F36
M1207
TEMP. COIL 7 BIT
27223
PCTLAL
25462
F79
M1208
TEMP. COIL 8 BIT
PCTTOV
26262
M1279
K4
27227
ON
585
MOV M1200 R3702
TMP.0B
1064
27230
M1279
K4
TEMP. COIL 0 BIT
27231
ON
585
MOV K0 M1200
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
F22
M1200
TEMP. COIL 0 BIT
27235
TBLSAL
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M1201
TEMP. COIL 1 BIT
1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
F23
M1203
TEMP. COIL 3 BIT
27238
TSLSAL
7216 3417 12986 13013
13400 15885 15916 15947
15989 16004 16056 16169
23472 19237 16517 16464
27155 23882 23867 23598
27375 27239 27221 27183
28458 27496 27459 27419

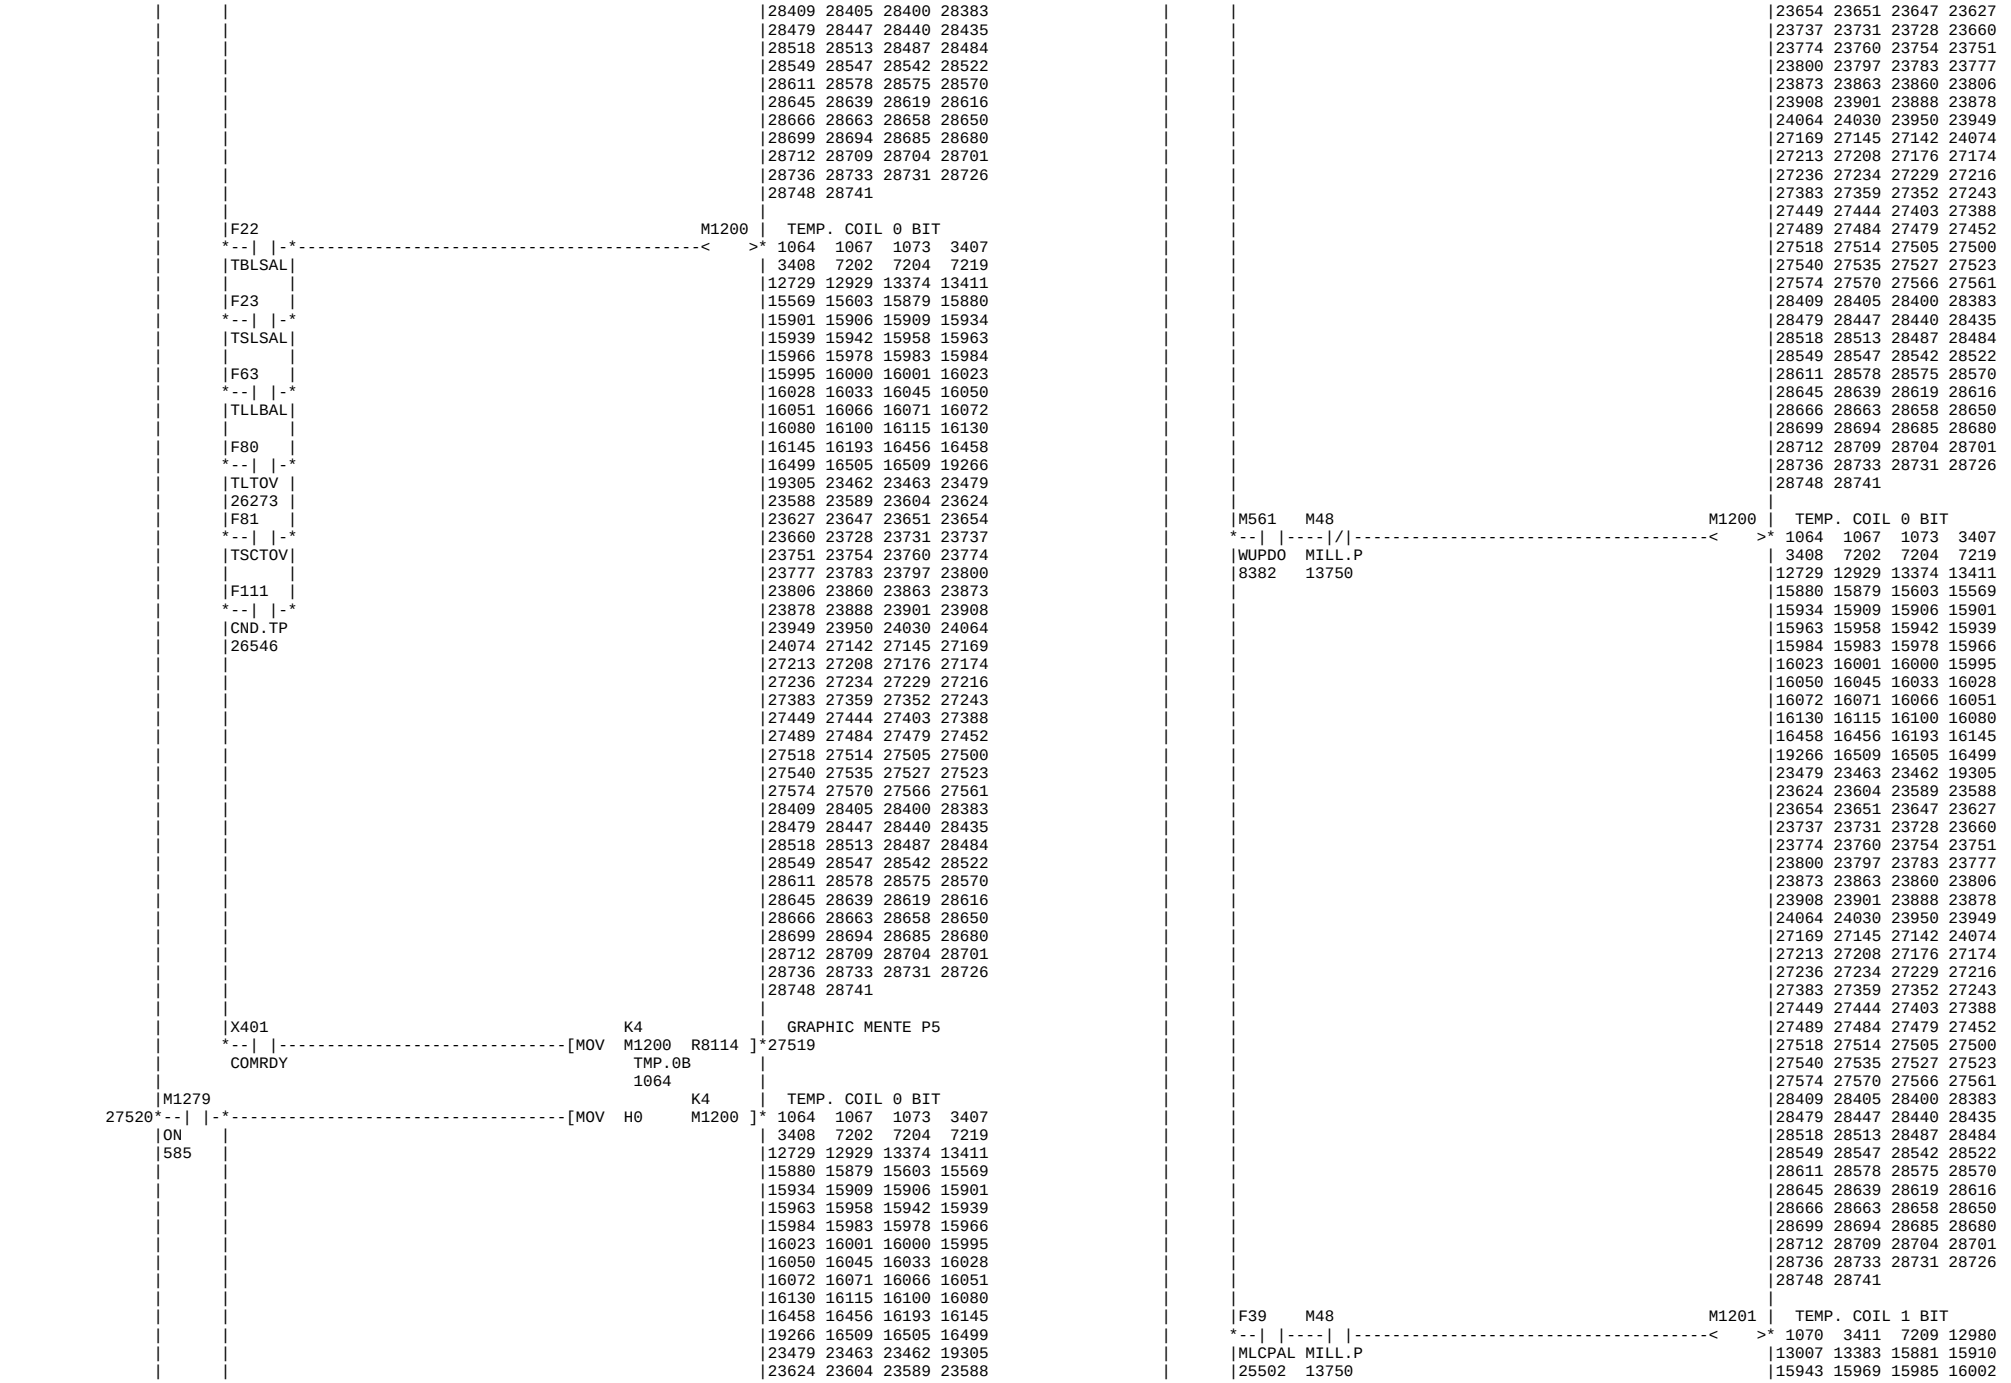

M1204 | TEMP. COIL 4 BIT
28723 28625 28555 28536
28743
13403 12989 13016 15888
15917 15948 15992 16005
16059 16473 19183 23870
27379 27240 27222 23885
28460 28419 27463 27423
28673 28628 28557 28539
28691
M1279
27241 ON
585
M1279
27245 ON
585
K4 M1200 R3703 TMP.0B 1064
27244
K4 | ALARM NO. 200-23
F0 D1011 THR1AL 25028
27248 27277
K8 | ALARM NO. 216-23
DMOV F16 D1012
27251 27280
K8 | ALARM NO. 263-24
DMOV F48 D1014 EXC.AL 25573
27254 27286
K8 | HD1 ALARM 295-2
DMOV F80 D1016 TLTOV 26273
27257 27292
K4 | HD1 ALARM 327-3
MOV F112 D1018 CND.PC 26566
27260 27298
K4 | ALARM NO. 328-35
MOV M5248 D1019
27263 27301
K8 | HD1 ALARM 395-3
DMOV M5264 D1020 AL344 26760
27266 27304
K4 | ALARM NO. 391-37
MOV M5296 D1022 AL376 1865
27269 27310
K2 | ALARM NO.392-399
MOV M5312 D1023 AL392
27273 27313
M1279
27274 ON
585
K0 D1011 K0 D1012
1>
K0 D1013 K0 D1014
2>
K0 D1015 K0 D1016
3>
K0 D1017 K0 D1018
4>
K0 D1019 K0 D1020
5>
K0 D1021 K0 D1022
6>
27248 27251 27254 27257 27260 27263 27266 27269
1 2 3 4 5 6
M700 | PC ALARM
27314 1557 3783
K0 D1023
27273
27315
RET
P1
27316
X23E X23F X244 X245 X246 M1276 M1276 M1276
27347 27345 27346
DEN1.N DEN2.N OP.N STL.N SPL.N
27347 27347
X274 X276
R335 R44
TF.N CMDTL BCODE BF.N
X270 X271
R32 R33
MF1.N 1=M-C 1=M-C MF2.N
X278 X279
mf1.N mf2.N
X272 X273
R34 R35
MF3.N 1=M-C 1=M-C MF4.N
X27A X27B
mf3.N mf4.N
27348
RET
P160
27349
M1279
ON
585
MOV H0 M1200 K4 | TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680

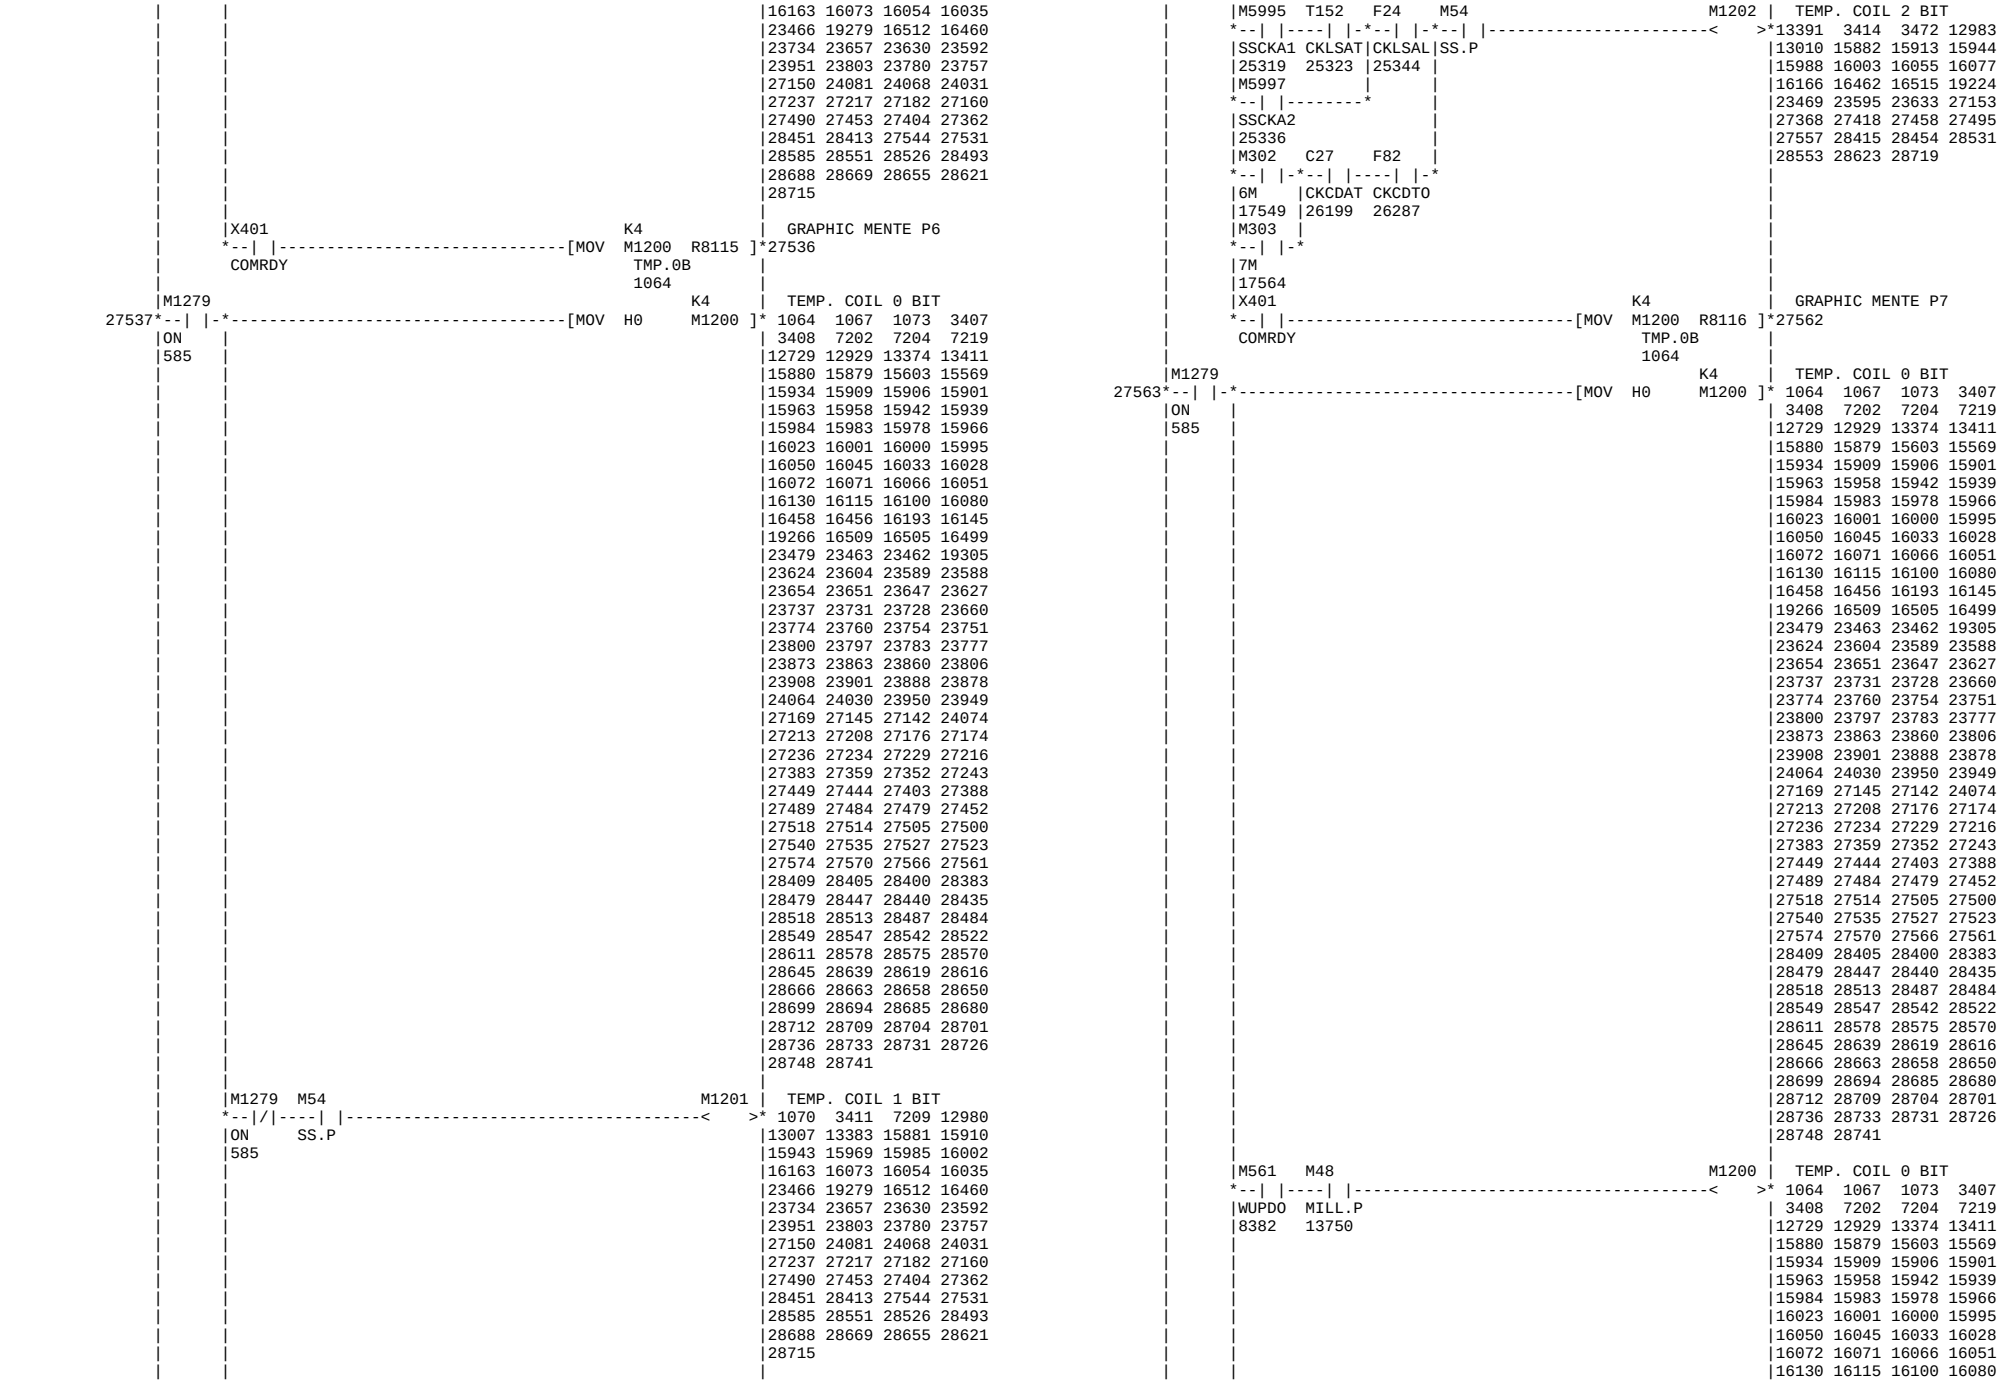

F6
M1200
TEMP. COIL 0 BIT
CCVOAL
CCVOP
DRLSAL
F55
F100
CND.FD
26426
M1279
M1201
TEMP. COIL 1 BIT
ON
585
F9
M1202
TEMP. COIL 2 BIT
TELSOF
F31
TELSAL
25434
F108
CND.TE
26479
F20
M1203
TEMP. COIL 3 BIT
TRIDMS
25271
F21
TRCLMS
25300
F72
TCDTOV
26183
F101
CND.TU
26467
M1279 M54
M1204
TEMP. COIL 4 BIT
ON SS.P
585
X401
K4
GRAPHIC MENTE P1
COMRDY
TMP.0B
1064
M1279
K4
TEMP. COIL 0 BIT
27385
ON
585
H0
M1200
F12
M1200
TEMP. COIL 0 BIT
CKSWAL
25195

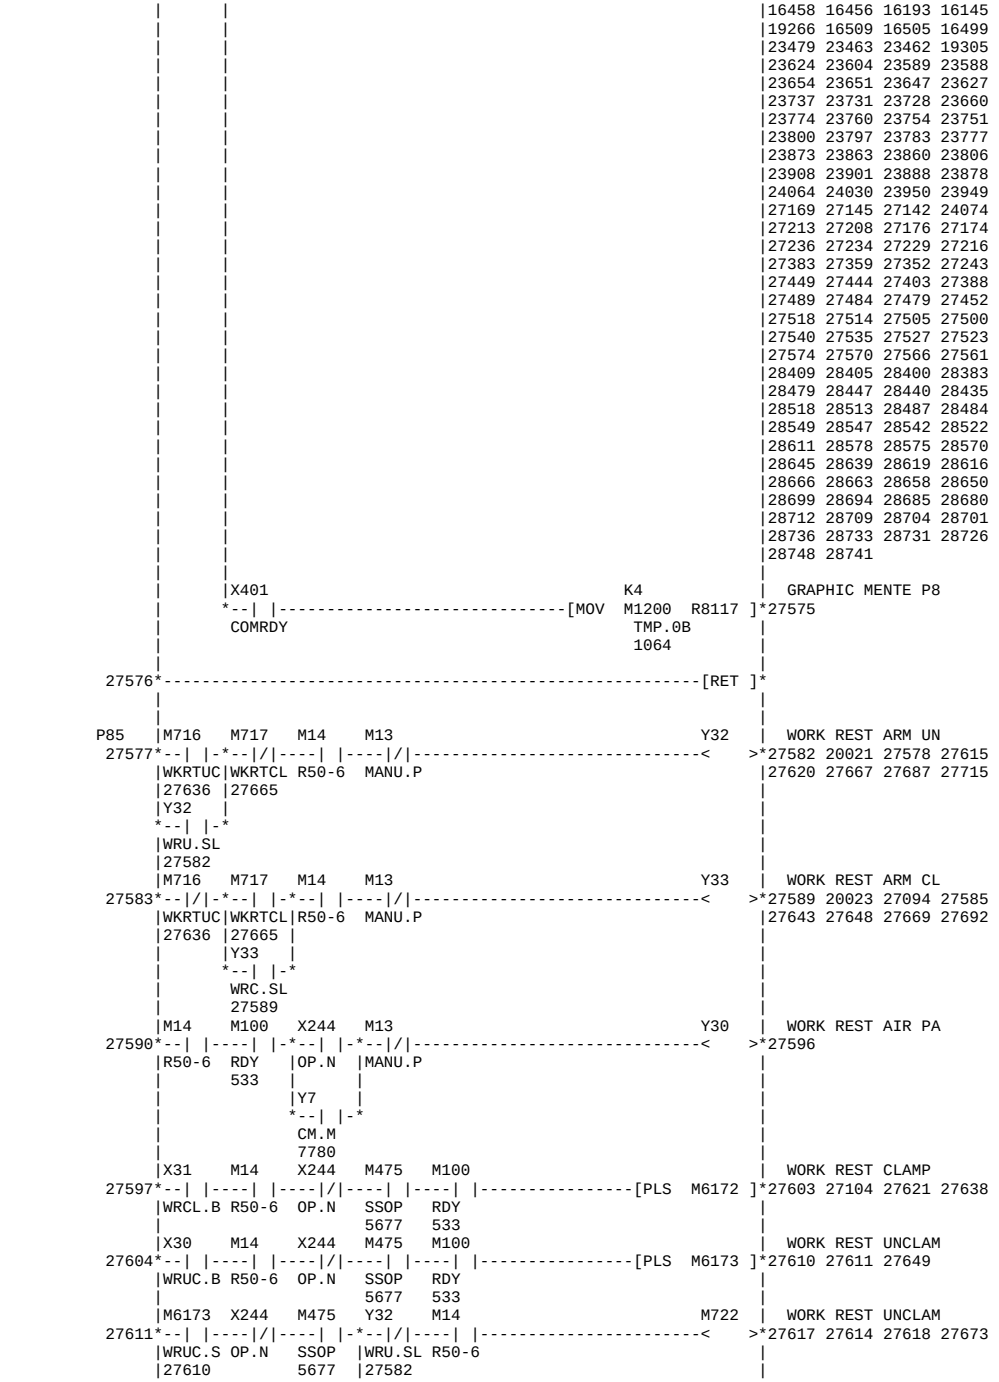

F97
M1201 | TEMP. COIL 1 BIT
MCPSAL
26331
M5994 T152 F24
CKSAL1 CKLSAT CKLSAL
25309 25323 25344
M5996
CKSAL2
25330
M206 C27 F82
6M CKCDAT CKCDTO
16852 26199 26287
M207
7M
16862
F12
M1202 | TEMP. COIL 2 BIT
CKSWAL
25195
M5994 T152 F24
CKSAL1 CKLSAT CKLSAL
25309 25323 25344
M1203 | TEMP. COIL 3 BIT
M5996
CKSAL2
25330
M206 C27 F82
6M CKCDAT CKCDTO
16852 26199 26287
M207
7M
16862
F3 M48
M1204 | TEMP. COIL 4 BIT
APDNAL MILL.P
25065 13750
F12 M54
M1205 | TEMP. COIL 5 BIT
CKSWAL SS.P
25195
F98
M1206 | TEMP. COIL 6 BIT
SCPSAL
26335
M5995 T152 F24
SSCKA1 CKLSAT CKLSAL
25319 25323 25344
M5997
SSCKA2
25336
M302 C27 F82
6M CKCDAT CKCDTO
17549 26199 26287
M303
7M
17564
X401
K4
GRAPHIC MENTE P2
COMRDY
MOV M1200 R8111
TMP.0B
1064
M1279
K4
TEMP. COIL 0 BIT
27446
ON
585
MOV H0 M1200
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
13007 13383 15881 15910
15943 15969 15985 16002
16035 16054 16073 16163
16460 16512 19279 23466
23592 23630 23657 23734
23757 23780 23803 23951
24031 24068 24081 27150
27160 27182 27217 27237
27362 27404 27453 27490
27531 27544 28413 28451
28493 28526 28551 28585
28621 28655 28669 28688
28715
13391 3414 3472 12983
13010 15882 15913 15944
15988 16003 16055 16077
19224 16515 16462 16166
27153 23633 23595 23469
27495 27458 27418 27368
28531 28454 28415 27557
28719 28623 28553
7216 3417 12986 13013
13400 15885 15916 15947
15989 16004 16056 16169
16464 16517 19237 23472
23598 23867 23882 27155
27183 27221 27239 27375
27419 27459 27496 28458
28536 28555 28625 28723
28743
13403 12989 13016 15888
15917 15948 15992 16005
16059 16473 19183 23870
27379 27240 27222 23885
28460 28419 27463 27423
28673 28628 28557 28539
28691
13405 12992 13019 15890
15918 15951 15972 16006
16038 16061 16475 19196
27467 27439 27218 23636
28559 28497 28463 28423
28677 28630 28591
13406 3465 3474 12995
13022 15895 15921 15952
15973 16007 16040 16062
16477 19142 23644 27219
27440 27471 28388 28466
28501 28561 28597 28632
28745
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074

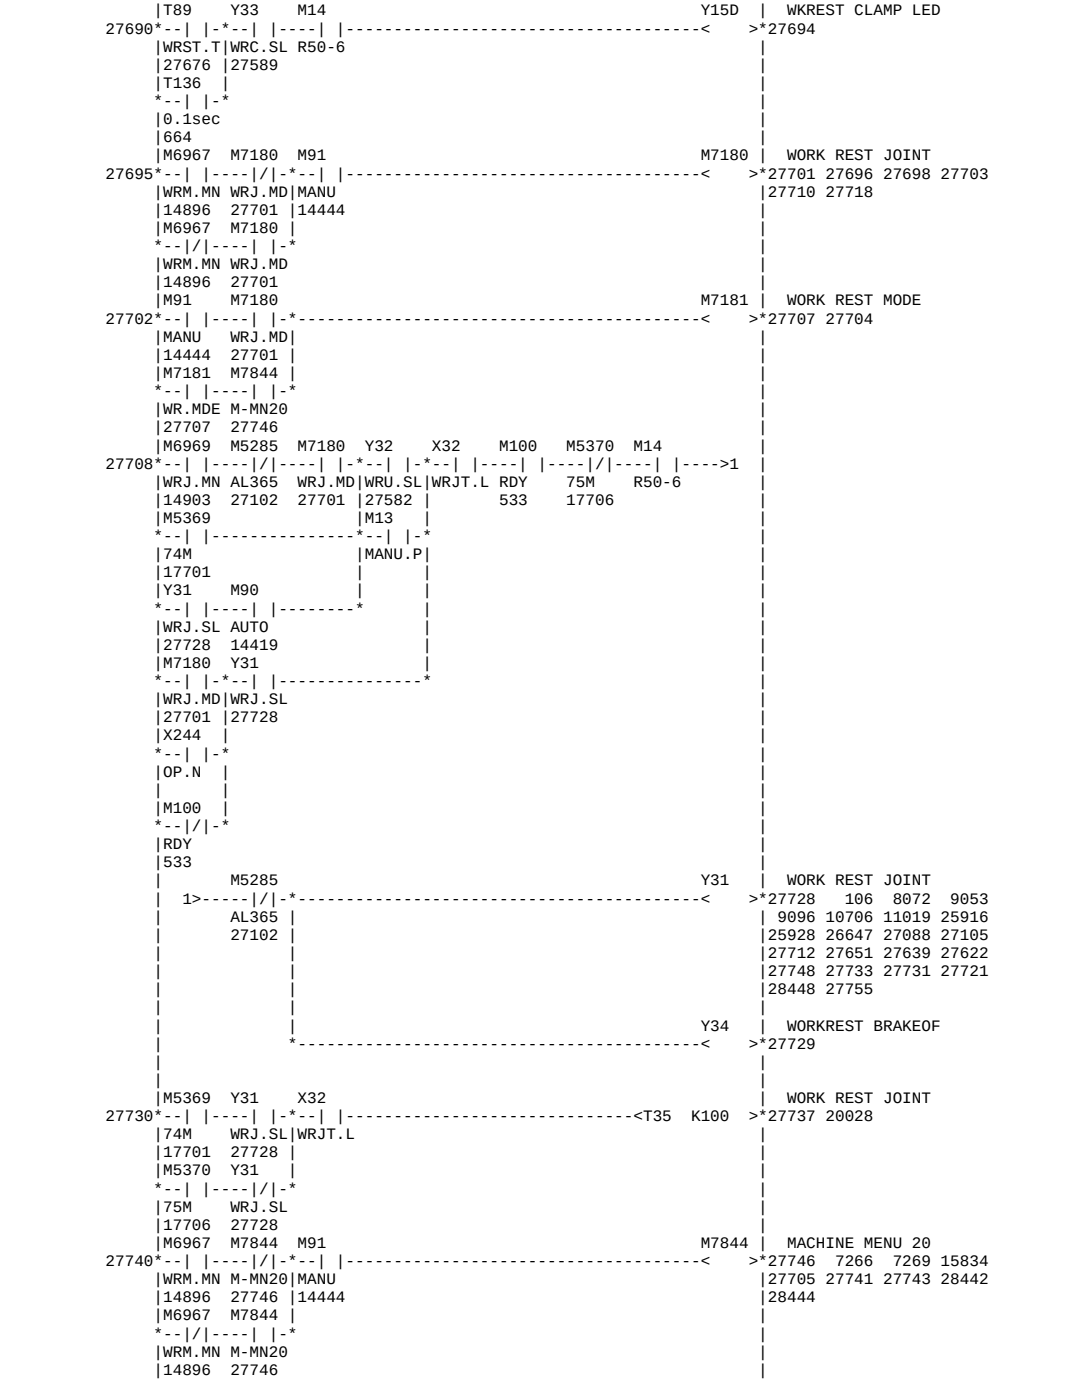

F2
M1200
TEMP. COIL 0 BIT
HPDNAL
25052
M1201
TEMP. COIL 1 BIT
F60
M1202
TEMP. COIL 2 BIT
WYLBAL
26061
F67
M1203
TEMP. COIL 3 BIT
BSLBAL
M1279 M49
M1204
TEMP. COIL 4 BIT
ON C.P
585
M1279 M54
M1205
TEMP. COIL 5 BIT
ON SS.P
585
F3 M48
M1206
TEMP. COIL 6 BIT
APDNAL MILL.P
25065 13750
M7086 M48
M1207
TEMP. COIL 7 BIT
LUBALM MILL.P
26078 13750
X401
K4
GRAPHIC MENTE P3
COMRDY
MOV M1200 R8112
TMP.0B
1064
M1279
K4
TEMP. COIL 0 BIT
27481
ON
585
MOV H0 M1200

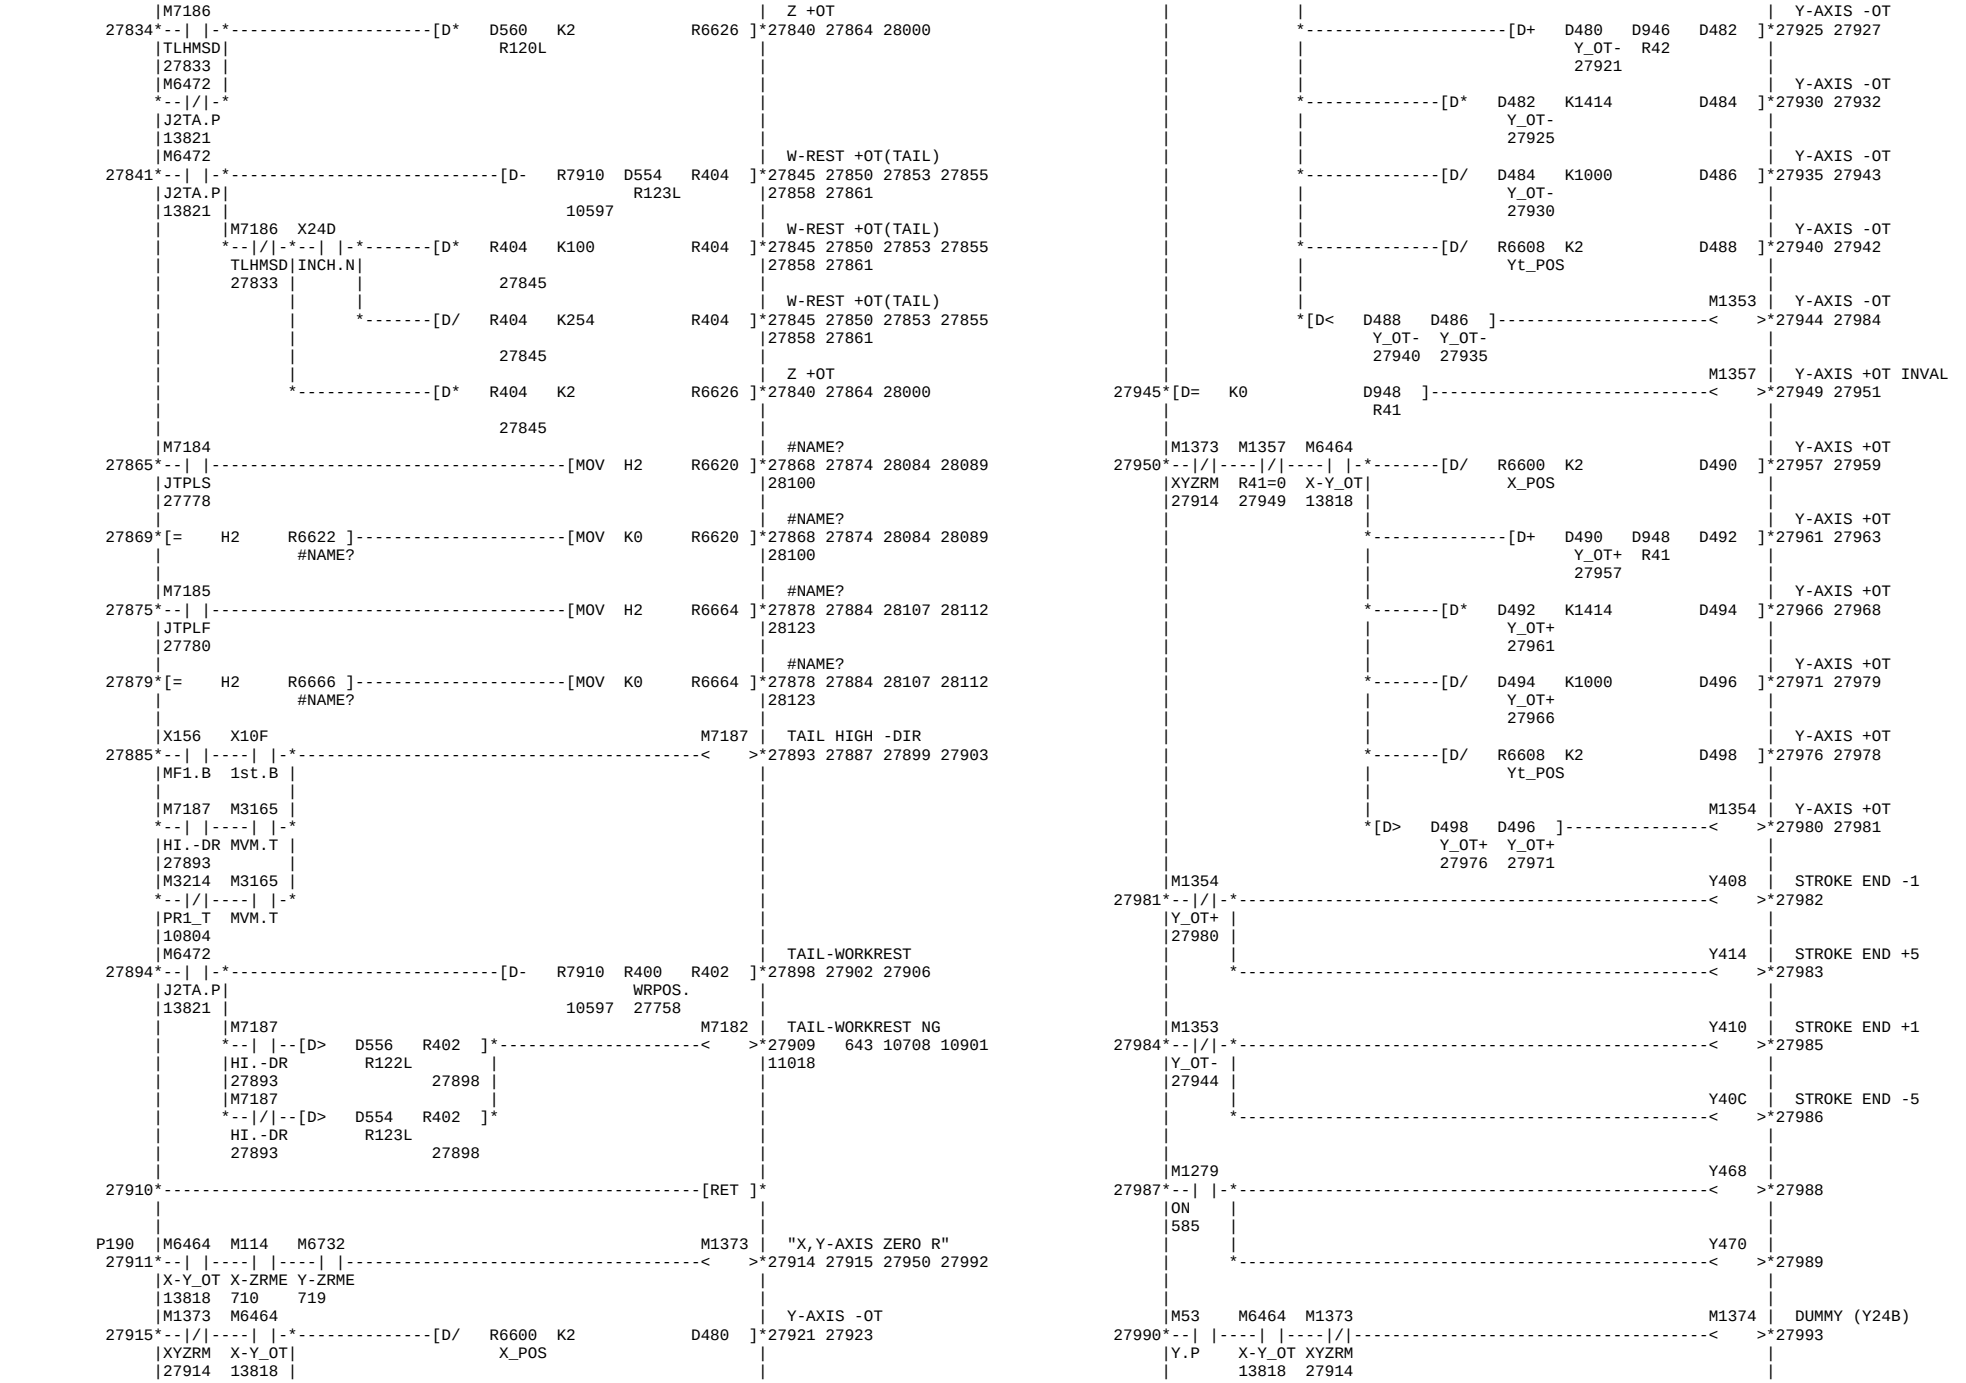

16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
F21
M1200
TEMP. COIL 0 BIT
TRCLMS
25300
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
F72
M1201
TEMP. COIL 1 BIT
TCDTOV
26183
1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
F21
M1202
TEMP. COIL 2 BIT
TRCLMS
25300
13391 3414 3472 12983
13010 15882 15913 15944
15988 16003 16055 16077
19224 16515 16462 16166
27153 23633 23595 23469
27495 27458 27418 27368
28531 28454 28415 27557
28719 28623 28553
F72
M1203
TEMP. COIL 3 BIT
TCDTOV
26183
7216 3417 12986 13013
13400 15885 15916 15947
15989 16004 16056 16169
23472 19237 16517 16464
27155 23882 23867 23598
27375 27239 27221 27183
28458 27496 27459 27419
28723 28625 28555 28536
28743
X401
K4
GRAPHIC MENTE P4
COMRDY
MOV
M1200
R8113
TMP.0B
1064
M1279
27502
ON
585
MOV
H0
K4
M1200
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561

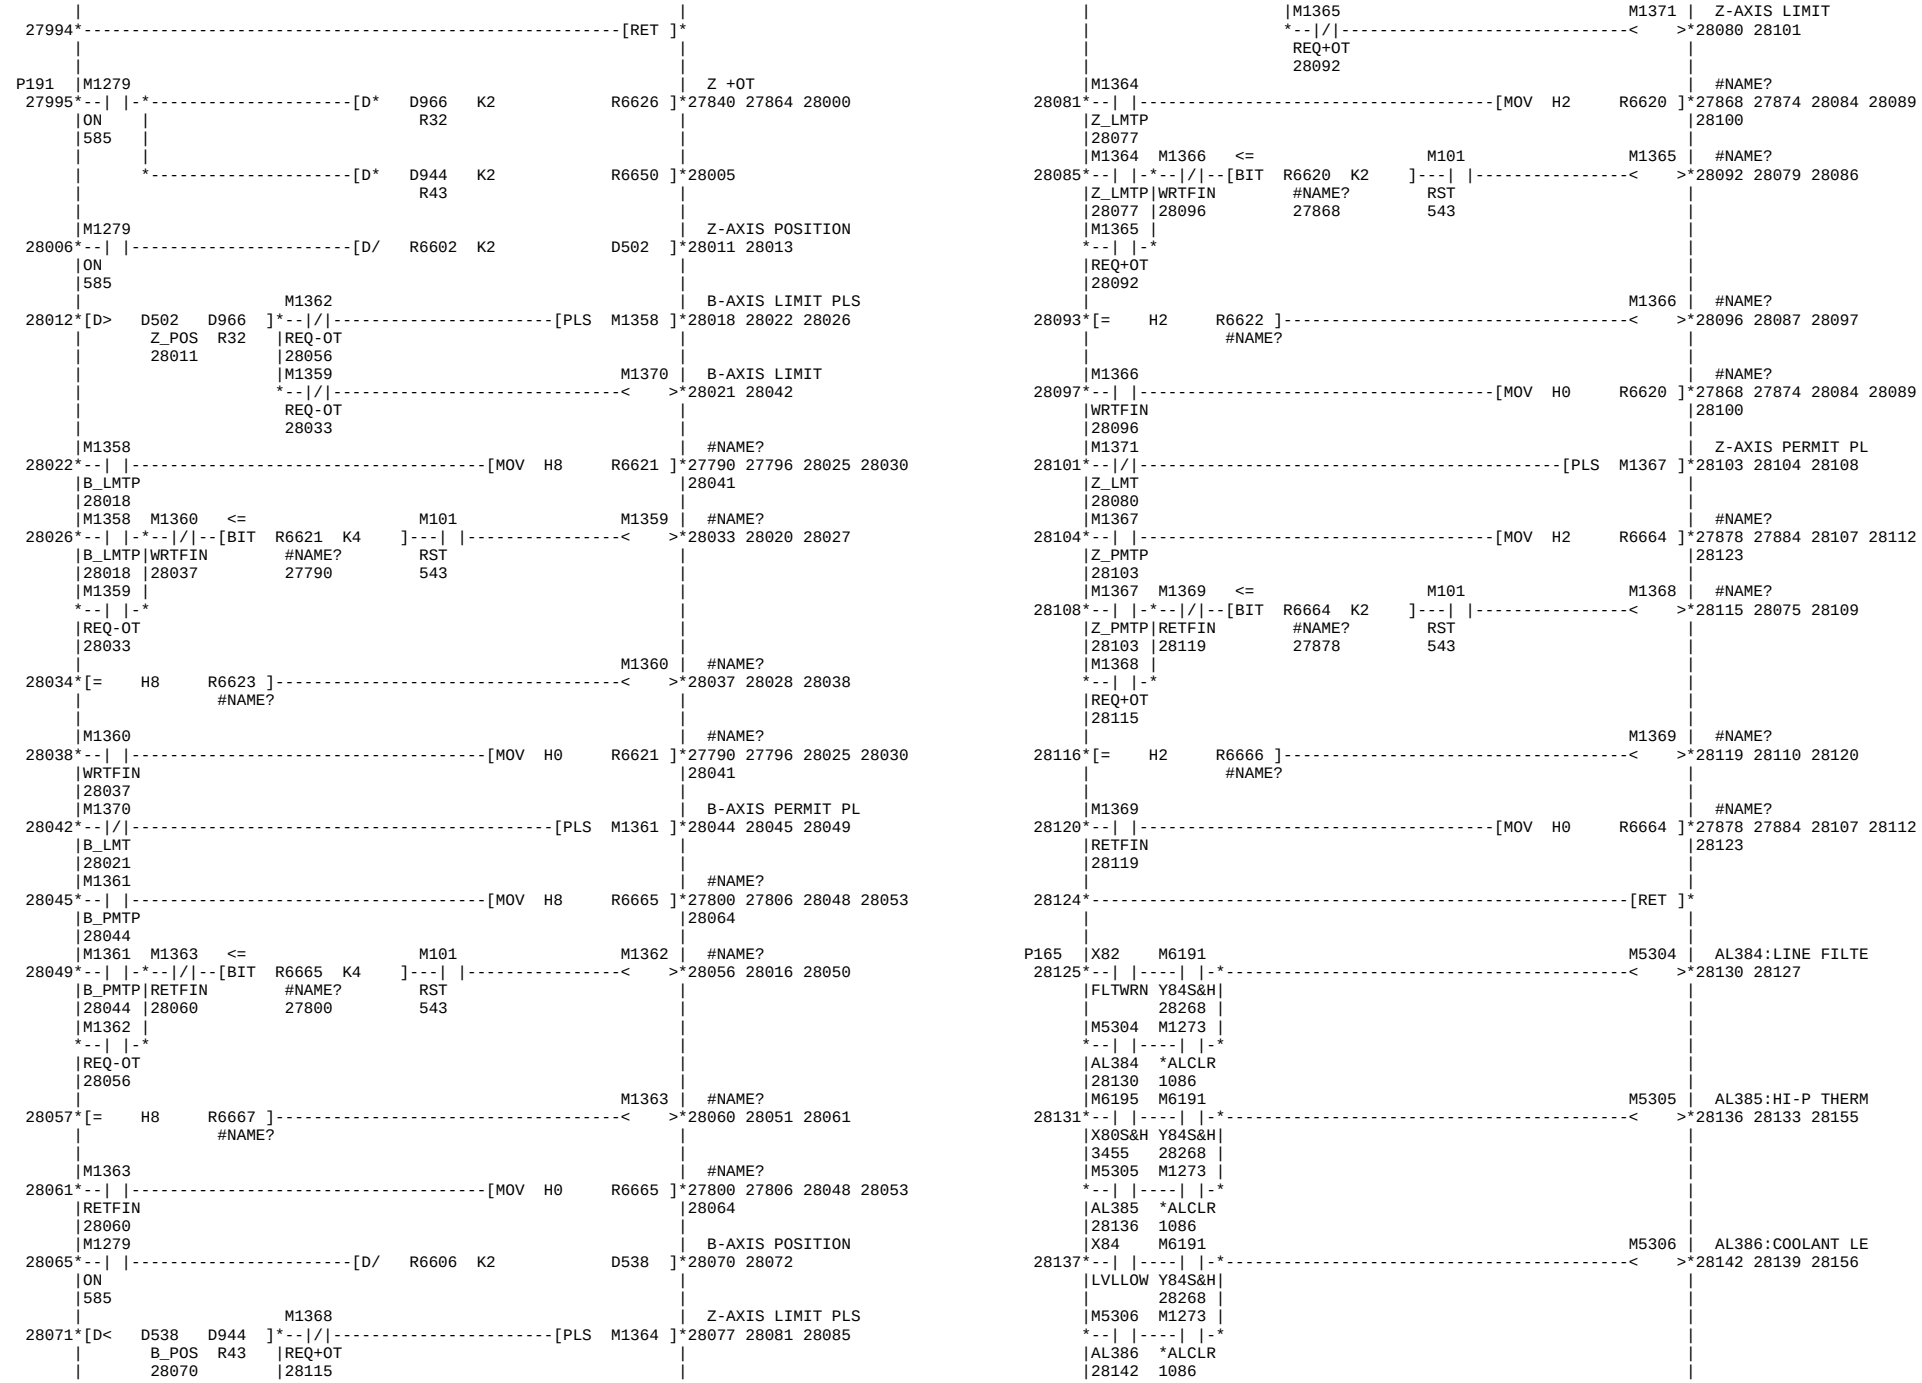

F22 M1200 | TEMP. COIL 0 BIT
TBLSAL
F23
TSLSAL
F63
TLLBAL
F80
TLTOV
26273
F81
TSCTOV
F111
CND.TP
26546
X401 K4 | GRAPHIC MENTE P5
COMRDY MOV M1200 R8114 TMP.0B 1064
M1279 K4 | TEMP. COIL 0 BIT
ON MOV H0 M1200
585
M561 M48 M1200 | TEMP. COIL 0 BIT
WUPDO MILL.P
8382 13750
F39 M48 M1201 | TEMP. COIL 1 BIT
MLCPAL MILL.P
25502 13750
1064 1067 1073 3407
3408 7202 7204 7219
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
27519
27520
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
12729 12929 13374 13411
15569 15603 15879 15880
15901 15906 15909 15934
15939 15942 15958 15963
15966 15978 15983 15984
15995 16000 16001 16023
16028 16033 16045 16050
16051 16066 16071 16072
16080 16100 16115 16130
16145 16193 16456 16458
16499 16505 16509 19266
19305 23462 23463 23479
23588 23589 23604 23624
23627 23647 23651 23654
23660 23728 23731 23737
23751 23754 23760 23774
23777 23783 23797 23800
23806 23860 23863 23873
23878 23888 23901 23908
23949 23950 24030 24064
24074 27142 27145 27169
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
13007 13383 15881 15910
15943 15969 15985 16002

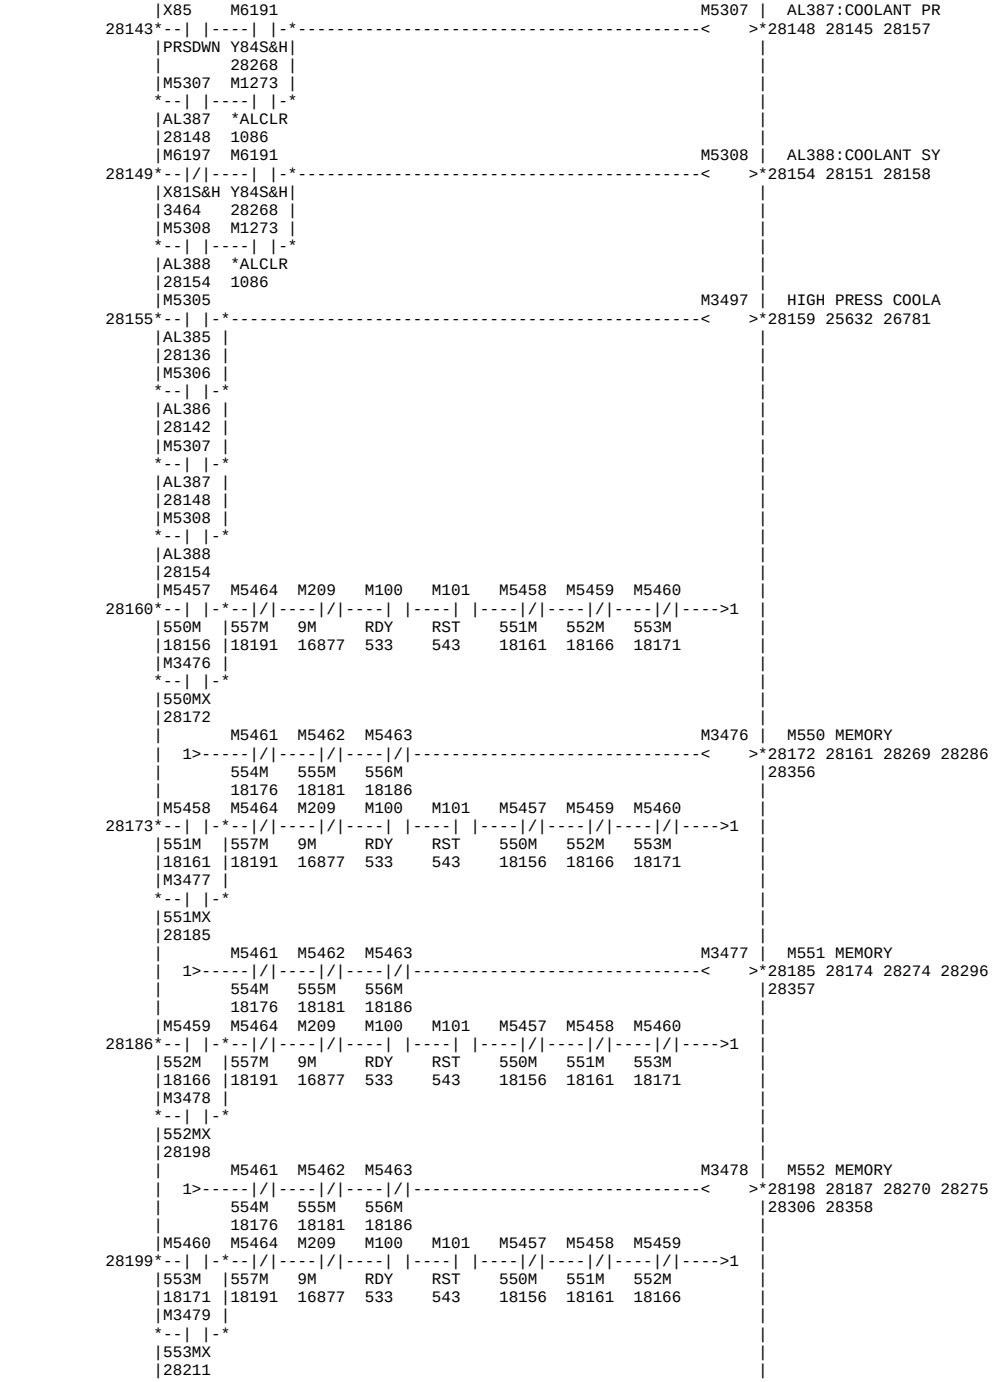

X401
COMRDY
K4
M1200 R8115
TMP.0B
1064
GRAPHIC MENTE P6
27536
M1279
ON
585
K4
M1200
H0
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M1279 M54
ON
585
SS.P
M1201
TEMP. COIL 1 BIT
1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
M5995 T152 F24 M54
SSCKA1 CKLSAT CKLSAL SS.P
25319 25323 25344
M5997
SSCKA2
25336
M302 C27 F82
6M CKCDAT CKCDTO
17549 26199 26287
M303
7M
17564
M1202
TEMP. COIL 2 BIT
13391 3414 3472 12983
13010 15882 15913 15944
15988 16003 16055 16077
16166 16462 16515 19224
23469 23595 23633 27153
27368 27418 27458 27495
27557 28415 28454 28531
28553 28623 28719
X401
COMRDY
K4
M1200 R8116
TMP.0B
1064
GRAPHIC MENTE P7
27562
M1279
ON
585
K4
M1200
H0
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M561 M48
WUPDO MILL.P
8382 13750
M1200
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080

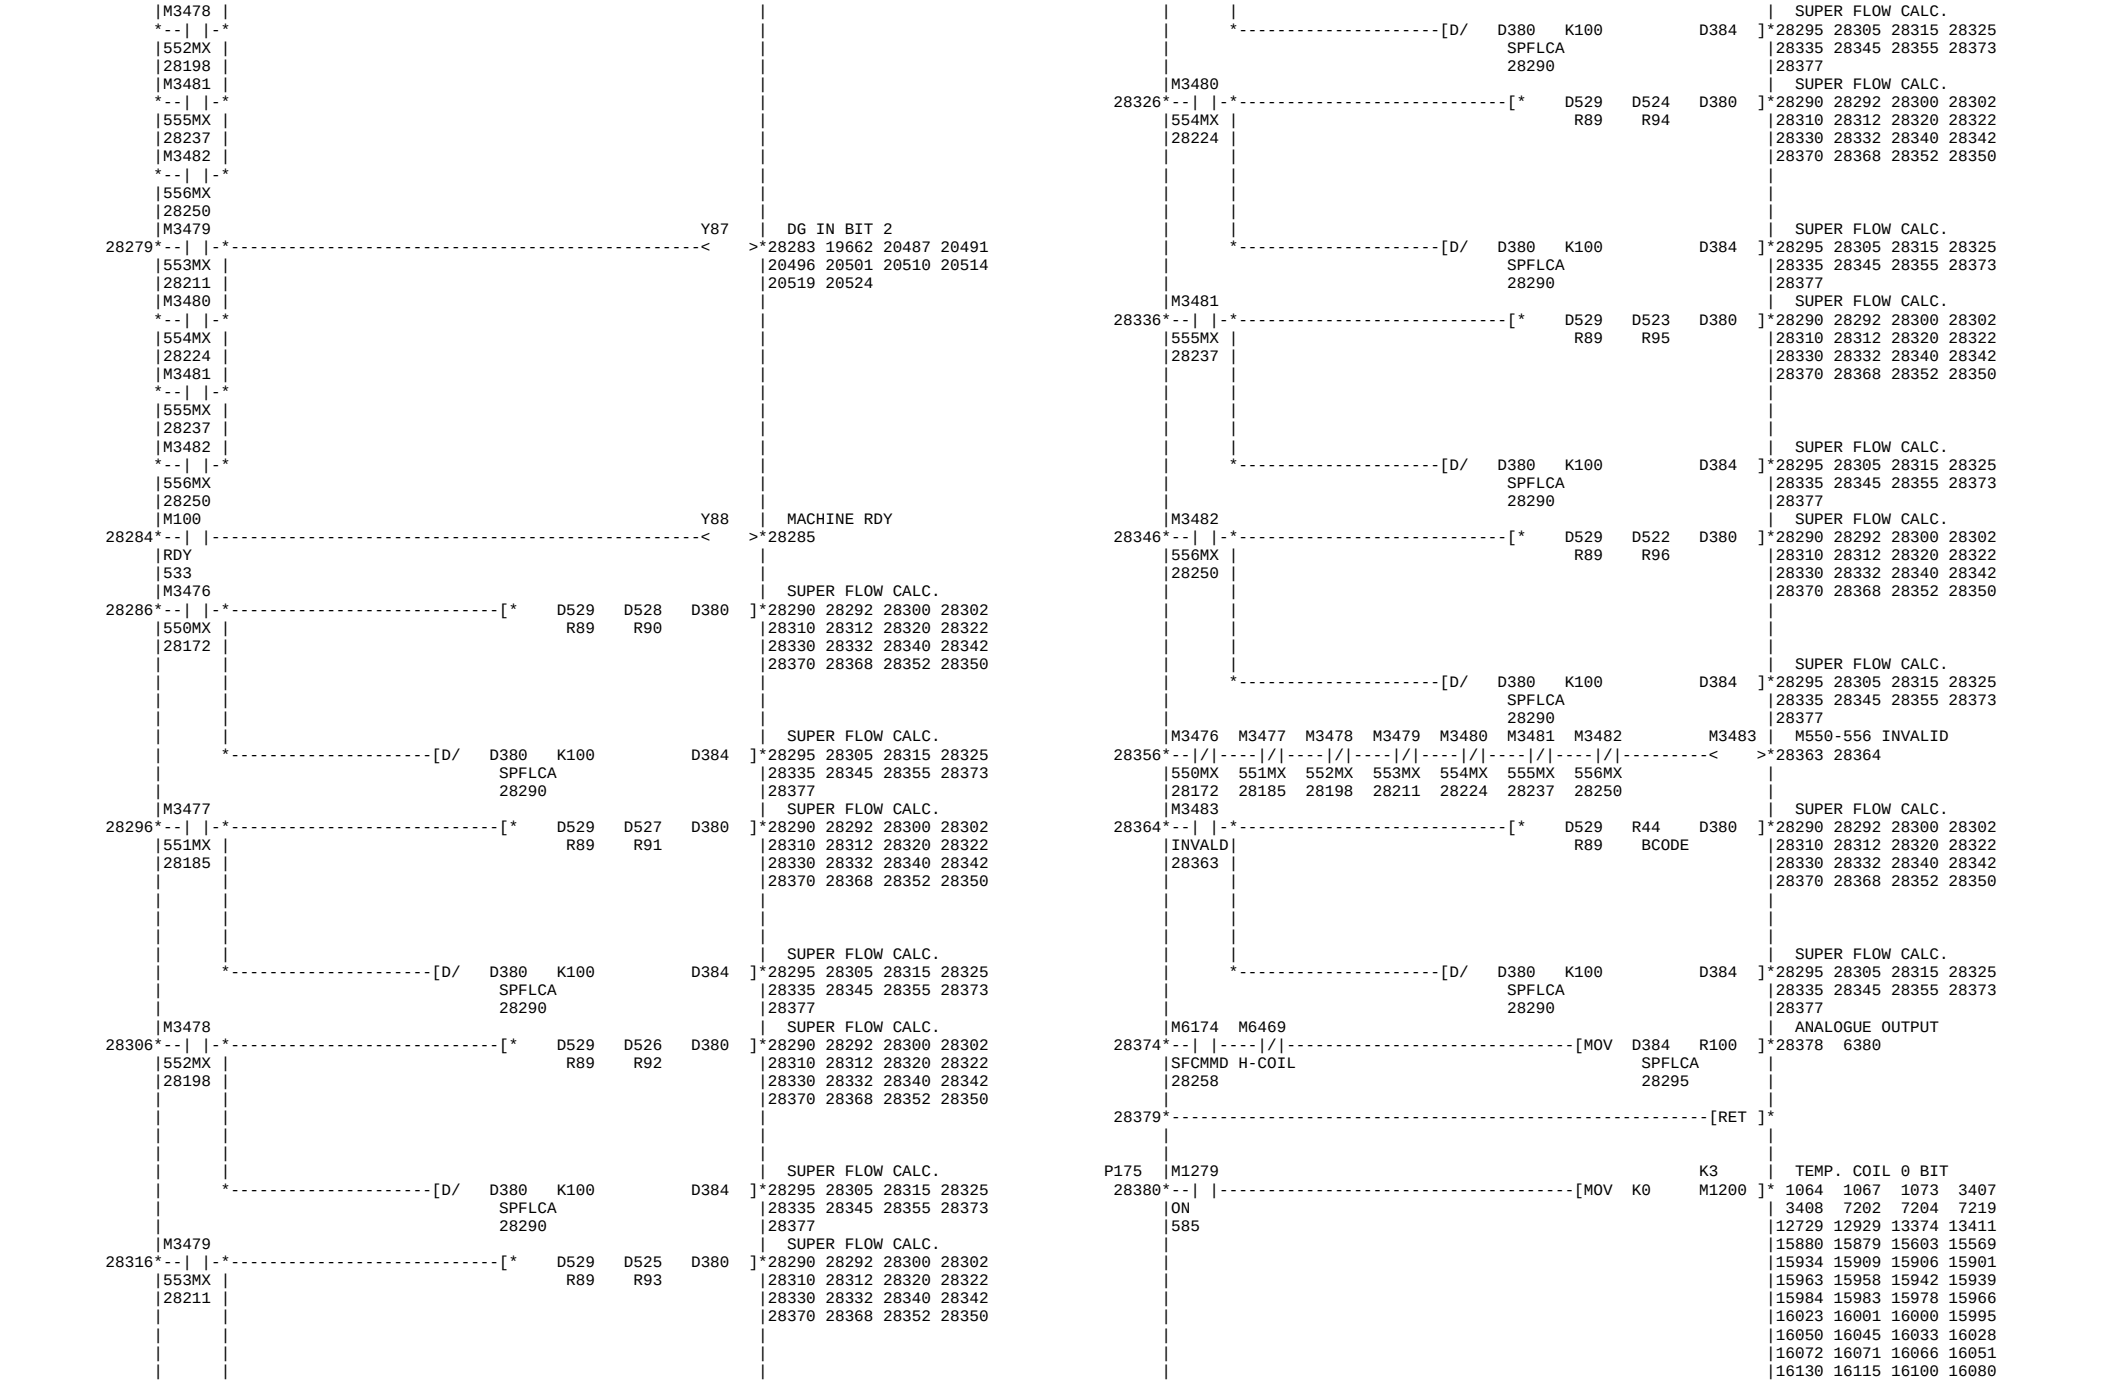

16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
X401
K4
GRAPHIC MENTE P8
COMRDY
MOV M1200 R8117
TMP.0B
1064
27575
27576
RET
P85
M716 M717 M14 M13
Y32
WORK REST ARM UN
27577
27582 20021 27578 27615
WKRTUC WKRTCL R50-6 MANU.P
27636 27665
Y32
WRU.SL
27582
27620 27667 27687 27715
M716 M717 M14 M13
Y33
WORK REST ARM CL
27583
27589 20023 27094 27585
WKRTUC WKRTCL R50-6 MANU.P
27636 27665
Y33
WRC.SL
27589
27643 27648 27669 27692
M14 M100 X244 M13
Y30
WORK REST AIR PA
27590
27596
R50-6 RDY OP.N MANU.P
533
Y7
CM.M
7780
X31 M14 X244 M475 M100
WORK REST CLAMP
27597
27603 27104 27621 27638
WRCL.B R50-6 OP.N SSOP RDY
5677 533
X30 M14 X244 M475 M100
WORK REST UNCLAM
27604
27610 27611 27649
WRUC.B R50-6 OP.N SSOP RDY
5677 533
M6173 X244 M475 Y32 M14
M722
WORK REST UNCLAM
27611
27617 27614 27618 27673
WRUC.S OP.N SSOP WRU.SL R50-6
27610 5677 27582
M722
WORTUC
27617
M722 X244 M6172 M5372 M100 M717
M716
WORKREST UNCLAMP
27618
27636 27577 27583 27628
WORTUC OP.N WRCL.S 87M RDY WKRTCL
27617 27603 17716 533 27665
27664 27668 27679
Y32 Y31 T89
WORK REST ARM CL
27637 24624 27655 27684
WRU.SL WRJ.SL WRST.T
27582 27728 27676
M5371
86M
17711
M102 L59
RDYP WRURST
535 27666
M716 M100
WKRTUC RDY
27636 533
M6172 Y31 X244 M475 Y33 M14
M723
WORK REST CLAMP
27638
27645 27642 27646 27674
WRCL.S WRJ.SL OP.N SSOP WRC.SL R50-6
27603 27728 5677 27589
M723
WORTCL
27645
M723 X244 M6173 M5371 M100 M716
M717
WORK REST CLAMP
27646
27665 27579 27584 27635
WORTCL OP.N WRUC.S 86M RDY WKRTUC
27645 27610 17711 533 27636
27657 27670 27682
Y33 T89
WRC.SL WRST.T
27589 27676
M5372 Y31 M5286
87M WRJ.SL AL366
17716 27728 27111
M102 L58
RDYP WRCRST
535 27637
M717 M100
WKRTCL RDY
27665 533
Y32 M716 M14 M722 M723
WORK REST TIMER
27667
27676 20025 27633 27662
WRU.SL WKRTUC R50-6 WORTUC WORTCL
27582 27636 27617 27645
T49 27680 27683 27685 27690
Y33 M717
WRC.SL WKRTCL
27589 27665
M716 T89
WORK REST ARM UN
27679
27666 24627 27626 27681
WKRTUC WRST.T
27636 27676
M717 T89
WORK REST ARM CL
27682
27637 24624 27655 27684
WKRTCL WRST.T
27665 27676
T89 Y32 M14
Y15E
WKREST UNCLP LED
27685
27689
WRST.T WRU.SL R50-6
27676 27582
T136
0.1sec
664

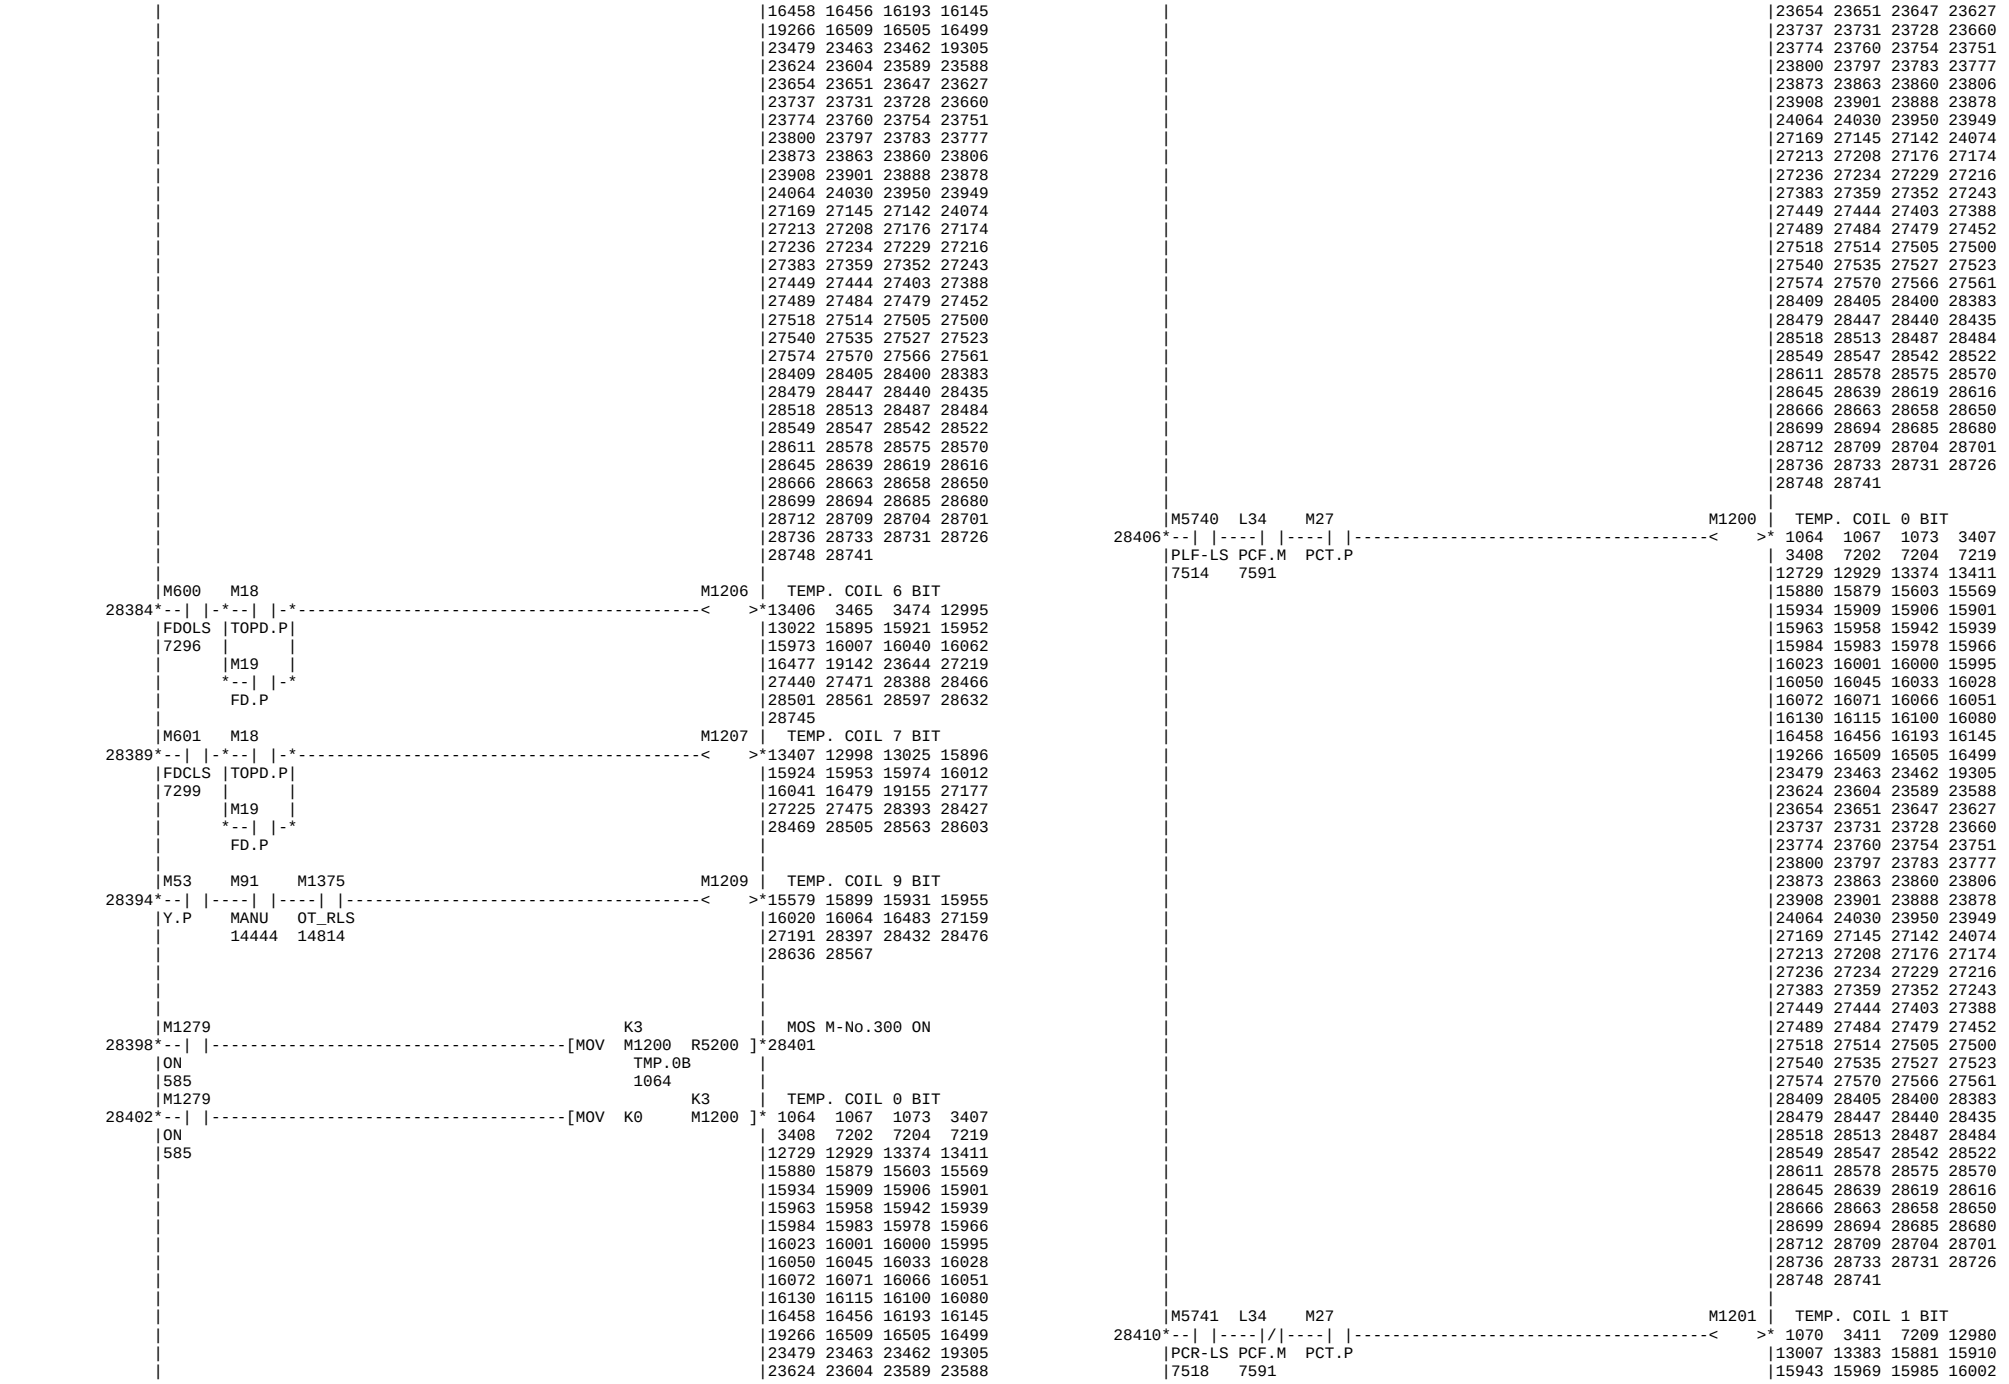

|T89 Y33 M14 Y15D | WKREST CLAMP LED
27690*--| |-*--| |----| |----------<
>*27694
|WRST.T|WRC.SL R50-6
|27676 |27589
|T136 |
--| |-
|0.1sec
|664
|M6967 M7180 M91 M7180 | WORK REST JOINT
27695*--| |----|/|-*--| |----------<
>*27701 27696 27698 27703
|WRM.MN WRJ.MD|MANU
|27710 27718
|14896 27701 |14444
|M6967 M7180 |
--|/|----| |-
|WRM.MN WRJ.MD
|14896 27701
|M91 M7180 M7181 | WORK REST MODE
27702*--| |----| |-*----------<
>*27707 27704
|MANU WRJ.MD|
|14444 27701 |
|M7181 M7844 |
--| |----| |-
|WR.MDE M-MN20
|27707 27746
|M6969 M5285 M7180 Y32 X32 M100 M5370 M14
27708*--| |----|/|----| |-*--| |-*--| |----| |----|/|----| |---->1
|WRJ.MN AL365 WRJ.MD|WRU.SL|WRJT.L RDY 75M R50-6
|14903 27102 27701 |27582 | 533 17706
|M5369 |M13 |
--| |-----------------| |-*
74M	MANU.P
17701	
Y31 M90	
*--		----		--------*
WRJ.SL AUTO
27728 14419
M7180 Y31
*--		-*--		---------------*
WRJ.MD	WRJ.SL
27701	27728
X244
*--		-*
OP.N
M100
*--	/	-*
RDY
533
M5285 Y31	WORK REST JOINT
1>-----	/	-*----------<
>*27728 106 8072 9053
AL365	9096 10706 11019 25916
27102	25928 26647 27088 27105
	27712 27651 27639 27622
	27748 27733 27731 27721
	28448 27755
Y34	WORKREST BRAKEOF
*----------<
>*27729
M5369 Y31 X32	WORK REST JOINT
27730*--| |----| |-*--| |----------<T35 K100 >*27737 20028
74M WRJ.SL	WRJT.L
17701 27728
M5370 Y31
*--		----	/	-*
75M WRJ.SL
17706 27728
M6967 M7844 M91 M7844	MACHINE MENU 20
27740*--| |----|/|-*--| |----------<
>*27746 7266 7269 15834
WRM.MN M-MN20	MANU
27705 27741 27743 28442
14896 27746	14444
28444
M6967 M7844
*--	/	----		-*
WRM.MN M-MN20
14896 27746
T136 M7183 M7846 M7845	MACHINE MENU 21
27747*--| |-*--| |----| |----------<
>*27751
0.1sec	WR.MDS M-MN22
664	7268 27754
Y31
*--		-*
WRJ.SL
27728
M7183 X32 M7846	MACHINE MENU 22
27752*--		----		----------<
>*27754 27750 28450 28687
WR.MDS WRJT.L
7268
Y31	WORKREST POS.
27755*--		-*----------[DMOV R6602 R400]*27758 8074 8077 26645
WRJ.SL		27760 27763 27767 27770
27728		27772 27775 27897
		WORKREST POS.
*----------[D/ R400 K2 R400]*27758 8074 8077 26645
	WRPOS. |27760 27763 27767 27770
	27758	27772 27775 27897
|X24D	WORKREST POS.
*--		-*----------[D* R400 K254 R400]*27758 8074 8077 26645
	INCH.N	WRPOS.	27760 27763 27767 27770
		27758	27772 27775 27897
			WORKREST POS.
	*----------[D/ R400 K100 R400]*27758 8074 8077 26645
	WRPOS. |27760 27763 27767 27770
	27758	27772 27775 27897
		W-REST JOINT PLS
*----------[PLS M7184]*27778 27787 27865
		W-REST JOINT PLF
*----------[PLF M7185]*27780 27797 27875
M1279	Z -OT
27781*--		----------[D* D558 K2 R6646]*27786
ON R121L
585
M7184	#NAME?
27787*--		----------[MOV H2 R6621]*27790 27796 28025 28030
JTPLS	28041
27778
	#NAME?
27791*[= H2 R6623]----------[MOV K0 R6621]*27790 27796 28025 28030
#NAME?	28041
M7185	#NAME?
27797*--		----------[MOV H2 R6665]*27800 27806 28048 28053
JTPLF	28064
27780
	#NAME?
27801*[= H2 R6667]----------[MOV K0 R6665]*27800 27806 28048 28053
#NAME?	28064
M6472 X24D	R120(mm)
27807*--		-*--	/	----------[DMOV D560 D312]*27812 27819 27821 27824
J2TA.P	INCH.N R120L	27827
13821
|X24D	R120(mm)
*--		-*----------[D* D560 K254 D312]*27812 27819 27821 27824
	INCH.N	R120L	27827
			R120(mm)
	*----------[D/ D312 K100 D312]*27812 27819 27821 27824
		27827
	27812
		TAIL&WORKREST
*----------[D+ D312 D554 D410]*27829 27831
	R123L
	27812
	M7186	TAIL HOME SIDE
*[D< D410 R7910]----------<
>*27833 27834 27846
27829 10597

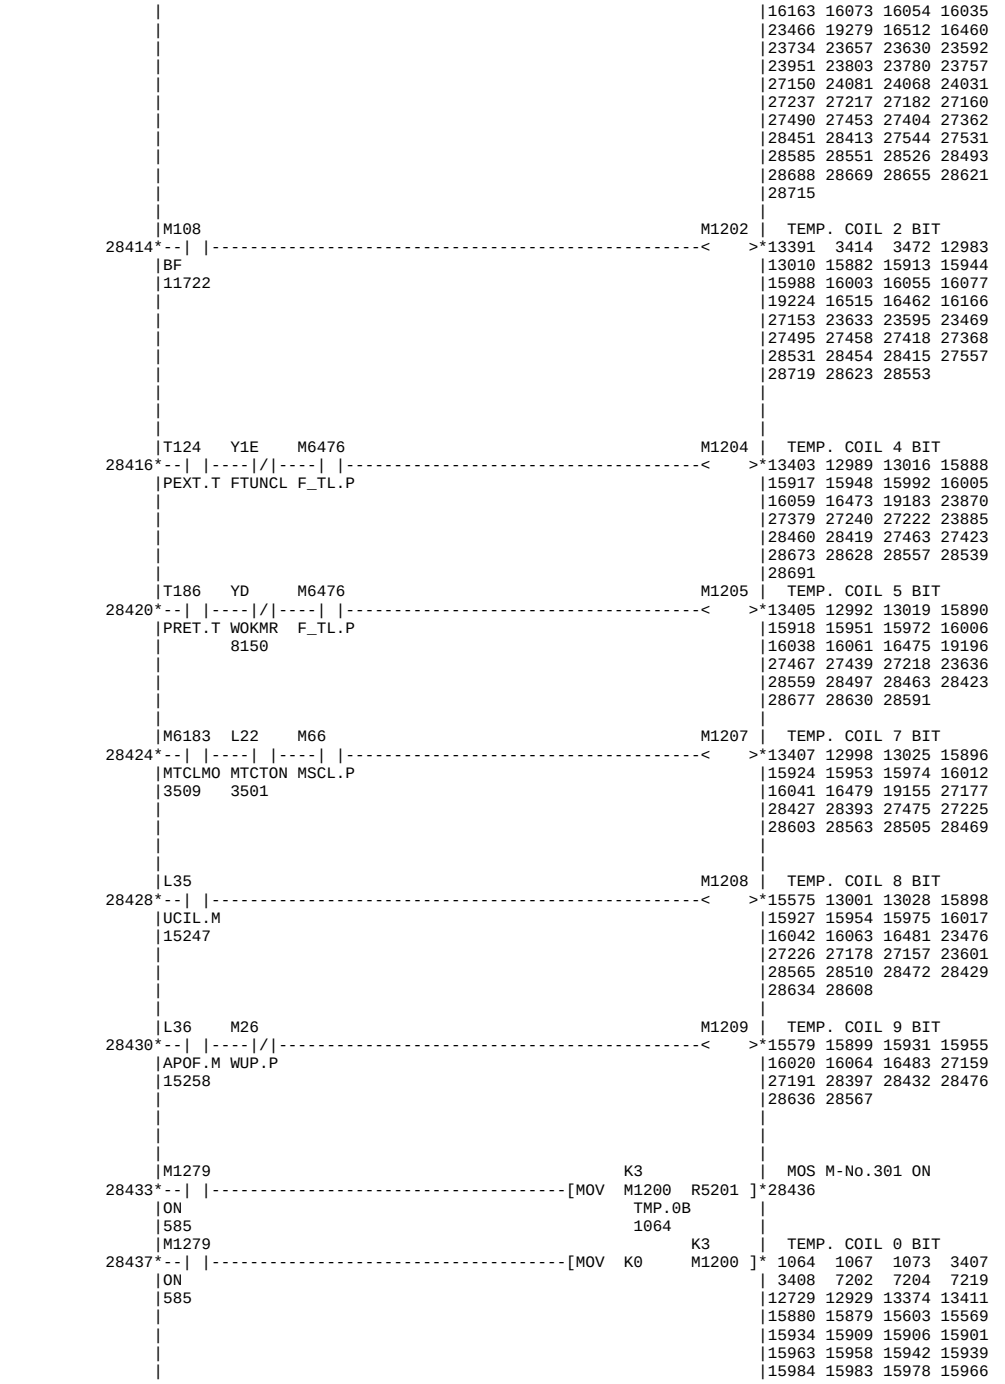

|M7186 | Z +OT
27834*--| |-*----------[D* D560 K2 R6626]*27840 27864 28000
TLHMSD	R120L
27833	
M6472	
*--	/	-*
J2TA.P
13821
M6472	W-REST +OT(TAIL)
27841*--| |-*----------[D- R7910 D554 R404]*27845 27850 27853 27855
J2TA.P	R123L	27858 27861
13821	10597
M7186 X24D	W-REST +OT(TAIL)
--|/|---| |-*-------[D* R404 K100 R404]*27845 27850 27853 27855
TLHMSD|INCH.N| |27858 27861
27833		27845
		W-REST +OT(TAIL)
*-------[D/ R404 K254 R404]*27845 27850 27853 27855
	27858 27861
27845
	Z +OT
----------[D R404 K2 R6626]*27840 27864 28000
27845
M7184	#NAME?
27865*--| |----------[MOV H2 R6620]*27868 27874 28084 28089
JTPLS	28100
27778
	#NAME?
27869*[= H2 R6622]----------[MOV K0 R6620]*27868 27874 28084 28089
#NAME? |28100
M7185	#NAME?
27875*--| |----------[MOV H2 R6664]*27878 27884 28107 28112
JTPLF	28123
27780
#NAME?
27879*[= H2 R6666]----------[MOV K0 R6664]*27878 27884 28107 28112
#NAME? |28123
X156 X10F M7187	TAIL HIGH -DIR
27885*--| |----| |-*----------< >*27893 27887 27899 27903
MF1.B 1st.B
M7187 M3165
--| |----| |-
HI.-DR MVM.T
27893
M3214 M3165
--|/|----| |-
PR1_T MVM.T
10804
M6472	TAIL-WORKREST
27894*--| |-*----------[D- R7910 R400 R402]*27898 27902 27906
J2TA.P	WRPOS.
13821	10597 27758
M7187 M7182	TAIL-WORKREST NG
--| |--[D> D556 R402]----------< >*27909 643 10708 10901
HI.-DR R122L	|11018
27893 27898
M7187
--|/|--[D> D554 R402]
HI.-DR R123L
27893 27898
27910*----------[RET]*
P190 |M6464 M114 M6732 M1373	"X,Y-AXIS ZERO R"
27911*--| |----| |----| |----------< >*27914 27915 27950 27992
X-Y_OT X-ZRME Y-ZRME
13818 710 719
M1373 M6464	Y-AXIS -OT
27915*--|/|----| |-*----------[D/ R6600 K2 D480]*27921 27923
XYZRM X-Y_OT	X_POS
27914 13818	
	Y-AXIS -OT
*----------[D+ D480 D946 D482]*27925 27927
Y_OT- R42
27921
Y-AXIS -OT
----------[D D482 K1414 D484]*27930 27932
Y_OT-
27925
Y-AXIS -OT
*----------[D/ D484 K1000 D486]*27935 27943
Y_OT-
27930
Y-AXIS -OT
*----------[D/ R6608 K2 D488]*27940 27942
Yt_POS
M1353	Y-AXIS -OT
*[D< D488 D486]----------< >*27944 27984
Y_OT- Y_OT-
27940 27935
M1357	Y-AXIS +OT INVAL
27945*[D= K0 D948]----------< >*27949 27951
R41
M1373 M1357 M6464	Y-AXIS +OT
27950*--|/|----|/|----| |-*-------[D/ R6600 K2 D490]*27957 27959
XYZRM R41=0 X-Y_OT	X_POS
27914 27949 13818	
	Y-AXIS +OT
*----------[D+ D490 D948 D492]*27961 27963
Y_OT+ R41
27957
Y-AXIS +OT
-------[D D492 K1414 D494]*27966 27968
Y_OT+
27961
Y-AXIS +OT
*-------[D/ D494 K1000 D496]*27971 27979
Y_OT+
27966
Y-AXIS +OT
*-------[D/ R6608 K2 D498]*27976 27978
Yt_POS
M1354	Y-AXIS +OT
*[D> D498 D496]----------< >*27980 27981
Y_OT+ Y_OT+
27976 27971
M1354 Y408	STROKE END -1
27981*--|/|-*----------< >*27982
Y_OT+
27980
Y414	STROKE END +5
*----------< >*27983
M1353 Y410	STROKE END +1
27984*--|/|-*----------< >*27985
Y_OT-
27944
Y40C	STROKE END -5
*----------< >*27986
M1279 Y468
27987*--| |-*----------< >*27988
ON
585
Y470
*----------< >*27989
|
|
|M53 M6464 M1373 M1374 | DUMMY (Y24B)
27990*--| |----| |----|/|----------< >*27993
|Y.P X-Y_OT XYZRM |
| 13818 27914 |

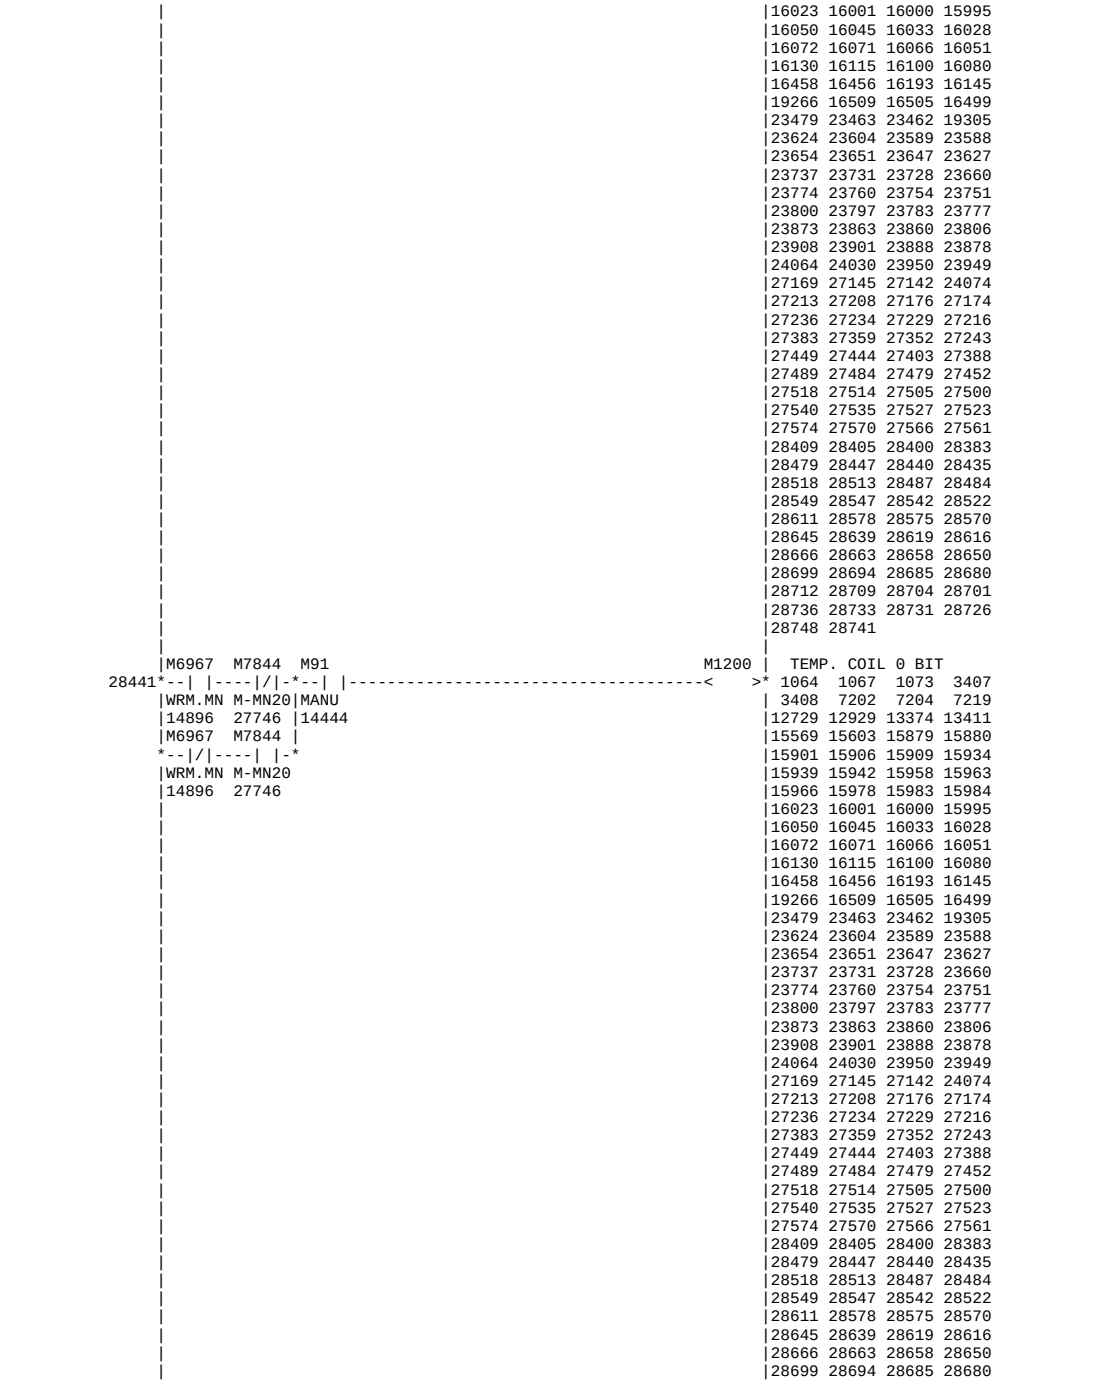

27994 [RET]
P191 M1279 Z +OT
27995 D* D966 K2 R6626]*27840 27864 28000
ON 585 R32
D* D944 K2 R6650]*28005
R43
M1279 Z-AXIS POSITION
28006 D/ R6602 K2 D502]*28011 28013
ON 585
M1362 B-AXIS LIMIT PLS
28012 D> D502 D966]*--|/|--[PLS M1358]*28018 28022 28026
Z_POS R32 28011
REQ-OT 28056
M1359 M1370 B-AXIS LIMIT
*--|/|--< >*28021 28042
REQ-OT 28033
M1358 #NAME?
28022 [MOV H8 R6621]*27790 27796 28025 28030
B_LMTP 28018 28041
M1358 M1360 <= M101 M1359 #NAME?
28026 BIT R6621 K4]---| |--< >*28033 28020 28027
B_LMTP WRTFIN 28018 28037 #NAME? 27790 RST 543 M1359
REQ-OT 28033
M1360 #NAME?
28034 [= H8 R6623]--< >*28037 28028 28038
#NAME?
M1360 #NAME?
28038 [MOV H0 R6621]*27790 27796 28025 28030
WRTFIN 28037 28041
M1370 B-AXIS PERMIT PL
28042 [PLS M1361]*28044 28045 28049
B_LMT 28021
M1361 #NAME?
28045 [MOV H8 R6665]*27800 27806 28048 28053
B_PMTP 28044 28064
M1361 M1363 <= M101 M1362 #NAME?
28049 BIT R6665 K4]---| |--< >*28056 28016 28050
B_PMTP RETFIN 28044 28060 #NAME? 27800 RST 543 M1362
REQ-OT 28056
M1363 #NAME?
28057 [= H8 R6667]--< >*28060 28051 28061
#NAME?
M1363 #NAME?
28061 [MOV H0 R6665]*27800 27806 28048 28053
RETFIN 28060 28064
M1279 B-AXIS POSITION
28065 D/ R6606 K2 D538]*28070 28072
ON 585
M1368 Z-AXIS LIMIT PLS
28071 D< D538 D944]*--|/|--[PLS M1364]*28077 28081 28085
B_POS R43 28070
REQ+OT 28115
M1365 M1371 Z-AXIS LIMIT
*--|/|--< >*28080 28101
REQ+OT 28092
M1364 #NAME?
28081 [MOV H2 R6620]*27868 27874 28084 28089
Z_LMTP 28077 28100
M1364 M1366 <= M101 M1365 #NAME?
28085 BIT R6620 K2]---| |--< >*28092 28079 28086
Z_LMTP WRTFIN 28077 28096 #NAME? 27868 RST 543 M1365
REQ+OT 28092
M1366 #NAME?
28093 [= H2 R6622]--< >*28096 28087 28097
#NAME?
M1366 #NAME?
28097 [MOV H0 R6620]*27868 27874 28084 28089
WRTFIN 28096 28100
M1371 Z-AXIS PERMIT PL
28101 [PLS M1367]*28103 28104 28108
Z_LMT 28080
M1367 #NAME?
28104 [MOV H2 R6664]*27878 27884 28107 28112
Z_PMTP 28103 28123
M1367 M1369 <= M101 M1368 #NAME?
28108 BIT R6664 K2]---| |--< >*28115 28075 28109
Z_PMTP RETFIN 28103 28119 #NAME? 27878 RST 543 M1368
REQ+OT 28115
M1369 #NAME?
28116 [= H2 R6666]--< >*28119 28110 28120
#NAME?
M1369 #NAME?
28120 [MOV H0 R6664]*27878 27884 28107 28112
RETFIN 28119 28123
28124 [RET]
P165 X82 M6191 M5304 AL384:LINE FILTE
28125 |----| |-*--< >*28130 28127
FLTWRN Y84S&H 28268 M5304 M1273
AL384 *ALCLR 28130 1086
M6195 M6191 M5305 AL385:HI-P THERM
28131 |----| |-*--< >*28136 28133 28155
X80S&H Y84S&H 3455 28268 M5305 M1273
AL385 *ALCLR 28136 1086
X84 M6191 M5306 AL386:COOLANT LE
28137 |----| |-*--< >*28142 28139 28156
LVLLOW Y84S&H 28268 M5306 M1273
AL386 *ALCLR 28142 1086

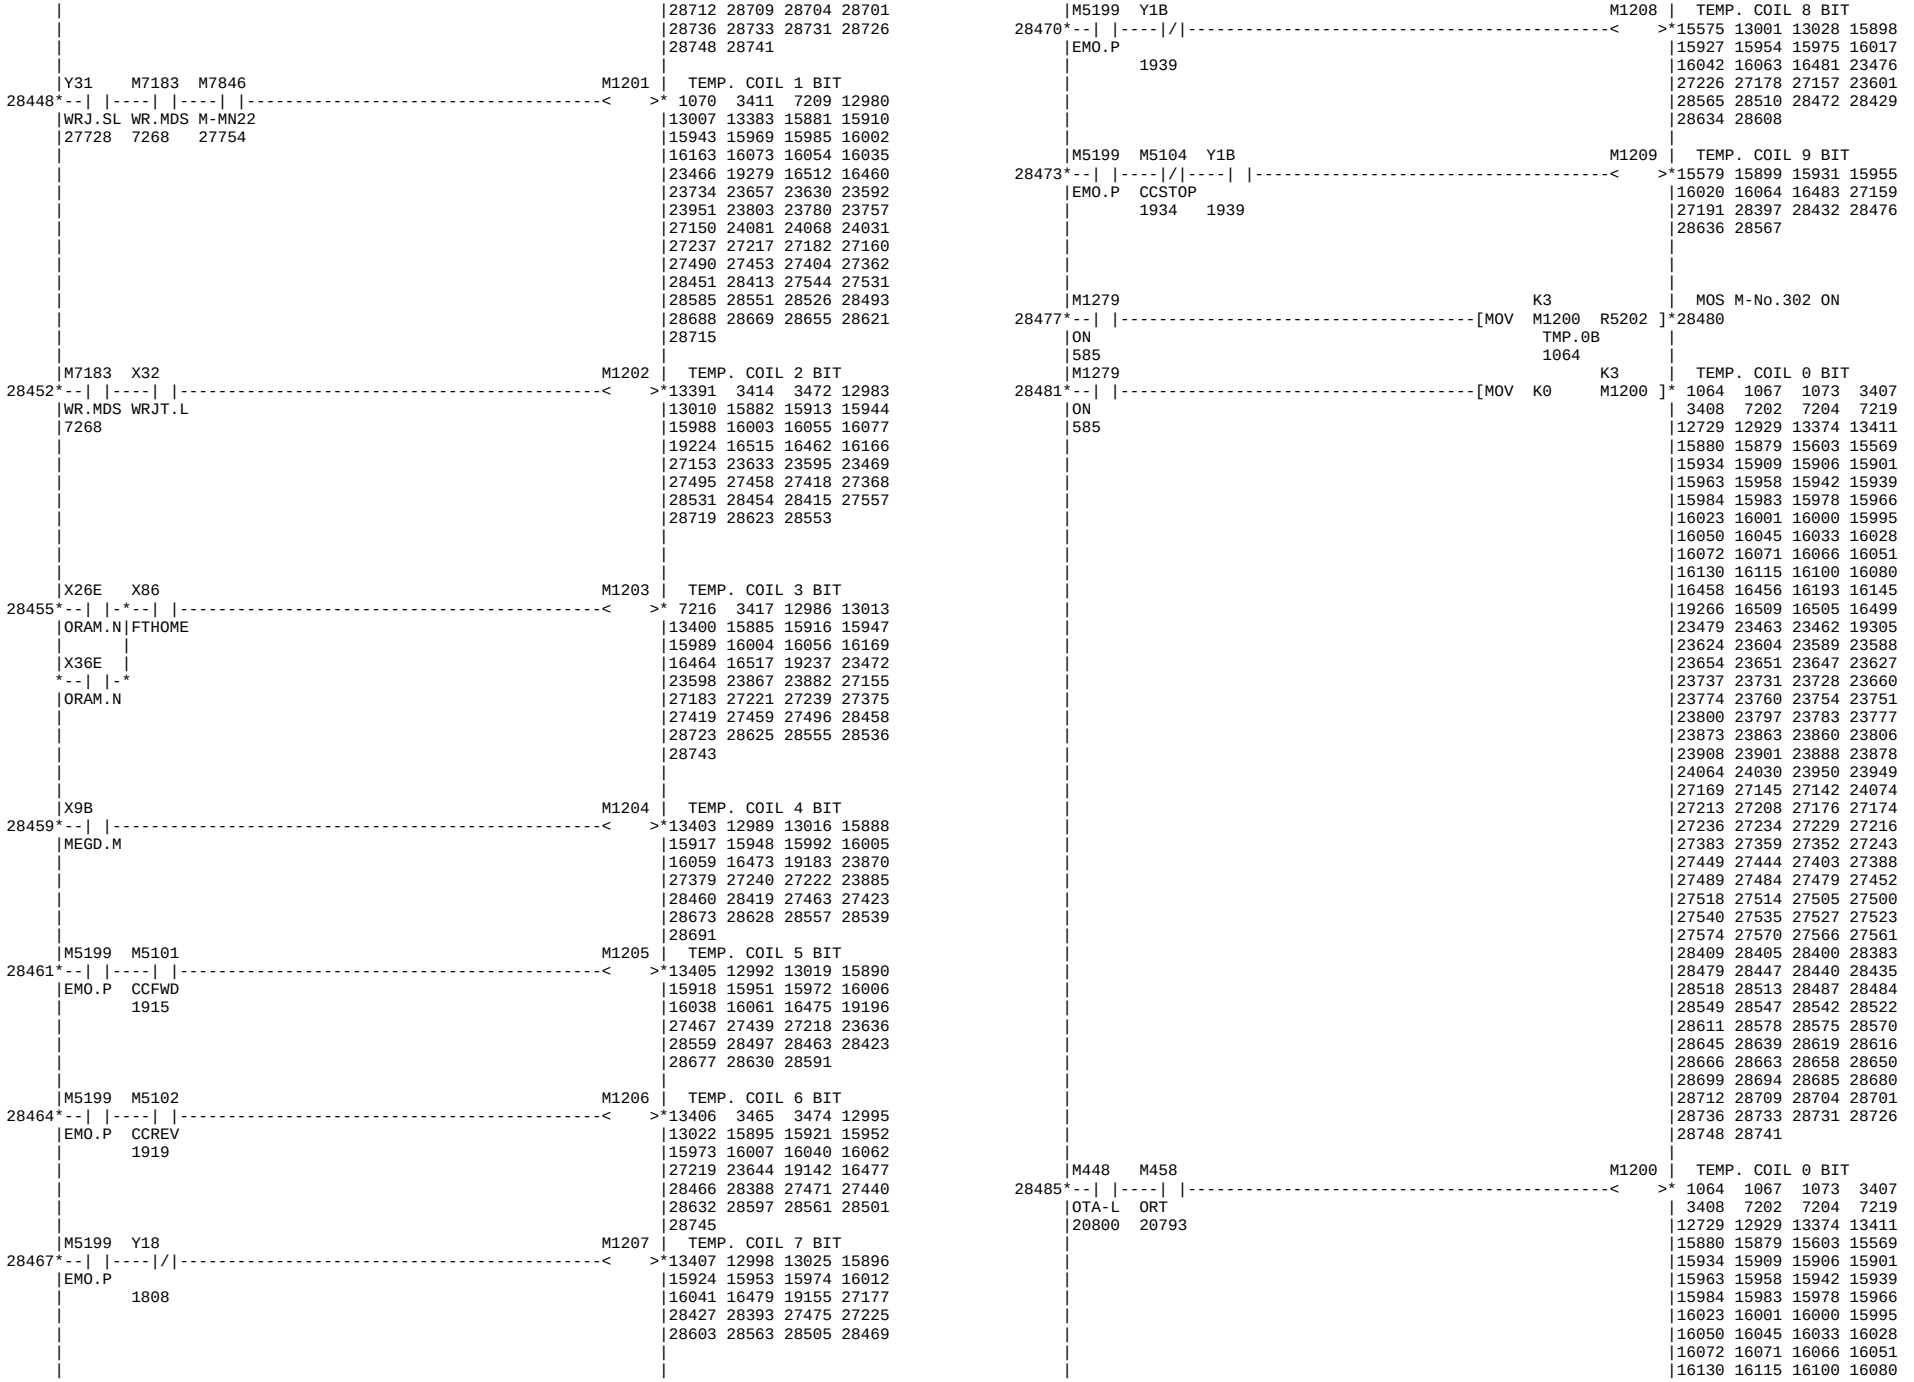

|X85 M6191 M5307 | AL387:COOLANT PR
28143*--| |----| |-*<
>*28148 28145 28157
|PRSDWN Y84S&H|
| 28268 |
|M5307 M1273 |
--| |----| |-
|AL387 *ALCLR
|28148 1086
|M6197 M6191 M5308 | AL388:COOLANT SY
28149*--|/|----| |-*<
>*28154 28151 28158
|X81S&H Y84S&H|
|3464 28268 |
|M5308 M1273 |
--| |----| |-
|AL388 *ALCLR
|28154 1086
|M5305 M3497 | HIGH PRESS COOLA
28155*--| |-*<
>*28159 25632 26781
|AL385 |
|28136 |
|M5306 |
--| |-
|AL386 |
|28142 |
|M5307 |
--| |-
|AL387 |
|28148 |
|M5308 |
--| |-
|AL388
|28154
|M5457 M5464 M209 M100 M101 M5458 M5459 M5460
28160*--| |-*--|/|----|/|----| |----| |----|/|----|/|----|/|----|/|---->1
|550M |557M 9M RDY RST 551M 552M 553M
|18156 |18191 16877 533 543 18161 18166 18171
|M3476 |
--| |-
|550MX
|28172
| M5461 M5462 M5463 M3476 | M550 MEMORY
| 1>-----|/|----|/|----|/|<
>*28172 28161 28269 28286
| 554M 555M 556M |28356
| 18176 18181 18186
|M5458 M5464 M209 M100 M101 M5457 M5459 M5460
28173*--| |-*--|/|----|/|----| |----| |----|/|----|/|----|/|----|/|---->1
|551M |557M 9M RDY RST 550M 552M 553M
|18161 |18191 16877 533 543 18156 18166 18171
|M3477 |
--| |-
|551MX
|28185
| M5461 M5462 M5463 M3477 | M551 MEMORY
| 1>-----|/|----|/|----|/|<
>*28185 28174 28274 28296
| 554M 555M 556M |28357
| 18176 18181 18186
|M5459 M5464 M209 M100 M101 M5457 M5458 M5460
28186*--| |-*--|/|----|/|----| |----| |----|/|----|/|----|/|----|/|---->1
|552M |557M 9M RDY RST 550M 551M 553M
|18166 |18191 16877 533 543 18156 18161 18171
|M3478 |
--| |-
|552MX
|28198
| M5461 M5462 M5463 M3478 | M552 MEMORY
| 1>-----|/|----|/|----|/|<
>*28198 28187 28270 28275
| 554M 555M 556M |28306 28358
| 18176 18181 18186
|M5460 M5464 M209 M100 M101 M5457 M5458 M5459
28199*--| |-*--|/|----|/|----| |----| |----|/|----|/|----|/|----|/|---->1
|553M |557M 9M RDY RST 550M 551M 552M
|18171 |18191 16877 533 543 18156 18161 18166
|M3479 |
--| |-
|553MX
|28211
| M5461 M5462 M5463 M3479 | M553 MEMORY
| 1>-----|/|----|/|----|/|<
>*28211 28200 28279 28316
| 554M 555M 556M |28359
| 18176 18181 18186
|M5461 M5464 M209 M100 M101 M5457 M5458 M5459
28212*--| |-*--|/|----|/|----| |----| |----|/|----|/|----|/|----|/|---->1
|554M |557M 9M RDY RST 550M 551M 552M
|18176 |18191 16877 533 543 18156 18161 18166
|M3480 |
--| |-
|554MX
|28224
| M5460 M5462 M5463 M3480 | M554 MEMORY
| 1>-----|/|----|/|----|/|<
>*28224 28213 28271 28280
| 553M 555M 556M |28326 28360
| 18171 18181 18186
|M5462 M5464 M209 M100 M101 M5457 M5458 M5459
28225*--| |-*--|/|----|/|----| |----| |----|/|----|/|----|/|----|/|---->1
|555M |557M 9M RDY RST 550M 551M 552M
|18181 |18191 16877 533 543 18156 18161 18166
|M3481 |
--| |-
|555MX
|28237
| M5460 M5461 M5463 M3481 | M555 MEMORY
| 1>-----|/|----|/|----|/|<
>*28237 28226 28276 28281
| 553M 554M 556M |28336 28361
| 18171 18176 18186
|M5463 M5464 M209 M100 M101 M5457 M5458 M5459
28238*--| |-*--|/|----|/|----| |----| |----|/|----|/|----|/|----|/|---->1
|556M |557M 9M RDY RST 550M 551M 552M
|18186 |18191 16877 533 543 18156 18161 18166
|M3482 |
--| |-
|556MX
|28250
| M5460 M5461 M5462 M3482 | M556 MEMROY
| 1>-----|/|----|/|----|/|<
>*28250 28239 28272 28277
| 553M 554M 555M |28282 28346 28362
| 18171 18176 18181
|M227 M209 M208 M369 M101 M100 M6174 | SUPER FLOW CM MD
28251*--| |-*--|/|----|/|----|/|----| |----| |----------<
>*28258 19661 20427 28252
|588M |9M 8M PENDP RST RDY |28259 28374
|17978 |16877 16872 3743 543 533
|M6174 |
--| |-
|SFCMMD
|28258
|M6174 M1410 M360 M130 M502 M494 M609 M100
28259*--| |----| |----|/|----| |----| |----|/|----|/|----| |---->1
|SFCMMD AUT&DR OSPMEM CLA:L TDIL MESON CILMON RDY
|28258 2439 3579 7662 8169 8032 7717 533
| M1322 M6191 | Y84 SPR FLW I/F
| 1>-----|/|<
>*28268 68 3433 7753
| CNTSPB | 9598 28126 28132 28138
| 7640 |28144 28150
|M3476 M6193 | Y85 SPR FLW I/F
28269*--| |-*<
>*28273 3441 19664 20489
|550MX | |20493 20498 20503 20512
|28172 | |20516 20521 20526
|M3478 |
--| |-
|552MX |
|28198 |
|M3480 |
--| |-
|554MX |
|28224 |
|M3482 |
--| |-
|556MX
|28250
|M3477 Y86 | DG IN BIT 1
28274*--| |-*<
>*28278 19663 20488 20492
|551MX | |20497 20502 20511 20515
|28185 | |20520 20525


|M3478 |
--| |-
|552MX |
|28198 |
|M3481 |
--| |-
|555MX |
|28237 |
|M3482 |
--| |-
|556MX
|28250
|M3479 Y87 | DG IN BIT 2
28279*--| |-*<
|553MX |
|28211 |
|M3480 |
--| |-
|554MX |
|28224 |
|M3481 |
--| |-
|555MX |
|28237 |
|M3482 |
--| |-
|556MX
|28250
|M100 Y88 | MACHINE RDY
28284*--| |<
|RDY
|533
|M3476 | SUPER FLOW CALC.
28286*--| |-*[* D529 D528 D380]*28290 28292 28300 28302
|550MX | R89 R90 |28310 28312 28320 28322
|28172 |28330 28332 28340 28342
|28370 28368 28352 28350
| SUPER FLOW CALC.
*[D/ D380 K100 D384]*28295 28305 28315 28325
SPFLCA |28335 28345 28355 28373
28290 |28377
|M3477 | SUPER FLOW CALC.
28296*--| |-*[* D529 D527 D380]*28290 28292 28300 28302
|551MX | R89 R91 |28310 28312 28320 28322
|28185 |28330 28332 28340 28342
|28370 28368 28352 28350
| SUPER FLOW CALC.
*[D/ D380 K100 D384]*28295 28305 28315 28325
SPFLCA |28335 28345 28355 28373
28290 |28377
|M3478 | SUPER FLOW CALC.
28306*--| |-*[* D529 D526 D380]*28290 28292 28300 28302
|552MX | R89 R92 |28310 28312 28320 28322
|28198 |28330 28332 28340 28342
|28370 28368 28352 28350
| SUPER FLOW CALC.
*[D/ D380 K100 D384]*28295 28305 28315 28325
SPFLCA |28335 28345 28355 28373
28290 |28377
|M3479 | SUPER FLOW CALC.
28316*--| |-*[* D529 D525 D380]*28290 28292 28300 28302
|553MX | R89 R93 |28310 28312 28320 28322
|28211 |28330 28332 28340 28342
|28370 28368 28352 28350
| SUPER FLOW CALC.
*[D/ D380 K100 D384]*28295 28305 28315 28325
SPFLCA |28335 28345 28355 28373
28290 |28377
|M3480 | SUPER FLOW CALC.
28326*--| |-*[* D529 D524 D380]*28290 28292 28300 28302
|554MX | R89 R94 |28310 28312 28320 28322
|28224 |28330 28332 28340 28342
|28370 28368 28352 28350
| SUPER FLOW CALC.
*[D/ D380 K100 D384]*28295 28305 28315 28325
SPFLCA |28335 28345 28355 28373
28290 |28377
|M3481 | SUPER FLOW CALC.
28336*--| |-*[* D529 D523 D380]*28290 28292 28300 28302
|555MX | R89 R95 |28310 28312 28320 28322
|28237 |28330 28332 28340 28342
|28370 28368 28352 28350
| SUPER FLOW CALC.
*[D/ D380 K100 D384]*28295 28305 28315 28325
SPFLCA |28335 28345 28355 28373
28290 |28377
|M3482 | SUPER FLOW CALC.
28346*--| |-*[* D529 D522 D380]*28290 28292 28300 28302
|556MX | R89 R96 |28310 28312 28320 28322
|28250 |28330 28332 28340 28342
|28370 28368 28352 28350
| SUPER FLOW CALC.
*[D/ D380 K100 D384]*28295 28305 28315 28325
SPFLCA |28335 28345 28355 28373
28290 |28377
|M3476 M3477 M3478 M3479 M3480 M3481 M3482 M3483 | M550-556 INVALID
28356*--|/|----|/|----|/|----|/|----|/|----|/|----|/|---------< >*28363 28364
|550MX 551MX 552MX 553MX 554MX 555MX 556MX |
|28172 28185 28198 28211 28224 28237 28250 |
|M3483 | SUPER FLOW CALC.
28364*--| |-*[* D529 R44 D380]*28290 28292 28300 28302
|INVALD| R89 BCODE |28310 28312 28320 28322
|28363 |28330 28332 28340 28342
|28370 28368 28352 28350
| SUPER FLOW CALC.
*[D/ D380 K100 D384]*28295 28305 28315 28325
SPFLCA |28335 28345 28355 28373
28290 |28377
|M6174 M6469 | ANALOGUE OUTPUT
28374*--| |----|/|----------[MOV D384 R100]*28378 6380
|SFCMMD H-COIL SPFLCA |
|28258 28295 |
|[RET]*
P175 |M1279 K3 | TEMP. COIL 0 BIT
28380*--| |----------[MOV K0 M1200]* 1064 1067 1073 3407
|ON | 3408 7202 7204 7219
|585 |12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080

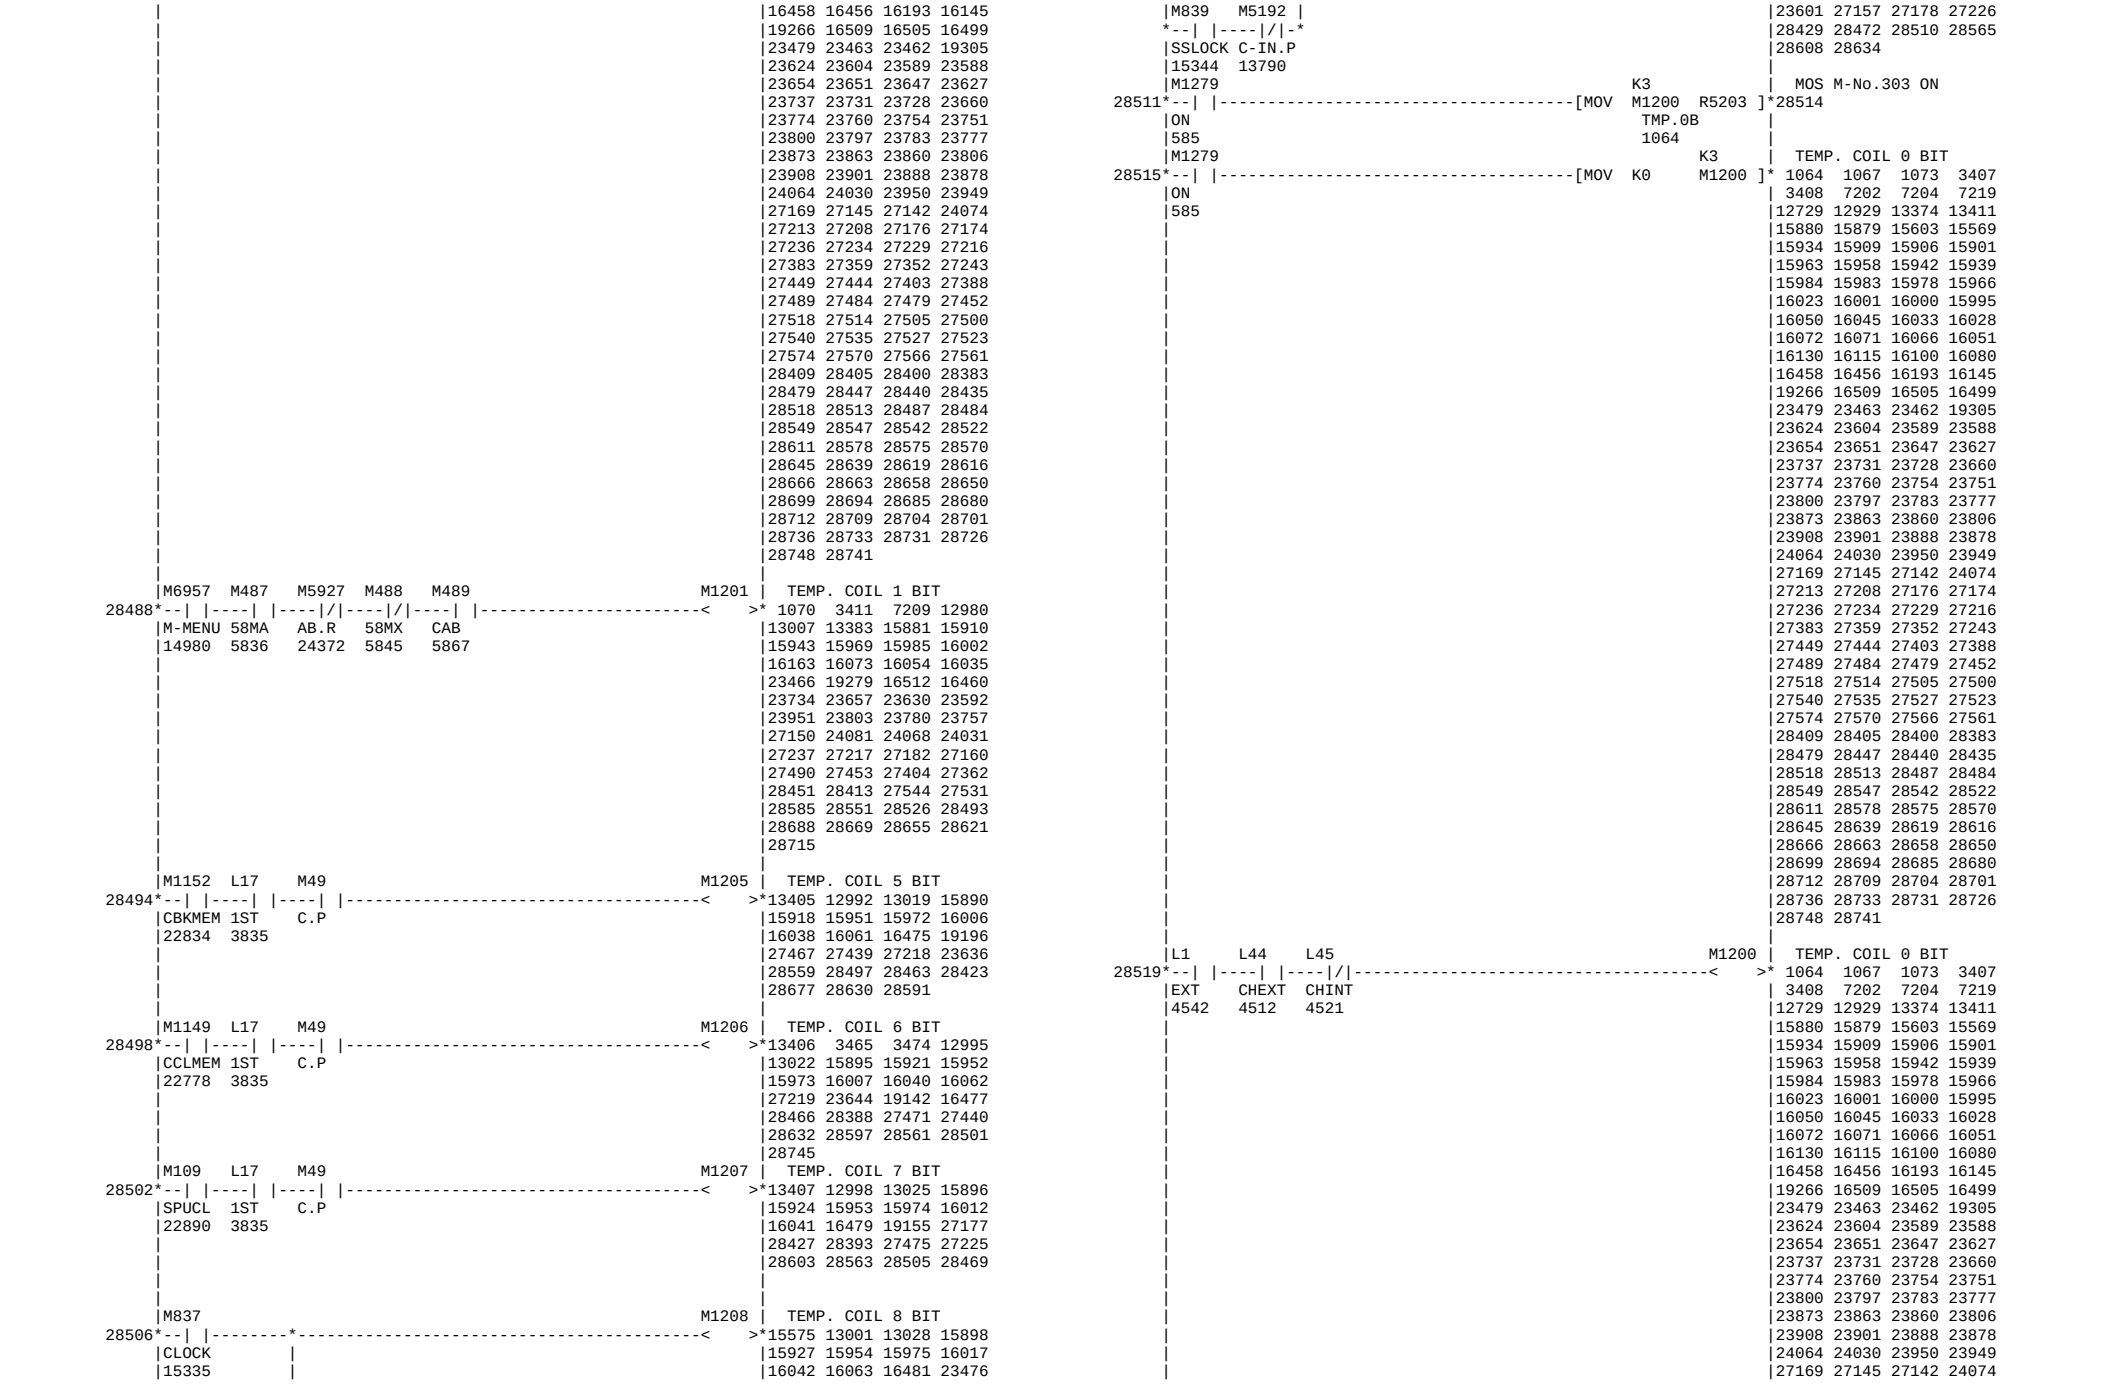

M600 M18 M1206
FDOLS TOPD.P
7296
M19
FD.P
M601 M18 M1207
FDCLS TOPD.P
7299
M19
FD.P
M53 M91 M1375 M1209
Y.P MANU OT_RLS
14444 14814
M1279 K3
ON TMP.0B
585 1064
M1279 K3
ON M1200
585
MOV M1200 R5200
MOV K0 M1200
MOS M-No.300 ON
TEMP. COIL 6 BIT
TEMP. COIL 7 BIT
TEMP. COIL 9 BIT
TEMP. COIL 0 BIT
28384
28389
28394
28398
28402
28401
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
13406 3465 3474 12995
13022 15895 15921 15952
15973 16007 16040 16062
16477 19142 23644 27219
27440 27471 28388 28466
28501 28561 28597 28632
28745
13407 12998 13025 15896
15924 15953 15974 16012
16041 16479 19155 27177
27225 27475 28393 28427
28469 28505 28563 28603
15579 15899 15931 15955
16020 16064 16483 27159
27191 28397 28432 28476
28636 28567
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M5740 L34 M27 M1200
PLF-LS PCF.M PCT.P
7514 7591
M5741 L34 M27 M1201
PCR-LS PCF.M PCT.P
7518 7591
28406
28410
TEMP. COIL 0 BIT
TEMP. COIL 1 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
13007 13383 15881 15910
15943 15969 15985 16002


M108
M1202
TEMP. COIL 2 BIT
BF
11722
T124 Y1E M6476
M1204
TEMP. COIL 4 BIT
PEXT.T FTUNCL F_TL.P
T186 YD M6476
M1205
TEMP. COIL 5 BIT
PRET.T WOKMR F_TL.P
8150
M6183 L22 M66
M1207
TEMP. COIL 7 BIT
MTCLMO MTCTON MSCL.P
3509 3501
L35
M1208
TEMP. COIL 8 BIT
UCIL.M
15247
L36 M26
M1209
TEMP. COIL 9 BIT
APOF.M WUP.P
15258
M1279
K3
MOS M-No.301 ON
ON
MOV M1200 R5201
TMP.0B
1064
585
M1279
K3
TEMP. COIL 0 BIT
ON
MOV K0 M1200
585
13391 3414 3472 12983
13010 15882 15913 15944
15988 16003 16055 16077
19224 16515 16462 16166
27153 23633 23595 23469
27495 27458 27418 27368
28531 28454 28415 27557
28719 28623 28553
13403 12989 13016 15888
15917 15948 15992 16005
16059 16473 19183 23870
27379 27240 27222 23885
28460 28419 27463 27423
28673 28628 28557 28539
28691
13405 12992 13019 15890
15918 15951 15972 16006
16038 16061 16475 19196
27467 27439 27218 23636
28559 28497 28463 28423
28677 28630 28591
13407 12998 13025 15896
15924 15953 15974 16012
16041 16479 19155 27177
28427 28393 27475 27225
28603 28563 28505 28469
15575 13001 13028 15898
15927 15954 15975 16017
16042 16063 16481 23476
27226 27178 27157 23601
28565 28510 28472 28429
28634 28608
15579 15899 15931 15955
16020 16064 16483 27159
27191 28397 28432 28476
28636 28567
28436
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715

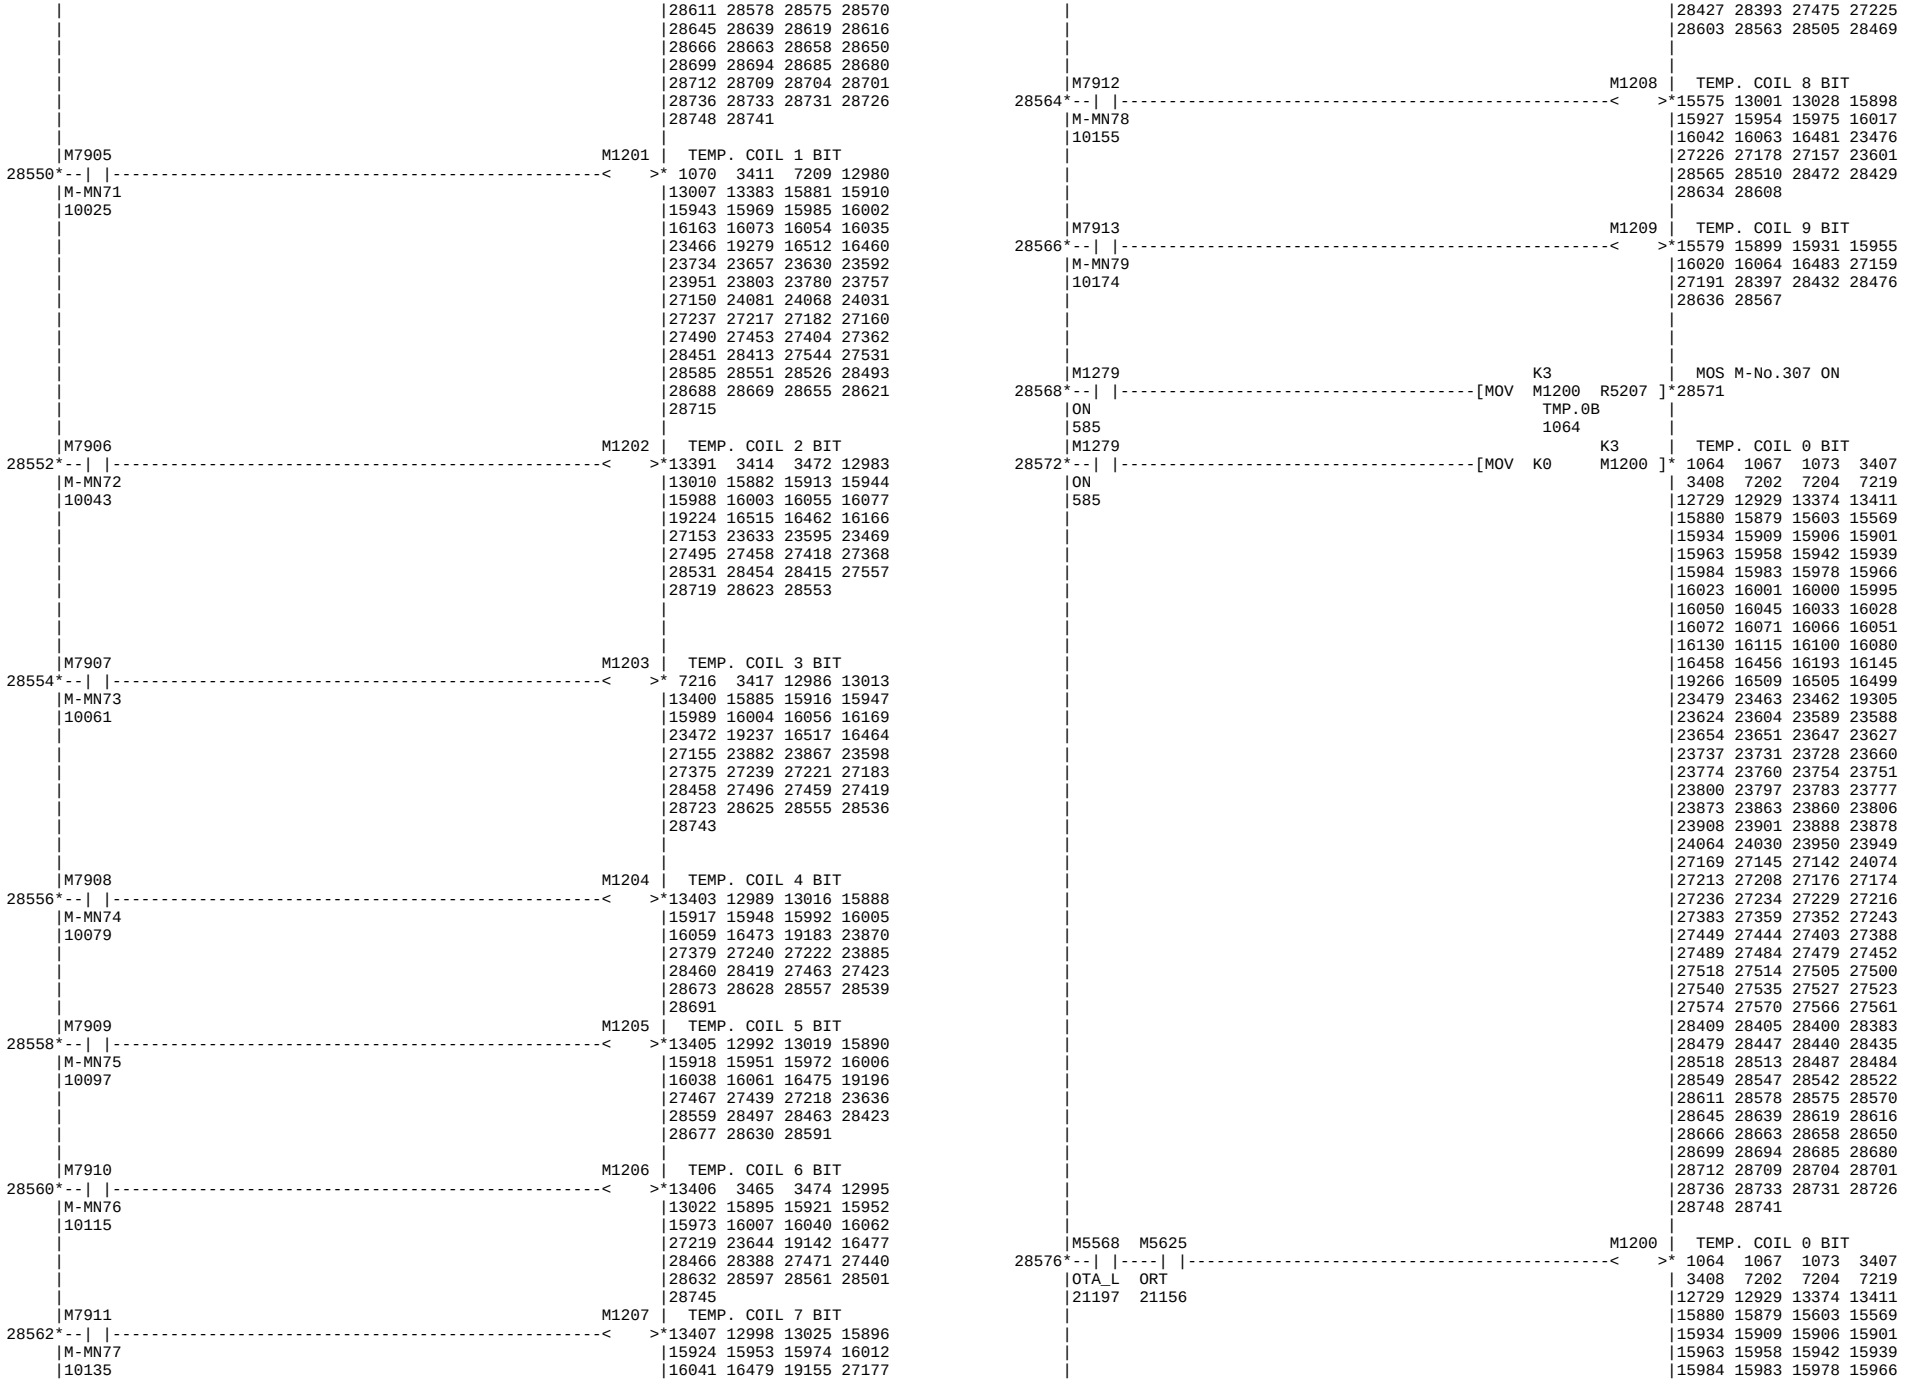

M6967 M7844 M91
M1200
TEMP. COIL 0 BIT
M6967 M7844
MANU
14896 27746 14444
WRM.MN M-MN20
14896 27746
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15569 15603 15879 15880
15901 15906 15909 15934
15939 15942 15958 15963
15966 15978 15983 15984
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741

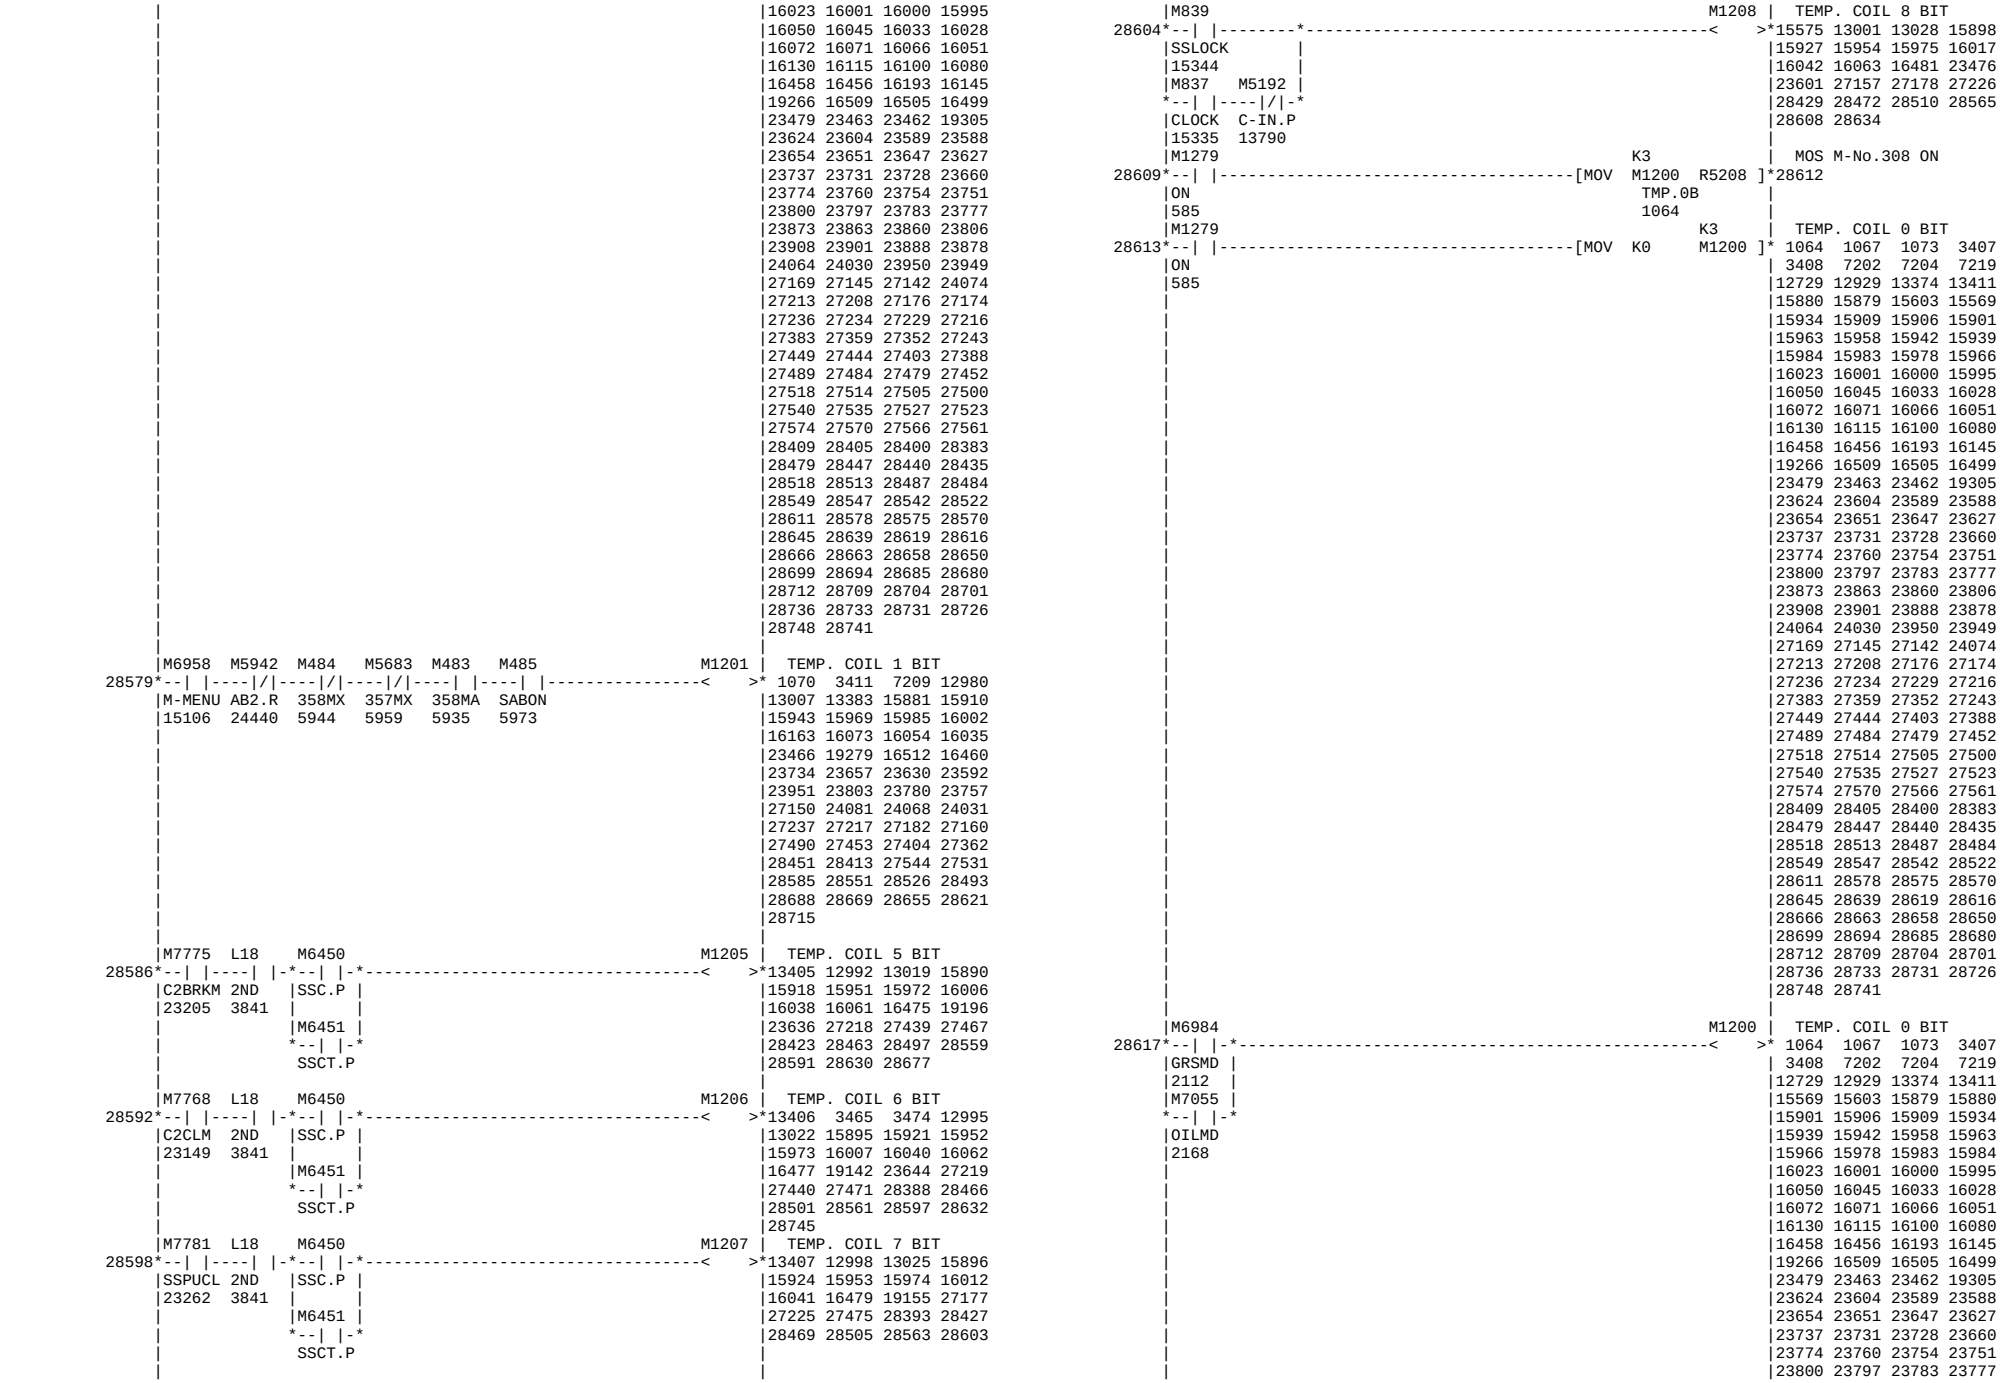

Y31 M7183 M7846 M1201 TEMP. COIL 1 BIT
WRJ.SL WR.MDS M-MN22
27728 7268 27754
M7183 X32 M1202 TEMP. COIL 2 BIT
WR.MDS WRJT.L
7268
X26E X86 M1203 TEMP. COIL 3 BIT
ORAM.N FTHOME
X36E
ORAM.N
X9B M1204 TEMP. COIL 4 BIT
MEGD.M
M5199 M5101 M1205 TEMP. COIL 5 BIT
EMO.P CCFWD
1915
M5199 M5102 M1206 TEMP. COIL 6 BIT
EMO.P CCREV
1919
M5199 Y18 M1207 TEMP. COIL 7 BIT
EMO.P
1808
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
13391 3414 3472 12983
13010 15882 15913 15944
15988 16003 16055 16077
19224 16515 16462 16166
27153 23633 23595 23469
27495 27458 27418 27368
28531 28454 28415 27557
28719 28623 28553
7216 3417 12986 13013
13400 15885 15916 15947
15989 16004 16056 16169
16464 16517 19237 23472
23598 23867 23882 27155
27183 27221 27239 27375
27419 27459 27496 28458
28723 28625 28555 28536
28743
13403 12989 13016 15888
15917 15948 15992 16005
16059 16473 19183 23870
27379 27240 27222 23885
28460 28419 27463 27423
28673 28628 28557 28539
28691
13405 12992 13019 15890
15918 15951 15972 16006
16038 16061 16475 19196
27467 27439 27218 23636
28559 28497 28463 28423
28677 28630 28591
13406 3465 3474 12995
13022 15895 15921 15952
15973 16007 16040 16062
27219 23644 19142 16477
28466 28388 27471 27440
28632 28597 28561 28501
28745
13407 12998 13025 15896
15924 15953 15974 16012
16041 16479 19155 27177
28427 28393 27475 27225
28603 28563 28505 28469

M5199 Y1B M1208 TEMP. COIL 8 BIT
EMO.P
1939
M5199 M5104 Y1B M1209 TEMP. COIL 9 BIT
EMO.P CCSTOP
1934 1939
M1279 K3 MOS M-No.302 ON
ON TMP.0B
585 1064
M1279 K3 M1200 TEMP. COIL 0 BIT
ON
585
M448 M458 M1200 TEMP. COIL 0 BIT
OTA-L ORT
20800 20793
15575 13001 13028 15898
15927 15954 15975 16017
16042 16063 16481 23476
27226 27178 27157 23601
28565 28510 28472 28429
28634 28608
15579 15899 15931 15955
16020 16064 16483 27159
27191 28397 28432 28476
28636 28567
28480
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080


M6957 M487 M5927 M488 M489 M1201
M-MENU 58MA AB.R 58MX CAB
M1152 L17 M49 M1205
CBKMEM 1ST C.P
M1149 L17 M49 M1206
CCLMEM 1ST C.P
M109 L17 M49 M1207
SPUCL 1ST C.P
M837 M1208
CLOCK
M839 M5192
SSLOCK C-IN.P
M1279
ON
585
M1279
ON
585
L1 L44 L45 M1200
EXT CHEXT CHINT
TEMP. COIL 1 BIT
TEMP. COIL 5 BIT
TEMP. COIL 6 BIT
TEMP. COIL 7 BIT
TEMP. COIL 8 BIT
MOS M-No.303 ON
TEMP. COIL 0 BIT
TEMP. COIL 0 BIT

```
     |                                                  |27213 27208 27176 27174
     |                                                  |27236 27234 27229 27216
     |                                                  |27383 27359 27352 27243
     |                                                  |27449 27444 27403 27388
     |                                                  |27489 27484 27479 27452
     |                                                  |27518 27514 27505 27500
     |                                                  |27540 27535 27527 27523
     |                                                  |27574 27570 27566 27561
     |                                                  |28409 28405 28400 28383
     |                                                  |28479 28447 28440 28435
     |                                                  |28518 28513 28487 28484
     |                                                  |28549 28547 28542 28522
     |                                                  |28611 28578 28575 28570
     |                                                  |28645 28639 28619 28616
     |                                                  |28666 28663 28658 28650
     |                                                  |28699 28694 28685 28680
     |                                                  |28712 28709 28704 28701
     |                                                  |28736 28733 28731 28726
     |                                                  |28748 28741
     |                                                  |
     |L0    L44   L45                             M1201 |  TEMP. COIL 1 BIT
28523*--| |----|/|----| |-------------------------------<    >* 1070  3411  7209 12980
     |INT   CHEXT CHINT                                 |13007 13383 15881 15910
     |4541  4512  4521                                  |15943 15969 15985 16002
     |                                                  |16163 16073 16054 16035
     |                                                  |23466 19279 16512 16460
     |                                                  |23734 23657 23630 23592
     |                                                  |23951 23803 23780 23757
     |                                                  |27150 24081 24068 24031
     |                                                  |27237 27217 27182 27160
     |                                                  |27490 27453 27404 27362
     |                                                  |28451 28413 27544 27531
     |                                                  |28585 28551 28526 28493
     |                                                  |28688 28669 28655 28621
     |                                                  |28715
     |                                                  |
     |L21   L46   L47   M54                         M1202 |  TEMP. COIL 2 BIT
28527*--| |----| |----|/|----| |-----------------------------<    >*13391  3414  3472 12983
     |SEXT  2CHEXT 2CHINT SS.P                          |13010 15882 15913 15944
     |4598  4574  4578                                  |15988 16003 16055 16077
     |                                                  |19224 16515 16462 16166
     |                                                  |27153 23633 23595 23469
     |                                                  |27495 27458 27418 27368
     |                                                  |28531 28454 28415 27557
     |                                                  |28719 28623 28553
     |                                                  |
     |                                                  |
     |                                                  |
     |L20   L46   L47   M54                         M1203 |  TEMP. COIL 3 BIT
28532*--| |----|/|----| |----| |-----------------------------<    >* 7216  3417 12986 13013
     |SINT  2CHEXT 2CHINT SS.P                          |13400 15885 15916 15947
     |4597  4574  4578                                  |15989 16004 16056 16169
     |                                                  |23472 19237 16517 16464
     |                                                  |27155 23882 23867 23598
     |                                                  |27375 27239 27221 27183
     |                                                  |28458 27496 27459 27419
     |                                                  |28723 28625 28555 28536
     |                                                  |28743
     |                                                  |
     |                                                  |
     |L2    M9                                      M1204 |  TEMP. COIL 4 BIT
28537*--| |----| |-----------------------------------------<    >*13403 12989 13016 15888
     |CKPRL CHPS.P                                      |15917 15948 15992 16005
     |4434                                              |16059 16473 19183 23870
     |                                                  |27379 27240 27222 23885
     |                                                  |28460 28419 27463 27423
     |                                                  |28673 28628 28557 28539
     |                                                  |28691
     |M1279                                  K3         |  MOS M-No.305 ON
28540*--| |-------------------------------------[MOV  M1200  R5205 ]*28543
     |ON                                      TMP.0B    |
     |585                                     1064      |
     |M1279                                     K3      |  TEMP. COIL 0 BIT
28544*--| |-------------------------------------[MOV  K0     M1200 ]* 1064  1067  1073  3407
     |ON                                                | 3408  7202  7204  7219
     |585                                               |12729 12929 13374 13411
     |                                                  |15880 15879 15603 15569
     |                                                  |15934 15909 15906 15901
     |                                                  |15963 15958 15942 15939
     |                                                  |15984 15983 15978 15966
     |                                                  |16023 16001 16000 15995
     |                                                  |16050 16045 16033 16028
     |                                                  |16072 16071 16066 16051
     |                                                  |16130 16115 16100 16080
     |                                                  |16458 16456 16193 16145
     |                                                  |19266 16509 16505 16499
     |                                                  |23479 23463 23462 19305
     |                                                  |23624 23604 23589 23588
     |                                                  |23654 23651 23647 23627
     |                                                  |23737 23731 23728 23660
     |                                                  |23774 23760 23754 23751
     |                                                  |23800 23797 23783 23777
     |                                                  |23873 23863 23860 23806
     |                                                  |23908 23901 23888 23878
     |                                                  |24064 24030 23950 23949
     |                                                  |27169 27145 27142 24074
     |                                                  |27213 27208 27176 27174
     |                                                  |27236 27234 27229 27216
     |                                                  |27383 27359 27352 27243
     |                                                  |27449 27444 27403 27388
     |                                                  |27489 27484 27479 27452
     |                                                  |27518 27514 27505 27500
     |                                                  |27540 27535 27527 27523
     |                                                  |27574 27570 27566 27561
     |                                                  |28409 28405 28400 28383
     |                                                  |28479 28447 28440 28435
     |                                                  |28518 28513 28487 28484
     |                                                  |28549 28547 28542 28522
     |                                                  |28611 28578 28575 28570
     |                                                  |28645 28639 28619 28616
     |                                                  |28666 28663 28658 28650
     |                                                  |28699 28694 28685 28680
     |                                                  |28712 28709 28704 28701
     |                                                  |28736 28733 28731 28726
     |                                                  |28748 28741
     |                                                  |
     |M7904                                         M1200 |  TEMP. COIL 0 BIT
28548*--| |-------------------------------------------------<    >* 1064  1067  1073  3407
     |M-MN70                                            | 3408  7202  7204  7219
     |10007                                             |12729 12929 13374 13411
     |                                                  |15880 15879 15603 15569
     |                                                  |15934 15909 15906 15901
     |                                                  |15963 15958 15942 15939
     |                                                  |15984 15983 15978 15966
     |                                                  |16023 16001 16000 15995
     |                                                  |16050 16045 16033 16028
     |                                                  |16072 16071 16066 16051
     |                                                  |16130 16115 16100 16080
     |                                                  |16458 16456 16193 16145
     |                                                  |19266 16509 16505 16499
     |                                                  |23479 23463 23462 19305
     |                                                  |23624 23604 23589 23588
     |                                                  |23654 23651 23647 23627
     |                                                  |23737 23731 23728 23660
     |                                                  |23774 23760 23754 23751
     |                                                  |23800 23797 23783 23777
     |                                                  |23873 23863 23860 23806
     |                                                  |23908 23901 23888 23878
     |                                                  |24064 24030 23950 23949
     |                                                  |27169 27145 27142 24074
     |                                                  |27213 27208 27176 27174
     |                                                  |27236 27234 27229 27216
     |                                                  |27383 27359 27352 27243
     |                                                  |27449 27444 27403 27388
     |                                                  |27489 27484 27479 27452
     |                                                  |27518 27514 27505 27500
     |                                                  |27540 27535 27527 27523
     |                                                  |27574 27570 27566 27561
     |                                                  |28409 28405 28400 28383
     |                                                  |28479 28447 28440 28435
     |                                                  |28518 28513 28487 28484
     |                                                  |28549 28547 28542 28522
```

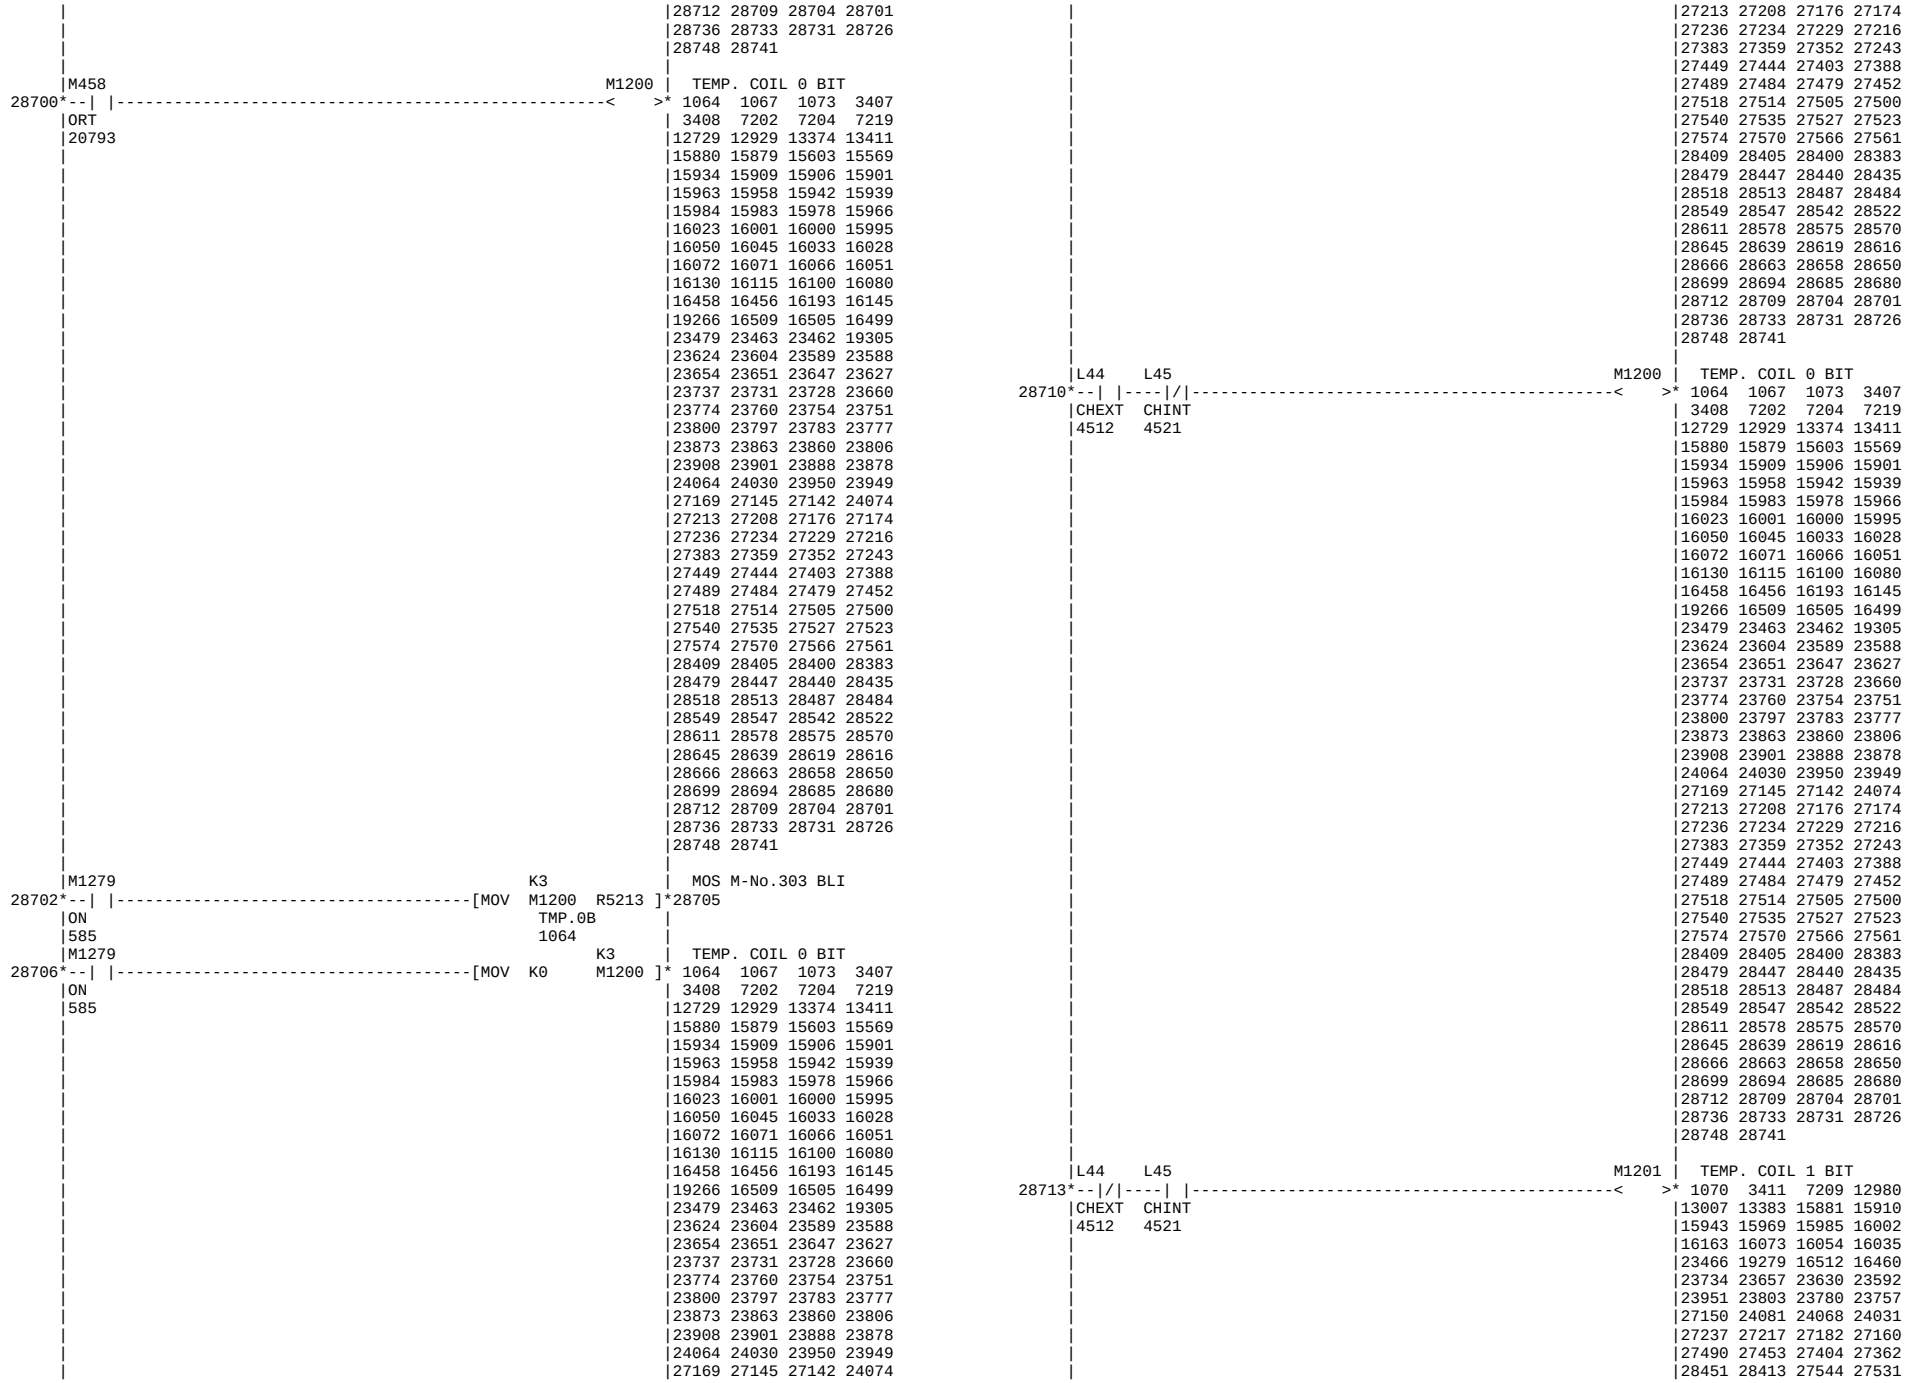

|M7905 M1201 | TEMP. COIL 1 BIT
28550*--| |----------<>* 1070 3411 7209 12980
|M-MN71
|10025
|M7906 M1202 | TEMP. COIL 2 BIT
28552*--| |----------<>*13391 3414 3472 12983
|M-MN72
|10043
|M7907 M1203 | TEMP. COIL 3 BIT
28554*--| |----------<>* 7216 3417 12986 13013
|M-MN73
|10061
|M7908 M1204 | TEMP. COIL 4 BIT
28556*--| |----------<>*13403 12989 13016 15888
|M-MN74
|10079
|M7909 M1205 | TEMP. COIL 5 BIT
28558*--| |----------<>*13405 12992 13019 15890
|M-MN75
|10097
|M7910 M1206 | TEMP. COIL 6 BIT
28560*--| |----------<>*13406 3465 3474 12995
|M-MN76
|10115
|M7911 M1207 | TEMP. COIL 7 BIT
28562*--| |----------<>*13407 12998 13025 15896
|M-MN77
|10135
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
|13007 13383 15881 15910
|15943 15969 15985 16002
|16163 16073 16054 16035
|23466 19279 16512 16460
|23734 23657 23630 23592
|23951 23803 23780 23757
|27150 24081 24068 24031
|27237 27217 27182 27160
|27490 27453 27404 27362
|28451 28413 27544 27531
|28585 28551 28526 28493
|28688 28669 28655 28621
|28715
|13010 15882 15913 15944
|15988 16003 16055 16077
|19224 16515 16462 16166
|27153 23633 23595 23469
|27495 27458 27418 27368
|28531 28454 28415 27557
|28719 28623 28553
|13400 15885 15916 15947
|15989 16004 16056 16169
|23472 19237 16517 16464
|27155 23882 23867 23598
|27375 27239 27221 27183
|28458 27496 27459 27419
|28723 28625 28555 28536
|28743
|13022 15895 15921 15952
|15973 16007 16040 16062
|27219 23644 19142 16477
|28466 28388 27471 27440
|28632 28597 28561 28501
|28745
|15924 15953 15974 16012
|16041 16479 19155 27177
|28427 28393 27475 27225
|28603 28563 28505 28469
|M7912 M1208 | TEMP. COIL 8 BIT
28564*--| |----------<>*15575 13001 13028 15898
|M-MN78
|10155
|M7913 M1209 | TEMP. COIL 9 BIT
28566*--| |----------<>*15579 15899 15931 15955
|M-MN79
|10174
|M1279 K3 | MOS M-No.307 ON
28568*--| |----------[MOV M1200 R5207]*28571
|ON TMP.0B
|585 1064
|M1279 K3 | TEMP. COIL 0 BIT
28572*--| |----------[MOV K0 M1200]* 1064 1067 1073 3407
|ON | 3408 7202 7204 7219
|585 |12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966
|16023 16001 16000 15995
|16050 16045 16033 16028
|16072 16071 16066 16051
|16130 16115 16100 16080
|16458 16456 16193 16145
|19266 16509 16505 16499
|23479 23463 23462 19305
|23624 23604 23589 23588
|23654 23651 23647 23627
|23737 23731 23728 23660
|23774 23760 23754 23751
|23800 23797 23783 23777
|23873 23863 23860 23806
|23908 23901 23888 23878
|24064 24030 23950 23949
|27169 27145 27142 24074
|27213 27208 27176 27174
|27236 27234 27229 27216
|27383 27359 27352 27243
|27449 27444 27403 27388
|27489 27484 27479 27452
|27518 27514 27505 27500
|27540 27535 27527 27523
|27574 27570 27566 27561
|28409 28405 28400 28383
|28479 28447 28440 28435
|28518 28513 28487 28484
|28549 28547 28542 28522
|28611 28578 28575 28570
|28645 28639 28619 28616
|28666 28663 28658 28650
|28699 28694 28685 28680
|28712 28709 28704 28701
|28736 28733 28731 28726
|28748 28741
|M5568 M5625 M1200 | TEMP. COIL 0 BIT
28576*--| |----| |----------<>* 1064 1067 1073 3407
|OTA_L ORT | 3408 7202 7204 7219
|21197 21156 |12729 12929 13374 13411
|15880 15879 15603 15569
|15934 15909 15906 15901
|15963 15958 15942 15939
|15984 15983 15978 15966

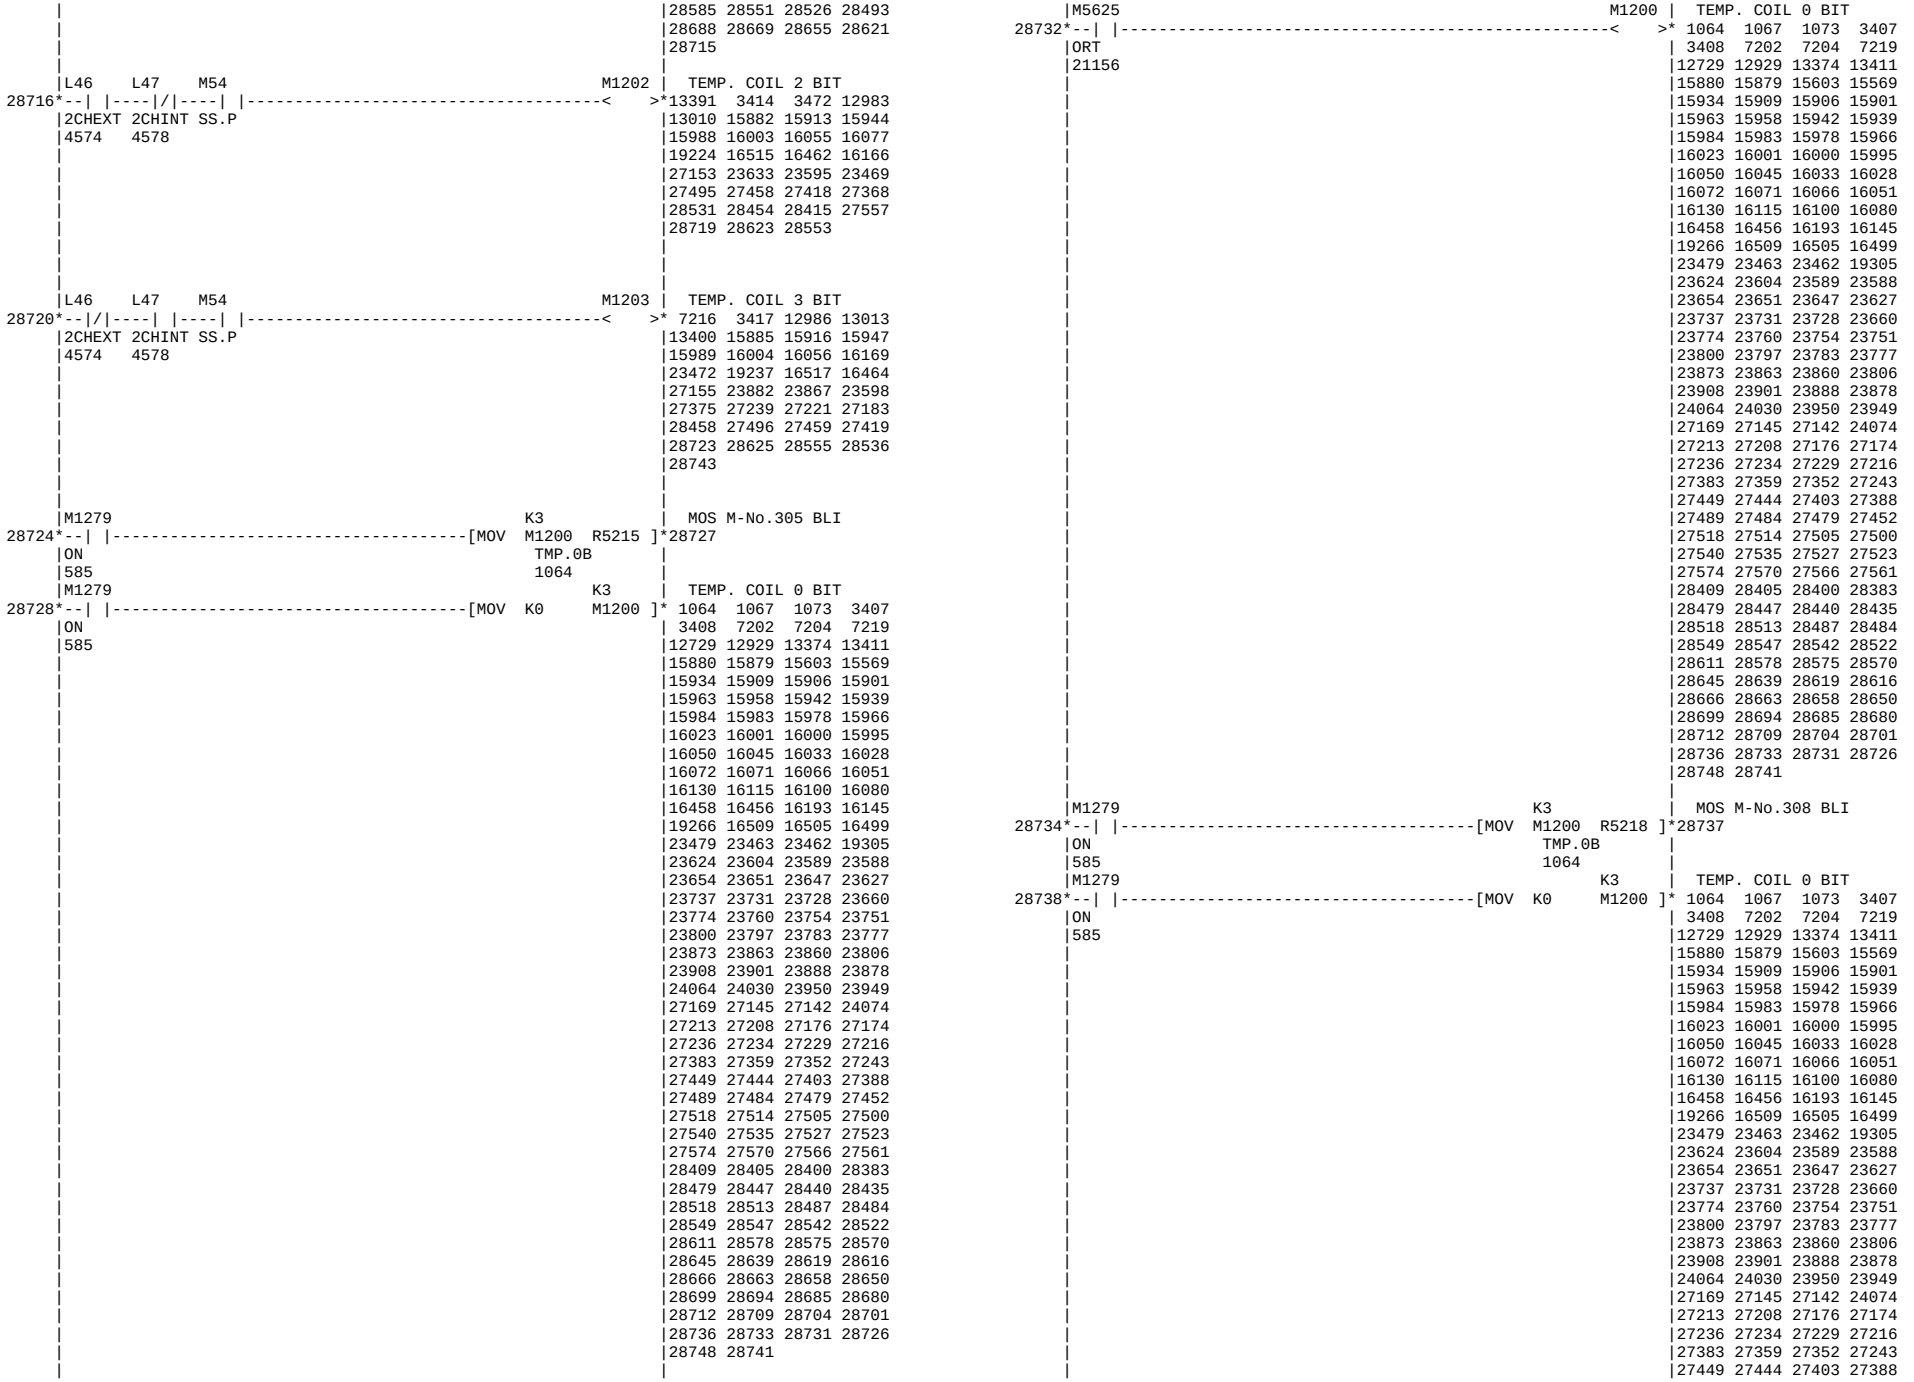

M6958 M5942 M484 M5683 M483 M485 M1201
M-MENU AB2.R 358MX 357MX 358MA SABON
15106 24440 5944 5959 5935 5973
M7775 L18 M6450 M1205
C2BRKM 2ND SSC.P
23205 3841
M6451
SSCT.P
M7768 L18 M6450 M1206
C2CLM 2ND SSC.P
23149 3841
M6451
SSCT.P
M7781 L18 M6450 M1207
SSPUCL 2ND SSC.P
23262 3841
M6451
SSCT.P
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
TEMP. COIL 1 BIT
28579 1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16163 16073 16054 16035
23466 19279 16512 16460
23734 23657 23630 23592
23951 23803 23780 23757
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
TEMP. COIL 5 BIT
28586 13405 12992 13019 15890
15918 15951 15972 16006
16038 16061 16475 19196
23636 27218 27439 27467
28423 28463 28497 28559
28591 28630 28677
TEMP. COIL 6 BIT
28592 13406 3465 3474 12995
13022 15895 15921 15952
15973 16007 16040 16062
16477 19142 23644 27219
27440 27471 28388 28466
28501 28561 28597 28632
28745
TEMP. COIL 7 BIT
28598 13407 12998 13025 15896
15924 15953 15974 16012
16041 16479 19155 27177
27225 27475 28393 28427
28469 28505 28563 28603
M839 M1208
SSLOCK
15344
M837 M5192
CLOCK C-IN.P
15335 13790
28604
TEMP. COIL 8 BIT
15575 13001 13028 15898
15927 15954 15975 16017
16042 16063 16481 23476
23601 27157 27178 27226
28429 28472 28510 28565
28608 28634
M1279 K3
ON TMP.0B
585 1064
28609 28612
MOS M-No.308 ON
M1279 K3
ON
585
28613
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15880 15879 15603 15569
15934 15909 15906 15901
15963 15958 15942 15939
15984 15983 15978 15966
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
M6984 M1200
GRSMD
2112
M7055
OILMD
2168
28617
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15569 15603 15879 15880
15901 15906 15909 15934
15939 15942 15958 15963
15966 15978 15983 15984
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777

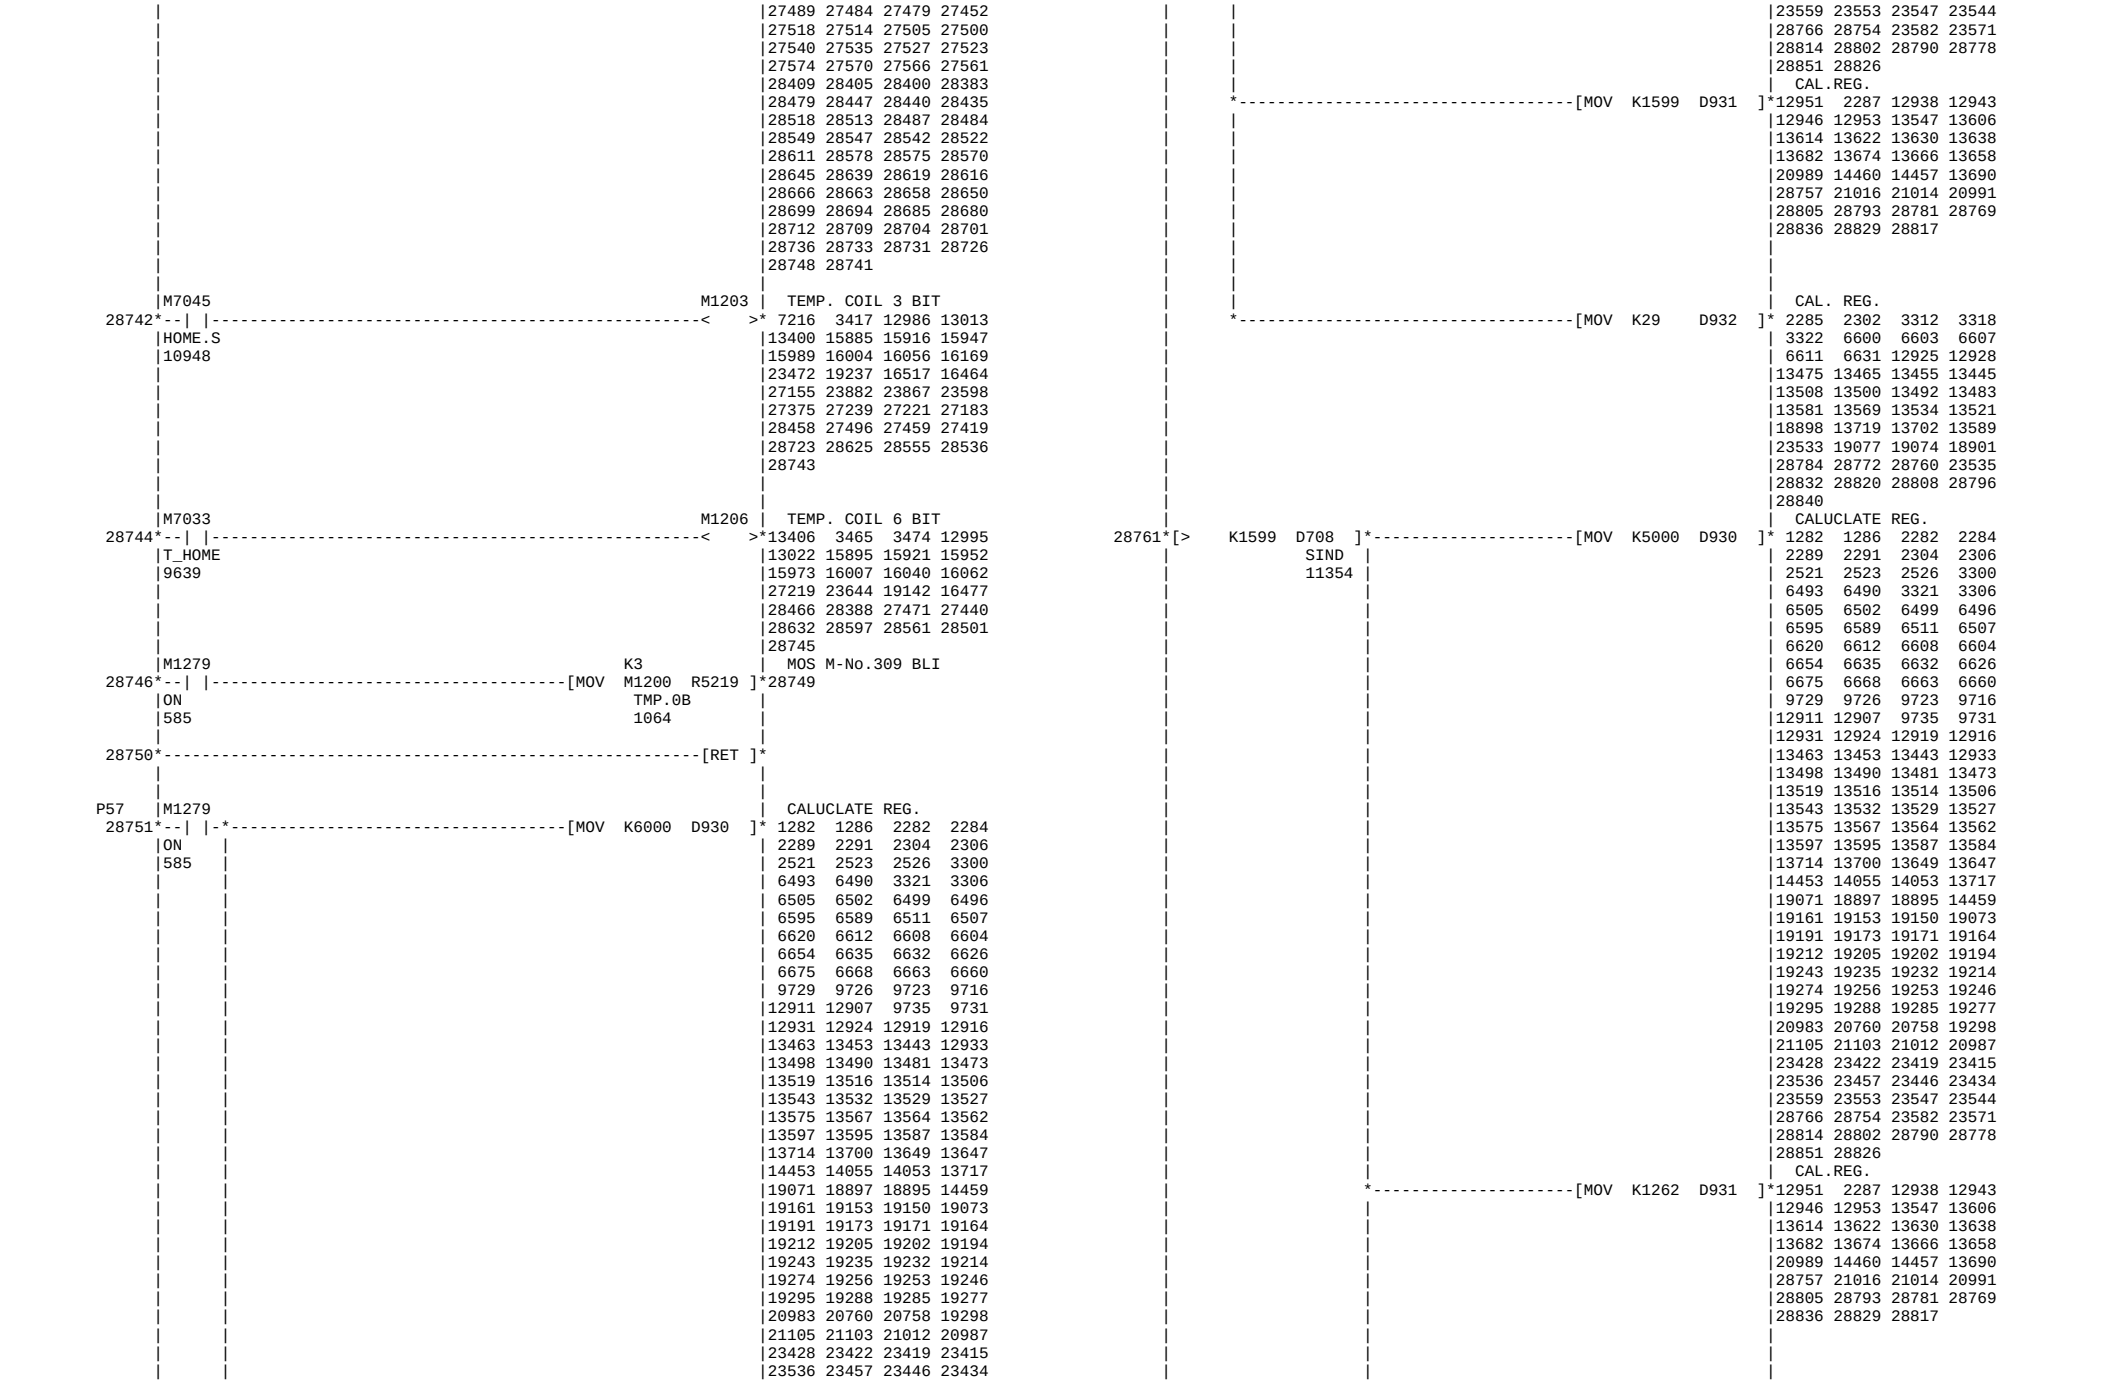
```
     |                                                    |23873 23863 23860 23806
     |                                                    |23908 23901 23888 23878
     |                                                    |24064 24030 23950 23949
     |                                                    |27169 27145 27142 24074
     |                                                    |27213 27208 27176 27174
     |                                                    |27236 27234 27229 27216
     |                                                    |27383 27359 27352 27243
     |                                                    |27449 27444 27403 27388
     |                                                    |27489 27484 27479 27452
     |                                                    |27518 27514 27505 27500
     |                                                    |27540 27535 27527 27523
     |                                                    |27574 27570 27566 27561
     |                                                    |28409 28405 28400 28383
     |                                                    |28479 28447 28440 28435
     |                                                    |28518 28513 28487 28484
     |                                                    |28549 28547 28542 28522
     |                                                    |28611 28578 28575 28570
     |                                                    |28645 28639 28619 28616
     |                                                    |28666 28663 28658 28650
     |                                                    |28699 28694 28685 28680
     |                                                    |28712 28709 28704 28701
     |                                                    |28736 28733 28731 28726
     |                                                    |28748 28741
     |                                                    |
     |M3238                                        M1201 |  TEMP. COIL 1 BIT
28620*--| |-------------------------------------------------<    >* 1070  3411  7209 12980
     |TUC_MO                                              |13007 13383 15881 15910
     |15550                                               |15943 15969 15985 16002
     |                                                    |16163 16073 16054 16035
     |                                                    |23466 19279 16512 16460
     |                                                    |23734 23657 23630 23592
     |                                                    |23951 23803 23780 23757
     |                                                    |27150 24081 24068 24031
     |                                                    |27237 27217 27182 27160
     |                                                    |27490 27453 27404 27362
     |                                                    |28451 28413 27544 27531
     |                                                    |28585 28551 28526 28493
     |                                                    |28688 28669 28655 28621
     |                                                    |28715
     |                                                    |
     |M3239                                        M1202 |  TEMP. COIL 2 BIT
28622*--| |-------------------------------------------------<    >*13391  3414  3472 12983
     |TR_MOD                                              |13010 15882 15913 15944
     |15557                                               |15988 16003 16055 16077
     |                                                    |19224 16515 16462 16166
     |                                                    |27153 23633 23595 23469
     |                                                    |27495 27458 27418 27368
     |                                                    |28531 28454 28415 27557
     |                                                    |28719 28623 28553
     |                                                    |
     |                                                    |
     |                                                    |
     |M3190                                        M1203 |  TEMP. COIL 3 BIT
28624*--| |-------------------------------------------------<    >* 7216  3417 12986 13013
     |ZSF.T                                               |13400 15885 15916 15947
     |                                                    |15989 16004 16056 16169
     |                                                    |23472 19237 16517 16464
     |                                                    |27155 23882 23867 23598
     |                                                    |27375 27239 27221 27183
     |                                                    |28458 27496 27459 27419
     |                                                    |28723 28625 28555 28536
     |                                                    |28743
     |                                                    |
     |                                                    |
     |Y232   M53                                   M1204 |  TEMP. COIL 4 BIT
28626*--|/|----| |-------------------------------------------<    >*13403 12989 13016 15888
     |YCNT.N Y.P                                          |15917 15948 15992 16005
     |767                                                 |16059 16473 19183 23870
     |                                                    |27379 27240 27222 23885
     |                                                    |28460 28419 27463 27423
     |                                                    |28673 28628 28557 28539
     |                                                    |28691
     |M3079                                        M1205 |  TEMP. COIL 5 BIT
28629*--| |-------------------------------------------------<    >*13405 12992 13019 15890
     |TR_MOD                                              |15918 15951 15972 16006
     |15564                                               |16038 16061 16475 19196
     |                                                    |27467 27439 27218 23636
     |                                                    |28559 28497 28463 28423
     |                                                    |28677 28630 28591
     |                                                    |
     |M3030                                        M1206 |  TEMP. COIL 6 BIT
28631*--| |-------------------------------------------------<    >*13406  3465  3474 12995
     |ZSF.T                                               |13022 15895 15921 15952
     |                                                    |15973 16007 16040 16062
     |                                                    |27219 23644 19142 16477
     |                                                    |28466 28388 27471 27440
     |                                                    |28632 28597 28561 28501
     |                                                    |28745
     |L38                                          M1208 |  TEMP. COIL 8 BIT
28633*--| |-------------------------------------------------<    >*15575 13001 13028 15898
     |ON                                                  |15927 15954 15975 16017
     |15375                                               |16042 16063 16481 23476
     |                                                    |27226 27178 27157 23601
     |                                                    |28565 28510 28472 28429
     |                                                    |28634 28608
     |                                                    |
     |L39                                          M1209 |  TEMP. COIL 9 BIT
28635*--| |-------------------------------------------------<    >*15579 15899 15931 15955
     |ON                                                  |16020 16064 16483 27159
     |1757                                                |27191 28397 28432 28476
     |                                                    |28636 28567
     |                                                    |
     |                                                    |
     |                                                    |
     |M1279                                  K3           |  MOS M-No.309 ON
28637*--| |-------------------------------------[MOV  M1200  R5209 ]*28640
     |ON                                      TMP.0B      |
     |585                                     1064        |
     |                                                    |
28641*-----------------------------------------------------[RET ]*
     |                                                    |
     |                                                    |
P176 |M1279                                  K3     M1200 |  TEMP. COIL 0 BIT
28642*--| |-------------------------------------[MOV  K0     M1200 ]* 1064  1067  1073  3407
     |ON                                                  | 3408  7202  7204  7219
     |585                                                 |12729 12929 13374 13411
     |                                                    |15880 15879 15603 15569
     |                                                    |15934 15909 15906 15901
     |                                                    |15963 15958 15942 15939
     |                                                    |15984 15983 15978 15966
     |                                                    |16023 16001 16000 15995
     |                                                    |16050 16045 16033 16028
     |                                                    |16072 16071 16066 16051
     |                                                    |16130 16115 16100 16080
     |                                                    |16458 16456 16193 16145
     |                                                    |19266 16509 16505 16499
     |                                                    |23479 23463 23462 19305
     |                                                    |23624 23604 23589 23588
     |                                                    |23654 23651 23647 23627
     |                                                    |23737 23731 23728 23660
     |                                                    |23774 23760 23754 23751
     |                                                    |23800 23797 23783 23777
     |                                                    |23873 23863 23860 23806
     |                                                    |23908 23901 23888 23878
     |                                                    |24064 24030 23950 23949
     |                                                    |27169 27145 27142 24074
     |                                                    |27213 27208 27176 27174
     |                                                    |27236 27234 27229 27216
     |                                                    |27383 27359 27352 27243
     |                                                    |27449 27444 27403 27388
     |                                                    |27489 27484 27479 27452
     |                                                    |27518 27514 27505 27500
     |                                                    |27540 27535 27527 27523
     |                                                    |27574 27570 27566 27561
     |                                                    |28409 28405 28400 28383
     |                                                    |28479 28447 28440 28435
     |                                                    |28518 28513 28487 28484
     |                                                    |28549 28547 28542 28522
     |                                                    |28611 28578 28575 28570
     |                                                    |28645 28639 28619 28616
     |                                                    |28666 28663 28658 28650
     |                                                    |28699 28694 28685 28680
```

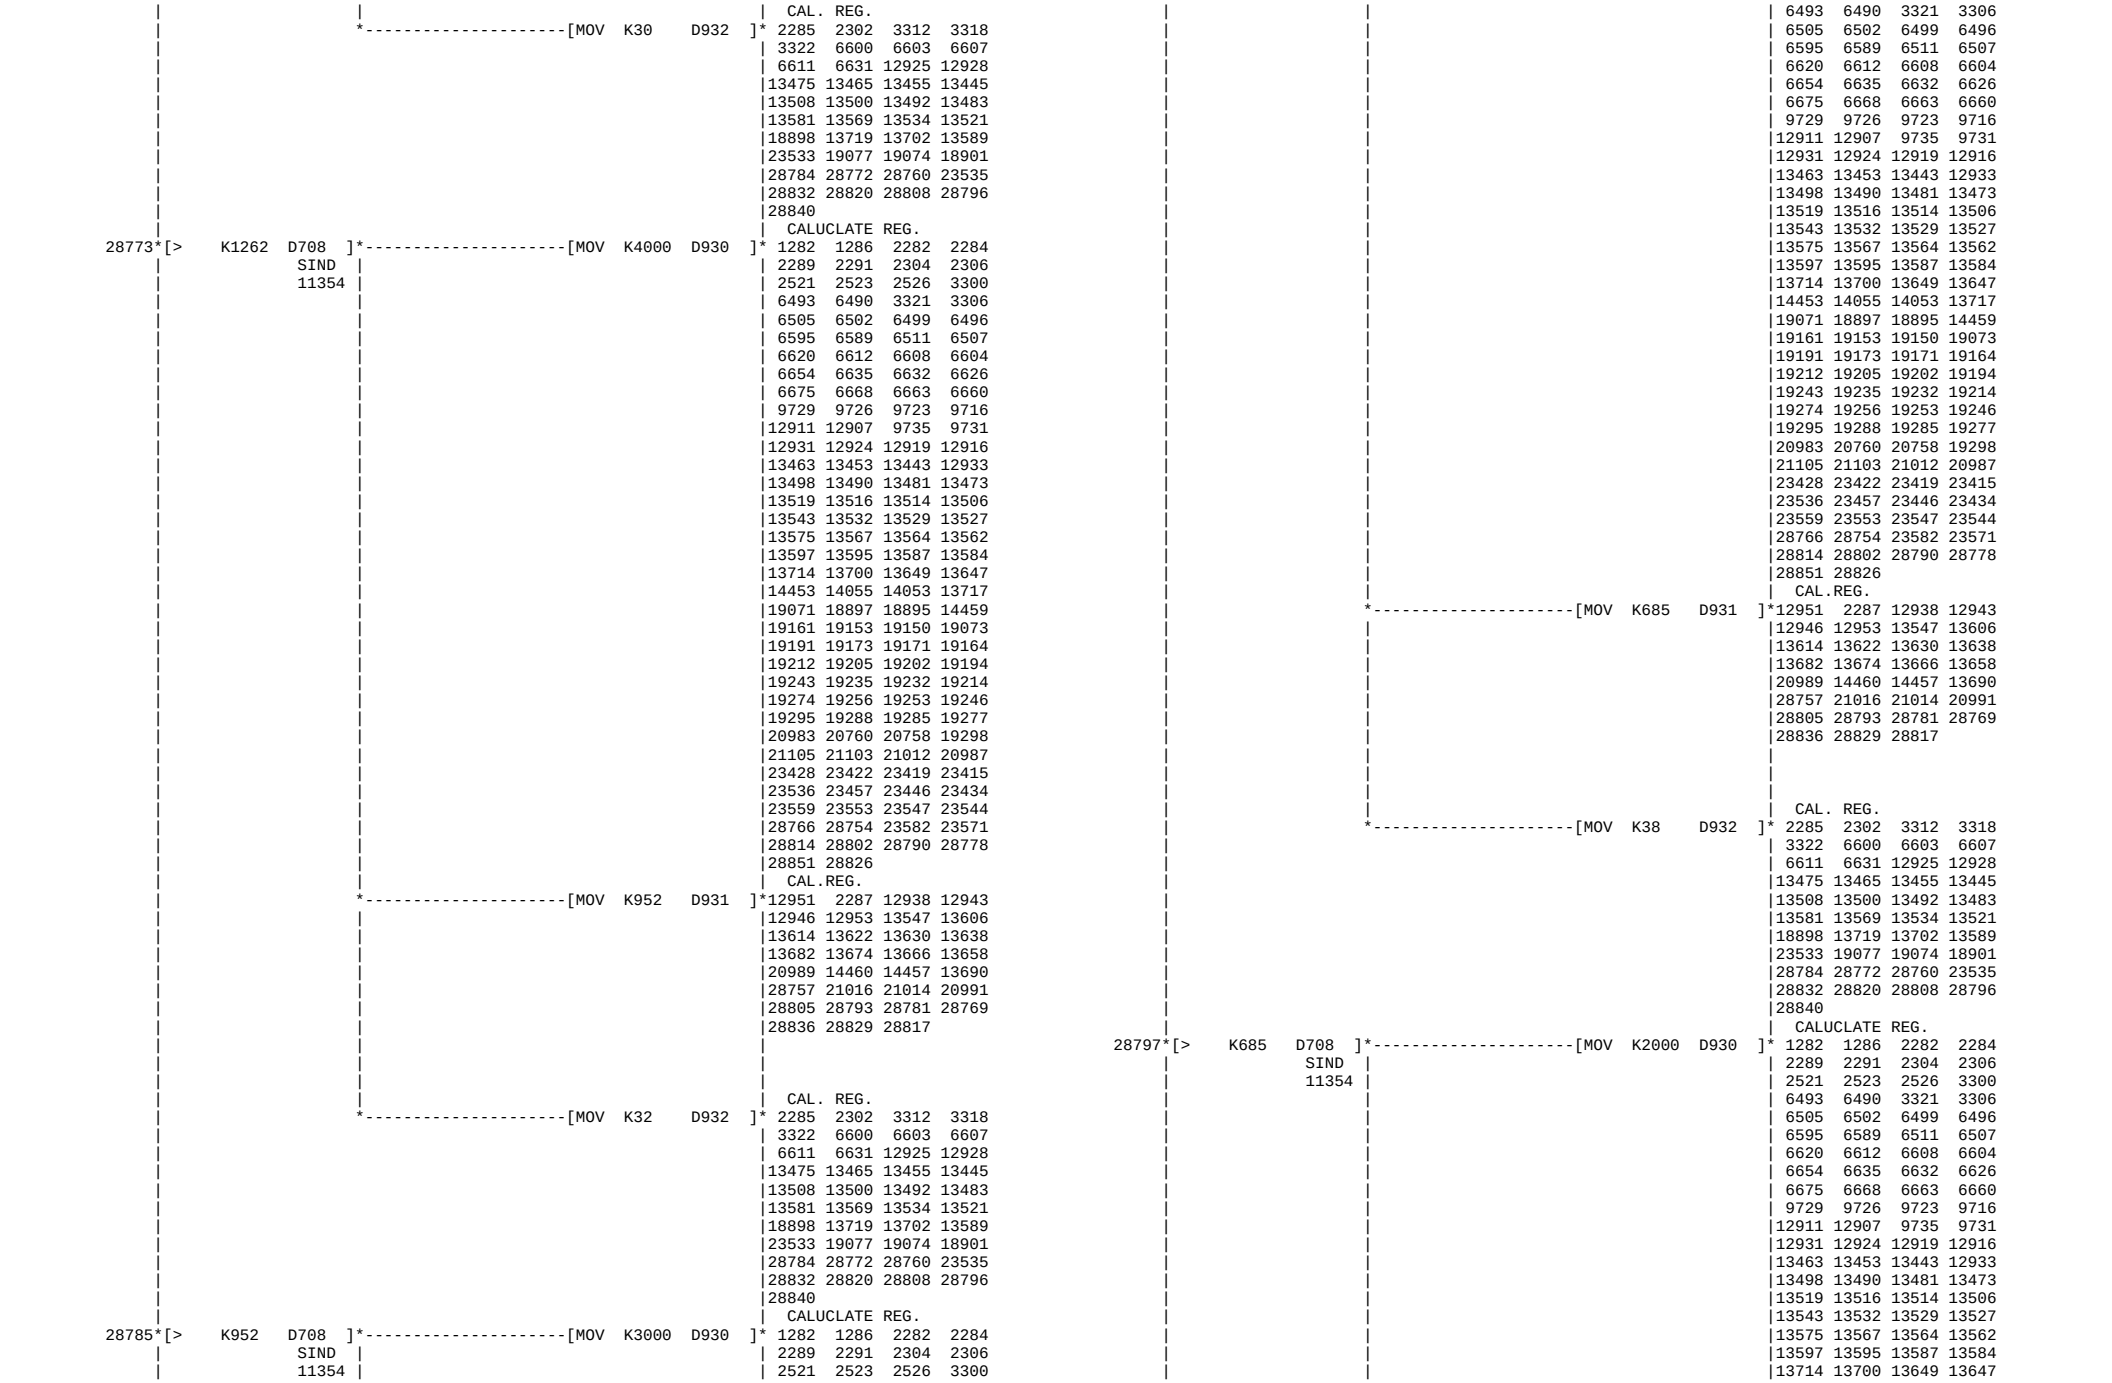

Y9D M18 M1200
FDOP.M TOPD.P
7443
M19
FD.P
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741
Y9E M18 M1201
FDCL.M TOPD.P
7470
M19
FD.P
TEMP. COIL 1 BIT
1070 3411 7209 12980
13007 13383 15881 15910
15943 15969 15985 16002
16035 16054 16073 16163
16460 16512 19279 23466
23592 23630 23657 23734
23757 23780 23803 23951
27150 24081 24068 24031
27237 27217 27182 27160
27490 27453 27404 27362
28451 28413 27544 27531
28585 28551 28526 28493
28688 28669 28655 28621
28715
M1279 K3
ON M1200 R5210 MOV
TMP.0B
1064
585
M1279 K3
ON K0 M1200 MOV
585
MOS M-No.300 BLI
TEMP. COIL 0 BIT
1064 1067 1073 3407
3408 7202 7204 7219
12729 12929 13374 13411
15569 15603 15879 15880
15901 15906 15909 15934
15939 15942 15958 15963
15966 15978 15983 15984
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
L34 M27 M1200
PCF.M PCT.P
7591
16023 16001 16000 15995
16050 16045 16033 16028
16072 16071 16066 16051
16130 16115 16100 16080
16458 16456 16193 16145
19266 16509 16505 16499
23479 23463 23462 19305
23624 23604 23589 23588
23654 23651 23647 23627
23737 23731 23728 23660
23774 23760 23754 23751
23800 23797 23783 23777
23873 23863 23860 23806
23908 23901 23888 23878
24064 24030 23950 23949
27169 27145 27142 24074
27213 27208 27176 27174
27236 27234 27229 27216
27383 27359 27352 27243
27449 27444 27403 27388
27489 27484 27479 27452
27518 27514 27505 27500
27540 27535 27527 27523
27574 27570 27566 27561
28409 28405 28400 28383
28479 28447 28440 28435
28518 28513 28487 28484
28549 28547 28542 28522
28611 28578 28575 28570
28645 28639 28619 28616
28666 28663 28658 28650
28699 28694 28685 28680
28712 28709 28704 28701
28736 28733 28731 28726
28748 28741

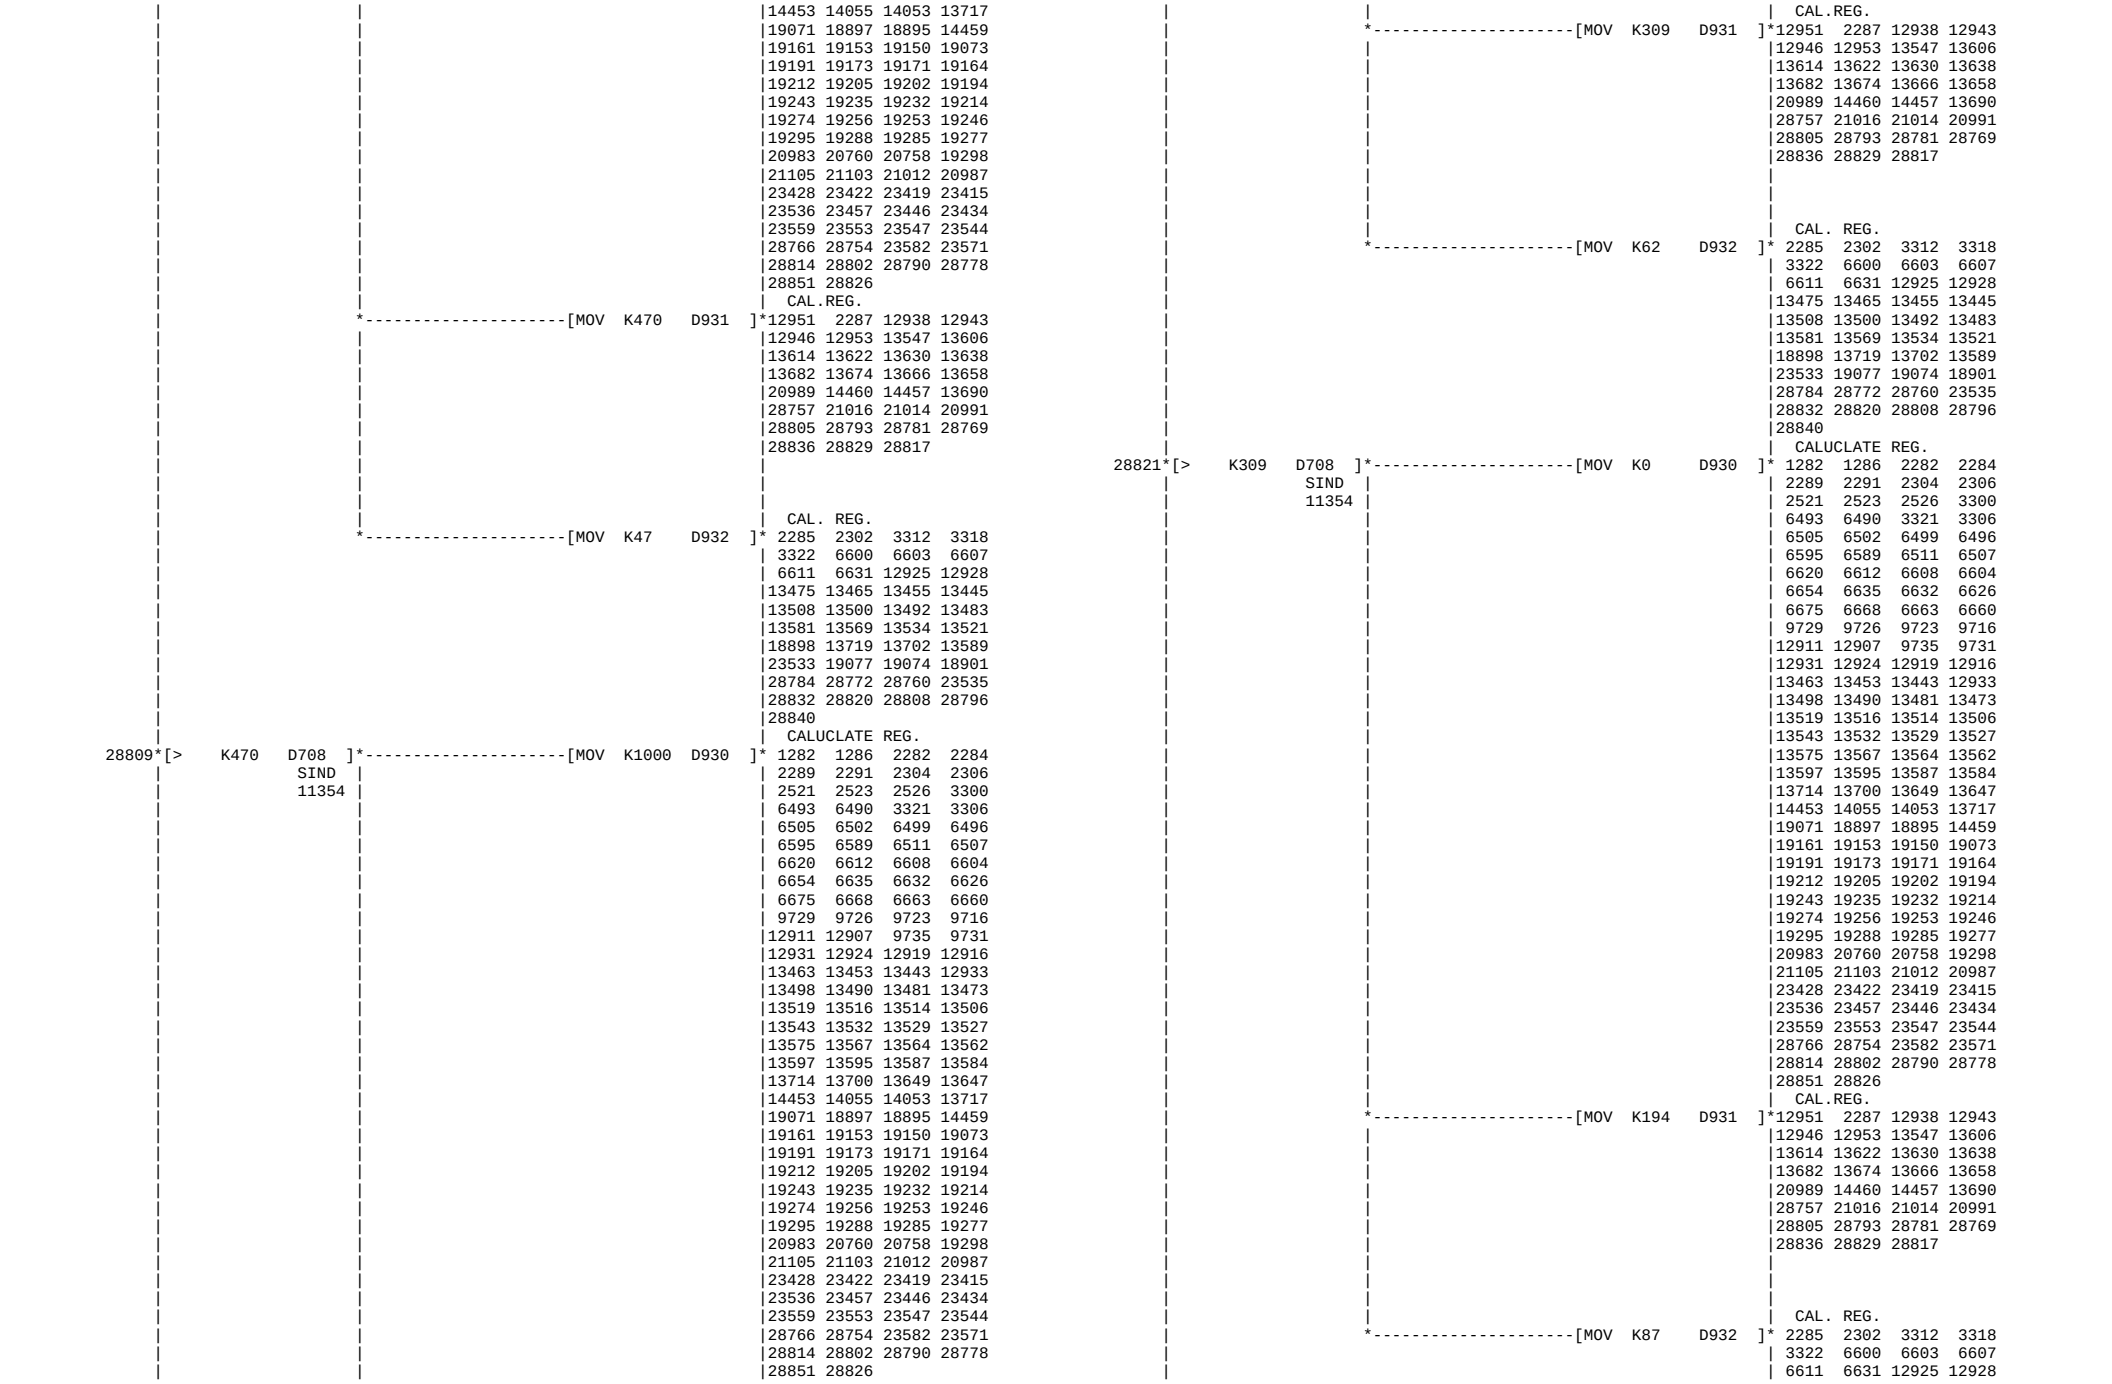
```
     |                                                  |28712 28709 28704 28701
     |                                                  |28736 28733 28731 28726
     |                                                  |28748 28741
     |                                                  |
     |L34    M27                                 M1201 |  TEMP. COIL 1 BIT
28667*--|/|----| |-----------------------------------------<    >* 1070  3411  7209 12980
     |PCF.M  PCT.P                                      |13007 13383 15881 15910
     |7591                                              |15943 15969 15985 16002
     |                                                  |16163 16073 16054 16035
     |                                                  |23466 19279 16512 16460
     |                                                  |23734 23657 23630 23592
     |                                                  |23951 23803 23780 23757
     |                                                  |27150 24081 24068 24031
     |                                                  |27237 27217 27182 27160
     |                                                  |27490 27453 27404 27362
     |                                                  |28451 28413 27544 27531
     |                                                  |28585 28551 28526 28493
     |                                                  |28688 28669 28655 28621
     |                                                  |28715
     |                                                  |
     |Y1D    Y1E    M6476                        M1204 |  TEMP. COIL 4 BIT
28670*--| |----|/|----| |-------------------------------<    >*13403 12989 13016 15888
     |FTCLMP FTUNCL F_TL.P                              |15917 15948 15992 16005
     |                                                  |16059 16473 19183 23870
     |                                                  |27379 27240 27222 23885
     |                                                  |28460 28419 27463 27423
     |                                                  |28673 28628 28557 28539
     |                                                  |28691
     |Y1E    Y1D    M6476                        M1205 |  TEMP. COIL 5 BIT
28674*--| |----|/|----| |-------------------------------<    >*13405 12992 13019 15890
     |FTUNCL FTCLMP F_TL.P                              |15918 15951 15972 16006
     |                                                  |16038 16061 16475 19196
     |                                                  |27467 27439 27218 23636
     |                                                  |28559 28497 28463 28423
     |                                                  |28677 28630 28591
     |                                                  |
     |M1279                                 K3          |  MOS M-No.301 BLI
28678*--| |-----------------------------------[MOV  M1200  R5211 ]*28681
     |ON                                     TMP.0B     |
     |585                                    1064       |
     |M1279                                     K3      |  TEMP. COIL 0 BIT
28682*--| |-----------------------------------[MOV  K0     M1200 ]* 1064  1067  1073  3407
     |ON                                                | 3408  7202  7204  7219
     |585                                               |12729 12929 13374 13411
     |                                                  |15880 15879 15603 15569
     |                                                  |15934 15909 15906 15901
     |                                                  |15963 15958 15942 15939
     |                                                  |15984 15983 15978 15966
     |                                                  |16023 16001 16000 15995
     |                                                  |16050 16045 16033 16028
     |                                                  |16072 16071 16066 16051
     |                                                  |16130 16115 16100 16080
     |                                                  |16458 16456 16193 16145
     |                                                  |19266 16509 16505 16499
     |                                                  |23479 23463 23462 19305
     |                                                  |23624 23604 23589 23588
     |                                                  |23654 23651 23647 23627
     |                                                  |23737 23731 23728 23660
     |                                                  |23774 23760 23754 23751
     |                                                  |23800 23797 23783 23777
     |                                                  |23873 23863 23860 23806
     |                                                  |23908 23901 23888 23878
     |                                                  |24064 24030 23950 23949
     |                                                  |27169 27145 27142 24074
     |                                                  |27213 27208 27176 27174
     |                                                  |27236 27234 27229 27216
     |                                                  |27383 27359 27352 27243
     |                                                  |27449 27444 27403 27388
     |                                                  |27489 27484 27479 27452
     |                                                  |27518 27514 27505 27500
     |                                                  |27540 27535 27527 27523
     |                                                  |27574 27570 27566 27561
     |                                                  |28409 28405 28400 28383
     |                                                  |28479 28447 28440 28435
     |                                                  |28518 28513 28487 28484
     |                                                  |28549 28547 28542 28522
     |                                                  |28611 28578 28575 28570
     |                                                  |28645 28639 28619 28616
     |                                                  |28666 28663 28658 28650
     |                                                  |28699 28694 28685 28680
     |                                                  |28712 28709 28704 28701
     |                                                  |28736 28733 28731 28726
     |                                                  |28748 28741
     |                                                  |
     |M7183  M7846                              M1201 |  TEMP. COIL 1 BIT
28686*--| |----| |-----------------------------------<    >* 1070  3411  7209 12980
     |WR.MDS M-MN22                                     |13007 13383 15881 15910
     |7268   27754                                      |15943 15969 15985 16002
     |                                                  |16163 16073 16054 16035
     |                                                  |23466 19279 16512 16460
     |                                                  |23734 23657 23630 23592
     |                                                  |23951 23803 23780 23757
     |                                                  |27150 24081 24068 24031
     |                                                  |27237 27217 27182 27160
     |                                                  |27490 27453 27404 27362
     |                                                  |28451 28413 27544 27531
     |                                                  |28585 28551 28526 28493
     |                                                  |28688 28669 28655 28621
     |                                                  |28715
     |                                                  |
     |M7090                                     M1204 |  TEMP. COIL 4 BIT
28689*--| |-*-------------------------------------------<    >*13403 12989 13016 15888
     |MLJON |                                           |15917 15948 15992 16005
     |      |                                           |16059 16473 19183 23870
     |X9C   |                                           |23885 27222 27240 27379
     *--|/|-*                                           |27423 27463 28419 28460
     |MDEG.M                                            |28539 28557 28628 28673
     |                                                  |28691
     |M1279                                 K3          |  MOS M-No.302 BLI
28692*--| |-----------------------------------[MOV  M1200  R5212 ]*28695
     |ON                                     TMP.0B     |
     |585                                    1064       |
     |M1279                                     K3      |  TEMP. COIL 0 BIT
28696*--| |-----------------------------------[MOV  K0     M1200 ]* 1064  1067  1073  3407
     |ON                                                | 3408  7202  7204  7219
     |585                                               |12729 12929 13374 13411
     |                                                  |15880 15879 15603 15569
     |                                                  |15934 15909 15906 15901
     |                                                  |15963 15958 15942 15939
     |                                                  |15984 15983 15978 15966
     |                                                  |16023 16001 16000 15995
     |                                                  |16050 16045 16033 16028
     |                                                  |16072 16071 16066 16051
     |                                                  |16130 16115 16100 16080
     |                                                  |16458 16456 16193 16145
     |                                                  |19266 16509 16505 16499
     |                                                  |23479 23463 23462 19305
     |                                                  |23624 23604 23589 23588
     |                                                  |23654 23651 23647 23627
     |                                                  |23737 23731 23728 23660
     |                                                  |23774 23760 23754 23751
     |                                                  |23800 23797 23783 23777
     |                                                  |23873 23863 23860 23806
     |                                                  |23908 23901 23888 23878
     |                                                  |24064 24030 23950 23949
     |                                                  |27169 27145 27142 24074
     |                                                  |27213 27208 27176 27174
     |                                                  |27236 27234 27229 27216
     |                                                  |27383 27359 27352 27243
     |                                                  |27449 27444 27403 27388
     |                                                  |27489 27484 27479 27452
     |                                                  |27518 27514 27505 27500
     |                                                  |27540 27535 27527 27523
     |                                                  |27574 27570 27566 27561
     |                                                  |28409 28405 28400 28383
     |                                                  |28479 28447 28440 28435
     |                                                  |28518 28513 28487 28484
     |                                                  |28549 28547 28542 28522
     |                                                  |28611 28578 28575 28570
     |                                                  |28645 28639 28619 28616
     |                                                  |28666 28663 28658 28650
     |                                                  |28699 28694 28685 28680
```

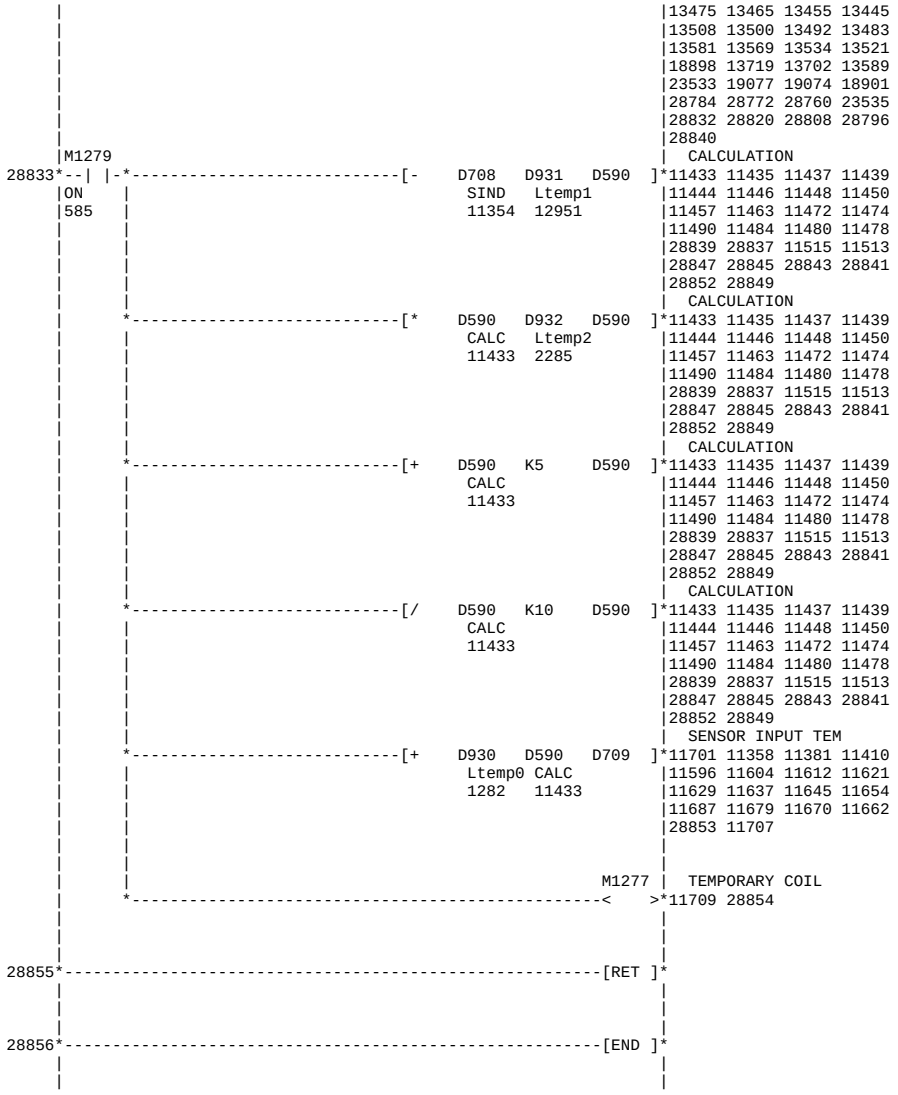

M458
M1200
TEMP. COIL 0 BIT
ORT
20793
M1279
K3
MOS M-No.303 BLI
ON
TMP.0B
585
1064
M1279
K3
TEMP. COIL 0 BIT
ON
585
L44
L45
M1200
TEMP. COIL 0 BIT
CHEXT
CHINT
4512
4521
L44
L45
M1201
TEMP. COIL 1 BIT
CHEXT
CHINT
4512
4521


L46 L47 M54 M1202
TEMP. COIL 2 BIT
2CHEXT 2CHINT SS.P
4574 4578
L46 L47 M54 M1203
TEMP. COIL 3 BIT
2CHEXT 2CHINT SS.P
4574 4578
M1279 K3
MOS M-No.305 BLI
ON
585
TMP.0B
1064
M1279 K3
TEMP. COIL 0 BIT
ON
585
M5625 M1200
TEMP. COIL 0 BIT
ORT
21156
M1279 K3
MOS M-No.308 BLI
ON
585
TMP.0B
1064
M1279 K3
TEMP. COIL 0 BIT
ON
585


M7045
M1203
TEMP. COIL 3 BIT
HOME.S
10948
M7033
M1206
TEMP. COIL 6 BIT
T_HOME
9639
M1279
K3
MOS M-No.309 BLI
ON
585
M1200
TMP.0B
1064
RET
M1279
CALUCLATE REG.
ON
585
MOV K6000 D930
MOV K1599 D931
MOV K29 D932
CAL. REG.
K1599 D708
SIND
11354
MOV K5000 D930
CALUCLATE REG.
MOV K1262 D931
CAL.REG.


CAL. REG.
[MOV K30 D932]
CALUCLATE REG.
[MOV K4000 D930]
K1262 D708]
SIND 11354
[MOV K952 D931]
CAL.REG.
[MOV K32 D932]
CAL. REG.
[MOV K952 D931]
CAL.REG.
[MOV K3000 D930]
CALUCLATE REG.
K952 D708]
SIND 11354
[MOV K685 D931]
CAL.REG.
[MOV K38 D932]
CAL. REG.
[MOV K685 D931]
CAL.REG.
[MOV K2000 D930]
CALUCLATE REG.
K685 D708]
SIND 11354
[MOV K2000 D930]
CALUCLATE REG.


[MOV K470 D931]
[MOV K47 D932]
[MOV K1000 D930]
[MOV K309 D931]
[MOV K62 D932]
[MOV K0 D930]
[MOV K194 D931]
[MOV K87 D932]
[> K470 D708]
[> K309 D708]
SIND 11354
CAL.REG.
CAL. REG.
CALUCLATE REG.
28809
28821


M1279
ON
585
D708 D931 D590
SIND Ltemp1
11354 12951
D590 D932 D590
CALC Ltemp2
11433 2285
D590 K5 D590
CALC
11433
D590 K10 D590
CALC
11433
D930 D590 D709
Ltemp0 CALC
1282 11433
M1277
CALCULATION
SENSOR INPUT TEM
TEMPORARY COIL
RET
END
28833
28855
28856
13475 13465 13455 13445
13508 13500 13492 13483
13581 13569 13534 13521
18898 13719 13702 13589
23533 19077 19074 18901
28784 28772 28760 23535
28832 28820 28808 28796
28840
11433 11435 11437 11439
11444 11446 11448 11450
11457 11463 11472 11474
11490 11484 11480 11478
28839 28837 11515 11513
28847 28845 28843 28841
28852 28849
11701 11358 11381 11410
11596 11604 11612 11621
11629 11637 11645 11654
11687 11679 11670 11662
28853 11707
11709 28854