


Revisions			
Rev.	Date	Author	Description

Notes

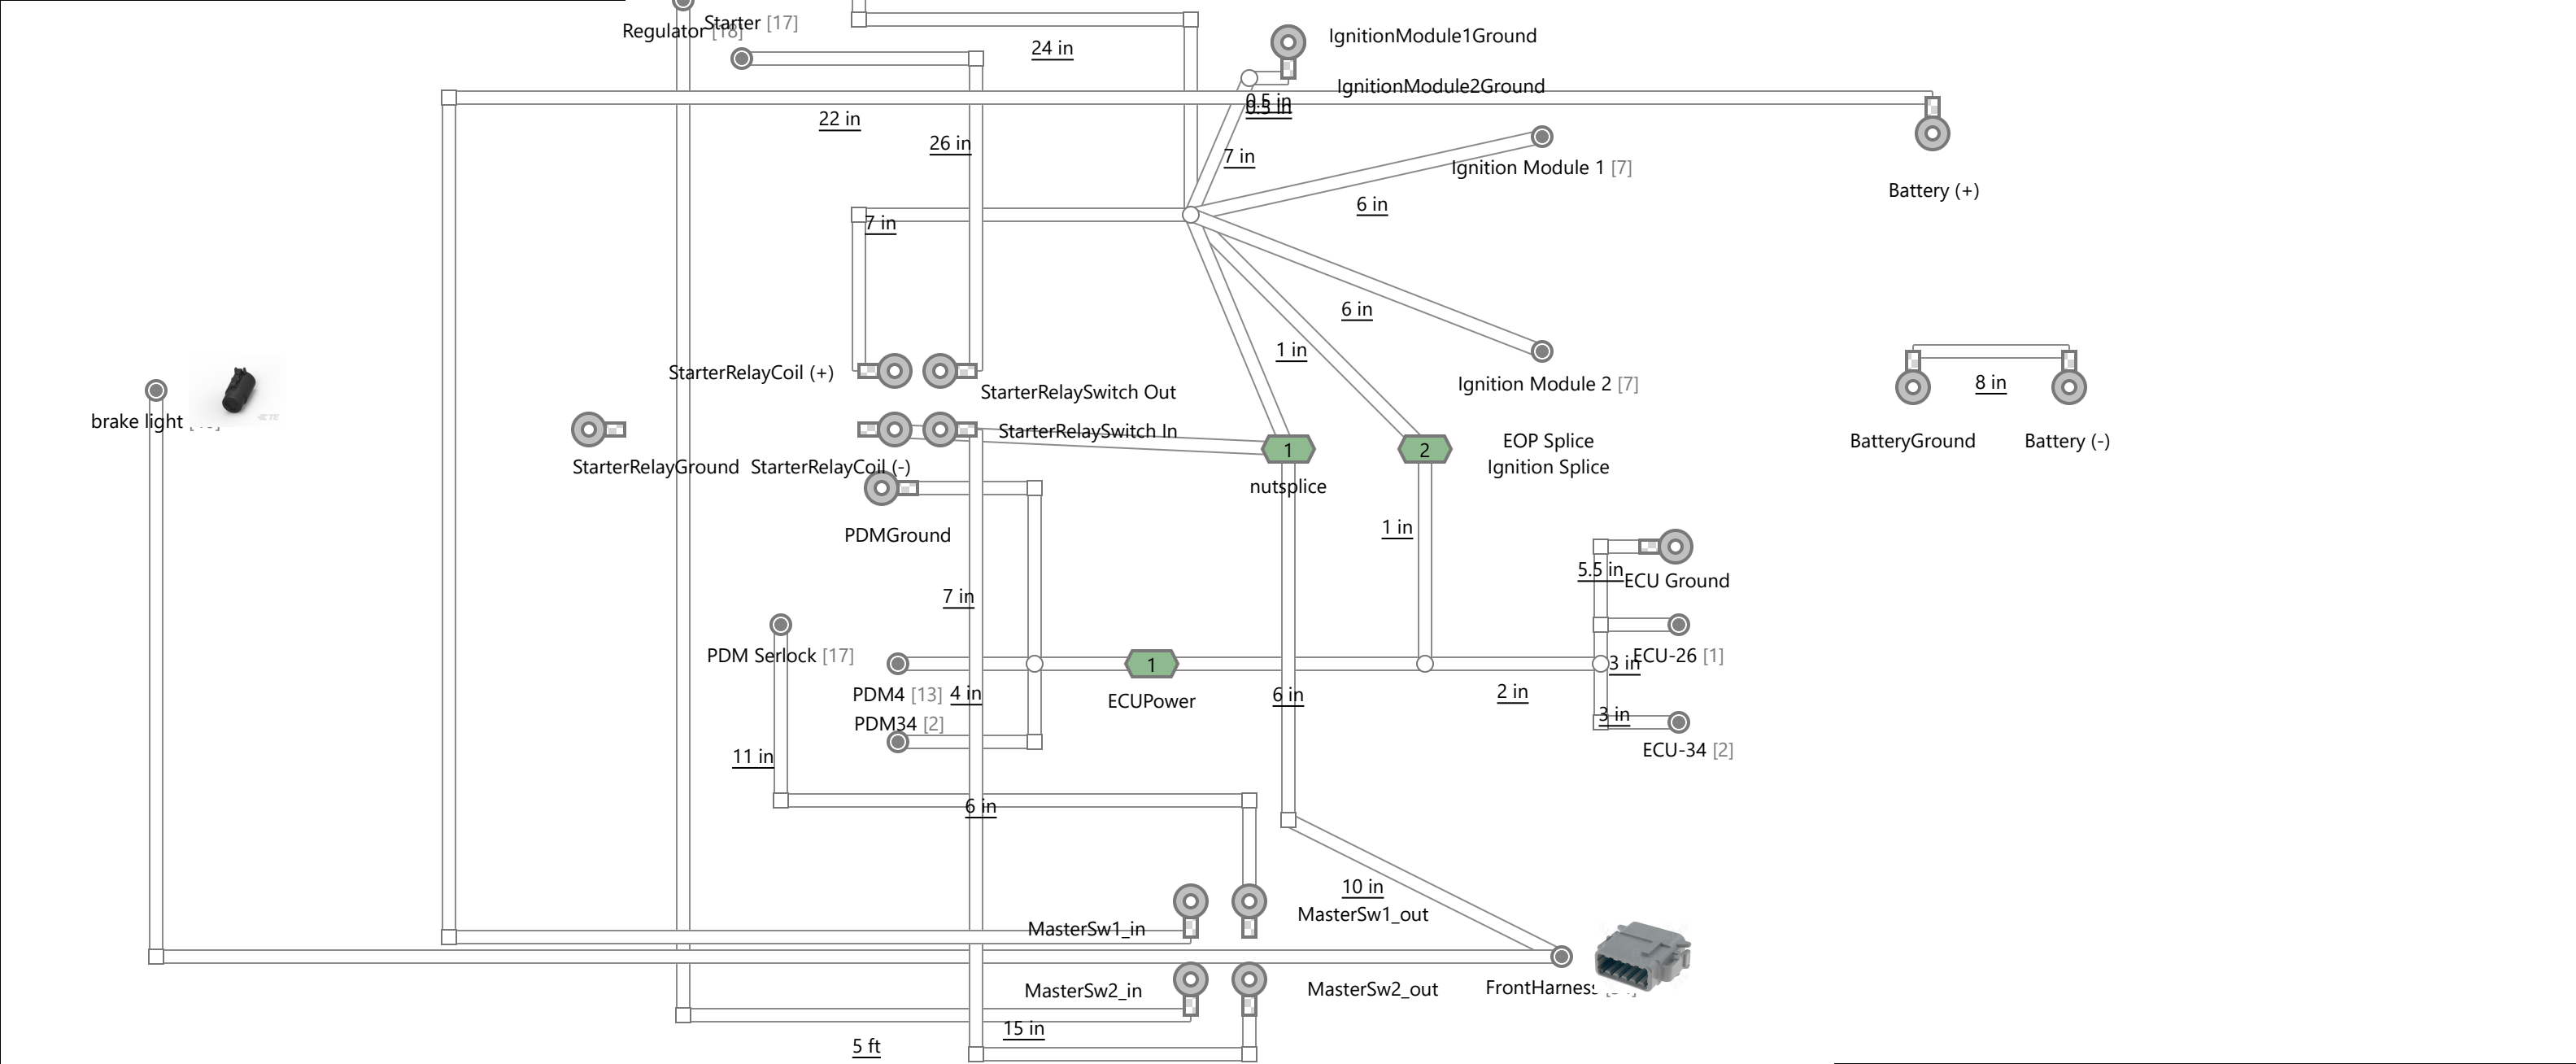

Title	----	Part Number	ECU to Engine	Revision	----
Description				QA	----

Drawn By	----	Date	----
Eng Approved	----		----
Mfg Approved	----		----
QA	----		----

This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.

Title:	----
Part Number:	ECU to Engine
Description:	



Rev.	Date	Author	Description

Title:	----
Part Number:	ECU to Engine
Description:	



Flag	Quantity	Note

Title:	----
Part Number:	ECU to Engine
Description:	

Id	Type	Manufacturer	Part Number	Description	Quantity	Usage
1	Connector		26 Cavity	Generic Connector	1	ECU-26
2	Connector		34 Cavity	Generic Connector	2	ECU-34, PDM34
7	Connector		7 Cavity	Generic Connector	2	Ignition Module 1, Ignition Module 2
13	Connector		4 Cavity	Generic Connector	1	PDM4
17	Connector		1 Cavity	Generic Connector	2	PDM Serlock, Starter
18	Connector		2 Cavity	Generic Connector	1	Regulator
20	Wire		20 AWG Red	Generic Wire	≥ 246 in	W1, W2, W3, W4, W5, W6, W7, W8, W9, W10, W100, W101, W102, W103, W104
21	Wire		UL1015 12 AWG Red	UL 1015 rated 12 AWG Red PVC Hook-up wire	≥ 15 ft	W11, W12, W13, W14, W15, W16, W17, W18, W19, W20
22	Wire		UL1015 12 AWG Yellow	UL 1015 rated 12 AWG Yellow PVC Hook-up wire	0 in	W21, W22, W23, W24, W25, W26, W27, W28, W29, W30
23	Wire		20 AWG Yellow	Generic Wire	≥ 54 in	W31, W32, W33, W34, W35, W36, W37, W38, W39, W40
24	Wire		UL1015 12 AWG Black	UL 1015 rated 12 AWG Black PVC Hook-up wire	27 in	W41, W42, W43, W44, W45, W46, W47, W48, W49, W50
25	Wire		18 AWG Black	Generic Wire	≥ 446 in	W51, W52, W53, W54, W55, W56, W57, W58, W59, W60, W73, W74, W75, W76, W77, W78, W79, W80, W81, W82, W83, W84, W85, W86, W87, W88, W89, W90, W91, W92
26	Wire		20 AWG Blue	Generic Wire	315 in	W61, W62, W63, W64, W65, W66, W67, W68, W69, W70
27	Wire		M22759/4-4-0	M22759 4 AWG Black Silver Plated Copper wire	8 in	W71
28	Wire		20 AWG Orange	Generic Wire	35 in	W72
30	Wire		M22759/41-4-2	M22759 4 AWG Red Nickel Plated Copper wire	74 in	W93, W94, W95, W96
31	Wire		20 AWG White	Generic Wire	≥ 17 in	W97
32	Wire		20 AWG Green	Generic Wire	≥ 17 in	W98
33	Wire		M22759/43-4-0	M22759 4 AWG Black Silver Plated Copper wire	0 in	W99
34	Connector	TE Connectivity / DEUTSCH	DTM06-12SA	Automotive Connector Housing, A Key, DTM, Plug, 12 Ways, DT Series Socket Contacts	1	FrontHarness
35	Connector	TE Connectivity / DEUTSCH	DRC22-40PA	Combination Line Connector, 40 Contact(s), Male, Crimp Terminal, Receptacle	1	Engine-40
36	Connector	TE Connectivity	DTP06-4S	Automotive Connector Housing, IP68, DTP Series, Plug, 4 Ways, AMP DTP Series Socket Contacts	1	Power
37	Wire		UL1015 16 AWG Black	UL 1015 rated 16 AWG Black PVC Hook-up wire	17 in	W105, W106
38	Wire		16 AWG Black	Generic Wire	52 in	W107, W108, W109, W110, W111
39	Wire		16 AWG Orange	Generic Wire	≥ 147 in	W112, W113, W114, W115, W116, W117, W118, W119, W120, W121

Title:	----
Part Number:	ECU to Engine
Description:	



Id	Type	Manufacturer	Part Number	Description	Quantity	Usage
40	Connector	TE Connectivity	DTHD06-1-4S	DEUTSCH DTHD Series 1 Position Wire-to-Wire Male Pin Black Automotive Connector	1	brake light

Title:	----
Part Number:	ECU to Engine
Description:	

From	To	Conductor	Conductor PN	Twisted With	Size	Length	From Contact PN	Notes
Battery (-)	BatteryGround	 W71.Black	M22759/4-4-0		4 AWG	8 in		
ECU-26.11	ECUPower	 W112.Orange	16 AWG Orange		16 AWG	11 in		ECU Main Power
ECU-26.14	PDM34.22	 W79.Black	18 AWG Black		18 AWG	≥ 17 in		pdroum34nd
ECU-26.23	PDM34.23	 W97.White	20 AWG White	W98	20 AWG	≥ 17 in		CAN High
ECU-26.24	PDM34.24	 W98.Green	20 AWG Green	W97	20 AWG	≥ 17 in		CAN Low
ECU-34.1	FrontHarness.8	 W78.Black	18 AWG Black		18 AWG	≥ 17 in		Engine Temp Warning
ECU-34.3	Ignition Module 2.7	 W54.Black	18 AWG Black		18 AWG	13 in		Cylinder 4 Ignition Module
ECU-34.4	Ignition Module 2.2	 W53.Black	18 AWG Black		18 AWG	13 in		Cylinder 3 Ignition Module
ECU-34.5	Ignition Module 1.7	 W52.Black	18 AWG Black		18 AWG	13 in		Cylinder 2 Ignition Module
ECU-34.6	Ignition Module 1.2	 W51.Black	18 AWG Black		18 AWG	13 in		Cylinder 1 Ignition Module
ECU-34.10	ECU Ground	 W105.Black	UL1015 16 AWG Black		16 AWG	8.5 in		ECU Ground
ECU-34.11	ECU Ground	 W106.Black	UL1015 16 AWG Black		16 AWG	8.5 in		ECU Ground
ECU-34.12	Engine-40.21	 W117.Orange	16 AWG Orange		16 AWG	35 in		knock 5v
ECU-34.13	Ignition Splice	 W34.Yellow	20 AWG Yellow		20 AWG	6 in		ECU Ignition Signal
ECU-34.17	EOP Splice	 W55.Black	18 AWG Black		18 AWG	6 in		EOP ECU
ECU-34.24	PDM34.21	 W10.Red	20 AWG Red		20 AWG	≥ 17 in		Fuel Pump Trigger
ECU-34.26	ECUPower	 W113.Orange	16 AWG Orange		16 AWG	11 in		ECU power
EOP Splice	FrontHarness.6	 W77.Black	18 AWG Black		18 AWG	≥ 11 in		EOP Light
Engine-40.1	nutssplice	 W76.Black	18 AWG Black		18 AWG	≥ 28 in		Neutral Switch
Engine-40.2	ECU-26.3	 W61.Blue	20 AWG Blue		20 AWG	35 in		IAT (Data)
Engine-40.3	ECU-26.12	 W62.Blue	20 AWG Blue		20 AWG	35 in		O2 Data
Engine-40.4	EOP Splice	 W56.Black	18 AWG Black		18 AWG	29 in		EOP
Engine-40.6	ECU-26.5	 W57.Black	18 AWG Black		18 AWG	35 in		CKP (-)
Engine-40.7	ECU-26.1	 W63.Blue	20 AWG Blue		20 AWG	35 in		CKP (+)
Engine-40.8	ECU-26.6	 W58.Black	18 AWG Black		18 AWG	35 in		CMP (-)
Engine-40.9	ECU-26.2	 W64.Blue	20 AWG Blue		20 AWG	35 in		CMP (+)
Engine-40.10	ECU-26.15	 W59.Black	18 AWG Black		18 AWG	35 in		Sensor Ground
Engine-40.11	ECU-34.14	 W65.Blue	20 AWG Blue		20 AWG	35 in		TPS (DATA)
Engine-40.13	Ignition Module 1.6	 W73.Black	18 AWG Black		18 AWG	34 in		Cylinder 2 Engine
Engine-40.14	Ignition Module 2.1	 W74.Black	18 AWG Black		18 AWG	34 in		Cylinder 3 Engine
Engine-40.15	Ignition Module 2.6	 W75.Black	18 AWG Black		18 AWG	34 in		Cylinder 4 Engine
Engine-40.16	ECU-34.15	 W66.Blue	20 AWG Blue		20 AWG	35 in		MAP (DATA)
Engine-40.17	ECU-34.2	 W67.Blue	20 AWG Blue		20 AWG	35 in		ECT (DATA)
Engine-40.18	ECU-26.8	 W68.Blue	20 AWG Blue		20 AWG	35 in		VS Sensor
Engine-40.22	Ignition Module 1.1	 W60.Black	18 AWG Black		18 AWG	34 in		Cylinder 1 Engine
Engine-40.26	ECU-34.23	 W1.Red	20 AWG Red		20 AWG	35 in		Injector 4 Ground
Engine-40.27	ECU-34.22	 W2.Red	20 AWG Red		20 AWG	35 in		Injector 3 Ground
Engine-40.28	ECU-34.20	 W3.Red	20 AWG Red		20 AWG	35 in		Injector 2 Ground
Engine-40.29	ECU-34.19	 W4.Red	20 AWG Red		20 AWG	35 in		injector 1 Ground
Engine-40.34	PDM34.18	 W114.Orange	16 AWG Orange		16 AWG	≥ 42 in		Inj2-3 Power
Engine-40.35	PDM34.17	 W115.Orange	16 AWG Orange		16 AWG	≥ 42 in		Inj 1-4 Power

Title:	----
Part Number:	ECU to Engine
Description:	

From	To	Conductor	Conductor PN	Twisted With	Size	Length	From Contact PN	Notes
Engine-40.36	ECU-34.9	 W72.Orange	20 AWG Orange		20 AWG	35 in		Sensor 5V
Engine-40.38	ECU-26.21	 W69.Blue	20 AWG Blue		20 AWG	35 in		Knock Sensor Data
Engine-40.40	ECU-26.16	 W82.Black	18 AWG Black		18 AWG	35 in		Knock Shielding
Ignition Module 2.4	IgnitionModule2Ground	 W44.Black	UL1015 12 AWG Black		12 AWG	13.5 in		IgnitionModule2Ground
Ignition Splice	FrontHarness.12	 W32.Yellow	20 AWG Yellow		20 AWG	≥ 11 in		Ignition Switch
IgnitionModule1Ground	Ignition Module 1.4	 W43.Black	UL1015 12 AWG Black		12 AWG	13.5 in		Ignition Module 1 Ground
MasterSw1_in	Battery (+)	 W93.Red	M22759/41-4-2		4 AWG	22 in		
MasterSw1_out	PDM Serlock.1	 W94.Red	M22759/41-4-2		4 AWG	11 in		PDM Power
MasterSw2_in	Regulator.1	 W11.Red	UL1015 12 AWG Red		12 AWG	5 ft		
MasterSw2_out	StarterRelaySwitch In	 W95.Red	M22759/41-4-2		4 AWG	15 in		Starter (+)
PDM4.1	Power.1	 W12.Red	UL1015 12 AWG Red		12 AWG	≥ 40 in		Coil Power
PDM4.2	Power.2	 W15.Red	UL1015 12 AWG Red		12 AWG	≥ 40 in		Fan Power
PDM4.4	Power.4	 W16.Red	UL1015 12 AWG Red		12 AWG	≥ 40 in		Fuel Pump power
PDM34.4	FrontHarness.9	 W31.Yellow	20 AWG Yellow		20 AWG	≥ 24 in		Shutdown In
PDM34.5	FrontHarness.10	 W6.Red	20 AWG Red		20 AWG	≥ 24 in		Brake Light Switch Power
PDM34.8	FrontHarness.1	 W5.Red	20 AWG Red		20 AWG	≥ 24 in		Dash LED Power
PDM34.9	FrontHarness.7	 W9.Red	20 AWG Red		20 AWG	≥ 24 in		Starter Switch out
PDM34.13	Ignition Splice	 W35.Yellow	20 AWG Yellow		20 AWG	≥ 13 in		PDM Ignition Signal
PDM34.25	ECUPower	 W116.Orange	16 AWG Orange		16 AWG	≥ 6 in		
PDM34.31	PDMGround	 W107.Black	16 AWG Black		16 AWG	13 in		PDM Ground
PDM34.32	PDMGround	 W108.Black	16 AWG Black		16 AWG	13 in		PDM Ground
PDM34.33	PDMGround	 W109.Black	16 AWG Black		16 AWG	13 in		PDM Ground
PDM34.34	PDMGround	 W110.Black	16 AWG Black		16 AWG	13 in		PDM Ground
StarterRelayCoil (+)	FrontHarness.4	 W8.Red	20 AWG Red		20 AWG	≥ 17 in		Starter Relay Coil (+)
StarterRelayCoil (-)	nutsplce	 W80.Black	18 AWG Black		18 AWG			Relay Ground
StarterRelaySwitch Out	Starter.1	 W96.Red	M22759/41-4-2		4 AWG	26 in		Starter Power
brake light.1	FrontHarness.11	 W13.Red	UL1015 12 AWG Red		12 AWG			brake light main
nutsplce	FrontHarness.5	 W81.Black	18 AWG Black		18 AWG	10 in		Neutral Light

Title:	----
Part Number:	ECU to Engine
Description:	

#	Type	Reference Designator	Manufacturer	Part Number	Color	Size	From Strip	To Strip	Length	Twisted With	Notes
1	Wire	W1		20 AWG Red	 Red	20 AWG			35 in		Injector 4 Ground
2	Wire	W2		20 AWG Red	 Red	20 AWG			35 in		Injector 3 Ground
3	Wire	W3		20 AWG Red	 Red	20 AWG			35 in		Injector 2 Ground
4	Wire	W4		20 AWG Red	 Red	20 AWG			35 in		injector 1 Ground
5	Wire	W5		20 AWG Red	 Red	20 AWG			≥ 24 in		Dash LED Power
6	Wire	W6		20 AWG Red	 Red	20 AWG			≥ 24 in		Brake Light Switch Power
7	Wire	W8		20 AWG Red	 Red	20 AWG			≥ 17 in		Starter Relay Coil (+)
8	Wire	W9		20 AWG Red	 Red	20 AWG			≥ 24 in		Starter Switch out
9	Wire	W10		20 AWG Red	 Red	20 AWG			≥ 17 in		Fuel Pump Trigger
10	Wire	W11		UL1015 12 AWG Red	 Red	12 AWG			5 ft		
11	Wire	W12		UL1015 12 AWG Red	 Red	12 AWG			≥ 40 in		Coil Power
12	Wire	W13		UL1015 12 AWG Red	 Red	12 AWG					brake light main
13	Wire	W15		UL1015 12 AWG Red	 Red	12 AWG			≥ 40 in		Fan Power
14	Wire	W16		UL1015 12 AWG Red	 Red	12 AWG			≥ 40 in		Fuel Pump power
15	Wire	W31		20 AWG Yellow	 Yellow	20 AWG			≥ 24 in		Shutdown In
16	Wire	W32		20 AWG Yellow	 Yellow	20 AWG			≥ 11 in		Ignition Switch
17	Wire	W34		20 AWG Yellow	 Yellow	20 AWG			6 in		ECU Ignition Signal
18	Wire	W35		20 AWG Yellow	 Yellow	20 AWG			≥ 13 in		PDM Ignition Signal
19	Wire	W43		UL1015 12 AWG Black	 Black	12 AWG			13.5 in		Ignition Module 1 Ground
20	Wire	W44		UL1015 12 AWG Black	 Black	12 AWG			13.5 in		IgnitionModule2Ground
21	Wire	W51		18 AWG Black	 Black	18 AWG			13 in		Cylinder 1 Ignition Module
22	Wire	W52		18 AWG Black	 Black	18 AWG			13 in		Cylinder 2 Ignition Module
23	Wire	W53		18 AWG Black	 Black	18 AWG			13 in		Cylinder 3 Ingition Module
24	Wire	W54		18 AWG Black	 Black	18 AWG			13 in		Cylinder 4 Ignition Module
25	Wire	W55		18 AWG Black	 Black	18 AWG			6 in		EOP ECU
26	Wire	W56		18 AWG Black	 Black	18 AWG			29 in		EOP
27	Wire	W57		18 AWG Black	 Black	18 AWG			35 in		CKP (-)
28	Wire	W58		18 AWG Black	 Black	18 AWG			35 in		CMP (-)
29	Wire	W59		18 AWG Black	 Black	18 AWG			35 in		Sensor Ground
30	Wire	W60		18 AWG Black	 Black	18 AWG			34 in		Cylinder 1 Engine
31	Wire	W61		20 AWG Blue	 Blue	20 AWG			35 in		IAT (Data)
32	Wire	W62		20 AWG Blue	 Blue	20 AWG			35 in		O2 Data
33	Wire	W63		20 AWG Blue	 Blue	20 AWG			35 in		CKP (+)
34	Wire	W64		20 AWG Blue	 Blue	20 AWG			35 in		CMP (+)
35	Wire	W65		20 AWG Blue	 Blue	20 AWG			35 in		TPS (DATA)
36	Wire	W66		20 AWG Blue	 Blue	20 AWG			35 in		MAP (DATA)
37	Wire	W67		20 AWG Blue	 Blue	20 AWG			35 in		ECT (DATA)
38	Wire	W68		20 AWG Blue	 Blue	20 AWG			35 in		VS Sensor
39	Wire	W69		20 AWG Blue	 Blue	20 AWG			35 in		Knock Sensor Data
40	Wire	W71		M22759/4-4-0	 Black	4 AWG			8 in		
41	Wire	W72		20 AWG Orange	 Orange	20 AWG			35 in		Sensor 5V

Title:	----
Part Number:	ECU to Engine
Description:	

#	Type	Reference Designator	Manufacturer	Part Number	Color	Size	From Strip	To Strip	Length	Twisted With	Notes
42	Wire	W73		18 AWG Black	 Black	18 AWG			34 in		Cylinder 2 Engine
43	Wire	W74		18 AWG Black	 Black	18 AWG			34 in		Cylinder 3 Engine
44	Wire	W75		18 AWG Black	 Black	18 AWG			34 in		Cylinder 4 Engine
45	Wire	W76		18 AWG Black	 Black	18 AWG			≥ 28 in		Neutral Switch
46	Wire	W77		18 AWG Black	 Black	18 AWG			≥ 11 in		EOP Light
47	Wire	W78		18 AWG Black	 Black	18 AWG			≥ 17 in		Engine Temp Warning
48	Wire	W79		18 AWG Black	 Black	18 AWG			≥ 17 in		pdroum34nd
49	Wire	W80		18 AWG Black	 Black	18 AWG					Relay Ground
50	Wire	W81		18 AWG Black	 Black	18 AWG			10 in		Neutral Light
51	Wire	W82		18 AWG Black	 Black	18 AWG			35 in		Knock Shielding
52	Wire	W93		M22759/41-4-2	 Red	4 AWG			22 in		
53	Wire	W94		M22759/41-4-2	 Red	4 AWG			11 in		PDM Power
54	Wire	W95		M22759/41-4-2	 Red	4 AWG			15 in		Starter (+)
55	Wire	W96		M22759/41-4-2	 Red	4 AWG			26 in		Starter Power
56	Wire	W97		20 AWG White	 White	20 AWG			≥ 17 in	W98	CAN High
57	Wire	W98		20 AWG Green	 Green	20 AWG			≥ 17 in	W97	CAN Low
58	Wire	W105		UL1015 16 AWG Black	 Black	16 AWG			8.5 in		ECU Ground
59	Wire	W106		UL1015 16 AWG Black	 Black	16 AWG			8.5 in		ECU Ground
60	Wire	W107		16 AWG Black	 Black	16 AWG			13 in		PDM Ground
61	Wire	W108		16 AWG Black	 Black	16 AWG			13 in		PDM Ground
62	Wire	W109		16 AWG Black	 Black	16 AWG			13 in		PDM Ground
63	Wire	W110		16 AWG Black	 Black	16 AWG			13 in		PDM Ground
64	Wire	W112		16 AWG Orange	 Orange	16 AWG			11 in		ECU Main Power
65	Wire	W113		16 AWG Orange	 Orange	16 AWG			11 in		ECU power
66	Wire	W114		16 AWG Orange	 Orange	16 AWG			≥ 42 in		Inj2-3 Power
67	Wire	W115		16 AWG Orange	 Orange	16 AWG			≥ 42 in		Inj 1-4 Power
68	Wire	W116		16 AWG Orange	 Orange	16 AWG			≥ 6 in		
69	Wire	W117		16 AWG Orange	 Orange	16 AWG			35 in		knock 5v

Title:	----
Part Number:	ECU to Engine
Description:	



#	Manufacturer	Part Number	Description	Label Text