source ..... expert sleepers
rev 2026.10

sd drums

_travelers guide
_for drumming in parallel worlds

6	3	48
trigger voices	multisample timbres	first note

› then noon = 12 o'clock tags = the panel drawing

drum samples from the microsd card · 03 sd multisample + 04 sd 6 triggers · sequenced by stolperbeats over cv or midi

01 what this sector is

sdd_01

the job	disting ex plays drum samples off the card · stolperbeats sequences them
two algorithms	**[03]** sd multisample · 8 voices, 3 timbres › **[04]** sd 6 triggers · 6 drum voices
two routes	trigger cables into the inputs, or midi through a tiny midi breakout
load one	**[p]** menu › algorithms › choose single › 3 or 4


02 which one?

sdd_02 · fig.01

6 triggers	each of inputs 1 – 6 fires its own voice · all six stolperbeats tracks over cables · choke groups
multisample	up to 3 gate inputs (3 timbres) · pitch cv picks the file · chords, arps, eq, delay
all six over midi	either algorithm · multisample plays a whole kit folder from one channel
rule of thumb	cables only › 6 triggers · velocity layers + midi › multisample

__fig.01 : six trigger outs

stolperbeats › disting ex

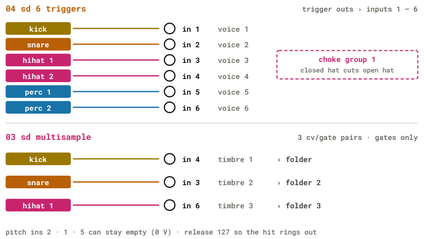

10 first flight

sdd_10 · six cables, one kit

1. kit folder of six wavs at the card root
2. **[p]** › algorithms › choose single › **[4]** sd 6 triggers
3. **[folder]** to the kit · press the menu button to load it
4. stolperbeats **kick** … **perc 2** into **in 1** … **in 6**
5. **[sample 1-6]**: one file each · **[choke group]** 1 on both hats
6. **out 1** **out 2** to the mixer · press play on stolperbeats

03 the card

sdd_03 · microsd

format	fat32, mbr partition · 32 gb sdhc recommended · sd association formatter
speed	misc › tests › test sd speed · ~3 mb/s max · under 1.8: suspect · samsung evo runs high speed, sandisk extreme doesn't
supplied card	fine for firmware and wavetables · not guaranteed for streaming wavs

04 folders

sdd_04 · fig.02

where	folders of .wav files (24 bit ok) at the top level of the card, not nested
order	sorted alphabetically · the **[folder]** number (0 – 999) counts down that list
tip	number the names (00 kit 808, 01 kit 909 …) so folder numbers stay put
switching	a new folder loads after you press the menu button to confirm
playlist.txt	optional · picks files, order and per-file settings · no playlist = alphabetical

__fig.02 : the card

alphabetical = folder number



05 file names

sdd_05 · suffixes

_C3 · _F#2	natural pitch · sharps only, no flats
_SW40	switch point (midi note) in multisample
_V1 · _V2	velocity layers · lowest number = softest
_RR1 · _RR2	round robins · **[round robin mode]**: in order · random · random2 (no repeats) · random3 (shuffled sets)
both	velocity first: snare_V2_RR1.wav
no note name	multisample numbers them from note 48 (C3) up · one file per semitone

06 sd 6 triggers

sdd_06 · algorithm 4

in 1 … **in 6**	trigger voice 1 – 6 · gate voltage = velocity, 5 V = max
[sample 1-6]	file per voice · –1 = voice off · **[r]** on it previews
[folder] **[folder 2-6]**	one shared folder, or –1 = use the shared one, per voice
[output 1-6]	1 – 4 mono · 5 = 1/2 stereo · 6 = 3/4 · 7 / 8 = 1/2 + out 3 / out 4
[gain] **[pan]**	–6 db default · pan on stereo outs
[env time]	100 = play to the end (default) · lower = shorter tails
[choke group]	1 – 3 · a hit cuts the others in its group (closed hat › open hat)
[start offset]	start later in the file, in 0.1 % steps
[transpose] **[fine]**	per voice tuning

07 sd multisample as drums

sdd_07 · algorithm 3 · cv

[input mode]	3 cv/gate pairs · gates **in 4** **in 3** **in 6** = timbre 1 · 2 · 3
pitch	**in 2** **in 1** **in 5** pair with those gates
[folder] **[folder 2]** **[folder 3]**	one drum folder per timbre · –1 = share folder 1
[release]	127 = play the file to its end · short triggers otherwise fade it early
[attack]	0 for a sharp hit
[output mode]	per gate 1-2-3: timbres to outs 1, 2, 3 mono · out 4 = paraphonic gate
[gain]	default is set for chords · raise it for single hits
[max voices]	8 shared by all three timbres

08 picking the sample

sdd_08 · multisample pitch cv

one file	an empty pitch input sits at 0 V · use **[transpose]** if the hit sounds pitched
many files	1 V/oct · each 1/12 V steps to the next file in the folder
[gate offset]	delays the gate so a moving cv lands first (0 – 496)


11 tiny midi breakout

sdd_11 · fig.03

to the ex	2 hp, passive, six trs sockets · ribbon to the rear **GT4/MIDI** header, pin 1 nearest the GT4 text
midi in	header pins 3 + 4 to a socket wired type a (tip, ring)
midi out	pins 1 + 2 to another socket (ring, tip) · soft thru forwards midi in › out · type b = swap tip, ring
the cable	stolperbeats **midi out** (trs a) › that socket · activity shows top right of the display

__fig.04 : the midi chain

tiny midi breakout



12 midi into 6 triggers

sdd_12

notes	six neighbouring notes fire voices 1 – 6 · 48 – 53 by default (menu)
stolperbeats	every track on the ex's channel · kick 48, snare 49, hh1 50, hh2 51, p1 52, p2 53 · velocity per track (1 LED = 8 steps)
channel	settings › midi/i2c › rx channel (single)
free the inputs	turn the trigger inputs off in the algorithm menu · use them for cv mapping


13 midi into multisample

sdd_13

timbres	three neighbouring channels from the rx channel (or set in the menu) · each its own folder
one kit	unnamed files sit at 48 up · six tracks on one channel, notes 48 – 53
[min / max note]	note range per timbre · velocity picks the _V layer
note length	stolperbeats duration (clicky – legato) sets the note-off · release 127 ignores it
[input mode]	no cv/gate inputs · frees all six for mapping
midi clock	stolperbeats sends 24 ppqn · the delay time can follow it (menu)

__fig.03 : the panel

numbers match the legend

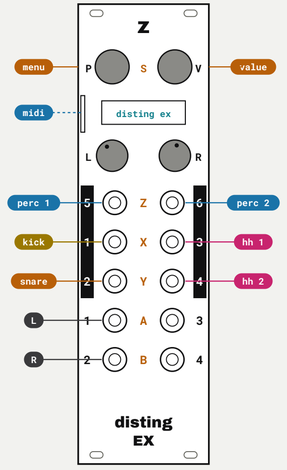

kick **in 1** · voice 1 · 6 triggers
snare **in 2** · voice 2
hh 1 **in 3** · voice 3 · choke 1
hh 2 **in 4** · voice 4 · choke 1
perc 1 **in 5** · voice 5
perc 2 **in 6** · voice 6
L **R** **out 1** · **out 2** · output 1-6 = 5 (stereo 1/2)
menu **p** · push = menu · confirms a folder
value **v** · turn = value
midi **rear header** · GT4/MIDI · tiny midi breakout

09 when it goes wrong

sdd_09

cut tails	release 127 (multisample) · env time 100 (6 triggers)
all at max	cv gates read volts as velocity · 10 V triggers = the loudest layer
glitches	test sd speed · a faster card · transpose limit in the menu
silence	sample set to –1 · folder not confirmed · out of min / max note
double hits	cables and midi driving the same voice

design homage to the house of x / powers of x data pages — designed by tom muller with jonathan hickman · panel drawing after the disting ex panel
not affiliated with expert sleepers, making sound machines or marvel