# sd drums

## _travelers guide
## _for drumming in parallel worlds

| 6 | 3 | 48 |
|---|---|---|
| trigger voices | multisample timbres | first note |

› then  noon = 12 o'clock  tags = the panel drawing

drum samples from the microsd card · 03 sd multisample + 04 sd 6 triggers · sequenced by stolperbeats over cv or midi

## 01 what this sector is

sdd_01

| | |
|---|---|
| the job | disting ex plays drum samples off the card · stolperbeats sequences them |
| two algorithms | [ 03 ] sd multisample · 8 voices, 3 timbres › [ 04 ] sd 6 triggers · 6 drum voices |
| two routes | trigger cables into the inputs, or midi through a tiny midi breakout |
| load one | [ p ] menu › algorithms › choose single › 3 or 4 |

## 02 which one?

sdd_02 · fig.01

| | |
|---|---|
| 6 triggers | each of inputs 1 – 6 fires its own voice · all six stolperbeats tracks over cables · choke groups |
| multisample | up to 3 gate inputs (3 timbres) · pitch cv picks the file · chords, arps, eq, delay |
| all six over midi | either algorithm · multisample plays a whole kit folder from one channel |
| rule of thumb | cables only › 6 triggers · velocity layers + midi › multisample |

## __fig.01 : six trigger outs

stolperbeats › disting ex




## 10 first flight

sdd_10 · six cables, one kit

1. kit folder of six wavs at the card root
2. [ p ] › algorithms › choose single › [ 4 ] sd 6 triggers
3. [ folder ] to the kit · press the menu button to load it
4. stolperbeats kick … perc 2 into in 1 … in 6
5. [ sample 1-6 ]: one file each · [ choke group ] 1 on both hats
6. out 1 out 2 to the mixer · press play on stolperbeats

## 03 the card

sdd_03 · microsd

| | |
|---|---|
| format | fat32, mbr partition · 32 gb sdhc recommended · sd association formatter |
| speed | misc › tests › test sd speed · ~3 mb/s max · under 1.8: suspect · samsung evo runs high speed, sandisk extreme doesn't |
| supplied card | fine for firmware and wavetables · not guaranteed for streaming wavs |

## 04 folders

sdd_04 · fig.02

| | |
|---|---|
| where | folders of .wav files (24 bit ok) at the top level of the card, not nested |
| order | sorted alphabetically · the [ folder ] number (0 – 999) counts down that list |
| tip | number the names (00 kit 808, 01 kit 909 …) so folder numbers stay put |
| switching | a new folder loads after you press the menu button to confirm |
| playlist.txt | optional · picks files, order and per-file settings · no playlist = alphabetical |

## __fig.02 : the card

alphabetical = folder number




## 05 file names

sdd_05 · suffixes

| | |
|---|---|
| _C3 · _F#2 | natural pitch · sharps only, no flats |
| _SW40 | switch point (midi note) in multisample |
| _V1 · _V2 | velocity layers · lowest number = softest |
| _RR1 · _RR2 | round robins · [ round robin mode ]: in order · random · random2 (no repeats) · random3 (shuffled sets) |
| both | velocity first: snare_V2_RR1.wav |
| no note name | multisample numbers them from note 48 (C3) up · one file per semitone |

## 06 sd 6 triggers

sdd_06 · algorithm 4

| | |
|---|---|
| in 1 … in 6 | trigger voice 1 – 6 · gate voltage = velocity, 5 V = max |
| [ sample 1-6 ] | file per voice · –1 = voice off · [ r ] on it previews |
| [ folder ] [ folder 2-6 ] | one shared folder, or –1 = use the shared one, per voice |
| [ output 1-6 ] | 1 – 4 mono · 5 = 1/2 stereo · 6 = 3/4 · 7 / 8 = 1/2 + out 3 / out 4 |
| [ gain ] [ pan ] | –6 db default · pan on stereo outs |
| [ env time ] | 100 = play to the end (default) · lower = shorter tails |
| [ choke group ] | 1 – 3 · a hit cuts the others in its group (closed hat › open hat) |
| [ start offset ] | start later in the file, in 0.1 % steps |
| [ transpose ] [ fine ] | per voice tuning |

## 07 sd multisample as drums

sdd_07 · algorithm 3 · cv

| | |
|---|---|
| [ input mode ] | 3 cv/gate pairs · gates in 4 in 3 in 6 = timbre 1 · 2 · 3 |
| pitch | in 2 in 1 in 5 pair with those gates |
| [ folder ] [ folder 2 ] [ folder 3 ] | one drum folder per timbre · –1 = share folder 1 |
| [ release ] | 127 = play the file to its end · short triggers otherwise fade it early |
| [ attack ] | 0 for a sharp hit |
| [ output mode ] | per gate 1-2-3: timbres to outs 1, 2, 3 mono · out 4 = paraphonic gate |
| [ gain ] | default is set for chords · raise it for single hits |
| [ max voices ] | 8 shared by all three timbres |

## 08 picking the sample

sdd_08 · multisample pitch cv

| | |
|---|---|
| one file | an empty pitch input sits at 0 V · use [ transpose ] if the hit sounds pitched |
| many files | 1 V/oct · each 1/12 V steps to the next file in the folder |
| [ gate offset ] | delays the gate so a moving cv lands first (0 – 496) |

## 11 tiny midi breakout

sdd_11 · fig.03

| | |
|---|---|
| to the ex | 2 hp, passive, six trs sockets · ribbon to the rear GT4/MIDI header, pin 1 nearest the GT4 text |
| midi in | header pins 3 + 4 to a socket wired type a (tip, ring) |
| midi out | pins 1 + 2 to another socket (ring, tip) · soft thru forwards midi in › out · type b = swap tip, ring |
| the cable | stolperbeats midi out (trs a) › that socket · activity shows top right of the display |

## __fig.04 : the midi chain

tiny midi breakout




in socket: pin 3 › tip, pin 4 › ring (type a) · out socket: pin 1 › ring, pin 2 › tip
stolperbeats out is type a; its rear switch sets type b · swap tip / ring to match
one 4-way ribbon comes with the breakout · it splits into two 2-way cables

## 12 midi into 6 triggers

sdd_12

| | |
|---|---|
| notes | six neighbouring notes fire voices 1 – 6 · 48 – 53 by default (menu) |
| stolperbeats | every track on the ex's channel · kick 48, snare 49, hh1 50, hh2 51, p1 52, p2 53 · velocity per track (1 LED = 8 steps) |
| channel | settings › midi/i2c › rx channel (single) |
| free the inputs | turn the trigger inputs off in the algorithm menu · use them for cv mapping |


## 13 midi into multisample

sdd_13

| | |
|---|---|
| timbres | three neighbouring channels from the rx channel (or set in the menu) · each its own folder |
| one kit | unnamed files sit at 48 up · six tracks on one channel, notes 48 – 53 |
| [ min / max note ] | note range per timbre · velocity picks the _V layer |
| note length | stolperbeats duration (clicky – legato) sets the note-off · release 127 ignores it |
| [ input mode ] | no cv/gate inputs · frees all six for mapping |
| midi clock | stolperbeats sends 24 ppqn · the delay time can follow it (menu) |

## __fig.03 : the panel

numbers match the legend

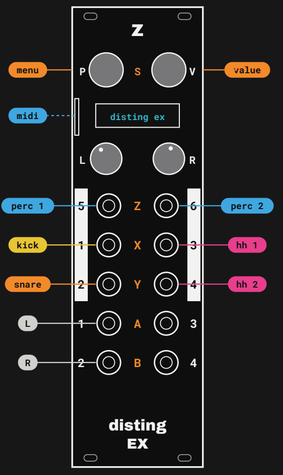


- kick in 1 · voice 1 · 6 triggers
- snare in 2 · voice 2
- hh 1 in 3 · voice 3 · choke 1
- hh 2 in 4 · voice 4 · choke 1
- perc 1 in 5 · voice 5
- perc 2 in 6 · voice 6
- L R out 1 · out 2 · output 1-6 = 5 (stereo 1/2)
- menu p · push = menu · confirms a folder
- value v · turn = value
- midi rear header · GT4/MIDI · tiny midi breakout

## 09 when it goes wrong

sdd_09

| | |
|---|---|
| cut tails | release 127 (multisample) · env time 100 (6 triggers) |
| all at max | cv gates read volts as velocity · 10 V triggers = the loudest layer |
| glitches | test sd speed · a faster card · transpose limit in the menu |
| silence | sample set to –1 · folder not confirmed · out of min / max note |
| double hits | cables and midi driving the same voice |