versio

_travelers guide
_for traversing the versio starsystem

11 noise engineering firmwares · **19** more from the community · **30** firmwares on one sheet

[fsu] press · [fsu] hold · › then · noon = 12 o'clock · cw / ccw = clockwise / counter

one body, many firmwares · every control below is named by its number on the numbered panel

firmware prices as listed by each developer, 2026.10 · every noise engineering firmware is free to swap

pink = hold

01 the platform

vrs_01

1 – 7	seven knobs, each with its own cv jack · 0–5 v · the knob is an offset
abc xyz	two 3-way switches · positions read left / middle / right
fsu	button + gate jack (high above about 2 v) · each firmware names it: tap, hit, gate…
in 1 in 2	stereo in · in 1 is normalled to in 2 (mono in = both)
out 1 out 2	stereo out
LEDs	4 rgb lights · at boot their colours identify the firmware
size	10 hp · 25 mm deep · 125 mA +12 v · 10 mA –12 v

02 swapping firmware

vrs_02

noise engineering	any of the 11 runs on any versio, free, any time · about a minute over usb
how	world of versio updater · chrome, edge or opera (webusb) · desktop or android
a custom .bin	the same updater: select custom file · or the daisy web programmer
dfu mode	hold the board's boot button, tap reset (cithara: hold 1, tap 2)
some builds	need the daisy bootloader first (v6.4 via flash.daisy.audio)
going back	reload any noise engineering firmware from world of versio
safety	never plug in usb while the rack powers the module

03 acidclank

vrs_03 · yota mori

frgmnts versio
acidclank

live-focused multi-effect hosting four curated effects: glitch / fragment, tape, wash delay, reverb

pay what you want · gumroad · video

vny404 versio
acidclank

lo-fi vinyl / cassette simulator after the sp-404: wow + flutter, compressor with trigger-in ducking

pay what you want · gumroad · video

04 noise engineering

vrs_04 · 11 firmwares

ampla versio
noise engineering

stereo vca + envelope

1 blend · 2 resonance · 3 attack · 4 release
5 decay · 6 sustain · 7 curve
abc lp · bp · hp
xyz 0 · i · ii
fsu gate

free with any versio · world of versio · manual

desmodus versio
noise engineering

tail-generator reverb (ships on every versio)

1 blend · 2 speed · 3 tone · 4 index
5 regen · 6 size · 7 dense
abc limit · distort · shimmer
xyz blend · interpolate · jump
fsu max regen, mutes the input

free with any versio · world of versio · manual

electus versio
noise engineering

clocked atmosphere generator

1 blend · 2 speed · 3 tone · 4 index
5 regen · 6 size · 7 dense
abc limit · distort · shimmer
xyz left-leaning · centred · right-leaning
fsu tap

free with any versio · world of versio · manual

fala versio
noise engineering

formant filter

1 fold · 2 speed · 3 q · 4 index
5 a2–a5 · 6 e4–e7 · 7 saturation
abc a · ae · ae3 filter
xyz i · ii · iv parallel filters
fsu tap

free with any versio · world of versio · manual

granulita versio
noise engineering

granular chord resynthesizer

1 blend · 2 pitch · 3 chord · 4 voice
5 verb · 6 count · 7 length
abc reverse · both · forward
xyz freeze · sync · trigger
fsu hit

free with any versio · world of versio · manual

imitor versio
noise engineering

experimental delay

1 blend · 2 skew · 3 angle · 4 lfo
5 regen · 6 time · 7 spread
abc limit · distort · shimmer
xyz decrescendo · equal · crescendo
fsu tap

free with any versio · world of versio · manual

lacrima versio
noise engineering

the devil's autowah

1 blend · 2 saturation · 3 low / band / high · 4 freq
5 q · 6 envelope · 7 mod
abc pre · bet · aft
xyz 0 · i · ii
fsu fsu

free with any versio · world of versio · manual

04 noise engineering

vrs_04 · continued

melotus versio
noise engineering

granular texturizer

1 blend · 2 sparse · 3 tone · 4 length
5 regen · 6 delay · 7 cohere
abc reverse · ??? · forward
xyz clock · hold · freeze
fsu flow

free with any versio · world of versio · manual

polydactyl versio
noise engineering

multiband dynamics processor

1 low ceiling · 2 low room · 3 mid ceiling · 4 mid room
5 high ceiling · 6 high room · 7 saturation
abc crossovers 250/1k · 500/2k · 1k/4k
xyz none · some · max
fsu fsu

free with any versio · world of versio · manual

ruina versio
noise engineering

stereo multi-distortion

1 blend · 2 fold · 3 center · 4 doom
5 phase · 6 drive · 7 8vize
abc under · x · over
xyz off · on · track
fsu smoosh

free with any versio · world of versio · manual

yester versio
noise engineering

simple delay

1 blend · 2 pan · 3 tone · 4 chorus
5 regen · 6 time · 7 fold
abc even · triplet · dotted
xyz fade · octave · jump
fsu tap

free with any versio · world of versio · manual

05 third party · mapped

vrs_05

acidus versio
blue nautilus

tb-303 voice: a port of open303 · jack 1 = v/oct, fsu jack = trigger

1 tuning · 2 decay · 3 cutoff · 4 slide
5 resonance · 6 env mod · 7 accent
abc saw · morph · square
xyz baby fish · momma · devil fish ranges
fsu trig

free · github

cithara versio
trickstersam · samuel burt

microtonal sympathetic strings after the ondes martenot palme resonator · mono in / out

1 blend · 2 tonic · 3 tone · 4 mode
5 regen · 6 steps · 7 amp

the two switches pick from a 3×3 tuning grid: 12 · 19 · 22 edo / 24 · 31 edo, 25ed5 / 13 · 17 · 31 ed3 · needs the daisy bootloader

free · github

05 third party · mapped

vrs_05 · continued

crcltr
s3g

dual stereo looper: loop 1 seamless crossfade, loop 2 click-free fades, up to 32 s

1 loop 1 rate · 2 loop 2 rate · 3 xfade type · 4 xfade
5 blend · 6 input gain · 7 output gain
abc record to loop 1 · both · loop 2
xyz thru 1 · silent · thru 2
fsu record while held

free · github

tapeo versio
onoma2

tape delay with fuzz, driven by an envelope follower (beta)

1 blend · 2 tape wobble · 3 tone · 4 fuzz mix
5 regen · 6 clock divider · 7 fuzz
abc fuzz ? · loop · post
xyz follower tri · f– · f+
fsu tap

free · github

triwalkma versio
onoma2

three varispeed stereo "walkmas" recording all the time; the wand picks where

1 blend · 2 left · 3 mid · 4 wand
5 regen · 6 right · 7 dub
abc record gate · on · tap
xyz routing y · 3 · >
fsu gate

free · github

__fig.04 : the star map

30 firmwares by maker


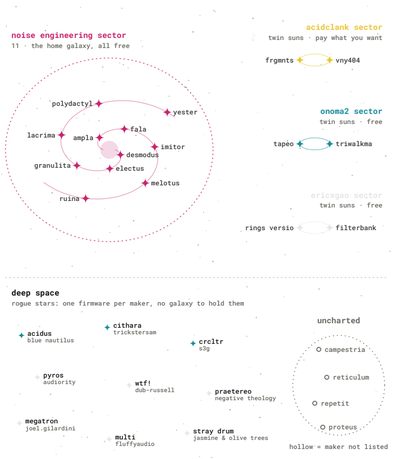


__fig.03 : numbered panel

the numbers every map uses

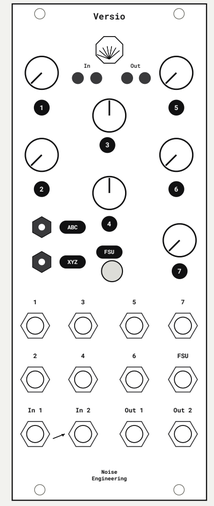

[1–7] __knobs : one per parameter
[1–7] __jacks : cv for that knob, 0–5 v
[abc] __top switch : left · mid · right
[xyz] __bottom switch : left · mid · right
[fsu] __button : the firmware's action
[fsu] __jack : gate for the button
[in] __in 1 / 2 : in 1 feeds both if alone
[out] __out 1 / 2 : stereo out
[LED] __in / out : firmware status colours

06 more firmwares

vrs_06 · 12 more stars

pyros versio
audiority

9-mode stereo distortion · pre-lpf, post-hpf, bias, bipolar feedback, radio mode

free · audiority.com

praetereo
negative theology

drifting looper: two buffers record by chance, sound-on-sound or chaos

free · modwiggler

filterbank
ericxgao

filter bank processor

free · reddit · drive

multi versio
fluffyaudio

multi-effects processor

free · dropbox · modwiggler

campestria versio
–

reverb

not listed · modwiggler

repetit versio
–

looper

not listed · modwiggler

wtf!
dub-russell

granular / beat-repeat · granular, repeat, cloud modes · ~90 s buffer

free · dubrussell.com

rings versio
ericxgao

a port of mutable instruments rings

free · google drive

megatron versio
joel.gilardini

monotron-inspired delay

free · drive · modwiggler

stray drum
jasmine & olive trees

drum synthesis

see site · jasmineandolivetrees.com

reticulum versio
–

asynchronous delay / looper

not listed · modwiggler

proteus versio
–

generative sequencer / synth

not listed · modwiggler