versio _travelers guide _for traversing the versio starsystem

11 noise engineering firmwares · **19** more from the community · **30** firmwares on one sheet

[fsu] press · [fsu] hold · › then · noon = 12 o'clock · cw / ccw = clockwise / counter

one world. many minds. · every control below is named by its number on the numbered panel · firmware prices as listed by each developer, 2026.10 · every noise engineering firmware is free to swap · pink = hold

01 the platform

vrs_01

1–7	seven knobs, each with its own cv jack · 0–5 v · the knob is an offset
abc xyz	two 3-way switches · positions read left / middle / right
fsu	button + gate jack (high above about 2 v) · each firmware names it: tap, hit, gate…
in 1 in 2	stereo in · in 1 is normalled to in 2 (mono in = both)
out 1 out 2	stereo out
LEDs	4 rgb lights · at boot their colours identify the firmware
size	10 hp · 25 mm deep · 125 mA +12 v · 10 mA –12 v

02 swapping firmware

vrs_02

noise engineering	all 11 run on any versio, free · about a minute
the tool	noise engineering firmware swap · also built into world of versio
browser	chromium-based (webusb): chrome, edge, opera · not firefox or safari
cable	micro usb **data** cable to the back of the module (charge-only fails)
steps	case off · unscrew · unplug the ribbon · usb in · follow the app · windows may need a one-time zadig driver
a custom .bin	the same updater: select custom file · or the daisy web programmer
dfu mode	hold the board's boot button, tap reset (cithara: hold 1, tap 2)
some builds	need the daisy bootloader first (v6.4 via flash.daisy.audio)
going back	reload any noise engineering firmware from world of versio

03 acidclank

vrs_03 · yota mori

frgmnts versio
acidclank

live-focused multi-effect hosting four curated effects: glitch / fragment, tape, wash delay, reverb

pay what you want · gumroad · video

vny404 versio
acidclank

lo-fi vinyl / cassette simulator after the sp-404: wow + flutter, compressor with trigger-in ducking

pay what you want · gumroad · video

04 noise engineering

vrs_04 · 11 firmwares

ampla versio
noise engineering

stereo vca + envelope

1 blend · 2 resonance · 3 attack · 4 release
5 decay · 6 sustain · 7 curve
abc lp · bp · hp
xyz 0 · i · ii
fsu gate

free with any versio · world of versio · manual

desmodus versio
noise engineering

tail-generator reverb (ships on every versio)

1 blend · 2 speed · 3 tone · 4 index
5 regen · 6 size · 7 dense
abc limit · distort · shimmer
xyz blend · interpolate · jump
fsu max regen, mutes the input

free with any versio · world of versio · manual

electus versio
noise engineering

clocked atmosphere generator

1 blend · 2 speed · 3 tone · 4 index
5 regen · 6 size · 7 dense
abc limit · distort · shimmer
xyz left-leaning · centred · right-leaning
fsu tap

free with any versio · world of versio · manual

fala versio
noise engineering

formant filter

1 fold · 2 speed · 3 q · 4 index
5 a2–a5 · 6 e4–e7 · 7 saturation
abc a · ae · ae3 filter
xyz i · ii · iv parallel filters
fsu tap

free with any versio · world of versio · manual

granulita versio
noise engineering

granular chord resynthesizer

1 blend · 2 pitch · 3 chord · 4 voice
5 verb · 6 count · 7 length
abc reverse · both · forward
xyz freeze · sync · trigger
fsu hit

free with any versio · world of versio · manual

imitor versio
noise engineering

experimental delay

1 blend · 2 skew · 3 angle · 4 lfo
5 regen · 6 time · 7 spread
abc limit · distort · shimmer
xyz decrescendo · equal · crescendo
fsu tap

free with any versio · world of versio · manual

lacrima versio
noise engineering

the devil's autowah

1 blend · 2 saturation · 3 low / band / high · 4 freq
5 q · 6 envelope · 7 mod
abc pre · bet · aft
xyz 0 · i · ii
fsu fsu

free with any versio · world of versio · manual

04 noise engineering

vrs_04 · continued

melotus versio
noise engineering

granular texturizer

1 blend · 2 sparse · 3 tone · 4 length
5 regen · 6 delay · 7 cohere
abc reverse · ??? · forward
xyz clock · hold · freeze
fsu flow

free with any versio · world of versio · manual

polydactyl versio
noise engineering

multiband dynamics processor

1 low ceiling · 2 low room · 3 mid ceiling · 4 mid room
5 high ceiling · 6 high room · 7 saturation
abc crossovers 250/1k · 500/2k · 1k/4k
xyz none · some · max
fsu fsu

free with any versio · world of versio · manual

ruina versio
noise engineering

stereo multi-distortion

1 blend · 2 fold · 3 center · 4 doom
5 phase · 6 drive · 7 8vize
abc under · x · over
xyz off · on · track
fsu smoosh

free with any versio · world of versio · manual

yester versio
noise engineering

simple delay

1 blend · 2 pan · 3 tone · 4 chorus
5 regen · 6 time · 7 fold
abc even · triplet · dotted
xyz fade · octave · jump
fsu tap

free with any versio · world of versio · manual

05 third party · mapped

vrs_05

acidus versio
blue nautilus

tb-303 voice: a port of open303 · jack 1 = v/oct, fsu jack = trigger

1 tuning · 2 decay · 3 cutoff · 4 slide
5 resonance · 6 env mod · 7 accent
abc saw · morph · square
xyz baby fish · momma · devil fish ranges
fsu trig

free · github

cithara versio
trickstersam · samuel burt

microtonal sympathetic strings after the ondes martenot palme resonator · mono in / out

1 blend · 2 tonic · 3 tone · 4 mode
5 regen · 6 steps · 7 amp

the two switches pick from a 3×3 tuning grid: 12 · 19 · 22 edo / 24 · 31 edo, 25ed5 / 13 · 17 · 31 ed3 · needs the daisy bootloader

free · github

05 third party · mapped

vrs_05 · continued

crcltr
s3g

dual stereo looper: loop 1 seamless crossfade, loop 2 click-free fades, up to 32 s

1 loop 1 rate · 2 loop 2 rate · 3 xfade type · 4 xfade
5 blend · 6 input gain · 7 output gain
abc record to loop 1 · both · loop 2
xyz thru 1 · silent · thru 2
fsu record while held

free · github

tapeo versio
onoma2

tape delay with fuzz, driven by an envelope follower (beta)

1 blend · 2 tape wobble · 3 tone · 4 fuzz mix
5 regen · 6 clock divider · 7 fuzz
abc fuzz ? · loop · post
xyz follower tri · f– · f+
fsu tap

free · github

triwalkma versio
onoma2

three varispeed stereo "walkmas" recording all the time; the wand picks where

1 blend · 2 left · 3 mid · 4 wand
5 regen · 6 right · 7 dub
abc record gate · on · tap
xyz routing y · 3 · >
fsu gate

free · github

__fig.04 : the star map

30 firmwares by maker


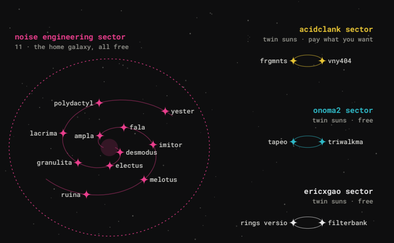




__fig.03 : numbered panel

the numbers every map uses

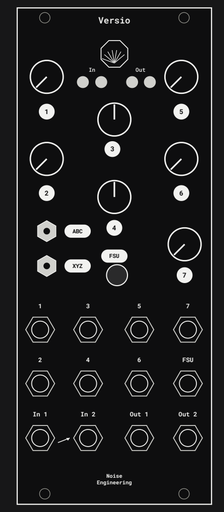

[1–7] __knobs : one per parameter
[1–7] __jacks : cv for that knob, 0–5 v
[abc] __top switch : left · mid · right
[xyz] __bottom switch : left · mid · right
[fsu] __button : the firmware's action
[fsu] __jack : gate for the button
[in] __in 1 / 2 : in 1 feeds both if alone
[out] __out 1 / 2 : stereo out
[LED] __in / out : firmware status colours

06 more firmwares

vrs_06 · 12 more stars

pyros versio
audiority

9-mode stereo distortion · pre-lpf, post-hpf, bias, bipolar feedback, radio mode

free · audiority.com

praetereo
negative theology

drifting looper: two buffers record by chance, sound-on-sound or chaos

free · modwiggler

filterbank
ericxgao

filter bank processor

free · reddit · drive

multi versio
fluffyaudio

multi-effects processor

free · dropbox · modwiggler

campestria versio
–

reverb

not listed · modwiggler

repetit versio
–

looper

not listed · modwiggler

wtf!
dub-russell

granular / beat-repeat · granular, repeat, cloud modes · ~90 s buffer

free · dubrussell.com

rings versio
ericxgao

a port of mutable instruments rings

free · google drive

megatron versio
joel.gilardini

monotron-inspired delay

free · drive · modwiggler

stray drum
jasmine & olive trees

drum synthesis

see site · jasmineandolivetrees.com

reticulum versio
–

asynchronous delay / looper

not listed · modwiggler

proteus versio
–

generative sequencer / synth

not listed · modwiggler