versio _travelers guide _for traversing the versio starsystem

11	19	30
noise engineering firmwares	more from the community	firmwares on one sheet

[fsu] press [fsu] hold › then noon = 12 o'clock cw / ccw = clockwise / counter

one world. many minds. · every control below is named by its number on the numbered panel

pink = hold

01 the platform

vrs_01

1–7	seven knobs, each with its own cv jack · 0–5 v · the knob is an offset
abc xyz	two 3-way switches · positions read left / middle / right
fsu	button + gate jack (high above about 2 v) · each firmware names it: tap, hit, gate…
in 1 in 2	stereo in · in 1 is normalled to in 2 (mono in = both)
out 1 out 2	stereo out
LEDs	4 rgb lights · at boot their colours identify the firmware
size	10 hp · 25 mm deep · 125 mA +12 v · 10 mA –12 v

02 swapping firmware

vrs_02

you need — a micro usb **data** cable, and chrome, edge or opera on a computer or android device

1. turn off the power to your case and unscrew the versio
2. unplug the power cable from the back of the module
3. plug the micro usb cable into the module and your computer
4. open the noise engineering firmware swap page, choose versio and a firmware, follow its instructions (free, about a minute)
5. unplug usb, reconnect power, screw the module back in

firefox and safari can't talk to the module · charge-only cables won't connect · windows may need a one-time zadig driver

community firmware — a .bin from the developer

most	same swap page: choose custom file · to go back, pick any noise engineering firmware
some	need the daisy web programmer, and the daisy bootloader (v6.4) installed first
dfu mode	hold the board's boot button, tap reset, let go (cithara: hold 1, tap 2)

03 acidclank

vrs_03 · yota mori

frgmnts versio
enter frgmnts sector

live-focused multi-effect hosting four curated effects: glitch / fragment, tape, wash delay, reverb

pay what you want gumroad · video

vny404 versio
enter vny404 sector

lo-fi vinyl / cassette simulator after the sp-404: wow + flutter, compressor with trigger-in ducking

pay what you want gumroad · video

04 noise engineering

vrs_04 · 11 firmwares

ampla versio
enter ampla sector

stereo vca + envelope

1 blend · 2 resonance · 3 attack · 4 release
5 decay · 6 sustain · 7 curve
abc lp · bp · hp
xyz 0 · i · ii
fsu gate

free with any versio world of versio · manual · video

desmodus versio
enter desmodus sector

tail-generator reverb (ships on every versio)

1 blend · 2 speed · 3 tone · 4 index
5 regen · 6 size · 7 dense
abc limit · distort · shimmer
xyz blend · interpolate · jump
fsu max regen, mutes the input

free with any versio world of versio · manual · video

electus versio
enter electus sector

clocked atmosphere generator

1 blend · 2 speed · 3 tone · 4 index
5 regen · 6 size · 7 dense
abc limit · distort · shimmer
xyz left-leaning · centred · right-leaning
fsu tap

free with any versio world of versio · manual · video

fala versio
enter fala sector

formant filter

1 fold · 2 speed · 3 q · 4 index
5 a2–a5 · 6 e4–e7 · 7 saturation
abc a · ae · ae3 filter
xyz i · ii · iv parallel filters
fsu tap

free with any versio world of versio · manual · video

granulita versio
enter granulita sector

granular chord resynthesizer

1 blend · 2 pitch · 3 chord · 4 voice
5 verb · 6 count · 7 length
abc reverse · both · forward
xyz freeze · sync · trigger
fsu hit

free with any versio world of versio · manual · video

imitor versio
enter imitor sector

experimental delay

1 blend · 2 skew · 3 angle · 4 lfo
5 regen · 6 time · 7 spread
abc limit · distort · shimmer
xyz decrescendo · equal · crescendo
fsu tap

free with any versio world of versio · manual · video

lacrima versio
enter lacrima sector

the devil's autowah

1 blend · 2 saturation · 3 low / band / high · 4 freq
5 q · 6 envelope · 7 mod
abc pre · bet · aft
xyz 0 · i · ii
fsu fsu

free with any versio world of versio · manual · video

04 noise engineering

vrs_04 · continued

melotus versio
enter melotus sector

granular texturizer

1 blend · 2 sparse · 3 tone · 4 length
5 regen · 6 delay · 7 cohere
abc reverse · ??? · forward
xyz clock · hold · freeze
fsu flow

free with any versio world of versio · manual · video

polydactyl versio
enter polydactyl sector

multiband dynamics processor

1 low ceiling · 2 low room · 3 mid ceiling · 4 mid room
5 high ceiling · 6 high room · 7 saturation
abc crossovers 250/1k · 500/2k · 1k/4k
xyz none · some · max
fsu fsu

free with any versio world of versio · manual · video

ruina versio
enter ruina sector

stereo multi-distortion

1 blend · 2 fold · 3 center · 4 doom
5 phase · 6 drive · 7 8vize
abc under · x · over
xyz off · on · track
fsu smoosh

free with any versio world of versio · manual · video

yester versio
enter yester sector

simple delay

1 blend · 2 pan · 3 tone · 4 chorus
5 regen · 6 time · 7 fold
abc even · triplet · dotted
xyz fade · octave · jump
fsu tap

free with any versio world of versio · manual · video

05 third party · mapped

vrs_05

acidus versio
blue nautilus

tb-303 voice: a port of open303 · jack 1 = v/oct, fsu jack = trigger

1 tuning · 2 decay · 3 cutoff · 4 slide
5 resonance · 6 env mod · 7 accent
abc saw · morph · square
xyz baby fish · momma · devil fish ranges
fsu trig

free github

cithara versio
tricksterSAM · samuel burt

microtonal sympathetic strings after the ondes martenot palme resonator · mono in / out

1 blend · 2 tonic · 3 tone · 4 mode
5 regen · 6 steps · 7 amp

the two switches pick from a 3×3 tuning grid: 12 · 19 · 22 edo / 24 · 31 edo, 25ed5 / 13 · 17 · 31 ed3 · needs the daisy bootloader

free github

05 third party · mapped

vrs_05 · continued

crcltr
s3g

dual stereo looper: loop 1 seamless crossfade, loop 2 click-free fades, up to 32 s

1 loop 1 rate · 2 loop 2 rate · 3 xfade type · 4 xfade
5 blend · 6 input gain · 7 output gain
abc record to loop 1 · both · loop 2
xyz thru 1 · silent · thru 2
fsu record while held

free github

tapeo versio
onoma2

tape delay with fuzz, driven by an envelope follower (beta)

1 blend · 2 tape wobble · 3 tone · 4 fuzz mix
5 regen · 6 clock divider · 7 fuzz
abc fuzz ? · loop · post
xyz follower tri · f– · f+
fsu tap

free github · demo

triwalkma versio
onoma2

three varispeed stereo "walkmas" recording all the time; the wand picks where

1 blend · 2 left · 3 mid · 4 wand
5 regen · 6 right · 7 dub
abc record gate · on · tap
xyz routing y · 3 · >
fsu gate

free github

__fig.04 : the star map

30 firmwares by maker


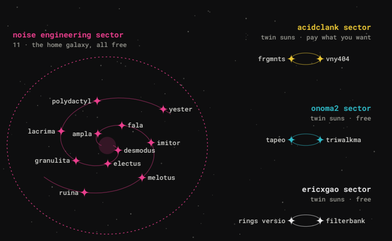


__fig.03 : numbered panel

the numbers every map uses

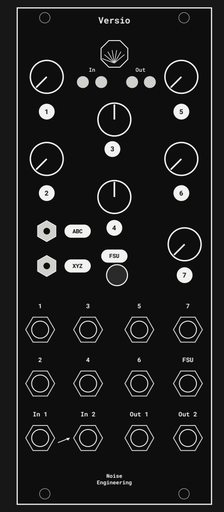

[1–7] __knobs : one per parameter
[1–7] __jacks : cv for that knob, 0–5 v
[abc] __top switch : left · mid · right
[xyz] __bottom switch : left · mid · right
[fsu] __button : the firmware's action
[fsu] __jack : gate for the button
[in] __in 1 / 2 : in 1 feeds both if alone
[out] __out 1 / 2 : stereo out
[LED] __in / out : firmware status colours

06 more firmwares

vrs_06 · 12 more stars

pyros versio
audiority

9-mode stereo distortion · pre-lpf, post-hpf, bias, bipolar feedback, radio mode

free audiority.com

praetereo
negative theology

drifting looper: two buffers record by chance, sound-on-sound or chaos

free modwiggler

filterbank
ericxgao

filter bank processor

free reddit · drive

multi versio
fluffyaudio

multi-effects processor

free dropbox · modwiggler

campestria versio
–

reverb

not listed modwiggler

repetit versio
–

looper

not listed modwiggler

wtf!
dub-russell

granular / beat-repeat · granular, repeat, cloud modes · ~90 s buffer

free dubrussell.com

rings versio
ericxgao

a port of mutable instruments rings

free google drive

megatron versio
joel.gilardini

monotron-inspired delay

free drive · modwiggler

stray drum
jasmine & olive trees

drum synthesis

see site jasmineandolivetrees.com

reticulum versio
–

asynchronous delay / looper

not listed modwiggler

proteus versio
–

generative sequencer / synth

not listed modwiggler