


Technical drawing of a rectangular plate with two circular holes and six mounting holes. The plate is 82 x 54 units. Two large circular holes are 36.0 units apart. Six smaller mounting holes are arranged in two rows of three, with a pitch of 28.0 units. The plate is 46.0 units high. The drawing includes dimensions for the plate outline, hole positions, and vertical offsets from the floor.

Dimensions and labels:

- Plate outline: 82 x 54, gasket the same
- Two large circular holes: 36.0 (pitch)
- Six mounting holes: 6 x 4.5 for M4, rows 46 apart
- Vertical dimensions: 46.0 (plate height), 55.0 above the floor (inner chamfer ends, Z 16.7)
- Labels: hole saw 29, inner rib (inside), rim, Z 124.87, cavity floor, Z 0

Cut order: mark, drill the six 4.5 holes, hole-saw the two 29 holes from outside, deburr both faces, dry-fit the plate, then gasket. The chamfer at the floor begins 16.7 mm up; nothing here reaches it.

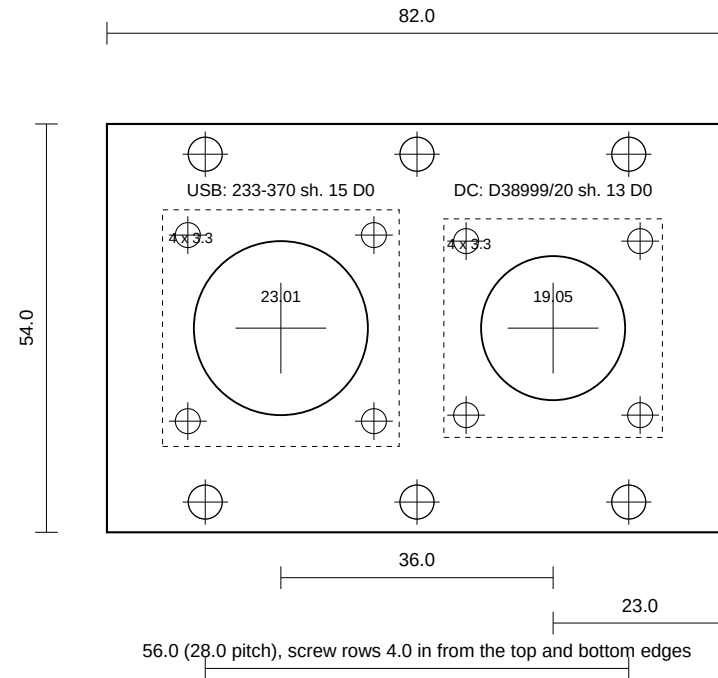

100 mm at 1:1 (print at 100 percent, no fit to page)
 SHEET 2 of 2: CONNECTOR PLATE, 82 x 54 x 3 mm aluminium (5052 or 6061), edges broken, seen from OUTSIDE the case. Gasket: 2 mm closed-cell neoprene or EPDM, same outline and holes, between plate and wall.

Shore DC: Glenair D38999/20 shell 13 wall mount with round holes (D0), front panel mount: hole 19.05, four M3 clearance holes on a 23.01 square, flange 28.9 square. Its own gasket seals to the plate.

USB host: Glenair 233-370 shell 15 wall mount D0, front panel mount: hole 23.01, four M3 clearance holes on a 24.61 square, flange 31.29 square; the 3 mm plate is inside its 1.6 to 6.35 mm panel range.

Both receptacles: flange outside, gasket, plate, then the receptacle's own nuts inside; M3 x 10 stainless with spring washers. Plate to wall: six M4 x 16 stainless, washers both sides, Nyloc nuts inside; torque 1.2 N m in a cross pattern so the gasket loads evenly.

Pin functions, cables and the dock leads: appendix 32.29 and ASSEMBLY.md section 4. Seen from outside the back wall (case +X to your left), as sheet

1. Nothing here has been cut yet.