Features

Switching Regulator

- Efficiency up to 97%, no need for heatsinks
- Pin-out compatible with LM78XX linears
- Very low profile
- 4.75V 32V Wide input range
- Short circuit protection, thermal shutdown
- Low ripple and noise
- IEC/EN60950-1 certified
- Positive to negative converter



R-78-0.5

0.5 Amp SIP3 Single Output









IEC/EN60950-1 certified EN55032 compliant

Description


The R-78xx-Series high efficiency switching regulators are ideally suited to replace 78xx linear regultors and are pin compatible. The efficiency of up to 97% means that very little energy is wasted as heat so there is no need for any heat sinks with their additional space and mounting costs. Low ripple and noise figures and short circuit, overload and over-temperature protection round off the specifications of this versatile converter series. This R-78xx-0.5 is fully certified to EN55032 EMC Standard and for IEC/EN-60950-1 + AM2 Safety.

Selection Guide					
Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [A]	Effic @ min Vin [%]	iency @ max. Vin [%]
R-781.5-0.5	4.75 - 30 ⁽¹⁾	1.5	0.5	73	63
R-781.8-0.5	4.75 - 32	1.8	0.5	82	71
R-782.5-0.5	4.75 - 32	2.5	0.5	87	77
R-783.3-0.5	4.75 ⁽²⁾ - 32	3.3	0.5	91	81
R-785.0-0.5	6.5 - 32	5.0	0.5	94	86
R-786.5-0.5	8.0 - 32	6.5	0.5	95	88
R-789.0-0.5	11 - 32	9.0	0.5	96	92
R-7812-0.5	15 - 32	12	0.5	97	94
R-7815-0.5	18 - 32	15	0.5	97	95

Notes:

Note1: 1.5V Output can be unstable with Vin>30VDC Note2: Refer to Transient Response on page I-3

Model Numbering





Series

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)


BASIC CHARACTERISTICS					
Parameter	Condi	Condition		Тур.	Max.
Absolute Maximum Input Voltage					34VDC
Quiescent Current	nom. Vin=	24VDC		5mA	7mA
Internal Power Dissipation					0.4W
Minimum Load (3)			0%		
Internal Operating Frequency			280kHz	330kHz	380kHz
	20MHz BW, without output	1.5 - 6.5VDC		20mVp-p	30mVp-p
Output Dipple and Noise	capacitor	9 - 15.5VDC		30mVp-p	40mVp-p
Output Ripple and Noise	20MHz BW (4)	1.5VDC		15mVp-p	20mVp-p
	ZUIVINZ BW 😘	1.8 - 15.5VDC		25mVp-p	35mVp-p
Absolute Maximum	1 second start up, no e	external components			220µF
Capacitive Load	<1 second start up + di	<1 second start up + diode protection circuit			6800µF


Notes:


Note3: Operation under no load will not harm the converter, but specifications may not be met


A minimum load of 6mA is recommended

Note4: Measurements are made with a 100nF MLCC across output (low ESR)








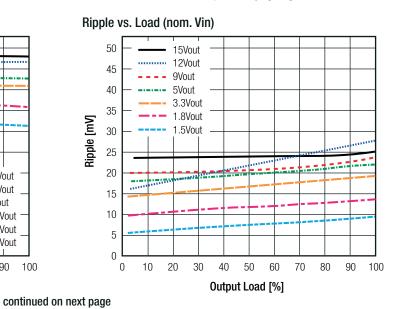




Series

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

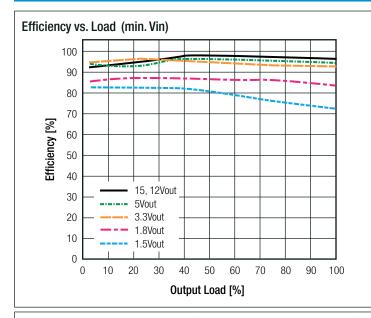



REGULATIONS				
Parameter	Condi	tion	Value	
Output Accuracy	100%	load	±2.0% typ / ±3.0% max.	
Line Regulation	low line to high line, 100% load	1.5V - 6.5V 9V - 15.5V	$\pm 0.2\%$ typ. / $\pm 0.4\%$ max. $\pm 0.1\%$ typ. / $\pm 0.2\%$ max.	
Load Regulation	10% to 100% load	1.5V - 6.5V 9V - 15.5V	±0.4% typ. / ±0.6% max. ±0.25% typ. / ±0.4% max.	
Transient Response (5)		100% <-> 50% load 100% <-> 10% load		

Notes:

Note5: The R.783.3-0.5 requires Vin>5.5V to meet the Transient Response specifications

PROTECTIONS Parameter Condition Value Short Circuit Protection (SCP) continuous, automatic recovery Short Circuit Input Current nom. Vin= 24VDC 60mA max.


Optional Diode Protection Circuit

Add a blocking diode to Vout if current can flow backwards into the output, as this can damage the converter when it is powered down.


The diode can either be fitted across the device if the source is low impedance or fitted in series with the output (recommended).

Application example:


Driving a high capacitive load



Optional Protection 1:



Optional Protection 2:



I-3




Series

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

ENVIRONMENTAL					
Parameter	Condition		Value		
Operating Temperature Range	with derating (see graph)		-40°C to +85°C		
Maximum Case Temperature			+100°C		
Temperature Coefficient			±0.015%/K		
Thermal Impedance	0.1m/s, vertical		70K/W		
Operating Altitude			2000m		
Operating Humidity	non-condensing		95% RH max.		
Pollution Degree			PD2		
MTBF	according to MIL-HDBK-217F, G.B.	+25°C	26163 x 10 ³ hours		

Derating Graph

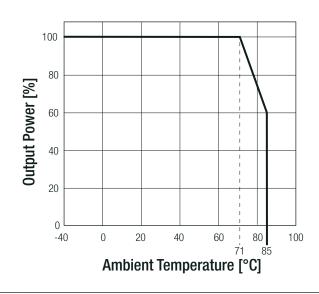


Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	1603123	IEC60950-1:2005, 2nd Edition + Am 2:2013 EN60950-1:2006 + Am 2:2013
EAC	RU-AT.49.09571	TP TC 004/2011
RoHs 2+		RoHS 2011/65/EU + AM2015/863
EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter (see filter suggestion below)	EN55032, Class A and E
ESD Electrostatic discharge immunity test	Contact ±6kV	EN61000-4-2, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	3V/m	EN61000-4-3, Criteria A
Fast Transient and Burst Immunity	±1.0kV	EN61000-4-4, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	3V	EN61000-4-6, Criteria A
Power Magnetic Field Immunity	50Hz, 3A/m	EN61000-4-8, Criteria A



Series

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

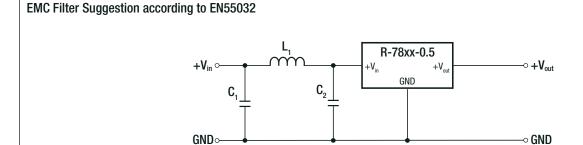

Component List Class A


MODEL	C1	C2	L1
R-785.0-0.5	10µF	3.3µF	3.9µH choke
R-7812-0.5	100V MLCC	100V MLCC	RLS-397

Component List Class B

MODEL	C1	C2	L1
R-785.0-0.5	10μF	3.3µF	5.6µH choke
R-7812-0.5	100V MLCC	100V MLCC	RLS-567

Notes:


Note6: Filter suggestions are valid for indicated part numbers only. For other part numbers, please contact RECOM tech support for advice

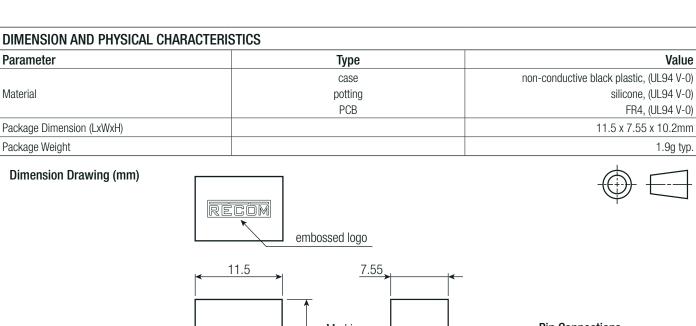



 $0.25^{\pm0.05}$

Tolerance: $xx.x = \pm 0.5mm$ $xx.xx = \pm 0.25mm$







Series

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

INSTALLATION AND APPLICATION

Positive to Negative Converter





C1 and C2 are required and should be fitted close to the converter pins.

Maximum capacitive load including C2 is $220\mu F$

Pin Connections

Pin #	Negative	Positive
1	+Vin	+Vin
2	-Vout	GND
3	GND	+Vout


Selection Guide - Negative Output

Part	Input	Output	Output	Effic	iency	External	Capacitor
Number	Voltage Range [VDC]	Voltage [VDC]	Current [A]	@ min Vin [%]	@ max. Vin [%]	C1	C2 ⁽⁷⁾
R-781.5-0.5	4.75 - 28	-1.5	-0.4	68	67	10μF/35V	22μF/6.3V
R-781.8-0.5	4.75 - 28	-1.8	-0.4	71	70	10μF/50V	22μF/6.3V
R-782.5-0.5	4.75 - 28	-2.5	-0.4	75	76	10μF/50V	22μF/6.3V
R-783.3-0.5	4.75 - 28	-3.3	-0.4	77	80	10μF/50V	22μF/6.3V
R-785.0-0.5	4.75 - 28	-5.0	-0.4	79	84	10μF/50V	22µF/10V
R-786.5-0.5	5.0 - 26	-6.5	-0.3	81	86	10μF/50V	10μF/10V
R-789.0-0.5	8.0 - 18	-9.0	-0.2	87	89	10μF/50V	10μF/16V
R-7812-0.5	8.0 - 18	-12	-0.2	87	90	10μF/50V	10μF/25V
R-7815-0.5	8.0 - 18	-15	-0.2	87	81	10μF/50V	10μF/25V

Notes:

Note7: Maximum Capacitive Load including C2 is 220µF

Dual Output (two Converters) with Negative Output




continued on next page



Series


Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

Standard Application Circuit




* Input capacitor required if Vin>26VDC (3.3μF) or if the supply is a battery or other low impedance source (4.7μF~10μF)
Capacitor should be electolytic or MLCC with low ESR (≤1Ω)

High Efficiency, Isolated, Dual Unregulated Output

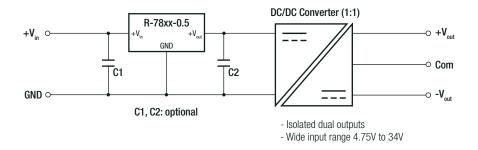

Isolated (up to 6kVDC), Wide Input Range Regulated Output

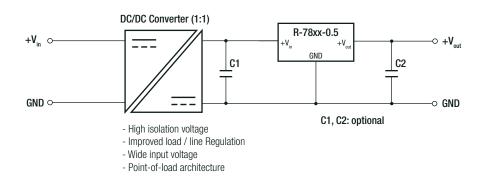

PACKAGING INFORMATION				
Parameter	Туре	Value		
Packaging Dimension (LxWxH)	tube	520.0 x 10.4 x 17.7mm		
Packaging Quantity	tube	42pcs		
Storage Temperature Range		-55°C to +125°C		
Storage Humidity		95% RH max.		

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.