

D

C

B

A


D

C


B

A


TABULATION	
DASH NO.	
-00	ORIGINAL RELEASE

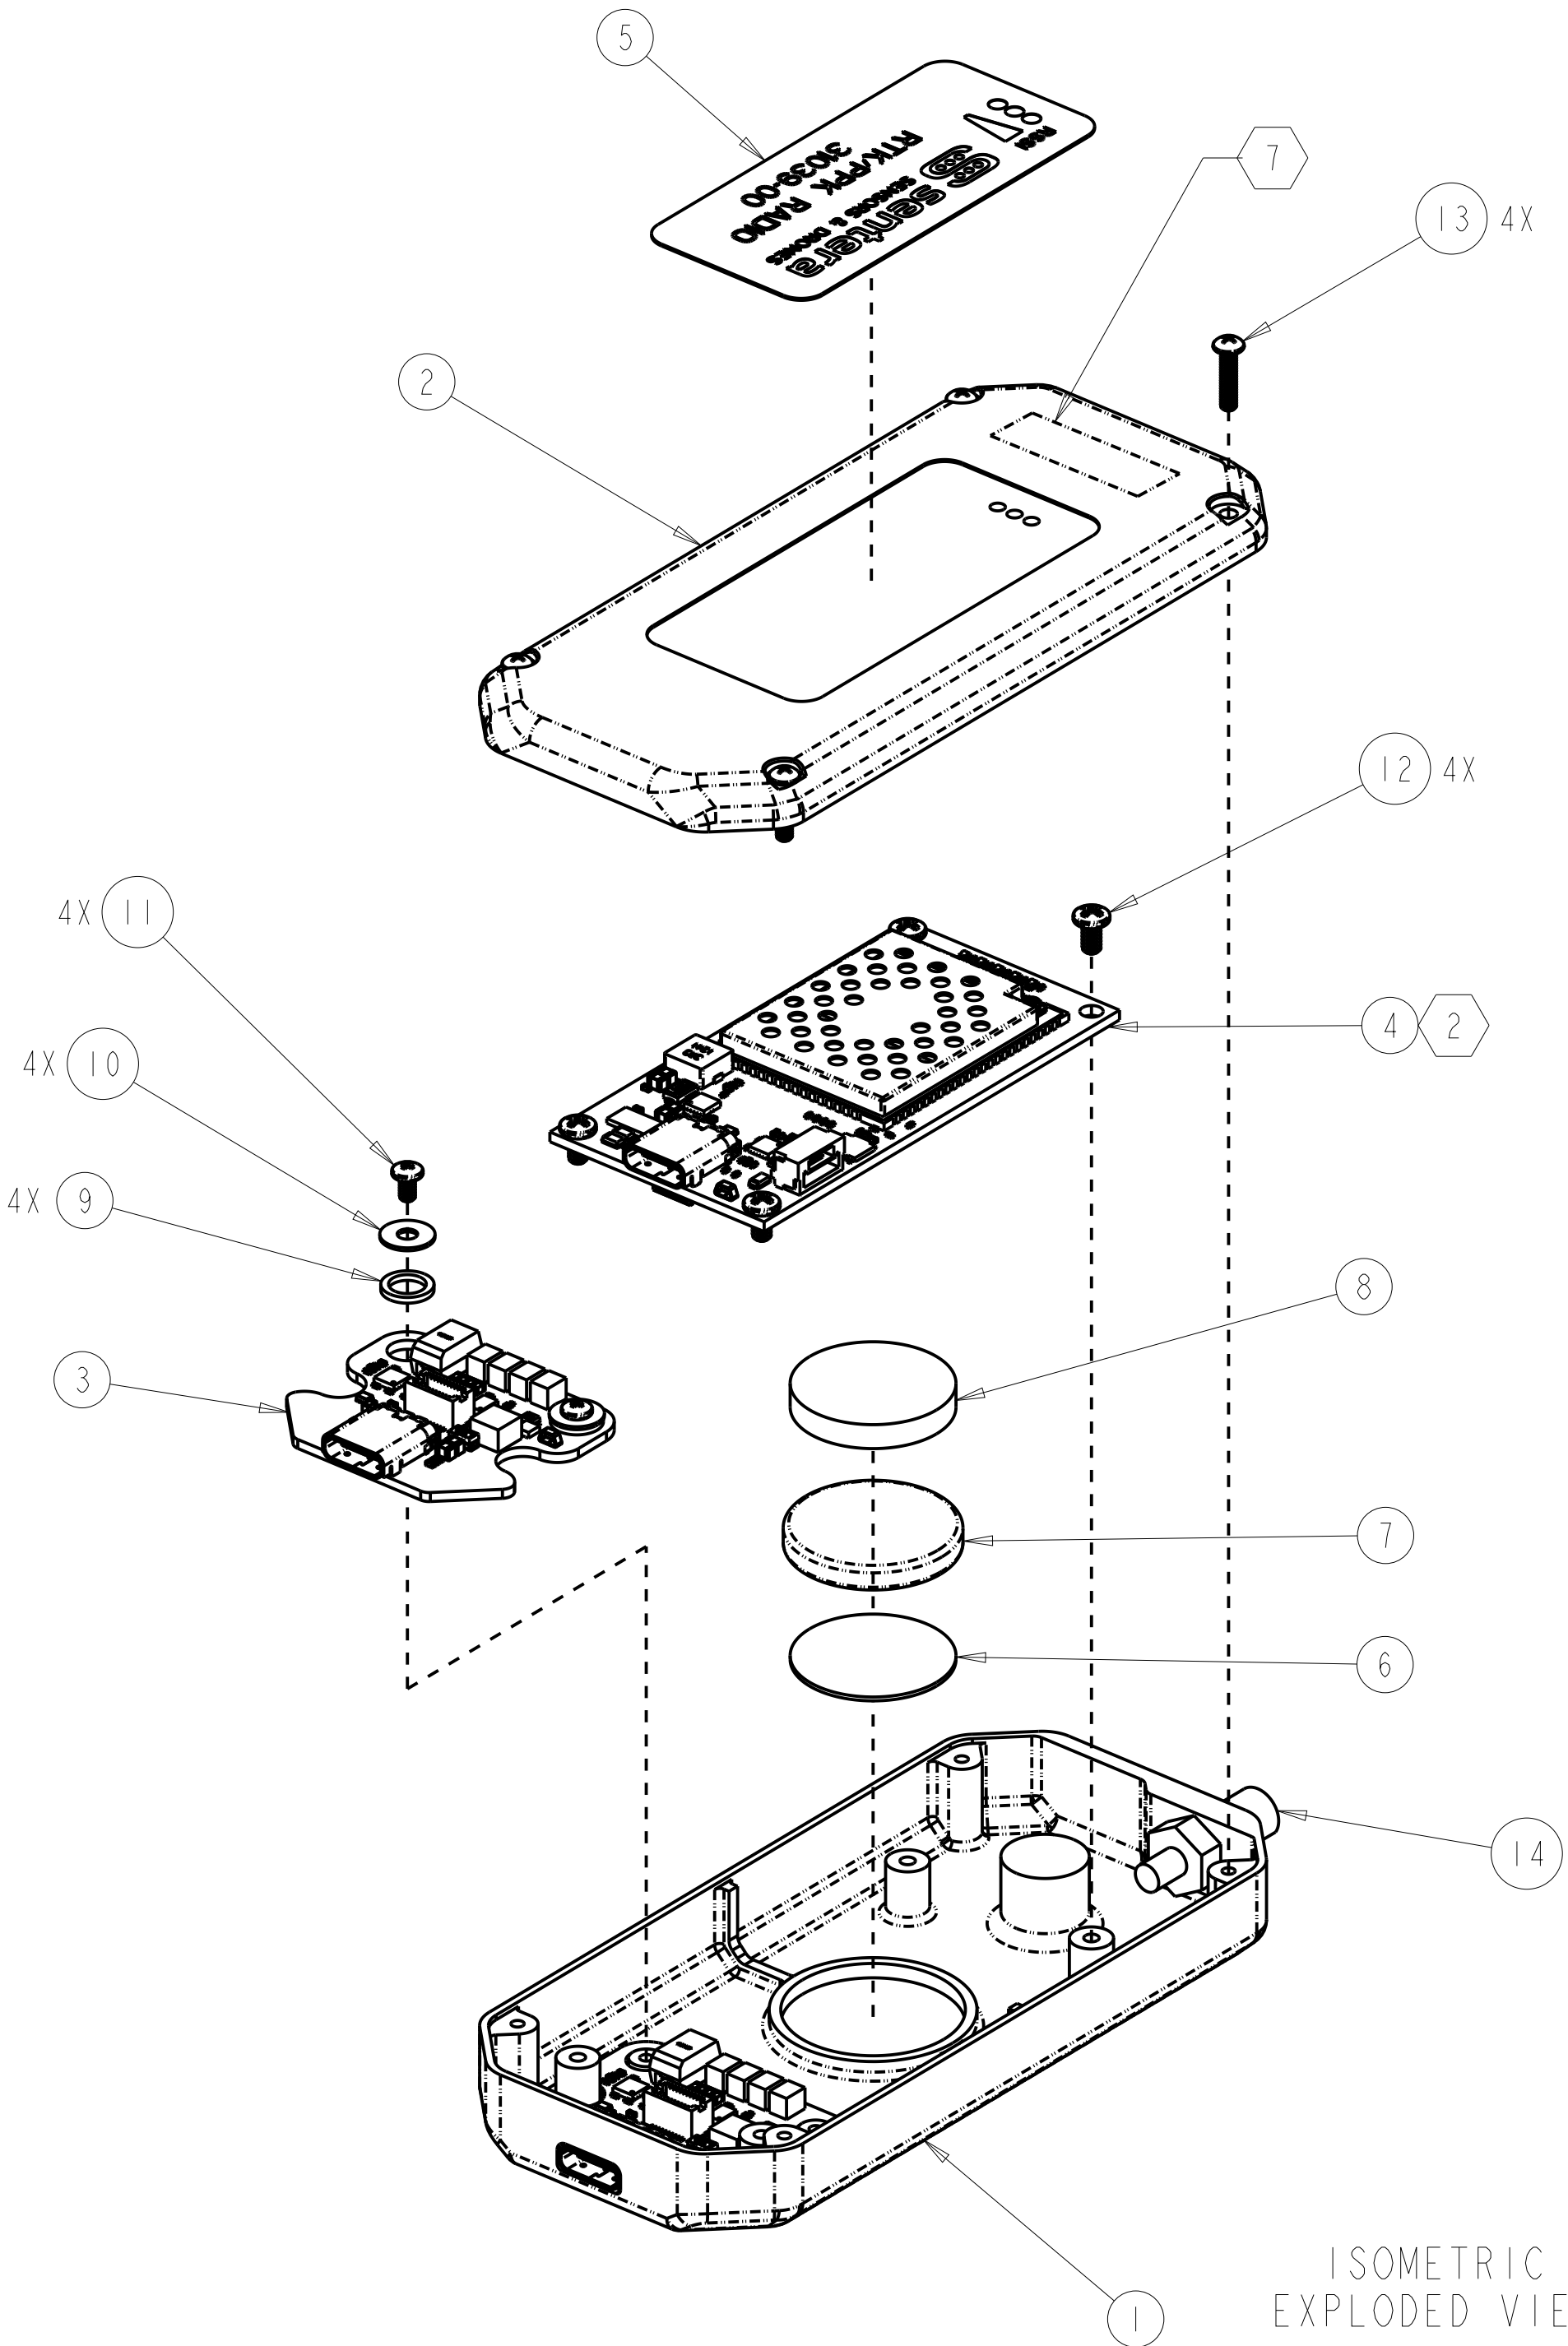

ISOMETRIC EXPLODED VIEW

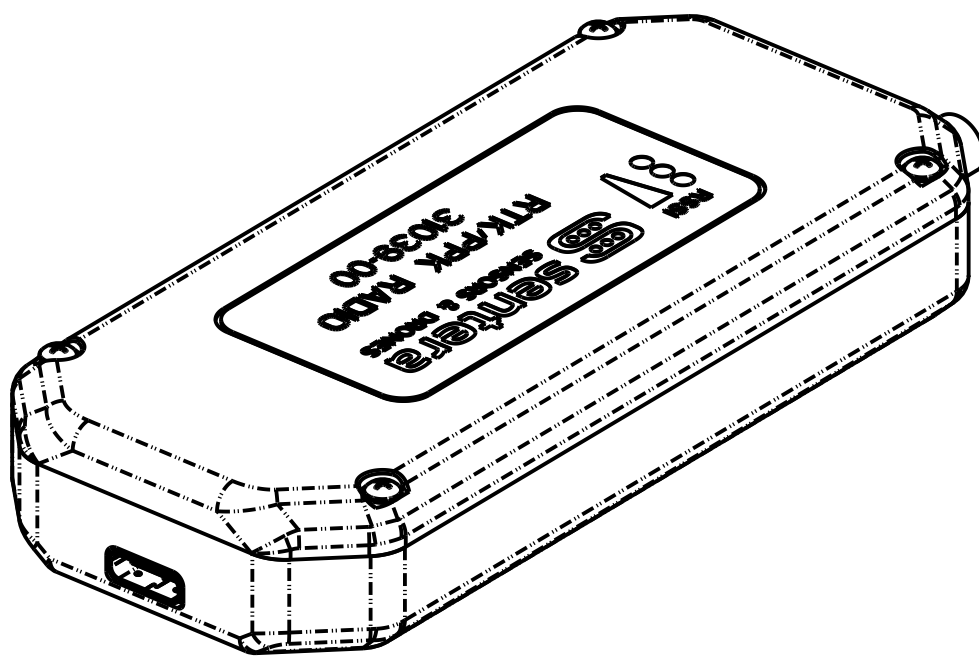

ISOMETRIC REFERENCE VIEW

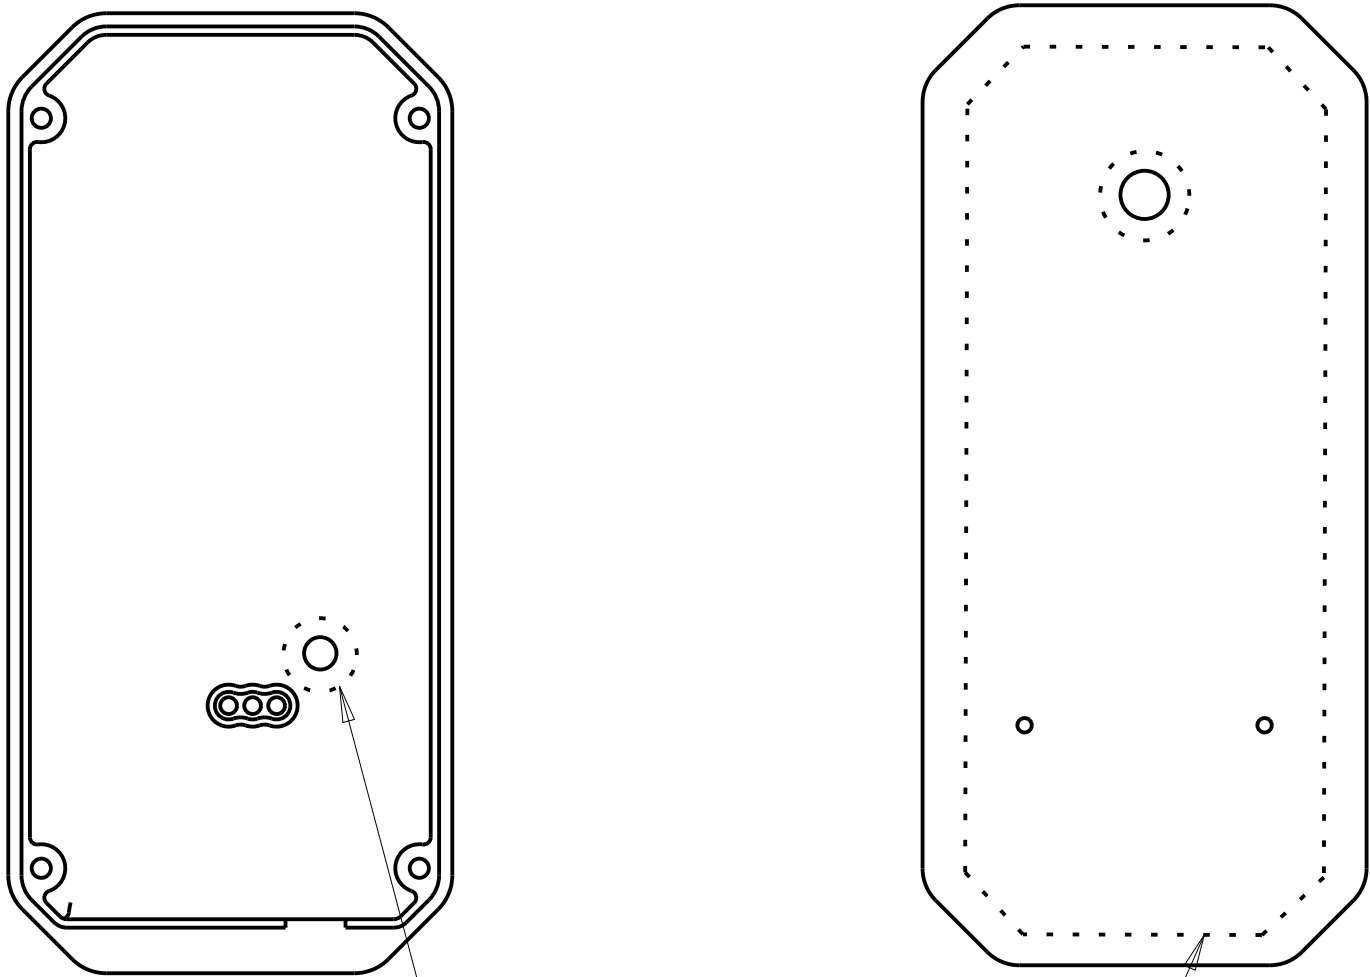

APPLY ADHESIVE-BACKED BLACK FELT LINER TO ITEM 1 AS SHOWN

APPLY .125" THICK ADHESIVE-BACKED FOAM TO ITEM 2 AS SHOWN

7. APPLY RADIO NET ID LABEL IN THIS LOCATION.
6. SECURE REAR HEX OF CONNECTOR IN PLACE BY APPLYING ARALDITE OR SIMILAR ADHESIVE TO INSIDE OF ITEM 1. INSTALL ITEM 15 TO ITEM 14.
5. CONNECT ITEM 14 TO ITEM 4. BOND SMA CONNECTOR OF ITEM 14 TO ITEM 1 USING EPOXY ADHESIVE.
4. TORQUE 1-72 SCREWS TO 20 IN-OZ AND 2-56 SCREWS TO 40 IN-OZ.
3. INSTALL ALL METAL ON METAL FASTENERS USING ITEM 16.
2. PROGRAM IAW SENTERA INSTRUCTION.
1. BUILD IAW IPC-A-610 CLASS 2.

NOTES:

DWG NO		31039		SH		1		1	
REVISIONS (ALL SHEETS ARE SAME REV)									
ZONE	REV	DESCRIPTION					CHG NO	APPD	DATE
	-	ORIGINAL RELEASE					N/A	RLN	250227
	A	ADDED VIEW IN ZONE C2, UPDATED ITEM 3					N/A	RLN	250708
	B	SWAPPED ITEM 7 AND 8 PART NUMBERS, INCREASED ITEM 8 QUANTITY, UPDATED NOTE 6, ADDED NOTE 7.					N/A	RLN	250924

ITEM	DASH	PART NUMBER	DESCRIPTION	SUPPLIER	QTY
1	ALL	35048-00	ENCLOSURE, RTK/PPK RADIO		1
2	ALL	35049-01	COVER, RTK/PPK RADIO		1
3	ALL	33021-01	USB-C BREAKOUT, P900, CCA		1
4	ALL	33011-01	P900 BASEBOARD, CCA		1
5	ALL	35050-00	PRINTED LABEL, RTK/PPK RADIO	GRAPHIC KNOWLGE	1
6	ALL	7170A54	MOUNTING TAPE, .750" DIAMETER	MCMaster	1
7	ALL	5862K162	MAGNET, .125" THICK, .812" DIAMETER	MCMaster	1
8	ALL	8213K5	FOAM BUMPER, .750" DIAMETER, .125" THICK	MCMaster	2
9	ALL	91017A656	SHIM WASHER, .171" OD, .03" THICK	MCMaster	2
10	ALL	92217A101	WASHER, #1, .218" OD	MCMaster	2
11	ALL	91772A063	SCREW, PANHEAD, 1-72UNF X .125"	MCMaster	2
12	ALL	91772A073	SCREW, PANHEAD, 2-56UNC X .156"	MCMaster	4
13	ALL	91772A067	SCREW, PANHEAD, 1-72UNF X .313	MCMaster	4
14	ALL	336313-12-0150	COAX CABLE, U.FL TO U.FL, 4.3"	AMPHENOL	1
15	ALL	AEACAC195013-S915	ANTENNA, 915MHZ, WHIP, SMA	ABRACON	1
16	ALL	222	THREAD LOCK	LOCTITE	AR

UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES REMOVE ALL BURRS AND SHARP EDGES. MACHINE SURFACE FINISH 125 -TOLERANCES- DECIMALS FRACTIONS .X ± .1 ± 1/32 .XX ± .02 ANGLES .XXX ± .010 ± 2° DO NOT SCALE PRINT	CONTRACT NO		Sentera, LLC		MINNEAPOLIS MINNESOTA USA	
	DR	R. NELSON	241121	TITLE		
	CHKD			P900 GROUND RADIO ASSEMBLY		
	APPD					
			SIZE D	CAGE CODE	DRAWING NO 31039	
	THIRD ANGLE PROJECTION		SCALE:		SHEET 1 OF 1	