

TABLE OF CONTENTS

TABLE OF CONTENTS..... 1

1 - INTRODUCTION 2

2 - PARTS 2

3 - FIELD SUPPLIED TOOLS 2

4 - DETERMINE NEED FOR UPGRADE 2

5 - PROCEDURE 3

REVISION HISTORY 6

1 - INTRODUCTION

This document is used to upgrade Signa 3.2, 4.1 - 4.3, 4.5 and 5.1 - 5.4 systems with quadrature head coil to Horizon 5.5 system only. Customers with a 3.2 system, with a linear head coil, will receive a new head coil for upgrade.

2 - PARTS

This upgrade package 2256690 includes the following components:

Description	Part Number	Quantity
Upgrading document	2256693	1
Capacitor	46-307583P99	6

3 - FIELD SUPPLIED TOOLS


¼ Inch (6.35mm) Standard or similar Flat Head Screwdriver
25-50 Watt Soldering Iron

4 - DETERMINE NEED FOR UPGRADE

Perform Head Quick Check SPT prior to modification. If the coil passes Head Quick Check SPT, do not continue with the upgrade. If coil SNR performance does not pass, perform the upgrade.


5 - PROCEDURE

1. De-assemble the Head Coil. See Illustration 5-1.

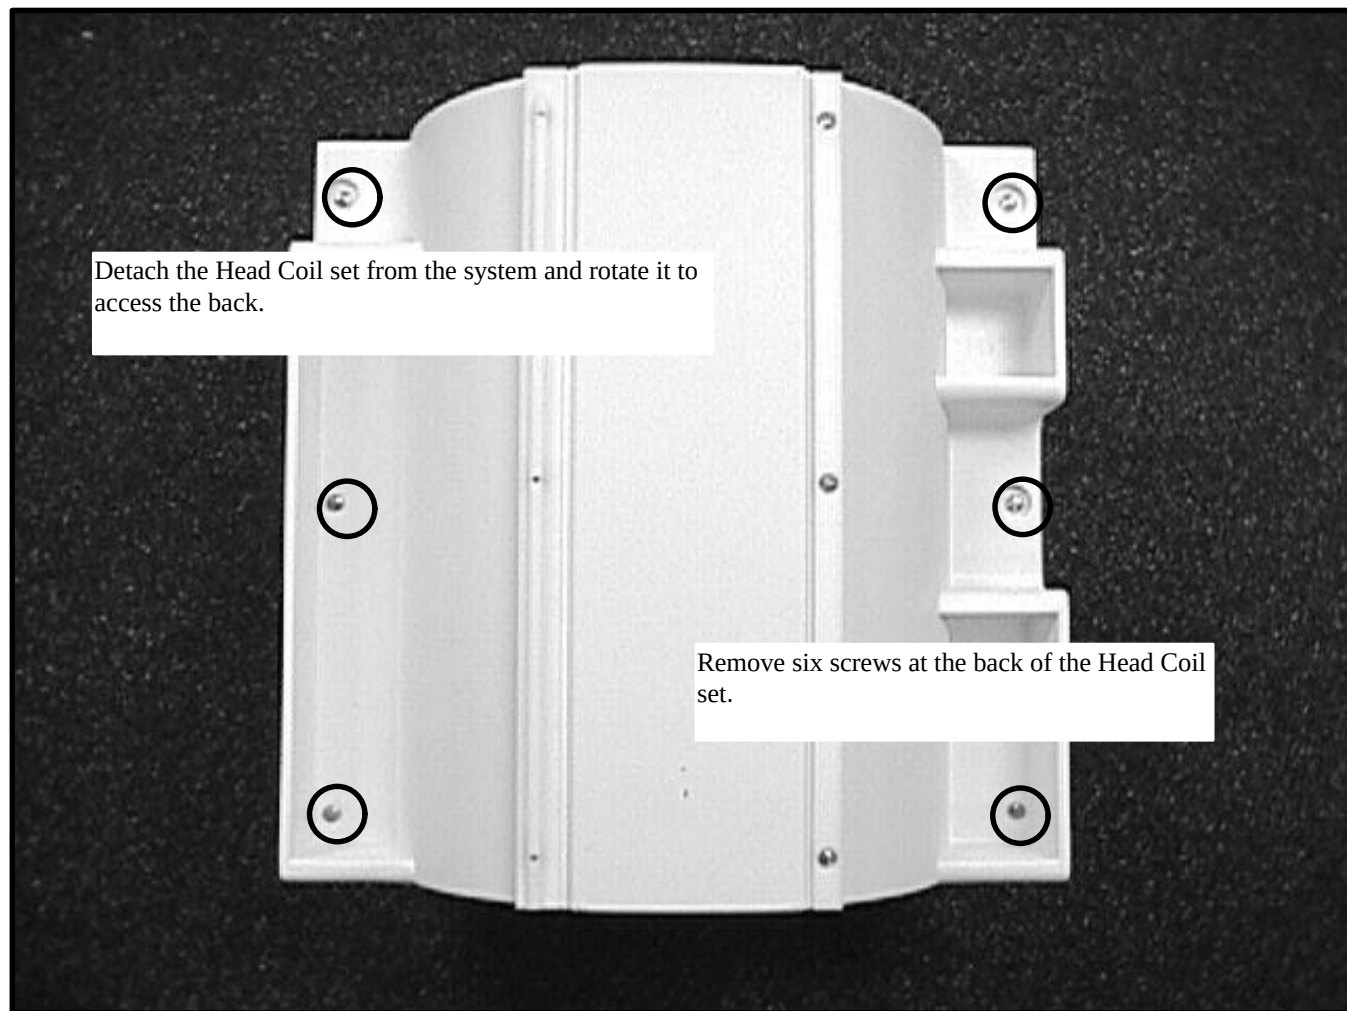


BOTTOM VIEW OF HEAD COIL
ILLUSTRATION 5-1

2. Note locations on coil where new capacitors will be placed. See Illustrations 5-2 and 5-3.

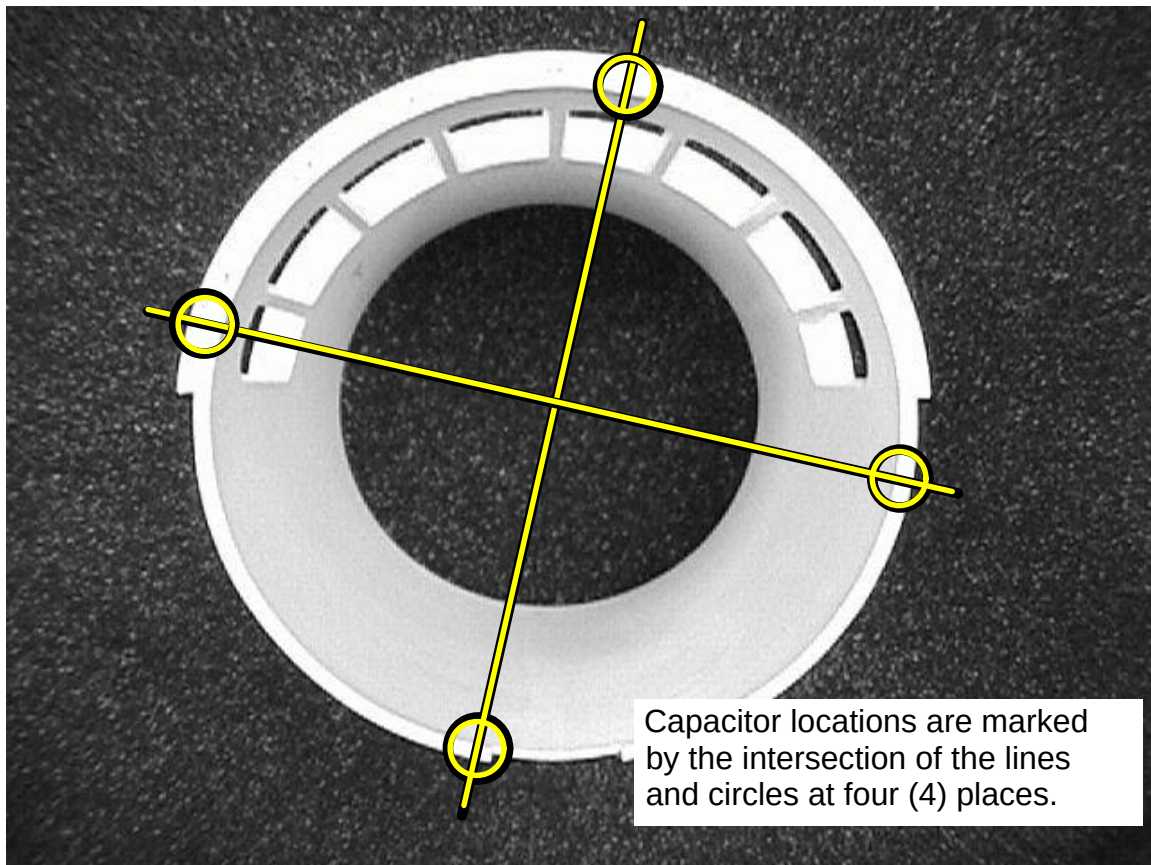


CAPACITOR LOCATIONS - BOTTOM VIEW
ILLUSTRATION 5-2

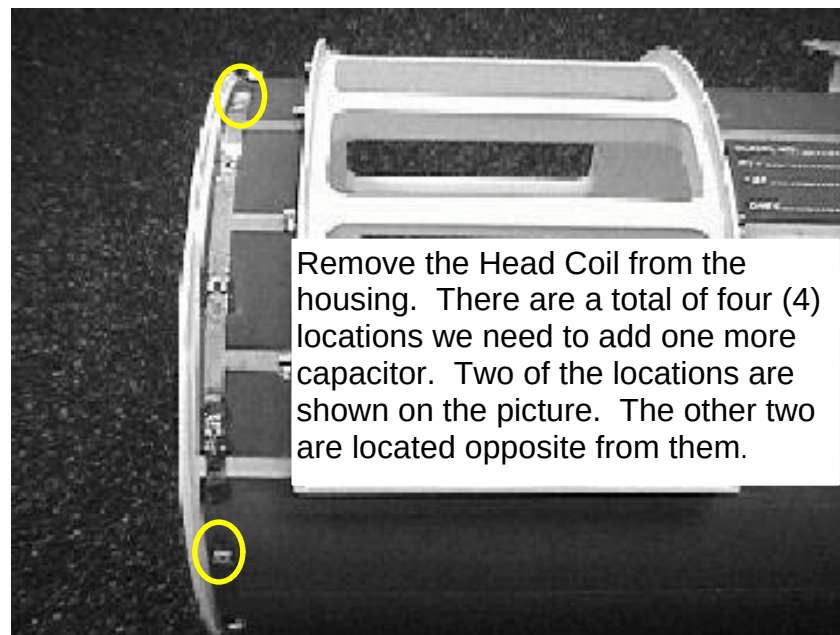

CAPACITOR LOCATIONS - SIDE VIEW
ILLUSTRATION 5-3

3. Modify the coil in four, 4, places by the addition of the new capacitors. See Illustrations 5-4 and 5-5. Repeat this step for the other three, 3, locations.

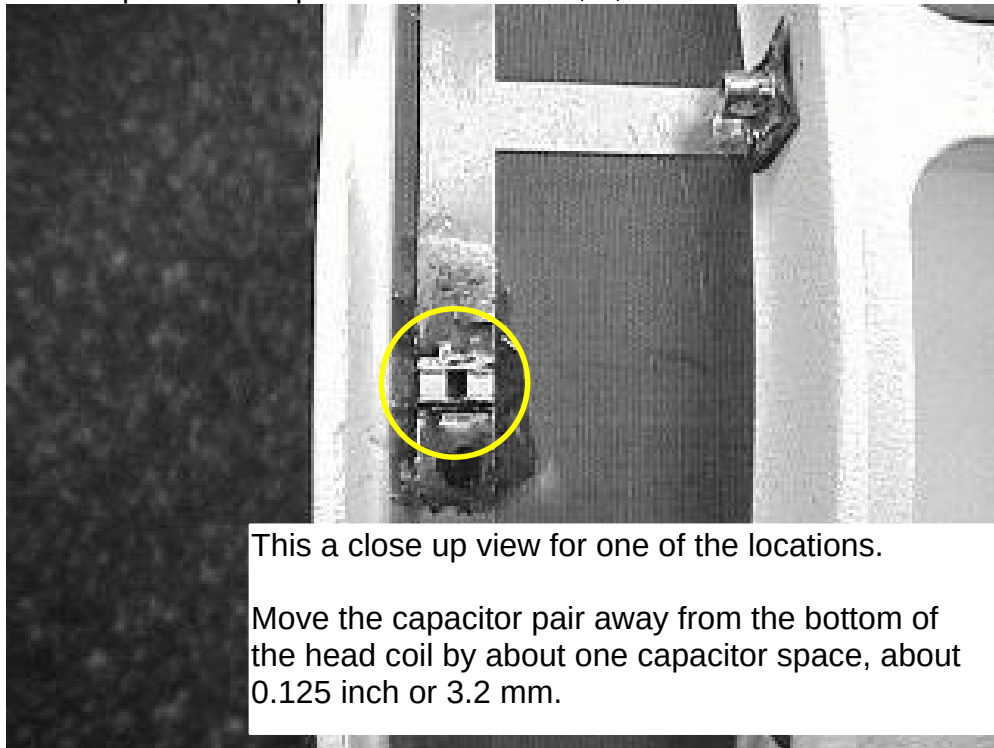


This a close up view for one of the locations.

Move the capacitor pair away from the bottom of the head coil by about one capacitor space, about 0.125 inch or 3.2 mm.

CAPACITOR LOCATION - START

ILLUSTRATION 5-4

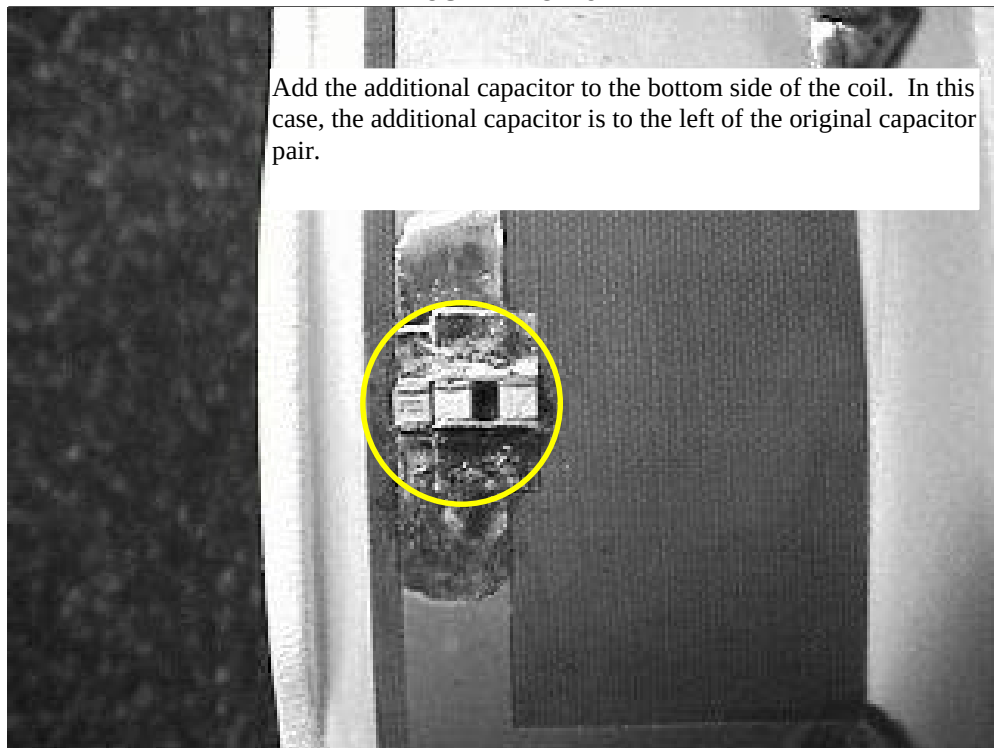

Add the additional capacitor to the bottom side of the coil. In this case, the additional capacitor is to the left of the original capacitor pair.

CAPACITOR LOCATION - FINISH

ILLUSTRATION 5-5

4. Re-assemble the Head Coil.
5. Perform a verification scan by performing Head Quick Check SPT.

REVISION HISTORY

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
0	Feb. 4, 2000	S. Davis	Initial Release