

TABLE OF CONTENTS

TABLE OF CONTENTS 1

1- REPLACING SPEAKER..... 2

 1-1 Speaker Removal..... 2

 1-2 Speaker Installation..... 4

REVISION HISTORY..... 5

Description - Procedure for replacing the speaker located in the rear end bell.

1- REPLACING SPEAKER

1-1 Speaker Removal

1. Lock out and tag out circuit breaker MR1 A14 CB6 at rear of RF/Pen Cabinet (MR1) on magnet enclosure power supply (MEPS) module.


For **RF/Pen II** and **RF/PDU Cabinet**: Lock out and tag out circuit breaker MR1 A20 CB4 at rear of RF/Pen II and RF/PDU Cabinet on System Support Module (SSM).

(Refer to CD-ROM *Dir. 2187583-3 [or -2], MR Release Signa 5x/8x Service Methods, Renewal Parts and Service Tools*, Procedure for Safety, Section 6, OSHA LOCKOUT/TAGOUT REQUIREMENTS.)

2. Verify that voltage between MR1 A14 TP4 (+) and TP13 (–) is 0 Vdc.


For RF/Pen II and RF/PDU Cabinet, verify that voltage between MR1 A20 TP4 (+) (SRI+24V) and TP13 (–) (SRI RTN) is 0 Vdc.

3. Remove three (3) screws holding speaker/microphone in place. See Illustration 1-1.

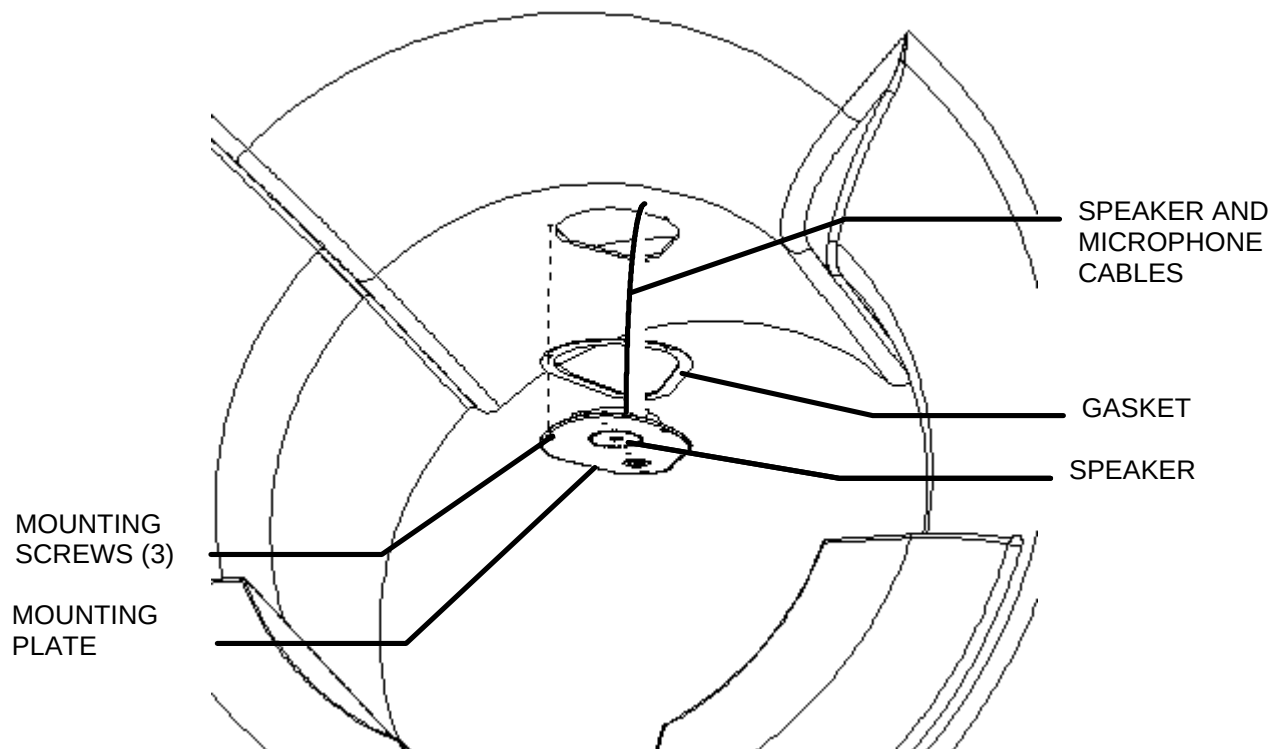

SPEAKER/MICROPHONE ASSEMBLY
ILLUSTRATION 1-1

4. Drop speaker/microphone assembly down and remove two (2) push on speaker wire connections. See Illustration 1-2.
5. Remove two (2) nuts holding speaker to mounting plate. See Illustration 1-2.
6. Lift speaker off of mounting plate.

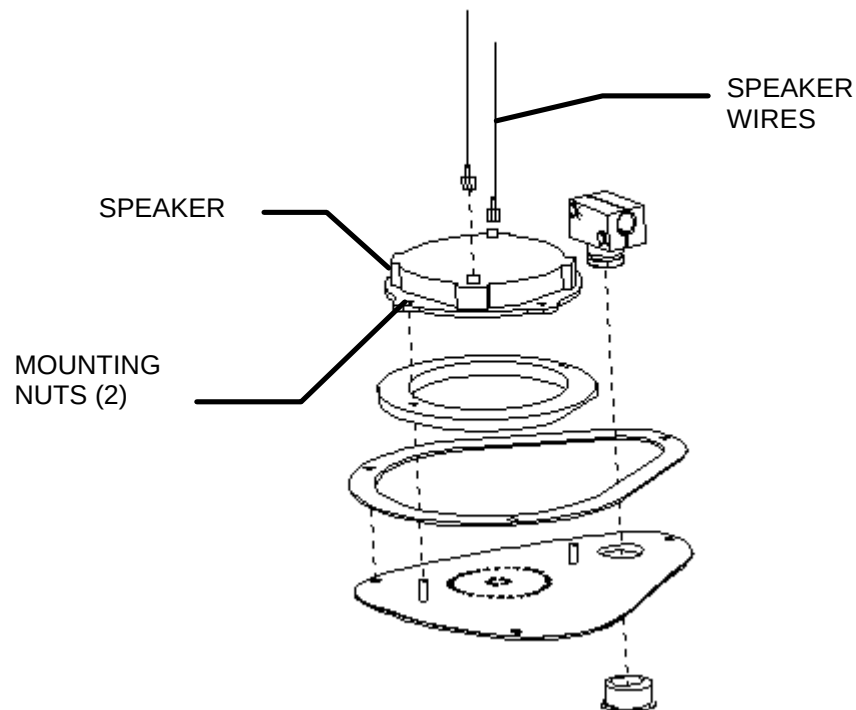

SPEAKER/MICROPHONE ASSEMBLY DETAIL
ILLUSTRATION 1-2

1-2 Speaker Installation

1. Secure new speaker to mounting plate with two (2) nuts.
2. Plug in speaker wires.
3. Secure speaker/microphone assembly to rear end bell using three (3) screws removed earlier.
4. Remove tag-out tag from circuit breaker MR1 A14 CB6 or MR1 A20 CB4.
5. Restore power to enclosure assemblies by switching on circuit breaker MR1 A14 CB6 at rear of RF/Pen Cabinet (MR1) on MEPS module.

RF/Pen II and RF/PDU Cabinet: Switch on circuit breaker MR1 A20 CB4 on the SSM at rear of RF/Pen II Cabinet or RF/PDU.

REVISION HISTORY

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
A	Nov 1, 1998	W. Pasciak	Initial revision
0	Feb 4, 1999	W. Pasciak	Final release