

AIRIS-II

Circuit Diagram

CONFIDENTIALITY:This material contains proprietary information of Hitachi Medical Corporation and it shall not be disclosed to the third party or reproduced without the prior written permission of Hitachi Medical Corporation. Copyright © Hitachi Medical Corporation. 2005. All rights reserved.

L3E
BM5442
1

CABLE CONNECTION & FILTER BOX

Page	Drawing Name	Drawing No.	Name of PCB	Note
1-1	Cable Connection Diagram	KA131581		Airis-II-1
1-2	Cable Connection Diagram	KA181075		Airis-II-2
1-3	MR-FB-4A Circuit Diagram	KA180742		
1-4	MR-FB-5A Circuit Diagram	KA181877		

MRI UNIT

Page	Drawing Name	Drawing No.	Name of PCB	Note
2-1	MR-RGH-10 Circuit	KA180154-A	————	
2-2	GC Unit Circuit	KA248859-A	————	
2-3	PD Heater Circuit	KA131470-A	————	
2-4	Heater Circuit	KA131634-A	YE2002(HEAT-4)	
2-5	GC CTL Circuit	KA247508-B	YS4006(GC CTL)	
2-5A	GC CTL2 Circuit	KB213402-A	YS4011(GC CTL2)	
2-6	MPX Circuit	KA280413-A	YG4014(MPX)	
2-7	PD Control Circuit	KA352402-B	XN2003(PD CNT2)	
2-8	NRF (0.3T) Internal Wiring Diagram	KA180594-A	————	

GANTRY

Page	Drawing Name	Drawing No.	Name of PCB	Note
3-1	Gantry Circuit Diagram	KA130716		Airis-II-1
3-2	Gantry Circuit Diagram	KA130762		Airis-II-2
3-2B	Gantry Circuit Diagram	KB112360		Airis-II-2
3-3	R. L Panel Circuit	KA128330A-D	WZ23AC(R PANEL2) WZ23AD(L PANEL2)	
3-4	Mic PCB Circuit Diagram	KA33376	CZ2069(MIC)	

PATIENT TABLE

Page	Drawing Name	Drawing No.	Name of PCB	Note
4-1	Patient Table Circuit	KB215040-A	————	
4-2	TCONT3 Circuit	KA249473-A	CZ43CP(TCONT3 PCB)	
4-3	TDRiV2 Circuit	KA249472-A	CC4237(TDRiV2 PCB)	
4-4	OPTFLT Circuit	KA280267-A	CZ41AN(OPTFLT PCB)	
4-5	Recieve Line Circuit	KA180044	————	

CENTRAL CONTROL CONSOLE

Page	Drawing Name	Drawing No.	Name of PCB	Note
5-1	IPU Internal Wiring Diagram	KA180880		MR-DP-7A
5-2	IPU Internal Wiring Diagram for Ultra Axi	KB110214		MR-DP-7B
5-3	IPU AC200V Power Supply Unit Wiring Diagram	KA282145		
5-4	9U9MB Circuit Diagram	KA281583	CZ64AE(9U9MB)	
5-5	HCD2 Circuit Diagram	KB211506(1/13)		
5-6	RTCONT Circuit Diagram	KB212452-1/29	CZ66AC-3(RTCONT)	
5-7	SEPARA Circuit Diagram	KA280268	XM2014(SEPARA)	
5-8	VDAMP Circuit Diagram	KA245024	XL2004(VDAMP)	
5-9	GRU Circuit Diagram	KA249995	YG4011(GRU)	
5-10	OPC Internal Wiring Diagram	KA250183		
5-11	OPC ACPS Wiring Diagram	KA250187		
5-12	OPC DCPS Wiring Diagram	KA250188		
5-13	PNLIF Circuit Diagram	KA249068	YG4010(PNLIF)	
5-14	PNLSW Circuit Diagram	KA246871	CZ21LF(PNLSW)	
5-15	LED PCB Circuit Diagram	KA366987	CZ21LG(LED)	
5-16	INTERCOM Circuit Diagram	KK-34919	MK-F4B	
5-17	JP Setting Table for MB	KA384303		
5-18	JP and SW Setting Table for PCB	KA282616		
5-19	JP Setting Diagram for BIT3 (467-1)	KA384367		

OPTIONS

Page	Drawing Name	Drawing No.	Name of PCB	Note
6-1	Field Compensator Circuit	KA345814		FC-2
6-2	MRFC2 Circuit Diagram	KA232422	YA2005(MRFC2)	FC-2
6-3	Field Compensator Circuit	KB316875		FC-3
6-4	MRFCH Circuit Diagram	KB111171	YG2020(MRFCH)	FC-3

CABLE CONNECTION & FILTER BOX

L3E-BM5442-1


Page	Drawing Name	Drawing No.	Name of PCB	Note
7-1	Cable Connection Diagram	KB111372		

MRI UNIT (MR-RGP-1)

Page	Drawing Name	Drawing No.	Name of PCB	Note
8-1	MR-RGP-1 Internal Wiring Diagram	KB010342		
8-2	NRF Unit Wiring Diagram	KB111322		
8-3	IPUIF Circuit Diagram	KB212656	YG4019(IPUIF)	
8-4	MPX2 Circuit Diagram	KB213066	YG4018(MPX2)	
8-5	JP and SW Setting Table for PCB	KA282616		Revised (5-18)
8-6	HCD3 Circuit Diagram	KB220848-1/13		
8-7	MRRCN2 Circuit Diagram	KB213250-1/27		
8-8	ISO2 Circuit Diagram	KB221132		
8-9	MRPSC Circuit Diagram	KA248306-1/26		

OPERATOR CONSOL (MR-OP-1)



Page	Drawing Name	Drawing No.	Name of PCB	Note
9-1	MR-OP-1 Wiring Diagram	KB213785		
9-2	MOUIF Circuit Diagram	KB213068	YA4009(MOUIF)	
9-3	PNLSW2 Circuit Diagram	KB213067	CZ21NE(PNLSW2)	
9-4	IAMPM Circuit Diagram	KB213786	CZ21NF(IAMPM)	

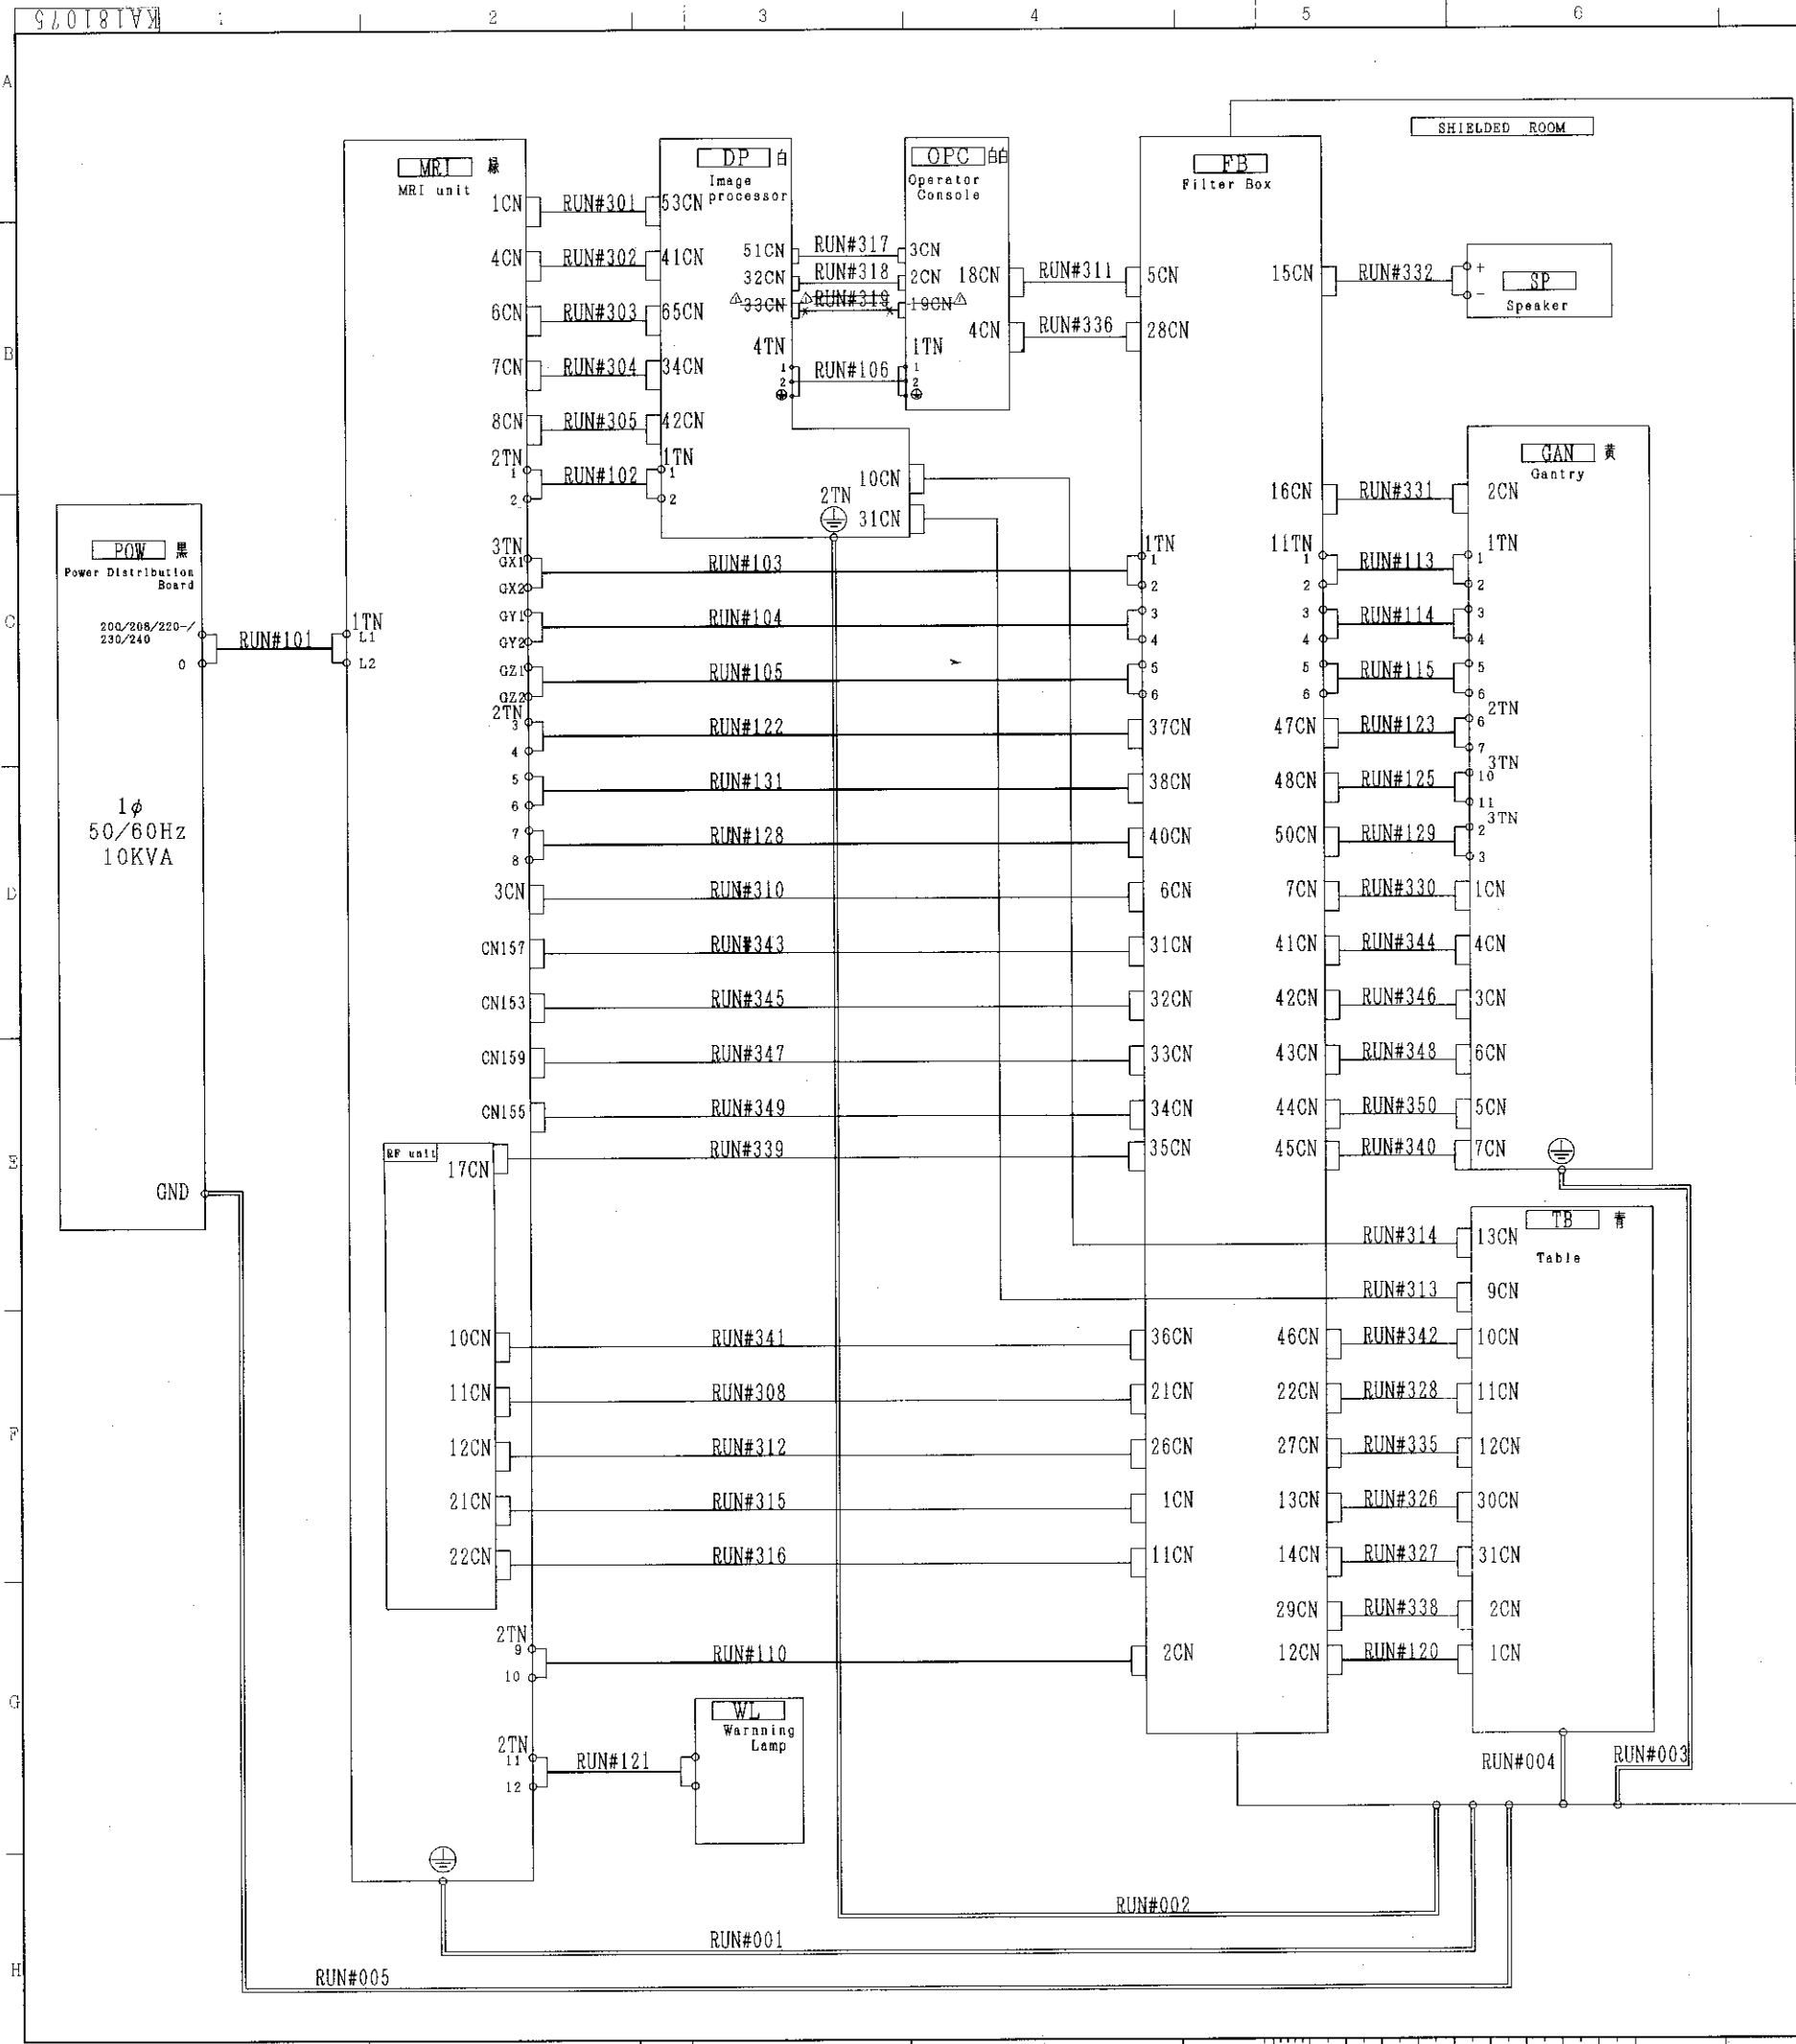

CABLE RUN#	DESTINATION	LENGTH		INTERNAL USE		CABLE DUT DIA.	No. OF CONDUCTORS AND WIRE THICKNESS	CONNECTOR SIZE (HxWxD)		DRAWING No.
		FROM	TO	FROM	TO			FROM	TO	
001	FIL MRI			0.5	0.4	3x20	UL1683 6AWG			KA212955-A
002	FIL DP			0.5	0.4	3x20	UL1683 6AWG			KA212955-B
003	FIL GAN			0.5	1.5	3x20	UL1683 6AWG			KA212955-C
004	FIL TB			0.5	2.2	3x20	UL1683 6AWG			KA212955-D
005	POW FIL			---	0.5	3x20	UL1683 6AWG			KA212955-H
101	POW MRI			---	0.4	25.3	UL-ST-SB 2X8AWG			KA212973-B
102	MRI DP			0.7	0.6	14.2	UL-ST-SB 3X14AWG			KA281892-D
103	MRI FIL			0.7	1.0	25.3	UL-ST-SB 2X6AWG			KA281892-A
104	MRI FIL			0.7	1.0	25.3	UL-ST-SB 2X6AWG			KA281892-B
105	MRI FIL			0.7	1.0	25.3	UL-ST-SB 2X6AWG			KA281892-C
106	OPC FIL			0.3	0.3	14.2	UL-ST-SB 3X14AWG			KA281892-E
110	MRI FIL			0.6	1.3	14.2	UL-ST-SB 3X14AWG	33.5φX71		KA242521-T
113	FIL GAN			1.0	1.5	25.7	UL-ST 2X6AWG			KA213048-M
114	FIL GAN			1.0	1.5	25.7	UL-ST 2X6AWG			KA213048-N
115	FIL GAN			1.0	1.5	25.7	UL-ST 2X6AWG			KA213048-P
120	FIL TB			1.0	2.2	14.2	UL-ST-SB 3X14AWG	33.5φX71	33.5φX71	KA212975-M
121	MRI WL			0.6	---	6.6	UL2464-SB 2X20AWG			KA281892-F
122	MRI FIL			0.4	1.0	14.2	UL-ST-SB 3X14AWG		33.5φX71	KA242521-R
123	FIL GAN			1.0	1.5	14.2	UL-ST-SB 3X14AWG	33.5φX71		KA242521-L
125	FIL GAN			1.0	1.5	14.2	UL-ST-SB 3X14AWG	33.5φX71		KA242521-U
128	MRI FIL			0.4	1.0	7.3	UL-ST-SB 4X18AWG	27φX63		KA242995-K
129	FIL GAN			1.0	1.5	7.3	UL-ST-SB 4X18AWG	27φX63		KA242995-L
131	MRI FIL			0.4	1.0	14.2	UL-ST-SB 3X14AWG		33.5φX71	KA242521-S
301	MRI DP			0.6	0.3	11.0	UL2464-SB 17PX28AWG	20X49X72	20X49X72	KA248934-F
302	MRI DP			0.7	0.3	13.0	UL2464-SB 25PX28AWG	20X77X72	20X77X72	KA248934-G
303	MRI DP			0.7	0.3	13.0	UL2464-SB 25PX28AWG	20X62X72	20X62X72	KA248934-H
304	MRI DP			0.7	0.3	13.0	UL2464-SB 25PX28AWG	20X77X72	20X77X72	KA248934-J
305	MRI DP			0.7	0.3	13.0	UL2464-SB 25PX28AWG	20X77X72	20X77X72	KA248934-K
308	MRI FIL			1.7	0.8	8.5	5D2W	14φX34	35X20.8X52.4	KA324931-A
310	MRI FIL			0.8	1.0	11.0	UL2464-SB 17PX28AWG	20X49X72	20X49X72	KA248934-A
311	OPC FIL			0.3	1.3	6.6+7.0	UL2464-SB 2X20AWG 3X20AWG	27φX63	27φX63	KA324805-D
312	MRI FIL			1.7	0.8	8.5	5D2W	14φX34	35X20.8X52.4	KA324931-C
313	DP TB			0.3	2.2	---	OPTICAL FIBER			KA381244-A
314	DP TB			1.0	2.2	---	OPTICAL FIBER			KA367815-D
315	MRI FB			1.0	2.2	8.5	5D2W	14φX34	35X20.8X52.4	KA324931-G
316	MRI FB			1.0	2.2	8.5	5D2W	14φX34	35X20.8X52.4	KA324931-H
317	DP OPC			1.0	2.2	13.0	UL2464-SB 25PX28AWG	20X62X72	20X62X72	KA244337-C
318	DP OPC			1.0	2.2	12.0	UL2464-SB 25PX28AWG	20X62X72	20X62X72	KA244338-C
319	DP OPC			1.0	2.2	6.6+6.6	UL2464-SB 2X20AWG 2X20AWG	27φX63	27φX63	KA244317-C
326	FIL TB			1.0	2.2	8.5	5D2W	35X20.8X52.4	14φX34	KA324931-J
327	FIL TB			1.0	2.2	8.5	5D2W	35X20.8X52.4	14φX34	KA324931-K
328	FIL TB			1.0	2.2	8.5	5D2W	35X20.8X52.4	14φX34	KA324931-E
330	FIL GAN			1.0	1.5	11.0	UL2464-SB 17PX28AWG	20X49X72	20X49X72	KA248934-B
331	FIL GAN			1.0	1.5	7.3	UL2464-SB 3PX20AWG	27φX63	15X35X30	KA212975-N
332	FIL SP			1.0	7.3	---	UL2464-SB 2PX20AWG	24φX58		KA242521-K
335	FIL TB			0.8	2.2	8.5	5D2W	35X20.8X52.4	14φX34	KA324931-F
336	OPC FB			0.7	1.1	9.0	UL2464-SB 10PX28AWG	20X49X72	20X49X72	KA248934-L
338	FIL TB			1.2	2.2	9.0	UL2464-SB 10PX28AWG	20X49X72	20X49X72	KA248934-B
339	MRI FIL			1.7	1.0	9.3	UL2464-SB 4PX22AWG	23φX36.5	23φX36.5	KA361392-F
340	FIL GAN			1.0	2.2	9.3	UL2464-SB 4PX22AWG	23φX36.5	23φX36.5	KA361392-H
341	MRI FIL			1.7	1.0	9.3	UL2464-SB 4PX22AWG	23φX36.5	23φX36.5	KA361392-E
342	FIL TB			1.0	2.2	9.3	UL2464-SB 4PX22AWG	23φX36.5	23φX36.5	KA361392-G
343	MRI FIL			2.5	1.0	8.5	5D2W	35X20.8X52.4	35X20.8X52.4	KA370120-C
344	FIL GAN			1.0	2.2	8.5	5D2W	35X20.8X52.4	35X20.8X52.4	KA323940-D
345	MRI FIL			2.5	1.0	8.5	5D2W	35X20.8X52.4	35X20.8X52.4	KA370120-A
346	FIL GAN			1.0	2.2	8.5	5D2W	35X20.8X52.4	35X20.8X52.4	KA323940-F
347	MRI FIL			2.5	1.0	8.5	5D2W	35X20.8X52.4	35X20.8X52.4	KA370120-D
348	FIL GAN			1.0	2.2	8.5	5D2W	35X20.8X52.4	35X20.8X52.4	KA323940-H
349	MRI FIL			2.5	1.0	8.5	5D2W	35X20.8X52.4	35X20.8X52.4	KA370120-B
350	FIL GAN			1.0	2.2	8.5	5D2W	35X20.8X52.4	35X20.8X52.4	KA323940-K

— GND
— POWER
— SIGNAL

製図	ヨシカワ	97.6.3	図	97.6.3	入	NTS	名	AKIS-11 2	
審査	マエダ	97.6.3	図	97.6.3	入	NTS	名	ケーブル・フルケッセンズ	
承認	マエダ	97.6.3	図	97.6.3	入	NTS	名	株式会社 日立メディコ	
								図番	KA181075

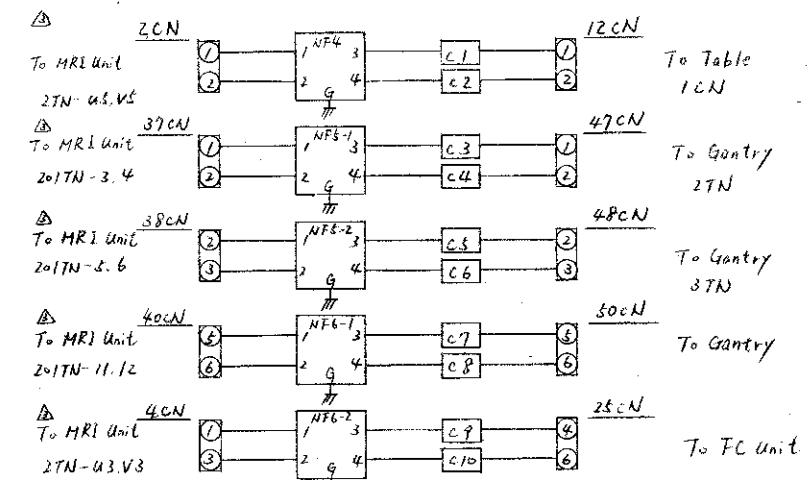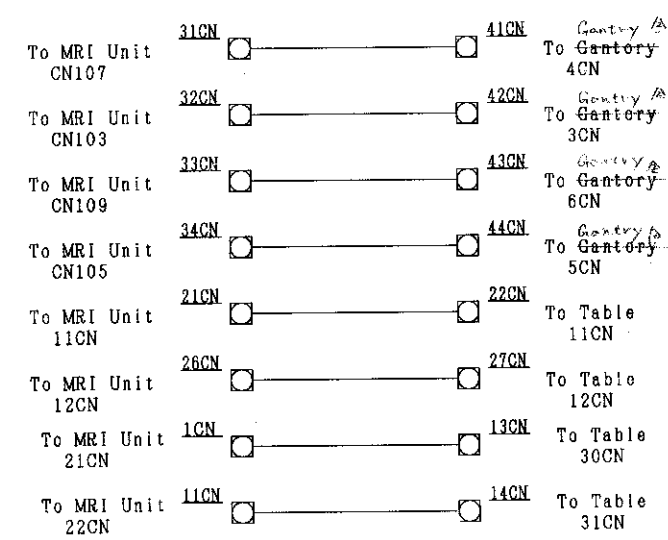

△ MR-FB-4A circuit diagram

製図	ヨシカタ	97.3.4	表影法		名称
審査	マエノ	97.6.5	尺度		
承認	マエノ	97.4.5	NTS		


MR-FB-4A カイロス


図番

株式会社 日立メディコ

KA180742

製図	シラカワ	98-229	技 影 法	名称	
審査	ヨシカワ	78-2-27		MR-FB-5A	カノロス
承認	マエタ	99-2-24	NTS 10.2.1 10.2.1	印番	KA181877
株式会社 日立メディコ				原番	1

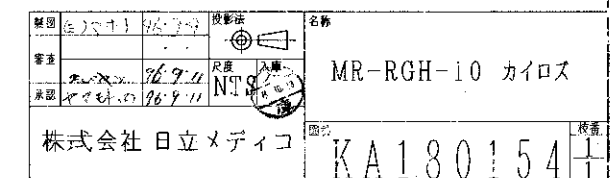

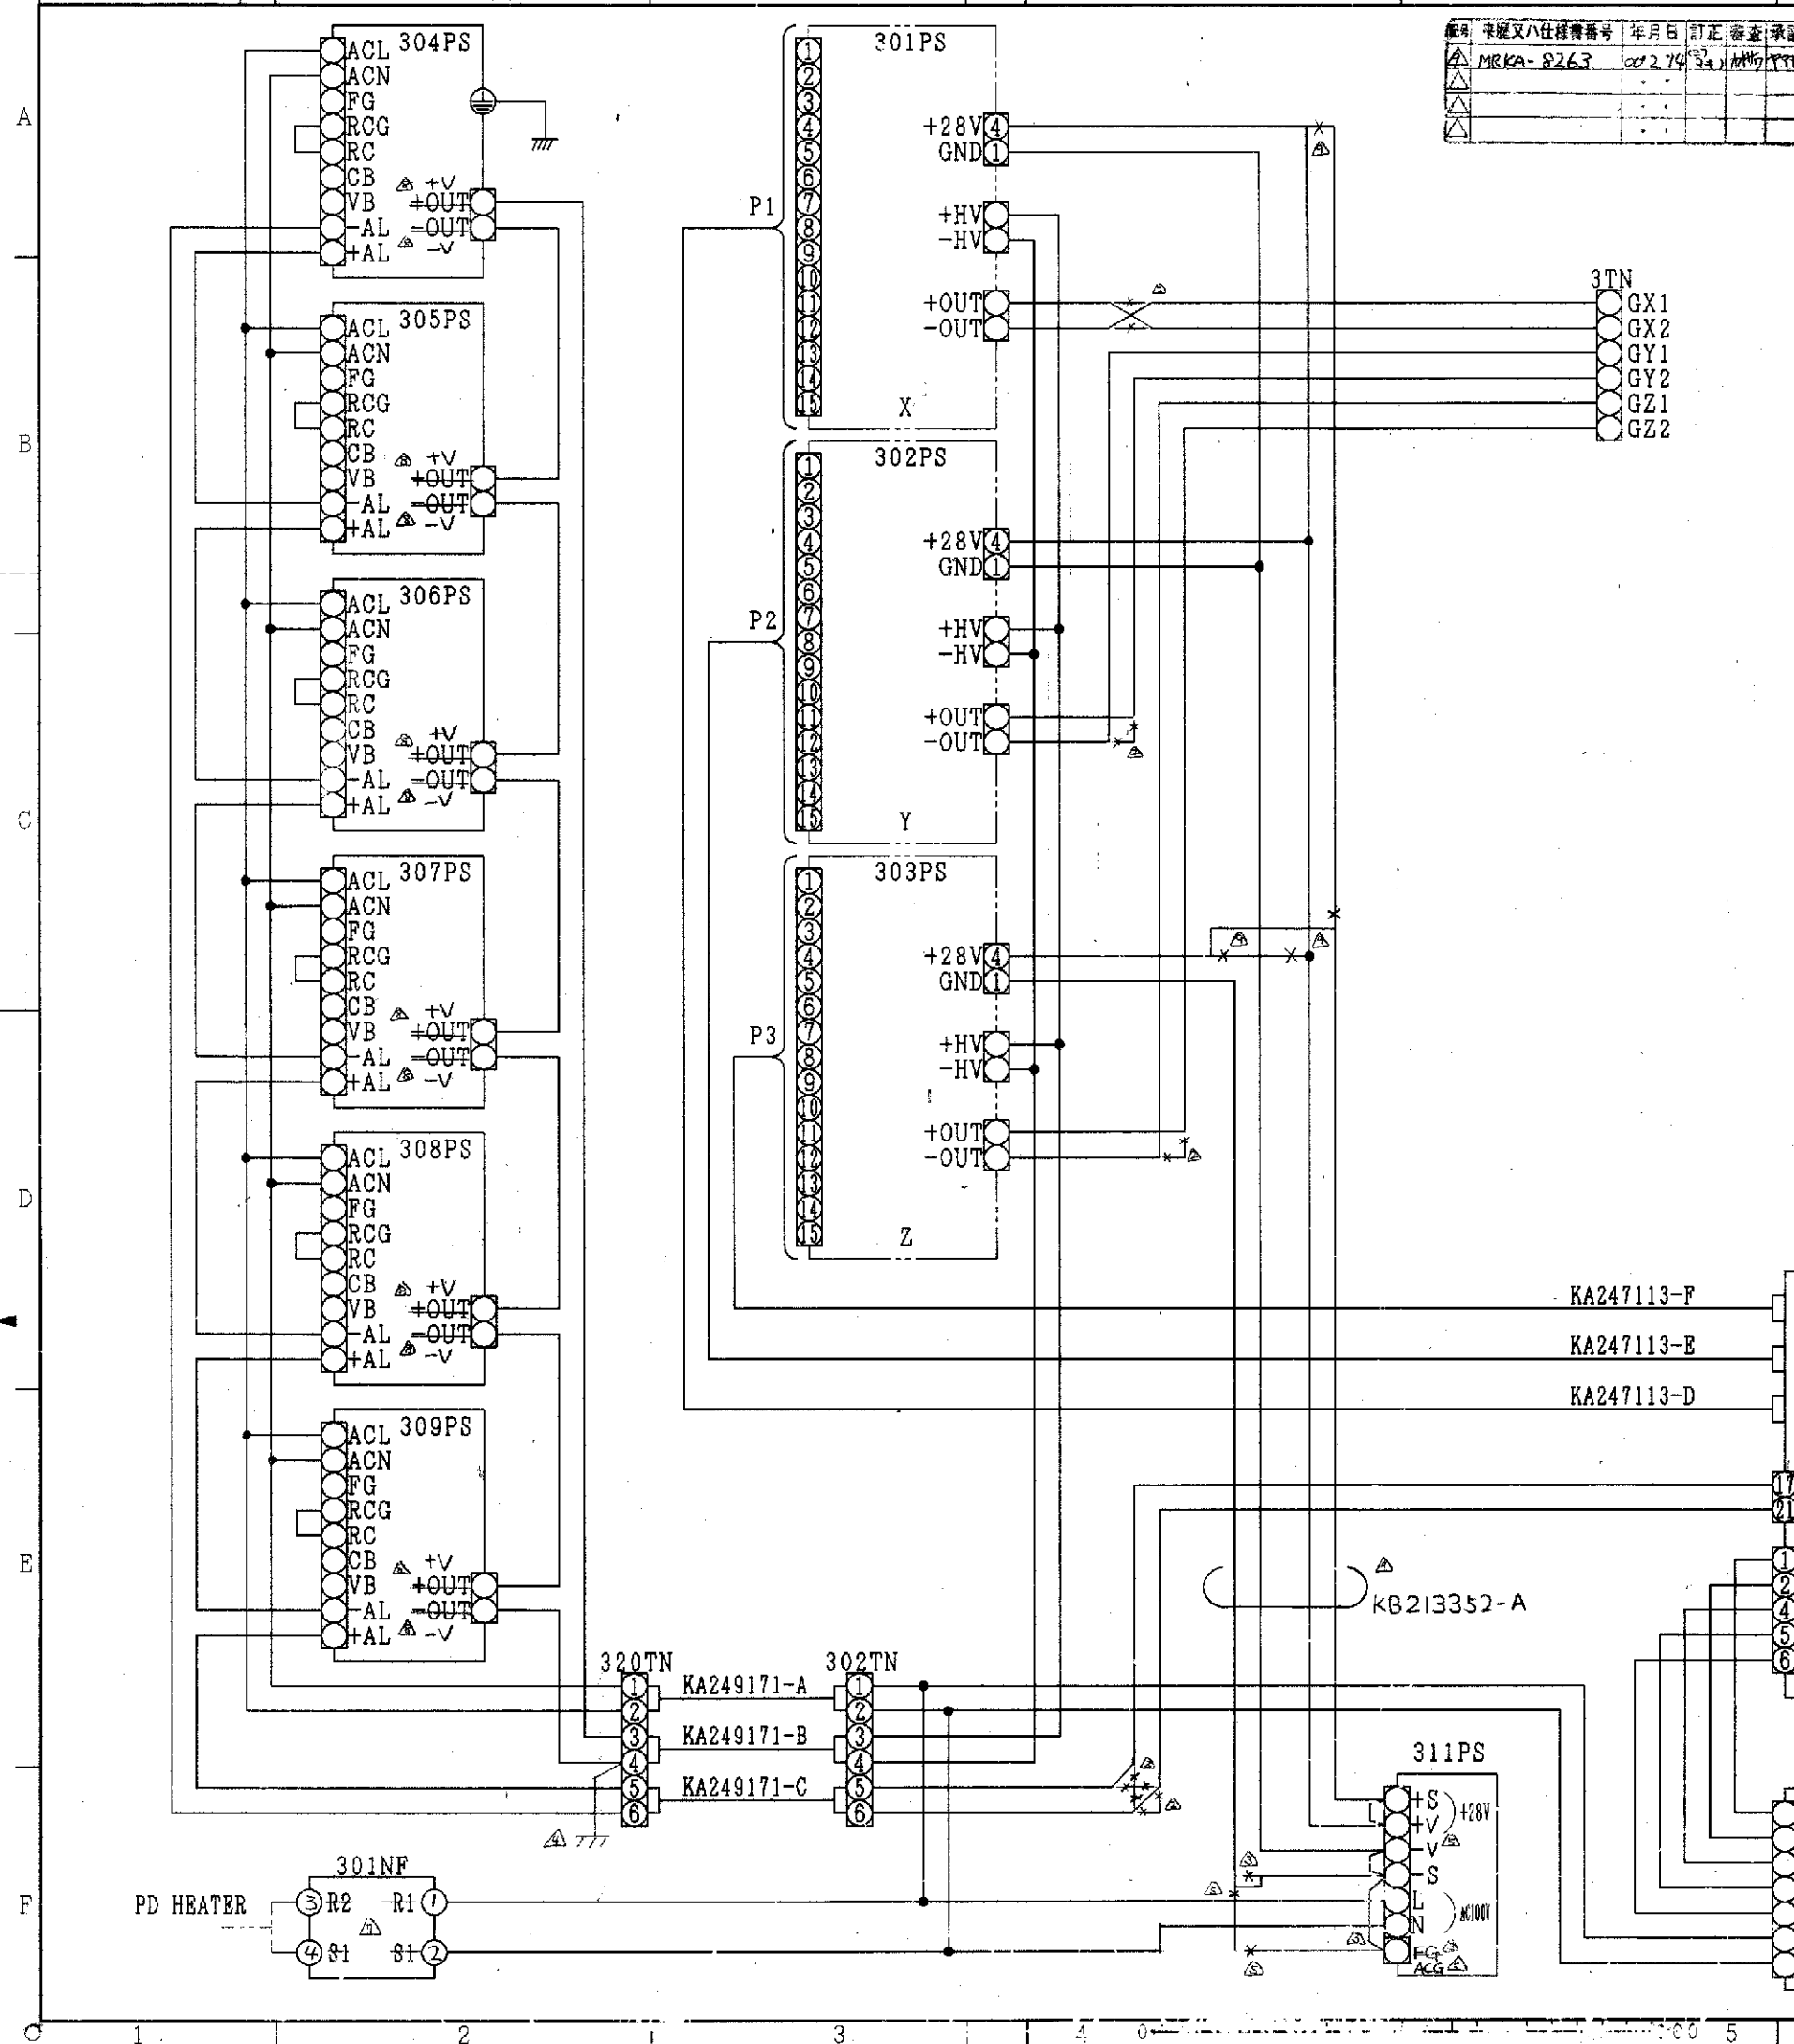

図番	年月日	訂正	検査	承認
MRKA-8263	02.24			


図番	年月日	訂正	検査	承認	図名	設計担当者	承認者	図番	年月日	訂正	検査	承認
1	02.24				GCユニットカイトス	K13C		0091				
2	02.24				MRKA-3895	96.10.16		MRKA-7187	97.12.29			
3	02.24				MRKA-4419	97.3.12		MRKA-7221	99.2.8			
4	02.24				MRKA-4895	97.8.26		MRKA-7268	99.2.16			
5	02.24				MRKA-5421	98.1.13		MRKA-7286	99.2.22			

作業員	品名	数量	単位	材料寸法	材料長さ	仕上重量	備考
0	10			カイトス			
2							
3							

C	B	A	SYMBOL	PART NAME	TYPE	MANUFACTURER
		3	301~303PS	POWER SUPPLY	262PN AMPLIFIER	COPELEY
		6	304~309PS	POWER SUPPLY	PAA600F-48-XHMD	COSEL
		1	310PS	POWER SUPPLY	HKT75-5PF	NEMIC
		1	311PS	POWER SUPPLY	HR-12F-28	NEMIC
		1	301NF	FILTER	SUP-M60H-ER-4	OKAYA
		1	3TN	TERMINAL	ZAGT-2250-M	TDK
		2	302, 320TN	TERMINAL	UF1005-60A-6	FUJIKON

GC Unit Circuit Diagram

製図	(E)マキ	76.7.27	投影法	名称
検査	キムラ	96.8.27	入庫	
承認	キムラ	96.8.28	NTS	
株式会社 日立メデコ				図番
GCユニットカイトス				1/1
KA248859				1/1

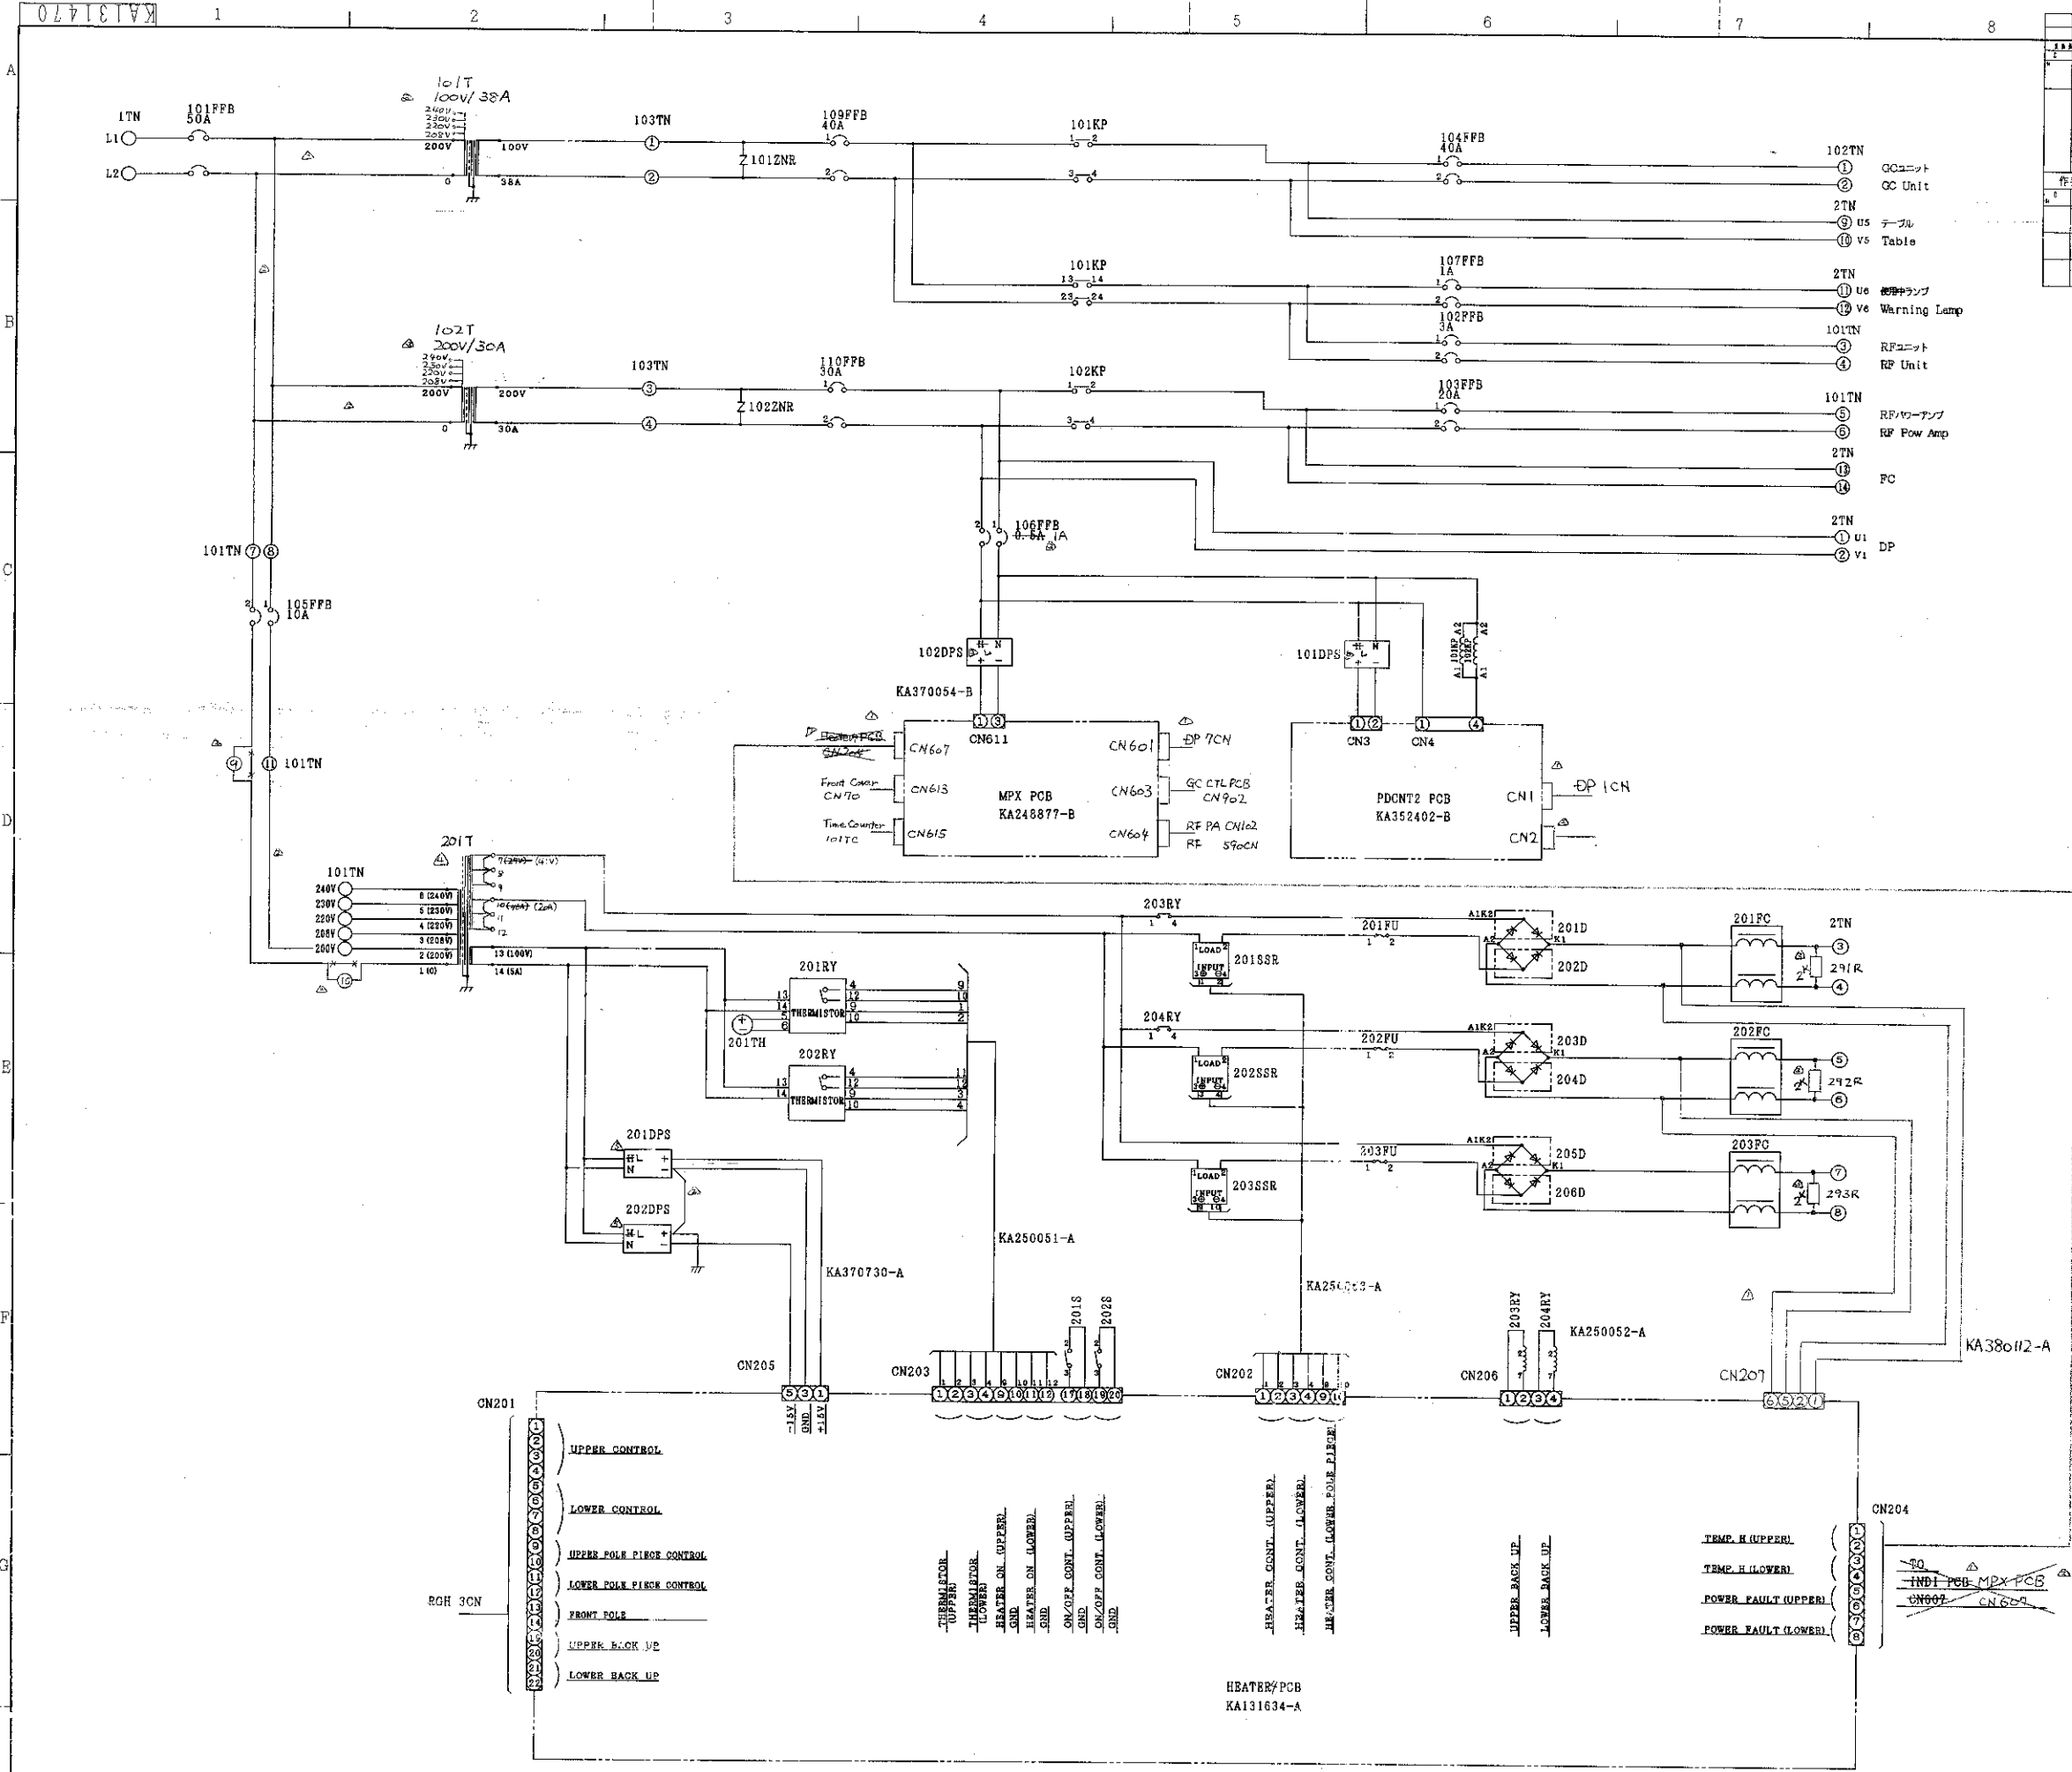


図番	図名	図種	図尺	図寸	図単位	図備考
KA131470-05	PDヒータカイトス	回路図	1/10	100	mm	
1	101FEB	CIRCUIT BREAKER	RU-FSB2050L	FUJI		
1	102FEB	CIRCUIT BREAKER	NRAN2100F-3AAA	IZUMI		
1	103FEB	CIRCUIT BREAKER	NRAN2100F-20AAA	IZUMI		
1	105FEB	CIRCUIT BREAKER	NRAN2100F-10AAA	IZUMI		
1	106FEB	CIRCUIT BREAKER	NRAN2100F-500MABA	IZUMI		
1	107FEB	CIRCUIT BREAKER	NRAN2100F-1AAA	IZUMI		
2	104FEB	CIRCUIT BREAKER	NRBM2100F-40AAA	IZUMI		
1	110FEB	CIRCUIT BREAKER	NRBM2100F-30AAA	IZUMI		
1	101KP	MAGNETIC CONTACTOR	SC-1N 2a2b AC200V	FUJI		
1	102KP	MAGNETIC CONTACTOR	SC-5-1 5a AC200V	FUJI		
2	101DPS	SURGE ABSORBER	ERZ-C14DK-391U	MITSUBISHI		
1	101DPS	SWITCHING POWER SUPPLY	EWS25-5	NEMIC		
1	102DPS	SWITCHING POWER SUPPLY	EWS25-5	NEMIC		
2	201.202DPS	DC POWER SUPPLY	HW-10-15	NEMIC		
1	101T	TRANSFORMER	KA369082-A 3.8k	DAITO		
1	102T	TRANSFORMER	KA369083-A 6k	DAITO		
1	201T	TRANSFORMER	KA385781-A	TAMURA		
1	201TH	TEMP METER	KA380442-A	OMRON		
1	202RY	TEMP CONTROLLER	E5L-AX1	OMRON		
1	1TN	TERMINAL BLOCK	UF1005-60A-2P	FUJIKON		
2	2	101TN	TERMINAL	JTU20-16HM	TECHNOMI	
2	2	102TN	TERMINAL	UF1005-60A-4P	FUJIKON	
2	2	201.202S	SWITCH	RE1011	FUJIKON	
6	6	201-206D	DIODE MODULE	RM30D2-M	MITSUBISHI	
2	2	203.204RY	RELAY	AP6221	MITSUBISHI	
3	3	201-203SSR	SSR	SP30DPS-H1-4	MITSUBISHI	
3	3	201-203PC	CORES	ESD-R-47B	TOKIN	
3	3	201-203FU	FUSE	CES6-15A	SOC	
1	1	1TN	TERMINAL BLOCK	G-1014	PHOENIX	
3	3	291-293R	RESISTOR	RSE48 2K1-6J	KOA	

QTY	SYMBOL	NAME	TYPE	MANU
1	101FEB	CIRCUIT BREAKER	BU-FSB2050L	FUJII
1	102FEB	CIRCUIT BREAKER	NRAN2100F-3AAA	IZUMI
1	103FEB	CIRCUIT BREAKER	NRAN2100F-20AAA	IZUMI
1	105FEB	CIRCUIT BREAKER	NRAN2100F-10AAA	IZUMI
1	106FEB	CIRCUIT BREAKER	NRAN2100F-500MABA	IZUMI
2	107FEB	CIRCUIT BREAKER	NRAN2100F-1AAA	IZUMI
2	104109FEB	CIRCUIT BREAKER	NRBM2100F-40AAA	IZUMI
1	110FEB	CIRCUIT BREAKER	NRBM2100F-30ABA	IZUMI
1	101KP	MAGNETIC CONTACTOR	SC-1N 2a2b AC200V	FUJII
1	102KP	MAGNETIC CONTACTOR	SC-5-1 5a AC200V	FUJII
2	101102ZNR	SURGE ABSORBER	ERZ-C14DK-391U	MITSUBISHI
1	101DPS	SWITCHING POWER SUPPLY	EWS25-5	NEMIC
1	102DPS	SWITCHING POWER SUPPLY	EWS25-5	NEMIC
2	201.202DPS	DC POWER SUPPLY	HW-10-15	NEMIC
1	101T	TRANSFORMER	KA369082-A 3.8k	DAITO
1	102T	TRANSFORMER	KA369083-A 6k	DAITO
1	201T	TRANSFORMER	KA385781-A	TAMURA
1	201RY	TEMP METER	KA380442-A	OMRON
1	201TH	TEMP CONTROLLER	E5L-AX1	OMRON
1	202RY	TEMP CONTROLLER	UF1-A1	OMRON
1	1TN	TERMINAL BLOCK	EP1005-60A-2P	FUJIKON
2	2 101TN	TERMINAL	JTU20-16HM	TECHNOMI
2	2 102 103TN	TERMINAL	UF1005-60A-4P	FUJIKON
2	2 201.202S	SWITCH	SE1011	FUJIKON
6	6 201-206D	DIODE MODULE	RM30DZ-M	MITSUBISHI
2	2 203.204RY	RELAY	AP6221	MITSUBISHI
3	3 201-203SSR	SSR	SP30DPS-H1-4	MITSUBISHI
3	3 201-203PC	CORES	ESD-R-47B	TOKIN
3	3 201-203FU	FUSE	CES6-15A	SOC
1	1TN	TERMINAL BLOCK	G 10/4	PHOENIX
3	291-293R	RESISTOR	RSF48 2K1-6J	KOA

PD Heater Circuit Diagram

製図	(3) 241	34.7.12	投影法	名義
審査	76.7.13	承認	NTS	PDヒータカイトス
承認	76.7.19	承認	NTS	株式会社 日立メディコ
図番				KA131470

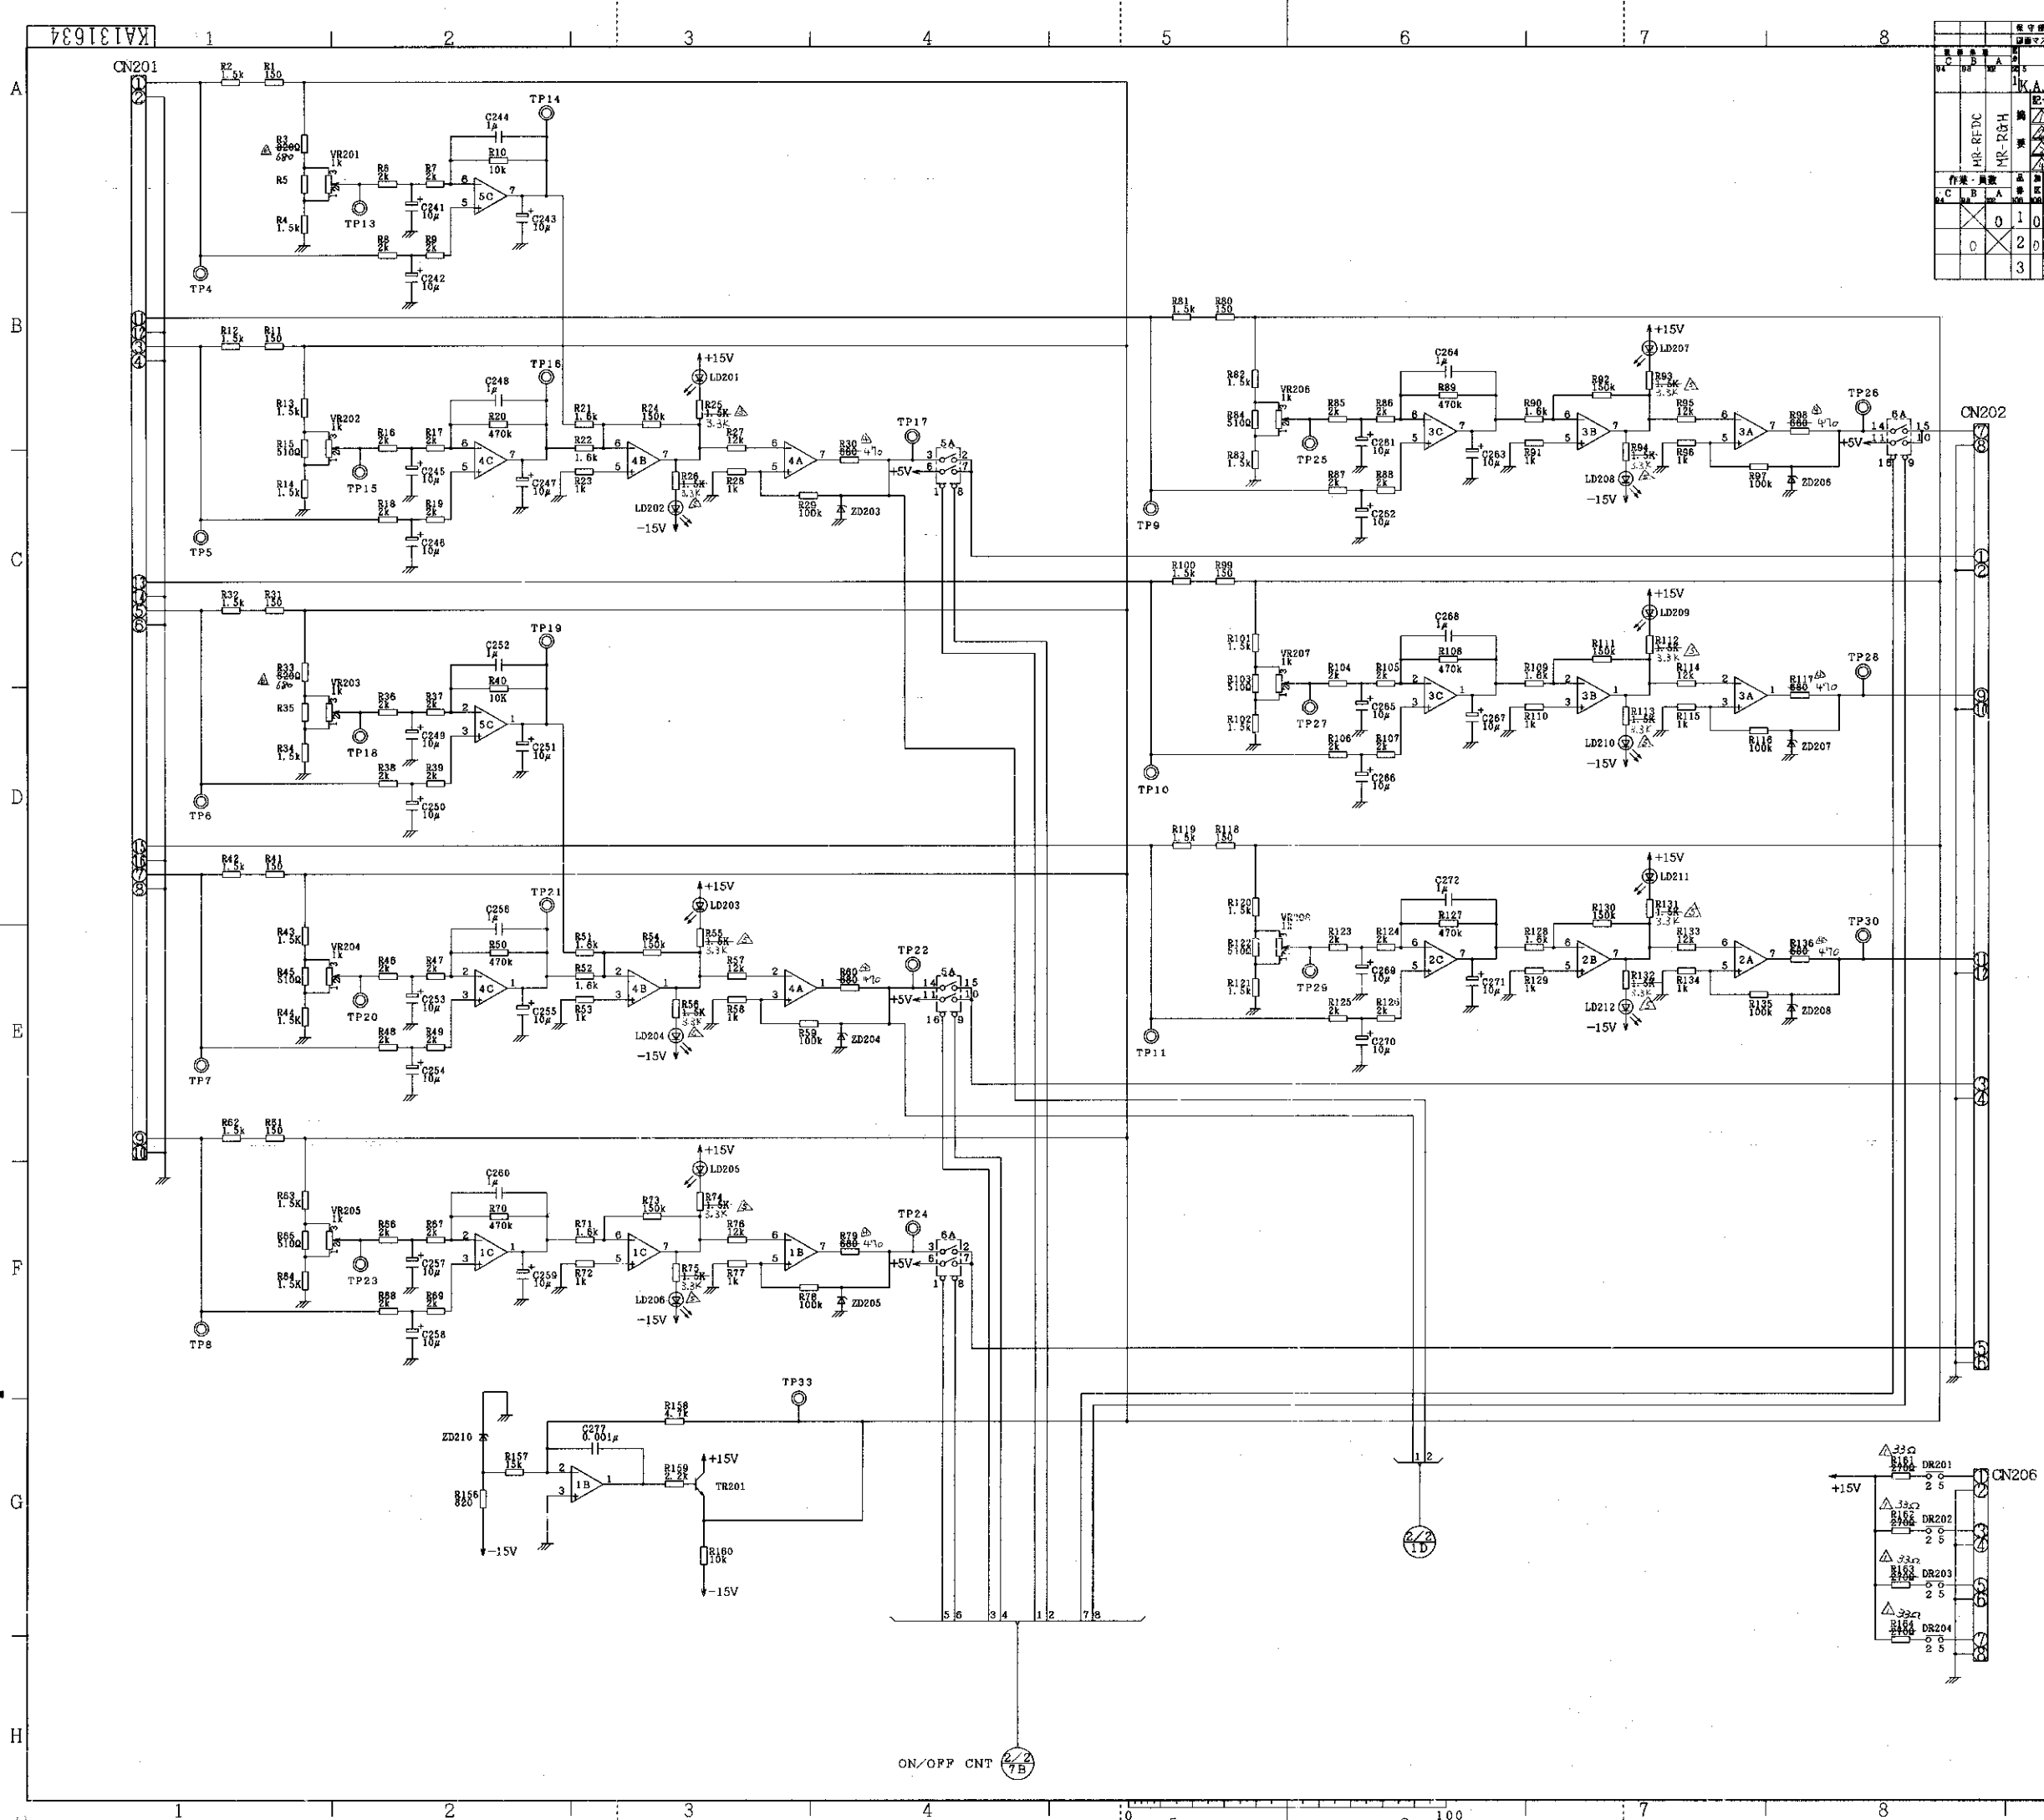

図面管理									
図番	KA131634	図名	ヒータセイギョカイロス	図尺	1/1	図種	回路図	図用	00912
作成	MRKA-3647	年月日	76.9.4	訂正	0	承認	MRKA-3647	年月日	76.9.4
検出	MRKA-3992	年月日	76.11.8	訂正	0	承認	MRKA-3992	年月日	76.11.8
変更	MRKA-5384	年月日	77.12.1	訂正	0	承認	MRKA-5384	年月日	77.12.1
再検	MRKA-7629	年月日	77.5.25	訂正	0	承認	MRKA-7629	年月日	77.5.25
作業・検査	0	部品名	カイロス	実寸法		実寸法		実寸法	
	0	部品名	カイロス	実寸法		実寸法		実寸法	
	3	部品名		実寸法		実寸法		実寸法	

Heater Control Circuit


製図(□)マキ	76.6.12	製図法	NTS	名称	ヒータセイギョカイロス
審査	ヨシカフ	76.6.12	尺取		
承認	マコフ	76.6.12	NTS		

株式会社 日立メディコ

KA131634

1	2
---	---

ON/OFF CNT
4H

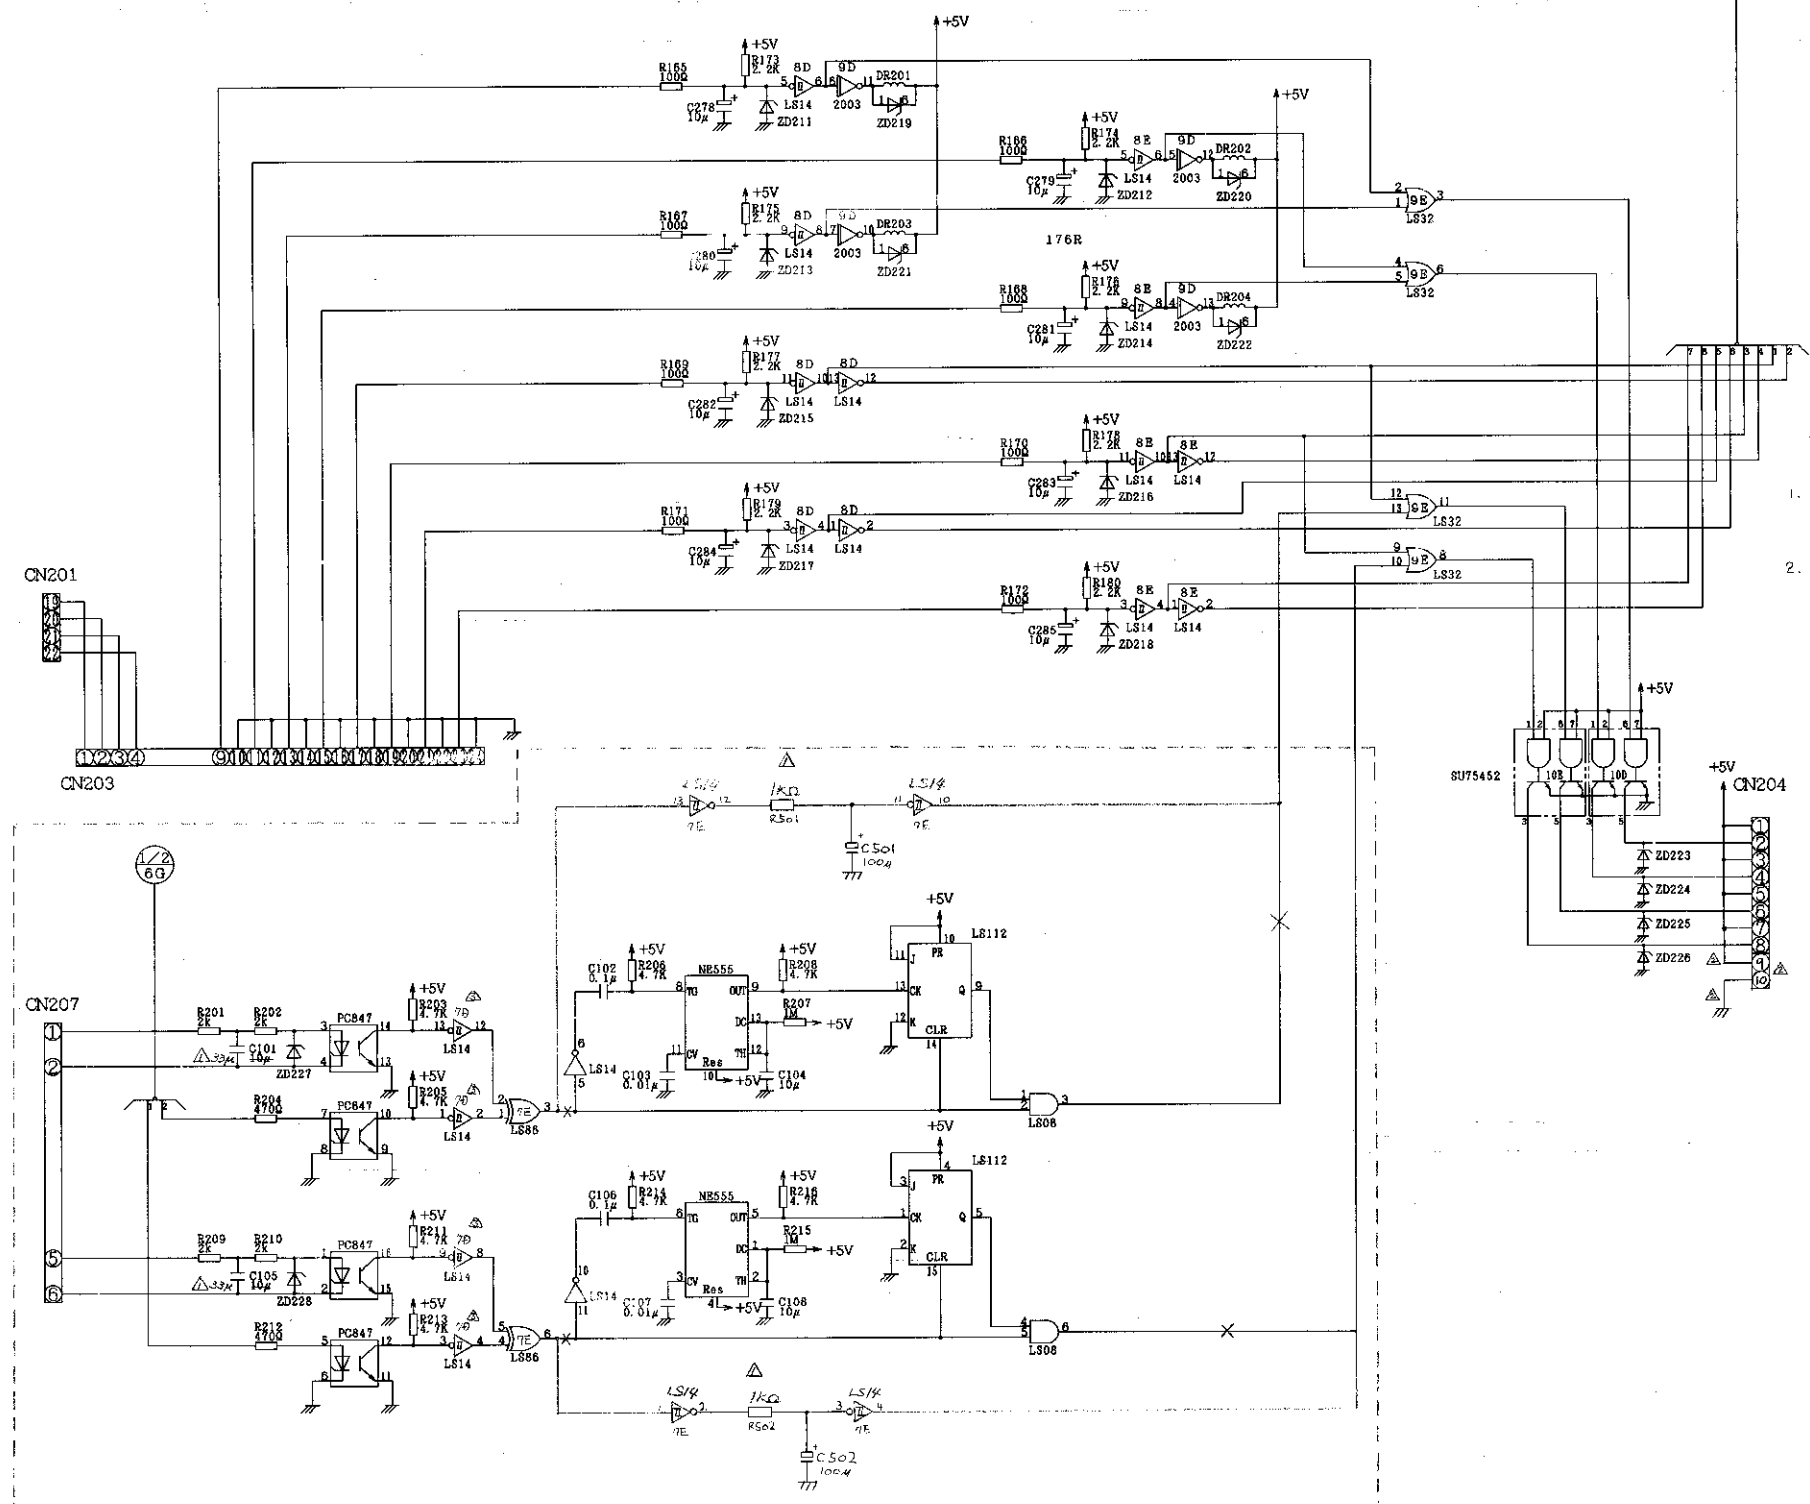


注記
1. 日作業時 9E-13 間 short
9-10 間
2. 日作業時 [] 内の部品は取付けない。


部品名	部品番号	数量	単位	備考
ヒータセイギョカイロス	76.6.12	1	個	
ヒータセイギョカイロス	76.6.12	1	個	
ヒータセイギョカイロス	76.6.12	1	個	

Q	LY	A	SYMBOL	PART NAME	TYPE	MANUFACTURE
12	12	1B, 1C, 2A, 2B, 2C, 3A, 3B, 3C, 4A, 4B, 4C, 5C	OP-AMP	HA17458PS	HITACHI	
2	2	5A, 6A	ANALOG SW	AFD5201C	NRC	
2	2	7B, 8D, 8E (1E, 7D)	TTL IC	HD74LS14P	HITACHI	
1	1	9B	TTL IC	HD74LS32	HITACHI	
2	2	10D, 10E	TTL IC	SN75452BP	TEXAS	
1	1	7D	TTL IC	HD74LS86	HITACHI	
1	1	6D	TTL IC	LS112	HITACHI	
1	1	7A	TTL IC	LS08	HITACHI	
1	1	6B	TRIMMER IC	NE555	T.I	
1	1	7B	PHOTOCAPRA	PC847	SHARP	
1	1	9D	DRIVER	ULN2003A	TEXAS	
1	1	RE01	REGULATOR	HA17805P	HITACHI	
1	1	TR201	TRANSISTOR	2SC1212AB	HITACHI	
1	1	ZD210	ZENER DIODE	182192	NEC	
16	16	ZD211-228	ZENER DIODE	RD6AL	NRC	
6	6	ZD203-208	ZENER DIODE	AW01-06	HITACHI	
2	2	ZD201, 202	ZENER DIODE	AW01-18	HITACHI	
2	2	ZD227, 228	ZENER DIODE	AW01-30	HITACHI	
8	8	VR201-208	TRIMMER	3206X-1-102	BOURNS	
8	8	R155-172	RESISTOR	LF1/4 100QF	TAMA	
8	8	R1, 11, 31, 41, 61, 80, 99, 118	RESISTOR	LF1/4 150QF	TAMA	
2	2	R204, 212	RESISTOR	LF1/4 470QF	TAMA	
6	6	R15, 45, 65, 84, 103, 122	RESISTOR	LF1/4 510QF	TAMA	
6	6	R30, 60, 79, 98, 117, 136	RESISTOR	LF1/4 450QF	TAMA	
12	12	R3, 23, 43, 58, 72, 91, 86, 110, 115	RESISTOR	LF1/4 820QF	TAMA	
12	12	R13, 134, 135, 136	RESISTOR	LF1/4 1KQF	TAMA	
12	12	R1, 11, 31, 41, 61, 80, 99, 118	RESISTOR	LF1/4 1.5KQF	TAMA	
8	8	R21, 22, 51, 52, 71, 90, 109, 128	RESISTOR	LF1/4 1.8KQF	TAMA	
32	32	R4-9, 10-19, 20-39, 40-49, 68-69, 85-88	RESISTOR	LF1/4 2KQF	TAMA	
9	9	R159, 173-180	RESISTOR	LF1/4 2.2KQF	TAMA	
1	1	R158, 203, 205, 206, 208, 211, 213, 214, 216	RESISTOR	LF1/4 4.7KQF	TAMA	
1	1	R160	RESISTOR	LF1/4 10KQF	TAMA	
6	6	R27, 57, 76, 95, 114, 133	RESISTOR	LF1/4 12KQF	TAMA	
1	1	R157	RESISTOR	LF1/4 15KQF	TAMA	
6	6	R29, 59, 78, 97, 116, 135	RESISTOR	LF1/4 100KQF	TAMA	
6	6	R24, 54, 73, 92, 111, 130	RESISTOR	LF1/4 150KQF	TAMA	
2	2	R207, 215	RESISTOR	LF1/4 1MOP	TAMA	
4	4	R161-184	RESISTOR	RSP2B 570QJ	KOA	
1	1	R200	RESISTOR	RSP2B 470QJ	KOA	
4	4	R201, 202, 209, 210	RESISTOR	RSP1B 2KQJ	KOA	
2	2	R10, 40	RESISTOR	RD25U 10KQJ	KOA	
6	6	R20, 50, 70, 89, 108, 127	RESISTOR	RE55YQ 470KQF	SUSUMU	
34	34	C203-230, 232-237, 109, 110, 111	CAPACITOR	BP122-801F155225	MURATA	
1	1	C127	CAPACITOR	508N-5002-102KB	NCC	
2	2	C103, 107	CAPACITOR	508N-5002-103KB	NCC	
2	2	C102, 106	CAPACITOR	533M-5302-104KA	NCC	
8	8	C244, 248, 252, 256, 260, 264, 268, 272	CAPACITOR	533M-5002-105K	NCC	
3	3	C278-285, 101, 104, 165, 109	CAPACITOR	UV8-1H-100MCA	NICHICON	
24	24	C281-283, 113-121, 245-247, 241-243, 245-247	CAPACITOR	UV8-1E-470MCA	NICHICON	
3	3	CN204, 205, 206, 207	CONNECTOR	HIF-30A-10PA-2.54D8A	HIROSE	
1	1	CN202	CONNECTOR	HIF-30A-18PA-2.54D8A	HIROSE	
2	2	CN201, 203	CONNECTOR	HIF-30A-28PA-2.54D8A	HIROSE	
4	4	DR201-204	RELAY	LAR2 (5V)	OMRON	
31	31	GND, TP1-11, 13-30, 33	CHECK PIN	00292-41	KYOUSHIN	
12	12	LD201-212	LED	GL-3HY1	SHARP	
2	2	L201, 202	INDUCTOR	SP-T10-50M	TDK	
2	2	C101, 105	CAPACITOR	15V-1H-33MCA 17K	NICHICON	
2	2	C501, 502	CAPACITOR	UV8-1H-101MCA	NICHICON	
12	12	R25, 26, 55, 56, 74, 75, 76, 112, 113, 114	RESISTOR	LF1/4 3.3K F-TP	TAMA	
2	2	R3, 33	RESISTOR	LF1/4 680 F-4F	TAMA	

Heater Control Circuit

製品 76.6.12 部品名 ヒータセイギョカイロス
 数量 76.6.12 図番 NTS
 承認 76.6.12 株式会社 日立メディコ
 図番 K131634


製図	(外) 詳細	95.12.08	投影法		名称 GC-CTLカイト
審査	キム	95.12.08	尺度		
承認	キム	95.12.08	NTS		
株式会社 日立メディコ					図番 KA247508
					校番 4

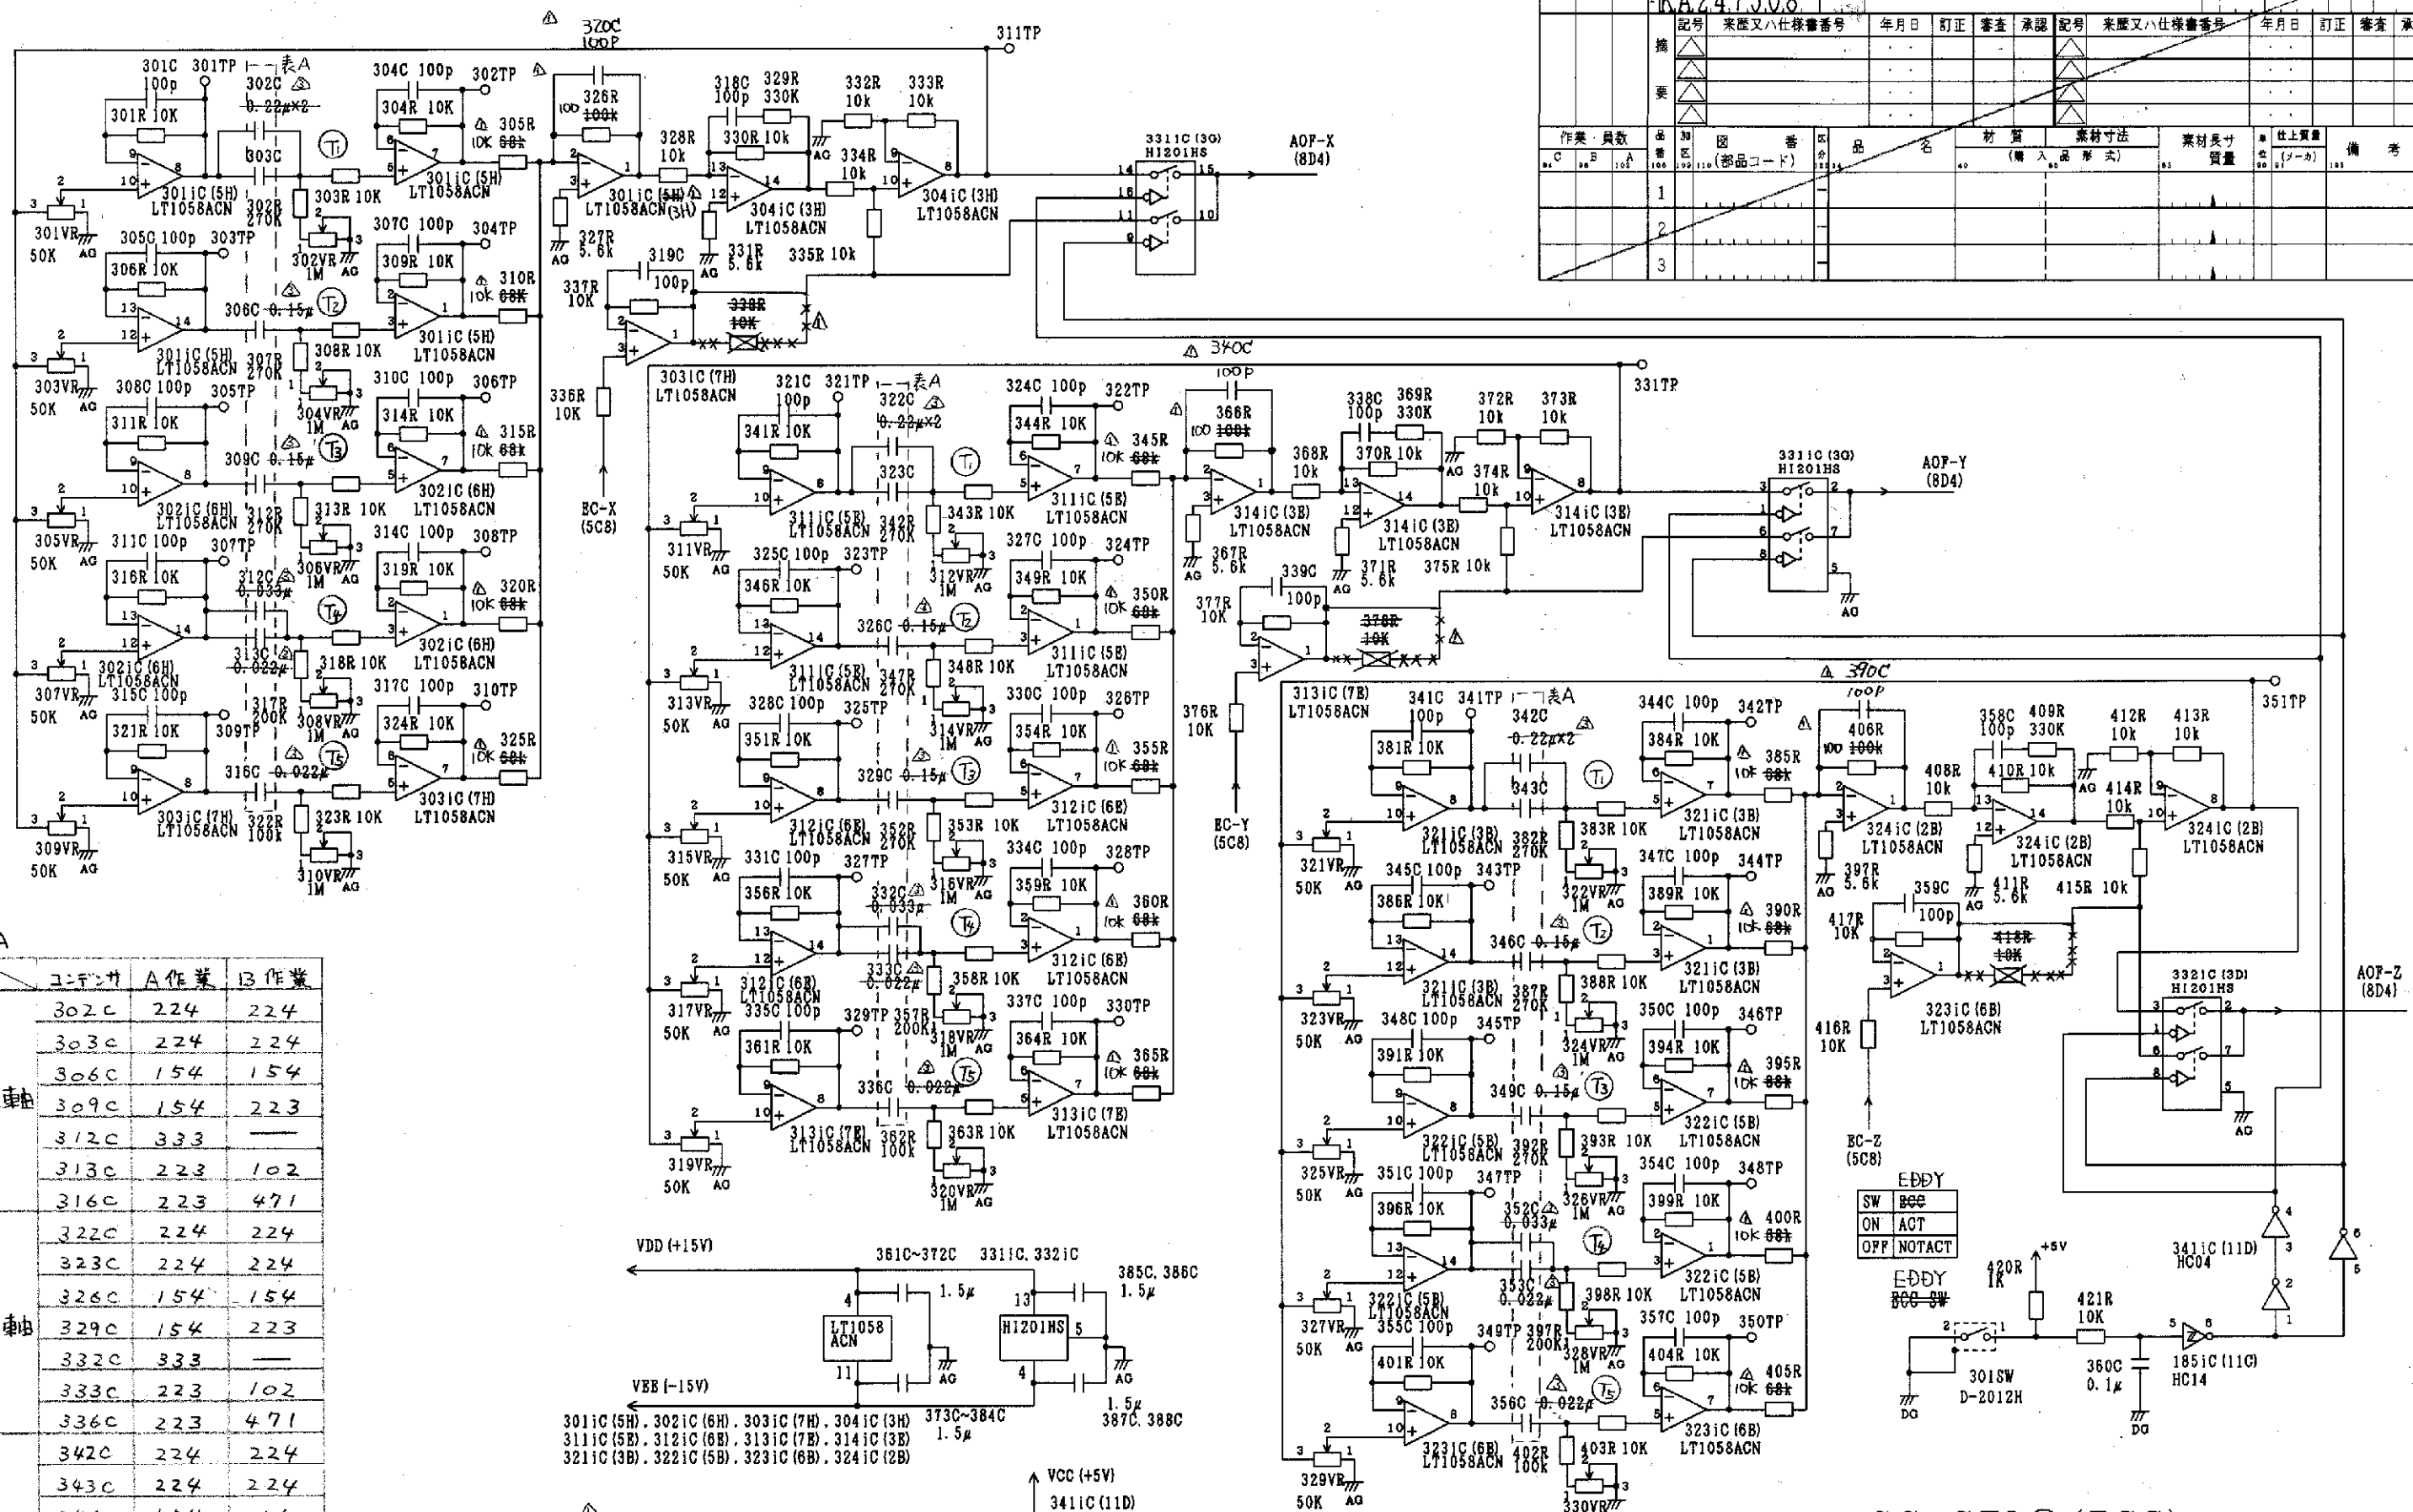


	コンサ	A作業	B作業
X軸	302C	224	224
	303C	224	224
	306C	154	154
	309C	154	223
	312C	333	—
	313C	223	102
Y軸	316C	223	471
	322C	224	224
	323C	224	224
	326C	154	154
	329C	154	223
	332C	333	—
Z軸	333C	223	102
	336C	223	471
	342C	224	224
	343C	224	224
	346C	154	154
	349C	154	223
	352C	333	152
	353C	223	222
	356C	223	152

Item	Range	Gain	
		A Work	B Work
T ₁	118 ~ 558 ms	1%	5%
T ₂	40 ~ 190 ms	1%	5%
T ₃	40 ~ 190 ms	1%	5%
T ₄	13 ~ 56 ms	1%	5%
T ₅	3 ~ 24 ms	1%	5%





図面番号		図面名	設計者	承認者	図面コード	図面サイズ	図面単位
KA247508		GC-CTLカイト	NTS	NTS	7-12-15	7-12-15	7-12-15
作業員数		品名	品番	品名	品番	品名	品番
1		品名	品番	品名	品番	品名	品番
2		品名	品番	品名	品番	品名	品番
3		品名	品番	品名	品番	品名	品番

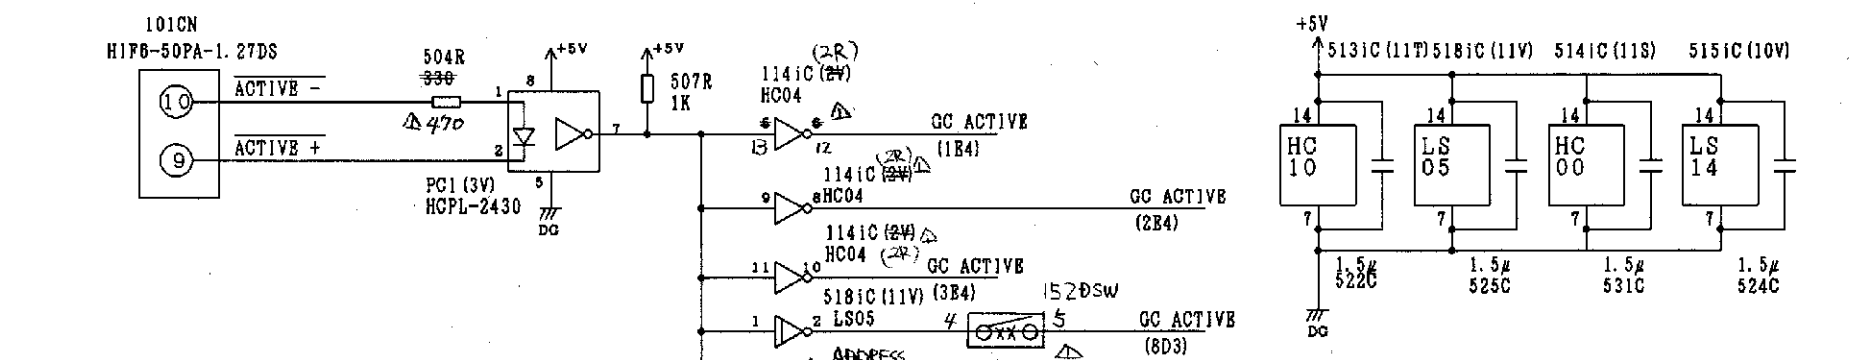

ADDRESS	DAC
14	Xch-DAC A&C
15	Xch-DAC B&D
44	Ych-DAC A&C
45	Ych-DAC B&D
54	Zch-DAC A&C
55	Zch-DAC B&D

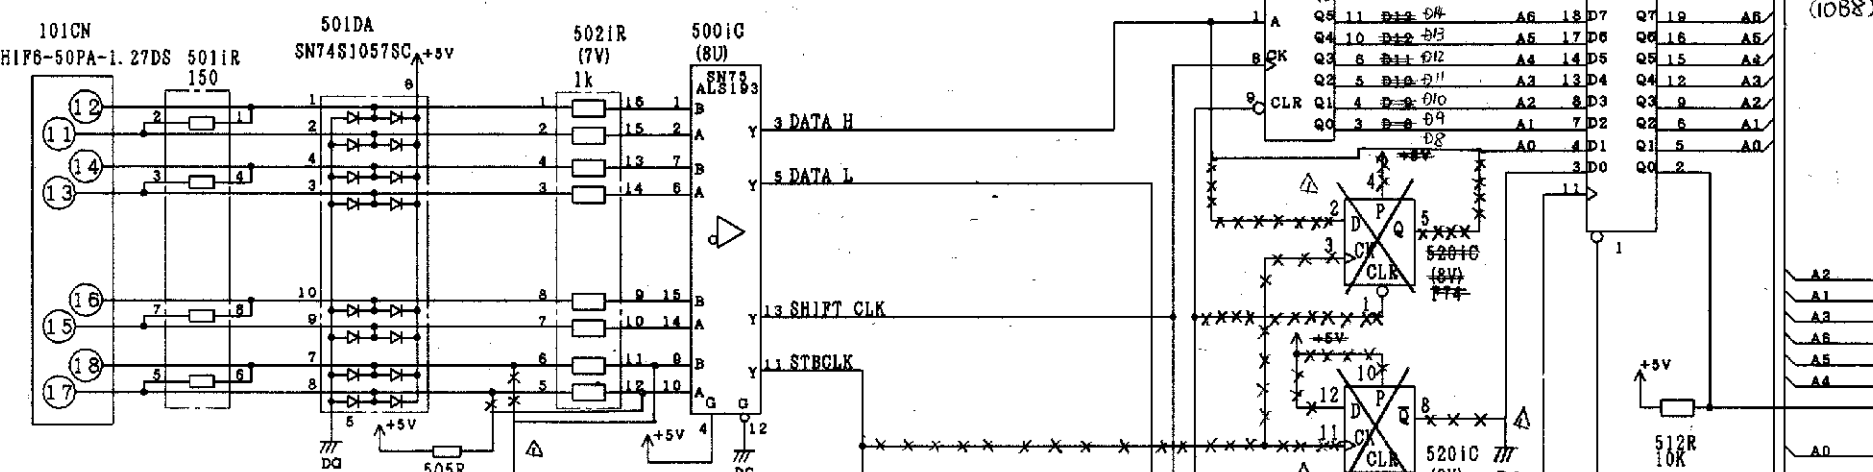

A0	R/W	DS1	DS2	TR	A/B	DAC
1	0	0	0	1	1	A&C
0	0	0	0	0	0	B&D
1	1	1	0	1	1	C
0	1	1	0	0	0	D

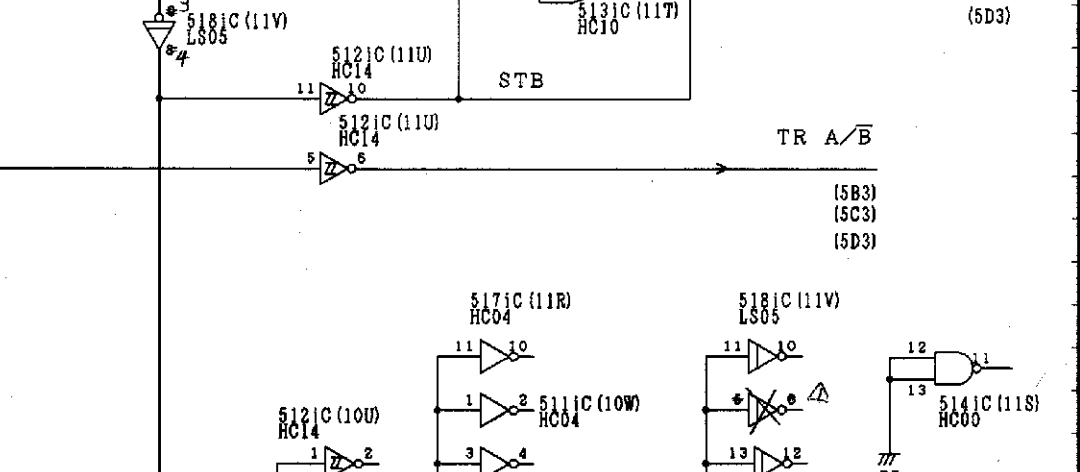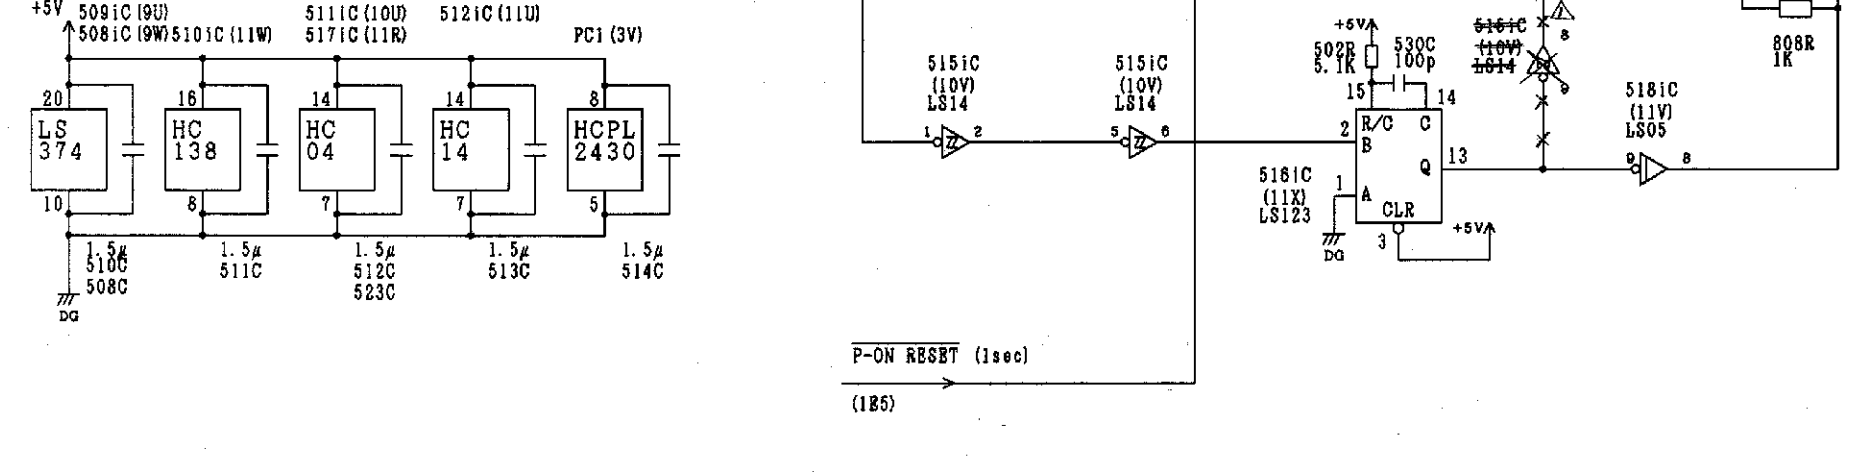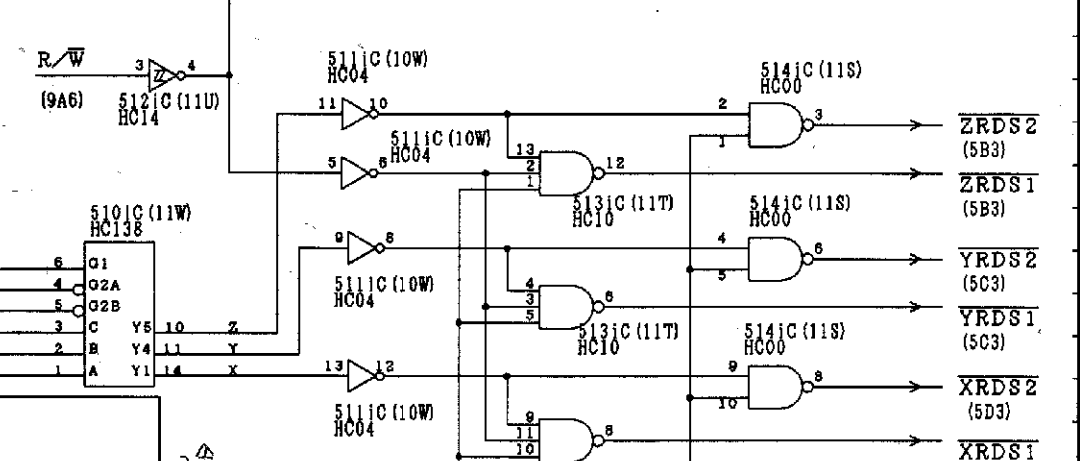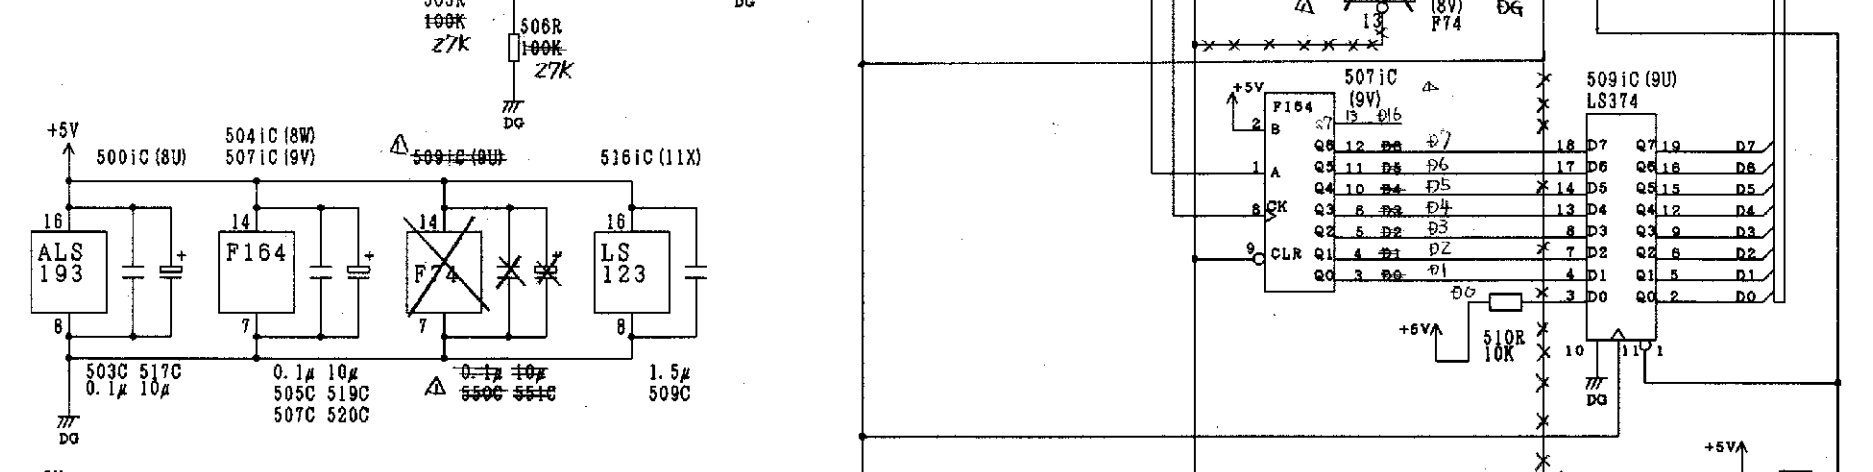




GC-GTL⑦ (GCC)

図面番号: 951208
図面名: GC-CTLカイト
図面コード: NTS
図面サイズ: 7-12-15
図面単位: 7-12-15

株式会社 日立メディコ

KA247508

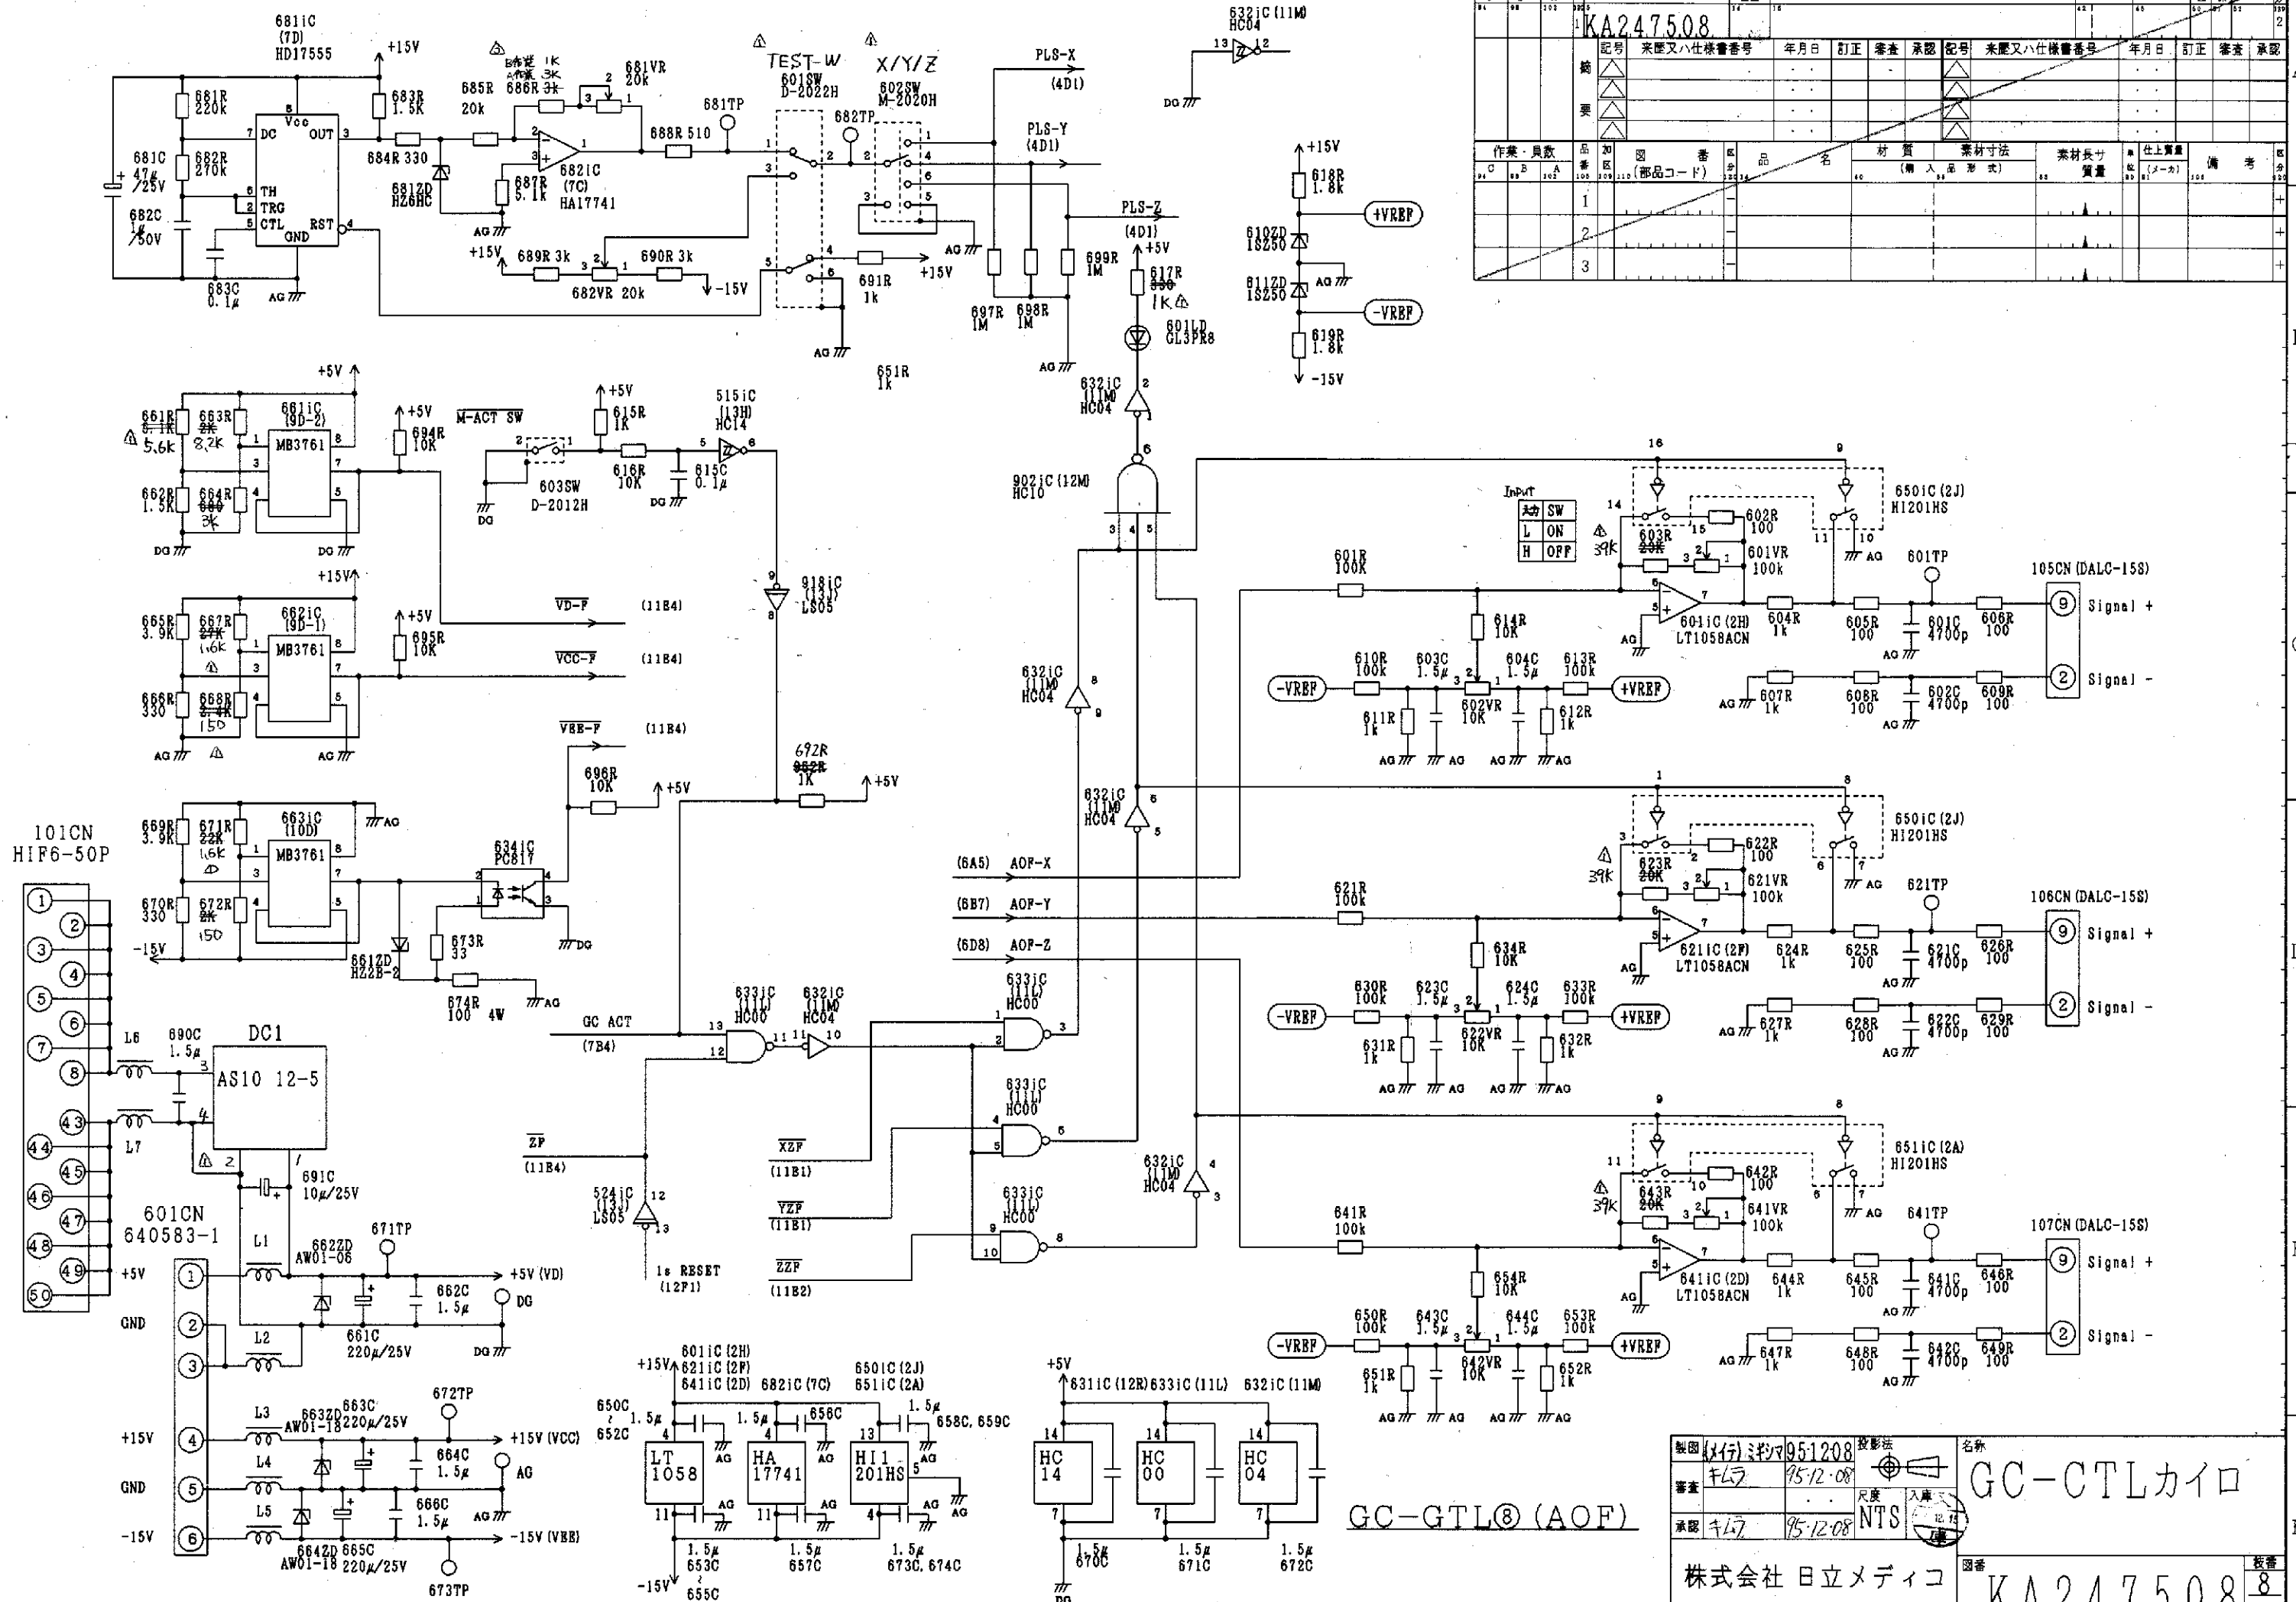

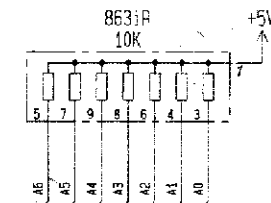[illegible]

枝番
<u>10</u>

D	C	B	A	SYMBOL	PARTS NAME	TYPE	MANUFACTURE	CODE
Δ		1	X	JP501	CN	00-8261-027900-878	ELCO	J8336101
		1		FU151	FUSE	FM03	DAITOU	J821W163
Δ		3	X	JP708, JP711, JP713	CN	00-8261-027900-878	ELCO	J8336101
Δ		2	X	JP910, JP912	↓	↓	↓	↓
		2		L1, L2	COIL	SP-77-50M	TDK	J5110201
		5		L3, L4, L5, L6, L7	↓	SP-T8-308M	↓	J5110201

Δ	4			C823, C825, C316, C336	CAPACITOR	DD108-959SL471J50	MURATA	J1727124
	3			C309, C329, C349	↓	506N-5002-223KB	NCC	J1317109
	3			C306, C326, C346	↓	503N-5002-154K1	↓	J1310014
	2			C313, C333	↓	506N-5002-102KB	↓	J1317101
	1			C353	↓	506N-5002-222KB	↓	J1317103
	2			C352, C356	↓	DB104-63B152K50	↓	J171A074
	3			R697, R690, R693	RESISTOR	LF 1/4 3K ΩF-TP	TAMADENKI	J2317044
	5			R270, R280, R420, R507, R686	↓	LF 1/4 1K ΩF-TP	↓	J2317033

D	C	B	A	SYMBOL	PARTS NAME	TYPE	MANUFACTURE	CODE
Δ		5	5	C158, C150, C178, C180, C188	CAPACITOR	506N-5002-102KB	NCC	J1317109
		1		C220	↓	↓	↓	↓
Δ		5	5	C158, C155, C173, C175, C183	↓	506N-5002-102KB	↓	J1317109
		1		C195	↓	↓	↓	↓
Δ		5	5	C601, C602, C621, C622, C641	↓	506N-5002-472KB	↓	J1317105
		1		C642	↓	↓	↓	↓
		1		C682	↓	553N-5002-105K	↓	J1317130
		3		C312, C332, C352	↓	506N-5002-102KB	↓	J1317010
		5		C313, C316, C333, C336, C353	↓	506N-5002-102KB	↓	J1317109
		1		C356	↓	↓	↓	↓
		5		C306, C309, C326, C328, C346	↓	506N-5002-102KB	↓	J1310014
		1		C349	↓	↓	↓	↓
		5		C302, C303, C322, C323, C342	↓	506N-5002-102KB	↓	J1310015
		1		C343	↓	506N-5002-102KB	↓	↓
		5		C123, C124, C126, C128, C129	↓	245M-1602-100MB	↓	J151W553
		7		C130, C32, C53, C56, C57, C59	↓	↓	↓	↓
		6		C81, C82, C84, C85, C88	↓	↓	↓	↓
Δ		3	3	C517, C519, C520, C521	↓	↓	↓	↓

		2		ZD610, ZD611	DIODE	1S250	NEC	J3149001
		1		ZD662	↓	AW01-06-TP	HITACHI	J3140106
		2		ZD663, ZD664	↓	AW01-18-TP	↓	J3140118
		1		ZD681	↓	HZ2B-2	↓	J3141019
		1		ZD681	↓	HZ5HC	↓	J3149004
		6		D901-D906	↓	16S149HTA	↓	J3127402
		3		D101, D851, D907	↓	182074H	↓	J3129001

		4		DA101, DA111, DA121, DA501	DIODE ARRAYS	SN74S1057SC	TI	J3190801
		1		DA901	↓	SN74S1057SC	↓	↓
		1		DA151	↓	μPA54HA	NEC	J3191501
		1		DA152	↓	μPA64HA	↓	J3191502

		13		LD601, LD901-LD912	LED	GL3PR8	SHARP	J3761417
		15		D801-8015	↓	GL3HY8	↓	J3761419

		5		DSW801, DSW851-DSW853	SW	DSS-7-08	FUJISOKU	J6890304
		2		DSW801, DSW152	↓	DSS-7-04	↓	J6890303
		1		SW801	↓	D-2022H	NIKKAI	J6111308
		1		SW802	↓	M-2020H	↓	J6111114
		4		SW151, SW161, SW301, SW803	↓	D-2012H	↓	J6111306
		1		SW802	↓	↓	↓	↓
		2		SW801, SW901	↓	APR-1P-6M-10	FUJISOKU	J641A014
		3		SW801, SW902, SW903	↓	APR1D-2M3-10	↓	J611A003

		3		CN105-CN107	CN	DALC-15315F-1308	JAE	J833A155
		1		CN902	↓	HIF3BA-34PA-2.54DS	HIROSE	J8334606
		1		CN901	↓	HIF3BA-26PA-2.54DS	↓	J8334503
		1		CN101	↓	HIF6-50PA-1.27DS	HIROSE	J8334543
		1		CN601	↓	B40583-1	AMP	J8330731

		4		JP910, JP711, JP712, JP713	JP	00-8261-023213-854	ELCO	J8336102
		3		JP501, JP502, JP503, JP508	JP	00-8261-023213-854	ELCO	J8336102
		18		TP102, TP103, TP104, TP105	TP	60809-2	AMP	J8390403
		10		TP602-10-DS	↓	↓	↓	↓
		22		TP341-TP351, TP321-TP331	TP	00292-41	KYOUSHIN	J8361921
		4		TP601, TP622, TP642, TP674	↓	↓	↓	↓
		3		TP675, TP681, TP682	↓	↓	↓	↓
		6		TP901-TP903, TP971-TP973	↓	↓	↓	↓
		10		TP910-TP914, TP151-TP180	↓	↓	↓	↓
		4		TP101, TP121, TP131, TP521	↓	↓	↓	↓
		14		TP190-TP193, TP301-TP311	↓	↓	↓	↓
		4		TP641, TP100, TP120, TP130	↓	↓	↓	↓

図面マスタ CA01

図番 KA247508

設計担当 K13J

記号 変更又ハ仕様番号 年月日 訂正 審査 承認 記号 変更又ハ仕様番号 年月日 訂正 審査 承認

作業員数 品名 図番 部品名 材質 素材寸法 素材長寸 仕上質量 備考

1

D	C	B	A	SYMBOL	PARTS NAME	TYPE	MANUFACTURE	CODE
Δ		2	X	C823, C825	CAPACITOR	DD108-959SL471J50	MURATA	J1727124
		3		C802, C820, C824	↓	SR245C102M-B6	ROHM	J1711607
Δ		9		C144-C149, C139, C140, C142	↓	SR245P104ZB6	↓	J1711704
		9		C112-C117, C205, C206, C360	↓	↓	↓	↓
Δ		7		C107, C108, C110, C503A-C503B	↓	↓	↓	↓
Δ		9		C678, C683, C691, C803	↓	↓	↓	↓
		10		C822, C901-C906, C940-C942	↓	↓	↓	↓
		1		C918, C68, C69, C71, C73-C78	↓	↓	↓	↓
Δ		4		C615, C625, C508, C68	↓	↓	↓	↓
Δ		5		C104, C105, C137, C138, C66	CAPACITOR	DD108-959SL471J50	MURATA	J1727124
		5		C151, C152, C154, C156, C157	↓	↓	↓	↓
		5		C159, C161, C171, C172, C174	↓	↓	↓	↓
		5		C176, C177, C301, C304, C305	↓	↓	↓	↓
		5		C307, C308, C310, C311, C314	↓	↓	↓	↓
		5		C315, C317, C318, C321, C324	↓	↓	↓	↓
		5		C325, C327, C328, C330, C331	↓	↓	↓	↓
		5		C334, C335, C337, C338, C341	↓	↓	↓	↓
		4		C344, C355, C357, C358	↓	↓	↓	↓
		5		C850, C319, C530, C339, C359	↓	↓	↓	↓
		5		C179, C181, C191, C192, C194	↓	↓	↓	↓
		4		C195, C197, C199, C201	↓	↓	↓	↓
		5		C67, C347, C348, C350, C351	↓	↓	↓	↓
Δ		5		C354, C804, C320, C340, C390	↓	↓	↓	↓
		8		C118-C122, C50, C51, C79	↓	KPE122-9617155225	↓	J1717001
Δ		20		C221-C237, C521-C525, C557	↓	↓	↓	↓
Δ		46		C241-C256, C361-C389, C447	↓	↓	↓	↓
Δ		9		C508-C514, C522, C531, C557	↓	↓	↓	↓
		5		C603, C604, C623, C624, C650	↓	↓	↓	↓
		12		C652-C659, C670-C672, C851	↓	↓	↓	↓
		4		C662, C664, C665, C675, C873	↓	↓	↓	↓
		4		C674, C643, C644, C690, C852	↓	↓	↓	↓
Δ		7		C813-C815, C817-C819, C960	↓	↓	↓	↓
		12		C850-C854, C856-C862	↓	↓	↓	↓
Δ		24		C807-C817, C820-C832	↓	↓	↓	↓
Δ		3		C80, C511, C943, C540	↓	↓	↓	↓
		3		C661, C663, C665	CAPACITOR	UVS-1E-221MCA-1TD	NICHICON	J1442001
		1		C681	↓	UVS-1E-470MCA-1TA	↓	J1447131
		1		C821	↓	USA-1H-2R2MCA-1TB	↓	J1447101
		6		C101-C103, C134-C136	↓	USA-1V-100MCA-1TB	↓	J1447104
		5		C63-C65, C691, C106	↓	↓	↓	↓
Δ		4		C819	↓	USA-1H-100MCA-1TB	↓	J1447101
Δ		3		C211-C213	↓	UVS-1H-47MCA-1TB	↓	J1447103
Δ		1		C919	↓	UVS-1E-220MCA	↓	J1447130

GC-GTL④ (LIST2)

製図 (47) 注 75.12.08 投影法 名称


審査 76.2 75.12.08 尺法 入力 75.12.15 GC-CTLカイト

承認 76.2 75.12.08 NTS 75.12.15

株式会社 日立メディコ 図番 KA247508 校審 149

PRINT: PT. 0		DWG No.		TITLE		DSCN. GR.		CLASS. CODE		DWG CODE	
DWG MTR		02		GCCTL2 110Z		K13G		00912			
SYN REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APP'D		DATE	
MSKA-1080		20.12.13		11.9		97.9					
MSKA-1358		22.2.14		11.9		97.9					
APPLICATION											
GROUP & QTY		DWG No. (PT. No.)		NAME OF PARTS		MATERIAL		MATERIAL SIZE		MATERIAL LENGTH OR MASS	
0 1 0				GCCTL2 110Z							

GCW-DATA X-CH

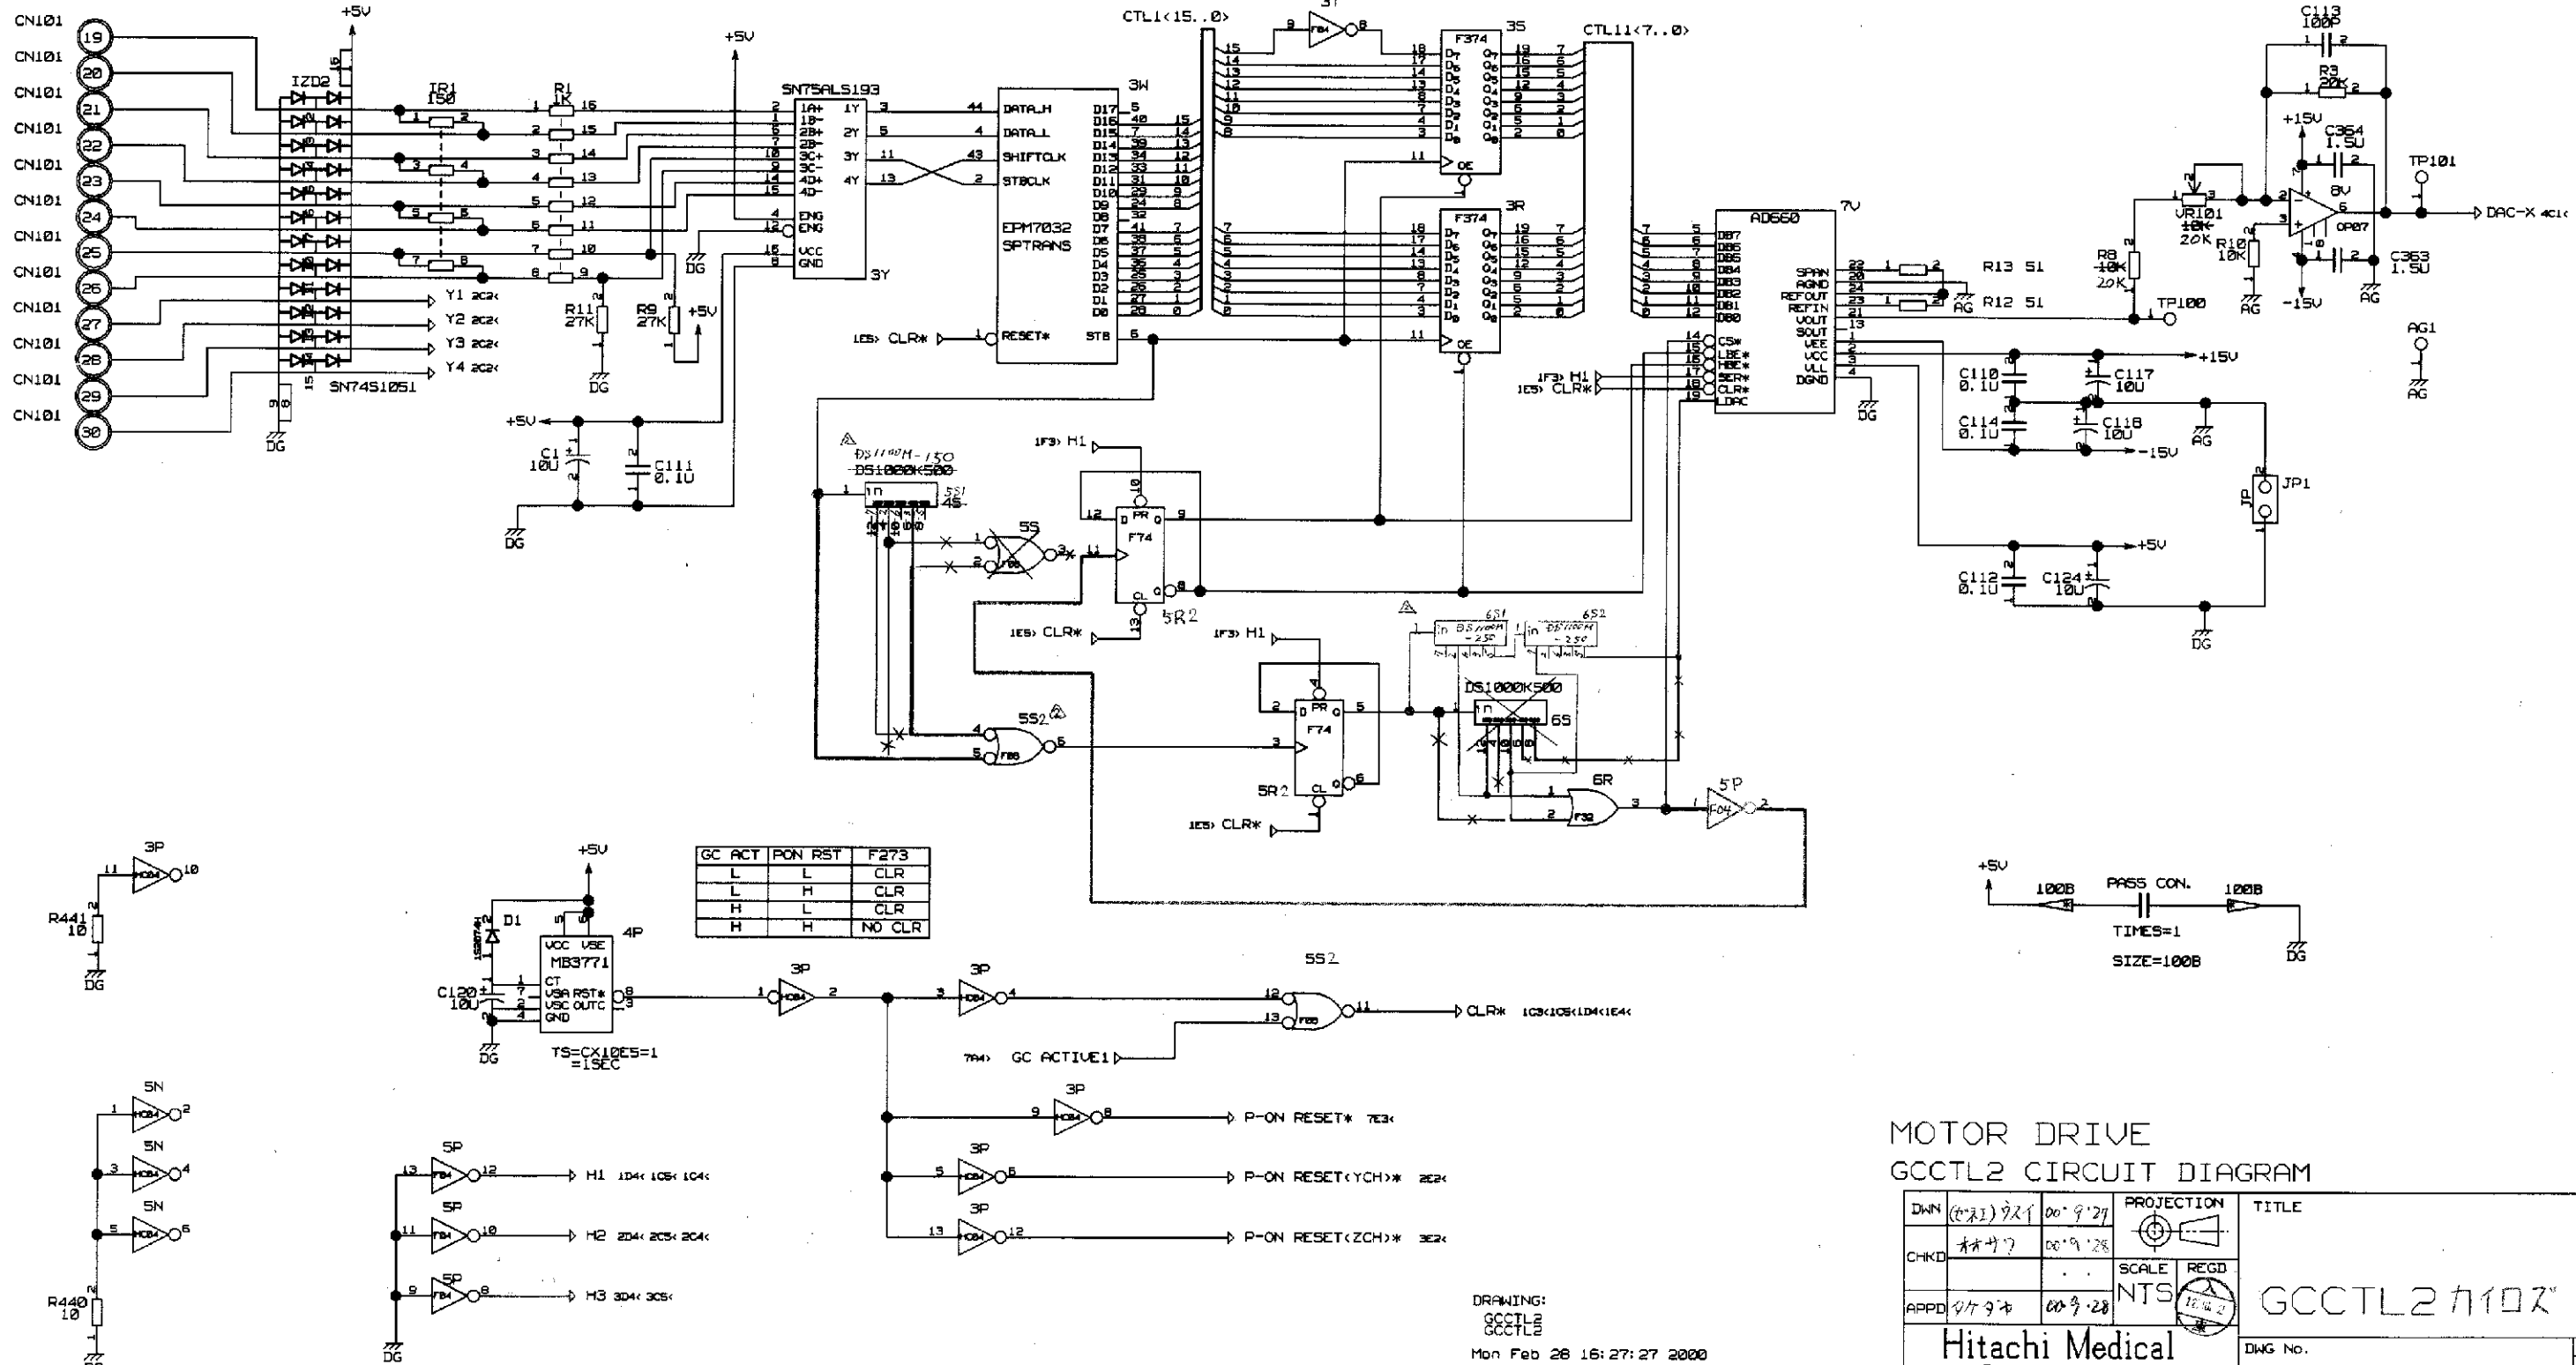


MOTOR DRIVE
GCCTL2 CIRCUIT DIAGRAM

DWN (02.1) 9.2.1		00.9.27		PROJECTION		TITLE	
CHKD 11.9.13		00.9.28		SCALE REGD		GCCTL2 110Z	
APPD 11.9.13		00.9.28		NTS			
Hitachi Medical Corporation		Dwg No.		KB213402		SH. 1/15	

DRAWING:
GCCTL2
GCCTL2
Mon Feb 28 16:27:27 2020

GCW-DATA Y-CH

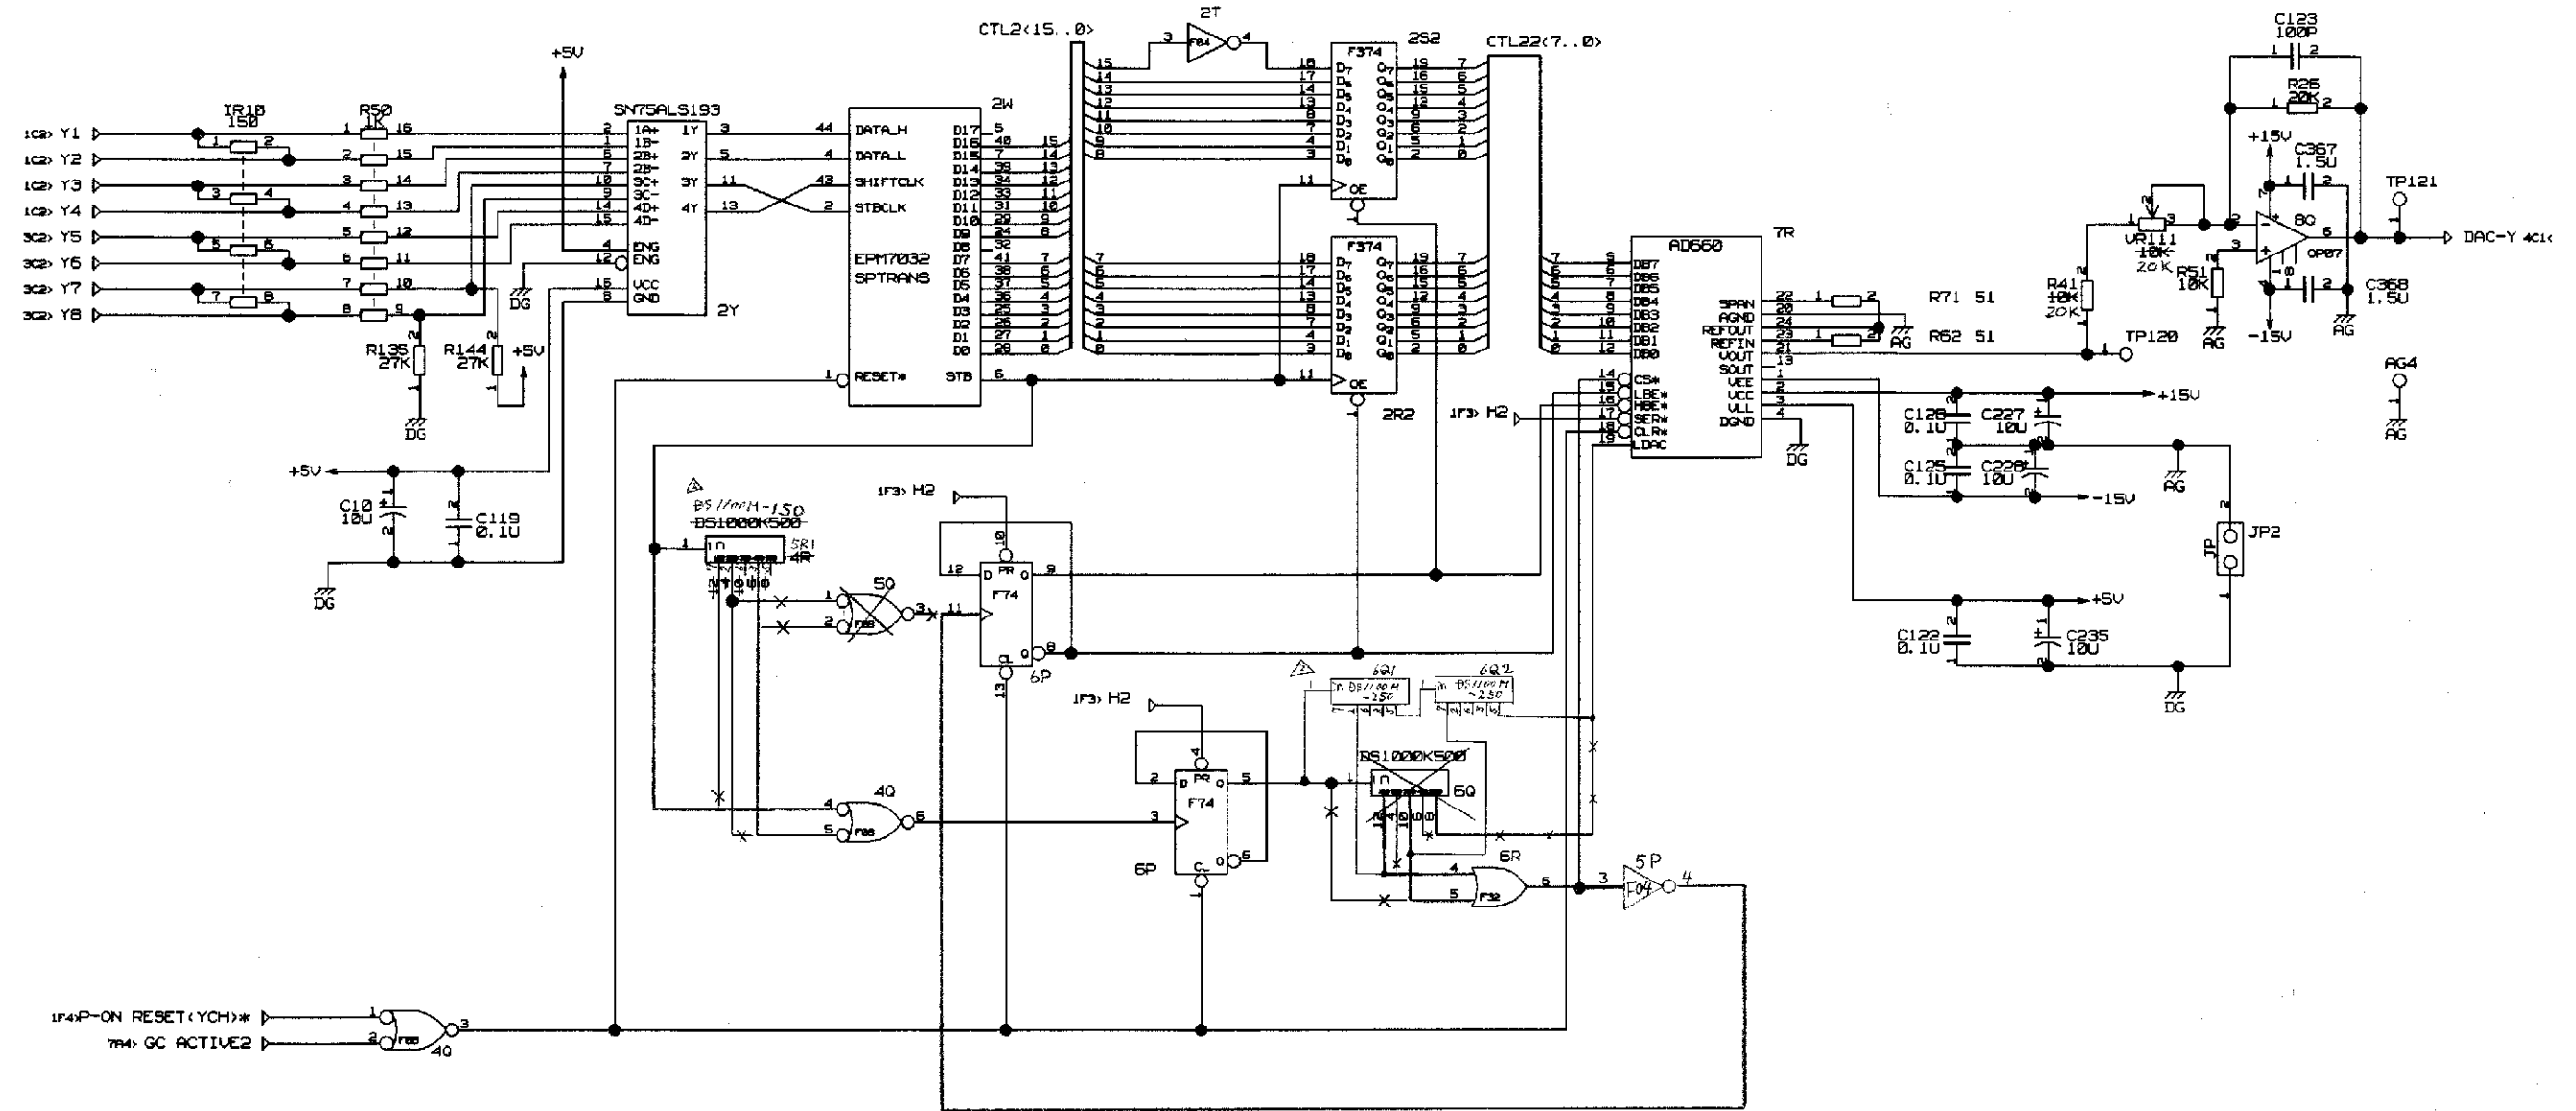

MOTOR DRIVE
GCCTL2 CIRCUIT DIAGRAM


DWG	00.9.27	PROJECTION	TITLE
CHKD	00.9.28	SCALE	REGD
APPD	00.9.28	NTS	GCCTL2 1102
Hitachi Medical Corporation			DWG No. KB213402
			SH. 2

DRAWING:
GCCTL2
GCCTL2
Fri Feb 25 10:49:50 2000

2078128411

SURFACE FIN.		DWG. NTR.	W	1 (CH01)	O		3	2	3	4	5	6	7	A	B
C	B	A	100	100	100	100	100	100	100	100	100	100	100	100	100
1		KB2		1		1		1		1		1		1	
SYN REVISIONS OR ECN No.		DATE		REVDCHECKD		APPD		SYN REVISIONS OR ECN No.		DATE		REVDCHECKD		APPD	
APPLICATION		DATE		REVDCHECKD		APPD		SYN REVISIONS OR ECN No.		DATE		REVDCHECKD		APPD	
GROUP/PT		DNG. No.		NAME OF PARTS		MATERIAL		MATERIAL SIZE		MATERIAL LENGTH OR MASS		REMARKS			
C B A		100 100 100		100 100 100		100 100 100		100 100 100		100 100 100		100 100 100		100 100 100	
0		1		0		0		0		0		0		0	


GCW-DATA Z-CH

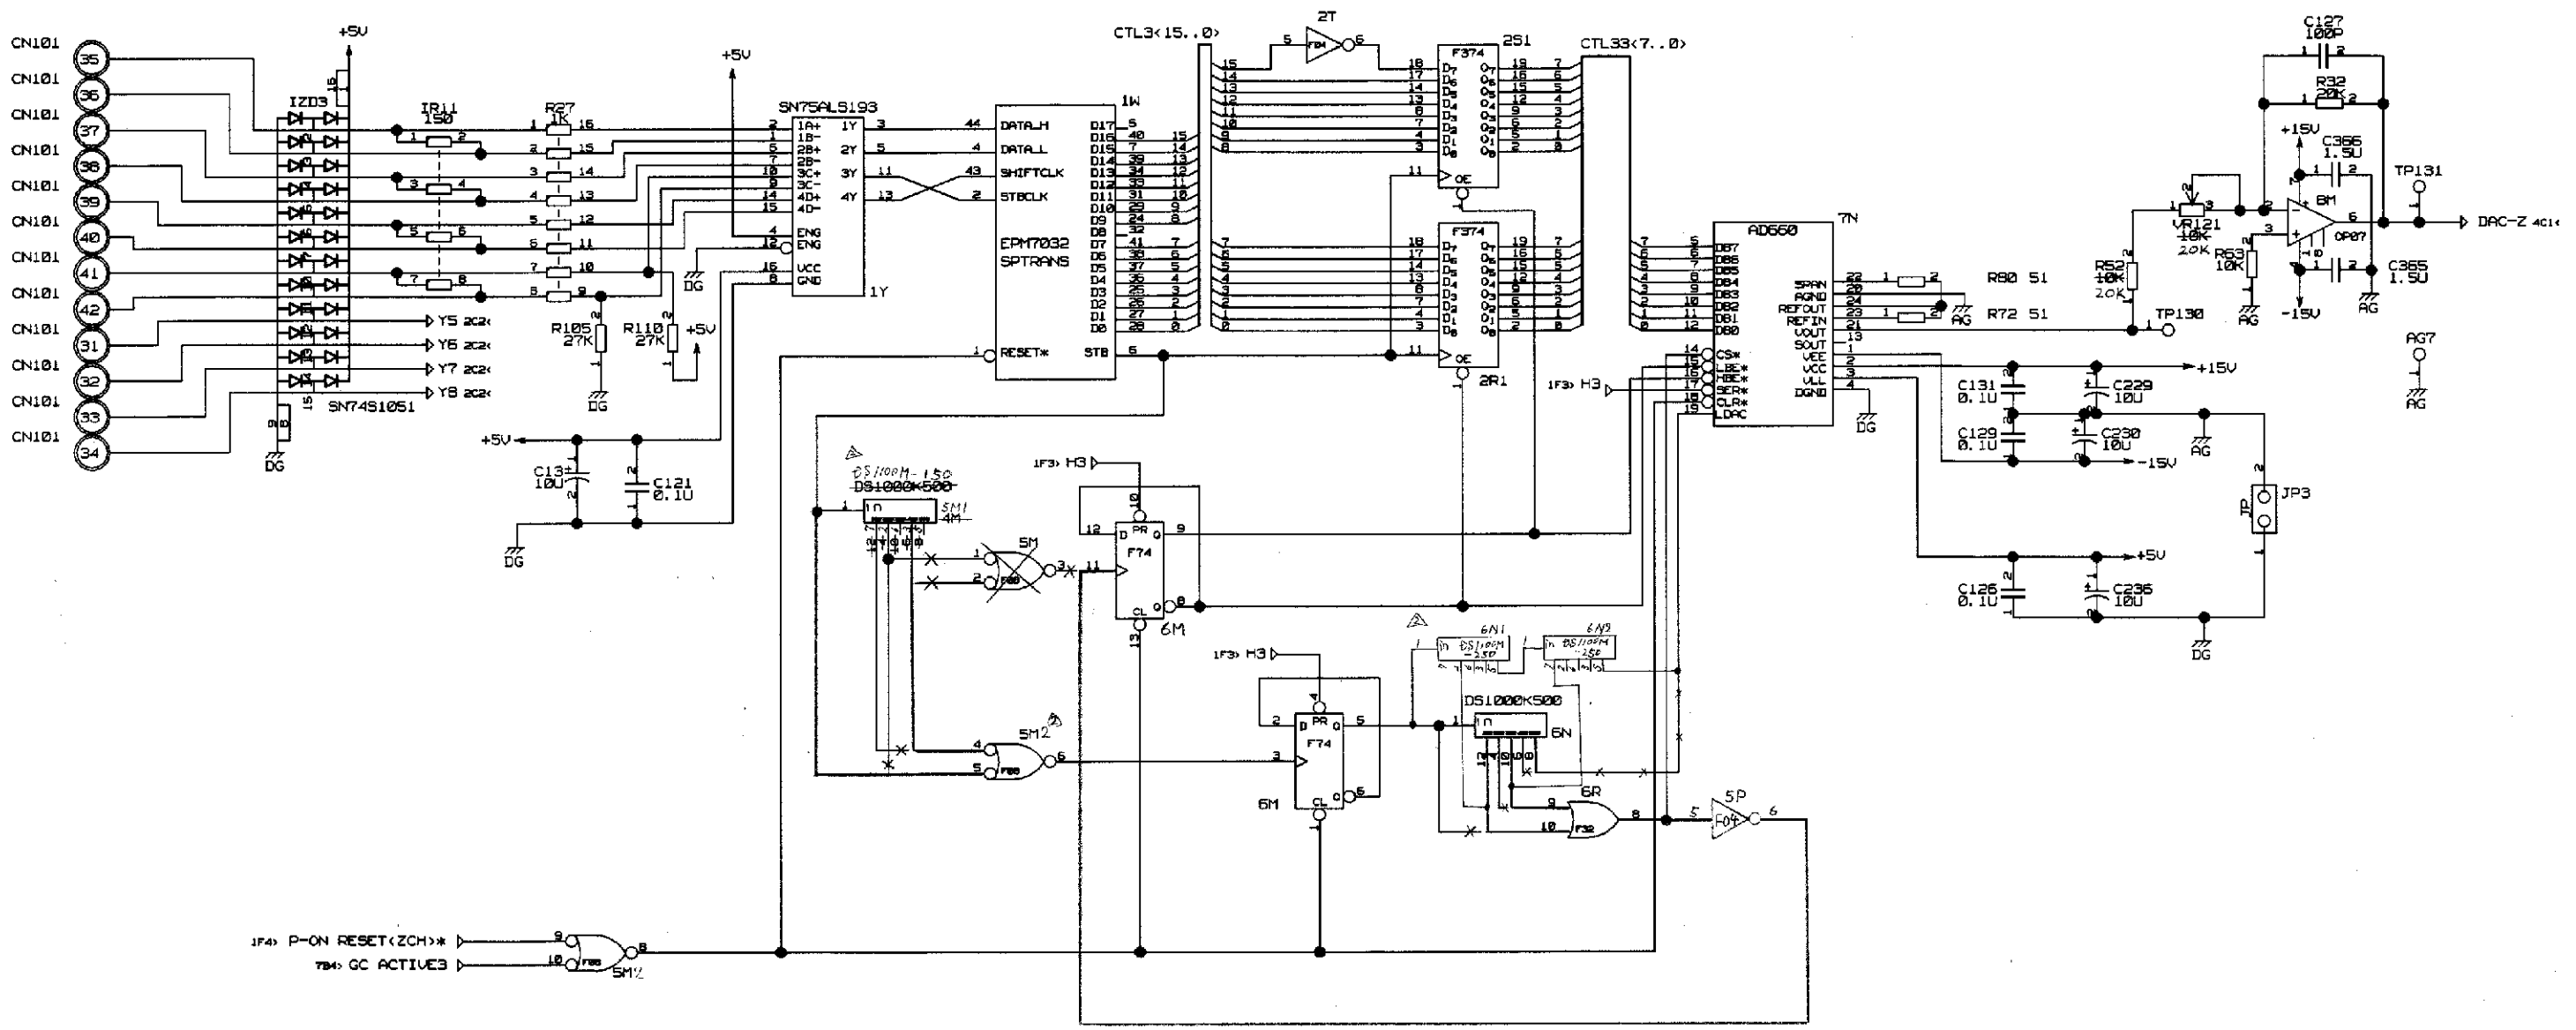


MOTOR DRIVE
GCCTL2 CIRCUIT DIAGRAM

DWN	(0.22) 72.1	00.9.27	PROJECTION	TITLE
CHKD	72.1	00.9.28	SCALE	RECD
APPD	94.9.28	00.9.28	NTS	1:1
Hitachi Medical Corporation				GCCTL2 7102
DNG. No.				KB213402
SH.				3

DRAWING:
GCCTL2
GCCTL2
Mon Feb 26 15:27:42 2000

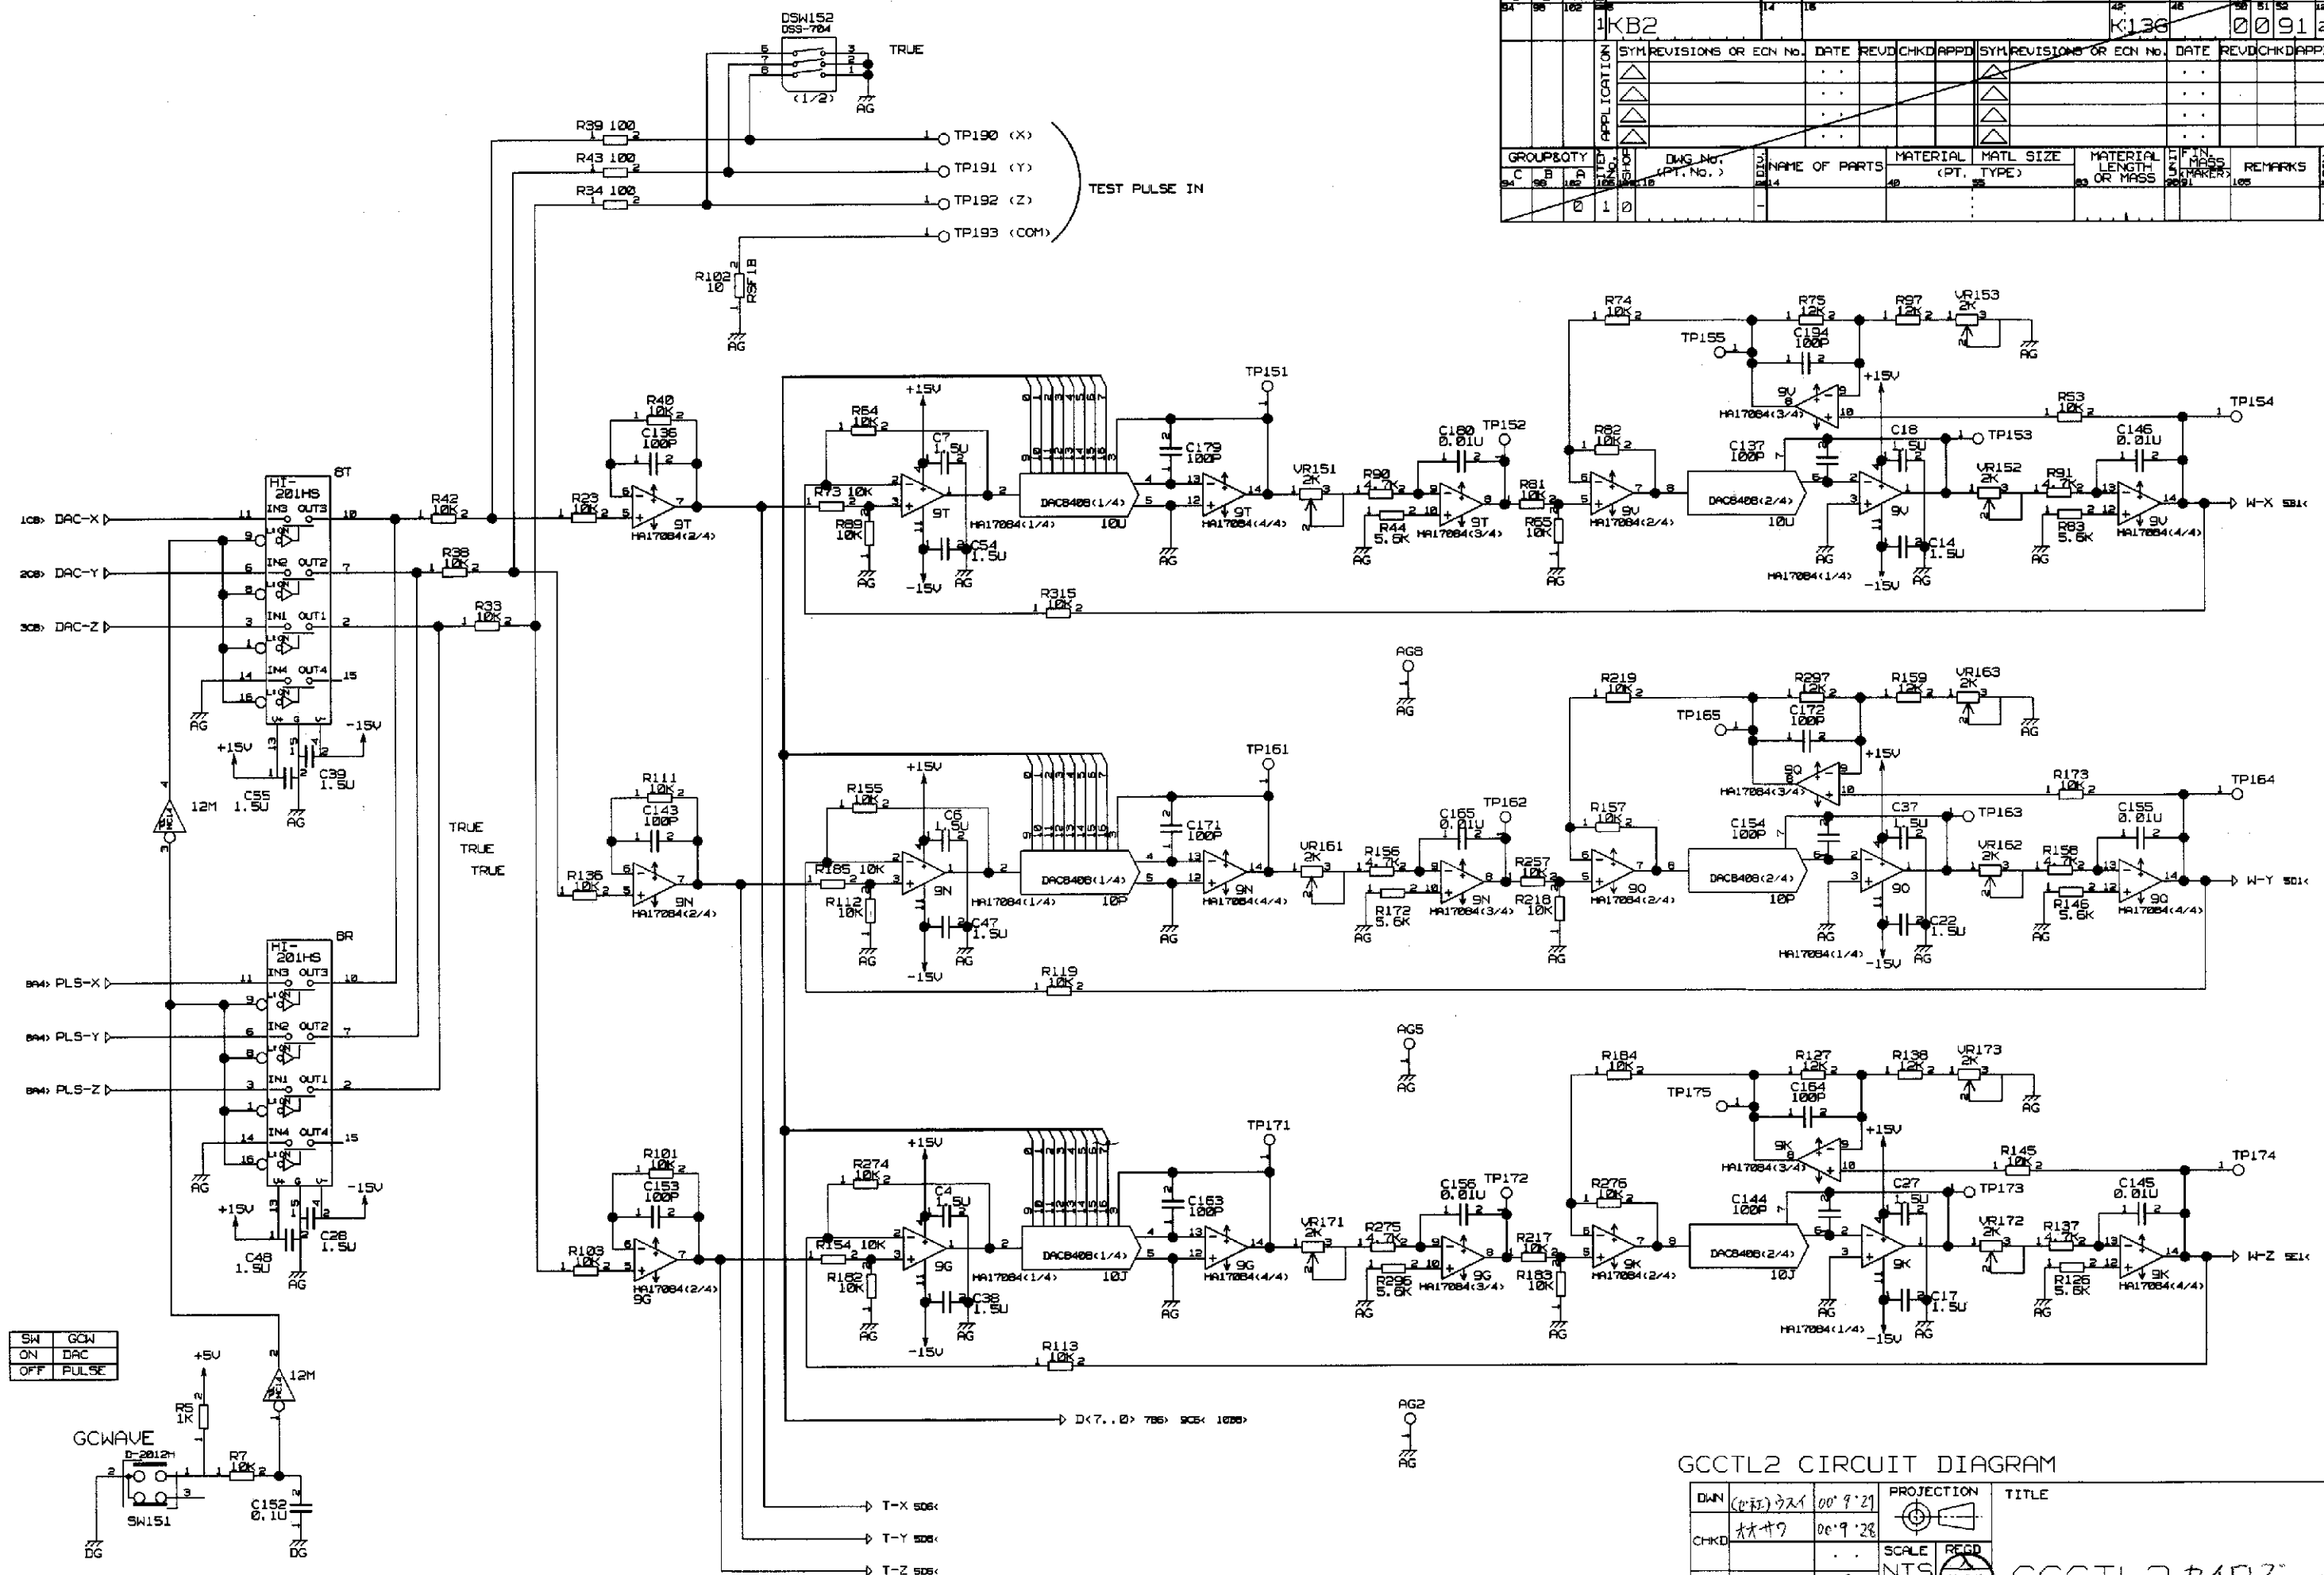
[illegible]

GCCTL2 CIRCUIT DIAGRAM

DWN	(0092) ウスイ	00'9'21	PROJECTION	TITLE
CHKD	木村サヲ	00'9'28		
APPD	タケタナ	00'9'28	SCALE NTS	
			REGD 13.0.2	GCCTL2 カ102
Hitachi Medical Corporation				DWG No. KB213402

DRAWING:
GCCTL2
GCCTL2
Fri Feb 25 10:49:11 2000

SURFACE FIN.			DWG NO.		FINAL REV.		TITLE			DSGN. GR.		CLASS. CODE		Dwg. Code								
C	B	A																				
54	56	162	1KB2		14					K136		00		912								
APPLICATION			SYM REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APPD		SYM REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APPD	
			△		..				△				..				△					
			△		..				△				..				△					
			△		..				△				..				△					
			△		..				△				..				△					
GROUP & QTY			DWG NO. (PT. No.)		NAME OF PARTS		MATERIAL		MATL SIZE (PT. TYPE)		MATERIAL LENGTH OR MASS		FIN. MASS (GRAMS)		REMARKS							
C	B	A																				
54	56	162	0 1 0		-																	

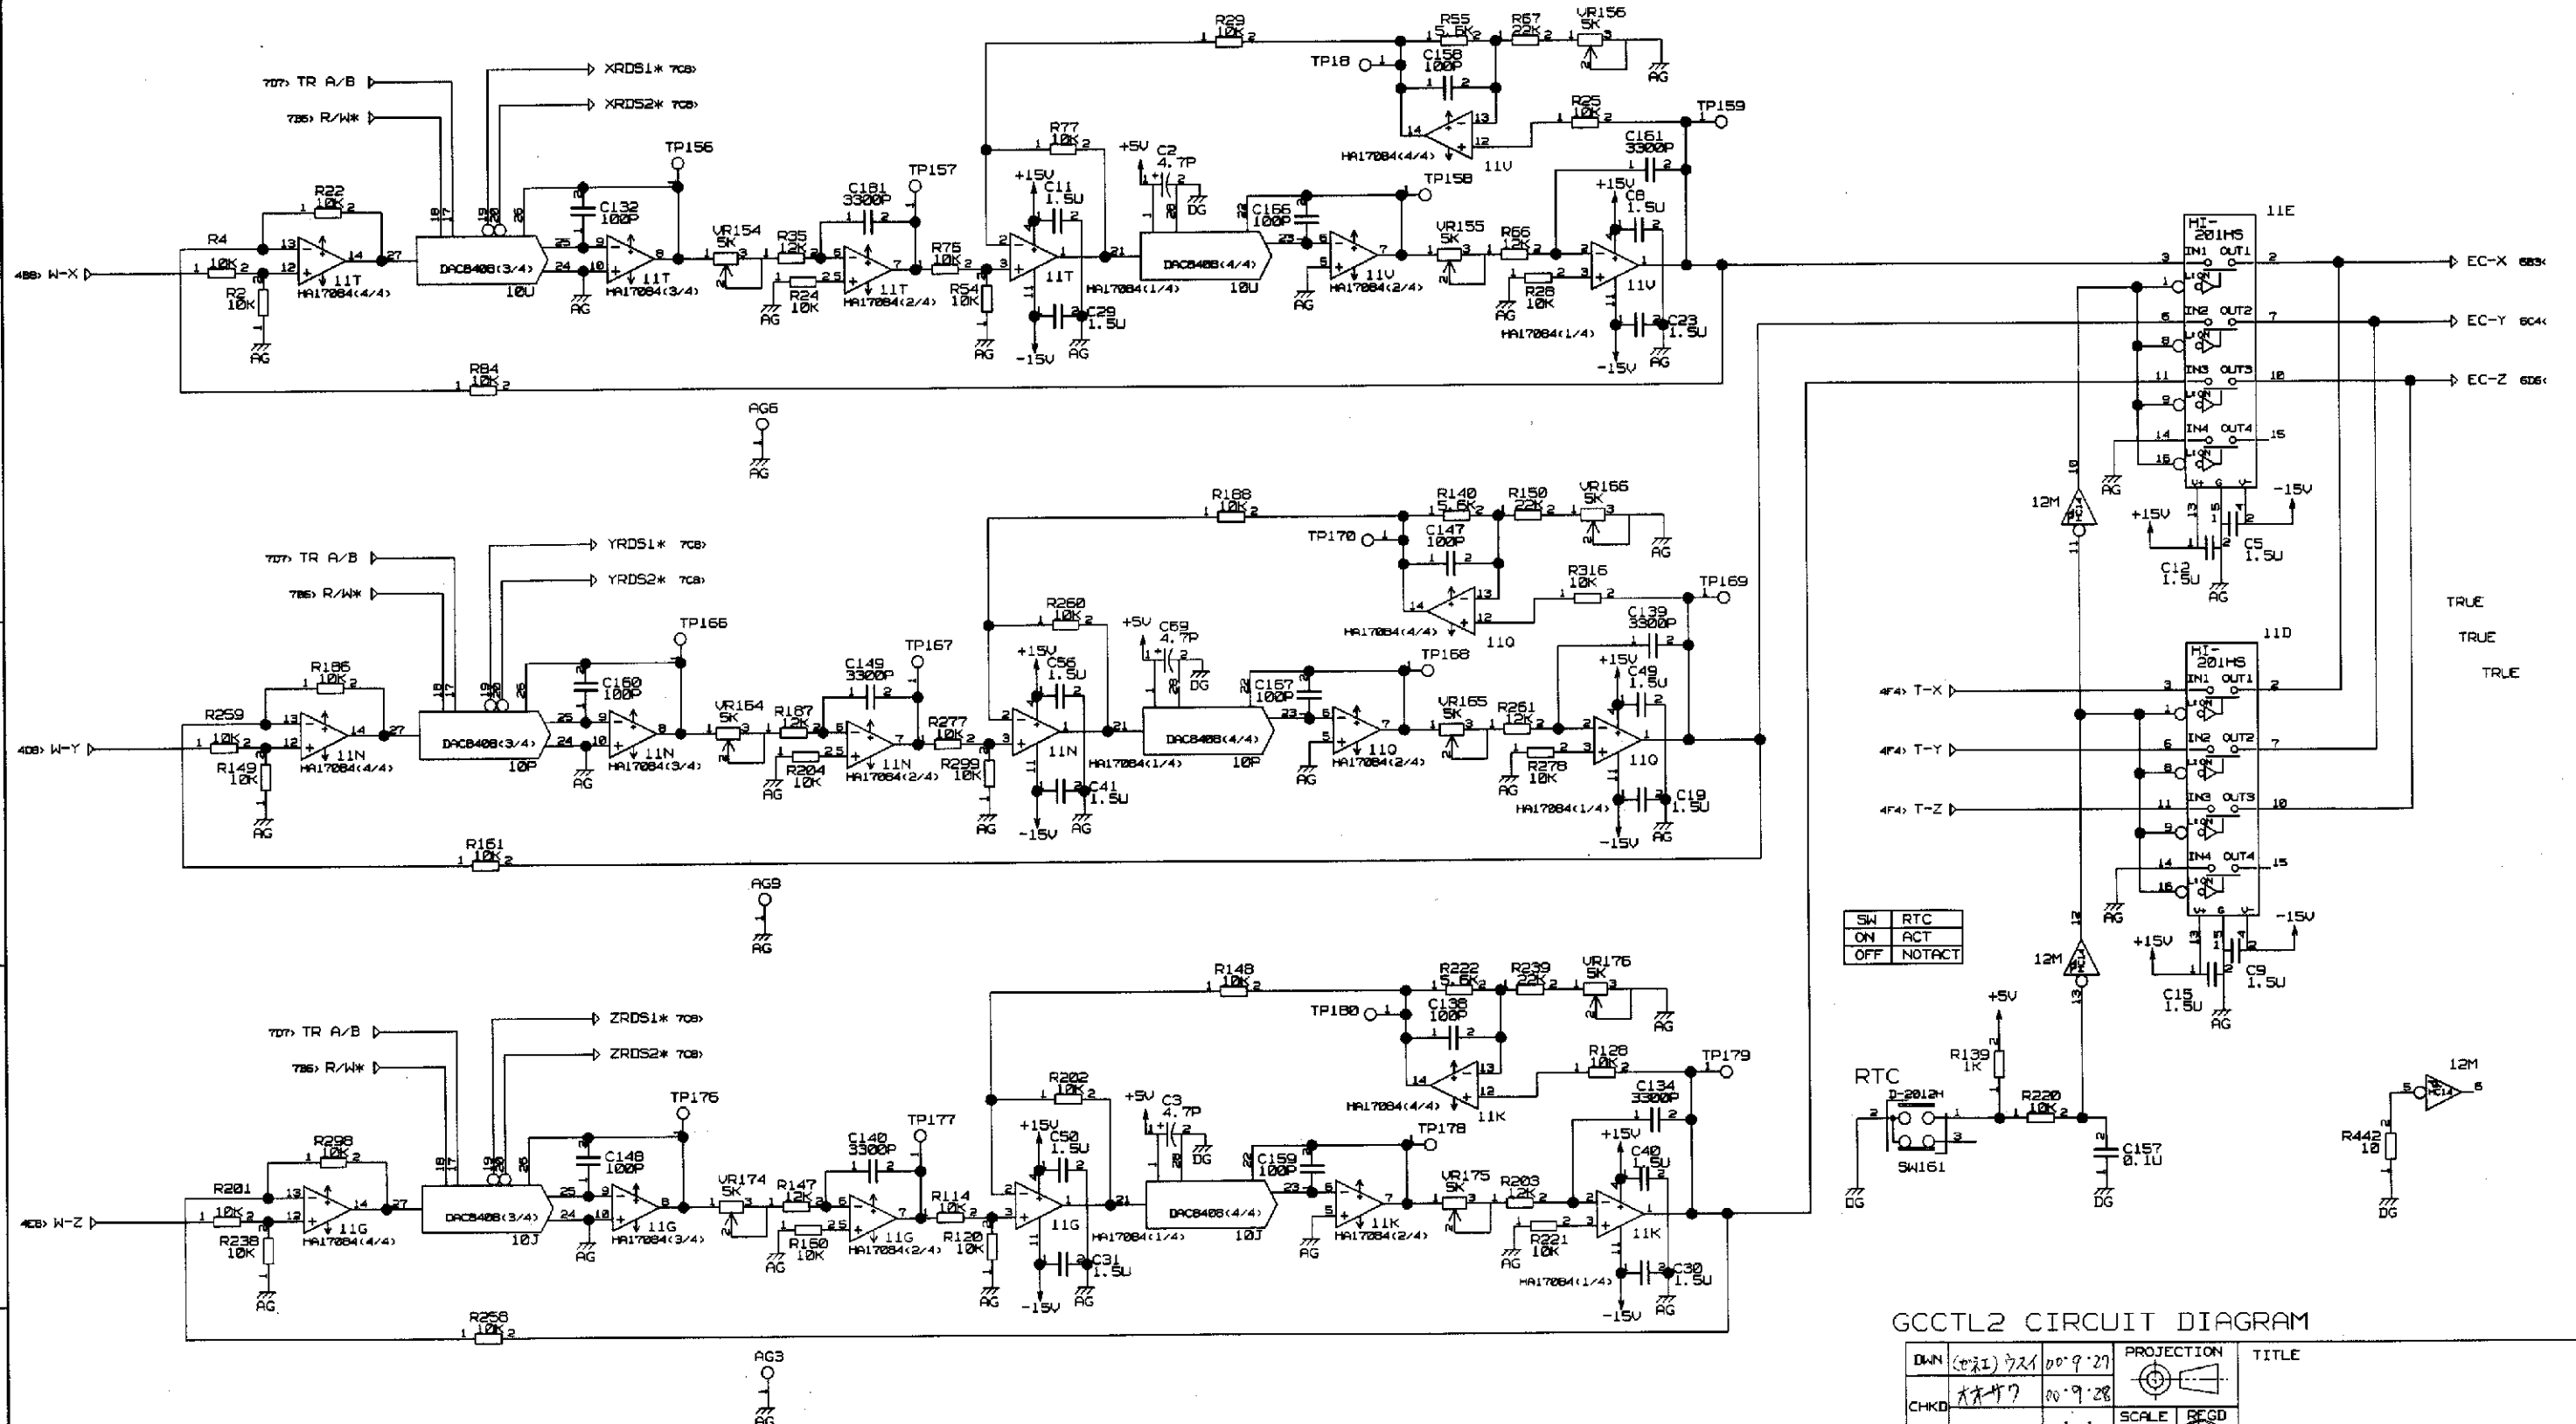


GCCTL2 CIRCUIT DIAGRAM

DWN	(世工) ウスイ	00.9.27	PROJECTION 	TITLE
CHKD	オオサワ	00.9.28		
APPD	タケタチ	00.9.28		
SCALE NTS			RECD 	GCCTL2カ107
Hitachi Medical Corporation				DWG NO. KB213402 SH. 5

DRAWING:
GCCTL2
GCCTL2
Fri Feb 25 10:48:52 2000

DWG MTR		CAB21		5/21/3/4/5/6/7/8	
DWG No.		TITLE		DSGN. GR.	
K136		K136		K136	
SYN REVISIONS OR ECN No.		DATE		REVD CHK D APPD	
SYN REVISIONS OR ECN No.		DATE		REVD CHK D APPD	
GROUP & QTY		DWG No.		NAME OF PARTS	
4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100		MATERIAL		MATERIAL SIZE	
MATERIAL LENGTH		MATERIAL TYPE		MATERIAL MASS	
REMARKS		REMARKS		REMARKS	

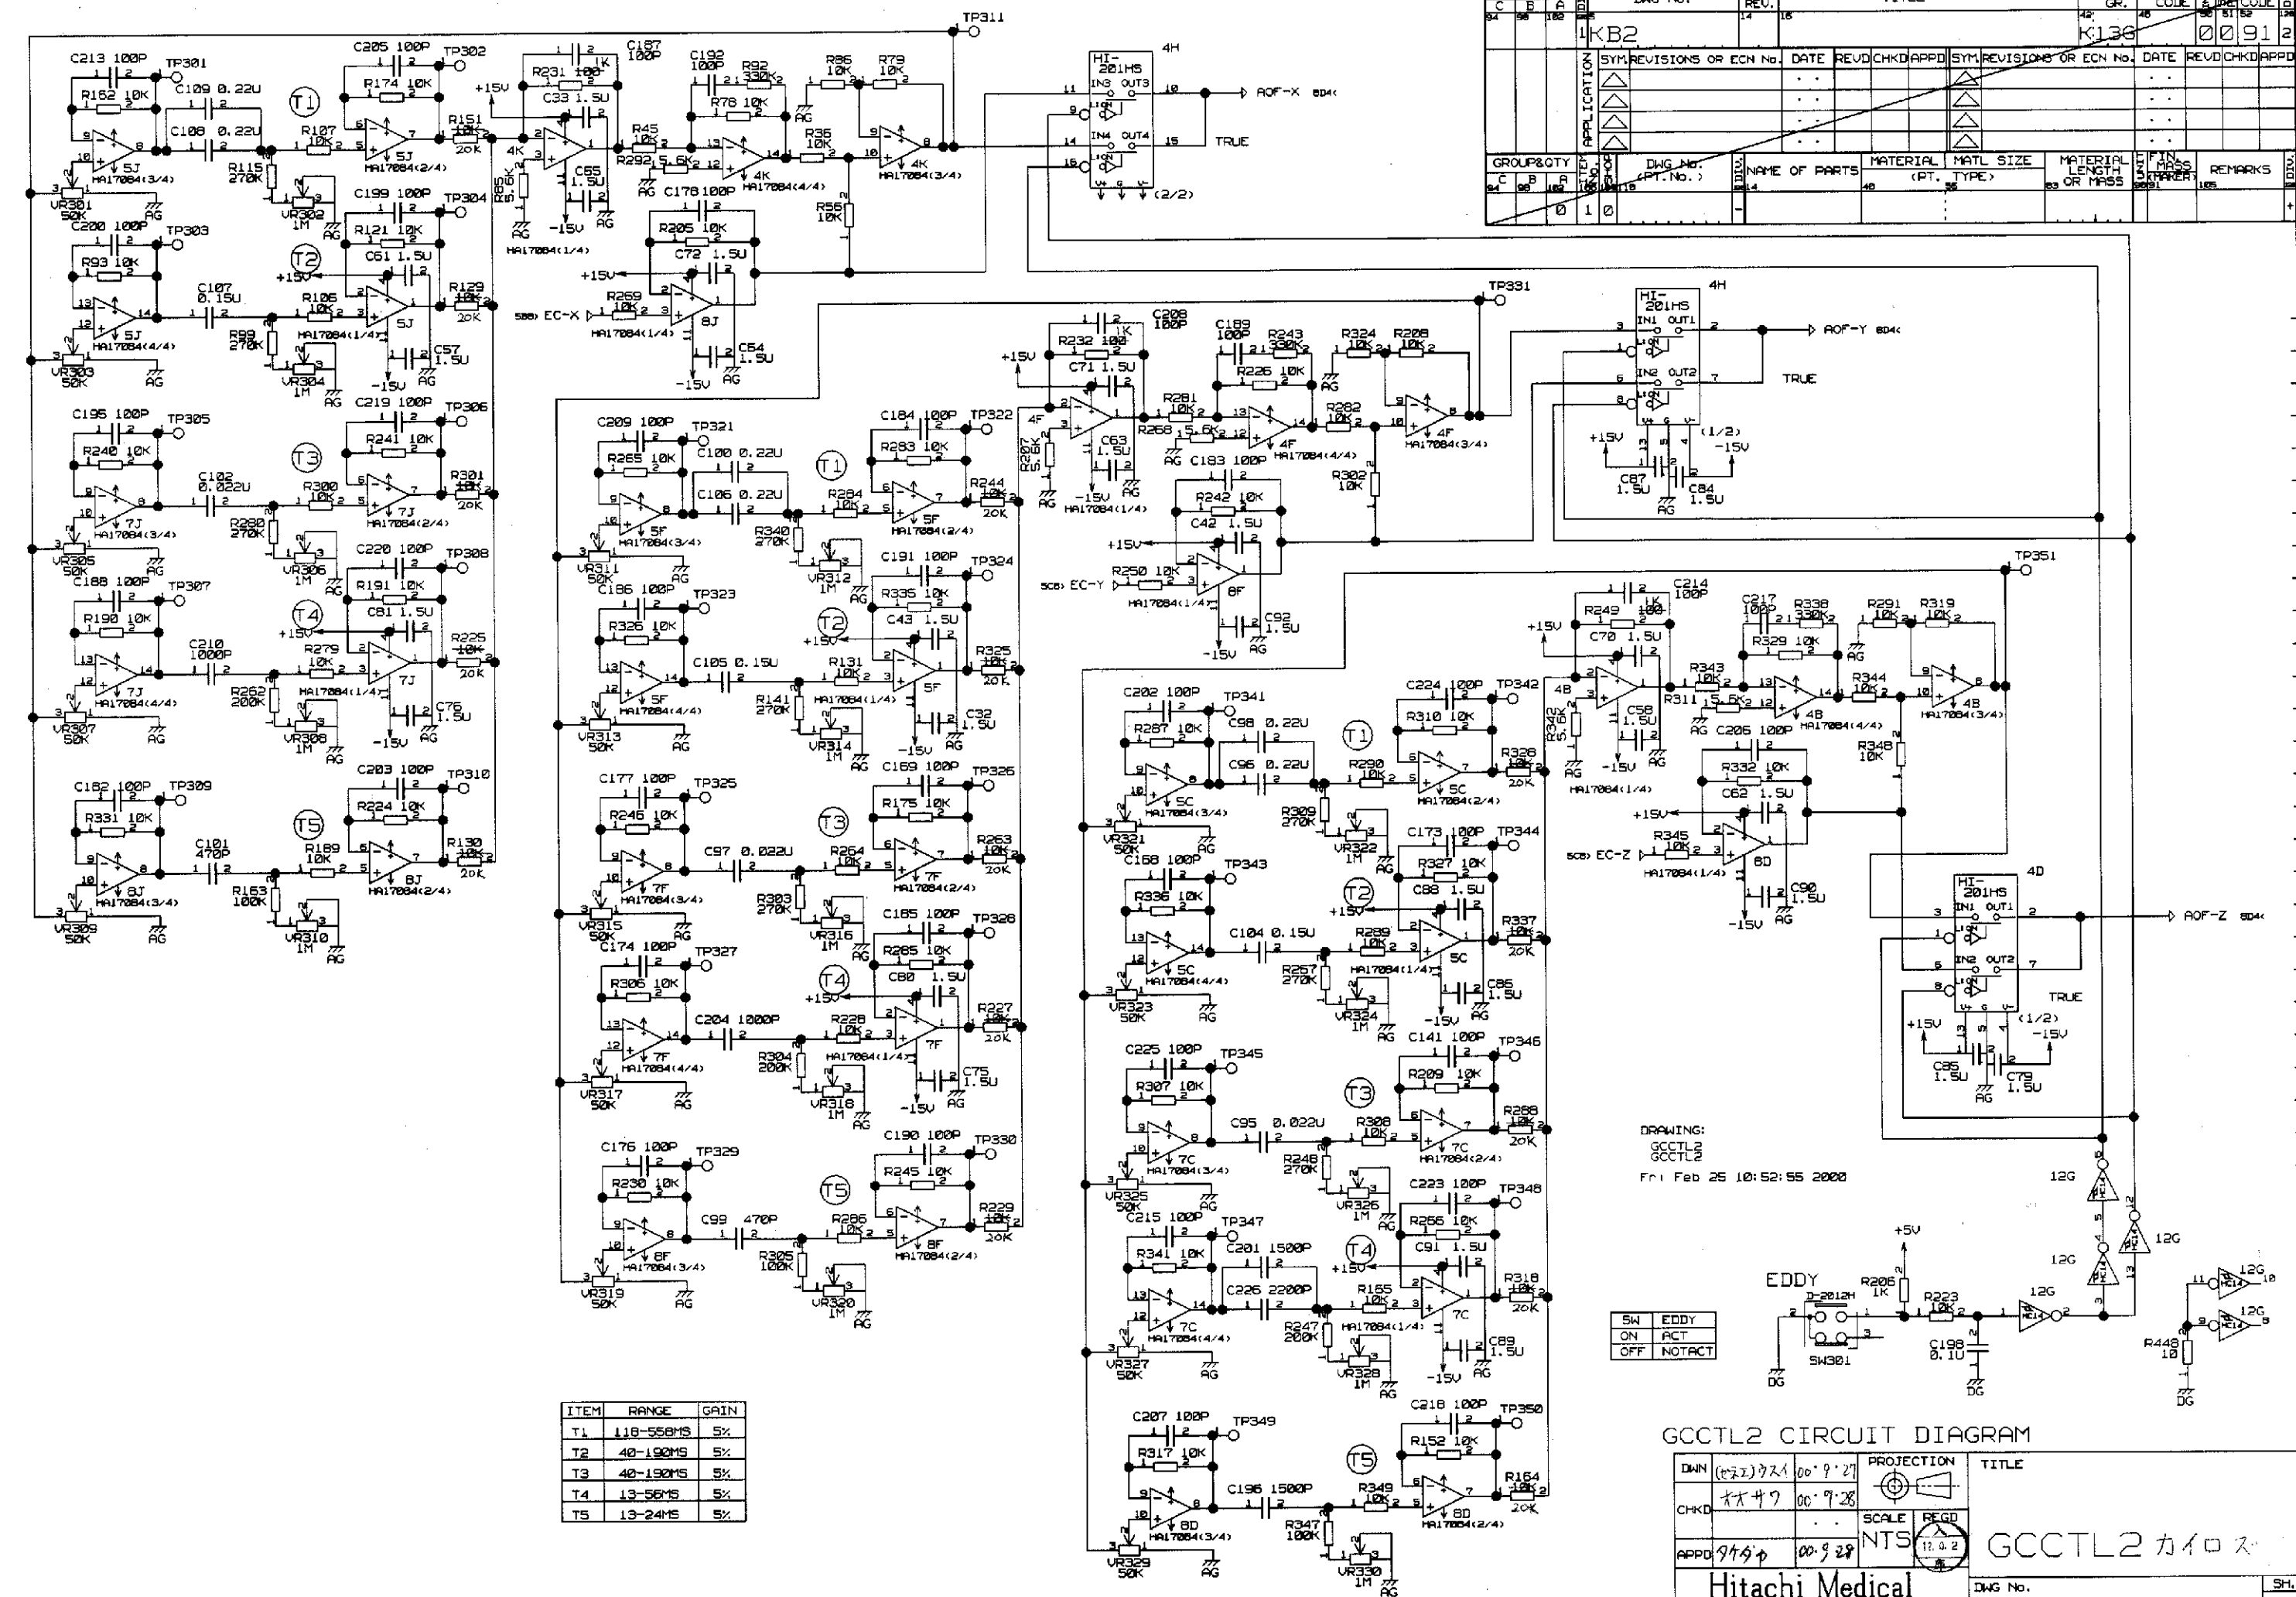



DRAWING:
GCCTL2
GCCTL2
Fri Feb 25 10:52:55 2000


SW	EDDY
ON	ACT
OFF	NOTACT

GCCTL2 CIRCUIT DIAGRAM

DWN (K136) 00.9.27		PROJECTION		TITLE	
CHKD K136 00.9.28		SCALE		GCCTL2 カイロス	
APPD 9/29/00		NTS		Hitachi Medical Corporation	
DWG No.		K136		SHI	
KB213402		5		5	


GROUP & QTY			DWG No. (PT. No.)		NAME OF PARTS	MATERIAL (PT. TYPE)	MATL SIZE	MATERIAL LENGTH OR MASS	UNIT	FIN. MASS (G/KG)	REMARKS
C	B	A	1	2							
34	35	36	37	38	39	40	41	42	43	44	45
		0	1	0							

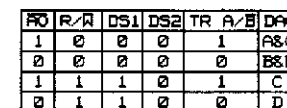

DWN	(世証) 〆ス人	00'9'27	PROJECTION 	TITLE
CHKD	才サ7	00'9'28		
APPD	949'4	00'9'28	SCALE NTS	GCCTL2 カ10ス
			1:10.2	
Hitachi Medical Corporation				DWG No. KB213402

DRAWING:
GCCTL2
GCCTL2
Fri Feb 25 10:55:43 2000


SURFACE FIN.		DNG MTR		DNG No.		FINAL REV.		TITLE		DSGN. GR.		CLASS. CODE		DNG CODE	
C	B	A	10	14	15	14	15	KB2		K136		00912			
SYN REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APP'D		SYN REVISIONS OR ECN No.		DATE		REV'D	
APPLICATION															
GROUP & QTY		DNG No.		NAME OF PARTS		MATERIAL		MATERIAL SIZE		MATERIAL LENGTH OR MASS		FIN. MASS		REMARKS	
C	B	A	10	14	15	14	15								

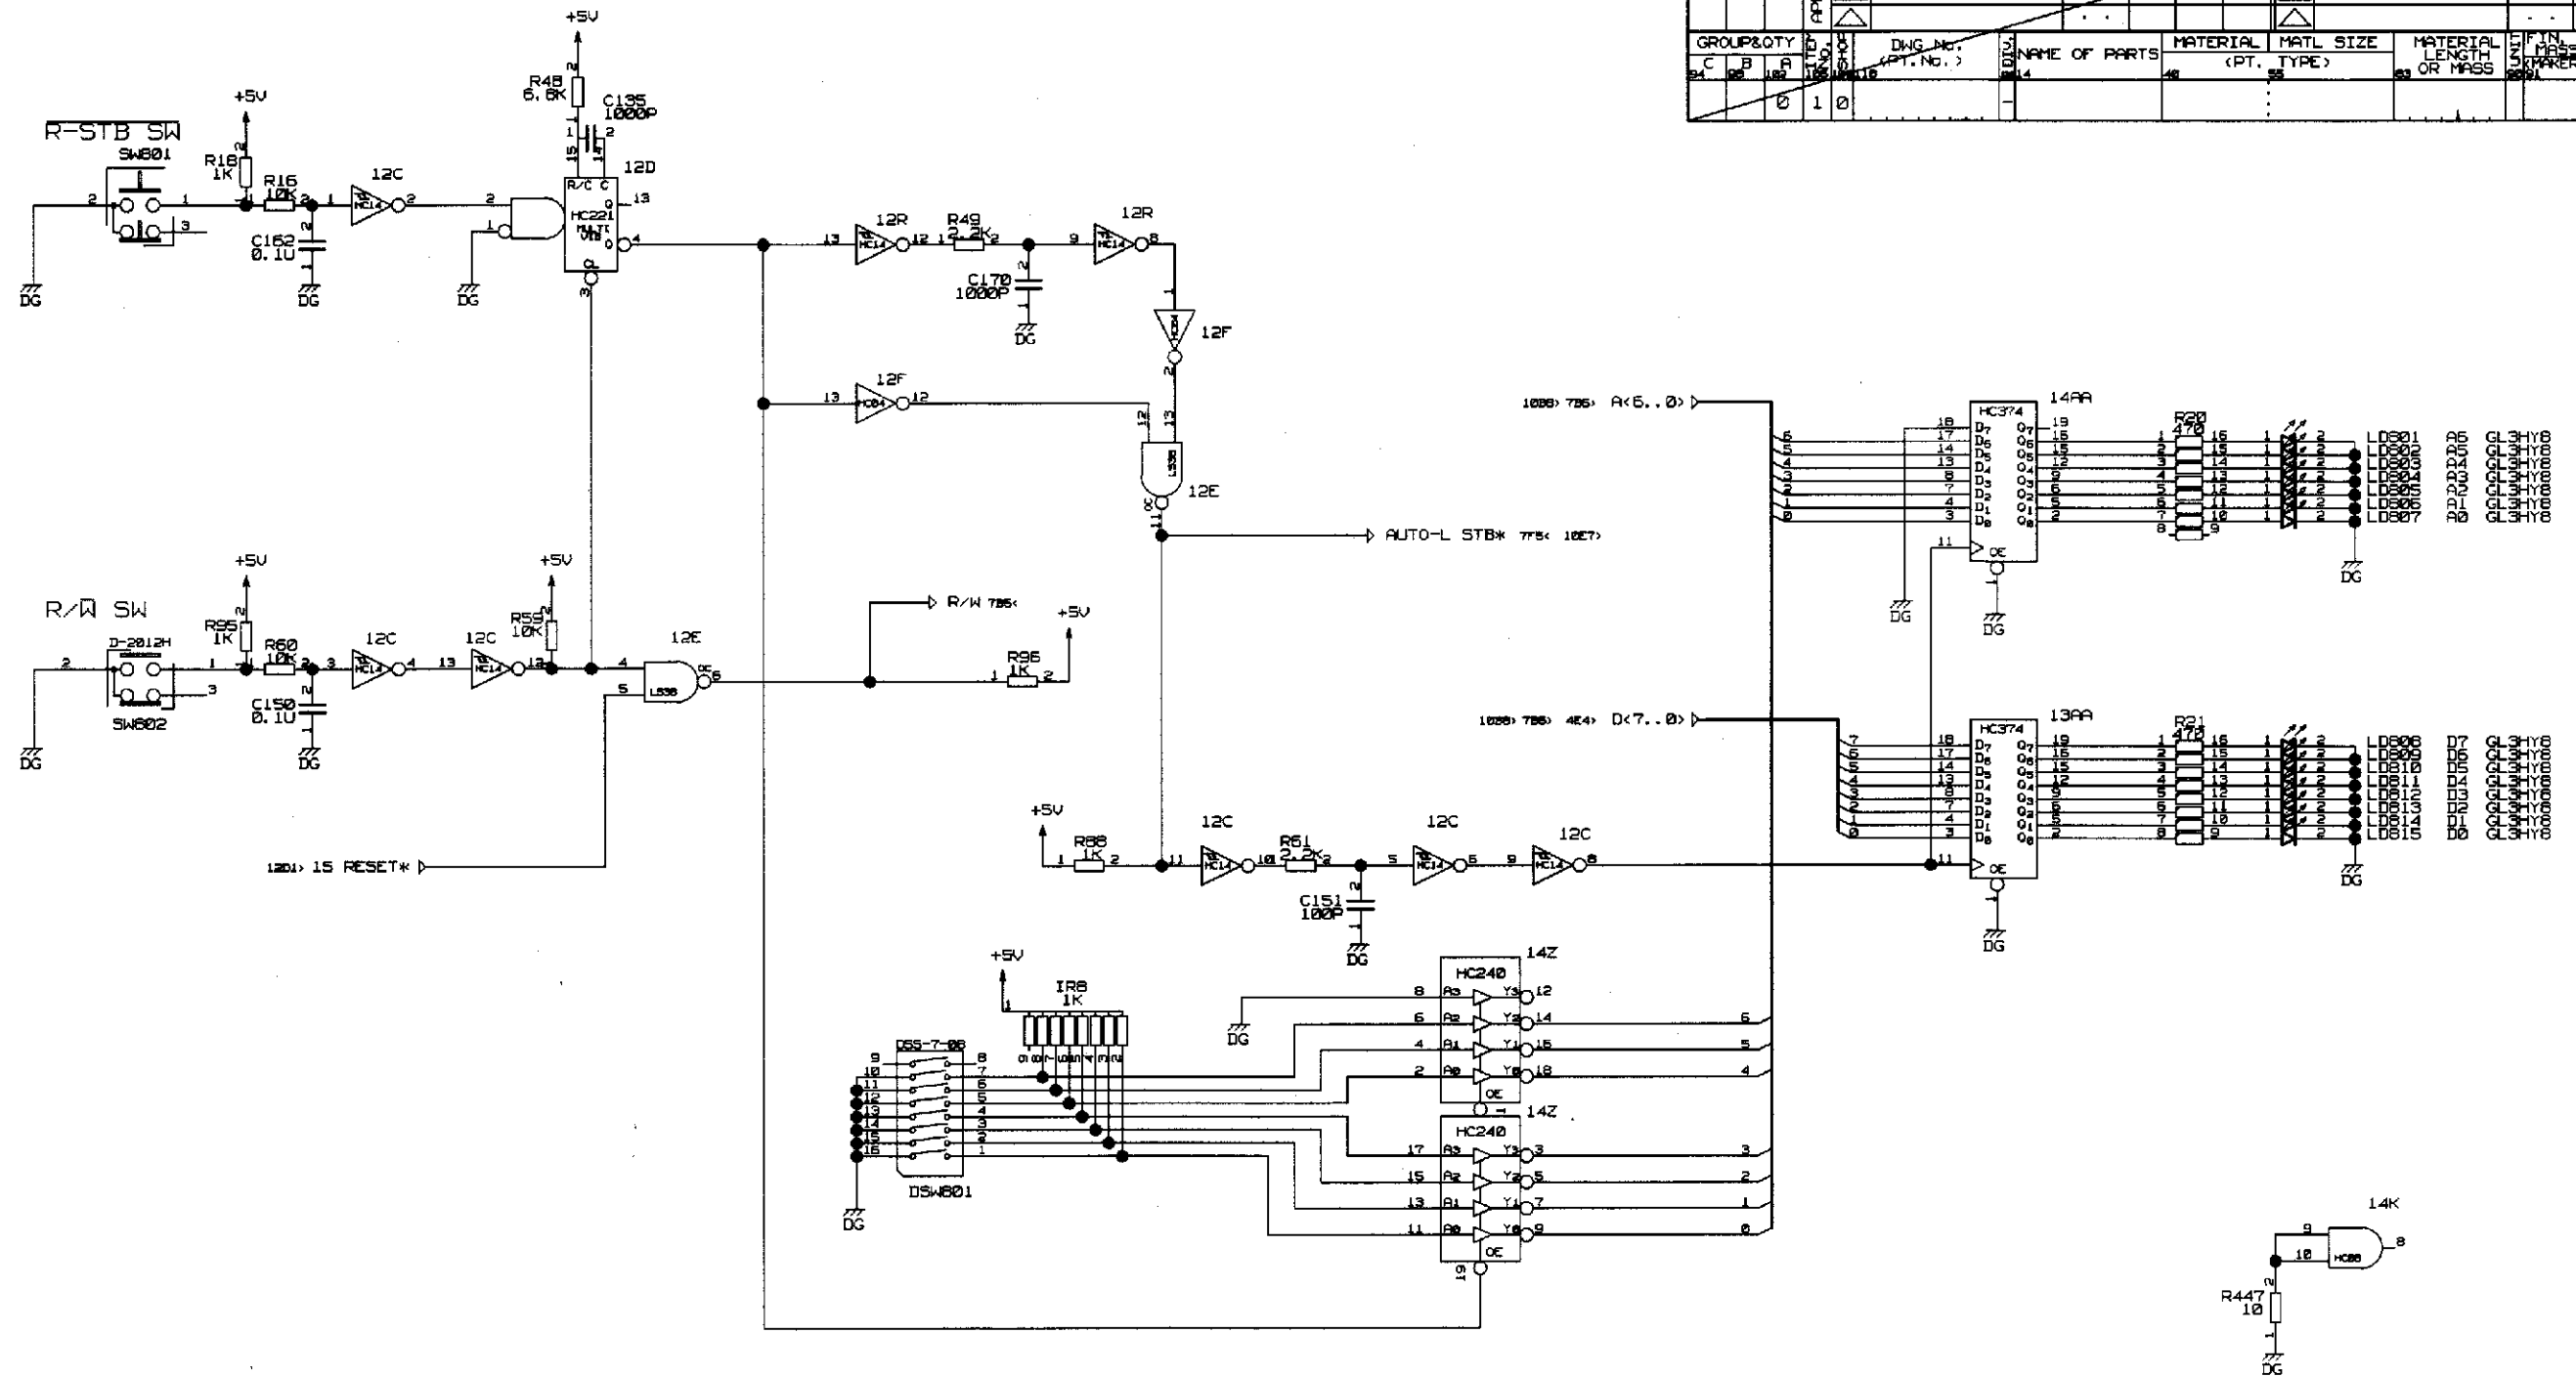


GCCTL2 CIRCUIT DIAGRAM

DWN		PROJECTION		TITLE	
(世) 9.27		SCALE		GCCTL2 9.27	
CHKD		NTS		Hitachi Medical Corporation	
APPD		DNG No.		KB213402	
		SH.		9	

DRAWING:
GCCTL2
GCCTL2
Fri Feb 25 11:13:30 2000

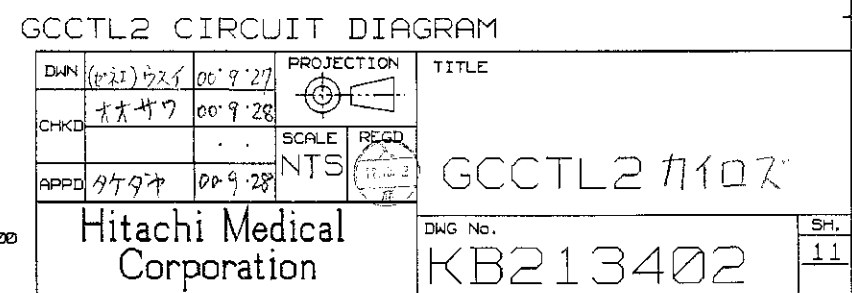

DWN	(世) 721	00' 9' 27	PROJECTION	TITLE
CHKD	才 47	00' 9' 28		
APPD	9/4/97	00' 9' 28	SCALE	
			REC'D	
			NTS	GCCTL2 1107
Hitachi Medical Corporation				DWG No.
				SH.
				12

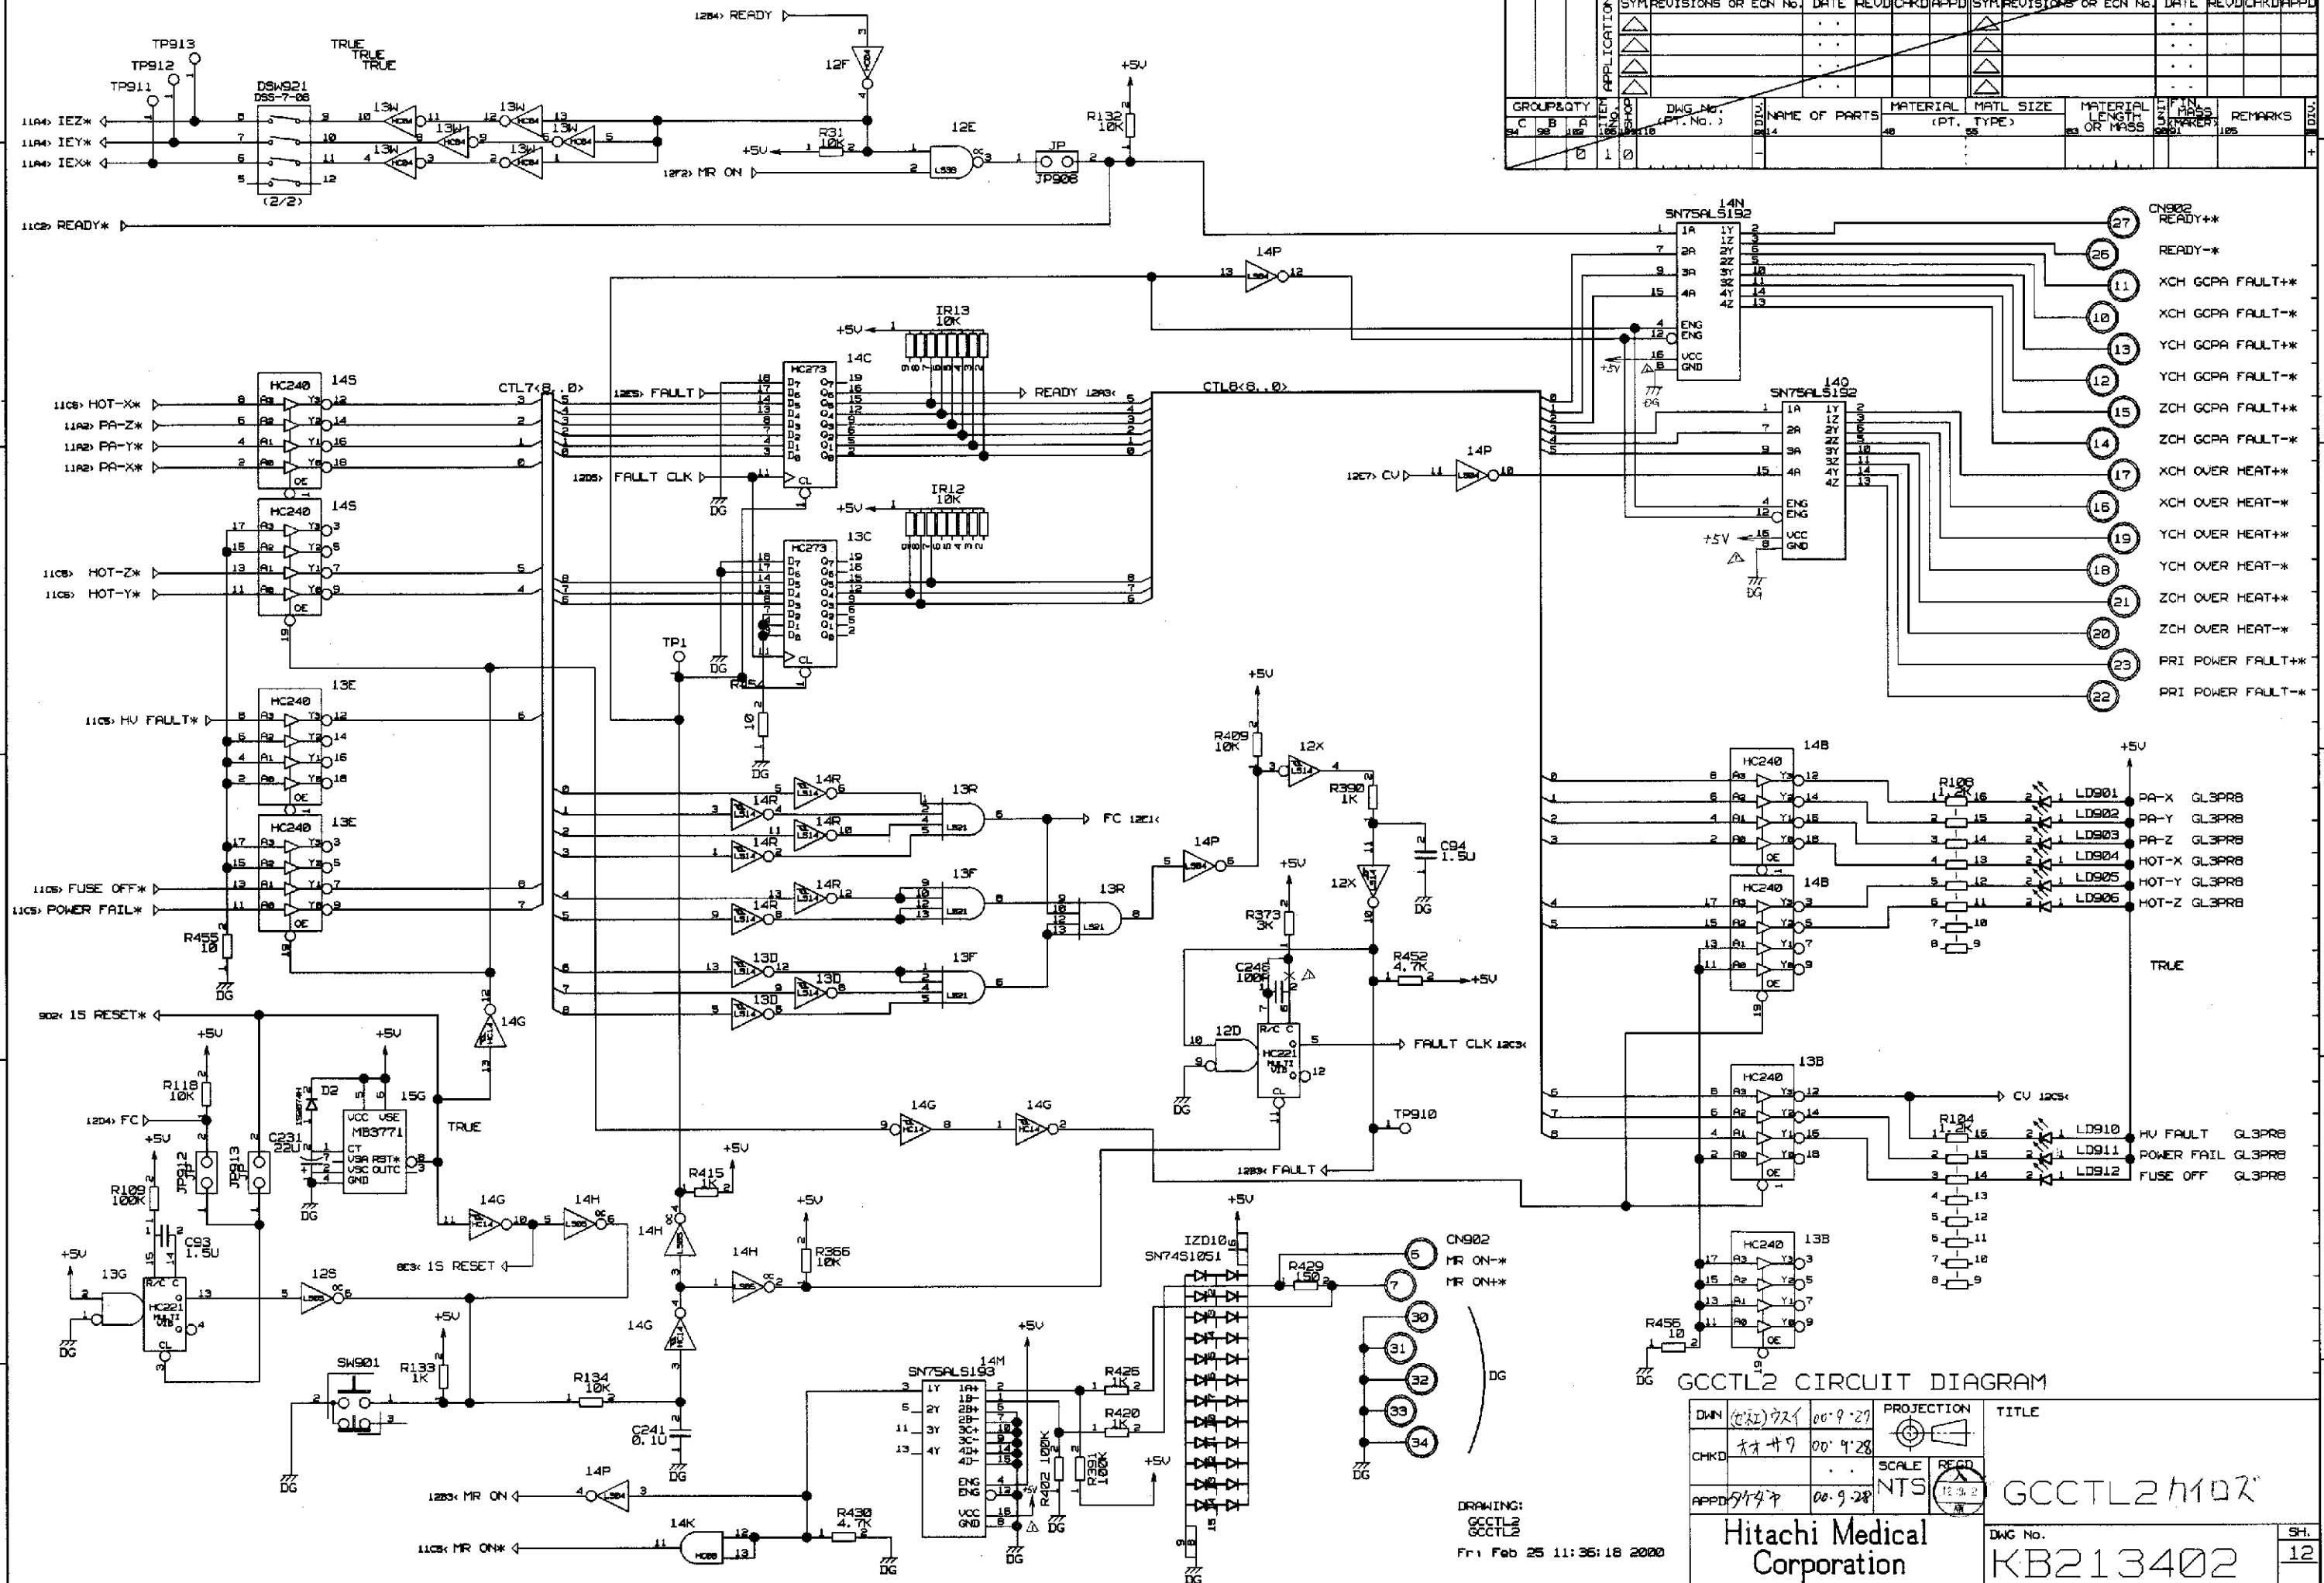

SURFACE FIN.		DNG No.		TITLE		DSGN. GR.		CLASS. CODE		DNG CODE	
1KB2		14		16		K136		00		912	
SYN REVISIONS OR ECN No.		DATE		REVDCCHKDAPPD		SYN REVISIONS OR ECN No.		DATE		REVDCCHKDAPPD	
APPLICATION		DATE		REVDCCHKDAPPD		APPLICATION		DATE		REVDCCHKDAPPD	
GROUP & QTY		DNG No.		NAME OF PARTS		MATERIAL		MATERIAL SIZE		REMARKS	
1 0		14		16		K136		00		912	

DIALPGND. DAT

CREFSIGNALS. DAT

POWER AND GROUND LIST - 1 17-Feb-19100 11:23:14.00

DESIGNATOR	PART TYPE	GND	VCC
1W	SPTRANS-1	10	3
		22	15
		30	23
		42	35
2T	74F04-1	7	14
2W	SPTRANS-1	10	3
		22	15
		30	23
		42	35
3P	74HC24-1	7	14
3Q	74HC14-1	7	14
3R	74F374-1	10	20
3S	74F374-1	10	20
3T	74F04-1	7	14
3W	SPTRANS-1	10	3
		22	15
		30	23
		42	35
4M-5M1	DS1000K500-1	7-4	14-8
4O	74F08-1	7	14
4R-5R1	DS1000K500-1	7-4	14-8
4S-5S1	DS1000K500-1	7-4	14-8
4M-5M2	74F08-1	7	14
5N	74HC24-1	7	14
5P	74F04-1	7	14
5Q	74F08-1	7	14
5R-5R2	74F74-1	7	14
5S-5S2	74F08-1	7	14
6M	74F74-1	7	14
6N	DS1000K500-1	7	14
6P	74F74-1	7	14
6Q	DS1000K500-1	7	14
6R	74F32-1	7	14
6S	DS1000K500-1	7	14
12C	74HC14-1	7	14
12D	74HC221-1	8	15
12E	74LS38-1	7	14
12F	74HC24-1	7	14
12G	74HC14-1	7	14
12H	74HC244-1	10	20
12J	74HC244-1	10	20
12K	74HC244-1	10	20
12M	74HC14-1	7	14
12N	74HC193-1	8	16
12P	74HC193-1	8	16
12Q	74HC20-1	7	14
12R	74HC14-1	7	14

POWER AND GROUND LIST - 1 17-Feb-19100 11:23:14.00

DESIGNATOR	PART TYPE	GND	VCC
12S	74LS205-1	7	14
12T	74LS123-1	8	16
12U	74HC10-1	7	14
12V	74HC04-1	7	14
12W	74HC138-1	8	16
12X	74LS14-1	7	14
12Y	74F154-1	7	14
12Z	74LS374-1	10	20
13B	74HC240-1	10	20
13C	74HC273-1	10	20
13D	74LS14-1	7	14
13E	74HC240-1	10	20
13F	74LS21-1	7	14
13G	74HC221-1	8	16
13H	74HC244-1	10	20
13N	74HC138-1	8	16
13P	74HC244-1	10	20
13R	74LS21-1	7	14
13S	74HC00-1	7	14
13T	74HC04-1	7	14
13U	74LS00-1	7	14
13V	74HC14-1	7	14
13W	74HC04-1	7	14
13X	74HC10-1	7	14
14B	74HC240-1	10	20
14C	74HC273-1	10	20
14D	74HC74-1	7	14
14F	74HC14-1	7	14
14G	74HC14-1	7	14
14H	74LS05-1	7	14
14J	74HC04-1	7	14
14K	74HC08-1	7	14
14P	74LS04-1	7	14
14R	74LS14-1	7	14
14S	74HC240-1	10	20
14Y	74LS04-1	7	14
14Z	74HC240-1	10	20
2R1	74F374-1	10	20
2R2	74F374-1	10	20
2S1	74F374-1	10	20
2S2	74F374-1	10	20
12AA	74LS374-1	10	20
12AB	74F154-1	7	14
13AA	74HC374-1	10	20
14AA	74HC374-1	10	20

END POWER AND GROUND LIST

+UREF	8C7> 8D7> 8E7> 8B4<	MR ON	12F2> 12B3<
-UREF	8C5> 8D5> 8E5> 8C4<	MR ON *	12F2> 11C5<
15 RESET	12E2> 8E3<	P-ON RESET *	1E4> 7E3<
15 RESET *	12D1> 9D2<	P-ON RESET<YCH> *	1F4> 2E2<
A<5..0>	7B6> 10B6> 9B6<	P-ON RESET<ZCH> *	1F4> 3E2<
AOF-X	6A5> 6D4<	PA-X *	11A2> 12C1<
AOF-Y	6B7> 6D4<	PA-Y *	11A2> 12B1<
AOF-Z	6D8> 6D4<	PA-Z *	11A2> 12B1<
AUTO-L STB *	9C5> 10E7> 7F5<	PLS-X	8A4> 4D1<
CLR *	1E5> 1C3> 1C5< 1D4< 1E4<	PLS-Y	8A4> 4D1<
CTL1<15..0>	1B4	PLS-Z	8A4> 4D1<
CTL2<15..0>	2B4	POWER FAIL *	11C5> 12D1<
CTL3<15..0>	3B4	R/W	9C4> 7B5<
CTL4<2..0>	11B4	R/W *	7B5> 5B2< 5C2< 5E2<
CTL5<2..0>	11B3	READY	12B4> 12A3<
CTL6<2..0>	11B3	READY *	11C2> 12B1<
CTL7<8..0>	12B2	T-X	4F4> 5D6<
CTL8<8..0>	12B5	T-Y	4F4> 5D6<
CTL11<7..0>	1B5	T-Z	4F4> 5D6<
CTL22<7..0>	2B5	TR A/B	7D7> 5B2< 5C2< 5E2<
CTL33<7..0>	3B5	W-X	4B8> 5B1<
CV	12E7> 12C5<	W-Y	4D8> 5D1<
D<7..0>	4E4> 7B6> 10B8> 9C6<	W-Z	4E8> 5E1<
DAC-X	1C8> 4C1<	X-SIG(+)	11B7> 8B8<
DAC-Y	2C8> 4C1<	X-SIG(-)	11B7> 8C8<
DAC-Z	3C8> 4C1<	XRDS1 *	5B3> 7C8<
EC-X	5B8> 6B3<	XRDS2 *	5B3> 7C8<
EC-Y	5C8> 6C4<	XZF *	11C5> 8E4<
EC-Z	5C8> 6D6<	Y-SIG(+)	11C7> 8D8<
FAULT	12E5> 12B3<	Y-SIG(-)	11C7> 8D8<
FAULT CLK	12D5> 12C3<	Y1	1C2> 2C2<
FC	12D4> 12E1<	Y2	1C2> 2C2<
FUSE OFF *	11C5> 12D1<	Y3	1C2> 2C2<
GC ACTIVE	7B4> 8D3<	Y4	1C2> 2C2<
GC ACTIVE1	7A4> 1E4<	Y5	3C2> 2C2<
GC ACTIVE2	7A4> 2E2<	Y6	3C2> 2C2<
GC ACTIVE3	7B4> 3E2<	Y7	3C2> 2C2<
H1	1F3> 1C4< 1C5< 1D4<	Y8	3C2> 2C2<
H2	1F3> 2C4< 2C5< 2D4<	YRDS1 *	5C3> 7C8<
H3	1F3> 3C5< 3D4<	YRDS2 *	5C3> 7C8<
HOT-X *	11C5> 12B1<	YZF *	11C5> 8E4<
HOT-Y *	11C5> 12C1<	Z-SIG(+)	11D7> 8E8<
HOT-Z *	11C5> 12C1<	Z-SIG(-)	11D7> 8E8<
HV FAULT *	11C5> 12C1<	ZF *	11C2> 8E3<
IEX *	11A4> 12B1<	ZRDS1 *	5E3> 7C8<
IEY *	11A4> 12A1>	ZRDS2 *	5E3> 7C8<
IEZ *	11A4> 12A1>	ZZF *	11C5> 8E4<

DRAWING:
GCCTL2
GCCTL2
Fri Feb 25 11:40:06 2000

DWG	GCCTL2	00.9.27	PROJECTION	TITLE
CHKD	GCCTL2	00.9.28	SCALE	REGD
APPD	GCCTL2	00.9.28	NTS	GCCTL2 1107
Hitachi Medical Corporation				DWG No.
				KB213402
				Sh.
				13

PSTRPRT.DAT

- SPARES LIST -

74F04-1 3T-12, 3T-10, 3T-5, 3T-3, 3T-1, ~~5P-5, 5P-3,~~
~~5P-1, 2T-12, 2T-10, 2T-8, 2T-1~~
 74F08-1 ~~5S-8, 5P-11, 5Q-11, 5O-8, 5Q-4, 4Q-11,~~
~~4Q-8, 5S2-3, 5M2-3~~
 74F32-1 5R-11
 74LS00-1 13U-11
 74LS04-1 14Y-12, 14Y-8, 14P-8
 74LS05-1 12S-12, 12S-10
 74LS123-1 12T-5
 74LS14-1 13D-10, 13D-3, 13D-1, 12X-8
 HA17084-1 ~~3E-8, 3E-12, 3+8, 3+12, 3K-8, 3K-12,~~
~~4E-5, 4F-5, 4K-5, 8D-12, 8F-12, 8J-12, 11O-8, 11K-8,~~
~~11U-8~~
 HI201A-1 3D-14
 HI201B-1 4D-9
 HIF3-34DS-1 CN902-29, CN902-28, CN902-25, CN902-24,
 CN902-9, CN902-8, CN902-5, CN902-4, CN902-3, CN902-2,
 CN902-1
 HIF326DS-1 CN901-26, CN901-25, CN901-24, CN901-20,
 CN901-14, CN901-10, CN901-6

- PART SUMMARY -


152074H-1	J3129001	152074H	3	CAP2A-1	J1447XXX	USA_OR_URS_SER1	3
15Z50-1	J3149001	15Z50	2	CAP2B-1	J151W553	245H1602-106M2	4
3296W-1	J27115XX	3296W-1-XXX	42	D-2012H-1	J6111306	D-2012H	5
3296WR-1	J27115XX	3296W-1-XXX	23	D2022H-1	J6111308	D-2022H	1
74F04-1	J4123004	74F04PC	3	DAC8408FP-1	H356A001	DAC-8408FP	3
74F08-1	J4123008	74F08PC	4-3	DS1000K500-1	J5141707	DS-1000K-500	6
74F164-1	H2160001	74F164APC	2	D55-7-00-1	J6890304	D55-7-00	5
74F32-1	J4123032	74F32PC	1	D55704B-1	J6890303	D55-7-04	1
74F374-1	J4123374	SN74F374N	5	D55708A-1	J6890304	D55-7-08	1
74F74-1	J4123074	74F74PC	3	DSUB15-1	J833A155	DALC-J155AF-13L	3
74HC00-1	J4211000	HD74HC00P	2	ERA34-1	H111A004	ERA34-10	6
74HC04-1	J4211004	HD74HC04P	7	HA1708A-1	J4410406	HA1708AP	27
74HC08-1	J4211008	HD74HC08P	1	HA17458PS-1	J4410404	HA17458PS	3
74HC10-1	J4211010	HD74HC10P	2	HA17555PS-1	J4191401	HA17555PS	2
74HC13B-1	J4211138	HD74HC13BP	2	HA17741PS-1	J4310001	HA17741PS	4
74HC14-1	J4211014	HD74HC14P	8	HCPL2430-1	H961A009	HCPL-2430	1
74HC153-1	J4211193	HD74HC193P	2	HI201-1	J4470504	HI1-201HS-5	4
74HC221-1	J4211403	HD74HC221P	2	HI201A-1	J4470504	HI1-201HS-5	2
74HC240-1	J4211240	HD74HC240P	5	HI201B-1	J4470504	HI1-201HS-5	2
74HC244-1	J4211244	HD74HC244P	5	HIF3-34D5-1	J8334606	HIF3BA-34PA-2.5	1
74HC273-1	J4211273	HD74HC273P	2	HIF326D5-1	J8334503	HIF3BA-26PA-2.5	1
74HC374-1	J4211374	HD74HC374P	2	HIF650D5-1	J8334543	HIF6-50PA-1.27D	1
74HC74-1	J4211074	HD74HC74P	1	HZ6HC-1	J3149004	HZ6HC	1
74LS00-1	J4120301	HD74LS00P	1	JP2-1	J8336102	00-8261-023213-	9-10
74LS04-1	J4120303	HD74LS04P	2	LED-1	J376141L	GL3----	31
74LS05-1	J4139005	HD74LS05P	2	M2020H-1	J6111114	M-2020H	1
74LS123-1	J4120319	HD74LS123P	1	M83-1	J2314XXX	MB-3-XXX_SERIES	4
74LS14-1	J4120306	HD74LS14P	3	M91-1	J2314XXX	M9-1-XXX_SERIES	9
74LS21-1	J4130021	HD74LS21P	2	MB3771-1	H399A010	MB3771P-G-FMM	3
74LS374-1	J4120627	HD74LS374P	2	MEITENSP-1	J8330731	6P-840563-1	1
74LS38-1	J4130038	HD74LS38P	1	OPAMP-1	J4411802	OP-07CP	3
8983R-1	J231XXXX	898-3-R	8	PASCON-1	J1717001	RPE122-901F155Z	100
AD660-1	HXXXXXXX	AD660	3	PCB17-1	J3331006	PC-B17	1
APIF6M-1	J641A014	APE-1F-6M-10	2	PP10.5_12-1	JXXXXXXX	PP10-5-12	1
AW01.06-1	J3140106	AW01-06-TP	1	RESI-1	J2317----	LF1/4	447
AW01.16-1	J3140118	AW01-16-TP	2	RSF1B-1	J232-----	SF1B	1
CAP1A-1	J1717001	RPE122-901F155Z	103	SFT12-1	J5110206	SF-T12-50M	2
CAP1B-1	J171XXXX	RPE132-901L_SER1	33	SFT8-1	J5110201	SF-T8-30SM	5
CAP1C-1	J172XXXX	DD104_SERIES	69	SN7451051-1	ZXXXXXXX	SN7451051	4
CAP1D-1	J131XXXX	506N-5002_SERIE	21	SN75ALS192N-1	H371A008	SN75ALS192N	2
CAP1E-1	J131XXXX	553M-5002_SERIE	1	SN75ALS193J-1	H372A003	SN75ALS193J	5
CAP1F-1	J172XXXX	DD108_SERIES	4	SPTANS-1	KA475378	EPMT032LC44-12	3
CAP1G-1	J131XXXX	506N-5002_SERIE	3	TP10G-1	J8390403	50809-2	1
CAP1H-1	J131XXXX	553M-6302_SERIE	3	TP1F-1	J8361921	00292-41	89
CAP1J-1	J131XXXX	553M-6302_SERIE	6	TP1G-1	J8390403	50809-2	13
CAP2-1	J1447XXX	USA_OR_URS_SER1	18	Total			1243

[illegible]

DWN	(022) 021	00' 9' 27"	PROJECTION	TITLE
CHKD	021	00' 9' 28"		
			SCALE	
APPD	021	00' 9' 28"	NTS	
Hitachi Medical Corporation			DWG No.	SH.
			KB213402	16e

DRAWING:
GCCTL2
GCCTL2
Mon Feb 28 15:23:13 2000

SURFACE FIN.		DWG. NO.		TITLE		DSGN. GR.		CLASS. CODE		DWG. CODE	
C	B	A	02	KA280413	MPX カイロズ	K13G				00912	
SYN. REVISIONS OR ECN NO.		DATE		REV. CHKD APPD		SYN. REVISIONS OR ECN NO.		DATE		REV. CHKD APPD	
MRKA-4657		97.6.16									
MRKA-5635		98.3.3									
GROUP & LOT		DWG. NO. (PT. NO.)		NAME OF PARTS (PT. TYPE)		MATERIAL (PT. TYPE)		MATERIAL SIZE		REMARKS	
				MPX カイロズ							

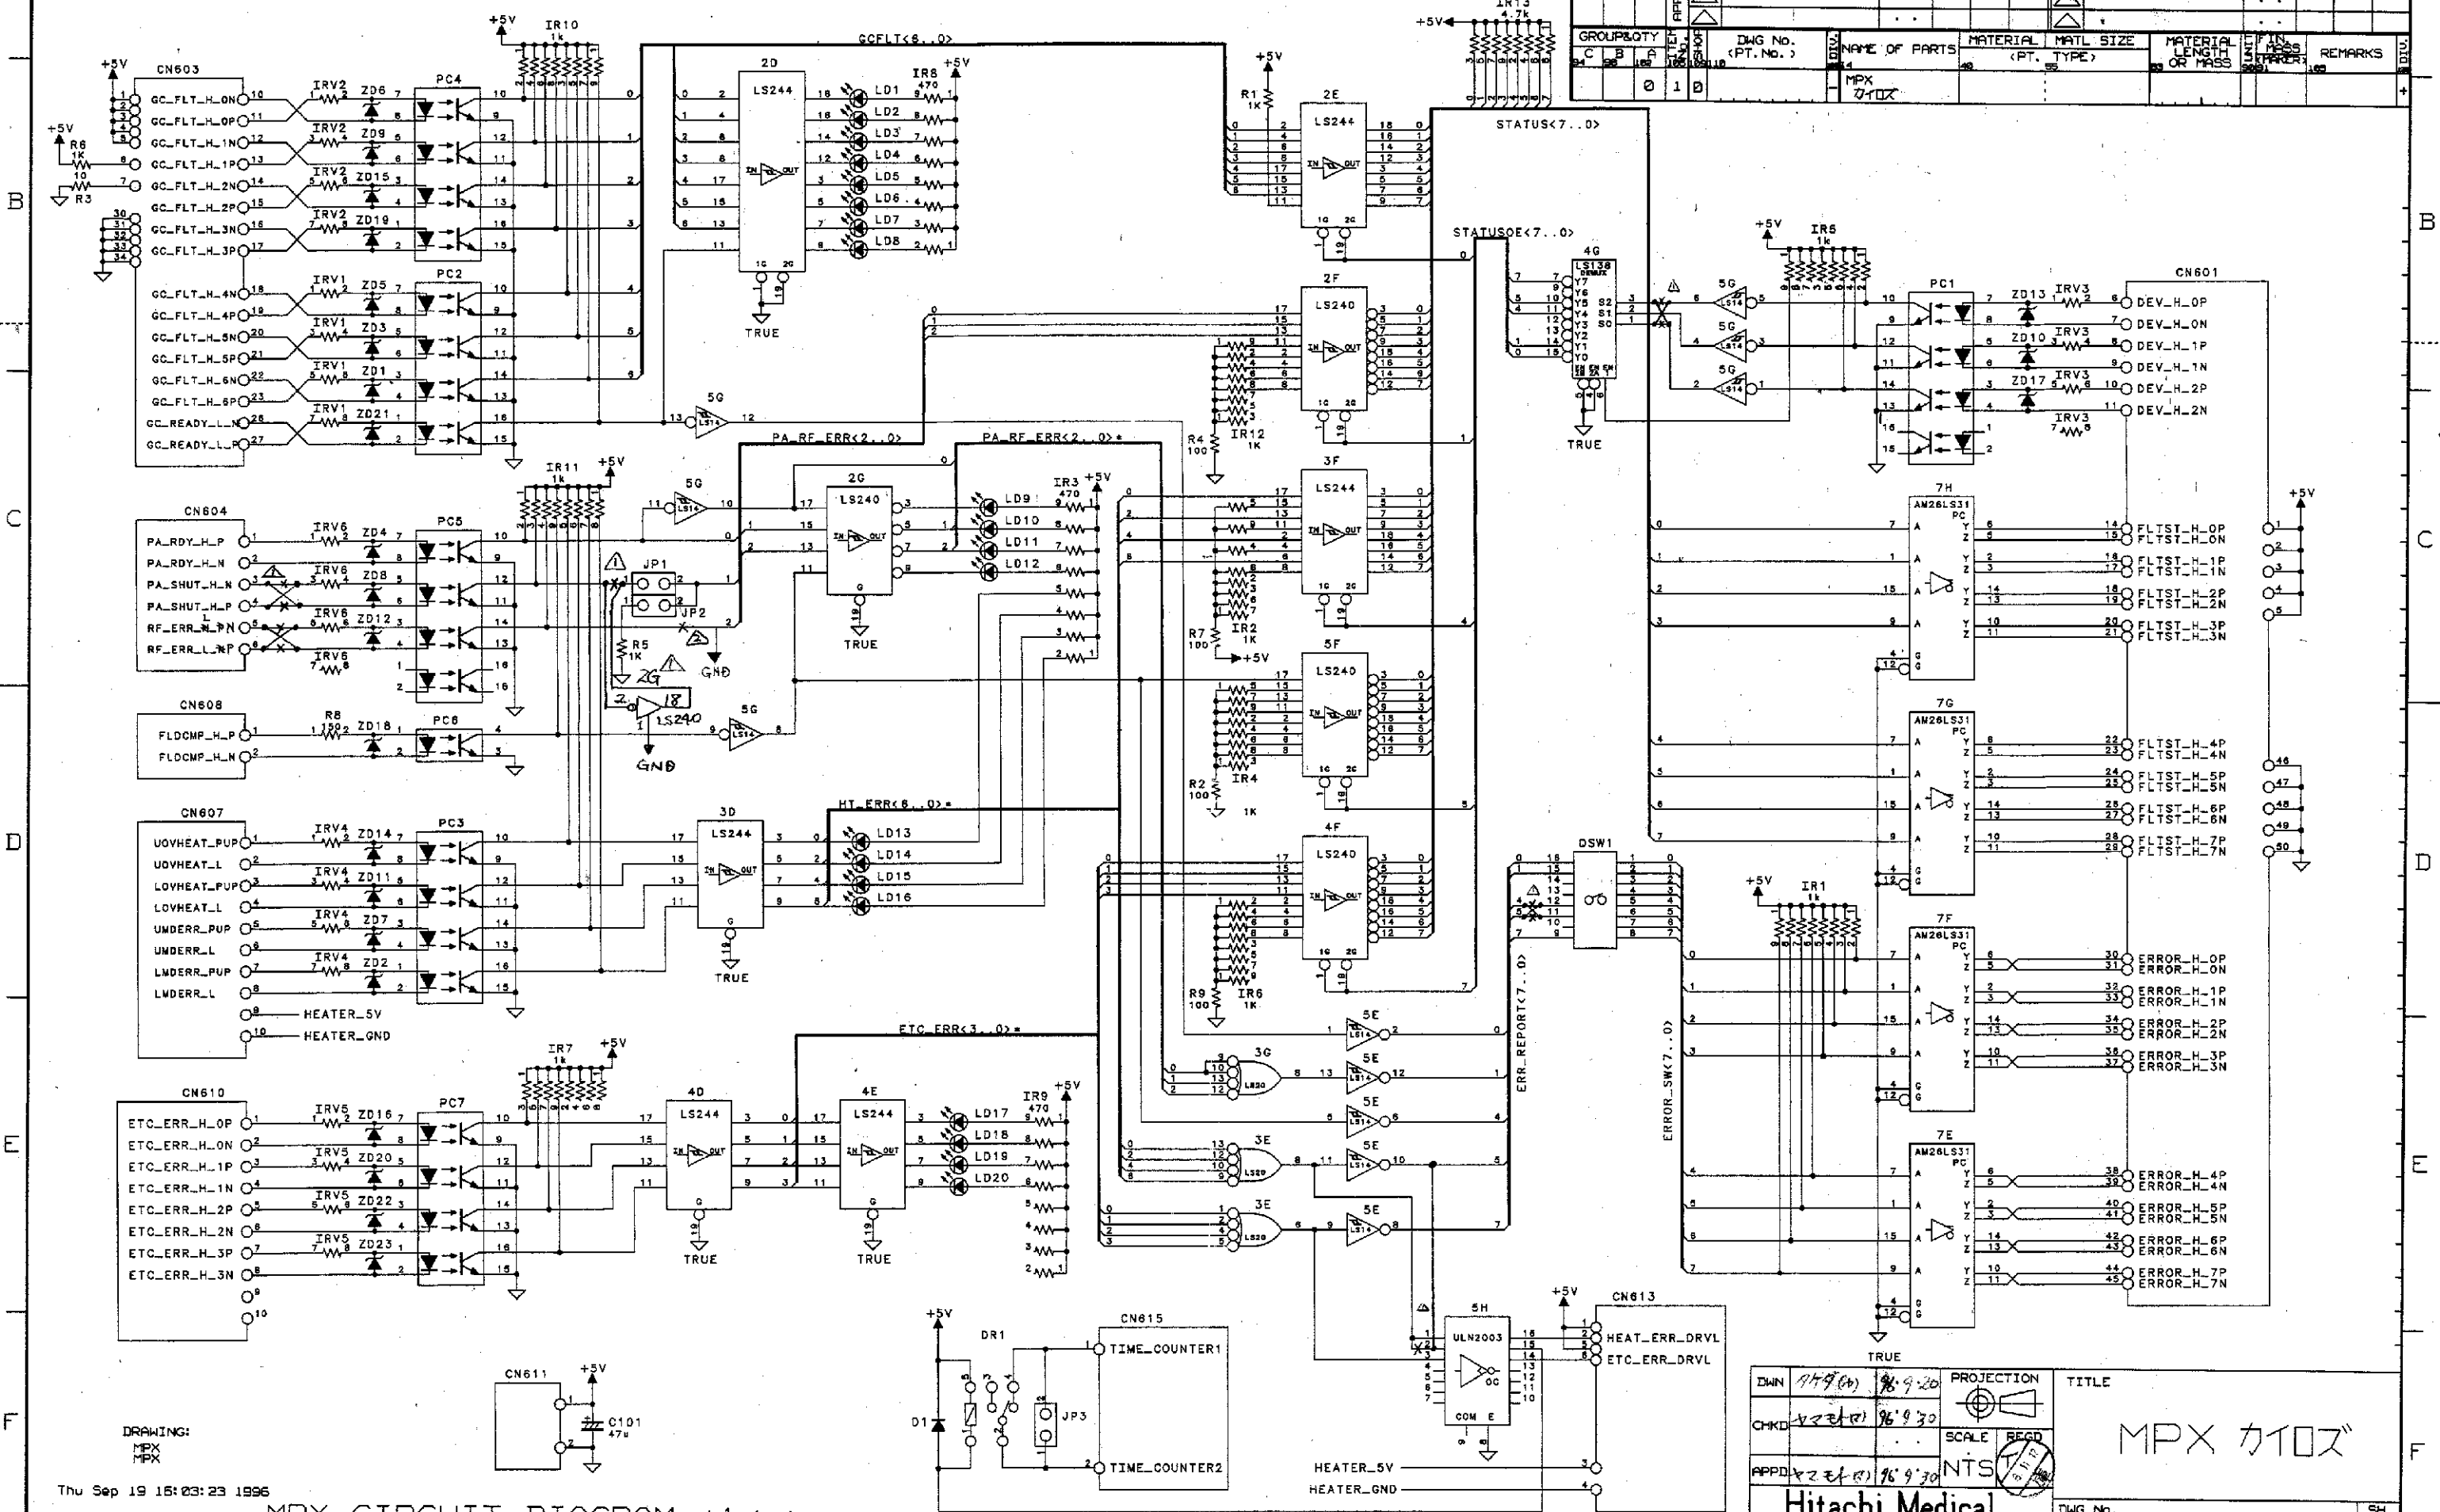


MPX CIRCUIT DIAGRAM (1/2)

DWG. 179 (A)	98.9.20	PROJECTION	TITLE
CHKD 179 (B)	98.9.30	SCALE	MPX カイロズ
APPD 179 (C)	98.9.30	NTS	
Hitachi Medical Corporation			DWG. No. KA280413
			SH. 1/2


Thu Sep 19 15:23:23 1996

Thu Sep 19 16:01:55 1996

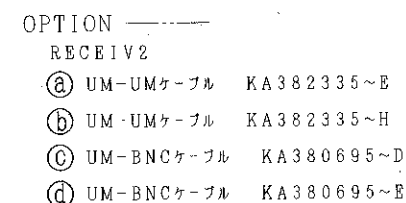[illegible]



NRF (0.3T) INTERNAL WIRING DIAGRAM

製品 (三和) イワセ 97.3.7 署名 オオサワ 97.3.7 承認 キムラ 97.3.7	撮影法  尺規  N72 	名称 NRFユニット ハイセンス (0.3T)
株式会社 日立メディコ	図番 KA180594	検査 1

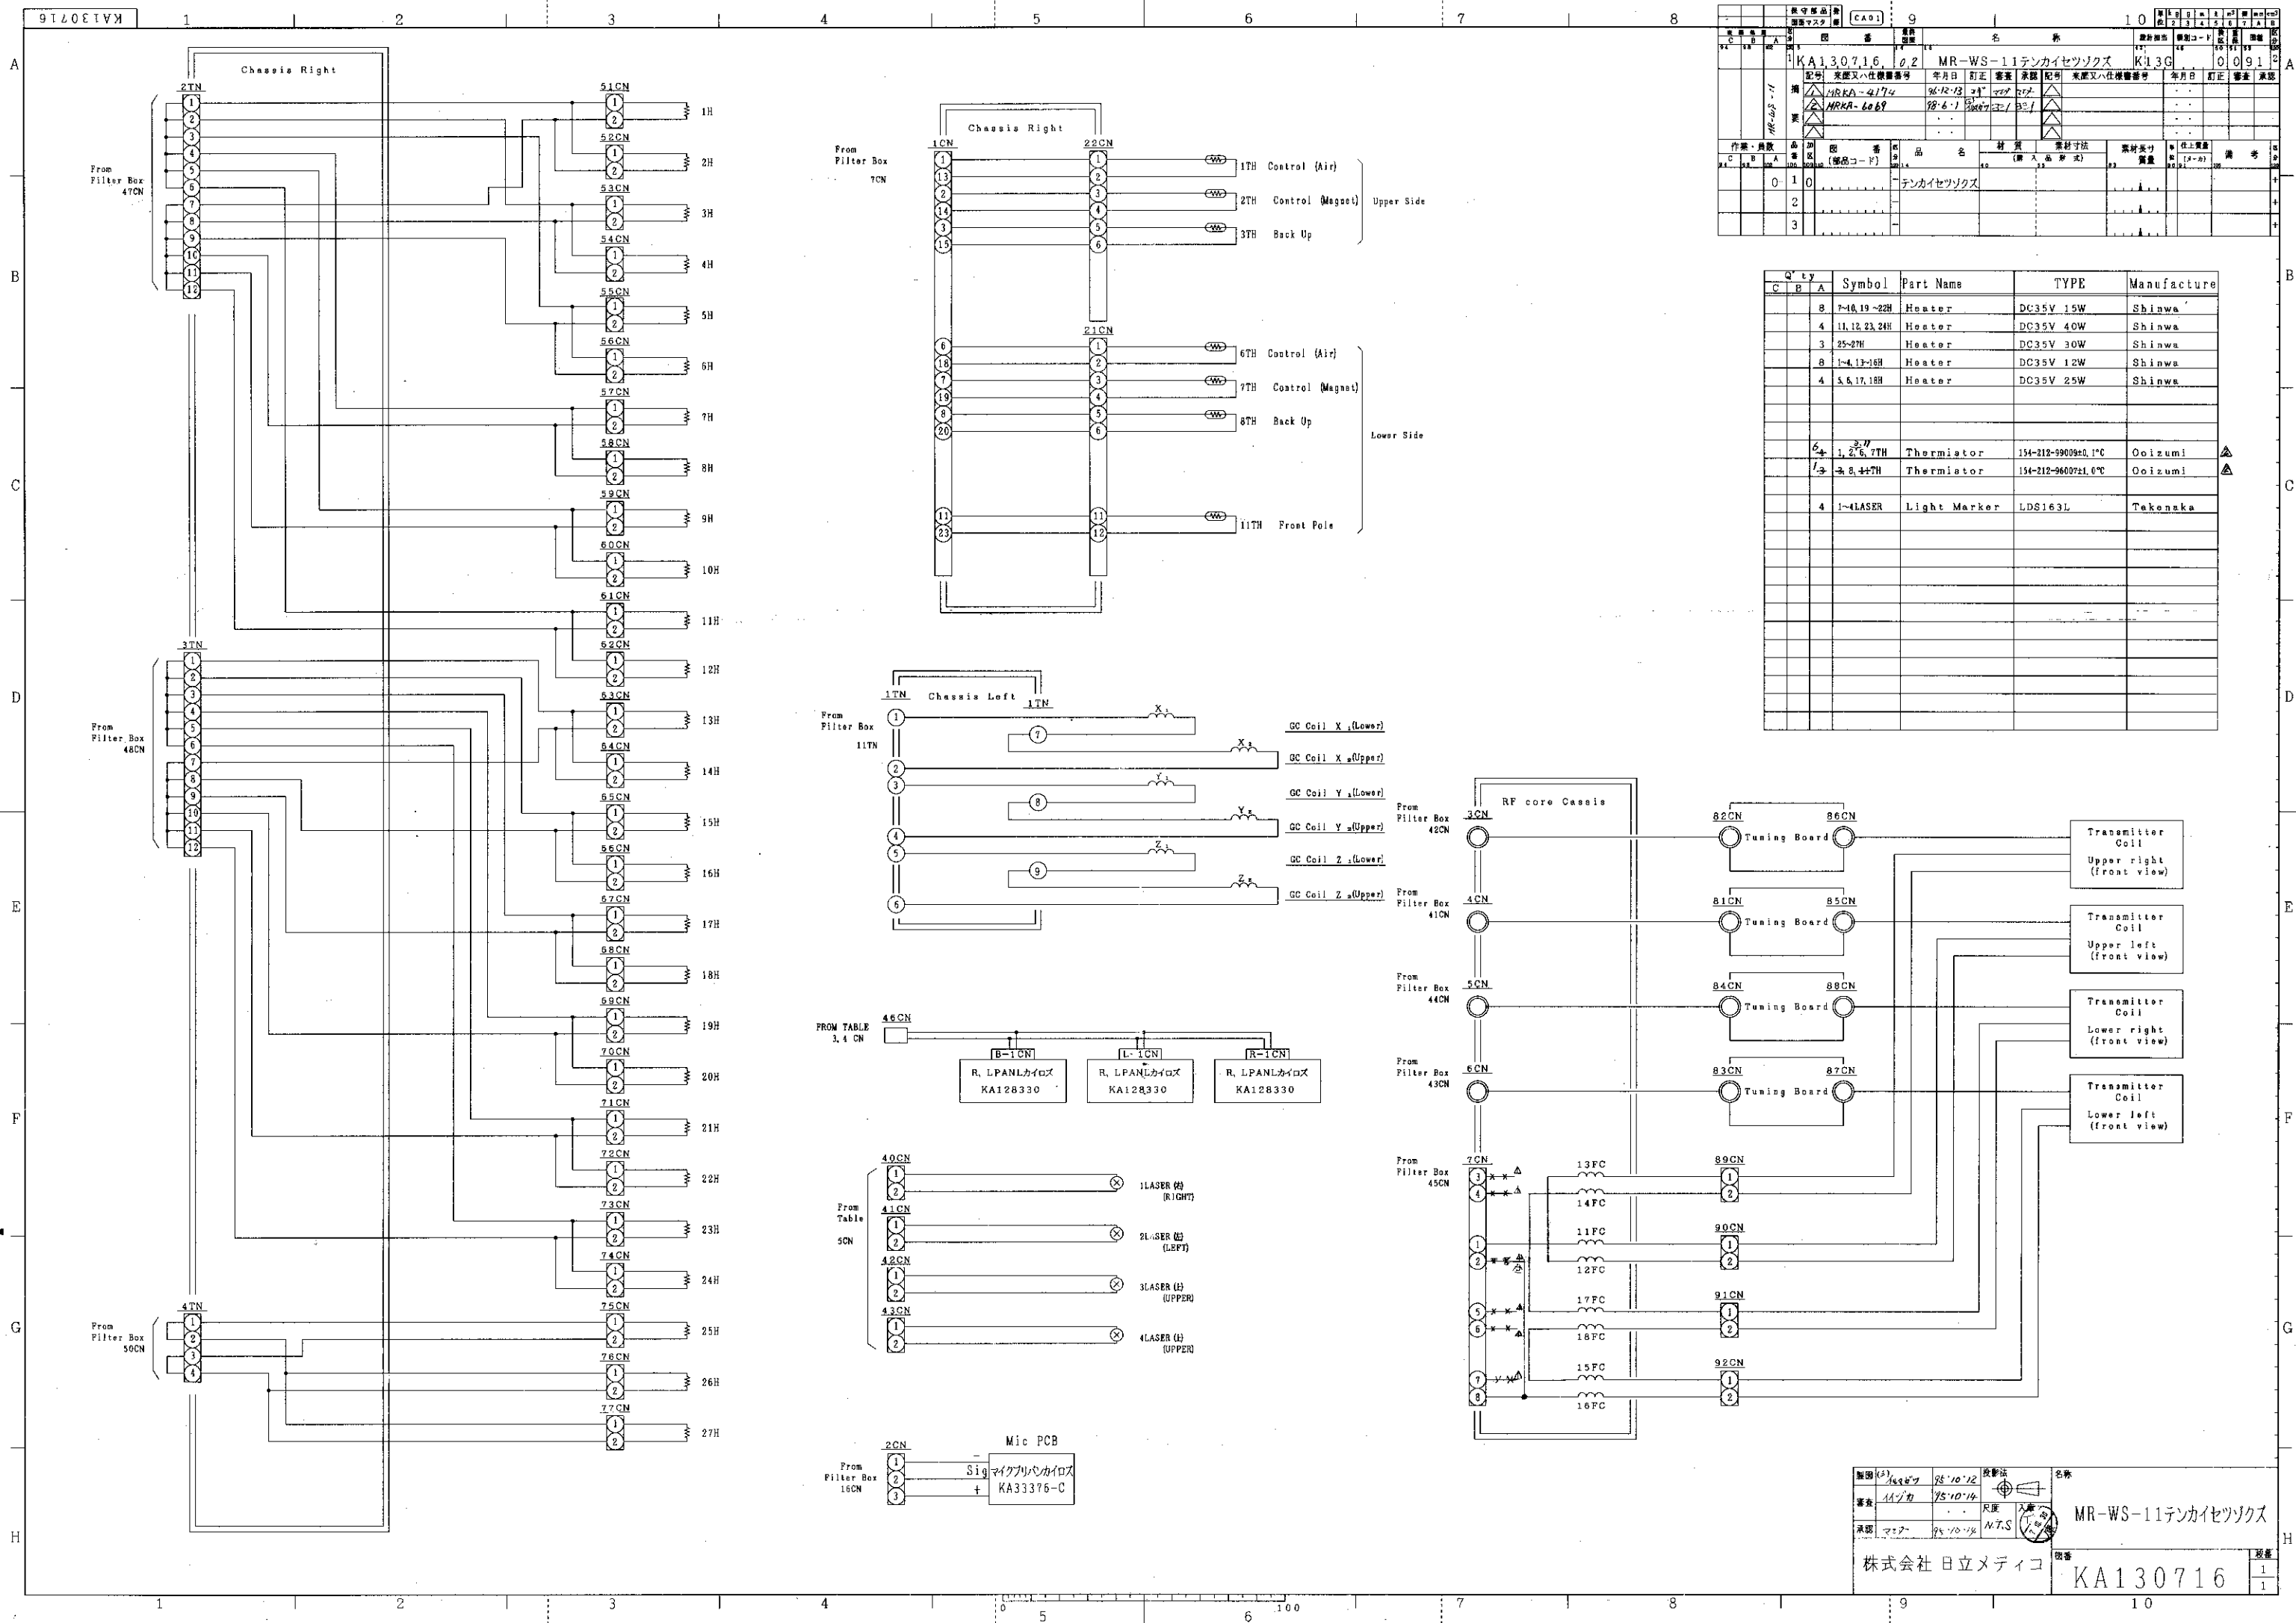

図番		図名	図種	図尺	図寸	図重	図価	図注
KA130716		MR-WS-11テンカイセツソクス	K13G	0.2	0.2	0.2	0.2	0.2
MRKA-4174		MRKA-4174	MRKA-4174	MRKA-4174	MRKA-4174	MRKA-4174	MRKA-4174	MRKA-4174
MRKA-4089		MRKA-4089	MRKA-4089	MRKA-4089	MRKA-4089	MRKA-4089	MRKA-4089	MRKA-4089
010		テンカイセツソクス	テンカイセツソクス	テンカイセツソクス	テンカイセツソクス	テンカイセツソクス	テンカイセツソクス	テンカイセツソクス
02								
03								

Q'ty	Symbol	Part Name	TYPE	Manufacture
8	7-10, 19-22H	Heater	DC35V 15W	Shinwa
4	11, 12, 23, 24H	Heater	DC35V 40W	Shinwa
3	25-27H	Heater	DC35V 30W	Shinwa
8	1-4, 13-16H	Heater	DC35V 12W	Shinwa
4	5, 6, 17, 18H	Heater	DC35V 25W	Shinwa
6	1, 2, 6, 7TH	Thermistor	154-212-9900±0.1°C	Ooizumi
2	8, 4+7TH	Thermistor	154-212-9600±1.0°C	Ooizumi
4	1-4LASER	Light Marker	LDS163L	Teknaka






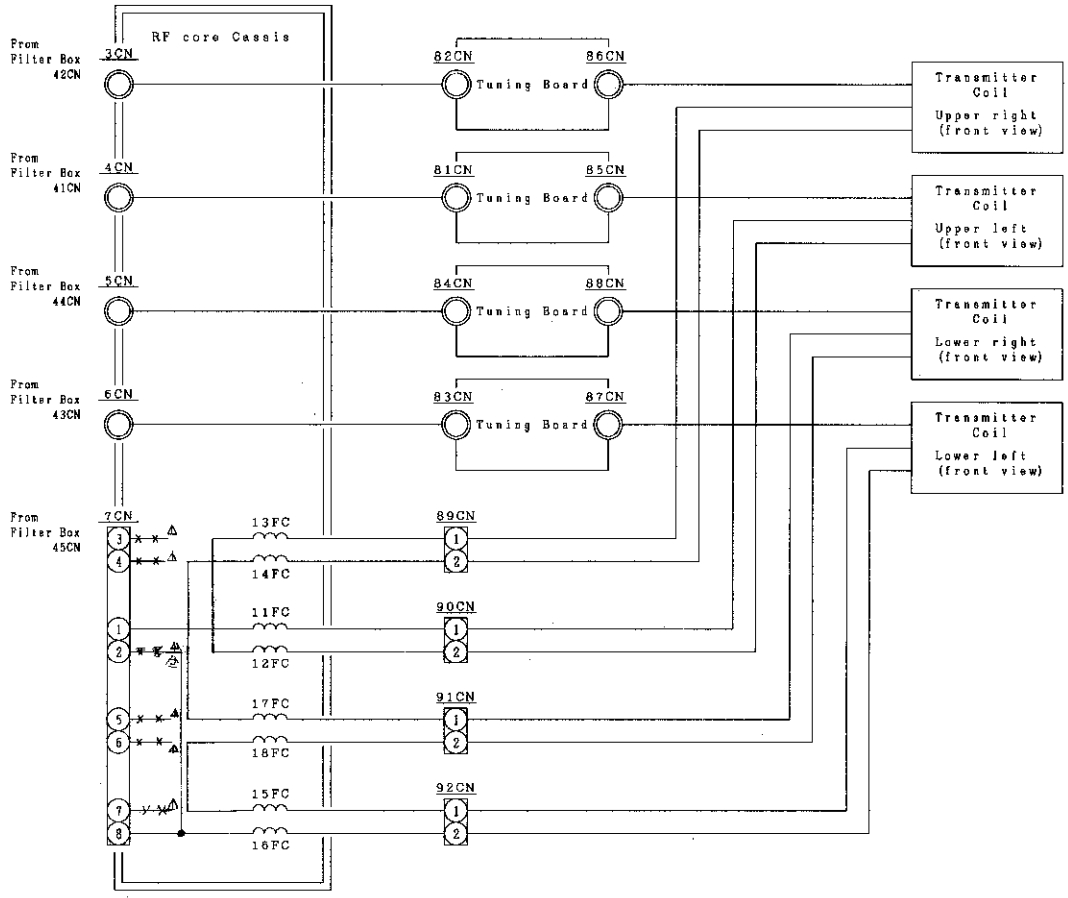
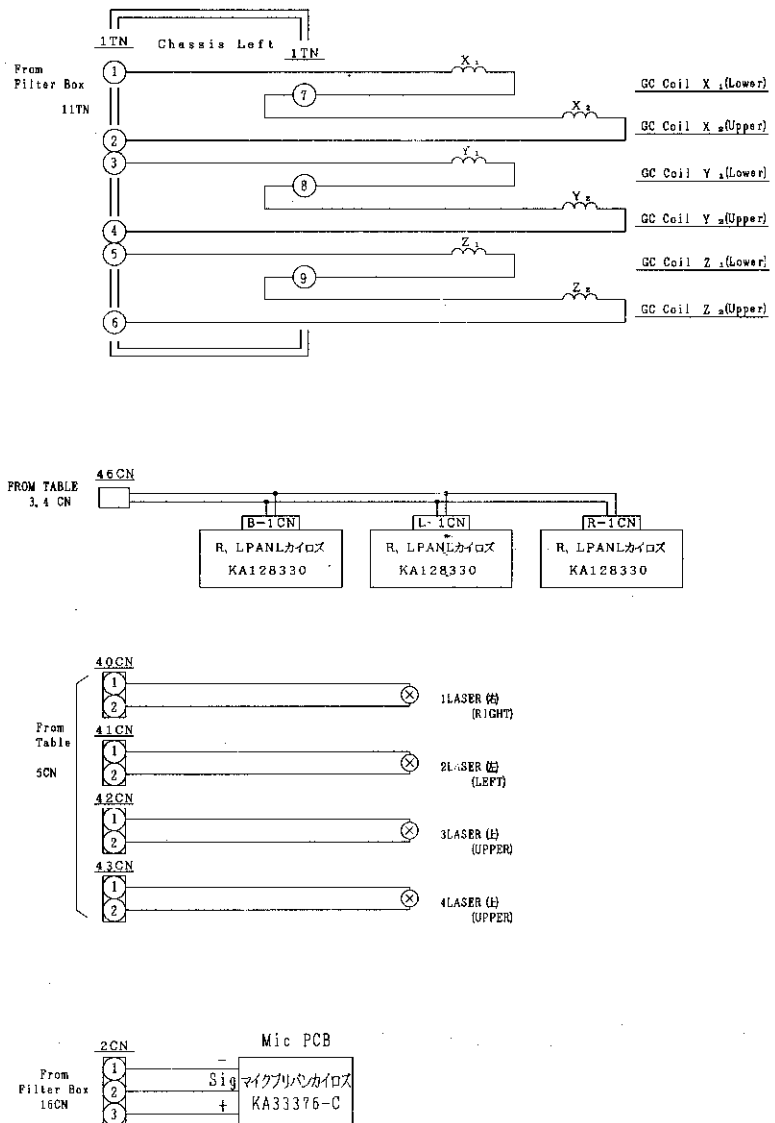



図番	図名	図種	図尺	図寸	図重	図価	図注
KA130716	MR-WS-11テンカイセツソクス	K13G	0.2	0.2	0.2	0.2	0.2
MRKA-4174	MRKA-4174	MRKA-4174	MRKA-4174	MRKA-4174	MRKA-4174	MRKA-4174	MRKA-4174
MRKA-4089	MRKA-4089	MRKA-4089	MRKA-4089	MRKA-4089	MRKA-4089	MRKA-4089	MRKA-4089
010	テンカイセツソクス	テンカイセツソクス	テンカイセツソクス	テンカイセツソクス	テンカイセツソクス	テンカイセツソクス	テンカイセツソクス
02							
03							


品名	数量	単位	備考
MR-WS-10 テンカイセツソクス	1	台	
部品名	数量	単位	備考
1. 10. 11. 21. 22H Heater	4	個	
2. 23-25H Heater	3	個	
3. 1-4. 12-15H Heater	8	個	
4. 5. 6. 16. 17H Heater	4	個	
5. 1. 2. 6. 7TH Thermistor	4	個	
6. 3. 8. 9TH Thermistor	4	個	
7. 1-4LASER Light Marker	4	個	
8. 1. 2PL Light	4	個	

Q'ty	Symbol	Part Name	TYPE	Manufacture
8	1-4. 10. 20. 26. 27H	Heater	DC35V 15W	Shinwa
4	10. 11. 21. 22H	Heater	DC35V 40W	Shinwa
3	23-25H	Heater	DC35V 30W	Shinwa
8	1-4. 12-15H	Heater	DC35V 12W	Shinwa
4	5. 6. 16. 17H	Heater	DC35V 25W	Shinwa
4	1. 2. 6. 7TH	Thermistor	154-212-9800±0.1°C	Coizumi
4	3. 8. 9TH	Thermistor	154-212-9800±0.1°C	Coizumi
4	1-4LASER	Light Marker	LDS163L	Takenaka
4	1. 2PL	Light	JR12V20W/K5W-C	Hitachi

製図	1/1	25.00.15	図名	MR-WS-10 テンカイセツソクス
審査	1/1	25.00.15	図番	KA130762
承認	1/1	25.00.15	図番	KA130762

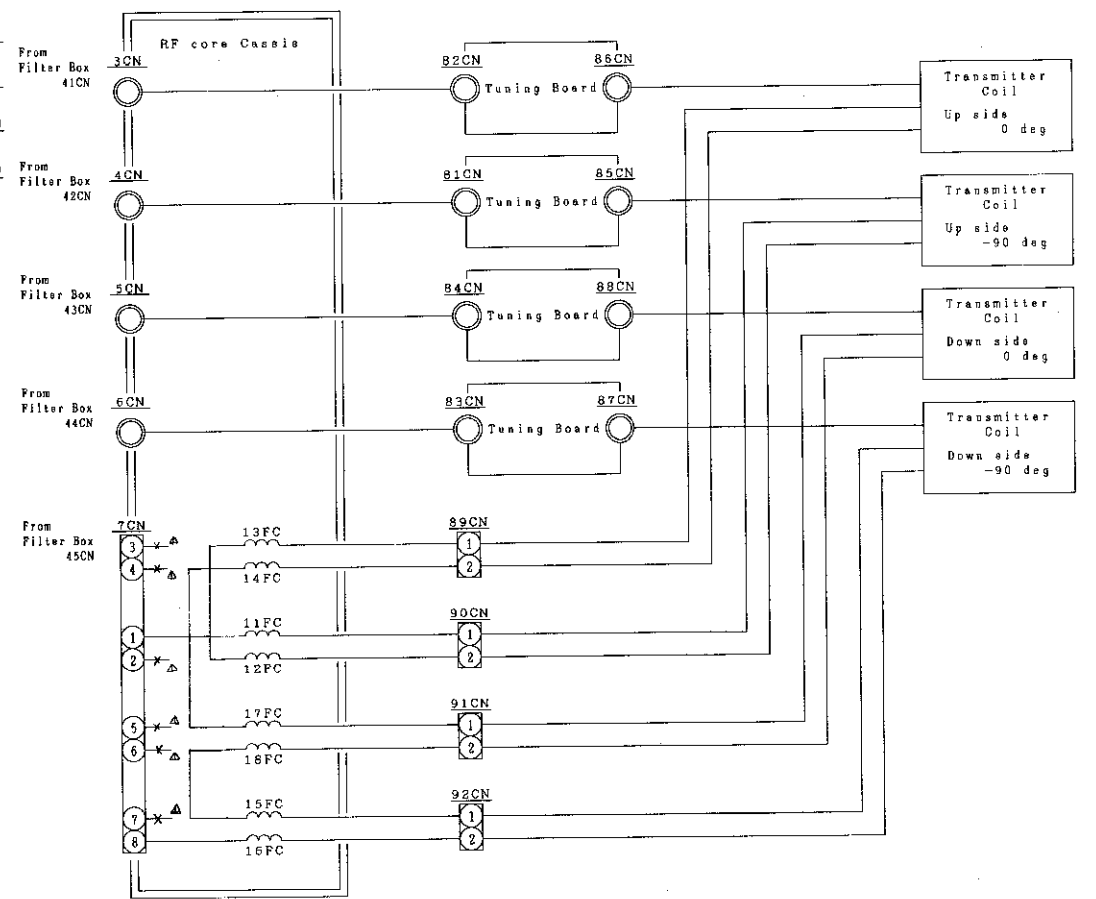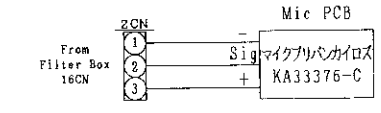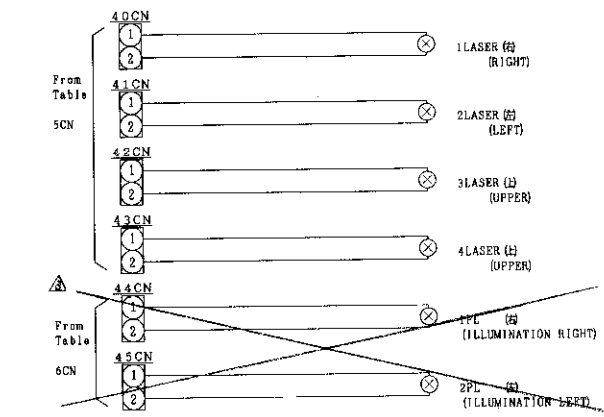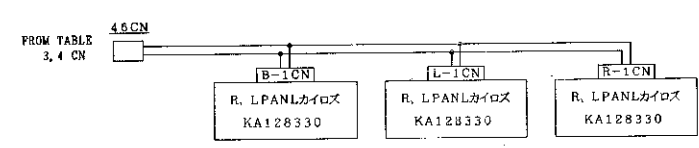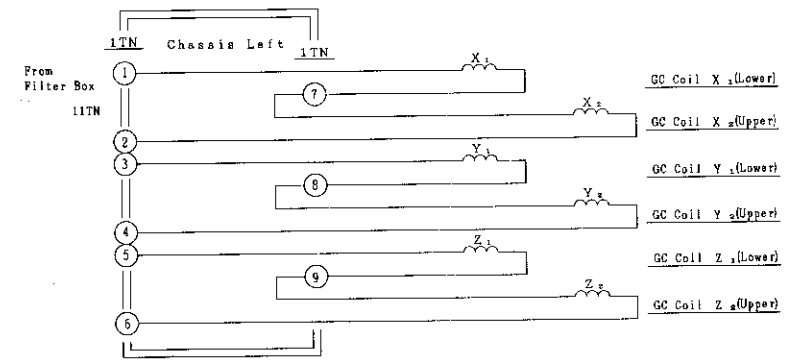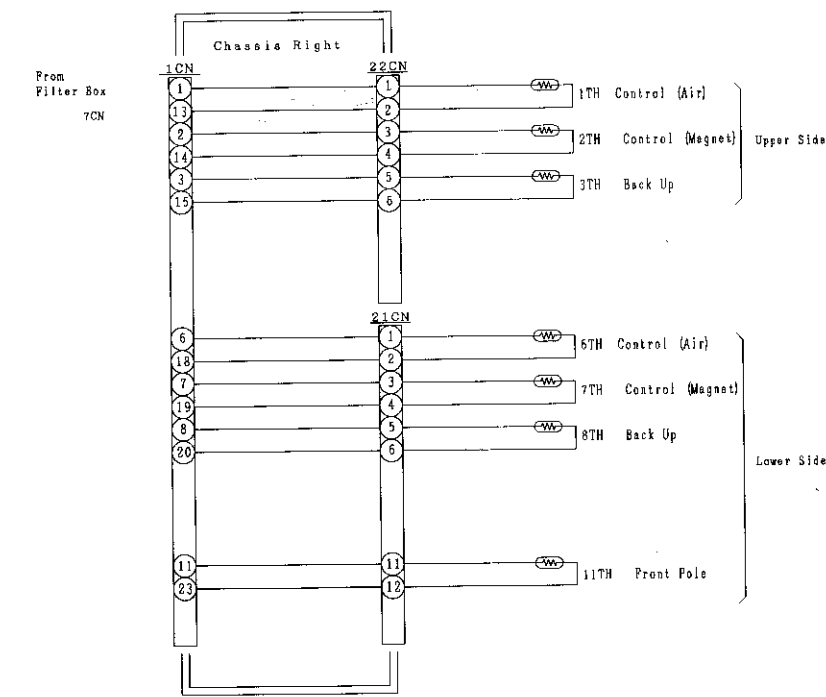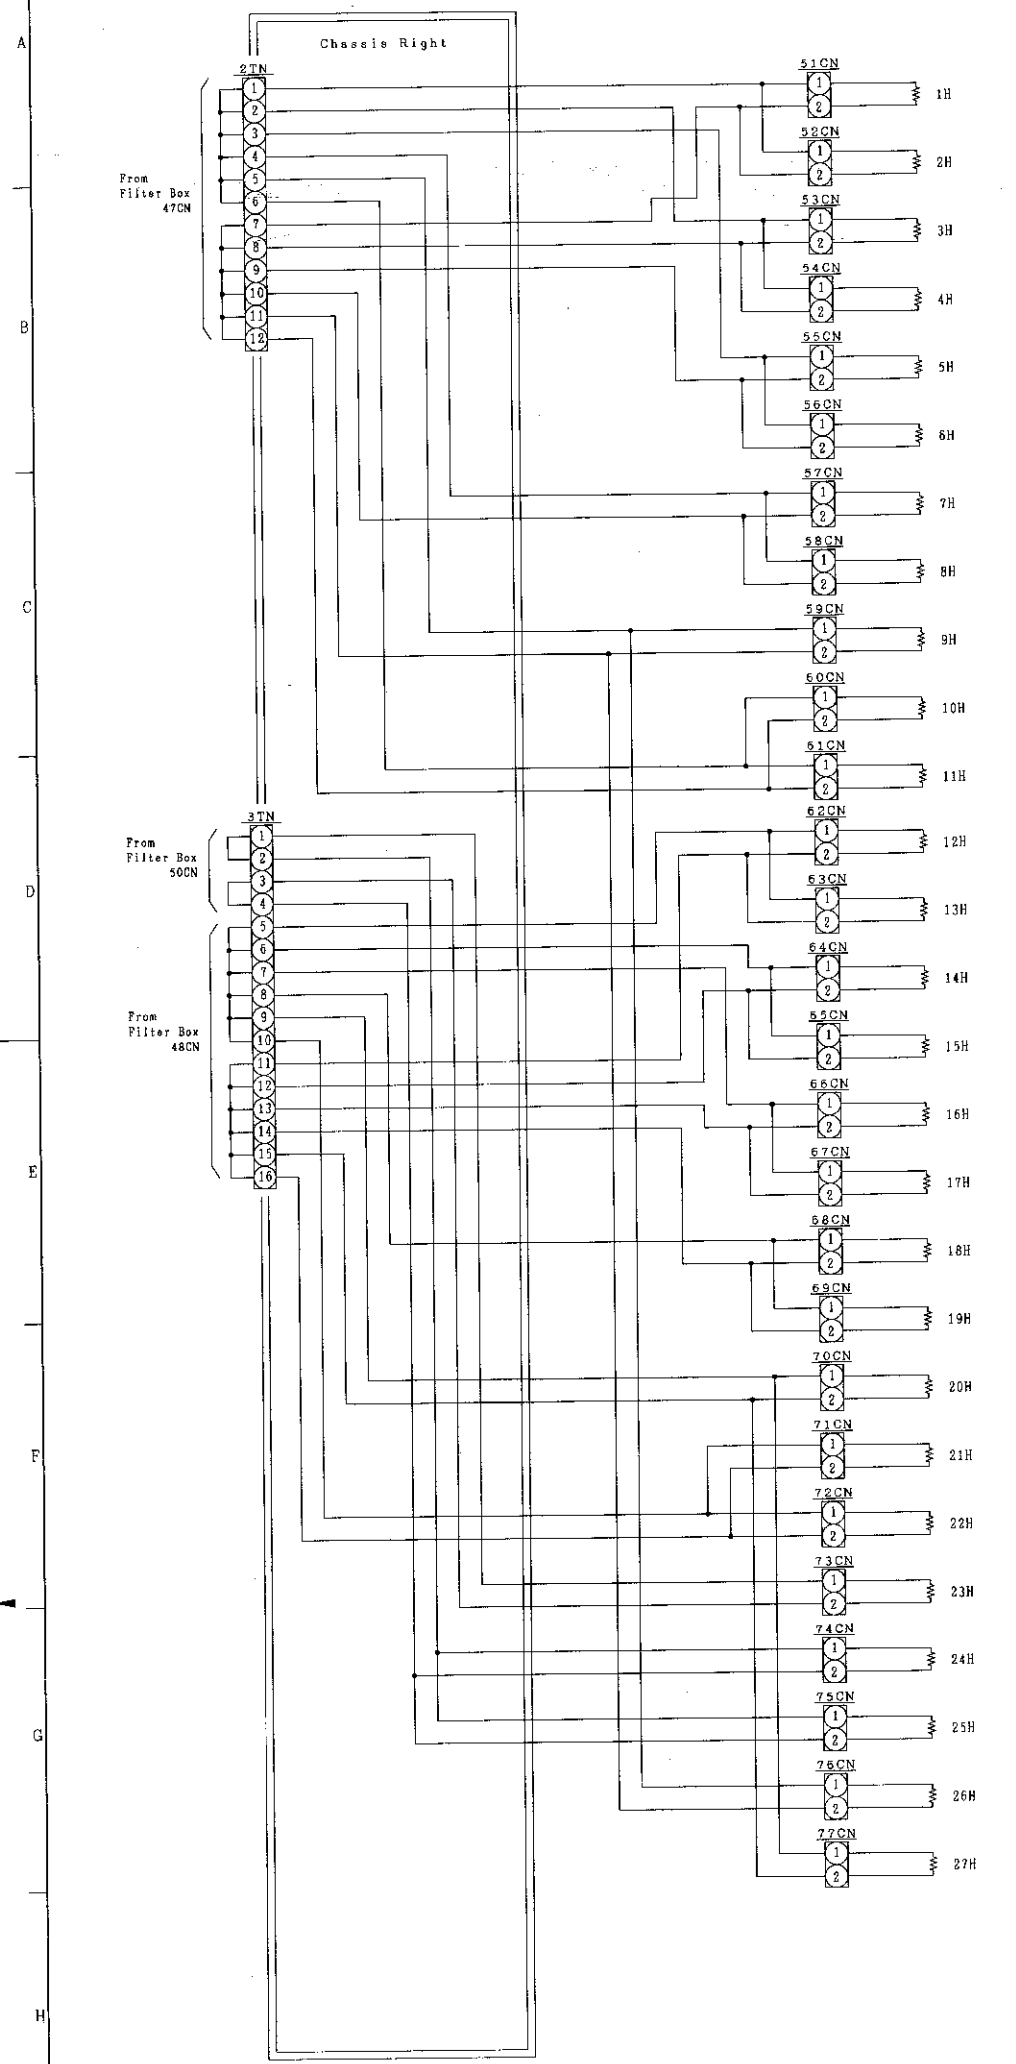


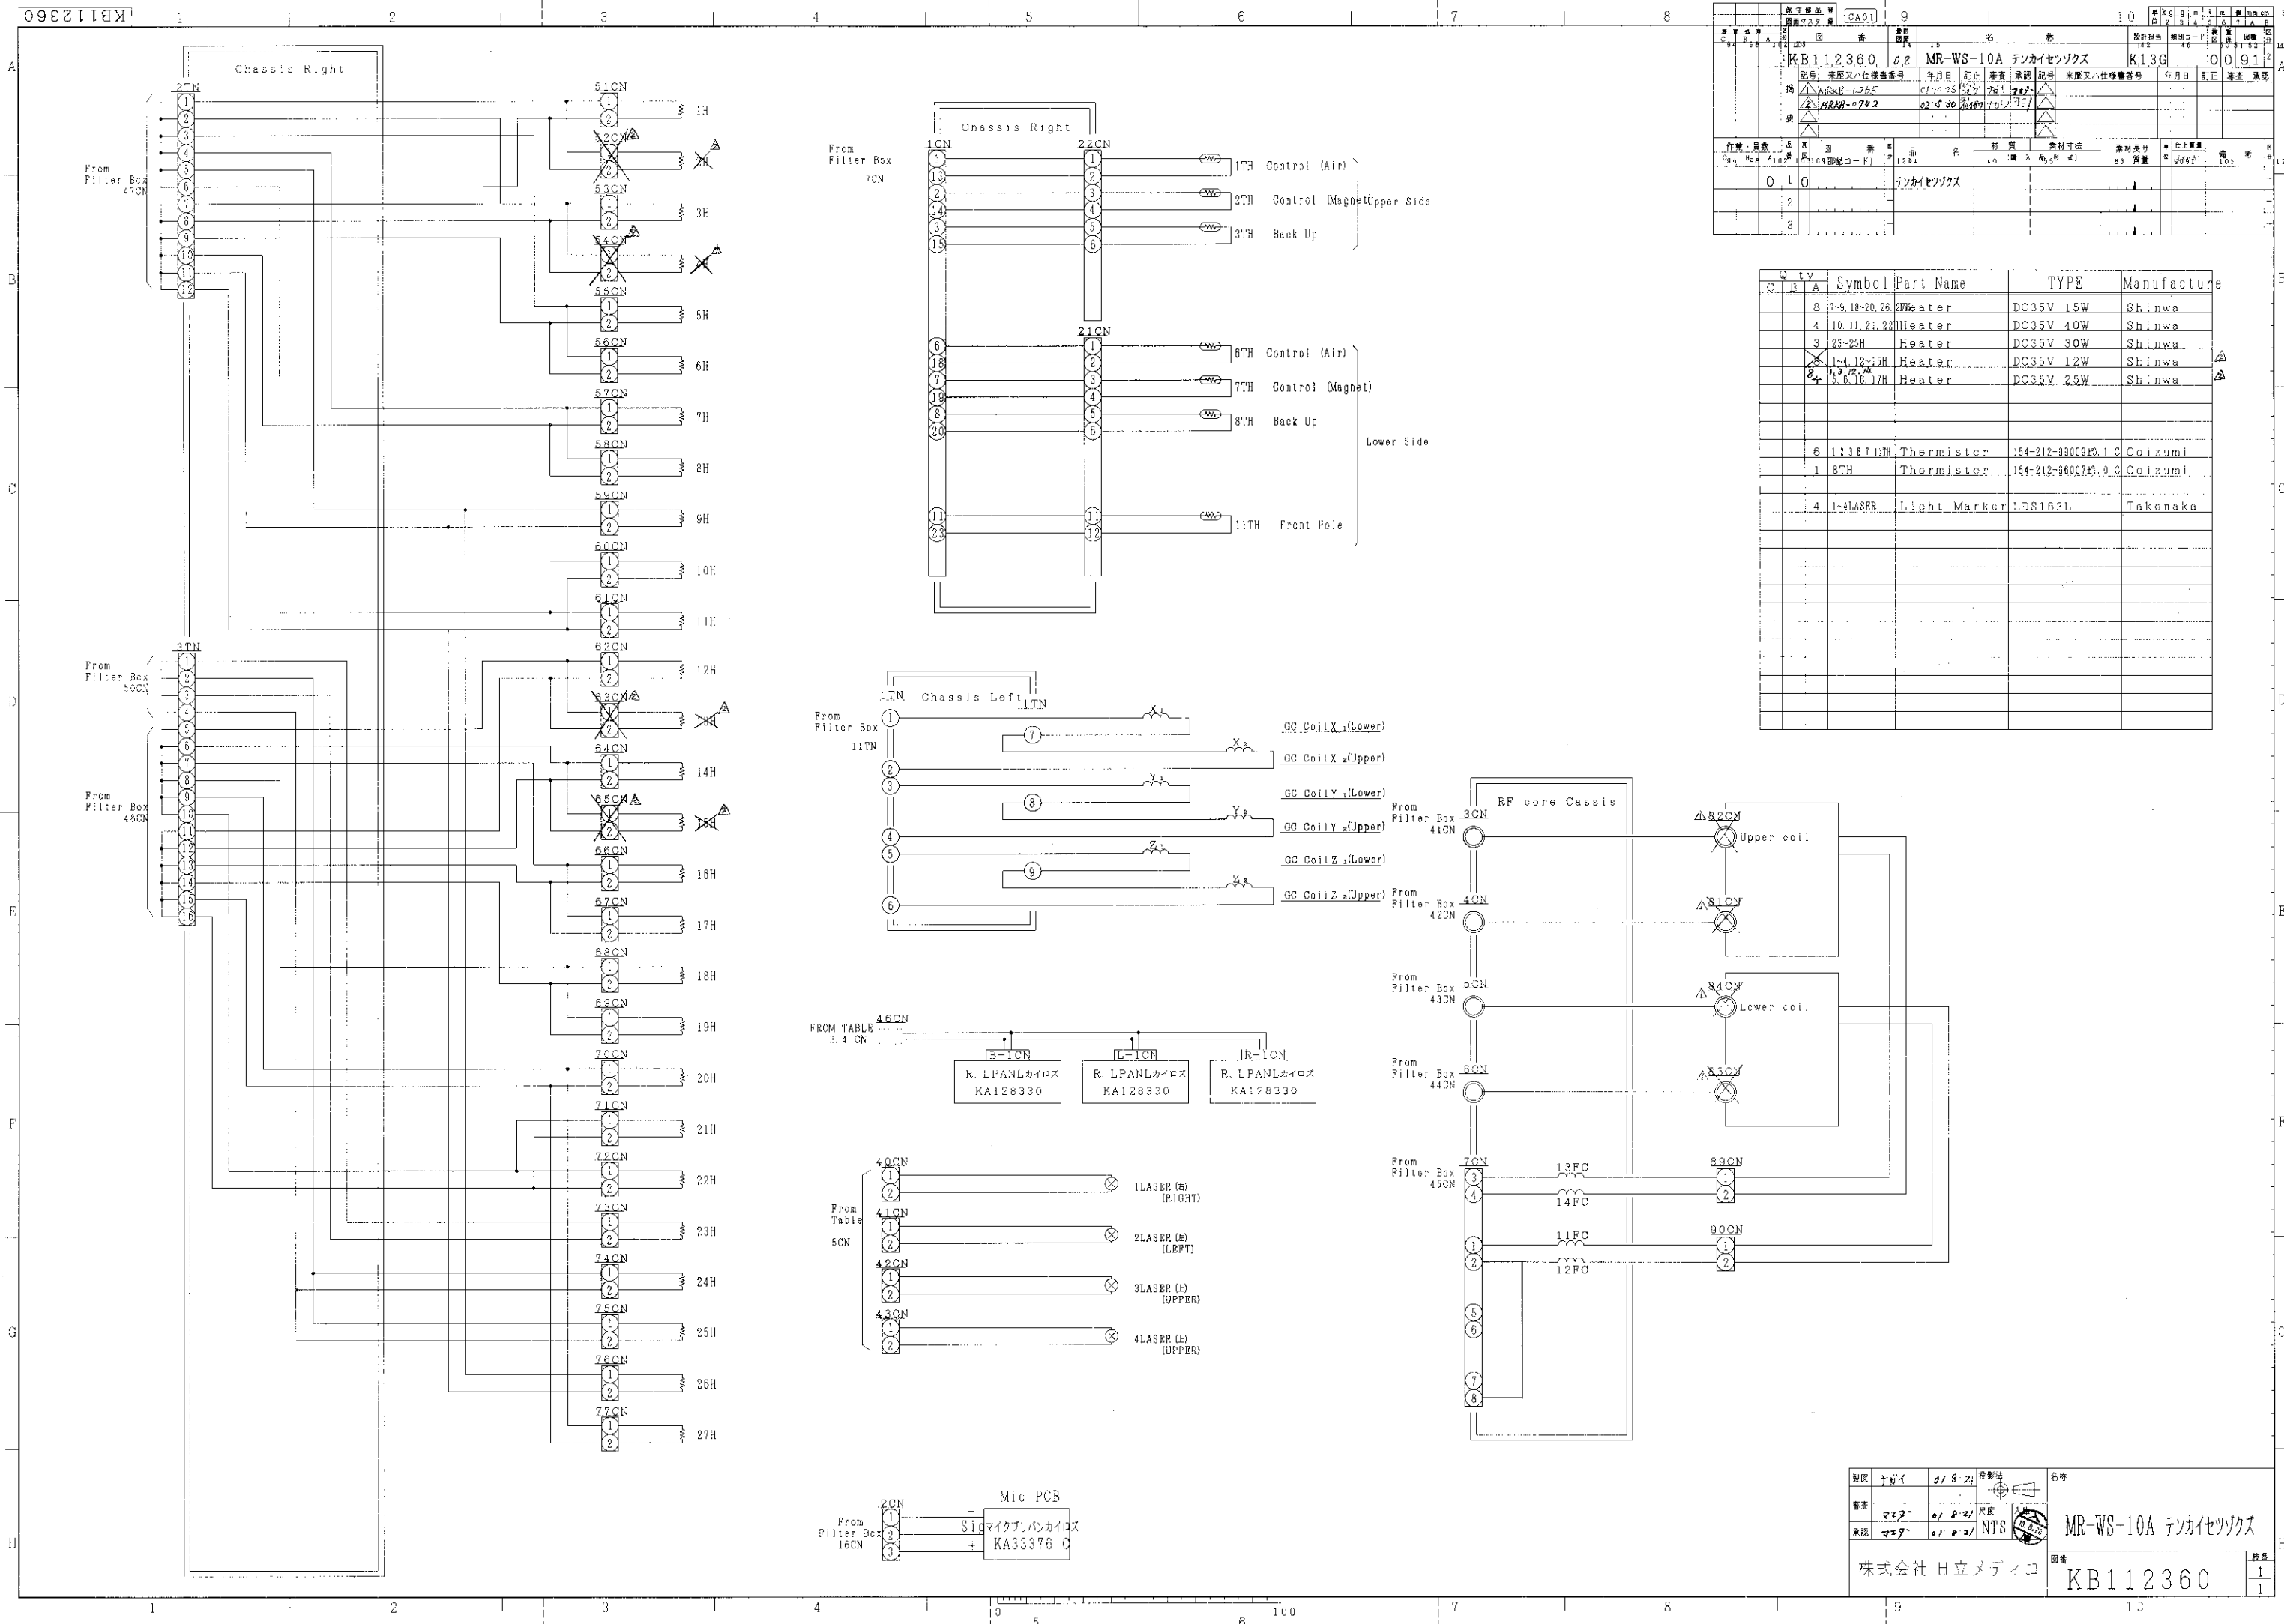

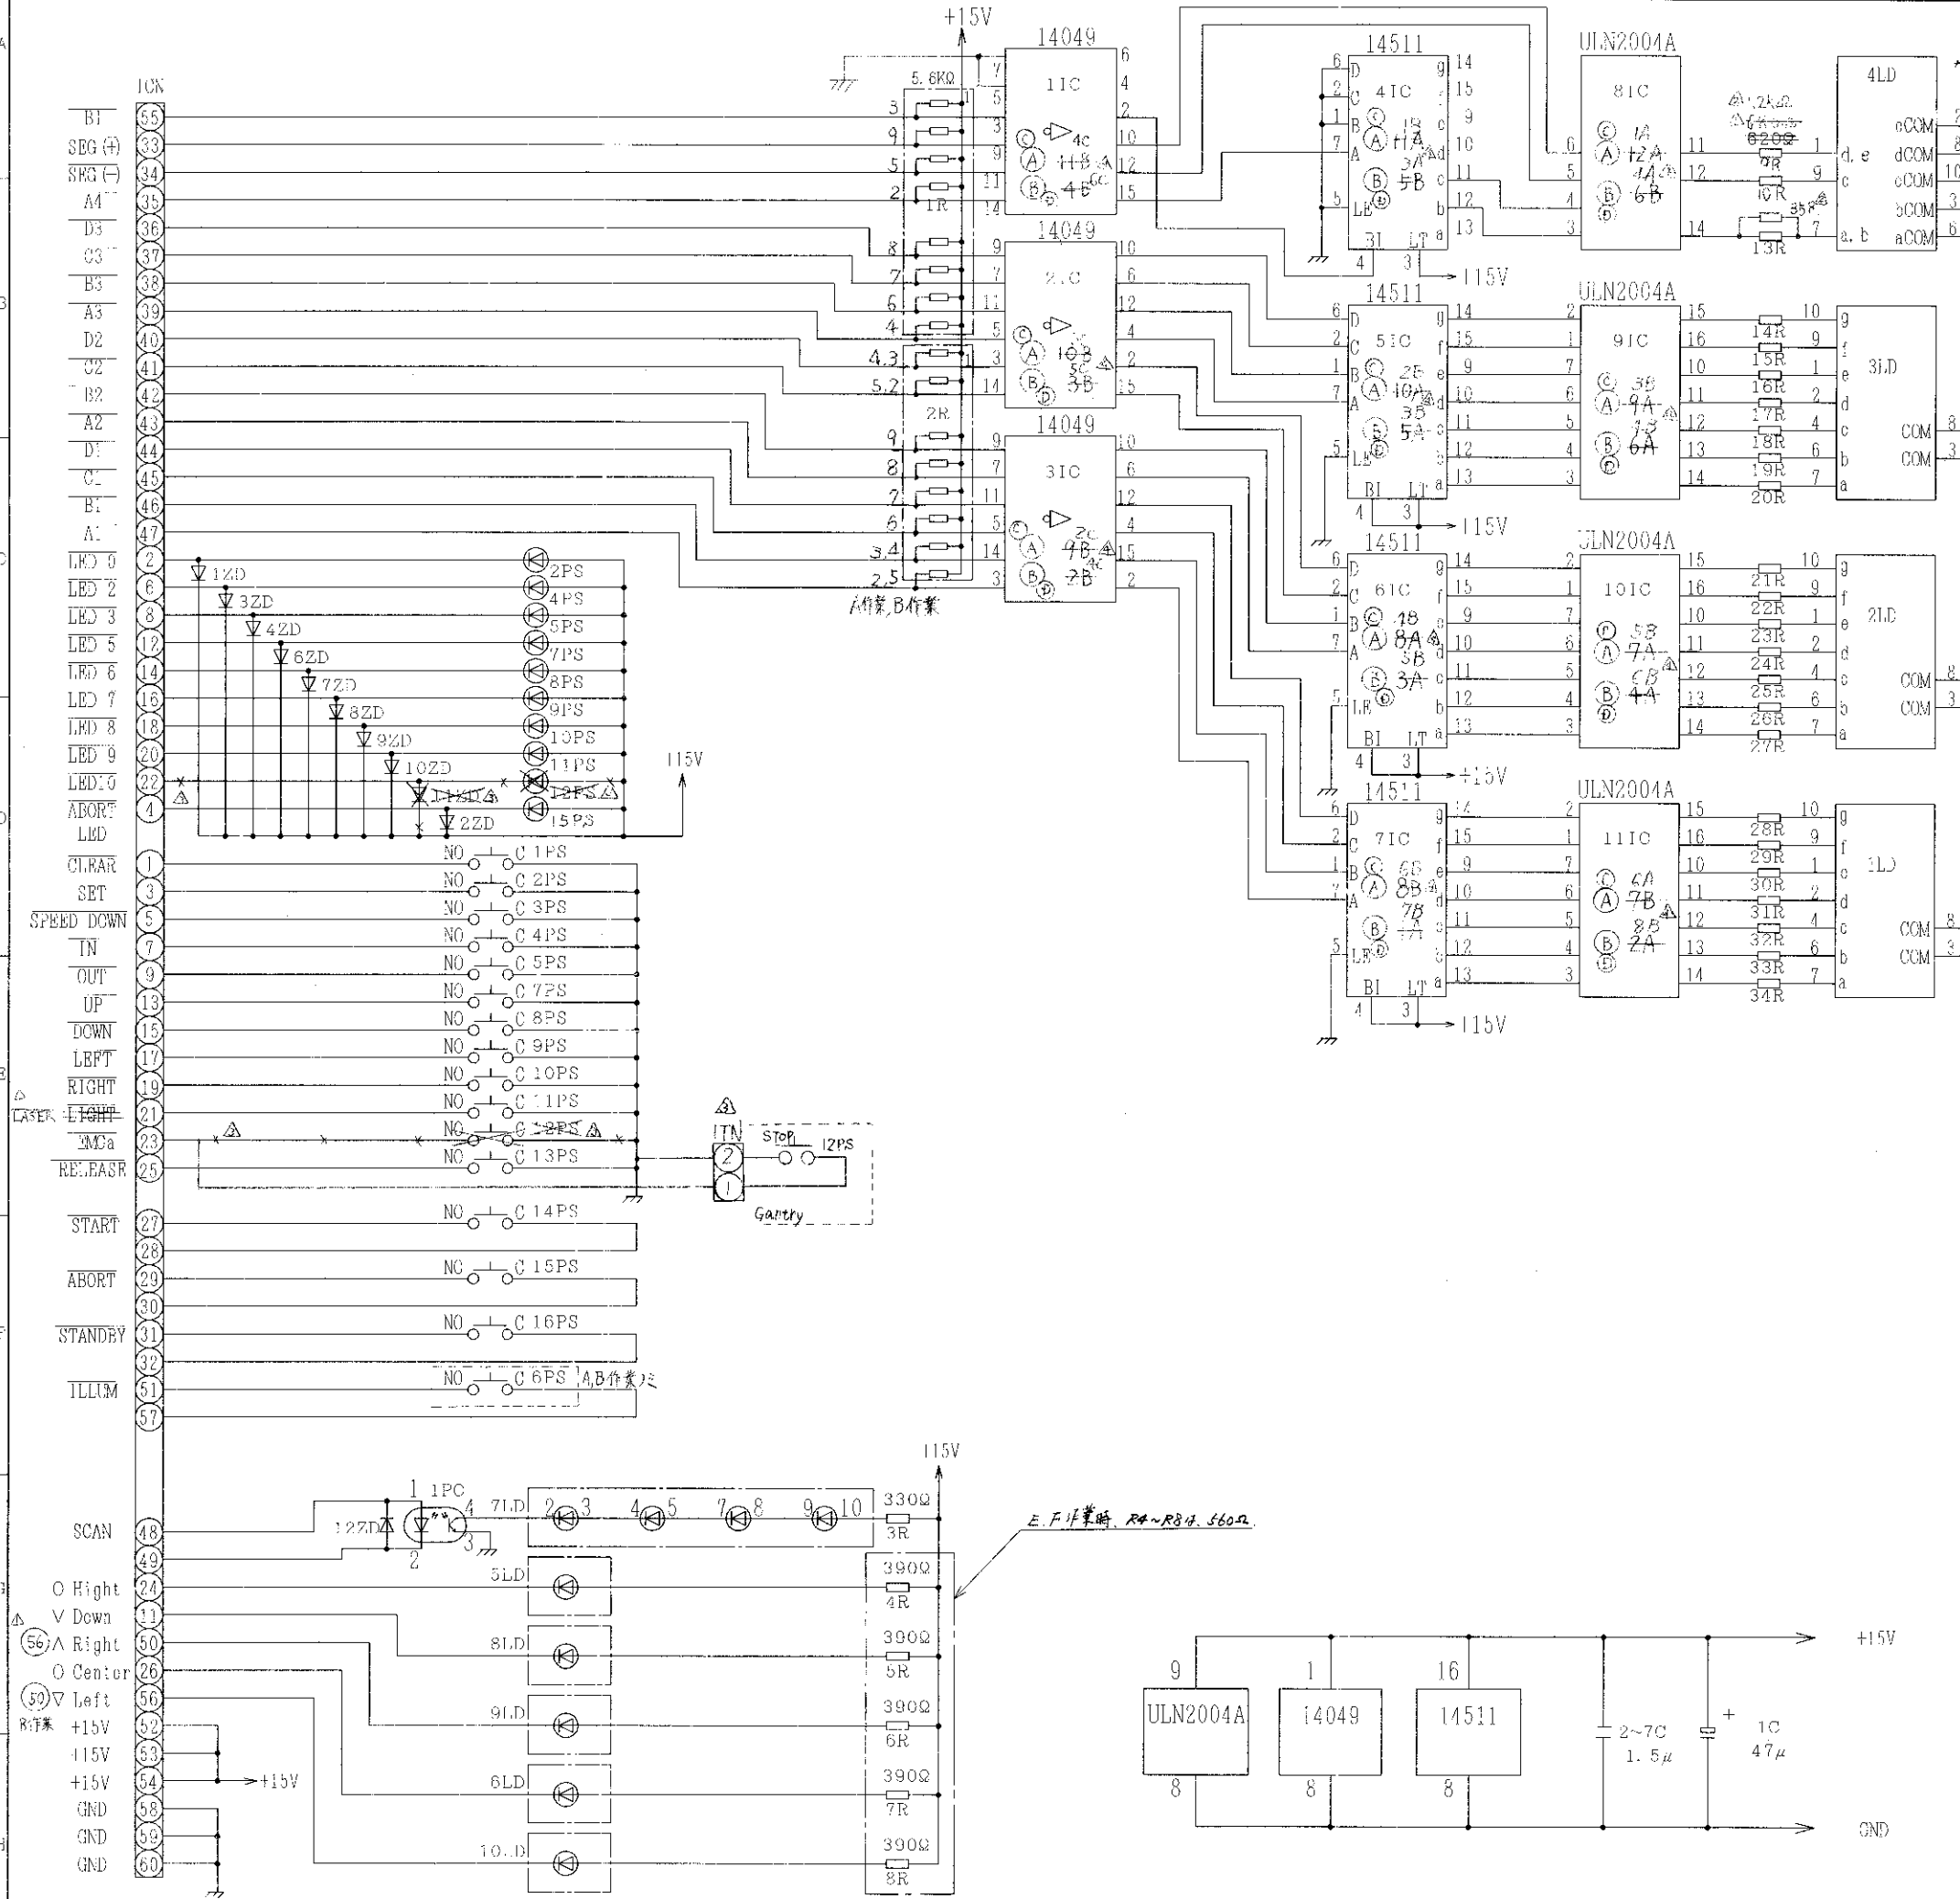


部品名				SYMBOL	PART NAME	TYPE	MANUFACTURE
1	3	3	3	1~3IC	CMOS	HD14049UBP	HITACHI
4	4	4	4	4~7IC	CMOS	HD14511BP	HITACHI
4	4	4	4	8~11IC	DRIVER	ULN2004A	T. I
3	3	3	3	1~3LD	LED	NAG163P	STANLEY
1	1	1	1	4LD	LED	NSG163P	STANLEY
5	5	5	5	5, 6, 8, 9, 10LD	LED	MU91-5001	STANLEY
1	1	1	1	7LD	LED	LT9220E	SHARP
1	1	1	1	1PC	PHOTO CAPRA	EE-CF1	OMRON
2	2	2	2	1-4, 6-14ZD	ZENER DIODE	HZ3.0PB	HITACHI
1	1	1	1	12ZD	ZENER DIODE	AW01-18	HITACHI
1	1	1	1	1CN	CONNECTOR	HIF3BA-60PA-2.54DS	HUROSE
2	2	2	2	1, 2R	RESISTOR	EXB-FQE-1023-YF	MATSUMITA
4	4	4	4	4~8R	RESISTOR	LF1/4 390ΩF	TAMA
1	1	1	1	3R	RESISTOR	LF1/4 330ΩF	TAMA
25	25	25	25	10, 11, 13-34R	RESISTOR	LF1/4 330ΩF	TAMA
1	1	1	1	1C	CAPACITOR	UVS-1E-470MCA	NICHICON
6	6	6	6	2~7C	CAPACITOR	RPE123-901F 155Z25	MURATA
1	1	1	1	1, 3, 6, 13, 14, 16PS	DIGITAST SW	DT-SEHJ-LG	TOKO
8	8	8	8	2, 4, 5, 7-10, 15PS	DIGITAST SW	DT-SEHJ-LG-G	TOKO
1	1	1	1	11PS	DIGITAST SW	DT-SEHJ-LG-Y	TOKO
1	1	1	1	12PS	DIGITAST SW	DT-SK5HJ-R-Y	TOKO
1	1	1	1	17N	TERMINAL	F2031A 2P(UL)	Fujitsu
1	1	1	1	12PS	SWITCH	Q1-121.0	ea.o
5	5	5	5	13, 15, 14, 16PS	DIGITAST SW	DT-SEH-LG	TOKO
5	5	5	5	R4~R8	RESISTOR	LF1/4 560Ω-4F-TP	TAMA

注記
A. 1. 51F作業パネル(左側)後側操作盤とし、
B. 51F作業パネル(右側)操作盤とする。

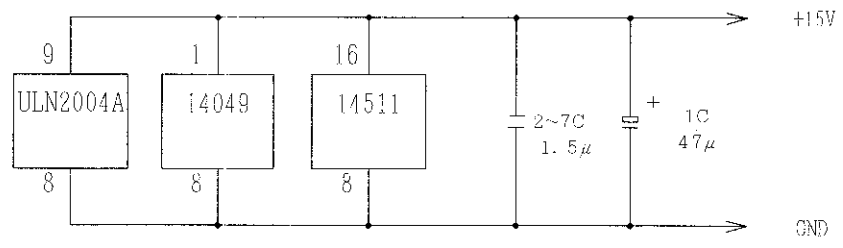

№	求歴又ハ仕様番番号	年月日	訂正	審査	承認
▲	MRKA-5866	98.4.14	訂正	112カ	331
▲	MRKA-8621	00.6.13	訂正	9494	331
▲		.			
▲		.			

(登)		(登)		CA01		4		5		6		単位表		8		m		e		n		mm		in	
C		B		A		区分		図番		品名		設計担当		類別コード		区番		番		図欄		区分			
34		35		36		37		38		39		40		41		42		43		44		45		46	
						1		KA33376		04 マイブプリバンカイロズ		K140 u509		00		91		2							
MR-HS-1		CT-W-S-3D		CT-W-S-4B		商標		記号		来歴		年月日		氏名		記号		来歴		年月日		氏名			
						△		B11年和入L.		83-6-27		T77		△		CMK-6456		87-12-14		J.H					
						△		C作業新設スル.		87-6-2		I71		△											
						△		CMK-6396		87-11-26		S79		△											
個数		品番		加工		図番		区分		品名		材質		素材寸法		率材長サ		電圧		仕上重量		備考			
C B A						(部品コード)						(購入品型式)				重量		(V)		(kg)					
34		35		36		37		38		39		40		41		42		43		44		45			
X		X		X		0		1		0		マイブプリバンカイロズ													
X		X		X		0		2		0		"													
0								3		0		"													

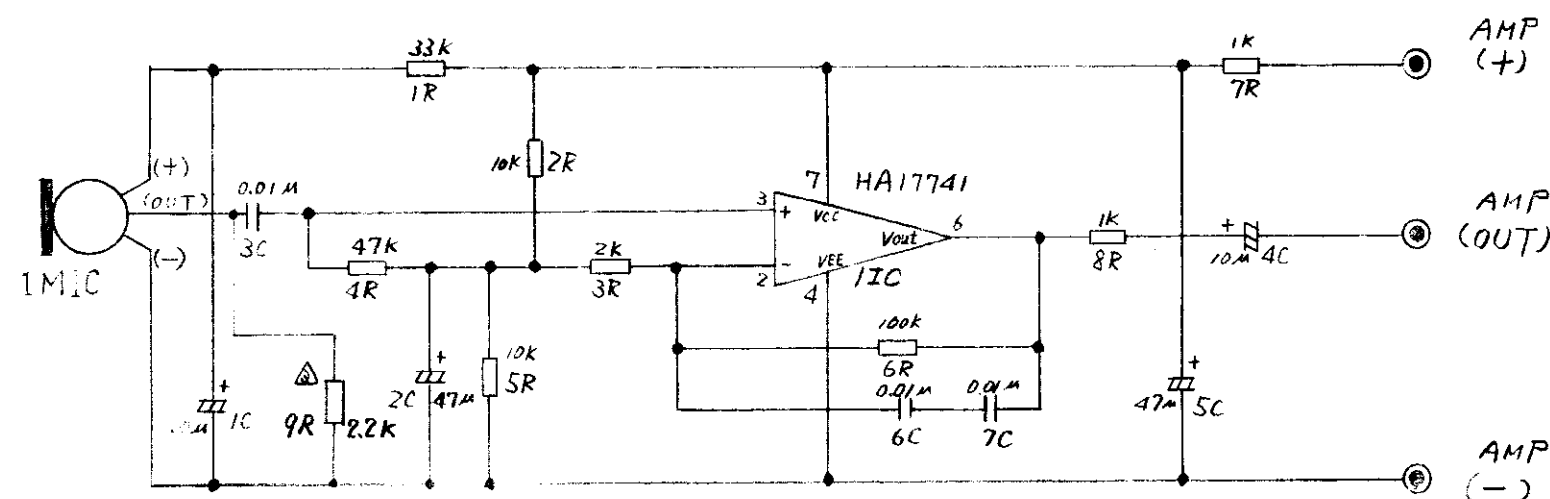[illegible]

Qty	Qty	Qty	Qty	Address / Symbol	Part name	Type	Part NO	Manufacturer
1	1	1		12C	OP AMP	HA17741 PS	J4310001	HITACHI
1				7R	resistor	RD 1/4W 1KΩ J	J2120055	KōA
1				8R	↓	↓ 100Ω J	J2120026	↓
1	1	1		1R	resistor	RD 1/4 WY 33kΩ J	J2120094	KōA
2	2	2		2R, 5R	↓	↓ 10kΩ J	J2120082	↓
1	1	1		3R	↓	↓ 2kΩ J	J2120062	↓
1	1	1		4R	↓	↓ 47kΩ J	J2120098	↓
1	1	1		6R	↓	↓ 100kΩ J	J2120109	↓
2	2	2		7R, 8R	↓	↓ 1kΩ J	J2120055	↓
1				6R	resistor	RD 1/4W 2.2MΩ J	J2120133	KōA
2	2	2		1C, 4C	Capacitor	25VBSN - 10	J1440013	Nippon Chemi - Con
1	1	1		2C	↓	↓ 47	J1440016	↓
3	3	3		3C, 6C, 7C	↓	MFL 5002 103K	J1310007	N.C.C
1	1	1		5C	↓	50VBSN - 47	J1440031	Nippon Chemi - Con
1B				1M 12C	Microphone		KA319725	
1				1MIC	Microphone	ERM-10 @ LB		
2				1C, 4C	Capacitor	UVS-1H-100MCA	J1447121	N.C.C
1				2C	↓	UVS-1E-470MCA-1AT	J1447131	↓
3				3C, 6C, 7C	↓	505N-5002-103KB	J1317107	N.C.C
1				5C	↓	UVS-1H-470MCA-1AT	J1447124	N.C.C
1				9R	resistor	LF 1/4 2.2kΩ F	J2317041	TAMA

MIC. P.C.B. CIRCUIT DIAGRAM

REF. DRAWING No.

CZ2069-0 PB-ASSY

:KA 44389

P. C. BOARD

KA 33377

P.C.B. ASSEMBLY (A.P.D.): VA33378

(C.F.F.) : KA ~~324572-A, B~~
320456

製圖: 凡山 83-5-11 初經用作番 PE 1015

三角法	品名
-----	----

重 計

... 凡


83-57

(株) 日立メディコ

柏工場

圖書

KA 33376

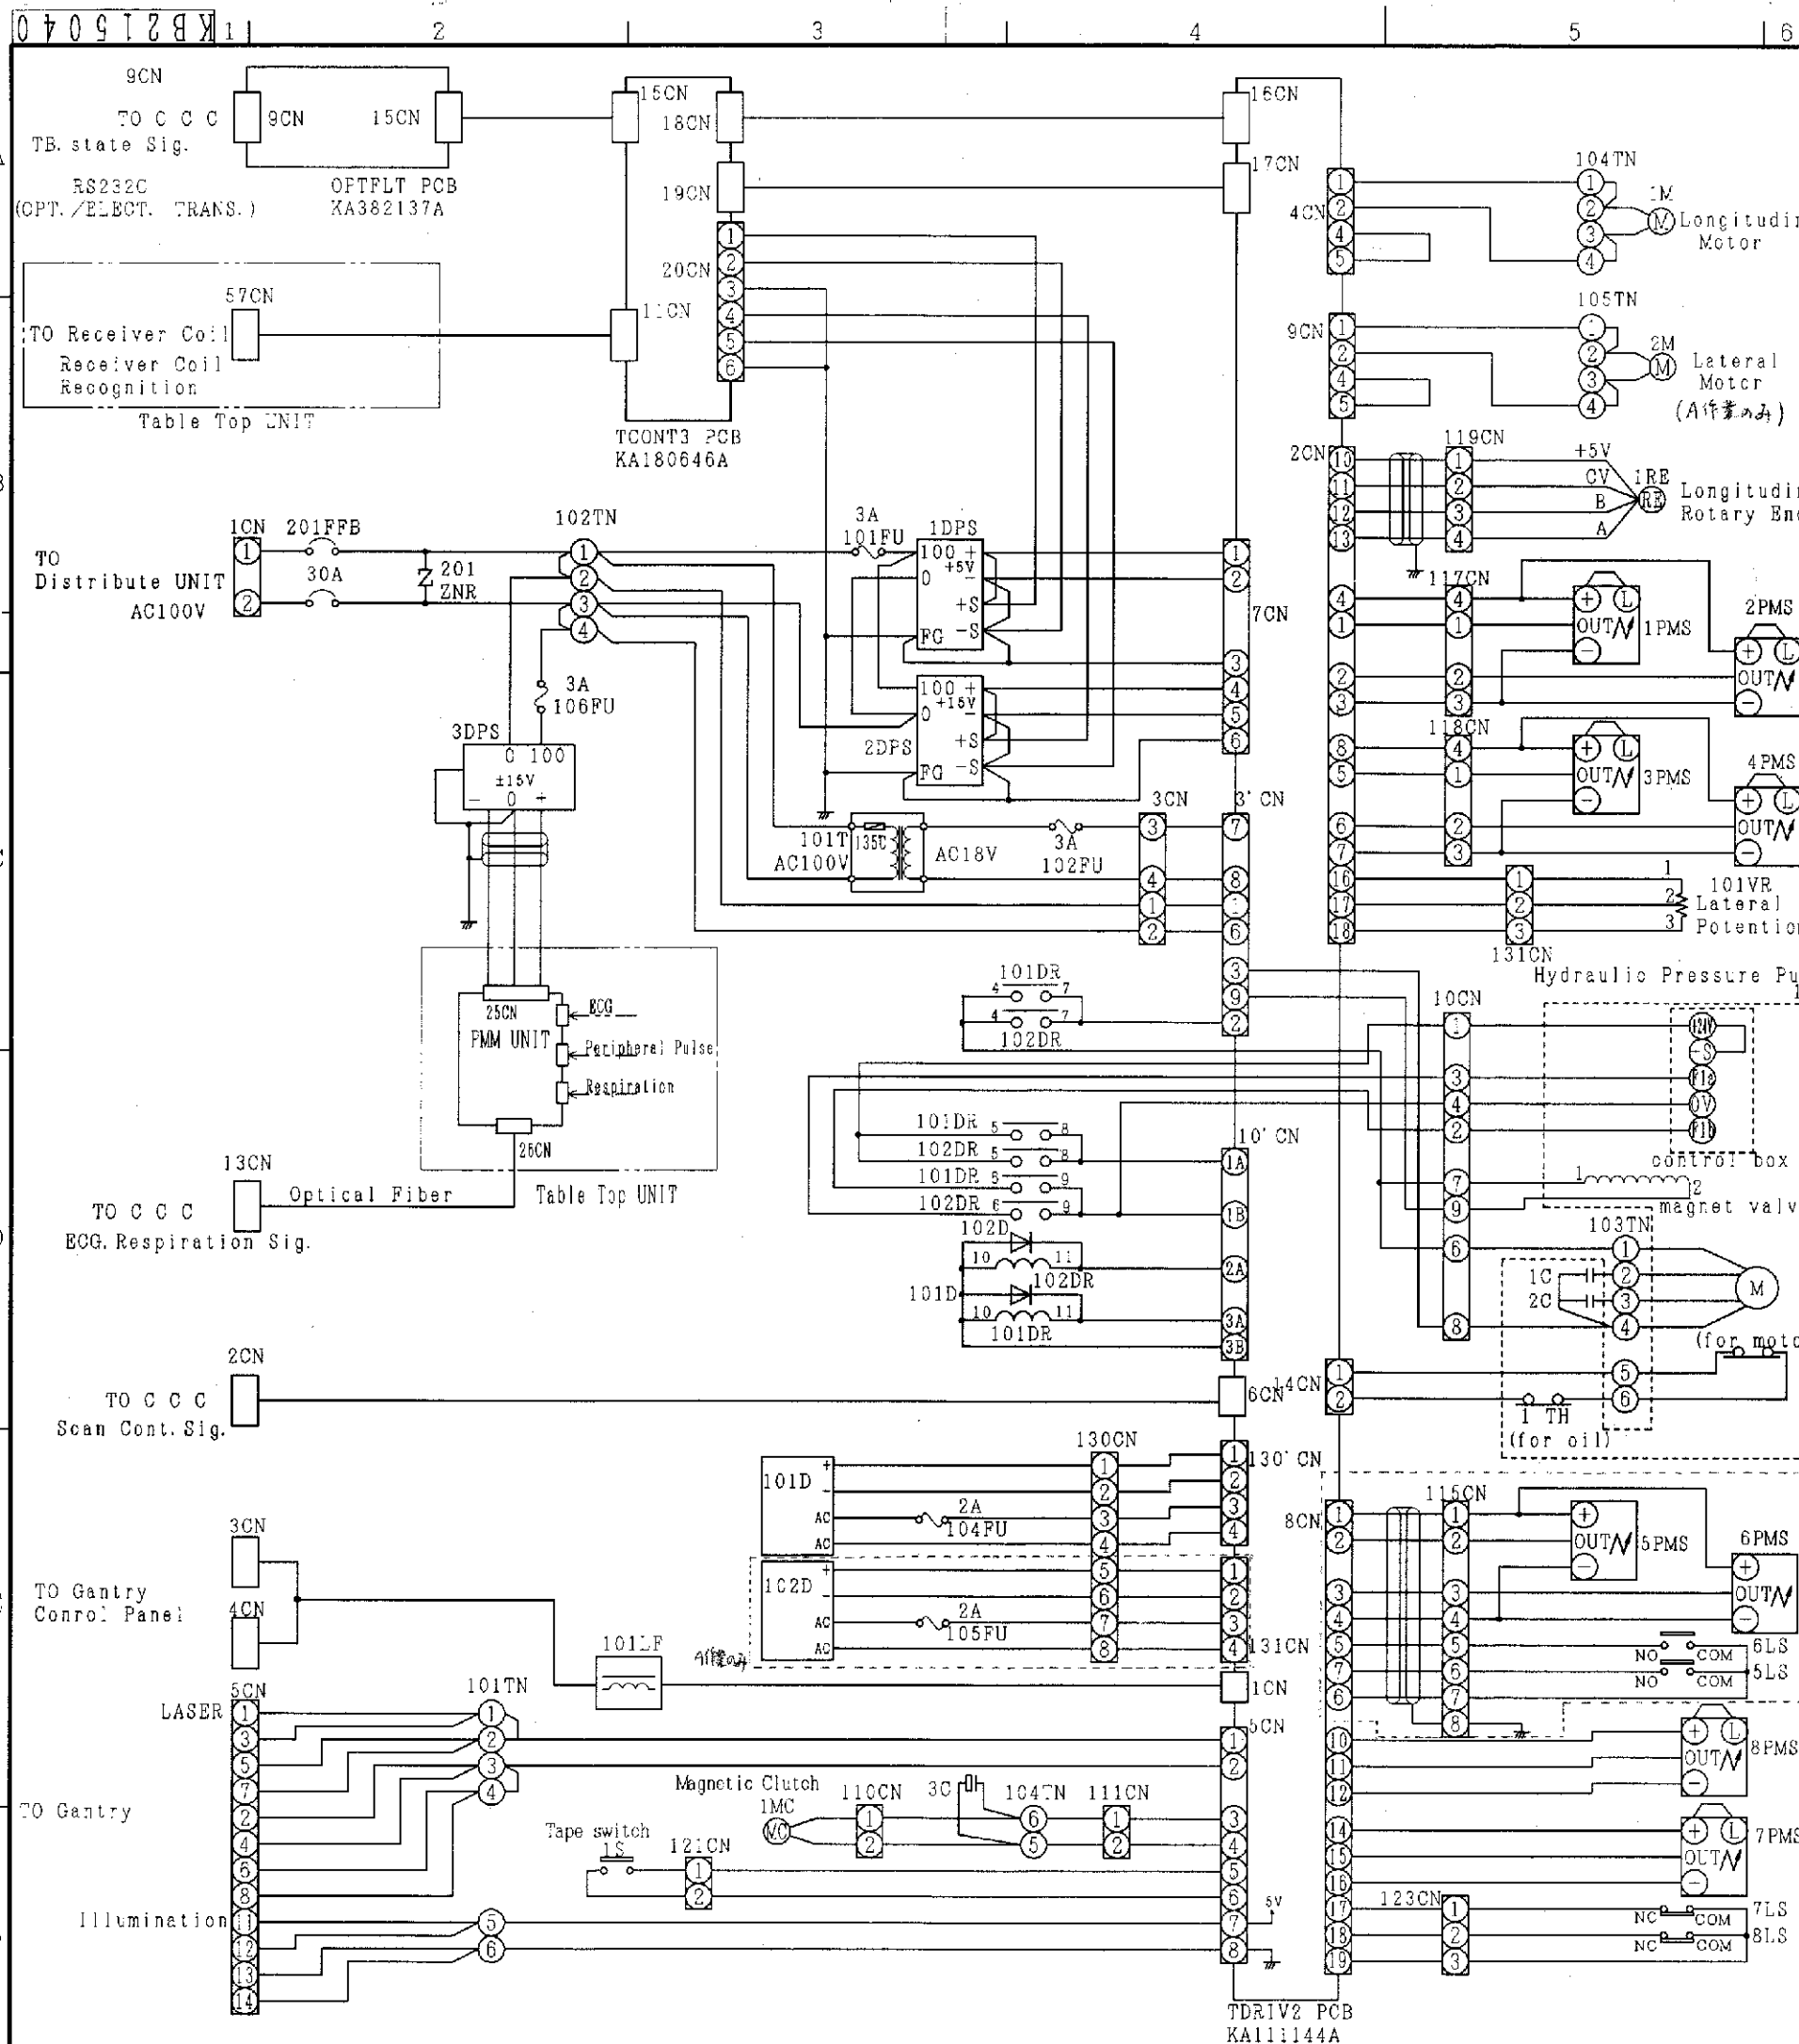


図番		名 称		設計担当	図面コード	図面番号
KB215040		テーブルユニットカイトス		K13C	0091	2
図 号	00	記号	来歴又は仕様書番号	年月日	訂正	承認
MR-TB-12	MR-TB-12	8作業新設	00/11/27	00/11/27		
作業・員数	品 名	材 質	素材寸法	素材長さ	仕上質量	備 考
0	10	カイトス				
0	20	カイトス				
3						

Qty	Symbol	part Name	Type	Manufacture
1	101T	Transformer	KA359911A	TAMURA
1	1DPS	DC Power Supply	GT3-5 TC 5A	COSEL
1	2DPS		GT3-15 TC 2.6A	
1	3DPS		GT3W-15-TC 1.3A	
1	101LF	Line Filter	ESD-E-60	TOKIN
3	101, 102, 106FU	Fuse	GDL3	NAGASAWA
1	104, 105FU		GDL2	
4	101, 102, 104~106FU	Fuse Holder	S-N1301	SHOWAMUSEN
5	1~4, 7, 8PMS	Photo Micro Sensor	EE-SY671	OMURON
2	5, 6PMS		EE-SX671A	
2	5~8LS	Limit Switch	BZ-2RW822-T4J	YAMATAKE
1	1 M	DC geared Motor	SS40E6V-U2L-30	SAWAMURA
1	2 M		SS40E-C-300	
1	1 RE	Rotary Encoder	LBJ-001-1000	SAMUTAKU
1	1 MC	Magnetic Clutch	AMC 80	OGURA
1	1 P	Hydraulic Unit	KA24109A	TOYOOKI
1	201PFB	Fuse Free Breaker	NRAN2100F-30AAA	IZUMI
2	101, 103TN	Terminal block	UF1005-20S-6P	FUJICON
2	102, 104, 105TN		UF1005-20S-4P	
1	101VR	Potentiometer	MF220D 5kΩ	NIHONSERVCO
1	1 S	Tape Switch	KA466410A	TOKYO SENSOR
1	201ZNR	Surge Absorber	ERZ-20DK-471	MATUSHITA
2	101, 102DR	Relay	LY3F	OMRON
1	101, 102D	Diode	V06B-TP	HITACHI
1	3C	Capacitor	SM350T-22	NITICON

Patient Table Circuit Diagram

製図	ヨシカワ	00/11/27	校核	NTS	名称	テーブルユニットカイトス
審査	ヨシカワ	00/12/1	尺 寸	入 庫	図番	KB215040
承認	ヨシカワ	00/12/1	校 査		校 査	


株式会社 日立メディコ

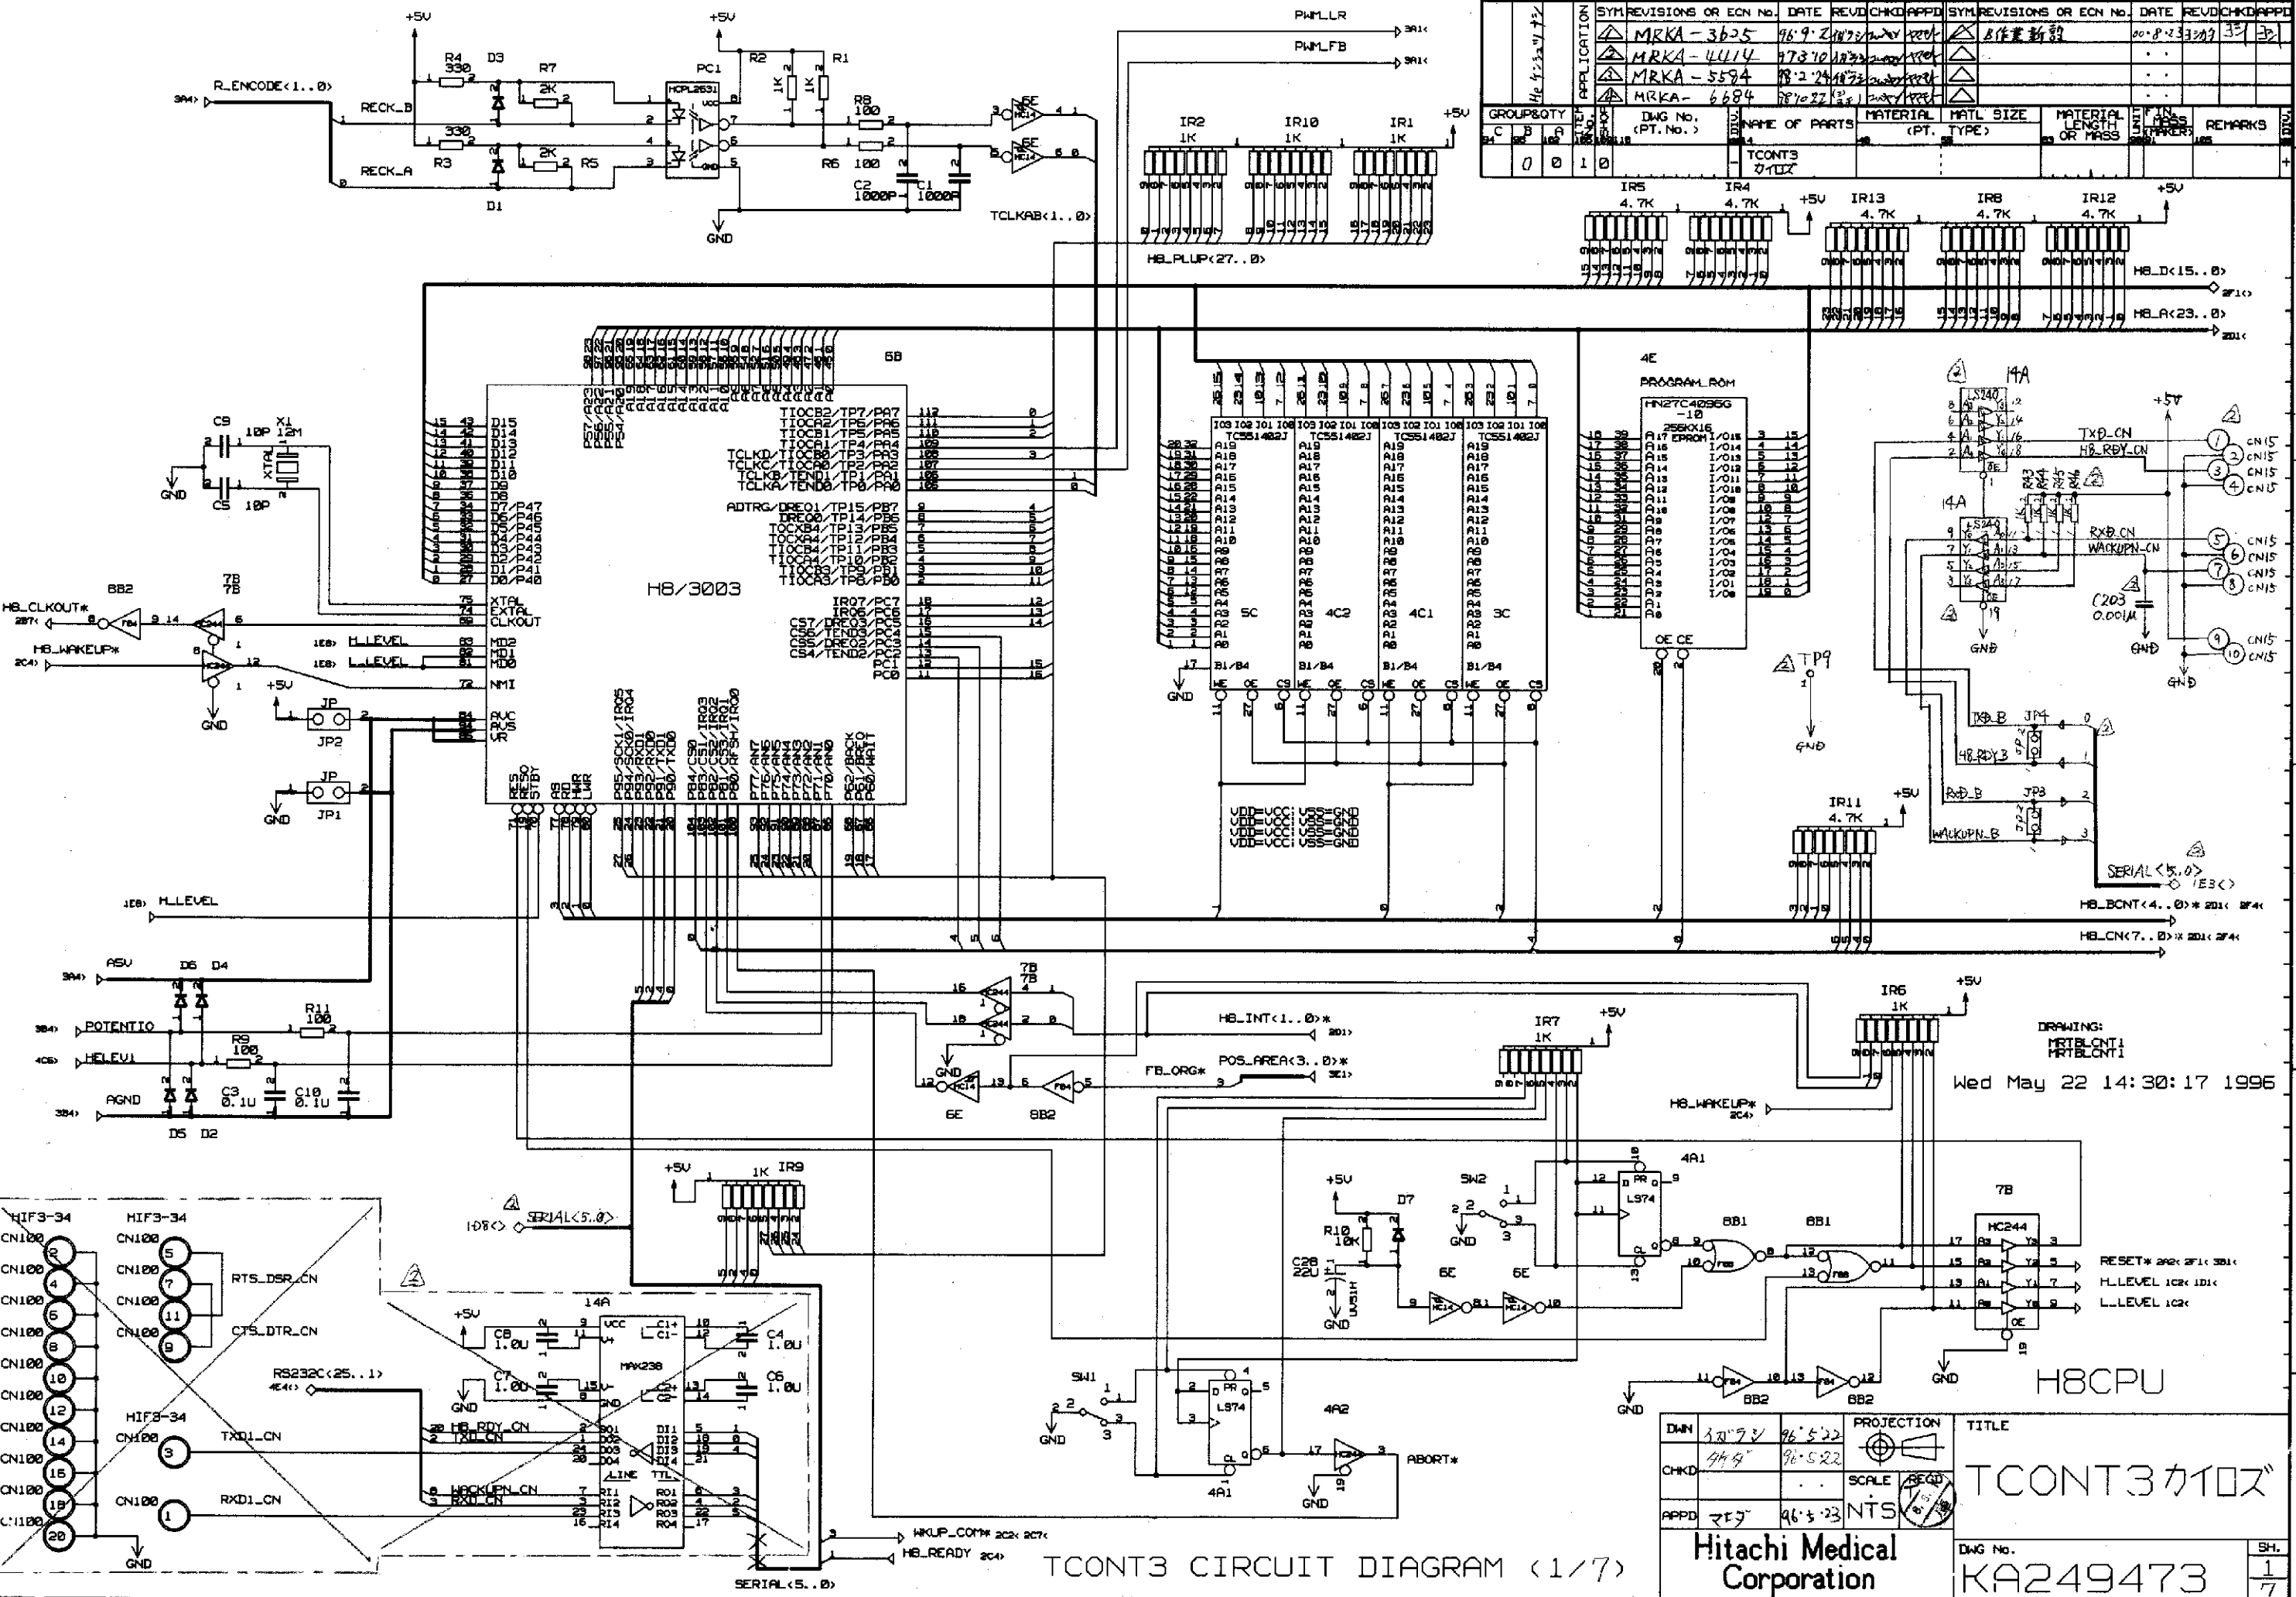

TCONT3 CIRCUIT DIAGRAM (1/7)

Hitachi Medical Corporation

Dwg No. KA249473

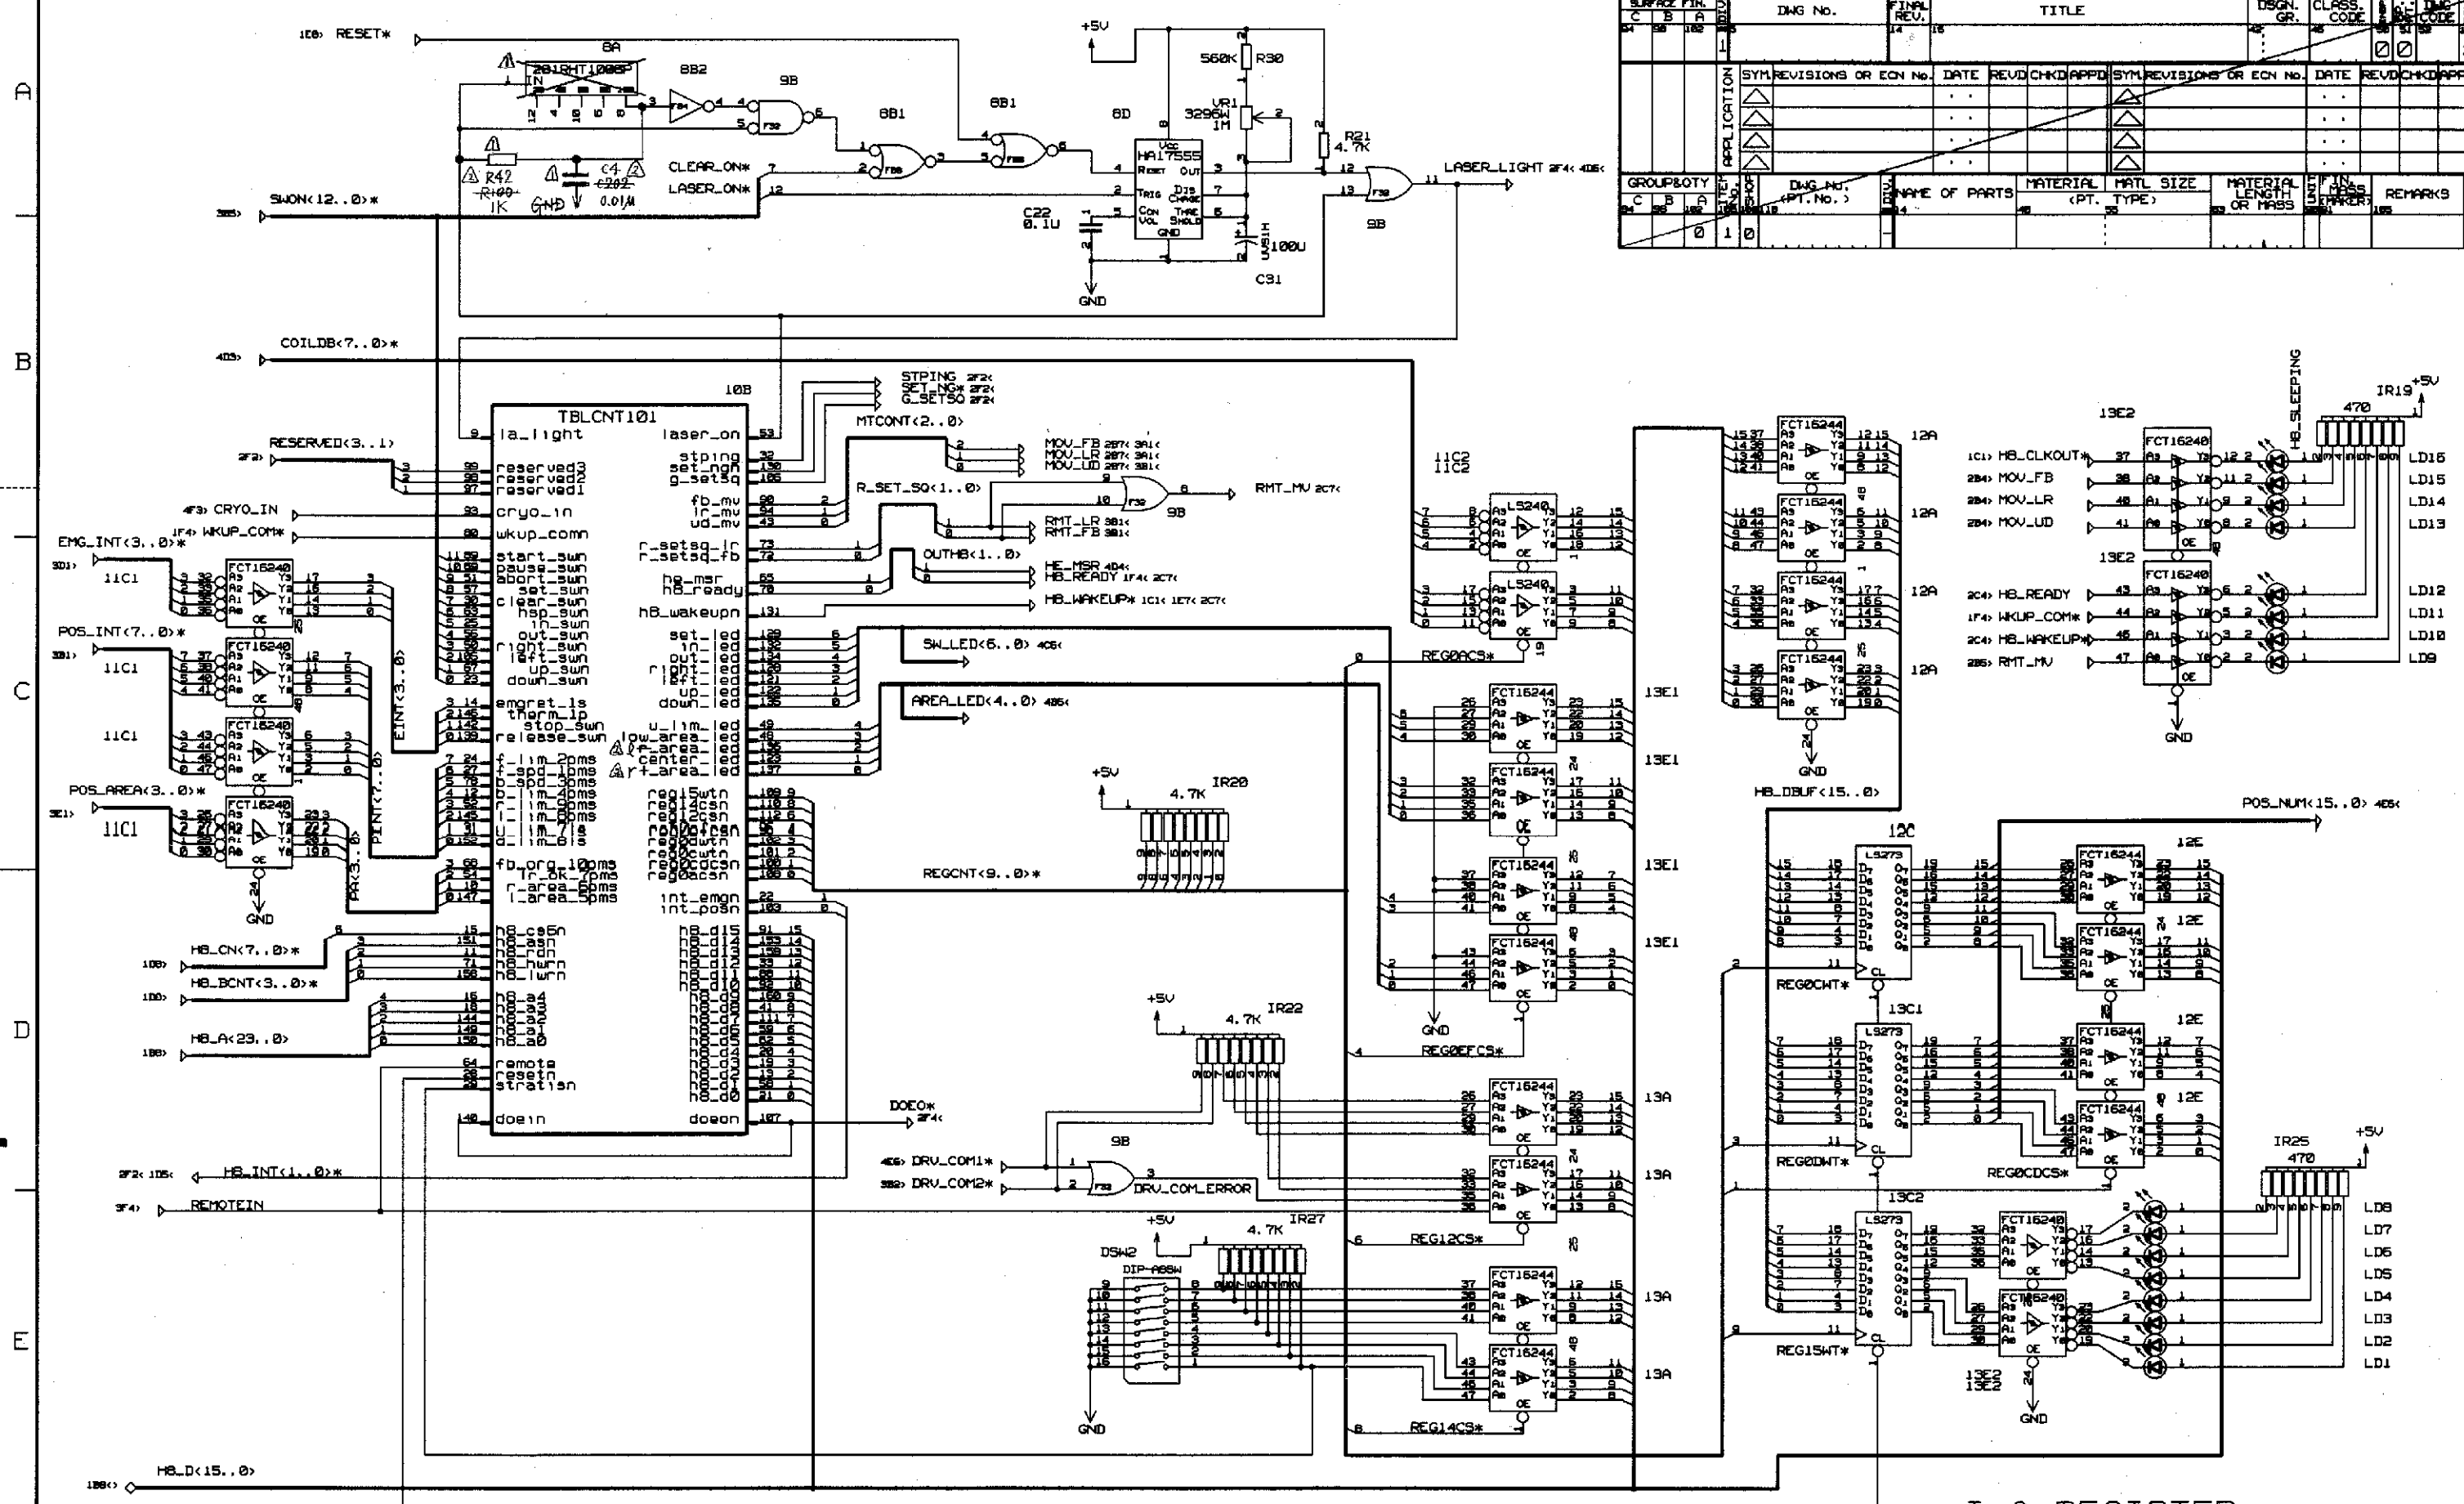

PRINT PT.		DNG HTR		CAB1		DNG No.		TITLE		DNG No.		CLASS.		CLASS.		CLASS.		CLASS.	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
SYN REVISIONS OR EGN No.		DATE		REV D		CHK D		APP D		SYN REVISIONS OR EGN No.		DATE		REV D		CHK D		APP D	
GROUP/OTY		DNG No.		NAME OF PARTS		MATERIAL		MATERIAL SIZE		MATERIAL LENGTH OR MASS		MATERIAL FIN. MASS		REMARKS		REMARKS		REMARKS	
1		1		1		1		1		1		1		1		1		1	

I/O REGISTER
TCONT3 CIRCUIT DIAGRAM (2/7)




DWG	11K249473	96.5.22	PROJECTION	TITLE
CHKD	97.9	96.5.22	SCALE	TCONT3カ10ズ
APPD	97.9	96.5.23	NIS	

Hitachi Medical Corporation

DWG No. 11K249473

SH. 2


DRAWING: HITBLCTH
Wed May 22 14:51:31 1996

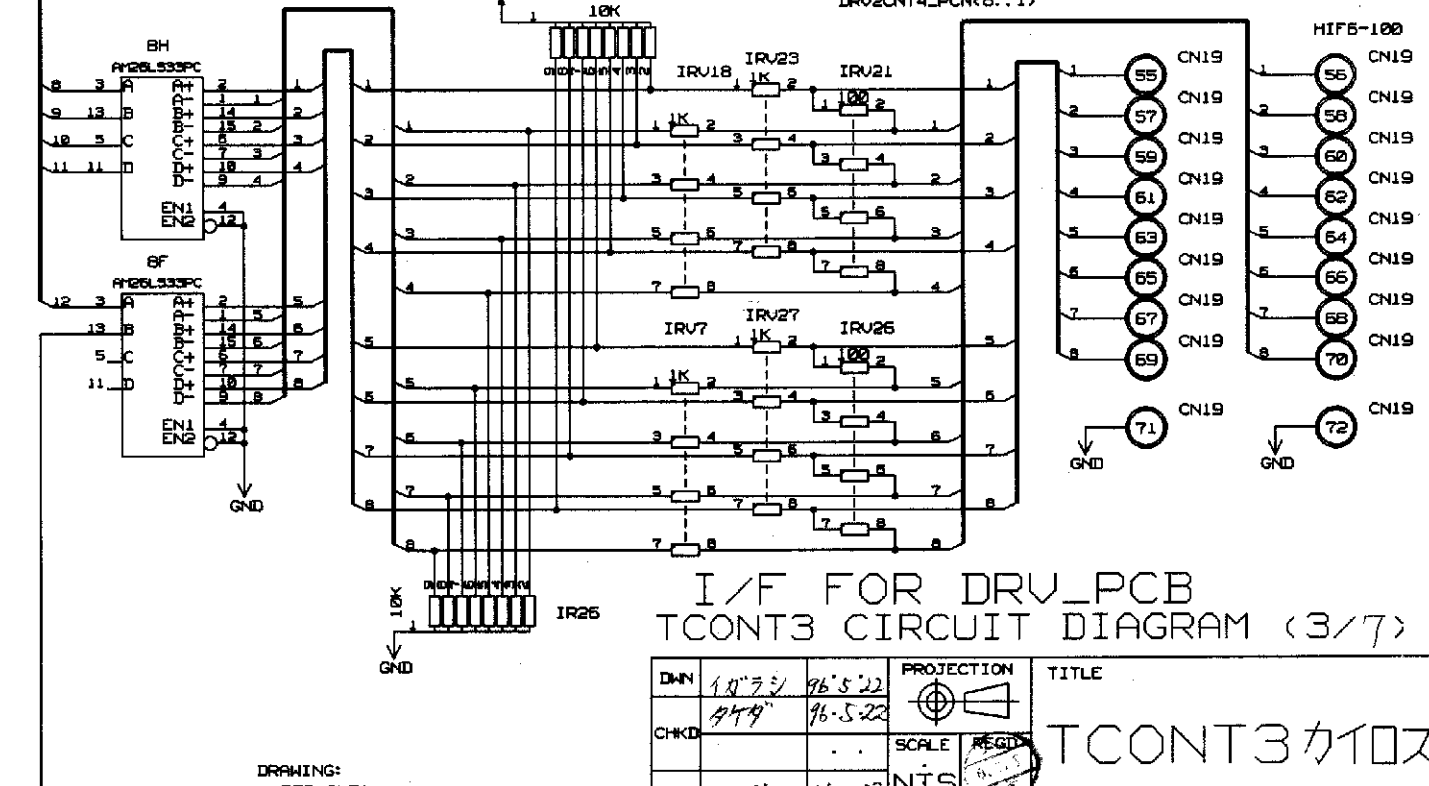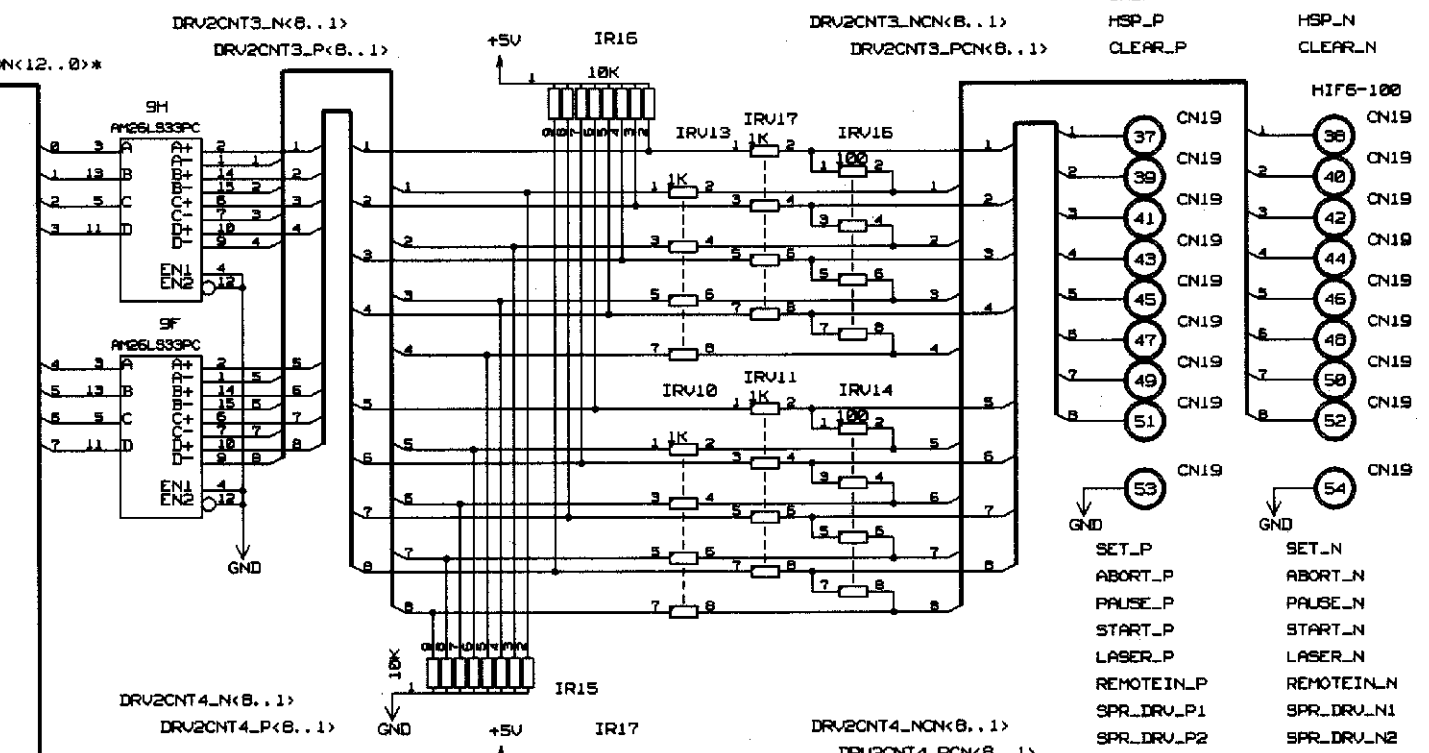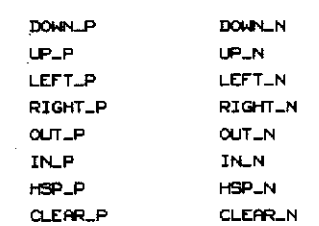

I/F FOR DRV_PCB
TCONT3 CIRCUIT DIAGRAM (3/7)

DWN	1A"7.5	96.5.22	PROJECTION		TITLE
CHKD	AS49	96.5.22			
APPR	217	96.5.23	SCALE	REGD	
			NTS	TCONT3 カイロズ	
Hitachi Medical Corporation					DWG No. KA249473
					SH. 3

DWN	10' 5' 1	96' 5' 22		TITLE
CHKD	9' 9' 9	96' 5' 22		
APPD	9' 9' 9	96' 5' 22	SCALE NTS	TCONT3カ10ズ"
			REGD S. I. I.	
Hitachi Medical Corporation			DWG No.	SH.
			KA249473	6

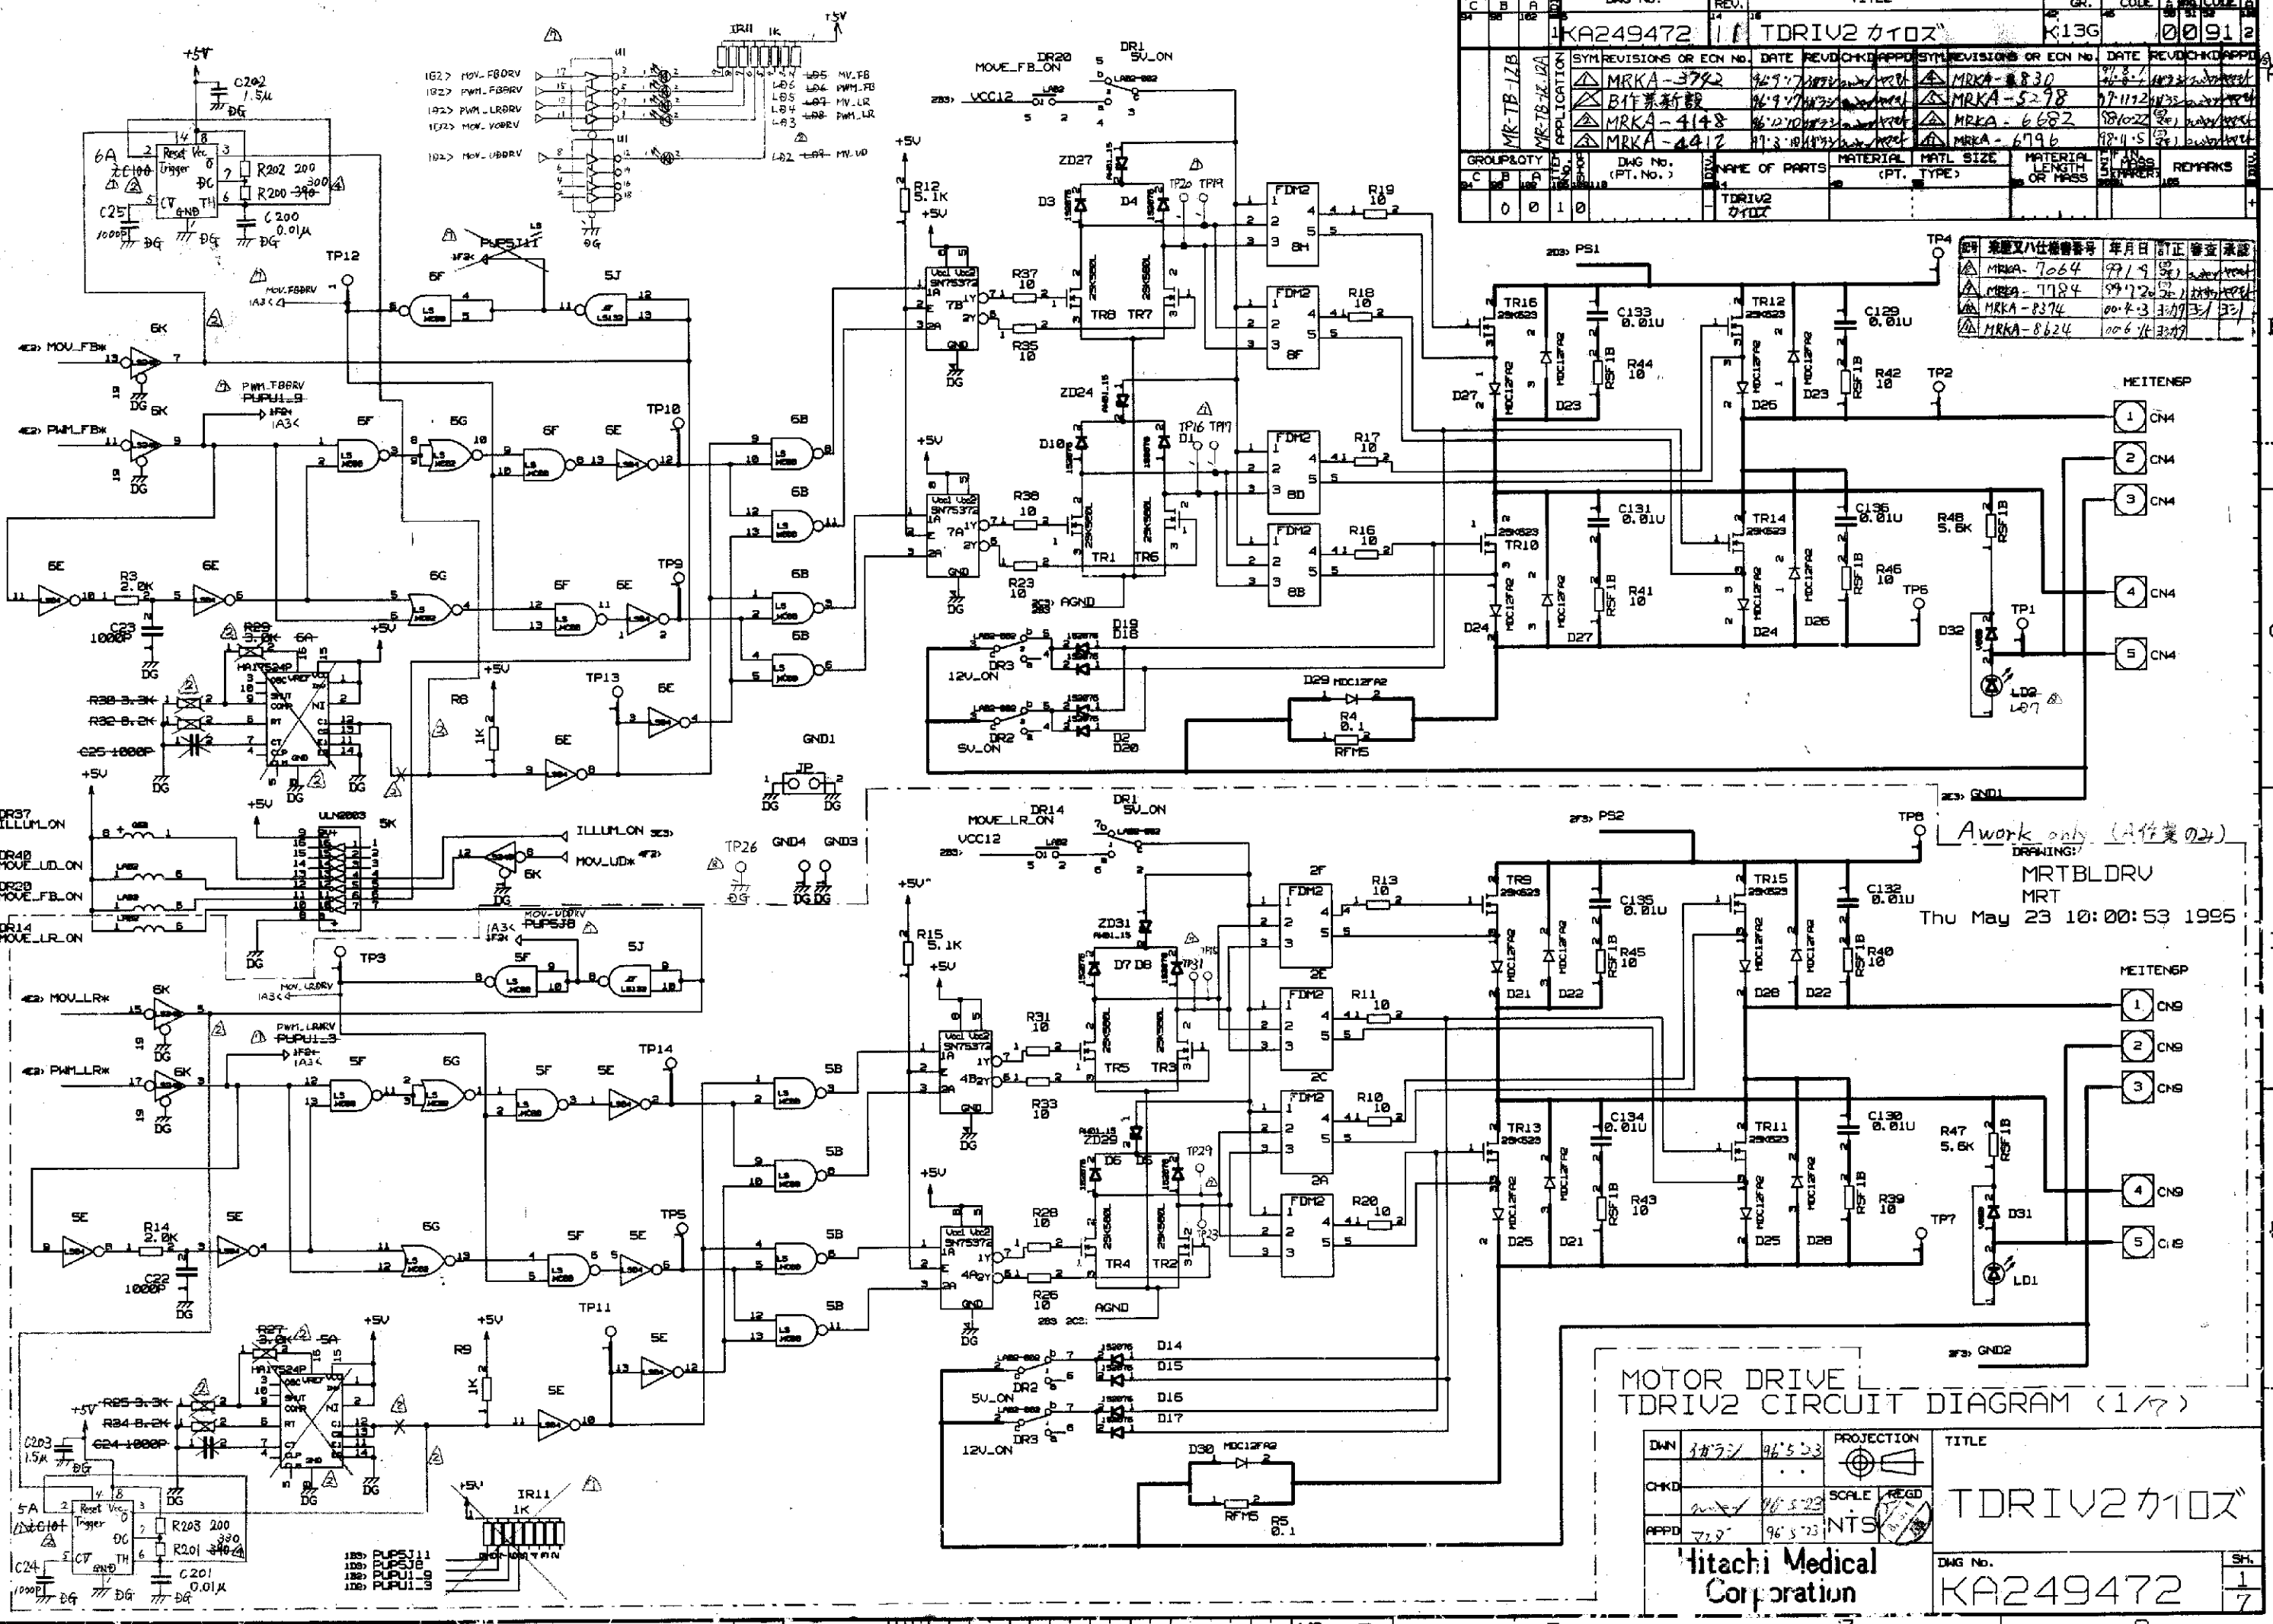

DAG No.		TITLE		DAG No.		TITLE	
1 KA249472		TDRIV2 カ102		1 KA249472		TDRIV2 カ102	
SYN REVISIONS OR EGN NO.		DATE		SYN REVISIONS OR EGN NO.		DATE	
MRKA-3792		94.7.7		MRKA-3792		94.7.7	
MRKA-3792		94.7.7		MRKA-3792		94.7.7	
MRKA-4148		94.7.10		MRKA-4148		94.7.10	
MRKA-4412		94.8.14		MRKA-4412		94.8.14	
MRKA-5298		94.8.14		MRKA-5298		94.8.14	
MRKA-6682		94.8.14		MRKA-6682		94.8.14	
MRKA-6796		94.8.14		MRKA-6796		94.8.14	
MRKA-7064		94.8.14		MRKA-7064		94.8.14	
MRKA-7184		94.8.14		MRKA-7184		94.8.14	
MRKA-8374		94.8.14		MRKA-8374		94.8.14	
MRKA-8624		94.8.14		MRKA-8624		94.8.14	

DAG No.		NAME OF PARTS		MATERIAL		MATERIAL SIZE		MATERIAL LENGTH OR MASS		REMARKS	
1 KA249472		TDRIV2 カ102		PT. No.		PT. TYPE		PT. TYPE		REMARKS	
0 0 1 0		TDRIV2 カ102									

DAG No.		NAME OF PARTS		MATERIAL		MATERIAL SIZE		MATERIAL LENGTH OR MASS		REMARKS	
1 KA249472		TDRIV2 カ102		PT. No.		PT. TYPE		PT. TYPE		REMARKS	
0 0 1 0		TDRIV2 カ102									

Awork only (A作業のみ)
DRAWING: MRTBLDRV
MRT
Thu May 23 10:00:53 1995

DAG No.		NAME OF PARTS		MATERIAL		MATERIAL SIZE		MATERIAL LENGTH OR MASS		REMARKS	
1 KA249472		TDRIV2 カ102		PT. No.		PT. TYPE		PT. TYPE		REMARKS	
0 0 1 0		TDRIV2 カ102									

DAG No.		NAME OF PARTS		MATERIAL		MATERIAL SIZE		MATERIAL LENGTH OR MASS		REMARKS	
1 KA249472		TDRIV2 カ102		PT. No.		PT. TYPE		PT. TYPE		REMARKS	
0 0 1 0		TDRIV2 カ102									

MOTOR DRIVE
TDRIV2 CIRCUIT DIAGRAM (1/7)















DAG No.		NAME OF PARTS		MATERIAL		MATERIAL SIZE		MATERIAL LENGTH OR MASS		REMARKS	
1 KA249472		TDRIV2 カ102		PT. No.		PT. TYPE		PT. TYPE		REMARKS	
0 0 1 0		TDRIV2 カ102									

Hitachi Medical
Corporation

DAG No.
KA249472

SH.
1/7

DNG No.		FINAL REV.	TITLE	DSGN. GR.	CLASS. CODE	DATE	REV. CHKD APPD	DATE	REV. CHKD APPD
1	1	1							
SYN REVISIONS OR ECN No.		DATE	REV. CHKD APPD	SYN REVISIONS OR ECN No.		DATE	REV. CHKD APPD		
APPLICATION				APPLICATION					
GROUP & QTY		DNG No. (PT. No.)	NAME OF PARTS	MATERIAL (PT. TYPE)	MTRL SIZE	MATERIAL LENGTH OR MASS	FIN. PASS	REMARKS	
1		1							

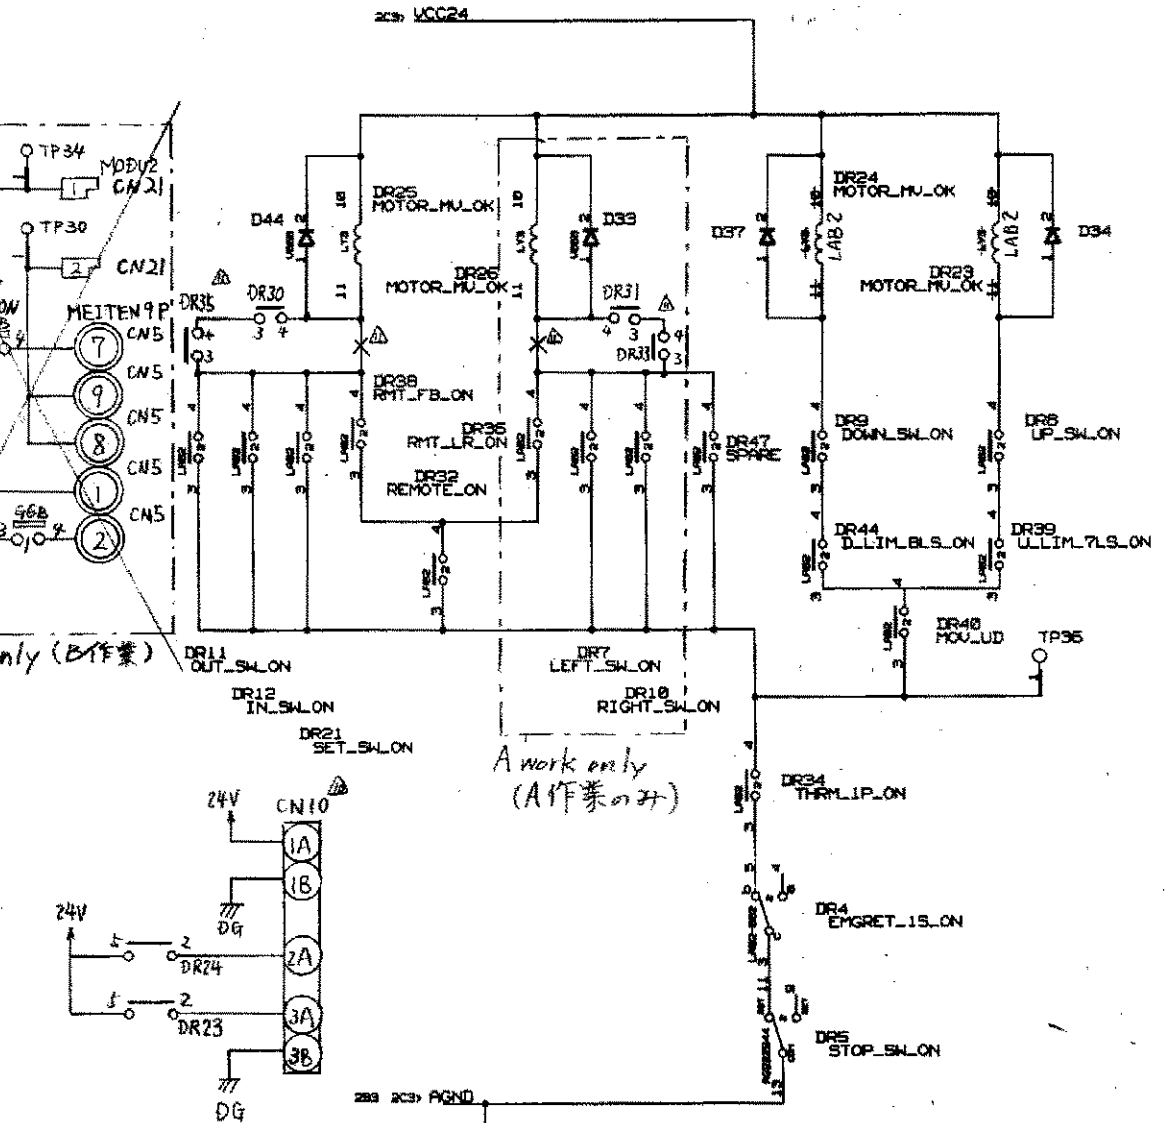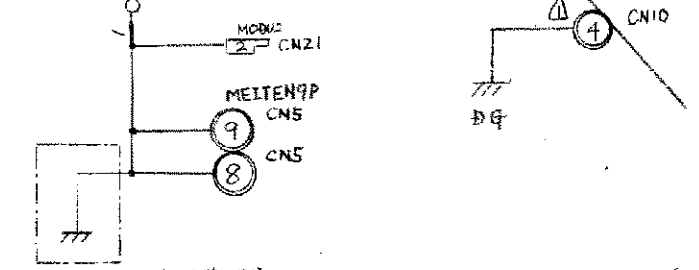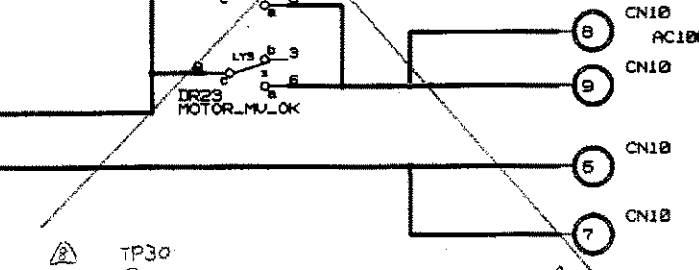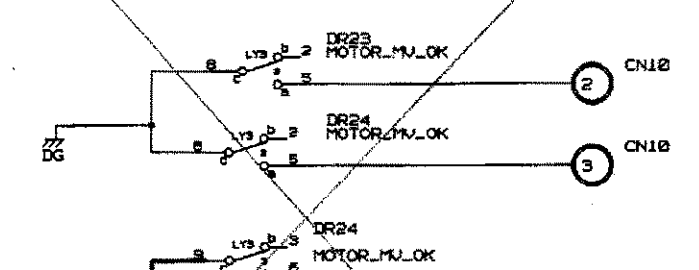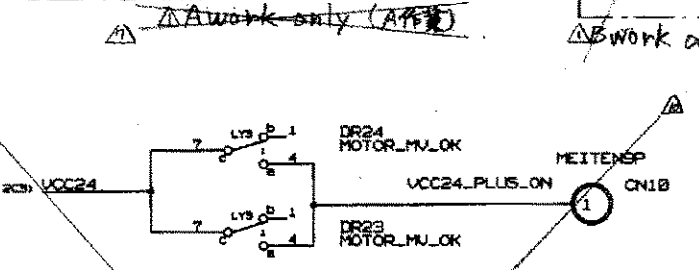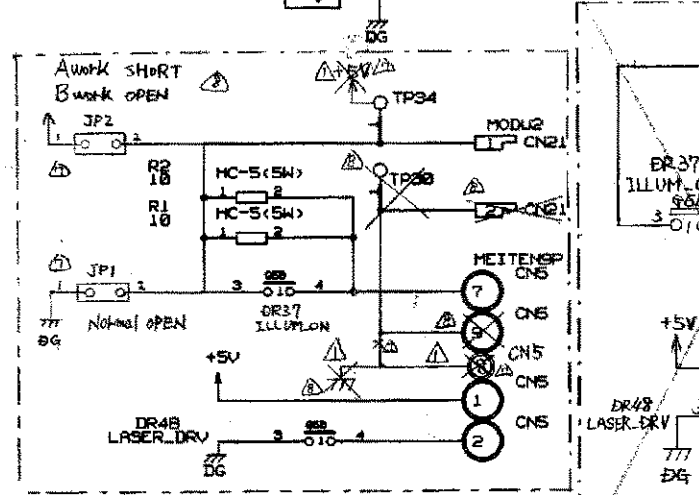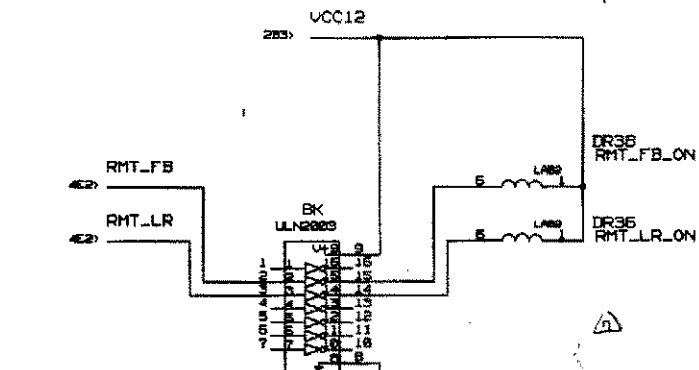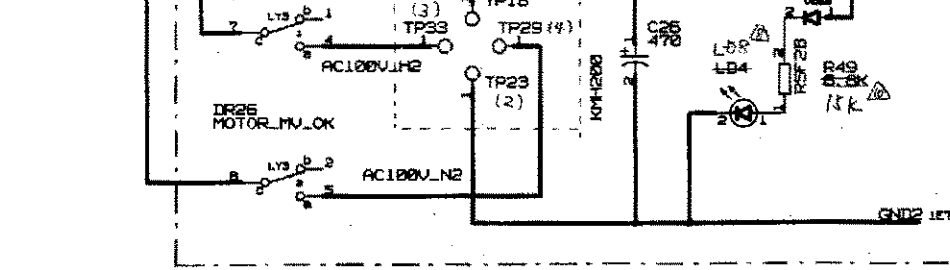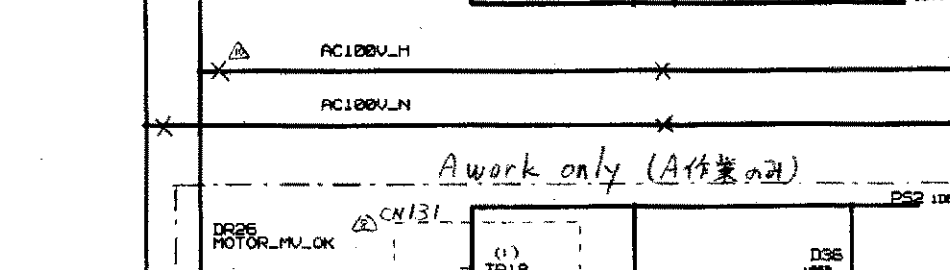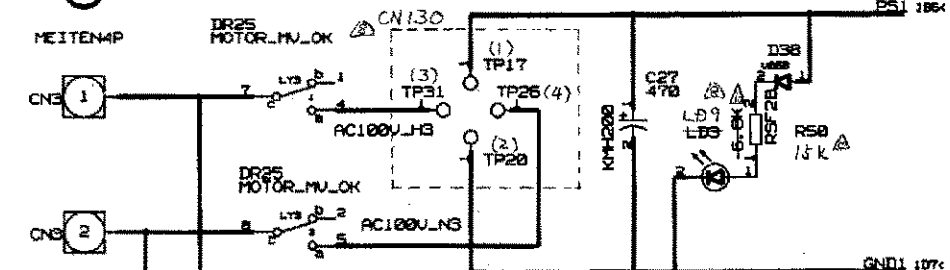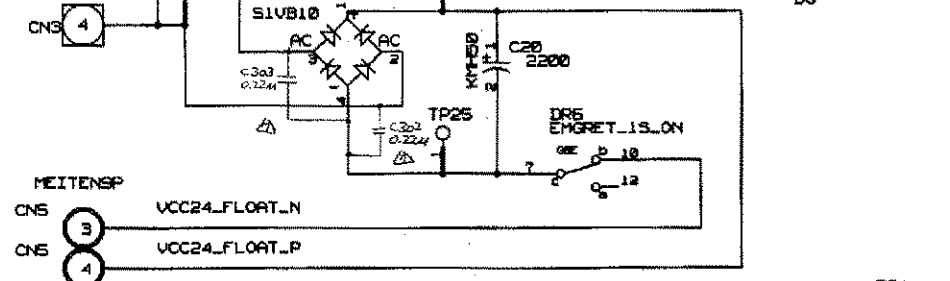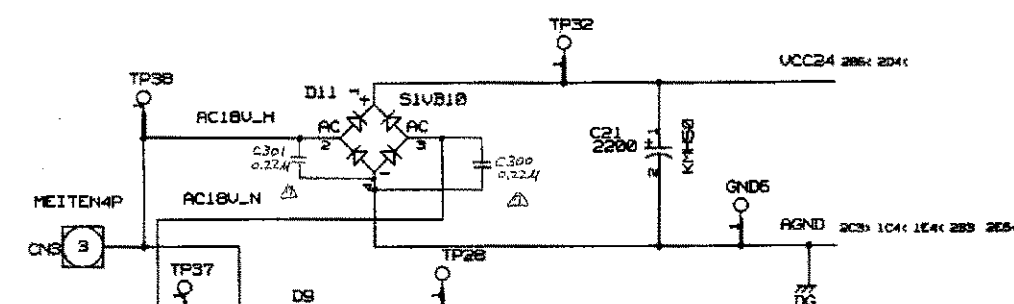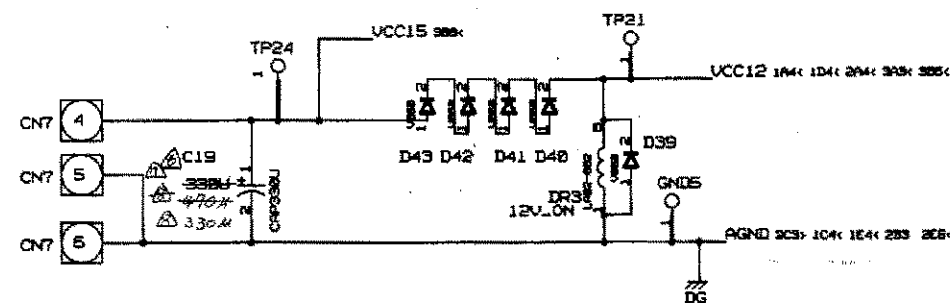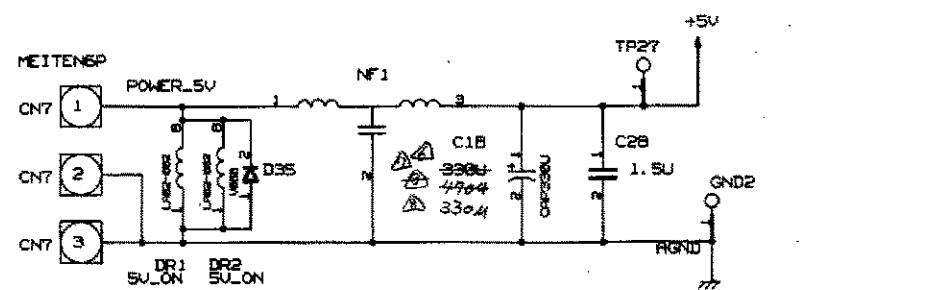


DRAWING:
MRTBLDRV
MRT


Wed May 22 15:07:28 1996

POWER SUPPLY
TDRIV2 CIRCUIT DIAGRAM (2/7)

DWG	1073	96.5.23	PROJECTION	TITLE
CHKD	1073	96.5.23	SCALE	TDRIV2カ1073
APPD	217	96.5.23	NTS	
Hitachi Medical Corporation				DWG No. KA249472
				SH. 2

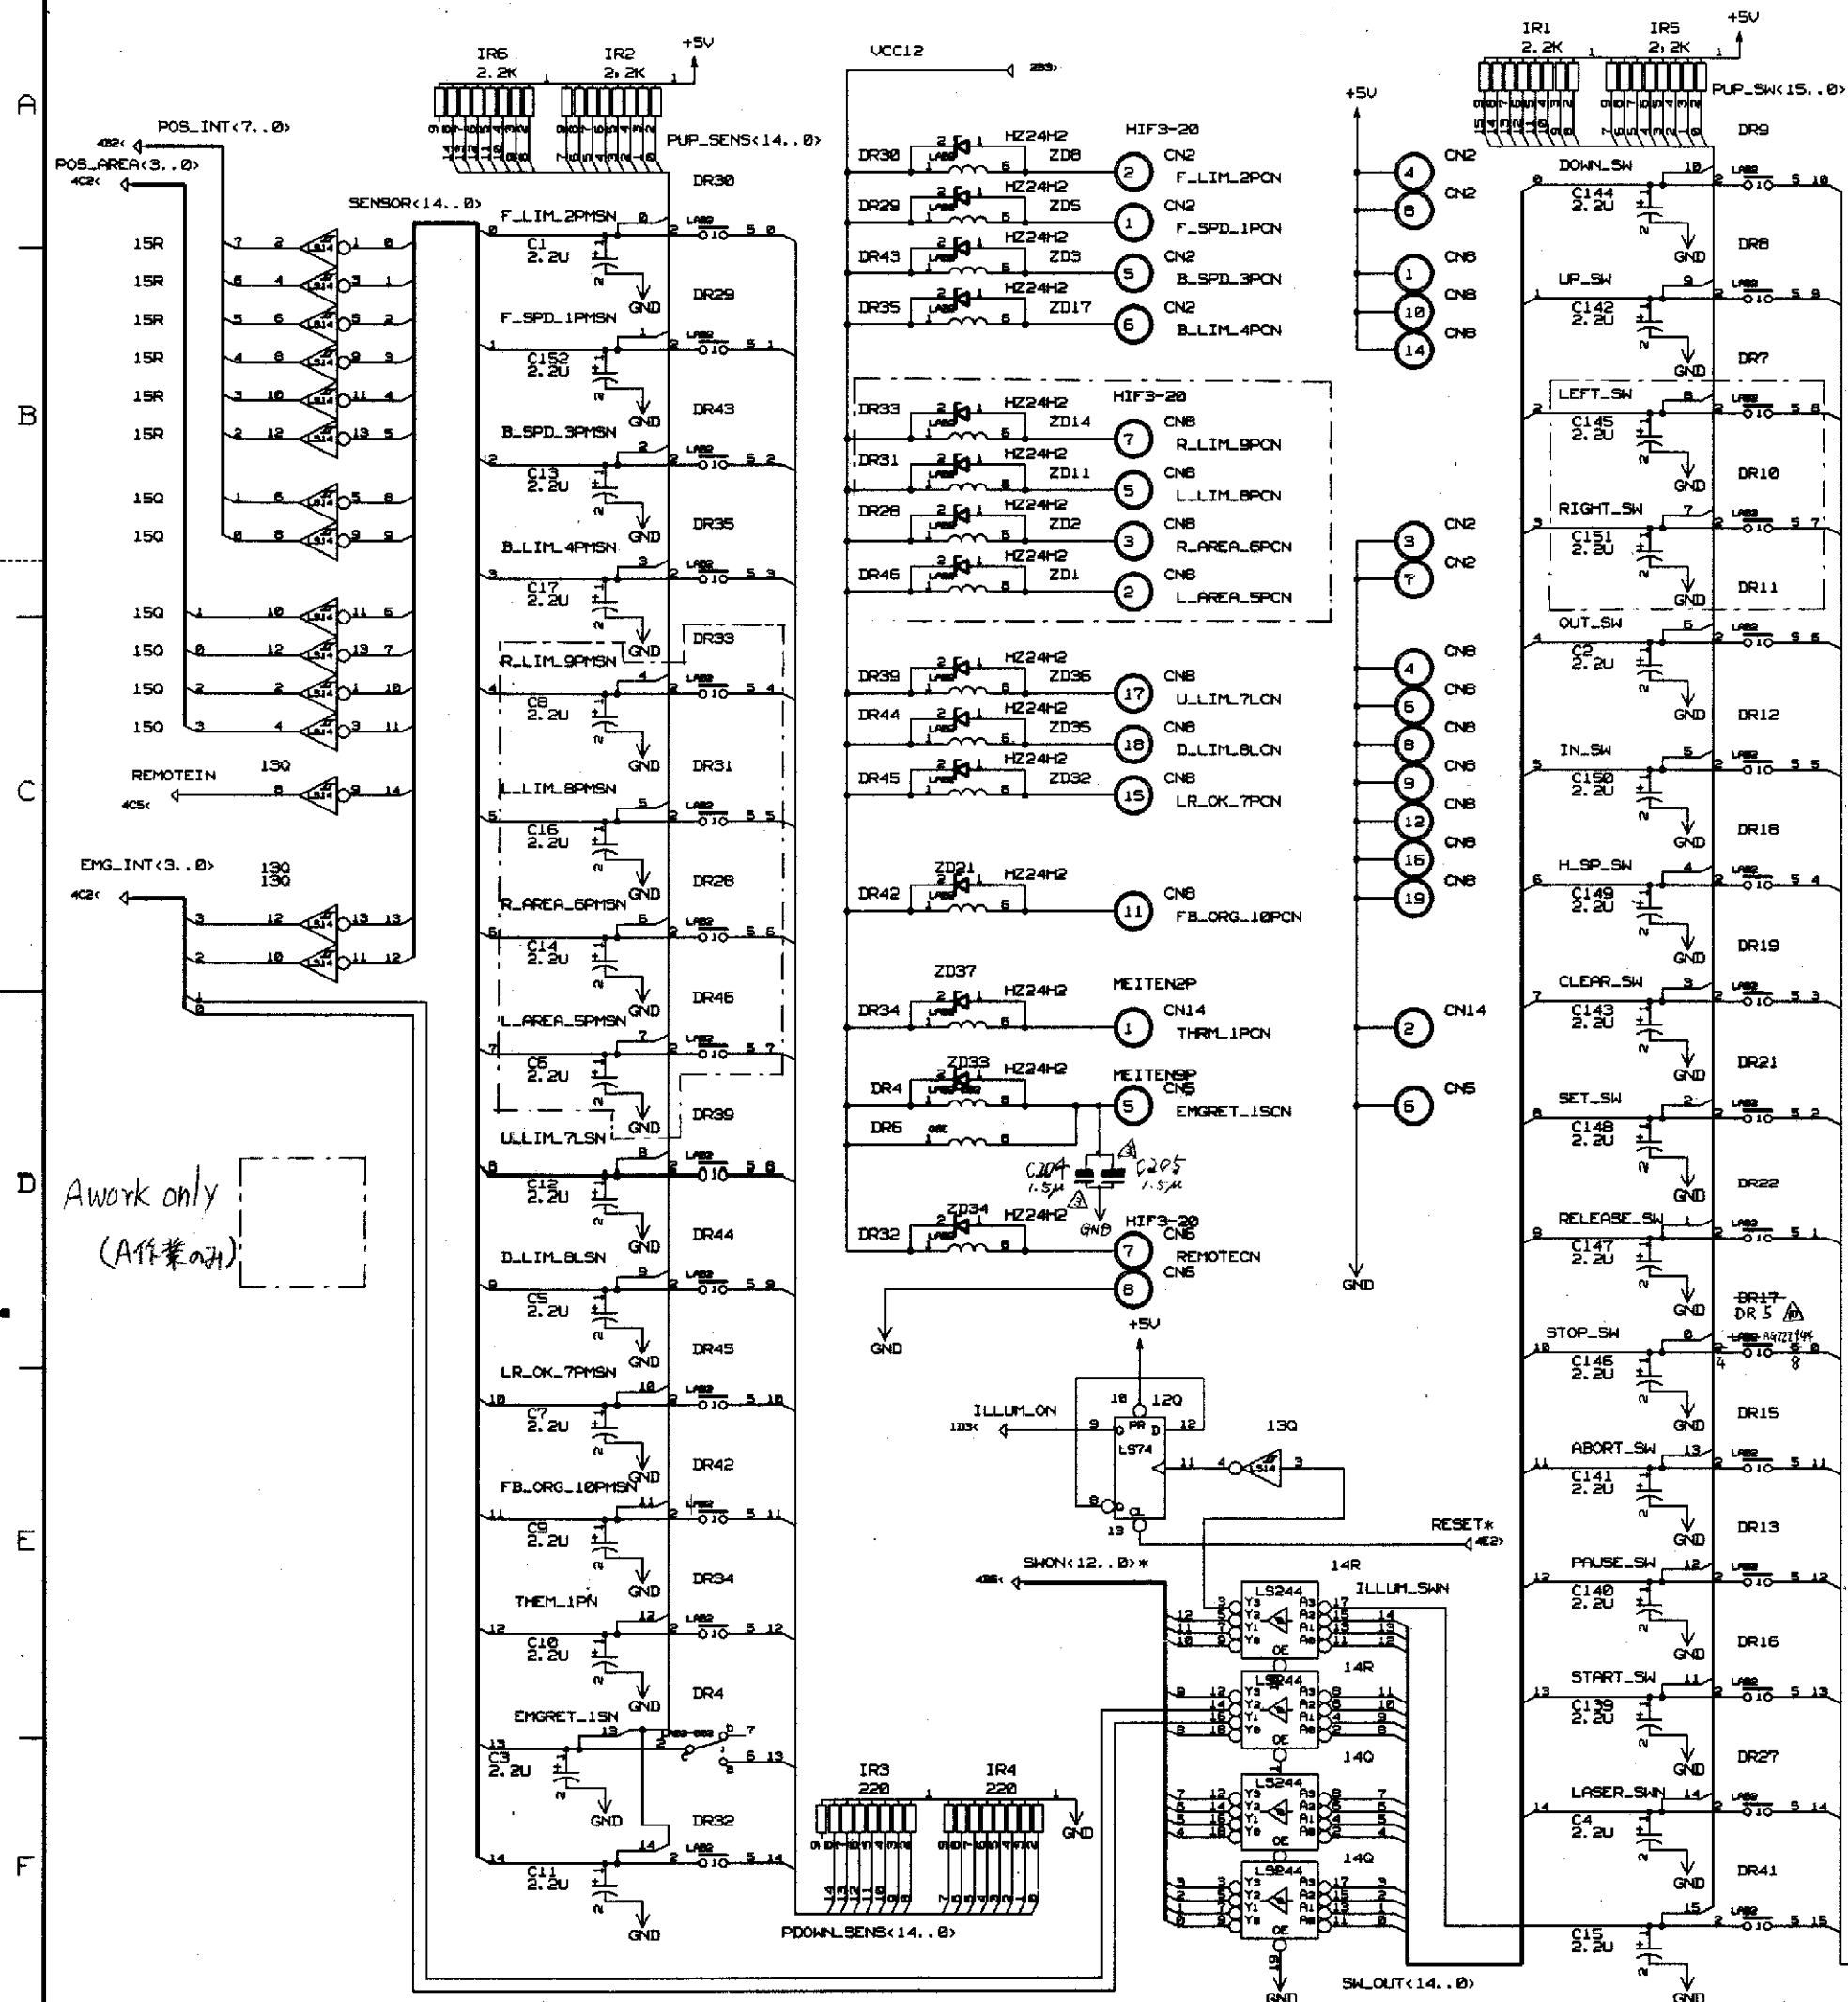

DNG No.		TITLE		DNG No.		TITLE	
1	1	1	1	1	1	1	1
2	2	2	2	2	2	2	2
3	3	3	3	3	3	3	3
4	4	4	4	4	4	4	4
5	5	5	5	5	5	5	5
6	6	6	6	6	6	6	6
7	7	7	7	7	7	7	7
8	8	8	8	8	8	8	8
9	9	9	9	9	9	9	9
10	10	10	10	10	10	10	10
11	11	11	11	11	11	11	11
12	12	12	12	12	12	12	12
13	13	13	13	13	13	13	13
14	14	14	14	14	14	14	14
15	15	15	15	15	15	15	15
16	16	16	16	16	16	16	16
17	17	17	17	17	17	17	17
18	18	18	18	18	18	18	18
19	19	19	19	19	19	19	19
20	20	20	20	20	20	20	20

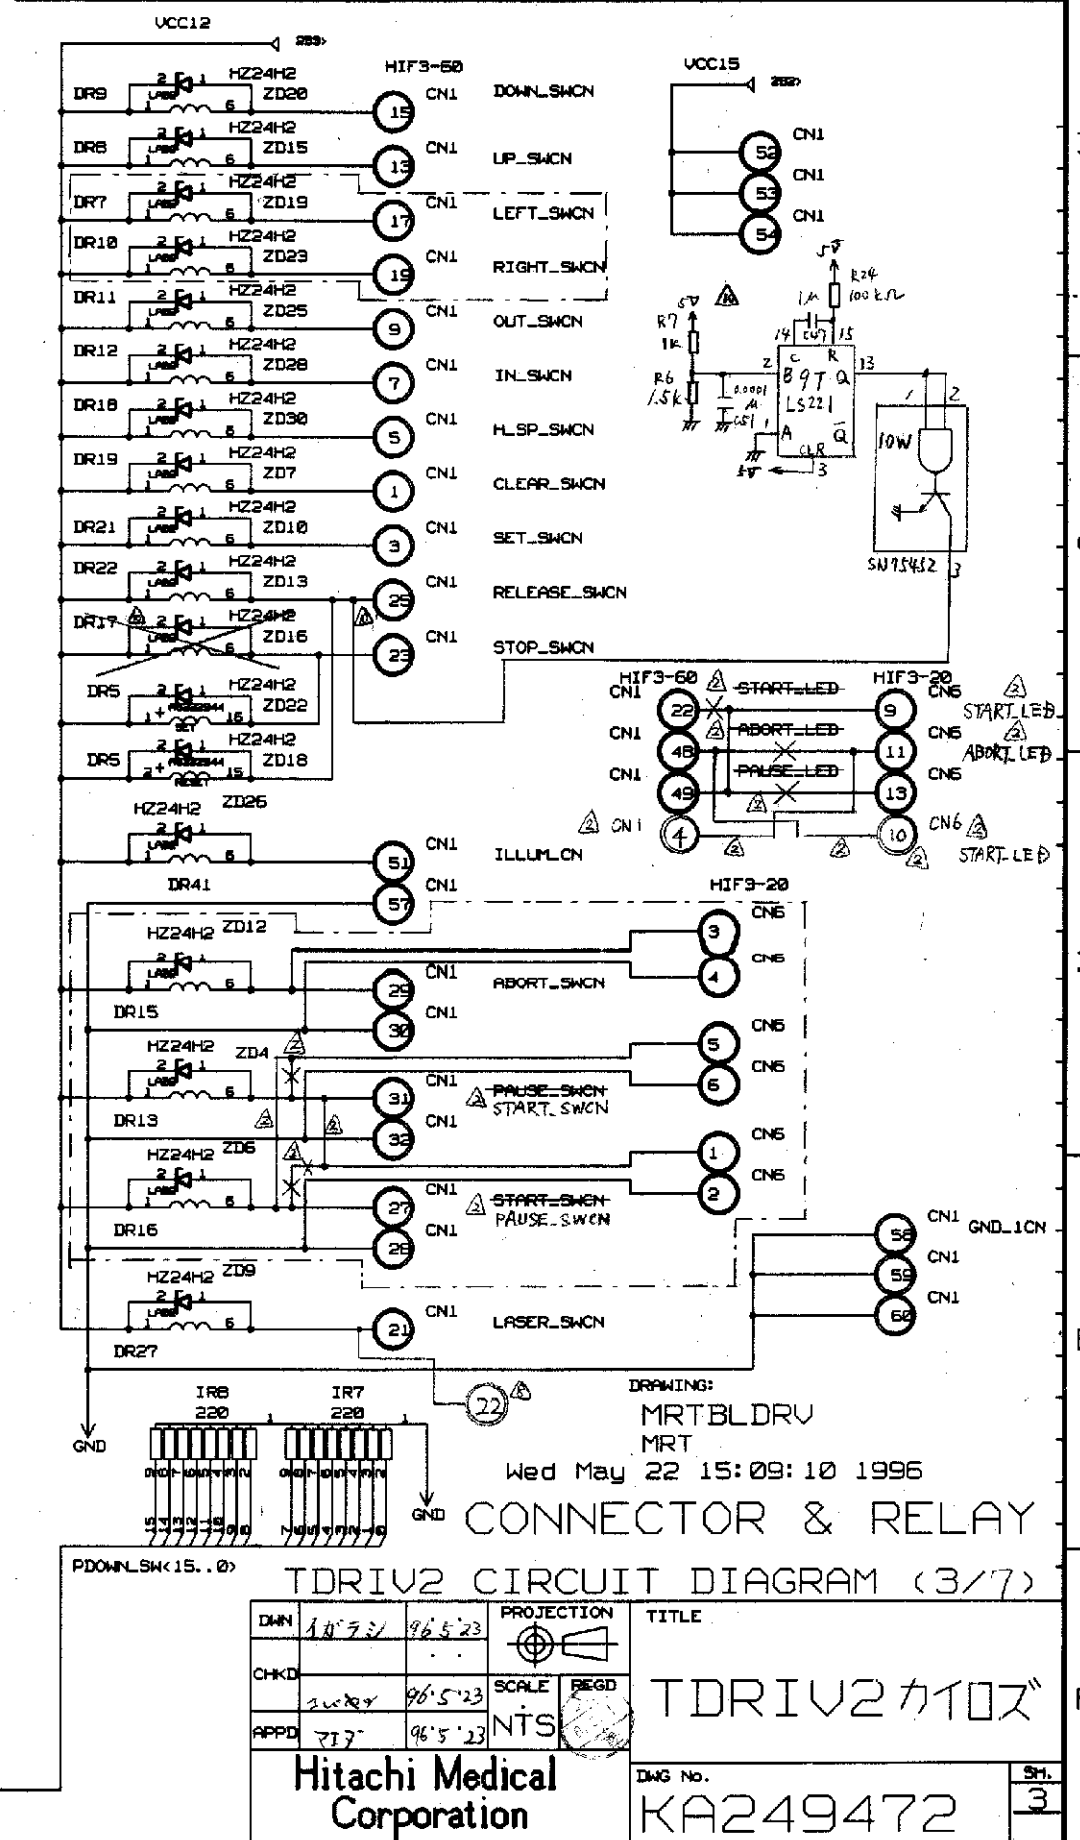

DWN	イカ"ラシ	96.5.23	PROJECTION	TITLE
CHKD				
APPD	アツク	96.5.23	SCALE	
			NTS	TDRIV2カ10ズ
Hitachi Medical Corporation				DWG No.
				KA249472
				SH.
				5


C	B	A	SYMBOL	PART NAME	TYPE	MANUFACTURE
	X	4	5B, 5F, 6B, 6F	TTL	HD74LS00P	HITACHI
	/	1	6G	TTL	HD74LS02P	HITACHI
	X	2	5E, 6E	TTL	HD74LS04P	HITACHI
	3	3	13Q, 15Q, 15R	TTL	HD74LS14P	HITACHI
	/	1	12Q	TTL	HD74LS74AP	HITACHI
	/	1	5J	TTL	HD74LS132P	HITACHI
	/	1	6K	TTL	HD74LS240P	HITACHI
	2	2	14Q, 14R	TTL	HD74LS244P	HITACHI
	2	2	9T, 11T	TTL	HD74LS221P	HITACHI
	8	8	14S, 14T, 14U, 14V, 15S, 15T, 15U, 15V	DRIVER	AM26LS31PC	AMD
	2	2	12U, 13U	DRIVER	AM26LS33PC	AMD
	X	4	4A, 4B, 7A, 7B	DRIVER	SN75372P	T. I.
	2	2	5K, 8K	DRIVER	ULN2003AN	T. I.
A	X	1	12Q2	TTL	HD74LS32P	HITACHI
	X	8	2A, 2C, 2E, 2F, 8B, 8D, 8F, 8H	PULSE TRANS	FDM2-1	NPC
	X	2	5A, 6A	REG	HA17524P	HITACHI
	2	2	DR1, DR2	RELAY	LAB2-002 DC5V	OMRON
	2	2	DR3, DR4	RELAY	LAB2-002 DC12V	OMRON
	/	1	DR5	RELAY	AG222944	MATSUSHITA
	/	1	DR6	RELAY	G6E-134P-US DC5V	OMRON
A	X	32	DR7~DR13, DR15~DR19, DR21, DR22, DR27~DR36, DR38, DR39, DR41~DR46	RELAY	LAB2 DC12V	OMRON
	X	3	DR14, DR20, DR40	RELAY	LAB2 DC5V	OMRON
A	X	4	DR47, 23, 24	RELAY	LAB2 DC24V	OMRON
A	X	4	DR23~DR26	RELAY	LY3 DC24V	OMRON
	2	2	DR37, DR48	RELAY	G6B-2214C-US 5V	OMRON
	X	18	D1~D8, D10, D14~D20	DIODE	1S2076ATA	HITACHI
	X	10	D21~D30	DIODE	ESAC93-02	FUJI DENKI
	X	14	D31~D44	DIODE	V06B- TP	HITACHI
	2	2	D9, D11	DIODE	S1VB10	SHINDEN
	X	33	ZD1~ZD23, ZD25, ZD26, ZD28, ZD30, ZD32~ZD37	ZENNER DIODE	HZ24H-2	HITACHI
	X	4	ZD24, ZD27, ZD29, ZD31	ZENNER DIODE	AW01-15	HITACHI
	X	8	TR1~TR8	TRANSISTOR	2SK580L	HITACHI
	X	8	TR9~TR16	TRANSISTOR	2SK623	HITACHI
	/	1	CN1	CONNECTER	HIF3BA-60PA-2, 54DSA	HIROSE
	X	2	CN2, CN6	CONNECTER	HIF3BA-20PA-2, 54DS	HIROSE
	/	1	CN3	CONNECTER	4P 350793-2	AMP
	X	3	CN4, CN7, CN9	CONNECTER	3x2P 350732-2	AMP
	2	2	CN5, CN10	CONNECTER	3x3P 350742-2	AMP
	/	1	CN8	CONNECTER	HIF3BA-20PA-2, 54DSA	HIROSE
	/	1	CN14	CONNECTER	2P 350787-2	AMP
	/	1	CN16	CONNECTER	HIF3BA-34PA-2, 54DS	HIROSE
	/	1	CN17	CONNECTER	HIF6- 100PA-1, 27DSA	HIROSE
	/	1	CN21	CONNECTER	4P 281916-2	AMP
	/	1	GND1	CONNECTER	00-8261-023213-854	ELCO
	2	X	6B, 6F	TTL	HD74LS00P	HITACHI
	/	X	6E	TTL	HD74LS004P	HITACHI
	/	X	7A, 7B	DRIVER	SN75372P	T. I.
	X	4	DR23~DR26	RELAY SOCKET	PT11-0	OMRON
	4	X	DR23~DR26	RELAY GUARD	PYC-P	OMRON
	8	X	D1~D4, D10, D18~D20	DIODE	1S2076ATA	HITACHI
	5	X	D23, D24, D26, D27, D29	DIODE	ESAC93-02	FUJI DENKI
	11	X	D2, D3, D5, D37~D44	DIODE	V06B- TP	HITACHI

4	4	IRV1, IRV3, IRV4, IRV6	RESISTOR	EXB-F8V-102J-YV	MATSUSHITA
2	2	IRV2, IRV5	RESISTOR	EXB-F8V-101J-YV	MATSUSHITA
4	4	IR1, IR2, IR5, IR6	RESISTOR	EXB-F9E-222J-YV	MATSUSHITA
4	4	IR3, IR4, IR7, IR8	RESISTOR	EXB-F9E-221J-YV	MATSUSHITA
2	2	IR9, IR10	RESISTOR	EXB-F9E-103J-YV	MATSUSHITA
1	1	IR11	RESISTOR	EXB-F9E-102J-YV	MATSUSHITA
Δ	1	R14	RESISTOR	LF1/4 100kΩF-TP	TAMA
×	2	R3, R14	RESISTOR	LF1/4 2.0KΩF-TP	TAMA
×	2	R8, R9	RESISTOR	LF1/4 1.0KΩF-TP	TAMA
×	16	R10, R11, R13, R16~R20, R23, R26, R28, R31, R33, R35, R37, R38	RESISTOR	LF1/4 100ΩF-TP	TAMA
×	2	R12, R15	RESISTOR	LF1/4 5.1KΩF-TP	TAMA
Δ	2	R25, R30	RESISTOR	LF1/4 3.3KΩF-TP	TAMA
Δ	2	R27, R29	RESISTOR	LF1/4 3.0KΩF-TP	TAMA
Δ	2	R32, R34	RESISTOR	LF1/4 8.2KΩF-TP	TAMA
Δ	1	R7	RESISTOR	LF1/4 1.0kΩF-TP	TAMA
2	2	R1, R2	RESISTOR	HC-5 100Ω	YAGISHITA
×	2	R4, R5	RESISTOR	RFM-5 0.1Ω	YAGISHITA
Δ	1	R6	RESISTOR	LF1/4 1.5kΩF-TP	TAMA
×	8	R39~R46	RESISTOR	RSF1B 100Ω	KOA
×	2	R47, R48	RESISTOR	RSF1B 5.6KΩJ	KOA
×	2	R49, R50	RESISTOR	RSF4B 12KΩJ	KOA
Δ	2	R21, R22	RESISTOR	LF1/4 75kΩF-TP	TAMA
×	31	C1~C17, C139~C152	CAPACITOR	USA-1H-2R2MCA-1TE	NIHON CHEMICAL
Δ	2	C18, C19	CAPACITOR	URS-1H-331MHA	NIHON CHEMICAL
2	2	C20, C21	CAPACITOR	KME50VNSN2200-22C	NIHON CHEMICAL
×	2	C22, C23	CAPACITOR	DD104-989B-102K	MURATA
×	2	C24, C25	CAPACITOR	506N-5002-102KB	MATSUO DENKI
×	2	C26, C27	CAPACITOR	KMH200VNSN-470-30A	NIHON CHEMICAL
19	19	C28~C46	CAPACITOR	RFB122-901F155Z25	MURATA
×	8	C129~C136	CAPACITOR	ECQ-E4103KF	MATSUSHITA
1	1	C51	CAPACITOR	506N-5002-102KB	MATSUO
1	1	NP1	NOISE FILTER	DSS310-55D223S	MURATA
×	4	LD1~LD4, LD1~LD9	LED	GL3KG43	SHRAP
×	35	GND2~GND6, TP1~TP14, TP17~TP18, TP20, TP21, TP23~TP25, TP27, TP28, TP30, TP32, TP34, TP36~TP39, TP24	DISCONNECT PIN	60809-2	AMP
Δ	11	TP15~TP20, TP22, TP23, TP26, TP29, TP31	DISCONNECT PIN	60809-2	AMP
24	24	ZB3, ZB5, ZB7~ZB10, ZB13, ZB15~ZB18, ZB20~ZB22	ZENNER DIODE	HZ24H-2	HITACHI
2	2	ZB24, ZB27	ZENNER DIODE	AW21-15	HITACHI
4	4	TR1, TR6~TR8	TRANSISTOR	2SK580L	HITACHI
4	4	TR10, TR12, TR14, TR16	TRANSISTOR	2SK623	HITACHI
2	2	CN4, CN7	CONNECTER	3X2P 350732-2	AMP
1	1	CN2	CONNECTER	HFB3A2PA-254DS	HIROSE
25	25	C1~C5, C7, C9~C13, C15, C17, C19~C21, C23, C25~C28, C30~C32, C34~C36, C38~C40, C42~C44, C46~C48, C50~C52	CAPACITOR	USA-1H-2R1MCA-1TE	NIHON CHEMICAL
Δ	2	C18, C19	CAPACITOR	URS-1H-331MHA	NIHON CHEMICAL


SURFACE			FIN.			Dwg. No.			FINAL REV.			TITLE			DSGN. GR.			CLASS. CODE			Dwg. No.																				
C	B	A	C	B	A																																				
24	25	26	27	28	29	14			15			42			43			50			51																				
APPLICATION						SYN. REVISIONS OR ECN No.						DATE						REV'D CHK'D APP'D						SYN. REVISIONS OR ECN No.						DATE						REV'D CHK'D APP'D					
△												..						△												..											
△												..						△												..											
△												..						△												..											
△												..						△												..											
GROUP & QTY			ATTN			Dwg. No.			MATERIAL			MATERIAL SIZE			MATERIAL LENGTH OR MASS			UNIT			IN. DIMS			REMARKS																	
C	B	A	C	B	A	PT. No.)			NAME OF PARTS			(PT. TYPE)																													
24	25	26	27	28	29	10			40			41			42			43			44			45																	
0			1			0																																			

	1	R3	RESISTOR	LFV420KQF-TP	TAMA
	1	R8	RESISTOR	LFV410KQF-TP	TAMA
	1	R12	RESISTOR	LFV451KQF-TP	TAMA
	5	R16, R23, R35, R37, R38	RESISTOR	LFV410KQF-TP	TAMA
	X	R29	RESISTOR	LFV430KQF-TP	TAMA
	X	R30	RESISTOR	LFV433KQF-TP	TAMA
	X	R32	RESISTOR	LFV482KQF-TP	TAMA
	4	R41, R42, R44, R46	RESISTOR	RSF1B 102J	KOA
	1	R48	RESISTOR	RSF1B 56KQJ	KOA
	1	R50	RESISTOR	RSF4B 12KQJ	KOA
	1	R4	RESISTOR	RFM-5 0.1QJ	YAGISHITA
	1	C23	CONNECTER	DD104-989B-102K	MURATA
	1	C25	CONNECTER	506N-5002-102KB	MATSUO DENKI
	1	C27	CONNECTER	KH120VNSN-470-30A	NIHON CHEMICAL
	4	C129, C131, C133, C136	CONNECTER	ECQ-E4103KF	MATSUSHITA
	3	DR23~DR25	RELAY	LY3 DC24V	OMRON
	22	DR3, DR4, DR11, DR12, DR17, DR18, DR21, DR22, DR23, DR24, DR26, DR33, DR34, DR35, DR36, DR37, DR38, DR39, DR40, DR41, DR42, DR43, DR44, DR45, DR46, DR47, DR48, DR49, DR50, DR51, DR52, DR53, DR54, DR55, DR56, DR57, DR58, DR59, DR60, DR61, DR62, DR63, DR64, DR65, DR66, DR67, DR68, DR69, DR70, DR71, DR72, DR73, DR74, DR75, DR76, DR77, DR78, DR79, DR80, DR81, DR82, DR83, DR84, DR85, DR86, DR87, DR88, DR89, DR90, DR91, DR92, DR93, DR94, DR95, DR96, DR97, DR98, DR99, DR100	RELAY	LAB2 DC12V	OMRON
A	2	LD1, LD3, LD2, LD7, LD9	LED	GL3K943	SHRAP
A	27	GN22, GN23, GN24, GN25, GN26, GN27, GN28, GN29, GN30, GN31, GN32, GN33, GN34, GN35, GN36, GN37, GN38, GN39, GN40, GN41, GN42, GN43, GN44, GN45, GN46, GN47, GN48, GN49, GN50, GN51, GN52, GN53, GN54, GN55, GN56, GN57, GN58, GN59, GN60, GN61, GN62, GN63, GN64, GN65, GN66, GN67, GN68, GN69, GN70, GN71, GN72, GN73, GN74, GN75, GN76, GN77, GN78, GN79, GN80, GN81, GN82, GN83, GN84, GN85, GN86, GN87, GN88, GN89, GN90, GN91, GN92, GN93, GN94, GN95, GN96, GN97, GN98, GN99, GN100	DISCONNECT PIN	60809-2	AMP
A	7	TP15, TP20, TP22, TP26	DISCONNECT PIN	60809-2	AMP
	4	8B, 8D, 8F, 8H	PULSE TRANS	FDM2-1	NPC
	X	6A	REG	HA17524P	HITACHI
	1	10W	IC	SN75452	T.1
	2	IC100, IC101, 5A, 6A	IC	HA17555PS	HITACHI
	1	IC102	IC	HA17555PS	HITACHI
	2	C240, C201	CAPACITOR	506N-5002-103KB	MATSUO DENKI
	1	C200	CAPACITOR	506N-5002-103KB	MATSUO DENKI
	2	C202, C203	CAPACITOR	RPE-123F-155325V	MURATA
	1	C202	CAPACITOR	RPE-123F-155325V	MURATA
	2	R200, R201	RESISTOR	LFV4390K-4F-TP	TAMA
	X	R200	RESISTOR	LFV4390K-4F-TP	TAMA
	2	R202, R203	RESISTOR	LFV4200K-4F-TP	TAMA
	1	R202	RESISTOR	LFV4200K-4F-TP	TAMA
	2	C48, C49	CAPACITOR	KME35VB-10BP	NIHON CHEMICAL
	2	C204, C205	CAPACITOR	RPE122-901F155325	MURATA
	1	C47	CAPACITOR	553H-5002-105K	MATSUO
	2	R200, R201	RESISTOR	LFV4330K-4F-TP	TAMA
	1	R200	RESISTOR	LFV4330K-4F-TP	TAMA

TDRIV2 CIRCUIT DIAGRAM (7/7)

DRAW	イガラシ	76'5'23	PROJECTION 		TITLE	TDRIV2	
CHKD							
	イガラシ	76'5'23	SCALE	REGD	カ10ズ		
APPD	727	76'5'23	N.T.S.				
Hitachi Medical Corporation					DWG No.	KA249472	SH. 7e

SURFACE FIN.		DWG No.		FINAL REV.		TITLE		DSGN. GR.		CLASS. CODE		DNG CODE	
C	B	1	KA280267	01		OPTFLT カイロズ		K13G		00	91	2	
SYN REVISIONS OR ECN No.		DATE		REV'D CHKD APP'D		SYN REVISIONS OR ECN No.		DATE		REV'D CHKD APP'D			
MRKA-6142		1986.9.23		[Signature]									
GROUP & QTY		DWG No. (PT. No.)		NAME OF PARTS		MATERIAL (PT. TYPE)		MATERIAL SIZE		MATERIAL LENGTH OR MASS		REMARKS	
C	B	1	0	OPTFLT カイロズ									

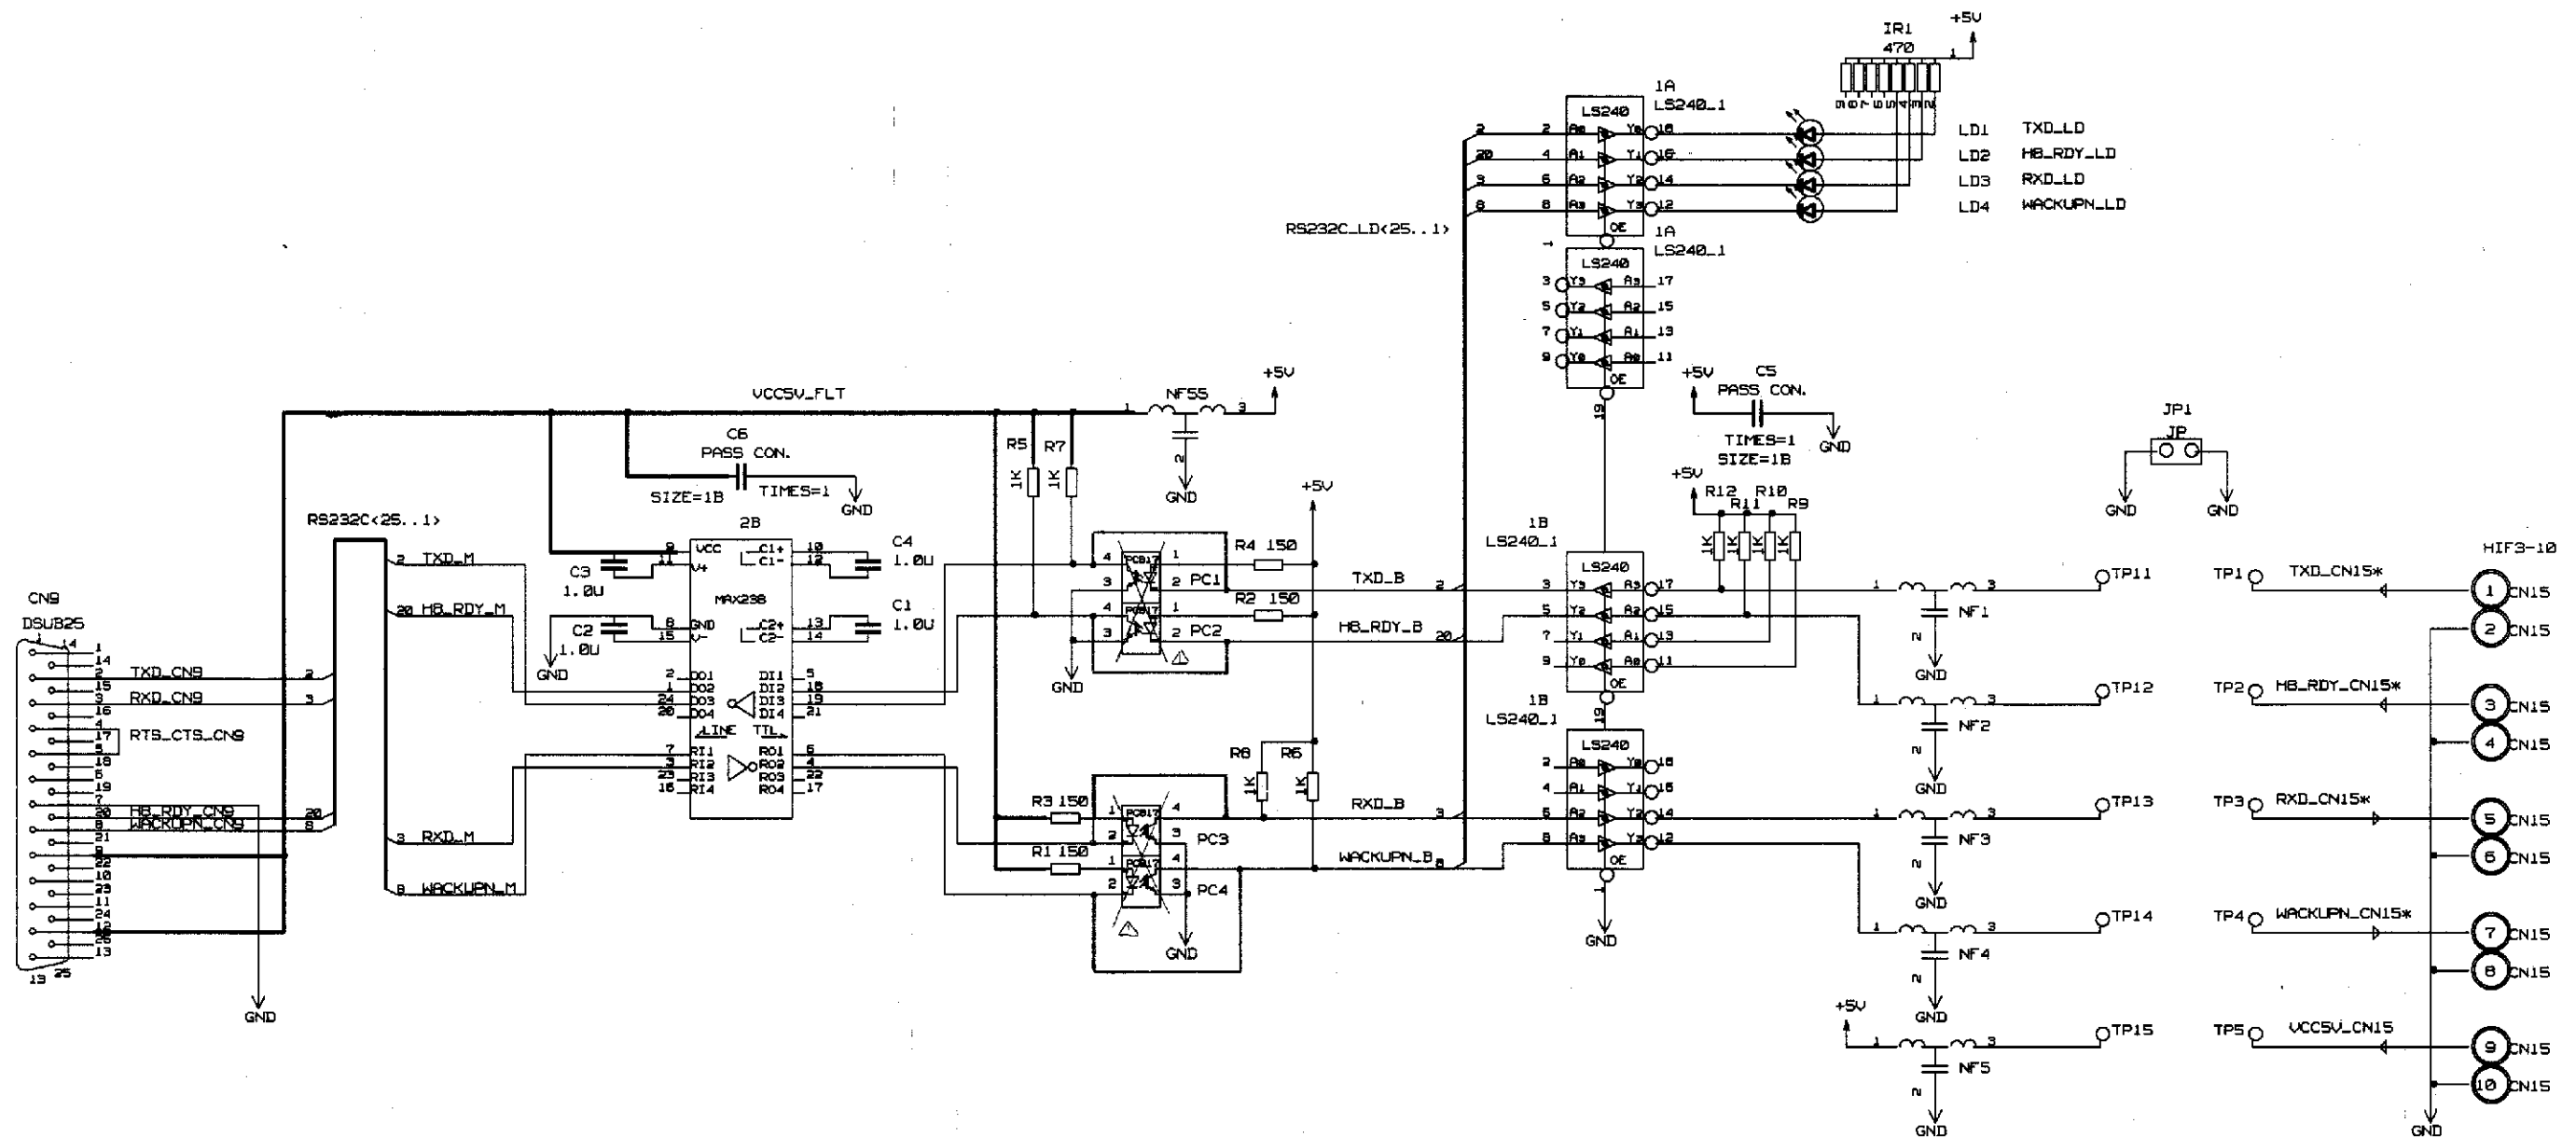OPTFLT 1
OPTFLT CIRCUIT DIAGRAM (1/2)DRAWING:
OPTFLT

Wed Jan 8 13:53:53 1997

DWN		971.8		PROJECTION		TITLE	
CHKD		971.8		SCALE		OPTFLT	
APPD		971.8		NTS		カイロズ	
Hitachi Medical Corporation		DNG No.		KA280267		SH.	
						1/2	

*** SIGNAL CROSS-REFERENCE ***
--- FOR THE ENTIRE DESIGN ---

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

*** UNIT CROSS-REFERENCE ***
--- FOR THE ENTIRE DESIGN ---

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

STUFF LIST - 1 8-Jan-1997 14:05:13.00

74LS240-1	J4120625	1A
74LS240-1	J4120625	1B
CAP1-1	J1711701 SR582F105ZB6	C1
CAP1-1	J1711701 SR582F105ZB6	C2
CAP1-1	J1711701 SR582F105ZB6	C3
CAP1-1	J1711701 SR582F105ZB6	C4
DSUB25-1	DBLC-J25SAF-13L8	CN9
EXB-F9E-1	J2314128 EXB-F9E-471J-YV	IR1
HIF3-10DS-1	J8334592 HIF3BD-10PA-2.54DS	CN15
LC-1	J8811202 DSS310-55D223S	NOISE_FILTER NF1
LC-1	J8811202 DSS310-55D223S	NOISE_FILTER NF2
LC-1	J8811202 DSS310-55D223S	NOISE_FILTER NF3
LC-1	J8811202 DSS310-55D223S	NOISE_FILTER NF4
LC-1	J8811202 DSS310-55D223S	NOISE_FILTER NF5
LC-1	J8811202 DSS310-55D223S	NOISE_FILTER NF55
LED-1	J3761415 GL3KG43	LD1
LED-1	J3761415 GL3KG43	LD2
LED-1	J3761415 GL3KG43	LD3
LED-1	J3761415 GL3KG43	LD4
MAX238-1	H371A006 ADM238LJR	2B
PASCON-1	PRE123-901F155Z25	C5
PASCON-1	PRE123-901F155Z25	C6
PCB17-1	J3331006 PCB17	PC1 Δ
PCB17-1	J3331006 PCB17	PC2 Δ
PCB17-1	J3331006 PCB17	PC3 Δ
PCB17-1	J3331006 PCB17	PC4 Δ
RESI-1	J2317011 LF1/4 150	R1
RESI-1	J2317011 LF1/4 150	R2
RESI-1	J2317011 LF1/4 150	R3
RESI-1	J2317011 LF1/4 150	R4
RESI-1	J2317033 LF1/4 1k	R5
RESI-1	J2317033 LF1/4 1k	R6
RESI-1	J2317033 LF1/4 1k	R7
RESI-1	J2317033 LF1/4 1k	R8
RESI-1	J2317033 LF1/4 1k	R9
RESI-1	J2317033 LF1/4 1k	R10
RESI-1	J2317033 LF1/4 1k	R11
RESI-1	J2317033 LF1/4 1k	R12

END STUFF LIST

POWER AND GROUND LIST - 1 8-Jan-1997 14:05:13.00

DESIGNATOR	PART TYPE	GND	VCC
1A	74LS240-1	10	20
1B	74LS240-1	10	20

END POWER AND GROUND LIST


BODY ORDERED NET LIST - 1 8-Jan-1997 14:05:13.00

CN9	DSUB25-1	1	NC
		2	TXDCN9
		3	RXDCN9
		4	RTSCTSCN9
		5	RTSCTSCN9
		6	NC
		7	GND
		8	WACKUPNCN9
		9	VCCSVFLT
		10	NC
		11	NC
		12	VCCSVFLT
		13	NC
		14	NC
		15	NC
		16	NC
		17	NC
		18	NC
		19	NC
		20	HBRDYCN9
		21	NC
		22	NC
		23	NC
		24	NC
		25	NC
CN15	HIF3-10DS-1	1	TXDCN15L
		2	GND
		3	HBRDYCN15L
		4	GND
		5	RXDCN15L
		6	GND
		7	WACKUPNCN15L
		8	GND
		9	VCCSVCN15
		10	GND


END BODY ORDERED NET LIST

OPTFLT CIRCUIT DIAGRAM (2/2)

DWG No.	97108	PROJECTION	97108	TITLE	OPTFLT
CHKD	97108	SCALE	97108	REVISION	97108
APPD	97108	NTS	97108	DATE	97108
Hitachi Medical Corporation				DWG No.	KA280267
				SH.	20

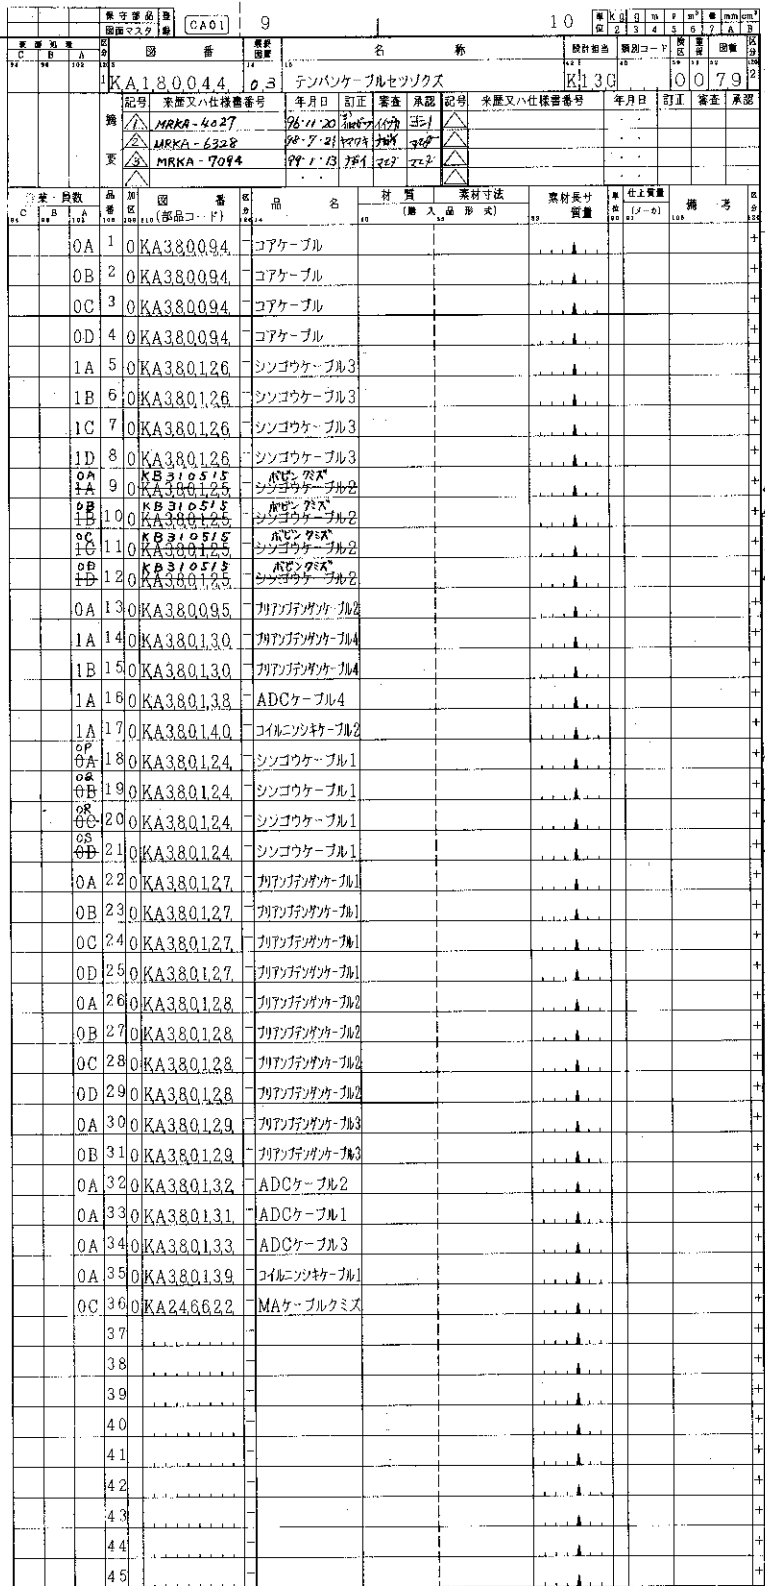

製図	14327	26.8.21	反巻法	名称	
事案	76.9.3	26.9.3	尺度	テンパンケーブルセツソクス	
承認	33.1	26.9.4	NTS		
株式会社 日立メディコ				図番	KA180044
				検査	1

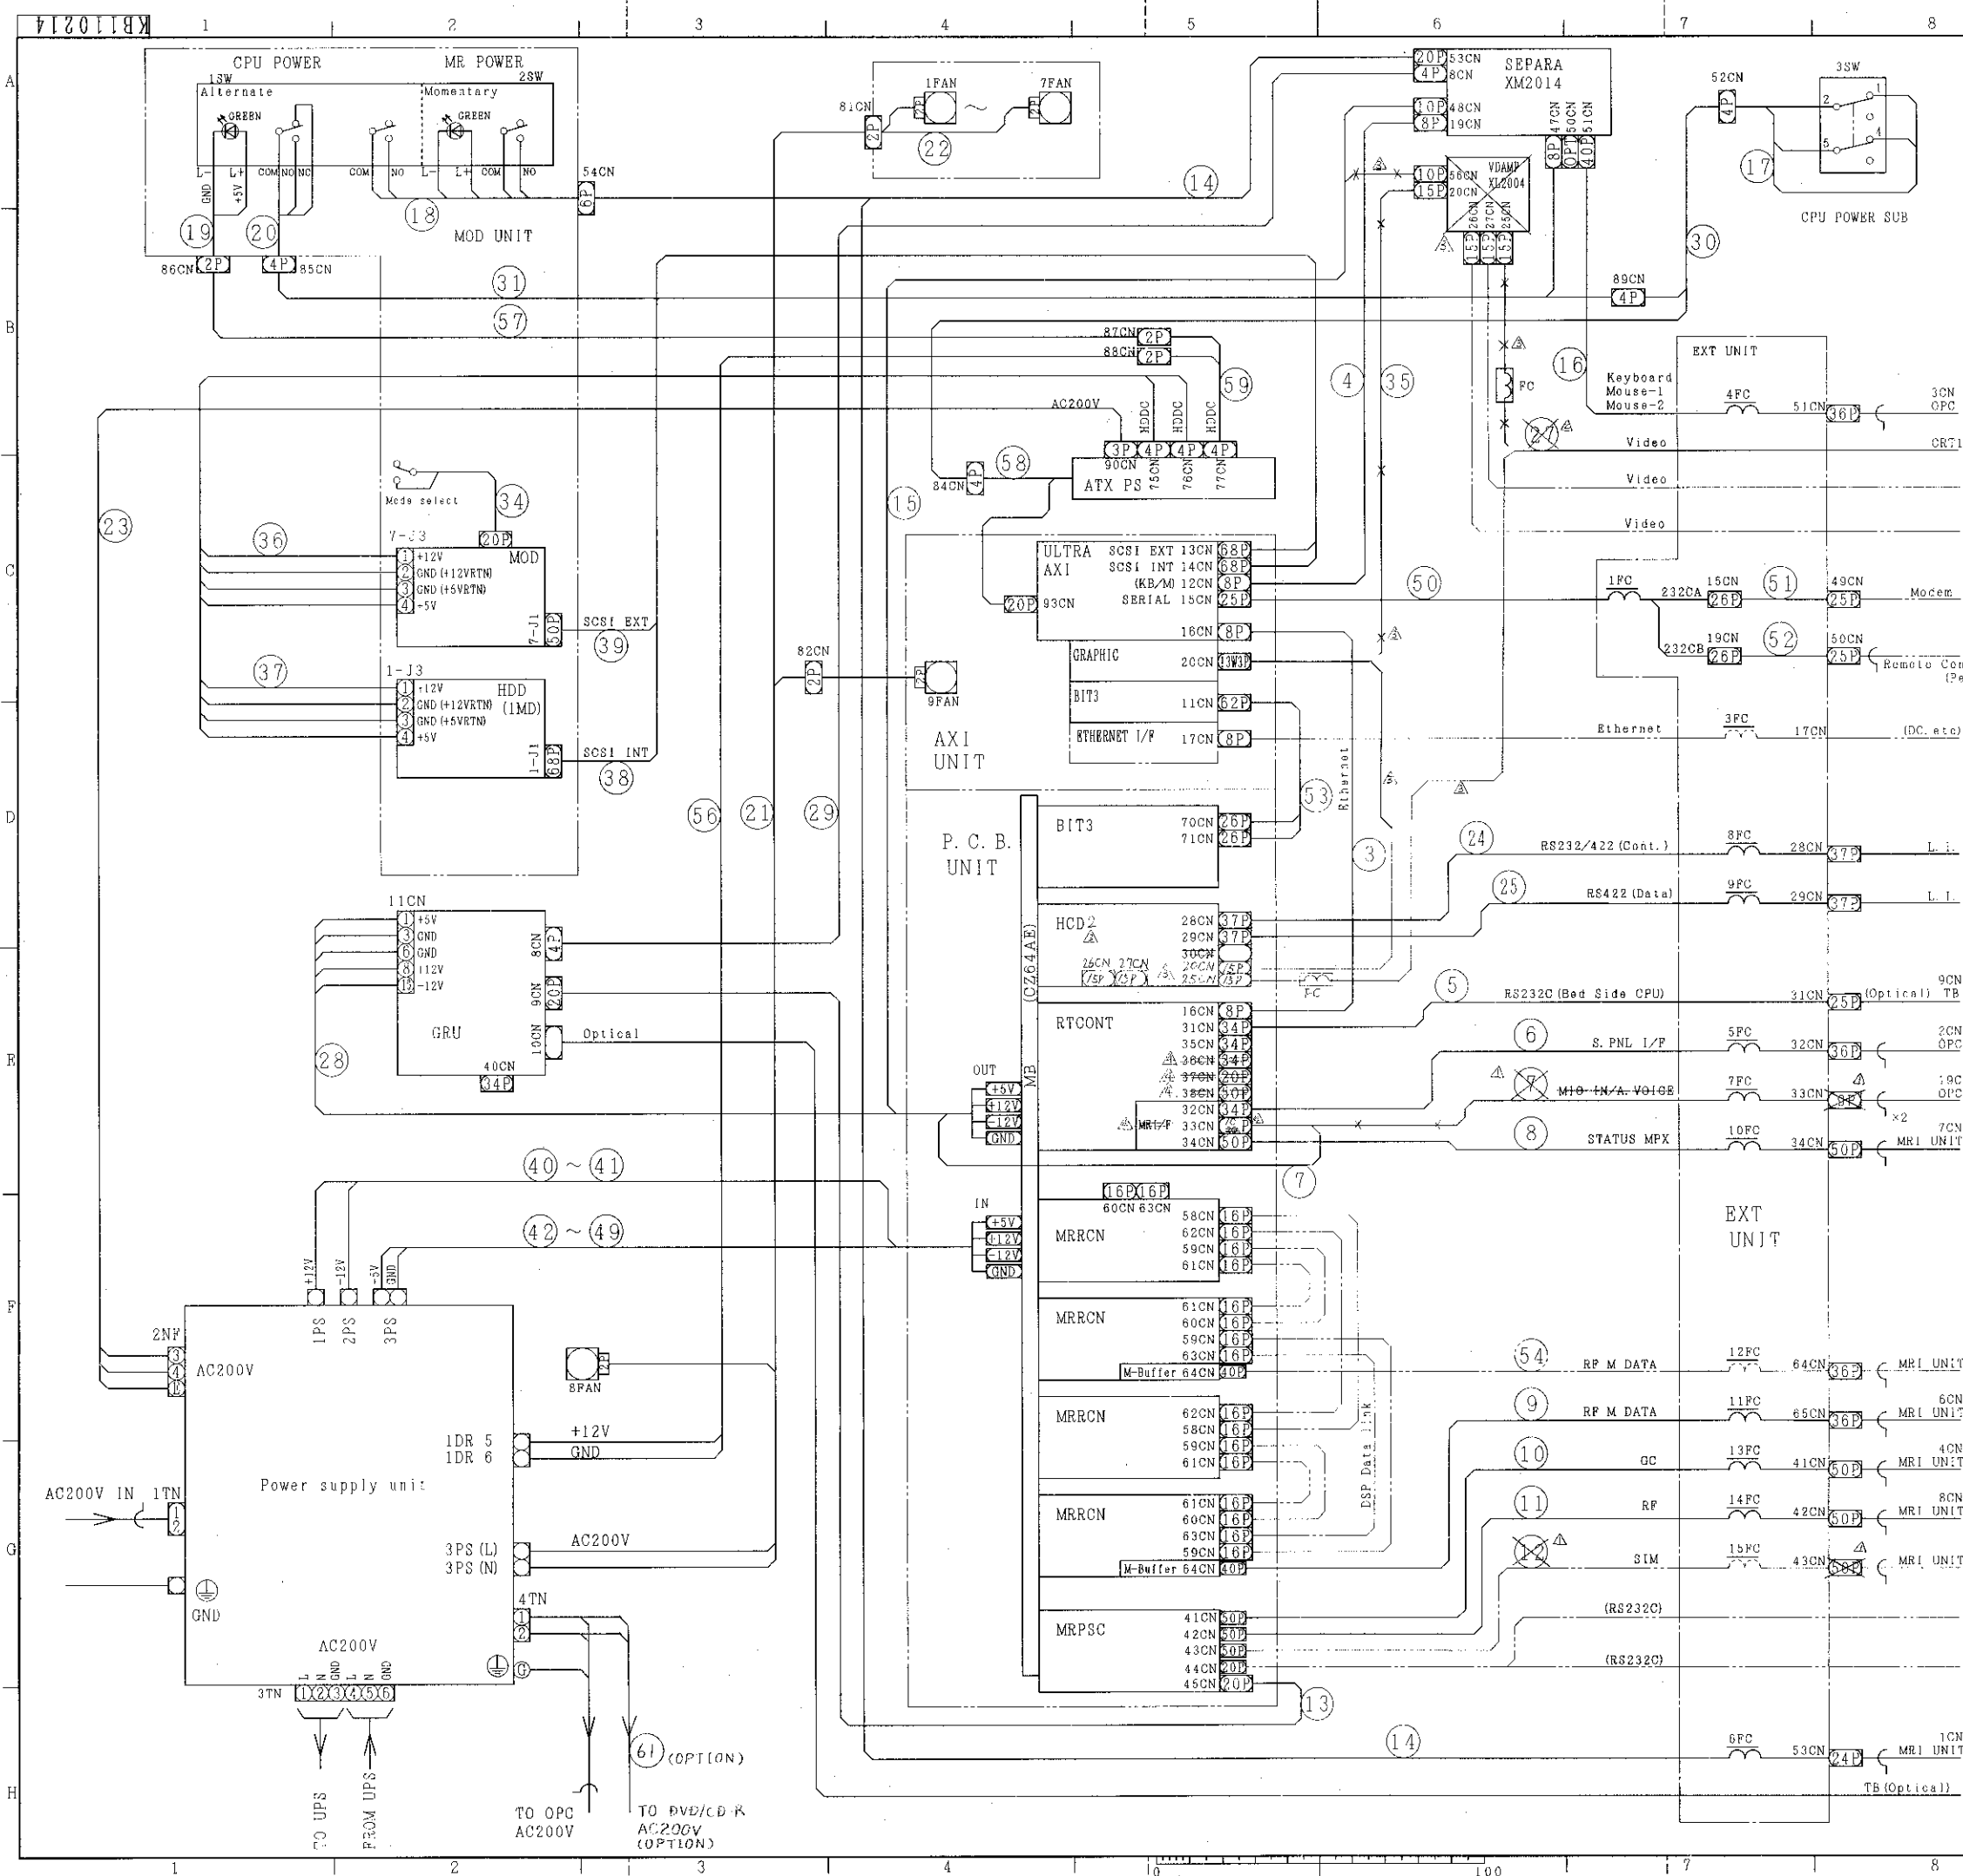

図名		図番	図尺	図式	図説	図注	図考
IPUキャビネット ナイブケッセンズAXI		KB110214	04				
部品名		部品番号	部品名	部品番号	部品名	部品番号	部品名
CPU POWER		19	MR POWER	20	MOD UNIT	31	AXI UNIT
P.C.B. UNIT		36	BXT UNIT	37	Power supply unit	38	GRU
HDD		39	SCSI EXT	40	SCSI INT	41	BIT3
HDC2		42	RTCONT	43	M-Buffer	44	M-Buffer
M-Buffer		45	M-Buffer	46	M-Buffer	47	M-Buffer
M-Buffer		48	M-Buffer	49	M-Buffer	50	M-Buffer
M-Buffer		51	M-Buffer	52	M-Buffer	53	M-Buffer
M-Buffer		54	M-Buffer	55	M-Buffer	56	M-Buffer
M-Buffer		57	M-Buffer	58	M-Buffer	59	M-Buffer
M-Buffer		60	M-Buffer	61	M-Buffer	62	M-Buffer
M-Buffer		63	M-Buffer	64	M-Buffer	65	M-Buffer
M-Buffer		66	M-Buffer	67	M-Buffer	68	M-Buffer
M-Buffer		69	M-Buffer	70	M-Buffer	71	M-Buffer
M-Buffer		72	M-Buffer	73	M-Buffer	74	M-Buffer
M-Buffer		75	M-Buffer	76	M-Buffer	77	M-Buffer
M-Buffer		78	M-Buffer	79	M-Buffer	80	M-Buffer
M-Buffer		81	M-Buffer	82	M-Buffer	83	M-Buffer
M-Buffer		84	M-Buffer	85	M-Buffer	86	M-Buffer
M-Buffer		87	M-Buffer	88	M-Buffer	89	M-Buffer
M-Buffer		90	M-Buffer	91	M-Buffer	92	M-Buffer
M-Buffer		93	M-Buffer	94	M-Buffer	95	M-Buffer
M-Buffer		96	M-Buffer	97	M-Buffer	98	M-Buffer
M-Buffer		99	M-Buffer	100	M-Buffer		


IPU INTERNAL WIRING DIAGRAM

株式会社 日立メディコ

KB110214

QTY	SYMBOL	PART NAME	TYPE	MANUFACTURE	PARTS No.
1	1FFB	CIRCUIT PROTECTOR	CP34R/20DN-20DN-20DN-20DN	FUJII	
2	1ZNR 22NR	SURGE ABSORBER	BRZ-C14DK391U	MATSUSHITA	J3631033
1	1DR	RELAY	AHE2231	MATSUSHITA	
2	1NF 2NF	NOISE FILTER	GP-22CU	TOKIN	J8811011
1	1SD	DIODE	V07J	HITACHI	J3130004
2	1PS 2PS	DC POWER SUPPLY	EWS25-12	NEMIC LAMBDA	K621A048
1	3PS	DC POWER SUPPLY	EWS25-12EWS600-5	NEMIC LAMBDA	K6211024
1	1TN	TERMINAL	JTU20-2HM	YOSHIDA	J836A043
1	3TN	TERMINAL	UP2035EW-8P-CT	FUJICON	J8361182
1	4TN	TERMINAL	UP2035EW-2F-CT	FUJICON	J8361183

注記: ----- は品番15、16の束線とする。

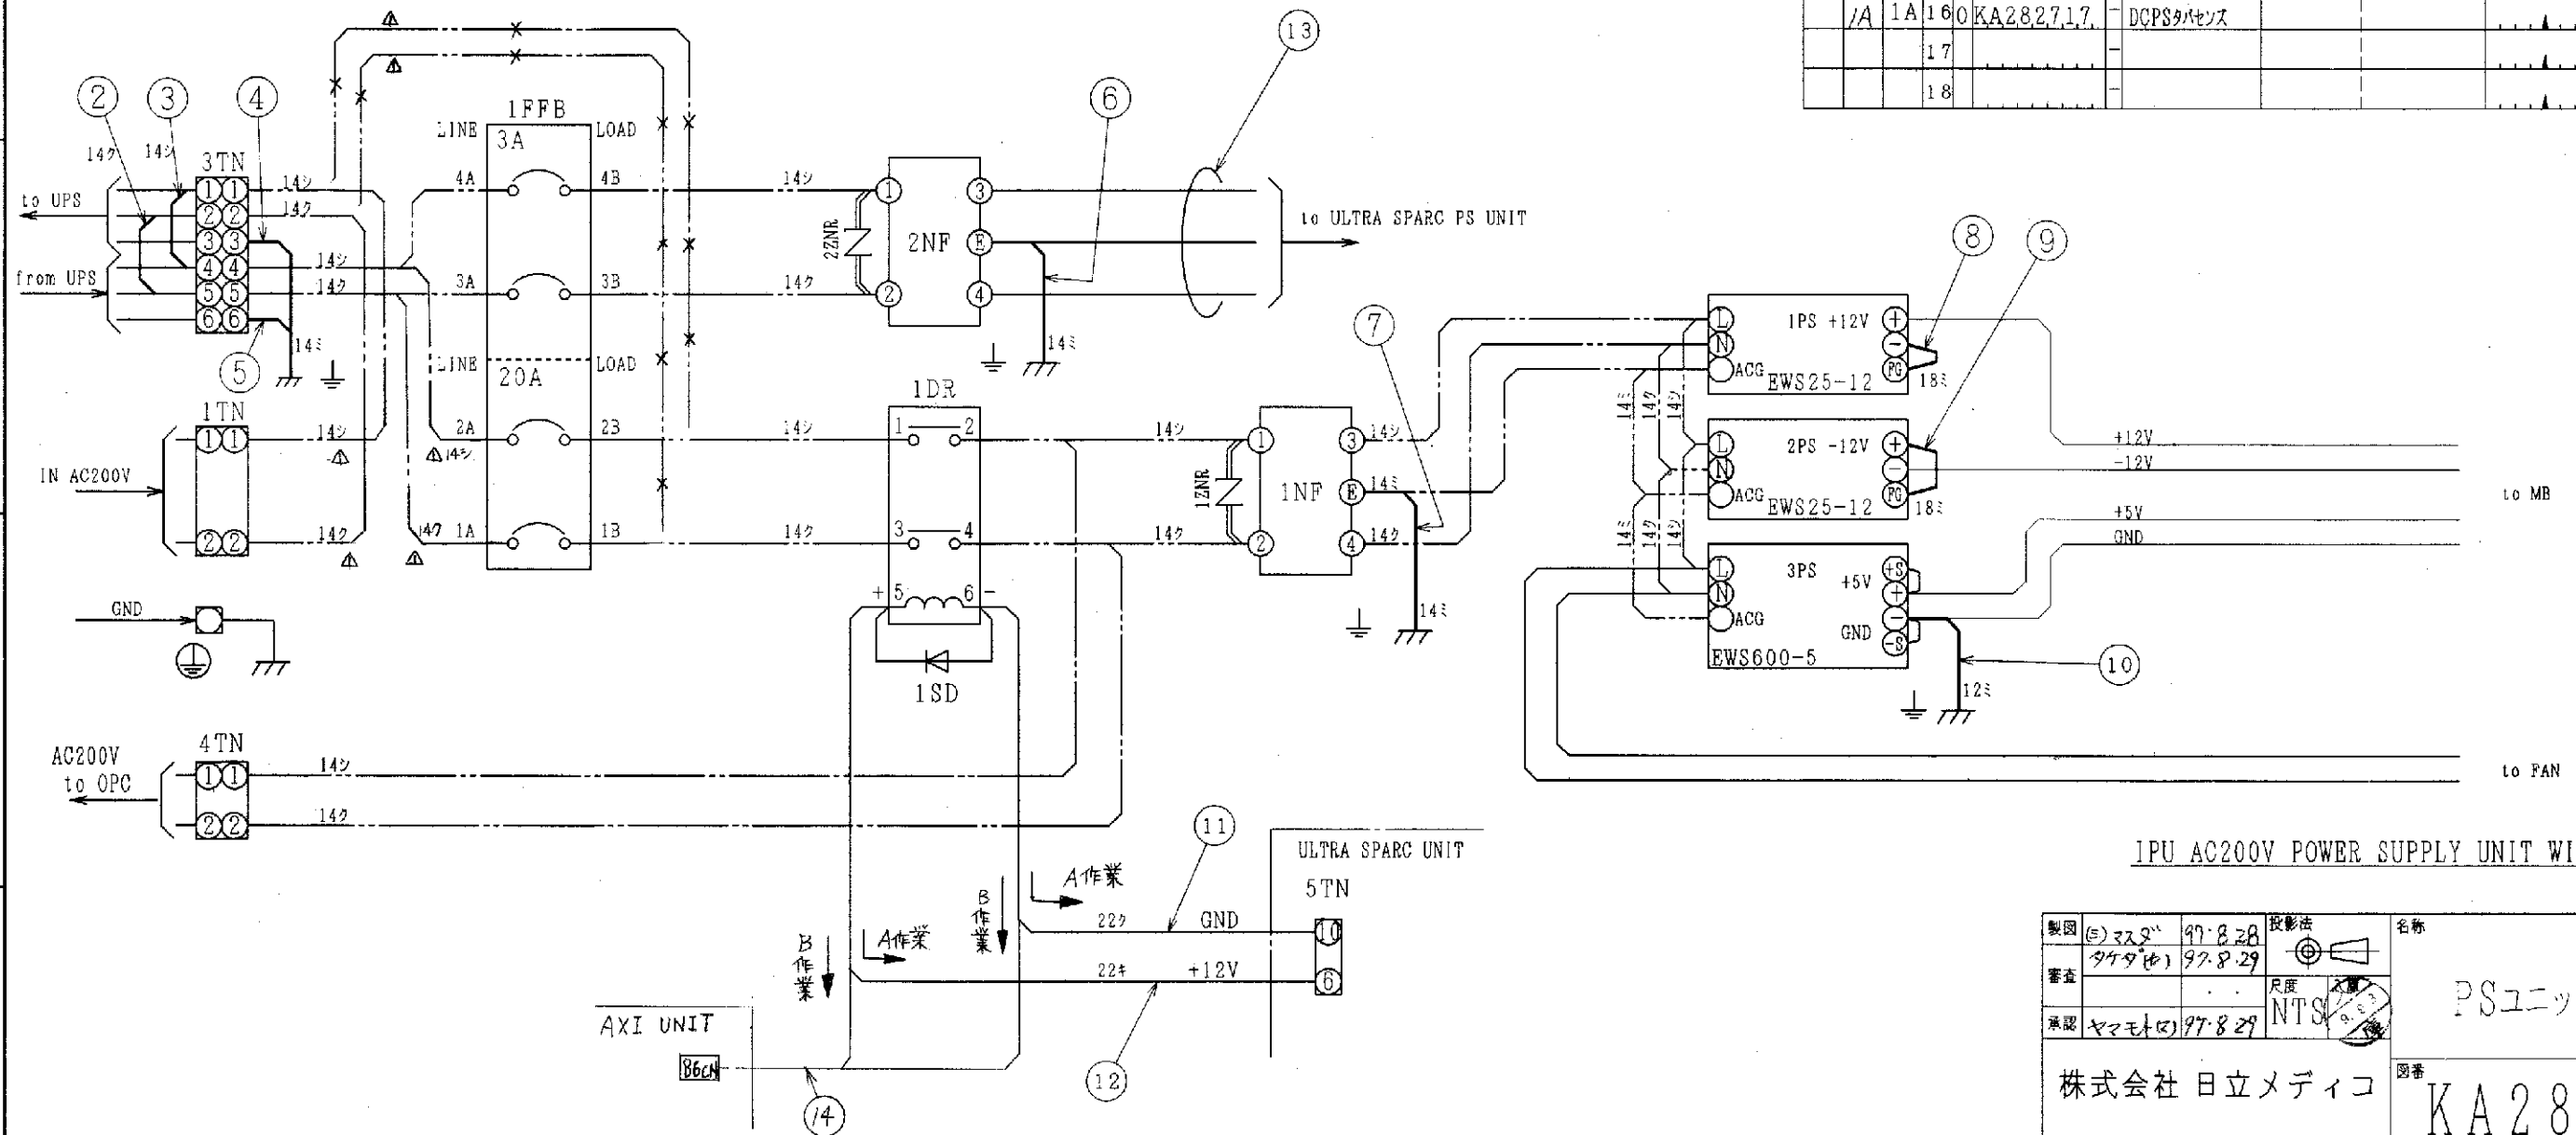


IPU AC200V POWER SUPPLY UNIT WIRING DIAGRAM

製図	(E) 322	97.8.28	投影法	名称	PSユニットハイセンス
審査	タケタ(中)	97.8.29	尺度	NTS	
承認	ヤマモト(中)	97.8.29	図番	KA282145	校番
株式会社 日立メディコ					1/1

図面マスタ	図番	品名	材質	素材寸法	素材長さ	仕上質量	備考
KA282145	0.1	PSユニットハイセンス	K13G	0089			
記号	来歴又は仕様書番号	年月日	訂正	審査	承認	記号	来歴又は仕様書番号
MSKA-0564	97.8.28	97.8.28	97.8.28	97.8.28	97.8.28		
B作業品	97.8.28	97.8.28	97.8.28	97.8.28	97.8.28		
作業員							
作業数							
品番	図番	品名	材質	素材寸法	素材長さ	仕上質量	備考
1	13	ハイセンスギョウ					
1A	2	KA283173	ハイセンス-フル3				
1B	3	KA283173	ハイセンス-フル3				
1C	4	KA283173	ハイセンス-フル3				
1D	5	KA283173	ハイセンス-フル3				
1E	6	KA283173	ハイセンス-フル3				
1F	7	KA283173	ハイセンス-フル3				
1G	8	KA283173	ハイセンス-フル3				
1H	9	KA283173	ハイセンス-フル3				
1J	10	KA283173	ハイセンス-フル3				
1K	11	KA283173	ハイセンス-フル3				
1L	12	KA283173	ハイセンス-フル3				
1B	13	KA383106	200Vデンソ-フル				
00	14	KB310601	SMPケ-7-1V				
1A	15	KA282710	PSユニットハイセンス				
1A	16	KA282717	DCPSハイセンス				
17							
18							

図面マスタ		図番		名 称		設計担当者		図面コード		図面番号		図面区分	
CA01		KA281583.00		9U9MB カイロ		K13G		00091					
記号		来歴又は仕様番号		年月日		訂正		審査		承認		記号	
来歴又は仕様番号		年月日		訂正		審査		承認		記号		来歴又は仕様番号	
年月日		訂正		審査		承認		記号		来歴又は仕様番号		年月日	
訂正		審査		承認		記号		来歴又は仕様番号		年月日		訂正	
審査		承認		記号		来歴又は仕様番号		年月日		訂正		審査	
承認		記号		来歴又は仕様番号		年月日		訂正		審査		承認	
作業・員数		品番		図番		品名		材質		素材寸法		仕上質量	
品番		図番		品名		材質		素材寸法		仕上質量		備 考	
0		1		0		9U9MB		カイロ					
2													
3													

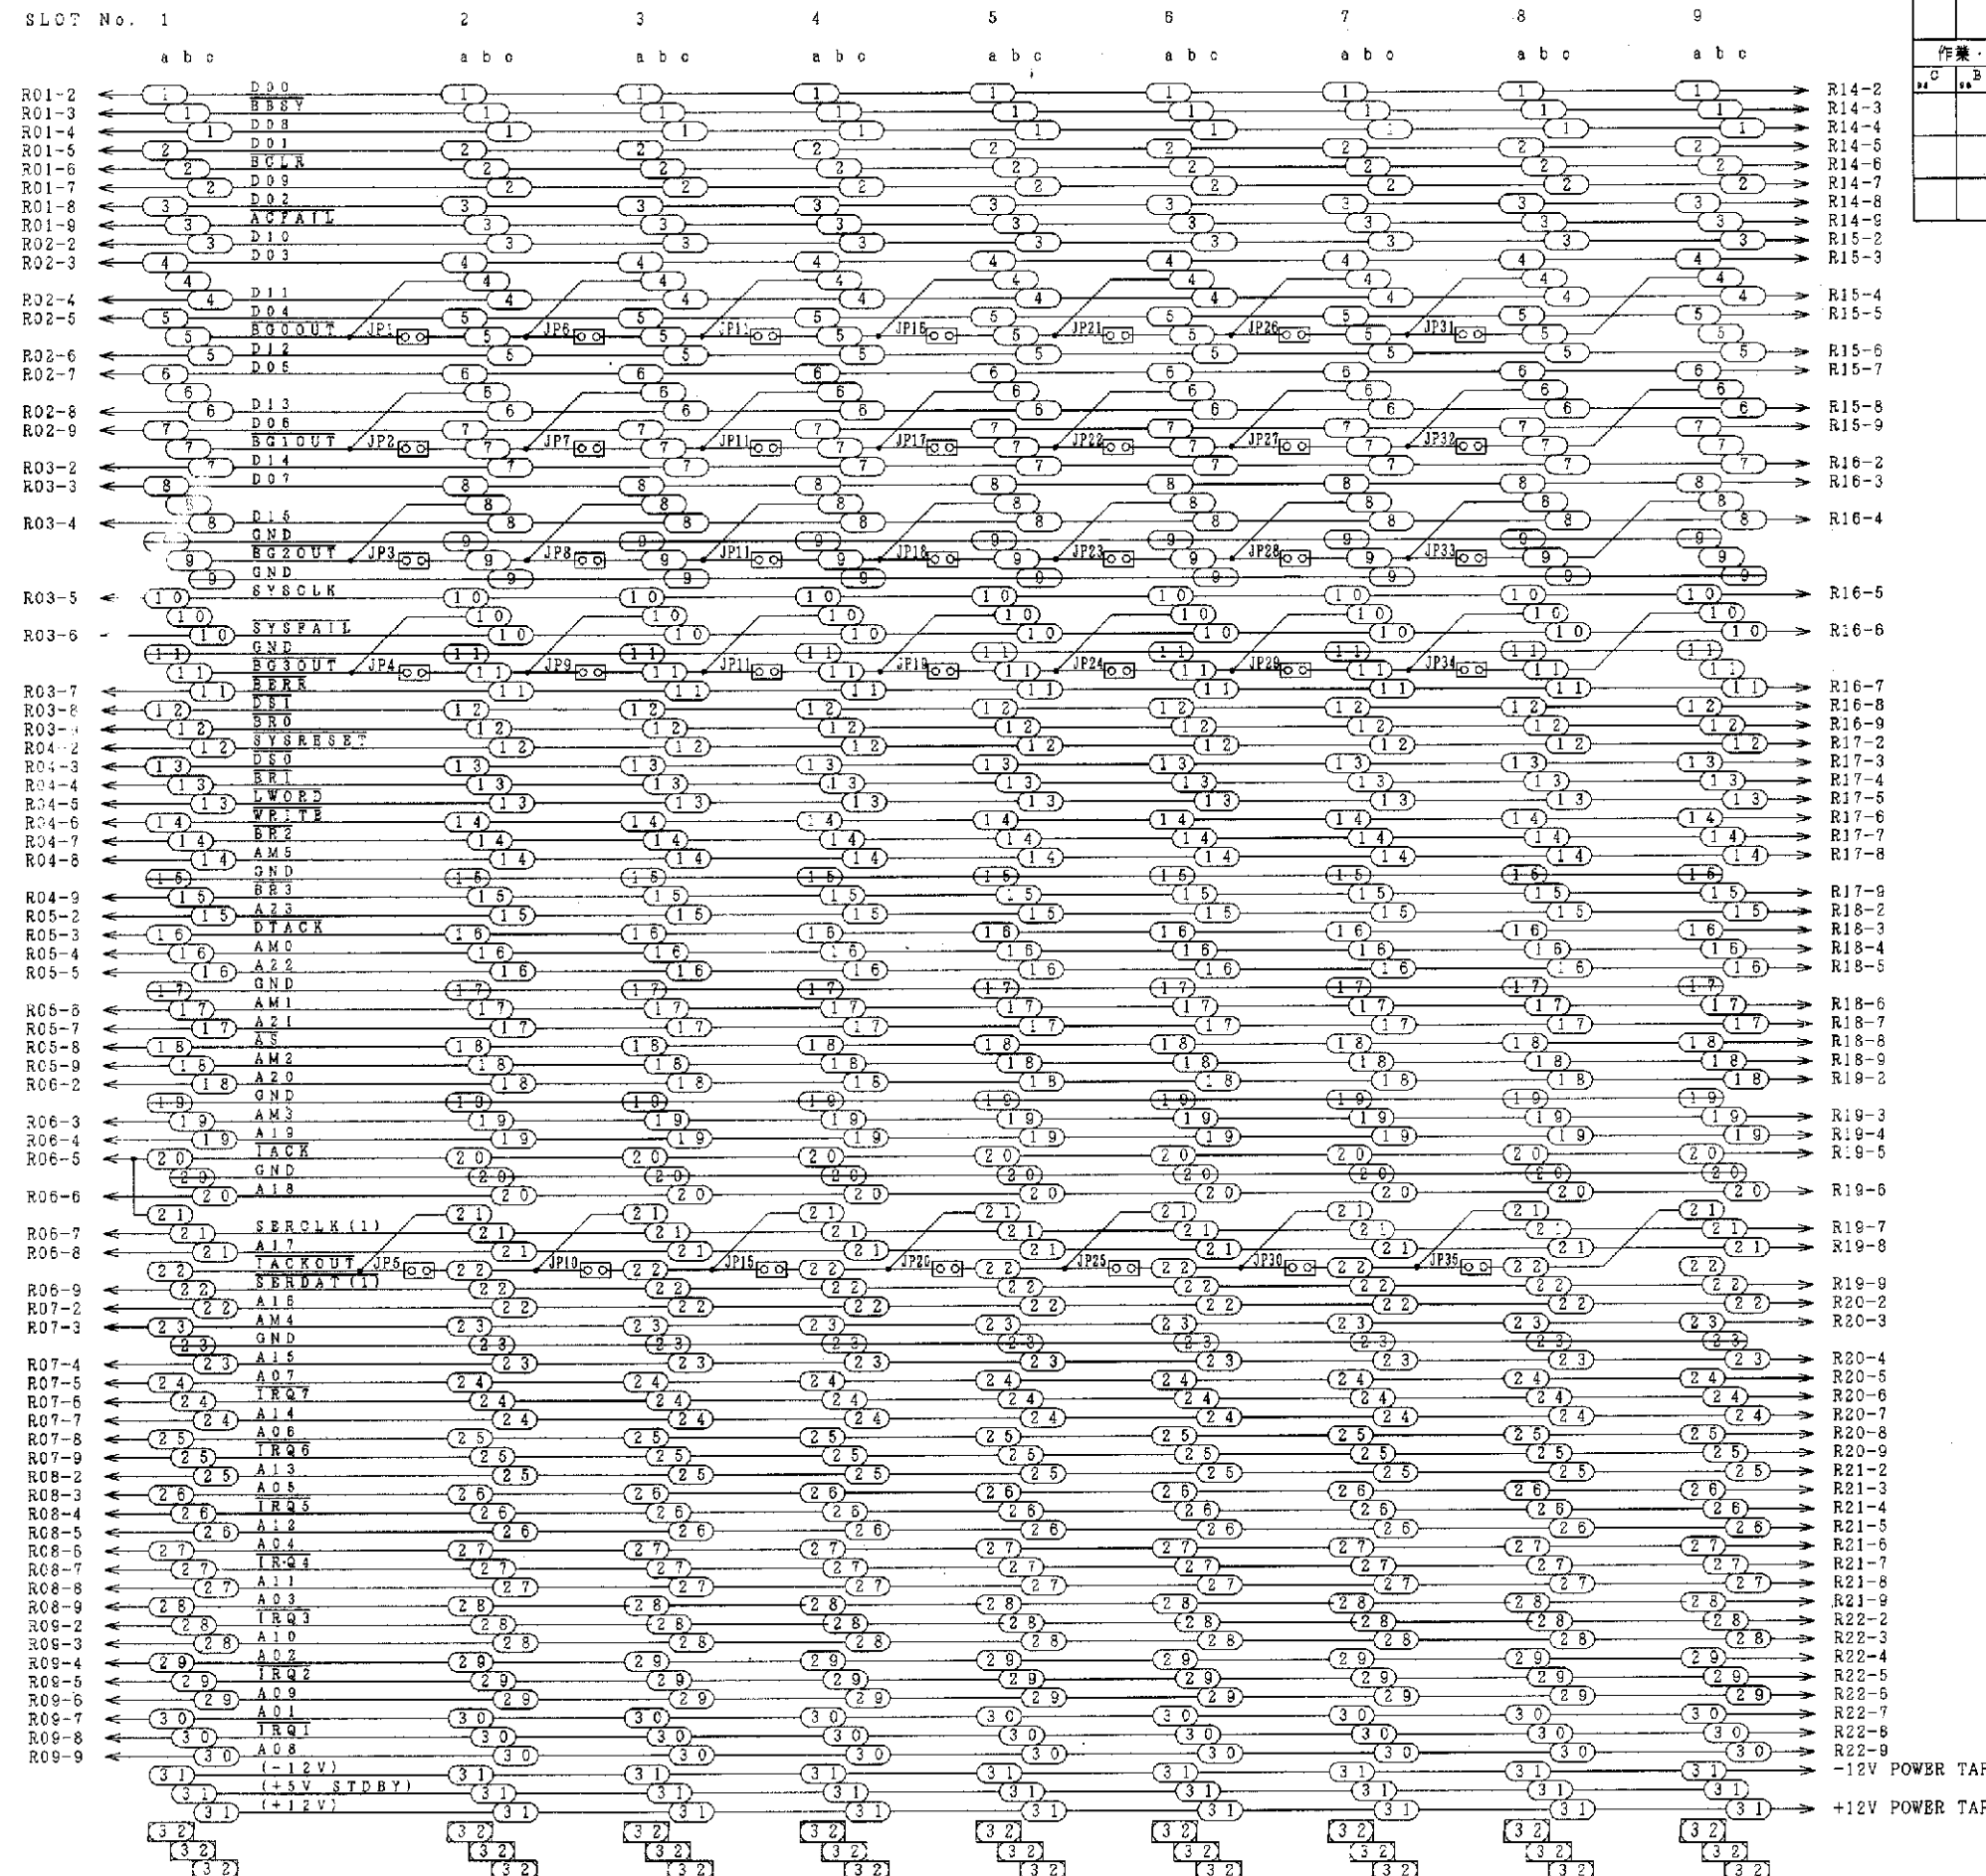


1/3 P1

9U9MB Circuit Diagram

製図	(2)229°	97.2.15	投影法	名称	9U9MB
審査	44444	97.2.26	尺 寸	入庫	カイロ
承認	44444	97.2.26	NTS	図番	KA281583
株式会社 日立メディコ					校 査
					1/3

A
B
C
D
E
F

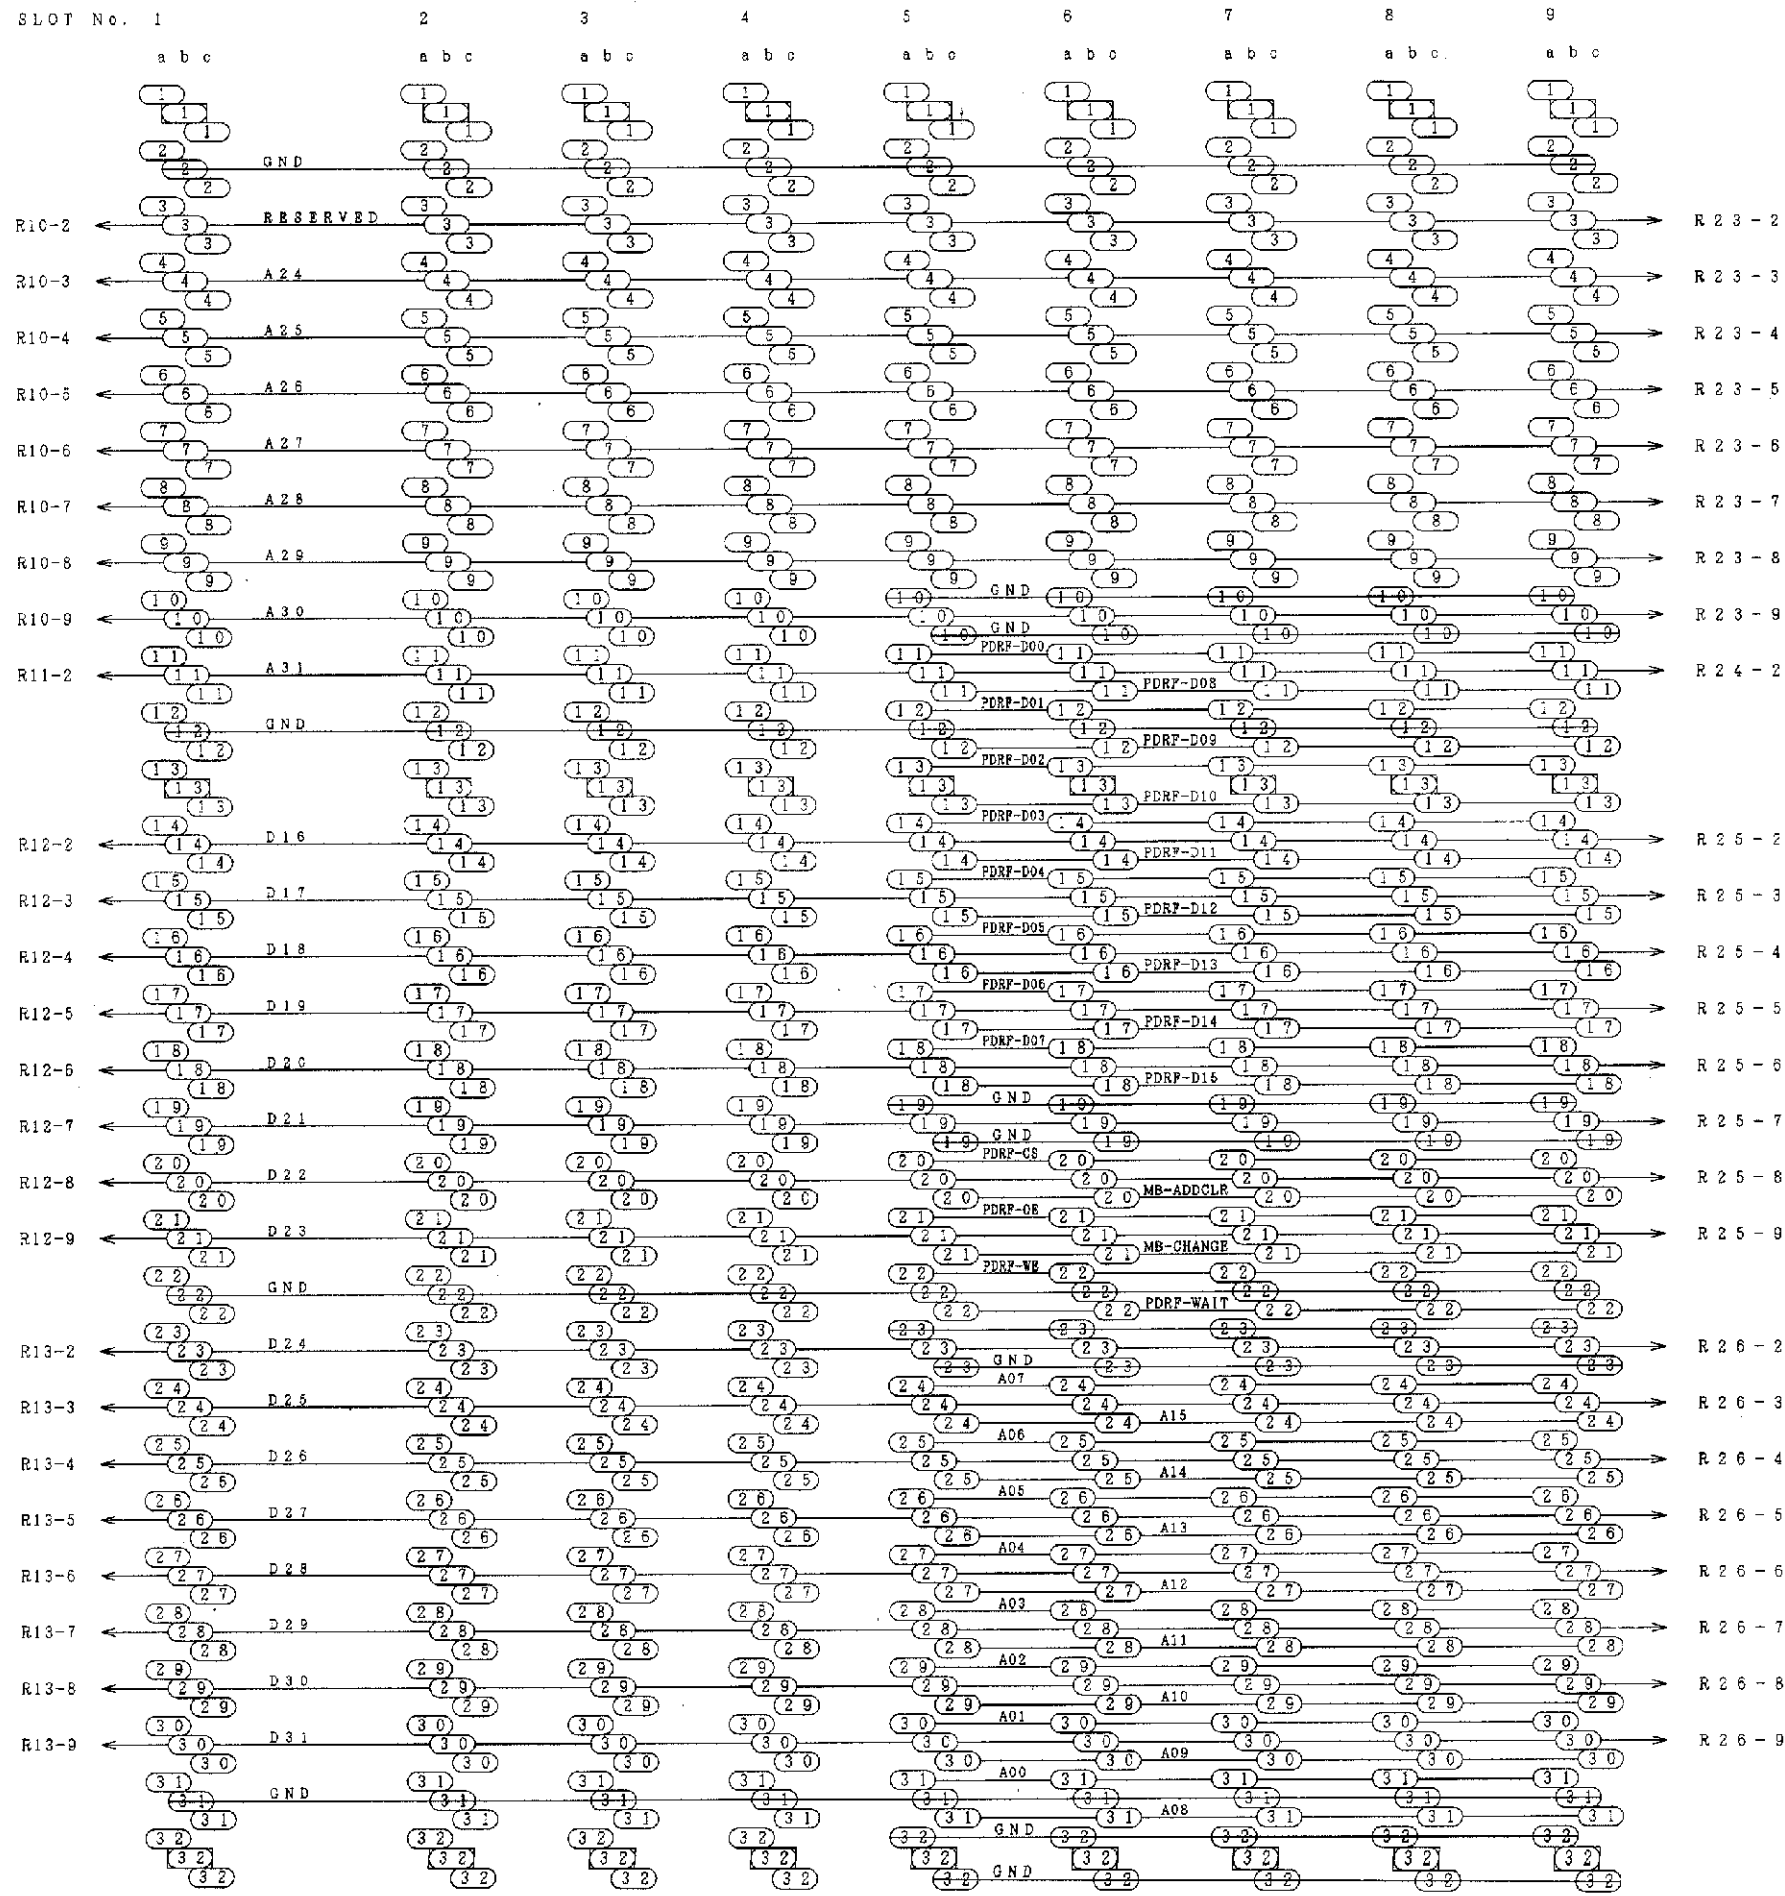


5 [V]
GND

2/3 P2

9U9MB Circuit Diagram

製図	97.2.15	投影法	90°	名称	9U9MB
審査	97.2.26	尺度	1/100	カロス	
承認	97.2.26	NTS			
株式会社 日立メディコ				図番	KA281583
				校番	2




→ -12V POWER TAP

9U14MB Circuit Diagram

製図	(三) 2224	97.2.15	投影法	名称	9U9MB
審査	97.2.15	97.2.26			
			尺度 入庫 NTS 3.11		
承認	97.2.26	97.2.26		カイロス	
株式会社 日立メディコ				図番	KA281583
					枝番 3e

				DWG MTR				(CAD)								8				3				2				3				4				5				6				7				A				B							
SURFACE FIN.				DWG No.				FINA. REV.				TITLE				DSGN. GR.				CLASS. CODE				REV. NO.				DWG CODE				REV. NO.				DWG CODE				REV. NO.				DWG CODE				REV. NO.											
54				56				122				14				16				42				46				50				51				56				57				61				62											
				1KB212452				05				RTCONT カロズ				K13G				0				0				91				2																											
				SYN REVISIONS OR ECN No.				DATE				REV'D				CHK'D				APPR'D				SYN REVISIONS OR ECN No.				DATE				REV'D				CHK'D				APPR'D																			
				△ MSKA-0911				00-2-1				00-2-1				00-2-1				00-2-1				△ MSKA-2080				00-7-29				00-7-29				00-7-29				00-7-29																			
				△ MSKA-0935				00-4-11				00-4-11				00-4-11				00-4-11																																							
				△ MSKA-1127				01-4-26				01-4-26				01-4-26				01-4-26																																							
				△ MSKA-1649				03-5-20				03-5-20				03-5-20				03-5-20																																							
GROUP & QTY				DWG No.				NAME OF PARTS				MATERIAL				MATERIAL SIZE				MATERIAL LENGTH OR MASS				FIN. MASS				REMARKS				TOTAL																											
C B A				(PT. No.)				NAME OF PARTS				(PT. TYPE)																																															
54 56 122				106 108 110				14 16				42 46				50 51 56				57 61 62				105 106 107																																			
0				1				0				RTCONT カロズ																																															

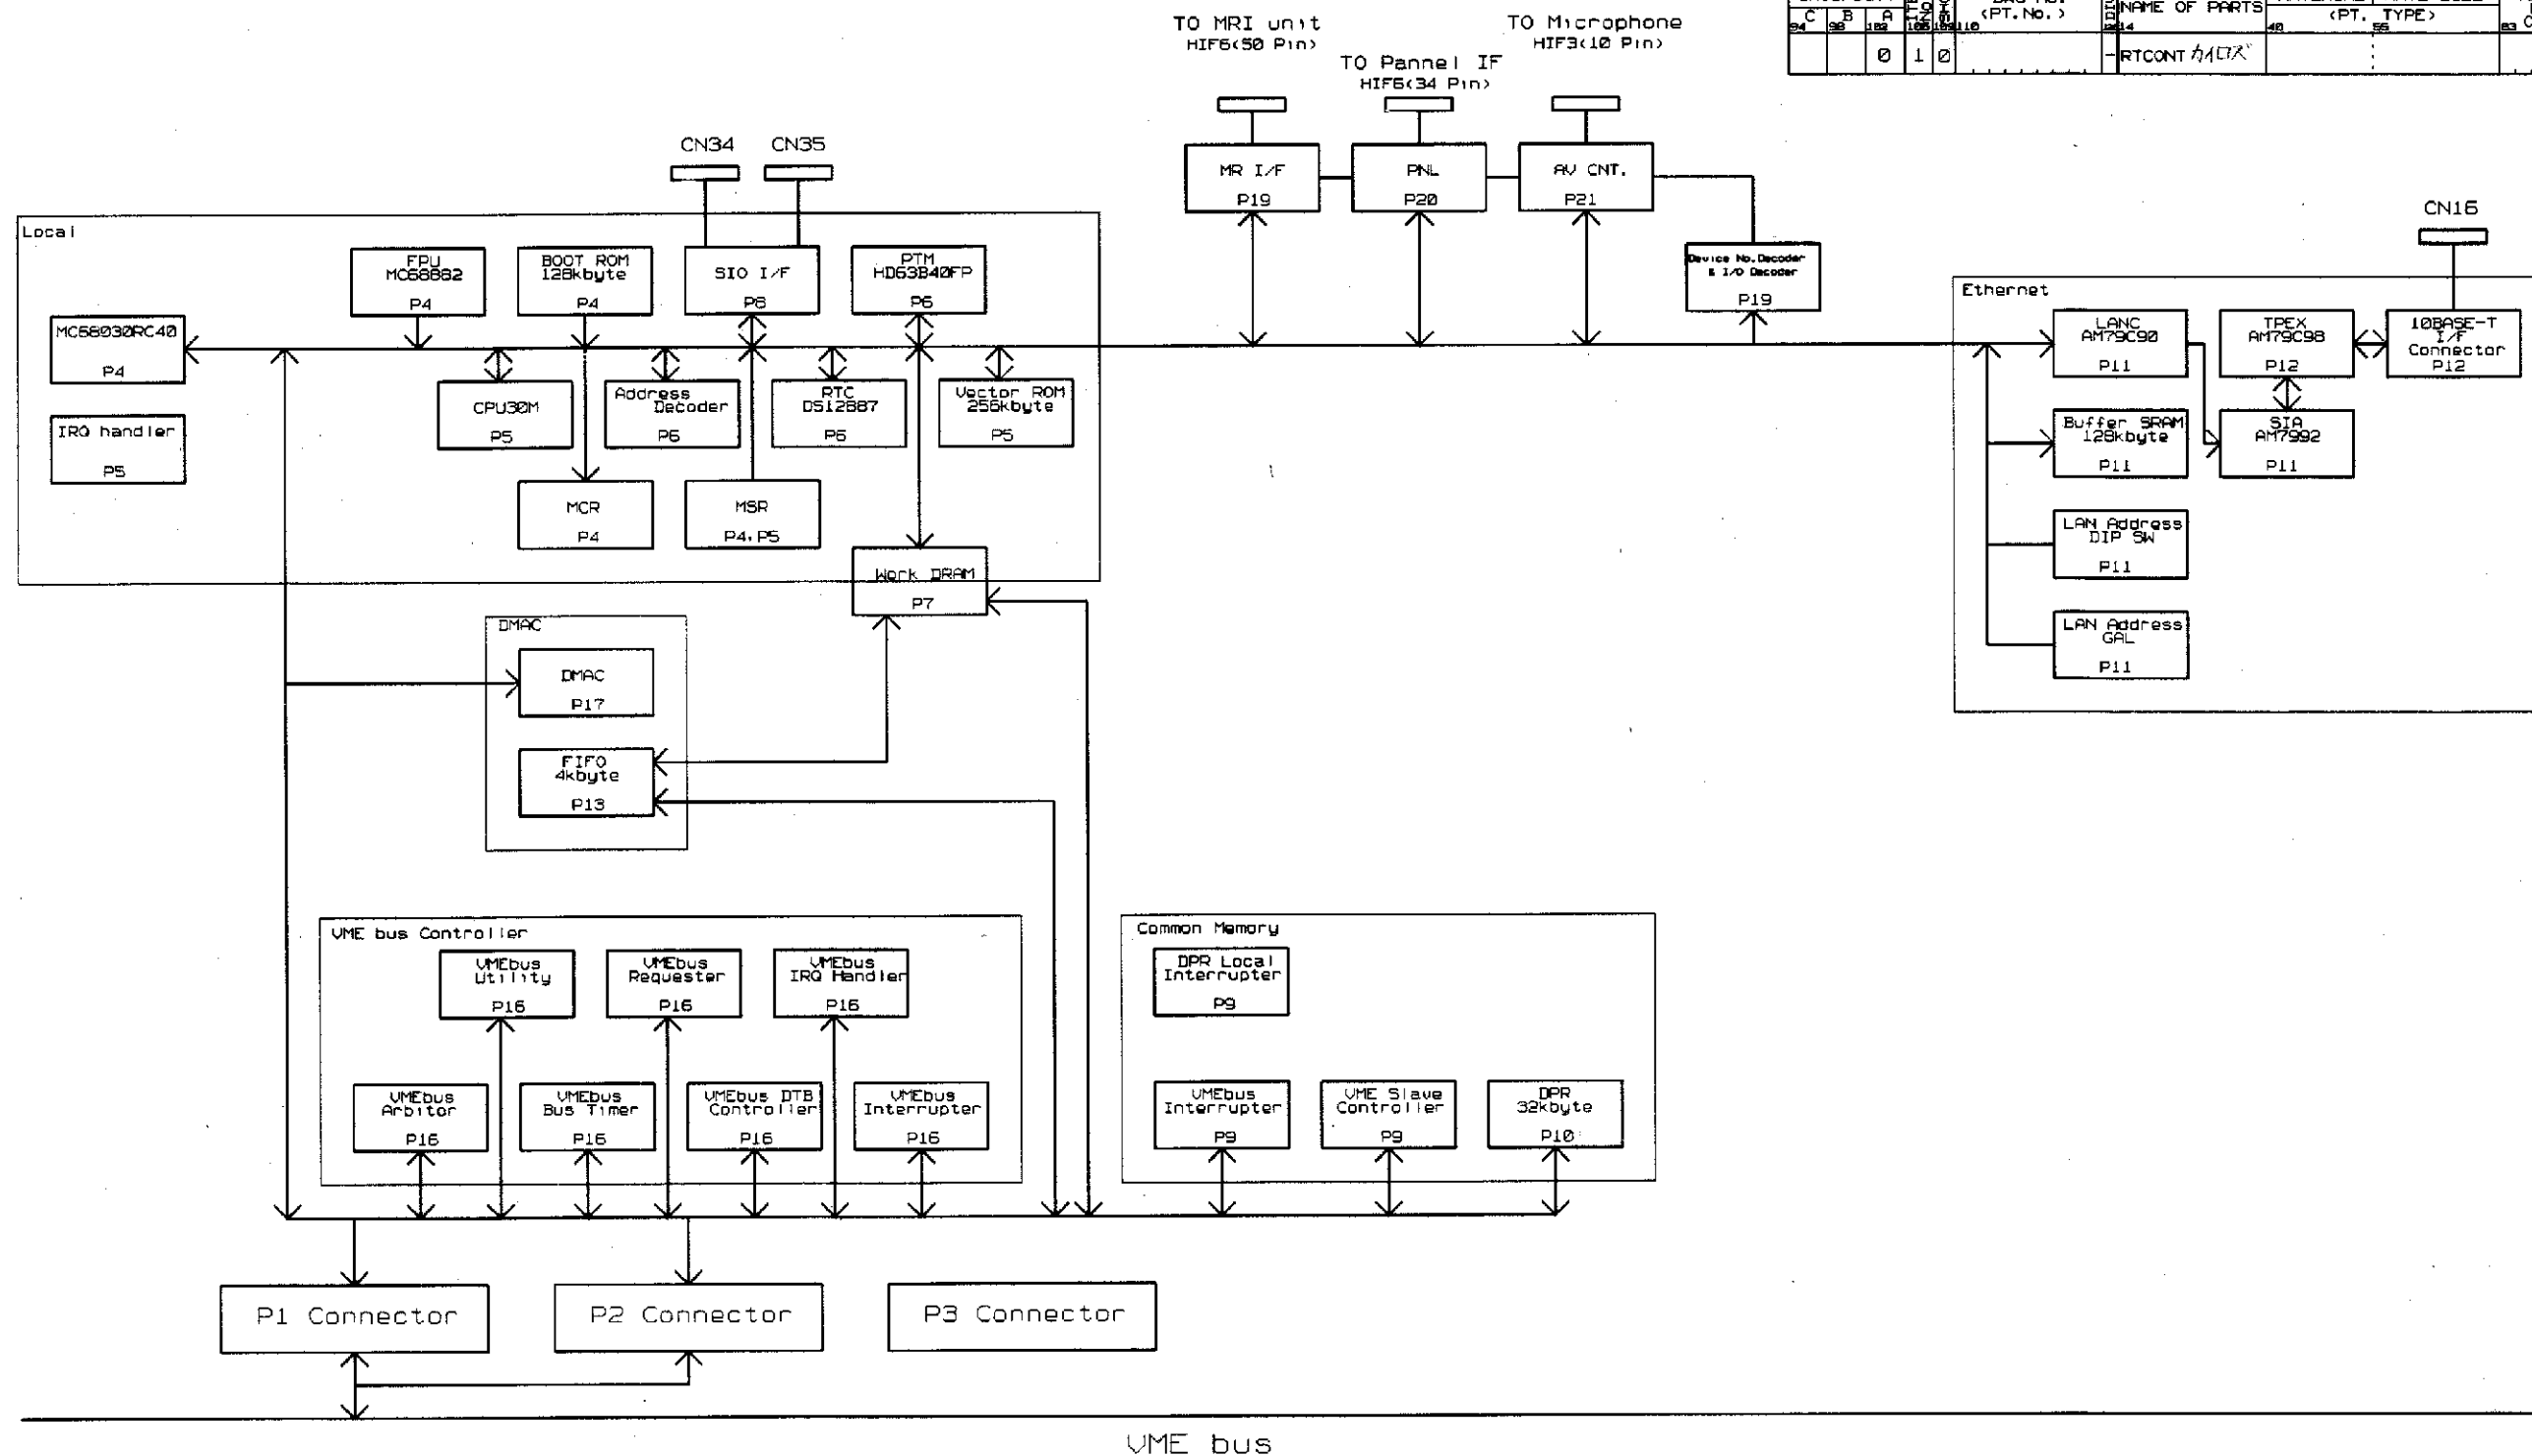


DRAWING:
RTCONT
RTCONT Fri Oct 22 16:42:24 1999

DWN	オカダ	99.11.5	PROJECTION	第一角法	TITLE	RTCONT カロズ
CHKD	タケタ	99.11.12	SCALE	REGD		
APPD	タケタ	99.11.12	NTS			
Hitachi Medical Corporation					DWG No.	KB212452
					SH.	1/21

830080711

SURFACE FIN.			DWG MTR			W (C401)						5			2			3			4			5			6			7			A			B		
C B A			DWG No.			FINAL REV.			TITLE			DSGN. GR.			CLASS. CODE			DATE			REV. CHKD APPD			DWG CODE			REV. CHKD APPD											
54 56 102			1 KA280268			01			SEPARA カ102			K13G						99.9.28			10/22			11/7			11/7			00 91			2					
APPLICATION			SYN. REVISIONS OR ECN No.			DATE			REV. CHKD APPD			SYN. REVISIONS OR ECN No.			DATE			REV. CHKD APPD			SYN. REVISIONS OR ECN No.			DATE			REV. CHKD APPD											
			△ MSKA-0855			99.9.28			10/22			△																										
			△			..						△																										
			△			..						△																										
			△			..						△																										
GROUP&QTY			DWG No. (PT. No.)			NAME OF PARTS			MATERIAL			MATERIAL SIZE			MATERIAL LENGTH OR MASS			REMARKS																				
C B A			102			SEPARA カ102																																
54 56 102			0			1			0																													

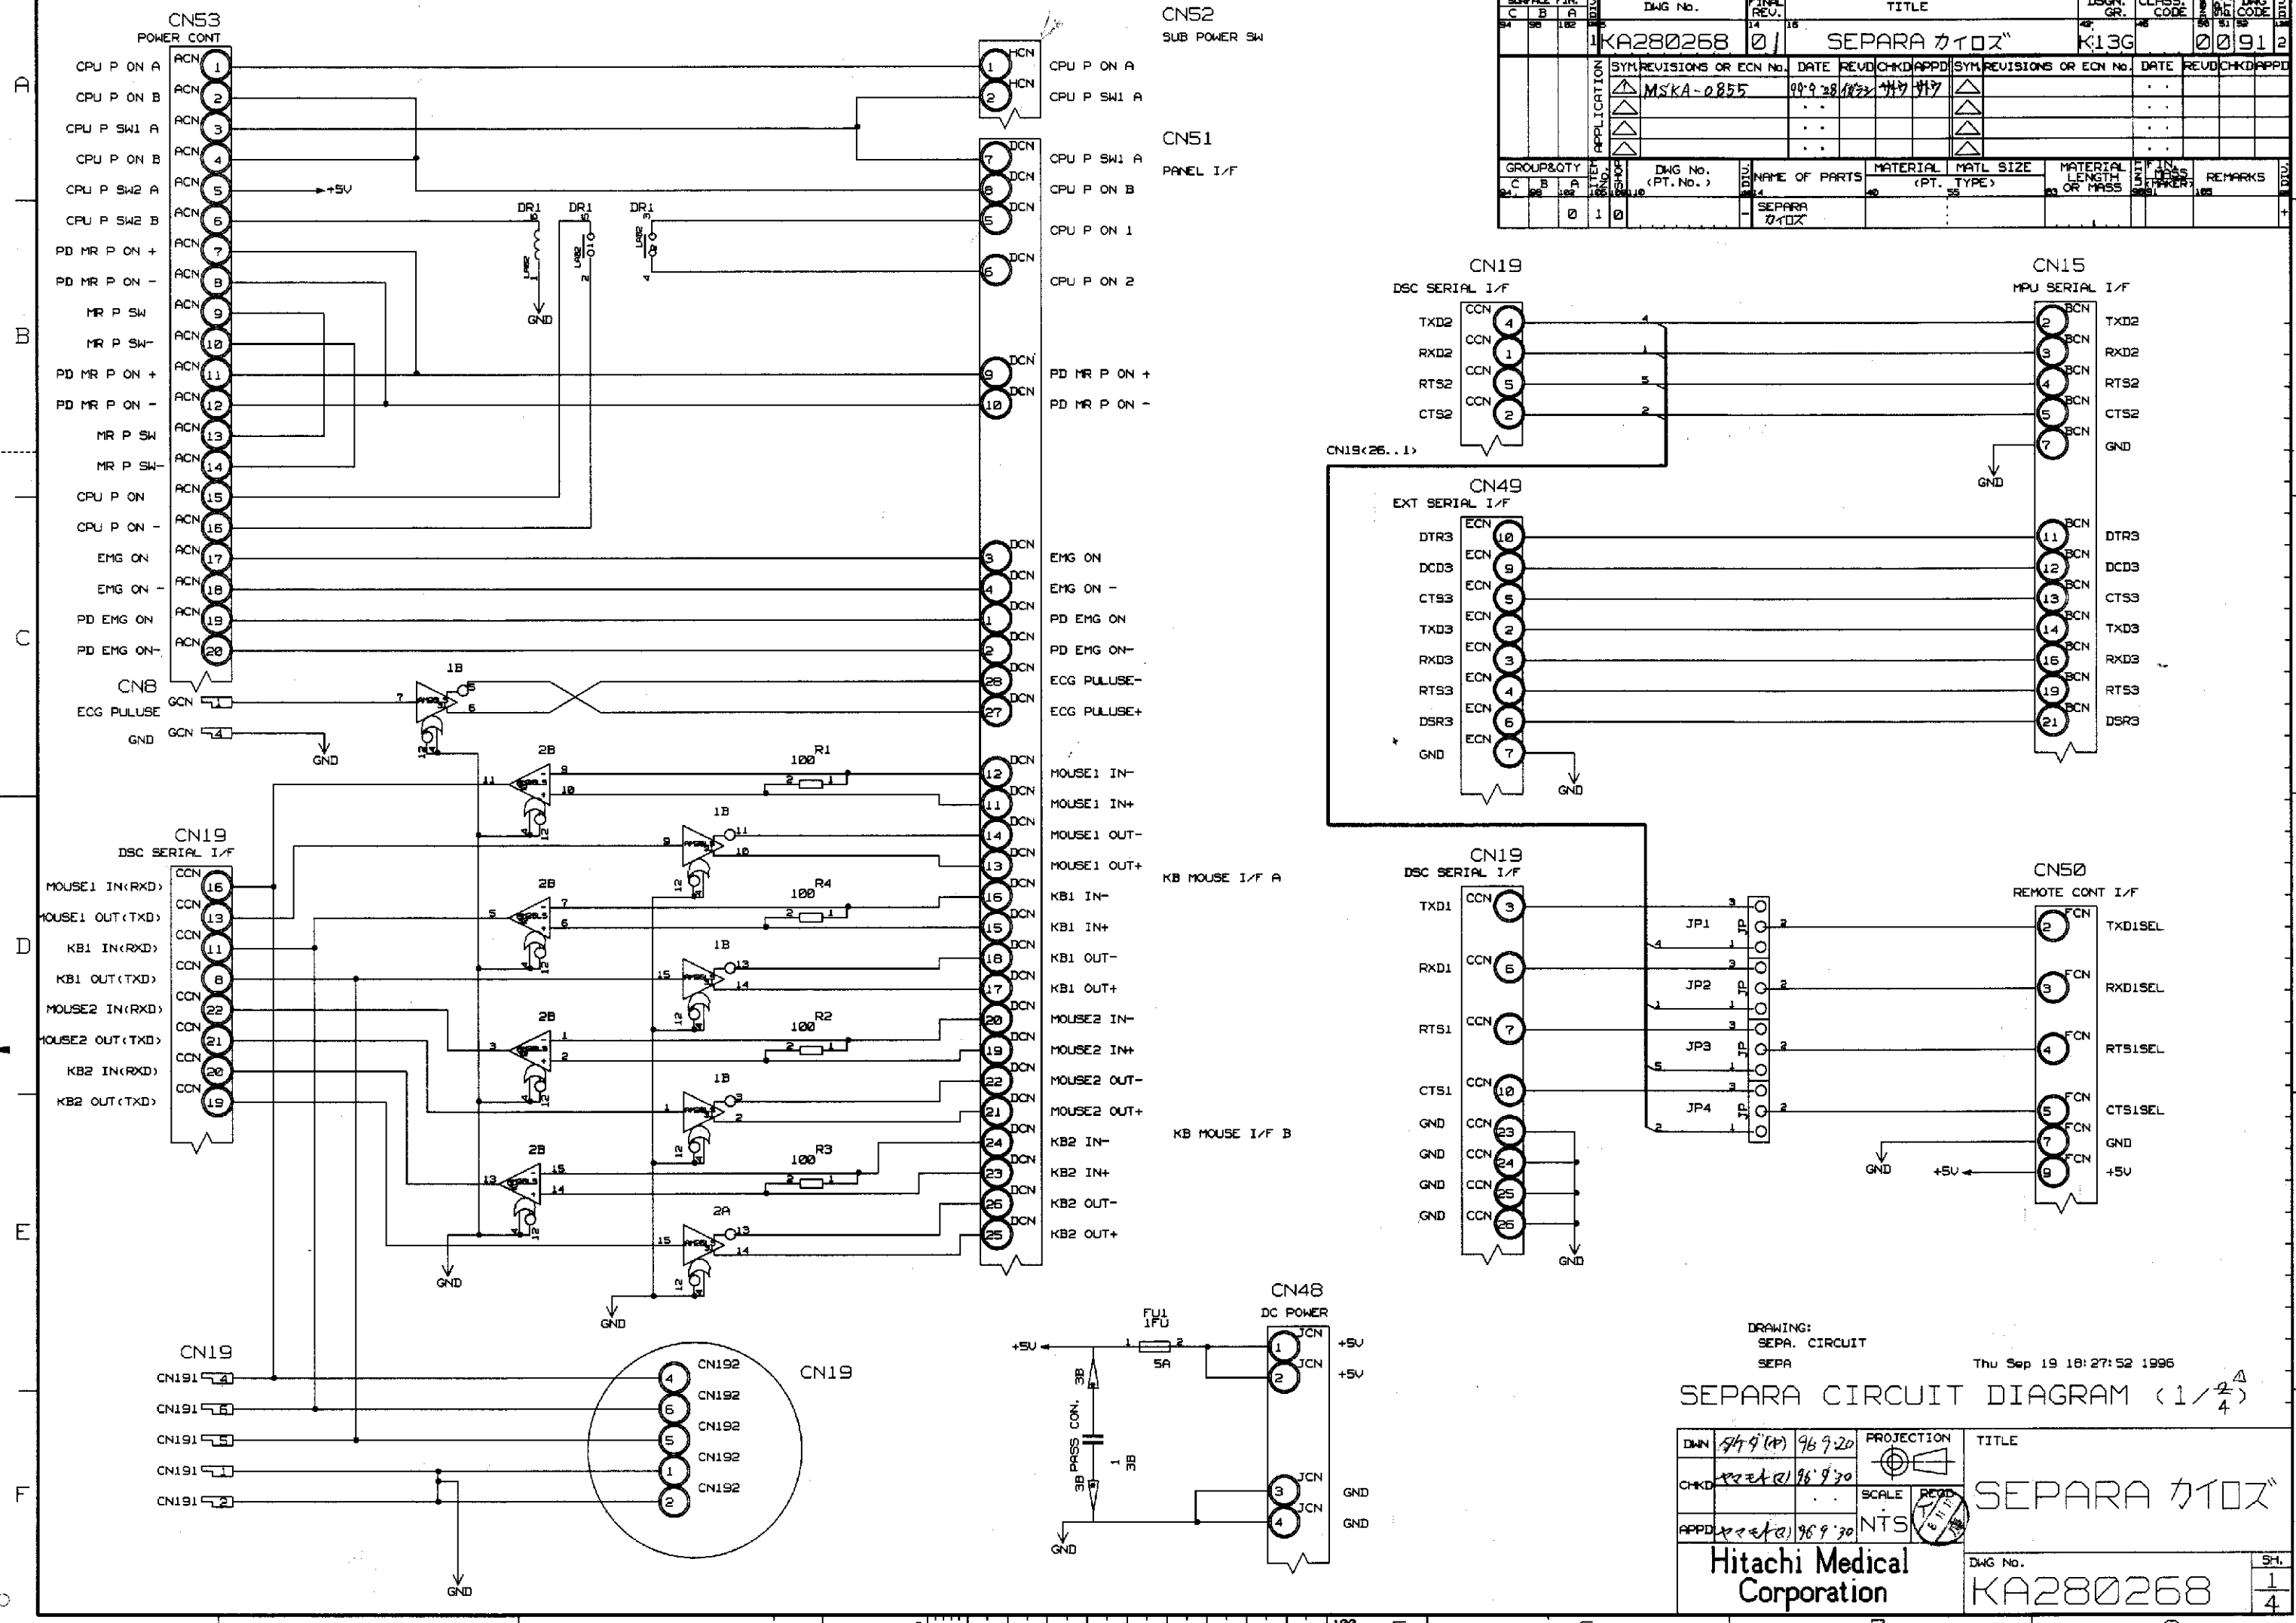

DRAWING: SEPA. CIRCUIT
SEPA

Thu Sep 19 18:27:52 1996

SEPARA CIRCUIT DIAGRAM (1/4)





DWG	9/19/96	96.9.20	PROJECTION	TITLE
CHKD	9/19/96	96.9.30	SCALE	SEPARA カ102
APPD	9/19/96	96.9.30	NTS	

Hitachi Medical Corporation

DWG No. KA280268

SH. 1/4

				PRINT. PT. DWG MTR		REV. NO. (CA01)		7		8		UNIT K0 2 m i m 3		REMARKS							
SURFACE FIN.		DWG No.		FINAL REV.		TITLE		DSGN. GR.		CLASS. CODE		DWG CODE									
C	B	A																			
54	56	152																			
		KA280268		0				K136		00912											
		SYN REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APP'D		SYN REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APP'D	
		△										△									
		△										△									
		△										△									
		△										△									
GROUP & QTY		DWG No.		NAME OF PARTS		MATERIAL		MTRL SIZE		MATERIAL LENGTH OR MASS		UNIT		REMARKS							
C	B	A																			
54	56	152																			
		0 1 0																			

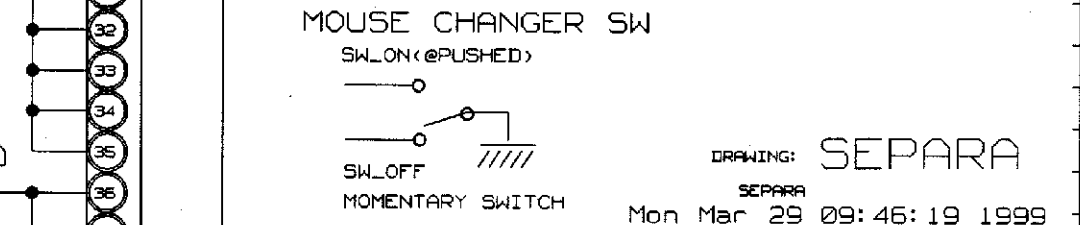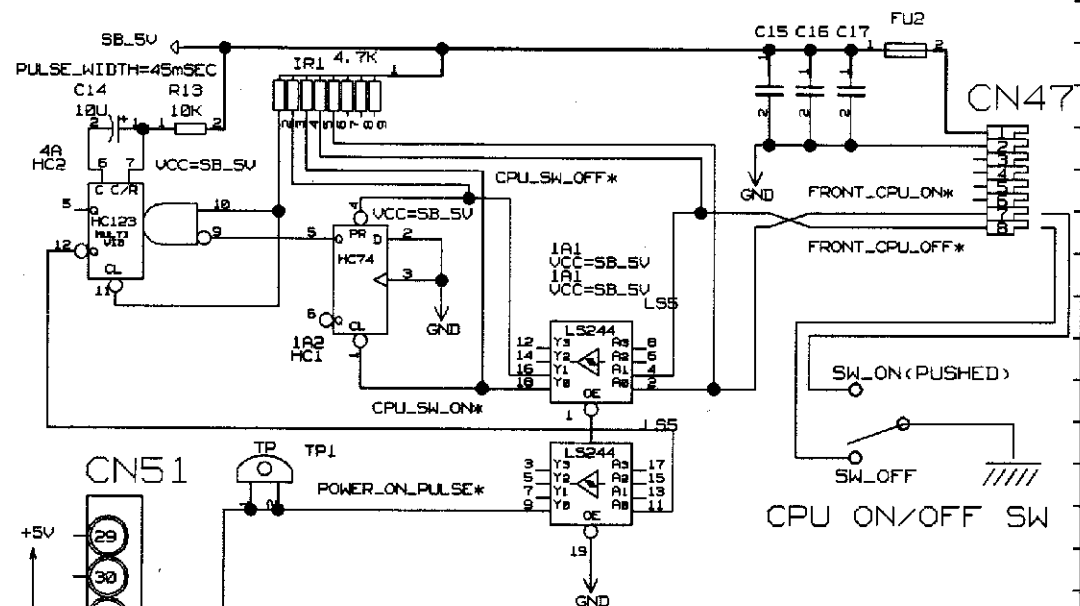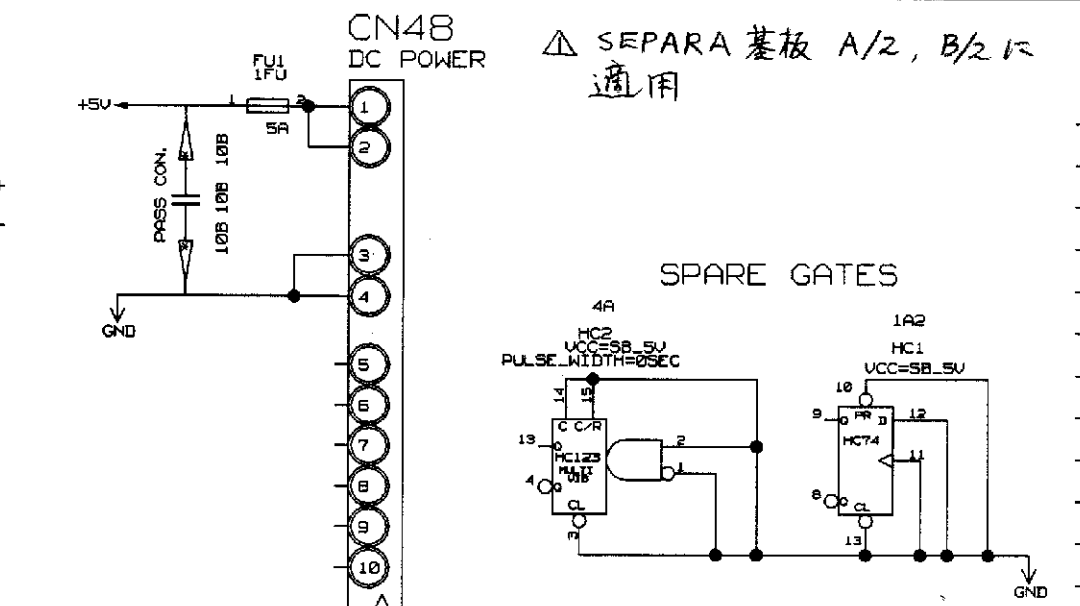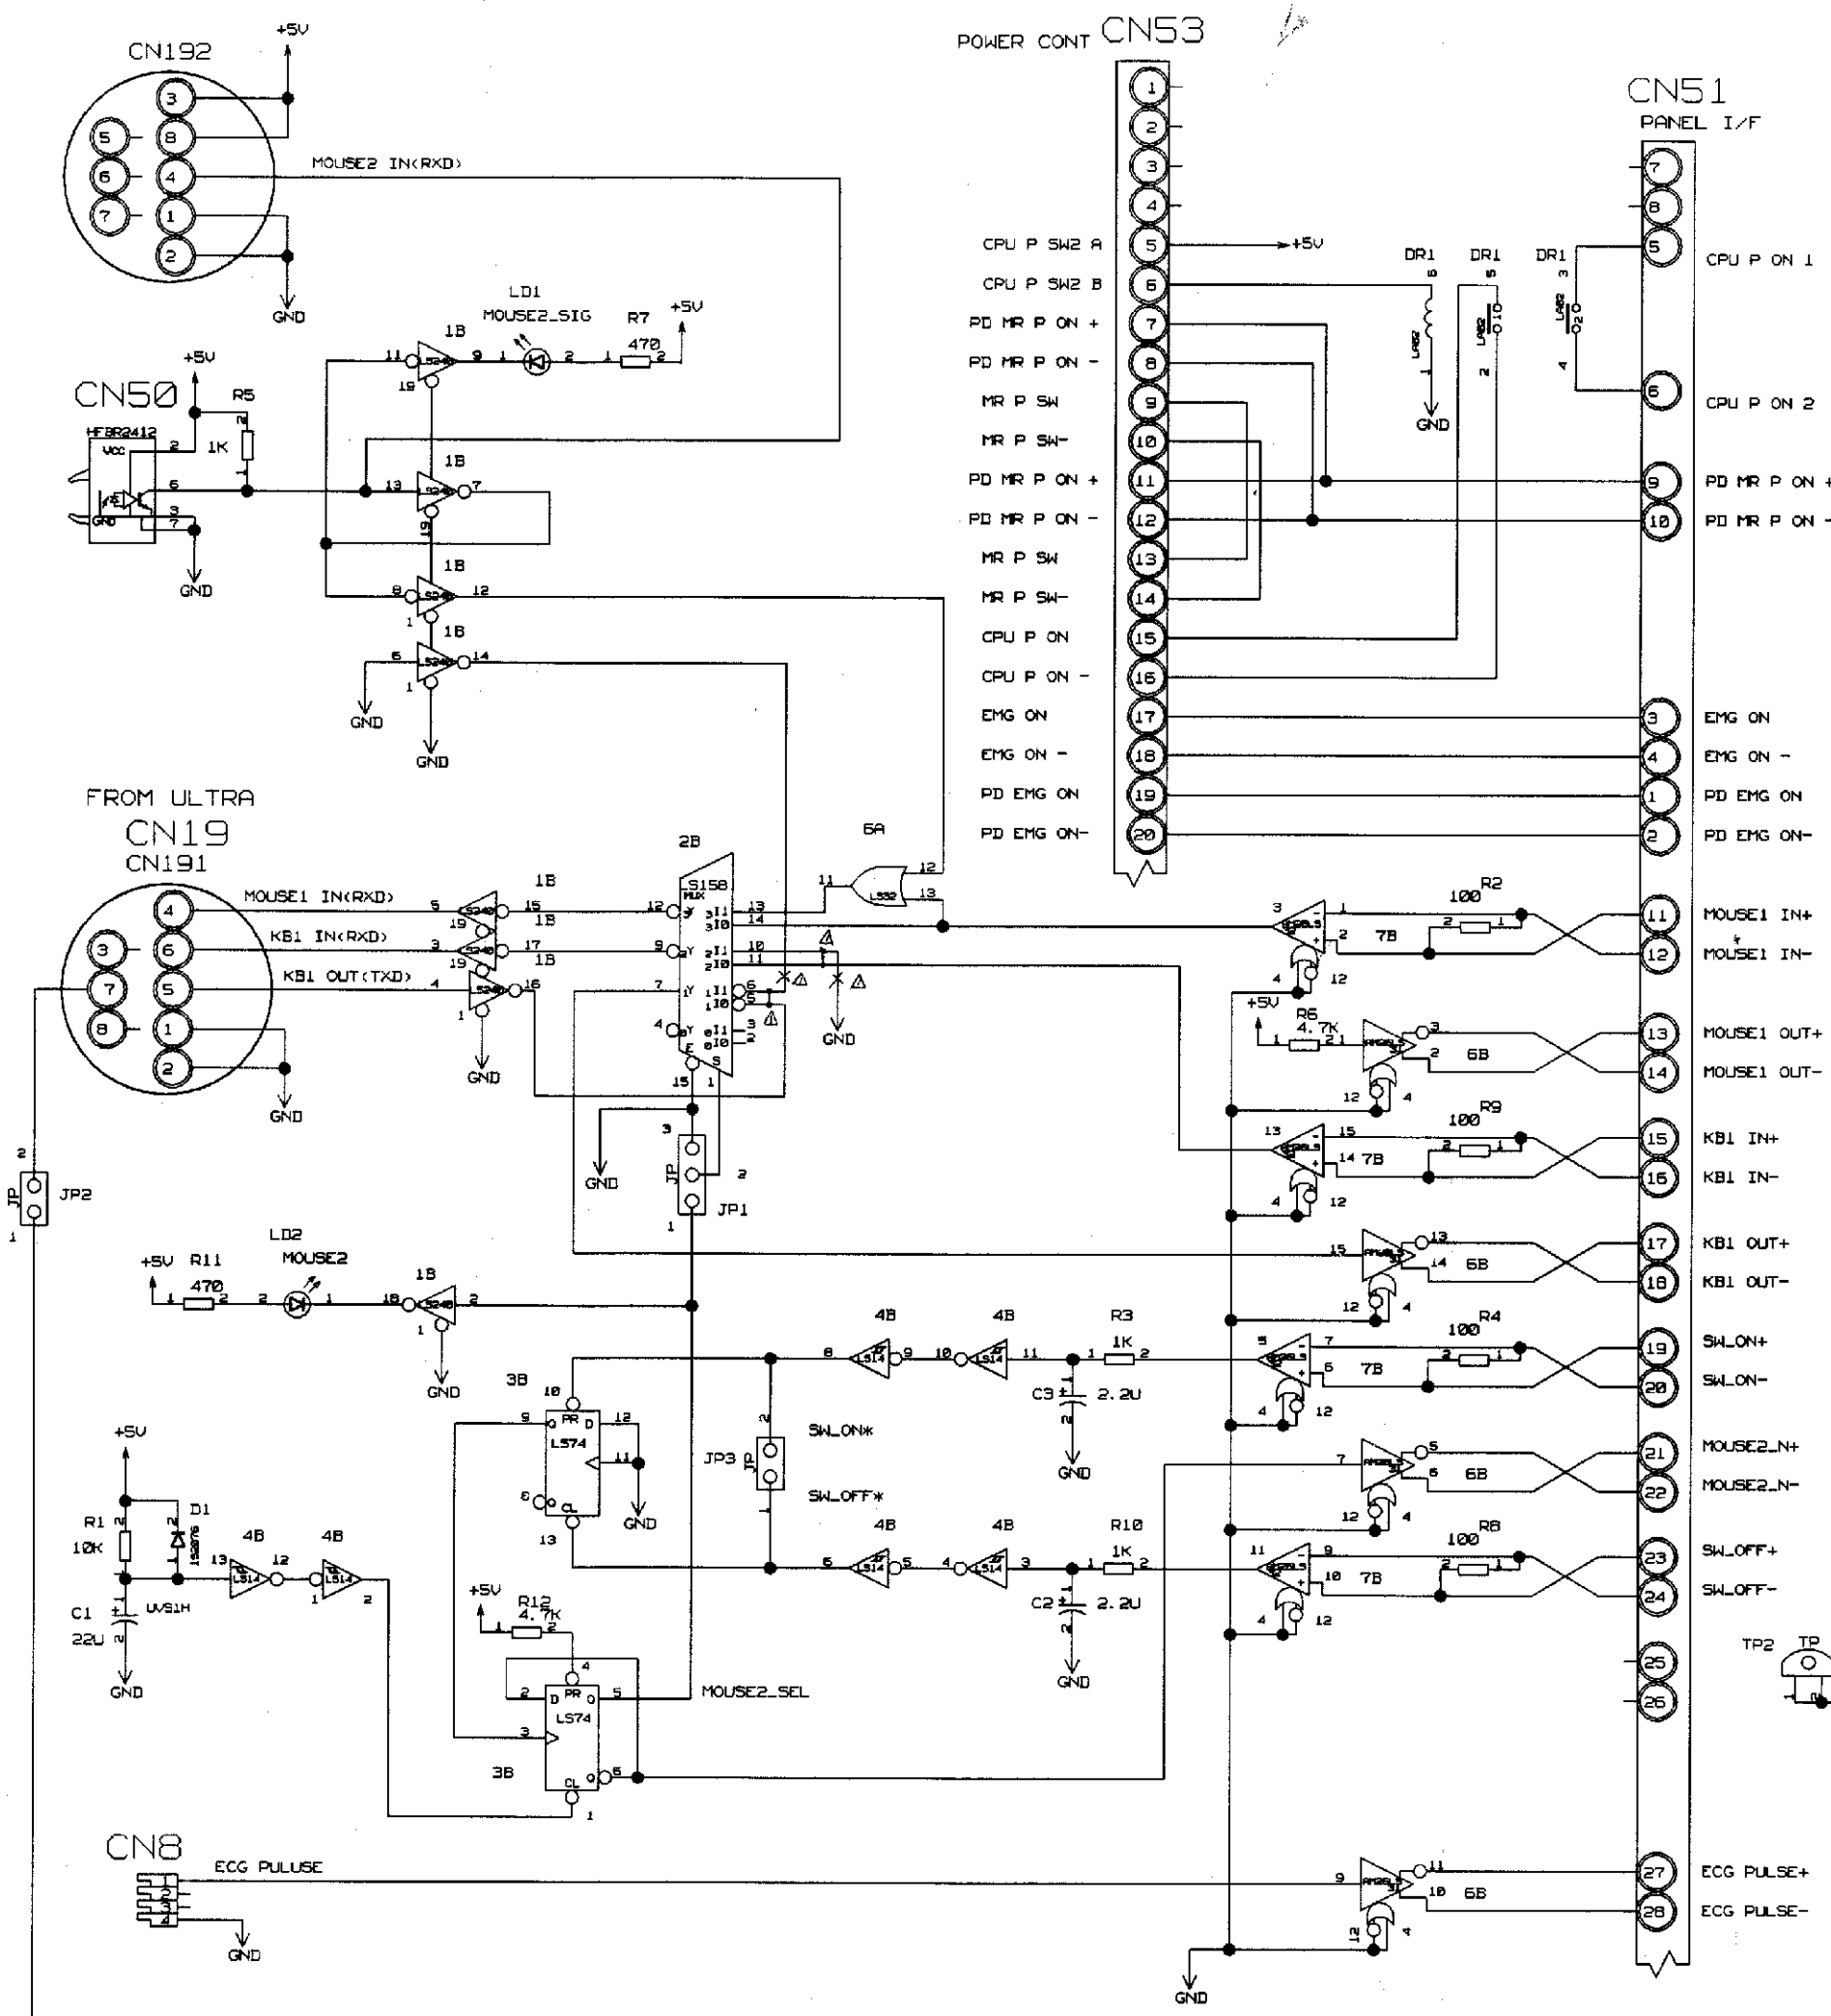

SEPARA CIRCUIT DIAGRAM (3/)

DWG	99.5.7	PROJECTION	TITLE
CHKD	99.5.8	SCALE	SEPARA カ102
APP'D	99.5.8	NTS	


Hitachi Medical Corporation

DWG No. KA280268

SH. 3


△ SEPARA基板 A/2, B/2に適用

DWN	94.9.7	99.5.7	PROJECTION	TITLE
CHKD	99.5.8	99.5.8		
APPD	99.5.8	99.5.8	SCALE NTS	SEPARA カ10ズ
			REGD 	
Hitachi Medical Corporation				DWG No. KA280268
				SH. 46

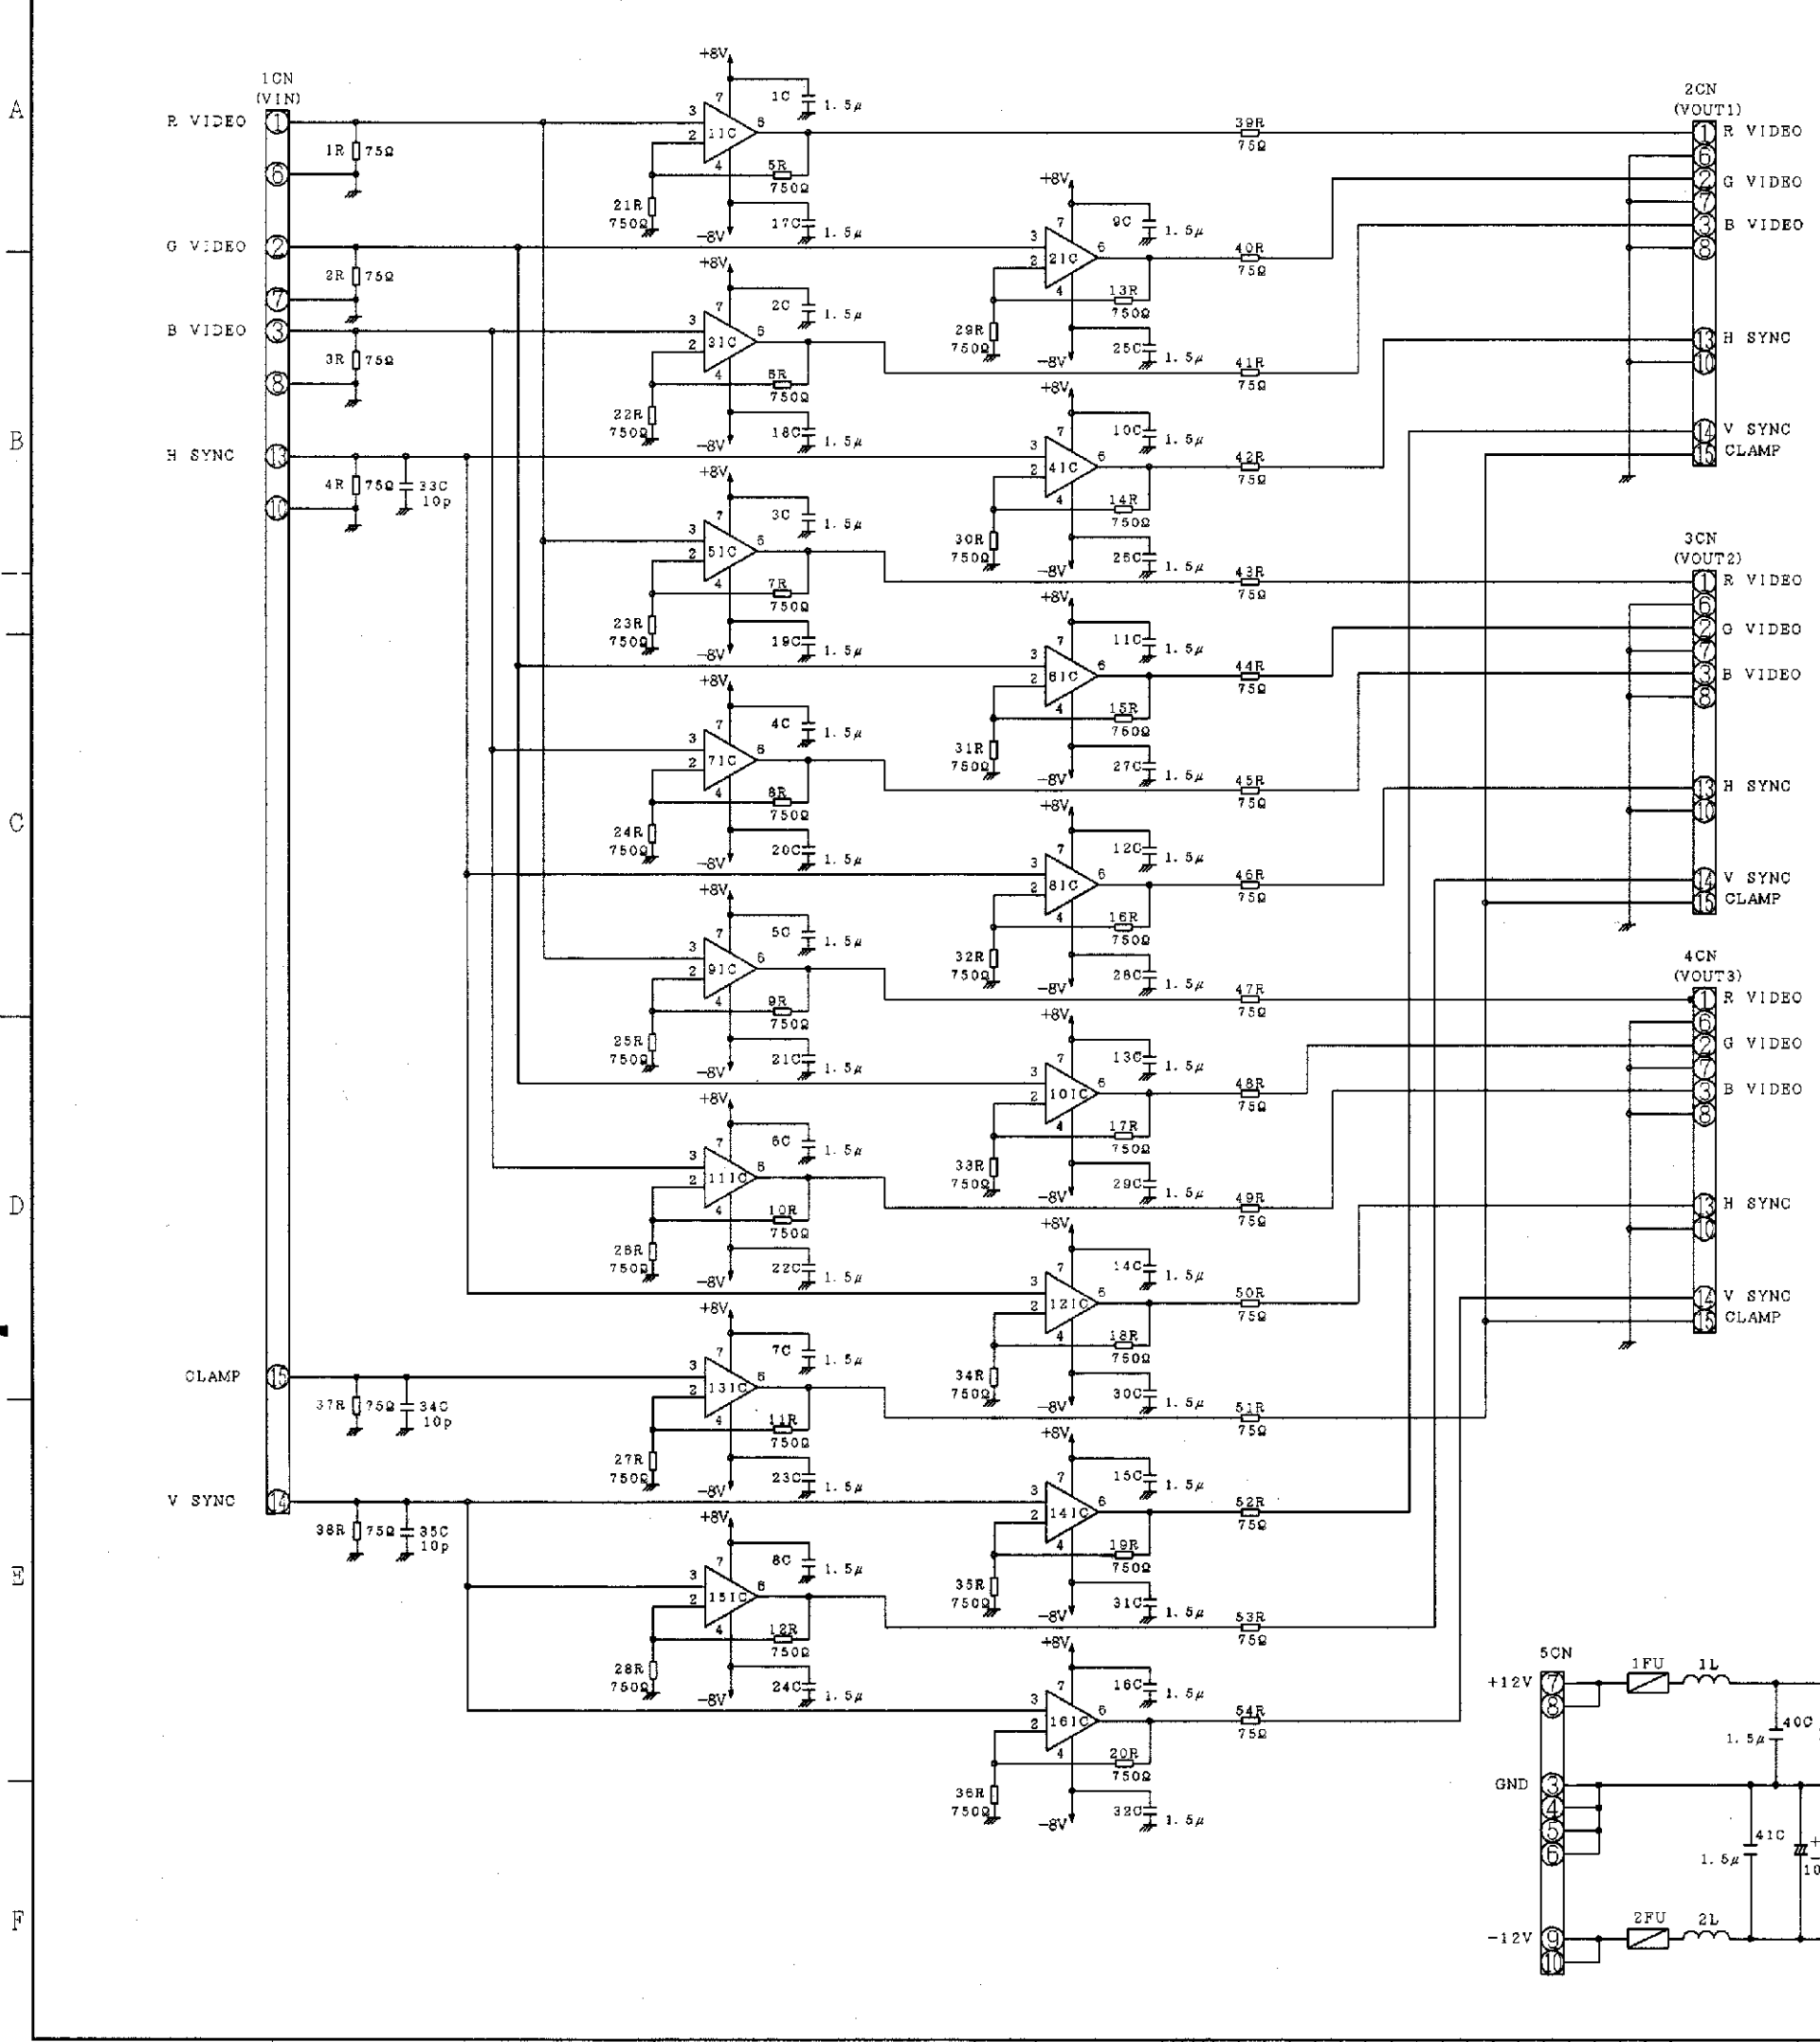


図面マスタ		図面番号		図面名称		図面コード		図面区分	
1	2	3	4	5	6	7	8	9	10
1	2	3	4	5	6	7	8	9	10
1	2	3	4	5	6	7	8	9	10
1	2	3	4	5	6	7	8	9	10
1	2	3	4	5	6	7	8	9	10
1	2	3	4	5	6	7	8	9	10
1	2	3	4	5	6	7	8	9	10
1	2	3	4	5	6	7	8	9	10
1	2	3	4	5	6	7	8	9	10

C	B	A	SYMBOL	PARTS NAME	TYPE	MANUFACTURER	PARTS No.
		34	1~32C 40C, 41C	CAPACITOR	RPE122-901F 155Z25	MURATA	J1717001
		3	33~35C	CAPACITOR	DD104-989CH 100D50	MURATA	J1721910
		4	36C~39C	CAPACITOR	UVS-1H-100MCA -1TA	NICHICON	J1447121
		2	1L, 2L	COIL	FL9H391K (0.39mH)	TAIYO YUDEN	J5110108
		22	1~4R 37~54R	RESISTOR	LF1/4 75QF-TP	TAMA	J2317252
		32	5~36R	RESISTOR	LF1/4 750QF-TP	TAMA	J1717001
		16	1~16IC	OP AMP	EL 2030CN	ELANTEC	J431W633
		1	1011C	REGULATOR	HA17808P	HITACHI	J4429008
		1	1021C	REGULATOR	MC7908CT	MOTOROLA	J4420307
		4	1~4CN	CONNECTOR	177017-5	AMP	J833A128
		1	5CN	CONNECTOR	HIF3BD-10CPA -2.54DSA	HIROSE	J8334607
		2	1, 2FU	FUSE	SSFR F003 5A	SOC	J821A015

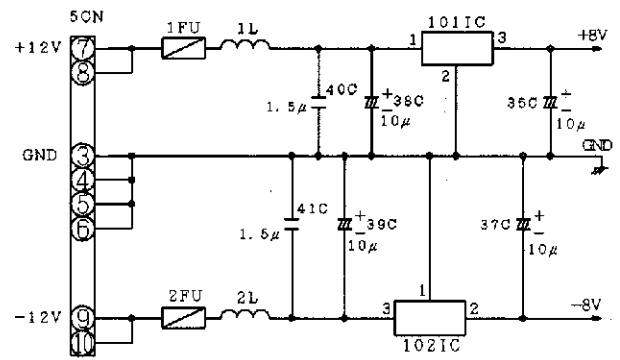

VDAMP circuit diagram

製図	三ツツ	95.10.11	投影法	名称
審査	ヤマモト	95.10.12	尺度	VDAMP カイロス
承認	サトウ	95.10.13	NTS	
株式会社 日立メディコ				図番
KA245024				校番
1				1

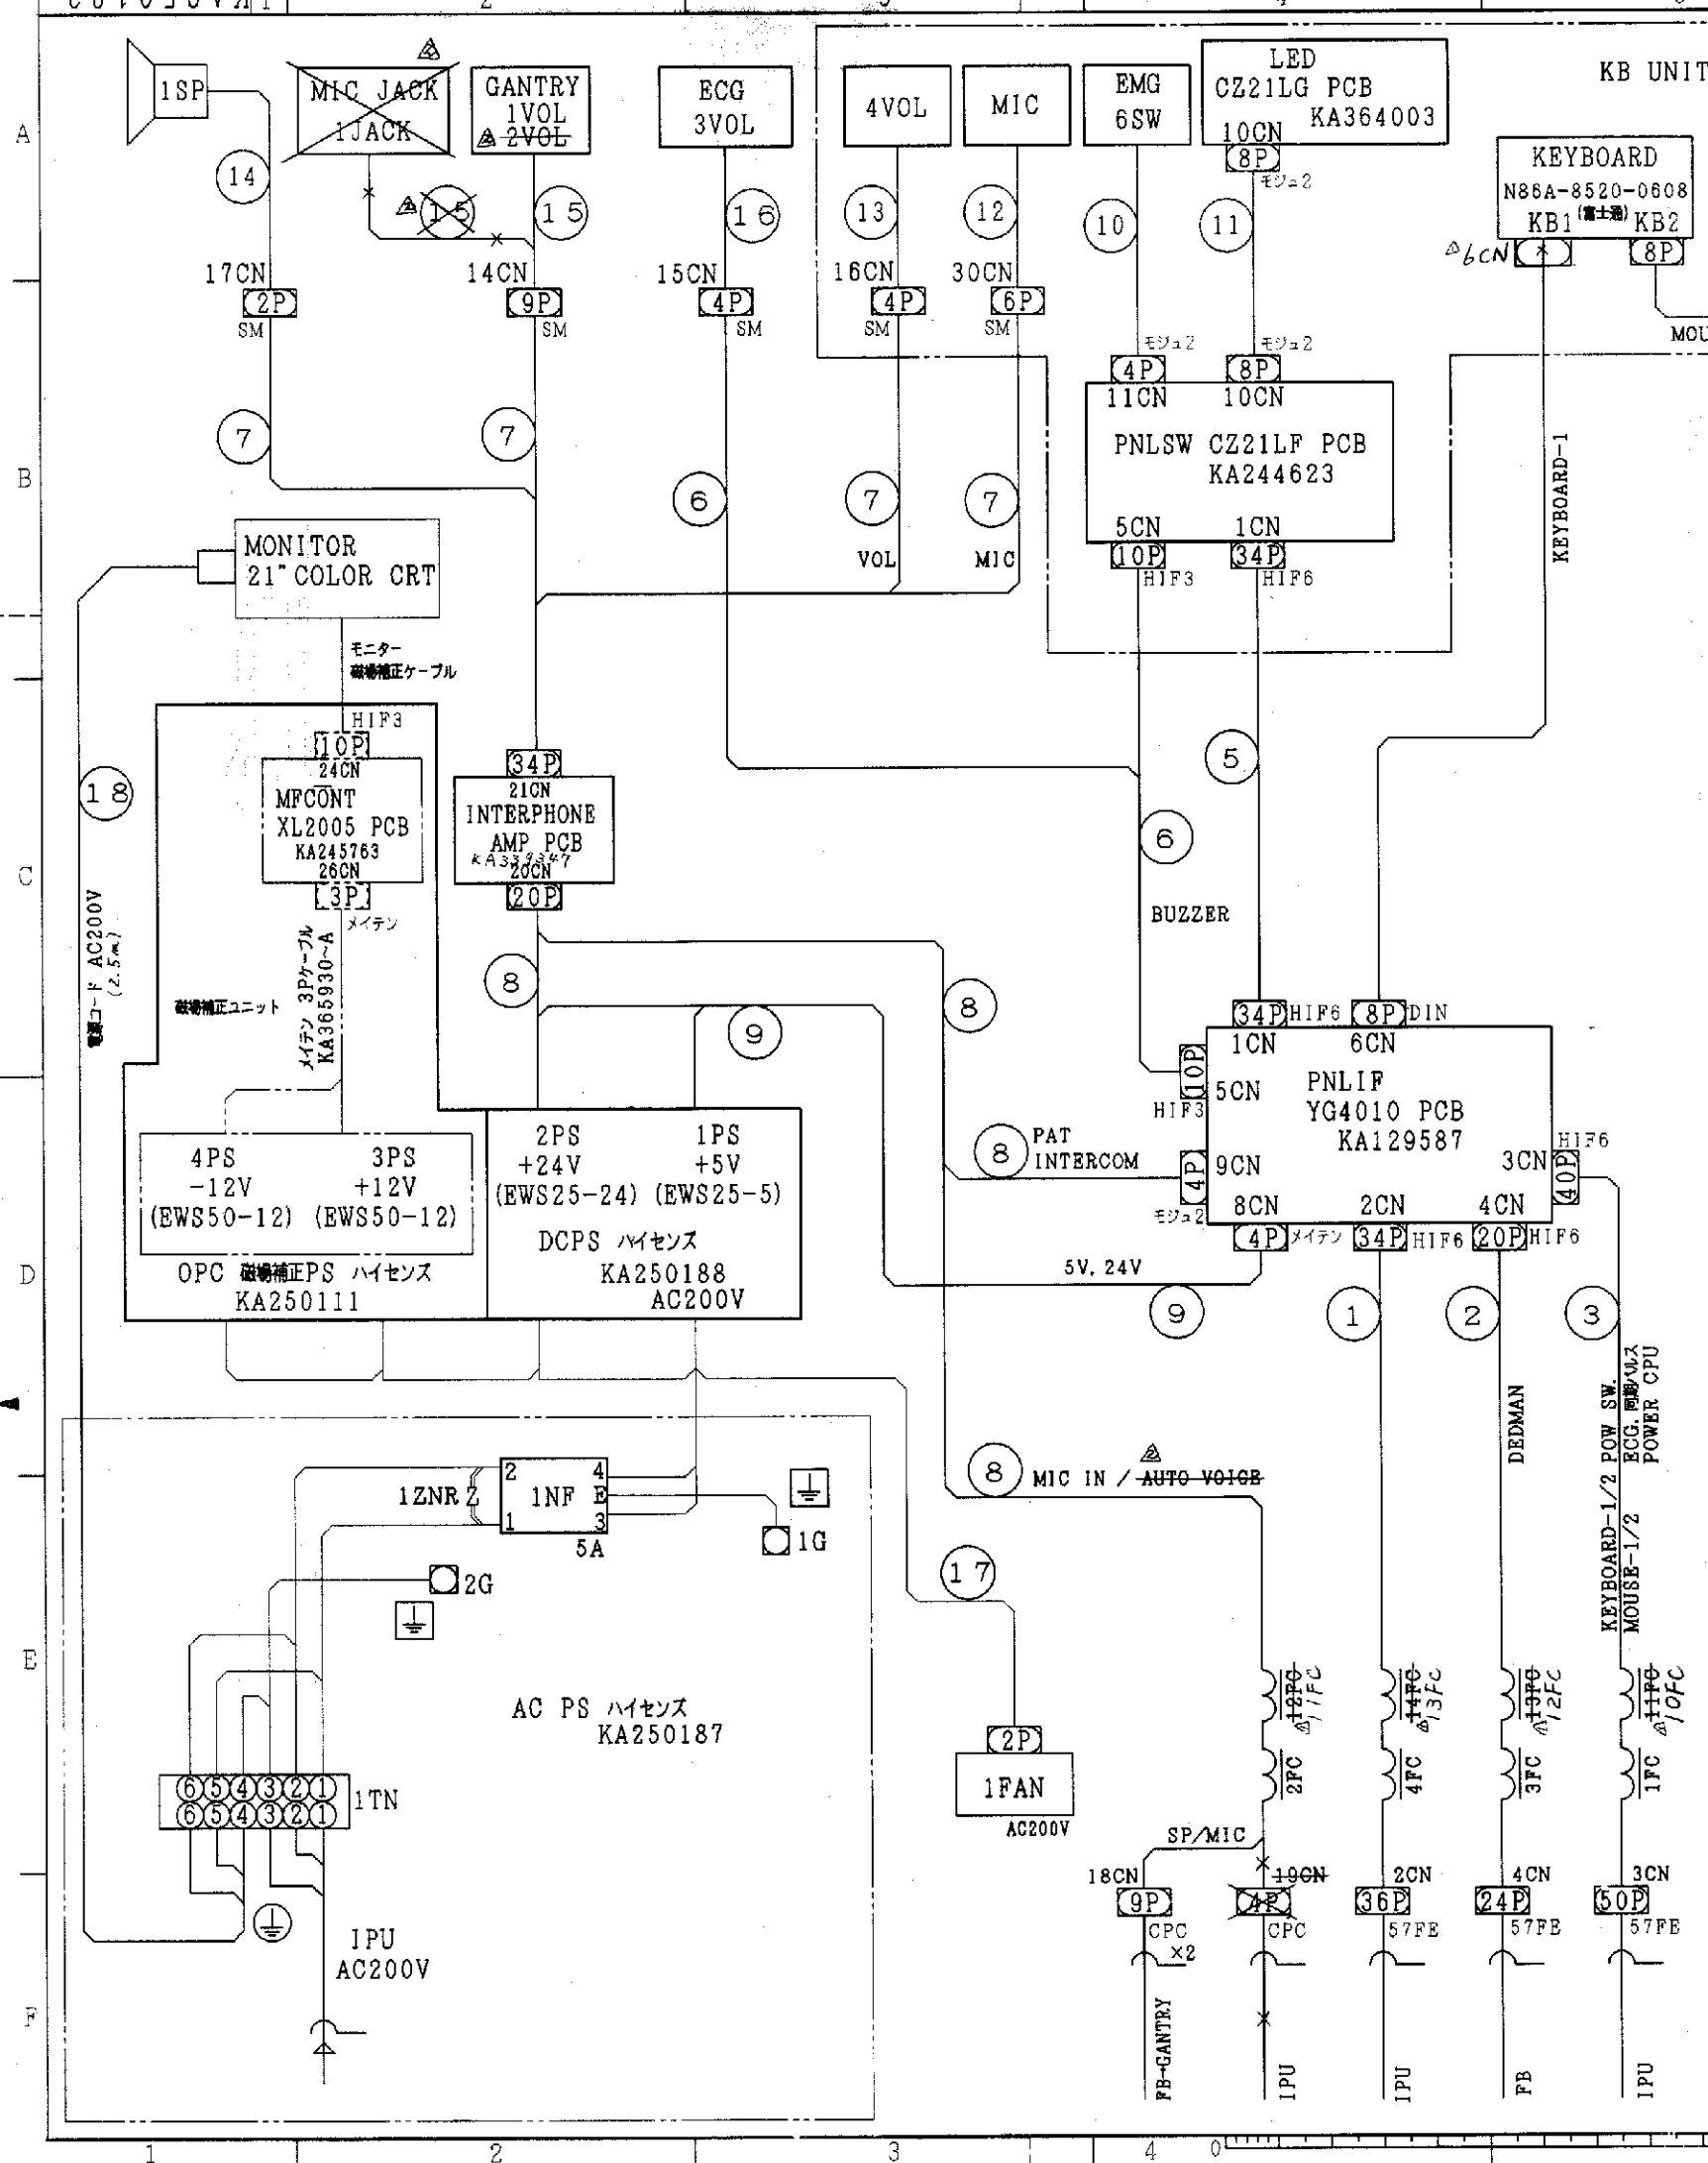

図番			図番			名称			設計担当			検定			図番			区分											
C			B			A			C			B			A			C			B			A					
1			2			3			4			5			6			7			8			9					
KA250183			02			OPCナイクセス			K13M			00179																	
記号			承認又は仕様書番号			年月日			訂正			承認			記号			承認又は仕様書番号			年月日			訂正			承認		
MSKA-0359			96.9.27			97.9.27			97.9.27			97.9.27			97.9.27														
MSKA-0797			99.4.26			99.4.26			99.4.26			99.4.26			99.4.26														

C	B	A	SYMBOL	PARTS NAME	TYPE	MANUFACTURE	PARTS No.
		1	1NF	NOISE FILTER	GF-220U GF-205U	TOKIN	J8811009
		1	12NR	SURGE ABSORBER	ERZ-C14DK39IU	MATSUSHITA	J3631033
		1	1FAN	FAN	4715MS-20T-B50-B00	MINEBEA	
		1	1TN	TERMINAL	UL2035EW-6P-CT	FUJICON	J8361182
		1	1PS	DC POWER SUPPLY	EWS25-5	NEMICLAMBDA	K621A025
		1	2PS	DC POWER SUPPLY	EWS25-24	NEMICLAMBDA	K621A026
		4	1FC~4FC	TOROIDAL COA	TRCN40-27-15	KITAGAWA	J8811401
		4	1FC~14FC/3FC	EI COA	BSD-B-60	TOKIN	J8811034
							KA319725-A
		1	MIC	CAPACITY MIC			KA364456-A
		1	1JACK	MIC JACK	3C-32		J8399903
		1	3VOL	ボリューム	RK11K11450KA	ALPS	J261A005
		3	1. 2. 4VOL	ボリューム	RK11K11410KA	ALPS	J261A004
		1	6SW	EMG SW	01-121.0	BAO	J641A023

OPC INTERNAL WIRING DIAGRAM

製図 (三) イワセ 96.7.19 投影法
審査 ヤマモト 96.7.19
承認 ヤマモト 96.7.19 NTS


名称
OPCナイクセス

図番
KA250183

改番
1

株式会社 日立メディコ


1. 圧着端子は、①を使用する。但し、圧着は全て1本圧着とする。
2. 線材には接続端子先のワイヤマーカを貼り付けること。
3. 線材の長さは（カッコ）内の数値を参照のこと。

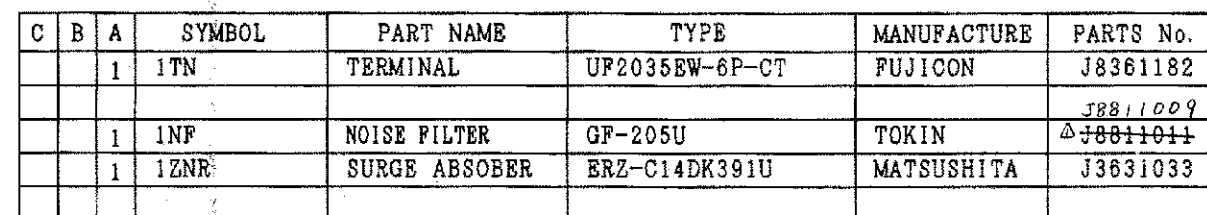[illegible]

WIRE COLOR	
B	BLACK
W	WHITE
R	RED
BL	BLUE
G	GREEN


①	TMEV 2-4S
---	-----------

OPC Δ ACPS WIRING DIAGRAM

製図	(三) イワセ	96.7.19	投影法		名称	OPC Δ ACPS ハイセンス
審査	ヤマセ	96.7.19				
承認	ヤマセ	96.7.19	NTS 			
株式会社 日立メデコ					図番	KA250187

配線仕様

1. 圧着端子は、①を使用する。但し、圧着は全て1本圧着とする。
2. 線材には接続端子先のワイヤマーカを貼り付けること。
3. 線材の長さは(カッコ)内の数値を参照のこと。

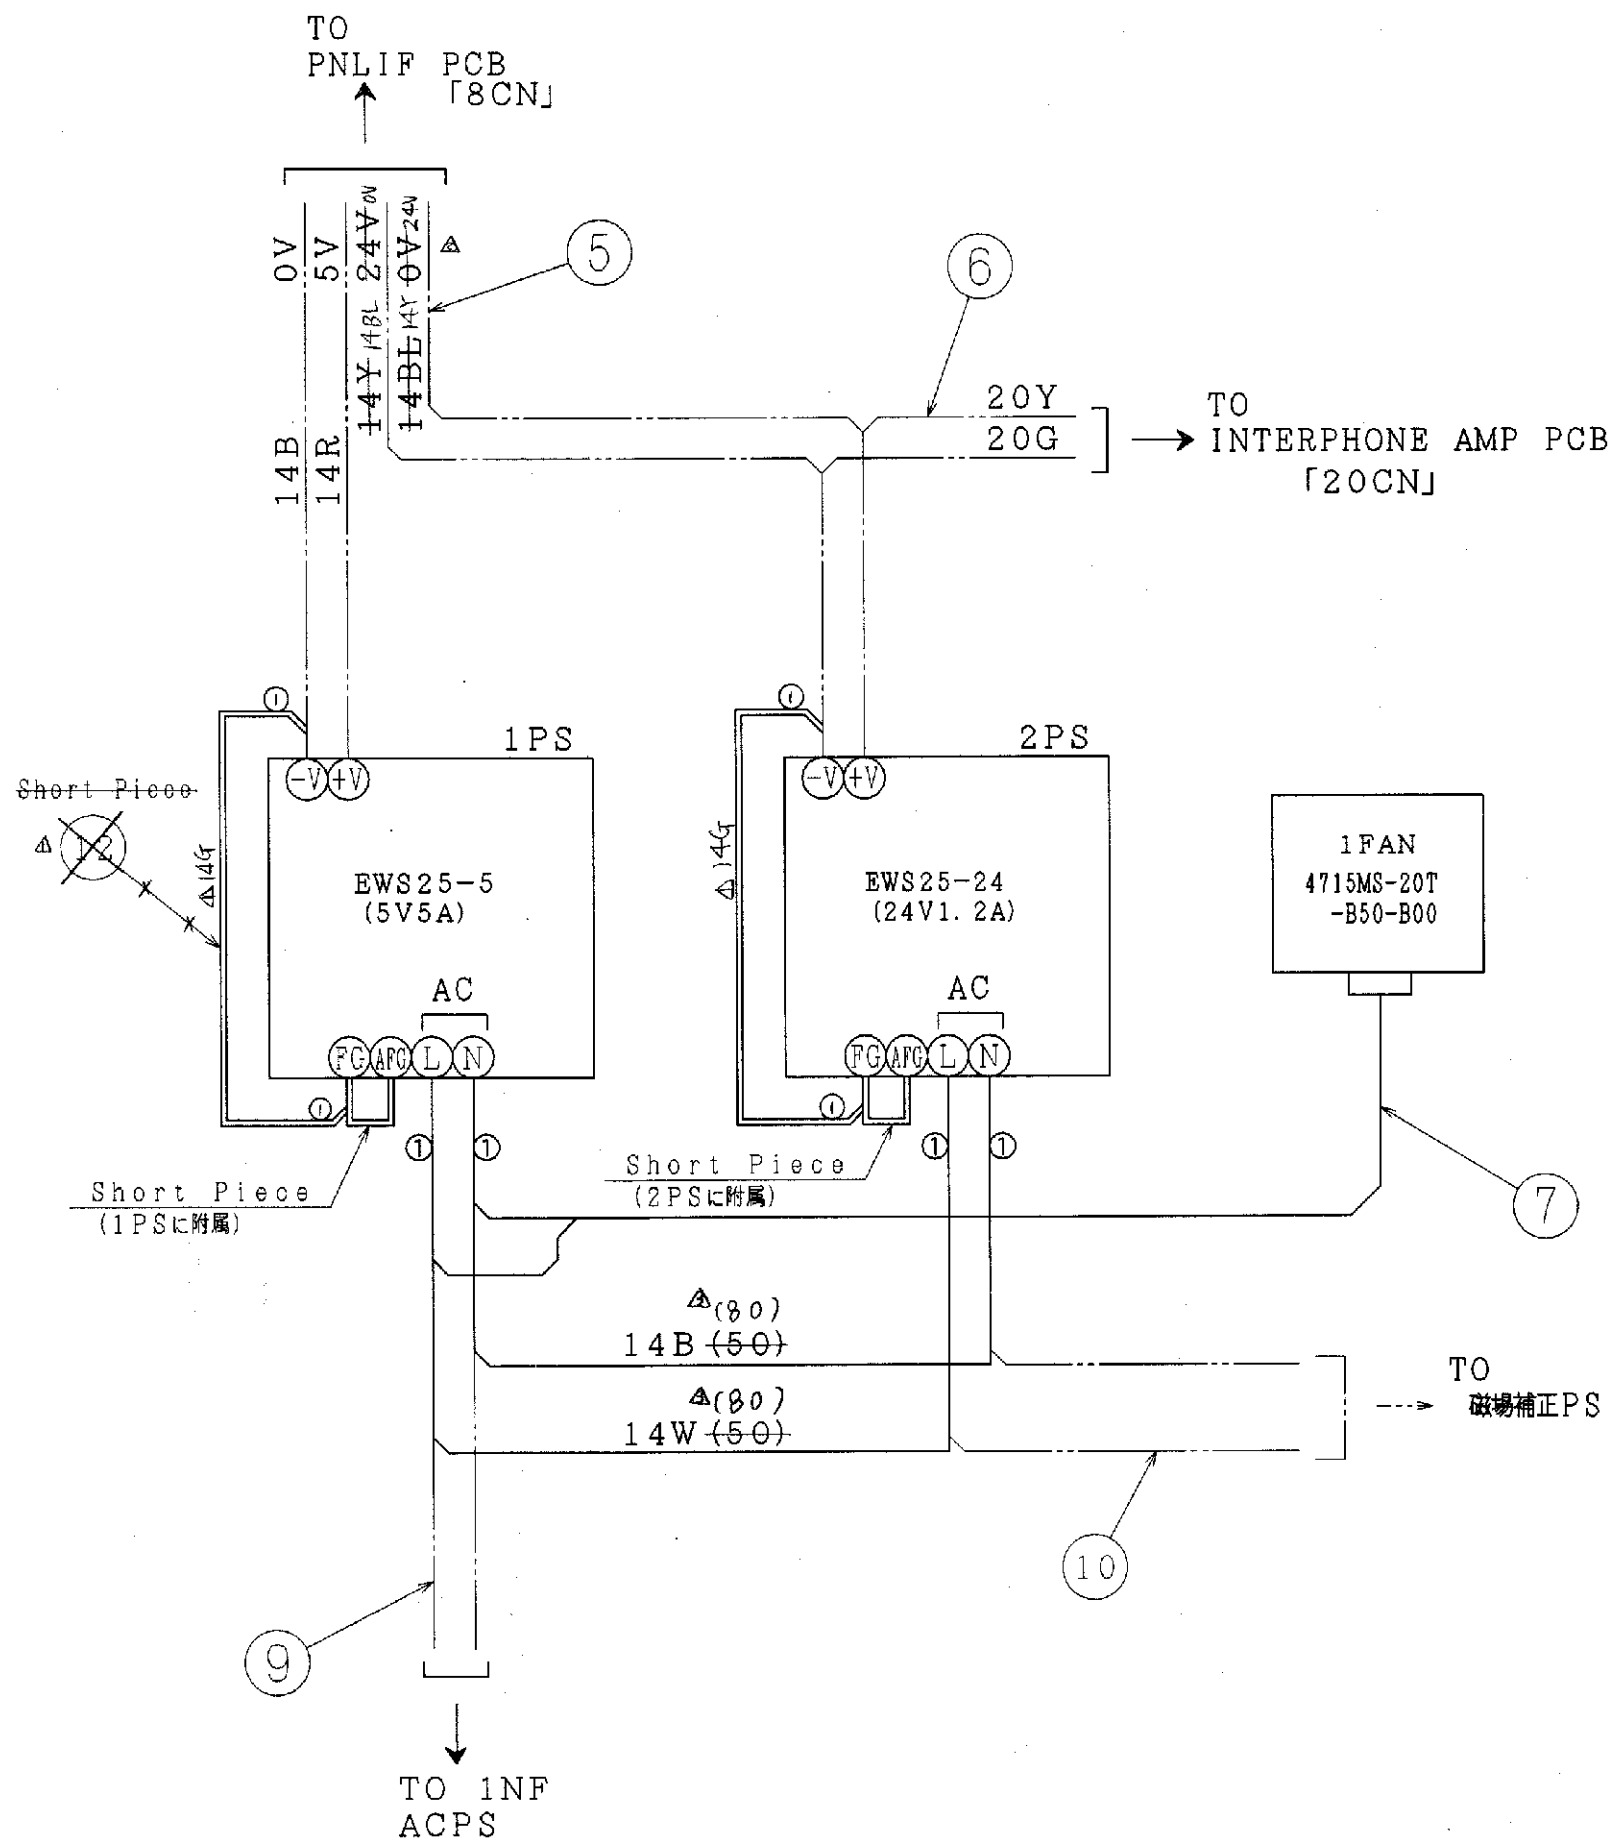

C	B	A	SYMBOL	PARTS NAME	TYPE	MANUFACTURE	PARTS No.
	1	1	1PS	DC POWER SUPPLY	EWS25-5	NEMIC LAMBDA	K621A025
	1	1	2PS	DC POWER SUPPLY	EWS25-24	NEMIC LAMBDA	K621A026
	1	1	1FAN	FAN	4715MS-20T-B50-B00	MINEBEA	

WIRE COLOR

B	BLACK
W	WHITE
R	RED
Y	YELLOW
BL	BLUE
G	GREEN

WIRE SIZE

14	14AWG
20	20AWG


SOLDERLESS TERMINAL

①	TMEV 2-4S
---	-----------

OPCΔDCPS WIRING DIAGRAM

製図	(三) イワセ 96.7.19	投影法	第一角法	名称	OPCΔDCPS ハイセンス
審査	ヤマモト 96.7.19	尺度	NTS	図番	KA250188
承認	ヤマモト 96.7.19	校査		図番	KA250188
株式会社 日立メディコ					

図番	部品名	数量	材質	寸法	単位	備考
KA250188	OPCΔDCPS ハイセンス	1				
MSKA-0501	センサ	1	UL1015	14AWG クロ	Q1.004	
MSKA-0618	センサ	1	UL1015	14AWG シロ	Q1.004	
MSKA-0853	センサ	1	UL1015	14AWG シロ	Q1.004	
KA363346	メイトン4Pケーブル	1				
KA244319	インターホンケーブル2	1				
KA363347	ファンコード	1				
KA250111	OPCΔDCPS ハイセンス	1				
J8363101	ショートピース	1	F2111			
	ハイセンサギョウ	1				

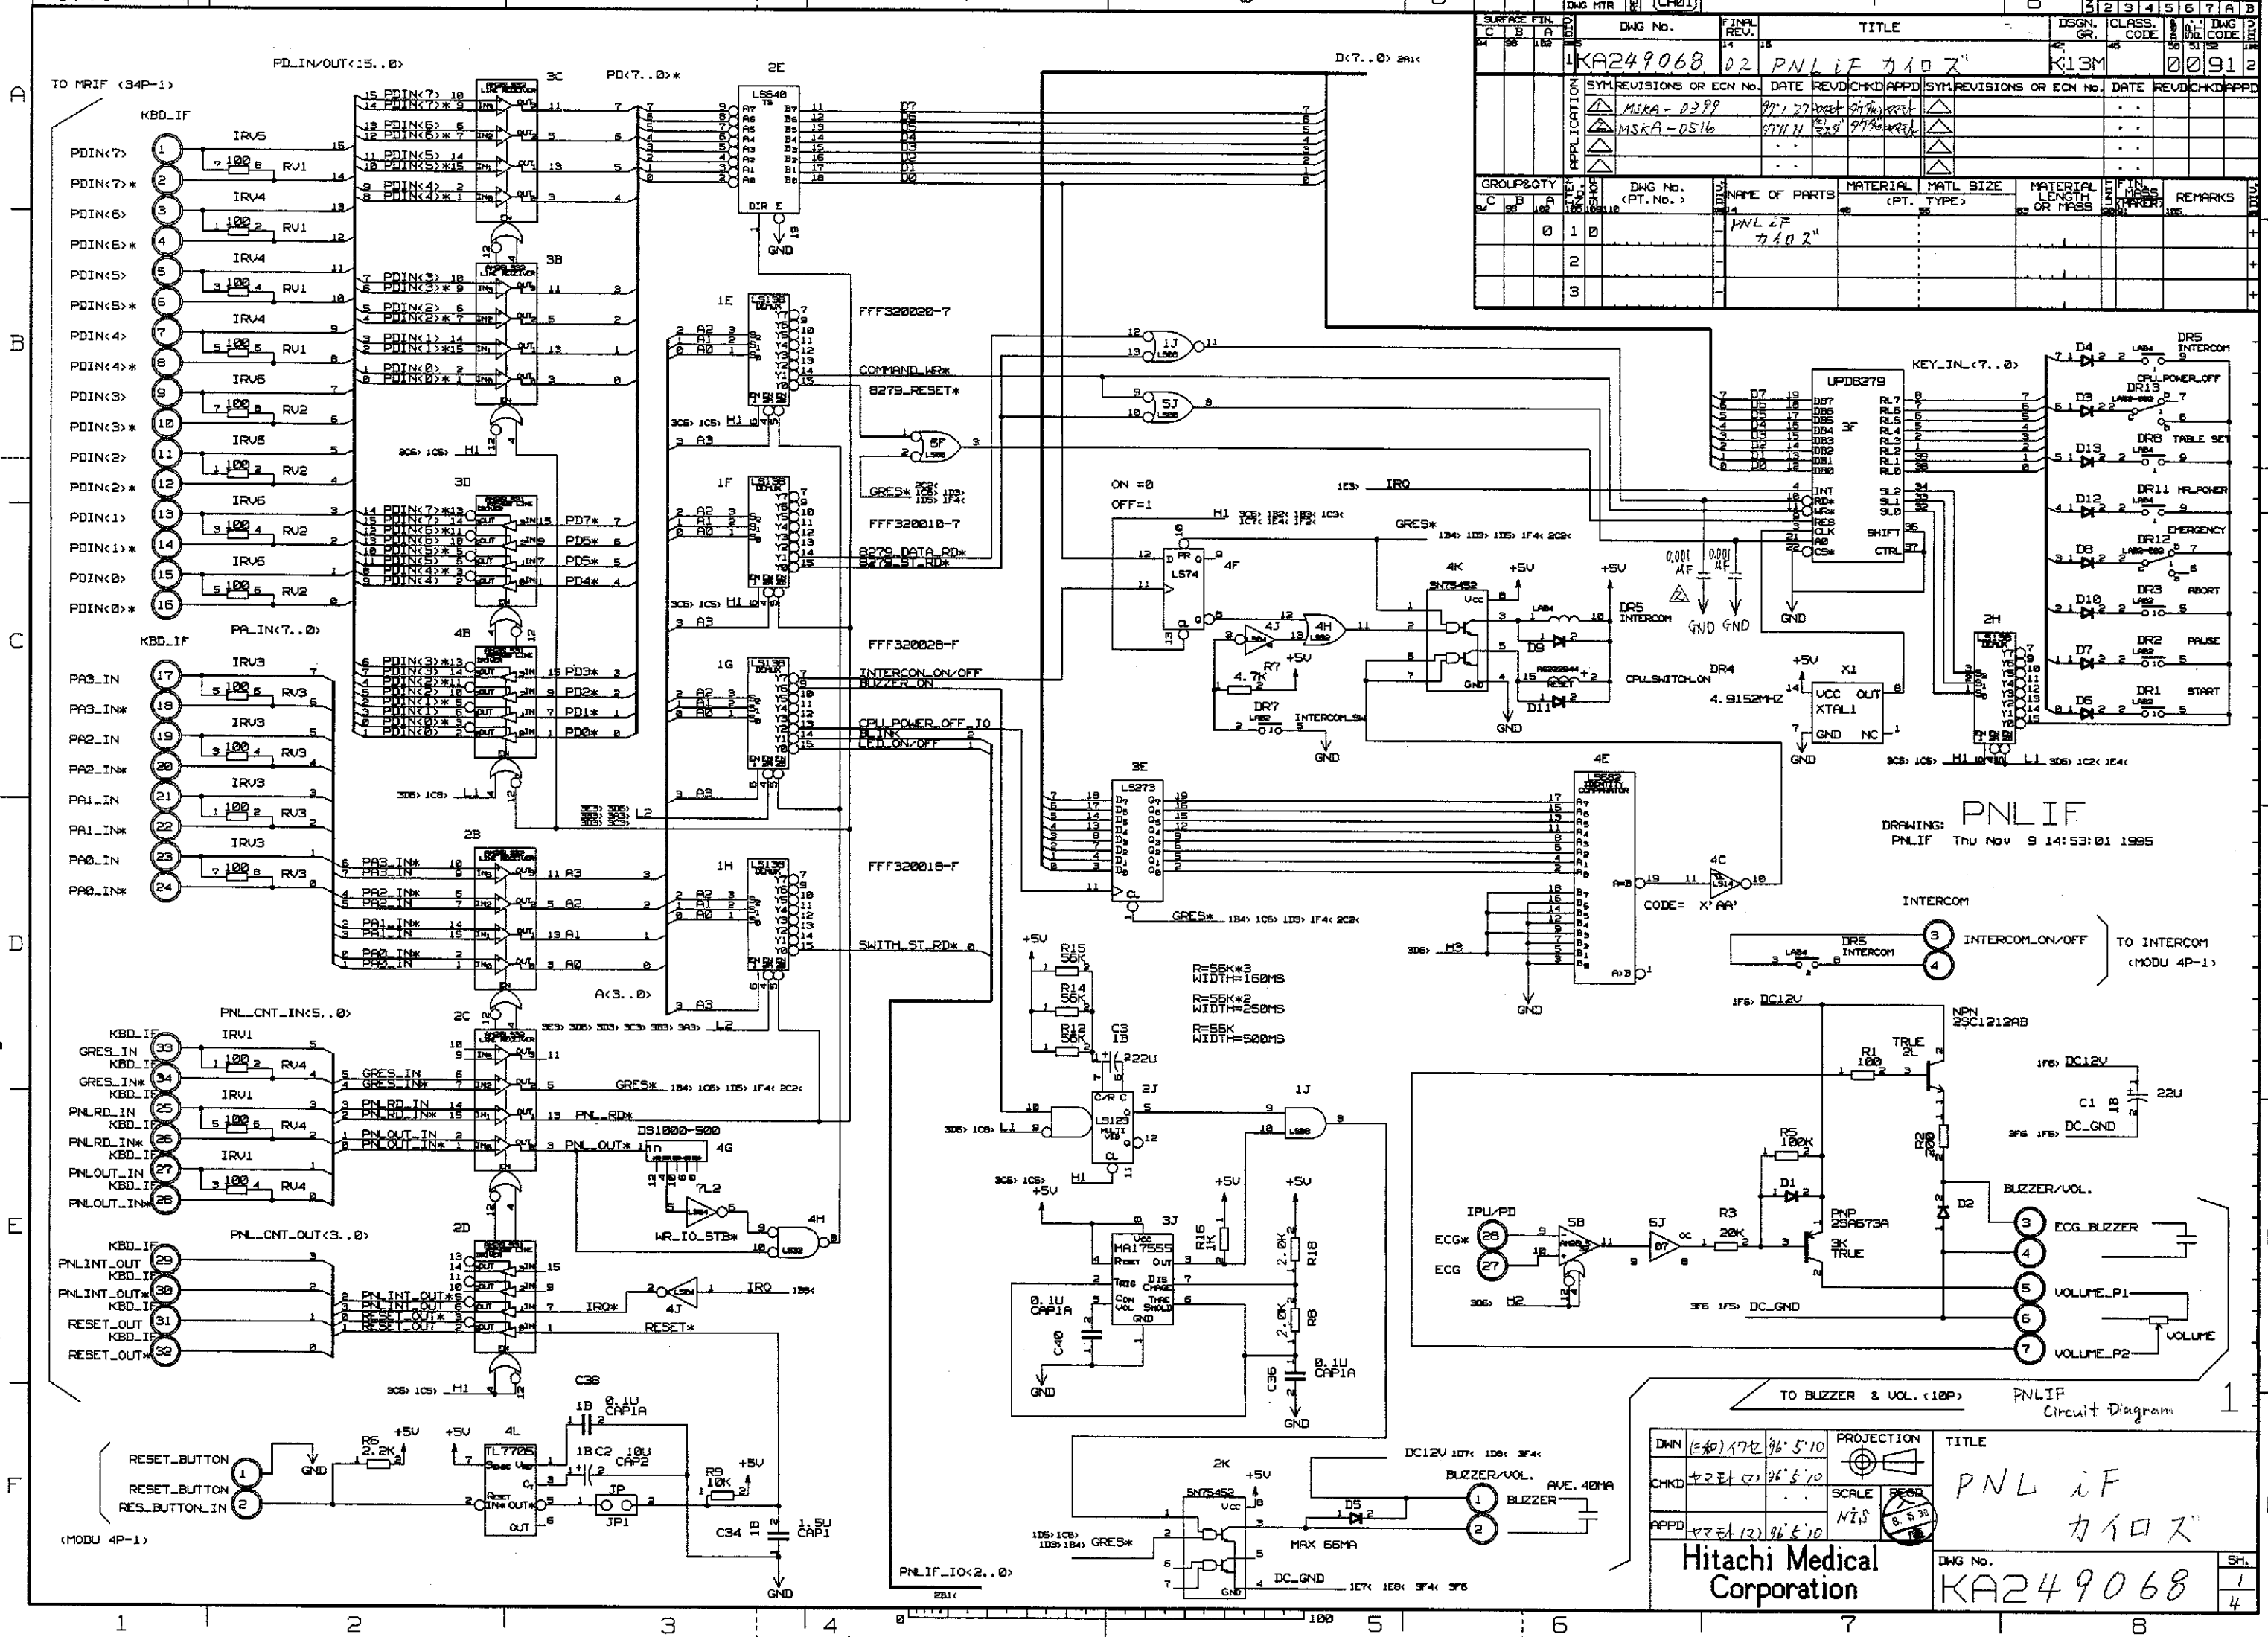

Dwg. No.		REV.	TITLE	DSGN. GR.	CLASS. CODE	DATE	REV.	CHKD.	APPD.
KA249068		02	PNL IF 710 Z	K13M	00912				
SYN. REVISIONS OR ECN No.		DATE	REV.	CHKD.	APPD.	SYN. REVISIONS OR ECN No.			
MSKA-0389		97.1.27	01	01	01				
MSKA-0516		97.11.11	02	02	02				
APPLICATION									
GROUP & QTY		DWG. No. (PT. No.)	NAME OF PARTS	MATERIAL (PT. TYPE)	MATL. SIZE	MATERIAL LENGTH OR MASS	FIN. MASS (TOLER.)	REMARKS	UNIT
C B 6		0 1 0	PNL IF 710 Z						
		2							
		3							

DRAWING: PNL IF Thu Nov 9 14:53:01 1995

TO BUZZER & VOL. (10P)

PNL IF
Circuit Diagram

DWG. (E&P) 170 96.5.10

CHKD. 4224 (7) 96.5.10

APPD. 4224 (2) 96.5.10

PROJECTION

SCALE

RECD.

TITLE

PNL IF 710 Z

DWG. No.

KA249068


Sh.

1

4

Hitachi Medical Corporation

Dwg MTR		DWG No.		TITLE		DSGN. GR.		CLASS. CODE		DWG CODE	
1		KA249068		PNL IF 4107		K13M		00912			
APPLICATION		SYN REVISIONS OR EGN No.		DATE		REV'D CHK'D APP'D		SYN REVISIONS OR EGN No.		DATE	
GROUP & QTY		DWG No.		NAME OF PARTS		MATERIAL		MTRL SIZE		MATERIAL LENGTH OR MASS	

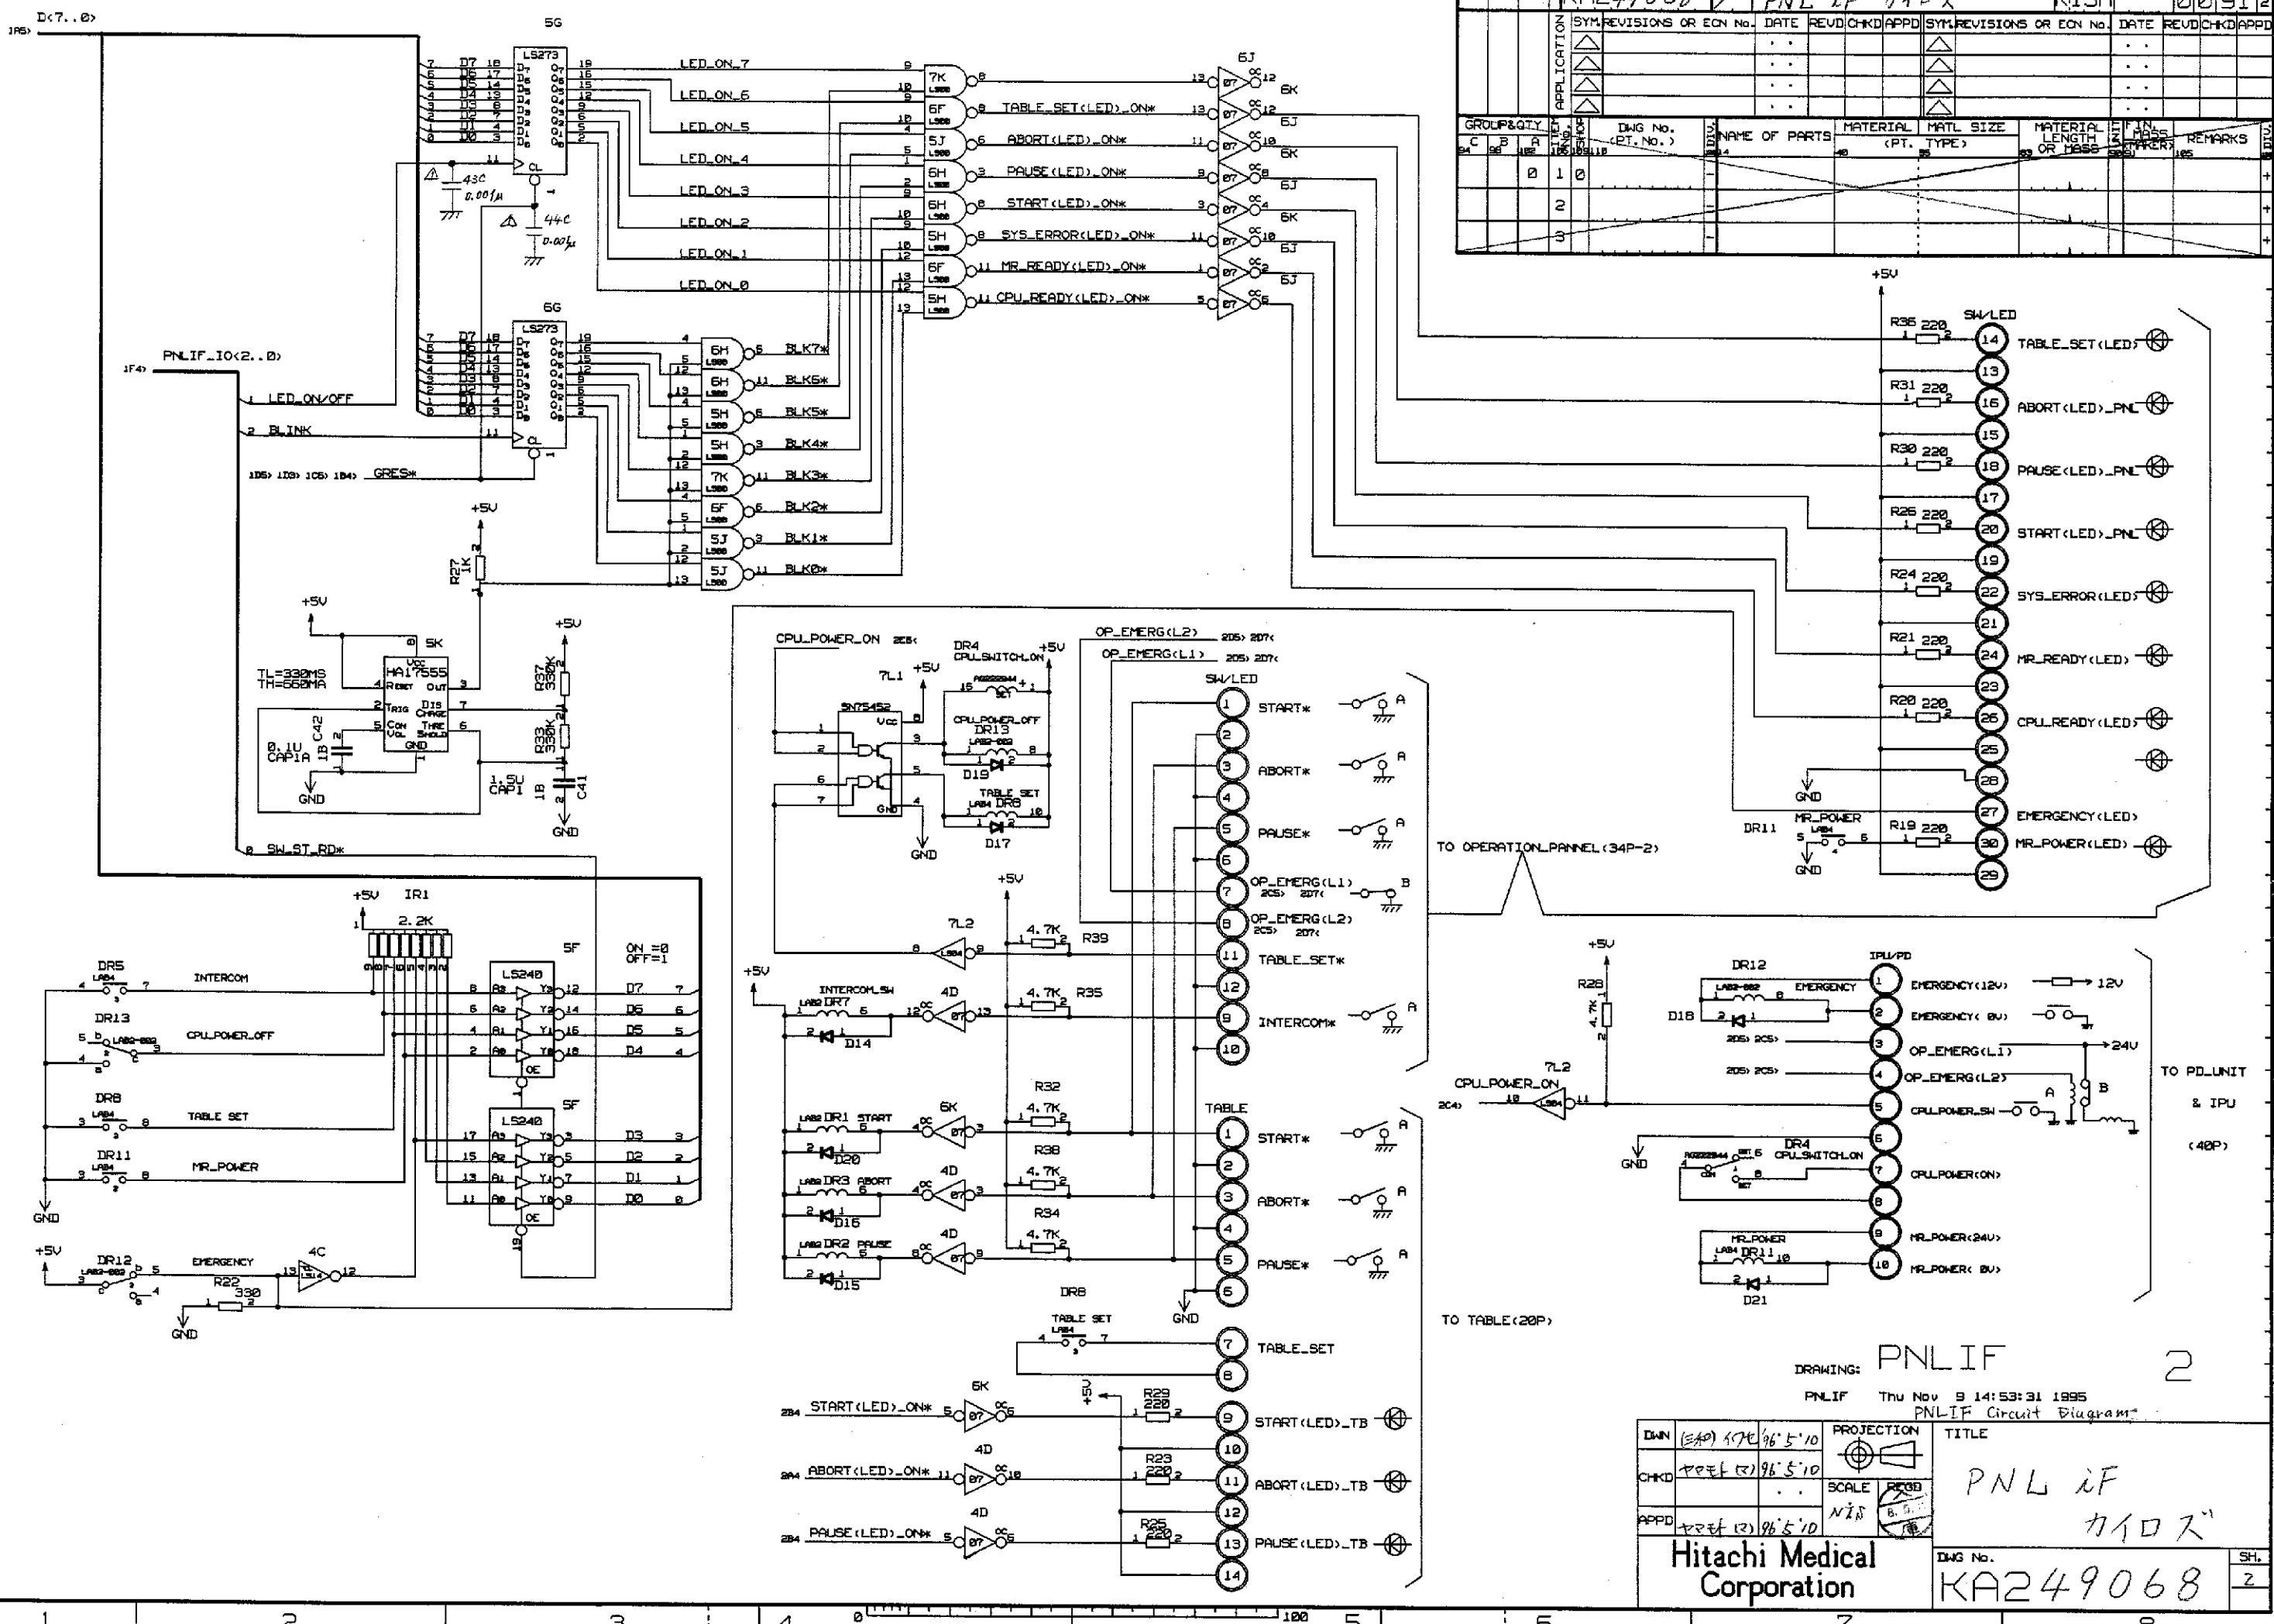

DRAWING: PNL IF 4107

PNL IF THU Nov 9 14:53:31 1995

PNL IF Circuit Diagram


DWG	CHKD	APPD	PROJECTION	SCALE	TITLE
1	2	3	4	5	PNL IF 4107

Hitachi Medical Corporation



DWG No. KA249068

SH. 2


SURFACE FIN.		DWG MTR		REV		DWG No.		FINAL REV.		TITLE		BSON. GR.		CLASS. CODE		DWG CODE							
C	B	A	162			KA249068				PNL IF 710Z		K13M				00912							
SYN		REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APP'D		SYN		REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APP'D	
GROUP & QTY.		DWG No.		NAME OF PARTS		MATERIAL		MATERIAL SIZE		MATERIAL LENGTH OR MASS		FIN. PASS		REMARKS									
C	B	A	162																				

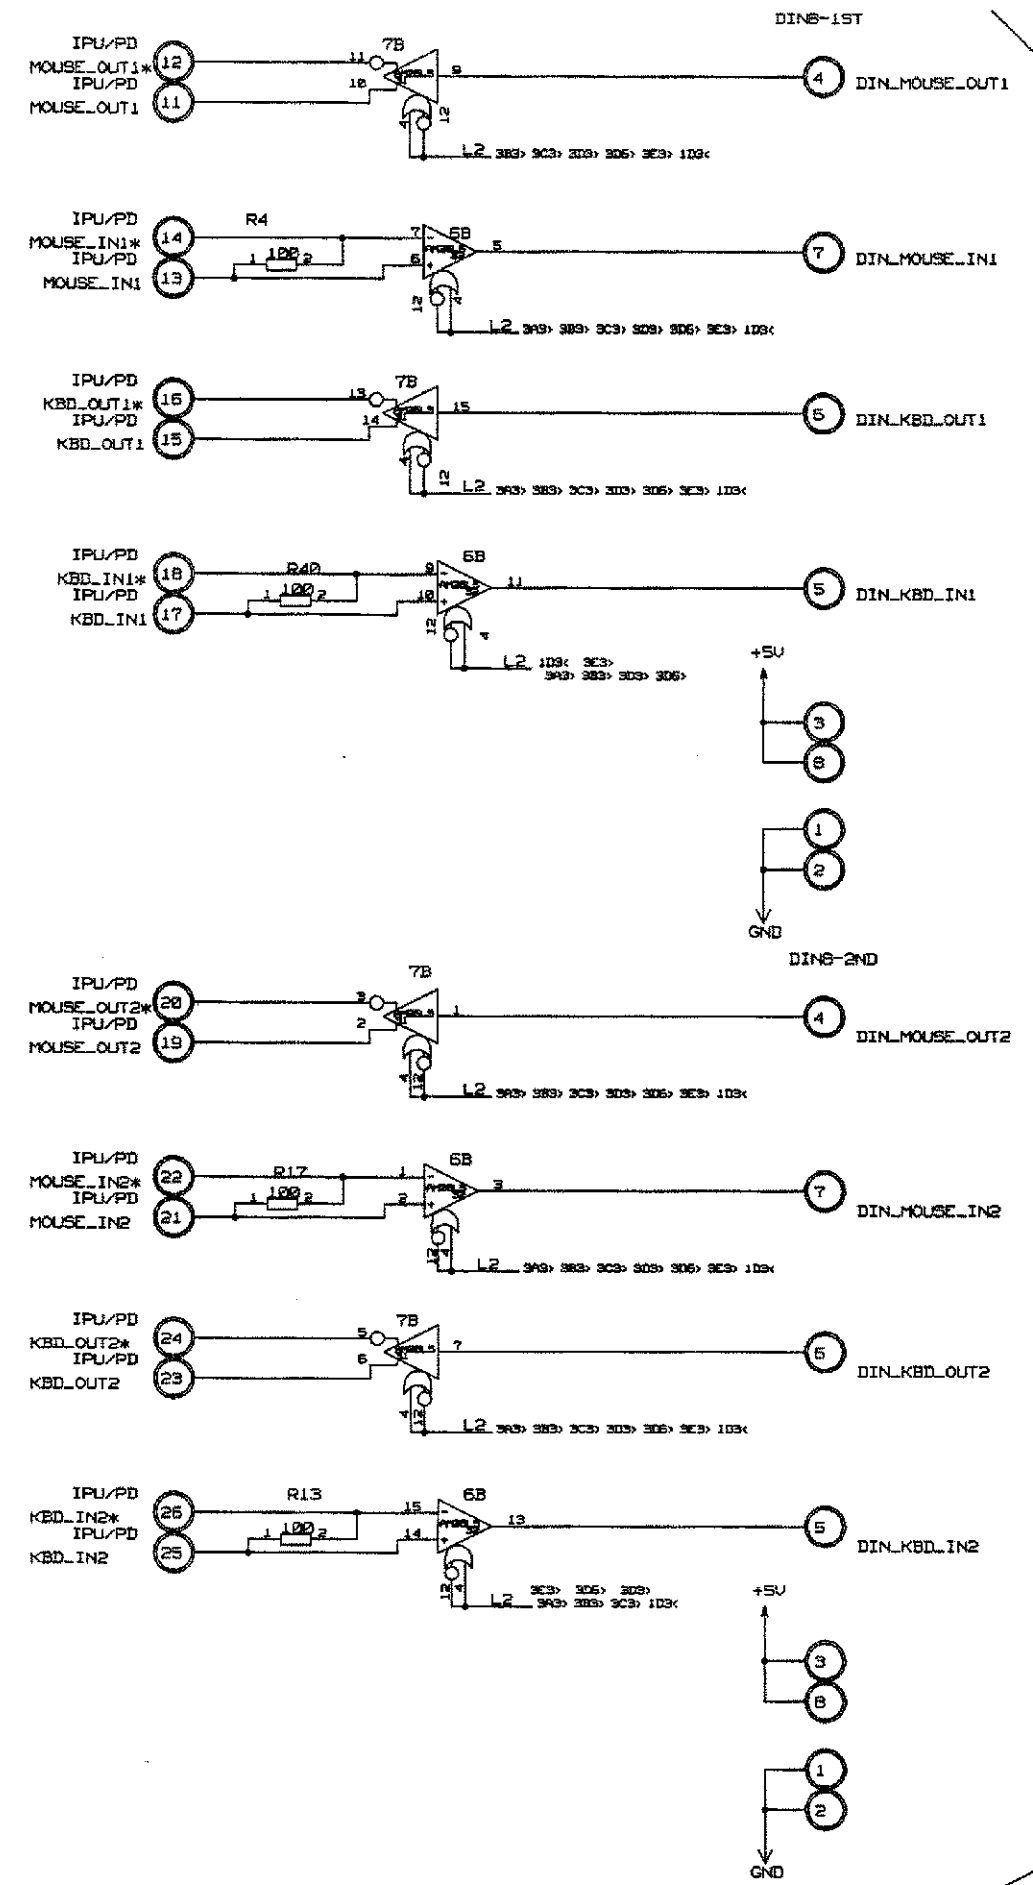


TO IPU (40P)

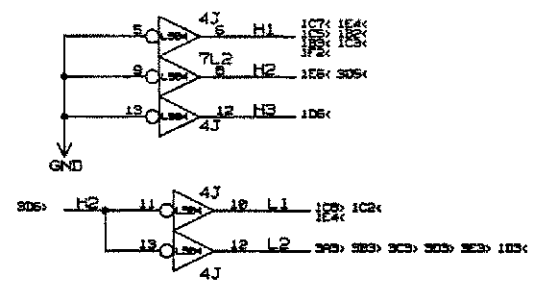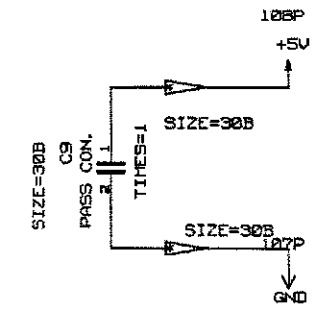

DRAWING: PNLIF Thu Nov 9 14:53:55 1995

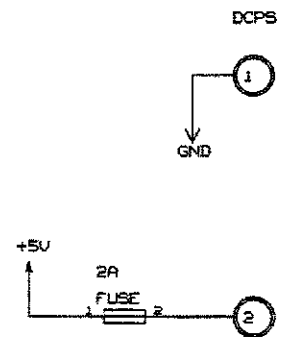

TO DCPS
(AMP 4P)

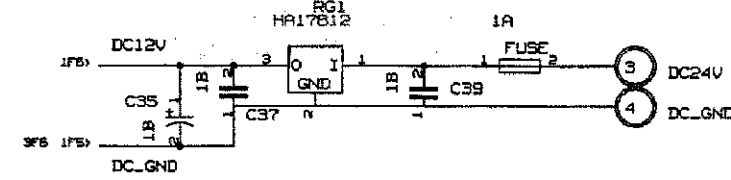

DWN		PROJECTION		TITLE	
1390170	96'5'10			PNL IF	
CHKD	96'5'10	SCALE	REC'D	710Z	
APP'D	96'5'10				
Hitachi Medical Corporation		DWG No.		SH.	
		KA249068		3	


KA366987

2

3

4

SURFACE FIN.		DWG No.		FINAL REV.		TITLE		DSGN. GR.		CLASS. CODE		DWG CODE	
C	B	A	1	00	14	15	LED PCB カイロス	K13M		00	91	2	
GROUP & QTY		DWG No. (PT. No.)		NAME OF PARTS		MATERIAL		MATL SIZE		MATERIAL LENGTH OR MASS		REMARKS	
C	B	A	1	0	LED PCB カイロス								
			2										
			3										

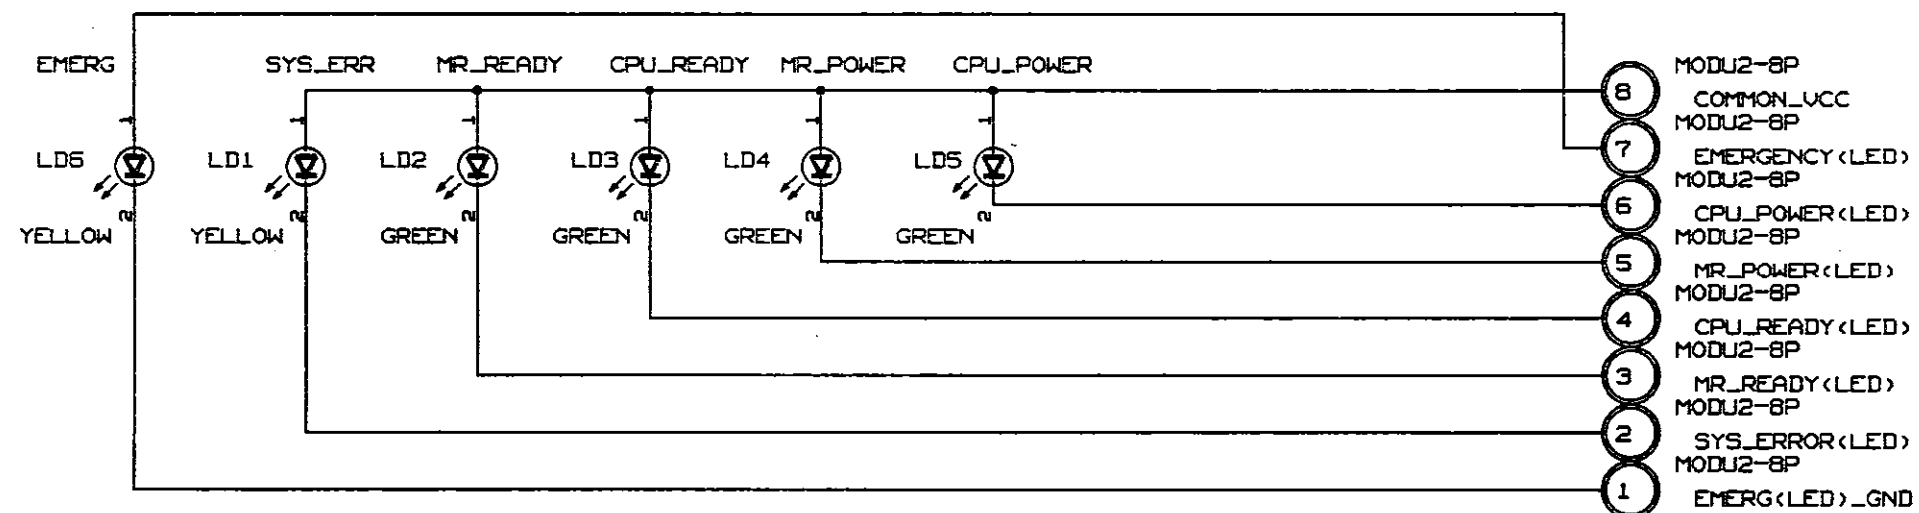


LED_PCB
DRAWING:
Mon Oct 2 16:58:58 1995

DWN	(30) 172	96.5.10	PROJECTION		TITLE	
CHKD	172 (2)	96.5.10	SCALE		LED PCB	
APPD	172 (2)	96.5.10	REGD		カイロス	
Hitachi Medical Corporation						DWG No. KA366987
						SH. 1

△ B作業時

記号	部名	正記号	部	年月日	組
△	抵抗	変更	b	2.8.10	底
△	抵抗	変更	c	2.9.3	底

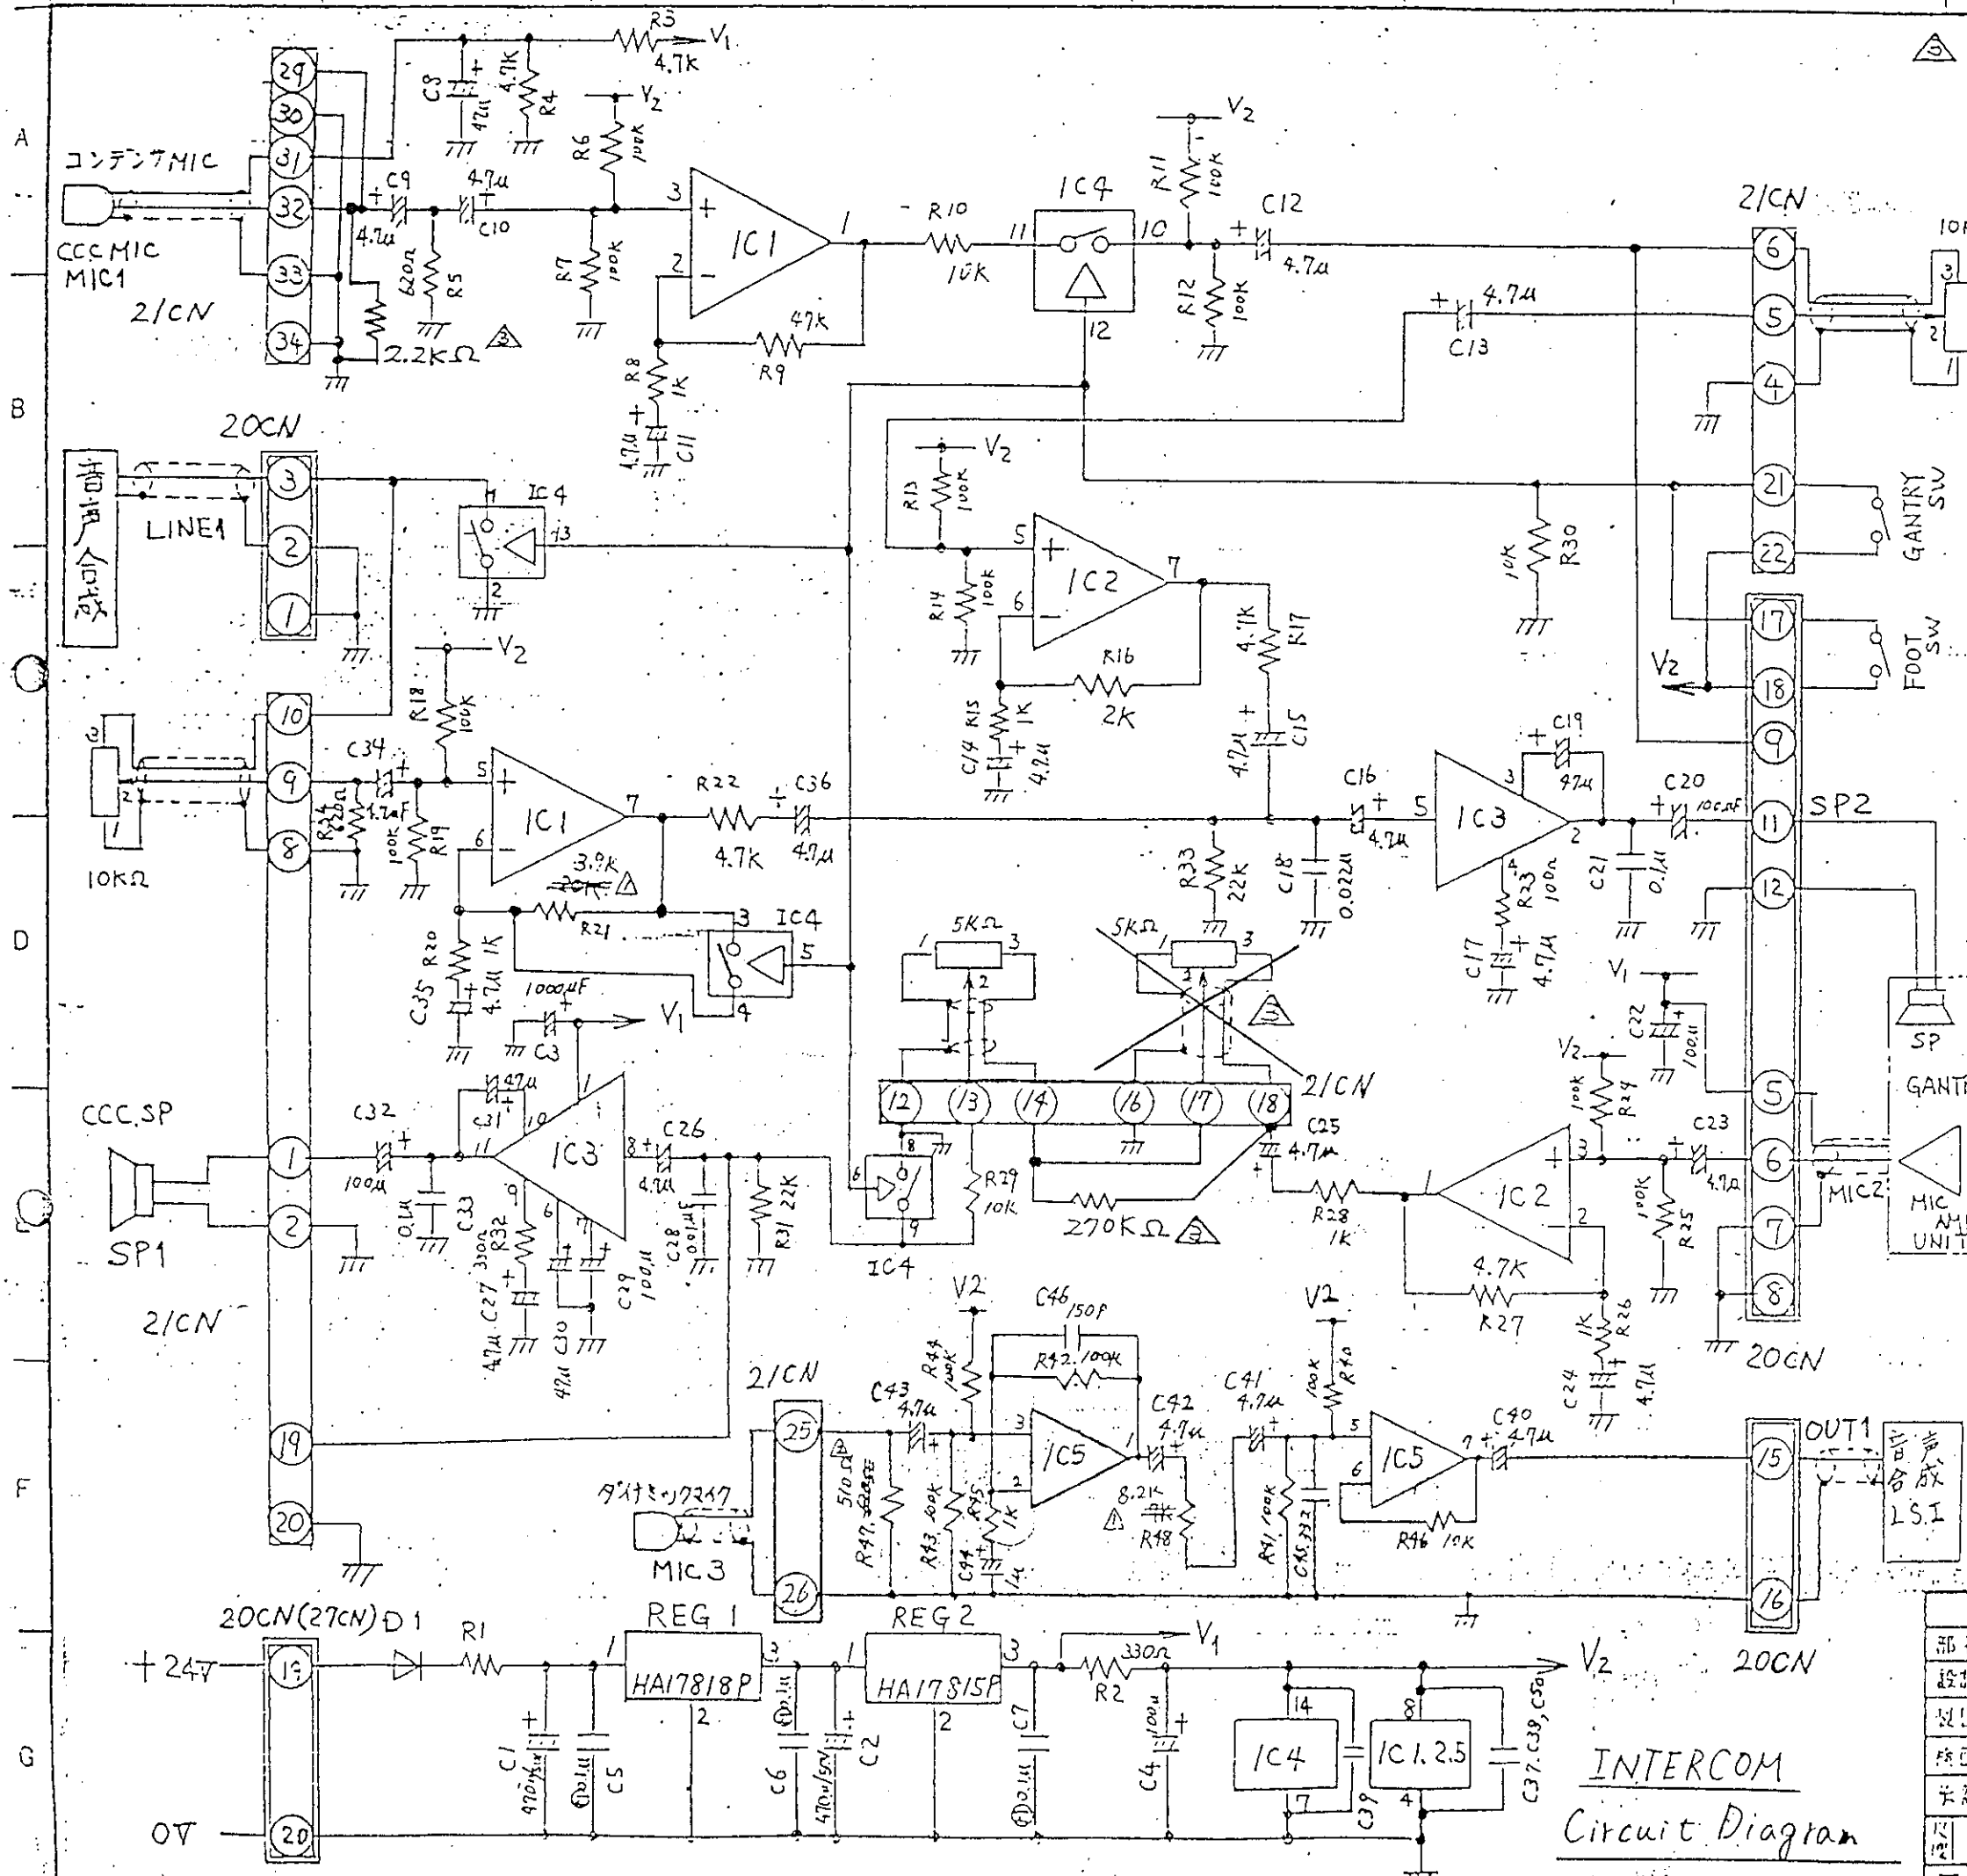

記号	部名	型	式	メーカー
1	R47	抵抗	RD25U510nJ	興亜
2	IC1,2	オペアンプ	MPC4560C	NEC
1	IC3	メインアンプ	BA5406	D-M
1	IC4	CMOS-IC	HD14066BP	日立
1	REG1	レギュレータ	HA17818P	
1	REG2	レギュレータ	HA17815P	
1	D1	ダイオード	V06C	Y
1	R1	セメント抵抗	S5 5.1nJ	利久
1	R23	抵抗	RD25U100nJ	興亜
2	R2, R32		330nJ	
2	R5, R34		620nJ	
8	R8, 15, 20, 26, 28, 45		1knJ	
5	R3, 4, 17, 22, 27		4.7knJ	
4	R10, 29, 30, 46		10knJ	
2	R31, 33		22knJ	
1	R21		3.9knJ	
1	R9		4.7knJ	
15	R6, 7, 11~14, 40~44, 18, 19, 24, 25		100knJ	Y
1	R16		2knJ	
2	C1, C2	電解コンデンサ	SME 50VB470uF	日本ケミ
1	C3		SME 35VB1000uF	
5	C4, 20, 22, 29, 32		100uF	
4	C8, 19, 30, 31		47uF	
21	C9, 17, 23~27, 31, 36, 40~43		4.7uF	
1	C44		1uF	
5	C5~7, 21, 33	マイコンデンサ	50IN 5002 104M	松本
1	C18		22nM	
1	C28		103M	
1	C45		332M	
4	C37~39, C50	ヒューズコンデンサ	UAT08X473M	太陽誘電
1	C46		RB05SL151	
1	20CN	コネクタ	H2F3BA-20PA-2.540S	ヒロト
1	21CN		H2F3BA-34PA-2.540S	
1	R48	抵抗	RD25U510nJ	興亜
1	IC5	オペアンプ	MPC4558-C	NEC

INTERCOM
Circuit Diagram

部品	部	品名	部数	材	質	処	理	素材寸法	図
設計	2.5.16	底面							
図面	1	1							
検閲	2.5.18	植付							
承認	2.5.18	中核							
名	X	MK-F4							
三角法	標	インタホンアンプ回路図							
図									

神田通信工業
株式会社

KK-34919

KA384303

2

3

4

保守部品		図面マスタ		5	CA01	6	7	8	単位	kg	g	m	mm	cm	mm	cm	mm	cm					
図面番号		図面名		最終図面		名称		設計担当		類別コード		検査		図面		区分							
1		KA384303		2		MBジャンパーセッテイズ		K13G		010		89		2									
記号		来歴又は仕様書番号		年月日		訂正		審査		承認		記号		来歴又は仕様書番号		年月日		訂正		審査		承認	
△		MSKA-1126		98.5.19		3.19		7.19		7.19		△											
△												△											
△												△											
作業・員数		品番		加工		図番		品名		材質		素材寸法		素材長さ		仕上質量		備考		区分			
C B A		100 101 102		103 104 105		106 107 108		109 110 111		112 113 114		115 116 117		118 119 120		121 122 123		124 125 126		127 128 129		130 131 132	
		1		1		3		セッテイギョウ															
				2																			
				3																			

- ※1. Slot 7 実装時は JP 30 を Open とする。
- ※2. Slot 6 実装時は JP 25 を Open とする。
- ※3. Slot 5 実装時は JP 20 を Open とする。

- ※1. In case Slot 7 is installed, JP 30 should be Open
- ※2. In case Slot 6 is installed, JP 25 should be Open
- ※3. In case Slot 5 is installed, JP 20 should be Open


SLOT No.		P.C.B Name					
SLOT 1		BIT 3	none				
SLOT 1	SLOT 2	none	JP 1	JP 2	JP 3	JP 4	JP 5
SLOT 2	SLOT 3	HcD or HcD2	JP 6	JP 7	JP 8	JP 9	JP 10
SLOT 3	SLOT 4	RTCONT	JP 11	JP 12	JP 13	JP 14	JP 15
SLOT 4	SLOT 5	RcN or RcN2	JP 16	JP 17	JP 18	JP 19	JP 20
SLOT 5	SLOT 6	RcN or RcN2	JP 21	JP 22	JP 23	JP 24	JP 25
SLOT 6	SLOT 7	RcN or RcN2	JP 26	JP 27	JP 28	JP 29	JP 30
SLOT 7	SLOT 8	RcN or RcN2	JP 31	JP 32	JP 33	JP 34	JP 35
SLOT 9		PSC	none				

 : ショート
 : オープン
 Short Open

- ※3 △
 - ※2 △
 - ※1 △
- オプション実装時 (SLOT 5、6、7 実装時) JP 20、JP 25、JP 30 は
 オープンとする。
 In case SLOT 5、6、7 are installed as option, JP 20, JP 25, JP 30 should be open

注記

- ショートはジャンパーの挿入、オープン
はジャンパープラグの取り外しを示します
(オープン時はジャンパープラグは、右図の様に
ピンにのみ挿入して、ピンになる様にします。)



図

fig

Jumper Open setting


MB JP SETTING FUNCTION TABLE

製図	図面番号	図面名	投影法	名称
審査	図面番号	図面名	投影法	MBジャンパーセッテイズ
承認	図面番号	図面名	投影法	
株式会社 日立メディコ				図番
				KA384303
				校番
				1/1

Table. 1 Switch Setting Table

PCB Name	Configuration
HCD (Slot No. 3)	
RTCONT (Slot No. 4)	
MRRON2 (Slot No. 5)	
MRRON3 (Slot No. 6)	
MRRON4 (Slot No. 7)	
MRRON5 (Slot No. 8)	
MRPSC (Slot No. 9)	
GRU	

PCB Name	Configuration
HCD2 (Slot No. 3)	
MPX2	
MOVIF	

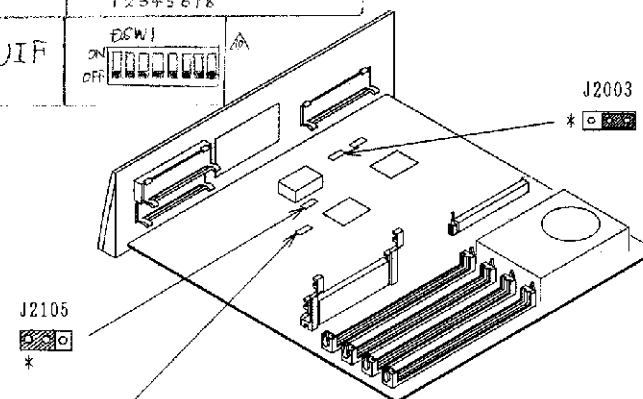

ULTRA SPARC (SEUIL-170-OP)

図2 (Fig. 2)


* MRRON PCBは、基板を実装する際のスロットNo. により、DIPSWの設定が異なるので注意する事。

*2 RTCONT 基板 A/2 以降に適用。(available for rev. A/2 and later RTCONT PCB)

Table. 2 Jumper Setting Table

PCB Name	Configuration	PCB Name	Configuration
HCD (Slot No. 3)		HCD2 (Slot No. 3)	
RTCONT (Slot No. 4)		MRRON2 (Slot No. 5)	
MRRON (Slot No. 5.6 7.8)		MRPSC (Slot No. 9)	
MRPSC (Slot No. 9)		MRRON2 (Slot No. 5)	
MRRON2 (Slot No. 5)		SEPARA (XM2014-1)	
ULTRA SPARC		ULTRA AXI	
GRU			

PCB Name	Configuration
IAMP	
IPUIF (work A)	
IPUIF (work B)	
MPX2	

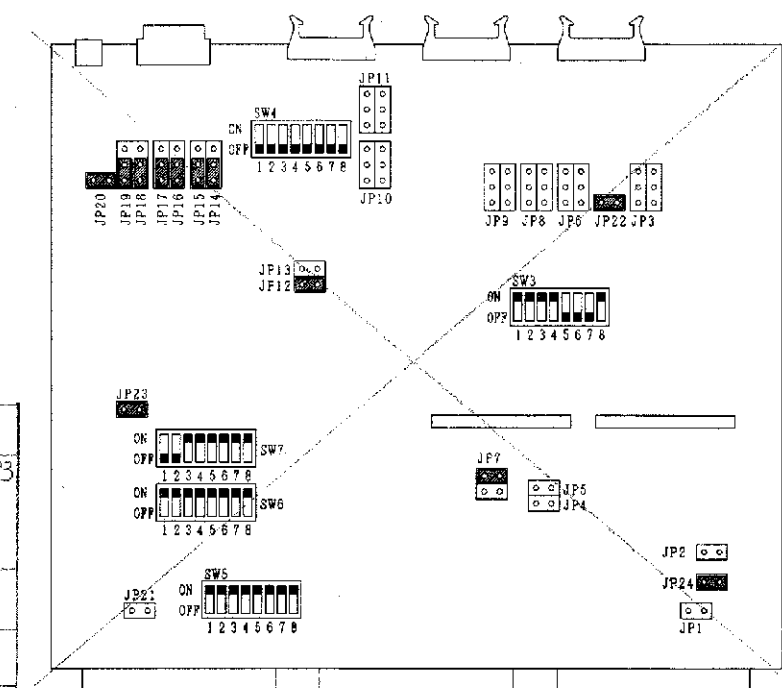

RTCONT PCB (A/0, A/1)

図1 (Fig. 1)

作業内容

各プリ板のディップスイッチ及びジャンパーの設定を表に従い設定する。
(※印部に注意する事。)

JP and SW setting table for PCB

製品	型番	図法	名称
KA282616	1/1	プリバンセットイシヨウス	
製図	4/17/90	尺法	入所
審査	97.6.10	NTS	
承認	97.6.11		
株式会社 日立メディコ	KA282616	1/1	

L9E48EV

2

3

4

△ 617, △ 620, △ 620-3, RPQ601391+2

本仕様図は、VMEバスアダプタ 467-1 () に
適用する。(MODEL 617は6UサイズボードのみJP設定する)

△ 620 △ 620-3 △ RPQ601391+2

① 467-1は 6Uサイズボード(図1), Sバスカード(図2)
から成る。

② 6Uサイズボードの設定(図1) Setting for 6U size board (Fig.1)

①~⑤へショートピンを追加する。Attaching short pin
to ①~⑤

- SYS ①~③
- BGO-BGI ④
- T-INT ⑤

③ Sバスカードの設定(図2)
図2の①の1-2間へ設定
されているショートピンを2-3
間へ変更する。

Setting for S bus card (Fig.2)

Detouch short pin setting
between 1 to 2 in ① of Fig.2,
and attach the short pin to between 2 to 3.

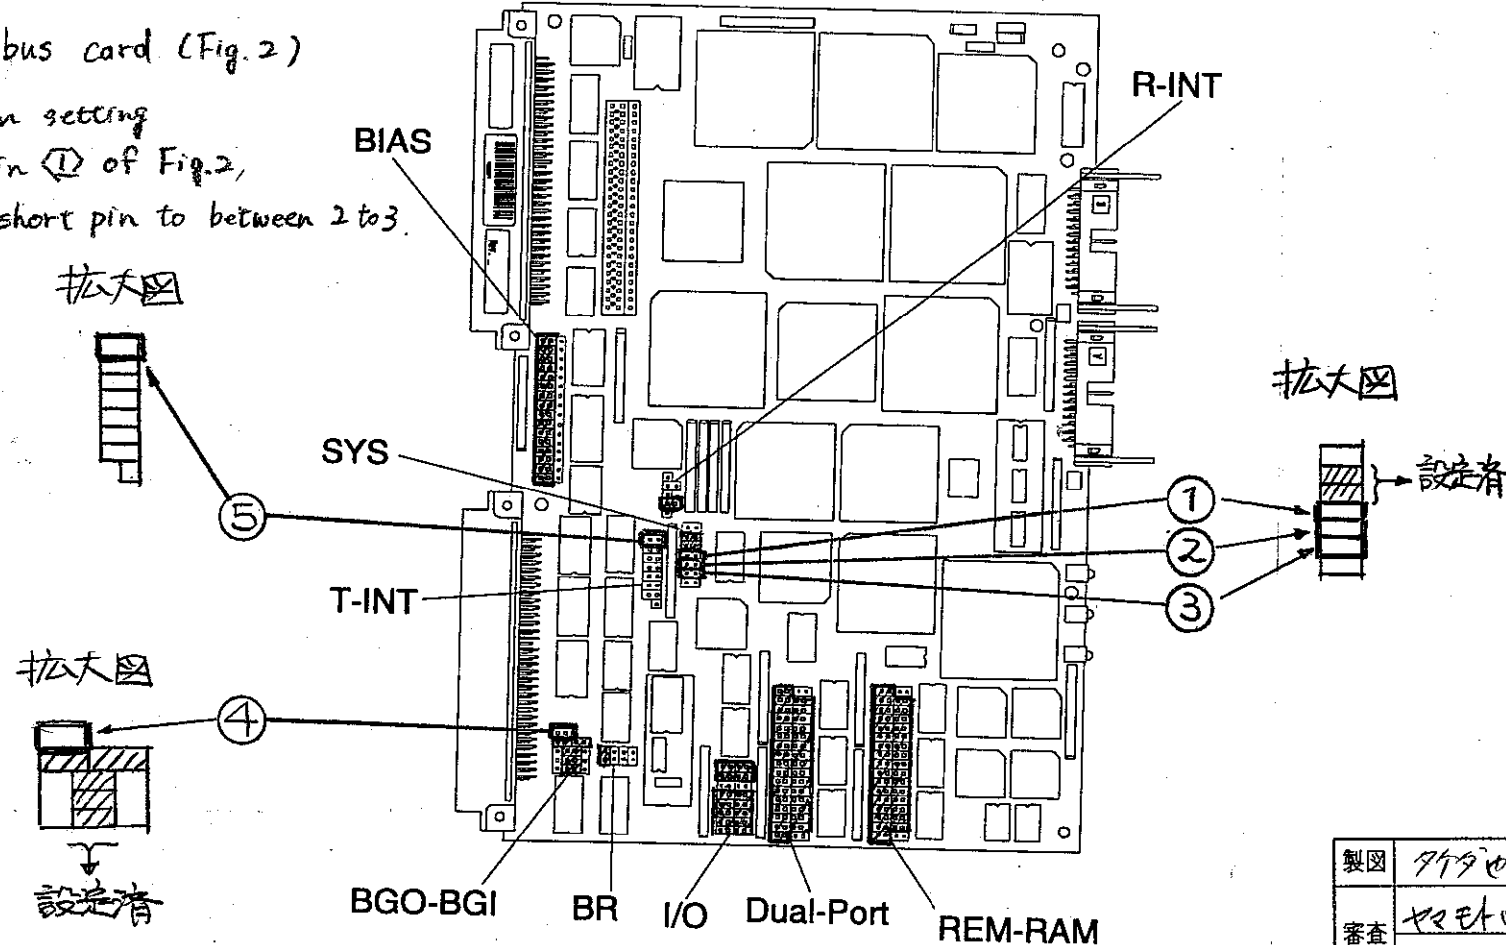


図1 6Uサイズボードの設定

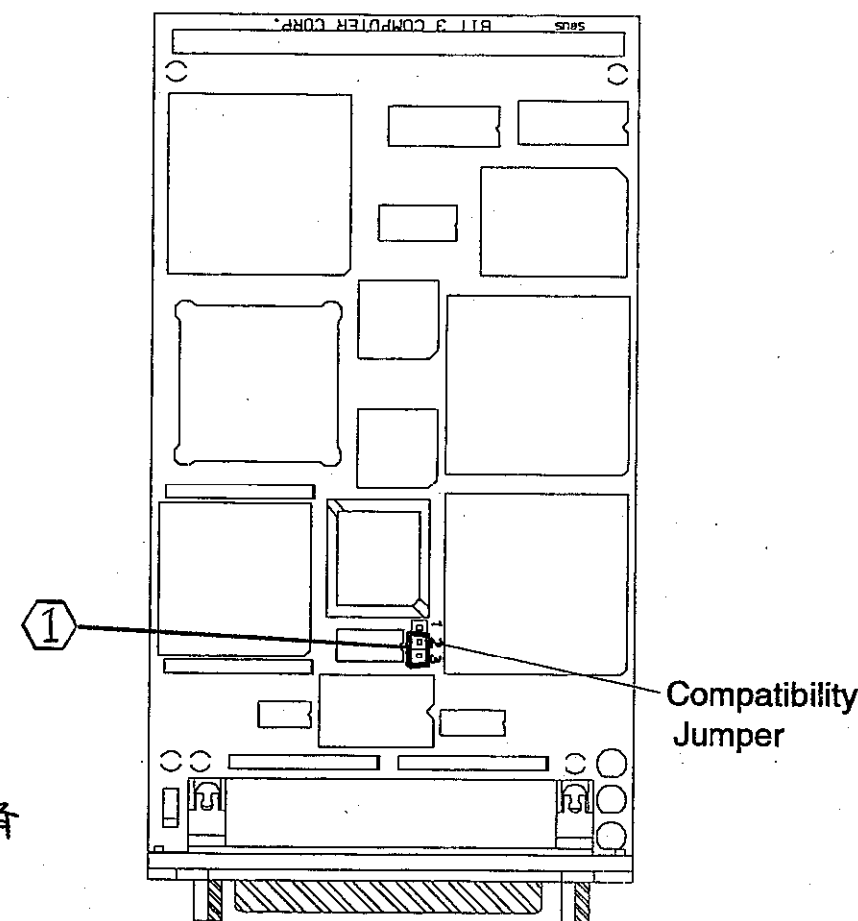


図2 Sバスカードの設定
△ (MODEL 467-1のみ設定する)
JP setting for BIT3

製図	7/17/91	97.5.30	投影法	名称	VMEバスアダプタ
審査	ヤマモト(2)	97.6.11	尺度	入庫	セッテイシヨウス
承認	ヤマモト(2)	97.6.11	NTS	図番	KA384367
株式会社 日立メディコ					枝番
					1/1

			保守部品登録		5		CA01		6		7		8		単位		kg		g		m		l		m ²		mm		cm ³	
			図面マスタ		5		CA01		6		7		8		単位		kg		g		m		l		m ²		mm		cm ³	
表面処理			区分		図		番		最終図		名		称		設計担当		類別コード		検区		監保		図種		区分					
C			B		A		102		220		14		18		42		46		50		51		52		53		54			
94			98		102		120		14		18		42		46		50		51		52		53		54					
1			KA384.367		0.5		VMEバスアダプタセテイシヨウス		K1.3G		0089		2																	
摘			記号		来歴又は仕様書番号		年月日		訂正		審査		承認		記号		来歴又は仕様書番号		年月日		訂正		審査		承認					
要			△		英語通知		98.5.19		シカガ		マシ		マシ		△		MSKA-1771		03.11.11		オカダ		97.9.9		97.9.9					
			△		MSKA-0783		99.4.9		シカガ		マシ		マシ		△		MSKA-2049		04.7.5		オカダ		97.9.9		97.9.9					
			△		MSKA-1250		01.10.19		シカガ		マシ		マシ		△															
			△		MSKA-1728		03.10.8		オカダ		97.9.9		97.9.9		△															
作業・員数			品番		加区		図		番		区分		品		名		材質		素材寸法		素材長さ		仕上質量		備考		区分			
C			B		A		100		109		110		(部品コード)		220		40		65		63		90		91		105			
94			98		102		100		109		110		(部品コード)		220		40		65		63		90		91		105			
1			1		3								セテイサキヨウ														+			
			2																								+			
			3																								+			



KA345814

2

3

保守部品登録		CA01		5		6 単位表		kg g m l ml mm cm	
図面マスタ		品名		設計担当		類別コード		図番	
1 KA345814		0.3 シバホセイソウチカイロス		K14G		00912			
記号		来歴		年月日		訂正		審査	
△ CRK-1888		92-4-24		17		227		△ B作業新設	
△ CRK-2092		92-7-29		17		227		△	
△ CRK-2526		93-4-8		31		227		△	
図数		品加		図番		区分		品名	
C B A		1 0		0		1		カイロス	
0		2 0		0		2		カイロス	
		3							

MRFC2 PCB
KA232422

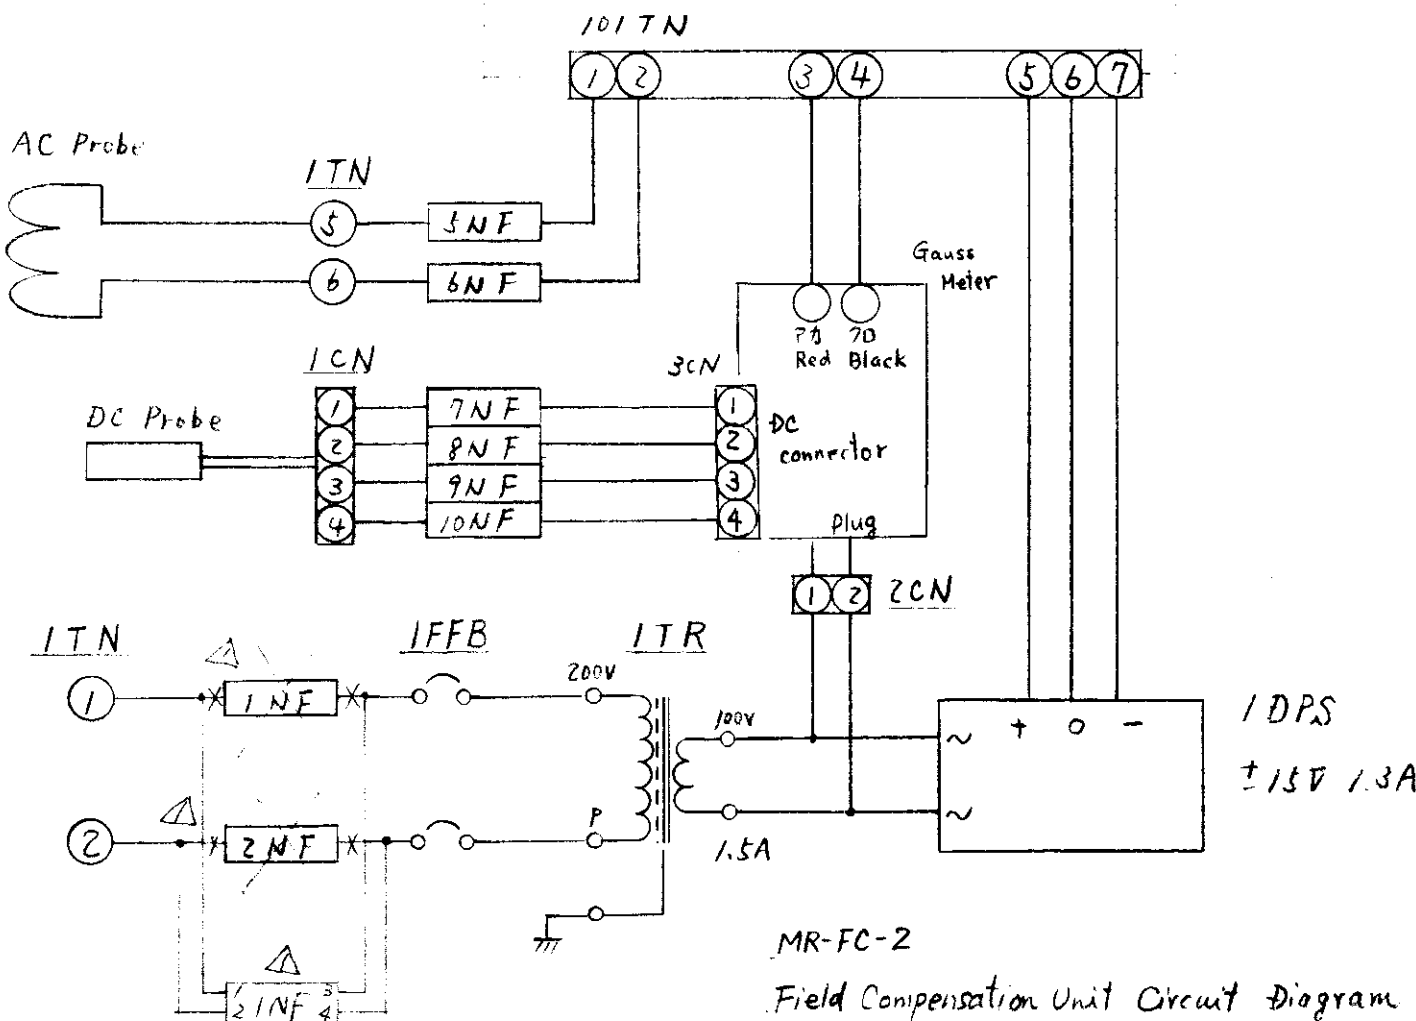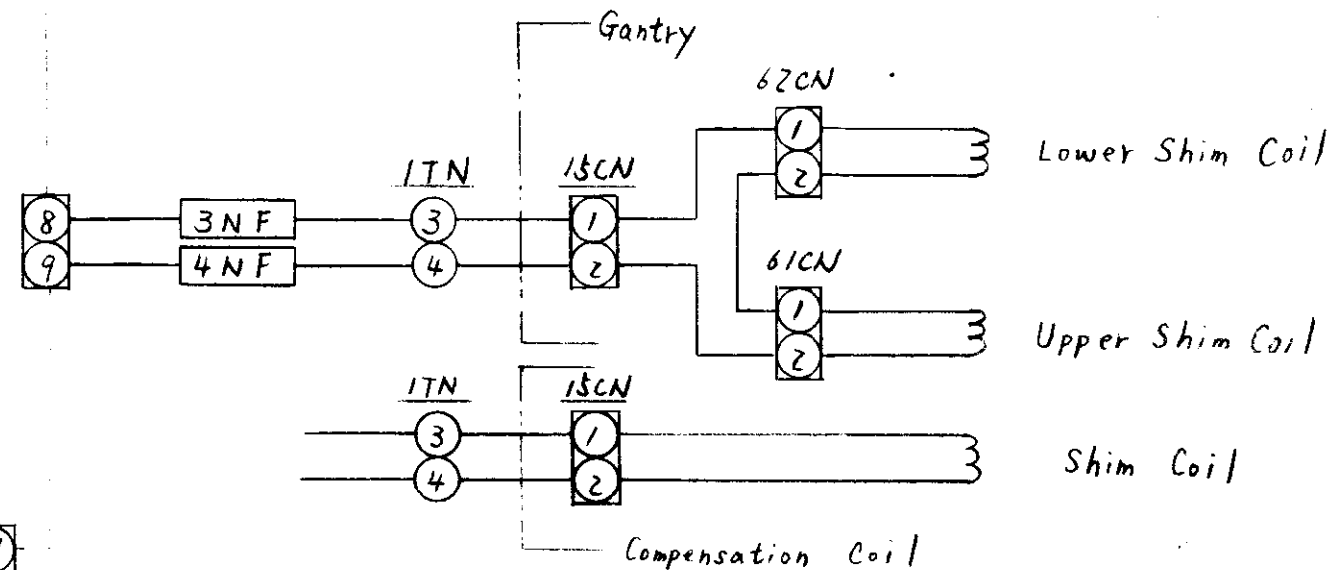

C	B	A	SYMBOL	PART NAME	TYPE	MANUFACTURER
	1	1		Gauss Meter	HM-201H	Mishima
	1	1	1TR	Transformer	KA345020-A	Asahi
	1	1	1DPS	DC Power Supply	GT3W115V, 1.3A	ELCO
	1	1	1NF	Noise Filter	GF-205U	Tokai
	1	1	1FFB	Circuit Protector	NRAN2100F-1AAA	Izumi
	1	1	1TN	Terminal	JTU20-6P	Yoshida
	8	10	1~10NF	Noise Filter	ZFN5205-00R	TDK
	1	1	1CN	Connector	HR10-7R-4S	Hirose
	1	1	2CN		WCF1041B	Matsushita

新HKK適用図面(製図, 普通許容差)

製図	ヨシカワ	91/10/29	初使用作番	三角法	品名
写図				R度 NTS:	シバホセイソウチカイロス
審査	マエダ	承認	サシ	入庫	図番
				(株) 日立メディコ	KA345814
				柏工場	

1

2

3

4

5

6

D

C

B

A


D

C

B

A

品名		MRFC27リボンカイロス		設計担当		K146		00912	
記号		ABS2100A-0013		年月日		92-3-25		訂正	
図番		010		品名		カイロス			

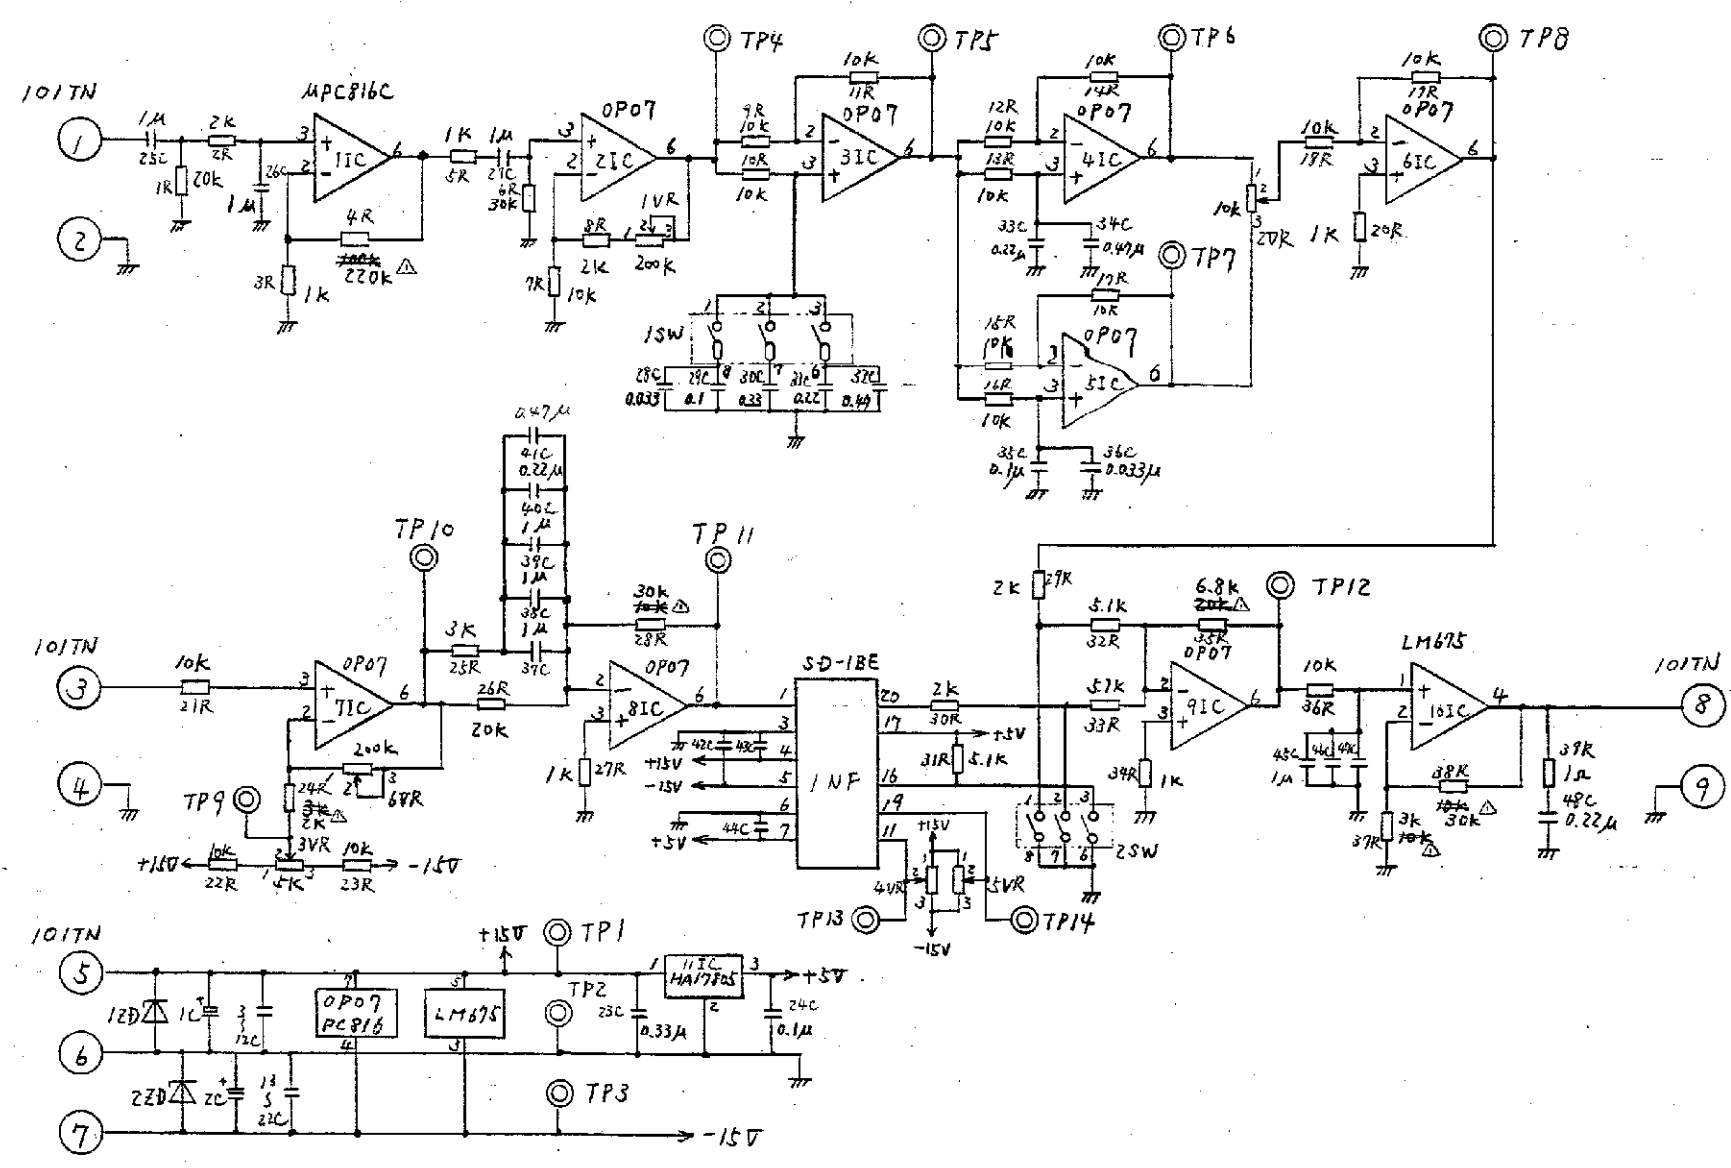

2SW 設定仕様

21, 2	ON	OFF
1	AC OFF	AC ON
2	DC OFF	DC ON
3	60HZ	50HZ
4		

C	B	A	SYMBOL	PART NAME	TYPE	MANUFACTURER
		1	IC	Op Amp	MPC816	NEC
		8	2~9 IC		op-07CP	PMI
		1	10 IC	Power OpAmp	LM675	NS
		1	1 NF	Filter	SD-1BE	NF
		2	1, 2 ZD	Zener Diode	AW01-18	Hitachi
		1	11 IC	Regulator	HA17805	
		2	1, 2 SW	Dip Switch	Dip-A4SW	DDK
		2	1, 2 C	Capacitor	USA-1V-220MCA-ITE	Nichicon
		20	3~22 C		RPE123-901F155E25	Murata
		9	25~27, 37~39, 45~47 C		553M-5002-104K	NCC
		2	28, 36 C		553M-6302-333KA	
		6	24, 29, 35, 42~44 C		-104KA	
		2	23, 30 C		-334KA	
		4	31, 33, 40, 48 C		-224KA	
		3	32, 34, 41 C		-474KA	
		3	1, 26, 35 R	Resistor	LF 1/4 20k2F	Tama
		4	2, 8, 29, 30 R		2k2F	
		3	3, 5, 20, 27, 34 R		1k2F	
		1	4 R		220k	
		7	6 R, 28, 38 R		30k2F	
		16	7, 9~19, 21~23, 28, 36~38 R		10k2F	
		2	24, 25 R, 37 R		3k2F	
		3	31~33 R		5.1k2F	
		1	39 R		HC-5 10J	Yagishita
		1	24 R		LF 1/4 2k2F	Tama
		1	35 R		6.8k2F	
		2	1, 6 VR	Trimmer	3296W-1-204	Bourns
		3	2, 4, 5 VR		-103	
		1	30 R		-502	
		1	1 TN	Terminal	KD0021-10	Kyoushin

MRFC2 PCB Circuit Diagram

新HKK適用図面(製図, 普通許容差)

製図	3/19	91/12/20	初版用作者	三角法	品名
号図				R度	NTS
書	マシ	承認	サト	(株) 日立メディコ	MRFC27リボンカイロス
				柏工場	KA232422

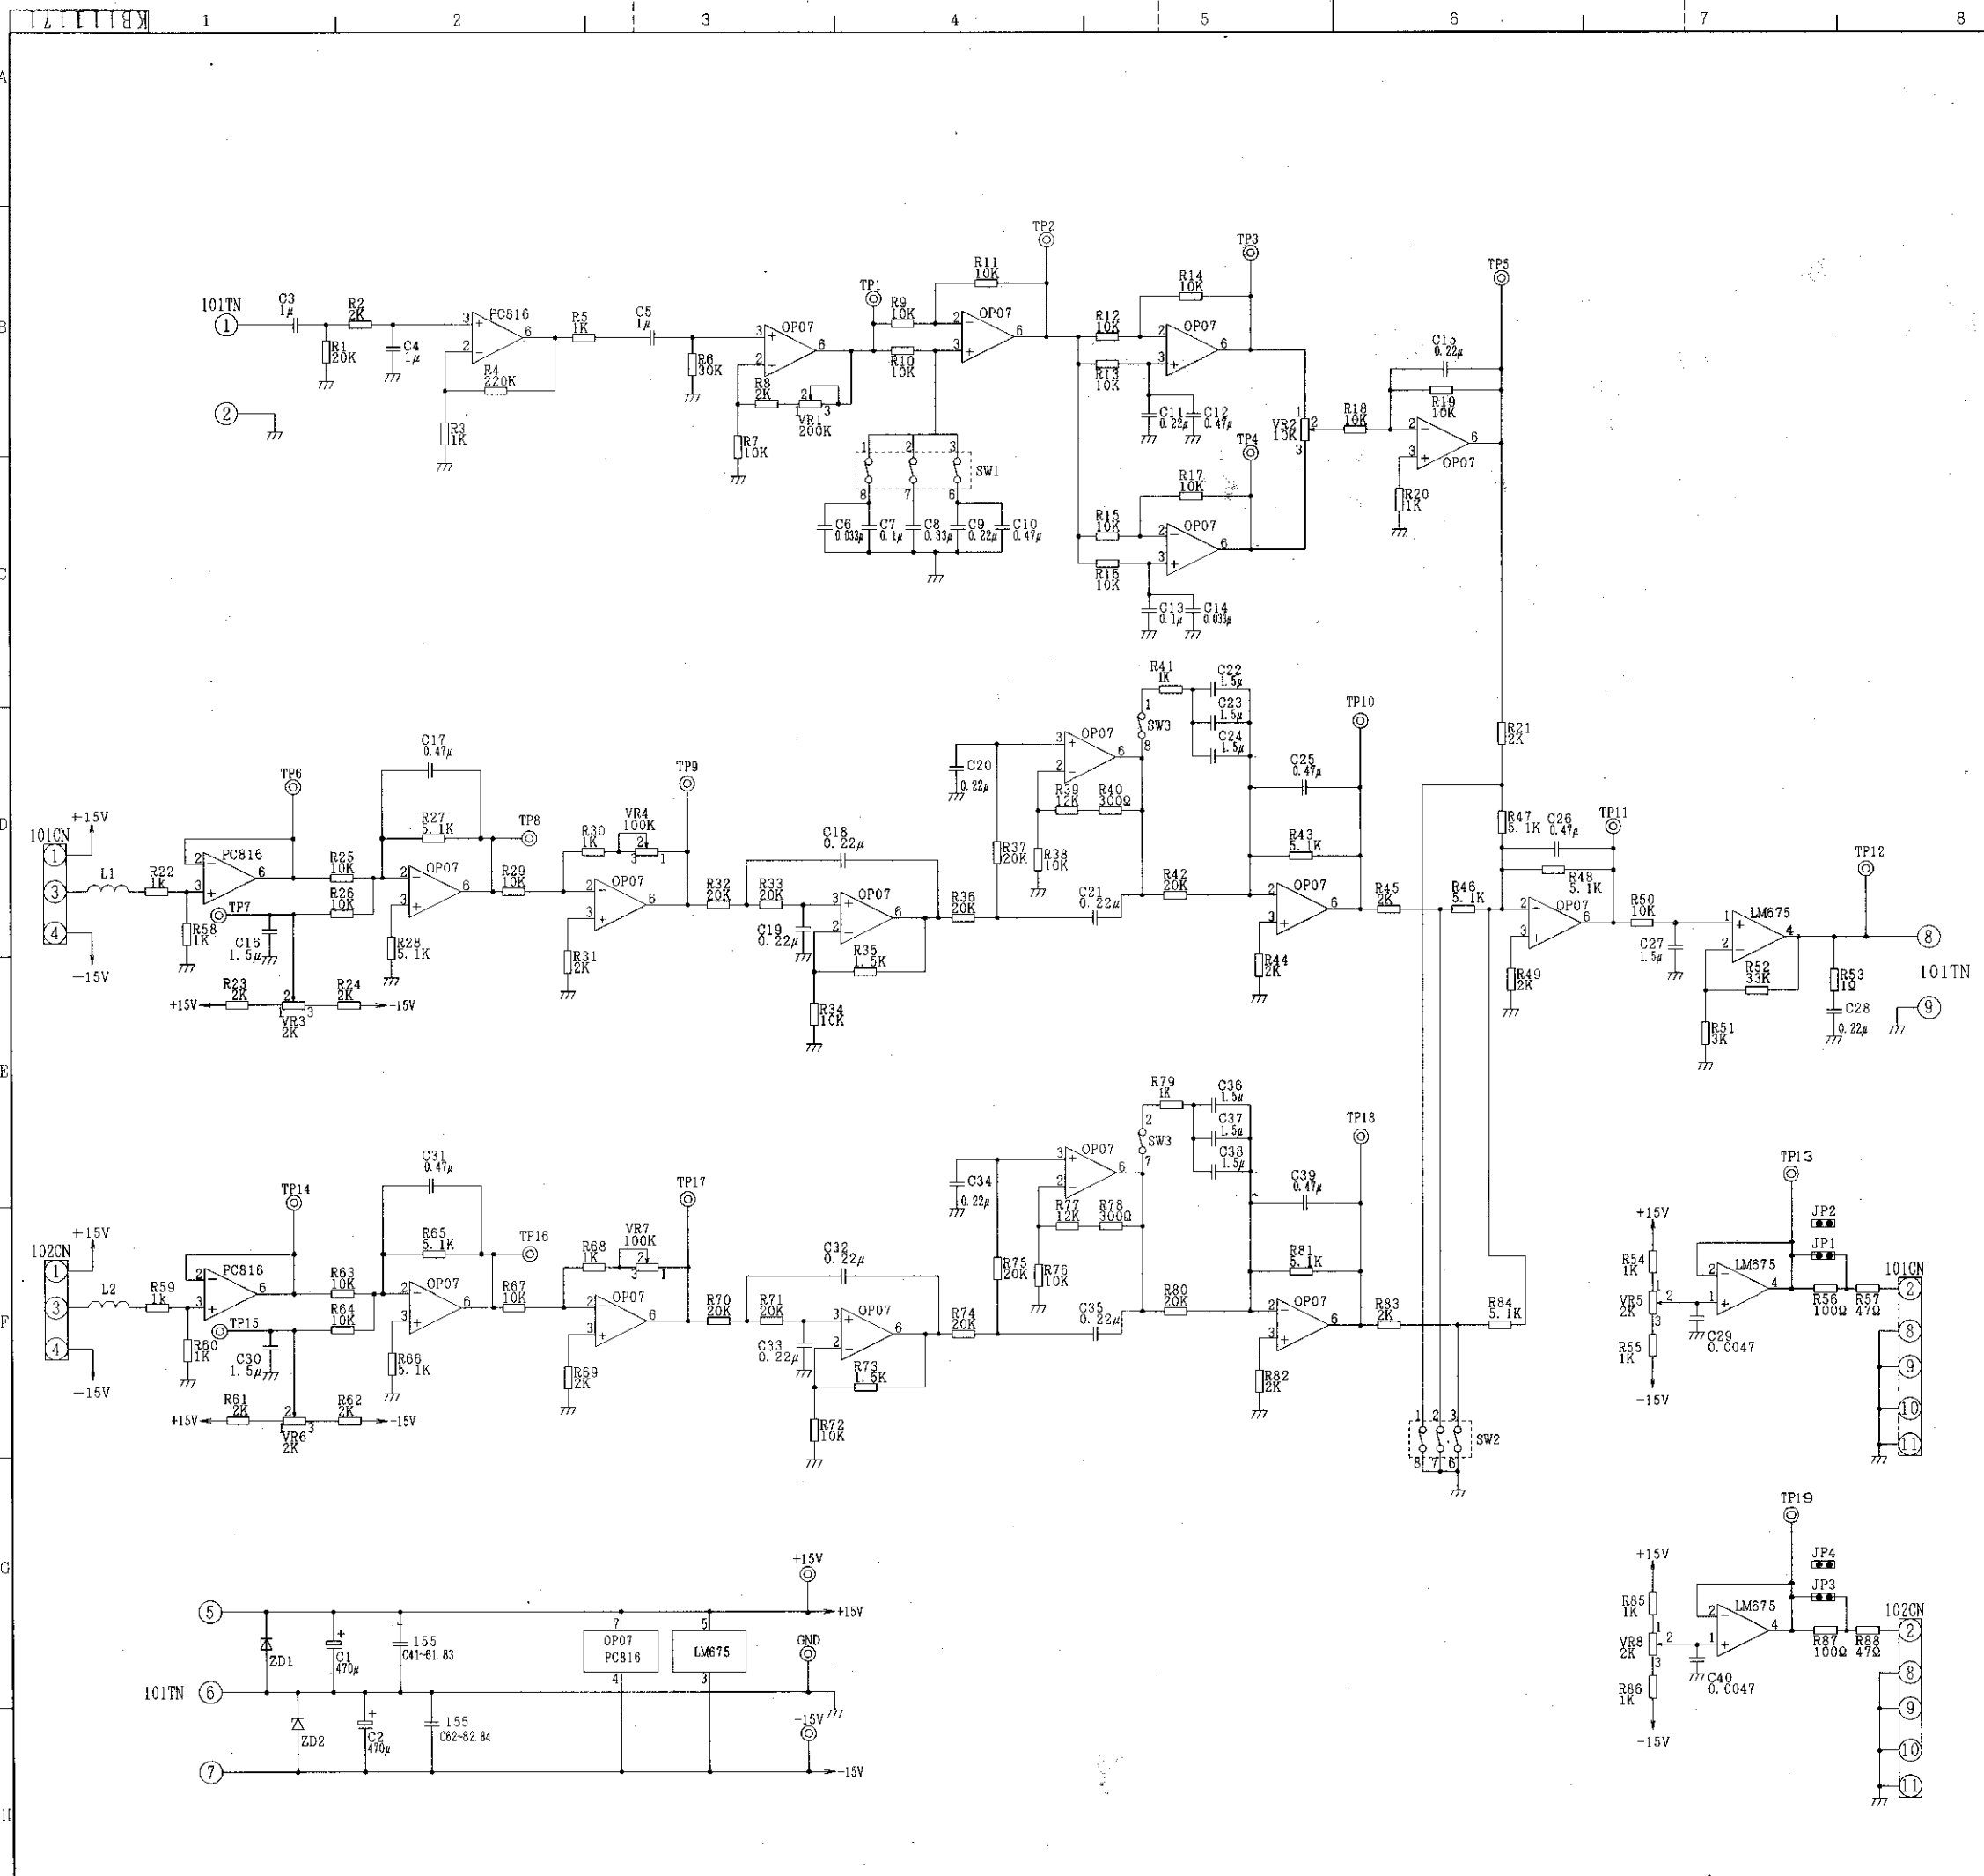


図 番		図 名	図 種	図 号	図 尺	図 寸	図 重	図 価	図 備
KB111171		MRFC-H フリップスイッチ	W13G	00191	12	12	12	12	12
MRFC-H		MRFC-H フリップスイッチ	W13G	00191	12	12	12	12	12
MRFC-H		MRFC-H フリップスイッチ	W13G	00191	12	12	12	12	12
MRFC-H		MRFC-H フリップスイッチ	W13G	00191	12	12	12	12	12
MRFC-H		MRFC-H フリップスイッチ	W13G	00191	12	12	12	12	12
MRFC-H		MRFC-H フリップスイッチ	W13G	00191	12	12	12	12	12
MRFC-H		MRFC-H フリップスイッチ	W13G	00191	12	12	12	12	12
MRFC-H		MRFC-H フリップスイッチ	W13G	00191	12	12	12	12	12
MRFC-H		MRFC-H フリップスイッチ	W13G	00191	12	12	12	12	12

C	B	A	SYMBOL	PART NAME	TYPE	MANUFACTURE
		3		OP-AMP	PC816	NEC
		16		OP-AMP	OP-07P	PMI
		3		POWER OP-AMP	LM675T	N.S.
		3	SW1. 2. 3	DIP SWITCH	DIP-A4SW	DDK
		2	ZD1. 2	ZENNER DIODE	AW01-18	HITACHI
		2	C1. 2	CAPACITOR	UBA-1H-471MHA	NICHICON
		2	C7. 13	CAPACITOR	553M-6302-104KA	NCC
		1	C8	CAPACITOR	553M-6302-334KA	NCC
		3	C3-5	CAPACITOR	553M-5002-105K	NCC
		12	C9. 11. 15. 18-21. 28. 32-35	CAPACITOR	553M-6302-224KA	NCC
		7	C10. 12. 17. 25. 26. 31. 39	CAPACITOR	553M-6302-474KA	NCC
		2	C6. 14	CAPACITOR	553M-6302-333KA	NCC
		2	C29. 40	CAPACITOR	506N-5002-472KE	NCC
		53	C16. 22-24. 27. 30. 38-38. 41-84	CAPACITOR	PRE122-901P155Z25	MURATA
		1	R53	RESISTOR	HC-5 10J	ヤシタ
		2	R56. 87	RESISTOR	RSF2B 100Q	KOA
		2	R57. 88	RESISTOR	RSF2B 47Q	KOA
		2	R40. 78	RESISTOR	LF1/4 300QF-TP	TAMA
		15	R1. 5. 20. 22. 30. 41. 54. 55. 58-80. 86. 79. 85. 86	RESISTOR	LF1/4 1KQF-TP	TAMA
		2	R35. 73	RESISTOR	LF1/4 1.5KQF-TP	TAMA
		14	R2. 8. 21. 23. 24. 31. 44. 45. 49. 51. 62. 69. 82. 83	RESISTOR	LF1/4 2KQF-TP	TAMA
		1	R51	RESISTOR	LF1/4 3KQF-TP	TAMA
		10	R27. 28. 43. 40. 47. 48. 65. 66. 81. 84	RESISTOR	LF1/4 5.1KQF-TP	TAMA
		23	R7. 9. 19. 25. 26. 29. 34. 38. 60. 82. 84. 67. 72. 76	RESISTOR	LF1/4 10KQF-TP	TAMA
		2	R39. 77	RESISTOR	LF1/4 12KQF-TP	TAMA
		1	R1. 32. 33. 36. 37. 42. 70. 71. 74. 75. 80	RESISTOR	LF1/4 20KQF-TP	TAMA
		1	R6	RESISTOR	LF1/4 30KQF-TP	TAMA
		1	R52	RESISTOR	LF1/4 33KQF-TP	TAMA
		1	R4	RESISTOR	LF1/4 220KQF-TP	TAMA
		1	VR1	TRIMMER	3296W-1-204	BOURNS
		1	VR2	TRIMMER	3296W-1-103	BOURNS
		4	VR3. 5. 6. 8	TRIMMER	3296W-1-502	BOURNS
		2	VR4. 7	TRIMMER	3296W-1-104	BOURNS
		4	JP1. 2. 3. 4	JUMPER PIN	00-8261-023213-854	ELCO
		22	TP1-19. +15V. GND. -15V	CHECK PIN	00282-41	KYOUSHIN
		2	CN101. 102	CONNECTOR	57-40140-8	DDK
		1	TN101	TERMINAL	KD0021-10	KYOUSHIN
		2	L1. L2	COIL	SF-T10-50M	TDK

無誤 ヨシカク 100-10-30 検査法

署名 マエダ 100-10-31 天候


承認 マエダ 100-10-31 NTS

名称 MRFC-H フリップスイッチ


図番 KB111171

数量 1

株式会社 日立メディコ

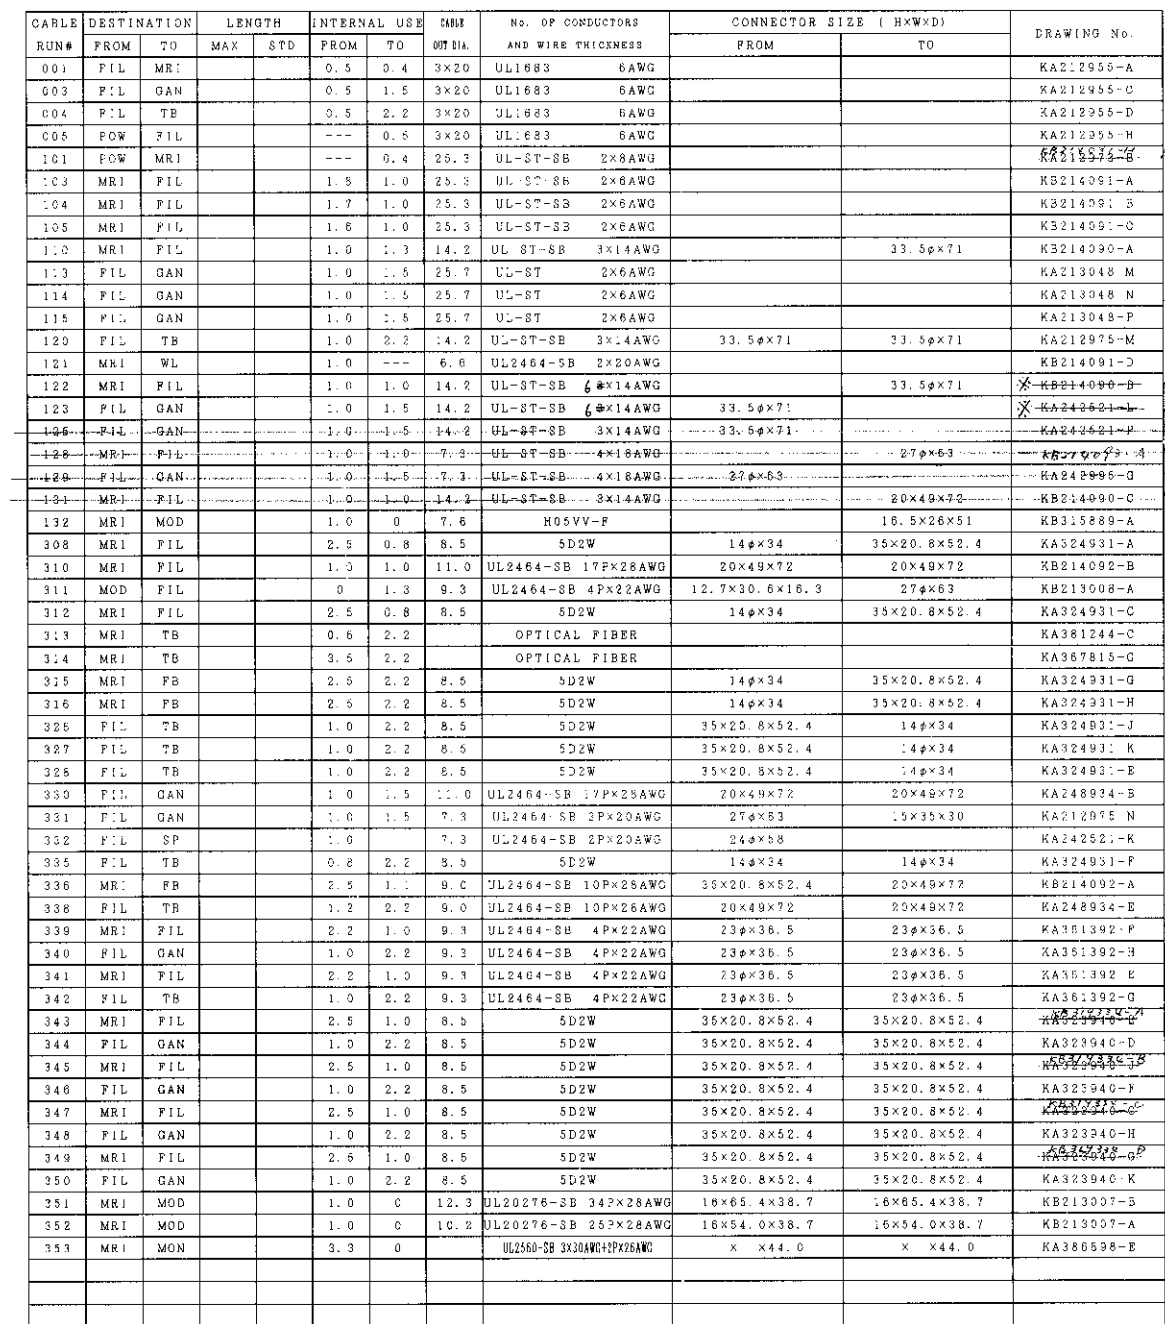


製品	2007 2007	図面番号	2007 2007	投影法	第一角法	名称	
審査				尺貫	入換	ガイケーブル ケットレス	
承認	2007	2007					
株式会社 日立メテコ						図番	KB111372
						校番	1

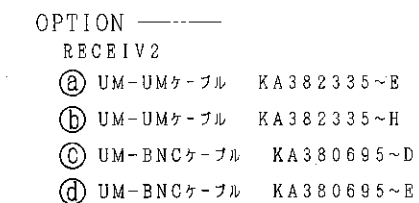[illegible]

NRF UNIT WIRING DIAGRAM

製図	ヤマモトミ	00.6.7	投影法		名称
著書	ヤマモトミ	00.6.7	尺度		
承認	マエタ	00.6.7	1:1		NRRユニットハイセンズ 図番
株式会社 日立メディコ					

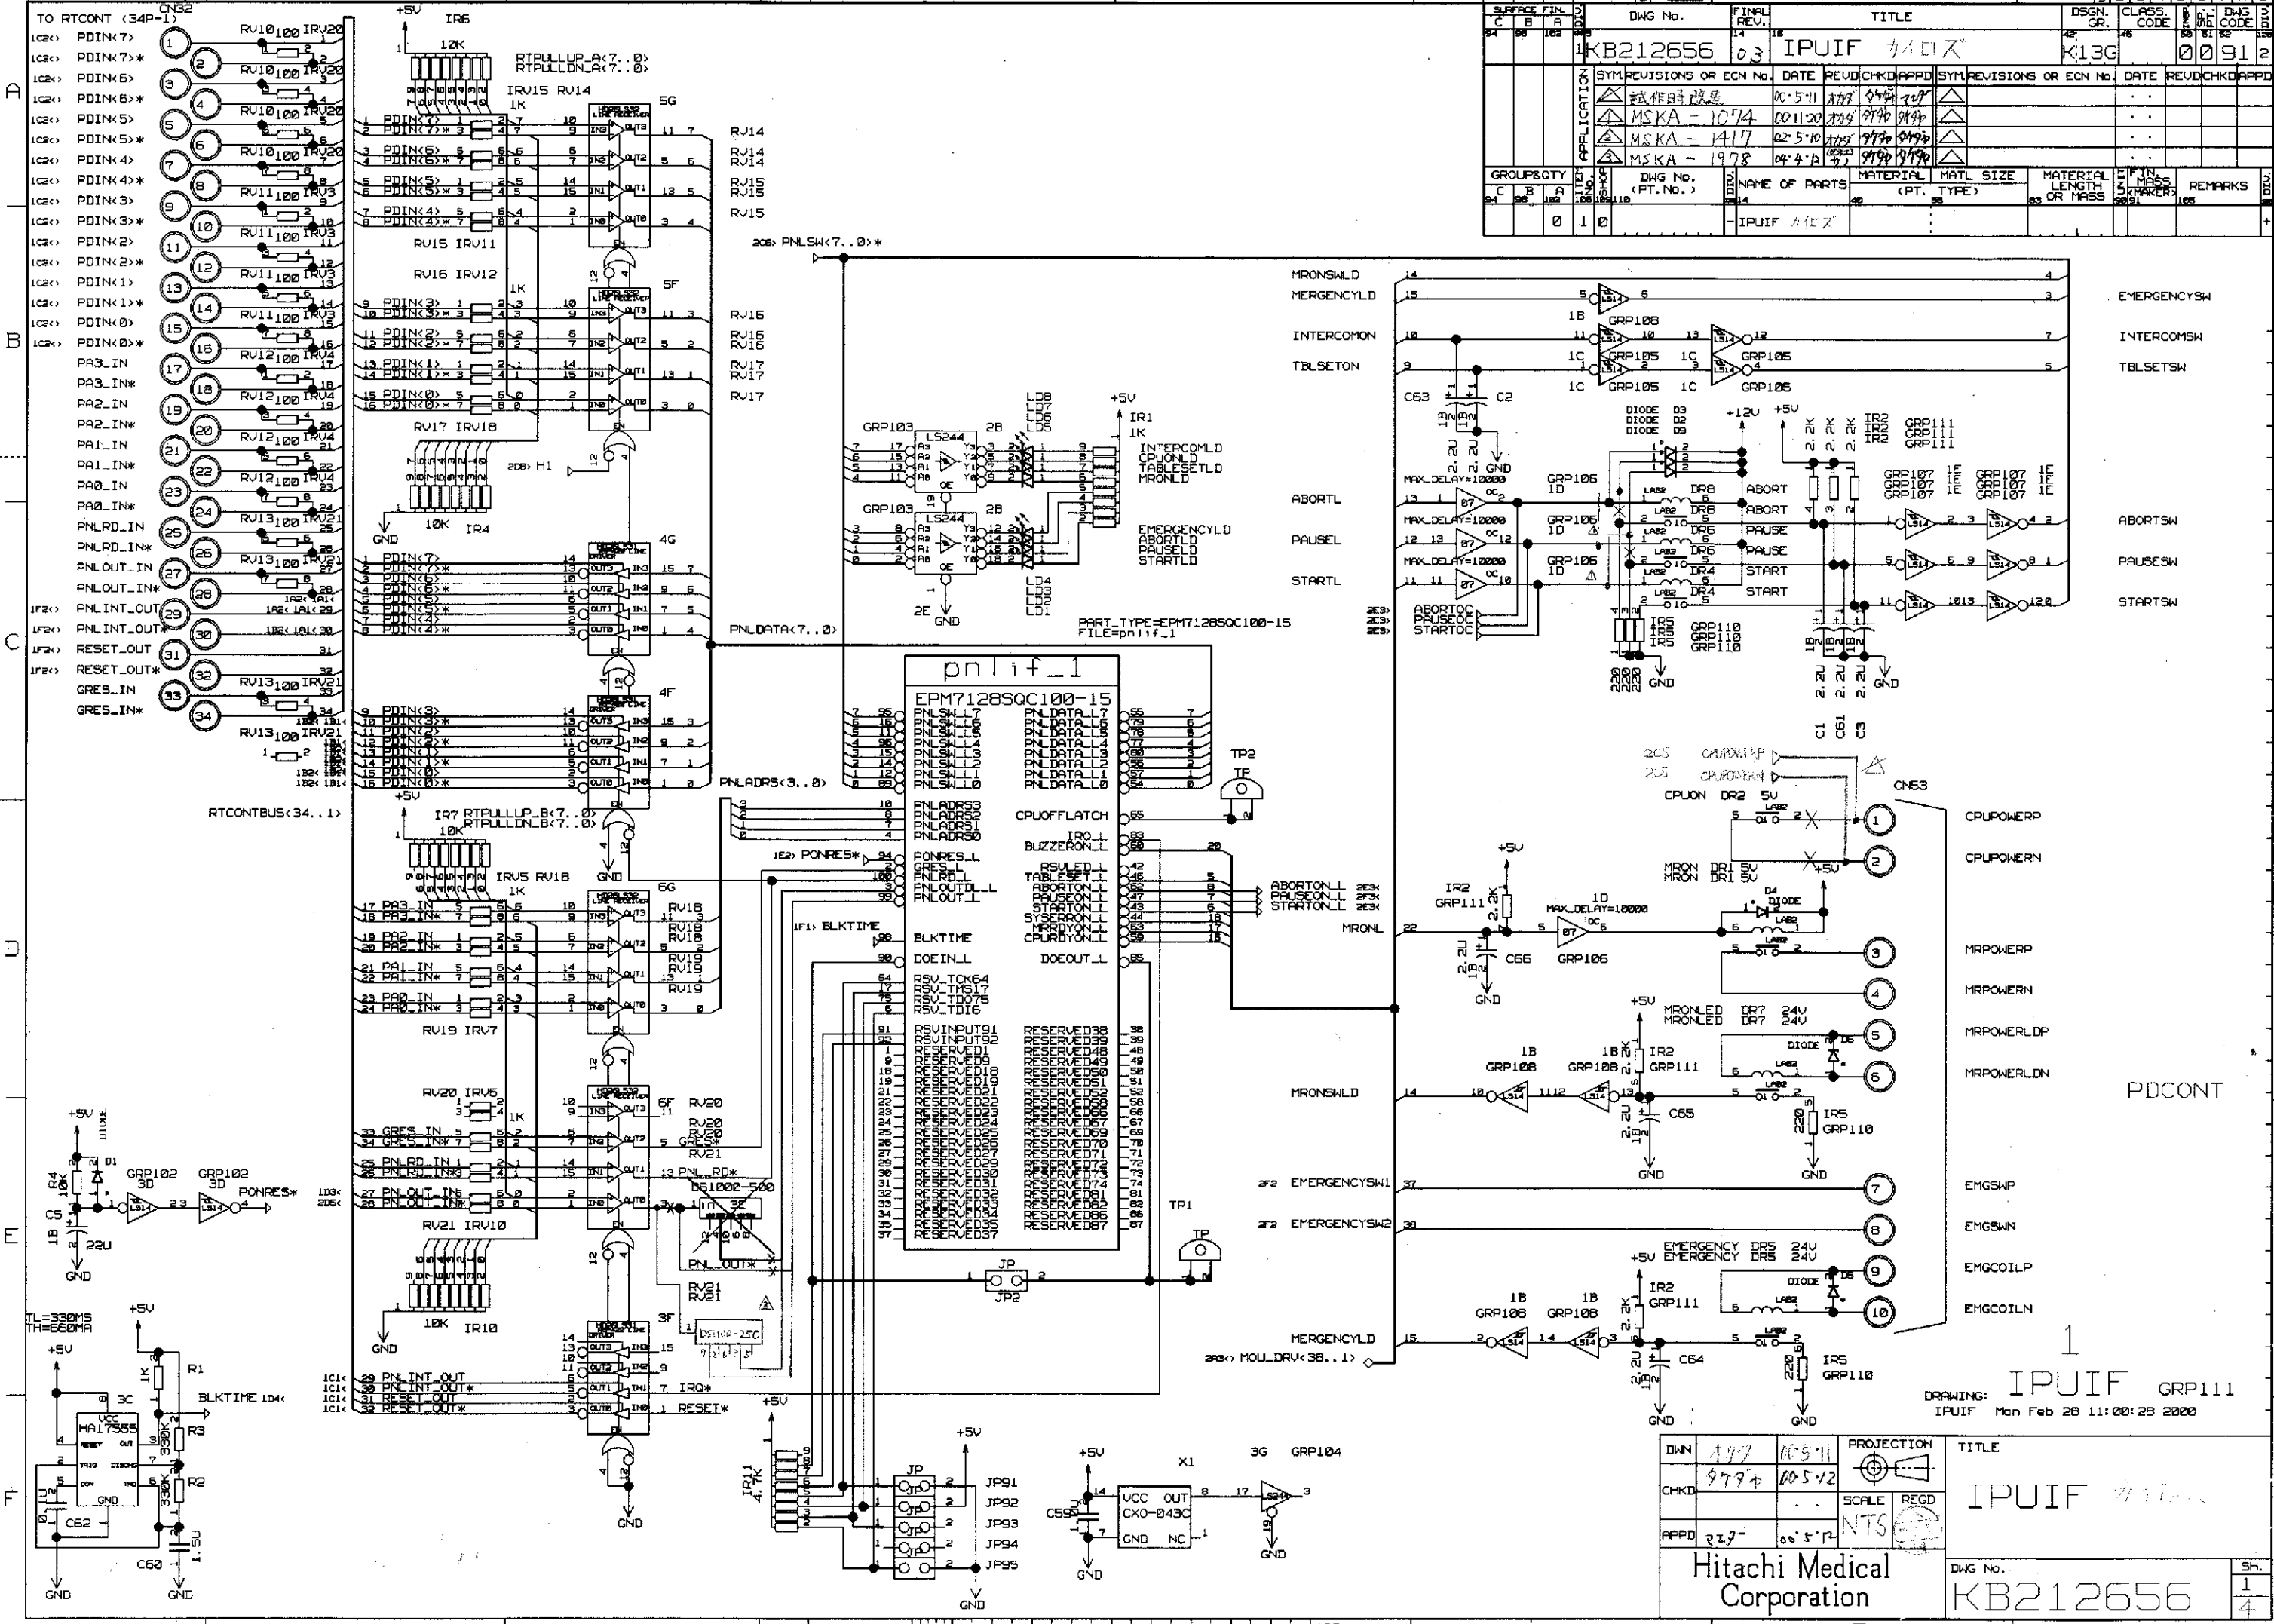



SYN REVISIONS OR ECH No.		DATE	REV	CHKD	APPD	SYN REVISIONS OR ECH No.		DATE	REV	CHKD	APPD
MSKA - 1074		00-5-11	177	979	979	MSKA - 1417		00-5-10	177	979	979
MSKA - 1978		04-4-18	979	979	979						

GROUP		DWG No.	NAME OF PARTS	MATERIAL	MATL SIZE	MATERIAL LENGTH OR MASS	FIN. MASS	REMARKS
0		1	IPUIF 410X					

DRAWING: IPUIF GRP111
IPUIF Mon Feb 28 11:00:28 2000

DWN		CHKD	APPD	PROJECTION	SCALE	REGD	TITLE		DWG No.	SH.
177		979	979	NTS			IPUIF 410X		KB212656	1
277										4

Hitachi Medical Corporation

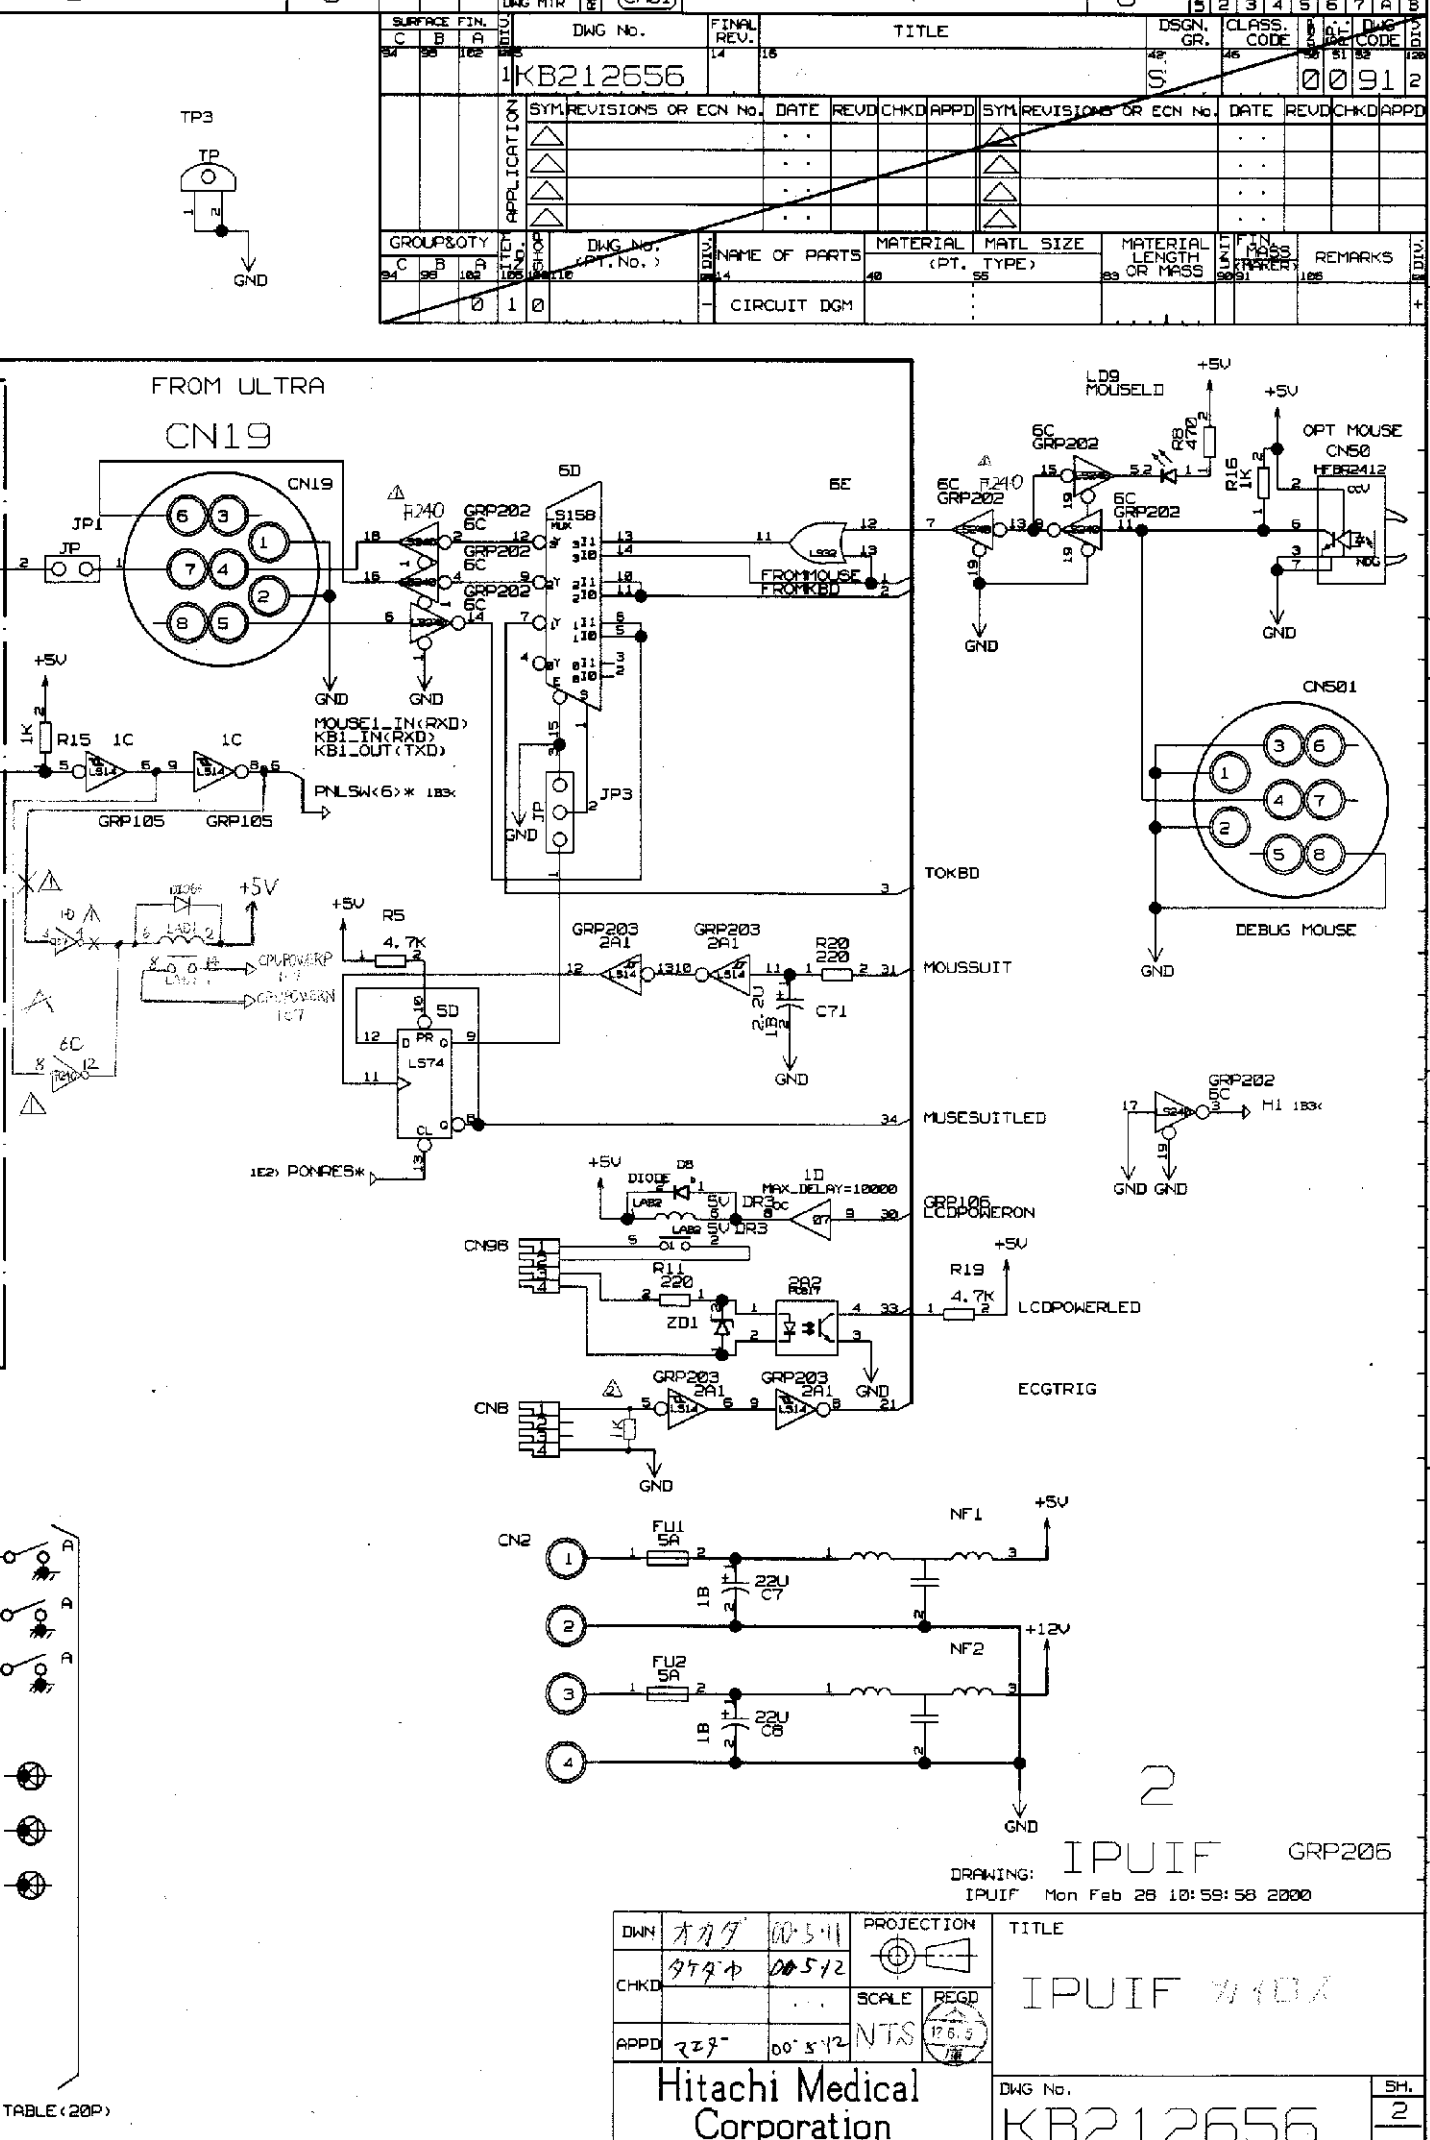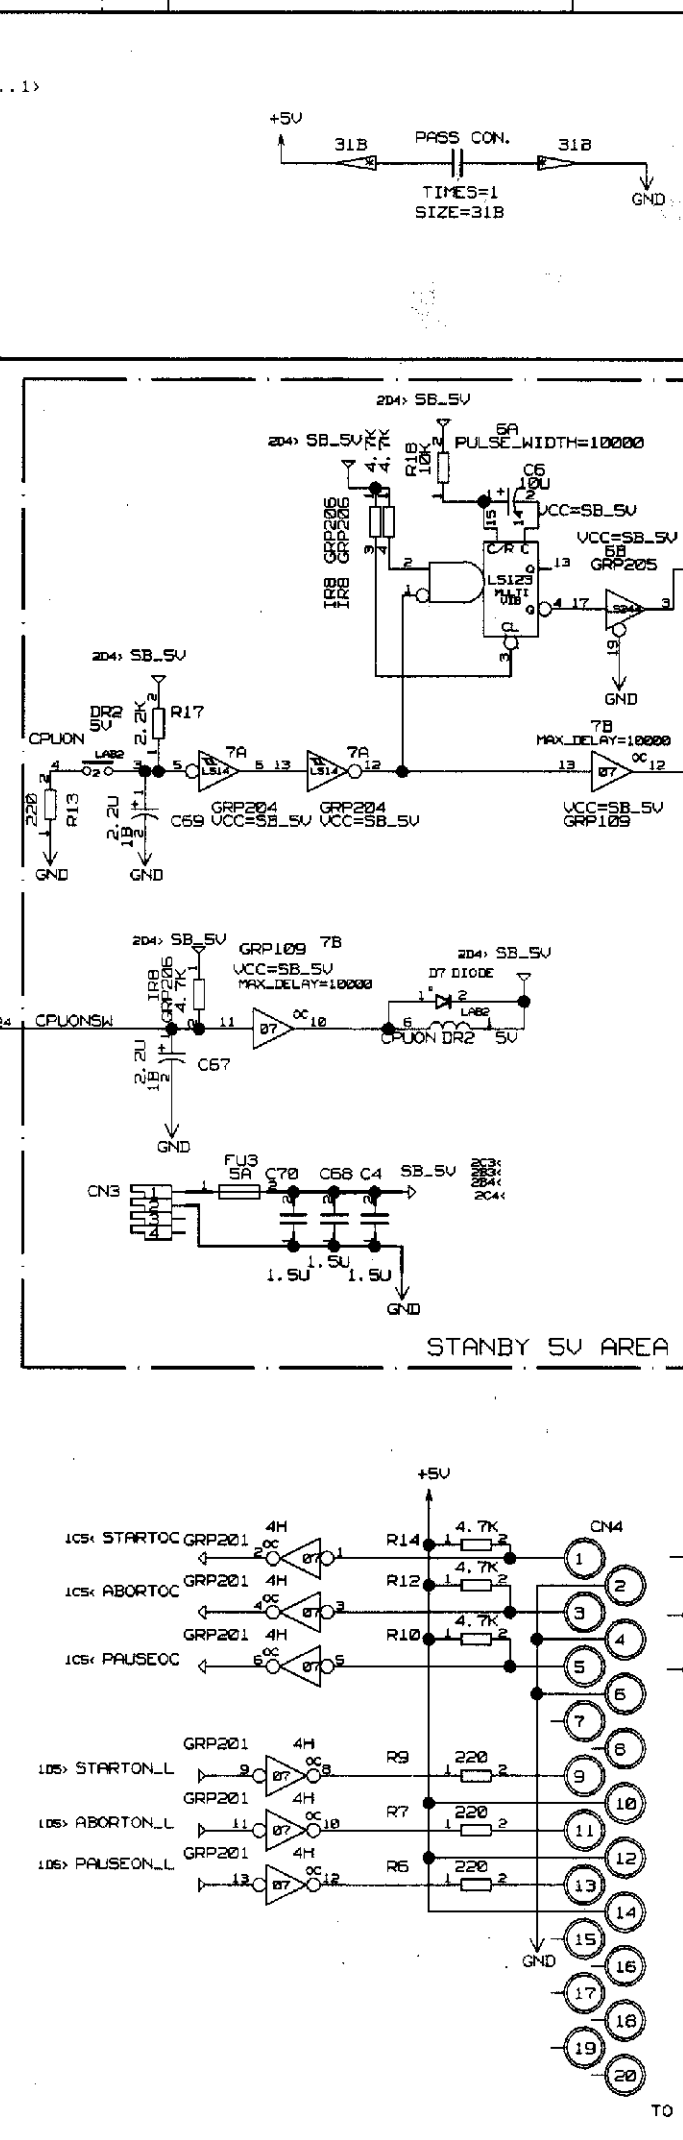

DWN	00541	PROJECTION	TITLE
CHKD	00542		IPUIF 740X
APPD	00542	SCALE REQD NTS 17.6.3	
Hitachi Medical Corporation			DWG No. KB212656
			SH. 2

DIALPGND.DAT

POWER AND GROUND LIST - 1 29-Dec-1999 10:20:18.00

DESIGNATOR	PART TYPE	GND	SELSV	VCC
1B	74LS14-1	7		14
1C	74LS14-1	7		14
1D	7407-1	7		14
1E	74LS14-1	7		14
2B	74LS244-1	10		20
2E	PNLIF_1-1	13		5
		28		20
		40		36
		45		41
		61		53
		76		68
		88		84
		97		93
3B	HD26LS32-1	8		16
3D	74LS14-1	7		14
3E	BS100-500-1	7		14
3F	HD26LS31-1	8		16
3G	74LS244-1	10		20
4B	HD26LS32-1	8		16
4D	HD26LS31-1	8		16
4E	HD26LS31-1	8		16
4F	HD26LS31-1	8		16
4G	HD26LS31-1	8		16
4H	7407-1	7		14
5B	HD26LS32-1	8		16
5C	HD26LS31-1	8		16
5D	74LS74-1	7		14
5F	HD26LS32-1	8		16
5G	HD26LS32-1	8		16
5A	74LS123-1	8	16	
5B	74LS244-1	10	20	
5C	74LS240-1	10		20
5D	74LS158-1	8		16
5E	74LS32-1	7		14
5F	HD26LS32-1	8		16
6G	HD26LS32-1	8		16
7A	74LS14-1	7	14	
7B	7407-1	7	14	
2A1	74LS14-1	7		14
4C1	HD26LS31-1	8		16
4C2	HD26LS31-1	8		16

END POWER AND GROUND LIST

CREFSIGNALS.DAT

ABORTLEDN	202<>	RESET *	1F3<
ABORTLEDP	202<>	RESET_OUT	1F2<> 1C1<
ABORTLN	2B2<	RESET_OUT *	1F2<> 1C1<
ABORTLP	2B2<	RTCONTBUS <34..1>	1D1
ABORTOC	2E3< 1C5<	RTPULLDN_A <7..0>	1A3
ABORTONLL	1D5< 2E3<	RTPULLDN_B <7..0>	1D2
BLKTIME	1F1< 1D4<	RTPULLUP_A <7..0>	1A3
BUZZERE	2F2<>	RTPULLUP_B <7..0>	1D2
BUZZERP	2F2<>	SELSV	2D4< 2B3< 2B4< 2C3< 2C4<
CPUNSW	2C3< 2F2	STARTLEDN	2D2<>
CPUREADYLEDN	2E2<>	STARTLEDP	2D2<>
CPUREADYLEDP	2E2<>	STARTLN	2B2<
ECGTRIG	2D7<	STARTLP	2B2<
ECGTRIGN	2F2<>	STARTOC	2E3< 1C5<
ECGTRIGP	2F2<>	STARTONLL	1D5< 2E3<
EMERGENCYSW1	1E5< 2F2	SYSEARLEDN	2E2<>
EMERGENCYSW2	1E5< 2F2	SYSEARLEDP	2E2<>
FROMKBD	2B7<	TBLSETLEDN	2D2<>
FROMKBDN	2A2<	TBLSETLEDP	2D2<>
FROMKBDP	2A2<	TBLSETONN	2C2<
FROMMOUSE	2B7<	TBLSETONP	2C2<
FROMMOUSEN	2A2<	TOKBD	2C7<
FROMMOUSEP	2A2<	TOKBDN	2C2<>
FROMPONN	2B2<	TOKBDP	2C2<>
FROMPONP	2A2<	TO_MOU <68..1>	2A1
GRES *	1E3<>		
GRES_IN	1C1< 1E2<		
GRES_IN *	1C1< 1E2<		
H1	2D8< 1B3<		
INTERCOMONN	2C2<		
INTERCOMONP	2C2<		
IRO *	1F3<>		
KB1_IN<RXD>	2C5<>		
KB1_OUT<TXD>	2C5<>		
LCDPOWERLED	2D7<		
LCDPOWERLEDN	2E2<>		
LCDPOWERLEDP	2E2<>		
LCDPOWERON	2D7<		
LCDPOWERONLN	2C2<		
LCDPOWERONLP	2C2<		
MERGENCELEDN	2E2<>		
MERGENCELEDP	2E2<>		
MOUPULLDN <11..0>	2A2		
MOUPULLUP <11..0>	2A2		
MOUSE1_IN<RXD>	2C5<>		
MOUSSUIT	2C7<		
MOUSSUITN	2C2<		
MOUSSUITP	2C2<		
MOULDRV <38..1>	1E5<> 2A3<>		
MRONLN	2B2<		
MRONLP	2B2<		
MRONSALEDN	2E2<>		
MRONSALEDP	2E2<>		
MREADYLEDN	2E2<>		
MREADYLEDP	2E2<>		
MUSESUITLED	2D7<		
MUSESUITLEDN	2E2<>		
MUSESUITLEDP	2E2<>		
PA0_IN	1B1< 1D2<		
PA0_IN *	1C1< 1D2<		
PA1_IN	1B1< 1D2<		
PA1_IN *	1B1< 1D2<		
PA2_IN	1B1< 1D2<		
PA2_IN *	1B1< 1D2<		
PA3_IN	1B1< 1D2<		
PA3_IN *	1B1< 1D2<		
PAUSELEDN	2D2<>		
PAUSELEDP	2D2<>		
PAUSELN	2B2<		
PAUSELP	2B2<		
PAUSEOC	2E3< 1C5<		
PAUSEONLL	1D5< 2F3<		
PDIN <7..0>	1C2<> 1A1< 1A2< 1B1< 1B2<		
PDIN <7..0> *	1C2<> 1A1< 1A2< 1B1< 1B2<		
PNLADRS <3..0>	1C3		
PNLDATA <7..0>	1C3		
PNLINT_OUT	1F2<> 1C1<		
PNLINT_OUT *	1F2<> 1C1<		
PNLOUT_IN	1C1< 1E2<		
PNLOUT_IN *	1C1< 1E2<		
PNLRD_IN	1C1< 1E2<		
PNLRD_IN *	1C1< 1E2<		
PNLSW <7..0> *	2C5< 1B3<		
PNL_OUT *	1E3<>		
PNL_RD *	1E3<>		
PONRES *	1E2< 1D3< 2D5<		

SURFACE FIN.		Dwg No.		FINAL REV.		TITLE		DSGN. GR.		CLASS. CODE		Dwg No.			
C	B	A	D	1	2	3	4	5	6	7	8	9	10		
1	2	3	4	5	6	7	8	9	10	11	12	13	14		
1KB212656															
SYN REVISIONS OR ECN No.				DATE		REVDCHECKD APPD		SYN REVISIONS OR ECN No.				DATE		REVDCHECKD APPD	
1				10/10/16				1				10/10/16			
GROUP & QTY				Dwg No.		NAME OF PARTS		MATERIAL		MATL SIZE		MATERIAL LENGTH OR MASS		REMARKS	
1				10/10/16		CIRCUIT DGM									

3

IPUIF

DRAWING: IPUIF Mon Feb 28 10:58:01 2020

DWN	CHKD	APPD	PROJECTION	SCALE	REGD	TITLE	DWG No.	SH.
7/7/9	8/4/9	7/7/9	00.5.11	00.5.12	00.5.12	IPUIF 7/10/7	KB212656	3
Hitachi Medical Corporation								

CREFPARTS. DAT

1B	LS14	1B6 1D6 1D6 1E6	IR1	RA	1B5
1C	LS14	1B6 2C5	IR2	RA	1B7 1D6 1D6 1E6
1D	Ø7	1B6 1C6 1D6 2D7	IR3	RA	2A2
1E	LS14	1B7 1B8	IR4	RA	1C2
2A1	LS14	2C6 2C7 2D7	IR5	RA	1C6 1E7
2A2	PC817	2D7	IR6	RA	1A2
2B	LS244	1B4 1C4	IR7	RA	1D2
2E	PNLIF_1	1C4	IR8	RA	2B4 2C3
3B	HD26LS32	2B3	IR9	RA	2A2
3C	HA17555	1F1	IR10	RA	1E2
3D	LS14	1E1	IR11	RA	1F3
3E	DS1000_500	1E3	IR12	RA	2C2
3F	HD26LS31	1E3	IR13	RA	2C2
3G	LS244	1F5	IRV1	RAV	2B2 2B3
4B	HD26LS32	2B3	IRV2	RAV	2B1 2C1 2D1
4C1	HD26LS31	2C3	IRV3	RAV	1A2 1B2
4C2	HD26LS31	2E3	IRV4	RAV	1B2
4D	HD26LS31	2D3	IRV5	RAV	1D2 1D3
4E	HD26LS31	2E3	IRV6	RAV	1D2 1D3 1E3
4F	HD26LS31	1C3	IRV7	RAV	1D2 1D3
4G	HD26LS31	1C3	IRV8	RAV	2B2 2B3
4H	Ø7	2E4 2F4	IRV9	RAV	2B2 2C3
5B	HD26LS32	2A3	IRV10	RAV	1E2 1E3
5C	HD26LS31	2D3	IRV11	RAV	1A3 1B2
5D	LS74	2C6	IRV12	RAV	1B2 1B3
5F	HD26LS32	1B3	IRV13	RAV	2A2 2A3
5G	HD26LS32	1A3	IRV14	RAV	2C2 2C3
6A	LS123	2B4	IRV15	RAV	1A3
6B	LS244	2B5	IRV16	RAV	2A1 2E1
6C	LS240	2B6 2B6 2B6 2B7 2B7 2B8 2D8	IRV17	RAV	2B2 2B3
6D	LS158	2B6	IRV18	RAV	1B2 1B3
6E	LS32	2B7	IRV19	RAV	2B1 2E1
6F	HD26LS32	1E3	IRV20	RAV	1A2
6G	HD26LS32	1D3	IRV21	RAV	1C2
7A	LS14	2C4	JP1	JP2	2B5
7B	Ø7	2C4 2C5	JP2	JP2	1E4
C1	CAP2A	1C7	JP3	JP3	2C6
C2	CAP2A	1B6	JP91	JP2	1F4
C3	CAP2A	1C7	JP92	JP2	1F4
C4	CAP_LEAD	2D4	JP93	JP2	1F4
C5	CAP2	1E1	JP94	JP2	1F4
C6	CAP2	2B4	JP95	JP2	1F4
C7	CAP2	2E7	LD1	LED	1C4
C8	CAP2	2E7	LD2	LED	1C4
C9	CAP_LEAD	1F4	LD3	LED	1C4
C10	CAP_LEAD	1F1	LD4	LED	1C4
C11	CAP2A	1C7	LD5	LED	1B4
C12	CAP_LEAD	1F1	LD6	LED	1B4
C13	CAP2A	1B5	LD7	LED	1B4
C14	CAP2A	1E6	LD8	LED	1B4
C15	CAP2A	1E6	LD9	LED	2B8
C16	CAP2A	1D6	NF1	LC	2E7
C17	CAP2A	2C4	NF2	LC	2E7
C18	CAP_LEAD	2D4	R1	RESIL-LEAD	1E1
C19	CAP2A	2C3	R2	RESIL-LEAD	1F1
C20	CAP_LEAD	2D4	R3	RESIL-LEAD	1F1
C21	CAP2A	2C7	R4	RESIL-LEAD	1E1
CN1	HIF668DS	2A1 2B1 2C1 2D1 2D1 2E1 2E1 2F1	R5	RESIL-LEAD	2C6
CN2	D3100S_4	2E6	R6	RESIL-LEAD	2F4
CN3	MODU2-4P-S	2D3	R7	RESIL-LEAD	2E4
CN4	CON20	2E5 2F5	R8	RESIL-LEAD	2B8
CN5	MODU2-4P-S	2D6	R9	RESIL-LEAD	2E4
CN19	CON8	2B6	R10	RESIL-LEAD	2E4
CN32	CON34	1A1 1A1 1A1 1B1 1B1 1B1 1C1 1C1	R11	RESIL-LEAD	2D6
CN50	HFB2412	2B8	R12	RESIL-LEAD	2E4
CN53	CON10	1C7 1D7 1D7 1E7	R13	RESIL-LEAD	2C3
CN98	MODU2-4P-S	2D6	R14	RESIL-LEAD	2E4
CN501	CON8	2C8	R15	RESIL-LEAD	2C5
D1	DIODE	1E1	R16	RESIL-LEAD	2B8
D2	DIODE	1B6	R17	RESIL-LEAD	2C3
D3	DIODE	1B6	R18	RESIL-LEAD	2B4
D4	DIODE	1D7	R19	RESIL-LEAD	2D7
D5	DIODE	1E7	R20	RESIL-LEAD	2C7
D6	DIODE	1D7	TP1	TP2MR	1E5
D7	DIODE	2C4	TP2	TP2MR	1C5
D8	DIODE	2D6	TP3	TP2MR	2A5
D9	DIODE	1B6	X1	CXO-Ø43C	1F5
DR1	LAB2	1D6	ZD1	ZENERDIODE	2D6
DR2	LAB2	1C7 2C3 2C4			
DR3	LAB2	2D7			
DR4	LAB2	1C6			
DR5	LAB2	1E7			
DR6	LAB2	1C6			
DR7	LAB2	1D7			
DR8	LAB2	1B6 1C6			
FU1	FUSE	2E6			
FU2	FUSE	2E6			
FU3	FUSE	2D4			

PRINT. PT.	CA01	DWG No.	1KB212656	TITLE	IPUIF	DSGN. GR.	S	CLASS. CODE	00912
DWG MTR		SYN REVISIONS OR ECH No.		DATE		REV'D	CHK'D	APP'D	
		SYN REVISIONS OR ECH No.		DATE		REV'D	CHK'D	APP'D	
		SYN REVISIONS OR ECH No.		DATE		REV'D	CHK'D	APP'D	
		SYN REVISIONS OR ECH No.		DATE		REV'D	CHK'D	APP'D	
GROUP & QTY		DWG No.		NAME OF PARTS		MATERIAL	MATL SIZE	MATERIAL LENGTH OR MASS	REMARKS
		(PT. No.)				(PT. TYPE)			
				CIRCUIT DGM					

PSTRPRT. DAT

- SPARES LIST -


7407-1 7B-8, 7B-5, 7B-3, 7B-1
7407-1 1B-3
74LS123-1 6A-5
74LS14-1 7A-10, 7A-8, 7A-3, 7A-1
74LS14-1 1B-6, 3D-12, 3D-10, 3D-6, 3D-5, 2A1-3, 2A1-1
74LS240-1 6C-8
74LS244-1 6B-5, 6B-7, 6B-9, 6B-8, 6B-6, 6B-4, 6B-2
74LS244-1 3G-5, 3G-7, 3G-9, 3G-8, 3G-6, 3G-4, 3G-2
74LS32-1 6E-8, 6E-4, 6E-1
74LS74-1 5D-1
EXB-F9C-1 IR2-9, IR2-8, IR5-9, IR5-8, IR5-7, IR8-9, IR8-8, IR8-7,
IR8-6, IR8-5
LAB2-1 DR6-3, DR6-3, DR4-3, DR1-3, DR7-3, DR5-3, DR3-3

- PART SUMMARY -

7407-1	J4130007	HD74LS07P	1
7407-1	J4130007	HD74LS07P	2
74LS123-1	J4120319	HD74LS123P	1
74LS14-1	J4120306	HD74LS14P	1
74LS14-1	J4120306	HD74LS14P	5
74LS158-1	J4139158	HD74LS158P	1
74LS240-1	J4120625	HD74LS240P	1
74LS244-1	J4120626	HD74LS244P	1
74LS244-1	J4120626	HD74LS244P	2
74LS32-1	J4120310	HD74LS32P	1
74LS74-1	J4120316	HD74LS74P	1
CAP2-1	J1447XXX	URS_OR_USA_SERI	4
CAP2A-1	J1447101	USA-1H-2R2MCA-1	11
CAP_LEAD-1	J171XXXX	SR SERIES	6
CON10-1	J8334607	HIF3BDL10P_2.54	1
CON20-1	J8334531	HIF5_20PA_1.27D	1
CON34-1	J8334532	HIF534PA1.27DSA	1
CON8-1	J833A119	TC57930L18_401	2
CXO-Ø43C-1	K730114X	SCO-Ø20_SERIES	1
D3100S_4-1	J833A209	I-178314-2	1
DIODE-1	J3127501	1S2074HRE	9
EXB-F9C-1	J2314181	M8_3_101J(3T)	21
EXB-F9C-1	J2314XXX	EXB-F9C_SERIES	13
FUSE-1	J821A015	55FRF003(5A)	3
HA17555PS-1	J4191401	HA17555PS	1
HD26LS31-1	J4172101	AM26LS31PC	6
HD26LS32-1	J4172103	AM26LS32PC	7
HFB2412-1	J838A003	HFB2412	1
HIF668DS-1	J833A278	HIF-5-68PA-1.27	1
JP2-1	J8339658	DIC-149-2P	7
JP3-1	J8339659	DIC1493P	1
LAB2-1	K12311XX	LAB2	8
LC-1	J8811202	D5S310-S5D2235	2
LED-1	H9220015	LT3K8B	9
MODU2-4P-S-1	J8331321	2B1916-2(STRAIG	3
PASCON-1	J1717001	PRE123-901F155Z	31
PC817-1	J3331014	PC817B	1
PNLIF_1-1	H421A041	EPM712850C100-1	1
RESIL-LEAD-1	J231XXXX	LF1/4 SERIES	20
TP2MR-1	J8361921	ØØ292-41	3
ZENERDIODE-1	J3140023	RØ8.2E	1
Total			197

DRAWING: IPUIF
IPUIF Mon Feb 28 10:57:02 2020

DWG No.	1KB212656	Sh.	4e
CHKD	7494	00.5.12	PROJECTION
APPD	7494	00.5.12	SCALE
Hitachi Medical Corporation		TITLE	
		IPUIF 7410%	

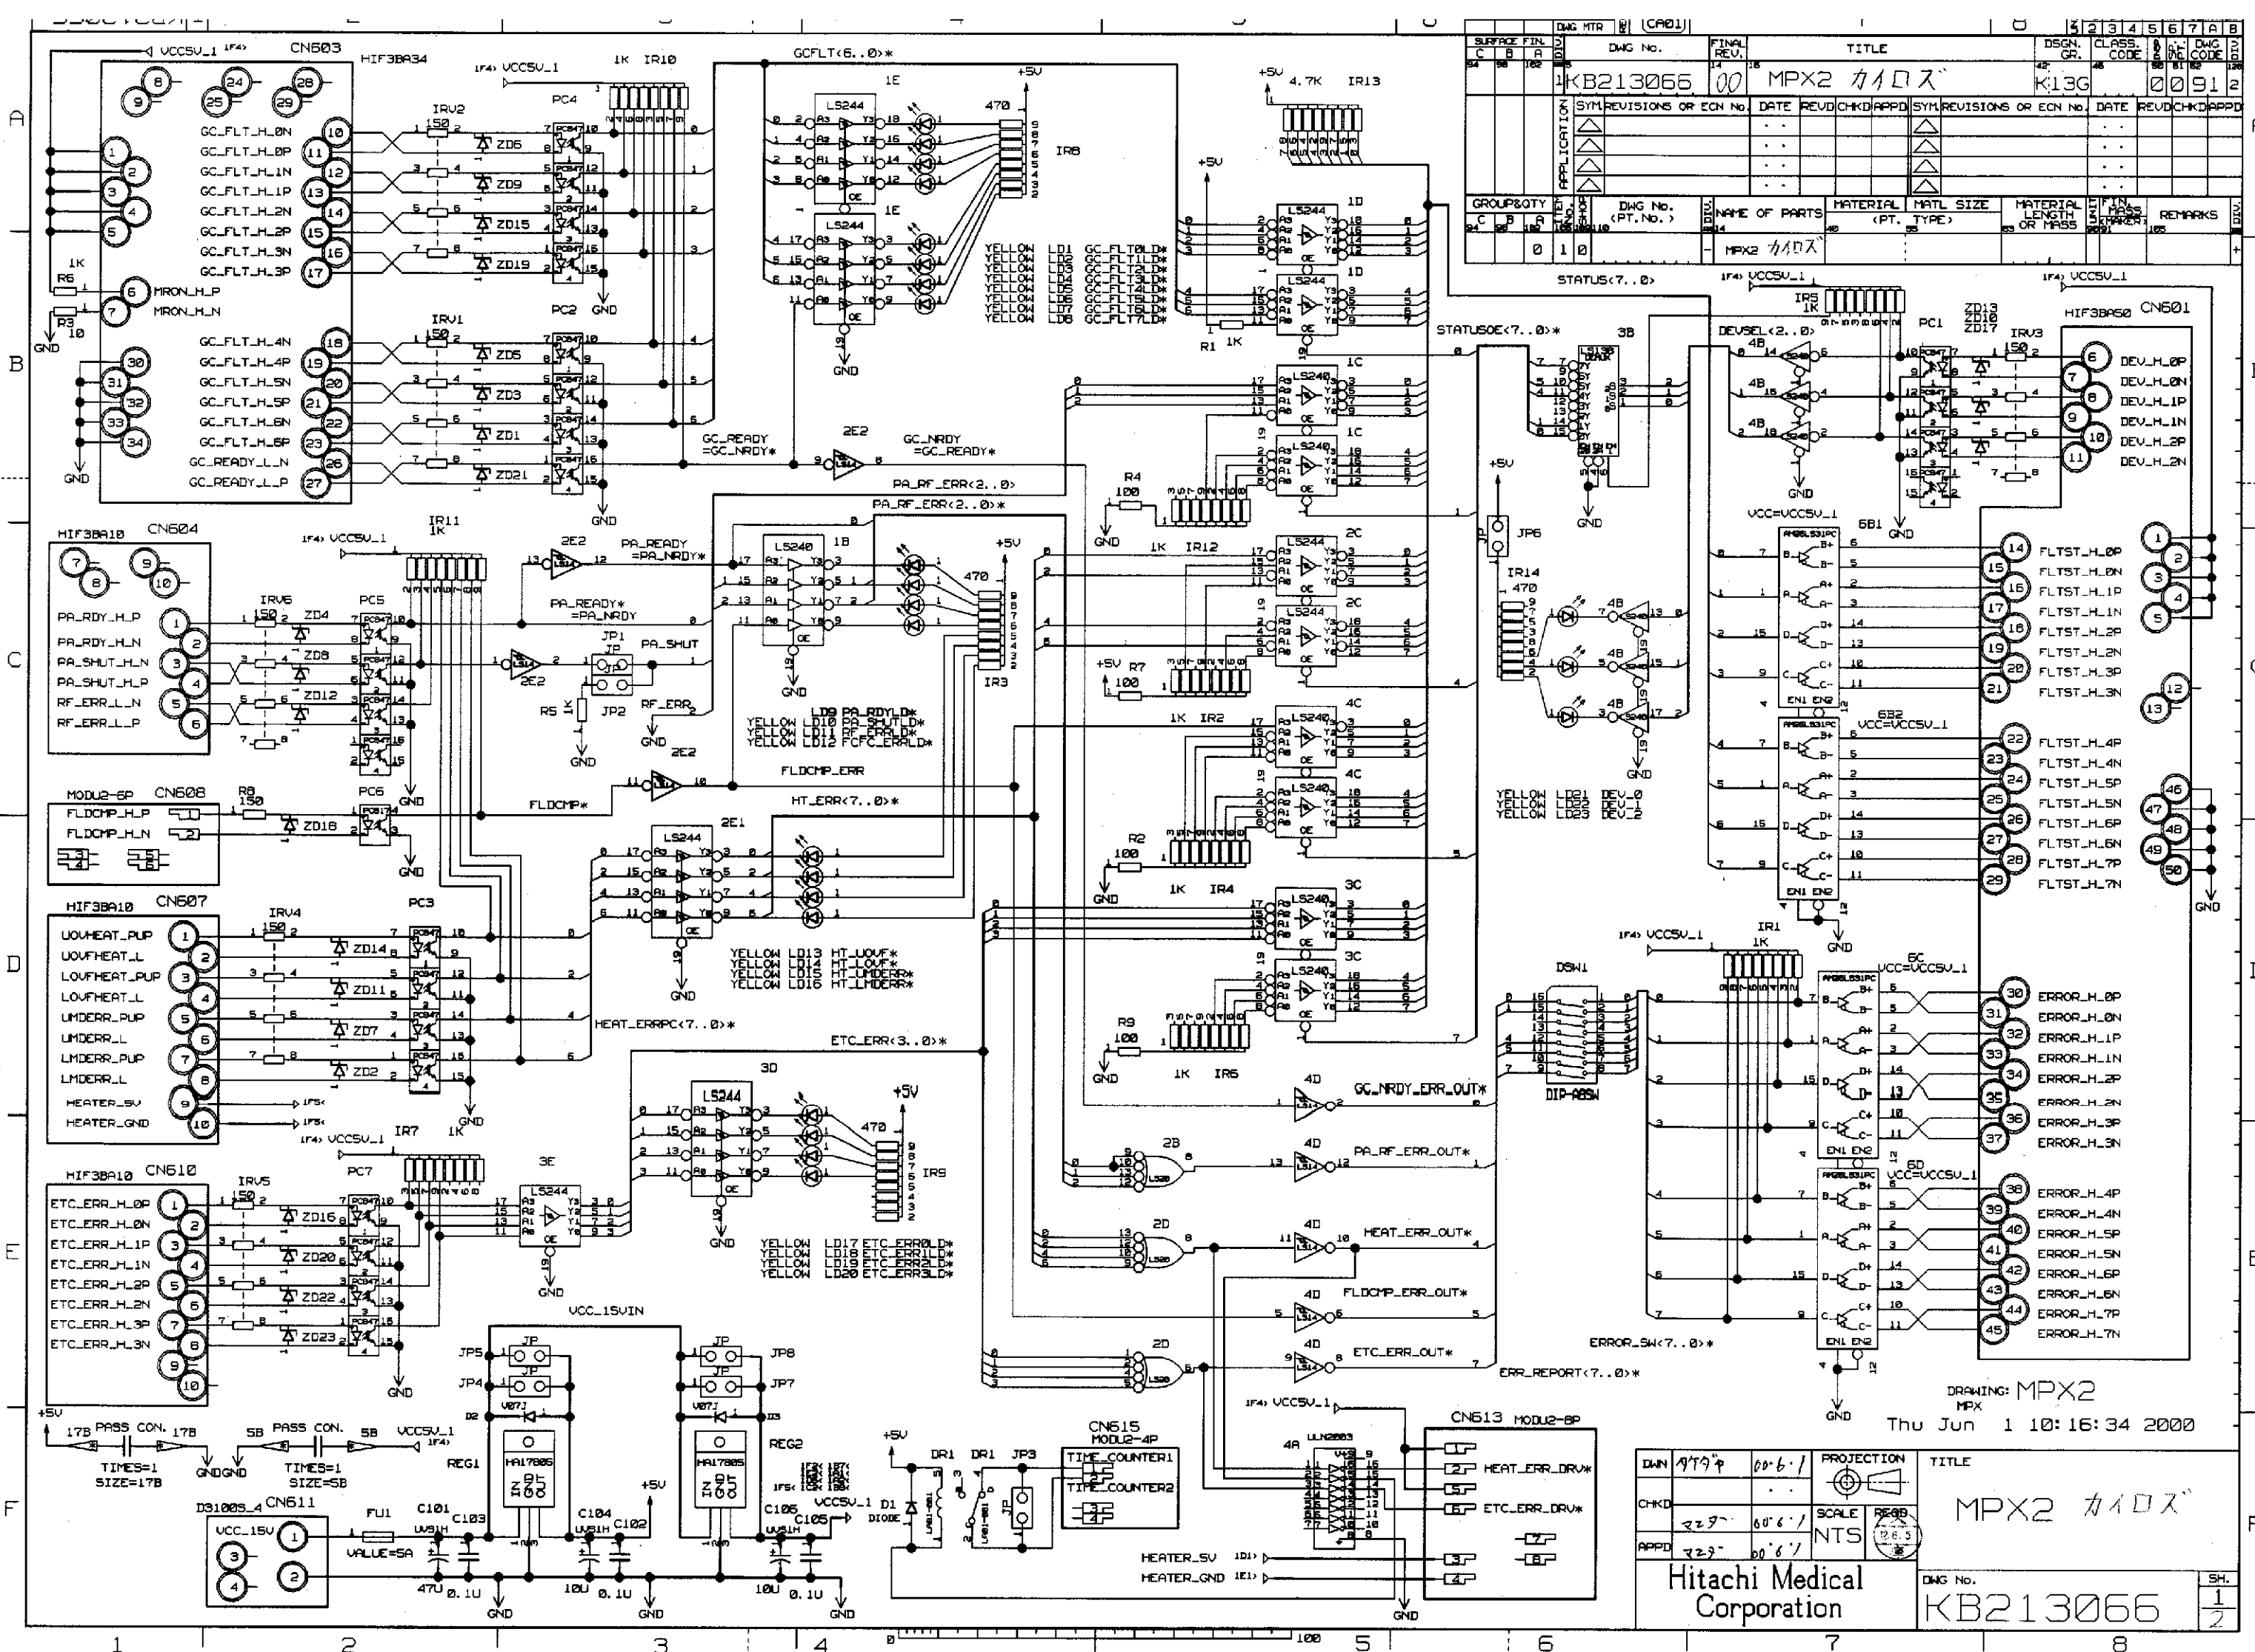

CONNECTOR

BODY ORDERED NET LIST - 1 27-Dec-1999 15:53:51.00

BODY ORDERED NET LIST - 1 27-Dec-1999 15:55:51.00	
CN501	HIF3-50DS-1
1	VCC5V1
2	VCC5V1
3	VCC5V1
4	VCC5V1
5	VCC5V1
6	DEUH2P
7	DEUH2N
8	DEUH1P
9	DEUH1N
10	DEUH2P
11	DEUH2N
12	NC
13	NC
14	FLTSTH0
15	FLTSTH0
16	FLTSTH1
17	FLTSTH1
18	FLTSTH2
19	FLTSTH2
20	FLTSTH3
21	FLTSTH3
22	FLTSTH4
23	FLTSTH4
24	FLTSTH5
25	FLTSTH5
26	FLTSTH6
27	FLTSTH6
28	FLTSTH7
29	FLTSTH7
30	ERRORH0
31	ERRORH0
32	ERRORH1
33	ERRORH1
34	ERRORH2
35	ERRORH2
36	ERRORH3
37	ERRORH3
38	ERRORH4
39	ERRORH4
40	ERRORH5
41	ERRORH5
42	ERRORH6
43	ERRORH6
44	ERRORH7
45	ERRORH7
46	GND
47	GND
48	GND
49	GND
50	GND
CN503	HIF3-34DS-1
1	VCC5V1
2	VCC5V1
3	VCC5V1
4	VCC5V1
5	VCC5V1
6	MRONHP
7	MRONHN
8	NC
9	NC
10	GCFLTTH0
11	GCFLTTH0
12	GCFLTTH1
13	GCFLTTH1
14	GCFLTTH2
15	GCFLTTH2
16	GCFLTTH3
17	GCFLTTH3
18	GCFLTTH4
19	GCFLTTH4
20	GCFLTTH5
21	GCFLTTH5
22	GCFLTTH6
23	GCFLTTH6
24	NC
25	NC
26	GCREADY1
27	GCREADY1
28	NC
29	NC
30	GND
31	GND
32	GND
33	GND
34	GND

1	PARDYHP	JP1	JP2-1	1	N1JP2187PP20
2	PARDYHN			2	PASHUT
3	PASHUTHN	JP2	JP2-1	1	N1JP2186PP20
4	PASHUTHP			2	PASHUT
5	RFERRLN	JP3	JP2-1	1	TIMECOUNTER2
6	RFERRLP			2	TIMECOUNTER1
7	NC	JP4	JP2-1	1	VCC15VIN
8	NC			2	VCC
9	NC	JP5	JP2-1	1	VCC15VIN
10	NC			2	VCC
1	UOVHEATPUP	JP6	JP2-1	1	N1R697PCMH10
2	UOVHEATL			2	VCC
3	LOVFHEATPUP	JP7	JP2-1	1	VCC15VIN
4	LOVFHEATL			2	VCCSV1
5	UMDERRPUP	JP8	JP2-1	1	VCC15VIN
6	UMDERRL			2	VCCSV1
7	LMDERRPUP	LD1	LED-1	1	GCFLT0LDL
8	LMDERRL	LD2	LED-1	1	GCFLT1LDL
9	HEATERSV	LD3	LED-1	1	GCFLT2LDL
10	HEATERGND	LD4	LED-1	1	GCFLT3LDL
1	FLDCMHP	LD5	LED-1	1	GCFLT4LDL
2	FLDCMHPN	LD6	LED-1	1	GCFLT5LDL
3	NC	LD7	LED-1	1	GCFLT6LDL
4	NC	LD8	LED-1	1	GCFLT7LDL
5	NC	LD9	LED-1	1	PARDYLDL
6	NC	LD10	LED-1	1	PASHUTLDL
1	ETCERRH0P	LD11	LED-1	1	RFERRLDL
2	ETCERRH0N	LD12	LED-1	1	FCFCERRLDL
3	ETCERRH1P	LD13	LED-1	1	HTUOVFL
4	ETCERRH1N	LD14	LED-1	1	HTLOVFL
5	ETCERRH2P	LD15	LED-1	1	HTLUMDERRL
6	ETCERRH2N	LD16	LED-1	1	HTLMDERRL
7	ETCERRH3P	LD17	LED-1	1	ETCERR0LDL
8	ETCERRH3N	LD18	LED-1	1	ETCERR1LDL
9	NC	LD19	LED-1	1	ETCERR2LDL
10	NC	LD20	LED-1	1	ETCERR3LDL
1	VCC15V	LD21	LED-1	1	DEV0
2	GND	LD22	LED-1	1	DEV1
3	NC	LD23	LED-1	1	DEV2

- SPARES LIST -

- PART SUMMARY -

74LS138-1	J4120520	1
74LS14-1	J4120306	2
74LS20-1	J4120307	2
74LS240-1	J4120525	5
74LS244-1	J4120525	6
AM26LS31PC.1	J4172101	4
CAPI-1	J171XXXX SR_SERIES	3
CLVLS1H-1	J1447XXX	3
D3100S-4-1	J833A209 1-178314-2	1
D10DE-1	J3129001 152074H	1
DIP-ABSW-1	J6890304 DSS-7-08	1
EXB-F8V-1	J2314XXX	6
EXB-F9E-1	J2314XXX	14
FUSE-1	J821A015 SSFRF003_5A	1
HA17805P-1	J4429005 HA17805UP	2
HIF3-100S-1	J8334592 HIF3BD-10PA-2.5	3
HIF3-34DS-1	J8334606 HIF3BA-34PA-2.5	1
HIF3-50DS-1	J8334610 HIF3BA-50PA-2.5	1
JP2-1	J8336102	8
LAB1001-1	K1231110 LAB1-001 DC 5V	1
LED-1	H922XXXX LT3_SERIES	23
MODU2-4P-L-1	J8331321 281915-2	1
MODU2-6P-L-1	J8331322 281915-3	1
MODU2-8P-L-1	J8331323 281915-4	2
PASCON-1	PRE123-901F155Z25	22
PCB17-1	J3331814 PC817B	1
PCB47-1	H9610003 PC847	6
RES1-1	J2317XXX LF1/4	9
ULN2003-1	J4172402 ULN2003AN	1
V07J-1	J3130004 V07J	2
ZENERDIODE-1	J3140023 R08.2E	23
Total		156

CN604	HIF3-10DS-1	1	PARDYHP	JP1	JP2-1	1	NIJP2187PP20
		2	PARDYHN			2	PASHUT
		3	PASHUTHN	JP2	JP2-1	1	NIJP2186PP20
		4	PASHUTHP			2	PASHUT
		5	RFERRLN	JP3	JP2-1	1	TIMECOUNTER2
		6	RFERRLP			2	TIMECOUNTER1
		7	NC	JP4	JP2-1	1	VCC15VIN
		8	NC			2	VCC
		9	NC	JP5	JP2-1	1	VCC15VIN
		10	NC			2	VCC
CN607	HIF3-10DS-1	1	UOVHEATPUP	JP6	JP2-1	1	NIRES97PCMINO
		2	UOVHEATL			2	VCC
		3	LOVFHEATPUP	JP7	JP2-1	1	VCC15VIN
		4	LOVFHEATL			2	VCCSV1
		5	UMDERRPUP	JP8	JP2-1	1	VCC15VIN
		6	UMDERRL			2	VCCSV1
		7	UMDERRPUP	LD1	LED-1	1	GCFLT0LDL
		8	UMDERRL	LD2	LED-1	1	GCFLT1LDL
		9	HEATERSV	LD3	LED-1	1	GCFLT2LDL
		10	HEATERGND	LD4	LED-1	1	GCFLT3LDL
CN608	MODU2-6P-L-1	1	FLDCMPHP	LD5	LED-1	1	GCFLT4LDL
		2	FLDCMPHN	LD6	LED-1	1	GCFLT5LDL
		3	NC	LD7	LED-1	1	GCFLT6LDL
		4	NC	LD8	LED-1	1	GCFLT7LDL
		5	NC	LD9	LED-1	1	PARDYLDL
		6	NC	LD10	LED-1	1	PASHUTLDL
		1	ETCERRH0P	LD11	LED-1	1	RFERRLDL
		2	ETCERRH0N	LD12	LED-1	1	FCFCERRLDL
		3	ETCERRH1P	LD13	LED-1	1	HTUOVFL
		4	ETCERRH1N	LD14	LED-1	1	HTLOVFL
CN610	HIF3-10DS-1	5	ETCERRH2P	LD15	LED-1	1	HTUMDERRL
		6	ETCERRH2N	LD16	LED-1	1	HTLMDERRL
		7	ETCERRH3P	LD17	LED-1	1	ETCERR2LDL
		8	ETCERRH3N	LD18	LED-1	1	ETCERR1LDL
		9	NC	LD19	LED-1	1	ETCERR2LDL
		10	NC	LD20	LED-1	1	ETCERR3LDL
		1	VCC15V	LD21	LED-1	1	DEV0
		2	GND	LD22	LED-1	1	DEV1
		3	NC	LD23	LED-1	1	DEV2
		4	NC				
CN611	D3100S_4-1	1	VCC15V	LD21	LED-1	1	DEV0
2	GND	LD22	LED-1	1	DEV1		
3	NC	LD23	LED-1	1	DEV2		
4	NC						
CN613	MODU2-8P-L-1	1	VCC5V1	END BODY ORDERED NET LIST			



DWG	7474	00-6/1	PROJECTION 		TITLE	
CHKD			SCALE	RED 12.6.5	MPX2 カイロス	
APPD	マツ	00-6/1	NTS			
Hitachi Medical Corporation					DWG NO.	KB213066
					SH.	20

Table. 1 Switch Setting Table

PCB Name	Configuration
HCD (Slot No. 3)	SW2 ON: 1 2 3 4 OFF: 1 2 3 4 SW3 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 SW4 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8
RTCONT (Slot No. 4)	SW3 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 SW4 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 SW5 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 SW6 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 SW7 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8
MRRON2 (Slot No. 5)	DSW1 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 DSW2 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 SW3 (Front View) :Code No. 0
MRRON2 (Slot No. 6)	DSW1 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 DSW2 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 SW3 (Front View) :Code No. 0
MRRON2 (Slot No. 7)	DSW1 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 DSW2 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 SW3 (Front View) :Code No. 0
MRRON2 (Slot No. 8)	DSW1 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 DSW2 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 SW3 (Front View) :Code No. 0
MRPSC (Slot No. 9)	DSW1 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 DSW2 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 DSW3 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8
GRU	DSW1 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8

PCB Name	Configuration
HCD2 (Slot No. 3)	DSW1 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 DSW2 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8 DSW3 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8
MPX2	DSW1 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8
MOVIF	DSW1 ON: 1 2 3 4 5 6 7 8 OFF: 1 2 3 4 5 6 7 8

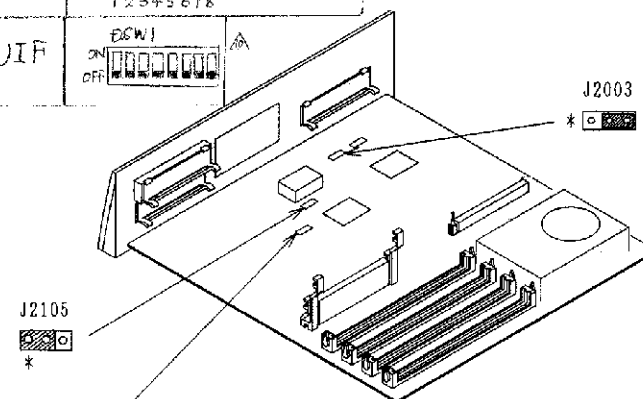



ULTRA SPARC (SEUIL-170-OP)

図2 (Fig. 2)

* MRRON PCBは、基板を実装する際のロットNo. により、DIPSWの設定が異なるので注意する事。


*2 RTCONT 基板 A/2 以降に適用。(available for rev. A/2 and later RTCONT PCB)

Table. 2 Jumper Setting Table

PCB Name	Configuration	PCB Name	Configuration
HCD (Slot No. 3)	 JP8 1 3  JP17 2 10 1 9  JP17 2 10 1 9	HCD2 (Slot No. 3)	 JP1734 to JP174 JP172


PCB Name	Configuration
IAMP	JP1 JP2 JP3 JP4 JP5 JP6 JP7 JP8 JP9 JP10 JP11 JP12 JP13 JP14 JP15 JP16 JP17 JP18 JP19 JP20 JP21 JP22 JP23 JP24 JP25 JP26 JP27 JP28 JP29 JP30 JP31 JP32 JP33 JP34 JP35 JP36 JP37 JP38 JP39 JP40 JP41 JP42 JP43 JP44 JP45 JP46 JP47 JP48 JP49 JP50 JP51 JP52 JP53 JP54 JP55 JP56 JP57 JP58 JP59 JP60 JP61 JP62 JP63 JP64 JP65 JP66 JP67 JP68 JP69 JP70 JP71 JP72 JP73 JP74 JP75 JP76 JP77 JP78 JP79 JP80 JP81 JP82 JP83 JP84 JP85 JP86 JP87 JP88 JP89 JP90 JP91 JP92 JP93 JP94 JP95 JP96 JP97 JP98 JP99 JP100
IPUIF (work A)	JP1 JP2 JP3 JP4 JP5 JP6 JP7 JP8 JP9 JP10 JP11 JP12 JP13 JP14 JP15 JP16 JP17 JP18 JP19 JP20 JP21 JP22 JP23 JP24 JP25 JP26 JP27 JP28 JP29 JP30 JP31 JP32 JP33 JP34 JP35 JP36 JP37 JP38 JP39 JP40 JP41 JP42 JP43 JP44 JP45 JP46 JP47 JP48 JP49 JP50 JP51 JP52 JP53 JP54 JP55 JP56 JP57 JP58 JP59 JP60 JP61 JP62 JP63 JP64 JP65 JP66 JP67 JP68 JP69 JP70 JP71 JP72 JP73 JP74 JP75 JP76 JP77 JP78 JP79 JP80 JP81 JP82 JP83 JP84 JP85 JP86 JP87 JP88 JP89 JP90 JP91 JP92 JP93 JP94 JP95 JP96 JP97 JP98 JP99 JP100
IPUIF (work B)	JP1 JP2 JP3 JP4 JP5 JP6 JP7 JP8 JP9 JP10 JP11 JP12 JP13 JP14 JP15 JP16 JP17 JP18 JP19 JP20 JP21 JP22 JP23 JP24 JP25 JP26 JP27 JP28 JP29 JP30 JP31 JP32 JP33 JP34 JP35 JP36 JP37 JP38 JP39 JP40 JP41 JP42 JP43 JP44 JP45 JP46 JP47 JP48 JP49 JP50 JP51 JP52 JP53 JP54 JP55

製 図 部 門			区 分		図 番		品 名		材 質		素 材 寸 法		素 材 長 寸		仕 上 質 量		備 考		区 分	
C	S	A	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
04	01	100	1		KB220848	01		HCD3 CIRCUIT DIAGRAM			K13G							0091		
			記号	来歴又は仕様書番号	年月日	訂正	審査	承認	記号	来歴又は仕様書番号	年月日	訂正	審査	承認						
			機	△	MSKA-2224	05/25/07	技	010	△											
			要	△					△											
				△					△											
				△					△											
作業・員数			品 番	区 分	図 番		品 名		材 質		素 材 寸 法		素 材 長 寸		仕 上 質 量		備 考		区 分	
C	S	A	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
		0	1	0				CIRCUIT DGM												
			2																	
			3																	

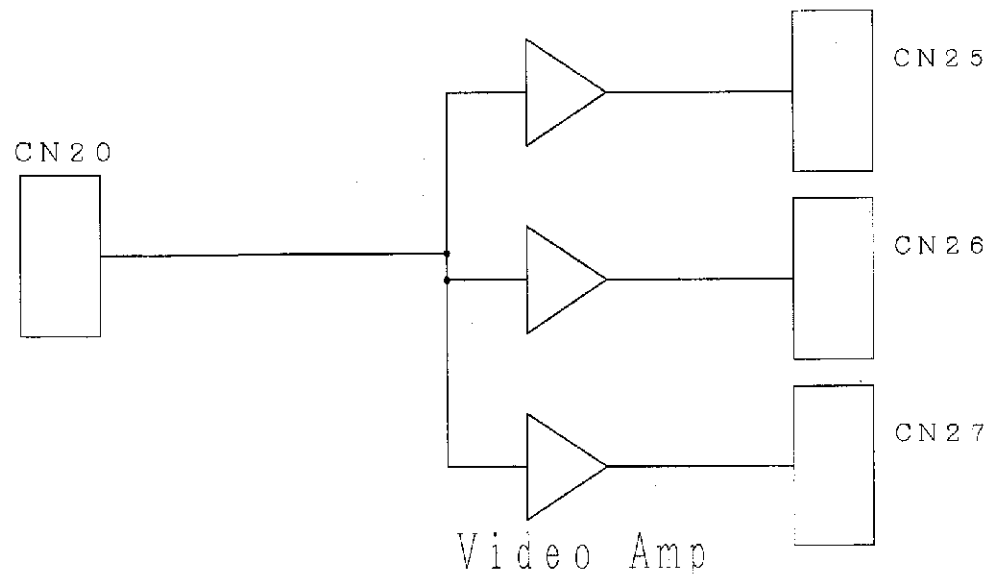

Page 2

Page 5

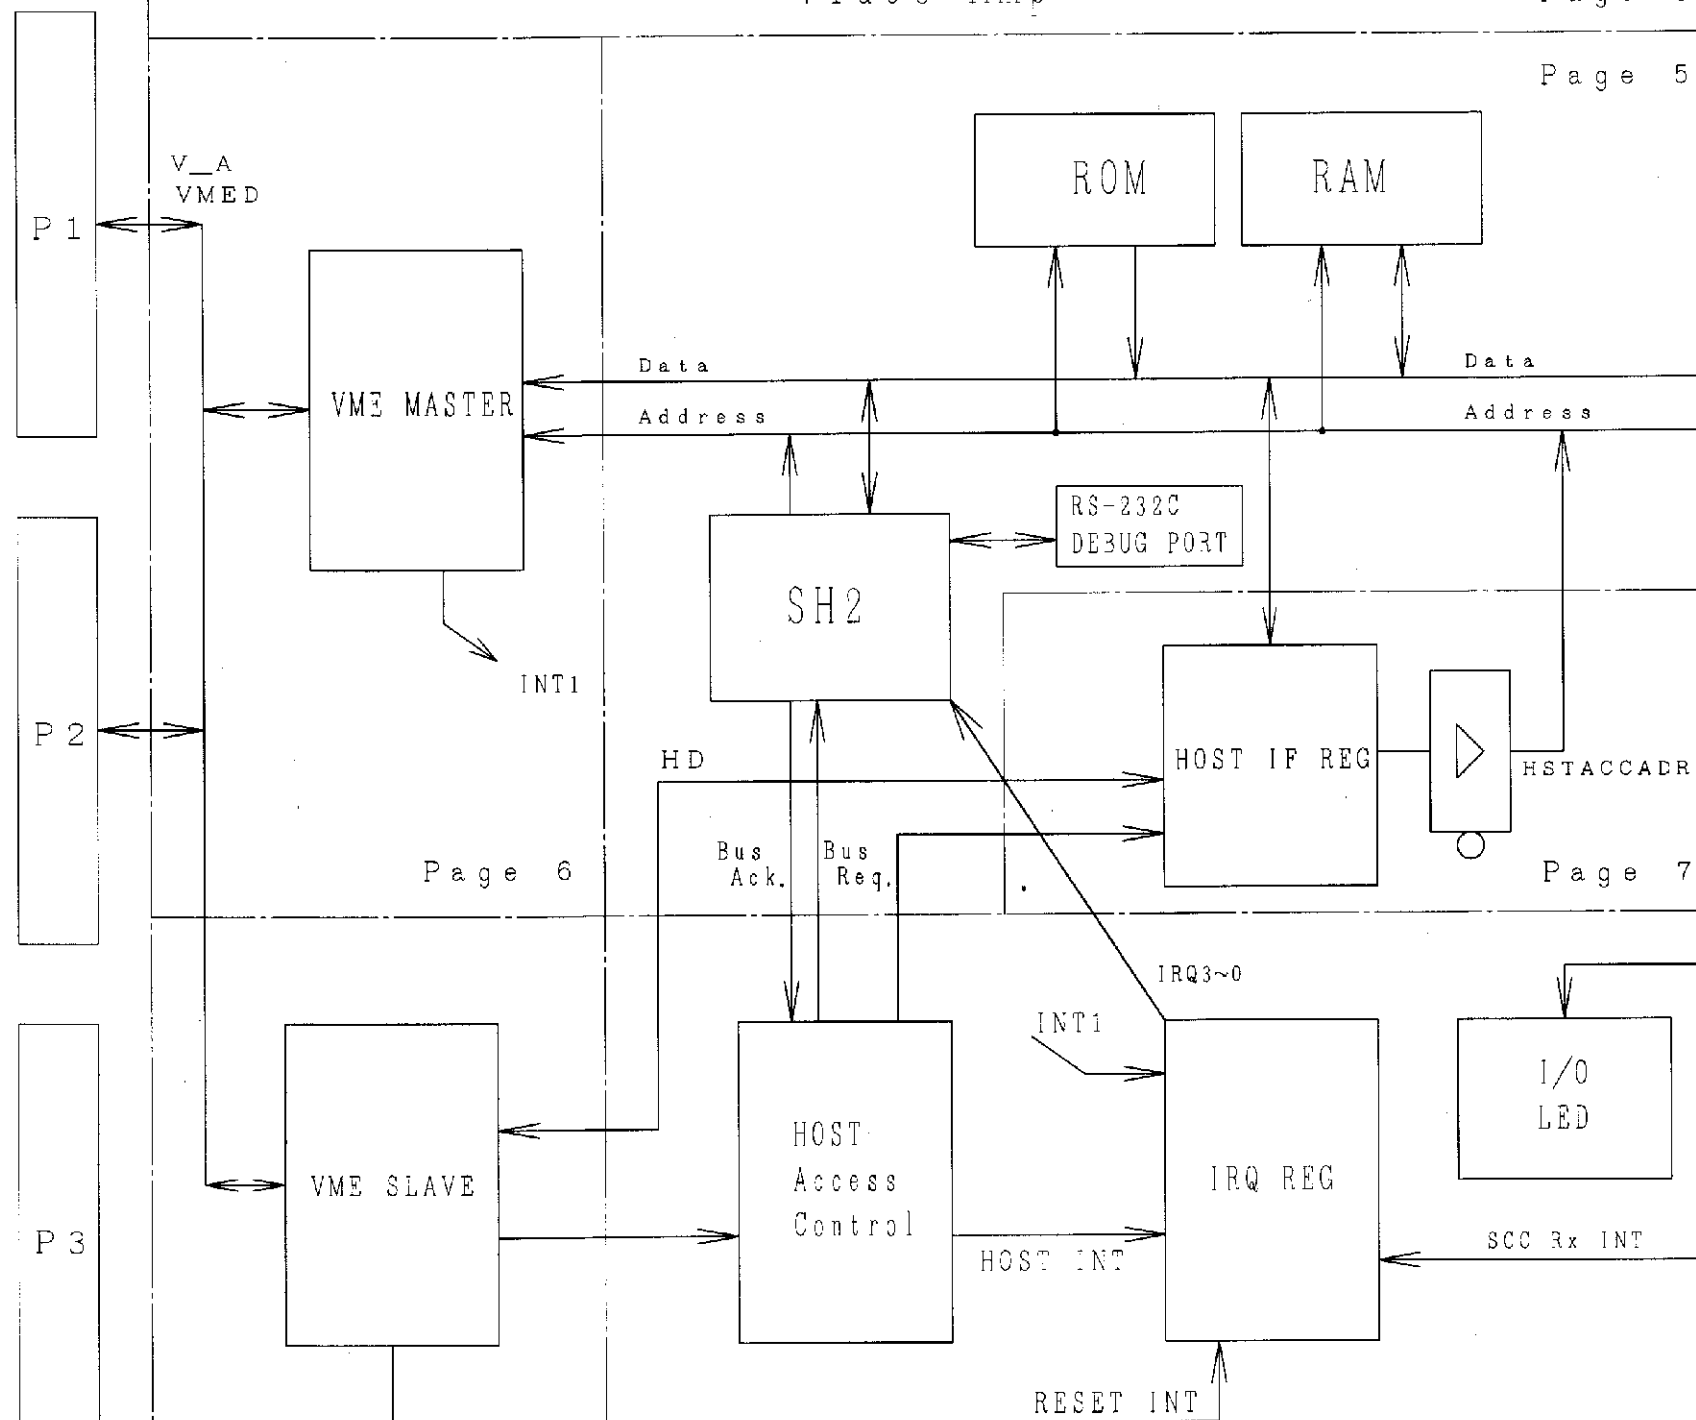


Page 3

Page 4

Page 10

Page 9

製図	(220848)	04.4.19	投影法	名称	HCD3 CIRCUIT DIAGRAM
審査	7447	04.4.19	尺度	図番	KB220848
承認	7447	04.4.19	NTS	校番	1/13
株式会社 日立メテコ					

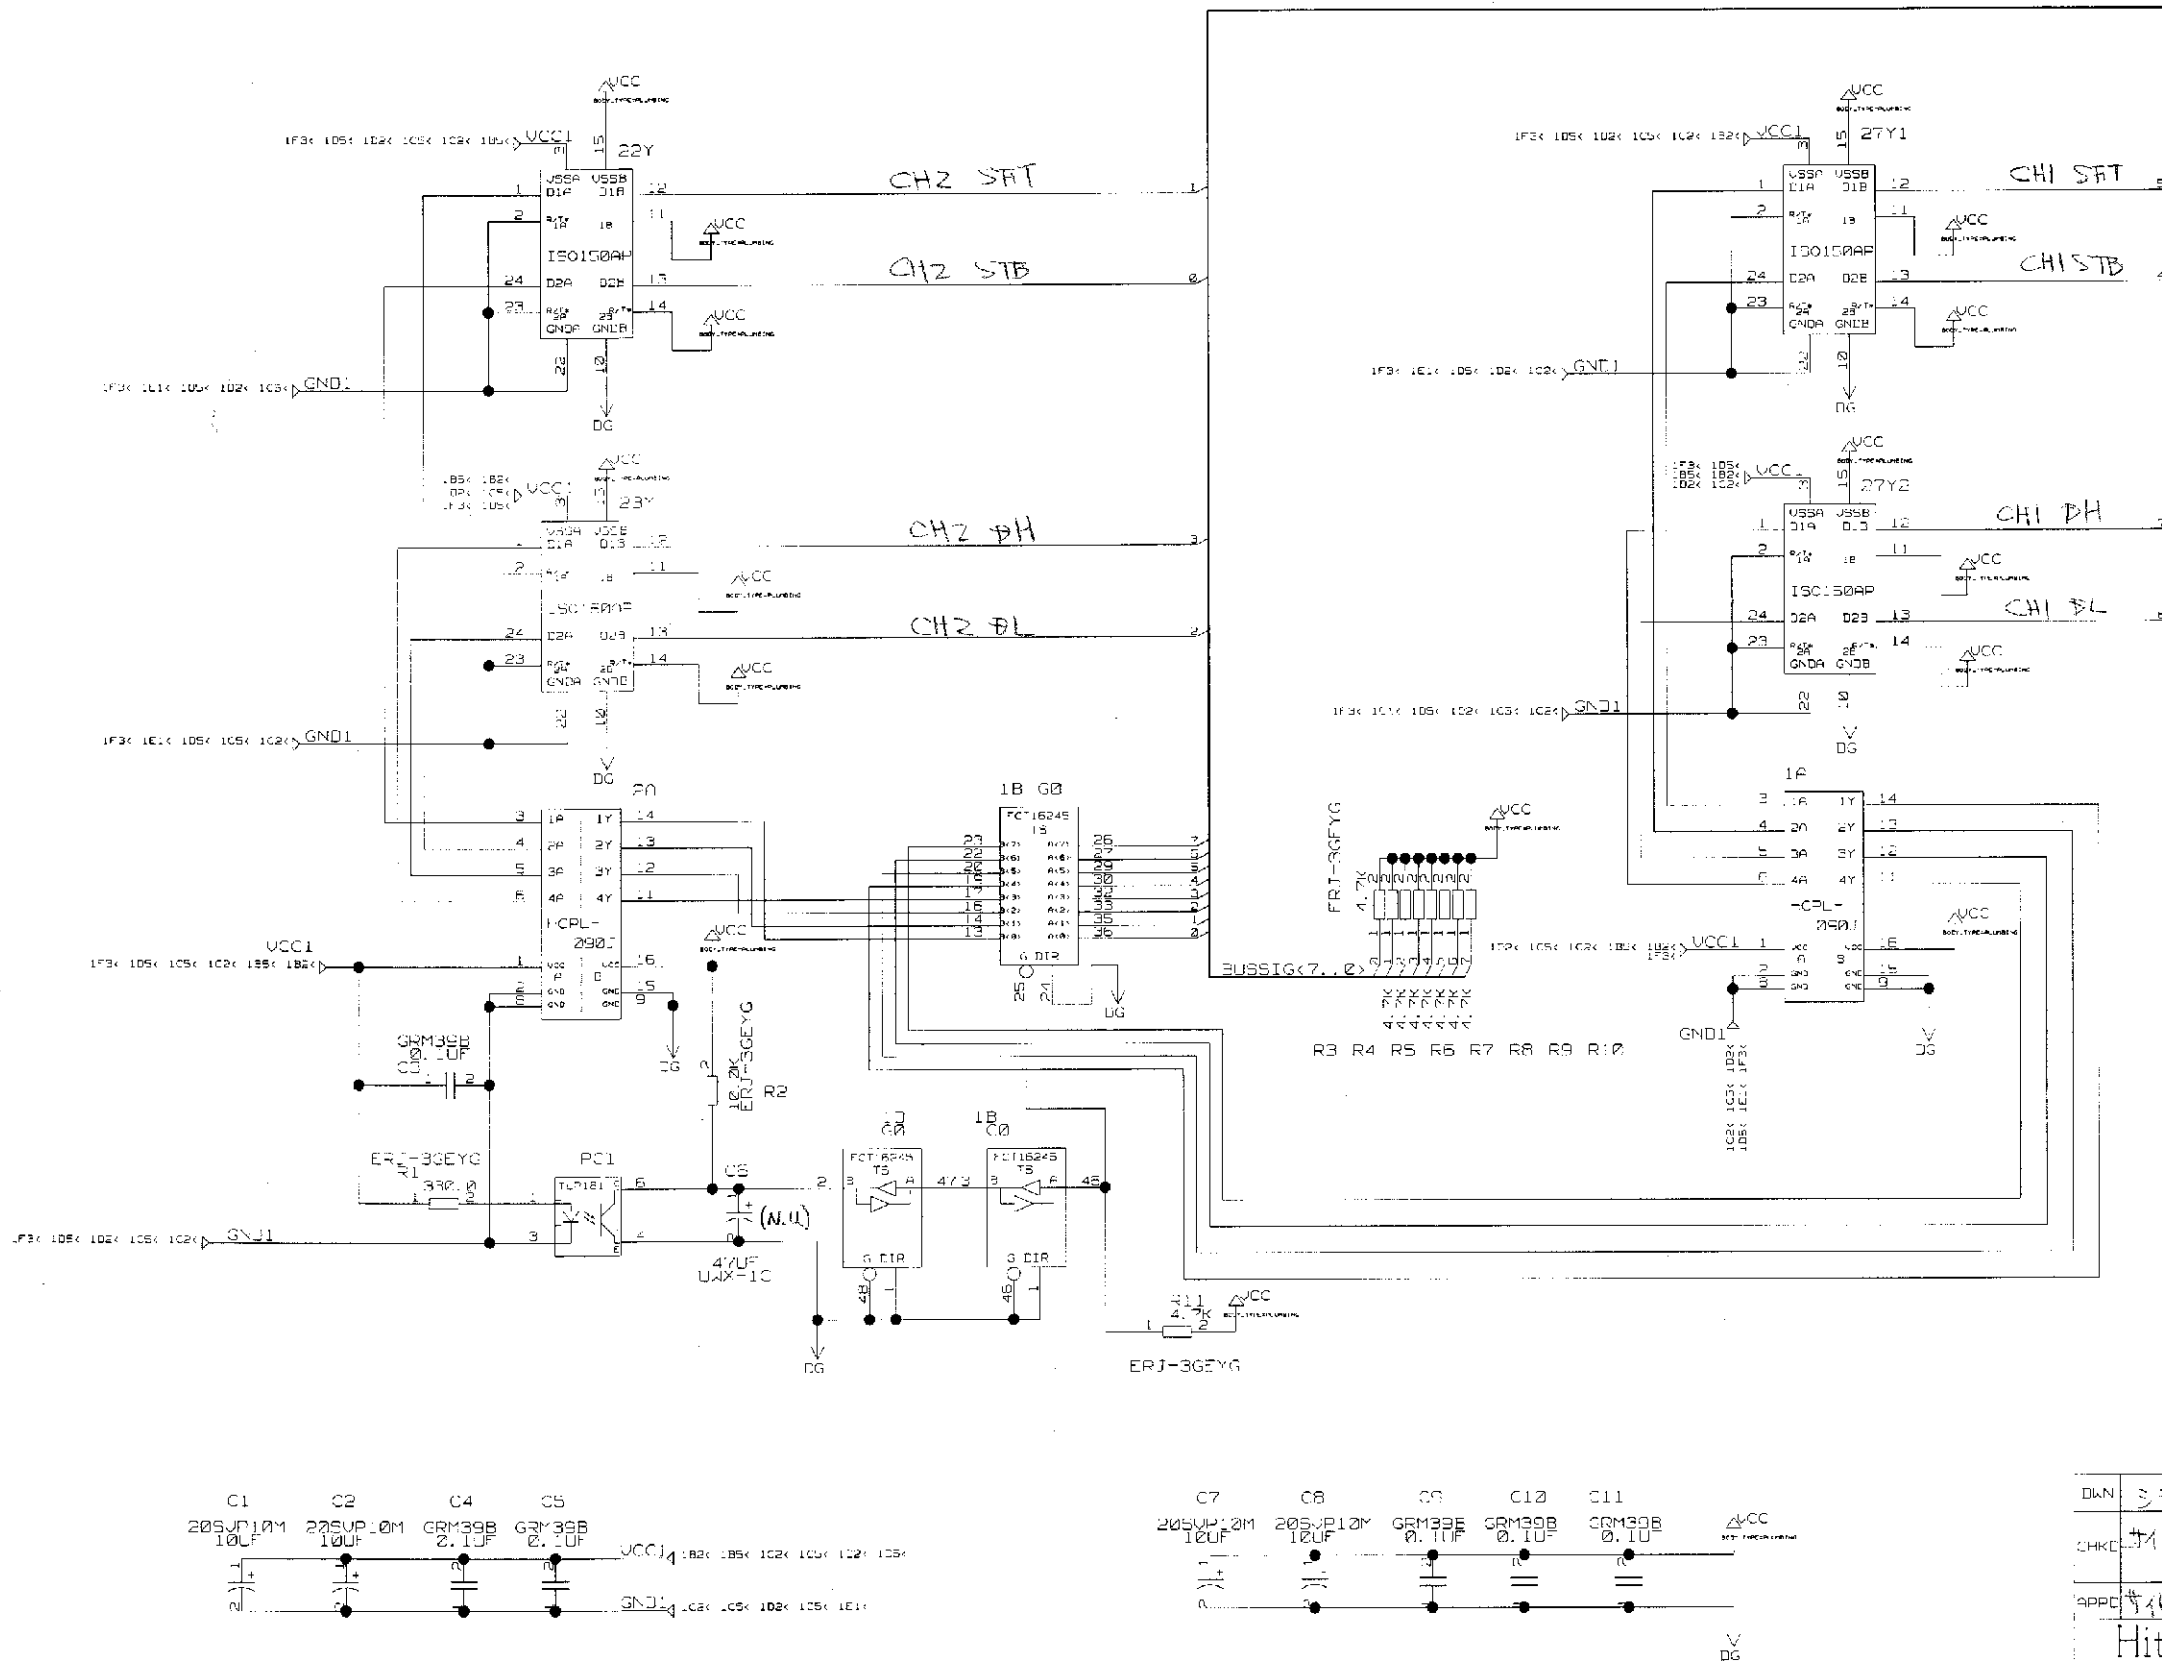
[illegible]

ISO2 Circuit Diagram


DWN	シライ	04'3'20	PROJECTION	TITLE
CHCK	ナナ	04'4'20	SCALE	ISO2 #10X
APPR	ナナ	04'4'20	RECD	
			NTS	
Hitachi Medical Corporation			DWG No.	S-4
			KB221132	1


[illegible]

C	B	SYMBOL	NAME	TYPE	MANU	CODE
	1 1	PS701	DC POWER SUPPLY	HK 50A-12	NEMIC	X621A037
	1 1	PS702	DC POWER SUPPLY	HK 25A-5	NEMIC	X621A032
	1 1	MOD	MOD	OD172S	HITACHI	Q241A005
	1 1	SCSIconv	SCSIconverter	SD11C	PARALAN	X730A155
	1 1	SW701	SWITCH	3HA-4308CH4P4	SAN MULON	J641A071
	1 1	SW702	SWITCH	3HM-4308CH4P4	SAN MULON	J641A072
	2 X	SW703,704	SWITCH	3HM-4305CH4P4	SAN MULON	J641A073
	1 1	SP701	SPEAKER	C050K12	PCSP3R	J811A004
	1 1	FAN701	FAN	109P0812M602	SANYO	152A015
	1 1	SW705	TGGLE SWITCH	8A1011	FUJISOKU	J6111150
	1 1	VOL4	VOLUME	RK11K11410KA	ALPS	J261A004
	1 1	MIC	MIC	KUC1703-01-5000	HOSIDEN	J812A003
	1 1	VR701	VOLUME	RV.RK11K114010KA	ALPS	J261A004

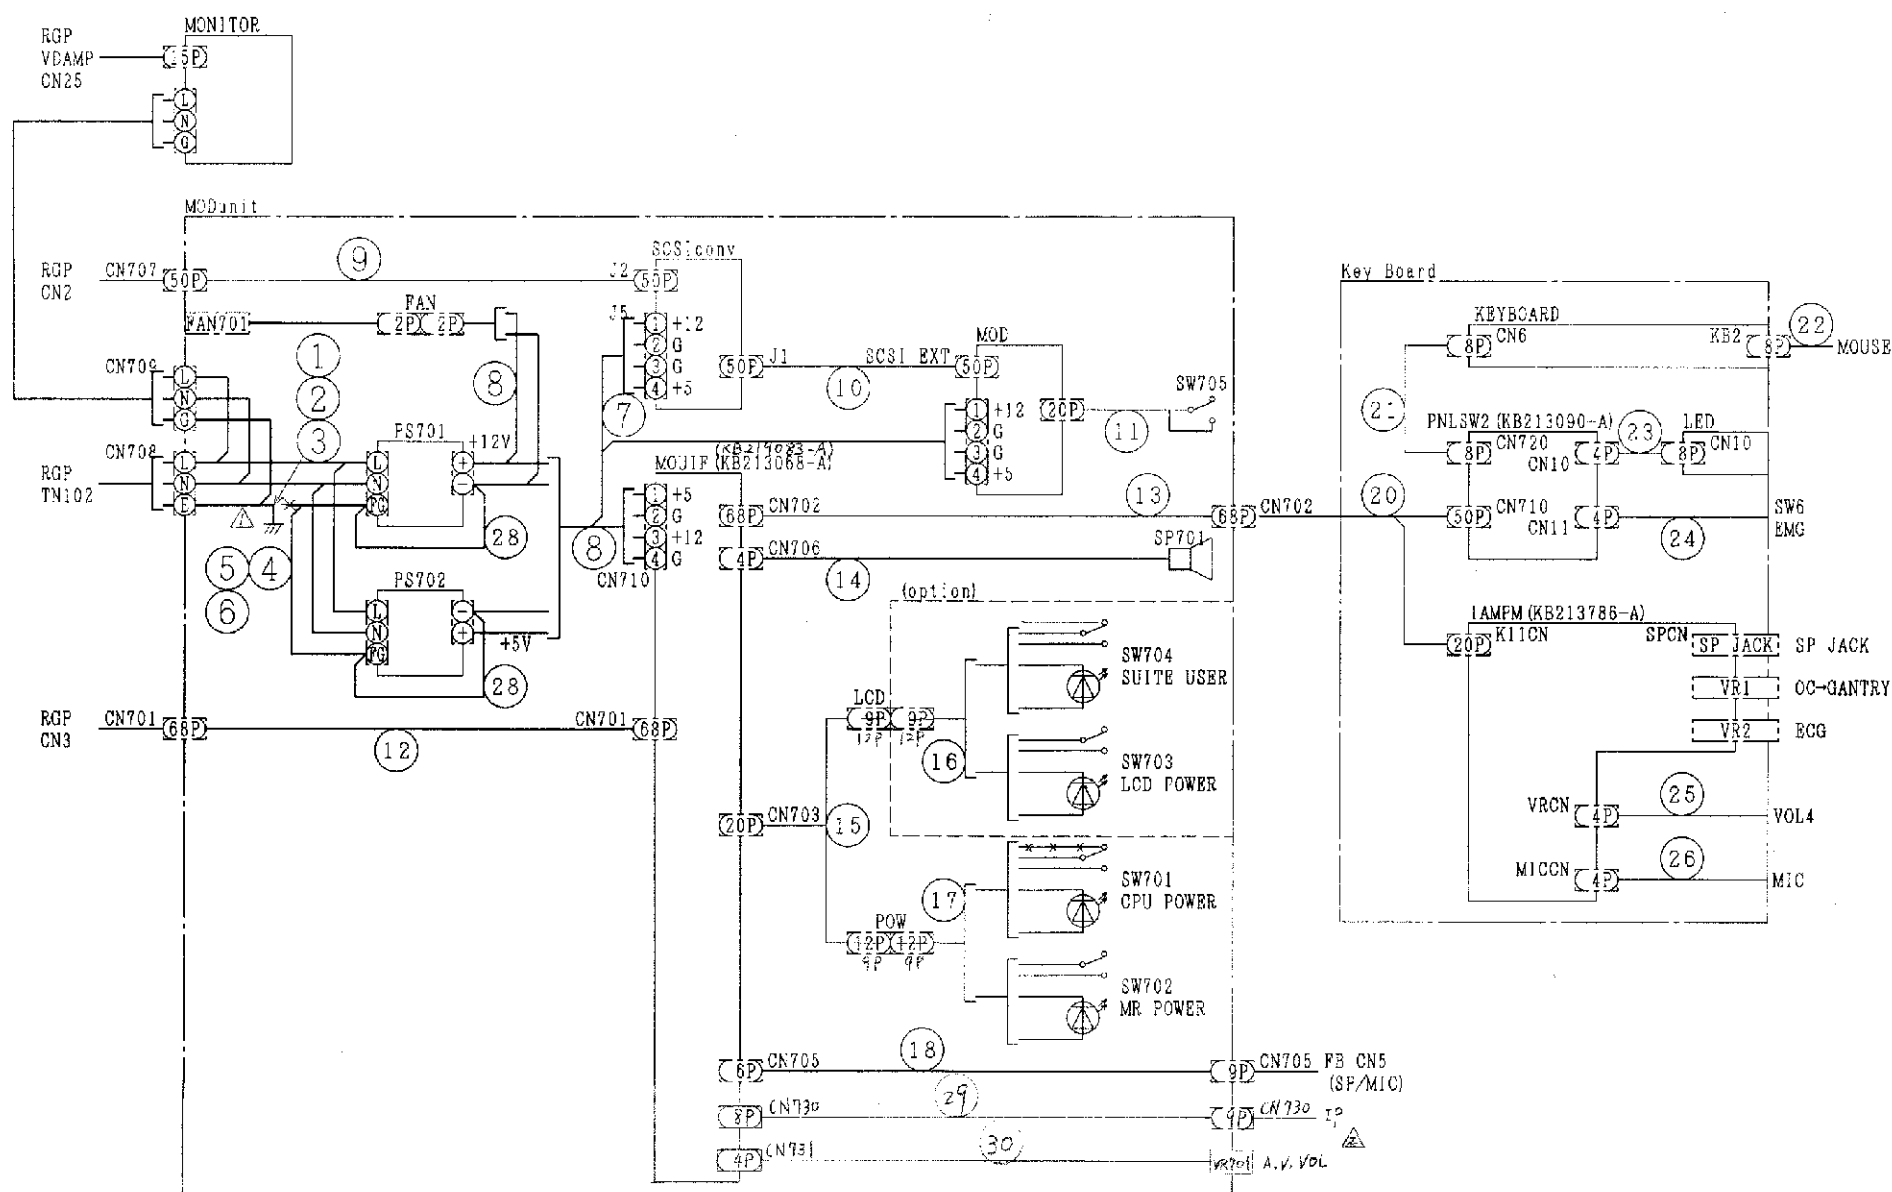


品番	図 番	品 名
1	KB315156-A	MOD Dengen Keibu
2	KB315156-B	MOD Dengen Keibu
3	KB315156-C ⁴	MOD Dengen Keibu
4	KB315156-D	MOD Dengen Keibu
5	KB315156-E	MOD Dengen Keibu
6	KB315156-F	MOD Dengen Keibu
7	KB314102-A	MOD DC ケーブル 1
8	KB314103-A	MOD DC ケーブル 2
9	KB314106-A	SCSI ケーブル
10	KB314107-A	MO-SCSI ケーブル
11	KA369040-B	MO スイッチ ケーブル
12	KB314108-A	MOD IF ケーブル
13	KB314108-B	MOD IF ケーブル
14	KB314105-A	スピーカ ケーブル
15	KB314099-A	MOUIF-SW ケーブル
16	KB314101-A	LCD スイッチ ケーブル
17	KB314100-A	MOD スイッチ ケーブル
18	KB314104-A	MOD SP ケーブル
19		
20	KB212994-A	MO-KB ケーブル
21	KB316320-A	KB ケーブル ツイカコウ
22	Q570A001	おひきりけいす
23	KA363344-A	モジュ 8P ケーブル
24	KA471794-A	EMG スイッチ クミズ
25	KB414579-A	VOL クミズ
26	KB410345-A	マイク トリツケ サギョウ
27		
28	J8363101	ショートピース
△ 29	KB321919-A	MODAL ケーブル
△ 30	KB321920-A	VOL ケーブル

製図	ヤマモトミ	00.8.24	投影法		名称	MODunitハイセンス				
審査	タケタケ	00.8.24								
承認	タケタケ	00.8.24								
株式会社 日立メディコ				図番	KB213785	<table border="1"> <tr> <td>校番</td> <td>1</td> </tr> <tr> <td></td> <td>1</td> </tr> </table>	校番	1		1
校番	1									
	1									

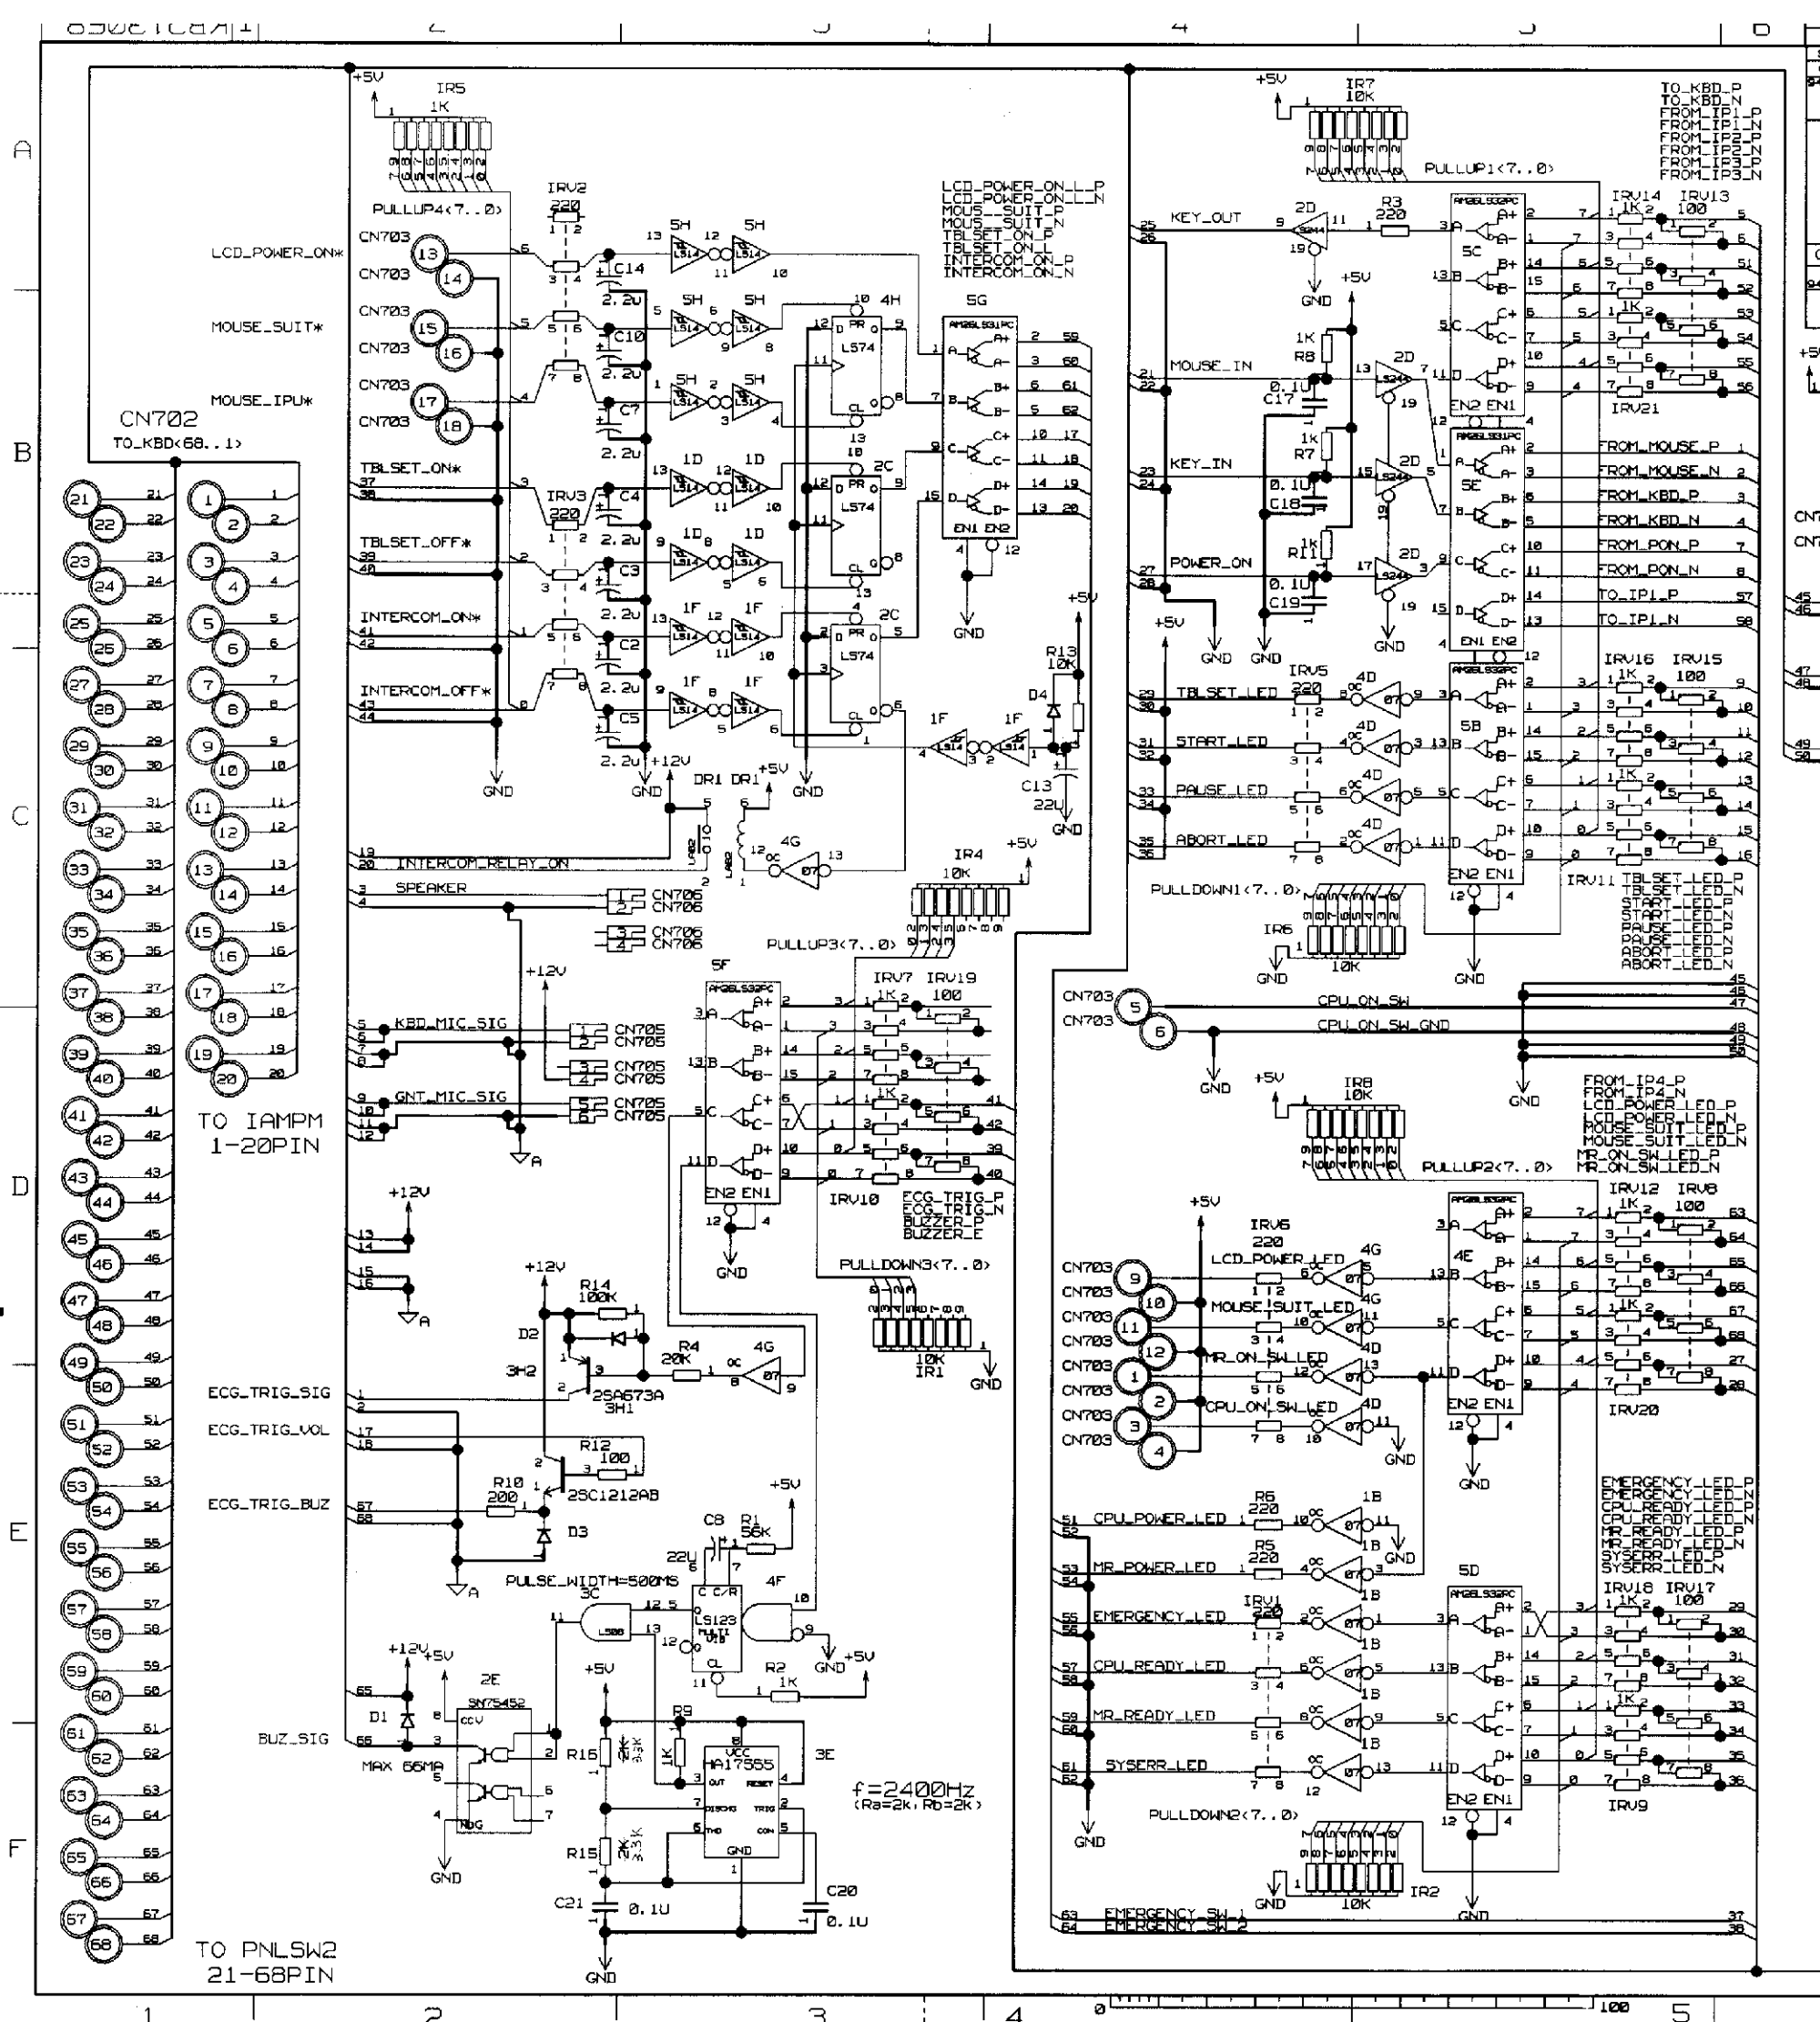









DNG HTR		DNG No.		TITLE		DSGN. GR.		CLASS. CODE		DNG CODE	
1	KB213068	01	MOUIF カイロズ	K13G	00912						
SYN REVISIONS OR EGN No.		DATE		REVDCHECKDAPPD		SYN REVISIONS OR EGN No.		DATE		REVDCHECKDAPPD	
MSKA-1522		12/9/11		100		100		100		100	
GROUP & QTY		DNG No. (PT. No.)		NAME OF PARTS		MATERIAL		MATL SIZE		MATERIAL LENGTH OR MASS	
0 1 0		(PT. No.)		MOUIF カイロズ							

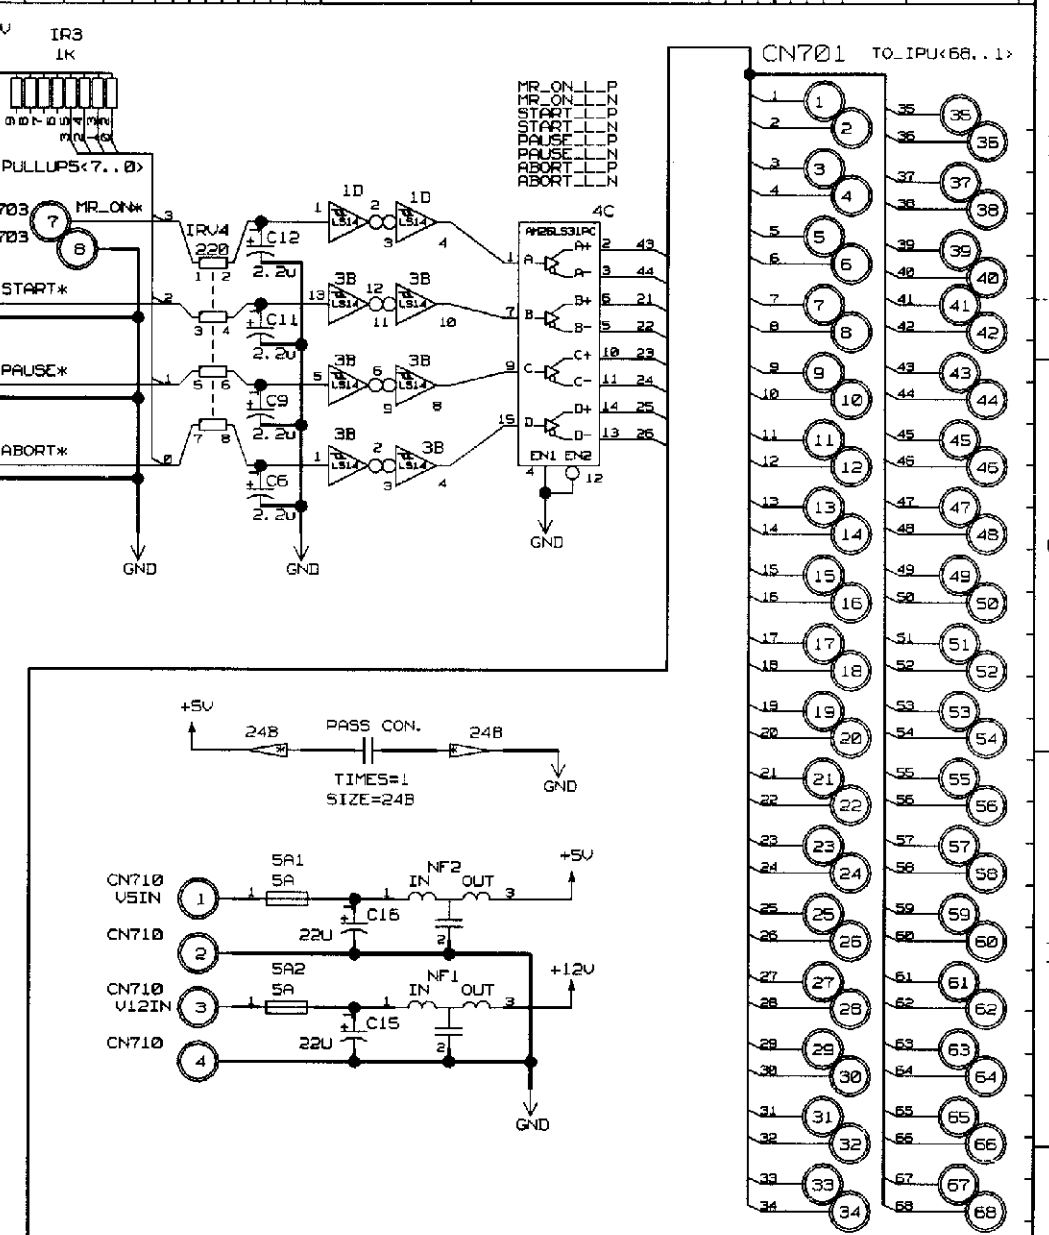

GROUP=IC9		GROUP=RY1		DNG No.		SH.	
DRAWING: MOUIF		Thu Jun 1 10:05:16 2000		KB213068		1/2	
MOUIF CIRCUIT DIAGRAM (1/1)							
DWN	7/9/11	00-6/1	PROJECTION	TITLE			
CHKD	2/27/11	00-6/1	SCALE	MOUIF カイロズ			
APPD	2/27/11	00-6/1	NTS				
Hitachi Medical Corporation							

250810841

SURFACE FIN.			DWG MTR			FINAL REV.			TITLE			DSGN. GR.			CLASS. CODE			DWG CODE		
C	B	A	1	2	3	4	5	6	PNLSW2 #10X			K13G						00912		
SYN			REVISIONS OR ECH NO.			DATE			SYN			REVISIONS OR ECH NO.			DATE			REVISIONS OR ECH NO.		
APPLICATION																				
GROUP & QTY			DWG No. (PT. No.)			NAME OF PARTS			MATERIAL (PT. TYPE)			MATERIAL LENGTH OR MASS			REMARKS					
C B A			10			PNLSW2 #10X														

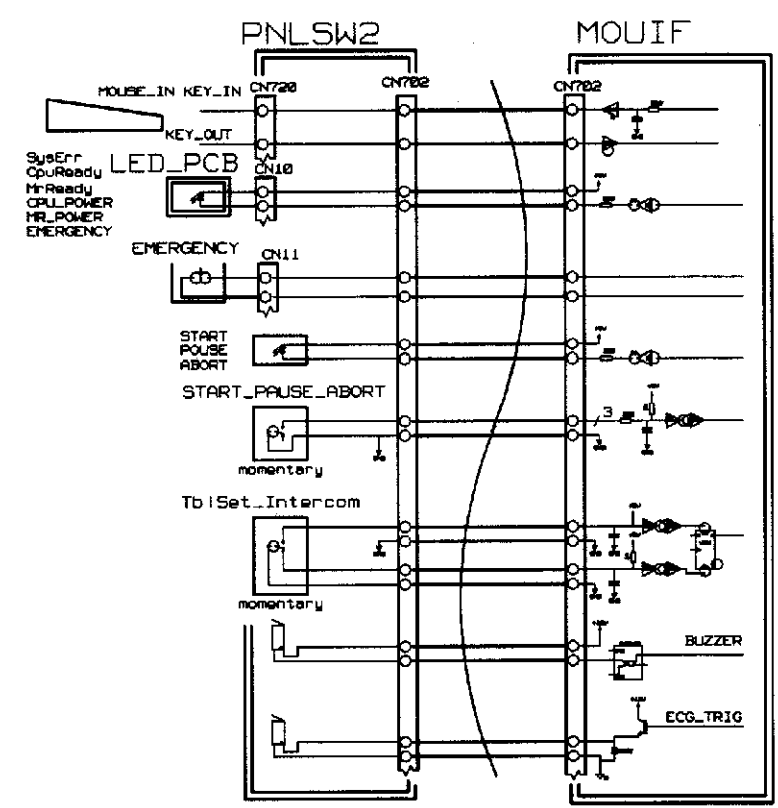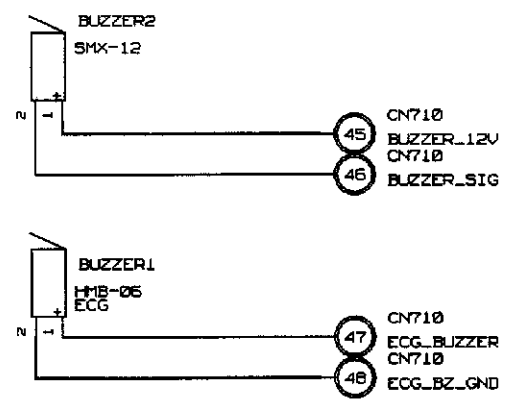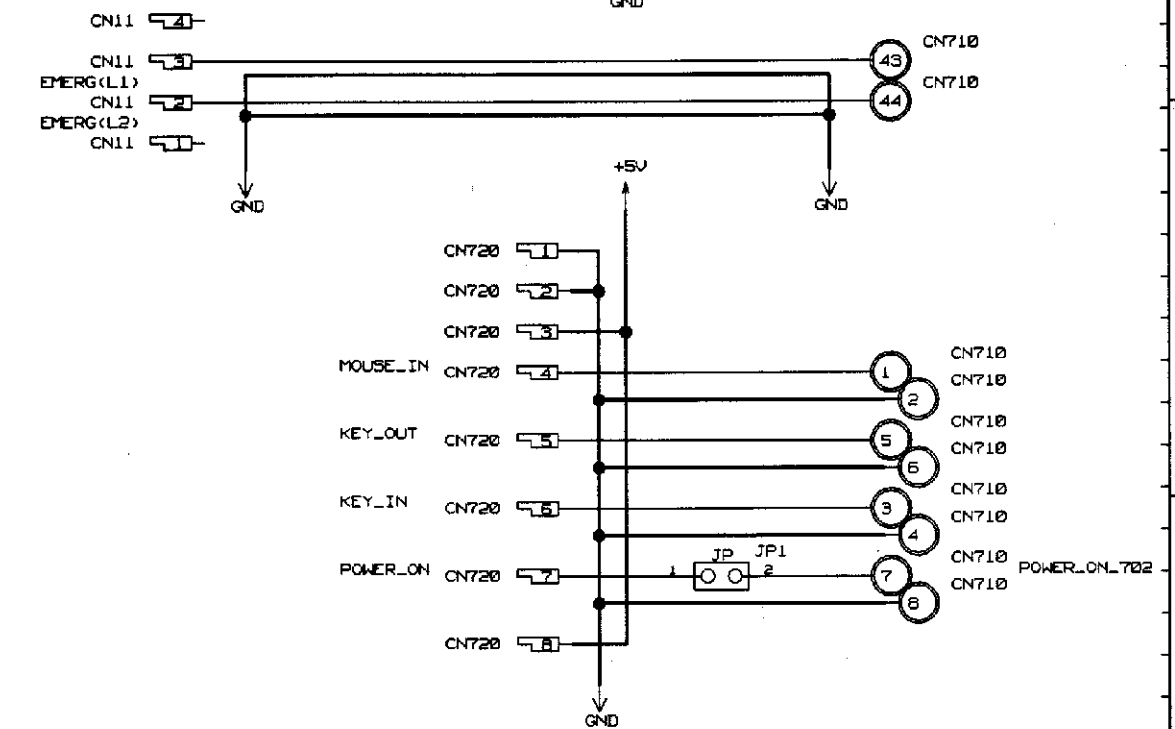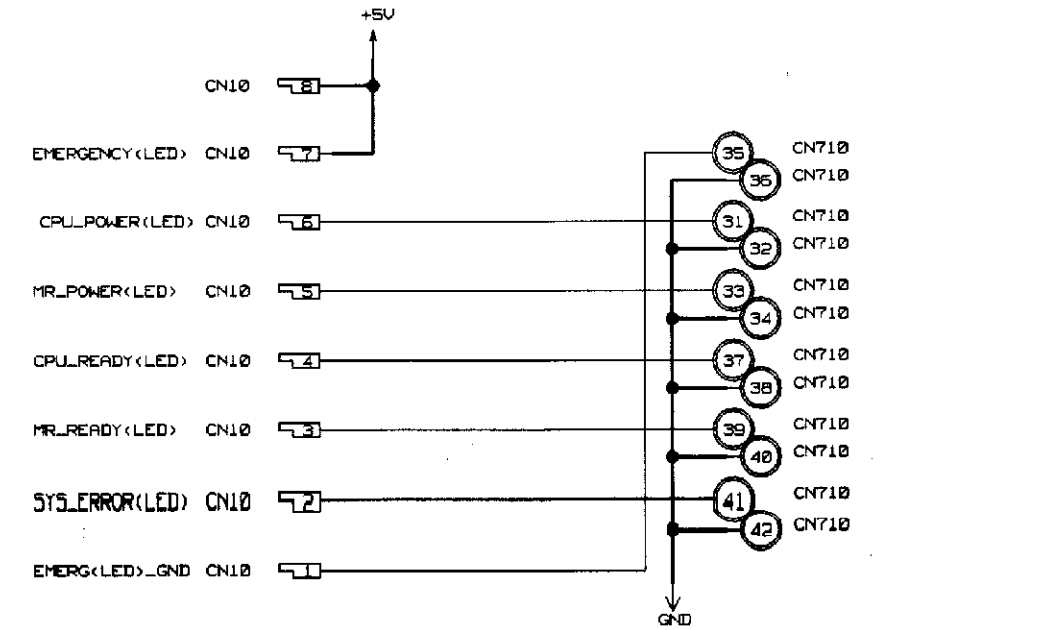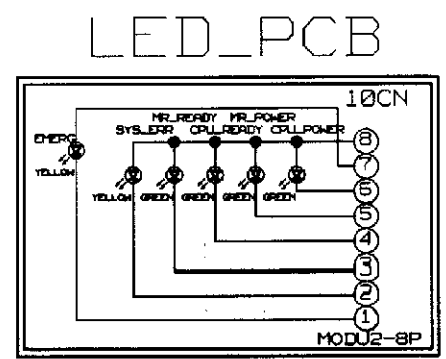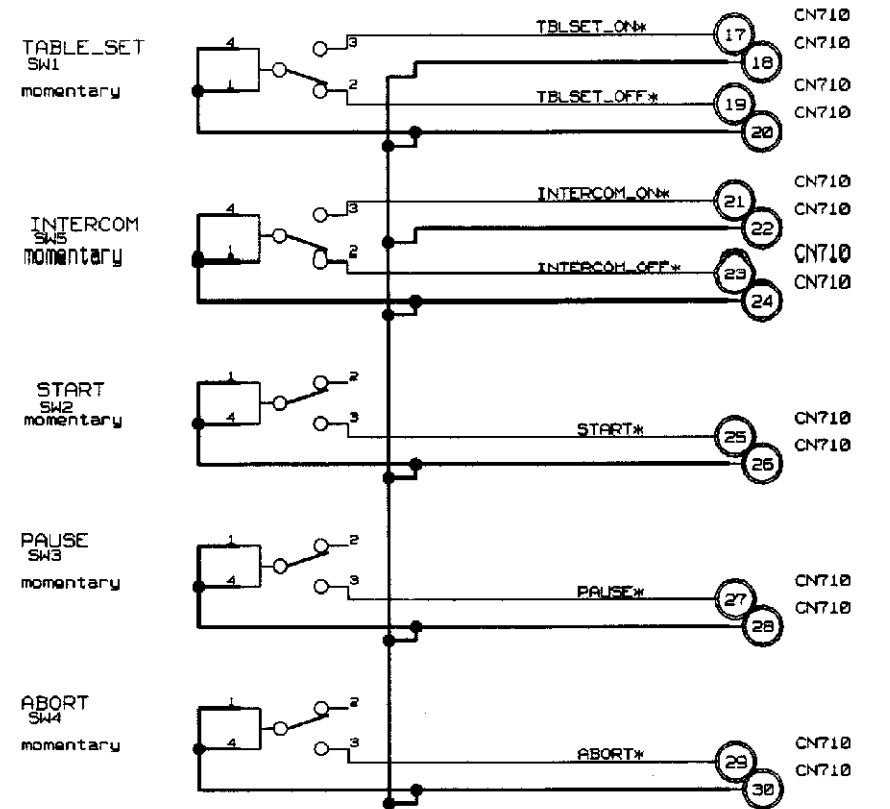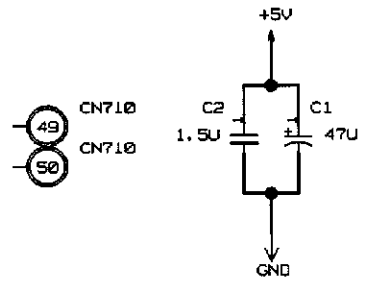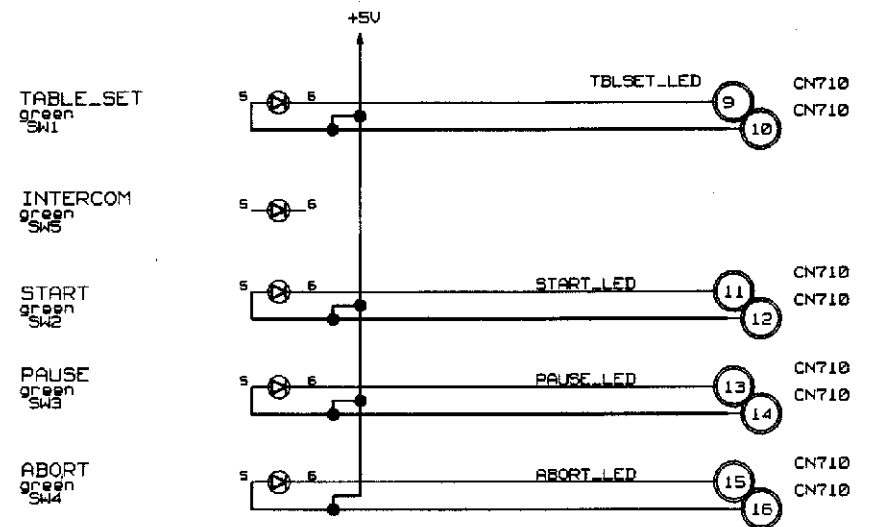

DRAWING: PNLSW2

PNLSW2 Thu Jun 1 09:22:13 2000

DWG	9/19/98	00' 6' /	PROJECTION	TITLE
CHKD	2/29	00' 6' /	SCALE	REGD
APPD	2/29	00' 6' /	NTS	RE.S
Hitachi Medical Corporation				DWG No. KB213067
				SH. 1/2

SURFACE FIN.		DNG MTR		DNG No.		FINAL REV.		TITLE		DSGN. GR.		CLASS. CODE		DNG CODE											
C B A		1 2 3 4 5 6 7 8		1 KB213067		14		PNLSW2		K136		00912		00912											
SYN		REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APP'D		SYN		REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APP'D			
APPLICATION		SYN		REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APP'D		SYN		REVISIONS OR ECN No.		DATE		REV'D		CHK'D		APP'D	
GROUP & QTY		DNG No.		NAME OF PARTS		MATERIAL		MATL SIZE		MATERIAL LENGTH OR MASS		FIN. MASS SEPARATE		REMARKS		DNG									
C B A		1 2 3 4 5 6 7 8		1 0		PNLSW2																			

CREFSIGNALS.DAT

ABORT * 1D3<>
ABORT_LED 1B2<>
BUZZER_12V 1E3<>
BUZZER_SIG 1E3<>
CPU_POWER(LED) 1B5<>
CPU_READY(LED) 1C5<>
ECG_BUZZER 1F3<>
ECG_BZ_GND 1F3<>
EMERG(L1) 1C6<>
EMERG(L2) 1D6<>
EMERG(LED)_GND 1C5<>
EMERGENCY(LED) 1B5<>
INTERCOM_OFF * 1C2<>
INTERCOM_ON * 1C2<>
KEY_IN 1E6<>
KEY_OUT 1D6<>
MOUSE_IN 1D6<>
MR_POWER(LED) 1B5<>
MR_READY(LED) 1C5<>
PAUSE * 1D3<>
PAUSE_LED 1B2<>
POWER_ON 1E6<>
POWER_ON_702 1E8<>
START * 1C3<>
START_LED 1B2<>
SYS_ERROR(LED) 1C5<>
TBLSET_LED 1A3<>
TBLSET_OFF * 1C2<>
TBLSET_ON * 1B2<>


CREFPARTS.DAT

BUZZER1 BUZZER2 1E2
BUZZER2 BUZZER3 1E2
C1 CAP2 1A5
C2 CAP1 1A5
CN10 MODU2-8P-S 1B6 1B6 1C5
CN11 MODU2-4P-S 1C5 1C6 1D6
CN710 HIF650DS 1A3 1A4 1B3 1B3 1B7 1C3 1C3 1C7 1C8 1C8 1D3 1D3 1D6 1D6
1E3 1E8 1E8 1F3
CN720 MODU2-8P-S 1D7 1D7 1E7
JP1 JP2 1E7
SW1 DTSESHJ 1A1 1B1
SW2 DTSESHJ 1B1 1C1
SW3 DTSESHJ 1B1 1D1
SW4 DTSESHJ 1B1 1D1
SW5 DTSESHJ 1A1 1C1

CREFRPRT.DAT

- SPARES LIST -
- PART SUMMARY -
BUZZER2-BASE J86SA003 HMB-06 1
BUZZER3-BASE J86SA004 SMX-12 1
CAP1-BASE J171XXXX SR SERIES 1
CAP2-BASE J1447101 USA-1H-2R2MCA-1TE 1
DTSESHJ-BASE J6111492 DT-SESHJ-LG-G 5
HIF650DS-BASE J8334534 HIF6-50PA-1.27DSA 1
JP2-BASE J8336102 00-8261-023213-854 1
MODU2-4P-S-BASE J8331321 281916-2(STRAIGHT) 1
MODU2-8P-S-BASE J8331323 281916-4(STRAIGHT) 2
TOTAL 14

D.N. 949p 00.6.1		PROJECTION		TITLE	
CHKD. 212 00.6.1		SCALE REGD		PNLSW2 710X	
APPD. 219 00.6.1		NTS 12.5			
Hitachi Medical Corporation				DNG No. KB213067	
				Sh. 2e	

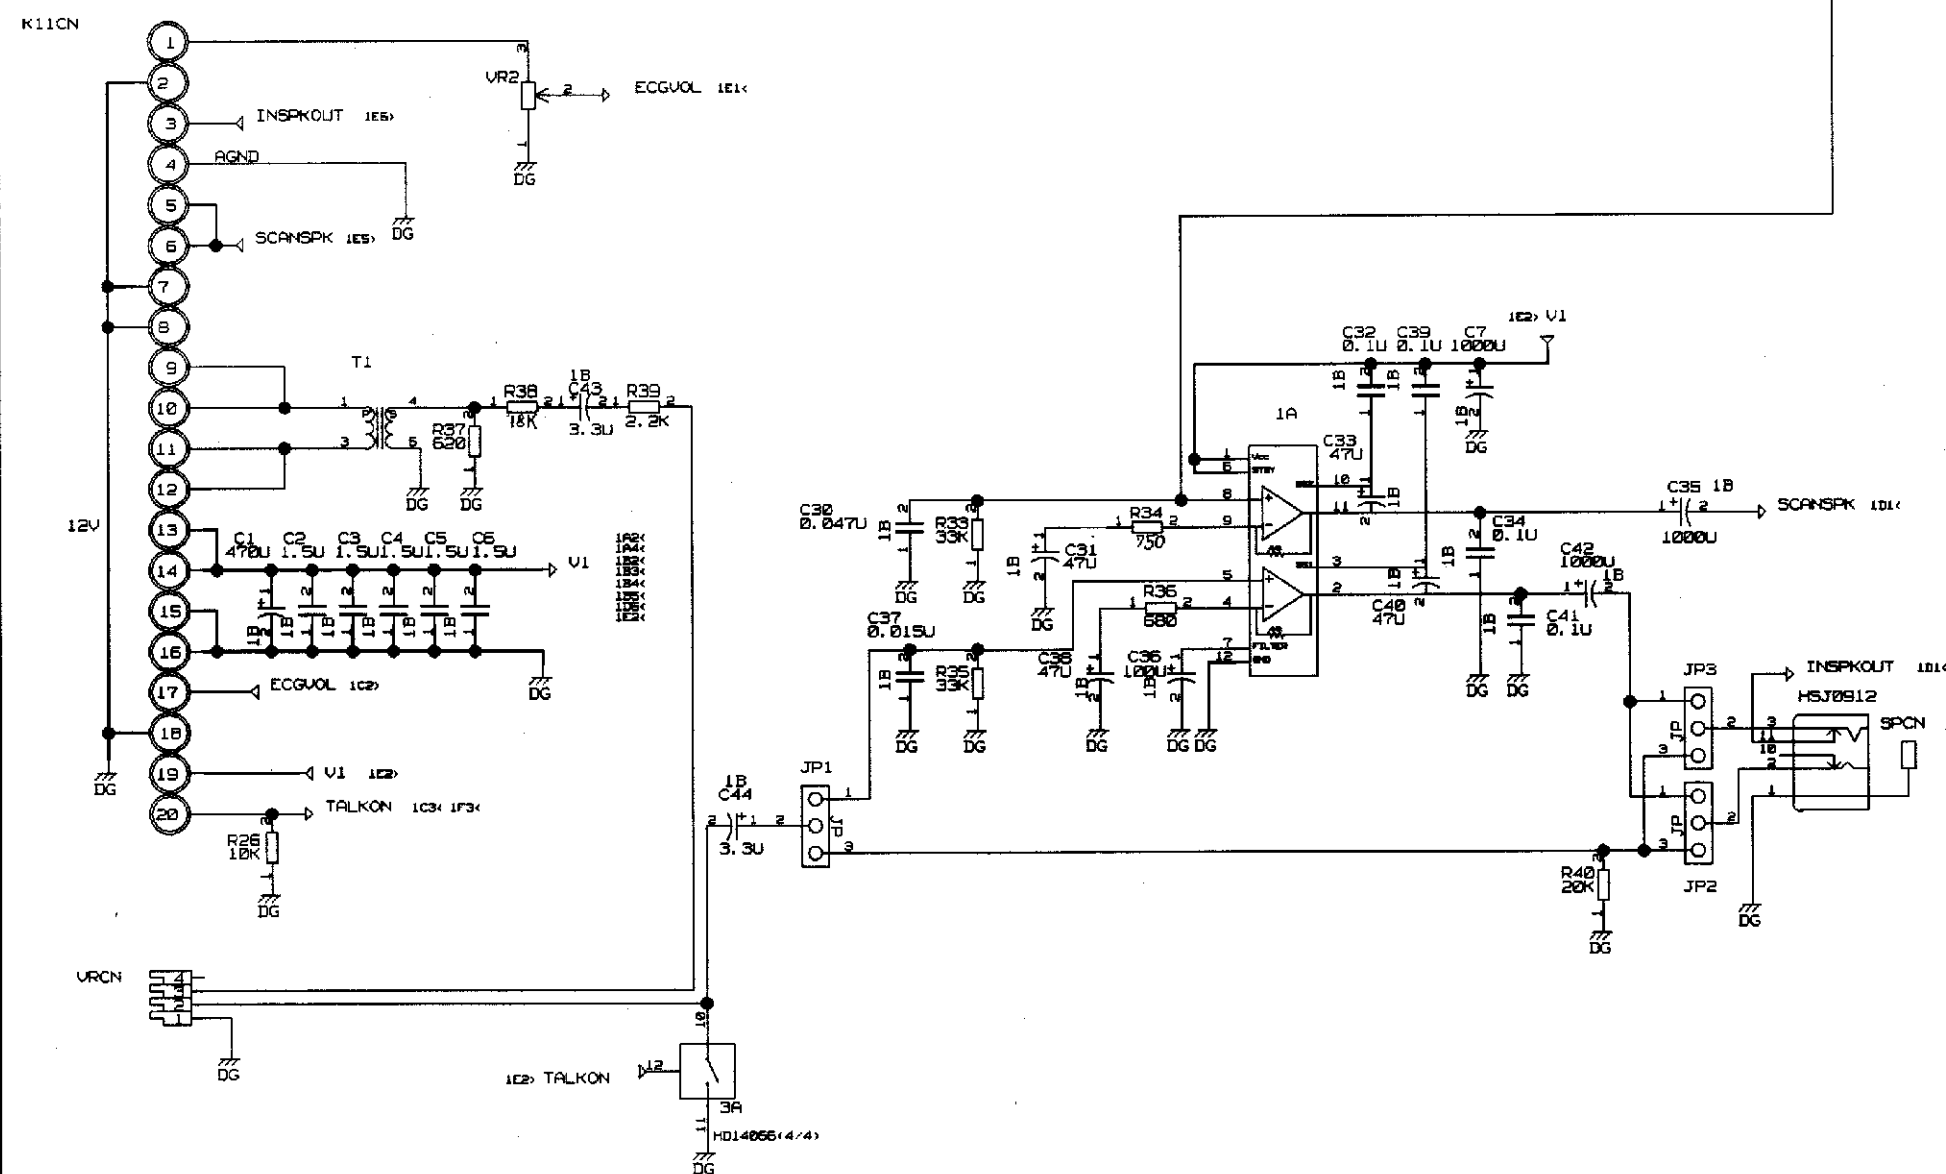

DWN	777	00-5-29	PROJECTION	TITLE IAMPM 7103
CHKD	777	00-5-29		
			SCALE	
APPD	777	00-5-29	NTS	
Hitachi Medical Corporation				DWG No. KB213786

CREFPARTS.DAT

1A	BAS415	1D4	
2B	UPD4558	1B5	1C2
3A	HD14066	1B3	1B4 1F3
4B	UPD4558	1A2	1A5
C1	CAP2	1E1	
C2	CAP1C	1E2	
C3	CAP1C	1E2	
C4	CAP1C	1E2	
C5	CAP1C	1E2	
C6	CAP1C	1E2	
C7	CAP2	1D5	
C8	CAP1C	1C3	
C9	CAP1C	1A2	
C12	CAP1C	1C4	
C13	CAP2B	1B2	
C14	CAP2B	1C2	
C15	CAP2B	1C2	
C16	CAP2B	1C2	
C18	CAP2B	1A1	
C19	CAP2B	1B2	
C20	CAP2B	1A3	
C21	CAP2B	1C3	
C22	CAP2B	1B4	
C23	CAP2B	1B4	
C24	CAP2B	1C5	
C25	CAP2B	1B5	
C27	CAP2B	1A4	
C28	CAP2B	1B5	
C29	CAP2B	1A5	
C30	CAP1A	1E3	
C31	CAP2B	1E4	
C32	CAP1	1D4	
C33	CAP2B	1D4	
C34	CAP1	1E5	
C35	CAP2	1D5	
C36	CAP2A	1E4	
C37	CAP1B	1E3	
C38	CAP2B	1E4	
C39	CAP1	1D4	
C40	CAP2B	1E4	
C41	CAP1	1E5	
C42	CAP2	1E5	
C43	CAP2B	1D2	
C44	CAP2B	1E3	

```

JP1      JP3      1E3
JP2      JP3      1F5
JP3      JP3      1E5
K11CN    CON20    1C1 1C1 1C1 1D1 1D1 1D1 1E1 1E1 1E1
MICCN    MODU2-4P-S 1B1 1C1
R1       RESI     1B2
R2       RESI     1B2
R3       RESI     1C1
R4       RESI     1C2
R5       RESI     1B2
R6       RESI     1C2
R7       RESI     1C2
R8       RESI     1B2
R9       RESI     1C3
R10      RESI     1A1
R11      RESI     1A1
R12      RESI     1A2
R13      RESI     1A2
R14      RESI     1A2
R15      RESI     1B4
R16      RESI     1B4
R17      RESI     1B5
R18      RESI     1C4
R19      RESI     1C5
R20      RESI     1B5
R21      RESI     1B5
R26      RESI     1E1
R28      RESI     1A4
R29      RESI     1A4
R30      RESI     1A5
R31      RESI     1A5
R32      RESI     1A5
R33      RESI     1E3
R34      RESI     1E4
R35      RESI     1E3
R36      RESI     1E4
R37      RESI     1D2
R38      RESI     1D2
R39      RESI     1D2
R40      RESI     1F5
SPCN     HSJ0912  1E6
T1       HT14_101 1D2
VR1      RK09K1110 1B4
VR2      RK09K1110 1C2
VRCN     MODU2-4P-S 1F1


```

SURFACE FIN.			DWG HTR			DWG No.			TITLE			DSGN. GR.			CLASS. CODE			DWG CODE								
C	B	A	DWG	REV.	DATE	REV	CHKD	APPD	SYN	REV	DATE	REV	CHKD	APPD	SYN	REV	DATE	REV	CHKD	APPD						
94	95	102	1	14	18	14				14	18	14				14	18	14								
			1 KB213786			IAMP			S			00 91 1			00 91 1											
GROUP & QTY			ITEM			DWG No.			NAME OF PARTS			MATERIAL			MATERIAL SIZE			MATERIAL LENGTH OR MASS			FIN. MASS (G)			REMARKS		
C	B	A	QTY	NO.	REV.	DWG	REV.	DATE	REV	CHKD	APPD	SYN	REV	DATE	REV	CHKD	APPD	SYN	REV	DATE	REV	CHKD	APPD	SYN	REV	DATE
94	95	102	1	14	18	14				14	18	14				14	18	14				14	18	14		
1			1			1			IAMP																	

	- SPARES LIST -	
	- PART SUMMARY -	
BA5415-BASE	H399A01B BA5415A	1
CAP1-BASE	J1310013 503N-5002-104K1	4
CAP1A-BASE	J1317011 503N-5002-473KB	1
CAP1B-BASE	J1317008 503N-5002-153KB	1
CAP1C-BASE	J17----- RPE-SERIES	8
CAP2-BASE	J144----- URS_UVZ_SERIES	4
CAP2A-BASE	J1447132 URS-1E-101MCA-1TA	1
CAP2B-BASE	J144----- URS_USA_SERIES	21
CON20-BASE	J8334615 HIF3BA_20PA_2.54DS	1
HD14066-BASE	J4210109 HD14066BP	1
HSJ0912-BASE	J833A450 HSJ0912-01-010	1
HT14_101-BASE	KA486173 HT14-101	1
JP3-BASE	J8339659 DIC-149-3P	3
MODU2-4P-S-BASE	J8331331 281910-2	2
REST1-BASE	J231XXXX LF1/4 SERIES	35
RK09K1110-BASE	J261A006 RK09K1110-10KA	2
UPD4558-BASE	H313A002 UPD4558C	2
TOTAL		84

2

DRAWING: IAMPM
IAMPM Fri May 26 10:48:02 2000

DWN	オカク	00529	PROJECTION	TITLE
CHKD	タケタキ	00529		IAMPM カイロス
APPD	マエノ	00529	SCALE NTS	
				
Hitachi Medical Corporation				DWG No. KB213786
				SH. 2