

TABLE OF CONTENTS

TABLE OF CONTENTS 1

1- REPLACING CONTROL / DISPLAY 2

 1-1 Operator Button Panel & Display Assembly (MG2 A4 A5)..... 2

REVISION HISTORY 4

Description - Procedures for replacing operator control/display hardware in the front magnet enclosure.

1- REPLACING CONTROL / DISPLAY

1-1 Operator Button Panel & Display Assembly (MG2 A4 A5)

1. Lock out and tag out circuit breaker MR1 A14 CB6 at rear of RF/Pen Cabinet (MR1) on magnet enclosure power supply (MEPS) module.


For **RF/Pen II** and **RF/PDU Cabinet**: Lock out and tag out circuit breaker MR1 A20 CB4 at rear of RF/Pen II and RF/PDU Cabinet on System Support Module (SSM).

(Refer to CD-ROM *Dir. 2187583-3 [or -2], MR Release Signa 5x/8x Service Methods, Renewal Parts and Service Tools*, Procedure for Safety, Section 6, OSHA LOCKOUT/TAGOUT REQUIREMENTS.)

2. Verify that voltage between MR1 A14 TP4 (+) and TP13 (–) is 0 Vdc.

For RF/Pen II and RF/PDU Cabinet, verify that voltage between MR1 A20 TP4 (+) (SRI+24V) and TP13 (–) (SRI RTN) is 0 Vdc.

3. Gain access to rear of Operator Button Panel & Display Assemblies by sliding magnet enclosure front cover forward (refer to procedure for Enclosure Covers, Section 1, Enclosure, MG2, if needed).
4. Remove Operator Button Panel and Display Assembly per steps in Illustration L4783A.

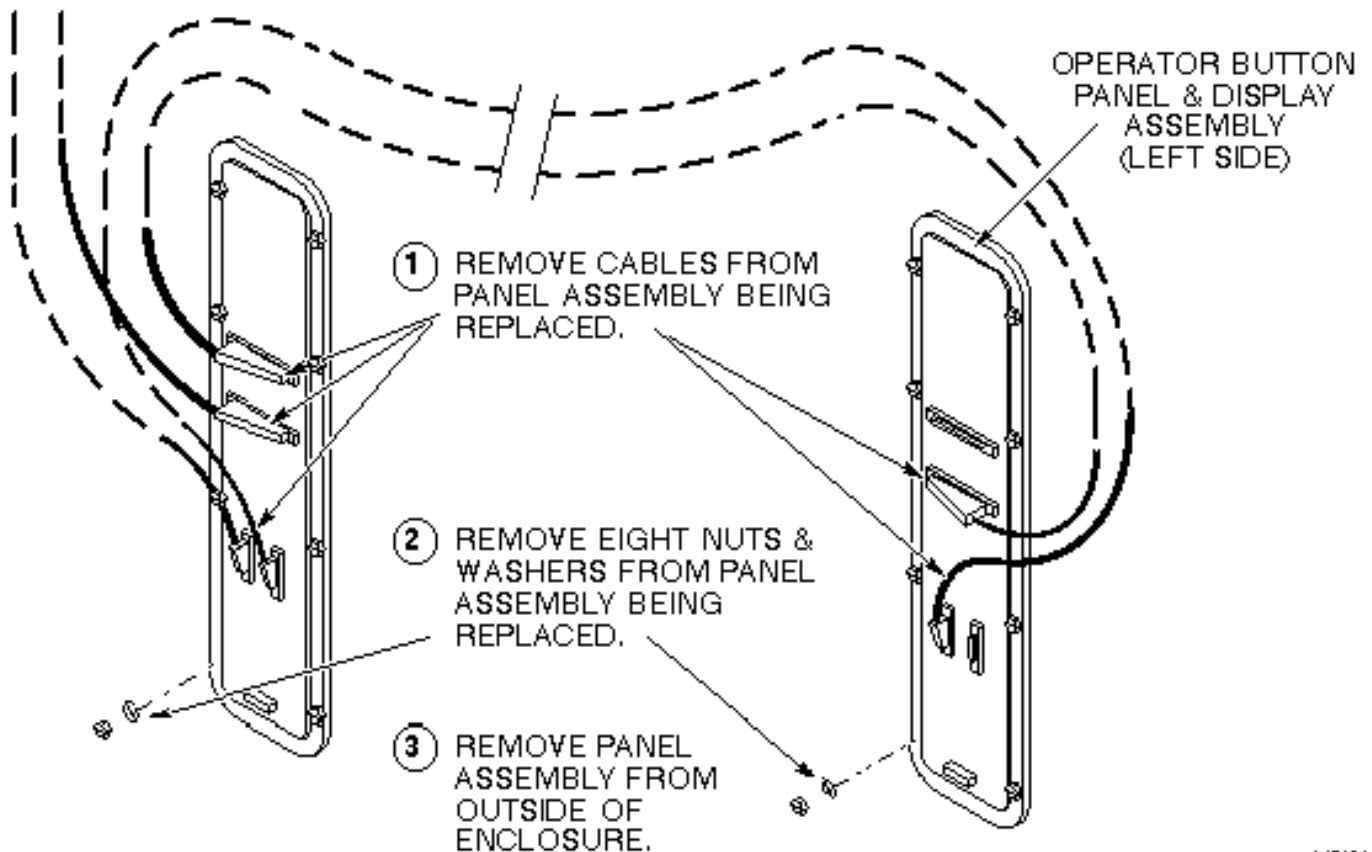

L4783A

OPERATOR BUTTON PANEL AND DISPLAY ASSEMBLIES
ILLUSTRATION L4783A

5. Install replacement Operator Button Panel and Display Assembly by performing Illustration L4783A steps in reverse order.
6. Close and latch magnet enclosure front cover.
7. Remove tag-out tag from circuit breaker MR1 A14 CB6 or MR1 A20 CB4.
8. Restore power to operator button panel and display assemblies by switching on circuit breaker MR1 A14 CB6 at rear of RF/Pen Cabinet (MR1) on MEPS module.

RF/Pen II and RF/PDU Cabinet: Switch on circuit breaker MR1 A20 CB4 on the SSM at rear of RF/Pen II Cabinet or RF/PDU.

REVISION HISTORY

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
0	June 16, 1998	J. Saperstein	Initial conversion from Toolbook to Word.