

[illegible]

GLOBAL OPERATOR CONSOLE – GOC6 SERIES

VCT High Definition Configuration	Sheet 1 of 4
VCT Performance Configuration	Sheet 2 of 4
VCT Standard Configuration	Sheet 3 of 4
Signal Tables	Sheet 4 of 4

ICOM – 5266222

Power LED Vol-Up Vol-DN TEST POT RESET

SCIM HD50 – J19 Blue NI Green DB25 – J20 RHARD J54 X-Ray Abort J53 Switch I 0 Power J9

POWER SWITCH PANEL 5269710

SERVICE KEY ETH SWITCH SCIM

SERVICE NETWORK

HOST AUDIO IN HOST AUDIO OUT SCIM/ICOM CUSTOM 50-PIN GANTRY INTERFACE CUSTOM 25-PIN 2-PIN (24VDC INTERLOCK)

TOP-REAR BULKHEAD 5304698

Modem Barcode Mouse Keyboard Trackball

USB-A USB-B USB-C USB-D USB-E

HOST 5183547-38

Power J6 Purple Green Serial Port Parallel Port USB

DVD-R DVD-RAM EXT HDD

PINK GRN BLUE MIC AOUT AIN

USB HUB VIDEO EMPTY EMPTY

ETH3* HSP ETH2* NIC(2) ETH1* TGP CNS ETH0* NIG(4) CH2 CH1 SCSI-2 MOD

VERB – 5255299-30

Power SW J13 GRN PRP Video

Serial TTYS0* ETH0 ETH1 RMM2 NVIDIA TESLA C870 – 5306965

VDIG – 5255299-20

Power SW J12 GRN PRP Video

Serial TTYS0* ETH0 ETH1 RMM2 SAS – 5304436 NVIDIA TESLA C870 – 5306965 VDP 232000

HSDA (1) - 5199748

Power SW J14 COM1 COM2

SAS PORTS CH0 CH1 EXP ETH

NETWORK SWITCH 5270510 (FRONT VIEW)

Power J8

ETHERNET 10/100/1000BASET SUBNET B (1-48)

DA(1) HOST DIG RMM VRB DA(1)

ETHERNET 10/100/1000BASET SUBNET A (9-16)

AW RPM SRV UPS SPF

REAR BULKHEAD 5269472

ETHERNET 10/100/1000BASET

J25 SLIPRING J20 GANTRY

PROTECTIVE EARTH GROUND PDU

POWER 208Y L-L-N-G

Outlet Box Assembly

CB1: J12 – J19
CB2: J2 – J11
CB3: J21 – J22

REV 3 ECO MADE BY GREGG MARTIN DATE DESCRIPTION JUN 12, 2006 UPDATED PER GOC6 SCHEMATIC REVIEW APP BY SCOTT TREML DATE JUN 12, 2008

REV 4 ECO MADE BY GREGG MARTIN DATE DESCRIPTION JUN 13, 2008 UPDATED PER GOC6 SCHEMATIC REVIEW APP BY SCOTT TREML DATE JUN 13, 2008

MADE BY: CHRIS JABLONOWSKI DATE: 12/FEB/2008

ELECTRONIC RELEASE PROCESS DESIGN RELEASED


GE Healthcare Milwaukee, WI USA

DESIGN TITLE FIRST MADE FOR GLOBAL OPERATOR CONSOLE (GOC6 SERIES) VCT HIGH DEFINITION PROGRAM

5212920SCH

REV 4 SIZE D SHEET 2 OF 4

State: COMPLETE - Production parts may not be defined by this document; it is an uneditable finished draft.
See the GEHC Myworkshop System to determine the status of this document.

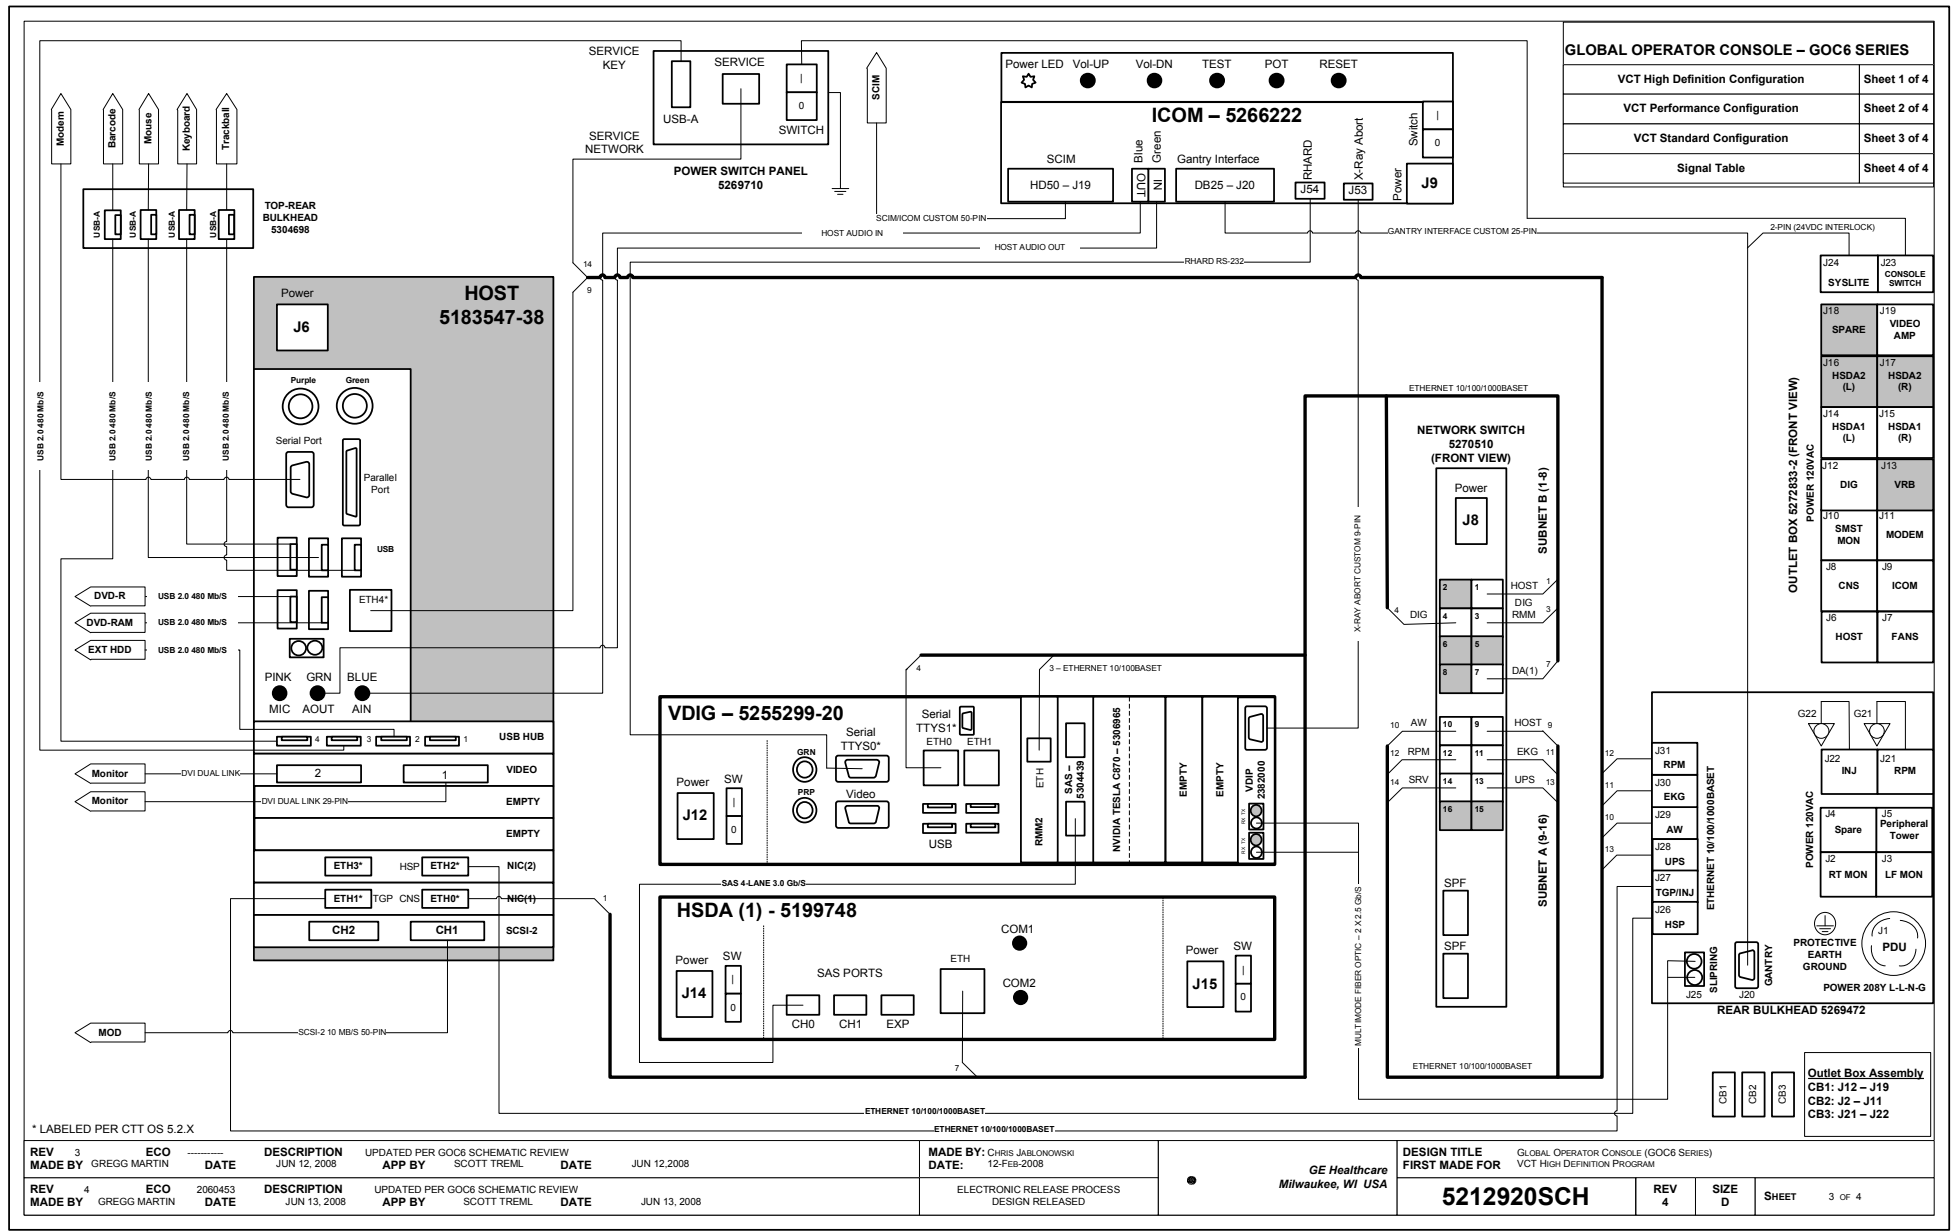

State: COMPLETE - Production parts may not be defined by this document; it is an uneditable finished draft.
See the GEHC Myworkshop System to determine the status of this document.

SIGNAL TABLE

GLOBAL OPERATOR CONSOLE – GOC6 SERIES

VCT High Definition Configuration	Sheet 1 of 4
VCT Performance Configuration	Sheet 2 of 4
VCT Standard Configuration	Sheet 3 of 4
Signal Table	Sheet 4 of 4

10/100/1000BASET ETHERNET (TIA-T568B) 8-PIN (SHIELDED WITH SUPPRESSION)	
PIN	SIGNAL NAME
PIN 01	PAIR 2 D+
PIN 02	PAIR 2 D-
PIN 03	PAIR 3 D+
PIN 04	PAIR 4 D+
PIN 05	PAIR 4 D-
PIN 06	PAIR 3 D-
PIN 07	PAIR 1 D+
PIN 08	PAIR 1 D-
SHIELD	CHASSIS GROUND
CORE	450Ω @ 1000MHz

X-RAY ABORT CUSTOM 9-PIN (VDIP)	
PIN	SIGNAL NAME
PIN 01	X-RAY ABORT IN (+24VDC)
PIN 02	FEC UNCORRECTED (LO)
PIN 03	X-RAY ABORT OUT (+24VDC)
PIN 04	FEC CORRECTED (LO)
PIN 05	+3.3VDC PULLUP
PIN 06	LGND
PIN 07	LGND
PIN 08	LGND
PIN 09	CABLE STATUS

X-RAY ABORT CUSTOM 9-PIN (HDIP)	
PIN	SIGNAL NAME
PIN 01	X-RAY ABORT IN (+24VDC)
PIN 02	-
PIN 03	X-RAY ABORT OUT (+24VDC)
PIN 04	-
PIN 05	+3.3VDC PULLUP
PIN 06	LGND
PIN 07	LGND
PIN 08	LGND
PIN 09	CABLE STATUS

RHARD RS-232 9-PIN (TIA-574) (SHIELDED)	
PIN	SIGNAL NAME (DCE DEVICE)
PIN 01	- (CARRIER DETECT) DCD
PIN 02	TRANSMITTED DATA TxD
PIN 03	RECEIVED DATA RxD
PIN 04	- (DATA TERMINAL READY) DTR
PIN 05	COMMON GROUND G
PIN 06	- (DATA SET READY) DSR
PIN 07	- (REQUEST TO SEND) RTS
PIN 08	- (CLEAR TO SEND) CTS
PIN 09	- (RING INDICATOR) RI
SHIELD	CHASSIS GROUND

GANTRY INTERFACE CUSTOM 25-PIN (SHIELDED)			
PIN	SIGNAL NAME	PIN	SIGNAL NAME
PIN 01	E-STOP RETURN	PIN 14	E-STOP RETURN
PIN 02	X-RAY ABORT OUT (+24VDC)	PIN 15	X-RAY ABORT IN (+24VDC)
PIN 03	PDU SYSLITE OUT (+24VDC)	PIN 16	PDU SYSLITE IN (+24VDC)
PIN 04	FKP TxD+	PIN 17	FKP TxD-
PIN 05	FKP RxD+	PIN 18	FKP RxD-
PIN 06	GANTRY RESET +	PIN 19	GANTRY RESET -
PIN 07	PRESCRIBED TILT L1+	PIN 20	PRESCRIBED TILT L1-
PIN 08	PRESCRIBED TILT L2+	PIN 21	PRESCRIBED TILT L2-
PIN 09	REM SPEAK	PIN 22	REM SPEAK GND
PIN 10	REM MIC +	PIN 23	REM MIC -
PIN 11	+12VDC	PIN 24	LGND
PIN 12	-12VDC	PIN 25	LGND
PIN 13	LGND		

USB 2.0 INTERFACE (SHIELDED) MAX LENGTH 5m	
PIN	SIGNAL NAME
PIN 01	+5VDC
PIN 02	DATA -
PIN 03	DATA +
PIN 04	GND
SHIELD	CGND

SERIAL ATTACHED SCSI (SAS) 4-PHYSICAL LINKS LVDS (SHIELDED)			
PIN	SIGNAL NAME	PIN	SIGNAL NAME
PIN 01	Rx0+	PIN G1	SIGNAL GROUND
PIN 02	Rx0-	PIN G2	SIGNAL GROUND
PIN 03	Rx1+	PIN G3	SIGNAL GROUND
PIN 04	Rx1-	PIN G4	SIGNAL GROUND
PIN 05	Rx2+	PIN G5	SIGNAL GROUND
PIN 06	Rx2-	PIN G6	SIGNAL GROUND
PIN 07	Rx3+	PIN G7	SIGNAL GROUND
PIN 08	Rx3-	PIN G8	SIGNAL GROUND
PIN 09	Tx3-	PIN G9	SIGNAL GROUND
PIN 10	Tx3+	SHIELD	CHASSIS GROUND
PIN 11	Tx2-		
PIN 12	Tx2+		
PIN 13	Tx1-		
PIN 14	Tx1+		
PIN 15	Tx0-		
PIN 16	Tx0+		

HOST AUDIO – 3.5mm MONO TELEPHONE	
PIN	SIGNAL NAME
PIN 01	SIGNAL GROUND

DAS INTERFACE - SCAN DATA 10Gb/S – FIBER OPTIC 50/125um (HDIP) 2.5Gb/S – FIBER OPTIC 62.5/125um (VDIP)	
PIN	SIGNAL NAME
PIN 01	TX
PIN 02	RX

SCIMICOM CUSTOM 50-PIN (SHIELDED)			
PIN	SIGNAL NAME	PIN	SIGNAL NAME
PIN 01	E-STOP	PIN 26	- (PULMONARY TRIGGER 2)
PIN 02	E-STOP RETURN	PIN 27	-
PIN 03	TALK	PIN 28	- (TRACKBALL TxD+)
PIN 04	TALK GND	PIN 29	- (TRACKBALL TxD-)
PIN 05	AUTO-VOICE VOL POT +5VDC	PIN 30	-
PIN 06	AUTO-VOICE VOL WIPER	PIN 31	-
PIN 07	ANALOG GND	PIN 32	PRESCRIBED TILT CONTACT 1
PIN 08	PATIENT VOLUME POT +5VDC	PIN 33	ANALOG GND
PIN 09	PATIENT VOLUME WIPER	PIN 34	PRESCRIBED TILT CONTACT 2
PIN 10	ANALOG GND	PIN 35	ANALOG GND
PIN 11	OC VOLUME POT +5VDC	PIN 36	-
PIN 12	OC VOLUME WIPER	PIN 37	ANALOG GND
PIN 13	OC VOLUME RETURN	PIN 38	-
PIN 14	OC MICROPHONE BIAS +5.9VDC	PIN 39	ANALOG GND
PIN 15	OC MICROPHONE	PIN 40	TRACKBALL DTR
PIN 16	OC MICROPHONE RETURN	PIN 41	SCIM POWER 1 +5VDC
PIN 17	OC SPEAKER	PIN 42	LGND (PRESOR TILT RETURN)
PIN 18	OC SPEAKER GND	PIN 43	SCIM POWER 2 +5VDC
PIN 19	FKP TxD+	PIN 44	TRACKBALL RTS
PIN 20	FKP TxD-	PIN 45	-
PIN 21	FKP RxD+	PIN 46	PRESCRIBED TILT UNUSED
PIN 22	FKP RxD-	PIN 47	-
PIN 23	-	PIN 48	-
PIN 24	-	PIN 49	+12VDC
PIN 25	- (PULMONARY TRIGGER 1)	PIN 50	-12VDC
		SHIELD	CHASSIS GROUND

DIGITAL VIDEO INTERFACE INTEGRATED ANALOG AND DIGITAL (DVI-I) (SHIELDED)			
PIN	SIGNAL NAME	PIN	SIGNAL NAME
PIN 01	DIGITAL RED LINK 1 -	C1	ANALOG RED
PIN 02	DIGITAL RED LINK 1 +	C2	ANALOG GREEN
PIN 03	TMDS SHIELD RED/GREEN	C3	ANALOG BLUE
PIN 04	DIGITAL GREEN LINK 2 -	C4	ANALOG HORIZONTAL SYNC
PIN 05	DIGITAL GREEN LINK 2 +	C5	ANALOG GROUND
PIN 06	DISPLAY DATA CHANNEL CLK	SHIELD	CHASSIS GROUND
PIN 07	DISPLAY DATA CHANNEL DATA		
PIN 08	ANALOG VERTICAL SYNC		
PIN 09	DIGITAL GREEN LINK 1 -		
PIN 10	DIGITAL GREEN LINK 1 +		
PIN 11	TMDS SHIELD GREEN/BLUE		
PIN 12	DIGITAL BLUE LINK 2 -		
PIN 13	DIGITAL BLUE LINK 2 +		
PIN 14	+5VDC STANDBY		
PIN 15	GROUND		
PIN 16	HOT PLUG DETECT		
PIN 17	DIGITAL BLUE/SYNC LINK 1 -		
PIN 18	DIGITAL BLUE/SYNC LINK 1 +		
PIN 19	TMDS SHIELD BLUE/RED		
PIN 20	DIGITAL RED LINK 2 -		
PIN 21	DIGITAL RED LINK 2 +		
PIN 22	TMDS CLK SHIELD		
PIN 23	DIGITAL CLK LINK 1/2 +		
PIN 24	DIGITAL CLK LINK 1/2 -		

SCSI-2 CENTRONICS 50-PIN DIFFERENTIAL (SHIELDED) MAXIMUM LENGTH 25m			
PIN	SIGNAL NAME	PIN	SIGNAL NAME
PIN 01	GROUND	PIN 26	GROUND
PIN 02	DATA0+	PIN 27	DATA0-
PIN 03	DATA1+	PIN 28	DATA1-
PIN 04	DATA2+	PIN 29	DATA2-
PIN 05	DATA3+	PIN 30	DATA3-
PIN 06	DATA4+	PIN 31	DATA4-
PIN 07	DATAS+	PIN 32	DATAS-
PIN 08	DATAG+	PIN 33	DATAG-
PIN 09	DATAT+	PIN 34	DATAT-
PIN 10	DATA PARITY+	PIN 35	DATA PARITY-
PIN 11	DIFFERENTIAL SENSE	PIN 36	GROUND
PIN 12	RESERVED	PIN 37	RESERVED
PIN 13	TERMINATION POWER	PIN 38	TERMINATION POWER
PIN 14	RESERVED	PIN 39	RESERVED
PIN 15	ATTENTION+	PIN 40	GROUND
PIN 16	GROUND	PIN 41	ATTENTION-
PIN 17	BUSY+	PIN 42	GROUND
PIN 18	ACKNOWLEDGE+	PIN 43	BUSY-
PIN 19	RESET+	PIN 44	ACKNOWLEDGE-
PIN 20	MESSAGE+	PIN 45	RESET-
PIN 21	SELECT+	PIN 46	MESSAGE-
PIN 22	C/D+	PIN 47	SELECT-
PIN 23	REQUEST+	PIN 48	C/D-
PIN 24	I/O+	PIN 49	REQUEST-
PIN 25	GROUND	PIN 50	I/O-
		SHIELD	CHASSIS GROUND

REV 3 MADE BY ECO GREGG MARTIN	DATE JUN 12, 2008	DESCRIPTION JUN 12, 2008	UPDATED PER GOC6 SCHEMATIC REVIEW APP BY SCOTT TREML DATE JUN 12, 2008	MADE BY: CHRIS JABLONOWSKI DATE: 12-FEB-2008	DESIGN TITLE FIRST MADE FOR GLOBAL OPERATOR CONSOLE (GOC6 SERIES) VCT HIGH DEFINITION PROGRAM
REV 4 MADE BY ECO GREGG MARTIN	DATE JUN 13, 2008	DESCRIPTION JUN 13, 2008	UPDATED PER GOC6 SCHEMATIC REVIEW APP BY SCOTT TREML DATE JUN 13, 2008	ELECTRONIC RELEASE PROCESS DESIGN RELEASED	5212920SCH REV 4 SHEET 4 OF 4