TPPA PAYMENTS

Kiosk guide

How a customer pays a bill at a TPPA self-service kiosk, and how the kiosk behaves.

For: Branch staff who help customers, and anyone who needs to know the kiosk

Version 1.0 · 2026-11-10

The screenshots come from a demonstration system: every name, account, amount and code in them is made up.

Contents

1 About this guide

2 The kiosk at a glance

- What it accepts
- Languages

3 Paying a bill, step by step

- Start: choose a language
- Step 1: the company
- Step 2: the account number
- Step 3: the name
- Step 4: the amount
- Step 5: check before you pay
- Insert the cash
- Paid

4 When something is different

- Already paid today
- The amount has centavos
- Over the limit
- This bill cannot be paid here
- "Are you still there?"
- Leaving with cash in: the kiosk credit
- After a power cut: Welcome back
- The receipt did not print
- Out of service

5 Timeouts

6 Privacy

7 What the kiosk prints

The official receipt

The kiosk credit slip

The cash collection slip

X-reading and Z-reading

8 The day end at midnight

9 Limits set by head office

10 For staff: helping a customer

11 Quick reference

1. About this guide

A TPPA kiosk is a self-service machine where customers pay their utility bills **in cash, without a teller**. It stands in malls and other public places and can run day and night with nobody beside it.

This guide follows a customer through a payment, screen by screen, and explains what the kiosk does in every special case: what the customer sees, and what you can tell them. The last part, "For staff: helping a customer", says what to do at the counter in each case.

The kiosk is for customers only. Staff work on it through **staff mode**, behind the service door: collecting the cash, loading paper, clearing faults. That is in the **Kiosk custodian guide**.

The screenshots come from a demonstration kiosk: every name, account, amount, OR number and code in them is made up.

2. The kiosk at a glance

What it accepts

Payment	**Cash only**
Notes	₱20, ₱50, ₱100, ₱200, ₱500, ₱1,000
Coins	₱1, ₱5, ₱10, ₱20
Change	**None.** The customer inserts the exact amount.
Bills	One bill (one account) per payment. To pay several bills, the customer pays them one after the other.
Largest payment	₱50,000.00 (head office can set it per kiosk, up to ₱100,000.00)

The notes and coins are those set for the kiosk by head office; the start screen always shows the ones this kiosk takes.

Exact amount, no change. Before each note or coin, the kiosk tells its acceptors which ones they may take: only those **not larger than what is still to pay**. A note that is too large is given straight back. A customer therefore cannot pay too much, and the kiosk never needs to give change.

Centavos. Because the smallest coin is ₱1, the kiosk cannot take a total with centavos (₱1,252.50, for example). It says so before any cash goes in, and the customer pays that bill at a TPPA counter.

Languages

Every customer screen is in **English**, **Filipino** or **Cebuano**. The customer chooses on the start screen, and can change at any time with the **English**, **Filipino** and **Cebuano** buttons at the top right of every screen. Head office chooses which of the three a kiosk offers.

The printed slips are in English.

Some of the texts, in the three languages:

English	Filipino	Cebuano
Pay your electric bill here	Magbayad ng bill sa kuryente dito	Bayri dinhi ang imong bill sa kuryente
Start in English	Magsimula sa Filipino	Sugod sa Cebuano
Tap to begin	I-tap para magsimula	I-tap aron magsugod
Step 1 of 5	Hakbang 1 sa 5	Lakang 1 sa 5
Which company is your bill from?	Saang kumpanya galing ang iyong bill?	Asa nga kompanya gikan ang imong bill?
Your account number	Ang iyong account number	Ang imong account number
Scan the barcode on your bill	I-scan ang barcode sa iyong bill	I-scan ang barcode sa imong bill
Name on the bill	Pangalan sa bill	Ngalan sa bill
Amount on the bill	Halaga sa bill	Kantidad sa bill
Check before you pay	Suriin bago magbayad	Susiha una mobayad
Total to insert	Kabuuang ihuhulog	Total nga isulod
Insert cash	Maghulog ng cash	Isulod ang cash
No change is given. Insert the exact amount.	Walang sukli. Ihulog ang eksaktong halaga.	Walay sukli. Isulod ang eksaktong kantidad.
Insert the exact amount	Ihulog ang eksaktong halaga	Isulod ang eksaktong kantidad
Still to insert	Kulang pa	Kulang pa
Paid. Thank you.	Bayad na. Salamat.	Bayad na. Salamat.
Next	Susunod	Sunod
Back	Bumalik	Balik
Cancel	Kanselahin	Kanselahon
Clear	Burahin	Papasa
Done	Tapos na	Human na
Are you still there?	Nandiyan ka pa ba?	Naa pa ba ka?
Continue	Magpatuloy	Padayon
Out of service	Hindi magagamit	Dili magamit
Nearest counter	Pinakamalapit na counter	Pinakaduol nga counter


Examples of whole screens in Filipino and Cebuano are in the next section (Steps 1, 2 and 5).

3. Paying a bill, step by step

The customer needs **the bill** and **the exact amount in cash**. The kiosk works by touch: one task per screen, with large buttons. **Cancel** (bottom left) ends the visit and goes back to the start at any time **until cash goes in**; **Back** goes back one step; **Next** moves on. The top of each screen shows the step ("Step 2 of 5").

Start: choose a language

The start screen says what the kiosk is for, in the three languages, what to bring, and the four steps: "Scan the barcode on your bill", "Check the amount and the fee", "Insert the exact cash", "Take your official receipt". The bottom line gives the cash rules and the companies whose bills can be paid here.

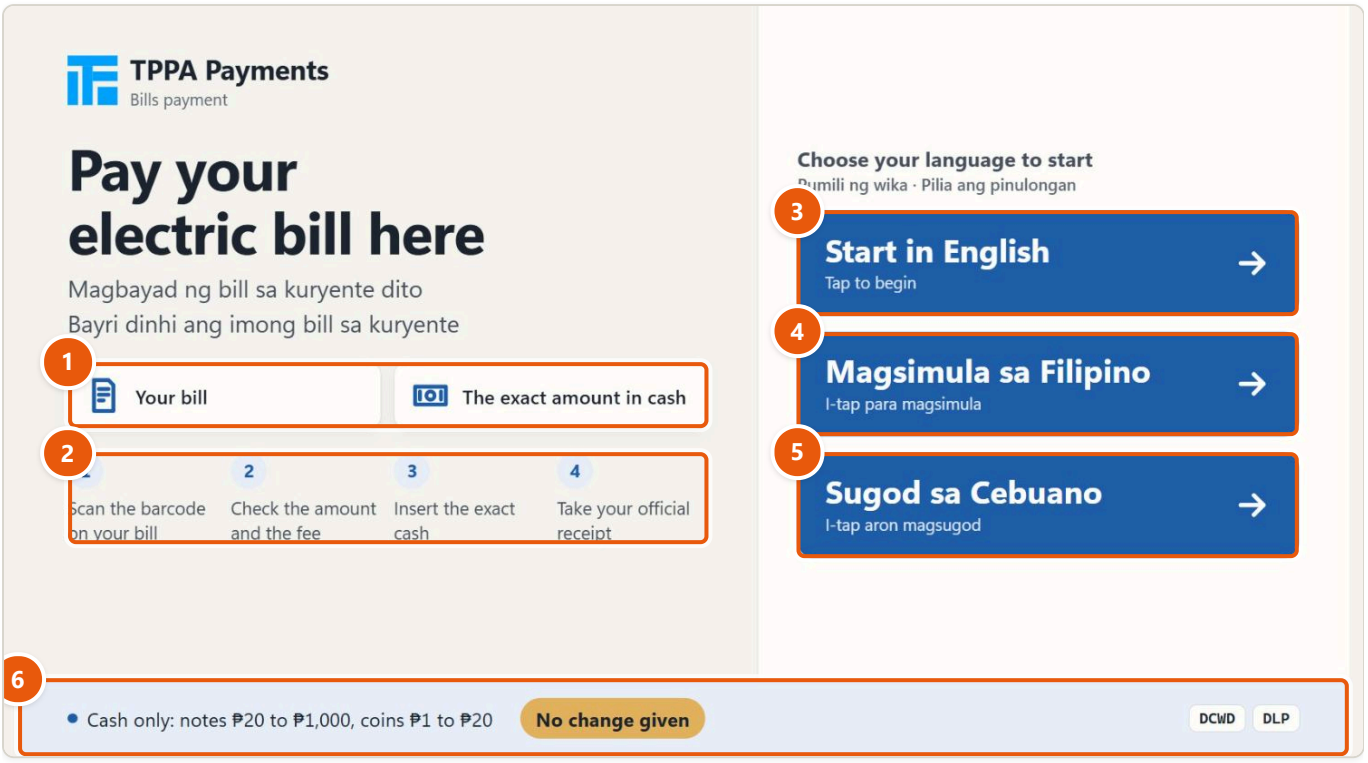


1. What to bring: the bill and the exact cash
2. The four steps
3. Start in English
4. Start in Filipino
5. Start in Cebuano
6. Cash rules: notes, coins, no change

To start, the customer taps the button of their language: **Start in English** (3), **Magsimula sa Filipino** (4) or **Sugod sa Cebuano** (5). The cash rules (6) read "Cash only: notes ₱20 to ₱1,000, coins ₱1 to ₱20" and "No change given".

Step 1: the company


"Which company is your bill from?" The customer taps the company named at the top of the bill, for example **DLP** (Davao Light and Power Co.) or **DCWD** (Davao City Water District).

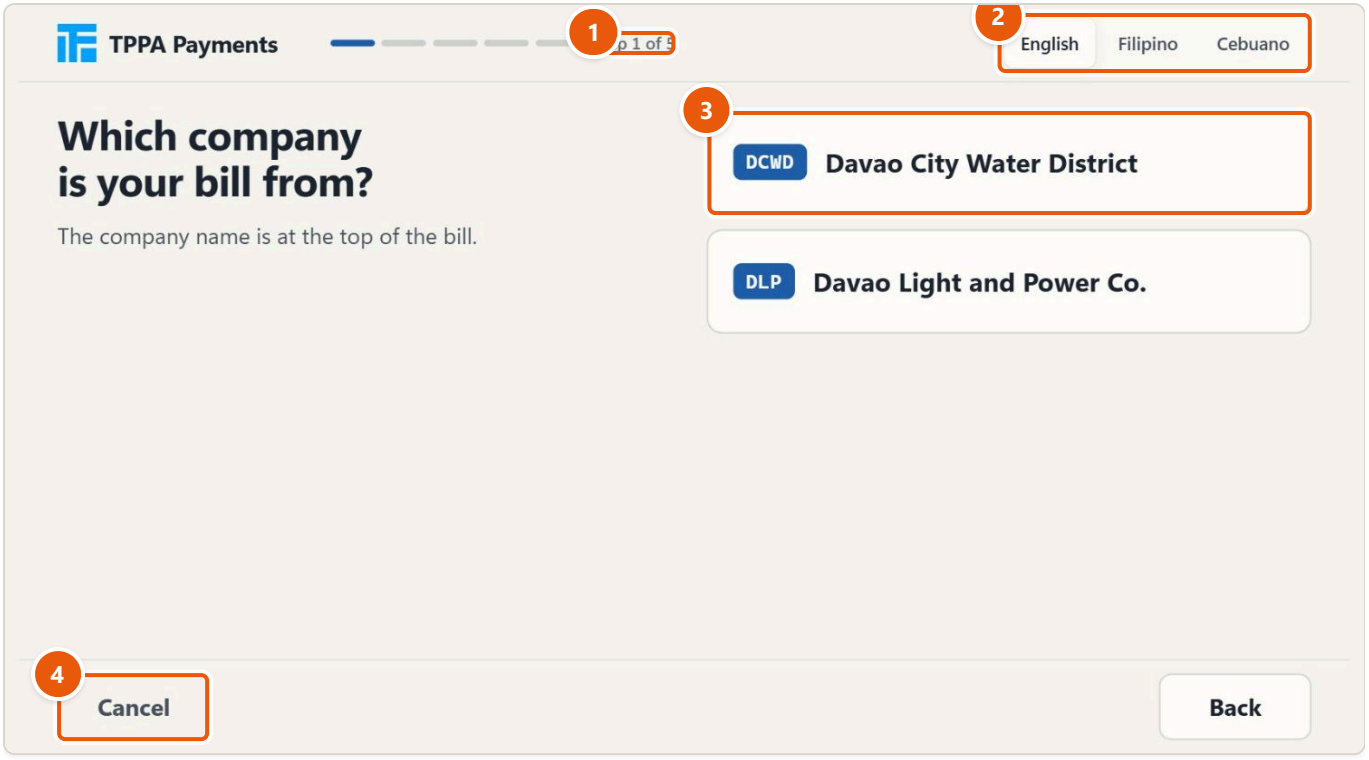

1. Step 1 of 5
2. Change the language at any time
3. Tap the company on the bill
4. Cancel: back to the start

When only one company can be paid at this kiosk, this step is skipped.


The same screen in Filipino:

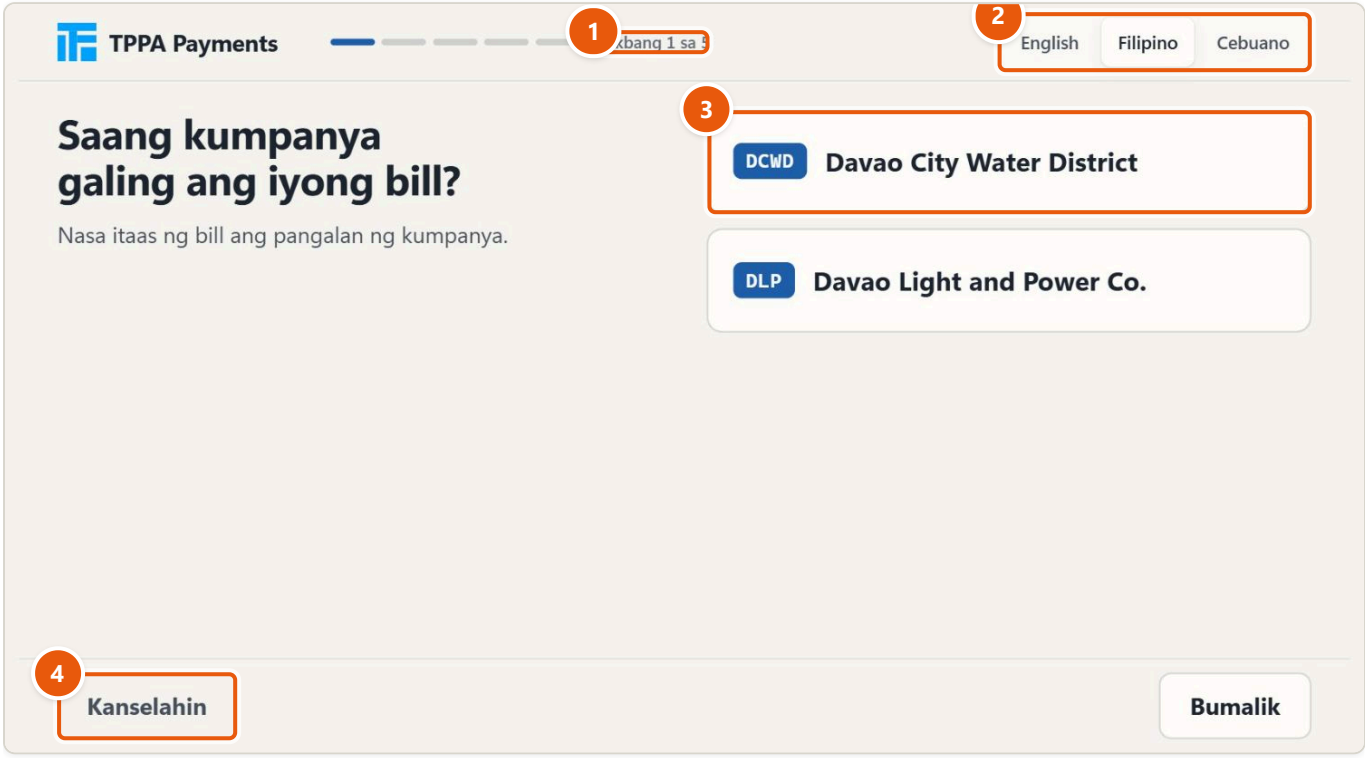

1. Hakbang 1 sa 5 (Step 1 of 5)
2. Filipino chosen
3. The company on the bill
4. Kanselahin (Cancel)

Step 2: the account number


"Your account number". The quickest way is to **scan the barcode** on the bill: "Hold the bill under the red light, below the screen." The number appears at once. Otherwise the customer types it on the keypad (2); the line below says how many digits the company's account numbers have ("11 digits, as printed on the bill." for DLP). **Clear** empties the number, ⌫ removes the last digit. Then **Next**.

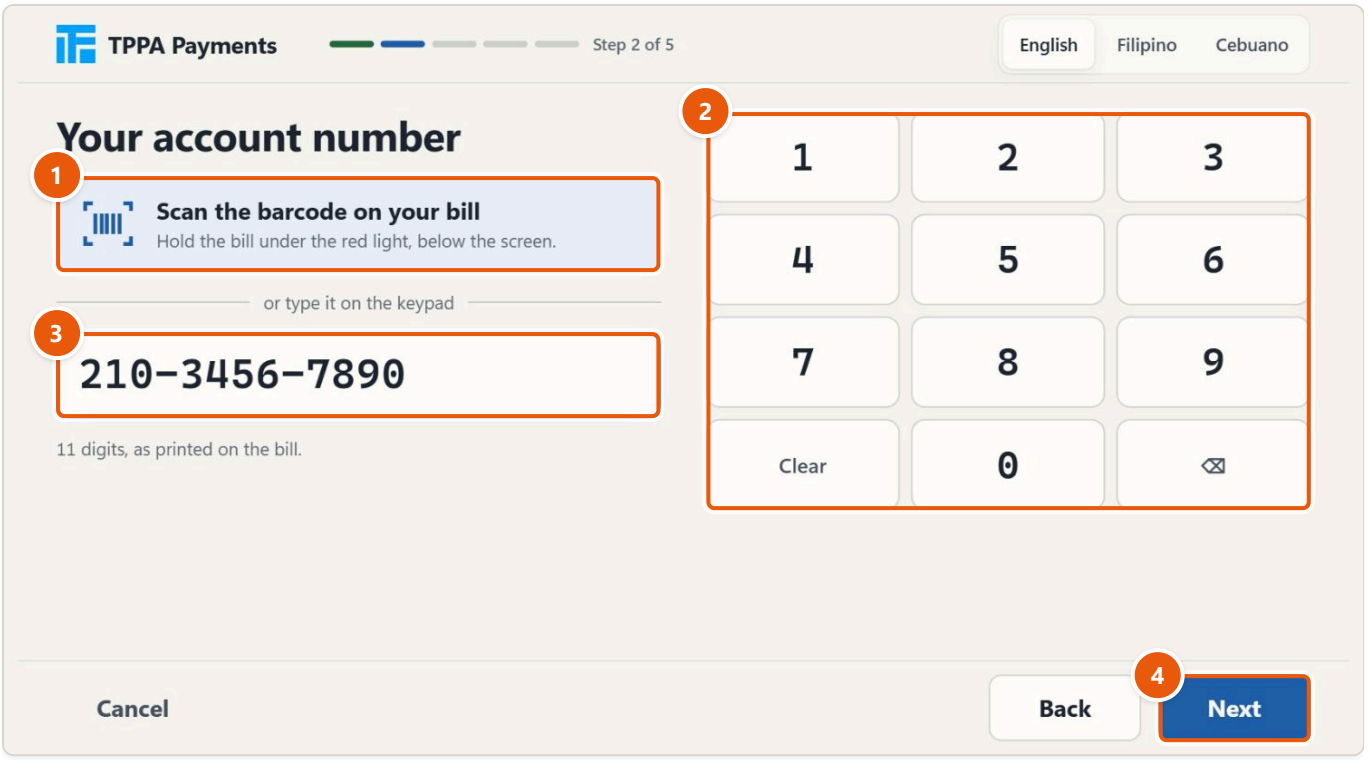

1. Scan the barcode on the bill
2. Or type the number on the keypad
3. The number as typed
4. Next

If the number is too short, the kiosk says so, for example "Enter all 11 digits of the Davao Light and Power Co. account number. This has 8." A barcode that is not an account number gives "That barcode is not an account number. Scan the barcode on the bill, or type the number."


The same screen in Cebuano:

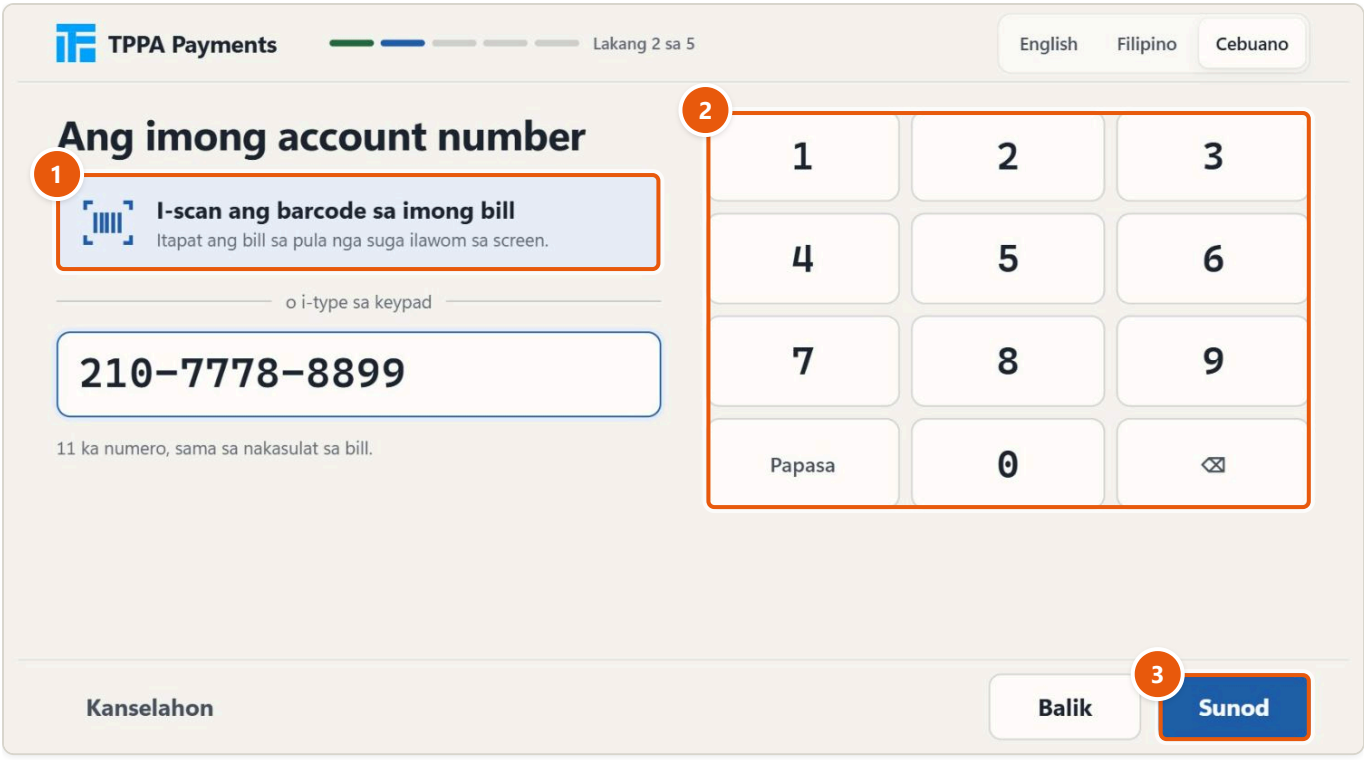

1 I-scan ang barcode (scan the barcode)
2 Or type it
3 Sunod (Next)

Step 3: the name

"Name on the bill", typed on the on-screen keyboard as printed on the bill. **Space** goes between names; the keyboard also has **Ñ**, a point and a hyphen. The name is needed for the company's records. Then **Next**.

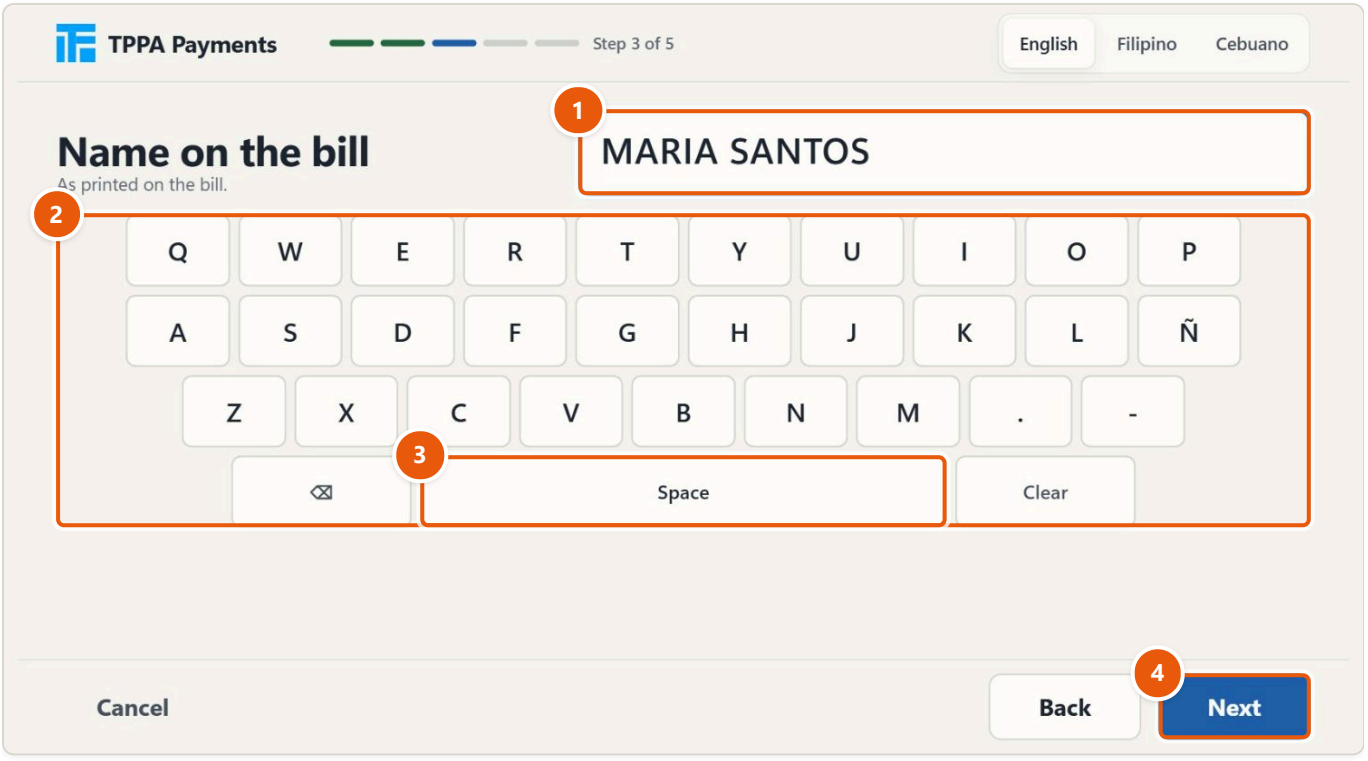


1 The name as on the bill
2 Type it on the keyboard
3 Space between names
4 Next

The kiosk never fills in a name by itself, not even for an account paid before (see "Privacy"). With no name, it asks: "Enter the name on the bill."

Step 4: the amount


"Amount on the bill": the amount the customer is paying for this bill, on the keypad. The point key (2) is for centavos. The reminder (3) says: "No change is given. Insert the exact amount." Then **Next**.

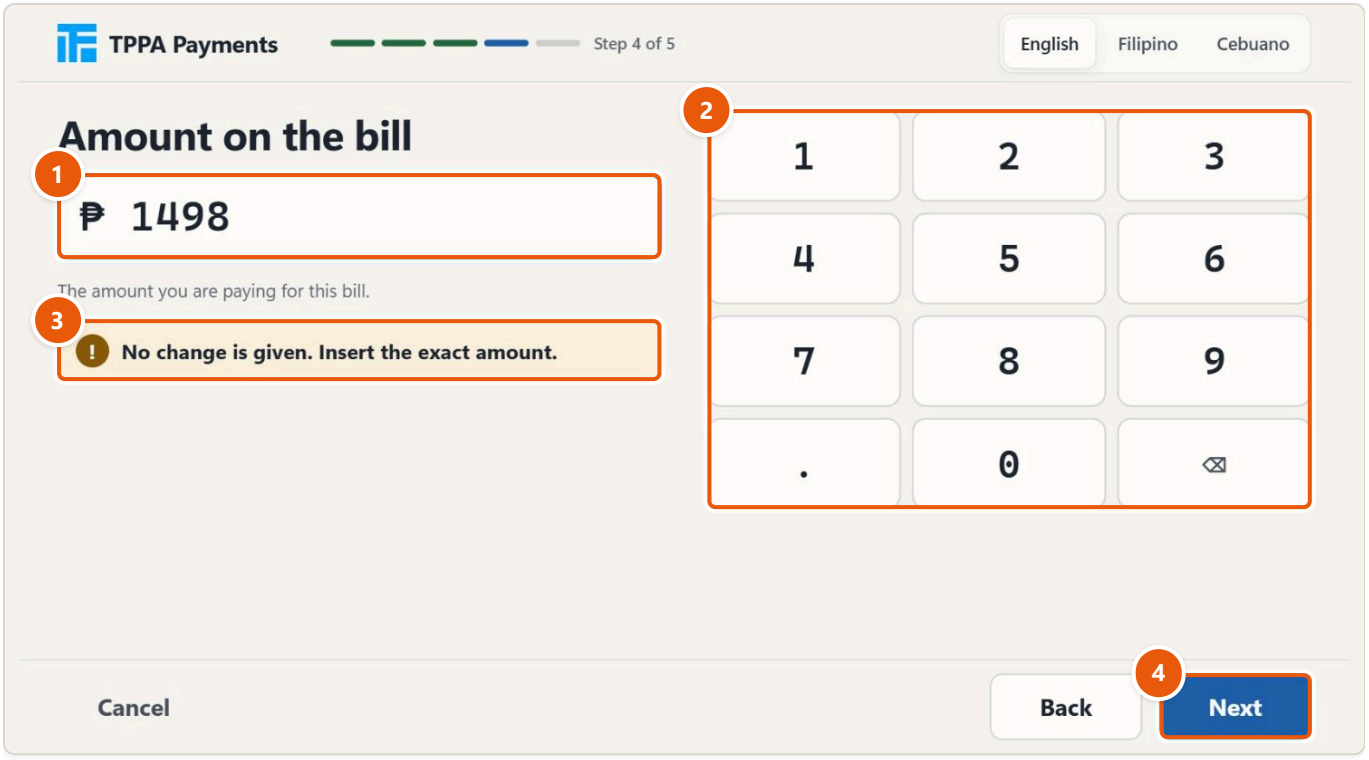

1. The bill amount
2. Keypad (with a point for centavos)
3. No change is given
4. Next

Step 5: check before you pay


The kiosk shows everything before any money goes in: the company, the account number, the name, the bill amount, the **service fee (VAT included)**, and in large figures the **total to insert** (2). The fee comes from head office's fee schedule; the kiosk cannot change or waive it.

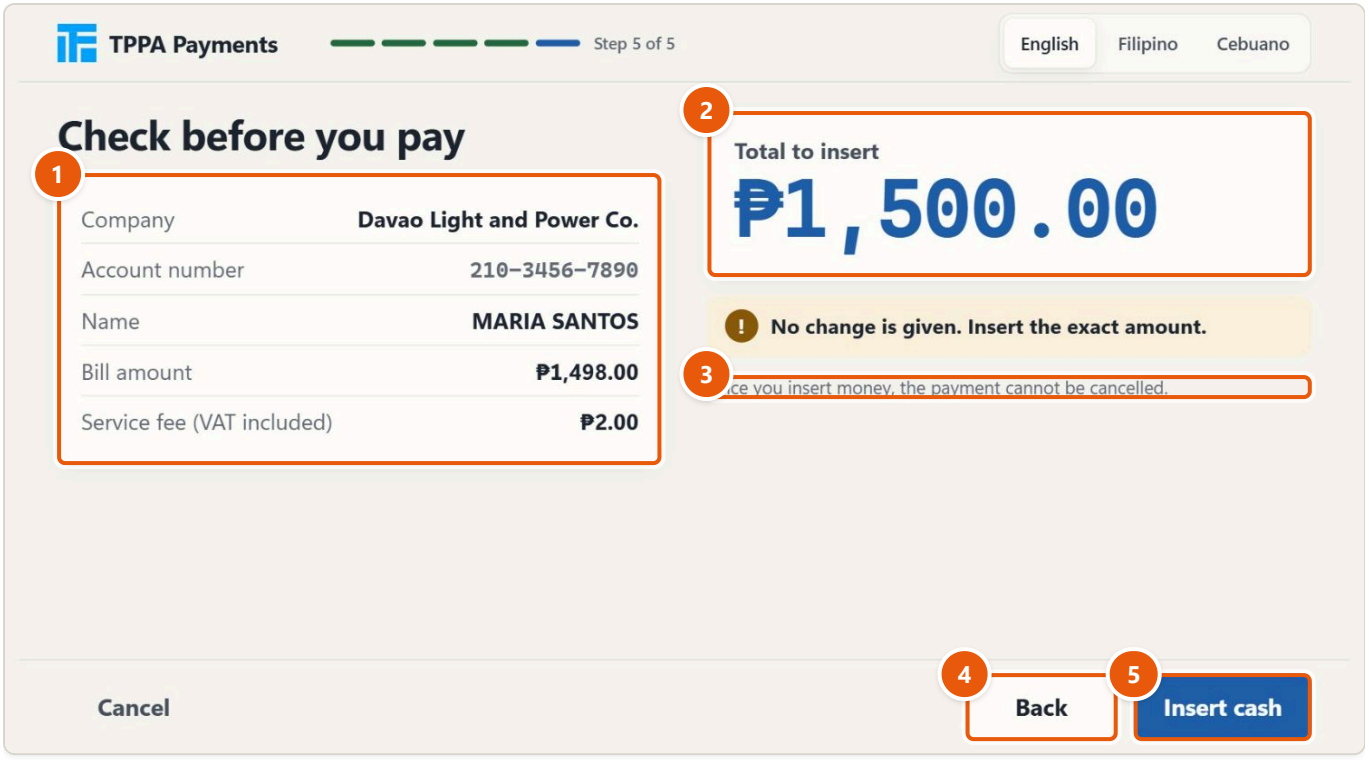


1. Company, account, name, bill and fee
2. Total to insert
3. No cancelling once money is in
4. Back to correct an entry
5. Insert cash

"Once you insert money, the payment cannot be cancelled." (3) If something is wrong, the customer taps **Back** (4) to correct it. When all is right, **Insert cash** (5).

The same screen in Filipino and in Cebuano:

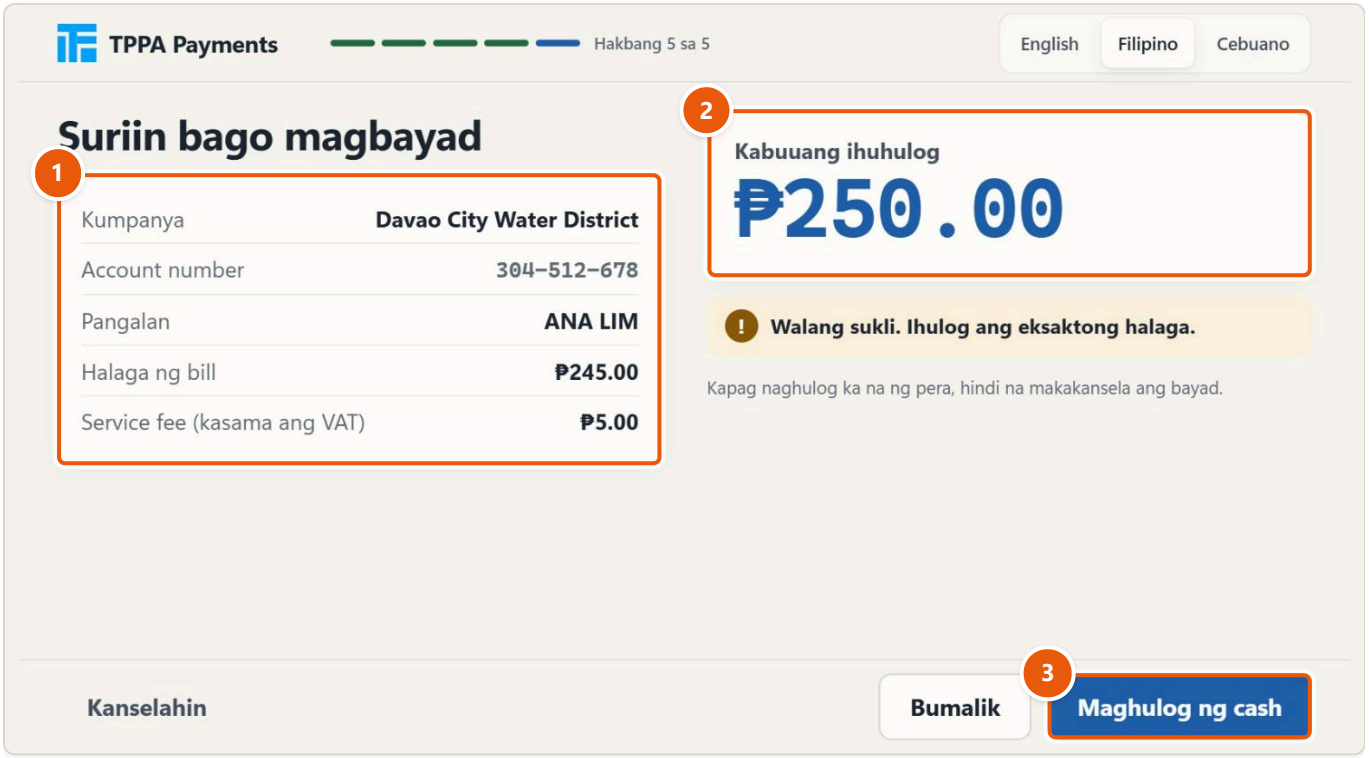

1. The bill and the fee
2. Kabuuang ihuhulog (Total to insert)
3. Maghulog ng cash (Insert cash)

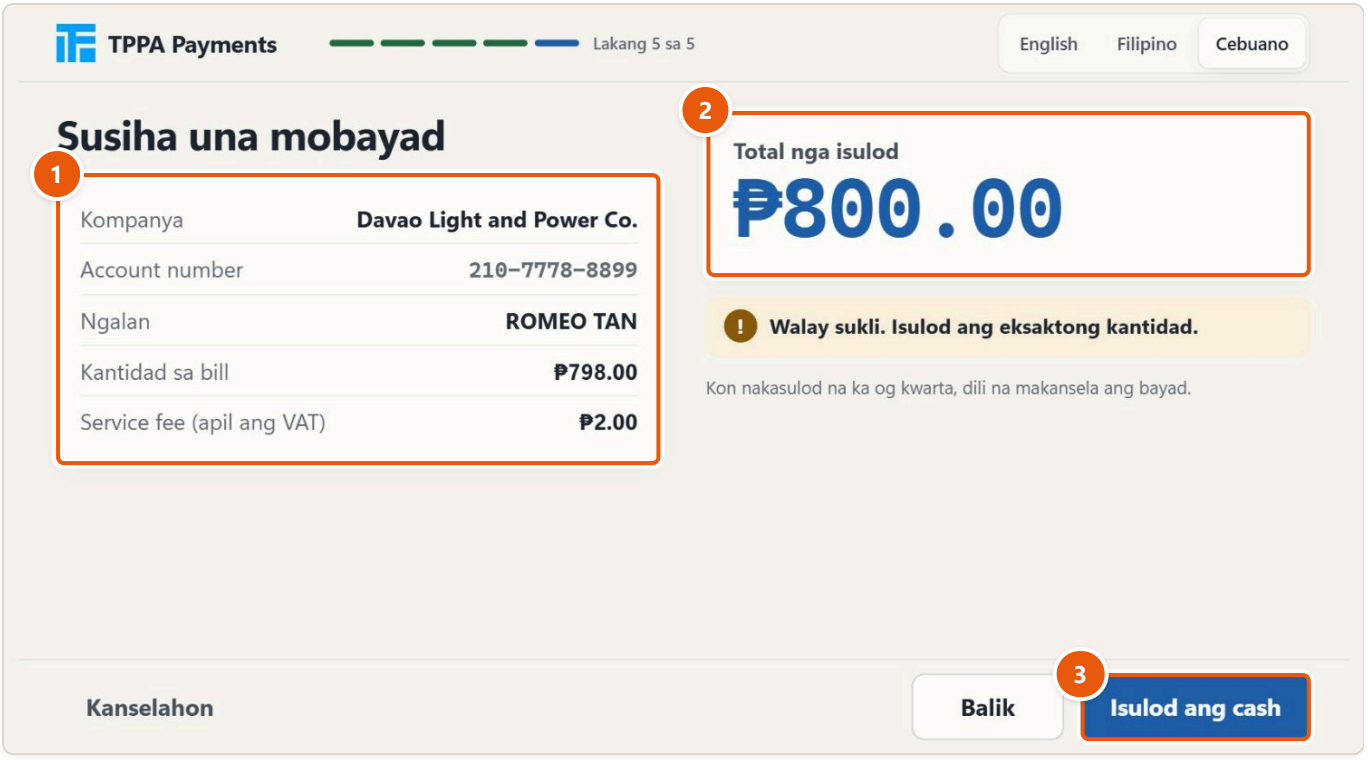

1 The bill and the fee


2 Total nga isulod (Total to insert)

3 Isulod ang cash (Insert cash)

If the total has centavos or is over the kiosk's limit, **Insert cash** stops and says why instead (see "When something is different").

Insert the cash


"Insert the exact amount". The large figure is what is **still to insert** (1); below it, how much is in already and the total. On the right, the notes and coins **accepted now** (2): only those that fit what is left are lit.

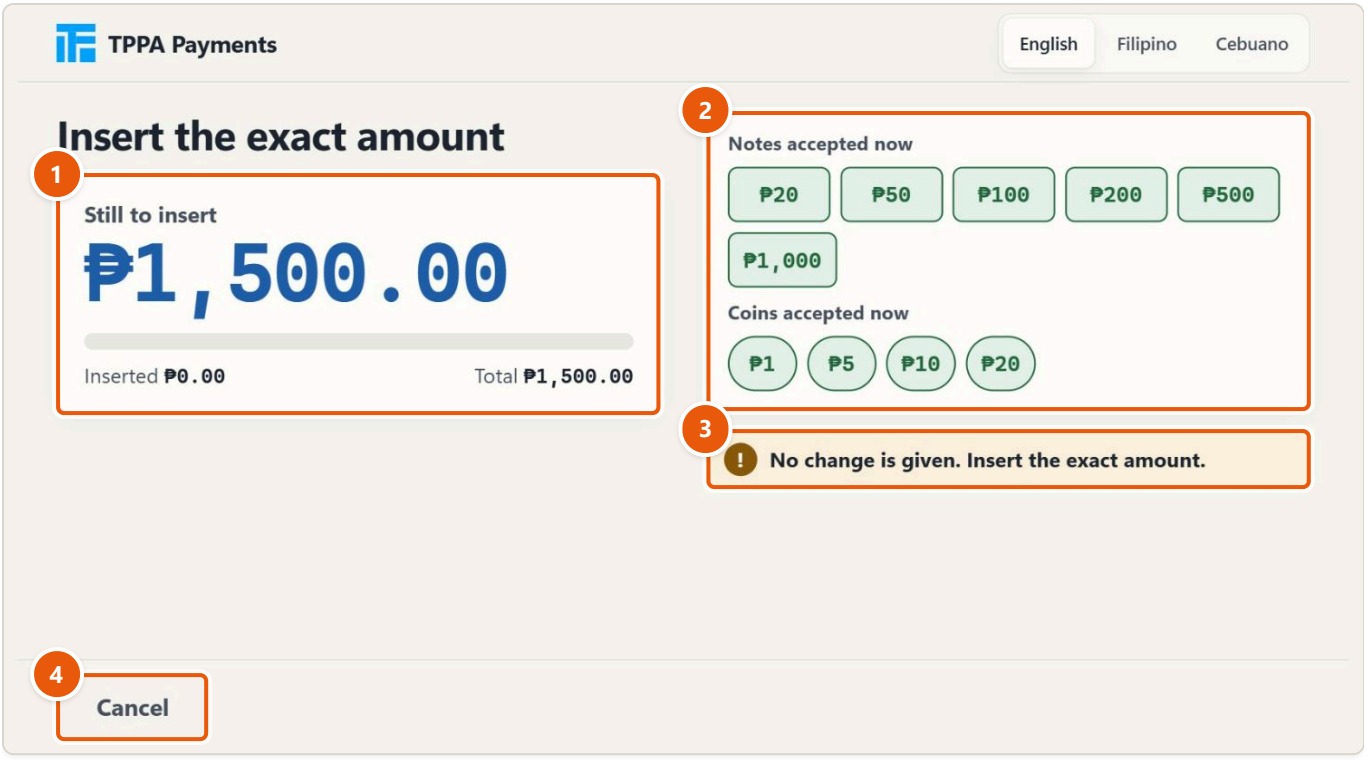

1. Still to insert
2. Notes and coins accepted now
3. No change is given
4. Cancel (only before any cash)

The customer feeds the notes into the note slot and the coins into the coin slot, one at a time. **Cancel** (4) is there only until the first note or coin is kept.

A note too large is returned. In the example below the customer has put in ₱1,000.00 of ₱1,500.00, then a second ₱1,000 note: the kiosk gives it back with "That ₱1,000.00 is more than the ₱500.00 left. Take it back and use smaller notes or coins." (1). The ₱1,000 is no longer lit.

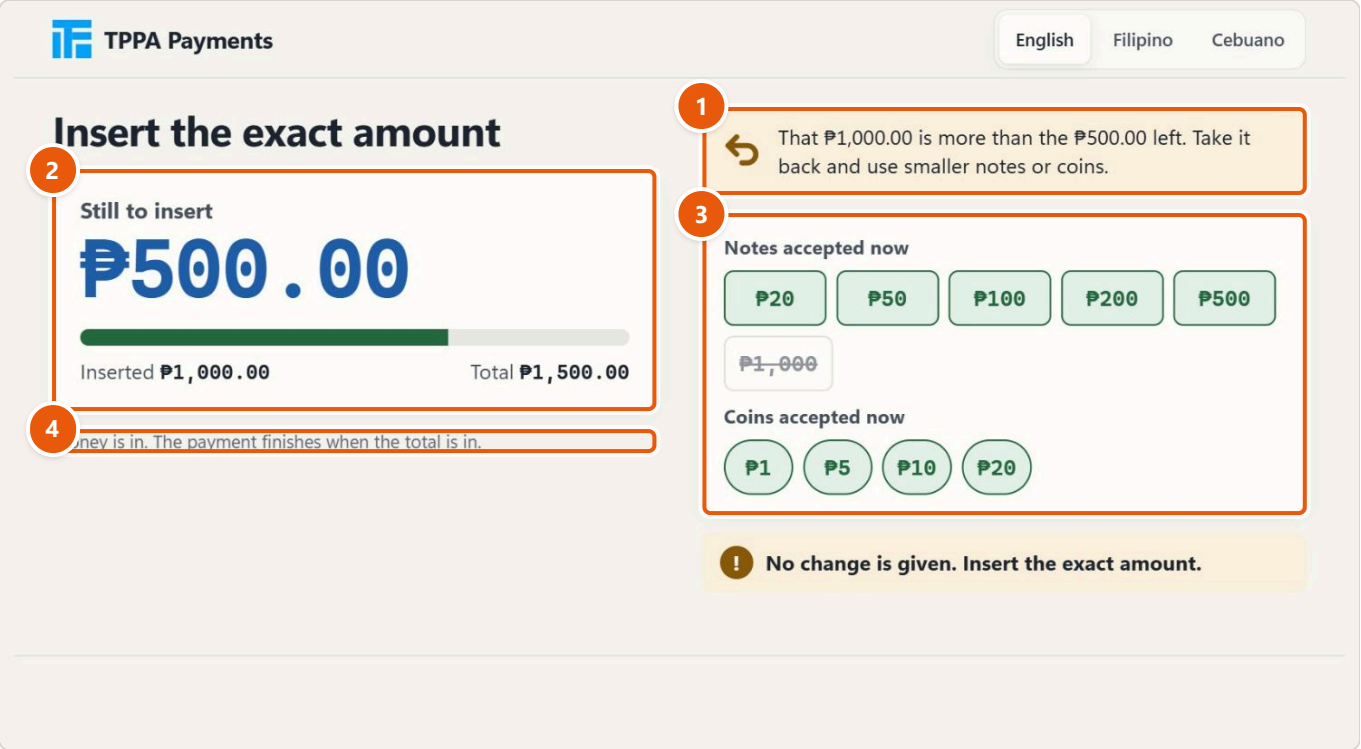


1. A note too large is given back
2. What is still to insert
3. Only what fits is accepted now
4. Money is in: no Cancel any more

Once money is in, **Cancel is gone** (4): "Money is in. The payment finishes when the total is in." The kiosk keeps every note and coin it has taken and cannot give them back. If the customer cannot finish, see "Leaving with cash in" below.

Paid

When the whole total is in, the payment is recorded and the official receipt prints: "Paid. Thank you." with the OR number in large type (3).

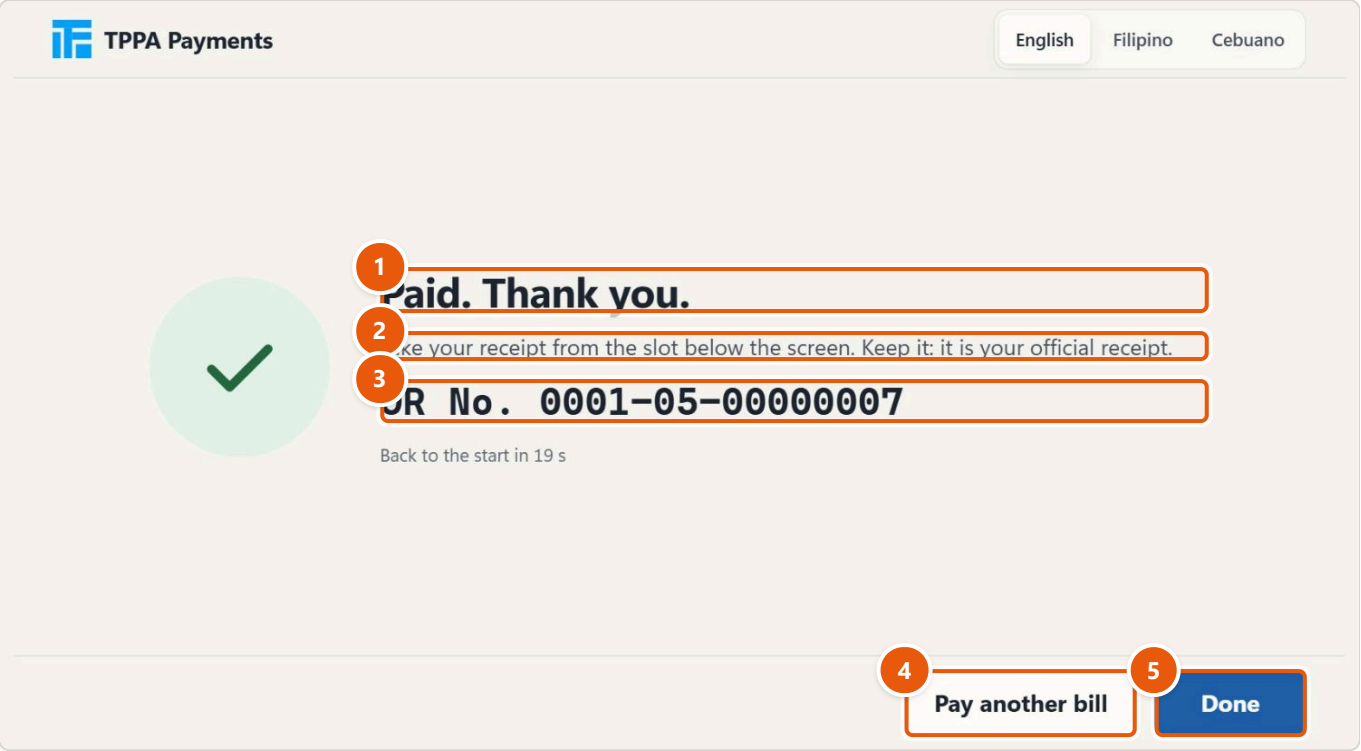


1. Paid
2. Take the receipt from the slot
3. The OR number
4. Pay another bill
5. Done

"Take your receipt from the slot below the screen. Keep it: it is your official receipt." (2) The customer taps **Pay another bill** (4) to pay the next bill, or **Done** (5). With no tap, the kiosk goes back to the start by itself after 20 seconds ("Back to the start in 19 s").

4. When something is different

Already paid today

If the account number was already paid at this kiosk today, the account screen says so, with the time only: "Already paid today at 9:19 AM. Go on only if you mean to pay again." (2)

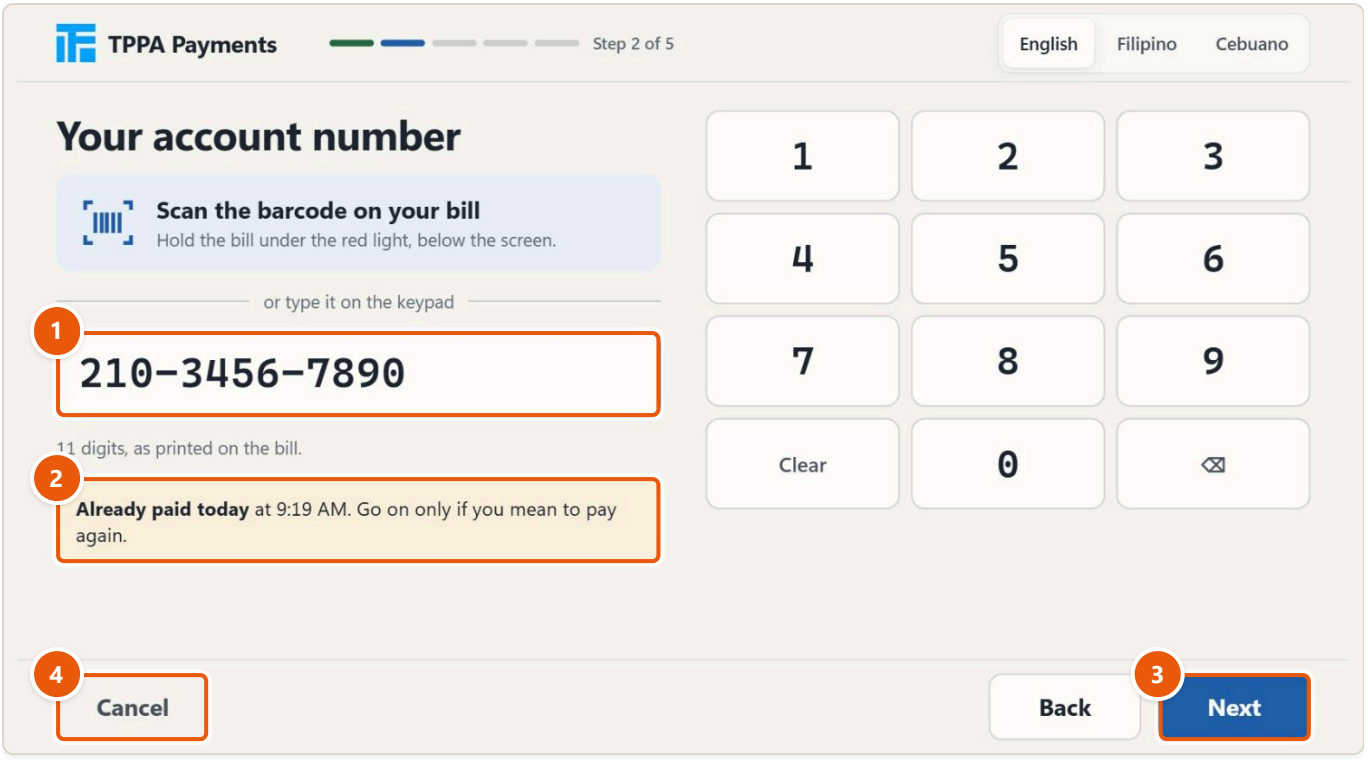


1. An account paid earlier today
2. Already paid today, with the time
3. Next: only to pay again
4. Cancel

This is a warning, not a stop: **Next** (3) goes on, for a customer who really means to pay again. Otherwise **Cancel** (4).

The amount has centavos

"This amount has centavos. This machine takes coins from ₱1 and gives no change. Pay this bill at a TPPA counter." The total it cannot take is shown (3). Nothing has been paid or recorded.

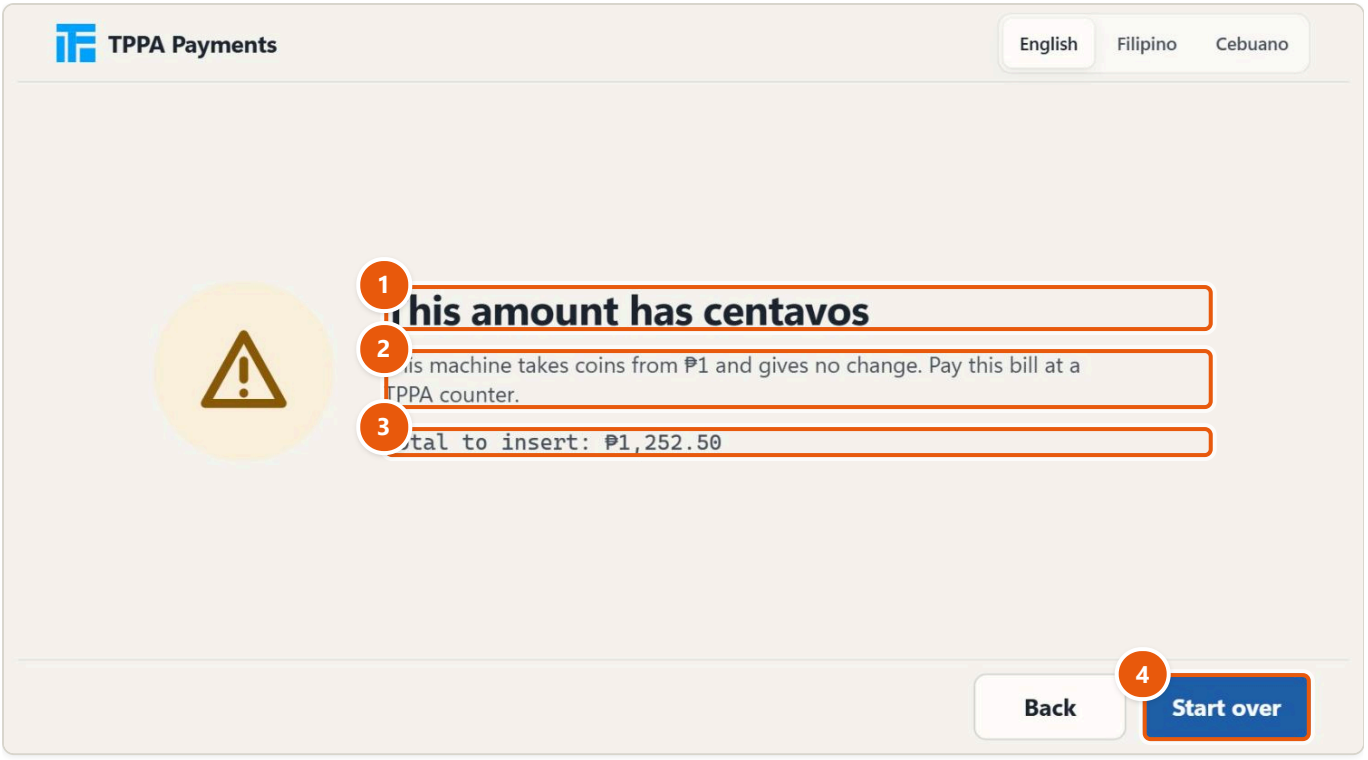


1. This amount has centavos
2. Pay this bill at a TPPA counter
3. The total it cannot take
4. Start over

Back returns to the check screen (to correct a mistyped amount); **Start over** (4) goes back to the start. A bill with centavos is paid at a counter.

Over the limit

"Over the limit for this machine. Bills over ₱50,000.00 are paid at a TPPA counter." The amount in the text is this kiosk's own limit.

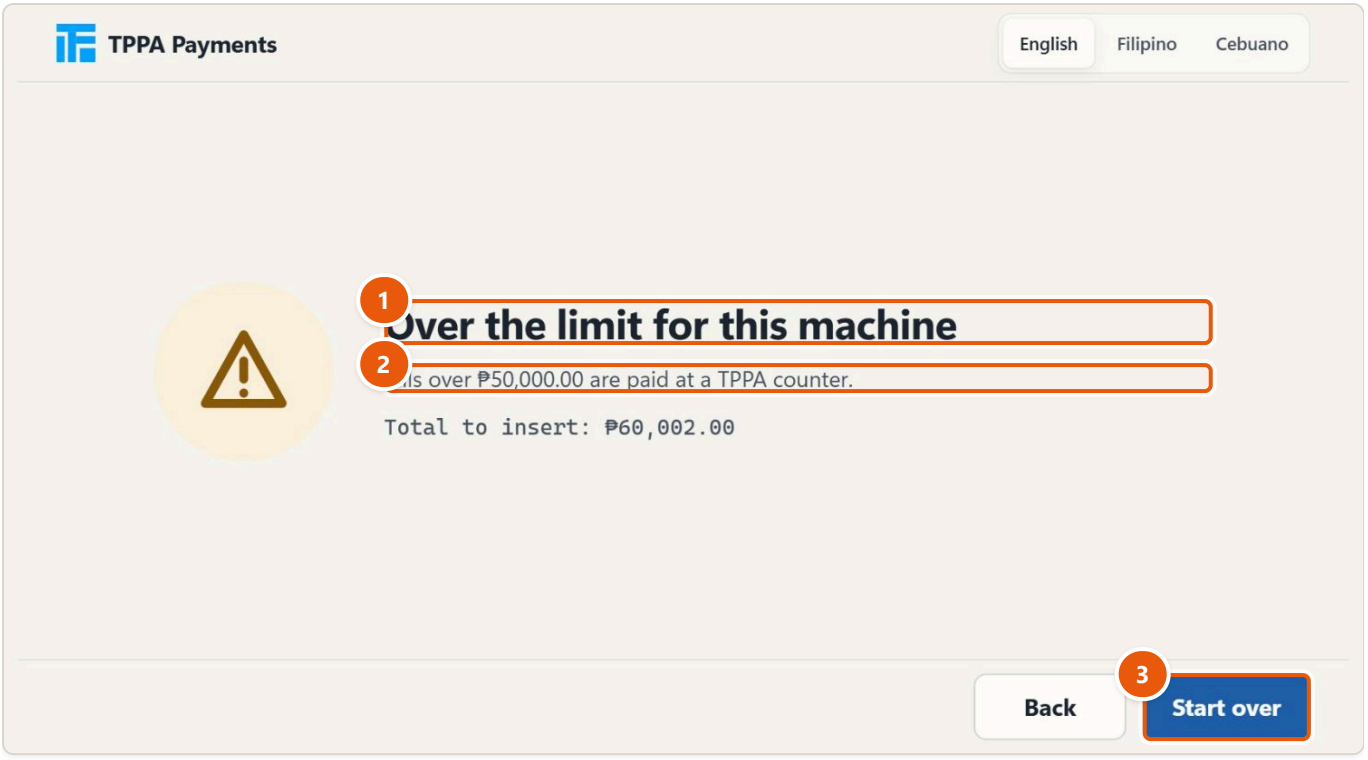

1 Over the limit for this machine
2 Bills over the limit: at a counter
3 Start over


Back or **Start over** (3), as for centavos. Nothing has been paid.

This bill cannot be paid here

When the kiosk refuses a bill for any other reason, it stops straight after the amount with "This bill cannot be paid here. Pay this bill at a TPPA counter." and **Start over**. Nothing has been paid.

"Are you still there?"

Before any cash goes in, if nobody touches the screen for 60 seconds (a setting of head office), the kiosk asks "Are you still there?": "Nothing has been paid. Tap Continue to go on." (2)

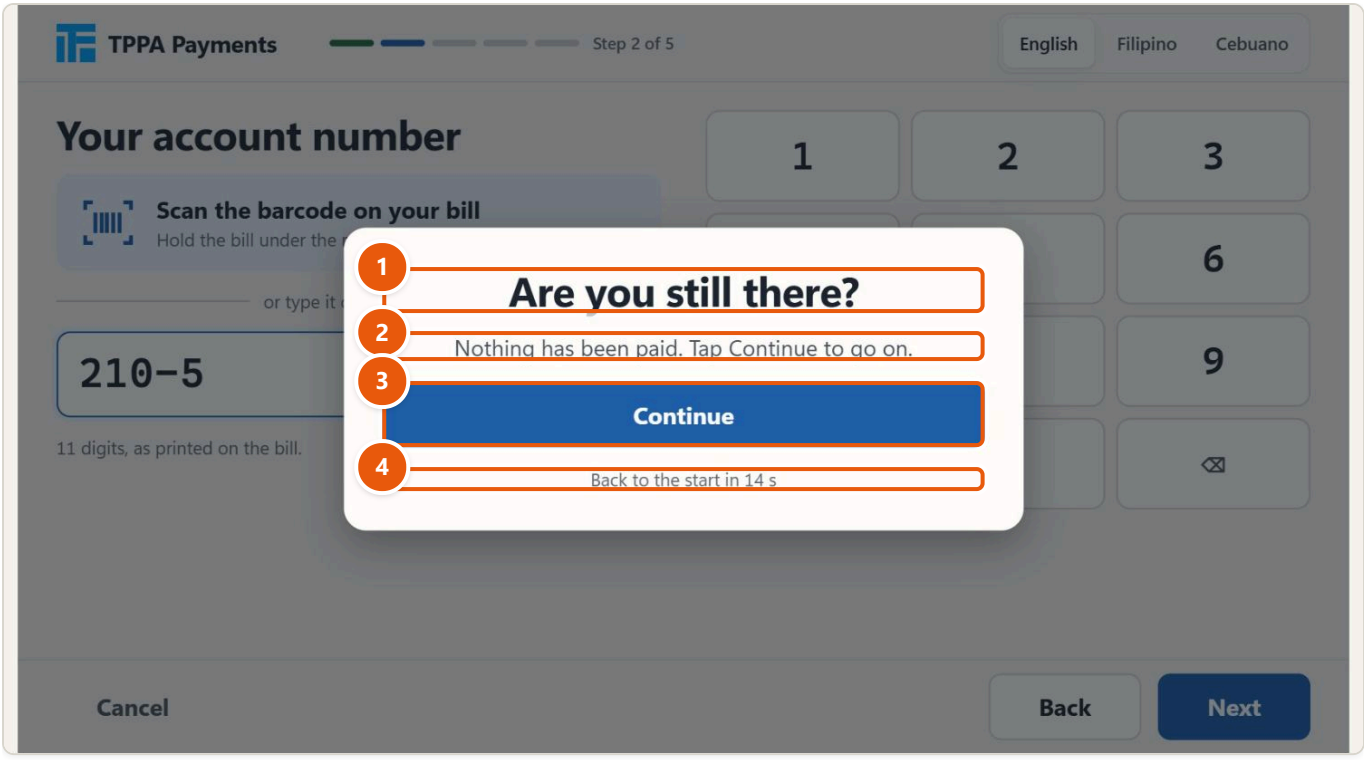


1. Are you still there?
2. Nothing has been paid
3. Continue: keep what was typed
4. Otherwise back to the start

Continue (3) goes on with everything typed so far. With no answer, the kiosk goes back to the start after 15 seconds more (4) and forgets what was typed. Nothing is recorded.


Leaving with cash in: the kiosk credit

Once some cash is in, the payment can only finish when the whole total is in. If the customer runs out of notes or walks away, the screen still shows what is missing (1) and has no Cancel (2):

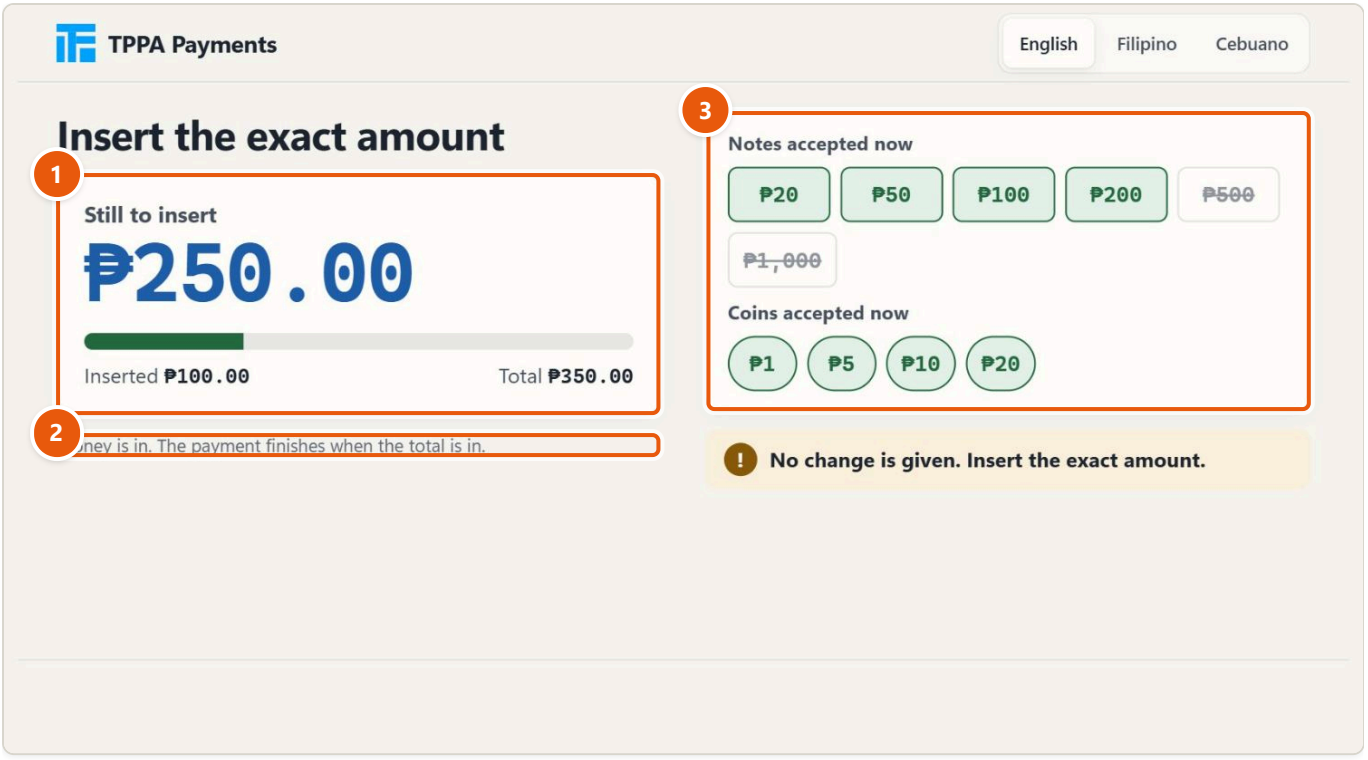

1. Some cash in, the rest missing
2. It cannot be cancelled now
3. What it still accepts

When **no new note or coin goes in for 3 minutes** (a setting of head office), the kiosk stops the payment and turns the cash already in into a **kiosk credit**: "Your payment could not be finished. Your ₱100.00 is safe. Take the slip from below the screen to any TPPA counter to get it back." The screen shows the **credit code** (3), and the kiosk prints a **kiosk credit slip** with the same code.

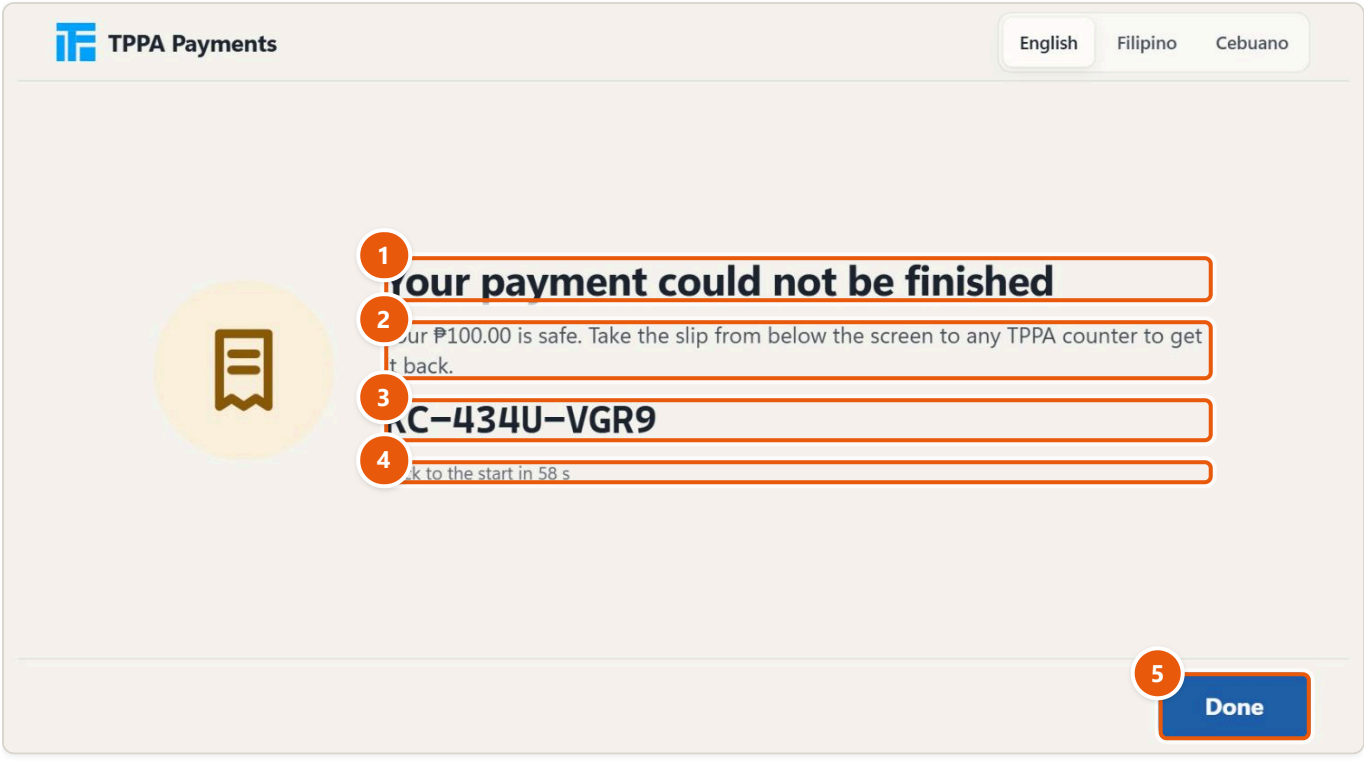

1. Your payment could not be finished
2. Your cash is safe: take the slip
3. The credit code
4. Back to the start after a minute
5. Done

The code stays on screen for a minute (4) so the customer can note it down; **Done** (5) goes back to the start.


The customer takes the slip to **any TPPA counter**: the teller checks the code with head office and pays the amount back in cash, with the branch manager's approval. A credit is paid back only once. No bill has been paid: the customer still has to pay the bill.

If the slip did not print, the screen says the code is enough: "Your ₱100.00 is safe. Note the code above: any TPPA counter refunds it with this code, or with the slip if it printed."

A credit is also made when the payment cannot be recorded at the moment the total is in (the kiosk stopped taking payments in between). Its slip gives the reason "The payment could not be finished" instead of "No new cash for 3 minutes".

After a power cut: Welcome back

The kiosk records every note and coin the moment it keeps it. If the power goes out in the middle of a payment, the kiosk knows what was in when it comes back: "Welcome back. The power went out. Your ₱200.00 is saved. Insert the rest to finish."

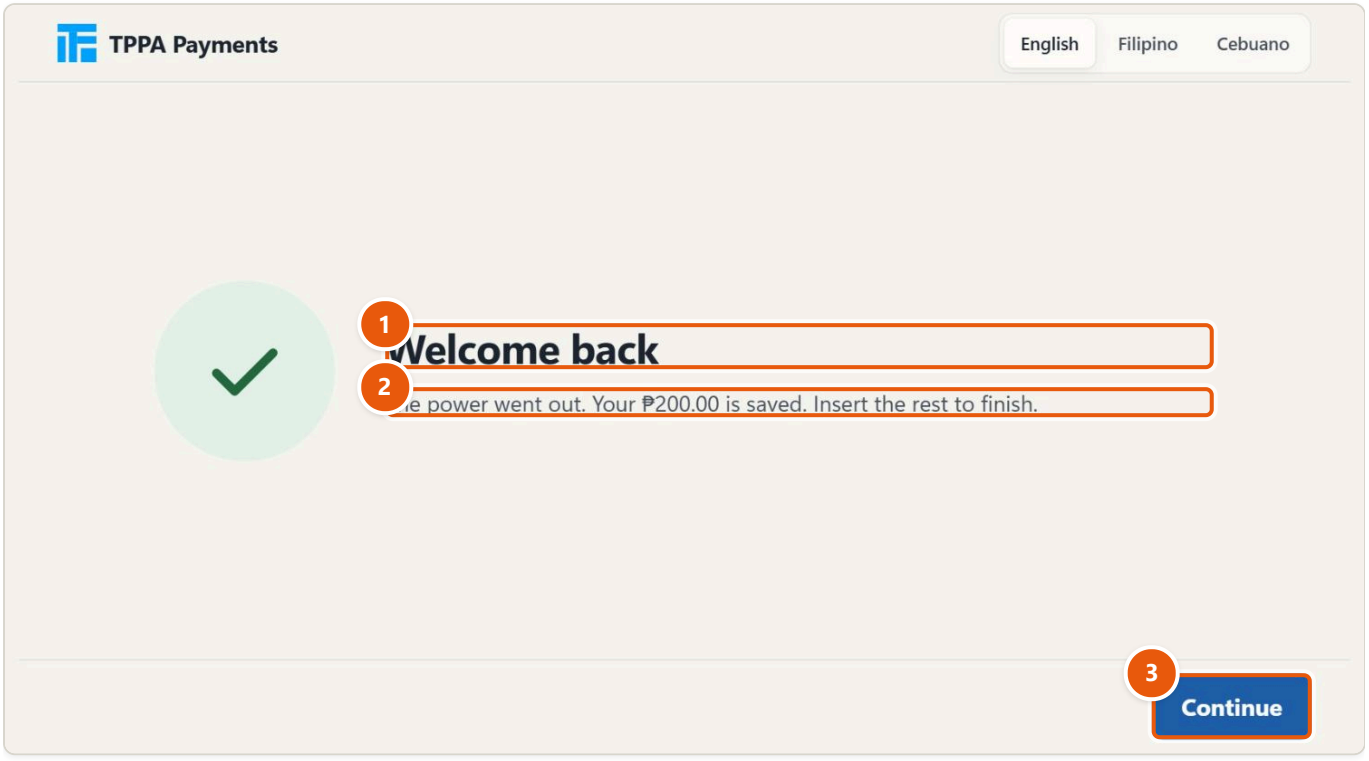

1. Welcome back
2. The cash already in is saved
3. Continue: insert the rest


Continue (3) goes back to "Insert the exact amount" with what was saved counted. If the whole total was already in, the payment is completed. If the kiosk cannot take payments when it comes back, the cash becomes a kiosk credit at once. If a kiosk credit was made in the last 10 minutes before the kiosk restarts, its screen and code are shown again until the customer taps **Done**: it is the same credit, not a new one. A customer who had not inserted any cash simply sees the start screen.

The receipt did not print

The payment stands even if the printer fails after it. The screen still shows the OR number in large type, with "The receipt could not be printed. Your payment is recorded under the OR number above: note it down, or take a photo of this screen."

Out of service

When the kiosk cannot take payments, it says so and sends the customer to the nearest counter: "Out of service. This machine cannot take payments right now. Pay at a TPPA counter." with "Nearest counter: TPPA Main Branch 0001, Quimpo Blvd, Davao City" (its own branch). The customer can read it in another language (4).

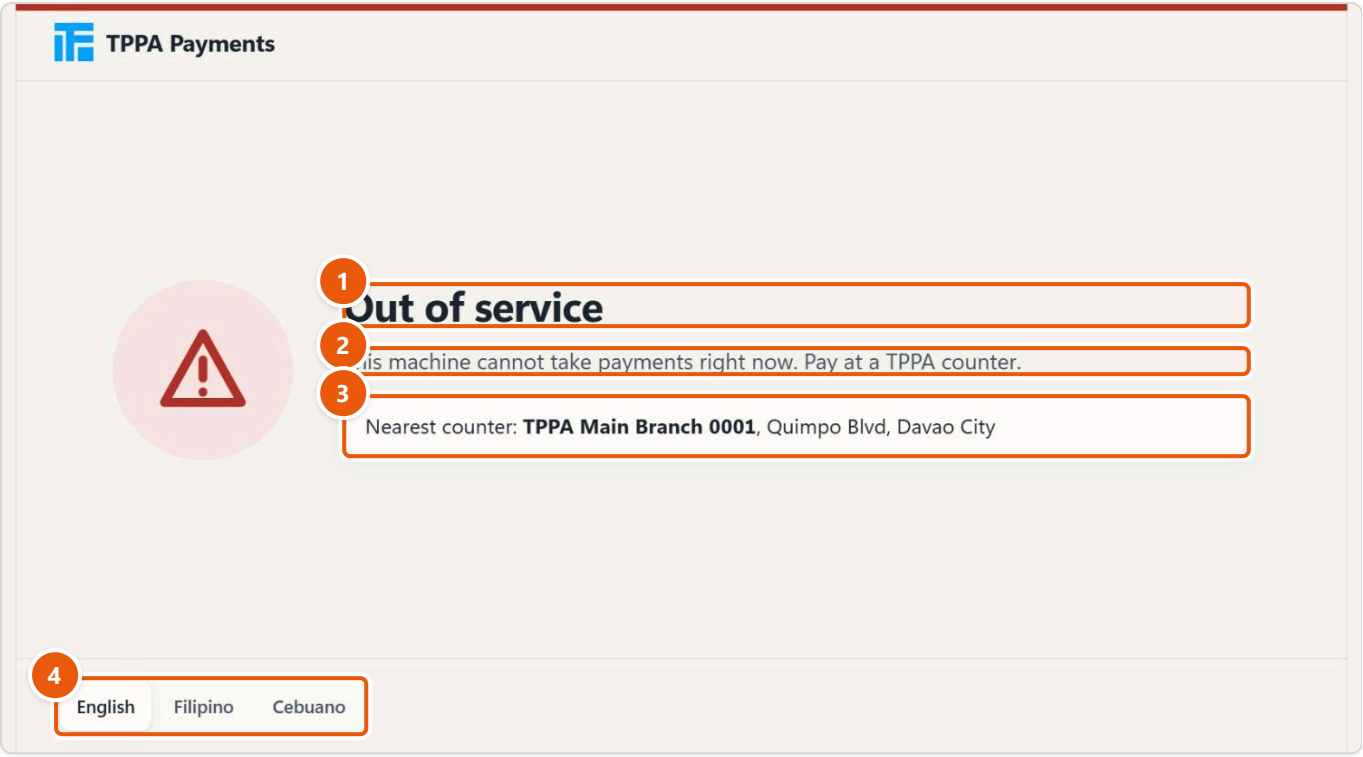


1. Out of service
2. Pay at a TPPA counter
3. The nearest counter
4. Read it in another language

In Filipino: "Hindi magagamit. Hindi tumatanggap ng bayad ang makinang ito ngayon. Magbayad po sa TPPA counter. Pinakamalapit na counter: …". In Cebuano: "Dili magamit. Dili makadawat og bayad kini nga makina karon. Palihug bayad sa TPPA counter. Pinakaduol nga counter: …".

The kiosk goes out of service, for example, when the paper roll is near its end or the printer is not ready, when an acceptor reports a fault, when the cash box is full, when the cash door is open, when it cannot take payments for a technical reason (old settings, a wrong clock, no OR numbers left), or when staff or head office take it out of service. It comes back by itself once the cause is fixed. The customer is never told the cause.

While a customer is typing a bill (no cash in yet), "Out of service" covers the screen, with the nearest counter and **Start over** (3). What was typed is kept: if the kiosk comes back, the customer carries on.

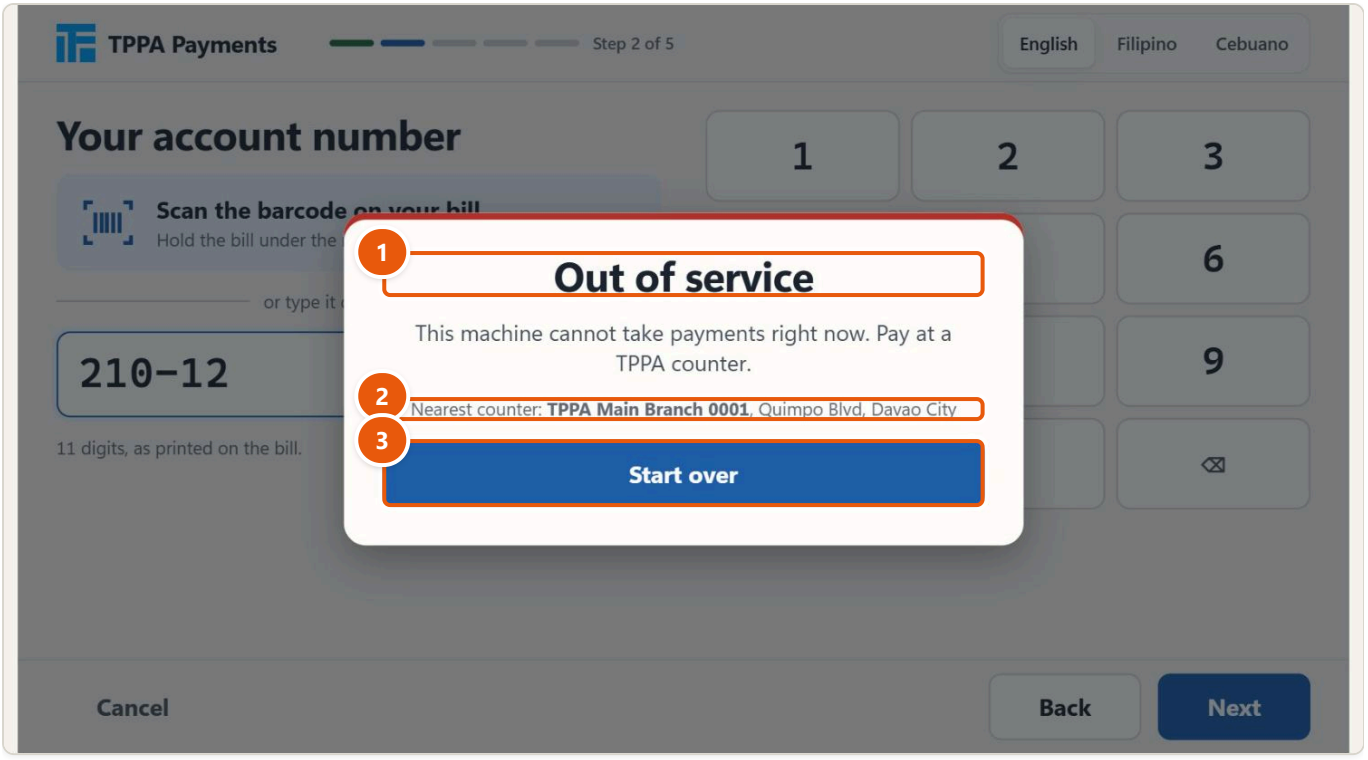

1. Out of service, over the screen
2. The nearest counter
3. Start over

A payment with cash in always finishes, whatever happens to the kiosk: it is paid, or becomes a kiosk credit.

5. Timeouts

When	After	What happens
Steps 1 to 5, or a stop screen, no tap	60 seconds (head office: 20 to 300)	"Are you still there?"
"Are you still there?", no answer	15 seconds more	Back to the start; nothing recorded
Inserting cash, nothing in yet, no cash	3 minutes (head office: 1 to 15)	Back to the start; nothing recorded
Inserting cash, some in, no new cash	3 minutes (head office: 1 to 15)	Kiosk credit, slip printed
"Paid. Thank you."	20 seconds	Back to the start
Kiosk credit screen	60 seconds	Back to the start

6. Privacy

A kiosk is a public screen. So:

- It **never shows names from earlier payments**, and never fills in the name by itself.
- "Already paid today" shows **the time only**: no name, no OR number, no amount.
- The screen clears after each customer.
- The receipt shows the account number as the customer entered it.

7. What the kiosk prints

The kiosk prints on an 80 mm thermal roll, each slip cut on its own. The header and footer come from the thermal roll layout approved by head office. The texts below are from the demonstration kiosk (Kiosk 05 at Main Branch 0001).

The official receipt

One receipt per payment. The OR number is printed as the **Transaction Id**; "Received by" is the kiosk.

```
 TRANS PILIPINAS
Power & Automation Inc.
Building 1, Quimpo Compound
Jail Road Maa, Davao City, Philippines
VAT REG. TIN 120001
Tel. (082) 233-4688  www.tppainc.com
Main Branch 0001  Kiosk 05  SN KSK-22-0418
------------------------------------------------
Account ID     : 210-3456-7890
Name           : MARIA SANTOS
Payment Method : Cash
Date           : Tue Nov 10 2026 09:21:24
Transaction Id : 0001-05-00000007
Received by    : Kiosk 05
------------------------------------------------
VAT Sales             :                1,500.00
Non-VAT Sales         :                    0.00
VAT Zero Related Sales:                    0.00
VAT Amount            :                    0.00
BIR 2306              :                    0.00
ADVANCE               :                    0.00
Total                 :                1,500.00
Amount Received       :                1,500.00
Amount Change         :                    0.00
------------------------------------------------
THIS IS A SYSTEM GENERATED
ACKNOWLEDGEMENT RECEIPT.
BIR Permit FP-2026-0005
Thank you for paying at TPPA.
```

"Amount Change" is always 0.00: the kiosk takes the exact amount. A copy reprinted by staff has the line **REPRINTED** under "Received by"; staff reprint today's receipts at the kiosk, older ones at a counter or by head office.

The kiosk credit slip

Printed when cash that went in could not become a payment. It is **not an official receipt**: it is the customer's proof of the amount held, under its code.

```
 TRANS PILIPINAS
Power & Automation Inc.
Building 1, Quimpo Compound
Jail Road Maa, Davao City, Philippines
VAT REG. TIN 120001
Tel. (082) 233-4688  www.tppainc.com
Main Branch 0001  Kiosk 05  SN KSK-22-0418
------------------------------------------------
KIOSK CREDIT
NOT AN OFFICIAL RECEIPT
------------------------------------------------
KC-434U-VGR9
Amount held    : 100.00
Date           : Tue Nov 10 2026 09:21:24
Kiosk          : 05  Main Branch 0001
Reason         : No new cash for 3 minutes

Bring this slip to any TPPA counter to get this
amount back in cash. Keep it safe: the code is
your proof.
------------------------------------------------
Thank you for paying at TPPA.
```

Credit codes start with **KC-** and use no O, 0, I, 1 or L, so they cannot be misread.

The cash collection slip

Printed for staff when they take the cash box out (see the Kiosk custodian guide). It goes into the box's bag; customers never see it.

```
 TRANS PILIPINAS
Power & Automation Inc.
Building 1, Quimpo Compound
Jail Road Maa, Davao City, Philippines
VAT REG. TIN 120001
Tel. (082) 233-4688  www.tppainc.com
Main Branch 0001  Kiosk 05  SN KSK-22-0418
------------------------------------------------
CASH COLLECTION
NOT AN OFFICIAL RECEIPT
------------------------------------------------
Date           : Tue Nov 10 2026 09:21:24
Kiosk          : 05  Main Branch 0001
Collected by   : Marco Dela Cruz
Expected in box: 2,100.00

Count the cash box at the counter. A difference
is reported to head office.
```

```
------------------------------------------------
Thank you for paying at TPPA.
```

X-reading and Z-reading

Staff print these in staff mode. The **X-reading** is the day so far; the **Z-reading** is a day that has closed. "Cash taken" is the payments plus the kiosk credits: all the cash the kiosk kept that day.

The X-reading of the demonstration kiosk:

```
 TRANS PILIPINAS
Power & Automation Inc.
Building 1, Quimpo Compound
Jail Road Maa, Davao City, Philippines
VAT REG. TIN 120001
Tel. (082) 233-4688  www.tppainc.com
Main Branch 0001  Kiosk 05  SN KSK-22-0418
------------------------------------------------
X-READING
Today so far
NOT AN OFFICIAL RECEIPT
------------------------------------------------
Business date  : Tue Nov 10 2026
Kiosk          : 05  Main Branch 0001
First OR       : 0001-05-00000007
Last OR        : 0001-05-00000008
Payments       : 2
Voided         : 0
------------------------------------------------
VAT Sales             :                2,000.00
Non-VAT Sales         :                    0.00
VAT Zero Related Sales:                    0.00
VAT Amount            :                    0.00
Total                 :                2,000.00
------------------------------------------------
Kiosk credits issued  :              1 (100.00)
Cash taken            :                2,100.00
Printed        : Tue Nov 10 2026 09:21:24
------------------------------------------------
Thank you for paying at TPPA.
```

A Z-reading has the same lines, with "Z-READING" and "Day closed" at the top, "Closed" (the time the day closed) instead of "Printed", and the line "Closed by the kiosk at midnight.". For example (no day had closed yet on the demonstration kiosk, so these figures are the sample the console uses):

```
------------------------------------------------
Z-READING
Day closed
NOT AN OFFICIAL RECEIPT
```

```
---------------------------------------------
Business date  : Thu Nov 05 2026
Kiosk          : 05  Main Branch 0001
First OR       : 0001-05-00000101
Last OR        : 0001-05-00000141
Payments       : 41
Voided         : 0
---------------------------------------------
VAT Sales             :               64,210.00
Non-VAT Sales         :                    0.00
VAT Zero Related Sales:                    0.00
VAT Amount            :                    0.00
Total                 :               64,210.00
---------------------------------------------
Kiosk credits issued  :              1 (700.00)
Cash taken            :               64,910.00
Closed         : Fri Nov 06 2026 00:00:00
Closed by the kiosk at midnight.
---------------------------------------------
Thank you for paying at TPPA.
```

(The header lines are the same as on the other slips.)

8. The day end at midnight

Nobody closes a kiosk's day. At **12:00 midnight, Manila time**, the kiosk closes the business day by itself: it records the day's Z-reading and sends it to head office. There is no drawer to count: the cash is counted when staff collect the cash box.

- A kiosk that runs all night keeps taking payments; those after midnight belong to the next day.
- A kiosk that was off at midnight closes the missed day as soon as it starts, before its next payment.
- The branch's collection files are made once every terminal of the branch, kiosks included, has closed the day (or earlier, by a branch manager or admin with a reason).

9. Limits set by head office

Head office sets these for each kiosk in the console (Terminals, the kiosk, Kiosk settings). The kiosk applies a change at its next sync.

Setting	Default	Range
Largest payment	₱50,000.00	Up to ₱100,000.00
Cash-box limit	₱300,000.00, or 90 % of the box's notes	The kiosk goes out of service at the limit until the cash is collected
Notes accepted	₱20 to ₱1,000	

Setting	Default	Range
Coins accepted	₱1, ₱5, ₱10, ₱20	₱0.25 can be added; it is off by default (small coins jam acceptors)
Languages	English, Filipino, Cebuano	
Seconds without a tap	60	20 to 300, then "Are you still there?"
Seconds without cash	180 (3 minutes)	60 to 900, then the cash in becomes a kiosk credit

The fees come from head office's fee schedule, as at the counter. Head office is also told when a kiosk's cash box reaches 75 % of its limit, so the cash can be collected before the kiosk stops.

10. For staff: helping a customer

The customer says or shows	What to do
"This amount has centavos"	Take the payment at your counter. The kiosk cannot take centavos.
"Over the limit for this machine"	Take the payment at your counter.
"This bill cannot be paid here"	Take the payment at your counter.
"Already paid today at …"	Ask whether they already paid this bill today. If they did, they should not pay again; if they mean to (a second bill on the same account), **Next** goes on.
A note keeps coming back	It is larger than what is left. Use smaller notes or coins; the screen lights only those it accepts now.
They have no small notes or coins left	The kiosk gives no change. Once cash is in, they can finish (insert the rest) or wait: after 3 minutes the cash becomes a kiosk credit.
A kiosk credit slip	Refund it at a counter (below). The bill is **not** paid.
The code of a credit, but no slip	Any counter refunds it with the code alone.
"The receipt could not be printed"	The payment is recorded under the OR number on the screen. A kiosk custodian or the branch manager reprints today's receipts in staff mode; older ones are reprinted at a counter or by head office.
"Welcome back" after a power cut	Their cash is saved. Tap **Continue** and insert the rest.
"Out of service"	Pay at a counter (the nearest is on the screen). Tell the kiosk custodian or the branch manager.

The customer says or shows	What to do
"Are you still there?"	Tap **Continue** within 15 seconds to keep what was typed.
They want to cancel after inserting cash	It is not possible: the kiosk keeps the cash. They insert the rest, or the cash becomes a kiosk credit after 3 minutes.
They paid by mistake	A kiosk payment cannot be cancelled at the kiosk. Call head office.

Refunding a kiosk credit at a counter (details in the Teller guide):

1. Take the customer's slip. In the teller app, open **Today** (`F7`) and choose **Refund a kiosk credit**.
2. Type or scan the code on the slip (KC-XXXX-XXXX), then **Check the code** (`Enter`). It is checked with head office, so the counter must be online.
3. Check the amount, the date, the kiosk and the reason. The branch manager approves with their own username and password.
4. Pay out the amount. It is counted in the day end as "Kiosk credits refunded".

A credit is refunded only once. A code already refunded is refused with when, where and by whom: do not pay it out again; keep the slip and call head office. An unknown code is refused too: check the code; if it is right, call head office and do not pay it out.

11. Quick reference

The customer wants to	On the kiosk
Start	Tap **Start in English**, **Magsimula sa Filipino** or **Sugod sa Cebuano**
Change the language	**English**, **Filipino** or **Cebuano**, top right
Enter the account	Scan the barcode under the red light, or type it, then **Next**
Correct an entry	**Back**
Stop before paying	**Cancel** (only until cash goes in)
Pay	**Insert cash** on "Check before you pay", then insert notes and coins
Pay another bill	**Pay another bill** on "Paid. Thank you."
Get back unfinished cash	The kiosk credit slip, at any TPPA counter

The kiosk	
Accepts	Cash only: notes ₱20 to ₱1,000, coins ₱1 to ₱20
Change	None: the exact amount only
Largest payment	₱50,000.00 (unless head office set otherwise)
Centavos	Not accepted: pay at a counter

The kiosk	
Day end	By itself at 12:00 midnight (Manila)