

Double Bi-Quad Directional Wi-Fi Antenna

2.43 GHz



- Wi-Fi Antenna perfectly tuned for use with signals in the 2.4 GHz Wi-Fi channel
- Additionally, the antenna is capable of excellent performance within the 5 GHz Wi-Fi channel
- Simple stub match can be applied to tune the antenna to the 1.8 GHz GSM channel
- High level of directionality
- High Gain
- Perfect for directing Wi-Fi

Antenna Performance								
Nominal Frequency (GHz)	Nominal Impedance (Ω)	2.43 GHz Peak Gain (dBi)	Reflected Power Coefficient	2.43 GHz Reflected Power Loss	-3dB Bandwidth 2.27 GHz to 2.64 GHz (MHz)	-3dB Reflected Power Loss	-10dB Bandwidth 2.38 GHz to 2.49 GHz (MHz)	-10dB Reflected Power Loss
2.43	50 + 1.5j	15.66	< -36 dB	0.02%	370	50%	110	10%
			0.02%	$\approx$ 0 dB		3.1 dB		0.44 dB

Figure 1 - Power reflection S11 (dB) vs frequency (GHz)

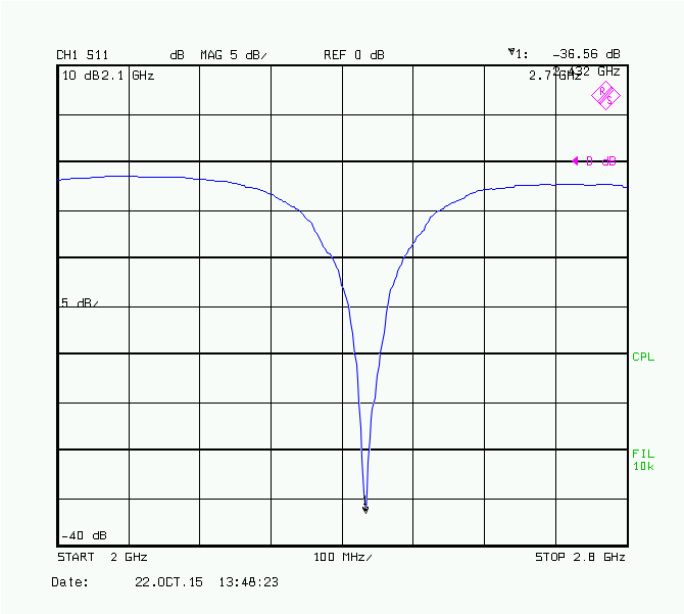


Figure 2 - Smith Chart

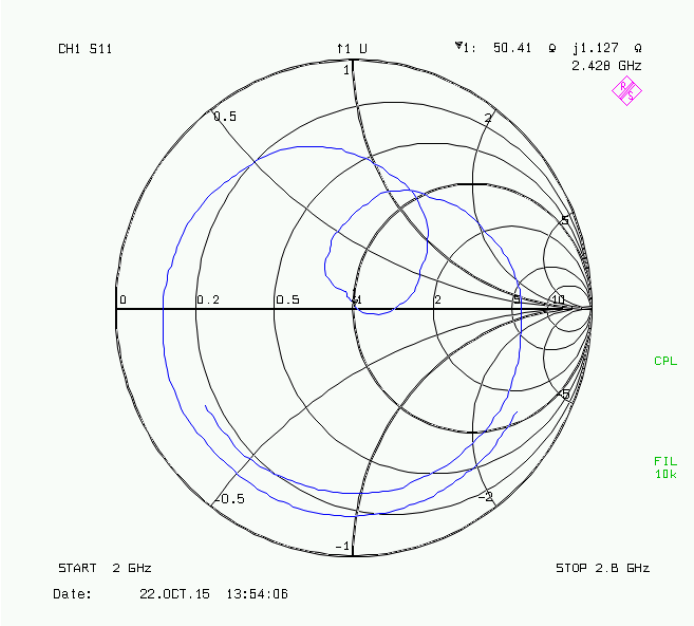


Figure 3 - XZ radiation pattern with -3dB line for calculating beam width

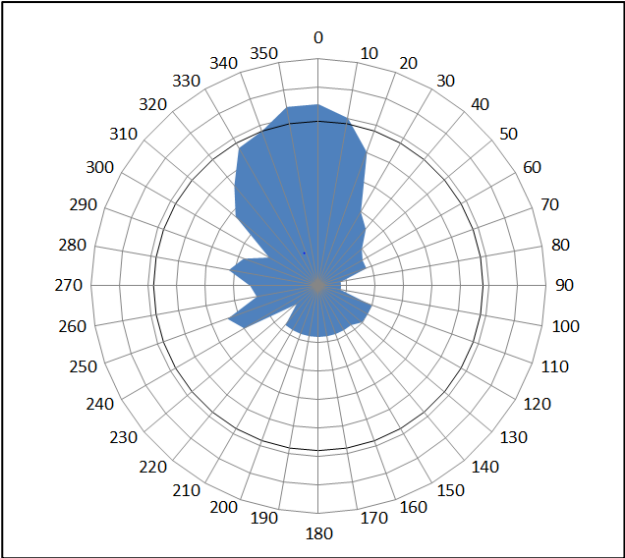


Figure 4 - YZ radiation pattern

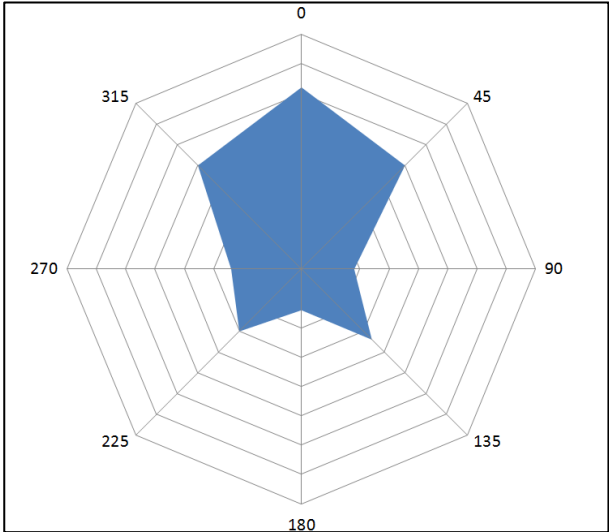


Figure 5 - XY radiation pattern

