



# Step 2 Connect the Board & Upload Your First Sketch

- Open the example script: Blink

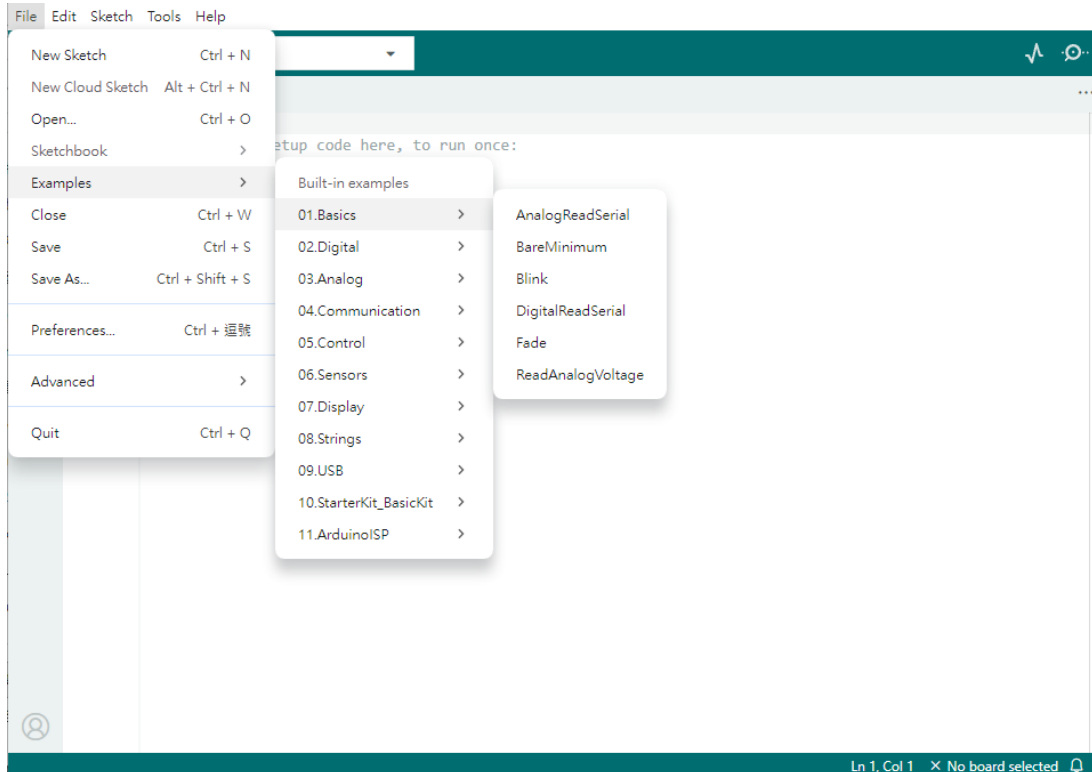

- Connect the Arduino Board to your PC,  
and choose the corresponding port

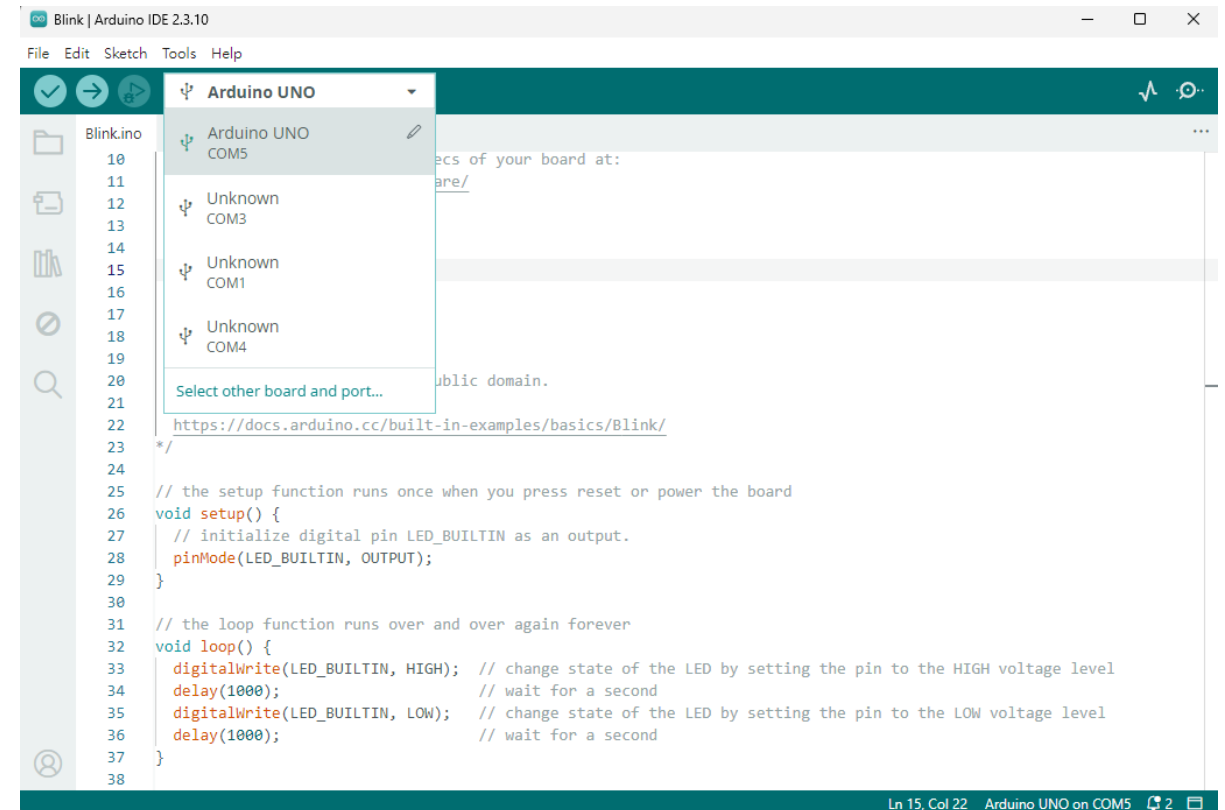





# Is the LED Blinking?

Congratulations —  
your first embedded program is up and running!

## No response? Check these three things:


- Does your USB cable support data (not just charging)?
- Open Device Manager to check which COM port it's using.
- Double-check that both the Board and Port settings match your actual hardware.

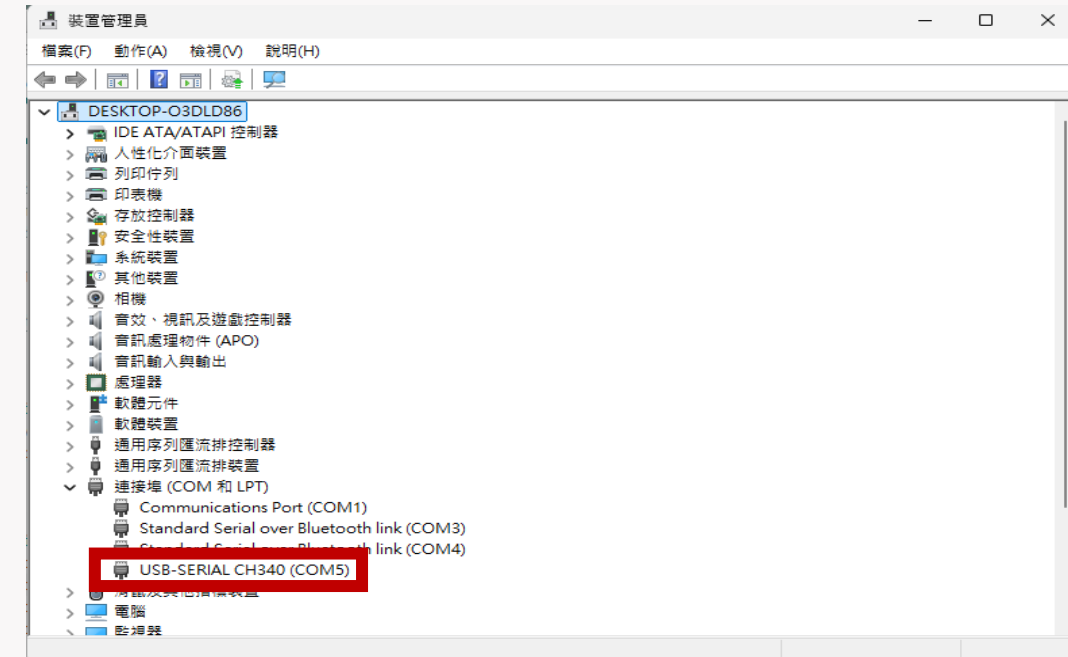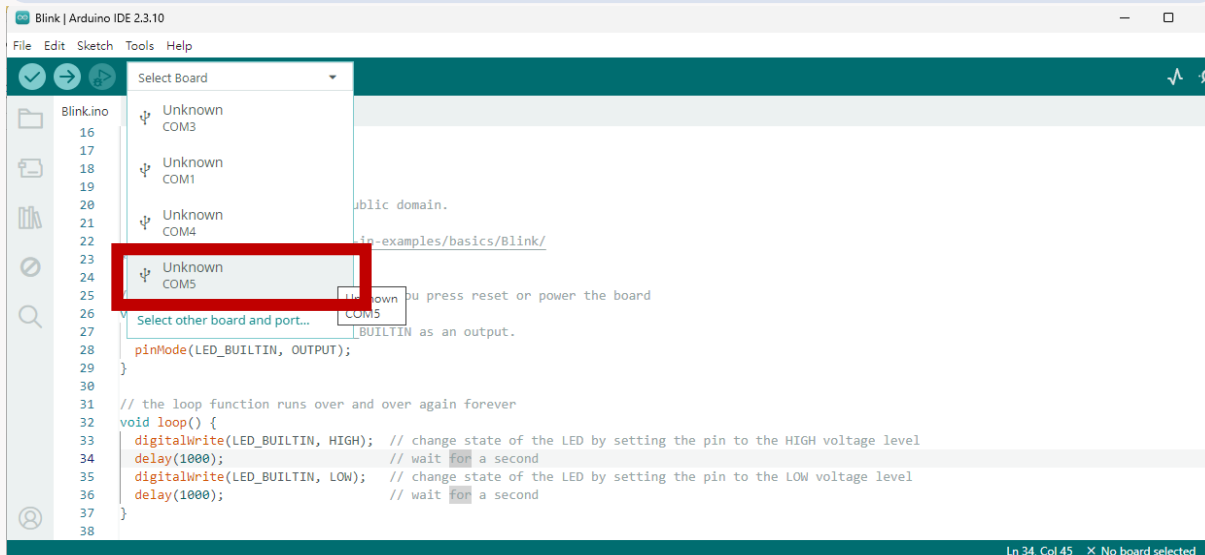


## Select Other Board and Port

Select both a Board and a Port if you want to upload a sketch.  
If you only select a Board you will be able to compile, but not to upload your sketch.

### BOARDS

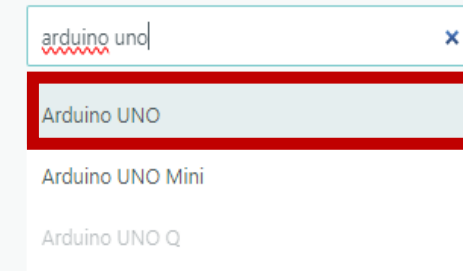

### PORTS

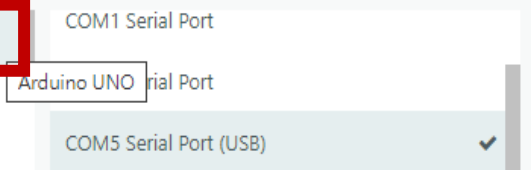

☐ Show all ports

Please pick a board connected to the port you have selected.

CANCEL

OK



# Is the LED Blinking?

Congratulations — your first embedded program is up and running!

- Press the “Verify” button to compile the example code, and press the “Upload” button to upload the sketch to the board

```
Blink | Arduino IDE 2.3.10
File Edit Sketch Tools Help
[Verify] [Upload] [Download]
Arduino UNO

Blinkino
16 by Arturo Guadalupi
17 modified 8 Sep 2016
18 by Colby Newman
19
20 This example code is in the public domain.
21
22 https://docs.arduino.cc/built-in-examples/basics/Blink/
23 */
24
25 // the setup function runs once when you press reset or power the board
26 void setup() {
27   // initialize digital pin LED_BUILTIN as an output.
28   pinMode(LED_BUILTIN, OUTPUT);
29 }
30
31 // the loop function runs over and over again forever
32 void loop() {
33   digitalWrite(LED_BUILTIN, HIGH); // change state of the LED by setting the pin to the HIGH voltage level
34   delay(1000); // wait for a second
35   digitalWrite(LED_BUILTIN, LOW); // change state of the LED by setting the pin to the LOW voltage level
36   delay(1000); // wait for a second
37 }
38
```

Ln 34, Col 45 Arduino UNO on COM5

