

# **Service Manual**

**ViewSonic N3260w(M)**

**N3760w(M)**

**N4060w(M)**

**Model No. VS10847-1M**

**VS10848-1M**

**VS10846-1M**

**32" 37" 40" LCD TV**

**(N3260w\_N3760w\_N4060w-1M\_SM\_Rev.1a\_Mar.2006)**

---

**ViewSonic® 381 Brea Canyon Road, Walnut, California 91789 USA - (800) 888-8583**

## **Copyright**

*Copyright © 2006 by ViewSonic Corporation. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of ViewSonic Corporation.*

## **Disclaimer**

*ViewSonic makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranty of merchantability or fitness for any particular purpose. Further, ViewSonic reserves the right to revise this publication and to make changes from time to time in the contents hereof without obligation of ViewSonic to notify any person of such revision or changes.*

## **Trademarks**

*Optiquest is a registered trademark of ViewSonic Corporation.*

*ViewSonic is a registered trademark of ViewSonic Corporation.*

*All other trademarks used within this document are the property of their respective owners.*

## **Revision History**

Revision	SM Editing Date	ECR Number	Description of Changes	Editor
1a	2006/03/30		Initial Release	Sophia Kao

## **TABLE OF CONTENTS**

1. Precautions and Safety Notices	3
2. Specification	6
3. Front Panel Function Control Description	9
4. Circuit Description	10
5. Adjustment Procedure	19
6. Trouble Shooting Flow Chart	22
7. Block Diagram	25
8. PCB Layout Diagrams	26
9. Schematic Diagrams	30
10.Exploded Diagram and Exploded Parts List	55
11. Recommended Spare Parts List	61

# 1. Precautions and Safety Notices

---

All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise, without the prior permission of the company.

## Disclaimer

We make no representations or warranties, either expressed or implied, with respect to the contents of this document, and specifically disclaims any warranties, merchantability or fitness for any particular purpose. Further, reserves the right to revise this publication and make changes in the contents without obligation to notify any person of such revision or change.

## All rights reserved

VGA and XGA are registered trademarks of International Business Machines Co. Inc.

## Product safety notice

Many electrical and mechanical parts in this product include specific, safety related characteristics. These characteristics may not be immediately obvious by visual inspection and the protection these components offer can not necessarily be obtained using replacement components with the same voltage or power ratings.

Offer can not necessarily be obtained using replacement components with the same voltage or power ratings. Electrical components having such features are identified by shading on the schematic diagram and in the parts list. Before replacing components, read the parts list in this manual thoroughly.

The use of substitute parts which do not have the same safety characteristics as those indicated in the parts list may cause electrical shock, fire, x-ray emissions, or other hazards.

## Service notes

1. When replacing circuit boards or components, clamp the lead wires to the terminals before soldering.
2. When replacing a high power resistor (oxide metal film resistor) on a circuit board, keep the resistor at least 10 mm (0.5-inch) from the circuit board.
3. Keep leads and wires away from high voltage and high temperature components.
4. If any fuse in the product is blown, replace it only with the correct fuse specified in the parts list.

## Handling of broken glass and liquid crystal leakage

If the LCD is damaged, liquid crystal leakage may occur and the glass may shatter into small pieces. Do not touch the broken glass or liquid crystal which is toxic. In addition to possible cuts resulting from broken glass, toxic leakage may cause skin irritation or poisoning. If liquid crystal enters your eyes or mouth, you should immediately rinse with clean water and consult a doctor.

## Important safety information

1. Read all these instructions.

2. Save these instructions for later use.
3. Unplug this television set from the wall outlet before cleaning.
4. Do not use accessories not recommended in the user manual as they may damage the product.
5. Do not use this product in wet locations such as near a bathtub, washbowl, kitchen sink, laundry tub, swimming pool, or in a wet basement
6. Do not place this product on an unstable cart, stand, or table. The television receiver may fall and cause serious injury as well as possibly damaging the product. Use only with a cart or stand recommended serious injury as well as possibly damaging the product. Use only with a cart or stand recommended instructions and only use a mounting kit as recommended by the manufacturer.
7. Blocking the ventilation holes can cause overheating and fire. Take care not to block any ventilation holes when siting the television close to walls or other objects. Never install this product in a closed cabinet or bookcase unless sufficient ventilation is provided.
8. This television should be operated using only the type of power source indicated on the label and in the user manual. If you are unsure what your home power supply is, you should consult the Power Company or talk to your television dealer.
9. This television is equipped with a plug designed to fit only one way in the power socket. The earth pin is an important safety feature of the plug. If the plug does not fit your outlets or your outlets do not include a hole for the earth pin, you should consult a qualified electrician about replacing the socket.
10. Do not rest anything on the power cord and do not allow the power cord to lie in a position where it is likely to be stepped on or tripped over.
11. Follow all warnings and instructions marked on the television receiver.
12. During thunderstorms and when the television is unused for extended periods of time, you should unplug the power cord from the outlet and disconnect the antenna.
13. External antenna systems should be sited away from overhead power lines and away from electrical circuits. Extreme caution should be exercised when erecting an outside antenna. Touching overhead power cables can be fatal.
14. Do not overload power outlets or extension cords as fire or electric shock can result.
15. Never push anything into the television through the ventilation slots as they may come into contact with high voltage elements of the device and cause electric shock or fire. Take care never to spill liquids into the product.
16. Servicing of this product should only be carried out by qualified service technicians.
17. Unplug this product from the power source and consult a qualified service technician in the following cases:
  - The power cord is damaged or frayed.
  - Liquid is spilled into the television.
  - The television is exposed to rain or water.
  - The television does not operate as the user manual describes. In this case, use only

the controls covered by the operating instructions. Improper adjustment of this equipment using controls not covered in the user manual may result in damage to the product that may require extensive work by qualified technicians to rectify.

- The television or cabinet is damaged.
- The television shows a change in performance that indicates a need for servicing.

18. When replacement parts are used, ensure that the technician uses only parts recommended by the manufacturer. Unauthorised replacement parts may cause a fire or electric shock.
19. After servicing, ensure that the technician performs routine safety checks to determine whether the television is in a safe operating condition.
20. When moving this equipment, care should be taken to prevent damage due to dropping, falling or impact.

## 2. Specification

Panel	Type	32" (full 31.5" viewable diagonal area) 37" (full 37.02" viewable diagonal area) 40" (full 39.9" viewable diagonal area) Active Matrix Wide-XGA, 1360 x 768
Viewing angles		32" 170° (H) / 170° (V) 37" 176° (H) / 176° (V) 40" 170° (H) / 170° (V)
Channel Capablility	ATSC/NTSC	VHF/UHF: 2-69 (ATSC/NTSC) CATV : 1-125 (NTSC)
Connection Terminals	TV	AIR IN VHF/UHF: 2-69 (ATSC/NTSC) CATV: 1-125 (NTSC)
	S/AV	Video IN x 2 S-Video IN x 2 (S jack has priority when S-jack and Video-jack plug in at the same time) Audio IN x 2
	COMPONENT	COMPONENT Video x 2 (YCbCr/YPbPr)(support 480i, 480P, 720P, 1080i) Audio IN x 2
	PC	VGA IN x 1 Audio IN x 1 (3.5mm Jack)
	HDMI	HDMI x 1 Audio IN x 1 (For HDMI Analog Audio)
	Audio Out	Analog Audio Out x 1
Compatibility	Mode	Compatible Inputs
	720 x 400 @ 70 Hz	PC, HDMI
	640 x 480 @ 60/75 Hz	PC, HDMI
	800 x 600 @ 60/75 Hz(VESA)	PC, HDMI
	832 x 624 @ 75 Hz (Mac)	PC, HDMI
	1024 x 768 @ 60/75 Hz(VESA)	PC, HDMI
	1280 x 720 @ 60 Hz	PC, HDMI
	1280 x 768 @ 60 Hz(VESA)	PC, HDMI
	1280 x 1024 @ 60 Hz(VESA)	PC, HDMI
	1360 x 768 @ 60 Hz	PC

	480 I 60 Hz(NTSC)	AV/S,HD
	480 P 60 Hz(DVD)	PC, HDMI
	720 P 50/60 Hz	PC, HDMI
	1080 I 50/60 Hz	PC, HDMI
Speaker Output		10 W + 10 W
Power	Voltage	100-240 VAC, 50/60 Hz (auto switch), 32" : 190W(MAXIMUN) 37" : 220W(MAXIMUN) 40" : 260W(MAXIMUN)
Operating Conditions	Temperature	0°C to 40°C (32°F to 104°F)
	Humidity	10% to 85% (no condensation)
	Altitude	To 3000 meters
Storage conditions	Temperature	-20°C to 60°C (-4°F to 140°F)
	Humidity	10% to 85% (no condensation)
	Altitude	To 12,000 meters
Dimensions	Physical	32" : 820 mm (W) x 650 mm (H) x 230 mm (D) 32.3" (W) x 25.6" (H) x 9.1 " (D) 37" : 960 mm (W) x 730 mm (H) x 280 mm (D) 37.8" (W) x 28.7" (H) x 11" (D) 40" : 1015 mm (W) x 755 mm (H) x 280 mm (D) 40.0 "(W) x 29.7" (H) x 11" (D)
	Package	32" : 960mm (W) x 780 mm (H) x 320 mm (D) 37.8" (W) x 30.7" (H) x 12.6 " (D) 37" : 1130 mm (W) x 870 mm (H) x 370 mm (D) 44.5" (W) x 34.3" (H) x 14.6" (D) 40" : 1145 mm (W) x 910 mm (H) x 370 mm (D) 45.1 (W) x 35.8" (H) x 14.6" (D)
Weight	Net	32" : 22 kg (48.5 lb.) 37" : 31 kg (68.3 lb.) 40" : 33 kg (72.7 lb.)
	Gross	32" : 26.5 kg (58.4 lb.) 37" : 38.5 kg (84.9 lb.) 40" : 40.0 kg (88.1 lb.)

Power saving modes stand by <1.5 W (Red LED)

---


Preset Timing Mode (Pre-adjusted to VESA 1360 x 768 at 60 Hz)

**Warning :** Do not set the graphics card in your computer to exceed these refresh rates. Doing so may result in permanent damage to the LCD.

Note : Product specifications are subject to change without notice.

---

### 3. Front Panel Function Control Description

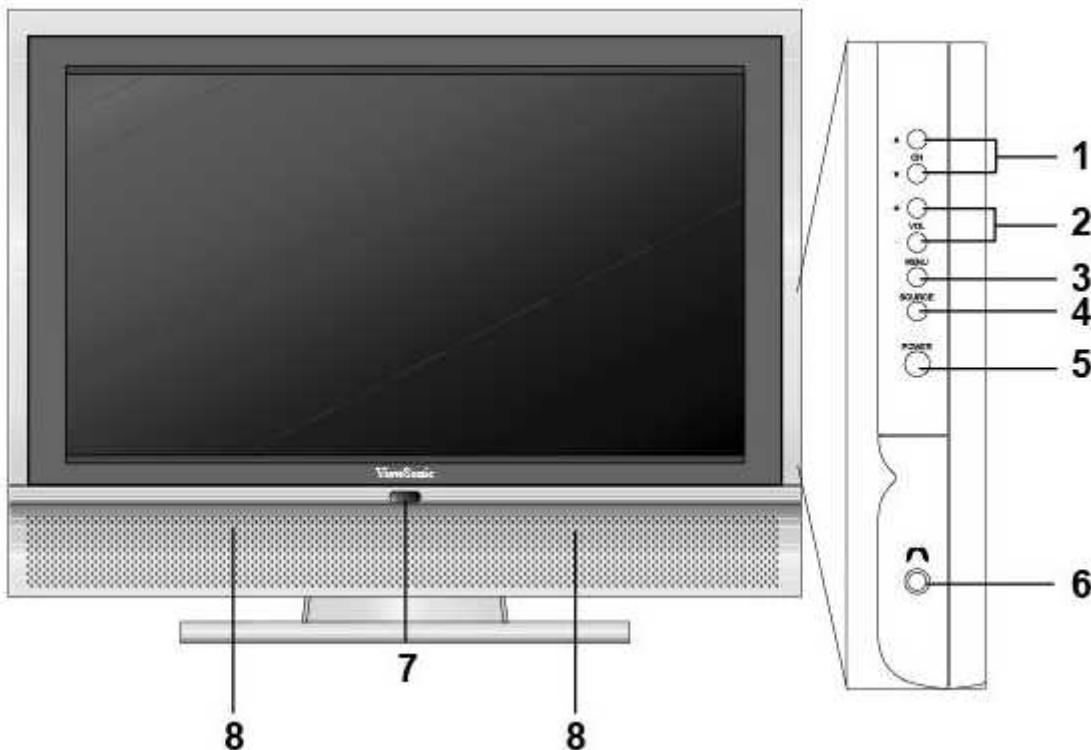

#### 1. CH ▲/▼

Changes the channel.

#### 2. VOL +/–

Used for changing the volume.

#### 3. MENU

Display menu screen

#### 4. SOURCE

Switch between display input sources.

#### 5. POWER

Turns the TV on and off. A green light indicates that TV is on and red that it is off.

#### 6. EARPHONE

Used for connecting headphones to the TV.

#### 7. Power indicator LED

GREEN shall apply during all operational states (i.e. with image present), LED light off when the product in stand-by mode. Red light apply when no PC/HDMI signals in PC/HDMI mode after 15 sec.

#### 8. SPEAKERS

Audio output.

## 4. Circuit Description

### Power Circuit:

Switching mode power supply provided 3 sets of Vcc power supply +5V, +12V and +24V. The Details please refer to page 26 of schematic.


Vcc +5V : supply to Stand-By U48 chip and Main Board or Panel LVDS.

Vcc +12V : supply to Audio Processor, Audio Class-D AMP or Panel LVDS.

Vcc +24V : supply to Panel's inverter.

#### A. Cold-Opening Mode :

- i. Switching power will produce +5V when plug in and transmit to the Vsub pin of Stand-By U48 chip via J17.

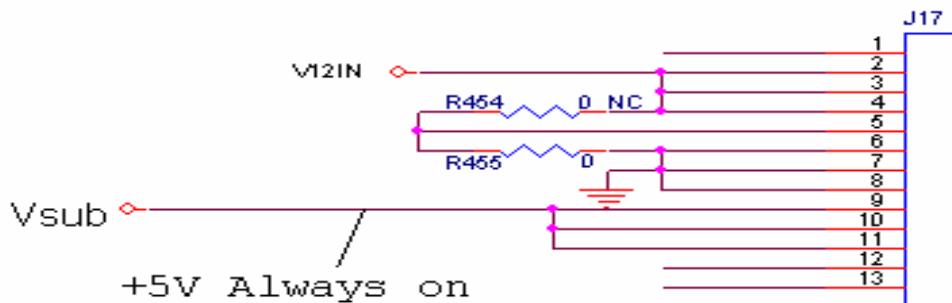

- ii. This machine is in Stand-By Mode now.


#### B. Stand-By Mode(+5V) :

- i. When this machine is in Stand-By mode, only U48 SM5964C40J keep working, so the system can assure the consumption power is < 1.0W in Stand-by Mode.

#### C. Power ON Mode(+5V ,+12V)

- i. Receives the start order


When the system receives the start order by Power Key of the remote control (signal mark IRUp) or Power ON/OFF of the control panel (signal mark PWSW) , it will process the following action.

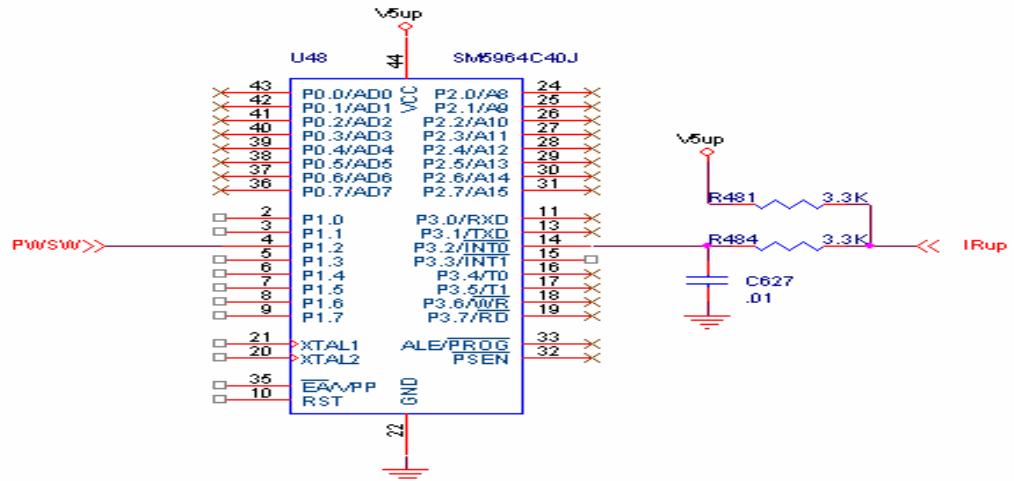

## ii. Switching power ON

When Switching power receives the start order by 2<sup>nd</sup> pin of U48 (signal mark PWRON),


Then by Q25 2N7002 (signal mark V12\_ON) and 1<sup>st</sup> pin of J17 to control Switching Power Model provides +12V (POWER STREE, refer to page 26 of schematic) and +24V to turn on the circuit of +5V(signal mark VCC).

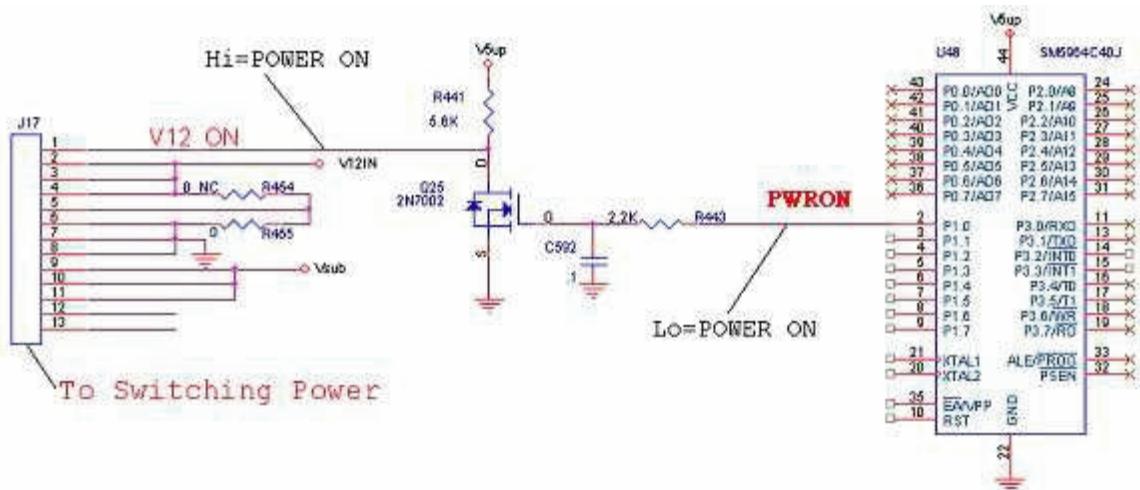

- iii. . +5V (signal mark VCC) turn on when V12\_ON=Hi, Every batches of digital board circuit would be able to process Power ON procedure. (VCC POWER STREE, please refer to page 26 of schematic)

## iv. CPU RESET


U19 PW328 CPU will output a Hi level to trigger other IC to reset when +5V, +12V and +24V start to work. Then Firmware starts to read the data of U39 and U40 via U35 PW200 CPU and transmits data via 12C and sends control signal to run the TURN ON procedure.

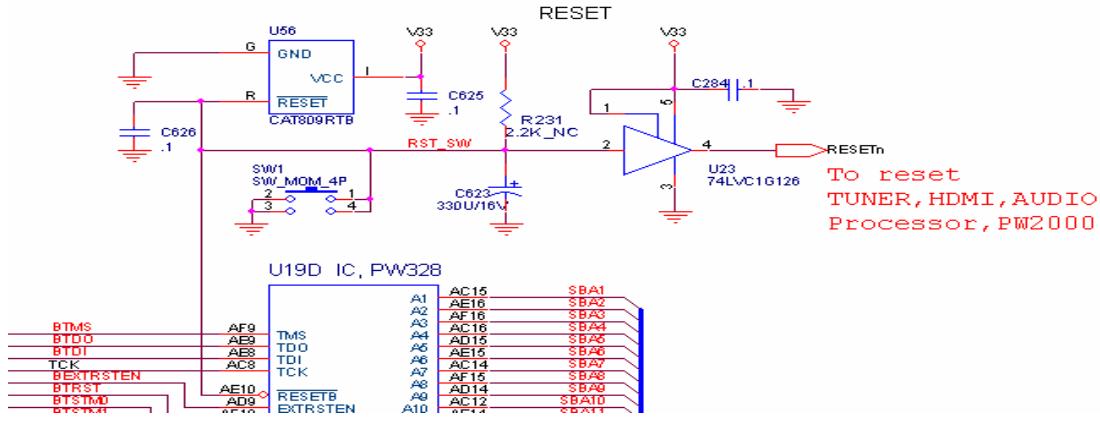

#### v. PANELVCC ON


In the period of POWER ON, the signal of control PANELVCC output a Hi level signal from PW2000 I/O port PNLPWR, PANELVCC will supply power to Panel via LVDS output Header J5.

### PANELVCC ON/OFF

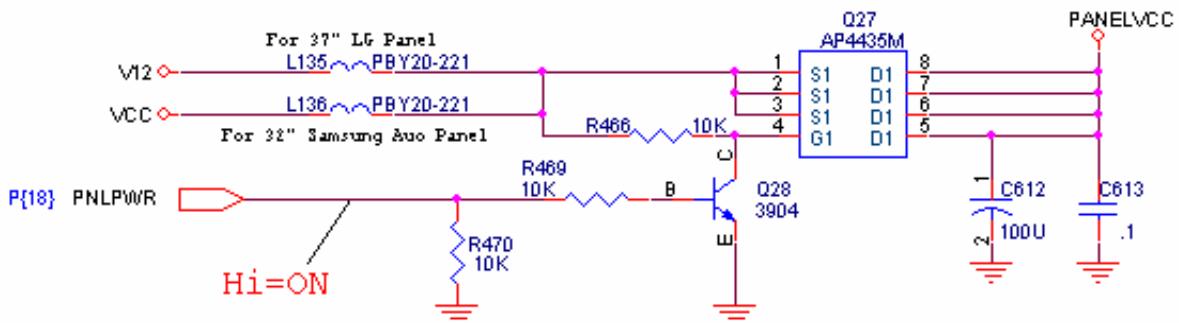


#### vi. INVERTER ON

When POWER ON, the signal of control Backlight-ON will output from I/O port BKLTPWR of U35 PW2000 via Q31, Q26 to 13<sup>th</sup> pin of J17 and sends to Switching Power supply. Then Switching Power Supply forwards the signal to the Inverter of Panel and turn it on.

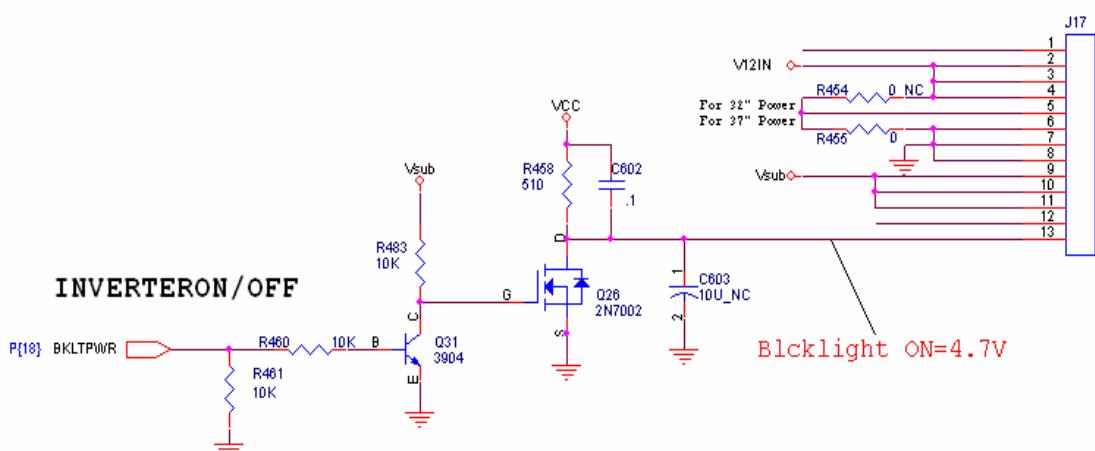


#### vii. BACKLIGHT ADJUST

The signal of Backlight Adjust which output from PWM I/O port of U19 PW328 sending a PWM signal to U57 C621 converged into a DC signal then forward to Inverter of Panel via 12<sup>th</sup> pin of J17 to adjust the brightness of Backlight.

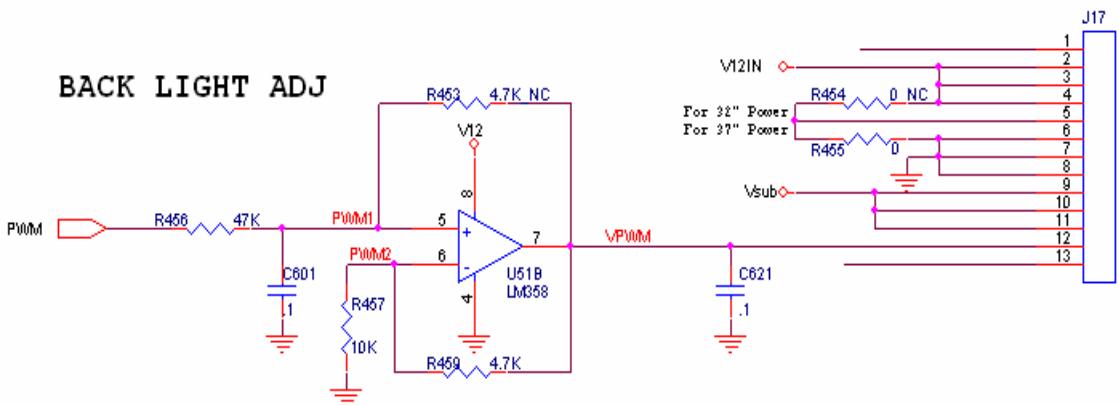


### viii. AUDIO AMP MUTE ON/OFF

The control signal of AMP MUT was outputed from MUTE1 and MUTE2 I/O port of PW2000. MUTE2 will control the RC JACK Audio Output Mute. (For preventing from abnormal sound occurred when turn on TV set, Audio Amp Mute will act in first and last procedure)

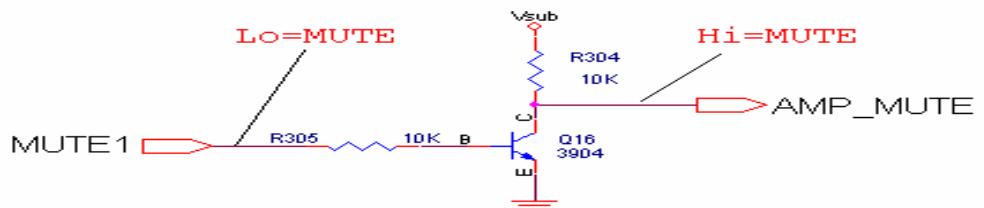

### ix.

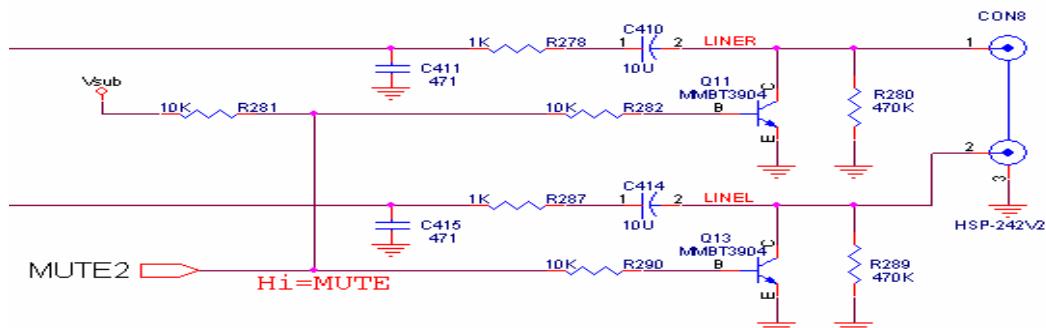


### x. THE THREE BIRDS LOGO

The ViewSonic Logo will show up in 5 seconds after program execution, then disappeared. All the POWER ON procedure will be finished when AMP Relay sound be heard and screen displayed.

### D. POWER OFF Mode :

- After POWER ON procedure finished, the signal of Keypad and remote control will transform to PW2000 for further processing. U48 chip did not handle the signal of Keypad and remote control any more. When the system receives the power off order by Power Key of remote control or Power ON/OFF of the keypad. Firstly PW2000 will send current screen status to memory U38 via I2C bus, then the PWRDOWN I/O port of PW2000 will send a Hi signal to U48 closing the Switching power.

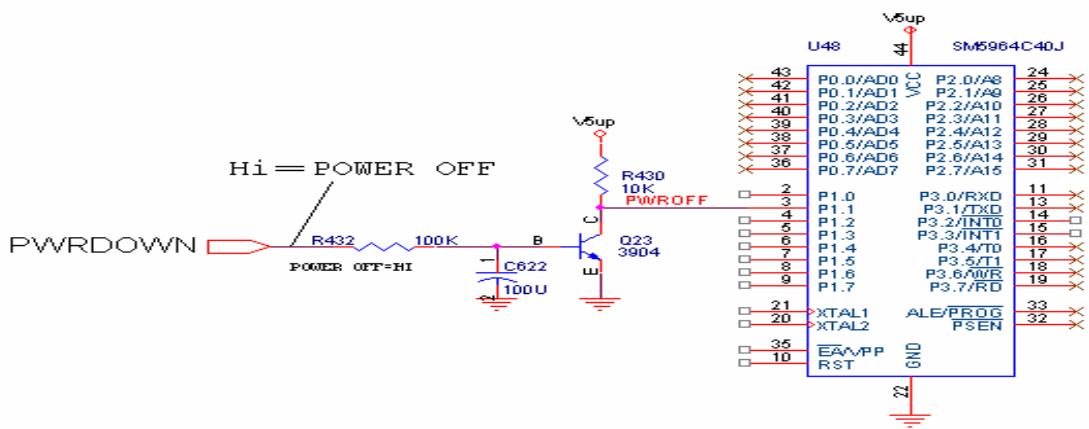

## Antenna Circuit:

Tuner (TUV1236D) has two RF inputs. Upwards was the connector of Terrestrial Input, Downwards was the connector of CATV Input.

### A. Terrestrial Input Connector :


Connects to your ATSC antenna and receives broadcasting signals. There are two signals, Analog TV (NTSC signal) and Digital TV (ATSC signal) could be received.

- Analog TV (NTSC signal)

Tuner TUV1236D receive the signal come from RF NTSC signal , Selects desired channel and demodulate image composite signal (signal mark T1CVBS) by pin 14 of Tuner output to U19 PW328 decoder via path C224 and audio SIF signal (signal mark T1SND) by pin15 of Tuner output to U29 MSP4450G via C396 for demodulating MTS/SAP of Digital TV signal (ATSC signal).

- Digital TV (ATSC signal)

Tuner TUV1236D receive the signal come from ATSC signal , Selects desired channel and converts analog signal into MPEG Transport Stream via Tuner TS1( Transport stream TS1DATA0-TS1DATA7) bus into U35 PW2000 to separates MPEG video and AC3 digital audio.

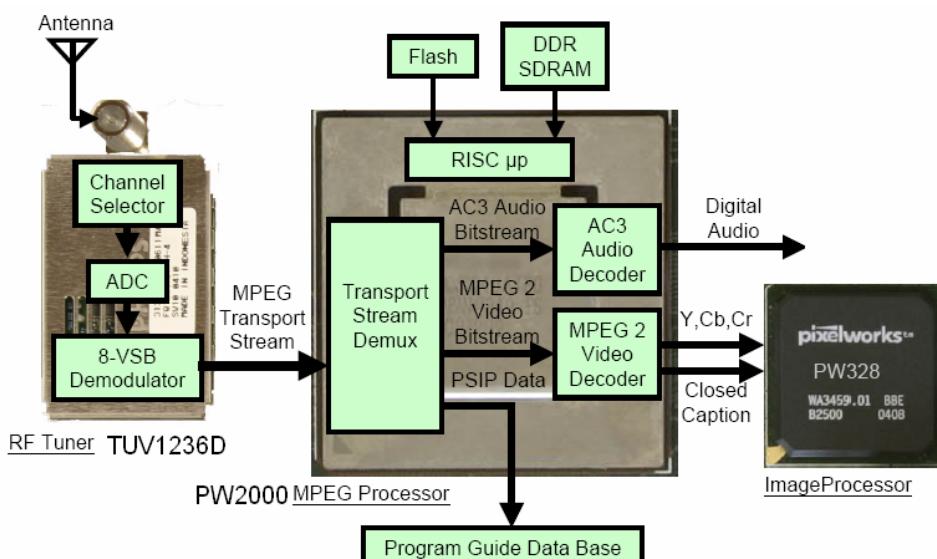

## B. CATV Input Connector :

Connecting to your coaxial cable from local TV station.


- Tuner TUV1236D receive the signal come from CATV signal , Selects desired channel and demodulate image composite signal (signal mark T1CVBS) by pin 14 of Tuner output to U19 PW328 VDC decoder via C224 and audio SIF signal (signal mark T1SND) by pin 15 of Tuner output to U29 MSP4450G via C396 for demodulating MTS/SAP.

## MPEG Processor PW2000:

When MPEG Transport Stream data input U35 PW2000 internal decoder Separates MPEG video and AC3 digital audio .The digital video output from PW2000 Digital Video Signal Output port (44 Pins) to U19 PW328 digital input port(port 1) . The digital audio output via I2S bus (MPEG\_CL, MPEG\_WS, I2S\_DI1) to the externally connected DA converter( U29 MSP4450G). Each of these functions was described in more detail in the sections that follow.

### ● System Control


The PWM2000 incorporates a TX49 core core ( 64-bit MCU core ) and a CRISC (Control 32-bit RISC processor ) for system control. The TX49 core issues instructions to the CRISC as well as to the peripheral controllers such as PCIC (PCI Controller) , USB, and UART. Based on the instructions sent from the TX49 core, the CRISC controls decoders such as video (VDEC), and audio (AUDIO),

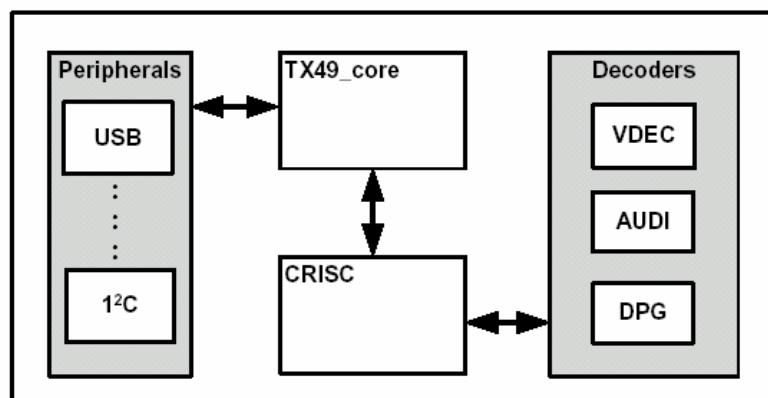

System Control Detail Block Diagram

### ● United Memory


DDR SDRAM ( U42,U43,U44,U45 ) is externally connected to the PWM2000. In addition to the CRISC and TX49 core, the unified memory allows all internal decoders can share data via VMMS ( Virtual Multi-port Memory System ,Controls external DDR-SDRAM 64 bits) , which reduces external memory types and capacities.

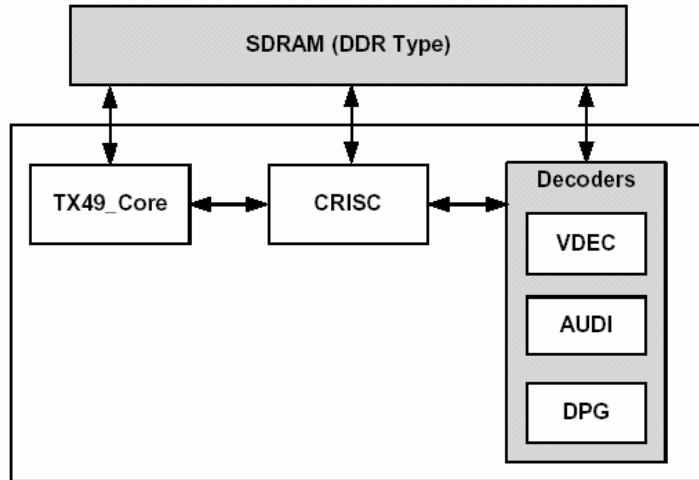

**Unified Memory Block Diagram**

- **Stream Decoder**

With the built-in Transport Stream Demultiplexing Processor (TSP), the PWM2000 supports bitstream input in TS format. The TSP can separate the TS into audio and video PES, analyzing the PES header, and transferring the PES to the audio and video decoders. The TSP can also transfer any data from the input stream to external memory.

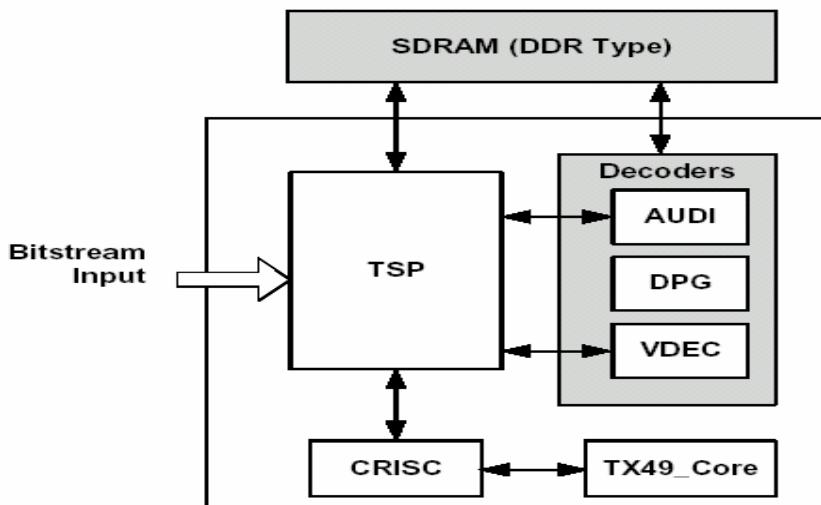


**Stream Decode Block Diagram**

- **Video/Audio Signal Output and External Signal Mixing**

Video data decoded by the VDEC (Video Decoder) is graphically processed (overlaid) by the DPG (Display Picture Generator). Digital video signals are directly output from the DPG.

The audio signals decoded by the AUDIO are output as digital data to the externally connected DA converter. The digital data output is also compatible with the SPDIF format output.

The PWM2000 can externally input both audio and video digital data. The PWM2000 has a function which mixes the input data internally then outputs them.

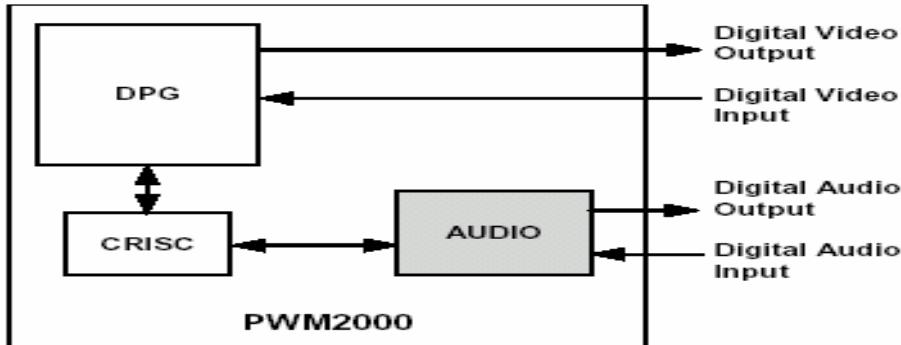

**Video/Audio Signal Output Block Diagram**

- **Firmware**

The CRISC/TSP/VDEC/DPG/AUDIO blocks of the PWM2000 are operated by firmware (U30,U40). A structure supporting firmware enables the PWM2000 to implement a flexible system configuration.

## AV Input circuit (AV,S,YPbPr,PC,HDMI ):

AV Input source include AV1(S1),AV2(S2),HD1,HD2,PC,HDMI.

- AV1 and AV2 Input

AV1 and AV2 include AV jack and S-video jack.

S jack has priority when S-jack and Video-jack plug in at the same time.

SDET-1 and SDET-2 =HI When S-jack plug in.

Composite video ( AV1CVBS , AV2CVBS ) and Y ( AV1LUMA , AV2LUMA ) /C(AV1CHROMA, AV2CHROMA) signal input Analog input port of U19 PW328.

AV1,AV2 Audio R/L Signals input U29 MSP4450G.

- HD1 and HD2 Input

Component signal includes Y,Pb,Pr

HD1(Component Video signal AV3Y, AV3PB, AV3PR) and HD2(Component Video signal AV4Y, AV4PB, AV4PR) signal input Analog input port of U19 PW328.

HD1 and HD2 Audio R/L Signals input U29 MSP4450G.

- PC INPUT

PC(VGA)signal includes :R , G , B , HS , (Horizontal Sync Signal) , VS(Vertical Sync Signal)

When power on, PC will read the data of U19 via I2C then transfer R, G, B, HS and Vs signals into analog input port of U19 PW328 via VGA Pin.

PC Audio R/L Signals input U29 MSP4450G.


- HDMI INPUT

The HDMI cable and connectors carry four differential pairs that make up the TMDS data and clock channels. These channels are used to carry video, audio and auxiliary data. In addition, HDMI carries a VESA DDC channel. The DDC is used for configuration and status exchange between a single Source and a single Sink(U13 Sil 9011 and U6 EDID PROM).


The U13 Sil 9011 video output goes to U19 PW328 digital input port(port 0).

The digital audio output by I2S bus (HDMI\_CL, HDMI\_WS, I2S\_DI2) to the externally connected DA

converter( U29 MSP4450G)

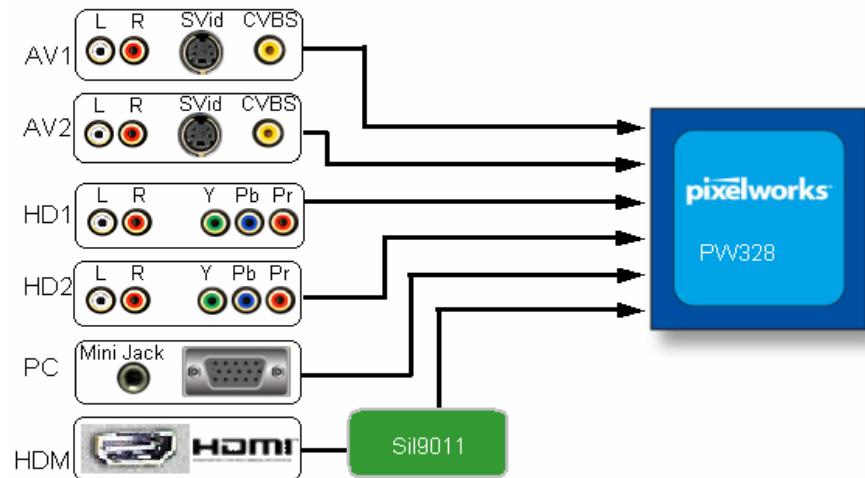

VIDEO Input circuit (AV,S,YPbPr,PC,HDMI )

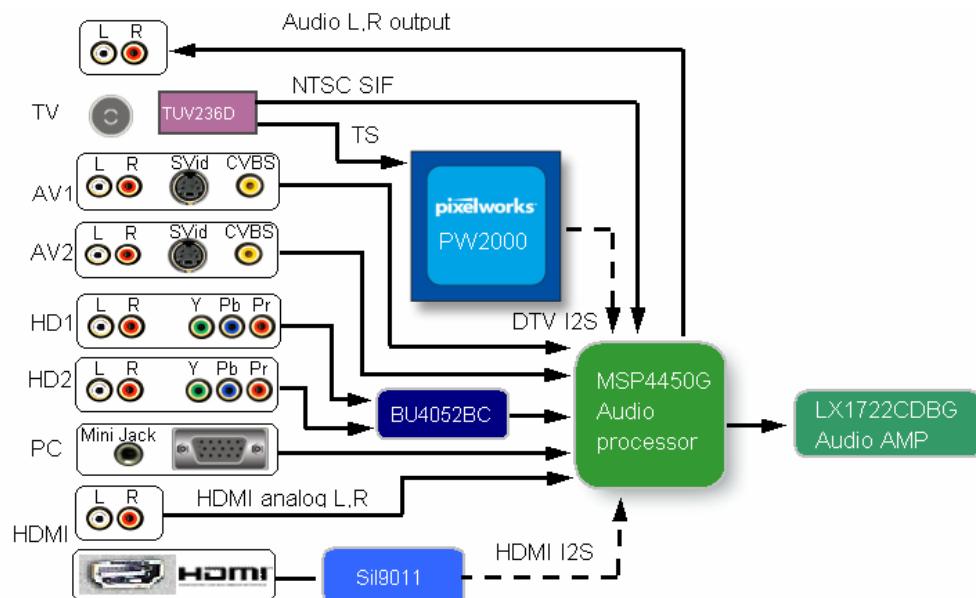

AUDIO Input circuit (TV,AV,S,YPbPr,PC,HDMI )

## 5. Adjusting Procedure (Service mode)

---

An internal settings service menu is provided to allow adjustment of the device by qualified service personal.

Improper use of the internal settings service menu may render the device unusable. Refer to the following sections to learn how to operate the service menu.

### Starting the service mode

To start the service mode of operation and view the internal settings menu, do the following:

1. Switch on the LCD TV and make sure that the TV mode is selected.
2. Press 991 on the remote control to enter the internal Service menu.
3. Press MENU to switch the service mode pages.
4. Press ▲ and ▼ to scroll through the various menu options.
5. Press ◀ and ▶ to change the menu settings.
6. Press WIDE to save the new settings and exit.

- **TV/AV/S-Video WHITE BALANCE, BRIGHTNESS, CONTRAST ADJUSTMENT (ADJUSTING UNDER AVI SOURCE)**

#### --WHITE BALANCE ADJUSTMENT--

1. Press 991 on the remote control to enter the internal Service menu.
2. Press MENU to switch to the PW328 Scaler Menu page
3. Press ▲ and ▼ to scroll to Page 2-3 options
4. Press ◀ and ▶ to adjust the Offset Red, Offset Blue, Gain Red, Gain Blue menu settings.
5. Press WIDE to save the new settings and exit.

(Please don't adjust others setting in page 2-3)

#### --BRIGHTNESS ADJUSTMENT—

1. Press 991 on the remote control to enter the internal Service menu.
2. Press MENU to switch to the PW328 Scaler Menu page
3. Press ▲ and ▼ to scroll to PW328 FE VDC Menu Page 2-1 options
4. Press ◀ and ▶ to adjust the Brightness setting.
5. Press ▲ and ▼ to scroll to TV/AV/S Parameter=AV1 setting and press ▶ to run the setting. (This procedure will copy the settings of AV1 to AV2 & TV)
6. Press WIDE to save the new settings and exit.

- **ATSC DTV WHITE BALANCE/BRIGHTNESS/CONTRAST ADJUSTMENT (ADJUSTING UNDER THE AIR MODE AND WITH ATSC SIGNAL)**

1. Repeat the above mentioned step 1 to 2
2. Press ▲ and ▼ to scroll to PW328 Scaler Menu Page 2-3 options
3. Press ◀ and ▶ to adjust the Offset Red, Offset Blue, Gain Red, Gain Blue menu settings
4. Press WIDE to save the new settings and exit.


(Please don't adjust others settings in page 2-3)

- **YCbCr & YpbPr of COMPONENT 1, 2 WHITE BALANCE/BRIGHTNESS/CONTRAST ADJUSTMENT**

Step 1: Getting COMPONENT 1 connect to 1080i signal. (The settings could not be saved if signals input from COMPONENT 2 or connect to other sources such as 720P, 480P, 480i.....,etc.)

Step 2: WHITE BALANCE ADJUSTMENT OF Component—

1. Repeat the above mentioned step 1 to 2
2. Press ▲ and ▼ to scroll to PE328 FE ADC page 2-2 options
3. Press ◀ and ▶ to adjust the Offset Red and Off Blue settings.
4. Press ◀ and ▶ to adjust the Offset Green setting. ( Brightness Adjustment)
5. Press ◀ and ▶ to adjust the Gain Green setting. (Contrast Adjustment)
6. Press ▲ and ▼ to scroll to 480i/480P/720P Parameter=1080i setting and press ▶ to run the setting.  
(This procedure will copy the setting of 1080i to 480i/480P/720P)
7. Press ▲ and ▼ to scroll to HD2 Parameter=HD1 and press ▶ to run the setting. (This procedure will copy the setting of HD1 to HD2)
8. Press WIDE to save the new settings and exit.

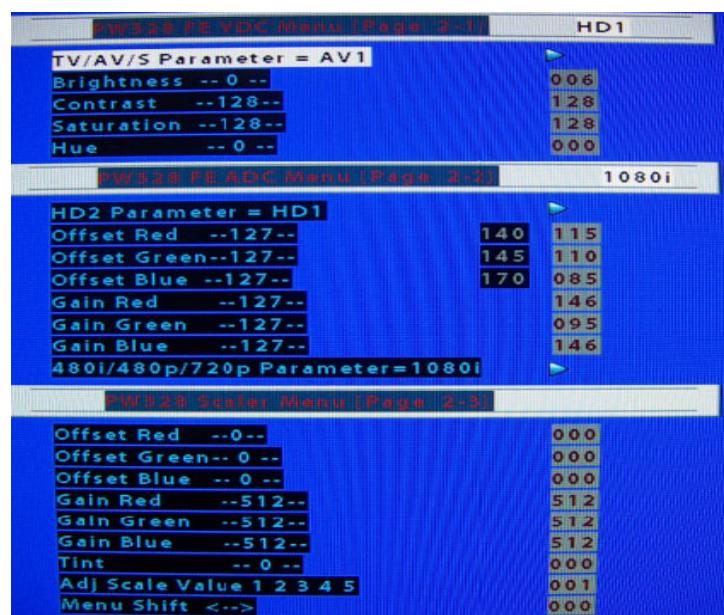

● WHITE BALANCE ADJUSTMENT OF PC INPUT

1. Connecting to VGA Timing mode
2. Under service mode, Press ▲ and ▼ to scroll to PE328 FE ADC page 2-2 options
3. Press ◀ and ▶ to adjust the Offset Red, Offset Green and Off Blue settings.
4. Press ◀ and ▶ to adjust the Gain Red and Gain Blue settings.
5. Press WIDE to save the new settings and exit.

OPERATION OF RS232 WRITING

(1) RS-232 mounted on the Main Board was the main interface writing new firmware. You can update new firmware to U39 by RS232.


(2) Writing firmware need following equipment:

- 1.RS232 interface built in PC.
- 2.RS232 cable
- 3.Pixelworks Flash Upgrader software

(3) Connecting method: connecting RS232 interfaces between PC and TV set.

Firmware writing procedure:

1. Execute Pixelworks Flash Upgrader software
2. Select Baud Rate by 57600
3. Download “appcode.cramfs” file.
4. Choose “Flash” mode entering standby status for writing firmware
5. Turn on TV set.
6. "Bytes Bar" will showed on the screen in few seconds indicating firmware was downloading.

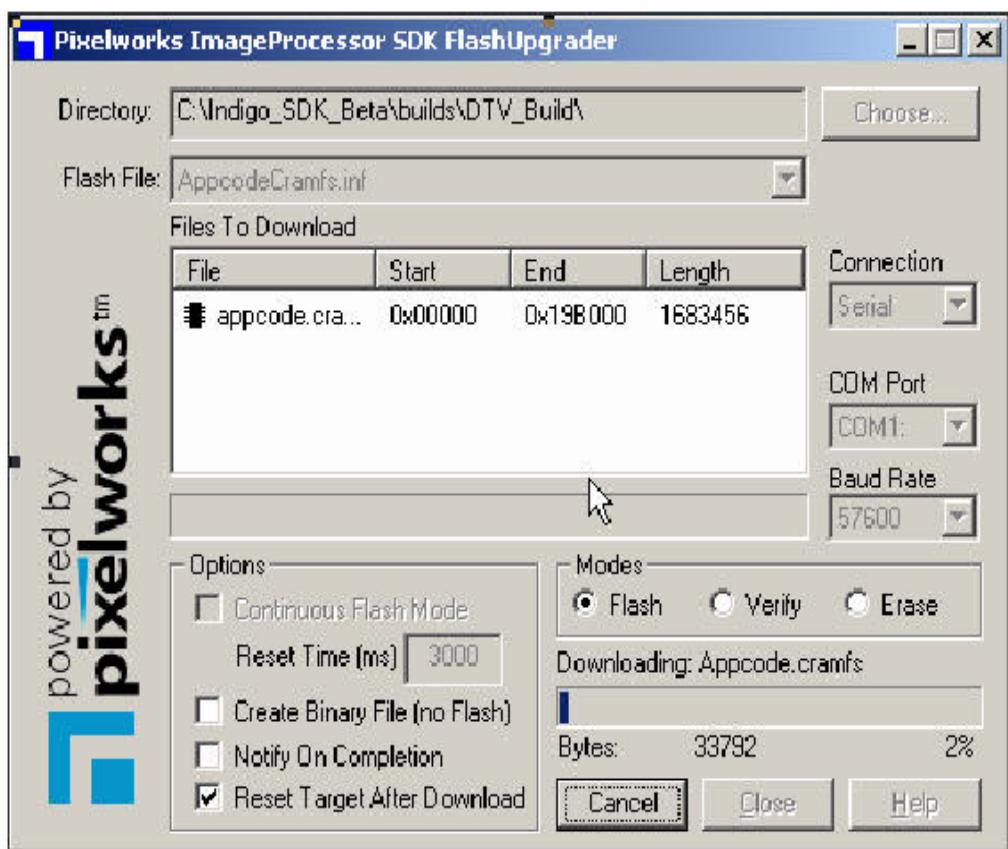

7. The download process will take about 4 Minutes. It won't change the original code when download process interrupted. Once download process was finished system have to take at least 30 seconds updating new firmware. Please make sure power was supplied without interruption; otherwise system will shut down.
8. System will restart automatically after finishing writing process.

## 6. Trouble Shooting Flow Chart

---

### No power

- Make sure the LCD is properly connected.
- Make sure the AC power cord is properly connected.
- Make sure the AC power is ON, DC power button is ON (Green LED).
- Plug another electrical device (like a radio) to the power outlet to verify that the outlet is supplying the proper voltage.(see figure 1)

### Poor or no picture

- The TV station may be experiencing problems. Try another channel.
- The Cable TV signal may be scrambled or encoded. Please contact your local cable operator.
- Make sure that connection to other components are correct.
- Make sure that setup has been done correctly after connections.
- Make sure the correct input is selected and the input signal is compatible. (see figure 2)

### Strange color, light color, or color misalignment

- Ensure that the video cable is securely connected.
- The picture may appear dim in a brightly lit room.
- Adjust brightness and contrast.
- Check the input signal setting.

### No sound

- Check your audio connections
- The MUTE button may have been pressed, try pressing this button again.
- Check your audio settings, your TV audio may be set to minimum.
- Press the Volume + (Up) button on the remote control. (see figure 3)

### Remote control unit does not operate

- Make sure batteries are inserted correctly.
- Batteries could be weak or dead. Replace batteries.
- Is a fluorescent light illuminated near the remote control sensor?
- The path of the remote control beam may be blocked. Make sure the path is clear and that the remote control is aimed at the remote control sensor on the TV.
- Press only one button at a time and it is the correct one for the operation you want to perform.

### Unit cannot be operated

- External influences such as lightning or static electricity may cause improper operation. In this case, operate the unit after first turning on the power of the LCD and the AVC System, or unplug the AC cord for 1 to 2 minutes, then replug again.

### Power is cut off suddenly

- Is the sleep timer set?

- The internal temperature of the unit has increased. Remove any objects blocking the vent or clean as necessary.

### No CATV or AIR reception

- Is the AIR/CABLE option set correctly? Please set the AIR/CABLE option to CABLE.
- AIR/CATV is connected improperly or not connected; please check all the AIR/CATV connections.
- The cable TV service is interrupted; please contact your cable operator.
- Connects to your ATSC antenna or coaxial cable from a local TV

### Picture is cut off/with sidebar screen

- Is the image positioned correctly?
- Are screen mode adjustments such as picture size set correctly?

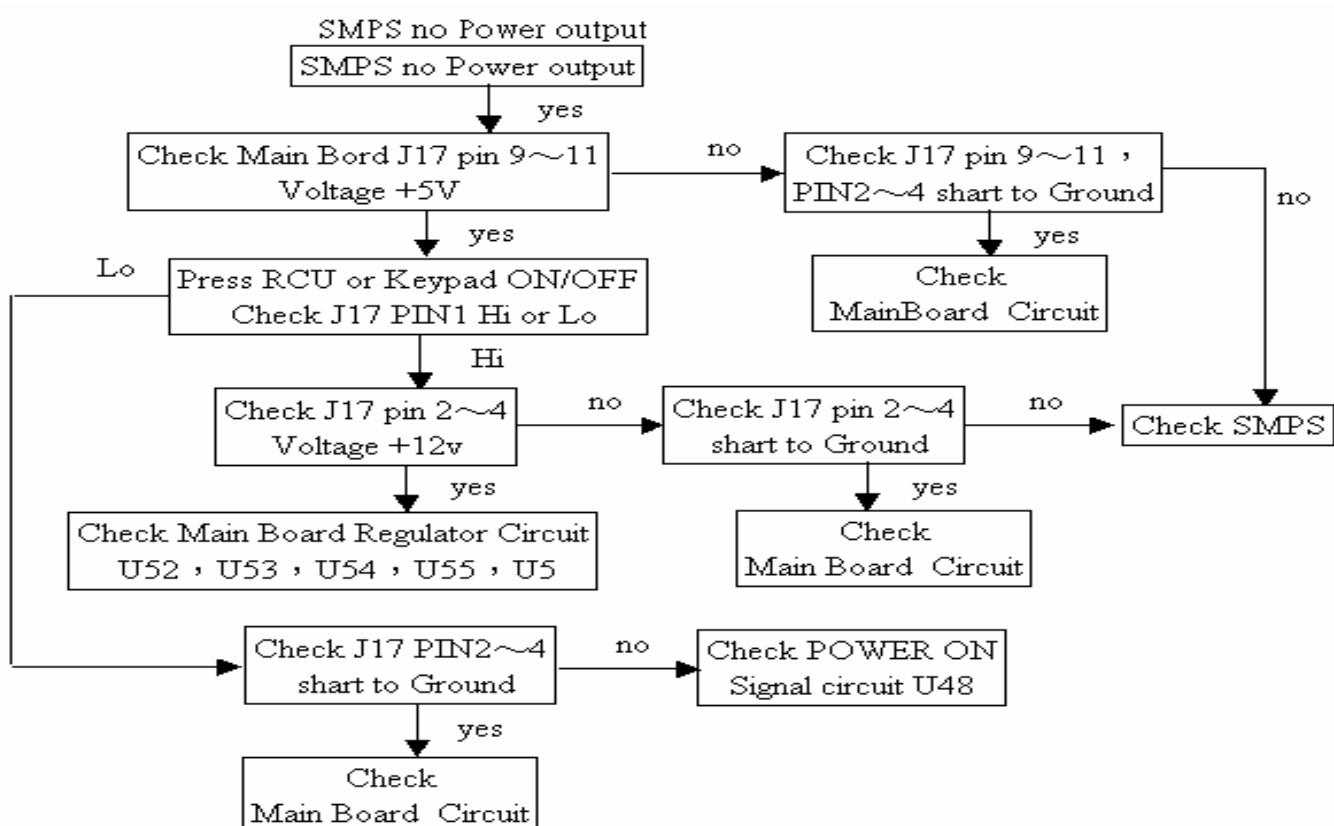


Figure 1 SMPS no power output

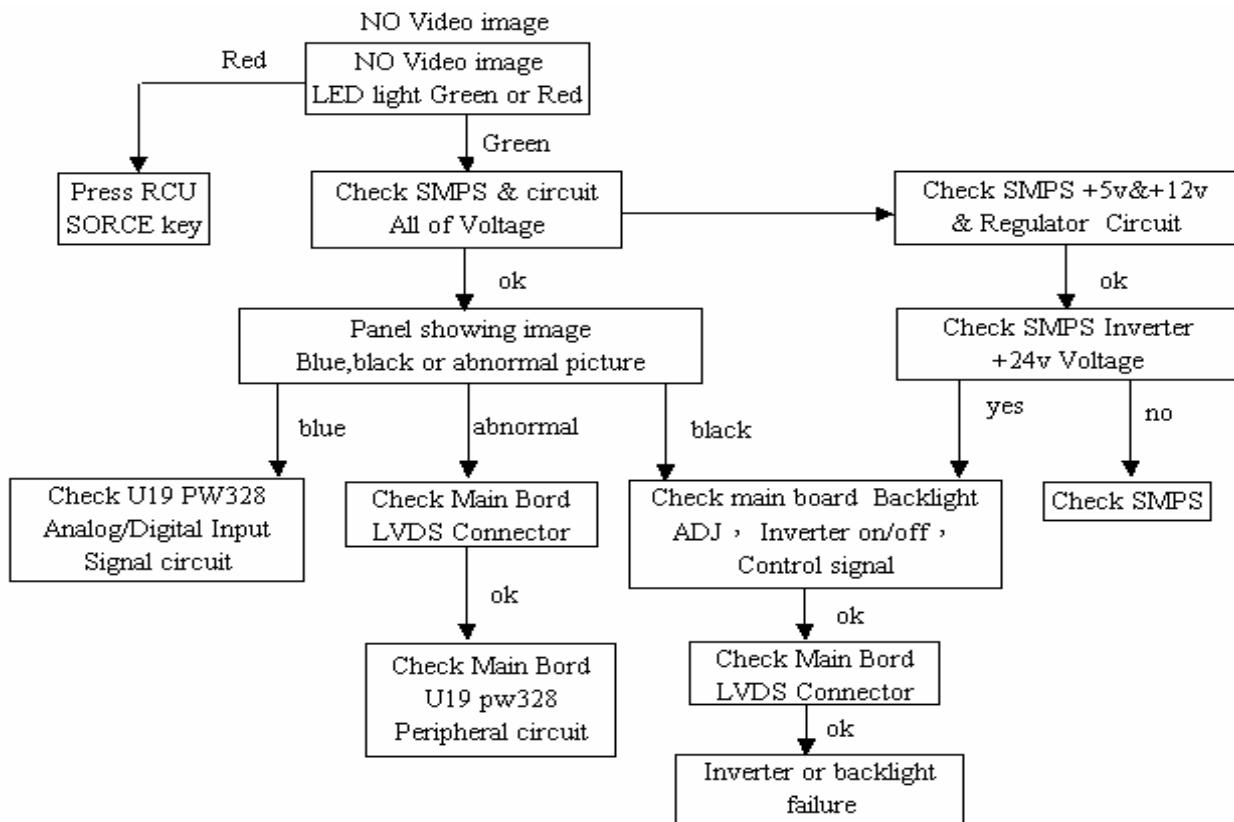


Figure 2 . NO Video image

### NO Audio output Sound


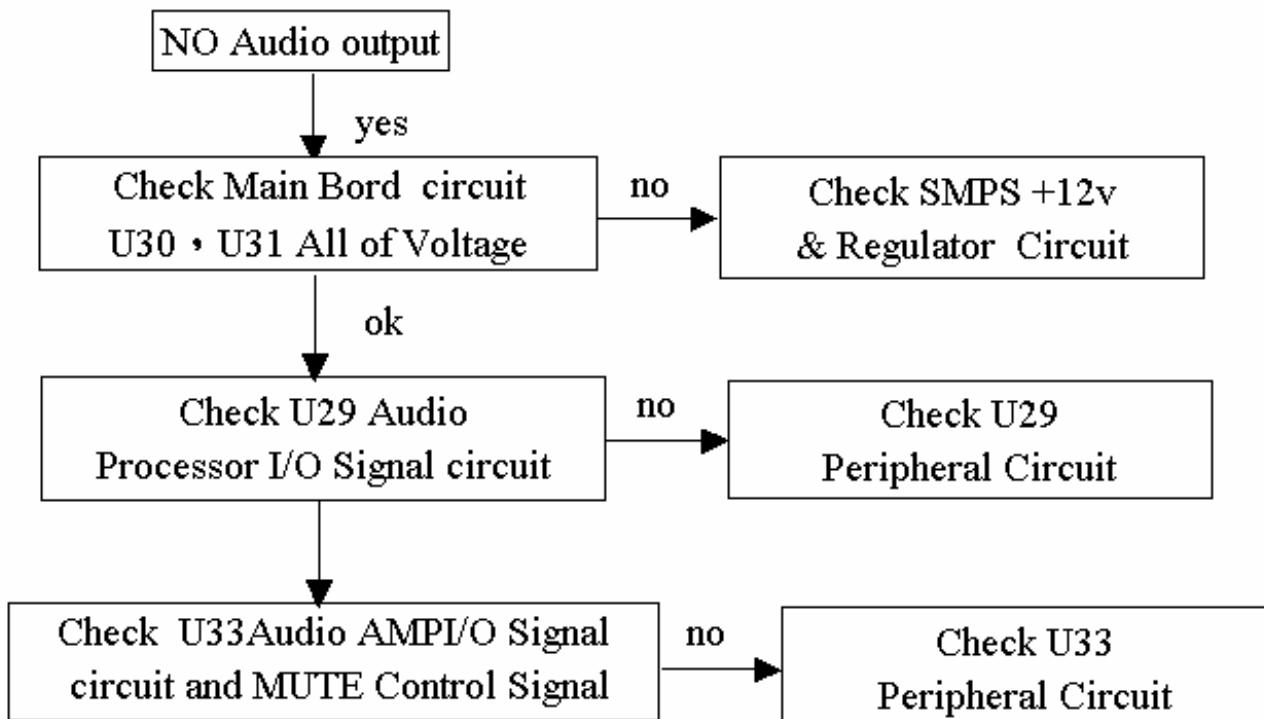



Figure 3 . NO Audio output Sound


## 7. Block Diagram

### N3260w / N3760w / N4060w

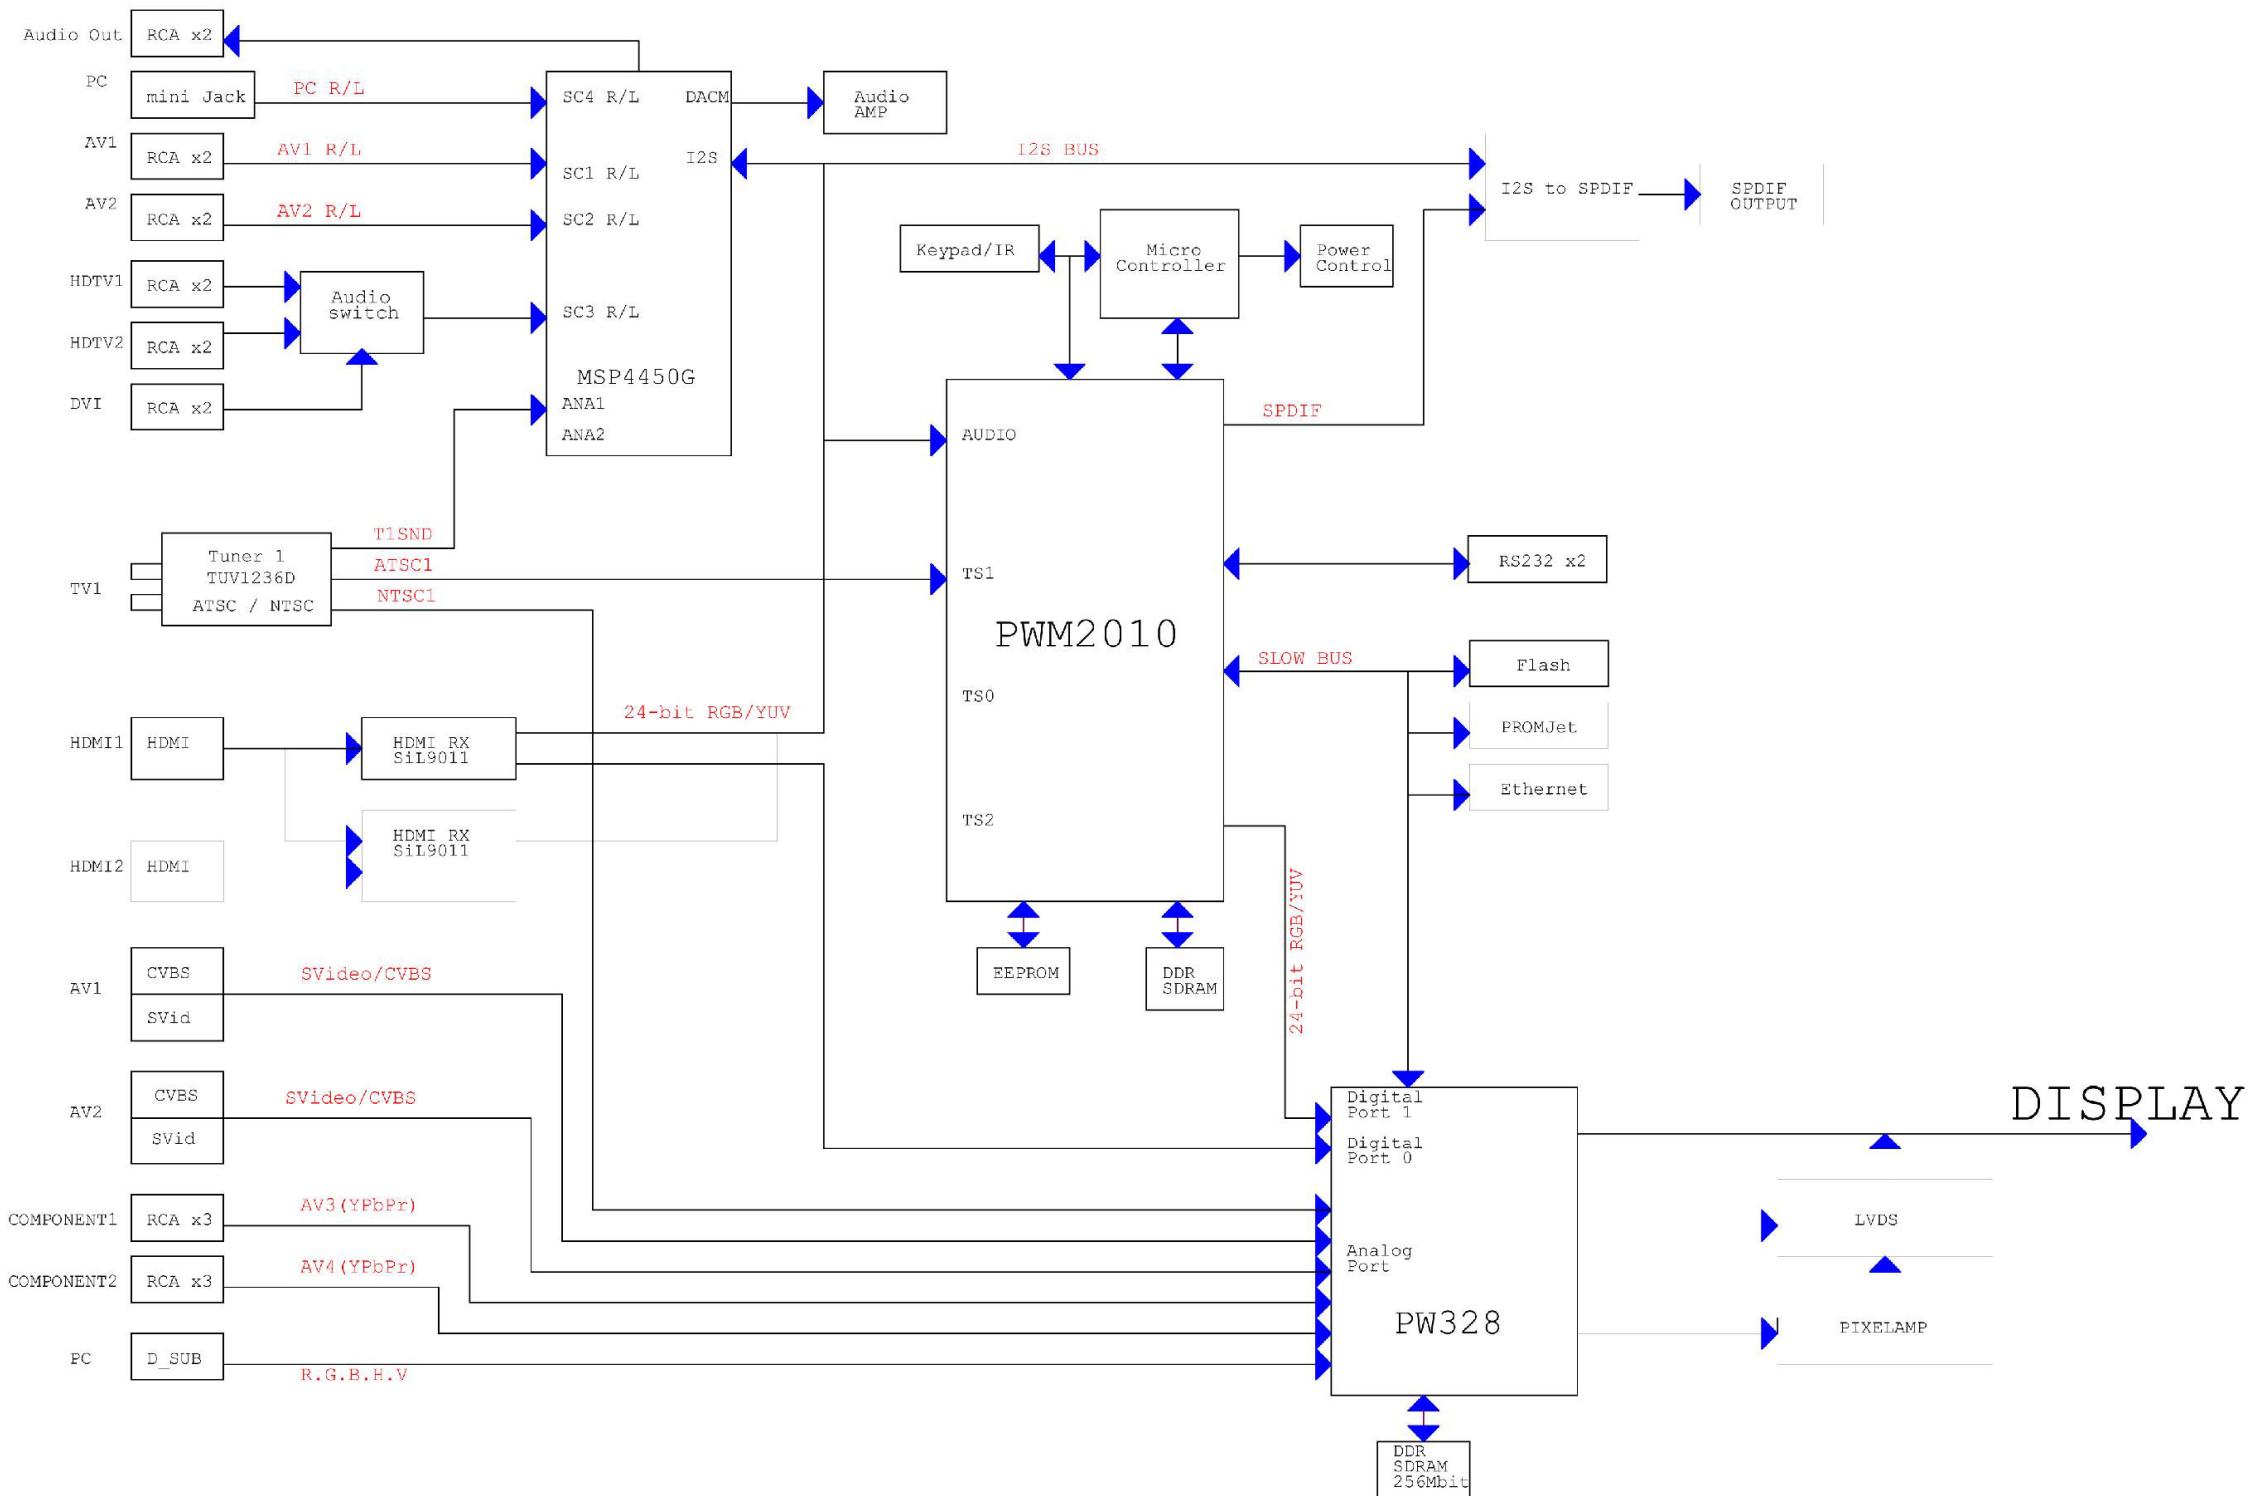


## 8. PCB Layout Diagrams

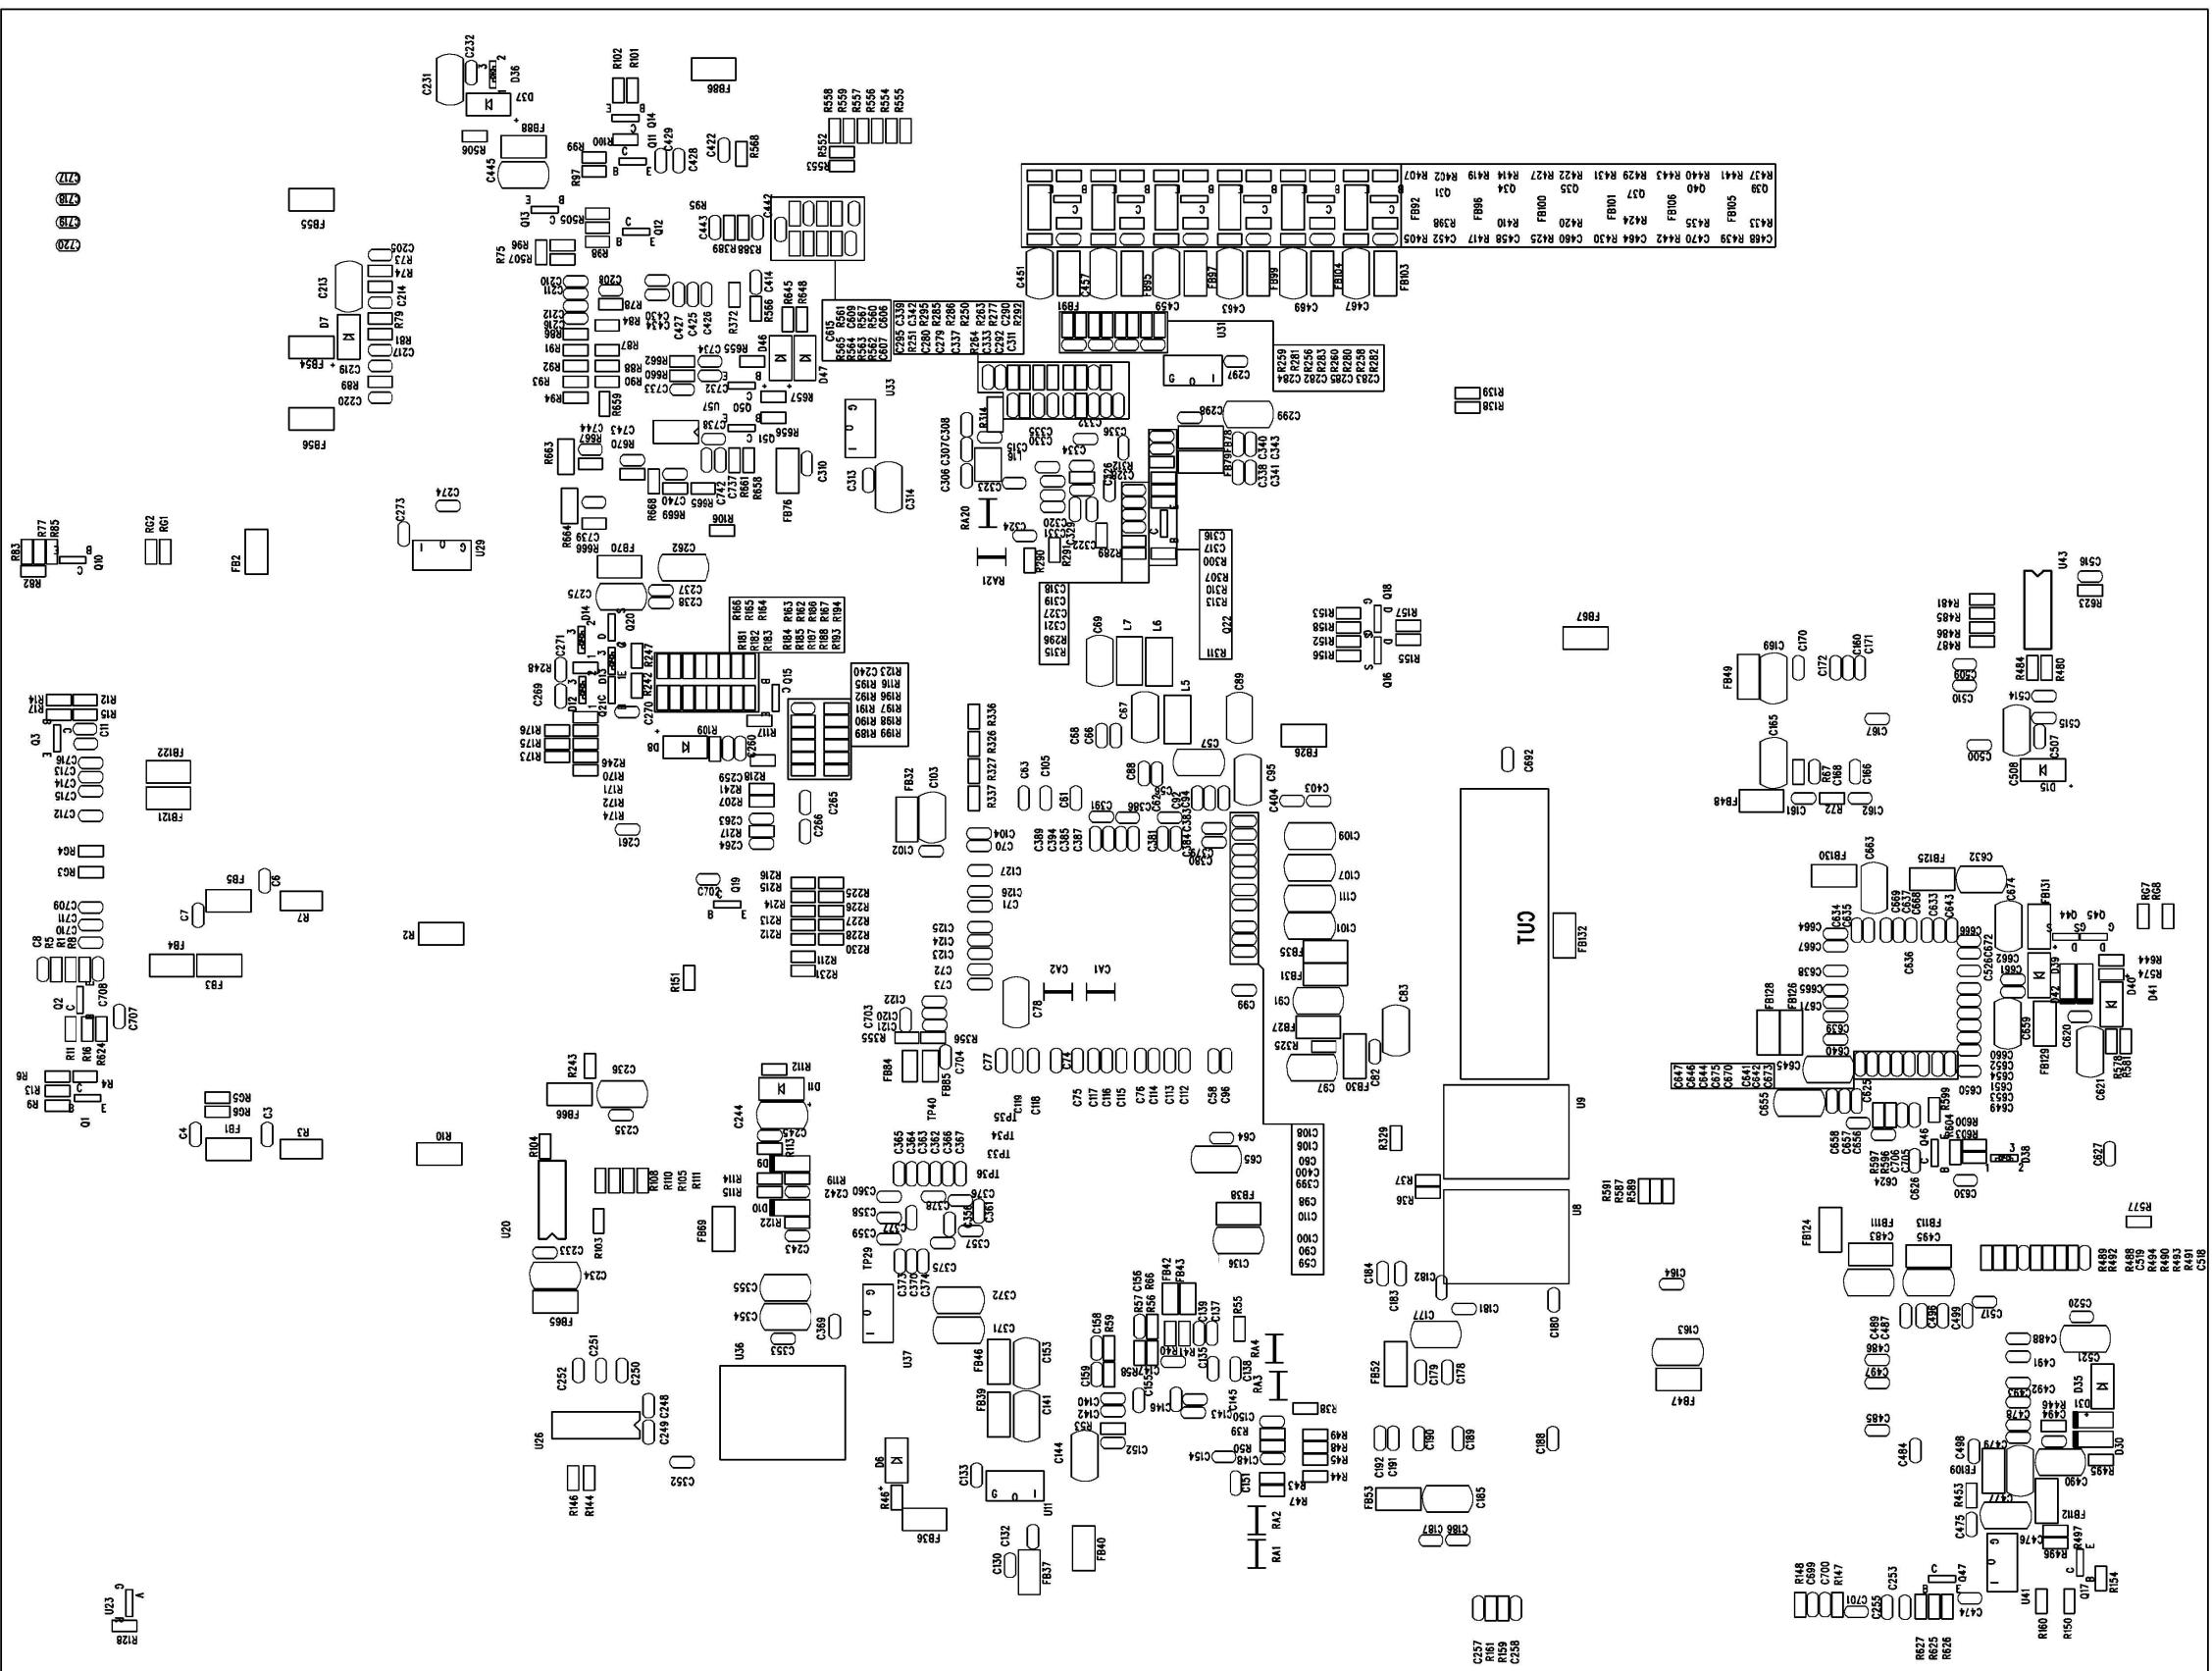


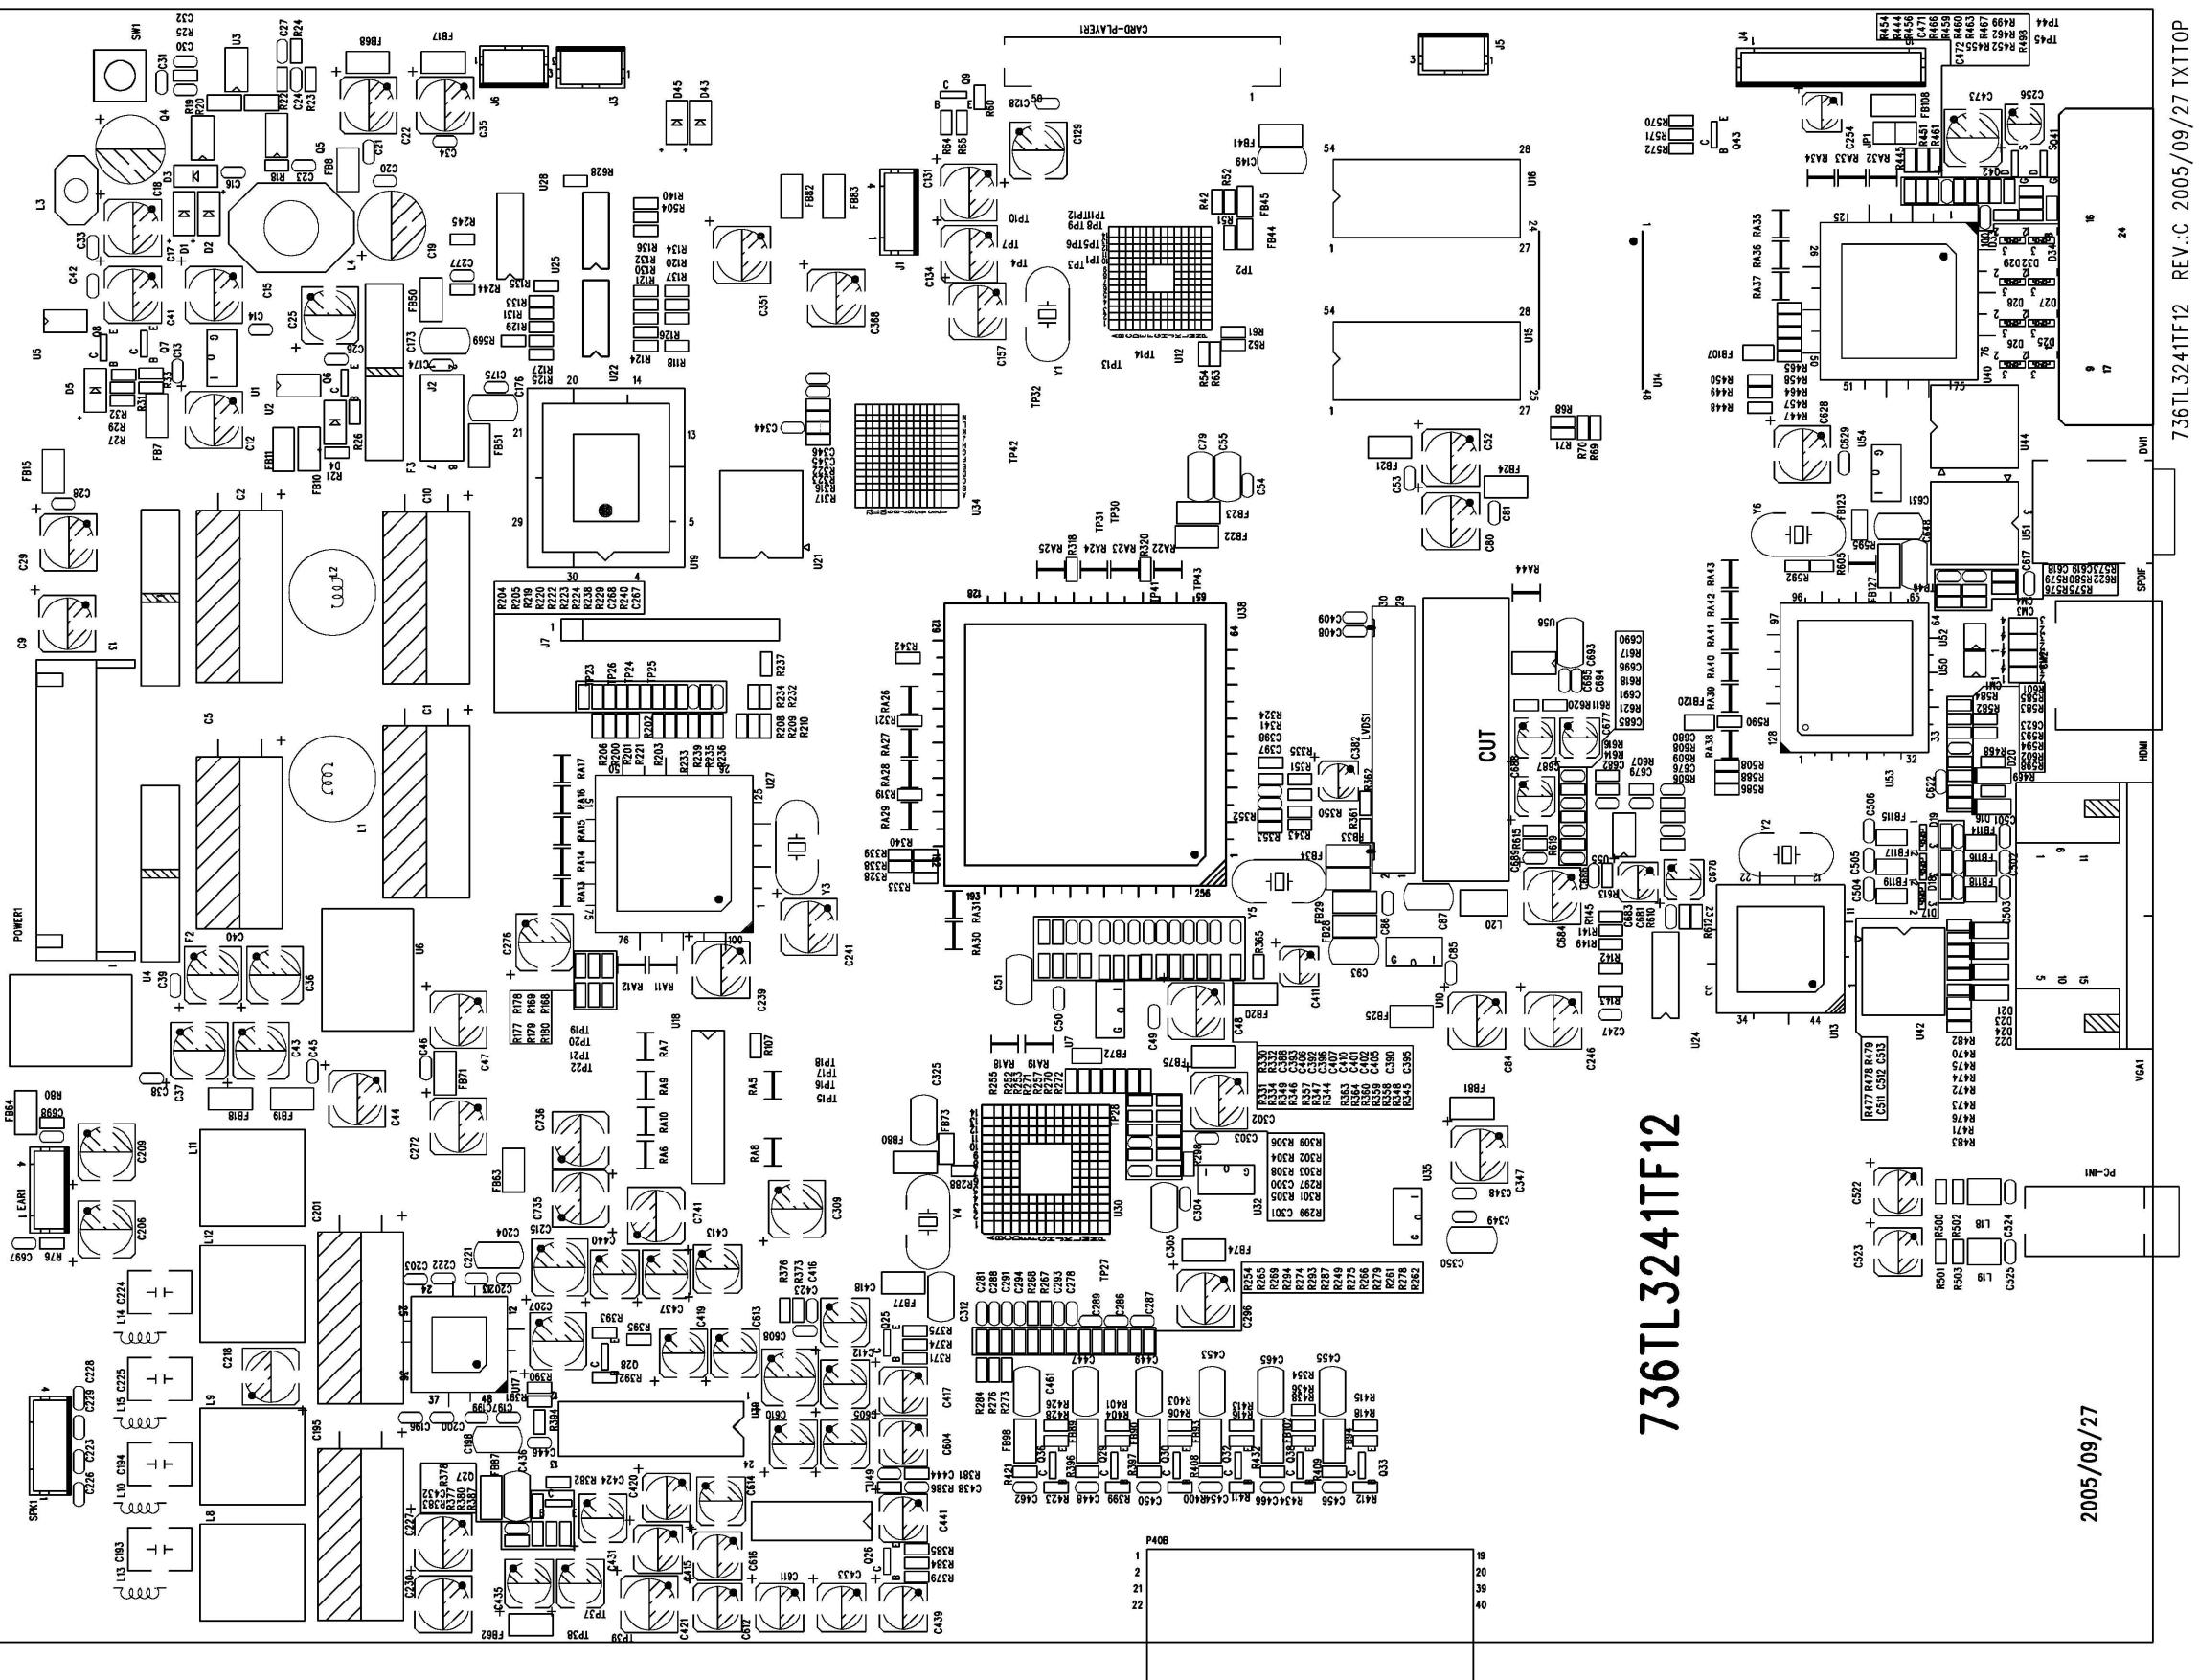

136 | L32411-F12


2005/09/27

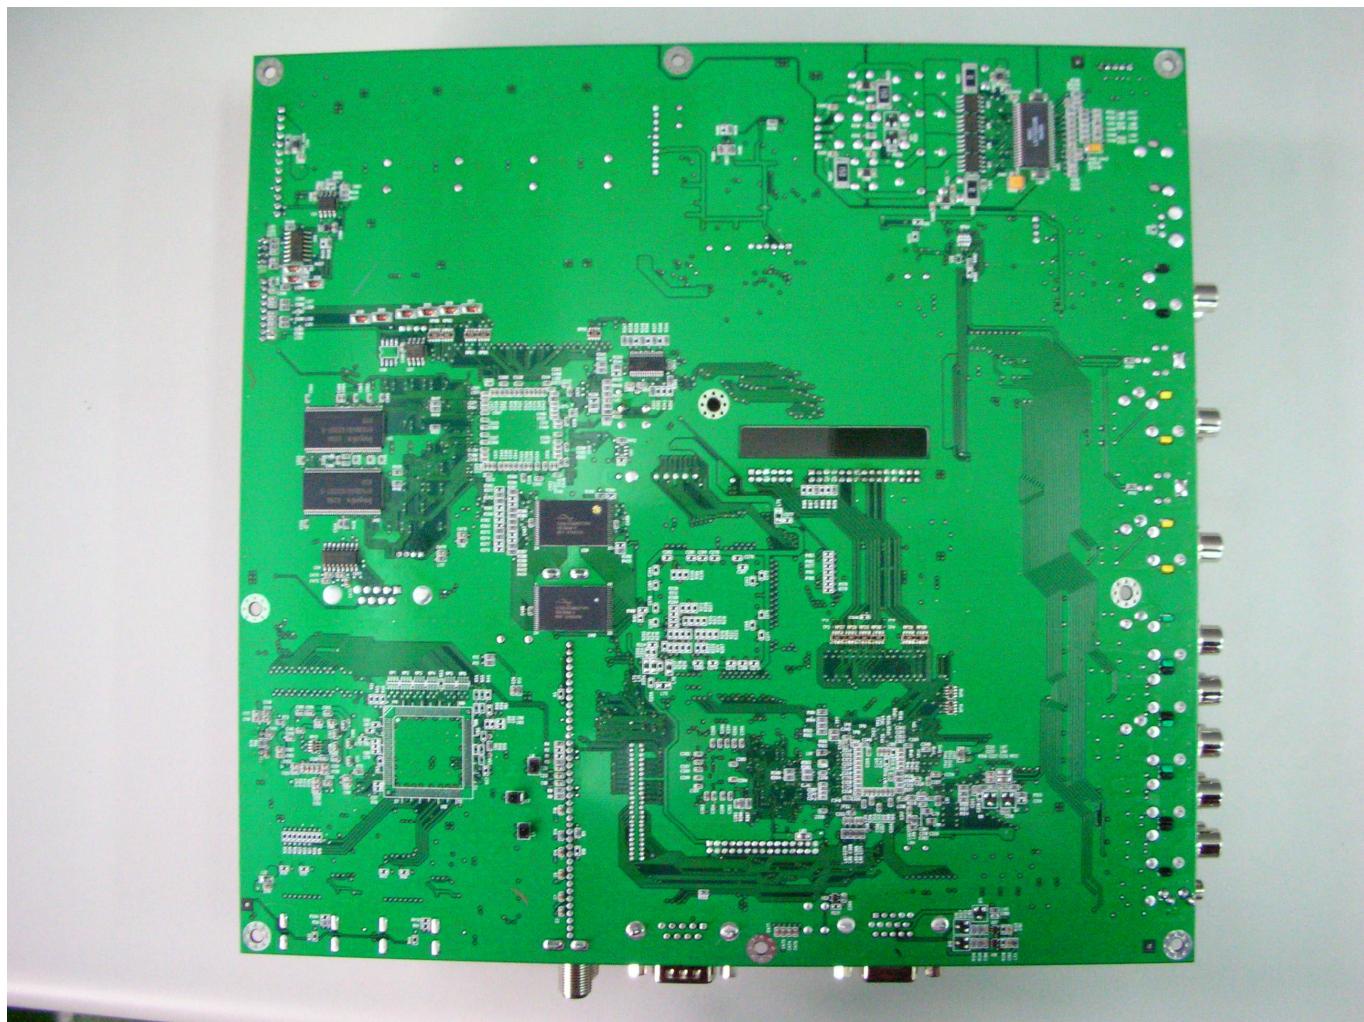

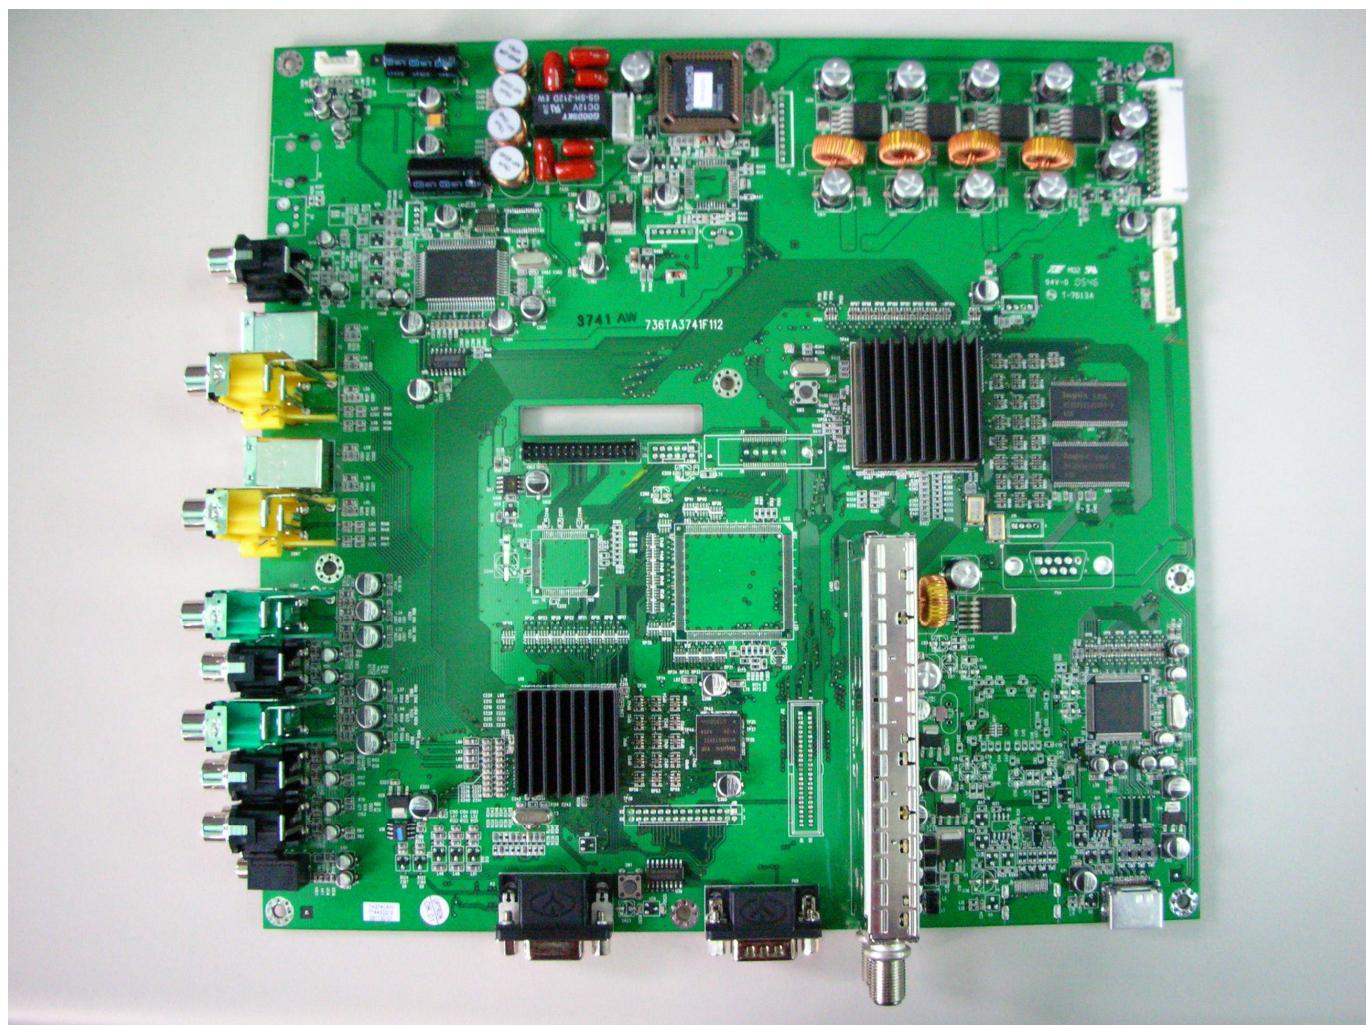


## 9. Schematic Diagrams


### 9.1 ATSC TUNER

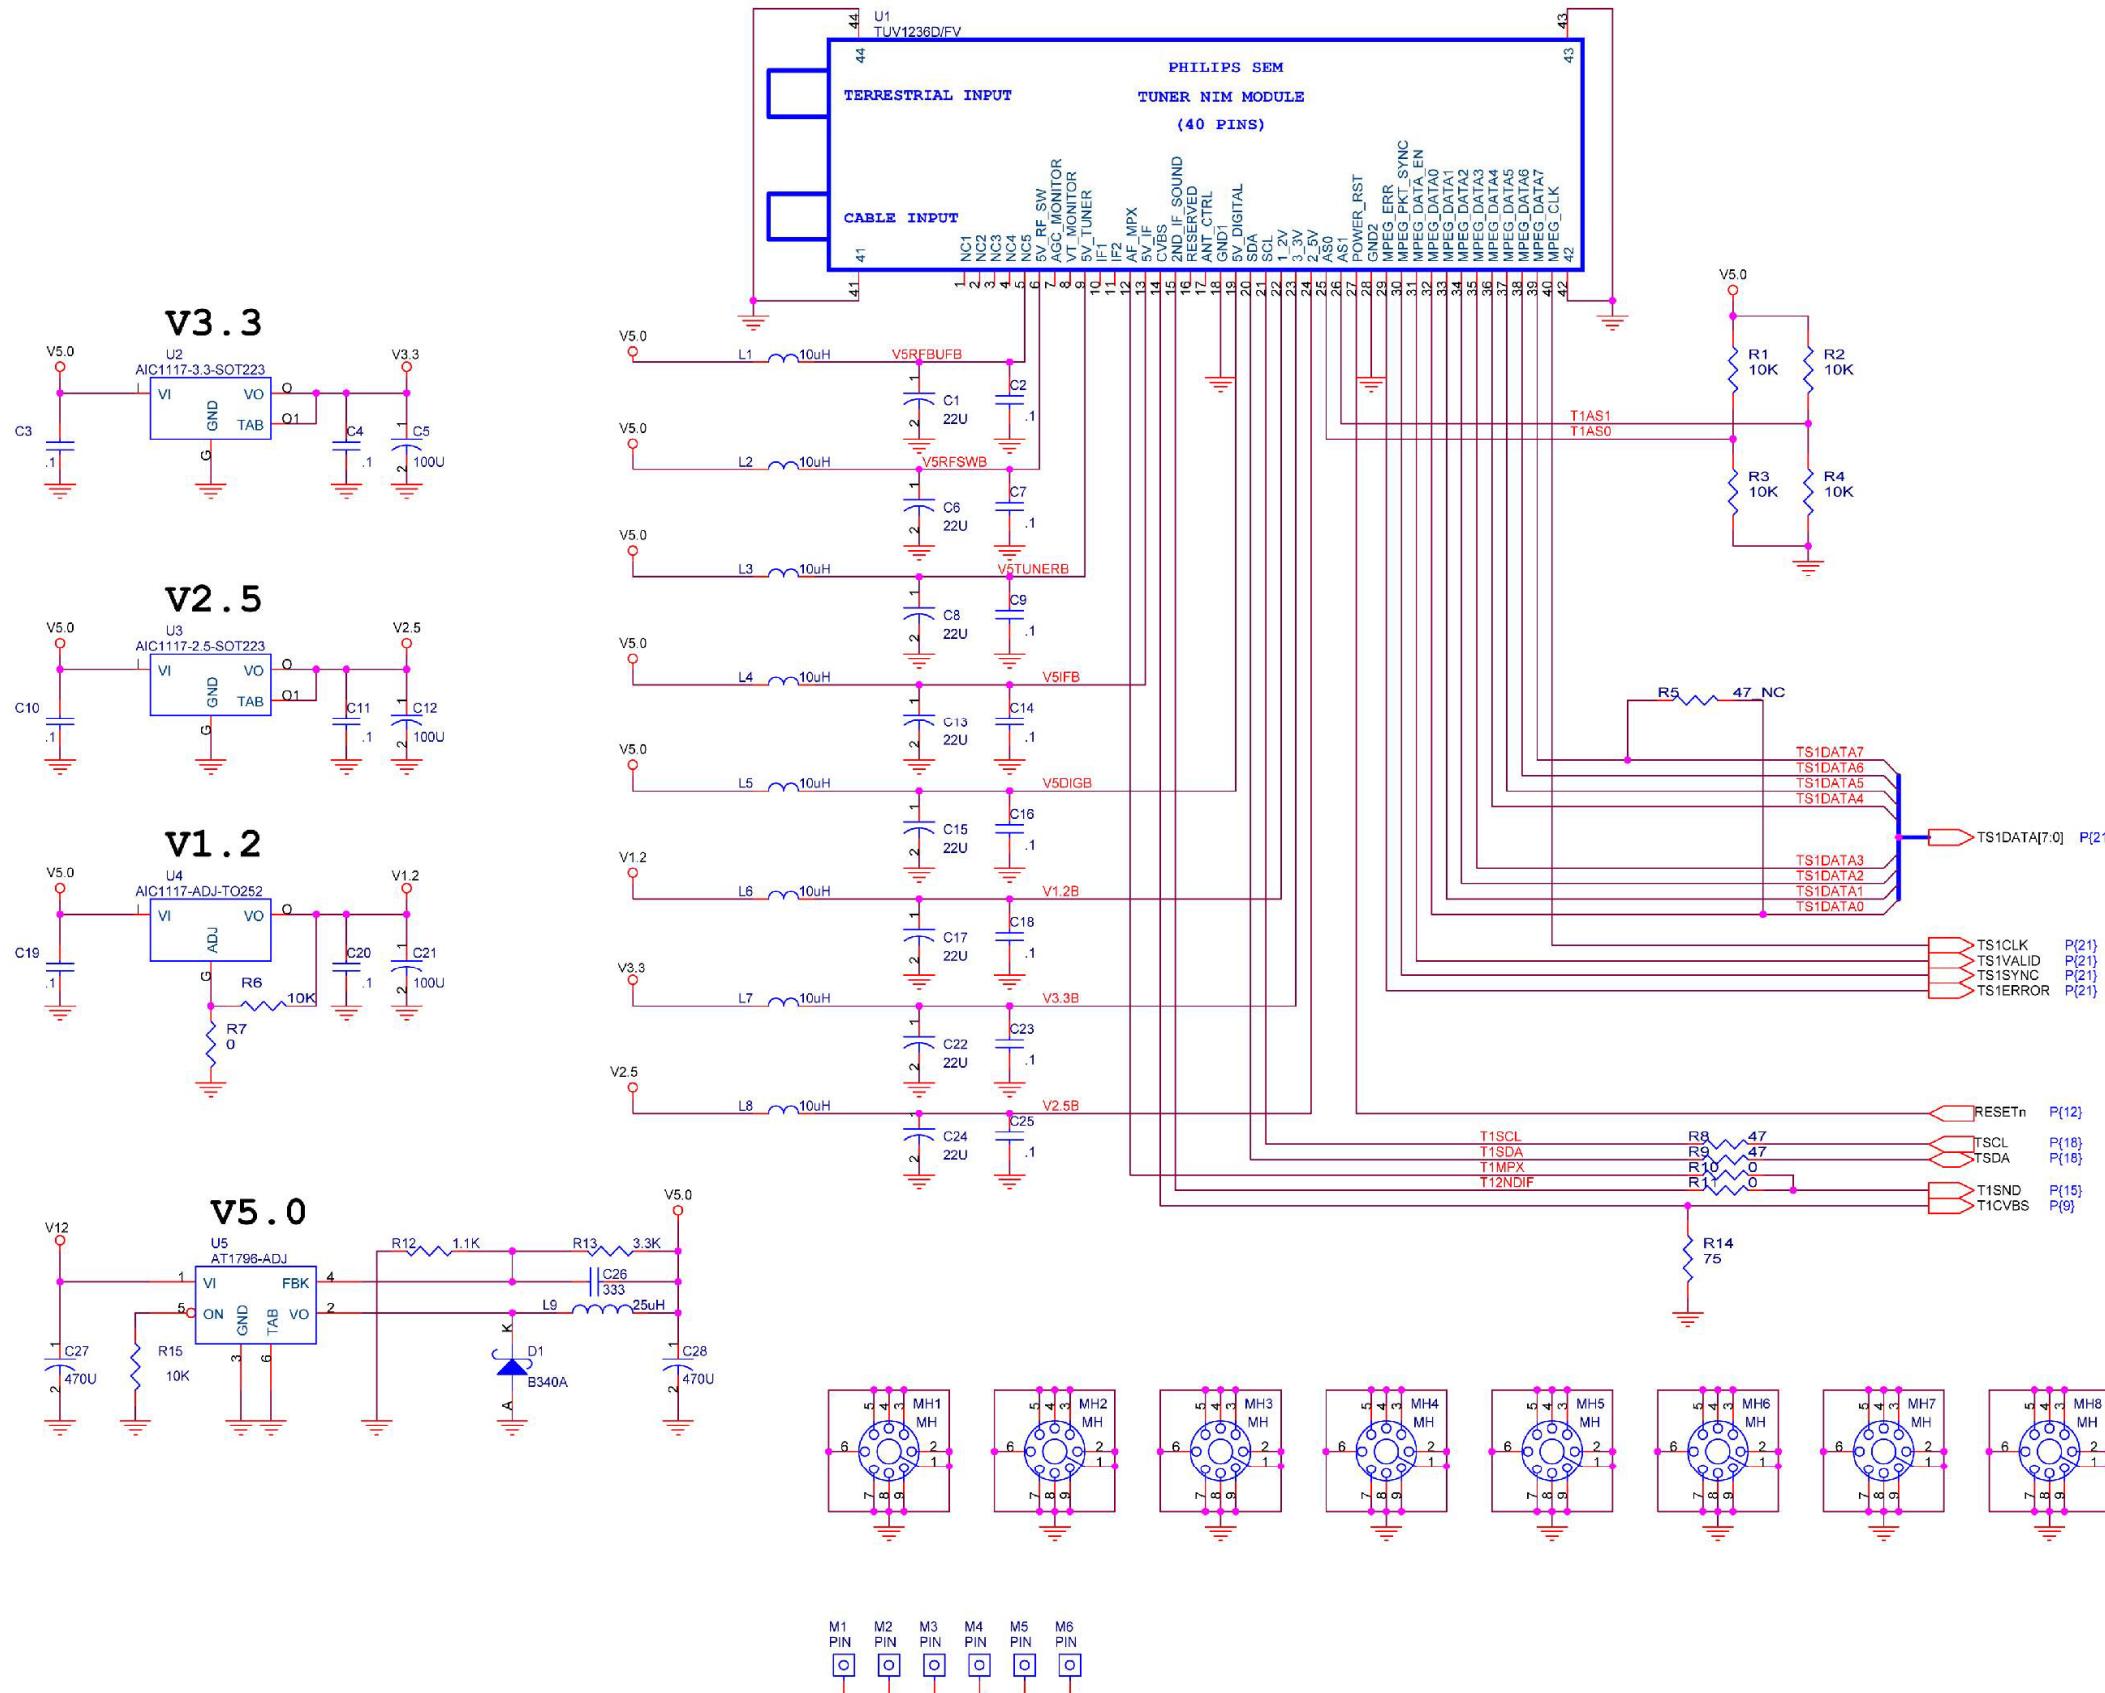


## 9.2 HDMI INPUT CONNECTORS

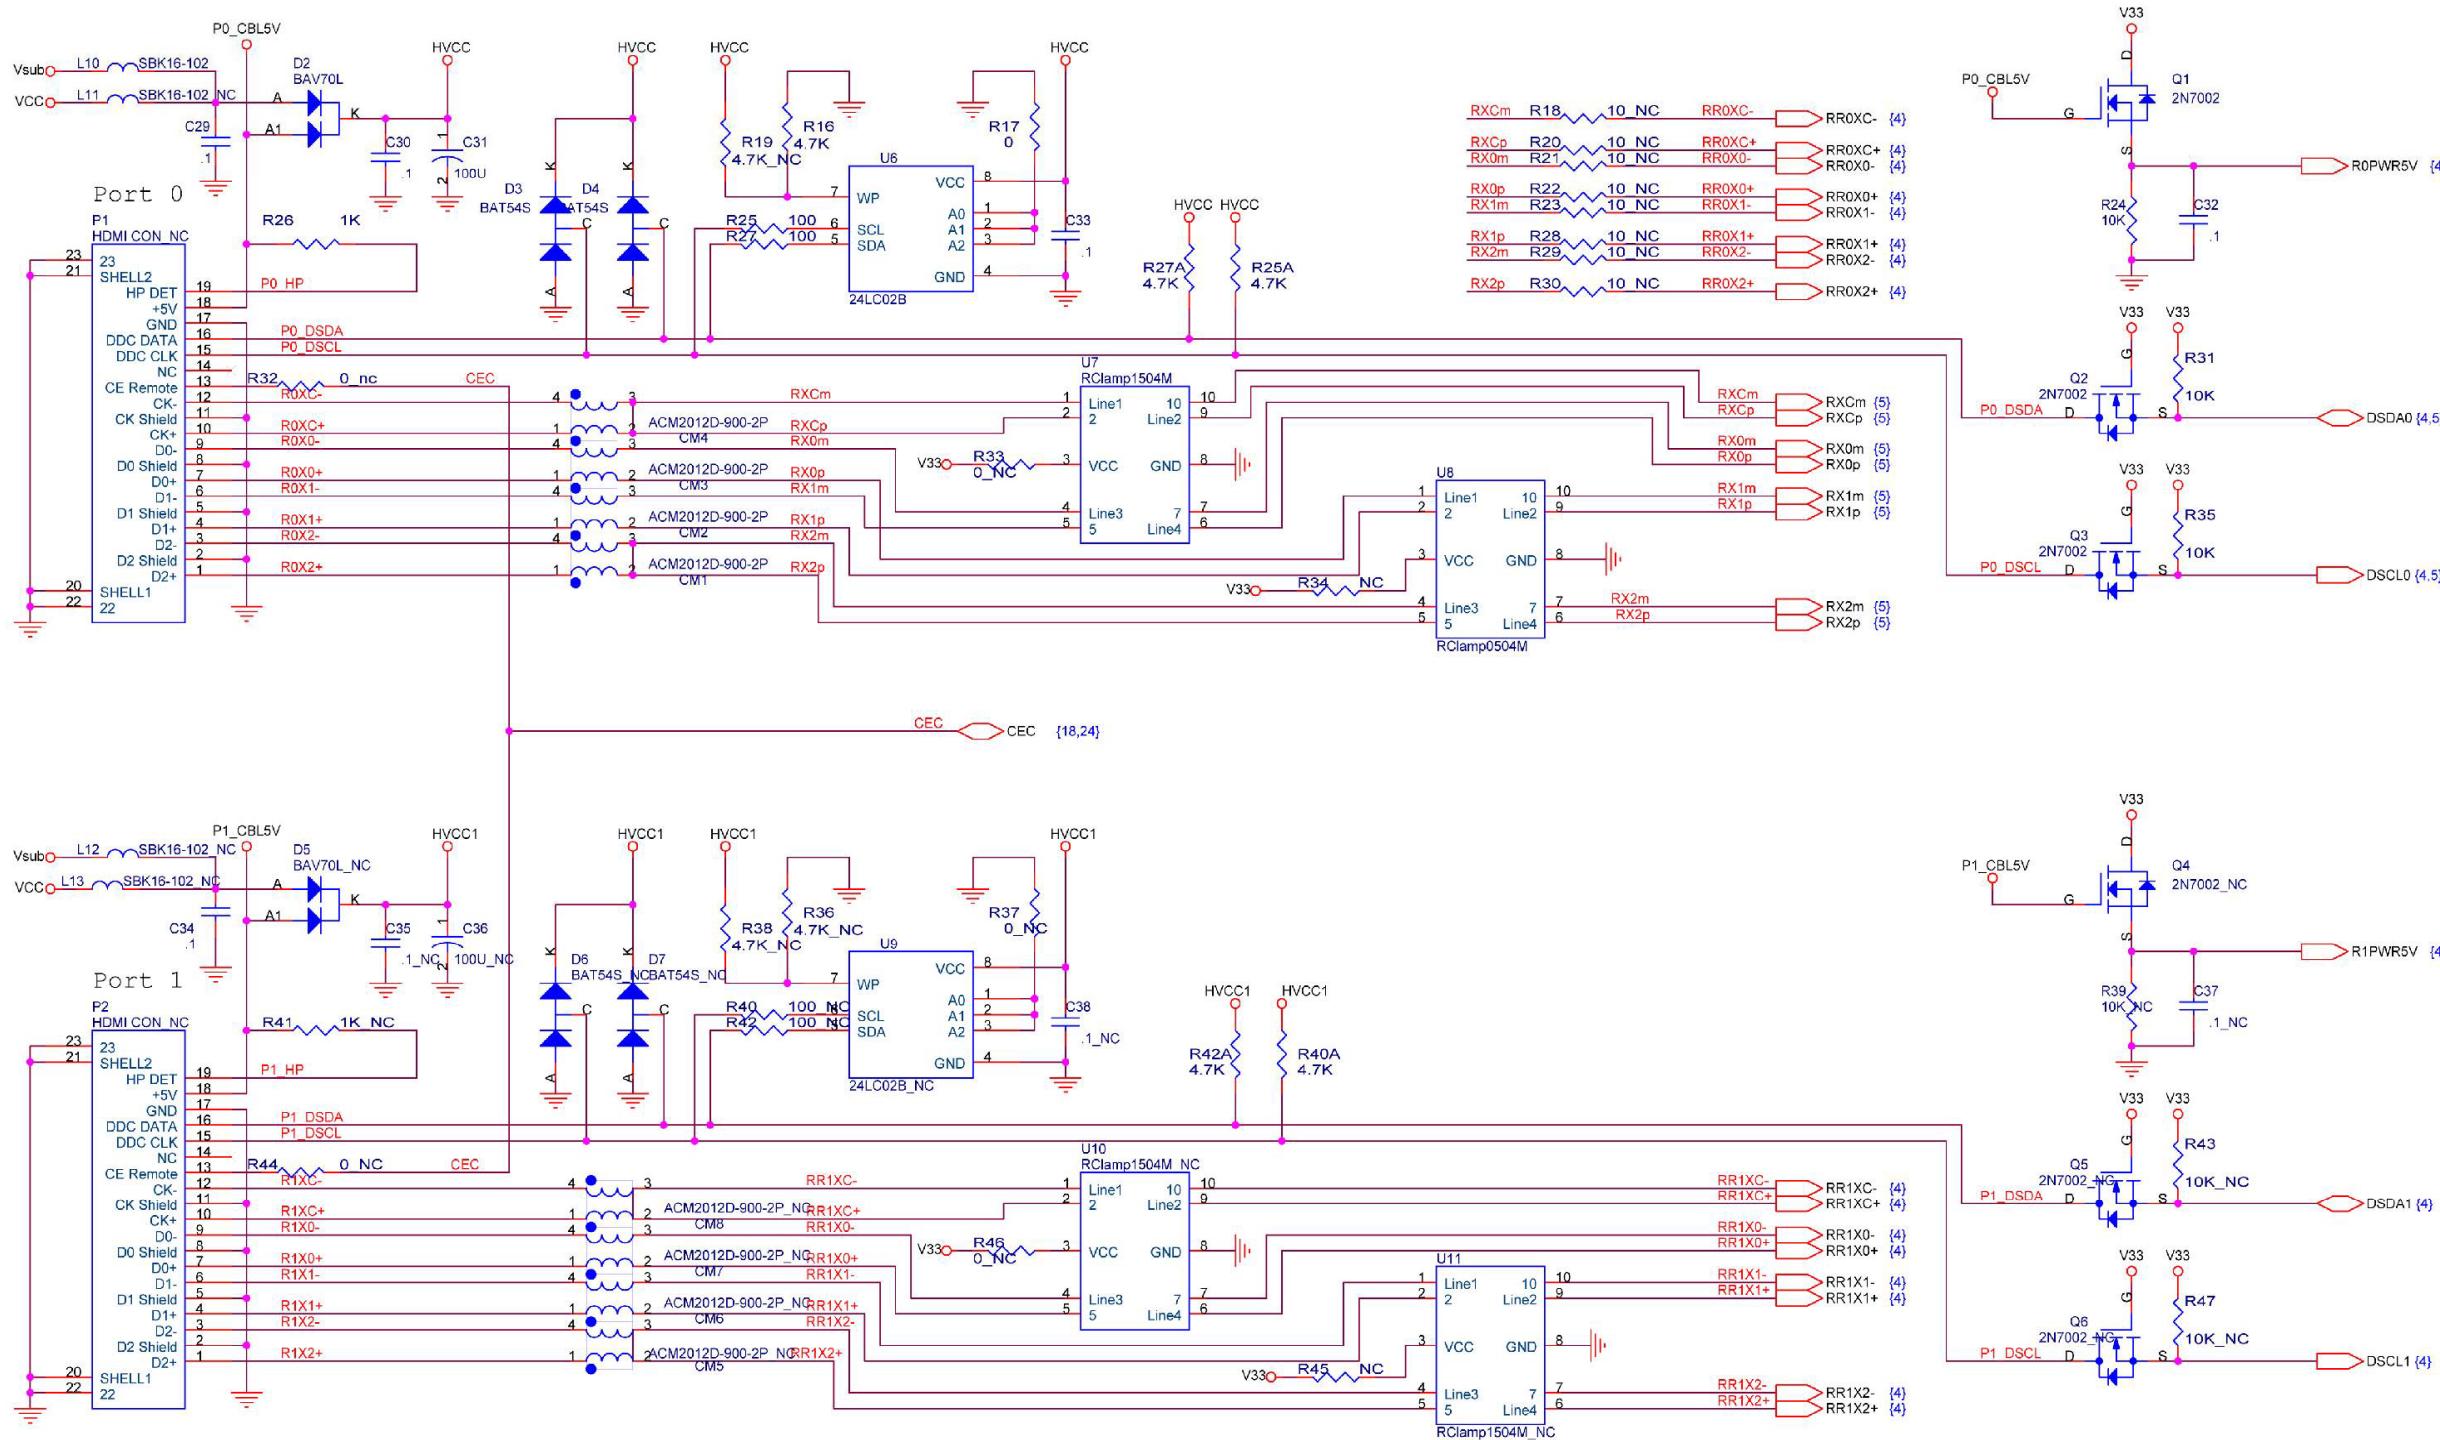

## **9.3 SIL 9021/31 DUAL-INPUT PX**

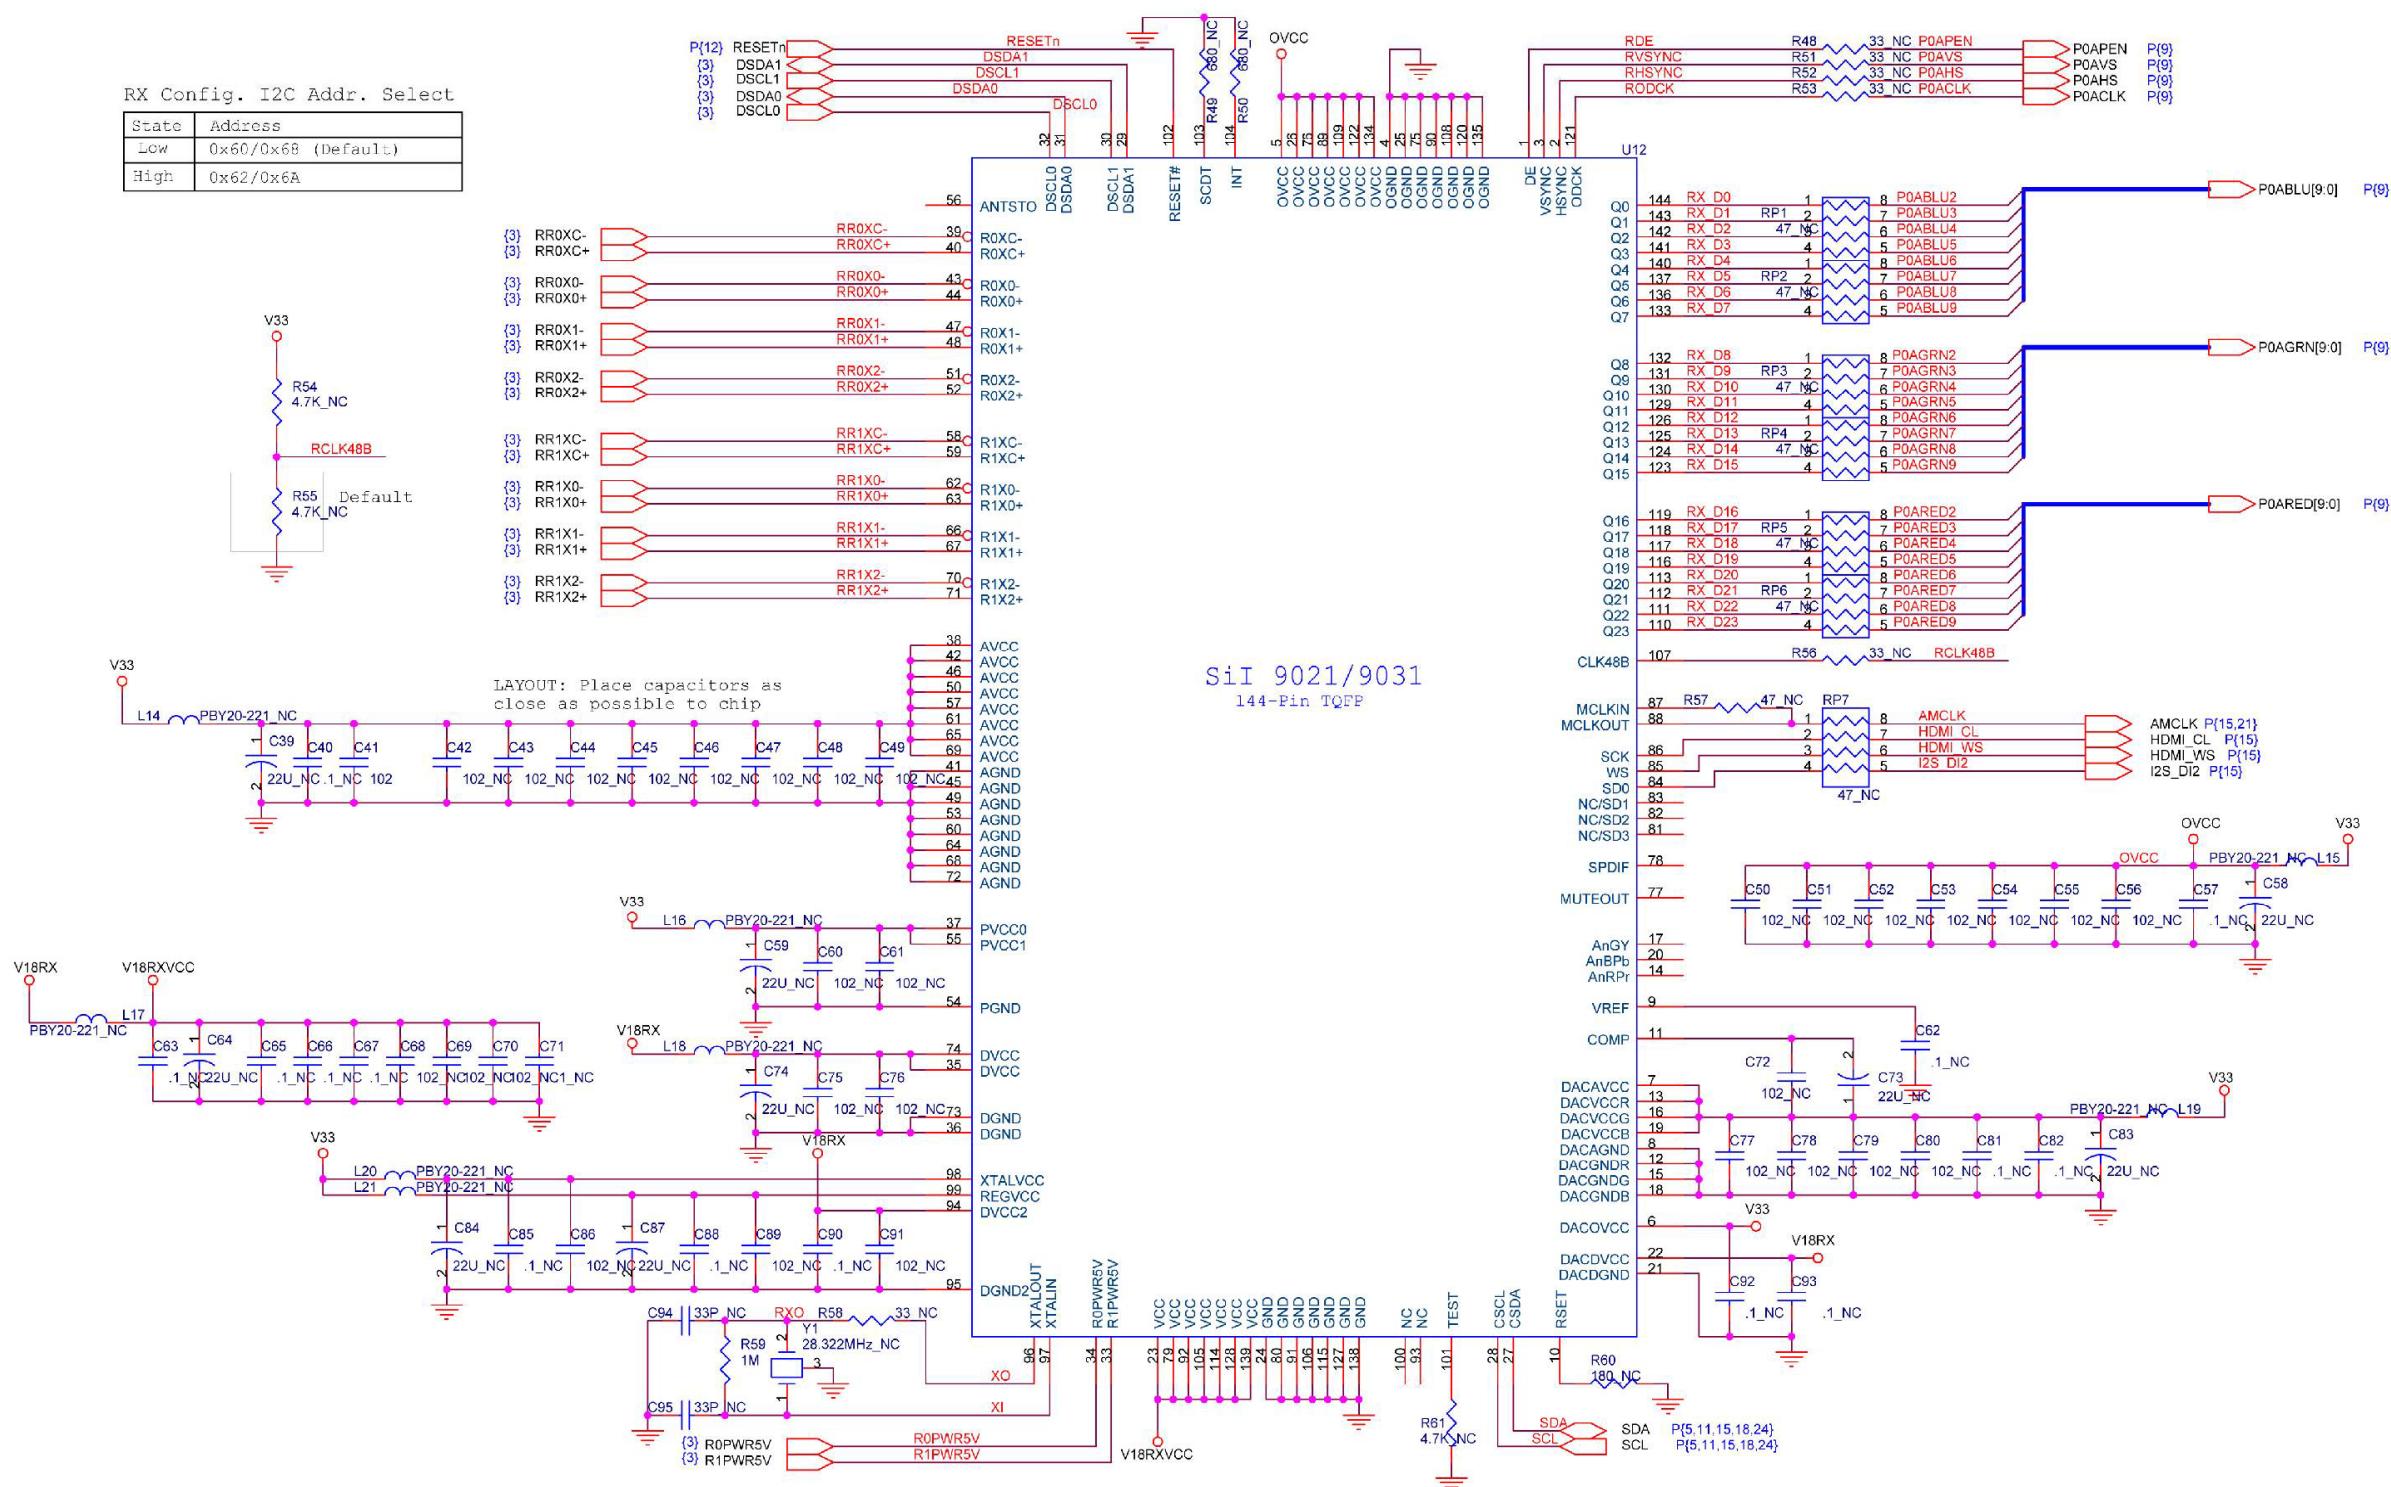


## 9.4 SIL9011(HDMI)

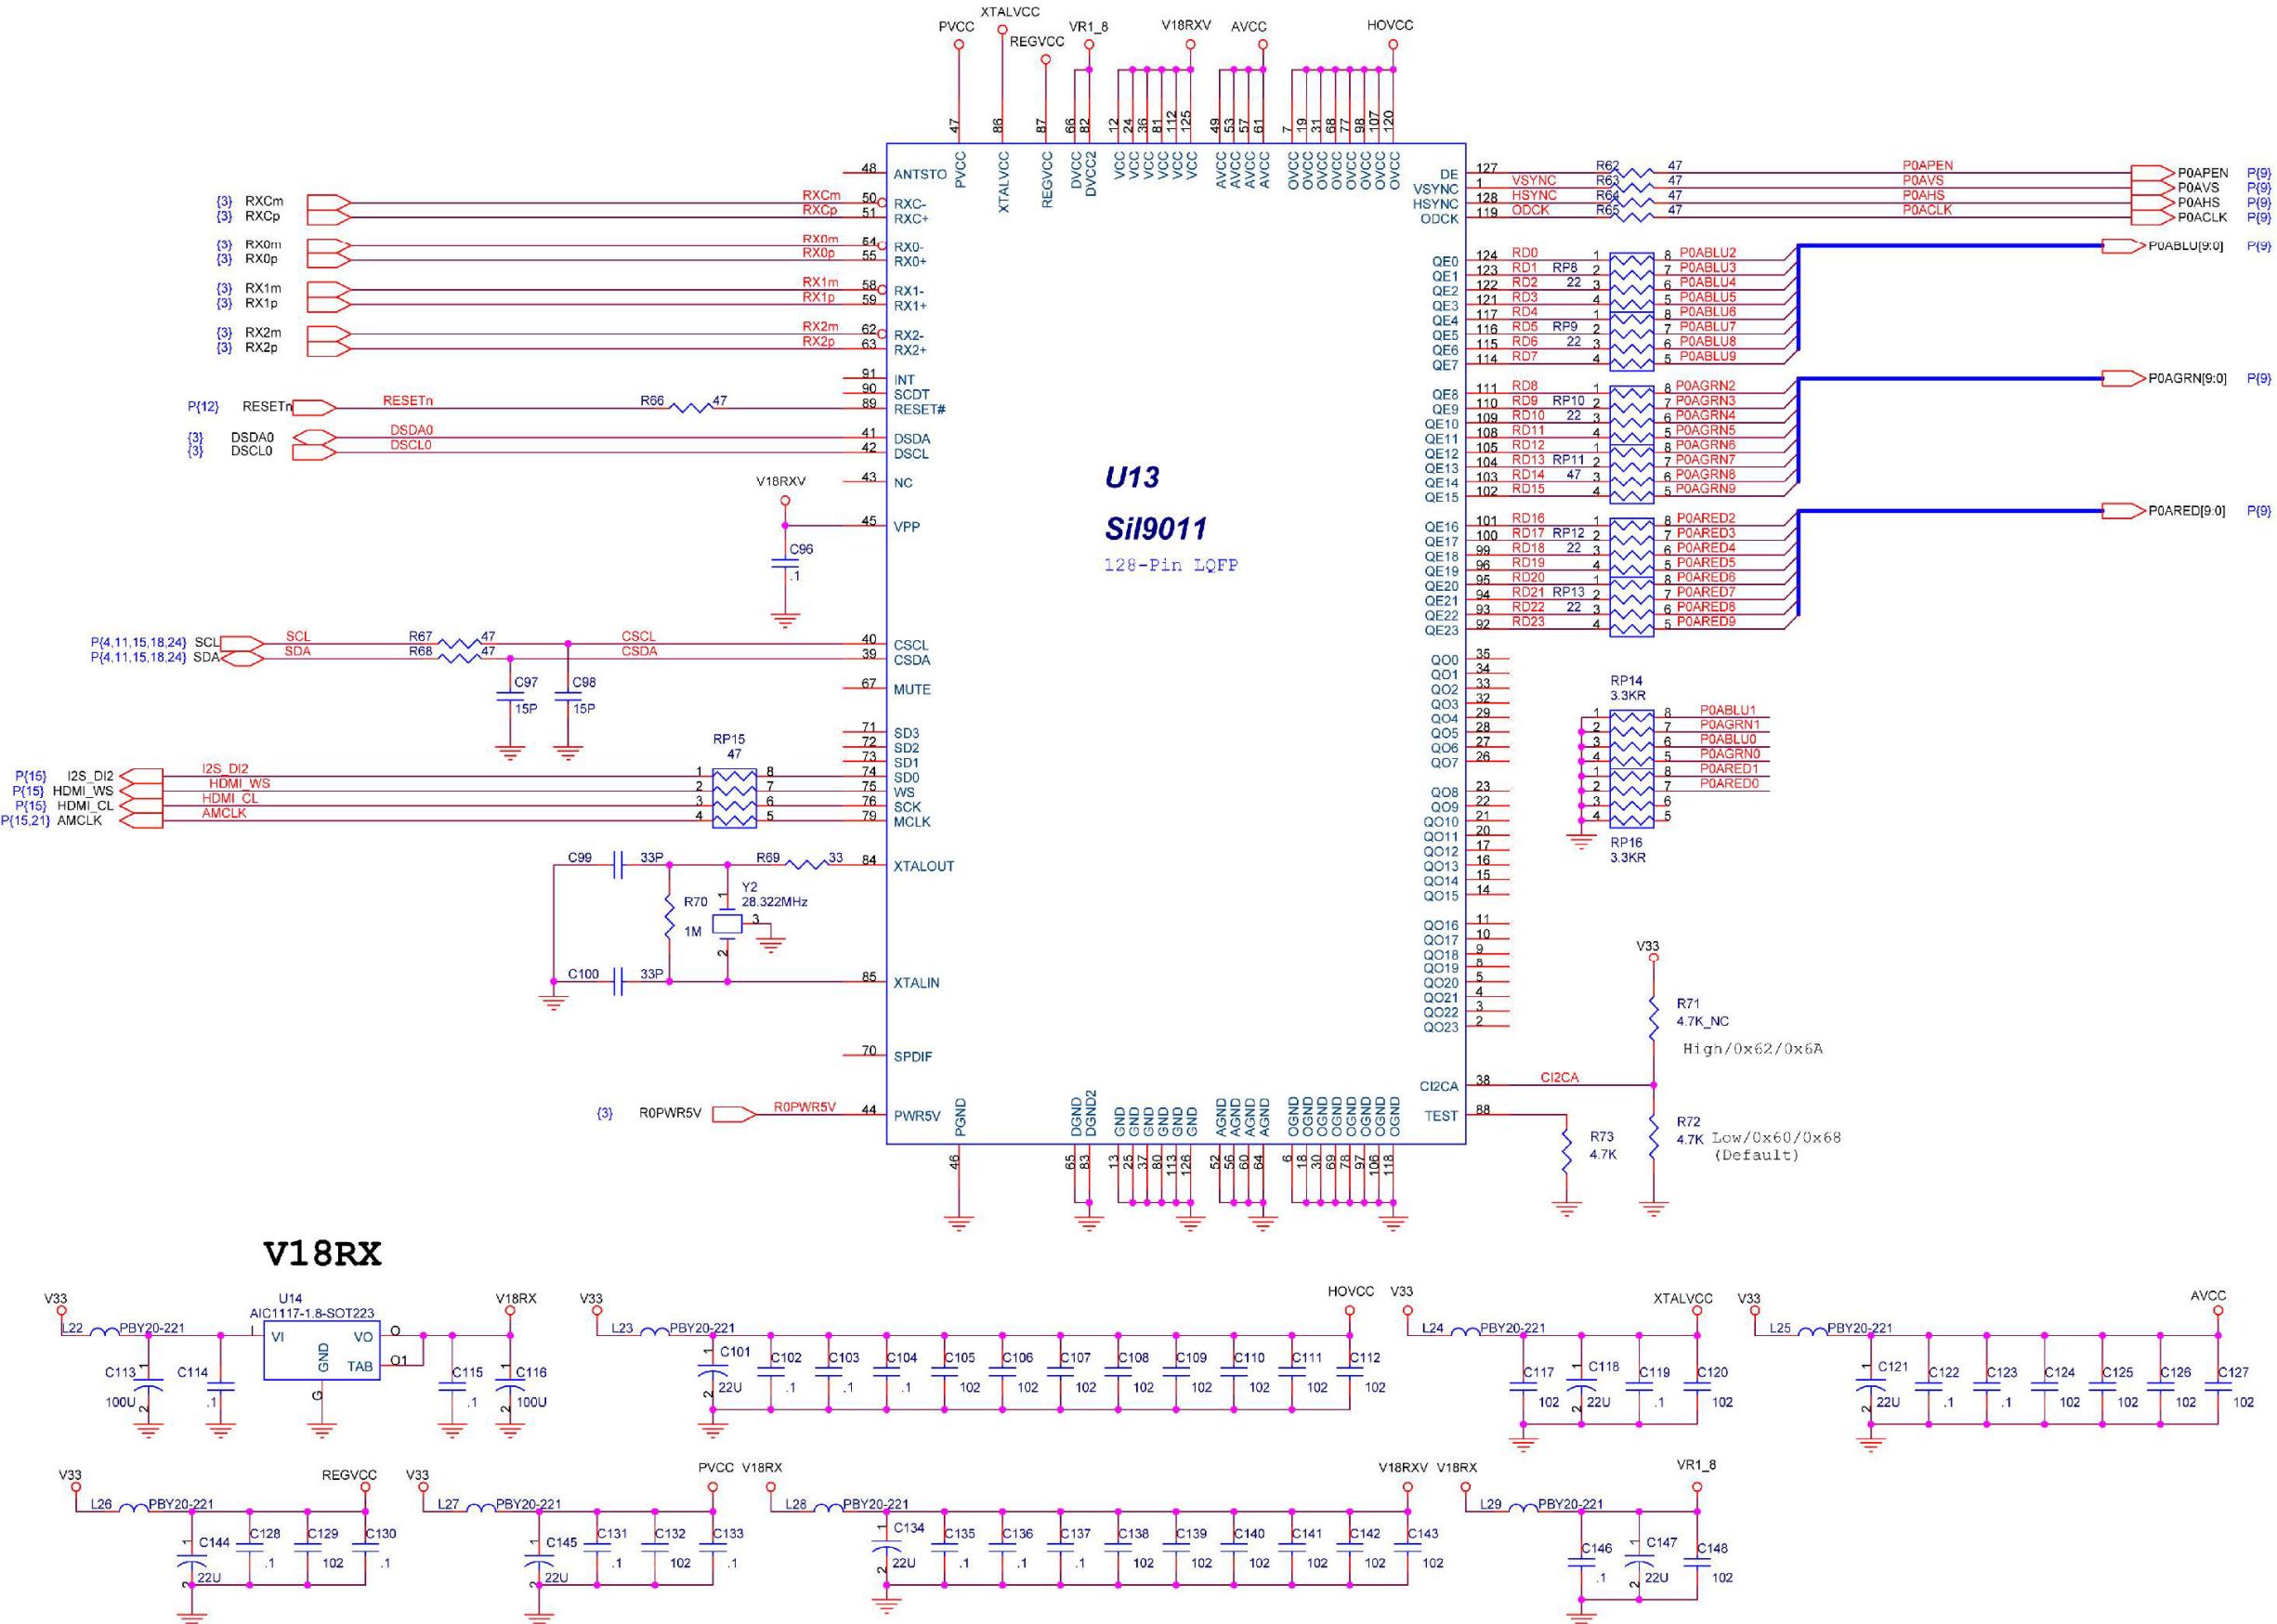


## 9.5 COMPONENT INPUTS


**Component 1 input**

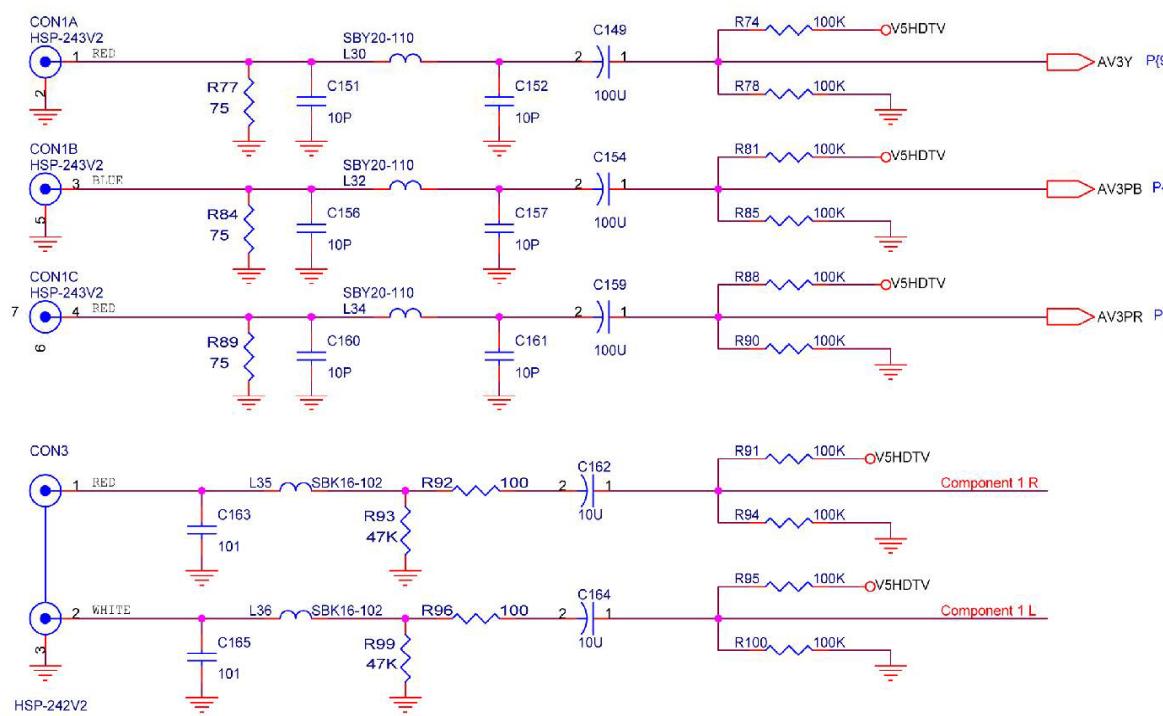




**Component 2 input**

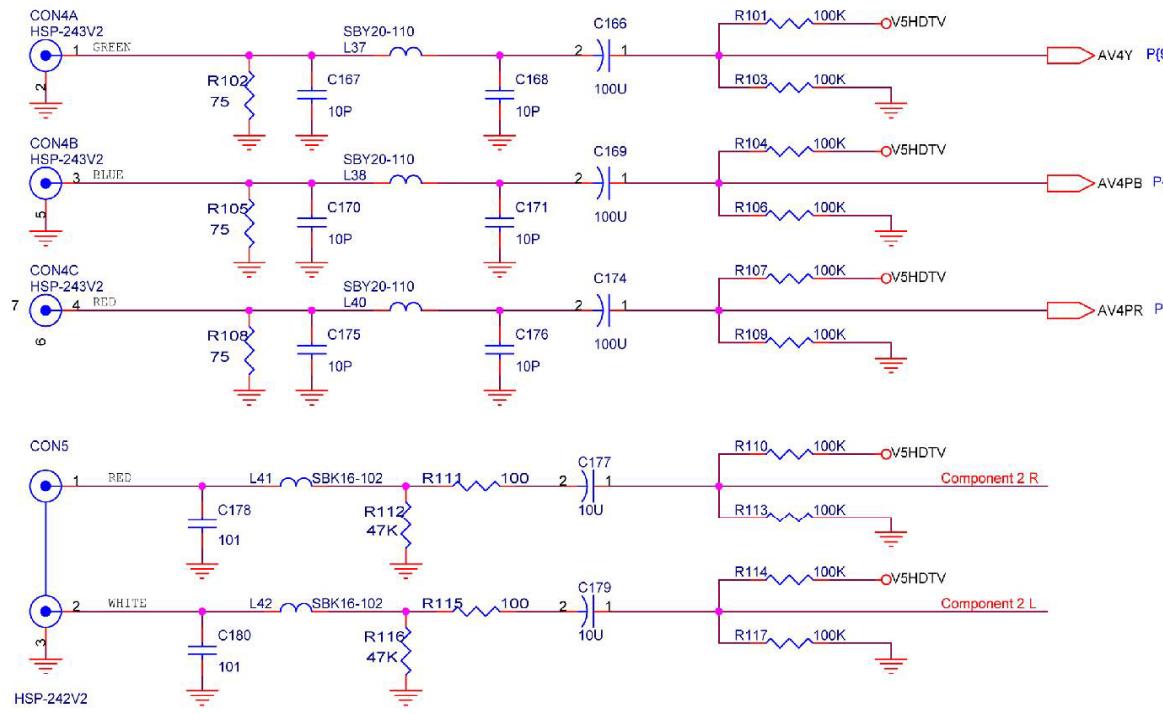

**DVI Audio input**

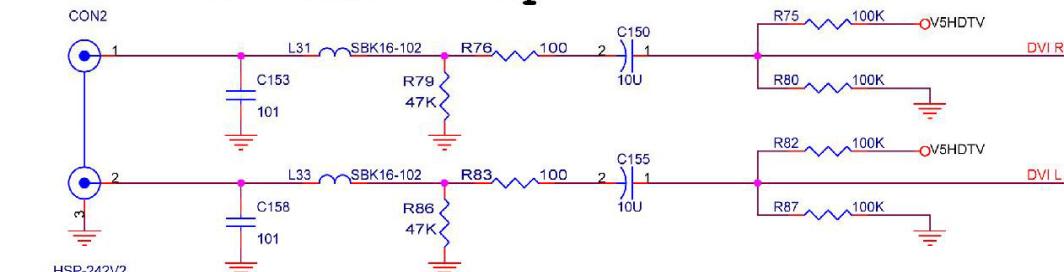


**AV3 Audio SEL**

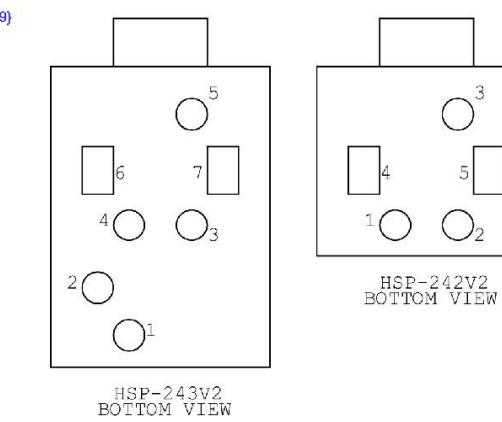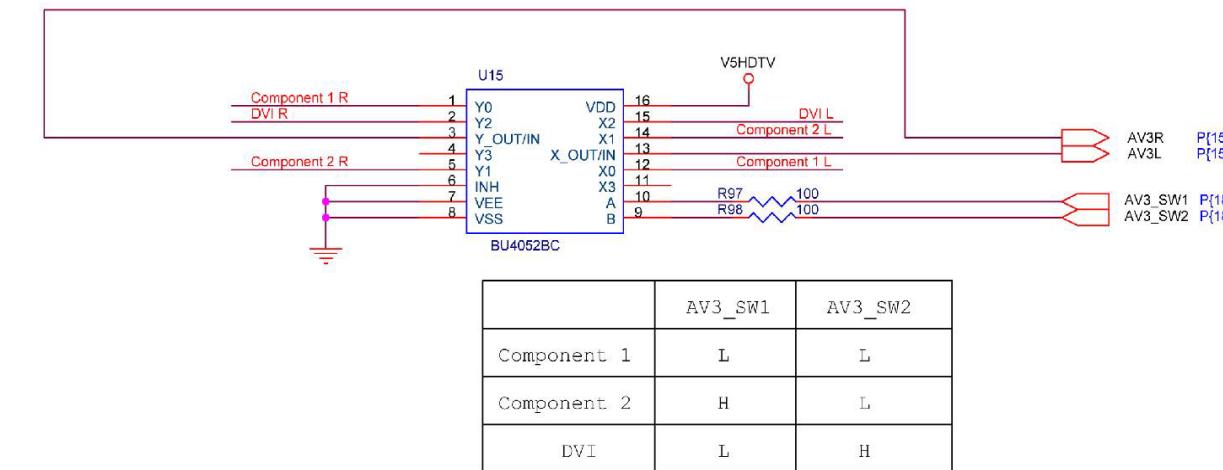


## **9.6 ANALOG RGB INPUT**

## Analog RGB input


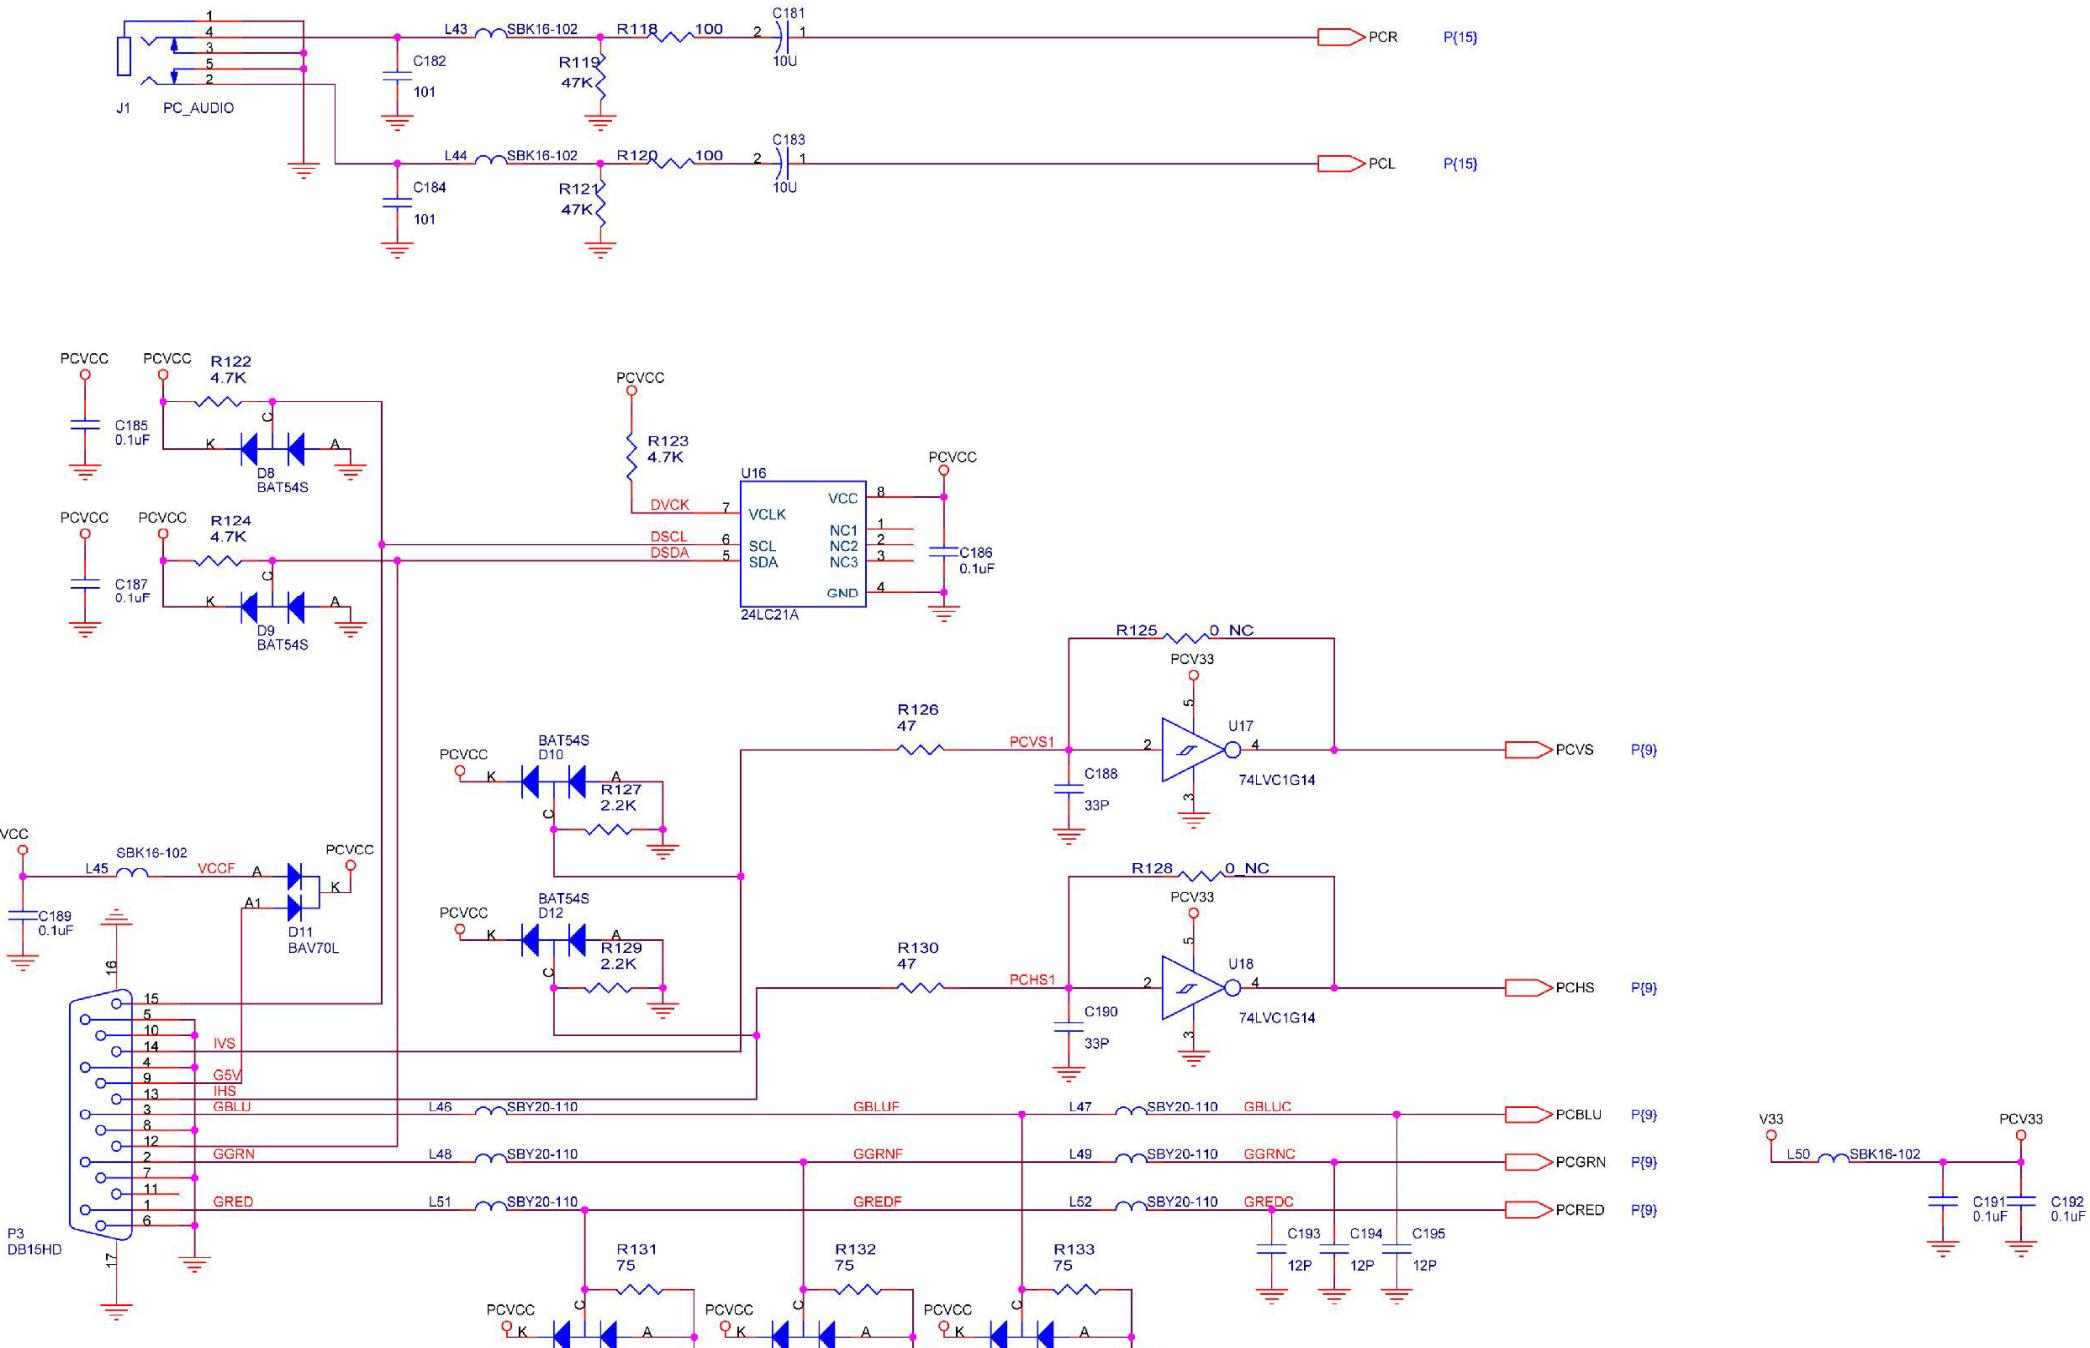


## 9.7 SVIDEO AND CVBS INPUTS


**AV1 inputs**

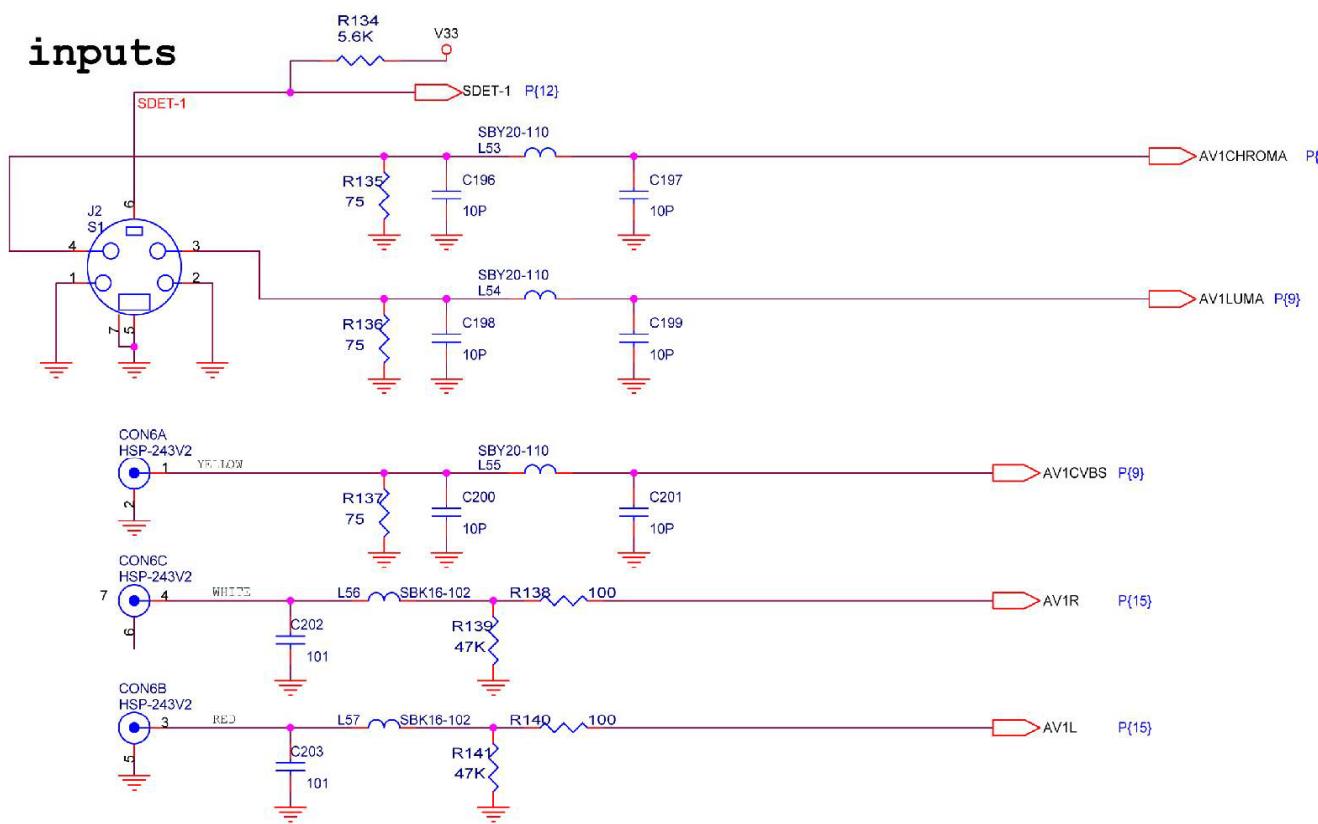


**AV2 inputs**

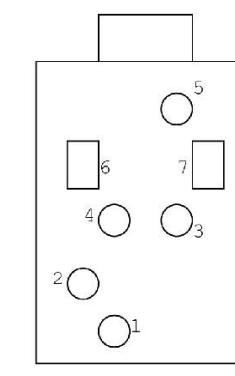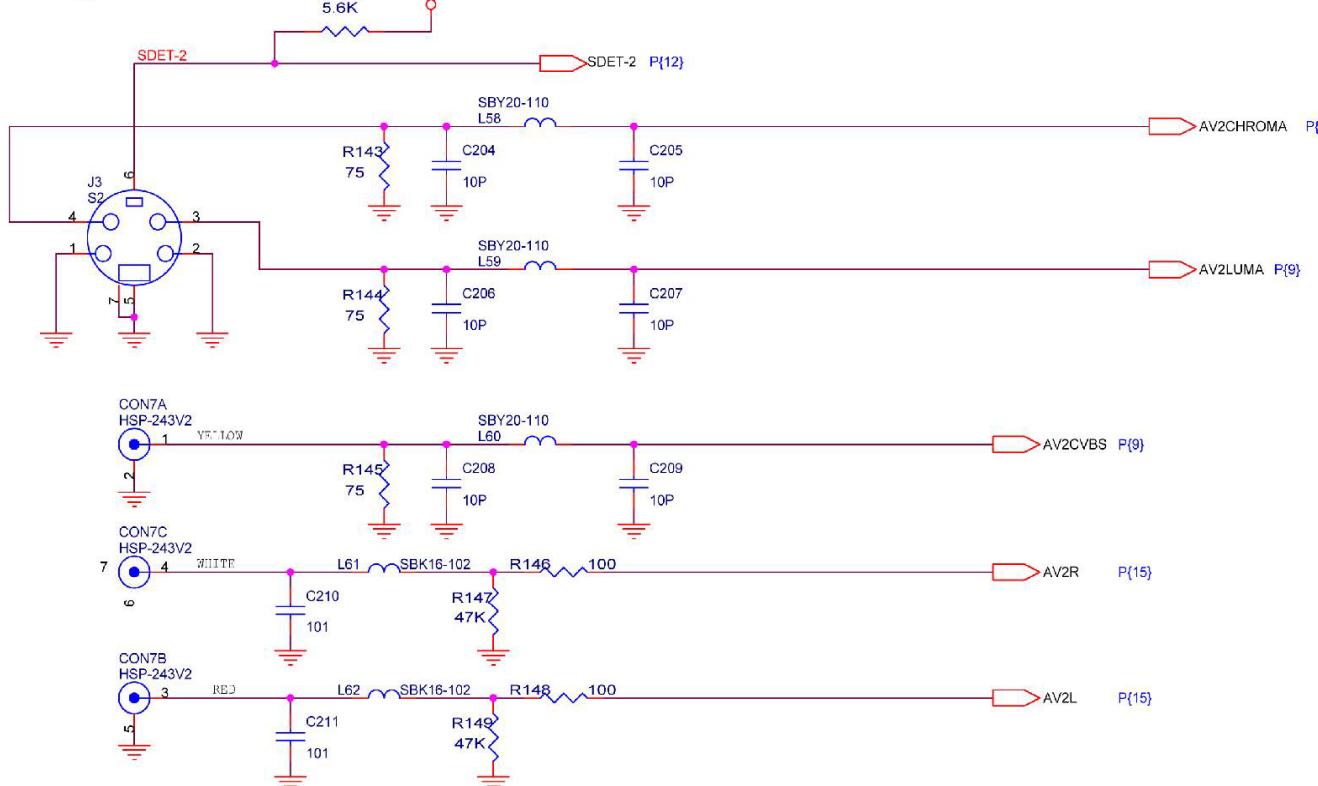


## **9.8 07PW328 ANALOG / DIGITAL INPUT**

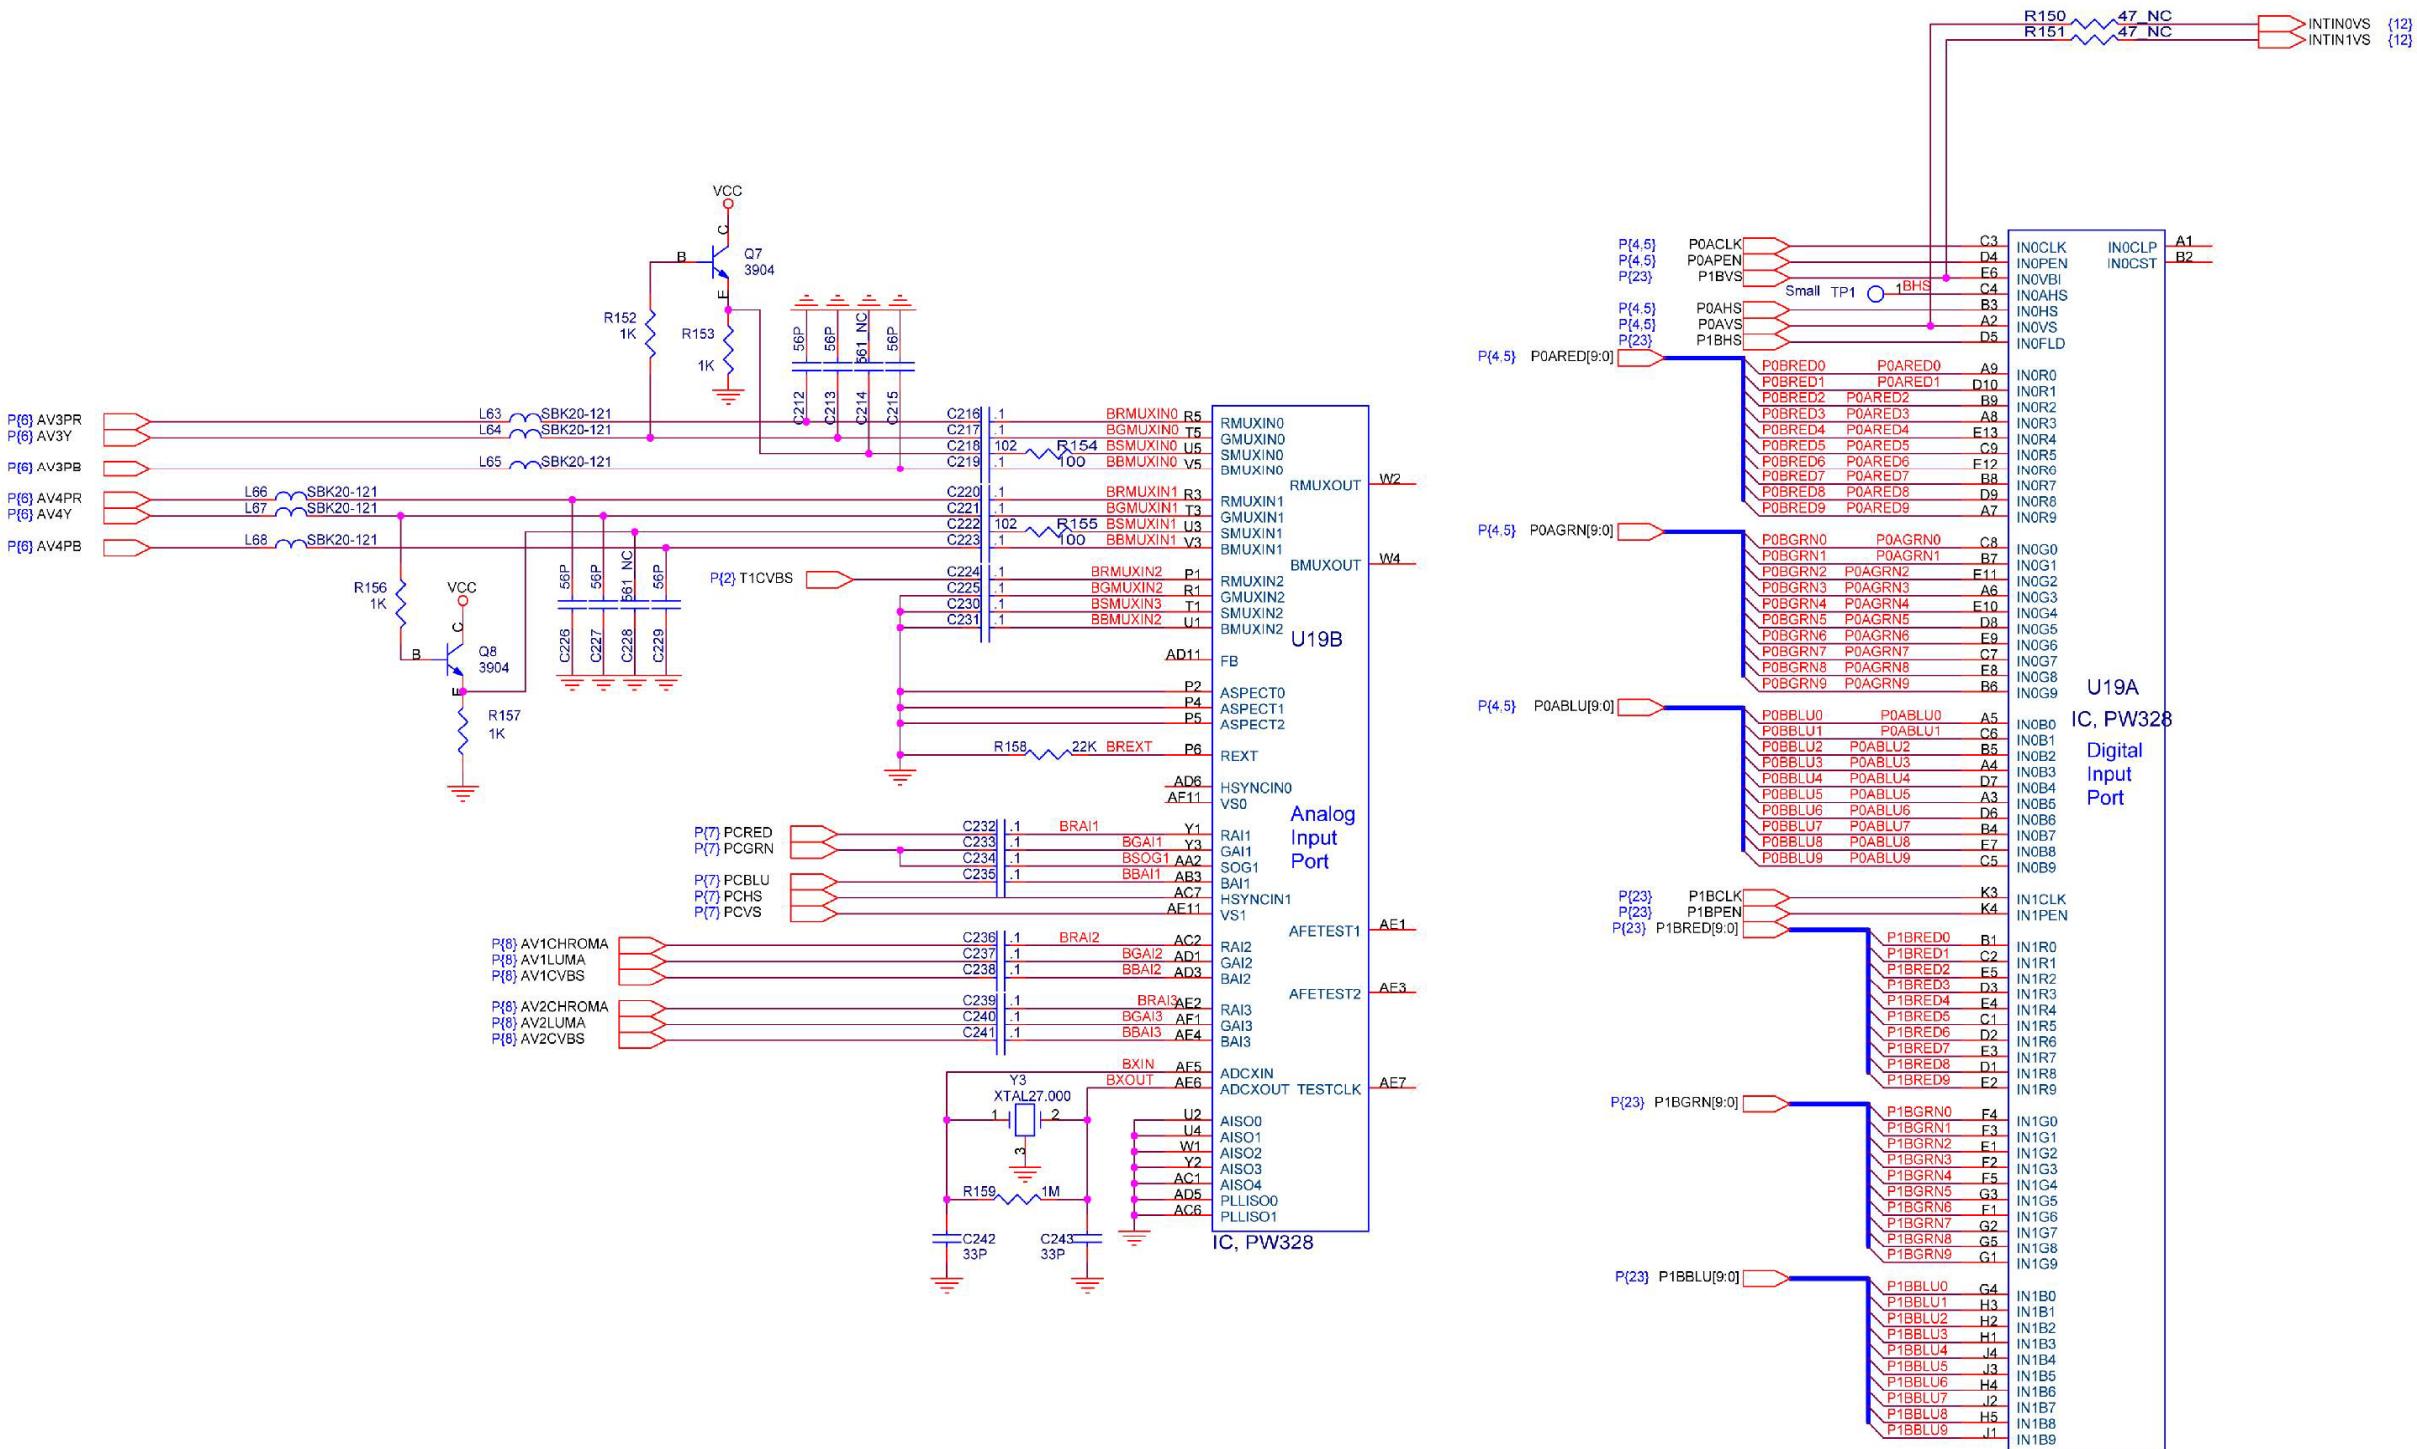

## 9.9 LVDS TRANSMITTER

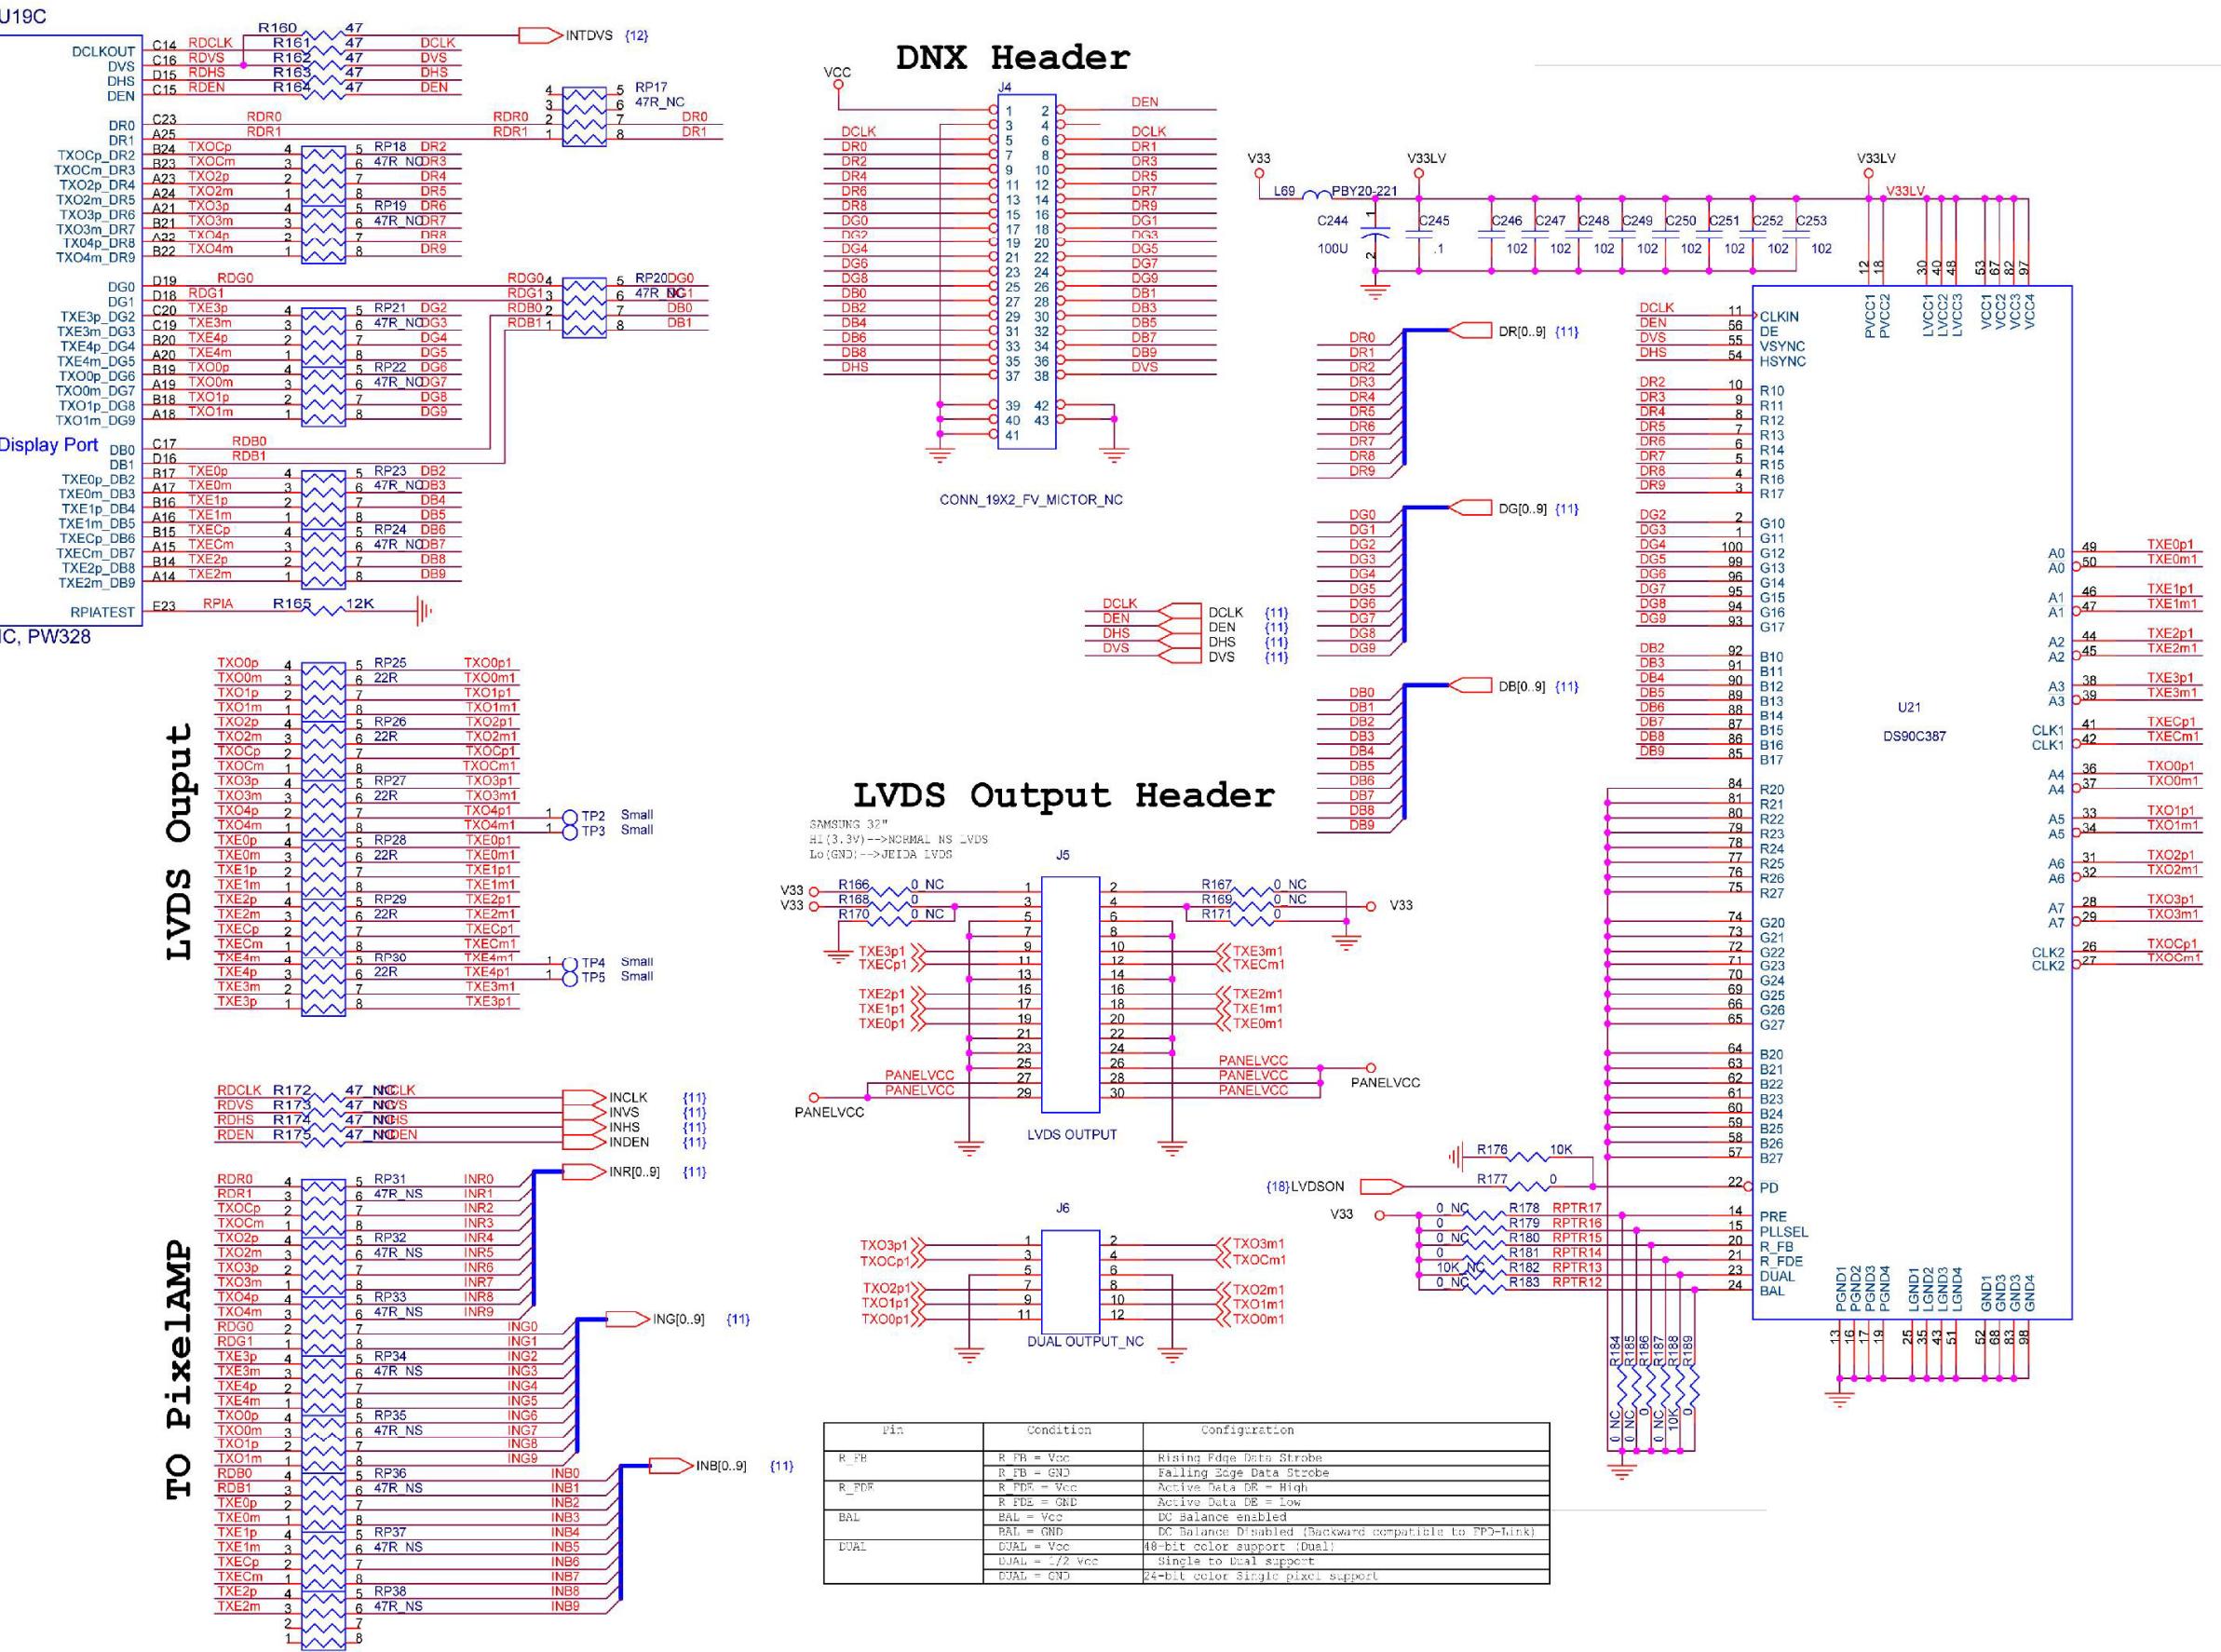


## 9.10 PW328 DIGITAL INPUT / OUTPUT PORTS

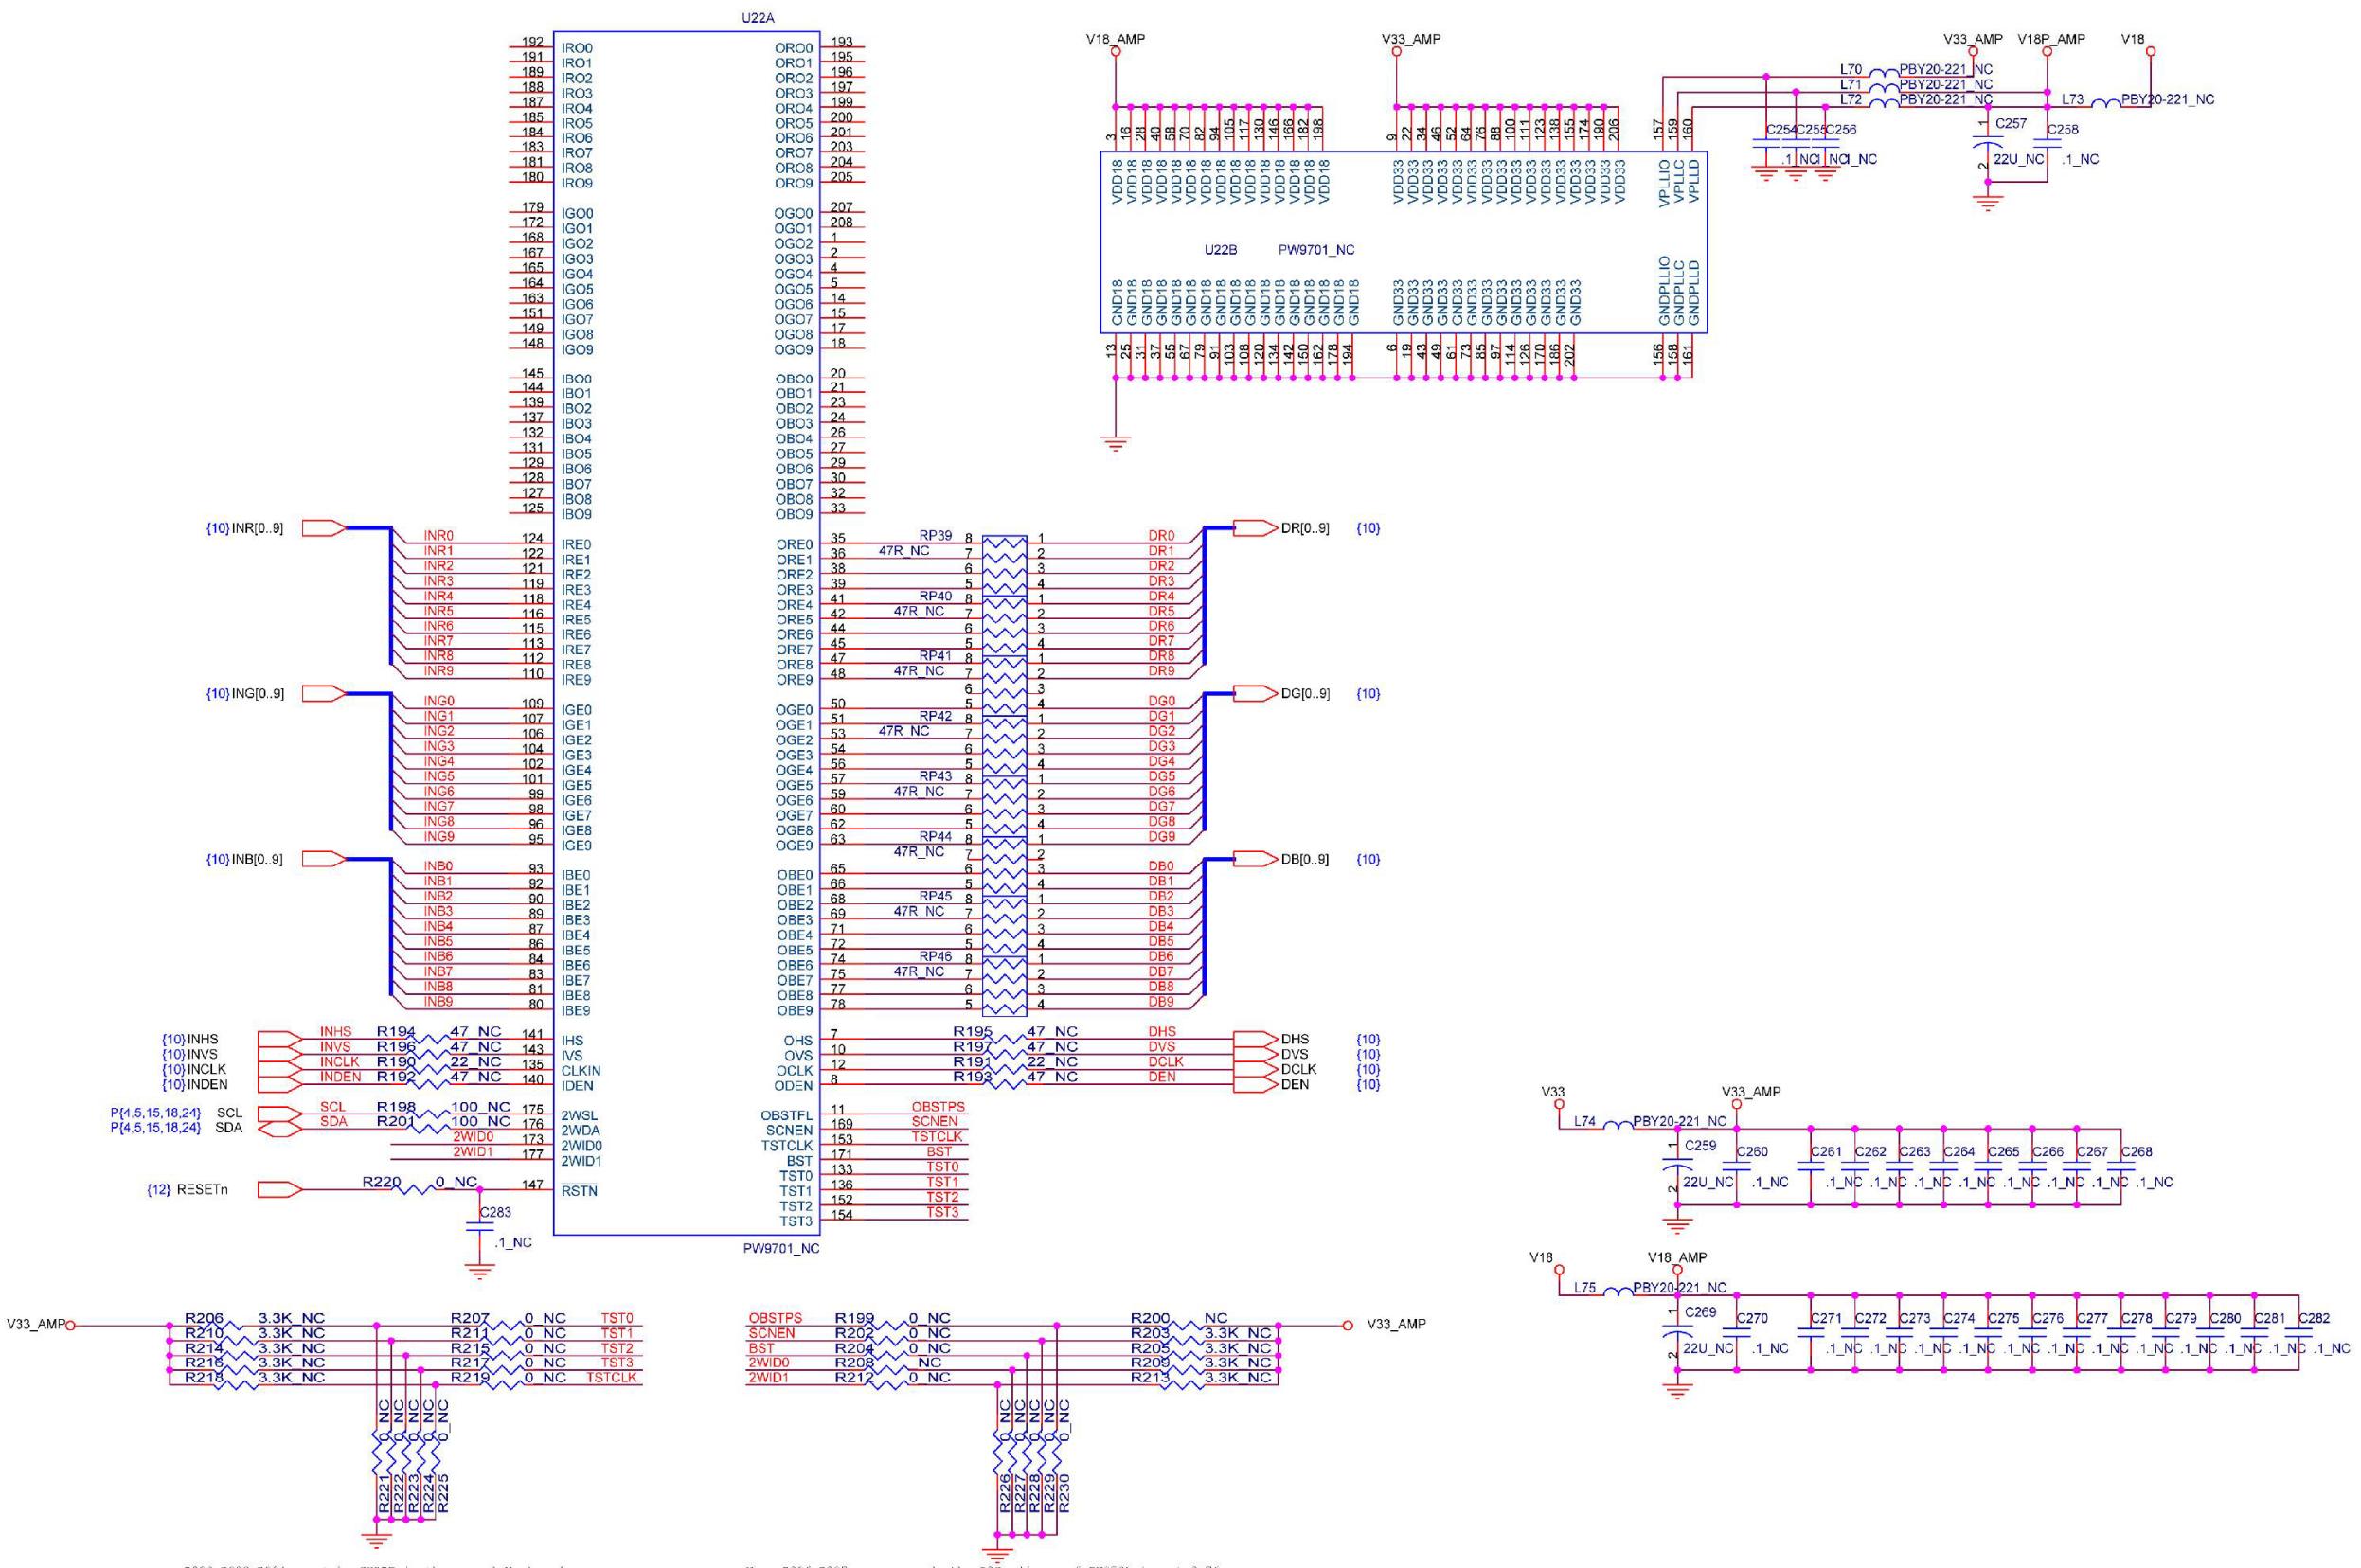


R222,R223,R224 must be SHORT in the normal Work mode

When R226,R227 are opened, the I<sup>2</sup>C address of PW9701 is set 0x76


## 9.11 PW328 CPU

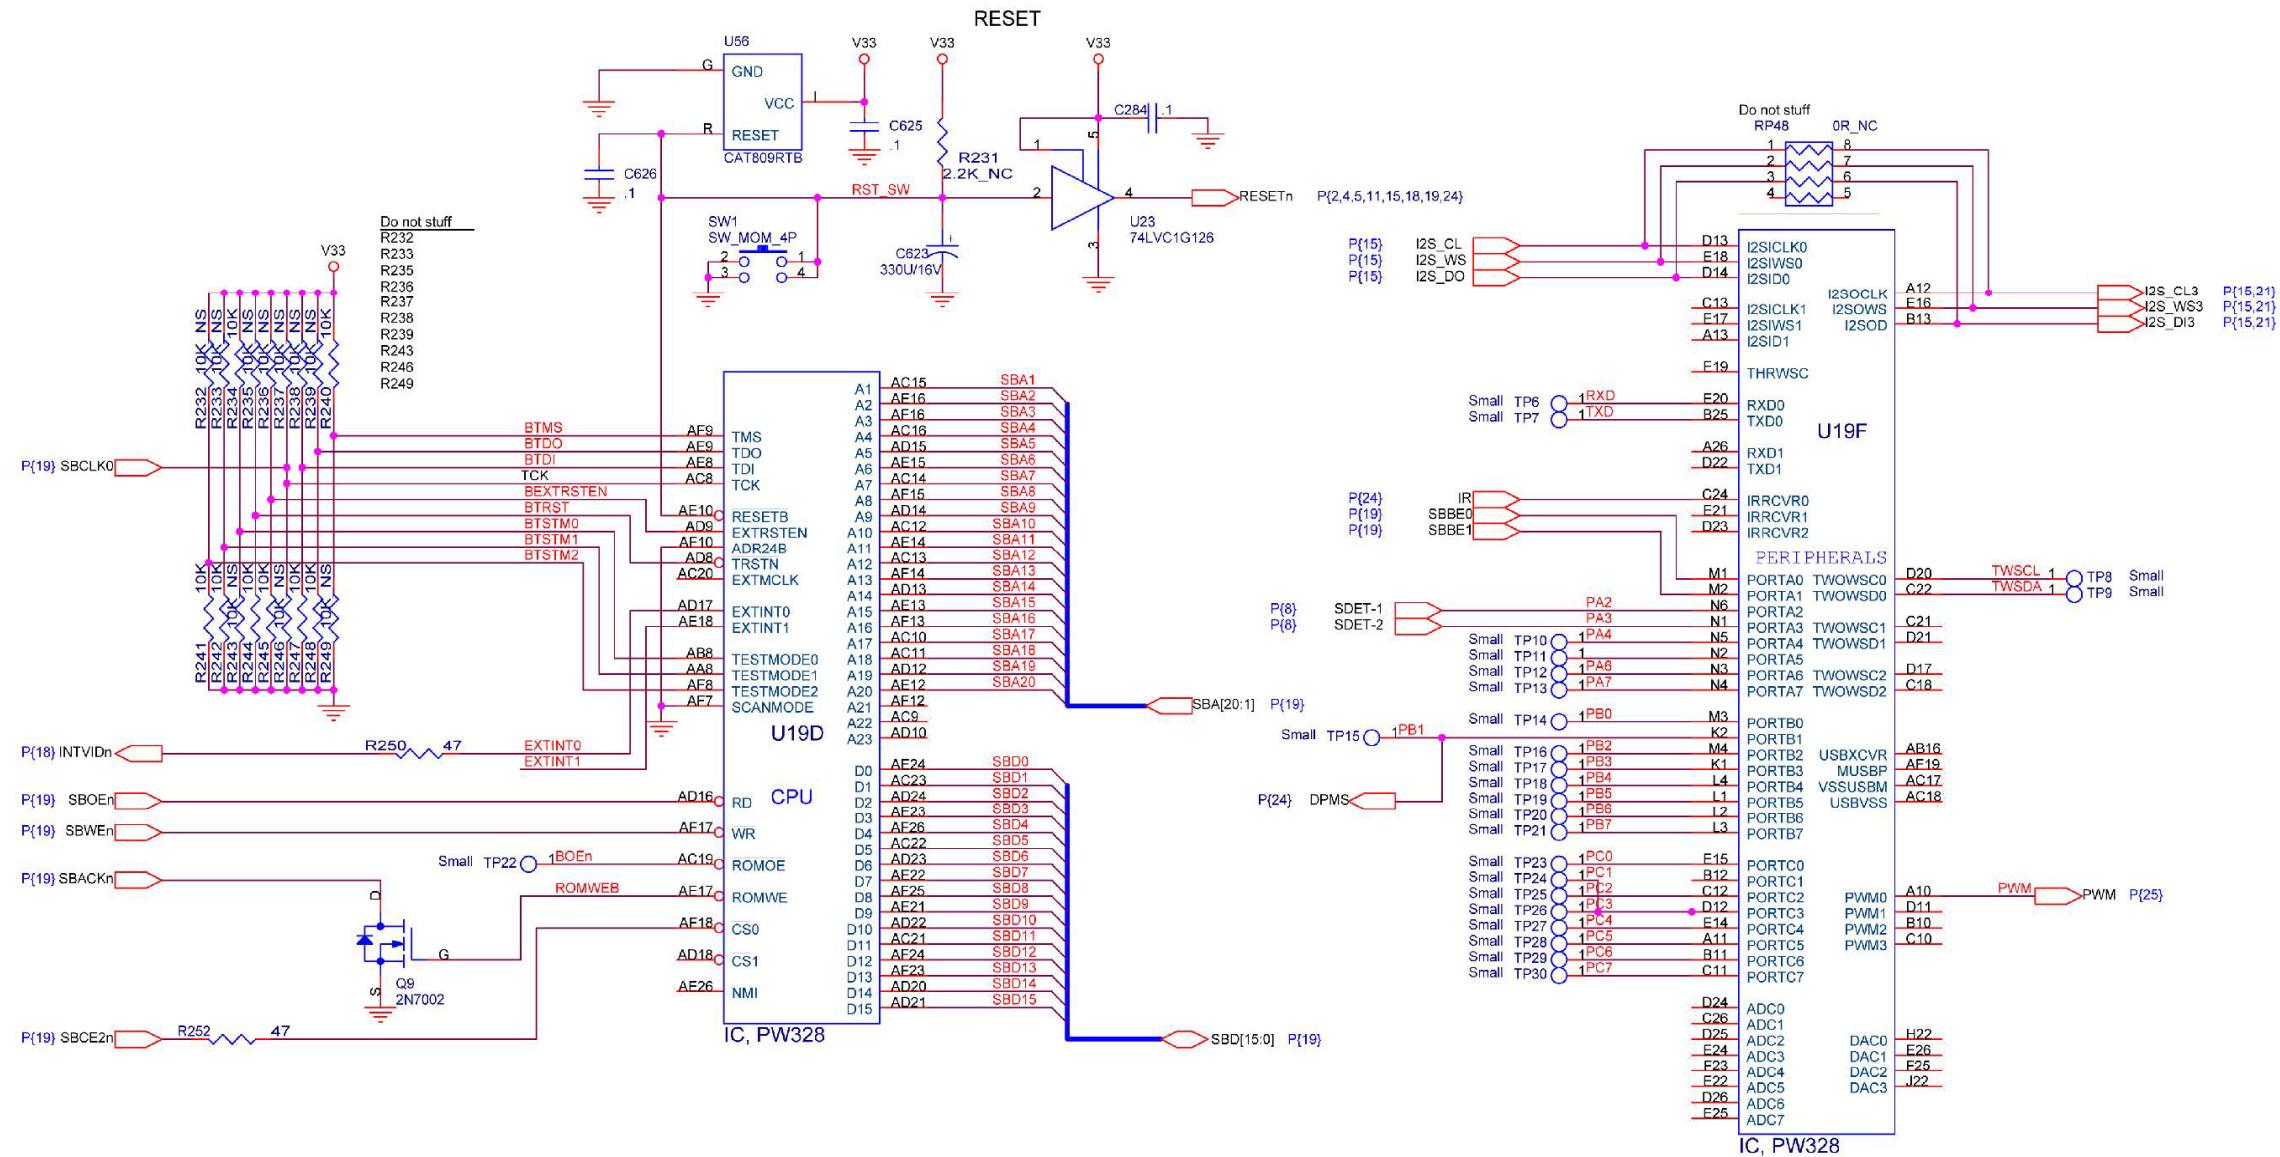


## **9.12 PW328 CPU DDR MEMORY**

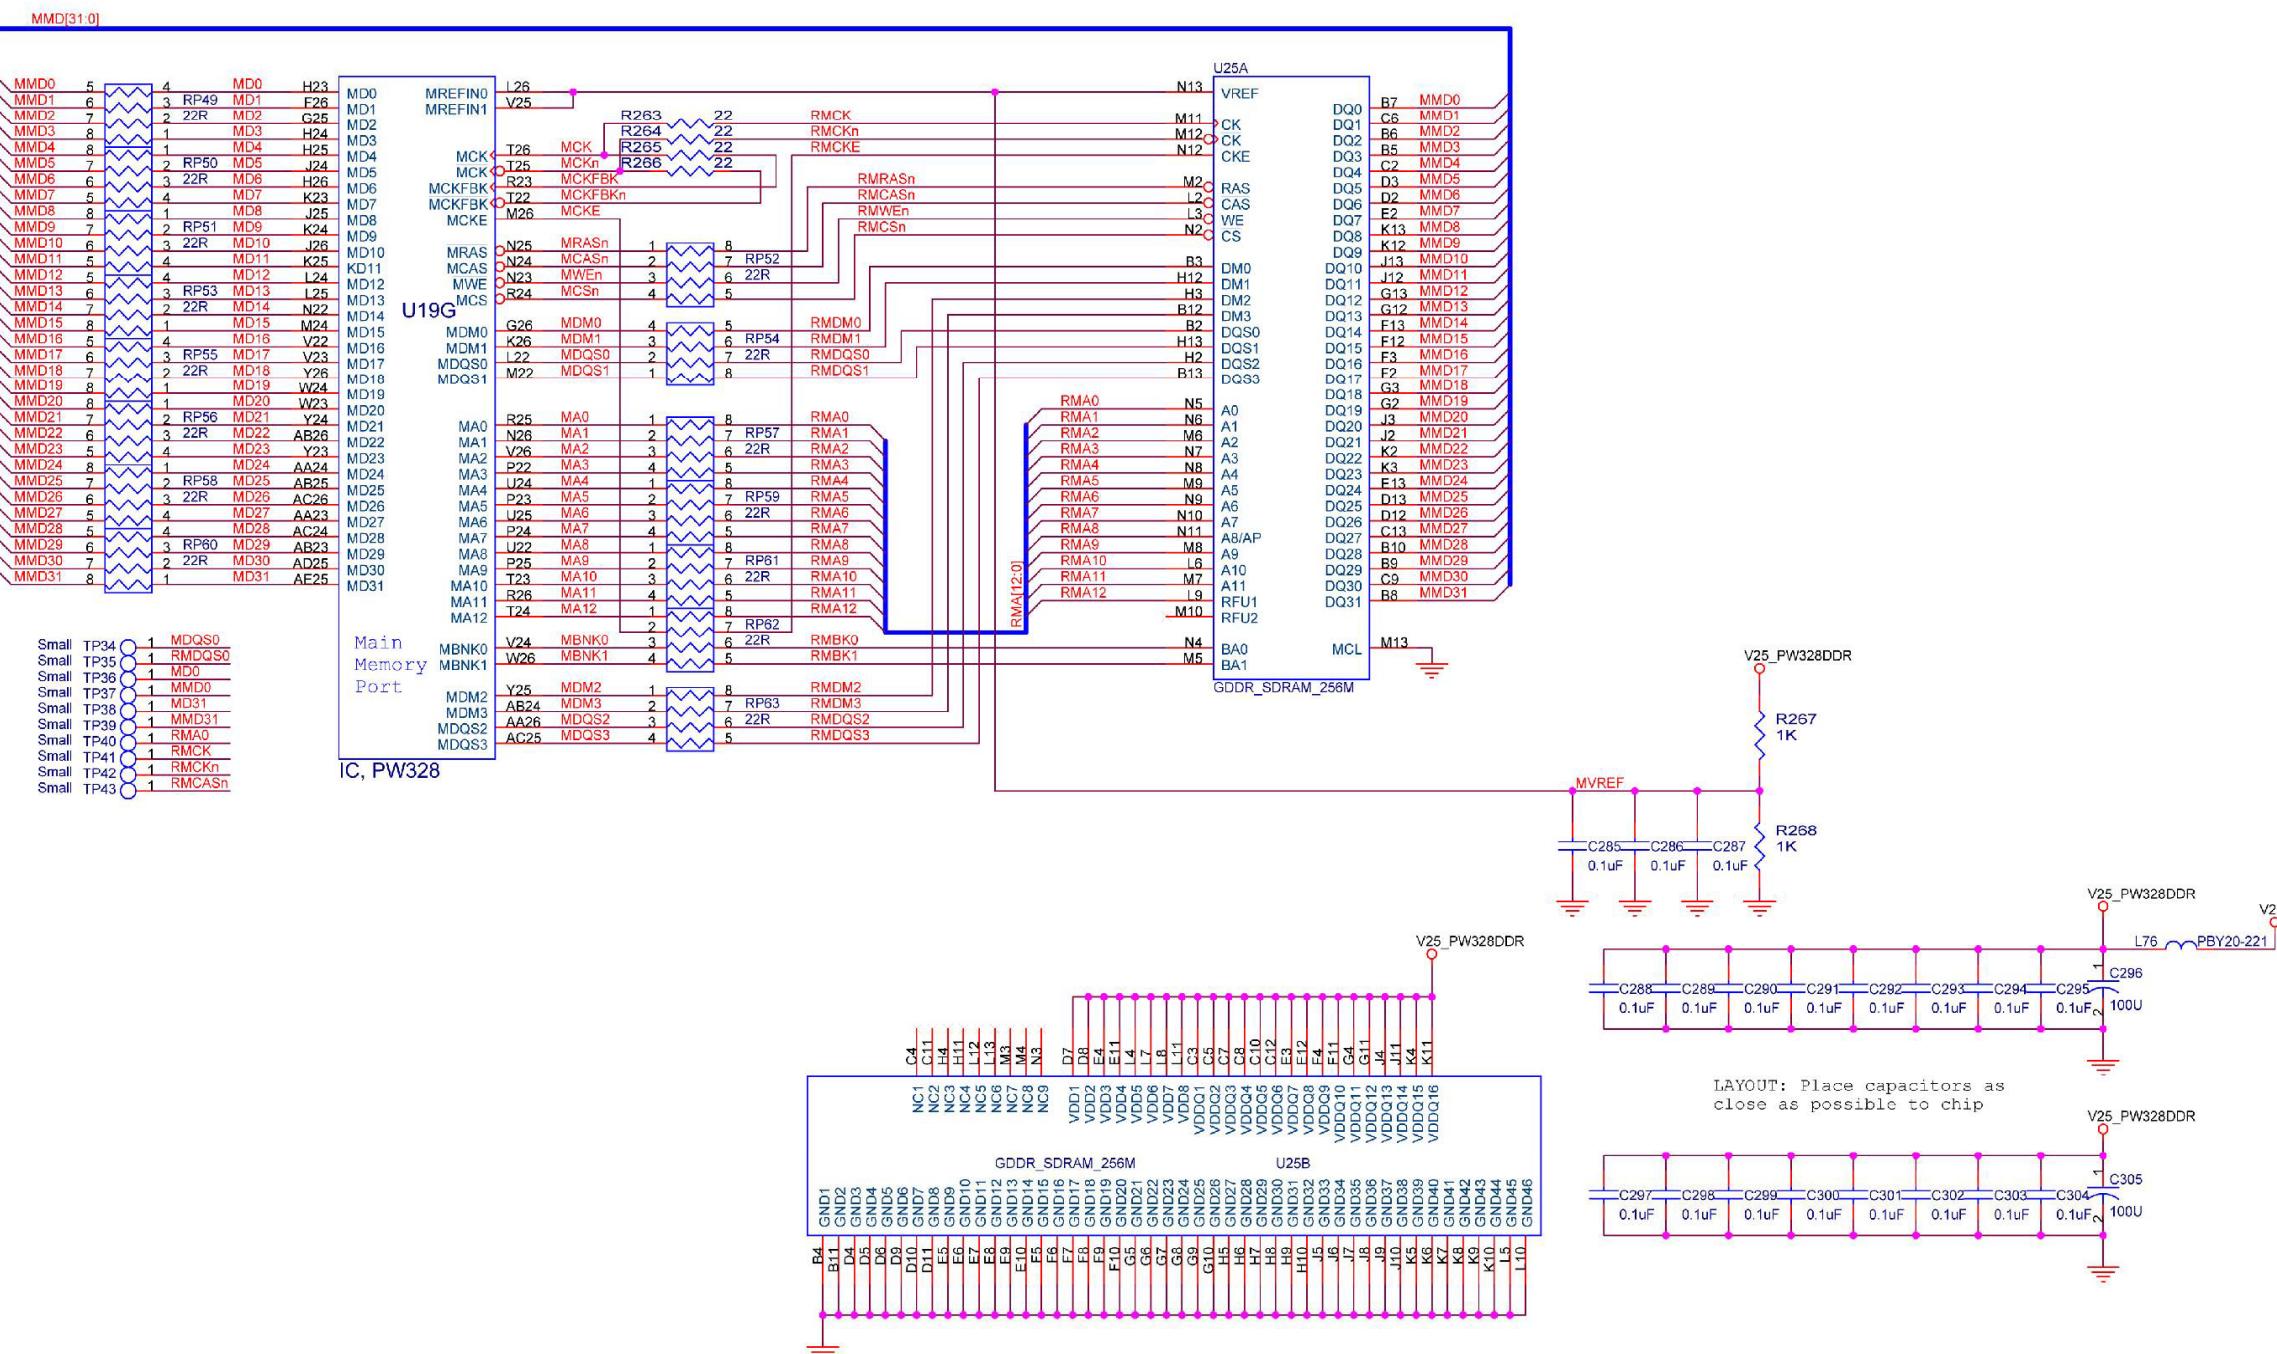


## 9.13 PW328 POWER

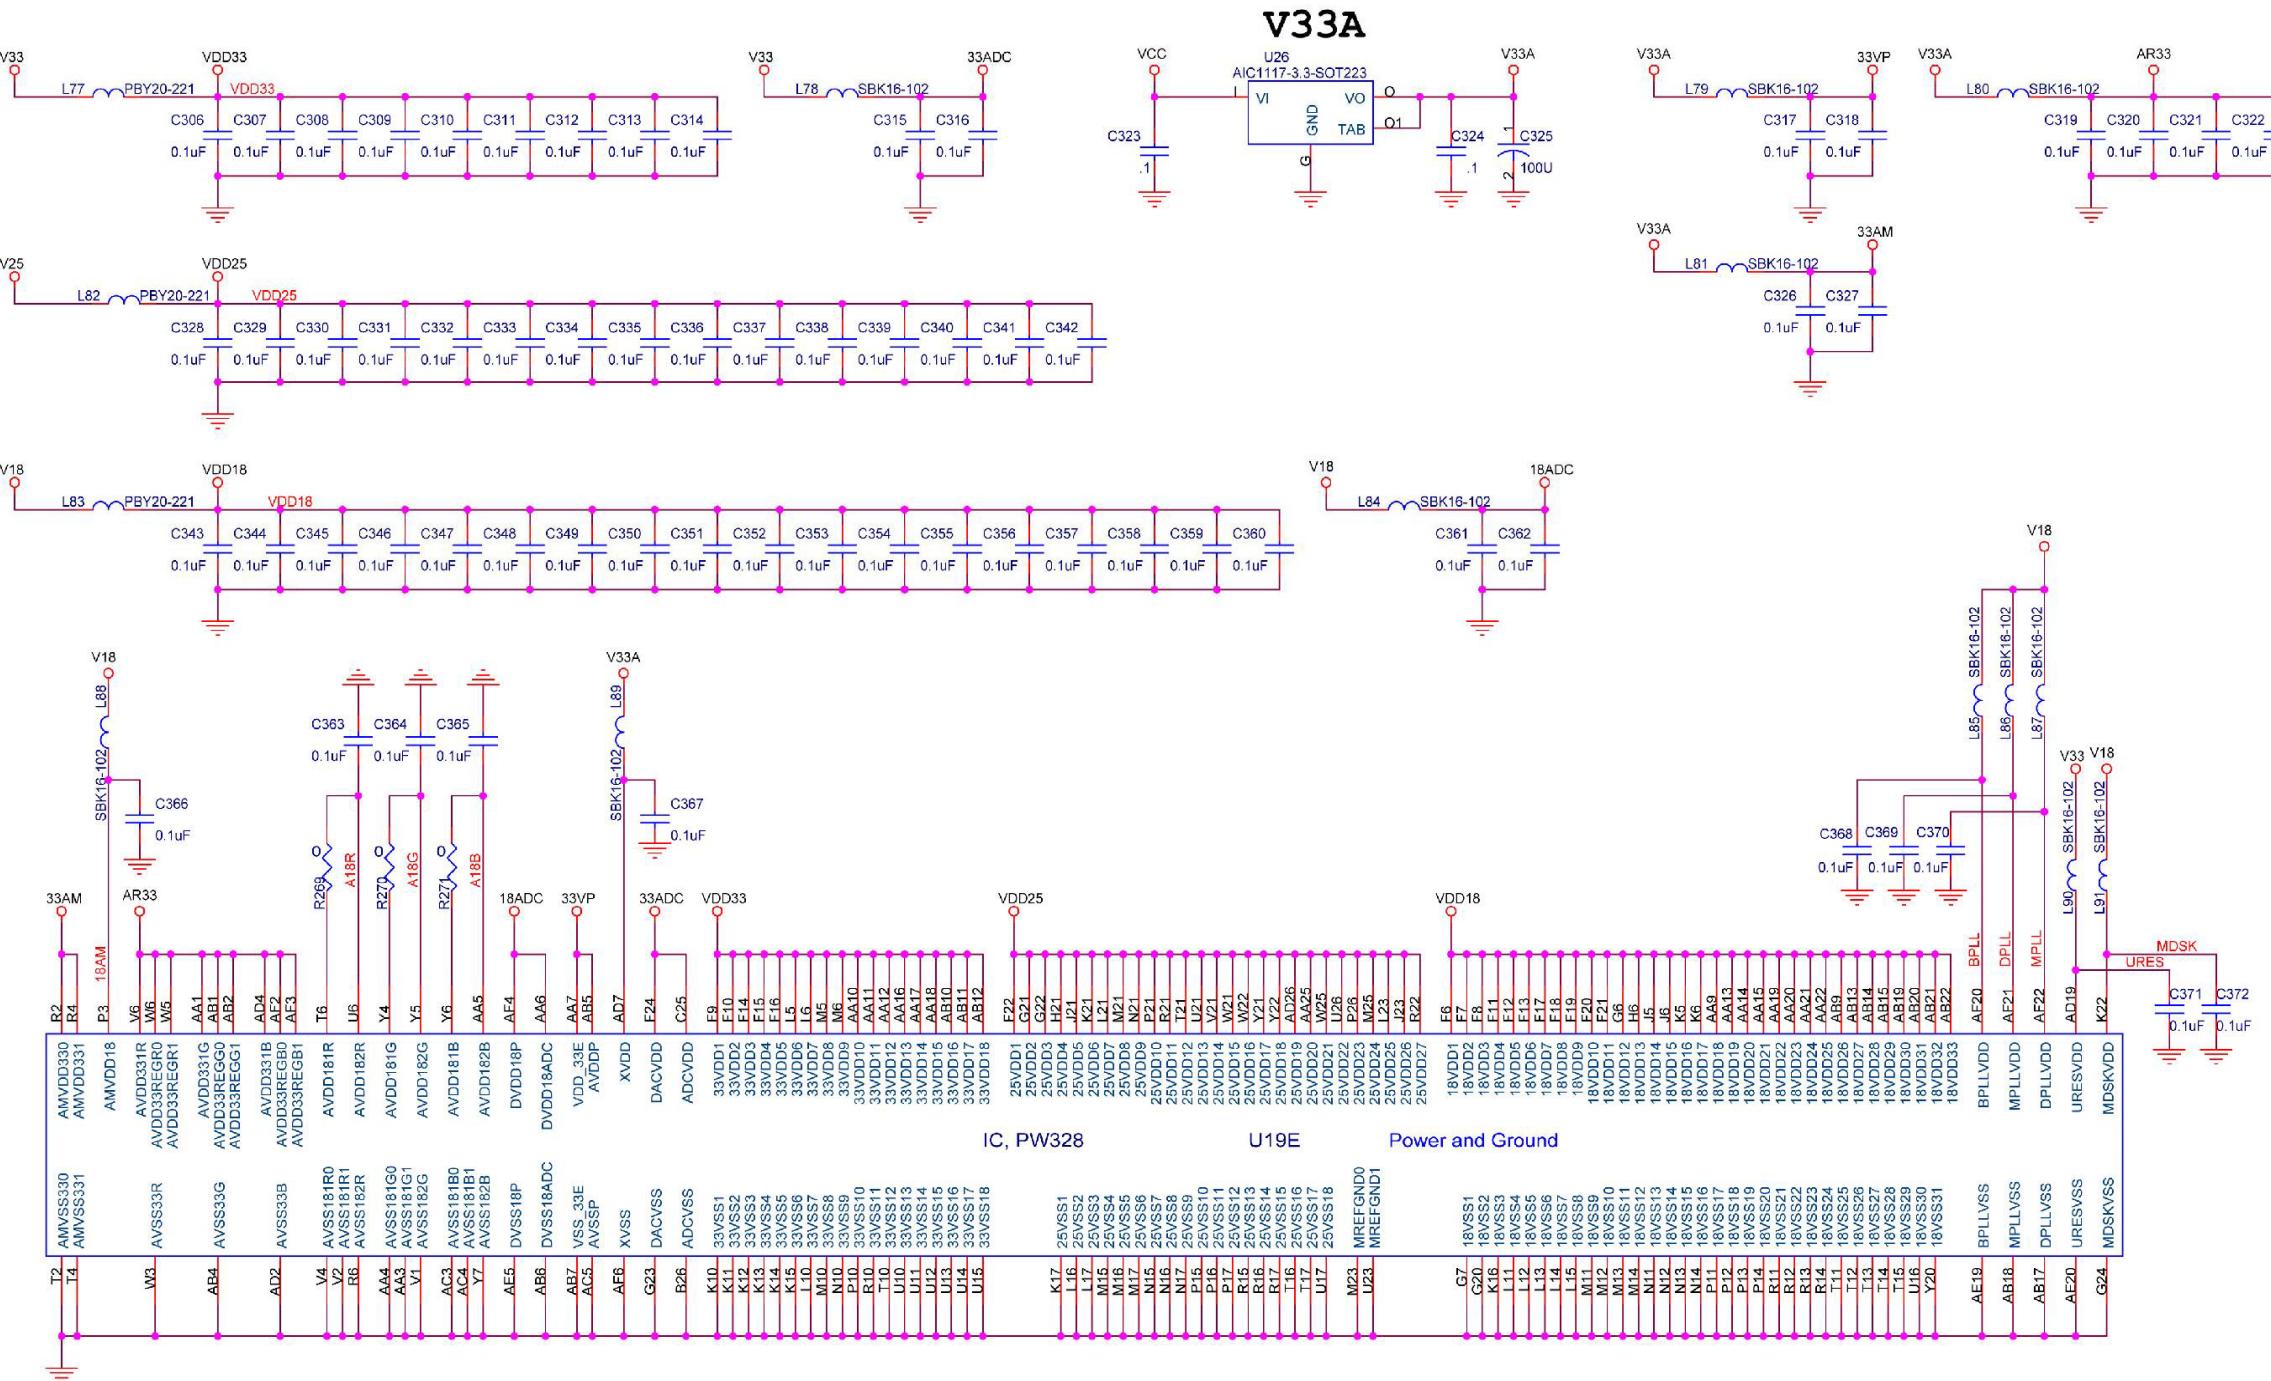


## 9.14 AUDIO PROCESSOR

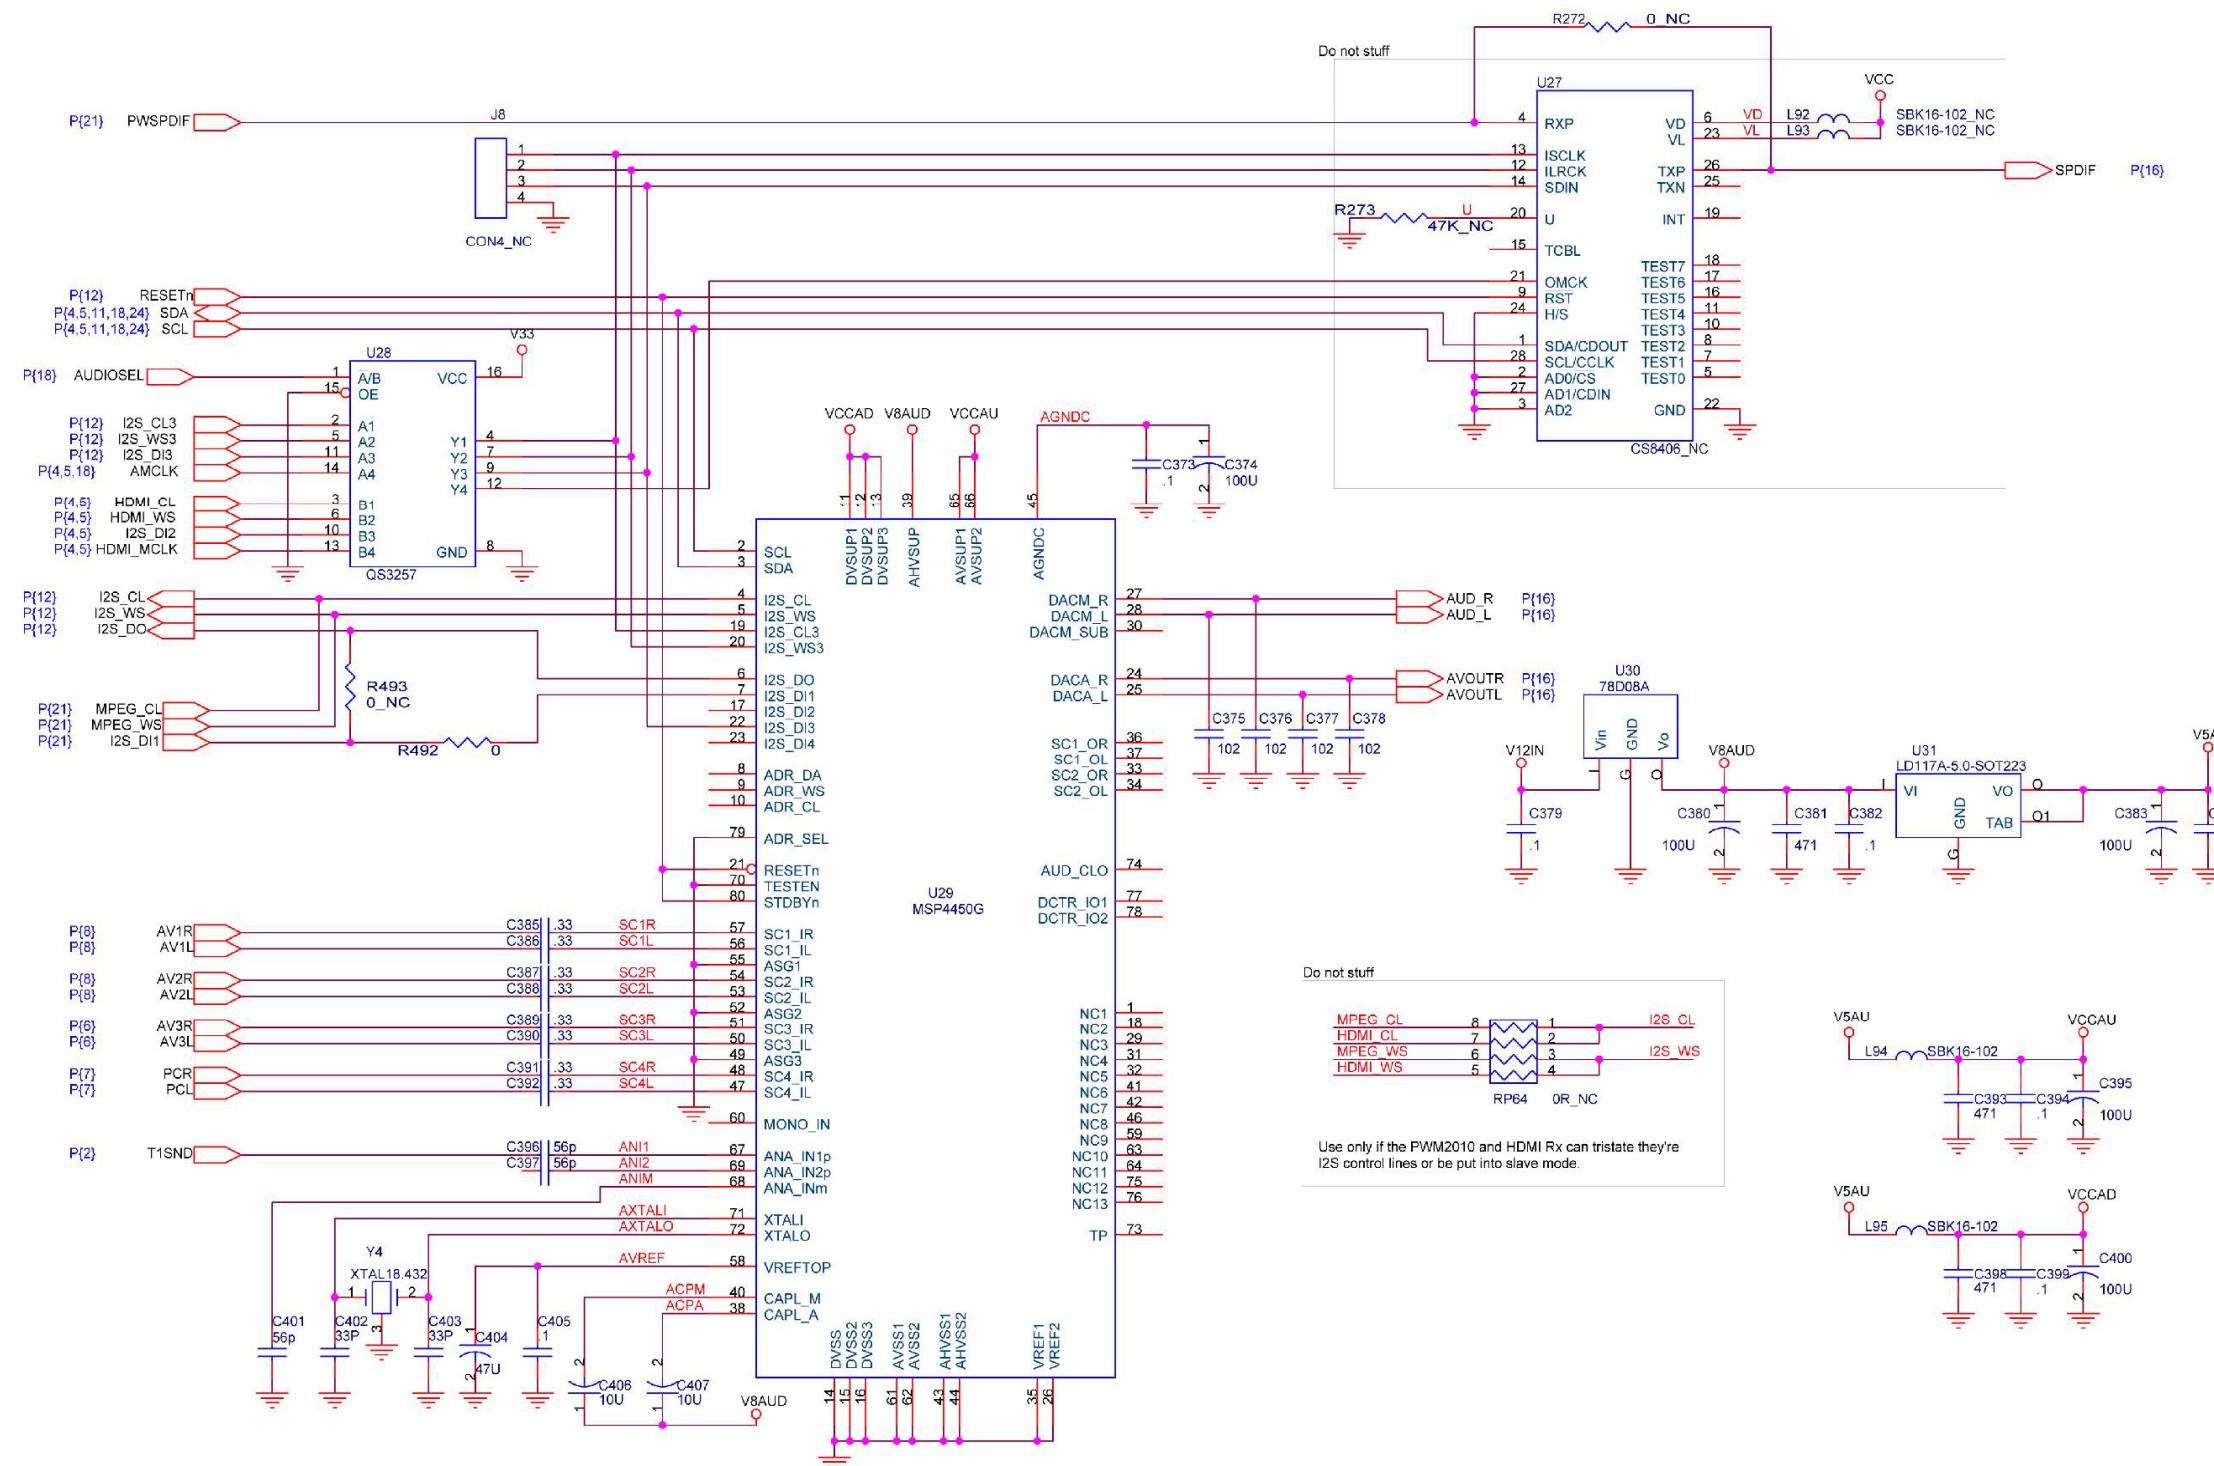


## 9.15 AUDIO AMPLIFIERS AND OUTPUTS

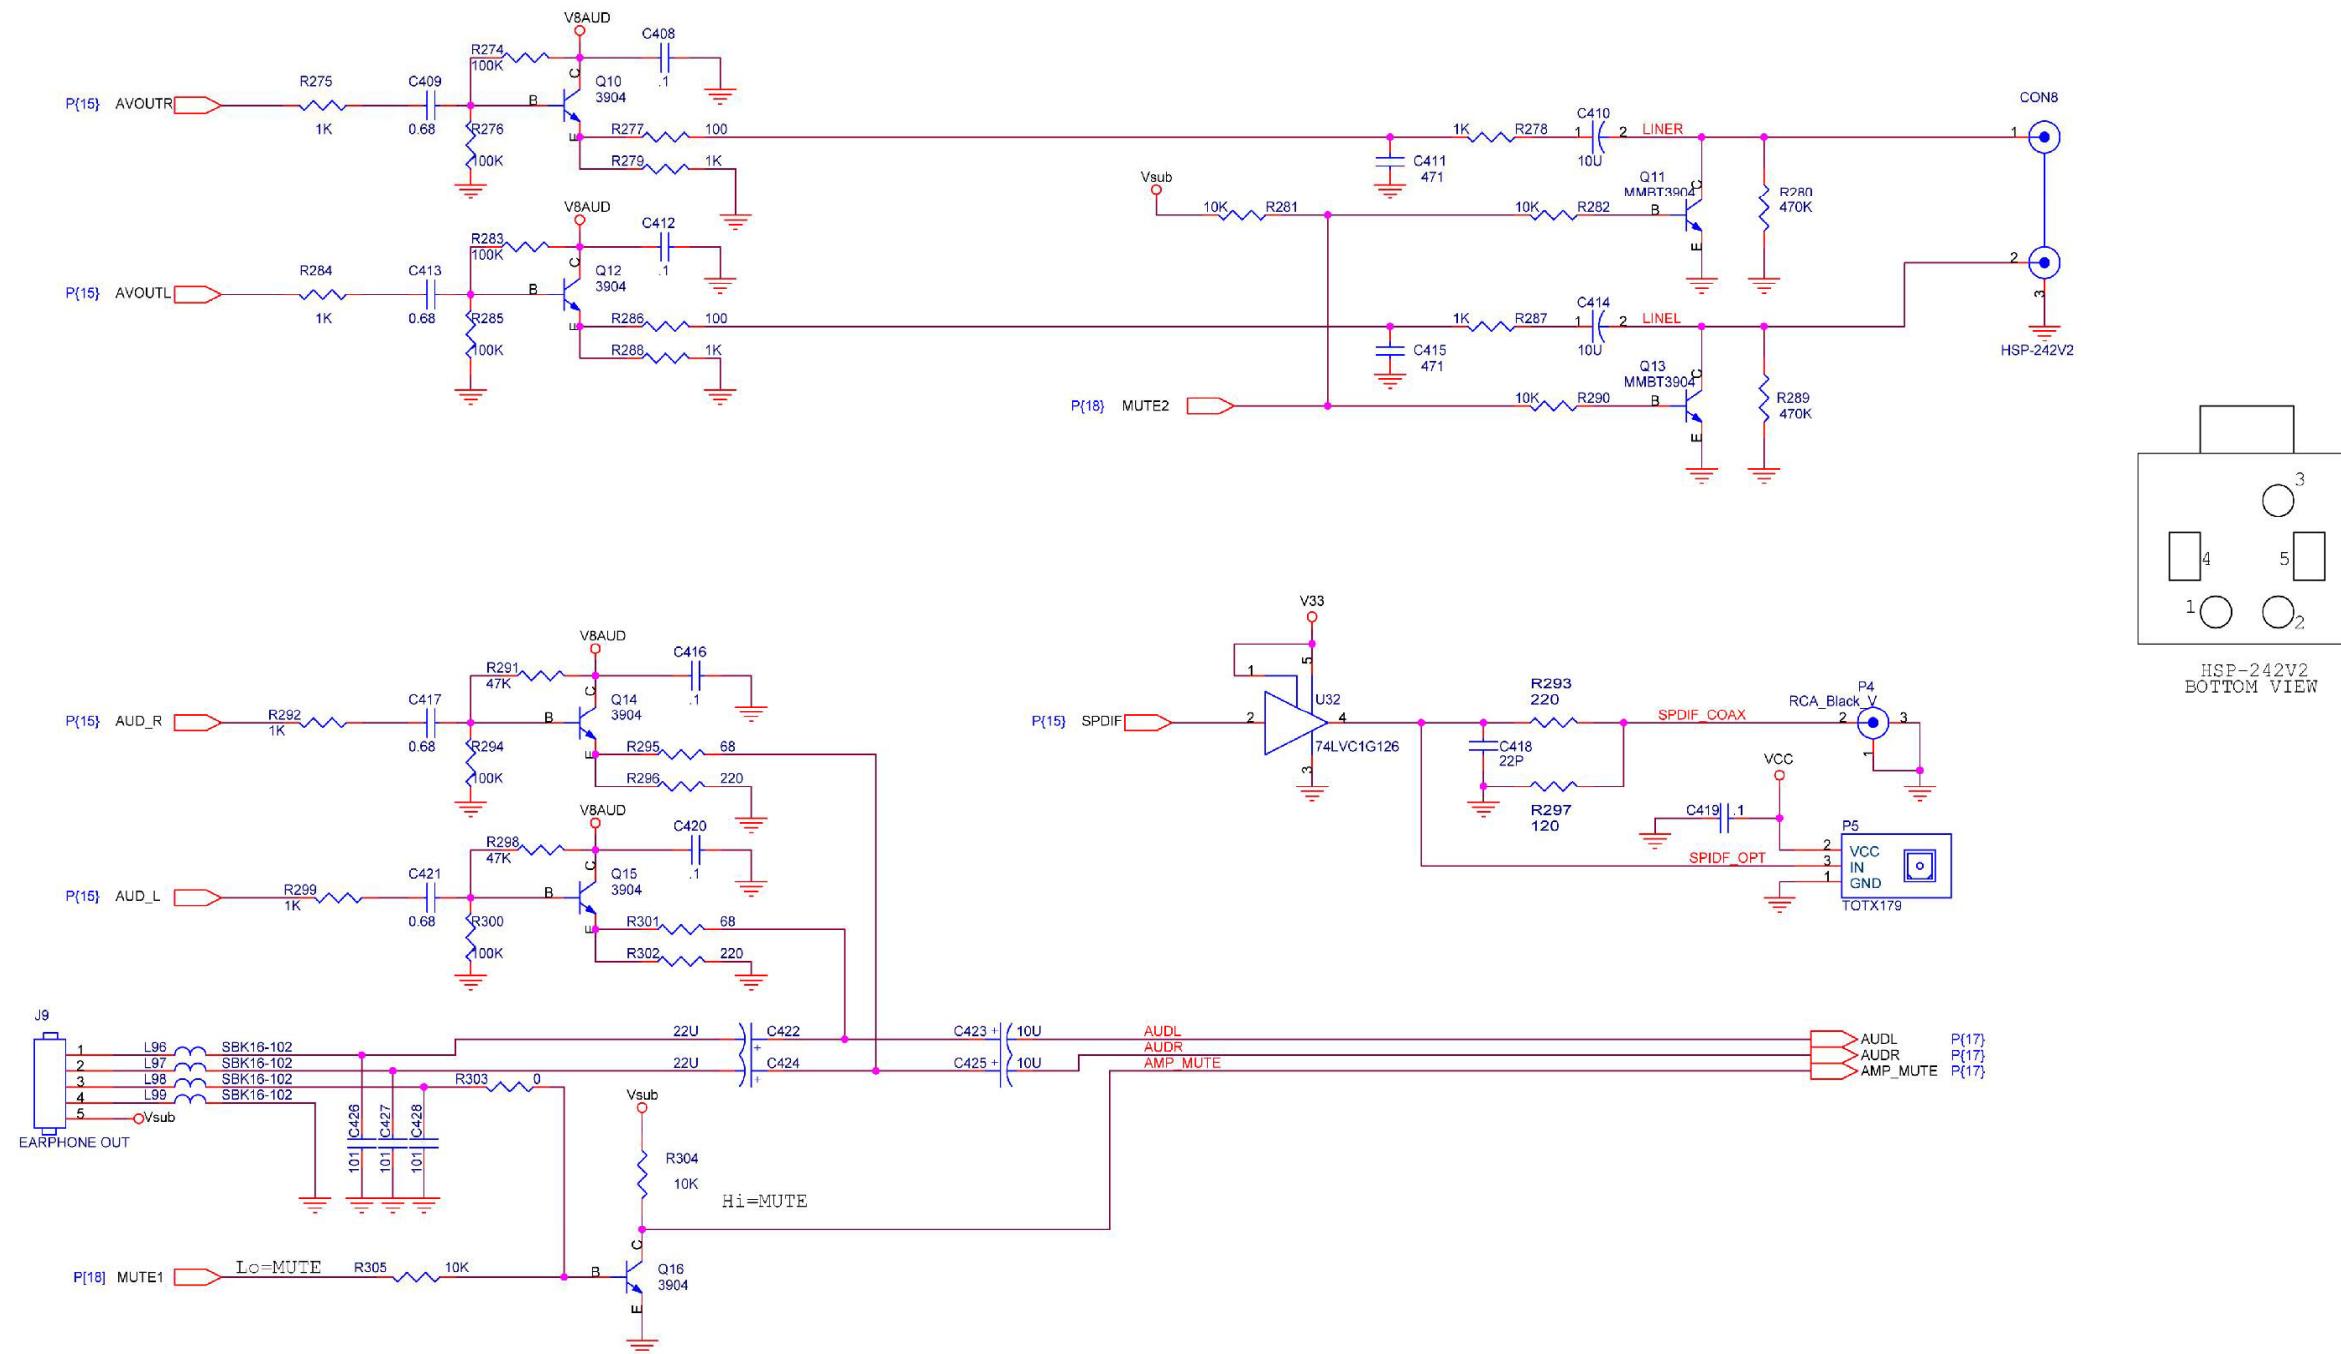


## 9.16 L1722CDB CLASS-D AMP

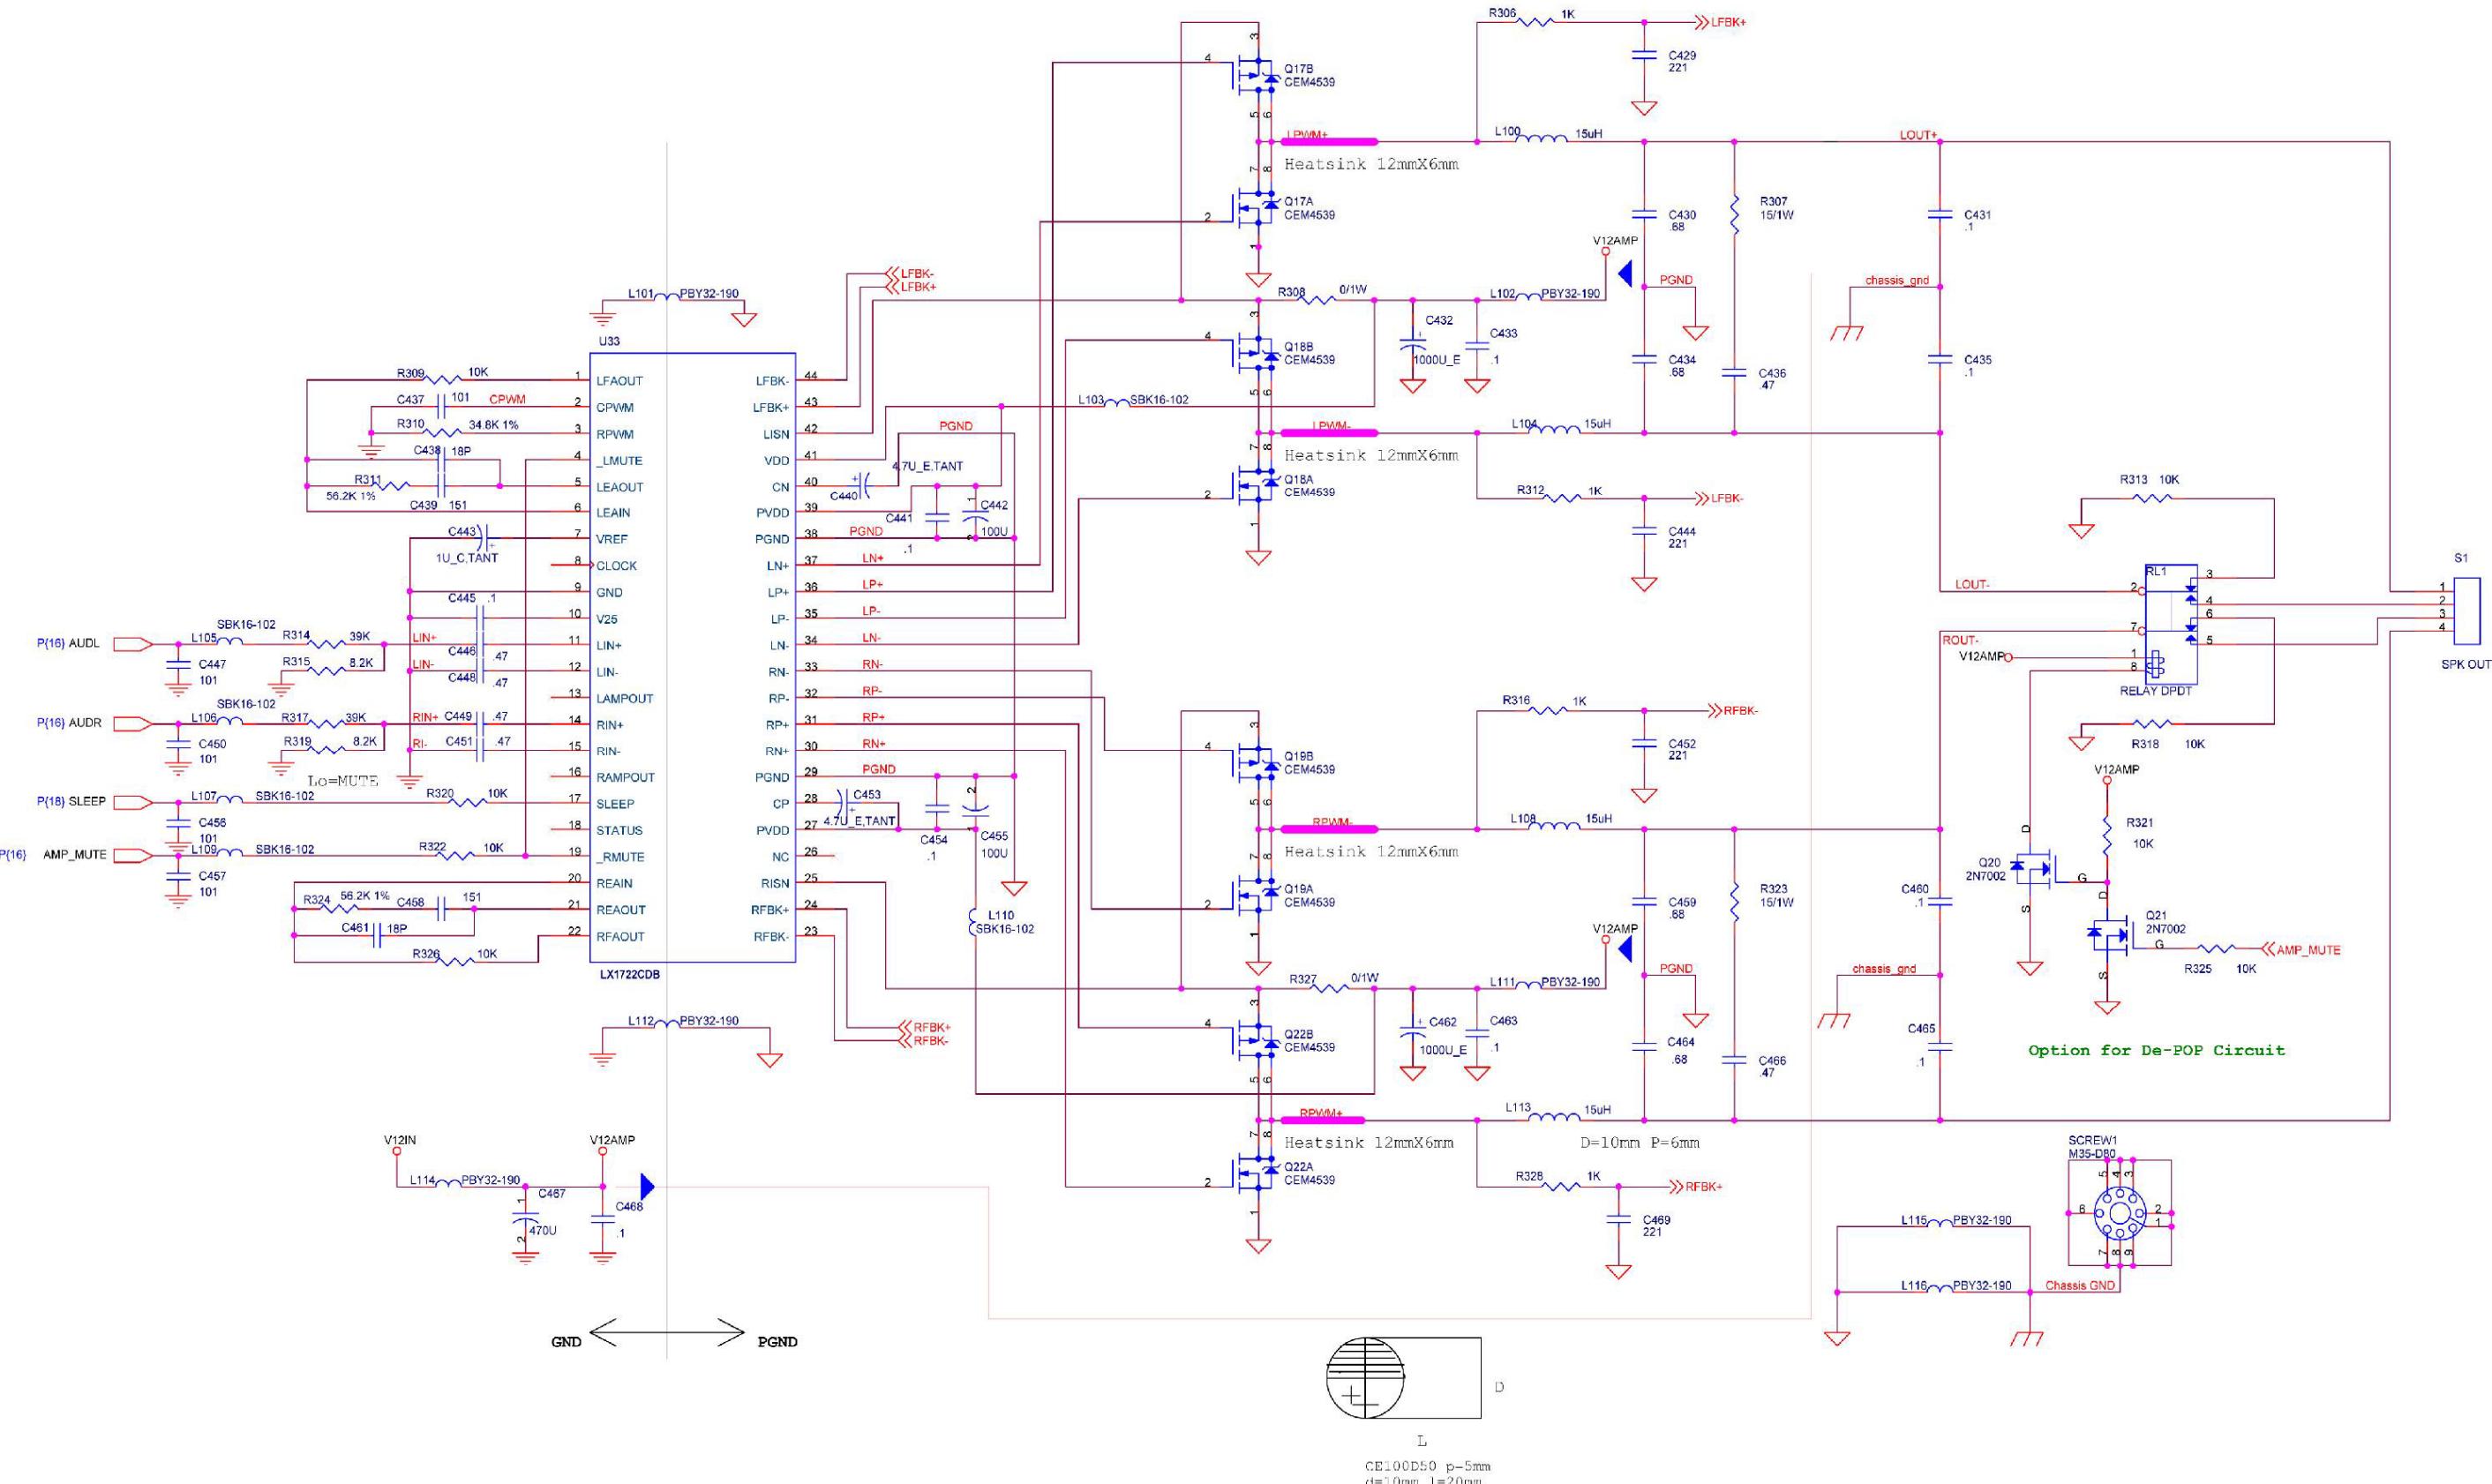


## 9.17 PWM2010 PERIPHERALS / CLOCKS

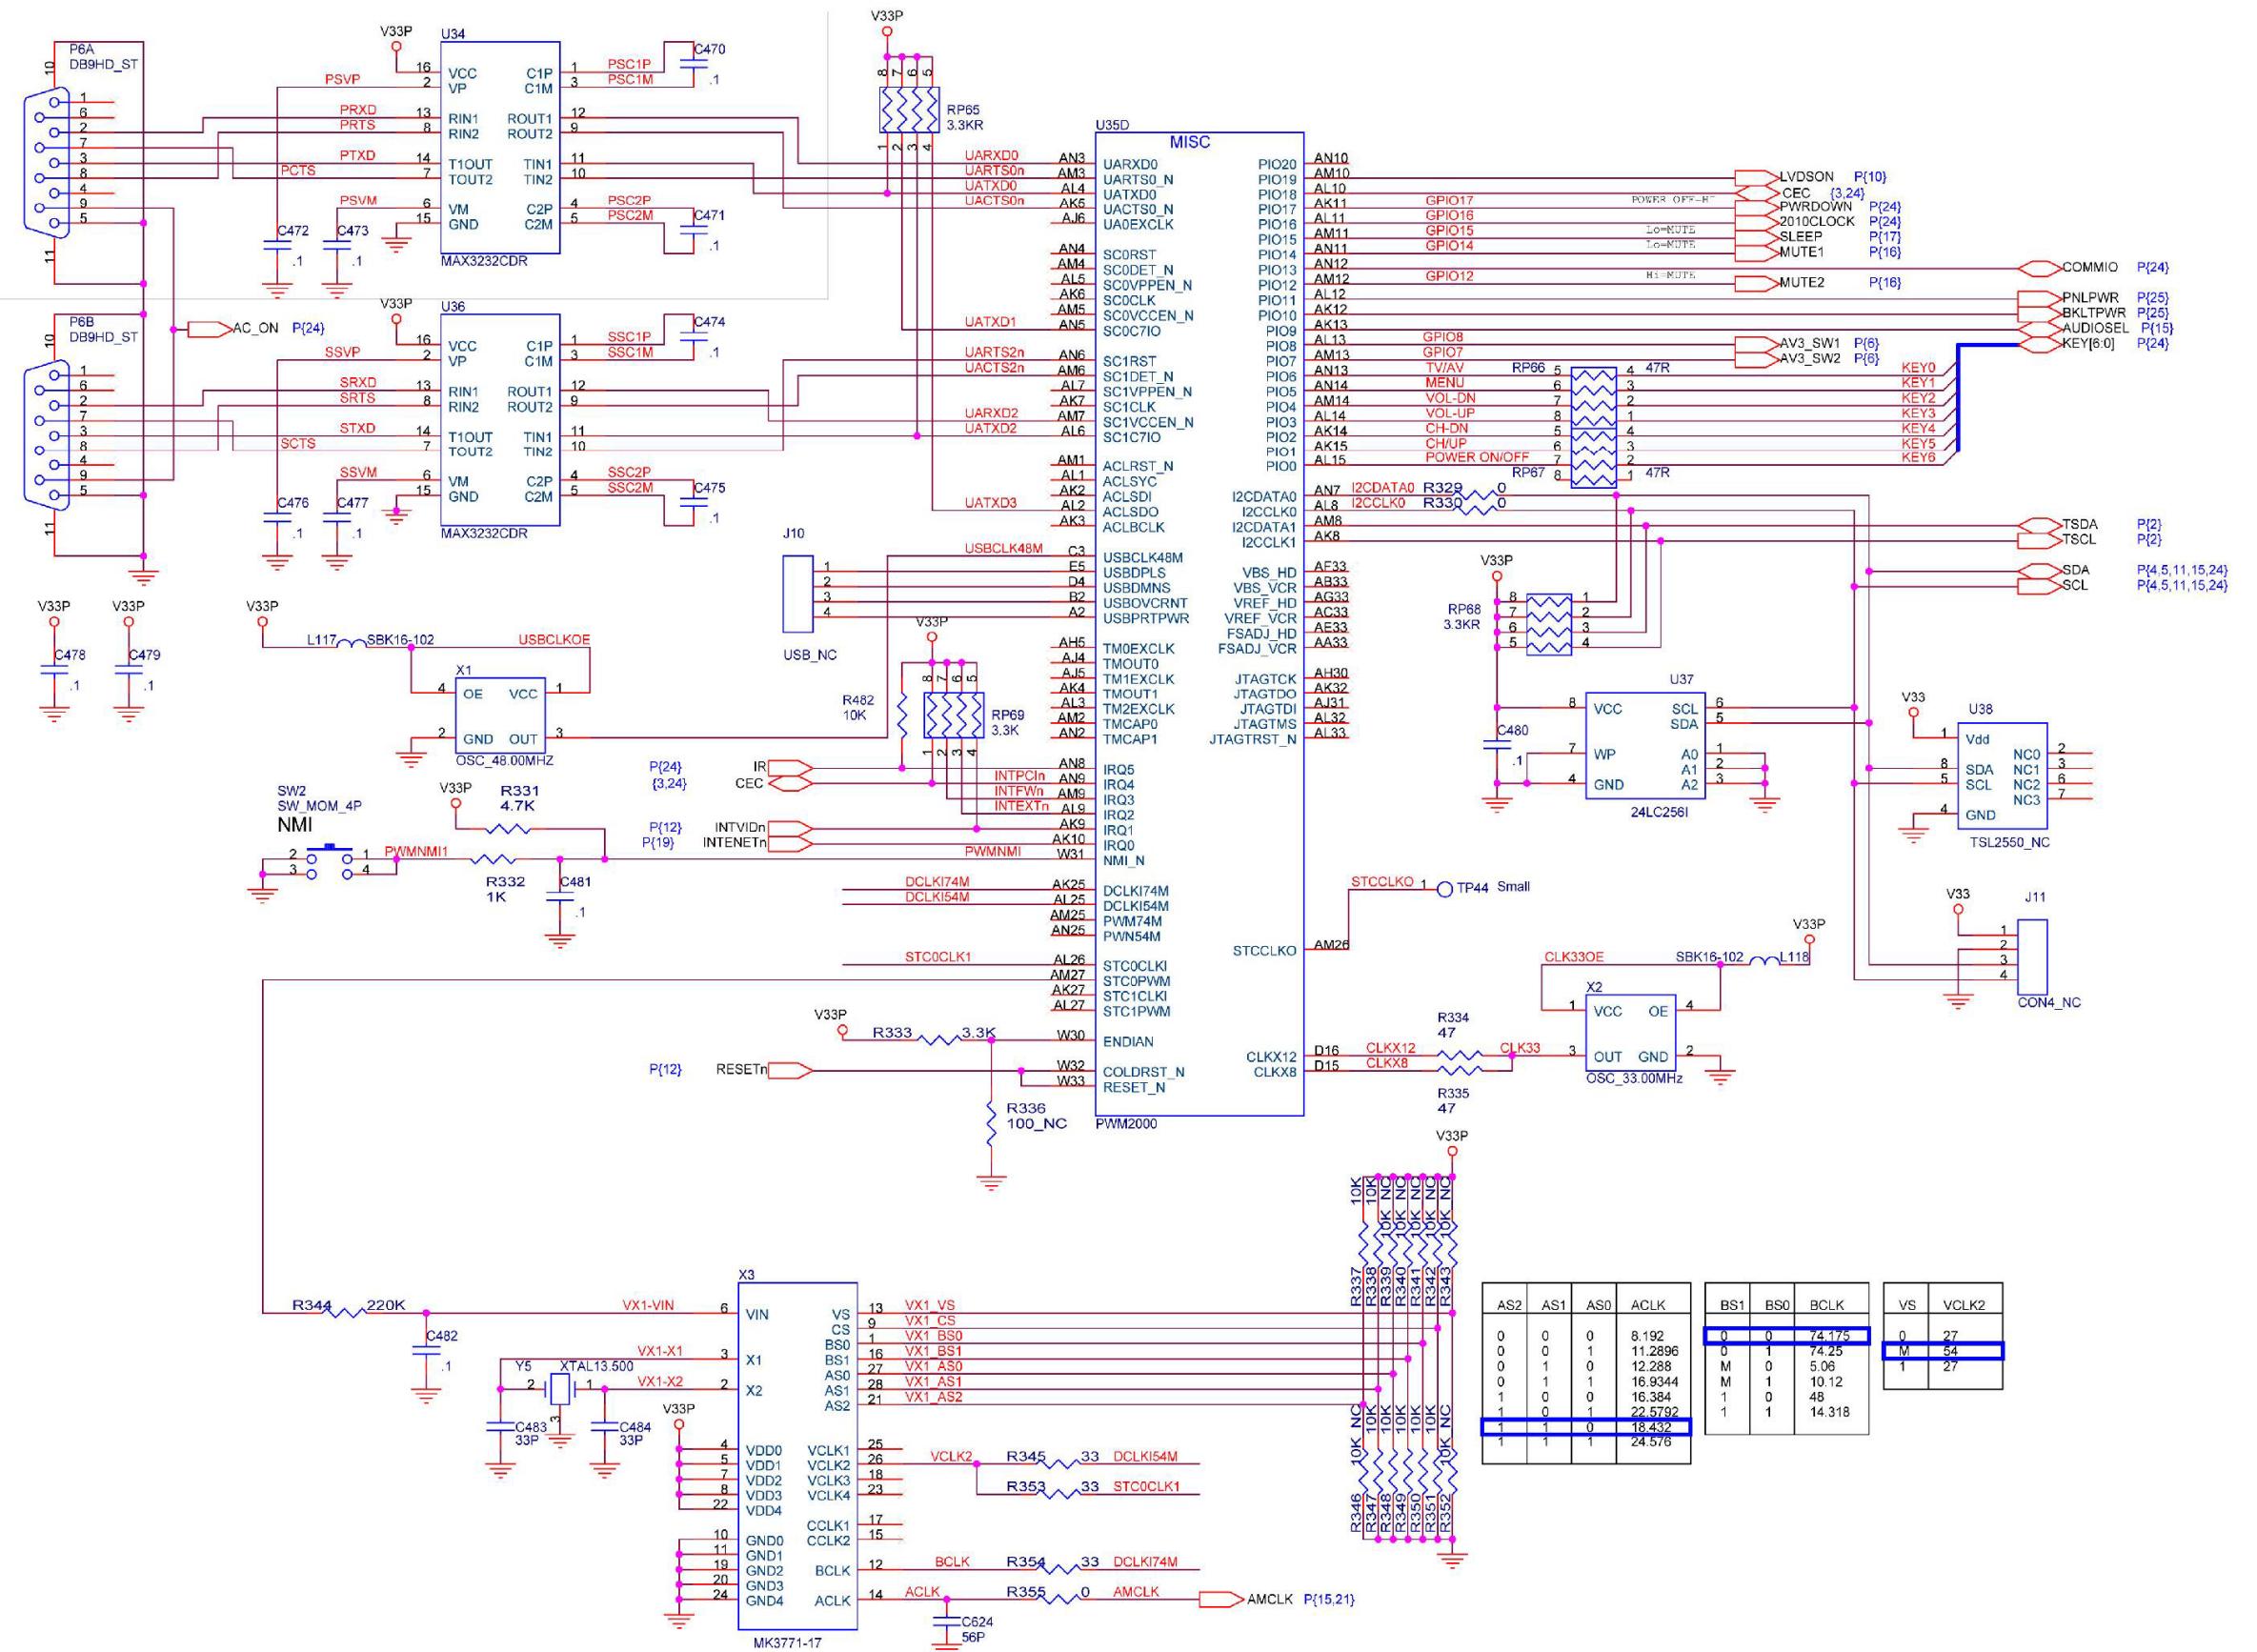


## 9.18 PWM2000 SLOWBUS

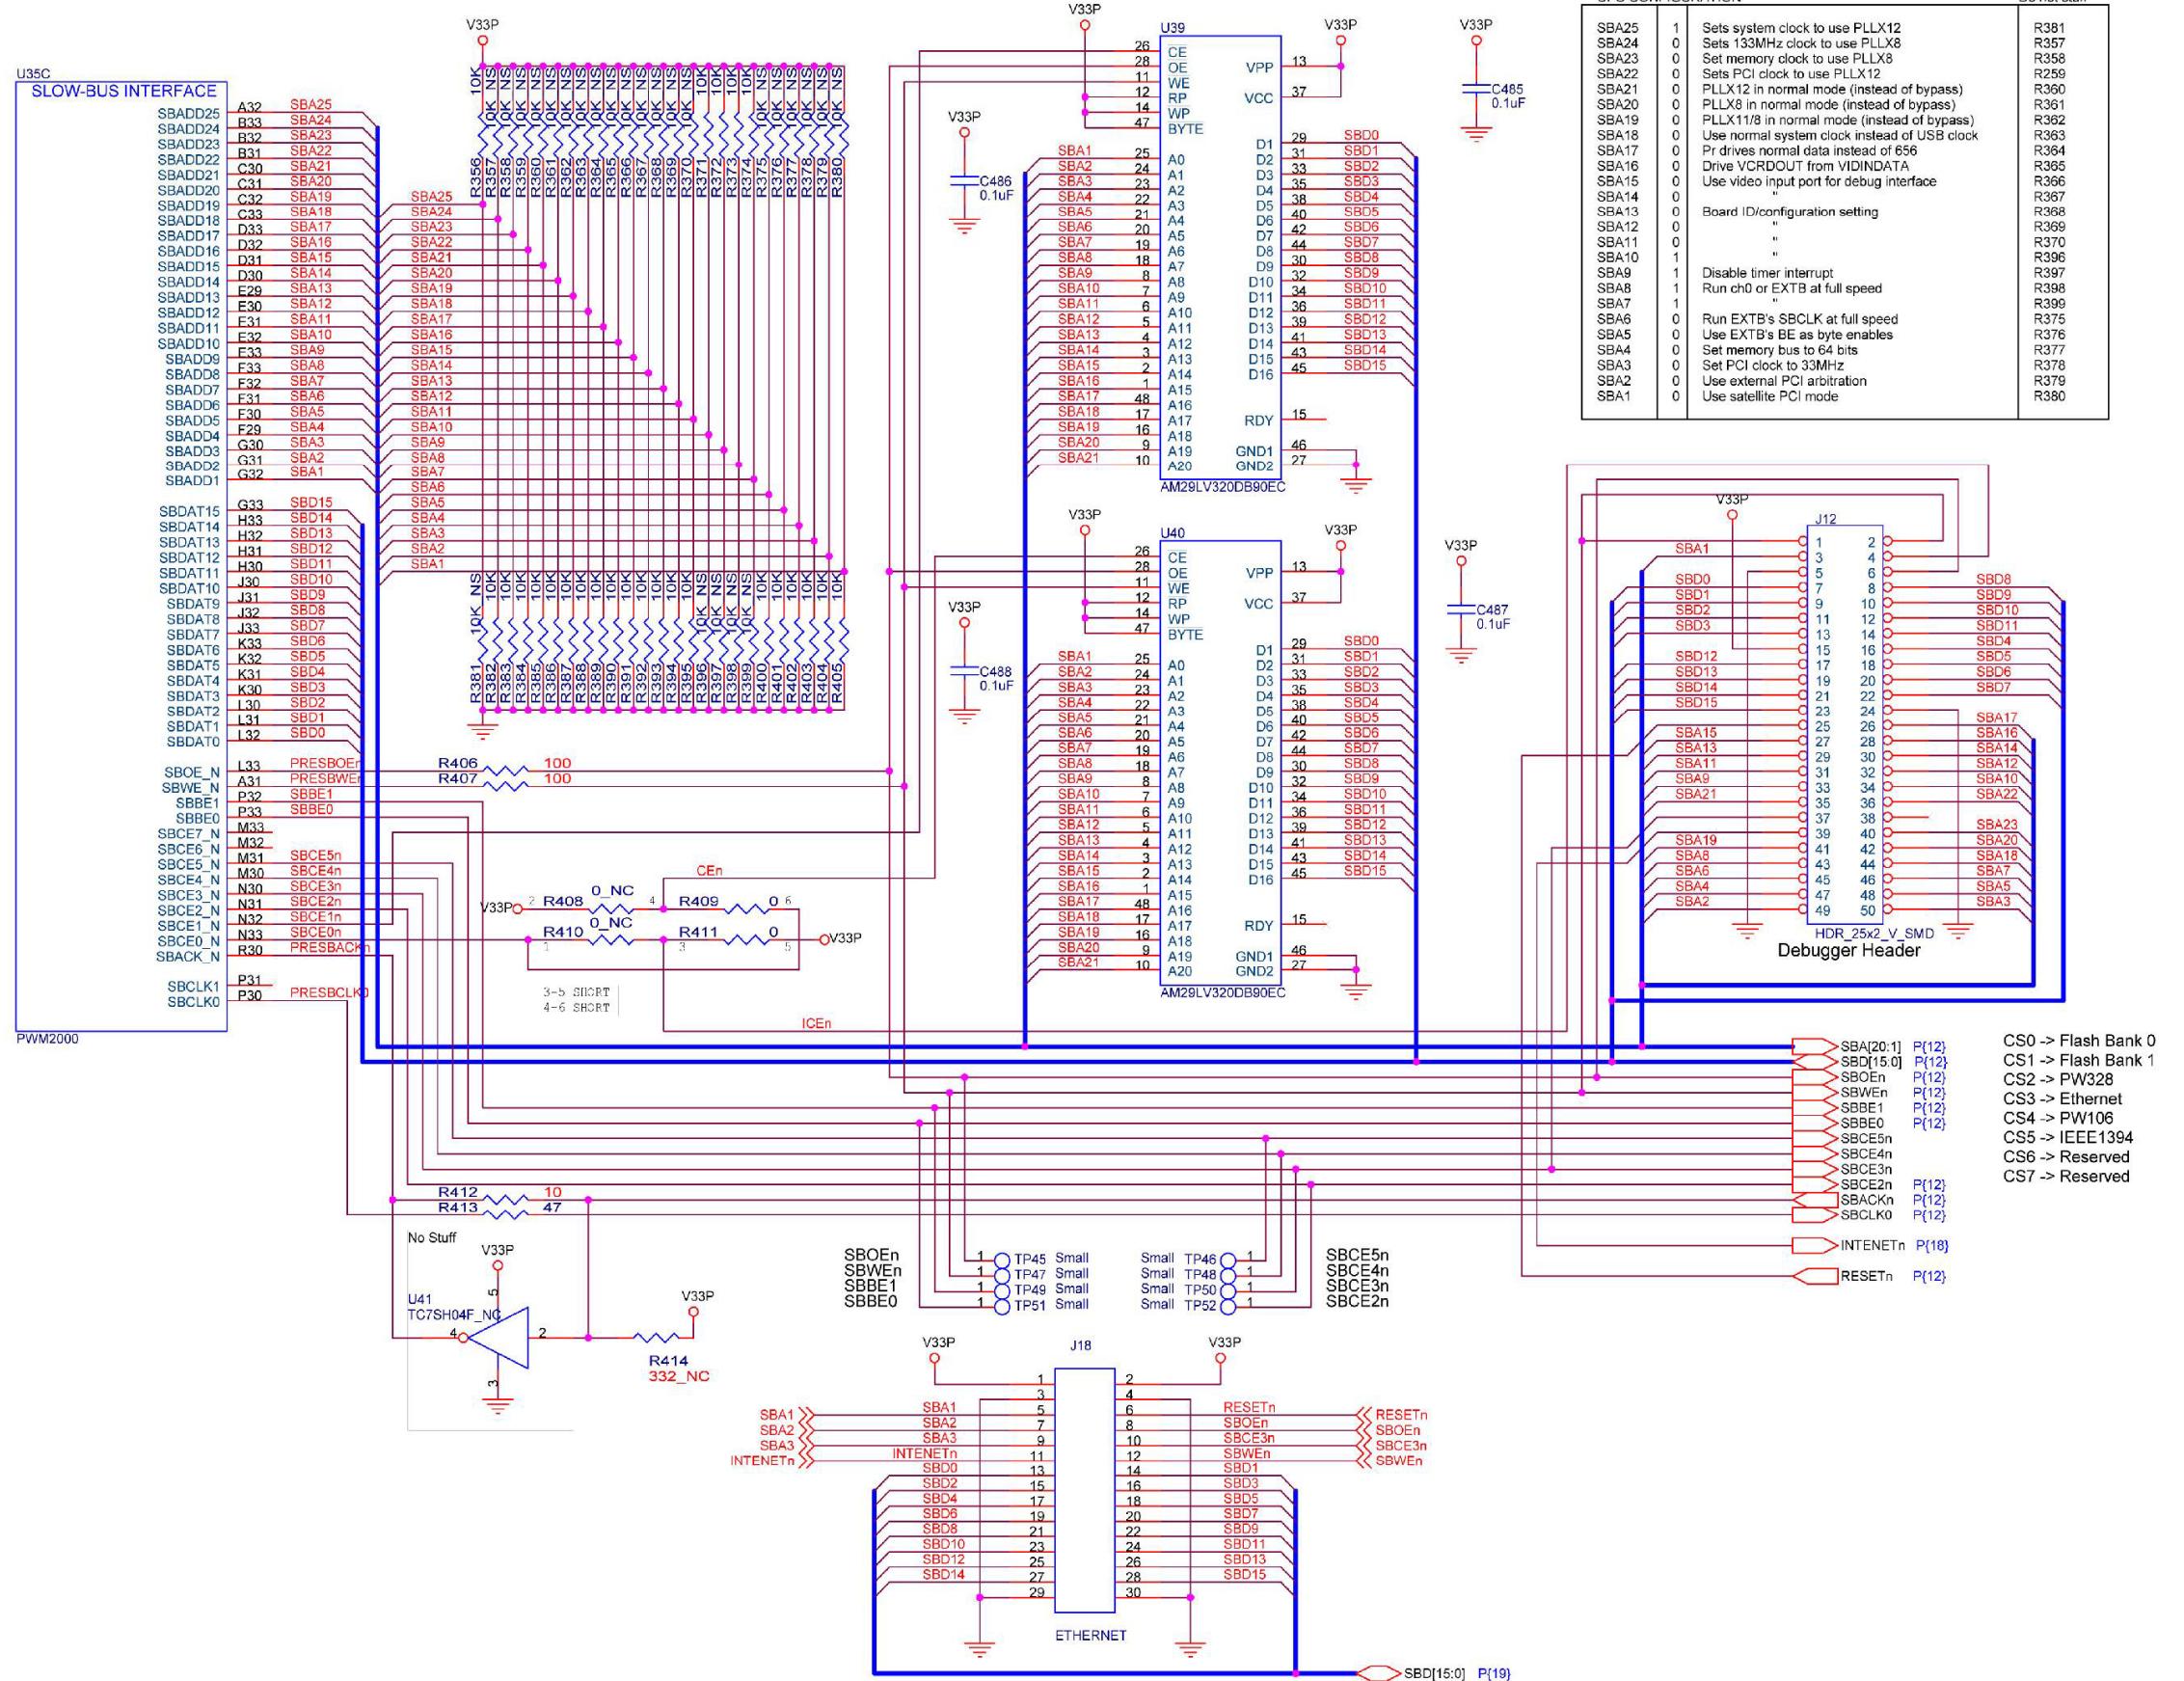


## 9.19 PWM2010 DDR MEMORY

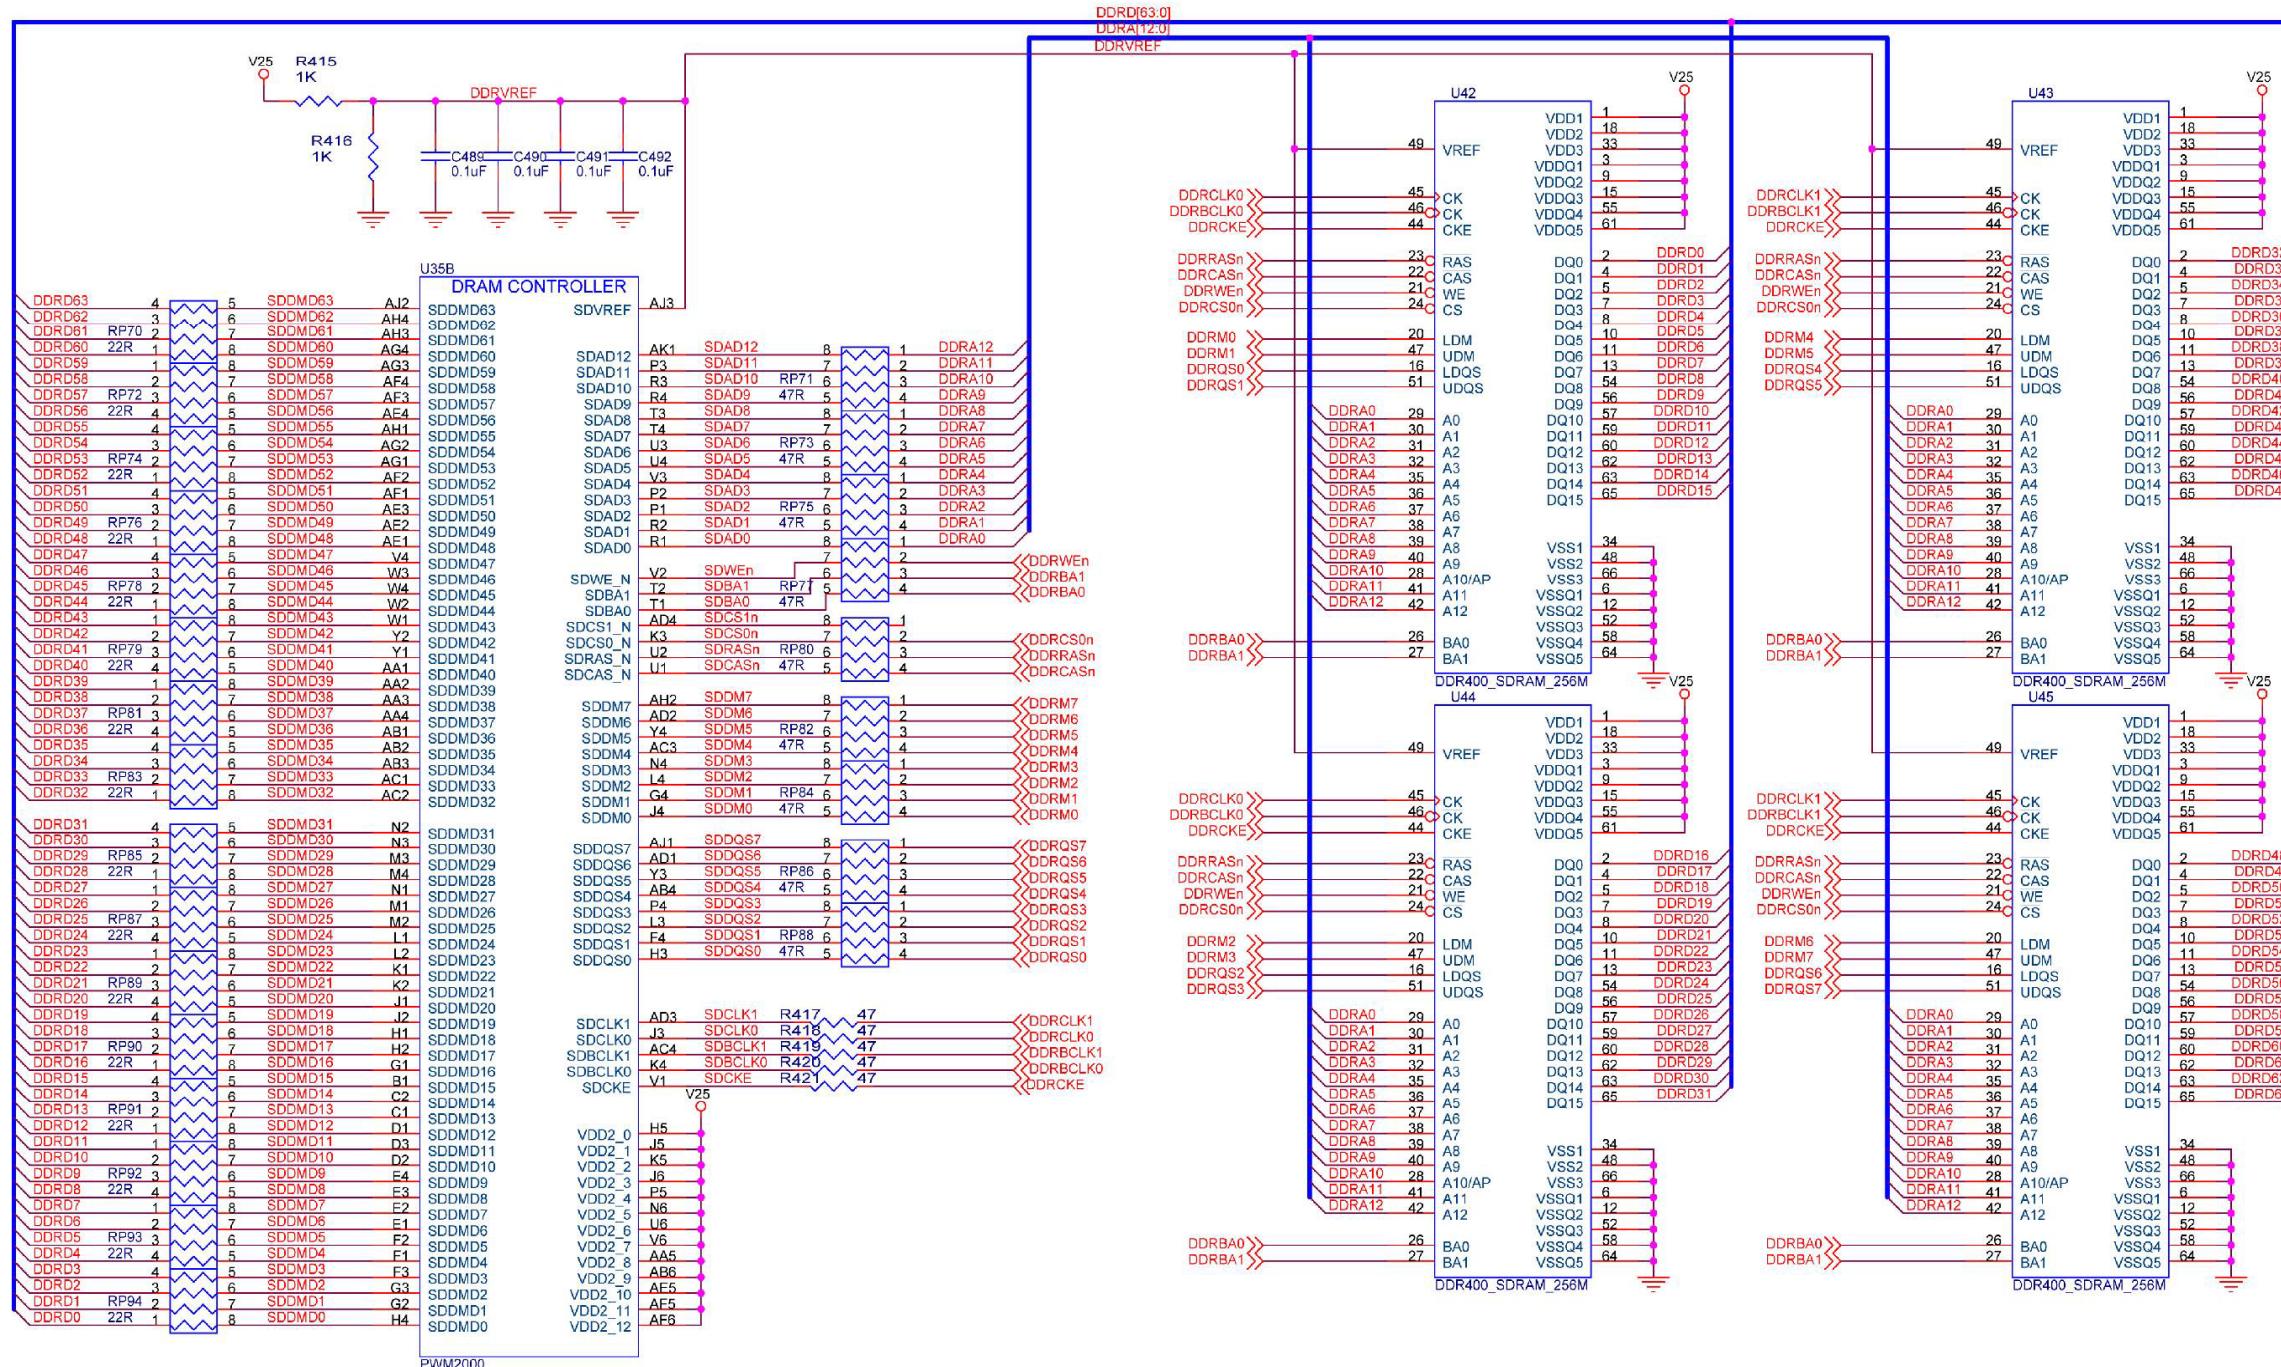


## 9.20 PWM2010 TRANSPORT STREAM & PWM2010 AUDIO

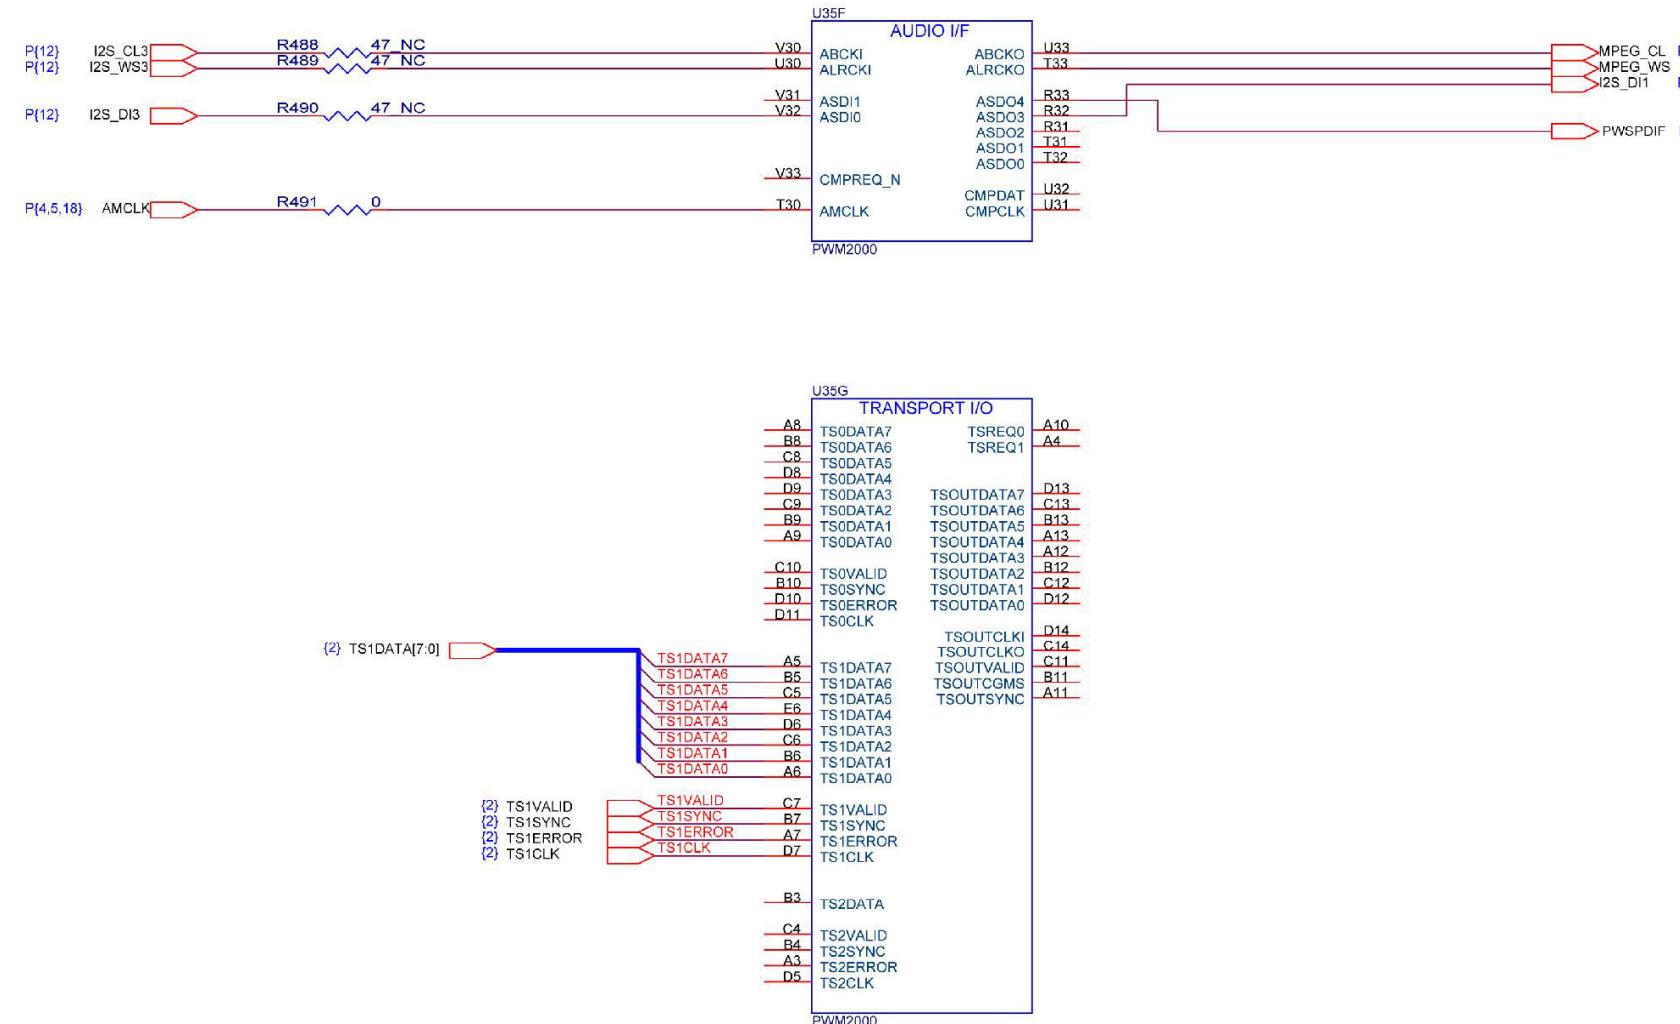


## 9.21 PWM2010 POWER

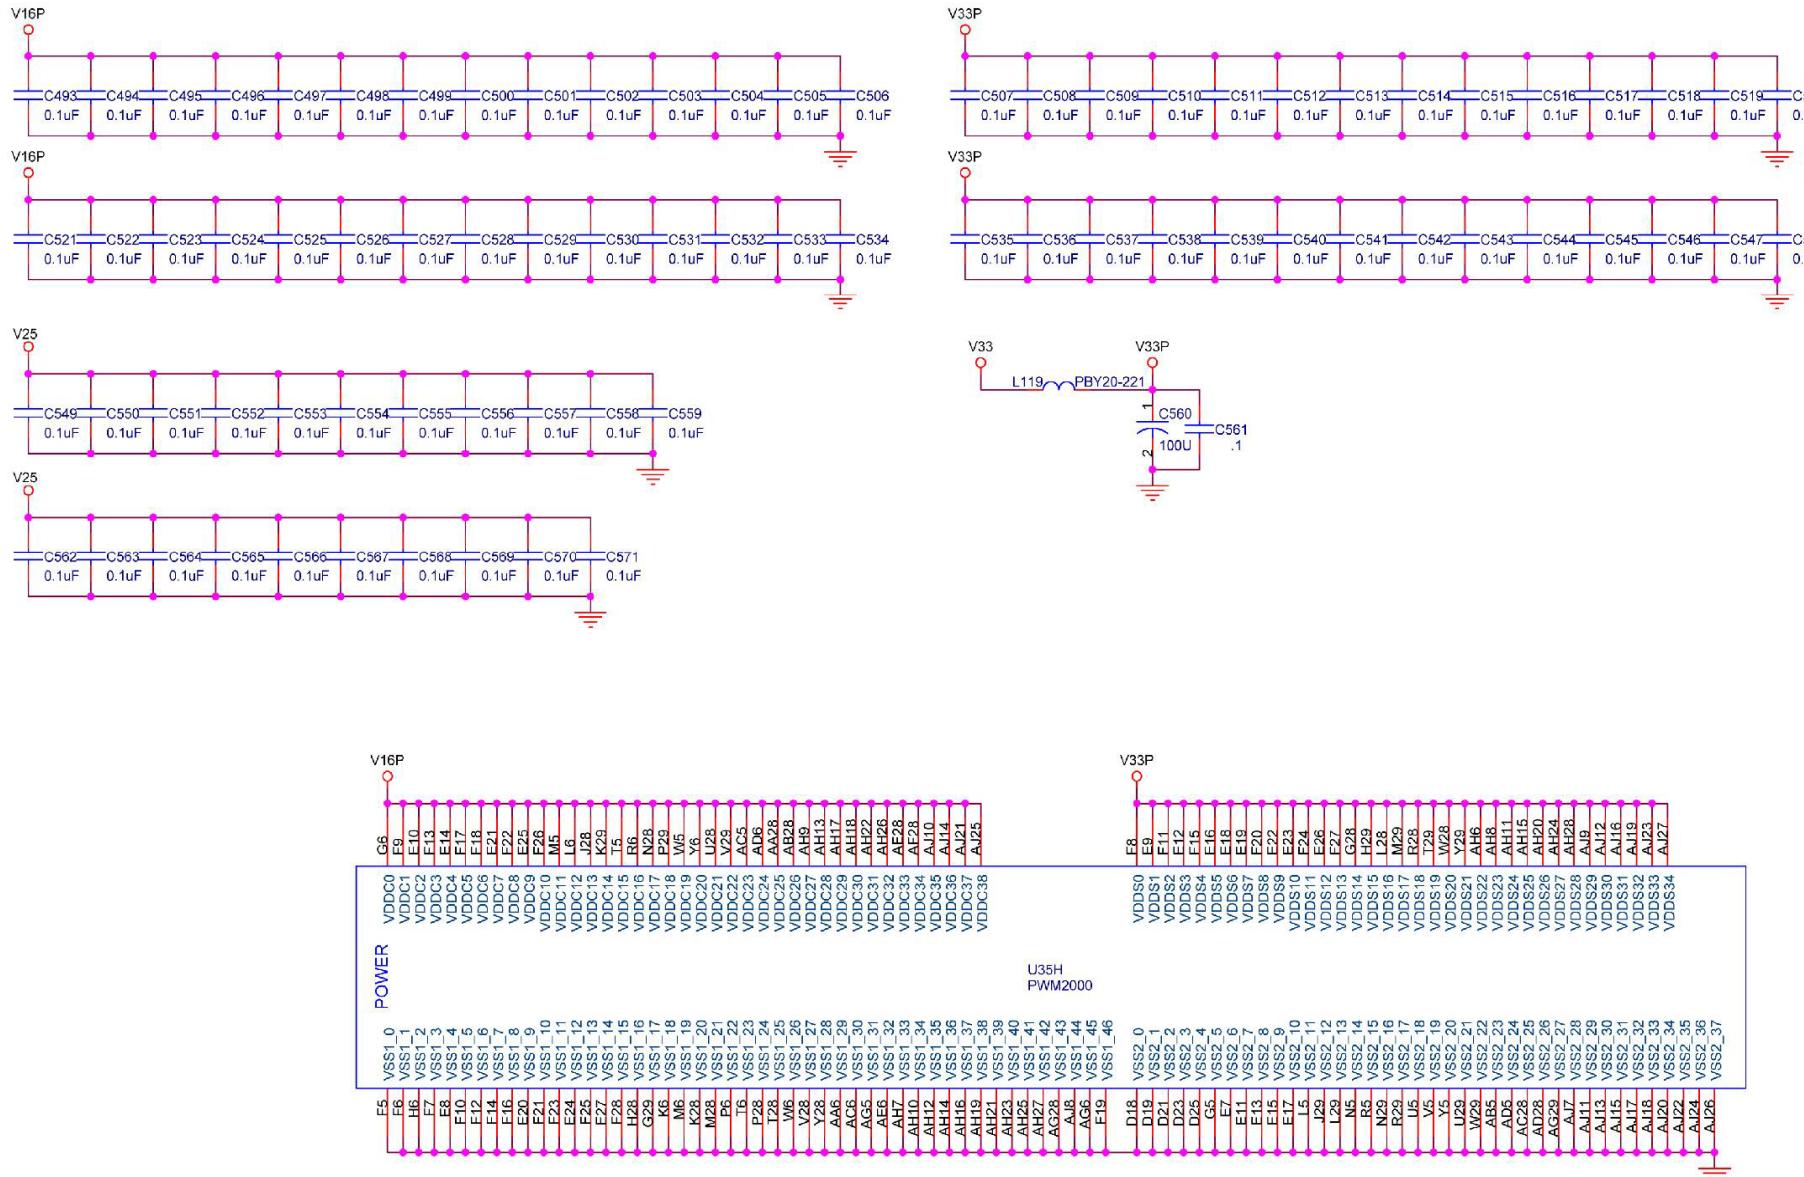


## 9.22 PWM2000 VIDEO OUTPUT

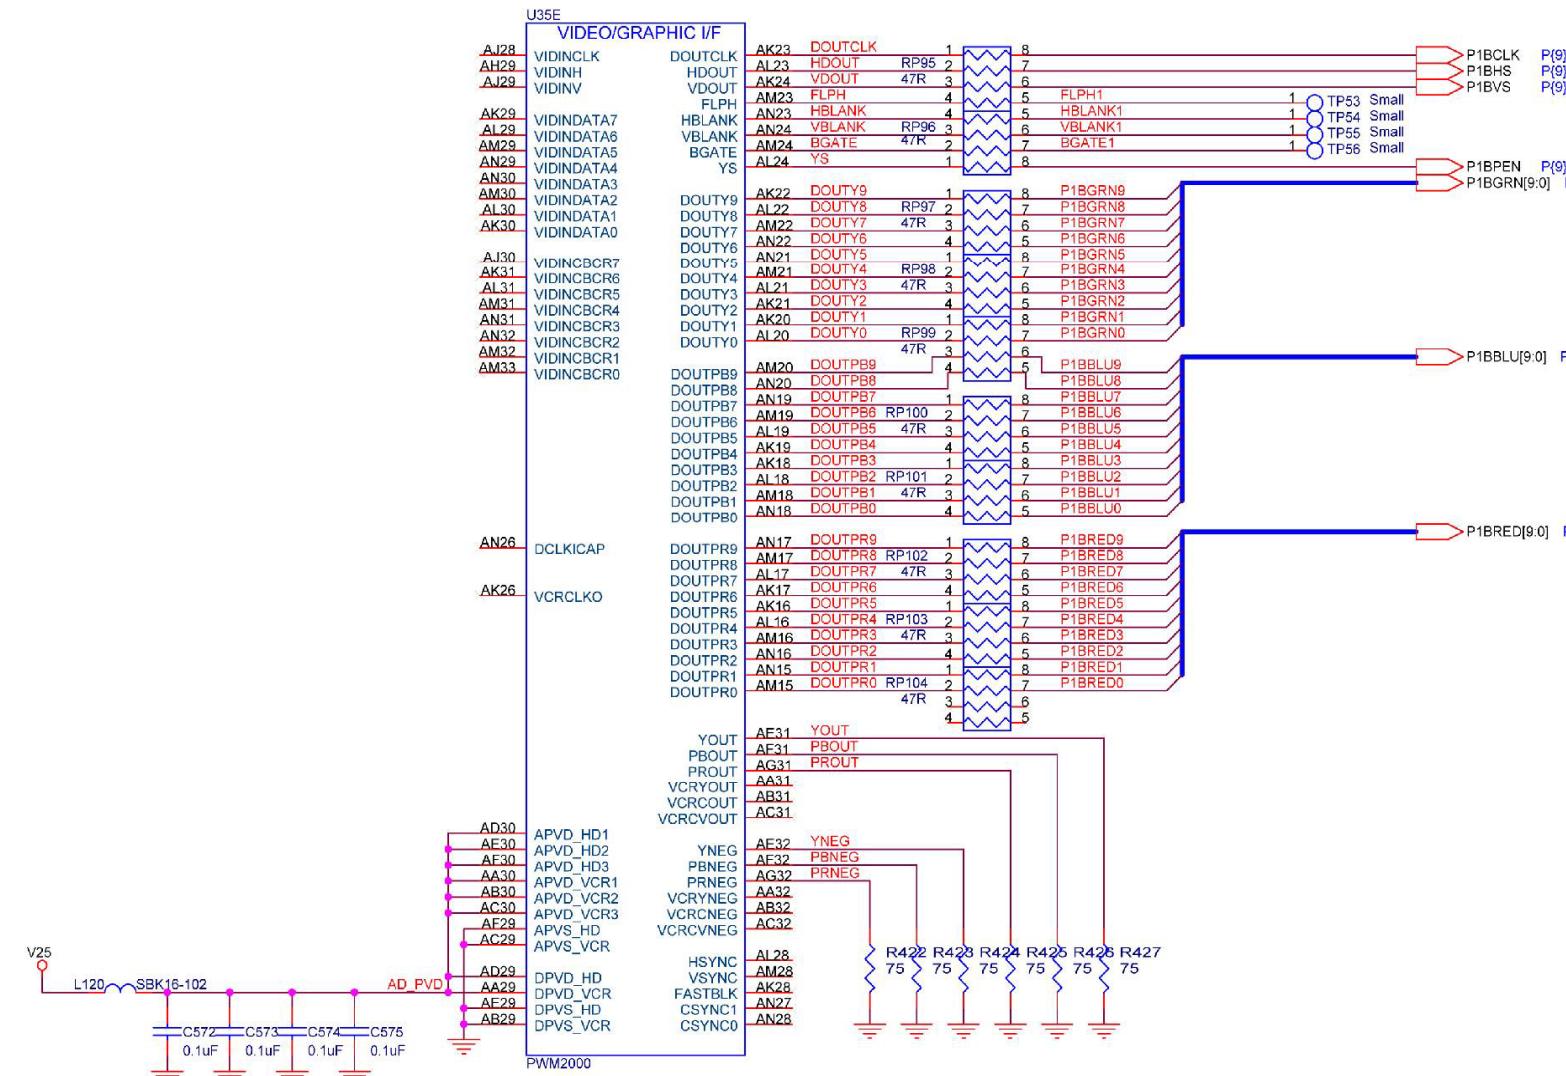


## 9.23 MICROCONTROLLER

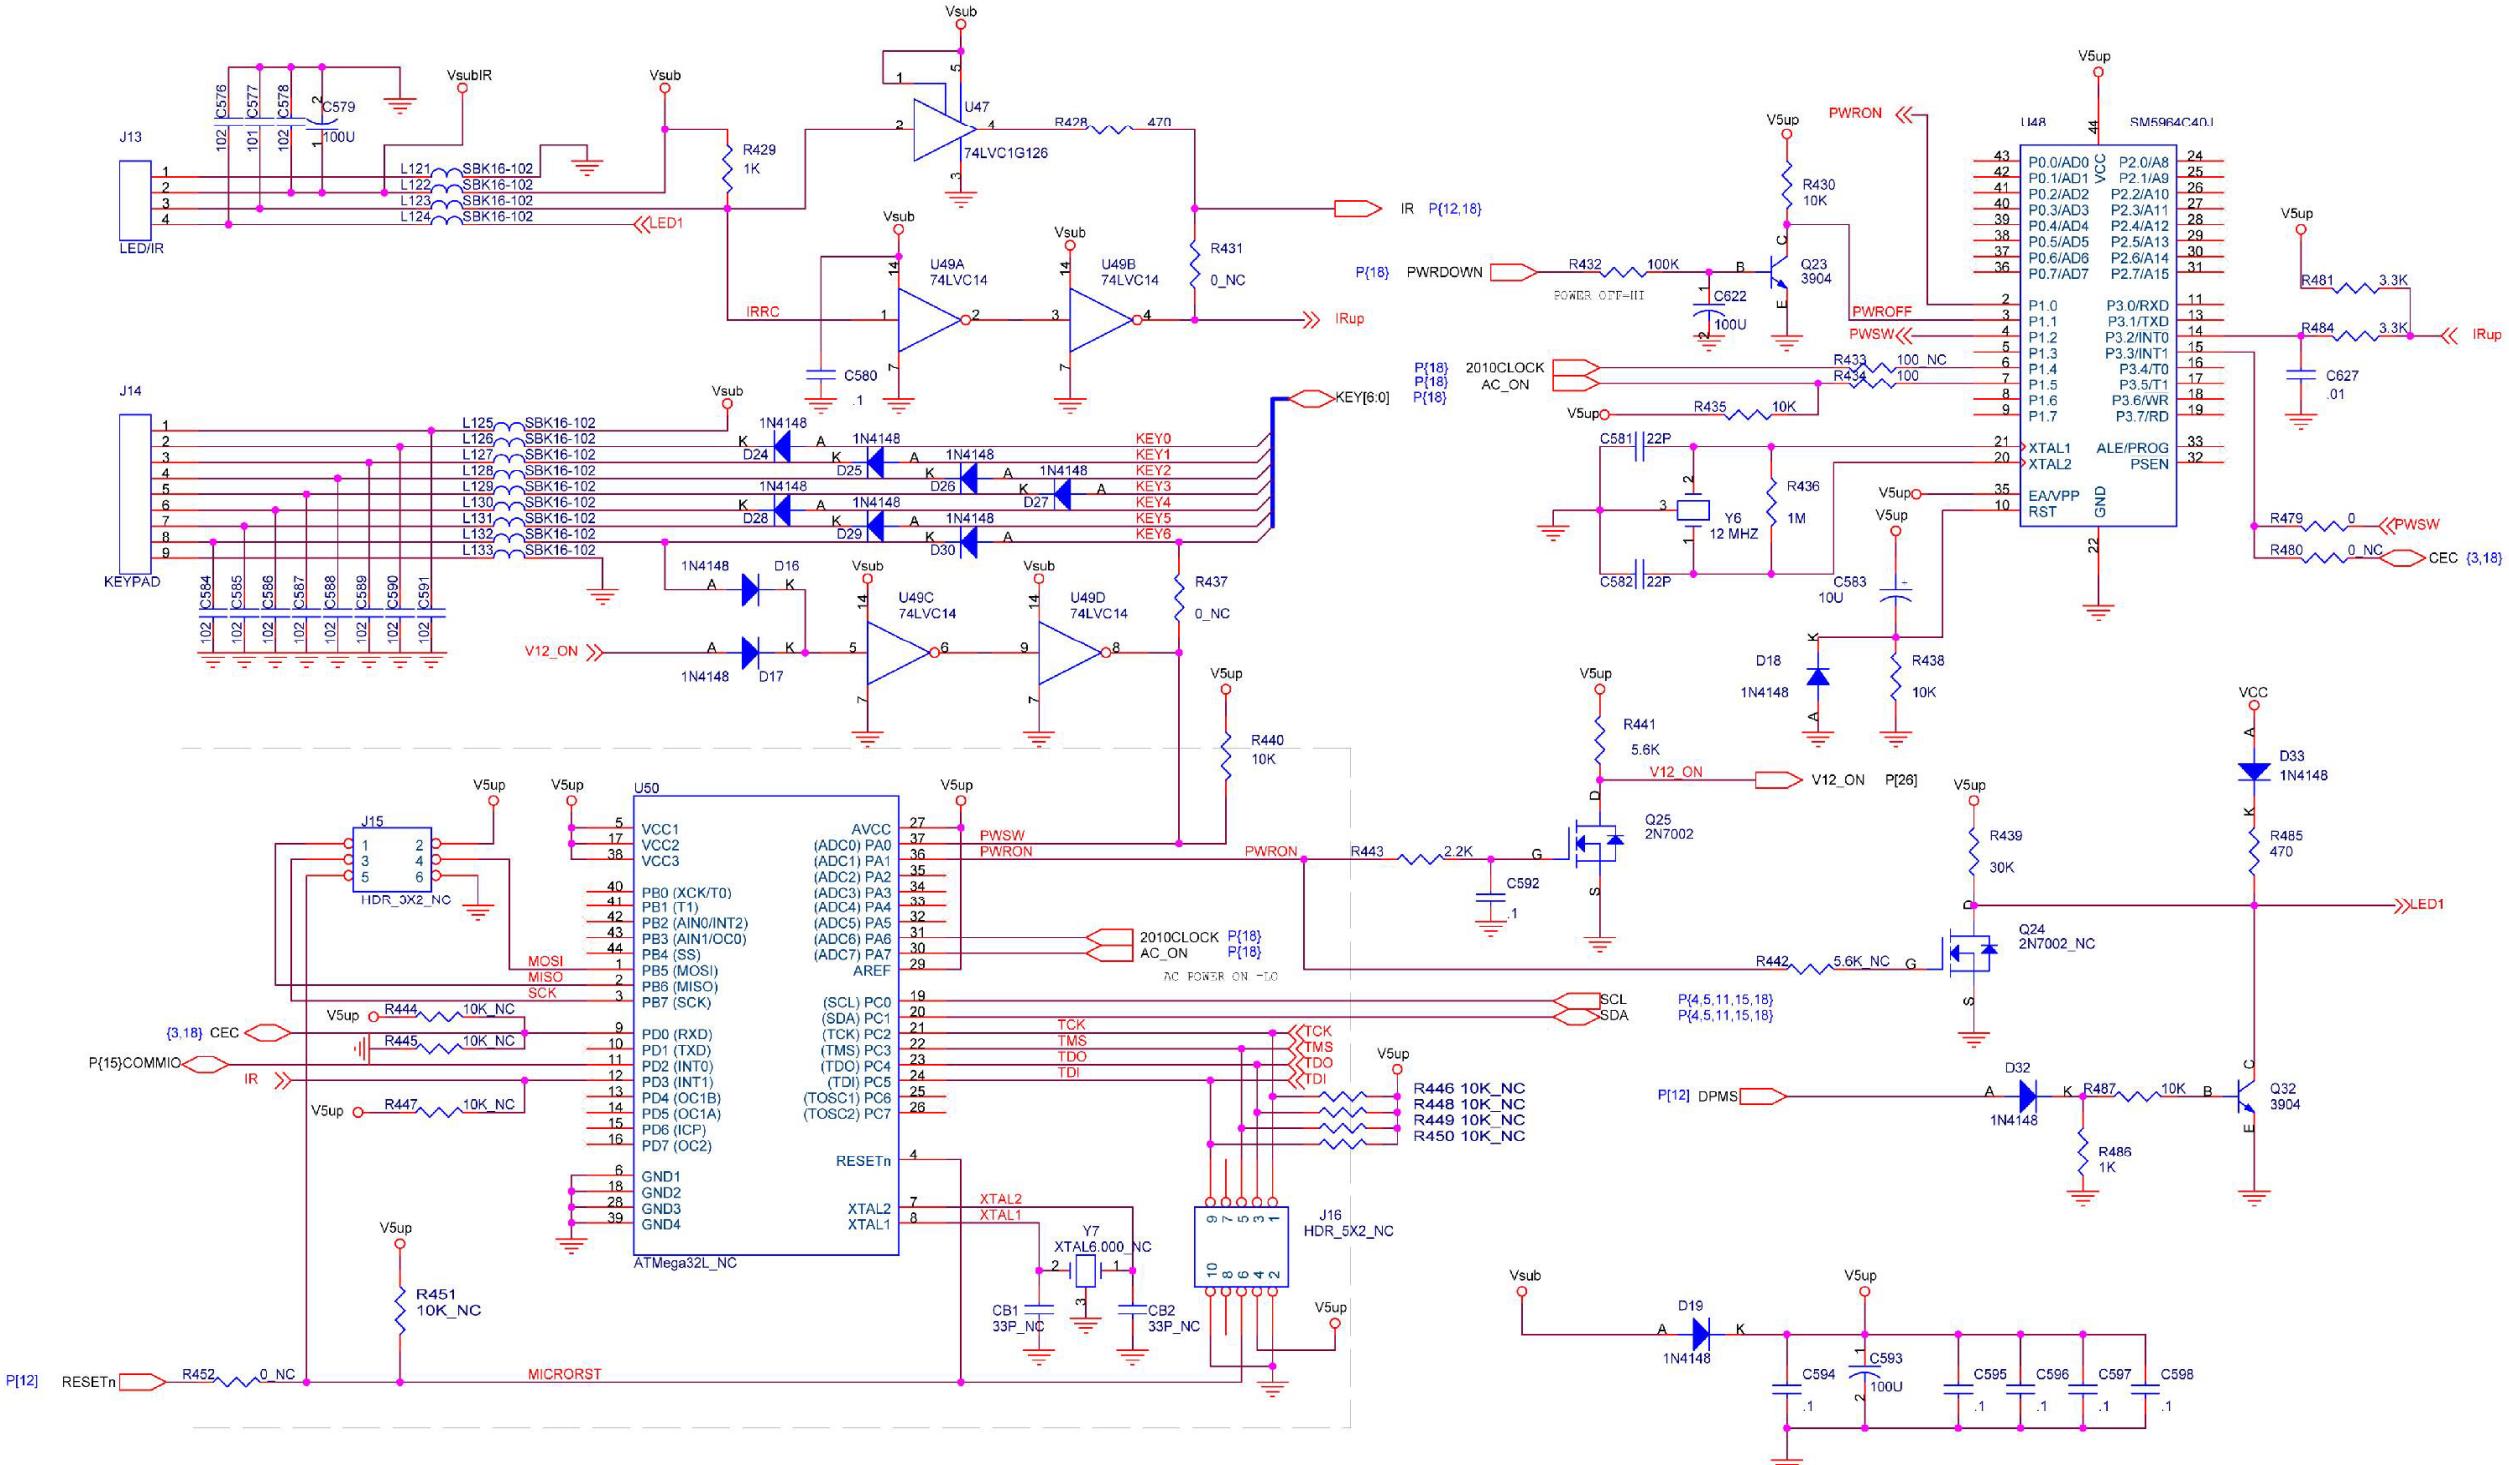

## 9.24 POWER / SWITCHES

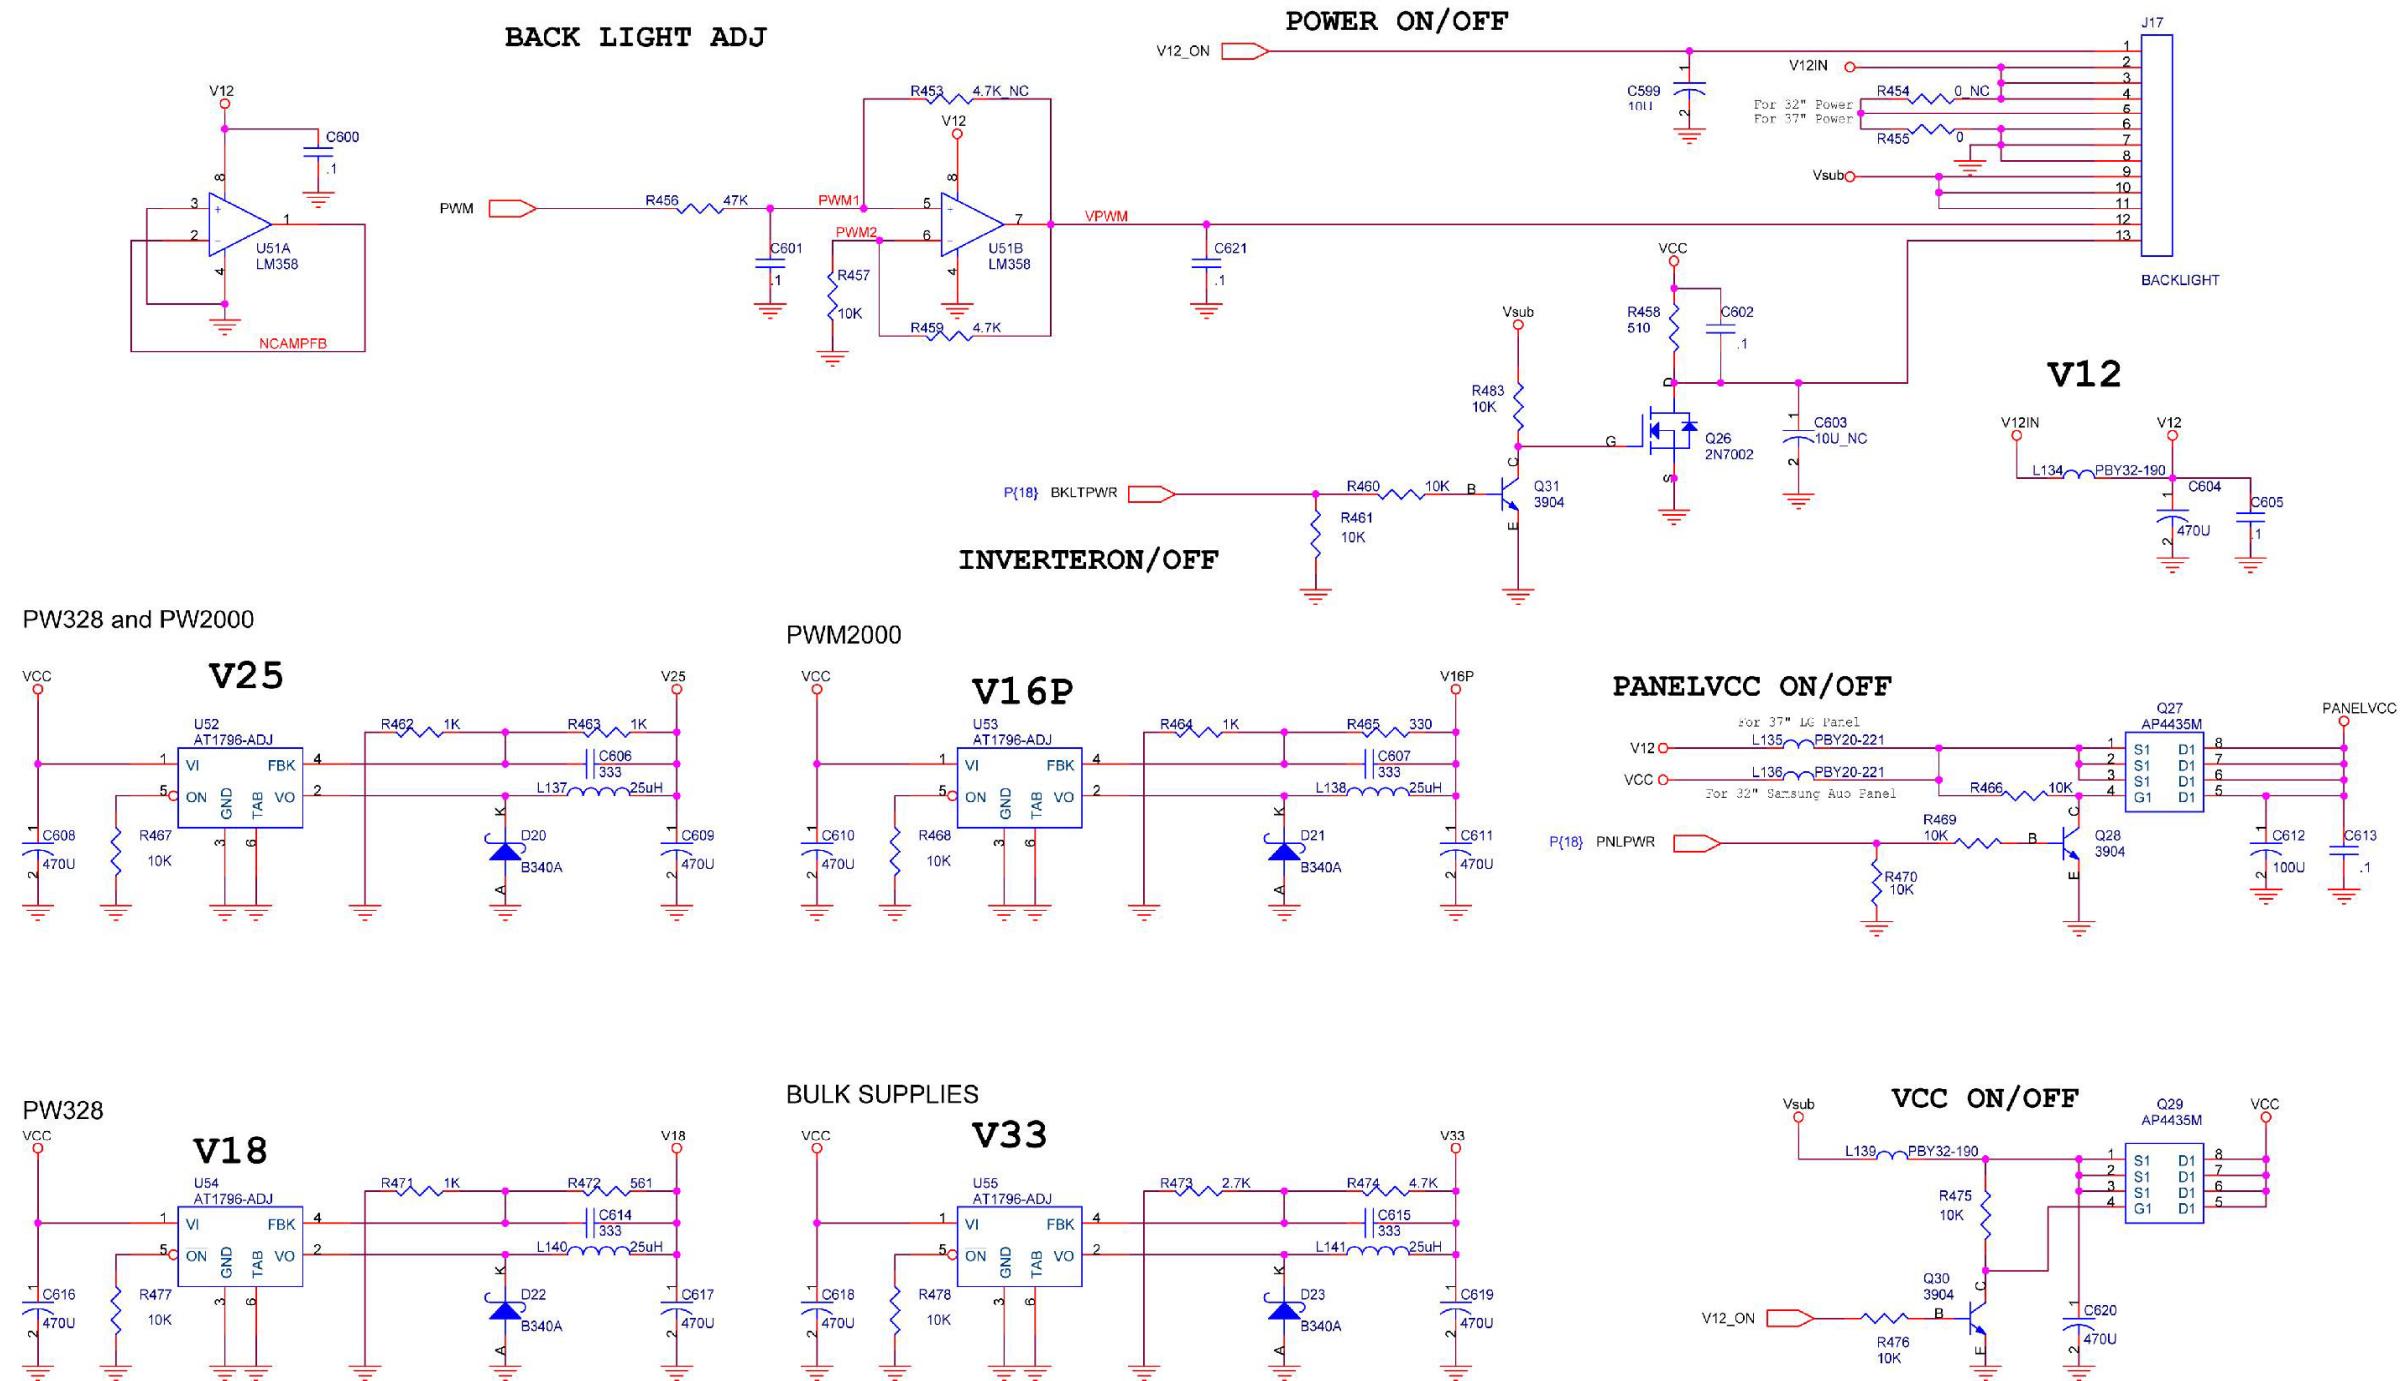


## **9.25 POWER TREE**

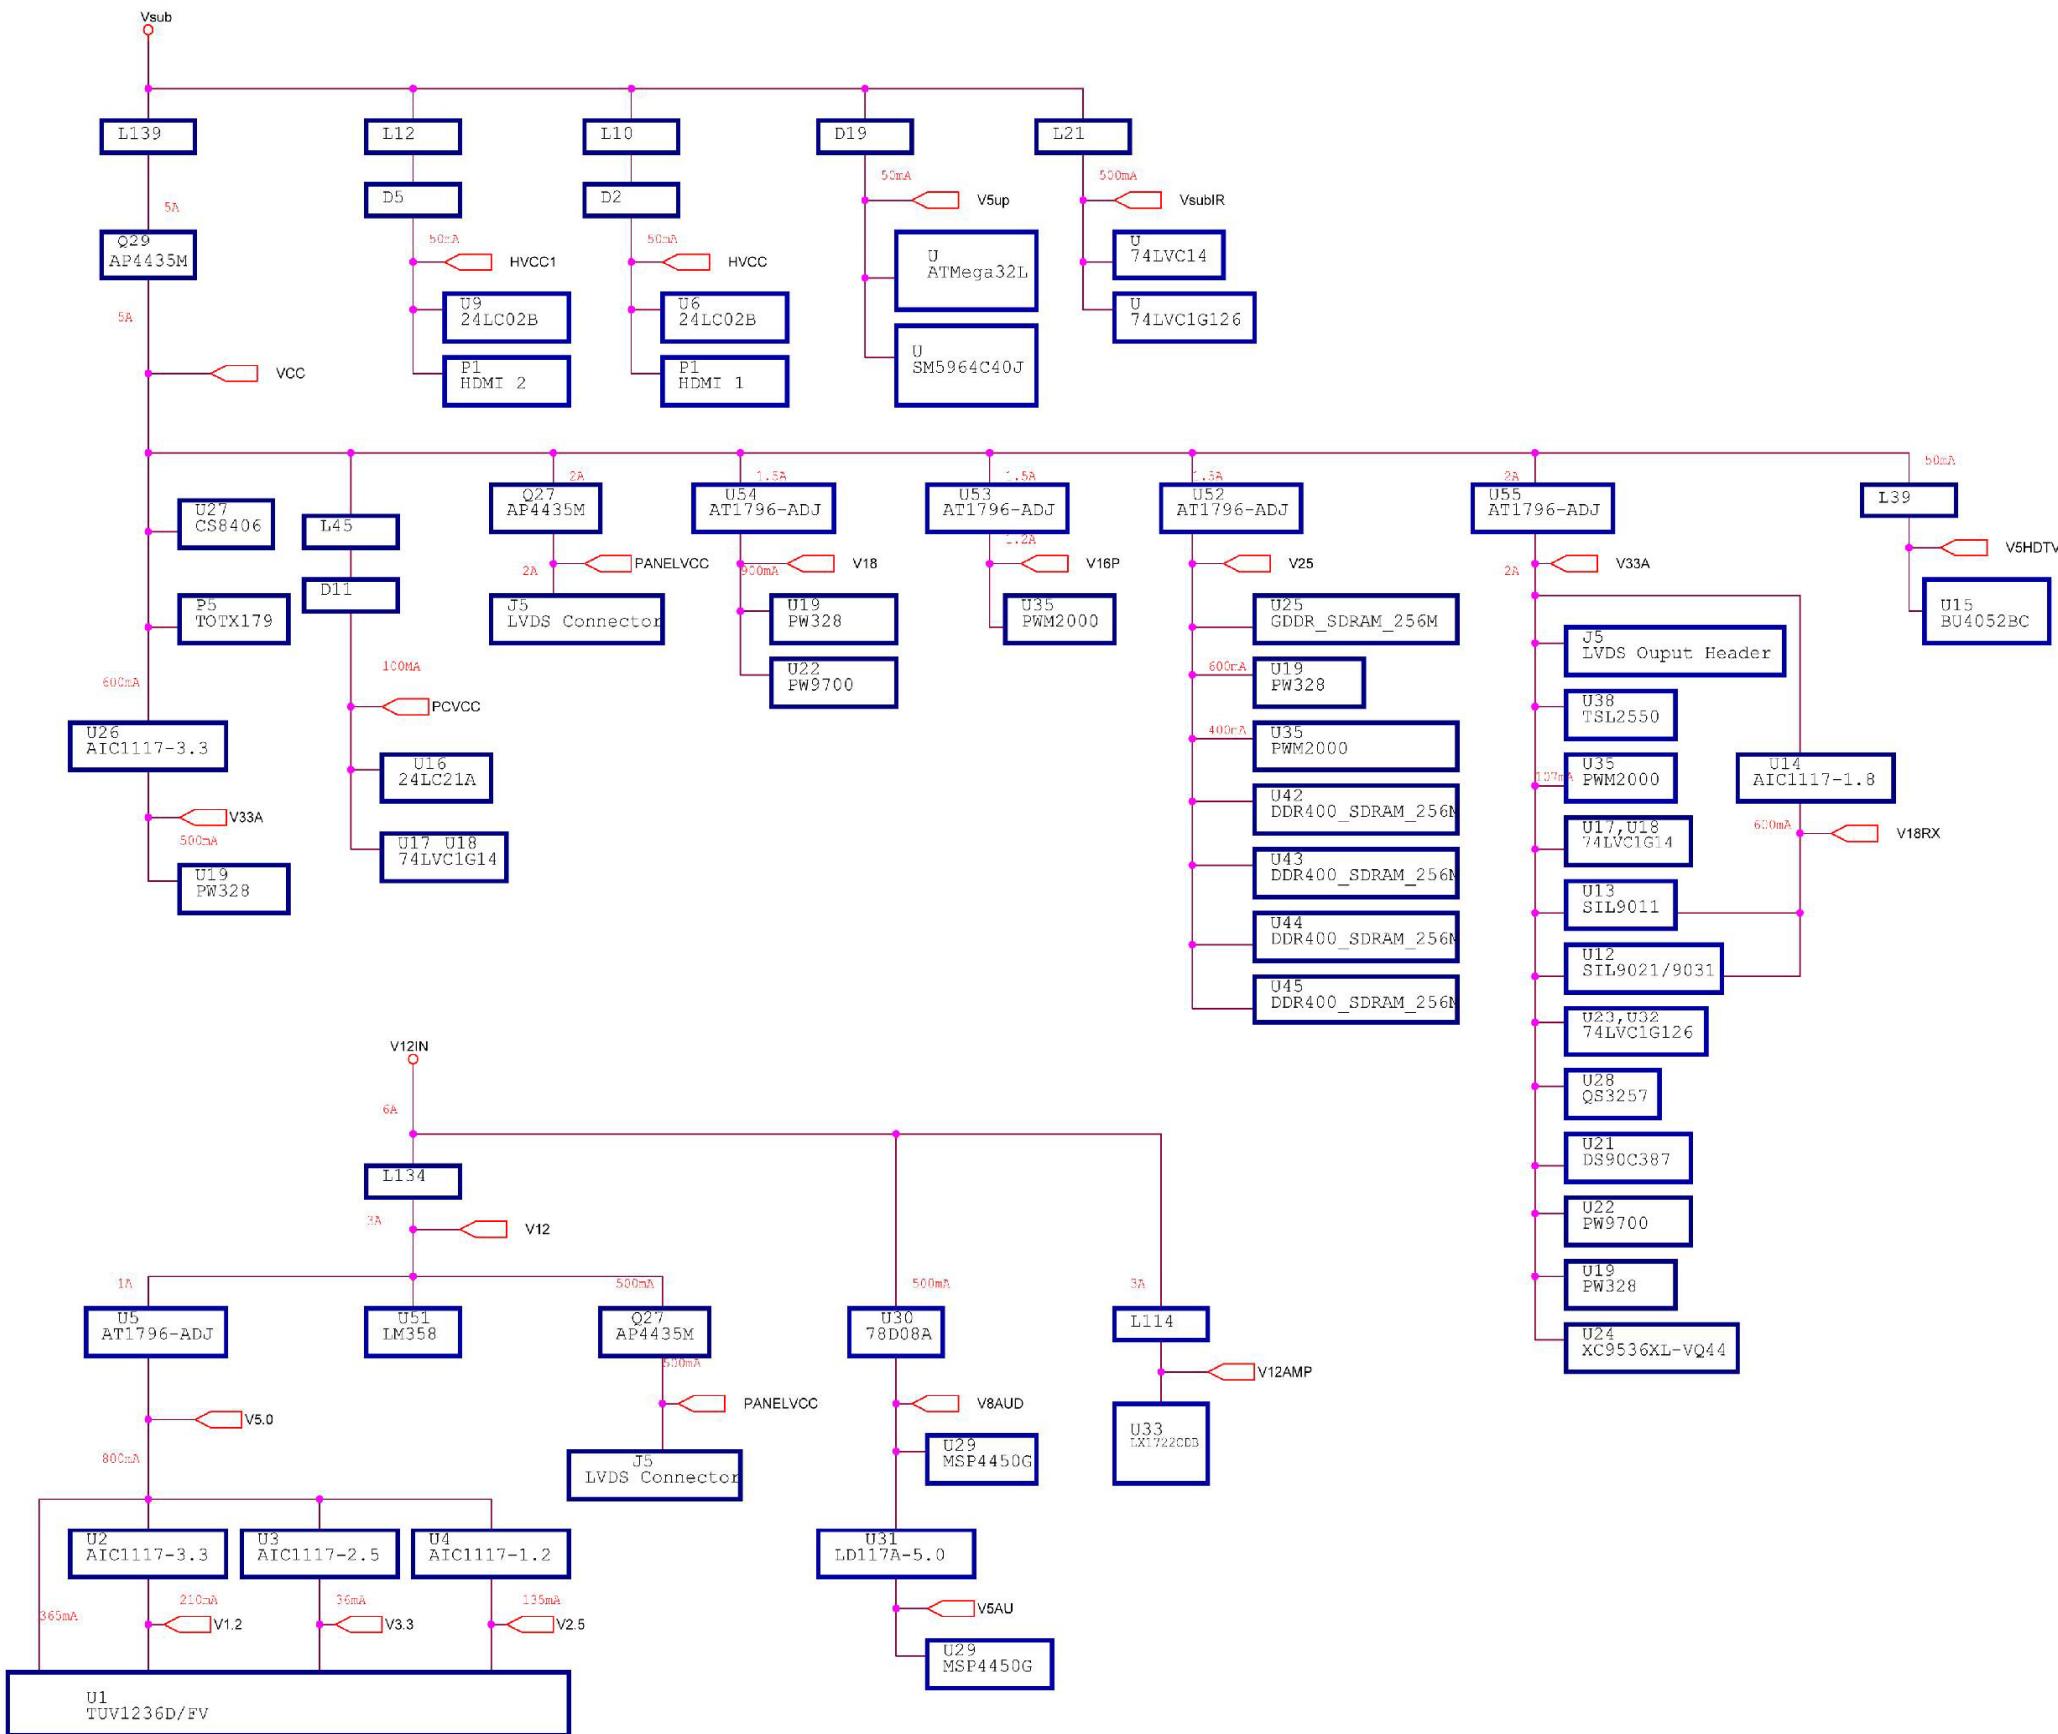


## 10. Exploded Diagram and Exploded Parts List


### 10.1 N3260w

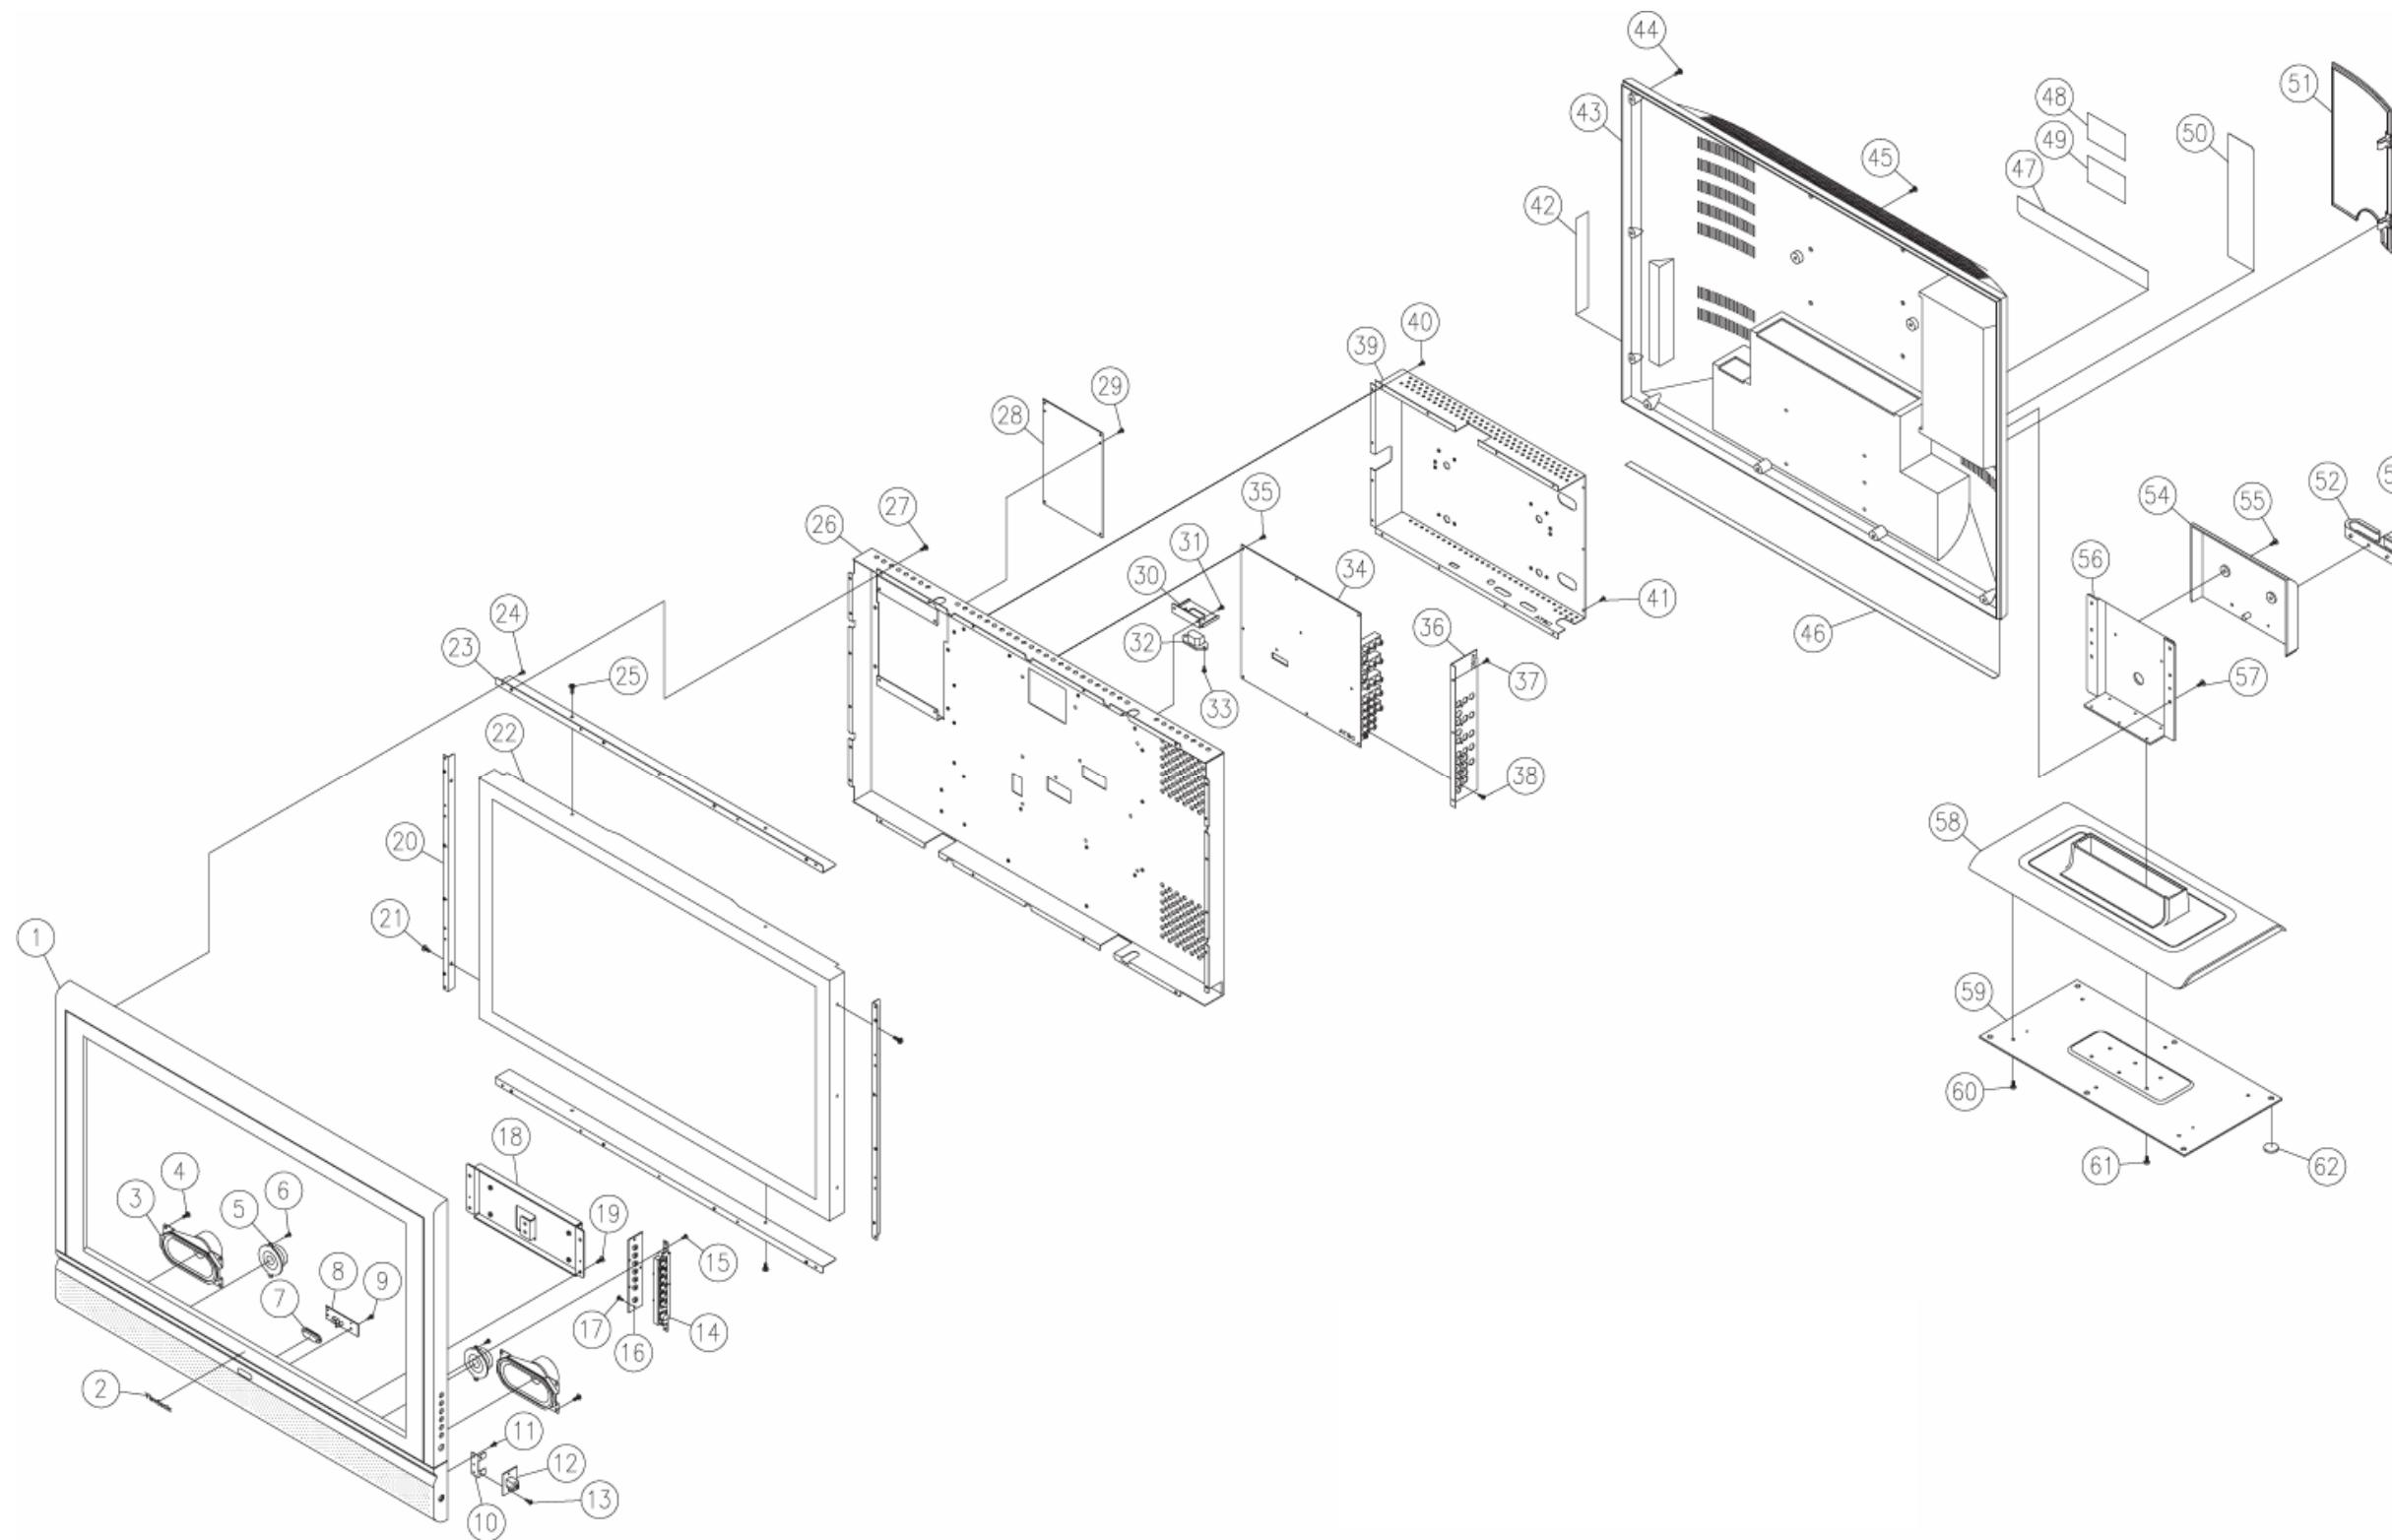

## 10.2 N3760w

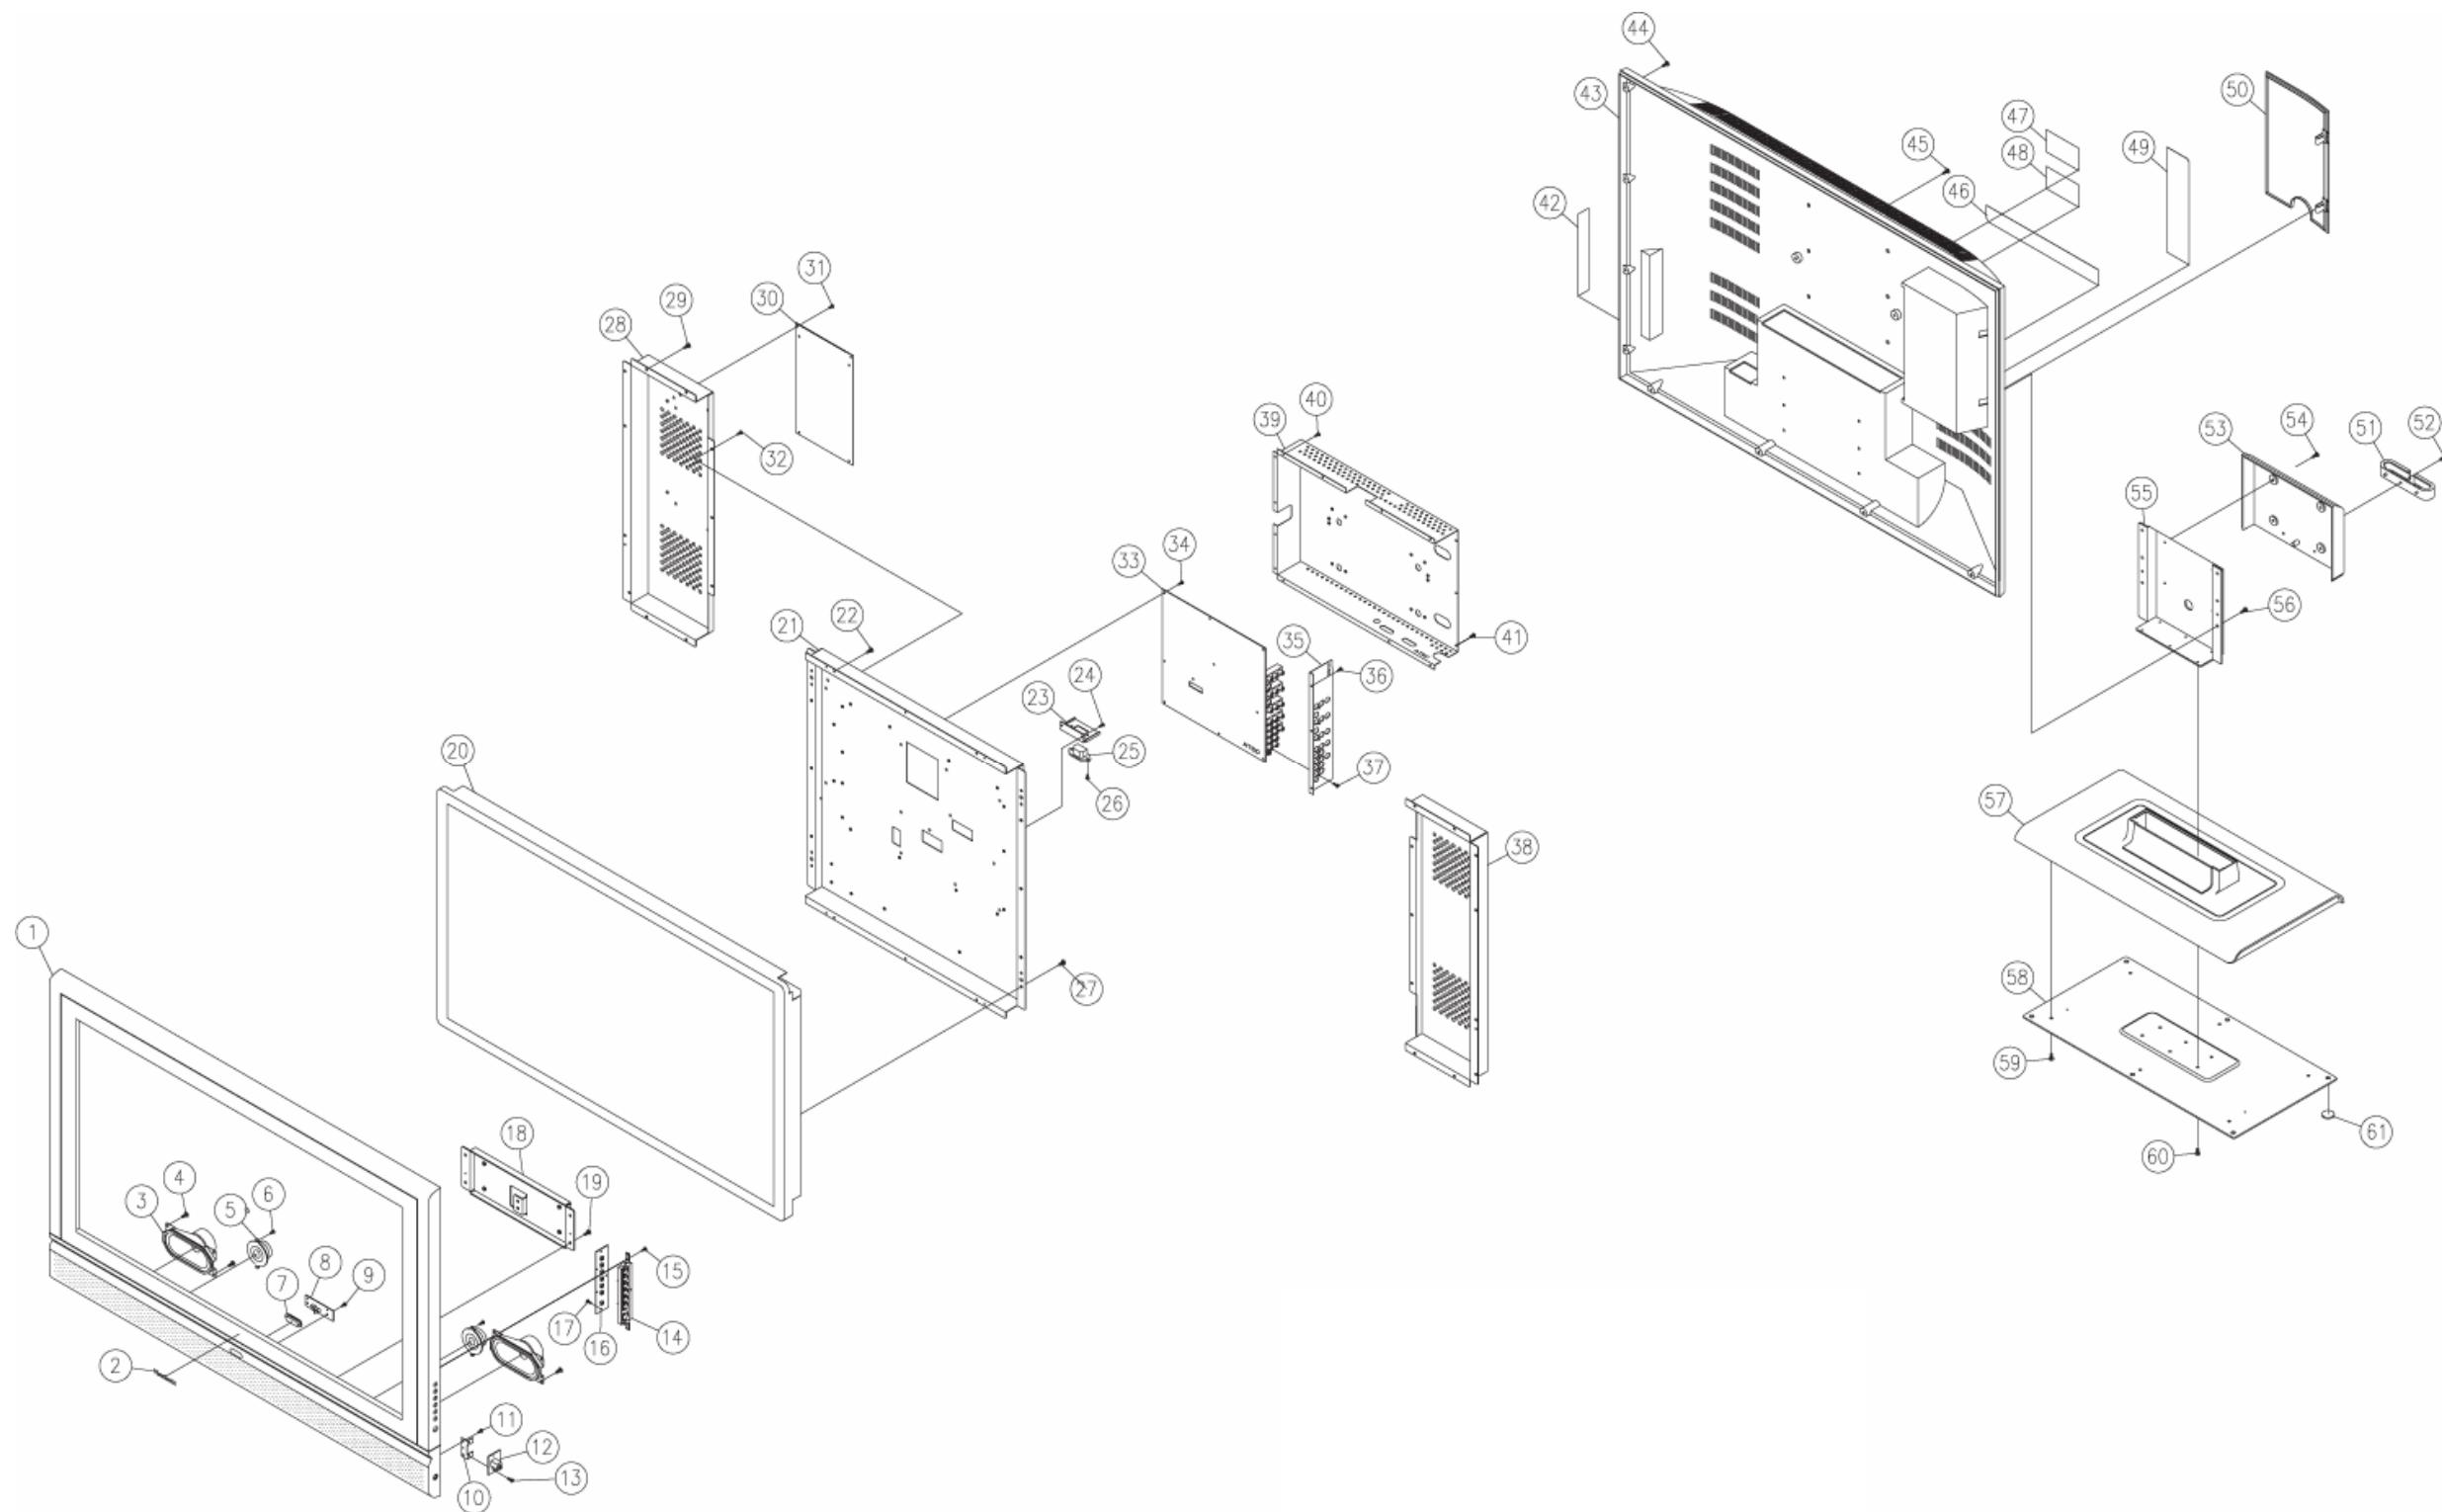

## 10.3 N4060w

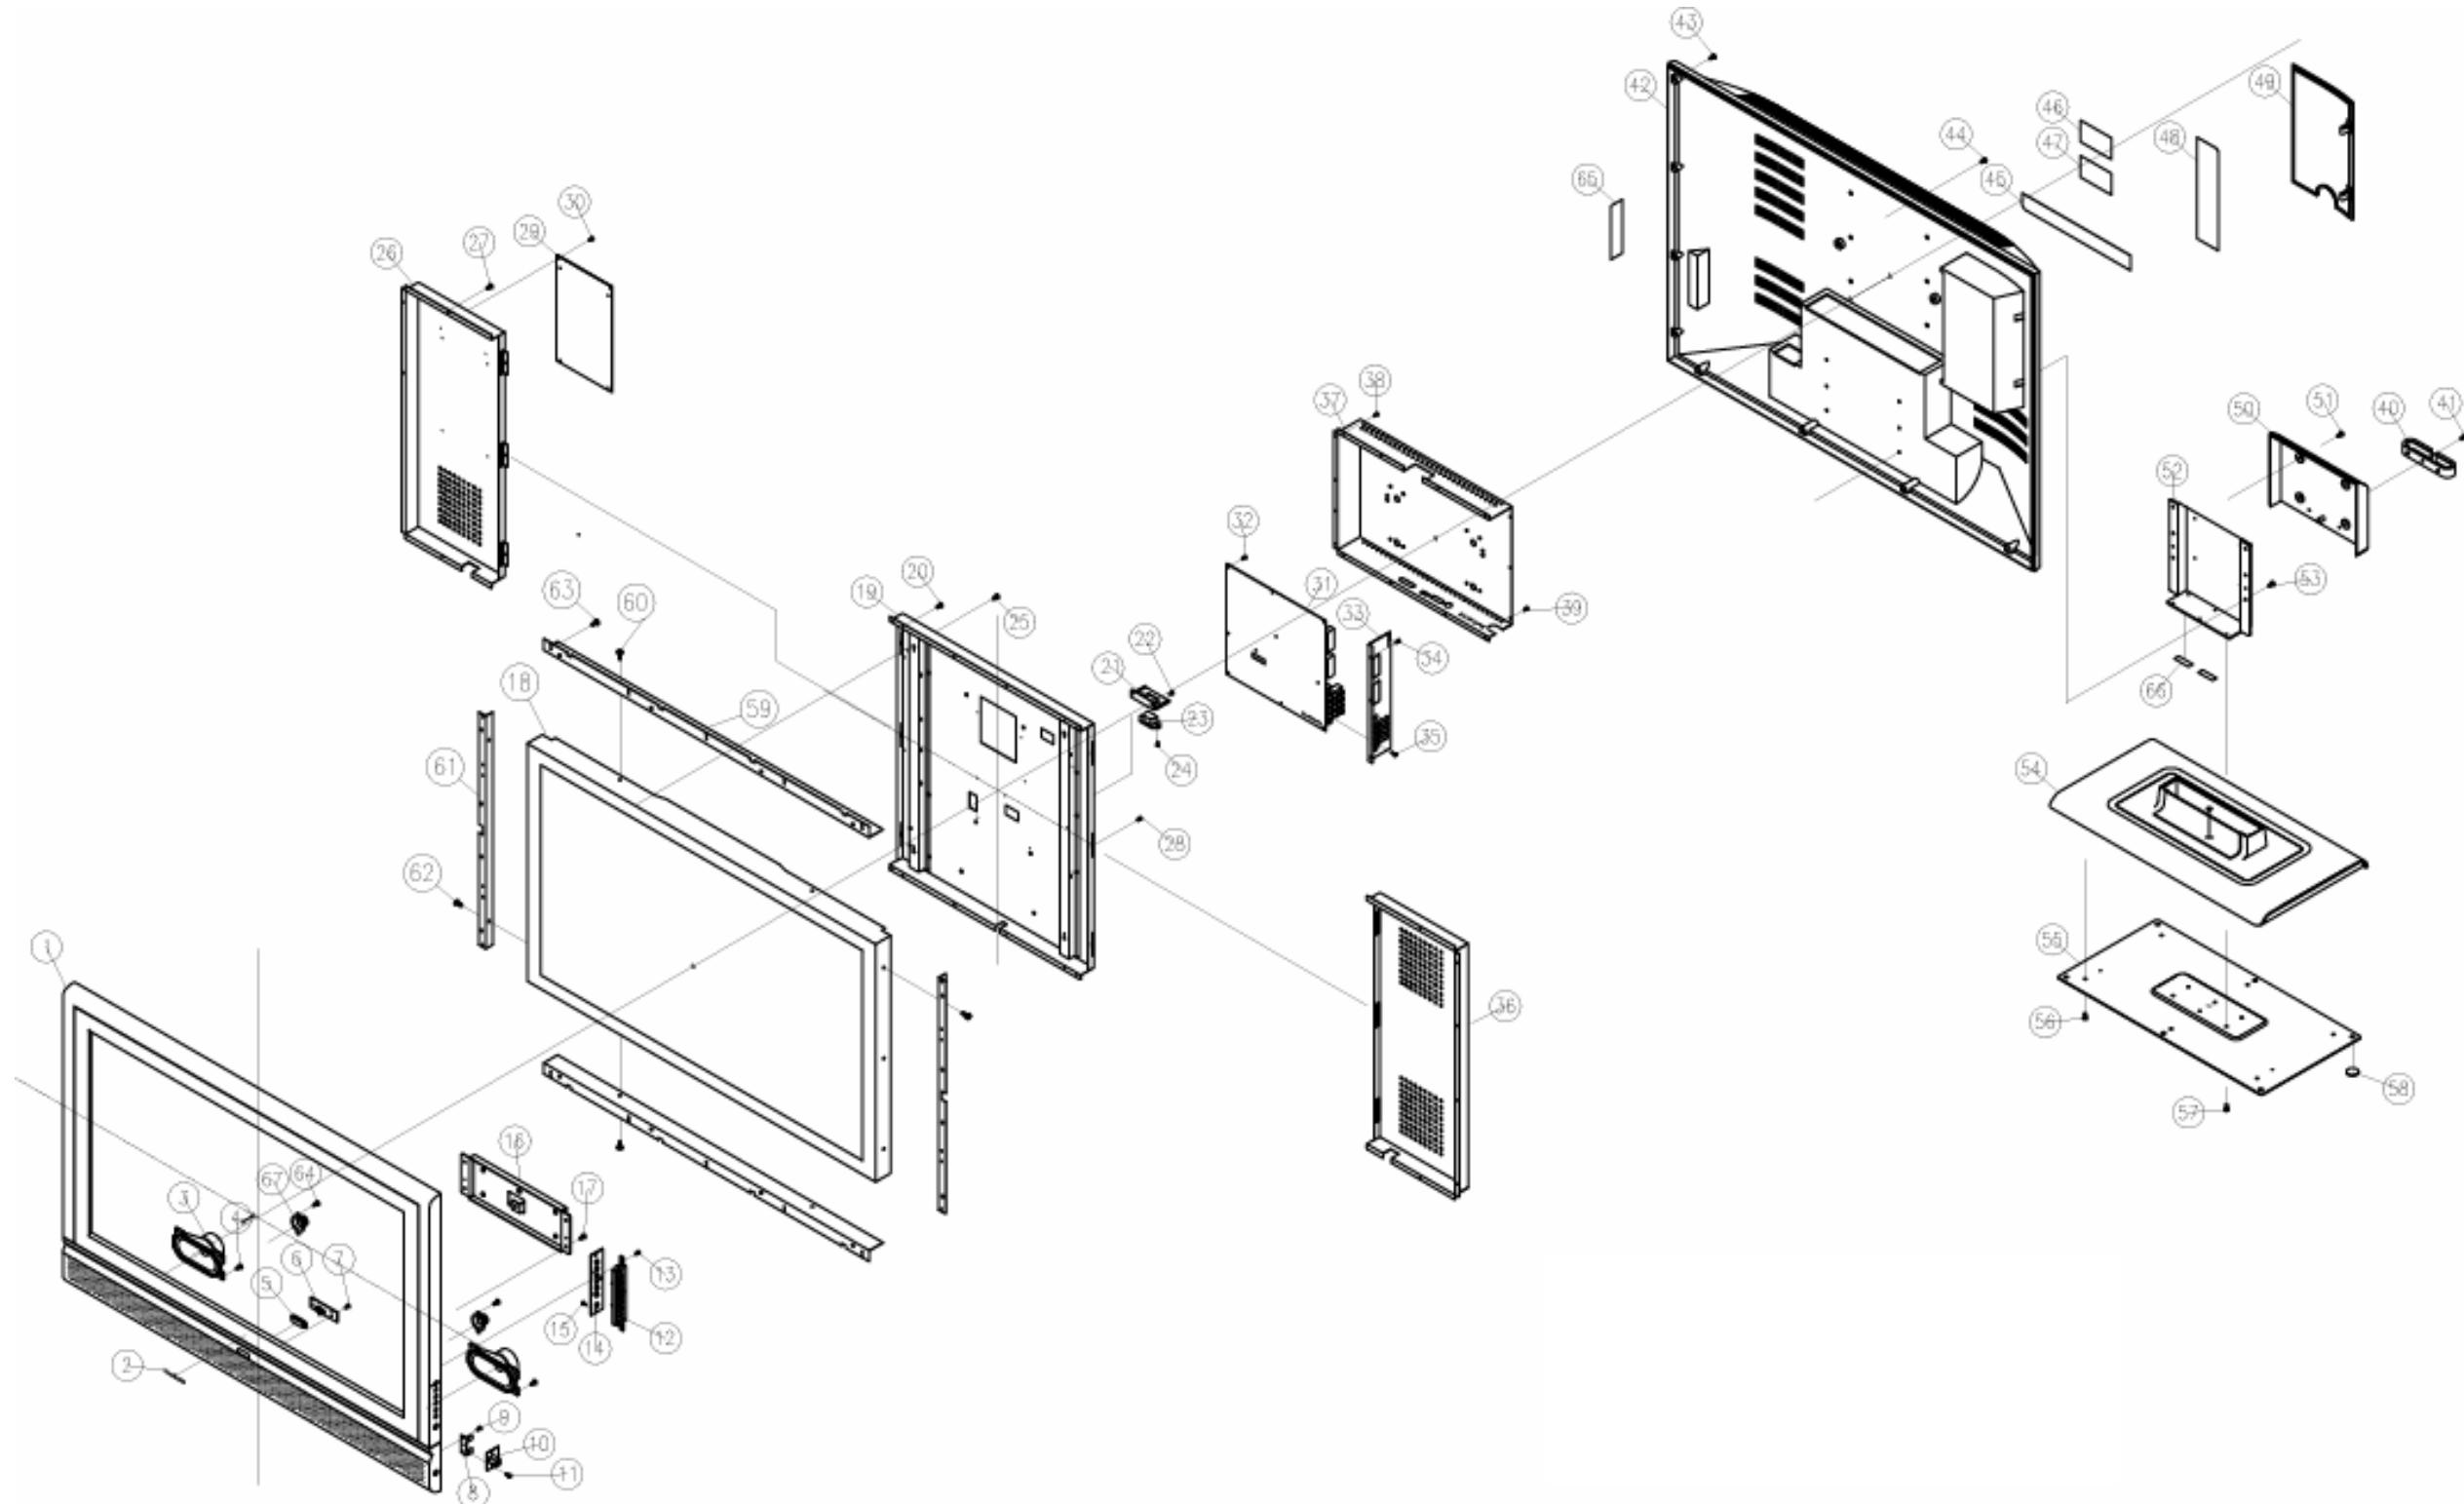

## EXPLODED PARTS LIST (N3260W)

**ViewSonic Model Number: VS10847-1M**

**Rev: 1b**

**Serial No. Prefix: PVA**

Item	ViewSonic P/N	Ref. P/N	Description	Q'ty
1	N/A	7024303008811	FRONT PANEL	1
2	N/A	7024734022111	NAME PLATE	1
3	E-00005475	735517000120G	SPK	2
4	N/A	780PB4010CB06	SCREW(SPK)	8
5	E-00005476	735512000060G	SPK	2
6	M-SCW-0824-6962	780PB3010CA01	SCREW(SPK)	4
7	M-00005487	7024414026311	DÉCOR PLATE RM	1
8	N/A	7TA3741AN110	LED PWB ASSY	1
9	M-SCW-0824-6962	780PB3010CA01	SCREW(LED PWB ASSY)	2
10	N/A	7024503018111	SUPPORT EAR.PWB	1
11	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT EAR.PWB)	2
12	N/A	7TA3741AL110	EAR.PWB ASSY	1
13	N/A	780PS3006CA00	SCREW(EAR.PWB ASSY)	2
14	PL-00005478	7024454014511	CTL KNOB	1
15	M-SCW-0824-6962	780PB3010CA01	SCREW(CTL KNOB)	2
16	B-0005472	7TA3741AH110	CTL PWB ASSY	1
17	M-SCW-0824-6962	780PB3010CA01	SCREW(CTL PWB ASSY)	2
18	N/A	7024503018011	SUPPORT	1
19	N/A	780PB4012CB06	SCREW	5
20	N/A	7024503017011	SUPPORT L.R	2
21	N/A	780PS4008CB06	SCREW(SUPPORT L.R)	4
22	N/A	7333063200502	TFT(AU)	1
23	N/A	7024503016911	SUPPORT TOP/BOTTOM	2
24	M-SCW-0824-6962	780PB3010CA01	SCREW	18
25	N/A	780PS4008CB06	SCREW(SUPPORT TOP/BOTTOM)	4
26	C-00005477	7024503016811	SUPPORT MAIN	1
27	M-SCW-0824-6962	780PB3010CA01	SCREW	16
28	N/A	7TA3241AA110	POWER PWB	1
29	N/A	780PS3006CA00	SCREW(POWER PWB)	4
30	N/A	7024504022711	SUPPORT AC	1
31	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT AC)	2
32	N/A	737420500290G	AC SOCAT	1
33	N/A	780XX40002711	SCREW(AC SOCAT)	2
34	B-00005471	7TA3241AF110	MAIN PWB ASSY	1
35	N/A	780PS3006CA00	SCREW(MAIN PWB ASSY)	10
36	N/A	7024503016211	SUPPORT JACK	1
37	N/A	780XX40002211	SCREW	3
38	M-SCW-0824-6962	780PB3010CA01	SCREW(JACK)	8
39	N/A	7024513005311	SHIELD MAIN PWB	1
40	N/A	780XX40002211	SCREW(SHIELD MAIN PWB)	12
41	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT JACK)	3
42	M-00005486	7024413057411	DÉCOR PLATE RM	1
43	C-00004609	7024313003111	BACK COVER	1
44	N/A	780PB4012CB07	SCREW(FRONT&BACK)	13
45	N/A	780PS4008CB06	SCREW(BACK&SHIELD)	2
46	N/A	7024614016111	DÉCOR SHEET	1
47	N/A	7024413056311	DÉCOR PLATE TN	1
48	N/A	7024764051911	LABEL MODEL	1
49	N/A	7024764041211	LABEL CAUTION	1
50	N/A	7024413055711	DÉCOR PLATE JACK	1
51	M-00005485	7024413056511	DÉCOR PLATE WIRE	1
52	PL-00004616	7024404012711	WIRE CLIP	1
53	N/A	780PB4012CB07	SCREW(WIRE CLIP)	1
54	M-00005483	7024413058511	DÉCOR PLATE HENGE	1
55	M-SCW-0824-6963	780PS4012CB08	SCREW(DÉCOR PLATE HENGE)	2
56	N/A	7024503017111	SUPPORT HENGE	1
57	M-SCW-0824-6963	780PS4012CB08	SCREW(SUPPORT ASSY&SET)	6
58	N/A	7024403012411	BOTTOM BASE	1
59	N/A	7024503017211	BASE SUPPORT SHEET	1
60	HW-00003604	780XX40002311	SCREW(HENGE&BASE SHEET)	6
61	N/A	780XX40002011	SCREW(BOTTOM BASE&BASE SHEET)	6
62	M-00005479	7024614014311	PAD	6

## EXPLODED PARTS LIST (N3760W)

**ViewSonic Model Number: VS10848-1M**

**Rev: 1b**

**Serial No. Prefix: PVE**

<b>Item</b>	<b>ViewSonic P/N</b>	<b>Ref. P/N</b>	<b>Description</b>	<b>Q'ty</b>
1	C-00005489	7024303008911	FRONT PANEL	1
2	N/A	7024734022211	NAME PLATE	1
3	E-00005475	735517000120G	SPK	2
4	N/A	780PB4010CB06	SCREW(SPK)	8
5	E-00005476	735512000060G	SPK	2
6	M-SCW-0824-6962	780PB3010CA01	SCREW(SPK)	4
7	M-00005487	7024414026311	DÉCOR PLATE RM	1
8	N/A	7TA3741AN110	LED PWB ASSY	1
9	M-SCW-0824-6962	780PB3010CA01	SCREW(LED PWB ASSY)	2
10	N/A	7024503018111	SUPPORT EAR.PWB	1
11	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT EAR.PWB)	2
12	N/A	7TA3741AL110	EAR.PWB ASSY	1
13	N/A	780PS3006CA00	SCREW(EAR.PWB ASSY)	2
14	PL-00005478	7024454014511	CTL KNOB	1
15	M-SCW-0824-6962	780PB3010CA01	SCREW(CTL KNOB)	2
16	B-00005472	7TA3741AH110	CTL PWB ASSY	1
17	M-SCW-0824-6962	780PB3010CA01	SCREW(CTL PWB ASSY)	2
18	N/A	7024503017911	SUPPORT	1
19	N/A	780PB4012CB06	SCREW	5
20	N/A	7333063700102	TFT(L.G)	1
21	C-00005490	7024503017411	SUPPORT MAIN(M)	1
22	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT MAIN(M))	6
23	N/A	7024504022711	SUPPORT AC	1
24	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT AC)	2
25	N/A	737420500310G	AC SOCAT	1
26	N/A	780XX40002711	SCREW(AC SOCAT)	2
27	N/A	780PS4008CB06	SCREW(TFT & SUPPORT MAIN(M))	8
28	N/A	7024503017611	SUPPORT MAIN(R)	1
29	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT MAIN(L,R))	16
30	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT MAIN(L,R))	6
31	N/A	7TA3741AA110	POWER PWB ASSY	1
32	N/A	780PS3006CA00	SCREW(POWER PWB ASSY)	4
33	B-00005488	7TA3741AF110	MAIN PWB ASSY	1
34	N/A	780PS3006CA00	SCREW(MAIN PWB ASSY)	9
35	N/A	7024503018311	SUPPORT JACK	1
36	N/A	780XX40002211	SCREW(SUPPORT JACK)	3
37	M-SCW-0824-6962	780PB3010CA01	SCREW(JACK)	8
38	N/A	7024503017511	SUPPORT MAIN(L)	1
39	N/A	7024513005311	SHIELD MAIN PWB	1
40	N/A	780XX40002211	SCREW(SHIELD MAIN PWB)	12
41	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT JACK)	3
42	M-00005486	7024413057411	DÉCOR PLATE	1
43	C-00004624	7024313003211	BACK COVER	1
44	N/A	780PB4012CB07	FRONT & BACK	16
45	N/A	780PS4008CB06	BACK&SHIELD	3
46	M-00005484	7024413057111	DÉCOR PLATE TN	1
47	N/A	7024764052411	LABEL MODEL	1
48	N/A	7024764041211	LABEL CAUTION	1
49	M-00005482	7024413056811	DÉCOR PLATE JACK	1
50	M-00005493	7024413056711	DÉCOR PLATE WIRE	1
51	PL-00004616	7024404012711	WIRE CUP	1
52	N/A	780PB4012CB07	SCREW(WIRE CLP)	1
53	M-00005492	7024413058611	DÉCOR PLATE HENGE	1
54	M-SCW-0824-6963	780PS4012CB08	SCREW(DÉCOR PLATE HENGE)	4
55	N/A	7024503017711	SUPPORT HENGE	1
56	M-SCW-0824-6963	780PS4012CB08	SUPPORT(SUPPORT ASSY&SET)	6
57	N/A	7024403012511	BOTTOM BASE	1
58	N/A	7024503017811	BASE SUPPORT SHEET	1
59	HW-00003604	780XX40002311	SCREW(HENGE&BASE SHEET)	6
60	N/A	780XX40002011	SCREW(BOTTOM BASE&BASE SHEET)	6
61	M-00005479	7024614014311	PAD	6

## EXPLODED PARTS LIST (N4060W)

ViewSonic Model Number: VS10846-1M

Rev: 1b

**Serial No. Prefix: PV6**

Item	ViewSonic P/N	Ref. P/N	Description	Q'ty
1	C-00005495	7024303009011	FRONT PANEL	1
2	N/A	7024734022211	NAME PLATE	1
3	E-00004604	735527000010G	SPK	2
4	N/A	780PB4010CB06	SCREW(SPK ASSY)	8
5	M-00005487	7024414026311	DÉCOR PLATE RM	1
6	B-00004621	7TL3741RN110	LED PWB ASSY	1
7	M-SCW-0824-6962	780PB3010CA01	SCREW(LED PWB ASSY)	2
8	N/A	7024503018111	SUPPORT EAR.PWB	1
9	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT EAR.PWB)	2
10	B-00004620	7TL3741RL110	EAR.PWB ASSY	1
11	N/A	780PS3006CA00	SCREW(EAR.PWB ASSY)	2
12	PL-00005478	7024454014511	CTL KNOB	1
13	M-SCW-0824-6962	780PB3010CA01	SCREW(CTL KNOB)	2
14	B-00004619	7TL3741RH110	CTL PWB ASSY	1
15	M-SCW-0824-6962	780PB3010CA01	SCREW(CTL PWB ASSY)	2
16	N/A	7024503017911	SUPPORT	1
17	N/A	780PB4012CB06	SCREW	5
18	N/A	7333064000202	TFT	1
19	N/A	7024503019411	SUPPORT MAIN(M)	1
20	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT MAIN(M))	8
21	N/A	7024504022711	SUPPORT AC	1
22	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT AC)	2
23	N/A	737420500290G	AC SOCAT	1
24	N/A	780XX40002711	SCREW(AC SOCAT)	2
25	N/A	780XX40004211	SCREW(TFT&SUPPORT MAIN(M))	4
26	N/A	7024503019611	SUPPORT MAIN(R)	1
27	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT MAIN(L.R))	12
28	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT MAIN(L.R))	6
29	N/A	7TL4041RA110	POWER PWB ASSY	1
30	N/A	780PS3006CA00	SCREW(POWER PWB ASSY)	4
31	N/A	7TA4041RF110	MAIN PWB ASSY	1
32	N/A	780PS3006CA00	SCREW(MAIN PWB ASSY)	9
33	N/A	7024503018311	SUPPORT JACK	1
34	N/A	780XX40002211	SCREW(SUPPORT JACK)	3
35	M-SCW-0824-6962	780PB3010CA01	SCREW(JACK)	4
36	N/A	7024503019511	SUPPORT MAIN(L)	1
37	N/A	7024513005311	SHIELD MAIN PWB	1
38	N/A	780XX40002211	SCREW(SHIELD MAIN PWB)	12
39	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT JACK)	3
40	PL-00004616	7024404012711	WIRE SLIP	1
41	N/A	780PB4012CB07	SCREW(WIRE CLIP)	1
42	C-00004634	7024313003311	BACK COVER	1
43	N/A	780PB4012CB07	SCREW(FRONT&BACK)	16
44	N/A	780PS4008CB06	BACK&SHIELD	3
45	M-00005484	7024413057111	DÉCOR PLATE TN	1
46	N/A	7024764055011	LABEL MODEL	1
47	N/A	7024764041211	LABEL CAUTION	1
48	M-00005482	7024413056811	DÉCOR PLATE JACK	1
49	M-00005497	7024413057511	DÉCOR PLATE WIRE	1
50	M-00005492	7024413058611	DÉCOR PLATE HENGE	1
51	M-SCW-0824-6963	780PS4012CB08	SCREW(DÉCOR PLATE HENGE)	2
52	N/A	7024503017711	SUPPORT HENGE	1
53	M-SCW-0824-6963	780PS4012CB08	SCREW(SUPPORT ASSY&SET)	6
54	C-00004625	7024403012111	BOTTOM BASE	1
55	N/A	7024503017811	BASE SUPPORT SHEET	1
56	HW-00003604	780XX40002311	SCREW(HENGE&BASE SHEET)	6
57	N/A	780XX40002011	SCREW(BOTTOM BASE&BASE SHEET)	6
58	M-00005479	7024614014311	PAD	6
59	N/A	7024503019711	SUPPORT(T.B)	2
60	N/A	780PS4008CB06	SCREW(SUPPORT(TB)&PANEL	5
61	N/A	7024503019811	SUPPORT(L.R)	2
62	N/A	780PS4008CB06	SCREW(SUPPORT(TB)&PANEL	4
63	M-SCW-0824-6962	780PB3010CA01	SCREW(SUPPORT&FRONT)	24
64	M-SCW-0824-6962	780PB3010CA01	SCREW(SPK ASSY)	4
65	M-00005486	7024413057411	DÉCOR PLATE CARD	1
66	N/A	7024414028211	DÉCOR PLATE	2
67	E-00005476	735512000060G	SPK	2

# 11. Recommended Spare Parts List

## RECOMMENDED SPARE PARTS LIST (N3260w-1M)

ViewSonic Model Number: VS10847-1M

Rev: 1b

Serial No. Prefix: PVA

Item	Description	ECR/ECN	ViewSonic P/N	Ref. P/N	Location	Universal number#	Q'ty
1	Accessories:		A-00005467	7352200080A0G			1
2			A-00005470	737212200450G			1
3	PC Board Assembly:		B-00005305	737504000250G			1
4			B-00005471	7TA3241AF110			1
5			B-00005472	7TA3741AH110			1
6			B-00005473	7TL3741AN110			1
7			B-00005474	7TL3741AL110			1
8	Cabinets:		C-00004608	7024303007511			1
9			C-00004609	7024313003111			1
10			C-00005477	7024503016811			1
11	Cable:		CB-00005481	7024404013111			1
12	Documentation:		DC-00005468	7024750043311			1
13			DC-00005469	7024750047211			1
14	Electronics:		E-00002300	7373000200602			1
15			E-00005475	735517000120G			1
16			E-00005476	735512000060G			1
17	Miscellaneous:		M-00002278	7024404008311			1
18			M-00005479	7024614014311			1
19			M-00005482	7024413056811			1
20			M-00005483	7024413058511			1
21			M-00005484	7024413057111			1
22			M-00005485	7024413056511			1
23			M-00005486	7024413057411			1
24			M-00005487	7024414026311			1
25	Packing Material:		M-MS-0808-9920	7024824006711			1
26			P-00001683	7024824006411			1
27			P-00004612	7024813006511			1
28			P-00004613	7024813006611			1
29			P-00004614	7024824005119			1
30			P-00004615	7024824005119			1
31			P-00005480	7024803013211			1
32	Plastics:		PL-00005478	7024454014511			1

Remark 1: Above listed items are examples, supplier can expand the rows to add more necessary items.

Remark 2: All revised RSPLs with newly added items or any change made should be highlighted and correlated with the ECN/ECR approved by ViewSonic Corporation. This is to eliminate repeated cross checks of each item between

## RECOMMENDED SPARE PARTS LIST (N3760w-1M)

ViewSonic Model Number: VS10848-1M

Rev: 1a

**Serial No. Prefix: PVE**

Item	Description	ECR/ECN	ViewSonic P/N	Ref. P/N	Location	Universal number#	Q'ty
1	Accessories:	Remote Control Unit		A-00005467	7352200080A0G		1
2	Board Assembly:	User's Manual		DC-00005468	7024750043311		1
3		QUICK START GUIDE		DC-00005469	7024750047211		1
4		AV Connector		E-00002274	7373000200602		1
5		AC Power Cord		A-00005470	737212200450G		1
6		Main PWB Assy		B-00005488	7TA3741AF110		1
7		CTL PWB Assy		B-00005472	7TA3741AH110		1
8	Cabinets:	LED PWB Assy		B-00005473	7TL3741AN110		1
9		EAR PWB Assy		B-00005474	7TL3741AL110		1
10		Power Assy		B-00004623	737504000240G		1
11	Documentation:	SPK Assy		E-00005475	735517000120G		1
12		SPK Assy		E-00005476	735512000060G		1
13	Electronics:	Front Panel		C-00005489	7024303008911		1
14		Back Cover		C-00004624	7024313003211		1
15	Packing Material:	Base Bottom		C-00005490	7024503017411		1
16		Support (RM)		M-00002278	7024404008311		1
17		POWER KNOB		PL-00005478	7024454014511		1
18		CUSHION LEG		M-00005479	7024614014311		1
19		Carton		P-00005491	7024803013611		1
20		Polyfoam (Top)		P-00004631	7024813006711		1
21		Polyfoam (Bottom)		P-00004630	7024813006811		1
22	Plastics:	WIRE CLIP		CB-00005481	7024404013111		1
23		PE Bag		P-00004614	7024824005119		1
24		EPE Sheet		P-00001683	7024824006411		1
25		EPE Bag		M-MS-0808-9920	7024824006711		1
26		PE Bag		P-00004614	7024824005119		1
27		DECOR PLATE JACK		M-00005482	7024413056811		1
28		DECOR PLATE HENGE		M-00005492	7024413058611		1
29		DECOR PLATE TN		M-00005484	7024413057111		1
30		DECOR PLATE WIRE		M-00005493	7024413056711		1
31		DECOR PLATE CAED		M-00005486	7024413057411		1
32		DECOR PLATE RN		M-00005487	7024414026311		1

Remark 1: Above listed items are examples, supplier can expand the rows to add more necessary items.

Remark 2: All revised RSPLs with newly added items or any change made should be highlighted and correlated with the ECN/ECR approved by ViewSonic Corporation. This is to eliminate repeated cross checks of each item between

## RECOMMENDED SPARE PARTS LIST (N4060w-1M)

ViewSonic Model Number: VS10846-1M

Rev: 1a

**Serial No. Prefix: PV9**

Item	Description	ECR/ECN	ViewSonic P/N	Ref. P/N	Location	Universal number#	Q'ty
1	<b>Accessories:</b>	Remote Control Unit		A-00005467	7352200080A0G		1
2		AC Power Cord		A-00005470	737212200450G		1
3	<b>Board Assembly:</b>	Power Assy		B-00004623	737504000240G		1
4		LED PWB Assy		B-00005473	7TL3741AN110		1
5		EAR PWB Assy		B-00005474	7TL3741AL110		1
6		Main PWB Assy		B-00005494	7TA4041AF110		1
7		CTL PWB Assy		B-0005472	7TA3741AH110		1
8	<b>Cabinets:</b>	Base Bottom		C-00004610	7024403012011		1
9		Back Cover		C-00004634	7024313003311		1
10		Front Panel		C-00005495	7024303009011		1
11	<b>Cable:</b>	WIRE CLIP		CB-00005481	7024404013111		1
12	<b>Documentation:</b>	User's Manual		DC-00005468	7024750043311		1
13		QUICK START GUIDE		DC-00005469	7024750047211		1
14	<b>Electronic Components:</b>	AV Connector		E-00002300	7373000200602		1
15		SPK Assy		E-00005475	735517000120G		1
16		SPK Assy		E-00005476	735512000060G		1
17	<b>Miscellaneous:</b>	Support (RM)		M-00002278	7024404008311		1
18		CUSHION LEG		M-00005479	7024614014311		1
19		DECOR PLATE JACK		M-00005482	7024413056811		1
20		DECOR PLATE TN		M-00005484	7024413057111		1
21		DECOR PLATE CAED		M-00005486	7024413057411		1
22		DECOR PLATE RN		M-00005487	7024414026311		1
23		DECOR PLATE HENGE		M-00005492	7024413058611		1
24		DECOR PLATE WIRE		M-00005497	7024413057511		1
25	<b>Packing Material:</b>	EPE Bag		M-MS-0808-9920	7024824006711		1
26		EPE Sheet		P-00001683	7024824006411		1
27		PE Bag		P-00004614	7024824005119		1
28		PE Bag		P-00004614	7024824005119		1
29		Polyfoam (Bottom)		P-00004638	7024813007211		1
30		Polyfoam (Top)		P-00004639	7024813007111		1
31		Carton		P-00005496	7024803014611		1
32	<b>Plastics:</b>	POWER KNOB		PL-00005478	7024454014511		1

Remark 1: Above listed items are examples, supplier can expand the rows to add more necessary items.

Remark 2: All revised RSPLs with newly added items or any change made should be highlighted and correlated with the ECN/ECR approved by ViewSonic Corporation. This is to eliminate repeated cross checks of each item

## BOM LIST (N3260W)

**ViewSonic Model Number: VS10847-1M**

**Rev: 1a**

**Serial No. Prefix:**

**PVA**

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1	N/A		FIREWARE 2.0			1
2	N/A	7TA3241A9310	PE BAG ASSY			1
3	N/A	7TA3241A0110	SET ASSY			1
4	M-MS-0808-9920	7024824006711	EPE BAG;TL3012FMA			1
5	P-00005480	7024803013211	CARTON;TA3241AW,(C)			1
6	P-00004612	7024813006511	POLYFOAM TOP;TL3241RT,(A)			1
7	P-00004613	7024813006611	POLYFOAM BOTTOM;TL3241RT,(A)			1
8	P-00001683	7024824006411	EPE SHEET;TL3001FM			1
9	N/A	7024764053311	LABEL CARTON(C);TA3241AW			1
10	N/A	7024764053611	LABEL SERIAL;TA3241AW,(C)			1
11	N/A	7TA3241A9310	PE BAG ASSY			
12	DC-00005468	7024750043311	USER'S MANUAL(C);TA3241AW			1
13	N/A	735499000120G	BATTERY DRY;GP15G(GP),(D)			2
14	A-00005467	7352200080A0G	B(RMTX UNIT;FOR TA3741A),(D)			1
15	P-00004614	7024824005119	PE BAG;TC3366CH SPK B,(A)			1
16	E-00002300	7373000200602	SIGNAL CABLE;1800mm(YO DYI),(E)			1
17	M-MS-0808-9924	7373000200612	AV CONNECTOR;PX-050829-01(PSI),(E)			0
18	DC-00005469	7024750047211	QUICK START GUIDE			1
19	N/A	7TA3241A0110	SET ASSY			
20	N/A	7TA3241A1010	CABI TOTAL ASSY			1
21	N/A	7TA3241A6110	BACK COVER ASSY			1
22			NAZZ;7833030000207			1
23			NAZZ;7833060000104			1
24	N/A	7833040002402	SILICONE GLUE;KE-45T			0.005
25			NAZZ;7833020000306			1
26			NAZZ;7833020000004			1
27	N/A	7024764052011	LABEL MODEL;TA3241AW,(C)			1
28	N/A	780PB4012CB07	SCREW M4X12;TL3201FM,(F)			16
29	N/A	780PS4008CB06	SCREW;S-TYPE M4*8,(F)			3
30	N/A	7TA3241A7010	SUPPORT ASSY			1
31	M-00005482	7024413056811	DECOR PLATE JACK (A);TA3241AW			1
32	M-SCW-0824-6963	780PS4012CB08	SCREW;S-TYPE M4*12,(F)	SCREW		6
33	M-00005483	7024413058511	DECOR PLATE HENGE;TA3241AW,(A)			1
34	M-SCW-0824-6963	780PS4012CB08	SCREW;S-TYPE M4*12,(F)			2
35	N/A	7024764040111	LABEL HI PORT OK;TL,(C)			1
36	M-00005484	7024413057111	DECOR PLATE TN;TA3241AW,(A)			1
37	M-00005485	7024413056511	DECOR PLATE WIRE (A);TL3241RT			1
38	M-00005486	7024413057411	DECOR PLATE CARD;TL3241RT(A)			1
39	N/A	7024764041211	LABEL(CAUTION);TL2327FMR,(C)			1
40	CB-00005481	7024404013111	WIRE CLIP;TL3241RT,(A)			1
41	N/A	780PB4012CB07	SCREW M4X12;TL3201FM,(F)			1
42	N/A	7TA3241A1010	CABI TOTAL ASSY			
43	N/A	7TA3241A1210	FRONT PANEL ASSY			1
44	N/A	7333063200502	TFT-LCD;T315XW01 V5(AU)			1
45	N/A	7024513005311	SHIELD MAIN PWB(B);TA3241AW			1
46	N/A	780XX-40002211	SCREW(TBF3X08);TL2003FM,(F)			12
47	N/A	780PS4008CB06	SCREW;S-TYPE M4*8,(F)			8
48	N/A	7024503016911	SUPPORT TOP(B);TL3241RT			2
49	N/A	7024503017011	SUPPORT L,R(B);TL3241RT			2
50	N/A	7TA3241A2010	CHASSIS ASSY			1
51	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			18
52	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)	SCREW		16
53	N/A	7024604019511	INSULATOR			1
54	N/A	7024503018011	SUPPORT (B);TL3241RT	SUPPORT		1
55	N/A	780PB4012CB07	SCREW M4X12;TL3201FM,(F)			5
56	N/A	7TA3241A3110	SPK ASSY			1
57	N/A	780PB4010CB06	SCREW;B-TYPE M4*10,(F)			8
58	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			4
59	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			3
60	N/A	7024604019411	CUSHION(TN);TA3241AW,(H)			1
61	N/A	7024604018411	CUSHION;(HDMI);TL3241RT,(H)			1
62	N/A	7024604011811	CUSHION;TL2009FM			2
63	N/A	737422200010G	WIRE HARNESS;1P/100mm(YO DYI),(E)			1
64	N/A	7TA3241A6110	BACK COVER ASSY			
65	C-00004609	7024313003111	BACK COVER(A);TL3241RT			1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
66	N/A	7024614016111	DECOR SHEET 800X12;TL3241RT,(G)			2
67	N/A	7TA3241A7010	SUPPORT ASSY			
68	N/A	7024503017111	SUPPORT HENGE(B);TL3241RT			1
69	N/A	7024403012411	BOTTOM BASE;TA3241AW,(A)			1
70	N/A	7024503017211	BASE SUPPORT SHEET(B);TL3241RT			1
71	HW-00003604	780XX40002311	SCREW(MSF4X12);TL3001FM,(F)			6
72	N/A	780XX40002011	SCREW;TBF M4*10,(F)			6
73	M-00005479	7024614014311	CUSHION LEG;TL3001FM,(H)			6
74	N/A	7TA3241A1210	FRONT PANEL ASSY			
75	N/A	7024303008811	FRONT PANEL;TA3241AW,(A)			1
76	M-SCW-0824-6962	780PB3010CA01	SCREW:B-TYPE M3*10,(F)			2
77	N/A	7TA3741AN110	LED PWB ASSY			1
78	N/A	7TA3741A1310	CTL PANEL ASSY			1
79	M-00005487	7024414026311	DECOR PLATE RN;TL3241RT,(A)			1
80	N/A	7TA3741A2710	EAR ASSY			1
81	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
82	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
83	N/A	7024734022111	NAME PLATE;TL3241RT(VIEW SONIC),(B)			1
84	N/A	7TA3241A2010	CHASSIS ASSY			
85	N/A	7TA3241A2510	POWER TERMINAL ASSY			1
86	N/A	7TA3241AA110	POWER ASSY			1
87	B-00005471	7TA3241AF110	MAIN PWB ASSY			1
88	N/A	7024503018311	SUPPORT JACK(B);TA3241AW			1
89	N/A	780XX40002211	SCREW(TBF3X08);TL2003FM,(F)			3
90	N/A	780PS3006CA00	SCREW;S-TYPE M3*6,(F)			4
91	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
92	C-00005477	7024503016811	SUPPORT MAIN(B);TL3241RT			1
93	N/A	780PS3006CA00	SCREW;S-TYPE M3*6,(F)			9
94	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			8
95	N/A	737425001140G	B(WIRE HARNESS;13P/550mm(YO-DYI),(E)			1
96	N/A	737425001160G	B(WIRE HARNESS;30P/300mm(YO-DYI),(E)			1
97	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			1
98	N/A	737425001070G	WIRE HARNESS;12P/700mm(YO DYI),(E)	INVERTER		1
99	N/A	7TA3241A3110	SPK ASSY			
100	E-00005475	735517000120G	B(SPK;2250176-04L;TECH)(D)			2
101	N/A	737410401320G	WIRE HARNESS;4P/820/820mm(YO DYI),(E)	S1		1
102	E-00005476	735512000060G	SPK;T13074-08R(TECH),(D)			2
103	N/A	737409200090G	WIRE ASSY;2P/100mm(YO DYI),(E)			1
104	N/A	737409200100G	WIRE ASSY;2P/100mm(YO DYI),(E)			1
105	N/A	7TA3741AN110	LED PWB ASSY			
106		736TA3741N112				1
107	N/A	2RDSPY1K00JT1	"RES. CARBON;RD1\6PTY1KJ,T	R10		1
108	N/A	2RDSPY4K70JT1	"RES. CARBON;RD1\6PTY4R7KJ,T	R11		1
109	N/A	2RDSPY220HJT1	"RES. CARBON;RD1\6PTY220HJ,T	R12		1
110	N/A	2TC00024YT040	TRANSISTOR;2SC1815-Y TPE2	Q1		1
111	N/A	2DL010300170G	LED;L-3WEWG(KINGBRIGHT)	LED		1
112	N/A	2AA090420017G	IC(3P);IRM-2638VS6F3(ELEC)	U1		1
113	N/A	737425401270G	B(WIRE HARNESS;4P(J13)/850mm(YO-DYI),(	J13		1
114	M-00002278	7024404008311	SUPPORT(RM);TL2003FM			1
115	N/A	7TA3741A1310	CTL PANEL ASSY			
116	B-0005472	7TA3741AH110	CTL PWB ASSY			1
117	PL-00005478	7024454014511	POWER KNOB(A);TL3241RT	CTL KNOB		1
118	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)	SCREW		3
119	N/A	7TA3741A2710	EAR ASSY			
120	N/A	7TA3741AL110	EAR PWB ASSY			1
121	N/A	7024503018111	SUPPORT EAR PWB (B);TL3241RT			1
122	N/A	780PS3006CA00	SCREW;S-TYPE M3*6,(F)	SCREW		2
123	N/A	7TA3241A2510	POWER TERMINAL ASSY			
124	N/A	7024504022711	SUPPORT POWER TL3241RT,(B)			1
125	N/A	737420500340G	WIRE HARNESS;5P(O)/240/100mm(YO DYI),(			1
126	N/A	780XX40002711	SCREW(TBF3X14);TL3001FM,(F)	SCREW		2
127	N/A	7TA3241AA110	POWER ASSY			
128	B-00005305	737504000250G	SMPS POWER ASSY;FSP228-3F01(SPI),(D)			1
129	A-00005470	737212200450G	AC POWER CORD;YP12/YC12(SHIH YANG)			1
130	B-00005471	7TA3241AF110	MAIN PWB ASSY			
131	N/A	736TA3741F112	A			1
132	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C430		1
133	N/A	733904140530G	B(CAP ELEC;TKR102M1EG21M,JAMICON)(D)	C432		1
134	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C434		1
135	N/A	2CF3N1H474JF2	CAP.MEF;CF93N1H474J,F	C436		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
136	N/A	2CTDJ1E4R7KTG	CAP.TANTALUM;CT1BJ1E4R7K,T(AVX/KYOCERA)	C440		1
137	N/A	2CTAJ1C010KTG	CAP TANTALUM;CT1BJ1C010K,T(AVX/KYOCERA)	C443		1
138	N/A	2CTDJ1E4R7KTG	CAP.TANTALUM;CT1BJ1E4R7K,T(AVX/KYOCERA)	C453		1
139	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C459		1
140	N/A	733904140530G	B(CAP ELEC:TKR102M1EG21M,JAMICON)(D)	C462		1
141	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C464		1
142	N/A	2CF3N1H474JF2	CAP.MEF;CF93N1H474J,F	C466		1
143	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D)	L9		1
144	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L100		1
145	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L104		1
146	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L108		1
147	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L113		1
148	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D)	L137		1
149	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D)	L138		1
150	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D)	L140		1
151	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D)	L141		1
152	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D)	CM1		1
153	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D)	CM2		1
154	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D)	CM3		1
155	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D)	CM4		1
156	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q1		1
157	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q2		1
158	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q3		1
159	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q7		1
160	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q8		1
161	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q9		1
162	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q10		1
163	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q11		1
164	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q12		1
165	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q13		1
166	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q14		1
167	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q15		1
168	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q16		1
169	N/A	2TF080010075G	FET;CEM4539(CET)	Q17		1
170	N/A	2TF080010075G	FET;CEM4539(CET)	Q18		1
171	N/A	2TF080010075G	FET;CEM4539(CET)	Q19		1
172	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q20		1
173	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q21		1
174	N/A	2TF080010075G	FET;CEM4539(CET)	Q22		1
175	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q23		1
176	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q25		1
177	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q26		1
178	N/A	2TF020030068G	FET;AP4435GM(AP)	Q27		1
179	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q28		1
180	N/A	2TF020030068G	FET;AP4435GM(AP)	Q29		1
181	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q30		1
182	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q31		1
183	N/A	2TX000280063G	TRANSISTOR:MMBT3904LT1G(ON)	Q32		1
184	N/A	733615011030G	B(TUNER;TUV1236D;PHILIPS),(D)	U1		1
185	N/A	2AA16094S191G	IC(3P);AIC1117-33PY(AIC)	U2		1
186	N/A	2AA16093S191G	IC(3P);AIC1117-25PY(AIC)	U3		1
187	N/A	2AA16099S177G	IC(3P);LD1117A-ADJ-AL(TO-252)(UTC)	U4		1
188	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U5		1
189	N/A	2AM07032S170G	IC(8P);24LC02BT/SNG(MICROCHIP)	U6		1
190	N/A	2DS06003S1D1G	DIODE ZENER;RCLAMP0514M.TBT(SEMTECH)	U7		1
191	N/A	2DS06003S1D1G	DIODE ZENER;RCLAMP0514M.TBT(SEMTECH)	U8		1
192	N/A	2AA13052S182G	IC(128P);SIL9011CLU,(WEIKENG)	U13		1
193	N/A	2AA16113S191G	IC(3P);AIC1117-18PY(UTC)	U14		1
194	N/A	2AA24002S110G	IC(16P);BU4052BCF-E2(ROHM)	U15		1
195	N/A	2AM0702SS170G	IC(8P);24LC21AT/SNG(MICROCHIP)	U16		1
196	N/A	2AL13006S124G	IC(5P);74LVC1G14GW(PHILIPS),(D)	U17		1
197	N/A	2AL13006S124G	IC(5P);74LVC1G14GW(PHILIPS),(D)	U18		1
198	N/A	2AA02072S174G	IC(548P);PW328-10L(PIXELWORKS),(D)	U19		1
199	N/A	7024524010911	HEAT SINK:TL3209FM,(B)	U19		1
200	N/A	2AL13005S124G	IC(5P);74LVC1G126GW(PHILIPS),(D)	U23		1
201	N/A	2AM02069S1D32	IC(144P);HY5DU573222F-25;HYNIX),(D)	U25		1
202	N/A	2AA16094S191G	IC(3P);AIC1117-33PY(AIC)	U26		1
203	N/A	2AL12002S122G	IC(16P);SN74CBT3257DBQR(TI),(D)	U28		1
204	N/A	2AA03108S158G	B(IC80P);MSP4440K-QA-D6-500;MICRONAS,	U29		1
205	N/A	2AA16106S177G	IC;78D08AL(UTC)	U30		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
206	N/A	2AA16114S191G	IC(3P);AIC1117-50PY(AIC)	U31		1
207	N/A	2AA03102S1C8G	B(IC(44P);LX1722CDBe3)(MICROSEMI),(D)	U33		1
208	N/A	2AA13050S122G	IC(16P);MAX3232CDR(TI)	U34		1
209	N/A	2AA03107S174G	IC(648P);PWM2000L(PIXELWORKS),(D)	U35		1
210	N/A	7024524010611	HEAT SINK;TL3002DM	U35		1
211	N/A	2AA13050S122G	IC(16P);MAX3232CDR(TI)	U36		1
212	N/A	2AM07035S170G	IC(8P);24LC256-I-SNG(MICROCHIP),(D)	U37		1
213	N/A	2AA04041S1D4G	B(IC;S29GL032M90TFIR40;SPANSTON,(D)	U39		1
214	N/A	2AA04041S1D4G	B(IC;S29GL032M90TFIR40;SPANSTON,(D)	U40		1
215	N/A	2AM02068S1D32	IC(66P)::HY5DU561622DT-5(HYNIX),(D)	U42		1
216	N/A	2AM02068S1D32	IC(66P)::HY5DU561622DT-5(HYNIX),(D)	U43		1
217	N/A	2AM02068S1D32	IC(66P)::HY5DU561622DT-5(HYNIX),(D)	U44		1
218	N/A	2AM02068S1D32	IC(66P)::HY5DU561622DT-5(HYNIX),(D)	U45		1
219	N/A	2AL13005S124G	IC(5P);74LVC1G126GW(PHILIPS),(D)	U47		1
220	N/A	737000100020G	SOCKET PLCC;14144-A0B7001N(TOP YANG),()	U48		1
221	N/A	2AC02039S1C9G	IC(44P);SM5964C40JP(SYNCMOS),(D)	U48		1
222	N/A	2AL13001S124G	IC(14P);74LVC14AD(PHILIPS)	U49		1
223	N/A	2AA11036S177G	IC(8P);LM358L(UTC)	U51		1
224	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U52		1
225	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U53		1
226	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U54		1
227	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U55		1
228	N/A	2AA20010S192G	IC(3P);CAT809RTBIT(CATALYST)	U56		1
229	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D1		1
230	N/A	2DS05066S124G	DIODE:BAV70(PHILIPS)	D2		1
231	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D3		1
232	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D4		1
233	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D8		1
234	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D9		1
235	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D10		1
236	N/A	2DS05066S124G	DIODE;BAV70(PHILIPS)	D11		1
237	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D12		1
238	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D13		1
239	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D14		1
240	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D15		1
241	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D16		1
242	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D17		1
243	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D18		1
244	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D19		1
245	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D20		1
246	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D21		1
247	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D22		1
248	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D23		1
249	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D24		1
250	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D25		1
251	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D26		1
252	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D27		1
253	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D28		1
254	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D29		1
255	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D30		1
256	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D32		1
257	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D33		1
258	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP8		1
259	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP9		1
260	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP10		1
261	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP11		1
262	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP12		1
263	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP13		1
264	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP14		1
265	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP15		1
266	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP16		1
267	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP25		1
268	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP26		1
269	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP27		1
270	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP28		1
271	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP29		1
272	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP30		1
273	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP49		1
274	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP50		1
275	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP51		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
276	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP52		1
277	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP53		1
278	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP54		1
279	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP55		1
280	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP56		1
281	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP57		1
282	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP58		1
283	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP59		1
284	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP60		1
285	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP61		1
286	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP62		1
287	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP63		1
288	N/A	734007200220G	RES.ARRAY;CN34JTNO332(TA-I)	RP65		1
289	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP66		1
290	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP67		1
291	N/A	734007200220G	RES.ARRAY;CN34JTNO332(TA-I)	RP68		1
292	N/A	734007200220G	RES.ARRAY;CN34JTNO332(TA-I)	RP69		1
293	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP70		1
294	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP71		1
295	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP72		1
296	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP73		1
297	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP74		1
298	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP75		1
299	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP76		1
300	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP77		1
301	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP78		1
302	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP79		1
303	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP80		1
304	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP81		1
305	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP82		1
306	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP83		1
307	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP84		1
308	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP85		1
309	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP86		1
310	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP87		1
311	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP88		1
312	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP89		1
313	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP90		1
314	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP91		1
315	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP92		1
316	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP93		1
317	N/A	734007200140G	RES.ARRAY;CN34JTNO220(TA-I)	RP94		1
318	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP95		1
319	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP96		1
320	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP97		1
321	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP98		1
322	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP99		1
323	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP100		1
324	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP101		1
325	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP102		1
326	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP103		1
327	N/A	734007200160G	RES.ARRAY;CN34JTNO470(TA-I)	RP104		1
328	N/A	733700001710G	B(CRYSTAL;SSP048000I3CH;HARMONY)(D)	X1		1
329	N/A	733700001700G	B(CRYSTAL;SSP033000I3CH;HARMONY)(D)	X2		1
330	N/A	2AA02074S159G	IC(28P);MK3771-17RLFTR(ICS),(D)	X3		1
331	N/A	733700001620G	CRYSTAL;28.322MHz/HC-49S(AIXING)	Y2		1
332	N/A	733700001380G	CRYSTAL;27.00MHz 16pf 49US(EWN),(D)	Y3		1
333	N/A	733700001650G	CRYSTAL;XAT018432FK1H-O(HARMONY)	Y4		1
334	N/A	733700001610G	CRYATAL;XAT013500FK1H(HARMONY)	Y5		1
335	N/A	733700001660G	CRYSTAL;XAT01200001-O(HARMONY)	Y6		1
336	N/A	735250000320G	B(RELAY;GS-SH-212D;GOODSKY),(D)	RL1		1
337	N/A	735204000220G	SW TACT;TSAB-2L(HUA JIE)(5mm)	SW1		1
338	N/A	735204000220G	SW TACT;TSAB-2L(HUA JIE)(5mm)	SW2		1
339	N/A	737010020820G	RCA JACK:HSP-243V2P-39(KUN MING)	CON1		1
340	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON2		1
341	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON3		1
342	N/A	737010020820G	RCA JACK:HSP-243V2P-39(KUN MING)	CON4		1
343	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON5		1
344	N/A	737010020790G	RCA JACK:HSP-243V2P-07(KUN MING)	CON6		1
345	N/A	737010020790G	RCA JACK:HSP-243V2P-07(KUN MING)	CON7		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
346	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON8		1
347	N/A	737010050100G	PHONE JACK(D3.5);PJ-0004T05B0L(AIXING)	J1		1
348	N/A	737000070130G	SOCKET DIN;LNB0509-4-SW(LIH SHENG)	J2		1
349	N/A	737000070130G	SOCKET DIN;LNB0509-4-SW(LIH SHENG)	J3		1
350	N/A	737114101030G	B(HEADER PIN:DF11-30DP-2DSA(YODYI),(D)	J5		1
351	N/A	737110151000G	B(HEADER PIN(5P);M5-I20001(YODYI),(D)	J9		1
352	N/A	737110141000G	B(HEADER PIN(4P);M4-I20001(YODYI),(D)	J13		1
353	N/A	737110191000G	B(HEADER PIN(9P);M9-I20001(YODYI),(D)	J14		1
354	N/A	737111202160G	B(HEADER PIN(13P);M13-I25002R(YODYI),(	J17		1
355	N/A	737110242080G	HEADER PIN(4PIN);M4-I25002(YO DYI)	S1		1
356	N/A	737050110010G	HDMI;HM-19F4-05(NIAN YEONG)	P1		1
357	N/A	737020020260G	D-SUB CONNECTOR;32115-AAA0030T,(D)	P3		1
358	N/A	737020020270G	D CONNECTOR;32009-AAA0030T,(D)	P6B		1
359	N/A	7TA3241AFDB0	SUB-MAIN PWB ASSY			1
360	B-0005472	7TA3741AH110	CTL PWB ASSY			
361	N/A	736TA3741D112	PCB ASSY;CY236X163S(CHIAN YOU),(D)			1
362		736TA3741H112				1
363	N/A	2RDSPY1K00JT1	"RES. CARBON;RD1\6PTY1KJ,T	R1		1
364	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R2		1
365	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R3		1
366	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R4		1
367	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R5		1
368	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R6		1
369	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R7		1
370	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R8		1
371	N/A	2RDSPY2K00JT5	"RES. CARBON;RD1\6PTY2KJ,T	R9		1
372	N/A	735204000220G	SW TACT;TSAB-2L(HUA JIE)(5mm)			7
373	N/A	737425900210G	WIRE HARNESS;9P/850mm(YO-DYI),(E)	J14		1
374	N/A	7TA3741AL110	EAR PWB ASSY			
375		736TA3741E112				1
376	N/A	2RDSPY5K10JT1	"RES. CARBON;RD1\6PTY5R1KJ,T	R13		1
377	N/A	2TC00024YT040	TRANSISTOR;2SC1815-Y TPE2	Q2		1
378	N/A	737010050090G	JACK EARPHONE;LJE0369-7(LIH SHENG)	EARPHONE		1
379	N/A	737425500680G	WIRE HARNESS;5P(J9)/1000mm(YO-DYI),(E)	J9		1
380	N/A	7TA3241AFDB0	SUB-MAIN PWB ASSY			
381	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R3		1
382	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R4		1
383	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R6		1
384	N/A	2RTDFKOH00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R7		1
385	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R8		1
386	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R9		1
387	N/A	2RTDFKOH00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R11		1
388	N/A	2RTDFK1K10FT2	B(RT1/10FK1R1KF,T)	R12		1
389	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R13		1
390	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R14		1
391	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R15		1
392	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R16		1
393	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R17		1
394	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R24		1
395	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R25		1
396	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R25A		1
397	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R26		1
398	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R27		1
399	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R27A		1
400	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R31		1
401	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R35		1
402	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R59		1
403	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R62		1
404	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R63		1
405	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R64		1
406	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R65		1
407	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R66		1
408	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R67		1
409	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R68		1
410	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R69		1
411	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R70		1
412	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R72		1
413	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R73		1
414	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R74		1
415	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R75		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
416	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R76		1
417	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R77		1
418	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R78		1
419	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R79		1
420	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R80		1
421	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R81		1
422	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R82		1
423	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R83		1
424	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R84		1
425	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R85		1
426	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R86		1
427	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R87		1
428	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R88		1
429	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R89		1
430	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R90		1
431	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R91		1
432	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R92		1
433	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R93		1
434	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R94		1
435	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R95		1
436	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R96		1
437	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R97		1
438	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R98		1
439	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R99		1
440	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R100		1
441	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R101		1
442	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R102		1
443	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R103		1
444	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R104		1
445	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R105		1
446	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R106		1
447	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R107		1
448	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R108		1
449	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R109		1
450	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R110		1
451	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R111		1
452	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R112		1
453	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R113		1
454	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R114		1
455	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R115		1
456	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R116		1
457	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R117		1
458	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R118		1
459	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R119		1
460	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R120		1
461	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R121		1
462	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R122		1
463	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R123		1
464	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R124		1
465	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R126		1
466	N/A	2RTDFK2K20JT2	RES.FLAT CHIP;RT1/10FK2R2KJ,T(LIAN SHE	R127		1
467	N/A	2RTDFK2K20JT2	RES.FLAT CHIP;RT1/10FK2R2KJ,T(LIAN SHE	R129		1
468	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R130		1
469	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R131		1
470	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R132		1
471	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R133		1
472	N/A	2RTDFK5K60JT2	RES.FLAT CHIP;RT1/10FK5R6KJ,T	R134		1
473	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R135		1
474	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R136		1
475	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R137		1
476	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R138		1
477	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R139		1
478	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R140		1
479	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R141		1
480	N/A	2RTDFK5K60JT2	RES.FLAT CHIP;RT1/10FK5R6KJ,T	R142		1
481	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R143		1
482	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R144		1
483	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R145		1
484	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R146		1
485	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R147		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
486	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R148		1
487	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R149		1
488	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R152		1
489	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R153		1
490	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R154		1
491	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R155		1
492	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R156		1
493	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R157		1
494	N/A	2RTDFK22K0JT2	RES.FLAT CHIP;RT1/10FK22KJ,T	R158		1
495	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R159		1
496	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R160		1
497	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R161		1
498	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R162		1
499	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R163		1
500	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R164		1
501	N/A	2RTDFK12K0JT2	RES.FLAT CHIP;RT1/10FK12KJ,T(LIAN SHEN	R165		1
502	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R168		1
503	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R171		1
504	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R234		1
505	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R240		1
506	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R241		1
507	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R242		1
508	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R244		1
509	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R245		1
510	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R247		1
511	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R248		1
512	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R250		1
513	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R252		1
514	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R263		1
515	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R264		1
516	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R265		1
517	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R266		1
518	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R267		1
519	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R268		1
520	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R269		1
521	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R270		1
522	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R271		1
523	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R274		1
524	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R275		1
525	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R276		1
526	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R277		1
527	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R278		1
528	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R279		1
529	N/A	2RTDFK470KJT2	RES.FLAT CHIP;RT1/10FK470KJ,T(LIAN SHE	R280		1
530	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R281		1
531	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R282		1
532	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R283		1
533	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R284		1
534	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R285		1
535	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R286		1
536	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R287		1
537	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R288		1
538	N/A	2RTDFK470KJT2	RES.FLAT CHIP;RT1/10FK470KJ,T(LIAN SHE	R289		1
539	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R290		1
540	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R291		1
541	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R292		1
542	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R294		1
543	N/A	2RTDFK68H0JT2	RES.FLAT CHIP;RT1/10FK68H0J,T	R295		1
544	N/A	2RTDFK220HJT2	RES.FLAT CHIP;RT1/10FK220HJ,T(LIAN SHE	R296		1
545	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R298		1
546	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R299		1
547	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R300		1
548	N/A	2RTDFK68H0JT2	RES.FLAT CHIP;RT1/10FK68H0J,T	R301		1
549	N/A	2RTDFK220HJT2	RES.FLAT CHIP;RT1/10FK220HJ,T(LIAN SHE	R302		1
550	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R303		1
551	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R304		1
552	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R305		1
553	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R306		1
554	N/A	2RT1FP15H0JT2	RES.FLAT CHIP;RT1FP15HJ,T	R307		1
555	N/A	2RT1FP0H00JT2	RES.FLAT CHIP;RT1FP0HJ,T(2512)	R308		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
556	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R309		1
557	N/A	2RTDFK34K8FT2	RES.FLAT CHIP;RT1/10FK34R8KF,T	R310		1
558	N/A	2RTDFK56K2FT2	RES.FLAT CHIP;RT1/10FK56R2KF,T	R311		1
559	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R312		1
560	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R313		1
561	N/A	2RTDFK39K0JT2	RES.FLAT CHIP;RT1/10FK39KJ,T(LIAN SHEN	R314		1
562	N/A	2RTDFK8K20JT2	RES.FLAT CHIP;RT1/10FK8R2KJ,T(LIAN SHE	R315		1
563	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R316		1
564	N/A	2RTDFK39K0JT2	RES.FLAT CHIP;RT1/10FK39KJ,T(LIAN SHEN	R317		1
565	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R318		1
566	N/A	2RTDFK8K20JT2	RES.FLAT CHIP;RT1/10FK8R2KJ,T(LIAN SHE	R319		1
567	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R320		1
568	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R321		1
569	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R322		1
570	N/A	2RT1FP15H0JT2	RES.FLAT CHIP;RT1FP15HJ,T	R323		1
571	N/A	2RTDFK56K2FT2	RES.FLAT CHIP;RT1/10FK56R2KF,T	R324		1
572	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R325		1
573	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R326		1
574	N/A	2RT1FP0H00JT2	RES.FLAT CHIP;RT1FP0HJ,T(2512)	R327		1
575	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R328		1
576	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R329		1
577	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R330		1
578	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R331		1
579	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R332		1
580	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R333		1
581	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R334		1
582	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R335		1
583	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R337		1
584	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R338		1
585	N/A	2RTDFK220KJT2	RES.FLAT CHIP;RT1/10FK220KJ,T(LIAN SHE	R344		1
586	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R345		1
587	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R347		1
588	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R348		1
589	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R349		1
590	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R350		1
591	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R351		1
592	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R353		1
593	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R354		1
594	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R355		1
595	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R356		1
596	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R371		1
597	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R372		1
598	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R373		1
599	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R374		1
600	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R382		1
601	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R383		1
602	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R384		1
603	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R385		1
604	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R386		1
605	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R387		1
606	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R388		1
607	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R389		1
608	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R390		1
609	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R391		1
610	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R392		1
611	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R393		1
612	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R394		1
613	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R395		1
614	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R400		1
615	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R401		1
616	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R402		1
617	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R403		1
618	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R404		1
619	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R405		1
620	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R406		1
621	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R407		1
622	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R409		1
623	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R411		1
624	N/A	2RTDFK10H0JT2	RES.FLAT CHIP;RT1/10FK10HJ,T(LIAN SHEN	R412		1
625	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R413		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
626	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R415		1
627	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R416		1
628	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R417		1
629	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R418		1
630	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R419		1
631	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R420		1
632	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R421		1
633	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R422		1
634	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R423		1
635	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R424		1
636	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R425		1
637	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R426		1
638	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R427		1
639	N/A	2RTDFK470HJT2	RES.FLAT CHIP;RT1/10FK470HJ,T(LIAN SHE	R428		1
640	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R429		1
641	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R430		1
642	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R432		1
643	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R433		1
644	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R434		1
645	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R435		1
646	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R436		1
647	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R438		1
648	N/A	2RTDFK30K0JT2	RES.FLAT CHIP;RT1/10FK30KJ,T(LIAN SHEN	R439		1
649	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R440		1
650	N/A	2RTDFK5K60JT2	RES.FLAT CHIP;RT1/10FK5R6KJ,T	R441		1
651	N/A	2RTDFK2K20JT2	RES.FLAT CHIP;RT1/10FK2R2KJ,T(LIAN SHE	R443		1
652	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R455		1
653	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R456		1
654	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R457		1
655	N/A	2RTDFK510HJT2	RES.FLAT CHIP;RT1/10FK510HJ,T(LIAN SHE	R458		1
656	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R459		1
657	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R460		1
658	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R461		1
659	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R462		1
660	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R463		1
661	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R464		1
662	N/A	2RTDFK330HJT2	RES.FLAT CHIP;RT1/10FK330HJ,T(LIAN SHE	R465		1
663	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R466		1
664	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R467		1
665	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R468		1
666	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R469		1
667	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R470		1
668	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R471		1
669	N/A	2RTDFK560HJT2	RES.FLAT CHIP;RT1/10FK560HJ,T	R472		1
670	N/A	2RTDFK2K70JT2	RES.FLAT CHIP;RT1/10FK2R7KJ,T(LIAN SHE	R473		1
671	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R474		1
672	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R475		1
673	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R476		1
674	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R477		1
675	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R478		1
676	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R479		1
677	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R481		1
678	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R482		1
679	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R483		1
680	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R484		1
681	N/A	2RTDFK510HJT2	RES.FLAT CHIP;RT1/10FK510HJ,T(LIAN SHE	R485		1
682	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R486		1
683	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R487		1
684	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R488		1
685	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R489		1
686	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R490		1
687	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R491		1
688	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R492		1
689	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C1		1
690	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C2		1
691	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C3		1
692	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C4		1
693	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C5		1
694	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C6		1
695	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C7		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
696	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C8		1
697	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C9		1
698	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C10		1
699	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C11		1
700	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C12		1
701	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C13		1
702	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C14		1
703	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C15		1
704	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C16		1
705	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C17		1
706	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C18		1
707	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C19		1
708	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C20		1
709	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C21		1
710	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C22		1
711	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C23		1
712	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C24		1
713	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C25		1
714	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C26		1
715	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C27		1
716	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C28		1
717	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C29		1
718	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C30		1
719	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C31		1
720	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C32		1
721	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C33		1
722	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C34		1
723	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C41		1
724	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C96		1
725	N/A	2CDJA1H150JT2	CAP.MTLYR CHIP;CD1JA1H150J,T(PAN OVERS	C97		1
726	N/A	2CDJA1H150JT2	CAP.MTLYR CHIP;CD1JA1H150J,T(PAN OVERS	C98		1
727	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C99		1
728	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C100		1
729	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C101		1
730	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C102		1
731	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C103		1
732	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C104		1
733	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C105		1
734	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C106		1
735	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C107		1
736	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C108		1
737	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C109		1
738	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C110		1
739	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C111		1
740	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C112		1
741	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C113		1
742	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C114		1
743	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C115		1
744	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C116		1
745	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C117		1
746	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C118		1
747	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C119		1
748	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C120		1
749	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C121		1
750	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C122		1
751	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C123		1
752	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C124		1
753	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C125		1
754	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C126		1
755	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C127		1
756	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C128		1
757	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C129		1
758	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C130		1
759	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C131		1
760	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C132		1
761	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C133		1
762	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C134		1
763	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C135		1
764	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C136		1
765	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C137		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
766	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C138		1
767	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C139		1
768	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C140		1
769	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C141		1
770	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C142		1
771	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C143		1
772	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C144		1
773	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C145		1
774	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C146		1
775	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C147		1
776	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C148		1
777	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C149		1
778	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C150		1
779	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C151		1
780	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C152		1
781	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C153		1
782	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C154		1
783	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C155		1
784	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C156		1
785	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C157		1
786	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C158		1
787	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C159		1
788	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C160		1
789	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C161		1
790	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C162		1
791	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C163		1
792	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C164		1
793	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C165		1
794	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C166		1
795	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C167		1
796	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C168		1
797	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C169		1
798	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C170		1
799	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C171		1
800	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C172		1
801	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C173		1
802	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C174		1
803	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C175		1
804	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C176		1
805	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C177		1
806	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C178		1
807	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C179		1
808	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C180		1
809	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C181		1
810	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C182		1
811	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C183		1
812	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C184		1
813	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C185		1
814	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C186		1
815	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C187		1
816	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C188		1
817	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C189		1
818	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C190		1
819	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C191		1
820	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C192		1
821	N/A	2CDJA1H120JT2	CAP.MTLYR CHIP;CD1JA1H120J,T(PAN OVERS	C193		1
822	N/A	2CDJA1H120JT2	CAP.MTLYR CHIP;CD1JA1H120J,T(PAN OVERS	C194		1
823	N/A	2CDJA1H120JT2	CAP.MTLYR CHIP;CD1JA1H120J,T(PAN OVERS	C195		1
824	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C196		1
825	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C197		1
826	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C198		1
827	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C199		1
828	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C200		1
829	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C201		1
830	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C202		1
831	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C203		1
832	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C204		1
833	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C205		1
834	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C206		1
835	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C207		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
836	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C208		1
837	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C209		1
838	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C210		1
839	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C211		1
840	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C212		1
841	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C213		1
842	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C215		1
843	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C216		1
844	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C217		1
845	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C218		1
846	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C219		1
847	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C220		1
848	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C221		1
849	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C222		1
850	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C223		1
851	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C224		1
852	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C225		1
853	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C226		1
854	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C227		1
855	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C229		1
856	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C230		1
857	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C231		1
858	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C232		1
859	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C233		1
860	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C234		1
861	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C235		1
862	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C236		1
863	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C237		1
864	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C238		1
865	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C239		1
866	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C240		1
867	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C241		1
868	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C242		1
869	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C243		1
870	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C284		1
871	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C285		1
872	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C286		1
873	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C287		1
874	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C288		1
875	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C289		1
876	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C290		1
877	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C291		1
878	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C292		1
879	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C293		1
880	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C294		1
881	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C295		1
882	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C296		1
883	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C297		1
884	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C298		1
885	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C299		1
886	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C300		1
887	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C301		1
888	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C302		1
889	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C303		1
890	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C304		1
891	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C305		1
892	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C306		1
893	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C307		1
894	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C308		1
895	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C309		1
896	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C310		1
897	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C311		1
898	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C312		1
899	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C313		1
900	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C314		1
901	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C315		1
902	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C316		1
903	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C317		1
904	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C318		1
905	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C319		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
906	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C320		1
907	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C321		1
908	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C322		1
909	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C323		1
910	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C324		1
911	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C325		1
912	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C326		1
913	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C327		1
914	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C328		1
915	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C329		1
916	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C330		1
917	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C331		1
918	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C332		1
919	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C333		1
920	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C334		1
921	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C335		1
922	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C336		1
923	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C337		1
924	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C338		1
925	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C339		1
926	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C340		1
927	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C341		1
928	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C342		1
929	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C343		1
930	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C344		1
931	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C345		1
932	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C346		1
933	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C347		1
934	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C348		1
935	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C349		1
936	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C350		1
937	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C351		1
938	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C352		1
939	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C353		1
940	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C354		1
941	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C355		1
942	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C356		1
943	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C357		1
944	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C358		1
945	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C359		1
946	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C360		1
947	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C361		1
948	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C362		1
949	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C363		1
950	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C364		1
951	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C365		1
952	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C366		1
953	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C367		1
954	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C368		1
955	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C369		1
956	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C370		1
957	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C371		1
958	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C372		1
959	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C373		1
960	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C374		1
961	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C375		1
962	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C376		1
963	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C377		1
964	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C378		1
965	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C379		1
966	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C380		1
967	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C381		1
968	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C382		1
969	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C383		1
970	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C384		1
971	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C385		1
972	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C386		1
973	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C387		1
974	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C388		1
975	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C389		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
976	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C390		1
977	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C391		1
978	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C392		1
979	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C393		1
980	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C394		1
981	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C395		1
982	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C396		1
983	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C397		1
984	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C398		1
985	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C399		1
986	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C400		1
987	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C401		1
988	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C402		1
989	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C403		1
990	N/A	2CEBC1C470MT2	CAP.ELEC(SMD);CE0BC1C470M,T	C404		1
991	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C405		1
992	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C406		1
993	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C407		1
994	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C408		1
995	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C409		1
996	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C410		1
997	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C411		1
998	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C412		1
999	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C413		1
1000	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C414		1
1001	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C415		1
1002	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C416		1
1003	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C417		1
1004	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C420		1
1005	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C421		1
1006	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C422		1
1007	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C423		1
1008	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C424		1
1009	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C425		1
1010	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C426		1
1011	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C427		1
1012	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C428		1
1013	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C429		1
1014	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C431		1
1015	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C433		1
1016	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C435		1
1017	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C437		1
1018	N/A	2CDJA1H180JT2	CAP.MTLYR CHIP;CD1JA1H180J,T(PAN OVERS	C438		1
1019	N/A	2CDJA1H151JT2	CAP.MTLYR CHIP;CD1JA1H151J,T	C439		1
1020	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C441		1
1021	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C442		1
1022	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C444		1
1023	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C445		1
1024	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C446		1
1025	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C447		1
1026	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C448		1
1027	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C449		1
1028	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C450		1
1029	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C451		1
1030	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C452		1
1031	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C454		1
1032	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C455		1
1033	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C456		1
1034	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C457		1
1035	N/A	2CDJA1H151JT2	CAP.MTLYR CHIP;CD1JA1H151J,T	C458		1
1036	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C460		1
1037	N/A	2CDJA1H180JT2	CAP.MTLYR CHIP;CD1JA1H180J,T(PAN OVERS	C461		1
1038	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C463		1
1039	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C465		1
1040	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C467		1
1041	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C468		1
1042	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C469		1
1043	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C470		1
1044	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C471		1
1045	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C472		1



Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1116	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C543		1
1117	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C544		1
1118	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C545		1
1119	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C546		1
1120	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C547		1
1121	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C548		1
1122	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C549		1
1123	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C550		1
1124	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C551		1
1125	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C552		1
1126	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C553		1
1127	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C554		1
1128	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C555		1
1129	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C556		1
1130	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C557		1
1131	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C558		1
1132	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C559		1
1133	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C560		1
1134	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C561		1
1135	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C562		1
1136	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C563		1
1137	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C564		1
1138	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C565		1
1139	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C566		1
1140	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C567		1
1141	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C568		1
1142	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C569		1
1143	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C570		1
1144	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C571		1
1145	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C572		1
1146	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C573		1
1147	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C574		1
1148	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C575		1
1149	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C576		1
1150	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C577		1
1151	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C578		1
1152	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C579		1
1153	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C580		1
1154	N/A	2CDJA1H220JT2	CAP.MTLYR CHIP;CD1JA1H220J,T(PAN OVERS	C581		1
1155	N/A	2CDJA1H220JT2	CAP.MTLYR CHIP;CD1JA1H220J,T(PAN OVERS	C582		1
1156	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C583		1
1157	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C584		1
1158	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C585		1
1159	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C586		1
1160	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C587		1
1161	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C588		1
1162	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C589		1
1163	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C590		1
1164	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C591		1
1165	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C592		1
1166	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C593		1
1167	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C594		1
1168	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C595		1
1169	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C596		1
1170	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C597		1
1171	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C598		1
1172	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C599		1
1173	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C600		1
1174	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C601		1
1175	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C602		1
1176	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C604		1
1177	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C605		1
1178	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C606		1
1179	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C607		1
1180	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C608		1
1181	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C609		1
1182	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C610		1
1183	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C611		1
1184	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C612		1
1185	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C613		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1186	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C614		1
1187	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C615		1
1188	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C616		1
1189	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C617		1
1190	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C618		1
1191	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C619		1
1192	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C620		1
1193	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C621		1
1194	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C622		1
1195	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C624		1
1196	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C625		1
1197	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C626		1
1198	N/A	2CDJA1H103ZT2	CAP.MTLYR CHIP;CD1JA1H103Z,T	C627		1
1199	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L1		1
1200	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L2		1
1201	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L3		1
1202	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L4		1
1203	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L5		1
1204	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L6		1
1205	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L7		1
1206	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L8		1
1207	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L10		1
1208	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L22		1
1209	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L23		1
1210	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L24		1
1211	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L25		1
1212	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L26		1
1213	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L27		1
1214	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L28		1
1215	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L29		1
1216	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L30		1
1217	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L31		1
1218	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L32		1
1219	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L33		1
1220	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L34		1
1221	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L35		1
1222	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L36		1
1223	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L37		1
1224	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L38		1
1225	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L39		1
1226	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L40		1
1227	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L41		1
1228	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L42		1
1229	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L43		1
1230	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L44		1
1231	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L45		1
1232	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L46		1
1233	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L47		1
1234	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L48		1
1235	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L49		1
1236	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L50		1
1237	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L51		1
1238	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L52		1
1239	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L53		1
1240	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L54		1
1241	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L55		1
1242	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L56		1
1243	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L57		1
1244	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L58		1
1245	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L59		1
1246	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L60		1
1247	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L61		1
1248	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L62		1
1249	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L63		1
1250	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L64		1
1251	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L65		1
1252	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L66		1
1253	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L67		1
1254	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L68		1
1255	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L76		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1256	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L77		1
1257	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L78		1
1258	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L79		1
1259	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L80		1
1260	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L81		1
1261	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L82		1
1262	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L83		1
1263	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L84		1
1264	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L85		1
1265	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L86		1
1266	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L87		1
1267	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L88		1
1268	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L89		1
1269	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L90		1
1270	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L91		1
1271	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L94		1
1272	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L95		1
1273	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L96		1
1274	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L97		1
1275	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L98		1
1276	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L99		1
1277	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L101		1
1278	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L102		1
1279	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L103		1
1280	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L105		1
1281	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L106		1
1282	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L107		1
1283	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L109		1
1284	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L110		1
1285	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L111		1
1286	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L112		1
1287	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L114		1
1288	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L115		1
1289	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L116		1
1290	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L117		1
1291	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L118		1
1292	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L119		1
1293	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L120		1
1294	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L121		1
1295	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L122		1
1296	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L123		1
1297	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L124		1
1298	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L125		1
1299	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L126		1
1300	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L127		1
1301	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L128		1
1302	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L129		1
1303	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L130		1
1304	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L131		1
1305	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L132		1
1306	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L133		1
1307	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L134		1
1308	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L136		1
1309	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L139		1

## BOM LIST (N3760W)

**ViewSonic Model Number: VS10848-1M**

**Rev: 1a**

**Serial No. Prefix: PVE**

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1	N/A		FIREWARE 2.0			1
2	N/A	7TA3741A9310	PE BAG ASSY			1
3	N/A	7TA3741A0110	SET ASSY			1
4	P-00004629	7024824008611	EPE BAG;TL3290JT (A)			1
5	P-00005491	7024803013611	CARTON(C);TA3741AW			1
6	P-00004631	7024813006711	POLYFOAM TOP;TL3741RT,(A)			1
7	P-00004630	7024813006811	POLYFOAM BOTTOM;TL3741RT,(A)			1
8	P-00001683	7024824006411	EPE SHEET;TL3001FM			1
9	N/A	7024764054111	LABEL CARTON(C);TA3741AW			1
10	N/A	7024764054411	LABEL SERIAL(C);TA3741AW			1
11	N/A	7024404012411	SUPPORT CARTON;TL2718FMR,(A)			4
12	N/A	7TA3741A9310	PE BAG ASSY			
13	DC-00005468	7024750043311	USER'S MANUAL(C);TA3241AW			1
14	N/A	735499000120G	BATTERY DRY;GP15G(GP),(D)			2
15	A-00005467	7352200080A0G	(BRMTX UNIT;FOR TA3741A),(D)			1
16	P-00004614	7024824005119	PE BAG;TC336CH SPK B,(A)			1
17	E-00002300	7373000200602	SIGNAL CABLE;1800mm(YO DYI),(E)			1
18	M-MS-0808-9924	7373000200612	AV CONNECTOR;PX-050829-01(PSI),(E)			0
19	DC-00005469	7024750047211	QUICK START GUIDE			1
20	N/A	7TA3741A0110	SET ASSY			
21	N/A	7TA3741A1010	CABI TOTAL ASSY			1
22	N/A	7TA3741A6110	BACK COVER ASSY			1
23			NAZZ;7833030000207			1
24			NAZZ;7833060000104			1
25	N/A	7833040002402	SILICONE GLUE;KE-45T			0.005
26			NAZZ;7833020000306			1
27			NAZZ;7833020000004			1
28	N/A	7024764052411	LABEL MODEL(C);TA3741AW			1
29	N/A	780PB4012CB07	SCREW M4X12;TL3201FM,(F)			16
30	N/A	780PS4008CB06	SCREW;S-TYPE M4*8,(F)			3
31	N/A	7TA3741A7010	SUPPORT ASSY			1
32	M-00005482	7024413056811	DECOR PLATE JACK (A);TA3241AW			1
33	M-SCW-0824-6963	780PS4012CB08	SCREW;S-TYPE M4*12,(F)	SCREW		6
34	M-00005492	7024413058611	DECOR PLATE HENGE;TA3741AW,(A)			1
35	M-SCW-0824-6963	780PS4012CB08	SCREW;S-TYPE M4*12,(F)			4
36	N/A	7024764040111	LABEL HI PORT OK;TL,(C)			1
37	M-00005484	7024413057111	DECOR PLATE TN;TA3241AW,(A)			1
38	M-00005493	7024413056711	DECOR PLATE WIRE (A);TL3741RT			1
39	M-00005486	7024413057411	DECOR PLATE CARD;TL3241RT(A)			1
40	N/A	7024764041211	LABEL(CAUTION);TL2327FMR,(C)			1
41	CB-00005481	7024404013111	WIRE CLIP;TL3241RT,(A)			1
42	N/A	780PB4012CB07	SCREW M4X12;TL3201FM,(F)			1
43	N/A	7TA3741A1010	CABI TOTAL ASSY			
44	N/A	7TA3741A1210	FRONT PANEL ASSY			1
45	N/A	7333063700102	TFT-LCD;LC370W01(LG.PHILIPS),(D)			1
46	N/A	7024513005311	SHIELD MAIN PWB(B);TA3241AW			1
47	N/A	780XX40002211	SCREW(TBF3X08);TL2003FM,(F)			12
48	N/A	780PS4008CB06	SCREW;S-TYPE M4*8,(F)			8
49	N/A	7024503017511	SUPPORT MAIN L(B);TL3741RT			1
50	N/A	7024503017611	SUPPORT MAIN R(B);TL3741RT			1
51	N/A	7TA3741A2010	CHASSIS ASSY			1
52	N/A	780PB3008CA00	SCREW;B-TYPE M3*8,(F)			6
53	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)	SCREW		16
54	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			6
55	N/A	7024604019511	INSULATOR			
56	N/A	7024503017911	SUPPORT (B);TL3741RT	SUPPORT		1
57	N/A	780PB4012CB07	SCREW M4X12;TL3201FM,(F)			5
58	N/A	7TA3741A3110	SPK ASSY			1
59	N/A	780PB4010CB06	SCREW;B-TYPE M4*10,(F)			8
60	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			3
61	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			4
62	N/A	7024604019411	CUSHION(TN);TA3241AW,(H)			1
63	N/A	7024604018411	CUSHION;(HDMI);TL3241RT,(H)			1
64	N/A	7024604011811	CUSHION;TL2009FM			2
65	N/A	737422200010G	WIRE HARNESS;1P/100mm(YO DYI),(E)			1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
66	N/A	7024604011011	CUSHION(80X15X15);TL3201FM,(H)			1
67	N/A	7024604018911	CUSHION(10X10X100);TL3741TT,(H)			1
68	N/A	7TA3741A6110	BACK COVER ASSY			
69	C-00004624	7024313003211	BACK COVER(A);TL3741RT			1
70	N/A	7TA3741A7010	SUPPORT ASSY			
71	N/A	7024503017711	SUPPORT HENGE;TL3741RT,(B)			1
72	N/A	7024403012511	BOTTOM BASE;TA3741AW,(A)			1
73	N/A	7024503017811	BASE SUPPORT SHEET;TL3741RT,(B)			1
74	HW-00003604	780XX40002311	SCREW(MSF4X12);TL3001FM,(F)			6
75	N/A	780XX40002011	SCREW;TBF M4*10,(F)			6
76	M-00005479	7024614014311	CUSHION LEG;TL3001FM,(H)			6
77	N/A	7TA3741A1210	FRONT PANEL ASSY			
78	C-00005489	7024303008911	FRONT PANEL;TA3741AW,(A)			1
79	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
80	N/A	7TA3741AN110	LED PWB ASSY			1
81	N/A	7TA3741A1310	CTL PANEL ASSY			1
82	M-00005487	7024414026311	DECOR PLATE RN;TL3241RT,(A)			1
83	N/A	7TA3741A2710	EAR ASSY			1
84	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
85	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
86	N/A	7024734022211	NAME PLATE;TL3741RT(VIEW SONIC),(B)			1
87	N/A	7TA3741A2010	CHASSIS ASSY			
88	N/A	7TA3741A2510	POWER TERMINAL ASSY			1
89	N/A	7TA3741AA110	POWER ASSY			1
90	B-00005488	7TA3741AF110	MAIN PWB ASSY			1
91	N/A	7024503018311	SUPPORT JACK(B);TA3241AW			1
92	N/A	780XX40002211	SCREW(TBF3X08);TL2003FM,(F)			3
93	N/A	780PS3006CA00	SCREW;S-TYPE M3*6,(F)			4
94	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
95	C-00005490	7024503017411	SUPPORT MAIN M(B);TL3741RT			1
96	N/A	780PS3006CA00	SCREW;S-TYPE M3*6,(F)			9
97	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			8
98	N/A	737425001140G	B(WIRE HARNESS;13P/550mm(YO-DYI),(E)			1
99	N/A	737425001150G	B(WIRE HARNESS;30P/200mm(YO-DYI),(E)			1
100	N/A	737425001130G	B(WIRE HARNESS;12P/900mm(YO-DYI),(E)			1
101	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			1
102	N/A	737425001010G	WIRE HARNESS;12P/400mm(YO-DYI),(E)	INVERTER		1
103	N/A	7TA3741A3110	SPK ASSY			
104	E-00005475	735517000120G	B(SPK;2250176-04L;TECH)(D)			2
105	N/A	737410401350G	WIRE HARNESS;4P/1050/1050mm(佑迪),(E)	S1		1
106	E-00005476	735512000060G	SPK;T13074-08R(TECH),(D)			2
107	N/A	737409200090G	WIRE ASSY;2P/100mm(YO DYI),(E)			1
108	N/A	737409200100G	WIRE ASSY;2P/100mm(YO DYI),(E)			1
109	N/A	7TA3741AN110	LED PWB ASSY			
110		736TA3741N112				1
111	N/A	2RDSPY1K00JT1	"RES. CARBON;RD1\6PTY1KJ,T	R10		1
112	N/A	2RDSPY4K70JT1	"RES. CARBON;RD1\6PTY4R7KJ,T	R11		1
113	N/A	2RDSPY220HJT1	"RES. CARBON;RD1\6PTY220HJ,T	R12		1
114	N/A	2TC0024YT040	TRANSISTOR;2SC1815-Y TPE2	Q1		1
115	N/A	2DL010300170G	LED;L-3WEGW(KINGBRIGHT)	LED		1
116	N/A	2AA090420017G	IC(3P);IRM-2638VS6F3(ELEC)	U1		1
117	N/A	737425401270G	B(WIRE HARNESS;4P(J13)/850mm(YO-DYI),(	J13		1
118	M-00002278	7024404008311	SUPPORT(RM);TL2003FM			1
119	N/A	7TA3741A1310	CTL PANEL ASSY			
120	B-0005472	7TA3741AH110	CTL PWB ASSY			1
121	PL-00005478	7024454014511	POWER KNOB(A);TL3241RT	CTL KNOB		1
122	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)	SCREW		3
123	N/A	7TA3741A2710	EAR ASSY			
124	N/A	7TA3741AL110	EAR PWB ASSY			1
125	N/A	7024503018111	SUPPORT EAR PWB (B);TL3241RT			1
126	N/A	780PS3006CA00	SCREW;S-TYPE M3*6,(F)	SCREW		2
127	N/A	7TA3741A2510	POWER TERMINAL ASSY			
128	N/A	7024504022711	SUPPORT POWER TL3241RT,(B)			1
129	N/A	737420500310G	WIRE HARNESS;5P/350mm(YO-DYI),(E)			1
130	N/A	780XX40002711	SCREW(TBF3X14);TL3001FM,(F)	SCREW		2
131	N/A	7TA3741AA110	POWER ASSY			
132	B-00004623	737504000240G	SMPS POWER ASSY;FSP276-3F01(SPI),(D)			1
133	A-00005470	737212200450G	AC POWER CORD;YP12/YC12(SHIH YANG)			1
134	B-00005488	7TA3741AF110	MAIN PWB ASSY			
135	N/A	736TA3741F112	A			1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
136	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C430		1
137	N/A	733904140530G	B(CAP ELEC;TKR102M1EG21M,JAMICON),(D)	C432		1
138	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C434		1
139	N/A	2CF3N1H474JF2	CAP.MEF;CF93N1H474J,F	C436		1
140	N/A	2CTDJ1E4R7KTG	CAP.TANTALUM;CT1BJ1E4R7K,T(AVX/KYOCERA	C440		1
141	N/A	2CTAJ1C010KTG	CAP TANTALUM;CT1BJ1C010K,T(AVX/KYOCERA	C443		1
142	N/A	2CTDJ1E4R7KTG	CAP.TANTALUM;CT1BJ1E4R7K,T(AVX/KYOCERA	C453		1
143	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C459		1
144	N/A	733904140530G	B(CAP ELEC;TKR102M1EG21M,JAMICON),(D)	C462		1
145	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C464		1
146	N/A	2CF3N1H474JF2	CAP.MEF;CF93N1H474J,F	C466		1
147	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D	L9		1
148	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L100		1
149	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L104		1
150	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L108		1
151	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L113		1
152	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D	L137		1
153	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D	L138		1
154	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D	L140		1
155	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D	L141		1
156	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D	CM1		1
157	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D	CM2		1
158	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D	CM3		1
159	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D	CM4		1
160	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q1		1
161	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q2		1
162	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q3		1
163	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q7		1
164	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q8		1
165	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q9		1
166	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q10		1
167	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q11		1
168	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q12		1
169	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q13		1
170	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q14		1
171	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q15		1
172	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q16		1
173	N/A	2TF080010075G	FET;CEM4539(CET)	Q17		1
174	N/A	2TF080010075G	FET;CEM4539(CET)	Q18		1
175	N/A	2TF080010075G	FET;CEM4539(CET)	Q19		1
176	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q20		1
177	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q21		1
178	N/A	2TF080010075G	FET;CEM4539(CET)	Q22		1
179	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q23		1
180	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q25		1
181	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q26		1
182	N/A	2TF020030068G	FET;AP4435GM(AP)	Q27		1
183	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q28		1
184	N/A	2TF020030068G	FET;AP4435GM(AP)	Q29		1
185	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q30		1
186	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q31		1
187	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q32		1
188	N/A	733615011030G	B(TUNER;TUV1236D;PHILIPS),(D)	U1		1
189	N/A	2AA16094S191G	IC(3P);AIC1117-33PY(AIC)	U2		1
190	N/A	2AA16093S191G	IC(3P);AIC1117-25PY(AIC)	U3		1
191	N/A	2AA16099S177G	IC(3P);LD1117A-ADJ-AL(TO-252)(UTC)	U4		1
192	N/A	2AA1611S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U5		1
193	N/A	2AM07032S170G	IC(8P);24LC02BT/SNG(MICROCHIP)	U6		1
194	N/A	2DS06003S1D1G	DIODE ZENER;RCLAMP0514M.TBT(SEMTECH)	U7		1
195	N/A	2DS06003S1D1G	DIODE ZENER;RCLAMP0514M.TBT(SEMTECH)	U8		1
196	N/A	2AA13052S182G	IC(128P);SIL9011CLU,(WEIKENG)	U13		1
197	N/A	2AA1611S191G	IC(3P);AIC1117-18PY(UTC)	U14		1
198	N/A	2AA24002S110G	IC(16P);BU4052BCF-E2(ROHM)	U15		1
199	N/A	2AM07025S170G	IC(8P);24LC21AT/SNG(MICROCHIP)	U16		1
200	N/A	2AL13006S124G	IC(5P);74LVC1G14GW(PHILIPS),(D)	U17		1
201	N/A	2AL13006S124G	IC(5P);74LVC1G14GW(PHILIPS),(D)	U18		1
202	N/A	2AA02072S174G	IC(548P);PW328-10L(PIXELWORKS),(D)	U19		1
203	N/A	7024524010911	HEAT SINK;TL3209FM,(B)	U19		1
204	N/A	2AL13005S124G	IC(5P);74LVC1G126GW(PHILIPS),(D)	U23		1
205	N/A	2AM02069S1D32	IC(144P);HY5DU573222F-25;HYNIX),(D)	U25		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
206	N/A	2AA16094S191G	IC(3P);AIC1117-33PY(AIC)	U26		1
207	N/A	2AL12002S122G	IC(16P);SN74CBT3257DBQR(TI),(D)	U28		1
208	N/A	2AA03108S158G	B(IC80P);MSP4440K-QA-D6-500;MICRONAS,	U29		1
209	N/A	2AA16106S177G	IC;78D08AL(UTC)	U30		1
210	N/A	2AA16114S191G	IC(3P);AIC1117-50PY(AIC)	U31		1
211	N/A	2AA03102S1C8G	B(IC44P);LX1722CDBe3)(MICROSEMI),(D)	U33		1
212	N/A	2AA13050S122G	IC(16P);MAX3232CDR(TI)	U34		1
213	N/A	2AA03107S174G	IC(648P);PWM2000L(PIXELWORKS),(D)	U35		1
214	N/A	7024524010611	HEAT SINK;TL3002DM	U35		1
215	N/A	2AA13050S122G	IC(16P);MAX3232CDR(TI)	U36		1
216	N/A	2AM07035S170G	IC(8P);24LC256-I/SNG(MICROCHIP),(D)	U37		1
217	N/A	2AA04041S1D4G	B(IC,S29GL032M90TFIR40;SPANSTON,(D)	U39		1
218	N/A	2AA04041S1D4G	B(IC,S29GL032M90TFIR40;SPANSTON,(D)	U40		1
219	N/A	2AM02068S1D32	IC(66P);HY5DU561622DT-5(HYNIX),(D)	U42		1
220	N/A	2AM02068S1D32	IC(66P);HY5DU561622DT-5(HYNIX),(D)	U43		1
221	N/A	2AM02068S1D32	IC(66P);HY5DU561622DT-5(HYNIX),(D)	U44		1
222	N/A	2AM02068S1D32	IC(66P);HY5DU561622DT-5(HYNIX),(D)	U45		1
223	N/A	2AL13005S124G	IC(5P);74LVC1G126GW(PHILIPS),(D)	U47		1
224	N/A	737000100020G	SOCKET PLCC;14144-A0B7001N(TOP YANG),()	U48		1
225	N/A	2AC02039S1C9G	IC(44P);SM5964C40JP(SYNCMOS),(D)	U48		1
226	N/A	2AL13001S124G	IC(14P);74LVC14AD(PHILIPS)	U49		1
227	N/A	2AA11036S177G	IC(8P);LM358L(UTC)	U51		1
228	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U52		1
229	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U53		1
230	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U54		1
231	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U55		1
232	N/A	2AA20010S192G	IC(3P);CAT809RTBIT(CATALYST)	U56		1
233	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D1		1
234	N/A	2DS05066S124G	DIODE;BAV70(PHILIPS)	D2		1
235	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D3		1
236	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D4		1
237	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D8		1
238	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D9		1
239	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D10		1
240	N/A	2DS05066S124G	DIODE;BAV70(PHILIPS)	D11		1
241	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D12		1
242	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D13		1
243	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D14		1
244	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D15		1
245	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D16		1
246	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D17		1
247	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D18		1
248	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D19		1
249	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D20		1
250	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D21		1
251	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D22		1
252	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D23		1
253	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D24		1
254	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D25		1
255	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D26		1
256	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D27		1
257	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D28		1
258	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D29		1
259	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D30		1
260	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D32		1
261	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D33		1
262	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP8		1
263	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP9		1
264	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP10		1
265	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP11		1
266	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP12		1
267	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP13		1
268	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP14		1
269	N/A	734007200160G	RES.ARRAY;CN34JTN470(TA-I)	RP15		1
270	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP16		1
271	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP25		1
272	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP26		1
273	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP27		1
274	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP28		1
275	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP29		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
276	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP30		1
277	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP49		1
278	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP50		1
279	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP51		1
280	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP52		1
281	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP53		1
282	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP54		1
283	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP55		1
284	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP56		1
285	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP57		1
286	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP58		1
287	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP59		1
288	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP60		1
289	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP61		1
290	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP62		1
291	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP63		1
292	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP65		1
293	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP66		1
294	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP67		1
295	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP68		1
296	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP69		1
297	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP70		1
298	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP71		1
299	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP72		1
300	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP73		1
301	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP74		1
302	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP75		1
303	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP76		1
304	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP77		1
305	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP78		1
306	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP79		1
307	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP80		1
308	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP81		1
309	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP82		1
310	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP83		1
311	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP84		1
312	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP85		1
313	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP86		1
314	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP87		1
315	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP88		1
316	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP89		1
317	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP90		1
318	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP91		1
319	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP92		1
320	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP93		1
321	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP94		1
322	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP95		1
323	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP96		1
324	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP97		1
325	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP98		1
326	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP99		1
327	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP100		1
328	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP101		1
329	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP102		1
330	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP103		1
331	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP104		1
332	N/A	733700001710G	B(CRYSTAL;SSP048000I3CH;HARMONY)(D)	X1		1
333	N/A	733700001700G	B(CRYSTAL;SSP033000I3CH;HARMONY)(D)	X2		1
334	N/A	2AA02074S159G	IC(28P);MK3771-17RLFTR(ICS),(D)	X3		1
335	N/A	733700001620G	CRYSTAL;28.32MHz/HC-49S(AIXING)	Y2		1
336	N/A	733700001380G	CRYSTAL;27.00MHz 16pf 49US(EWN),(D)	Y3		1
337	N/A	733700001650G	CRYSTAL;XAT018432FK1H-O(HARMONY)	Y4		1
338	N/A	733700001610G	CRYATAL;XAT013500FK1H(HARMONY)	Y5		1
339	N/A	733700001660G	CRYSTAL;XAT01200001-O(HARMONY)	Y6		1
340	N/A	735250000320G	B(RELAY;GS-SH-212D;GOODSKY),(D)	RL1		1
341	N/A	735204000220G	SW TACT;TSAB-2L(HUA JIE)(5mm)	SW1		1
342	N/A	735204000220G	SW TACT;TSAB-2L(HUA JIE)(5mm)	SW2		1
343	N/A	737010020820G	RCA JACK;HSP-243V2P-39(KUN MING)	CON1		1
344	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON2		1
345	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON3		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
346	N/A	737010020820G	RCA JACK;HSP-243V2P-39(KUN MING)	CON4		1
347	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON5		1
348	N/A	737010020790G	RCA JACK;HSP-243V2P-07(KUN MING)	CON6		1
349	N/A	737010020790G	RCA JACK;HSP-243V2P-07(KUN MING)	CON7		1
350	N/A	737010020870G	PIN JACK:KM04022P-01Z(KUNMING)	CON8		1
351	N/A	737010050100G	PHONE JACK(D3.5);PJ-0004T05B0L(AIXING)	J1		1
352	N/A	737000070130G	SOCKET DIN:LNB0509-4-SW(LIH SHENG)	J2		1
353	N/A	737000070130G	SOCKET DIN:LNB0509-4-SW(LIH SHENG)	J3		1
354	N/A	737114101030G	B(H HEADER PIN;DF11-30DP-2DSA(YODYI),(D)	J5		1
355	N/A	737110151000G	B(H HEADER PIN(5P);M5-I20001(YODYI),(D)	J9		1
356	N/A	737110141000G	B(H HEADER PIN(4P);M4-I20001(YODYI),(D)	J13		1
357	N/A	737110191000G	B(H HEADER PIN(9P);M9-I20001(YODYI),(D)	J14		1
358	N/A	737111202160G	B(H HEADER PIN(13P);M13-I25002R(YODYI),)	J17		1
359	N/A	737110242080G	HEADER PIN(4PIN);M4-I25002(YO DYI)	S1		1
360	N/A	737050110010G	HDMI;HM-19F4-05(NIAN YEONG)	P1		1
361	N/A	737020020260G	D-SUB CONNECTOR;32115-AAA0030T,(D)	P3		1
362	N/A	737020020270G	D CONNECTOR;32009-AAA0030T,(D)	P6B		1
363	N/A	7TA3741AFDB0	SUB-MAIN PWB ASSY			1
364	B-0005472	7TA3741AH110	CTL PWB ASSY			
365	N/A	736TA3741D112	PCB ASSY;CY236X163S(CHIAN YOU),(D)			1
366		736TA3741H112				1
367	N/A	2RDSPY1K00JT1	"RES. CARBON;RD1\6PTY1KJ,T	R1		1
368	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R2		1
369	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R3		1
370	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R4		1
371	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R5		1
372	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R6		1
373	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R7		1
374	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R8		1
375	N/A	2RDSPY2K00JT5	"RES. CARBON;RD1\6PTY2KJ,T	R9		1
376	N/A	735204000220G	SW TACT;TSAB-2L(HUA JIE)(5mm)			7
377	N/A	737425900210G	WIRE HARNESS;9P/850mm(YO-DYI),(E)	J14		1
378	N/A	7TA3741AL110	EAR PWB ASSY			
379		736TA3741E112				1
380	N/A	2RDSPY5K10JT1	"RES. CARBON;RD1\6PTY5R1KJ,T	R13		1
381	N/A	2TC00024YT040	TRANSISTOR;2SC1815-Y TPE2	Q2		1
382	N/A	737010050090G	JACK EARPHONE;LJE0369-7(LIH SHENG)	EARPHONE		1
383	N/A	737425500680G	WIRE HARNESS;5P(J9)/1000mm(YO-DYI),(E)	J9		1
384	N/A	7TA3741AFDB0	SUB-MAIN PWB ASSY			
385	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R3		1
386	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R4		1
387	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R6		1
388	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R7		1
389	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R8		1
390	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R9		1
391	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R11		1
392	N/A	2RTDFK1K10FT2	(RT1/10FK1K1F,T)	R12		1
393	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R13		1
394	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R14		1
395	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R15		1
396	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R16		1
397	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R17		1
398	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R24		1
399	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R25		1
400	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R25A		1
401	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R26		1
402	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R27		1
403	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R27A		1
404	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R31		1
405	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R35		1
406	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R59		1
407	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R62		1
408	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R63		1
409	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R64		1
410	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R65		1
411	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R66		1
412	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R67		1
413	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R68		1
414	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R69		1
415	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R70		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
416	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R72		1
417	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R73		1
418	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R74		1
419	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R75		1
420	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R76		1
421	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R77		1
422	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R78		1
423	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R79		1
424	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R80		1
425	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R81		1
426	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R82		1
427	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R83		1
428	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R84		1
429	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R85		1
430	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R86		1
431	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R87		1
432	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R88		1
433	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R89		1
434	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R90		1
435	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R91		1
436	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R92		1
437	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R93		1
438	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R94		1
439	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R95		1
440	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R96		1
441	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R97		1
442	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R98		1
443	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R99		1
444	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R100		1
445	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R101		1
446	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R102		1
447	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R103		1
448	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R104		1
449	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R105		1
450	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R106		1
451	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R107		1
452	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R108		1
453	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R109		1
454	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R110		1
455	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R111		1
456	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R112		1
457	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R113		1
458	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R114		1
459	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R115		1
460	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R116		1
461	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R117		1
462	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R118		1
463	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R119		1
464	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R120		1
465	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R121		1
466	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R122		1
467	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R123		1
468	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R124		1
469	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R126		1
470	N/A	2RTDFK2K20JT2	RES.FLAT CHIP;RT1/10FK2R2KJ,T(LIAN SHE	R127		1
471	N/A	2RTDFK2K20JT2	RES.FLAT CHIP;RT1/10FK2R2KJ,T(LIAN SHE	R129		1
472	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R130		1
473	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R131		1
474	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R132		1
475	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R133		1
476	N/A	2RTDFK5K60JT2	RES.FLAT CHIP;RT1/10FK5R6KJ,T	R134		1
477	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R135		1
478	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R136		1
479	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R137		1
480	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R138		1
481	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R139		1
482	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R140		1
483	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R141		1
484	N/A	2RTDFK5K60JT2	RES.FLAT CHIP;RT1/10FK5R6KJ,T	R142		1
485	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R143		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
486	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R144		1
487	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R145		1
488	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R146		1
489	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R147		1
490	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R148		1
491	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R149		1
492	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R152		1
493	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R153		1
494	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R154		1
495	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R155		1
496	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R156		1
497	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R157		1
498	N/A	2RTDFK22K0JT2	RES.FLAT CHIP;RT1/10FK22KJ,T	R158		1
499	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R159		1
500	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R160		1
501	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R161		1
502	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R162		1
503	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R163		1
504	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R164		1
505	N/A	2RTDFK12K0JT2	RES.FLAT CHIP;RT1/10FK12KJ,T(LIAN SHEN	R165		1
506	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R170		1
507	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R171		1
508	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R234		1
509	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R240		1
510	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R241		1
511	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R242		1
512	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R244		1
513	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R245		1
514	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R247		1
515	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R248		1
516	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R250		1
517	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R252		1
518	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R263		1
519	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R264		1
520	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R265		1
521	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R266		1
522	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R267		1
523	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R268		1
524	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R269		1
525	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R270		1
526	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R271		1
527	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R274		1
528	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R275		1
529	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R276		1
530	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R277		1
531	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R278		1
532	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R279		1
533	N/A	2RTDFK470KJT2	RES.FLAT CHIP;RT1/10FK470KJ,T(LIAN SHE	R280		1
534	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R281		1
535	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R282		1
536	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R283		1
537	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R284		1
538	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R285		1
539	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R286		1
540	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R287		1
541	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R288		1
542	N/A	2RTDFK470KJT2	RES.FLAT CHIP;RT1/10FK470KJ,T(LIAN SHE	R289		1
543	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R290		1
544	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R291		1
545	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R292		1
546	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R294		1
547	N/A	2RTDFK68H0JT2	RES.FLAT CHIP;RT1/10FK68H0J,T	R295		1
548	N/A	2RTDFK220HJT2	RES.FLAT CHIP;RT1/10FK220HJ,T(LIAN SHE	R296		1
549	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R298		1
550	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R299		1
551	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R300		1
552	N/A	2RTDFK68H0JT2	RES.FLAT CHIP;RT1/10FK68H0J,T	R301		1
553	N/A	2RTDFK220HJT2	RES.FLAT CHIP;RT1/10FK220HJ,T(LIAN SHE	R302		1
554	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R303		1
555	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R304		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
556	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R305		1
557	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R306		1
558	N/A	2RT1FP15H0JT2	RES.FLAT CHIP;RT1FP15HJ,T	R307		1
559	N/A	2RT1FP0H00JT2	RES.FLAT CHIP;RT1FP0HJ,T(2512)	R308		1
560	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R309		1
561	N/A	2RTDFK34K8FT2	RES.FLAT CHIP;RT1/10FK34R8KF,T	R310		1
562	N/A	2RTDFK56K2FT2	RES.FLAT CHIP;RT1/10FK56R2KF,T	R311		1
563	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R312		1
564	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R313		1
565	N/A	2RTDFK39K0JT2	RES.FLAT CHIP;RT1/10FK39KJ,T(LIAN SHEN	R314		1
566	N/A	2RTDFK8K20JT2	RES.FLAT CHIP;RT1/10FK8R2KJ,T(LIAN SHE	R315		1
567	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R316		1
568	N/A	2RTDFK39K0JT2	RES.FLAT CHIP;RT1/10FK39KJ,T(LIAN SHEN	R317		1
569	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R318		1
570	N/A	2RTDFK8K20JT2	RES.FLAT CHIP;RT1/10FK8R2KJ,T(LIAN SHE	R319		1
571	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R320		1
572	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R321		1
573	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R322		1
574	N/A	2RT1FP15H0JT2	RES.FLAT CHIP;RT1FP15HJ,T	R323		1
575	N/A	2RTDFK56K2FT2	RES.FLAT CHIP;RT1/10FK56R2KF,T	R324		1
576	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R325		1
577	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R326		1
578	N/A	2RT1FP0H00JT2	RES.FLAT CHIP;RT1FP0HJ,T(2512)	R327		1
579	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R328		1
580	N/A	2RTDFKOH00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R329		1
581	N/A	2RTDFKOH00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R330		1
582	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R331		1
583	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R332		1
584	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R333		1
585	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R334		1
586	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R335		1
587	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R337		1
588	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R338		1
589	N/A	2RTDFK220KJT2	RES.FLAT CHIP;RT1/10FK220KJ,T(LIAN SHE	R344		1
590	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R345		1
591	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R347		1
592	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R348		1
593	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R349		1
594	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R350		1
595	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R351		1
596	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R353		1
597	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R354		1
598	N/A	2RTDFKOH00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R355		1
599	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R356		1
600	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R371		1
601	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R372		1
602	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R373		1
603	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R374		1
604	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R382		1
605	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R383		1
606	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R384		1
607	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R385		1
608	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R386		1
609	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R387		1
610	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R388		1
611	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R389		1
612	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R390		1
613	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R391		1
614	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R392		1
615	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R393		1
616	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R394		1
617	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R395		1
618	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R400		1
619	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R401		1
620	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R402		1
621	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R403		1
622	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R404		1
623	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R405		1
624	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R406		1
625	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R407		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
626	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R409		1
627	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R411		1
628	N/A	2RTDFK10H0JT2	RES.FLAT CHIP;RT1/10FK10HJ,T(LIAN SHEN	R412		1
629	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R413		1
630	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R415		1
631	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R416		1
632	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R417		1
633	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R418		1
634	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R419		1
635	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R420		1
636	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R421		1
637	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R422		1
638	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R423		1
639	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R424		1
640	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R425		1
641	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R426		1
642	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R427		1
643	N/A	2RTDFK470HJT2	RES.FLAT CHIP;RT1/10FK470HJ,T(LIAN SHE	R428		1
644	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R429		1
645	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R430		1
646	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R432		1
647	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R433		1
648	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R434		1
649	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R435		1
650	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R436		1
651	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R438		1
652	N/A	2RTDFK30K0JT2	RES.FLAT CHIP;RT1/10FK30KJ,T(LIAN SHEN	R439		1
653	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R440		1
654	N/A	2RTDFK5K60JT2	RES.FLAT CHIP;RT1/10FK5R6KJ,T	R441		1
655	N/A	2RTDFK2K20JT2	RES.FLAT CHIP;RT1/10FK2R2KJ,T(LIAN SHE	R443		1
656	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R455		1
657	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R456		1
658	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R457		1
659	N/A	2RTDFK510HJT2	RES.FLAT CHIP;RT1/10FK510HJ,T(LIAN SHE	R458		1
660	N/A	2RTDFK470KJT2	RES.FLAT CHIP;RT1/10FK470KJ,T(LIAN SHE	R459		1
661	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R460		1
662	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R461		1
663	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R462		1
664	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R463		1
665	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R464		1
666	N/A	2RTDFK330HJT2	RES.FLAT CHIP;RT1/10FK330HJ,T(LIAN SHE	R465		1
667	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R466		1
668	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R467		1
669	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R468		1
670	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R469		1
671	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R470		1
672	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R471		1
673	N/A	2RTDFK560HJT2	RES.FLAT CHIP;RT1/10FK560HJ,T	R472		1
674	N/A	2RTDFK2K70JT2	RES.FLAT CHIP;RT1/10FK2R7KJ,T(LIAN SHE	R473		1
675	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R474		1
676	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R475		1
677	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R476		1
678	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R477		1
679	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R478		1
680	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R479		1
681	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R481		1
682	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R482		1
683	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R483		1
684	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R484		1
685	N/A	2RTDFK510HJT2	RES.FLAT CHIP;RT1/10FK510HJ,T(LIAN SHE	R485		1
686	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R486		1
687	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R487		1
688	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R488		1
689	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R489		1
690	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R490		1
691	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R491		1
692	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R492		1
693	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C1		1
694	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C2		1
695	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C3		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
696	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C4		1
697	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C5		1
698	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C6		1
699	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C7		1
700	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C8		1
701	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C9		1
702	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C10		1
703	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C11		1
704	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C12		1
705	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C13		1
706	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C14		1
707	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C15		1
708	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C16		1
709	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C17		1
710	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C18		1
711	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C19		1
712	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C20		1
713	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C21		1
714	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C22		1
715	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C23		1
716	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C24		1
717	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C25		1
718	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C26		1
719	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C27		1
720	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C28		1
721	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C29		1
722	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C30		1
723	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C31		1
724	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C32		1
725	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C33		1
726	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C34		1
727	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C41		1
728	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C96		1
729	N/A	2CDJA1H150JT2	CAP.MTLYR CHIP;CD1JA1H150J,T(PAN OVERS	C97		1
730	N/A	2CDJA1H150JT2	CAP.MTLYR CHIP;CD1JA1H150J,T(PAN OVERS	C98		1
731	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C99		1
732	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C100		1
733	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C101		1
734	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C102		1
735	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C103		1
736	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C104		1
737	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C105		1
738	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C106		1
739	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C107		1
740	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C108		1
741	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C109		1
742	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C110		1
743	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C111		1
744	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C112		1
745	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C113		1
746	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C114		1
747	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C115		1
748	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C116		1
749	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C117		1
750	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C118		1
751	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C119		1
752	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C120		1
753	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C121		1
754	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C122		1
755	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C123		1
756	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C124		1
757	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C125		1
758	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C126		1
759	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C127		1
760	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C128		1
761	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C129		1
762	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C130		1
763	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C131		1
764	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C132		1
765	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C133		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
766	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C134		1
767	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C135		1
768	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C136		1
769	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C137		1
770	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C138		1
771	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C139		1
772	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C140		1
773	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C141		1
774	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C142		1
775	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C143		1
776	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C144		1
777	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C145		1
778	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C146		1
779	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C147		1
780	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C148		1
781	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C149		1
782	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C150		1
783	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C151		1
784	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C152		1
785	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C153		1
786	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C154		1
787	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C155		1
788	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C156		1
789	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C157		1
790	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C158		1
791	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C159		1
792	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C160		1
793	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C161		1
794	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C162		1
795	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C163		1
796	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C164		1
797	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C165		1
798	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C166		1
799	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C167		1
800	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C168		1
801	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C169		1
802	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C170		1
803	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C171		1
804	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C172		1
805	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C173		1
806	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C174		1
807	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C175		1
808	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C176		1
809	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C177		1
810	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C178		1
811	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C179		1
812	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C180		1
813	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C181		1
814	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C182		1
815	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C183		1
816	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C184		1
817	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C185		1
818	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C186		1
819	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C187		1
820	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C188		1
821	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C189		1
822	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C190		1
823	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C191		1
824	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C192		1
825	N/A	2CDJA1H120JT2	CAP.MTLYR CHIP;CD1JA1H120J,T(PAN OVERS	C193		1
826	N/A	2CDJA1H120JT2	CAP.MTLYR CHIP;CD1JA1H120J,T(PAN OVERS	C194		1
827	N/A	2CDJA1H120JT2	CAP.MTLYR CHIP;CD1JA1H120J,T(PAN OVERS	C195		1
828	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C196		1
829	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C197		1
830	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C198		1
831	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C199		1
832	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C200		1
833	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C201		1
834	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C202		1
835	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C203		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
836	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C204		1
837	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C205		1
838	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C206		1
839	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C207		1
840	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C208		1
841	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C209		1
842	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C210		1
843	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C211		1
844	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C212		1
845	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C213		1
846	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C215		1
847	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C216		1
848	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C217		1
849	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C218		1
850	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C219		1
851	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C220		1
852	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C221		1
853	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C222		1
854	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C223		1
855	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C224		1
856	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C225		1
857	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C226		1
858	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C227		1
859	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C229		1
860	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C230		1
861	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C231		1
862	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C232		1
863	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C233		1
864	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C234		1
865	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C235		1
866	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C236		1
867	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C237		1
868	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C238		1
869	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C239		1
870	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C240		1
871	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C241		1
872	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C242		1
873	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C243		1
874	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C284		1
875	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C285		1
876	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C286		1
877	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C287		1
878	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C288		1
879	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C289		1
880	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C290		1
881	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C291		1
882	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C292		1
883	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C293		1
884	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C294		1
885	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C295		1
886	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C296		1
887	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C297		1
888	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C298		1
889	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C299		1
890	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C300		1
891	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C301		1
892	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C302		1
893	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C303		1
894	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C304		1
895	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C305		1
896	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C306		1
897	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C307		1
898	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C308		1
899	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C309		1
900	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C310		1
901	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C311		1
902	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C312		1
903	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C313		1
904	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C314		1
905	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C315		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
906	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C316		1
907	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C317		1
908	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C318		1
909	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C319		1
910	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C320		1
911	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C321		1
912	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C322		1
913	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C323		1
914	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C324		1
915	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C325		1
916	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C326		1
917	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C327		1
918	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C328		1
919	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C329		1
920	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C330		1
921	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C331		1
922	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C332		1
923	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C333		1
924	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C334		1
925	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C335		1
926	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C336		1
927	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C337		1
928	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C338		1
929	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C339		1
930	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C340		1
931	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C341		1
932	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C342		1
933	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C343		1
934	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C344		1
935	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C345		1
936	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C346		1
937	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C347		1
938	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C348		1
939	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C349		1
940	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C350		1
941	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C351		1
942	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C352		1
943	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C353		1
944	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C354		1
945	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C355		1
946	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C356		1
947	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C357		1
948	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C358		1
949	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C359		1
950	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C360		1
951	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C361		1
952	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C362		1
953	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C363		1
954	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C364		1
955	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C365		1
956	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C366		1
957	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C367		1
958	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C368		1
959	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C369		1
960	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C370		1
961	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C371		1
962	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C372		1
963	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C373		1
964	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C374		1
965	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C375		1
966	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C376		1
967	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C377		1
968	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C378		1
969	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C379		1
970	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C380		1
971	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C381		1
972	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C382		1
973	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C383		1
974	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C384		1
975	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C385		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
976	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C386		1
977	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C387		1
978	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C388		1
979	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C389		1
980	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C390		1
981	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C391		1
982	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C392		1
983	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C393		1
984	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C394		1
985	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C395		1
986	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C396		1
987	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C397		1
988	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C398		1
989	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C399		1
990	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C400		1
991	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C401		1
992	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C402		1
993	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C403		1
994	N/A	2CEBC1C470MT2	CAP.ELEC(SMD);CE0BC1C470M,T	C404		1
995	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C405		1
996	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C406		1
997	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C407		1
998	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C408		1
999	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C409		1
1000	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C410		1
1001	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C411		1
1002	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C412		1
1003	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C413		1
1004	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C414		1
1005	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C415		1
1006	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C416		1
1007	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C417		1
1008	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C420		1
1009	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C421		1
1010	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C422		1
1011	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C423		1
1012	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C424		1
1013	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C425		1
1014	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C426		1
1015	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C427		1
1016	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C428		1
1017	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C429		1
1018	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C431		1
1019	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C433		1
1020	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C435		1
1021	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C437		1
1022	N/A	2CDJA1H180JT2	CAP.MTLYR CHIP;CD1JA1H180J,T(PAN OVERS	C438		1
1023	N/A	2CDJA1H151JT2	CAP.MTLYR CHIP;CD1JA1H151J,T	C439		1
1024	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C441		1
1025	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C442		1
1026	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C444		1
1027	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C445		1
1028	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C446		1
1029	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C447		1
1030	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C448		1
1031	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C449		1
1032	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C450		1
1033	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C451		1
1034	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C452		1
1035	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C454		1
1036	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C455		1
1037	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C456		1
1038	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C457		1
1039	N/A	2CDJA1H151JT2	CAP.MTLYR CHIP;CD1JA1H151J,T	C458		1
1040	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C460		1
1041	N/A	2CDJA1H180JT2	CAP.MTLYR CHIP;CD1JA1H180J,T(PAN OVERS	C461		1
1042	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C463		1
1043	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C465		1
1044	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C467		1
1045	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C468		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1046	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C469		1
1047	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C470		1
1048	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C471		1
1049	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C472		1
1050	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C473		1
1051	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C474		1
1052	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C475		1
1053	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C476		1
1054	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C477		1
1055	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C478		1
1056	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C479		1
1057	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C480		1
1058	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C481		1
1059	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C482		1
1060	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C483		1
1061	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C484		1
1062	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C485		1
1063	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C486		1
1064	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C487		1
1065	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C488		1
1066	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C489		1
1067	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C490		1
1068	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C491		1
1069	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C492		1
1070	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C493		1
1071	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C494		1
1072	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C495		1
1073	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C496		1
1074	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C497		1
1075	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C498		1
1076	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C499		1
1077	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C500		1
1078	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C501		1
1079	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C502		1
1080	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C503		1
1081	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C504		1
1082	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C505		1
1083	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C506		1
1084	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C507		1
1085	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C508		1
1086	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C509		1
1087	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C510		1
1088	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C511		1
1089	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C512		1
1090	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C513		1
1091	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C514		1
1092	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C515		1
1093	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C516		1
1094	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C517		1
1095	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C518		1
1096	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C519		1
1097	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C520		1
1098	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C521		1
1099	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C522		1
1100	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C523		1
1101	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C524		1
1102	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C525		1
1103	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C526		1
1104	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C527		1
1105	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C528		1
1106	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C529		1
1107	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C530		1
1108	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C531		1
1109	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C532		1
1110	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C533		1
1111	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C534		1
1112	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C535		1
1113	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C536		1
1114	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C537		1
1115	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C538		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1116	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C539		1
1117	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C540		1
1118	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C541		1
1119	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C542		1
1120	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C543		1
1121	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C544		1
1122	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C545		1
1123	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C546		1
1124	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C547		1
1125	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C548		1
1126	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C549		1
1127	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C550		1
1128	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C551		1
1129	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C552		1
1130	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C553		1
1131	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C554		1
1132	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C555		1
1133	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C556		1
1134	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C557		1
1135	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C558		1
1136	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C559		1
1137	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C560		1
1138	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C561		1
1139	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C562		1
1140	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C563		1
1141	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C564		1
1142	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C565		1
1143	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C566		1
1144	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C567		1
1145	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C568		1
1146	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C569		1
1147	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C570		1
1148	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C571		1
1149	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C572		1
1150	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C573		1
1151	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C574		1
1152	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C575		1
1153	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C576		1
1154	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C577		1
1155	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C578		1
1156	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C579		1
1157	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C580		1
1158	N/A	2CDJA1H220JT2	CAP.MTLYR CHIP;CD1JA1H220J,T(PAN OVERS	C581		1
1159	N/A	2CDJA1H220JT2	CAP.MTLYR CHIP;CD1JA1H220J,T(PAN OVERS	C582		1
1160	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C583		1
1161	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C584		1
1162	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C585		1
1163	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C586		1
1164	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C587		1
1165	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C588		1
1166	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C589		1
1167	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C590		1
1168	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C591		1
1169	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C592		1
1170	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C593		1
1171	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C594		1
1172	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C595		1
1173	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C596		1
1174	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C597		1
1175	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C598		1
1176	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C599		1
1177	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C600		1
1178	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C601		1
1179	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C602		1
1180	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C604		1
1181	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C605		1
1182	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C606		1
1183	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C607		1
1184	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C608		1
1185	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C609		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1186	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C610		1
1187	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C611		1
1188	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C612		1
1189	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C613		1
1190	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C614		1
1191	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C615		1
1192	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C616		1
1193	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C617		1
1194	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C618		1
1195	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C619		1
1196	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C620		1
1197	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C621		1
1198	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C622		1
1199	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C624		1
1200	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C625		1
1201	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C626		1
1202	N/A	2CDJA1H103ZT2	CAP.MTLYR CHIP;CD1JA1H103Z,T	C627		1
1203	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L1		1
1204	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L2		1
1205	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L3		1
1206	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L4		1
1207	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L5		1
1208	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L6		1
1209	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L7		1
1210	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L8		1
1211	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L10		1
1212	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L22		1
1213	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L23		1
1214	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L24		1
1215	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L25		1
1216	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L26		1
1217	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L27		1
1218	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L28		1
1219	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L29		1
1220	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L30		1
1221	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L31		1
1222	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L32		1
1223	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L33		1
1224	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L34		1
1225	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L35		1
1226	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L36		1
1227	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L37		1
1228	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L38		1
1229	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L39		1
1230	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L40		1
1231	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L41		1
1232	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L42		1
1233	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L43		1
1234	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L44		1
1235	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L45		1
1236	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L46		1
1237	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L47		1
1238	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L48		1
1239	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L49		1
1240	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L50		1
1241	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L51		1
1242	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L52		1
1243	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L53		1
1244	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L54		1
1245	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L55		1
1246	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L56		1
1247	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L57		1
1248	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L58		1
1249	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L59		1
1250	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L60		1
1251	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L61		1
1252	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L62		1
1253	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L63		1
1254	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L64		1
1255	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L65		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1256	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L66		1
1257	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L67		1
1258	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L68		1
1259	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L76		1
1260	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L77		1
1261	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L78		1
1262	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L79		1
1263	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L80		1
1264	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L81		1
1265	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L82		1
1266	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L83		1
1267	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L84		1
1268	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L85		1
1269	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L86		1
1270	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L87		1
1271	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L88		1
1272	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L89		1
1273	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L90		1
1274	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L91		1
1275	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L94		1
1276	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L95		1
1277	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L96		1
1278	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L97		1
1279	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L98		1
1280	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L99		1
1281	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L101		1
1282	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L102		1
1283	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L103		1
1284	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L105		1
1285	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L106		1
1286	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L107		1
1287	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L109		1
1288	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L110		1
1289	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L111		1
1290	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L112		1
1291	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L114		1
1292	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L115		1
1293	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L116		1
1294	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L117		1
1295	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L118		1
1296	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L119		1
1297	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L120		1
1298	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L121		1
1299	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L122		1
1300	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L123		1
1301	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L124		1
1302	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L125		1
1303	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L126		1
1304	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L127		1
1305	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L128		1
1306	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L129		1
1307	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L130		1
1308	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L131		1
1309	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L132		1
1310	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L133		1
1311	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L134		1
1312	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L135		1
1313	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L139		1

## BOM LIST (N4060W)

**ViewSonic Model Number: VS10846-1M**

**Rev: 1a**

**Serial No. Prefix: PV6**

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1	N/A		FIREWARE 2.0			1
2	N/A	7TA4041A9310	PE BAG ASSY			1
3	N/A	7TA4041A0110	SET ASSY			1
4	P-00004629	7024824008611	EPE BAG;TL3290JT (A)			1
5	P-00005496	7024803014611	CARTON;TA4041AW,(C)			1
6	P-00004639	7024813007111	POLYFOAM TOP;TL4041RT,(A)			1
7	P-00004638	7024813007211	POLYFOAM BOTTOM;TL4041RT,(A)			1
8	P-00001683	7024824006411	EPE SHEET;TL3001FM			1
9	N/A	7024764055411	LABEL CARTON;TA4041AW,(C)			1
10	N/A	7024764055811	LABEL SERIAL;TA4041AW,(C)			1
11	N/A	7024404012411	SUPPORT CARTON;TL2718FMR,(A)			4
12	N/A	7024764031514	LABEL SER;TC2135FM			1
13	N/A	7TA4041A9310	PE BAG ASSY			
14	DC-00005468	7024750043311	USER'S MANUAL(C);TA3241AW			1
15	N/A	735499000120G	BATTERY DRY;GP15G(GP),(D)			2
16	A-00005467	7352200080A0G	B(RMTX UNIT;FOR TA3741A),(D)			1
17	P-00004614	7024824005119	PE BAG;TC3366CH SPK B,(A)			1
18	E-00002300	7373000200602	SIGNAL CABLE;1800mm(YO DYI),(E)			1
19	M-MS-0808-9924	7373000200612	AV CONNECTOR;PX-050829-01(PSI),(E)			0
20	DC-00005469	7024750047211	QUICK START GUIDE			1
21	N/A	7TA4041A0110	SET ASSY			
22	N/A	7TA4041A1010	CABI TOTAL ASSY			1
23	N/A	7TA4041A6110	BACK COVER ASSY			1
24			NAZZ;7833030000207			1
25			NAZZ;7833060000104			1
26	N/A	7833040002402	SILICONE GLUE;KE-45T			0.005
27			NAZZ;7833020000306			1
28			NAZZ;7833020000004			1
29	N/A	7024764055011	LABEL MODEL;TA4041AW,(C)			1
30	N/A	780PB4012CB07	SCREW M4X12;TL3201FM,(F)			16
31	N/A	780PS4008CB06	SCREW;S-TYPE M4*8,(F)			3
32	N/A	7TA4041A7010	SUPPORT ASSY			1
33	M-00005482	7024413056811	DECOR PLATE JACK (A);TA3241AW			1
34	M-SCW-0824-6963	780PS4012CB08	SCREW;S-TYPE M4*12,(F)	SCREW		6
35	M-00005492	7024413058611	DECOR PLATE HENGE;TA3741AW,(A)			1
36	M-SCW-0824-6963	780PS4012CB08	SCREW;S-TYPE M4*12,(F)			4
37	N/A	7024764040111	LABEL HI PORT OK;TL,(C)			1
38	M-00005484	7024413057111	DECOR PLATE TN;TA3241AW,(A)			1
39	M-00005497	7024413057511	DECOR PLATE WIRE ;TL4041RT,(A)			1
40	M-00005486	7024413057411	DECOR PLATE CARD;TL3241RT(A)			1
41	N/A	7024764041211	LABEL(CAUTION);TL2327FMR,(C)			1
42	CB-00005481	7024404013111	WIRE CLIP;TL3241RT,(A)			1
43	N/A	780PB4012CB07	SCREW M4X12;TL3201FM,(F)			1
44	N/A	7TA4041A1010	CABI TOTAL ASSY			
45	N/A	7TA4041A1210	FRONT PANEL ASSY			1
46	N/A	7333064000202	TFT-LCD;LTA400W2-L01(SAMSUNG),(D)			1
47	N/A	7024513005311	SHIELD MAIN PWB(B);TA3241AW			1
48	N/A	780XX40002211	SCREW(TBF3X08);TL2003FM,(F)			12
49	N/A	780PS4008CB06	SCREW;S-TYPE M4*8,(F)			9
50	N/A	7024503019511	SUPPORT MAIN L(TL4041RT),(B)			1
51	N/A	7024503019611	SUPPORT MAIN/R(TL4041RT),(B)			1
52	N/A	7TA4041A2010	CHASSIS ASSY			1
53	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			6
54	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)	SCREW		12
55	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			8
56	N/A	7024604019511	INSULATOR			
57	N/A	7024503017911	SUPPORT (B);TL3741RT	SUPPORT		1
58	N/A	780PB4012CB07	SCREW M4X12;TL3201FM,(F)			5
59	N/A	7TA3741A3110	SPK ASSY			1
60	N/A	780PB4010CB06	SCREW;B-TYPE M4*10,(F)			8
61	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			4
62	N/A	780XX40002211	SCREW(TBF3X08);TL2003FM,(F)			3
63	N/A	7024503019711	SUPPORT (T,B);TL4041RT,(B)			2
64	N/A	7024503019811	SUPPORT (R,L) TL4041RT,(B)			2
65	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			24
66	N/A	7024604019411	CUSHION(TN);TA3241AW,(H)			1
67	N/A	7024604018411	CUSHION;(HDMI);TL3241RT,(H)			1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
68	N/A	7024604011811	CUSHION;TL2009FM			2
69	N/A	737422200010G	WIRE HARNESS;1P/100mm(YO DYI),(E)			1
70	N/A	7TA4041A6110	BACK COVER ASSY			
71	C-00004634	7024313003311	BACK COVER;TL4041RT,(A)			1
72	N/A	7TA4041A7010	SUPPORT ASSY			
73	N/A	7024503017711	SUPPORT HENGE;TL3741RT,(B)			1
74	N/A	7024403012511	BOTTOM BASE;TA3741AW,(A)			1
75	N/A	7024503017811	BASE SUPPORT SHEET;TL3741RT,(B)			1
76	HW-00003604	780XX40002311	SCREW(MSF4X12);TL3001FM,(F)			6
77	N/A	780XX40002011	SCREW;TBF M4*10,(F)			6
78	M-00005479	7024614014311	CUSHION LEG;TL3001FM,(H)			6
79	N/A	7TA4041A1210	FRONT PANEL ASSY			
80	C-00005495	7024303009011	FRONT PANEL;TA4041AW,(A)			1
81	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
82	N/A	7TA3741AN110	LED PWB ASSY			1
83	N/A	7TA3741A1310	CTL PANEL ASSY			1
84	M-00005487	7024414026311	DECOR PLATE RN;TL3241RT,(A)			1
85	N/A	7TA3741A2710	EAR ASSY			1
86	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
87	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
88	N/A	7024734022211	NAME PLATE;TL3741RT(VIEW SONIC),(B)			1
89	N/A	7TA4041A2010	CHASSIS ASSY			
90	N/A	7TA3741A2510	POWER TERMINAL ASSY			1
91	N/A	7TA3741AA110	POWER ASSY			1
92	B-00005494	7TA4041AF110	MAIN PWB ASSY			1
93	N/A	7024503018311	SUPPORT JACK(B);TA3241AW			1
94	N/A	780XX40002211	SCREW(TBF3X08);TL2003FM,(F)			3
95	N/A	780PS3006CA00	SCREW;S-TYPE M3*6,(F)			4
96	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			2
97	N/A	7024503019411	SUPPORT MAIN M(TL4041RT)(B)			1
98	N/A	780PS3006CA00	SCREW;S-TYPE M3*6,(F)			10
99	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			6
100	N/A	737425001140G	B(WIRE HARNESS;13P/550mm(YO-DYI),(E)			1
101	N/A	737425001160G	B(WIRE HARNESS;30P/300mm(YO-DYI),(E)			1
102	N/A	737425000960G	WIRE HARNESS;12P/14P/900mm(YO-DYI),(E)			1
103	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)			1
104	N/A	780XX40004211	SCREW M5X10;TL3201FM,(F)			4
105	N/A	737425000990G	WIRE HARNESS;12P/14P/500mm(YO-DYI),(E)	INVERTER		1
106	N/A	7TA3741A3110	SPK ASSY			
107	E-00005475	735517000120G	B(SPK;2250176-04L;TECH)(D)			2
108	N/A	737410401350G	WIRE HARNESS;4P/1050/1050mm(佑迪),(E)	S1		1
109	E-00005476	735512000060G	SPK;T13074-08R(TECH),(D)			2
110	N/A	737409200090G	WIRE ASSY;2P/100mm(YO DYI),(E)			1
111	N/A	737409200100G	WIRE ASSY;2P/100mm(YO DYI),(E)			1
112	N/A	7TA3741AN110	LED PWB ASSY			
113		736TA3741N112				1
114	N/A	2RDSPY1K00JT1	"RES. CARBON;RD1\6PTY1KJ,T	R10		1
115	N/A	2RDSPY4K70JT1	"RES. CARBON;RD1\6PTY4R7KJ,T	R11		1
116	N/A	2RDSPY220HJT1	"RES. CARBON;RD1\6PTY220HJ,T	R12		1
117	N/A	2TC00024YT040	TRANSISTOR;2SC1815-Y TPE2	Q1		1
118	N/A	2DL010300170G	LED;L-3WEGW(KINGBRIGHT)	LED		1
119	N/A	2AA090420017G	IC(3P):IRM-2638VS6F3(ELEC)	U1		1
120	N/A	737425401270G	B(WIRE HARNESS;4PJ13)/850mm(YO-DYI),(	J13		1
121	M-00002278	7024404008311	SUPPORT(RM);TL2003FM			1
122	N/A	7TA3741A1310	CTL PANEL ASSY			
123	B-00005472	7TA3741AH110	CTL PWB ASSY			1
124	PL-00005478	7024454014511	POWER KNOB(A);TL3241RT	CTL KNOB		1
125	M-SCW-0824-6962	780PB3010CA01	SCREW;B-TYPE M3*10,(F)	SCREW		3
126	N/A	7TA3741A2710	EAR ASSY			
127	N/A	7TA3741AL110	EAR PWB ASSY			1
128	N/A	7024503018111	SUPPORT EAR PWB (B);TL3241RT			1
129	N/A	780PS3006CA00	SCREW;S-TYPE M3*6,(F)	SCREW		2
130	N/A	7TA3741A2510	POWER TERMINAL ASSY			
131	N/A	7024504022711	SUPPORT POWER TL3241RT,(B)			1
132	N/A	737420500310G	WIRE HARNESS;5P/350mm(YO-DYI),(E)			1
133	N/A	780XX40002711	SCREW(TBF3X14);TL3001FM,(F)	SCREW		2
134	N/A	7TA3741AA110	POWER ASSY			
135	B-00004623	737504000240G	SMPS POWER ASSY;FSP276-3F01(SPI),(D)			1
136	A-00005470	737212200450G	AC POWER CORD;YP12/YC12(SHIH YANG)			1
137	B-00005494	7TA4041AF110	MAIN PWB ASSY			
138	N/A	736TA3741F112	A			1
139	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C430		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
140	N/A	733904140530G	B(CAP ELEC;TKR102M1EG21M,JAMICON)(D)	C432		1
141	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C434		1
142	N/A	2CF3N1H474JF2	CAP.MEF;CF93N1H474J,F	C436		1
143	N/A	2CTDJ1E4R7KTG	CAP.TANTALUM;CT1BJ1E4R7K,T(AVX/KYOCERA	C440		1
144	N/A	2CTAJ1C010KTG	CAP TANTALUM;CT1BJ1C010K,T(AVX/KYOCERA	C443		1
145	N/A	2CTDJ1E4R7KTG	CAP.TANTALUM;CT1BJ1E4R7K,T(AVX/KYOCERA	C453		1
146	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C459		1
147	N/A	733904140530G	B(CAP ELEC;TKR102M1EG21M,JAMICON)(D)	C462		1
148	N/A	2CF3N1H684JF2	CAP.MEF;CF93N1H684J,F	C464		1
149	N/A	2CF3N1H474JF2	CAP.MEF;CF93N1H474J,F	C466		1
150	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D	L9		1
151	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L100		1
152	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L104		1
153	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L108		1
154	N/A	735111001100G	COIL CHOKE;E6-201-G051(MAIN POWER),(D)	L113		1
155	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D	L137		1
156	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D	L138		1
157	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D	L140		1
158	N/A	735100200060G	COIL CHOKE;E6-204-G025(MAIN POWER),(D	L141		1
159	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D	CM1		1
160	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D	CM2		1
161	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D	CM3		1
162	N/A	735124000020G	EMI FILTER;ACM2012D-900-2P-T00(TDK),(D	CM4		1
163	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q1		1
164	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q2		1
165	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q3		1
166	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q7		1
167	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q8		1
168	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q9		1
169	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q10		1
170	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q11		1
171	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q12		1
172	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q13		1
173	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q14		1
174	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q15		1
175	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q16		1
176	N/A	2TF080010075G	FET;CEM4539(CET)	Q17		1
177	N/A	2TF080010075G	FET;CEM4539(CET)	Q18		1
178	N/A	2TF080010075G	FET;CEM4539(CET)	Q19		1
179	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q20		1
180	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q21		1
181	N/A	2TF080010075G	FET;CEM4539(CET)	Q22		1
182	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q23		1
183	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q25		1
184	N/A	2TF070070024G	FET(3P);2N7002(PHILIPS),(D)	Q26		1
185	N/A	2TF020030068G	FET;AP4435GM(AP)	Q27		1
186	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q28		1
187	N/A	2TF020030068G	FET;AP4435GM(AP)	Q29		1
188	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q30		1
189	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q31		1
190	N/A	2TX000280063G	TRANSISTOR;MMBT3904LT1G(ON)	Q32		1
191	N/A	733615011030G	B(TUNER:TUV1236D;PHILIPS),(D)	U1		1
192	N/A	2AA16094S191G	IC(3P);AIC1117-33PY(AIC)	U2		1
193	N/A	2AA16093S191G	IC(3P);AIC1117-25PY(AIC)	U3		1
194	N/A	2AA16099S177G	IC(3P);LD1117A-ADJ-AL(TO-252)(UTC)	U4		1
195	N/A	2AA16111S1C5G	IC(5P);AT11796-ADJ PBF(AIMTRON),(D)	U5		1
196	N/A	2AM07032S170G	IC(8P);24LC02BT/SNG(MICROCHIP)	U6		1
197	N/A	2DS06003S1D1G	DIODE ZENER;RCLAMP0514M.TBT(SEMTECH)	U7		1
198	N/A	2DS06003S1D1G	DIODE ZENER;RCLAMP0514M.TBT(SEMTECH)	U8		1
199	N/A	2AA13052S182G	IC(128P);SIL9011CLU,(WEIKENG)	U13		1
200	N/A	2AA16113S191G	IC(3P);AIC1117-18PY(UTC)	U14		1
201	N/A	2AA24002S110G	IC(16P);BU4052BCF-E2(ROHM)	U15		1
202	N/A	2AM07025S170G	IC(8P);24LC21AT/SNG(MICROCHIP)	U16		1
203	N/A	2AL13006S124G	IC(5P);74LVC1G14GW(PHILIPS),(D)	U17		1
204	N/A	2AL13006S124G	IC(5P);74LVC1G14GW(PHILIPS),(D)	U18		1
205	N/A	2AA02072S174G	IC(548P);PW328-10L(PIXELWORKS),(D)	U19		1
206	N/A	7024524010911	HEAT SINK;TL3209FM,(B)	U19		1
207	N/A	2AL13005S124G	IC(5P);74LVC1G126GW(PHILIPS),(D)	U23		1
208	N/A	2AM02069S1D32	IC(144P);HY5DU573222F-25;HYNIX),(D)	U25		1
209	N/A	2AA16094S191G	IC(3P);AIC1117-33PY(AIC)	U26		1
210	N/A	2AL12002S122G	IC(16P);SN74CBT3257DBQR(TI),(D)	U28		1
211	N/A	2AA03108S158G	B(IC(80P);MSP4440K-QA-D6-500;MICRONAS,	U29		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
212	N/A	2AA16106S177G	IC;78D08AL(UTC)	U30		1
213	N/A	2AA16114S191G	IC(3P);AIC1117-50PY(AIC)	U31		1
214	N/A	2AA03102S1C8G	B(IC44P);LX1722CDBe3)(MICROSEMI),(D)	U33		1
215	N/A	2AA13050S122G	IC(16P);MAX3232CDR(TI)	U34		1
216	N/A	2AA03107S174G	IC(64P);PWM2000L(PIXELWORKS),(D)	U35		1
217	N/A	7024524010611	HEAT SINK;TL3002DM	U35		1
218	N/A	2AA13050S122G	IC(16P);MAX3232CDR(TI)	U36		1
219	N/A	2AM07035S170G	IC(8P);24LC256-I/SNG(MICROCHIP),(D)	U37		1
220	N/A	2AA04041S1D4G	B(IC;S29GL032M90TFIR40;SPANSTON,(D)	U39		1
221	N/A	2AA04041S1D4G	B(IC;S29GL032M90TFIR40;SPANSTON,(D)	U40		1
222	N/A	2AM02068S1D32	IC(66P);;HY5DU561622DT-5(HYNIX),(D)	U42		1
223	N/A	2AM02068S1D32	IC(66P);;HY5DU561622DT-5(HYNIX),(D)	U43		1
224	N/A	2AM02068S1D32	IC(66P);;HY5DU561622DT-5(HYNIX),(D)	U44		1
225	N/A	2AM02068S1D32	IC(66P);;HY5DU561622DT-5(HYNIX),(D)	U45		1
226	N/A	2AL13005S124G	IC(5P);74LVC1G126GW(PHILIPS),(D)	U47		1
227	N/A	737000100020G	SOCKET PLCC;14144-A0B7001N(TOP YANG),()	U48		1
228	N/A	2AC02039S1C9G	IC(44P);SM5964C40JP(SYNCMOS),(D)	U48		1
229	N/A	2AL13001S124G	IC(14P);74LVC14AD(PHILIPS)	U49		1
230	N/A	2AA11036S177G	IC(8P);LM358L(UTC)	U51		1
231	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U52		1
232	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U53		1
233	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U54		1
234	N/A	2AA16111S1C5G	IC(5P);AT1796-ADJ PBF(AIMTRON),(D)	U55		1
235	N/A	2AA20010S192G	IC(3P);CAT809RTBIT(CATALYST)	U56		1
236	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D1		1
237	N/A	2DS05066S124G	DIODE;BAV70(PHILIPS)	D2		1
238	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D3		1
239	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D4		1
240	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D8		1
241	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D9		1
242	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D10		1
243	N/A	2DS05066S124G	DIODE;BAV70(PHILIPS)	D11		1
244	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D12		1
245	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D13		1
246	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D14		1
247	N/A	2DS01085S124G	DIODE;BAT54S(PHILIPS)	D15		1
248	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D16		1
249	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D17		1
250	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D18		1
251	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D19		1
252	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D20		1
253	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D21		1
254	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D22		1
255	N/A	2DS01084S199G	DIODE SCHOTTKY(SMD);B340A-F(LITEON)	D23		1
256	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D24		1
257	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D25		1
258	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D26		1
259	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D27		1
260	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D28		1
261	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D29		1
262	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D30		1
263	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D32		1
264	N/A	2DS01086S110G	DIODE;RLS4148N-T11(ROHM)	D33		1
265	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP8		1
266	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP9		1
267	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP10		1
268	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP11		1
269	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP12		1
270	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP13		1
271	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP14		1
272	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP15		1
273	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP16		1
274	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP25		1
275	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP26		1
276	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP27		1
277	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP28		1
278	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP29		1
279	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP30		1
280	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP49		1
281	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP50		1
282	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP51		1
283	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP52		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
284	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP53		1
285	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP54		1
286	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP55		1
287	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP56		1
288	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP57		1
289	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP58		1
290	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP59		1
291	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP60		1
292	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP61		1
293	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP62		1
294	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP63		1
295	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP65		1
296	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP66		1
297	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP67		1
298	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP68		1
299	N/A	734007200220G	RES.ARRAY;CN34JTN332(TA-I)	RP69		1
300	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP70		1
301	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP71		1
302	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP72		1
303	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP73		1
304	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP74		1
305	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP75		1
306	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP76		1
307	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP77		1
308	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP78		1
309	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP79		1
310	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP80		1
311	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP81		1
312	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP82		1
313	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP83		1
314	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP84		1
315	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP85		1
316	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP86		1
317	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP87		1
318	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP88		1
319	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP89		1
320	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP90		1
321	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP91		1
322	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP92		1
323	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP93		1
324	N/A	734007200140G	RES.ARRAY;CN34JTN0220(TA-I)	RP94		1
325	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP95		1
326	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP96		1
327	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP97		1
328	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP98		1
329	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP99		1
330	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP100		1
331	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP101		1
332	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP102		1
333	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP103		1
334	N/A	734007200160G	RES.ARRAY;CN34JTN0470(TA-I)	RP104		1
335	N/A	733700001710G	B(CRYSTAL;SSP048000I3CH;HARMONY)(D)	X1		1
336	N/A	733700001700G	B(CRYSTAL;SSP033000I3CH;HARMONY)(D)	X2		1
337	N/A	2AA02074S159G	IC(28P);MK3771-17RLFTR(ICS),(D)	X3		1
338	N/A	733700001620G	CRYSTAL;28.322MHz/HC-49S(AIXING)	Y2		1
339	N/A	733700001380G	CRYSTAL;27.00MHz 16pf 49US(EWN),(D)	Y3		1
340	N/A	733700001650G	CRYSTAL;XAT018432FK1H-O(HARMONY)	Y4		1
341	N/A	733700001610G	CRYATAL;XAT013500FK1H(HARMONY)	Y5		1
342	N/A	733700001660G	CRYSTAL;XAT01200001-O(HARMONY)	Y6		1
343	N/A	735250000320G	B(RELAY;GS-SH-212D;GOODSKY),(D)	RL1		1
344	N/A	735204000220G	SW TACT;TSAB-2L(HUA JIE)(5mm)	SW1		1
345	N/A	735204000220G	SW TACT;TSAB-2L(HUA JIE)(5mm)	SW2		1
346	N/A	737010020820G	RCA JACK;HSP-243V2P-39(KUN MING)	CON1		1
347	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON2		1
348	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON3		1
349	N/A	737010020820G	RCA JACK;HSP-243V2P-39(KUN MING)	CON4		1
350	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON5		1
351	N/A	737010020790G	RCA JACK;HSP-243V2P-07(KUN MING)	CON6		1
352	N/A	737010020790G	RCA JACK;HSP-243V2P-07(KUN MING)	CON7		1
353	N/A	737010020870G	PIN JACK;KM04022P-01Z(KUNMING)	CON8		1
354	N/A	737010050100G	PHONE JACK(D3.5);PJ-0004T05B0L(AIXING)	J1		1
355	N/A	737000070130G	SOCKET DIN;LNB0509-4-SW(LIH SHENG)	J2		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
356	N/A	737000070130G	SOCKET DIN;LNB0509-4-SW(LIH SHENG)	J3		1
357	N/A	737114101030G	B(HEADER PIN;DF11-30DP-2DSA(YODYI),(D)	J5		1
358	N/A	737110151000G	B(HEADER PIN(5P);M5-I20001(YODYI),(D)	J9		1
359	N/A	737110141000G	B(HEADER PIN(4P);M4-I20001(YODYI),(D)	J13		1
360	N/A	737110191000G	B(HEADER PIN(9P);M9-I20001(YODYI),(D)	J14		1
361	N/A	737111202160G	B(HEADER PIN(13P);M13-I25002R(YODYI),(C)	J17		1
362	N/A	737110242080G	HEADER PIN(4PIN);M4-I25002(YO DYI)	S1		1
363	N/A	737050110010G	HDMI;HM-19F4-05(NIAN YEONG)	P1		1
364	N/A	737020020260G	D-SUB CONNECTOR;32115-AAA0030T,(D)	P3		1
365	N/A	737020020270G	D CONNECTOR;32009-AAA0030T,(D)	P6B		1
366	N/A	7TA4041AFDB0	SUB-MAIN PWB ASSY			1
367	B-0005472	7TA3741AH110	CTL PWB ASSY			
368	N/A	736TA3741D112	PCB ASSY;CY236X163S(CHIAN YOU),(D)			1
369		736TA3741H112				1
370	N/A	2RDSPY1K00JT1	"RES. CARBON;RD1\6PTY1KJ,T	R1		1
371	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R2		1
372	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R3		1
373	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R4		1
374	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R5		1
375	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R6		1
376	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R7		1
377	N/A	2RDSPY3K30JT5	"RES. CARBON;RD1\6PTY3R3KJ,T	R8		1
378	N/A	2RDSPY2K00JT5	"RES. CARBON;RD1\6PTY2KJ,T	R9		1
379	N/A	735204000220G	SW TACT;TSAB-2L(HUA JIE)(5mm)			7
380	N/A	737425900210G	WIRE HARNESS;9P/850mm(YO-DYI),(E)	J14		1
381	N/A	7TA3741AL110	EAR PWB ASSY			
382		736TA3741E112				1
383	N/A	2RDSPY5K10JT1	"RES. CARBON;RD1\6PTY5R1KJ,T	R13		1
384	N/A	2TC00024YT040	TRANSISTOR;2SC1815-Y TPE2	Q2		1
385	N/A	737010050090G	JACK EARPHONE;LJE0369-7(LIH SHENG)	EARPHONE		1
386	N/A	737425500680G	WIRE HARNESS;5P(J9)/1000mm(YO-DYI),(E)	J9		1
387	N/A	7TA4041AFDB0	SUB-MAIN PWB ASSY			
388	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R3		1
389	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R4		1
390	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R6		1
391	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R7		1
392	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R8		1
393	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R9		1
394	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R11		1
395	N/A	2RTDFK1K10FT2	B(RT1/10FK1R1KF,T)	R12		1
396	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R13		1
397	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R14		1
398	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R15		1
399	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R16		1
400	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R17		1
401	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R24		1
402	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R25		1
403	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R25A		1
404	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KL,T(LIAN SHENG	R26		1
405	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R27		1
406	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R27A		1
407	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R31		1
408	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R35		1
409	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R59		1
410	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R62		1
411	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R63		1
412	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R64		1
413	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R65		1
414	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R66		1
415	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R67		1
416	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R68		1
417	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R69		1
418	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R70		1
419	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R72		1
420	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R73		1
421	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R74		1
422	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R75		1
423	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R76		1
424	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R77		1
425	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R78		1
426	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R79		1
427	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R80		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
428	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R81		1
429	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R82		1
430	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R83		1
431	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R84		1
432	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R85		1
433	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R86		1
434	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R87		1
435	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R88		1
436	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R89		1
437	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R90		1
438	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R91		1
439	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R92		1
440	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R93		1
441	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R94		1
442	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R95		1
443	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R96		1
444	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R97		1
445	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R98		1
446	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R99		1
447	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R100		1
448	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R101		1
449	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R102		1
450	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R103		1
451	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R104		1
452	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R105		1
453	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R106		1
454	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R107		1
455	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R108		1
456	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R109		1
457	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R110		1
458	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R111		1
459	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R112		1
460	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R113		1
461	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R114		1
462	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R115		1
463	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R116		1
464	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R117		1
465	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R118		1
466	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R119		1
467	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R120		1
468	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R121		1
469	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R122		1
470	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R123		1
471	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R124		1
472	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R126		1
473	N/A	2RTDFK2K20JT2	RES.FLAT CHIP;RT1/10FK2R2KJ,T(LIAN SHE	R127		1
474	N/A	2RTDFK2K20JT2	RES.FLAT CHIP;RT1/10FK2R2KJ,T(LIAN SHE	R129		1
475	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R130		1
476	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R131		1
477	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R132		1
478	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R133		1
479	N/A	2RTDFK5K60JT2	RES.FLAT CHIP;RT1/10FK5R6KJ,T	R134		1
480	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R135		1
481	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R136		1
482	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R137		1
483	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R138		1
484	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R139		1
485	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R140		1
486	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R141		1
487	N/A	2RTDFK5K60JT2	RES.FLAT CHIP;RT1/10FK5R6KJ,T	R142		1
488	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R143		1
489	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R144		1
490	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R145		1
491	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R146		1
492	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R147		1
493	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R148		1
494	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R149		1
495	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R152		1
496	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R153		1
497	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R154		1
498	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R155		1
499	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R156		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
500	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R157		1
501	N/A	2RTDFK22K0JT2	RES.FLAT CHIP;RT1/10FK22KJ,T	R158		1
502	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R159		1
503	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R160		1
504	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R161		1
505	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R162		1
506	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R163		1
507	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R164		1
508	N/A	2RTDFK12K0JT2	RES.FLAT CHIP;RT1/10FK12KJ,T(LIAN SHEN	R165		1
509	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R168		1
510	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R171		1
511	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R234		1
512	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R240		1
513	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R241		1
514	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R242		1
515	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R244		1
516	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R245		1
517	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R247		1
518	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R248		1
519	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R250		1
520	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R252		1
521	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R263		1
522	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R264		1
523	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R265		1
524	N/A	2RTDFK22H0JT2	RES.FLAT CHIP;RT1/10FK22HJ,T(LIAN SHEN	R266		1
525	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R267		1
526	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R268		1
527	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R269		1
528	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R270		1
529	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R271		1
530	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R274		1
531	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R275		1
532	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R276		1
533	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R277		1
534	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R278		1
535	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R279		1
536	N/A	2RTDFK470KJT2	RES.FLAT CHIP;RT1/10FK470KJ,T(LIAN SHE	R280		1
537	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R281		1
538	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R282		1
539	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R283		1
540	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R284		1
541	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R285		1
542	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R286		1
543	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R287		1
544	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R288		1
545	N/A	2RTDFK470KJT2	RES.FLAT CHIP;RT1/10FK470KJ,T(LIAN SHE	R289		1
546	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R290		1
547	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R291		1
548	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R292		1
549	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R294		1
550	N/A	2RTDFK68H0JT2	RES.FLAT CHIP;RT1/10FK68H0J,T	R295		1
551	N/A	2RTDFK220HJT2	RES.FLAT CHIP;RT1/10FK220HJ,T(LIAN SHE	R296		1
552	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R298		1
553	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R299		1
554	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R300		1
555	N/A	2RTDFK68H0JT2	RES.FLAT CHIP;RT1/10FK68H0J,T	R301		1
556	N/A	2RTDFK220HJT2	RES.FLAT CHIP;RT1/10FK220HJ,T(LIAN SHE	R302		1
557	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R303		1
558	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R304		1
559	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R305		1
560	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R306		1
561	N/A	2RT1FP15H0JT2	RES.FLAT CHIP;RT1FP15HJ,T	R307		1
562	N/A	2RT1FP0H00JT2	RES.FLAT CHIP;RT1FP0HJ,T(2512)	R308		1
563	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R309		1
564	N/A	2RTDFK34K8FT2	RES.FLAT CHIP;RT1/10FK34R8KF,T	R310		1
565	N/A	2RTDFK56K2FT2	RES.FLAT CHIP;RT1/10FK56R2KF,T	R311		1
566	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R312		1
567	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R313		1
568	N/A	2RTDFK39K0JT2	RES.FLAT CHIP;RT1/10FK39KJ,T(LIAN SHEN	R314		1
569	N/A	2RTDFK8K20JT2	RES.FLAT CHIP;RT1/10FK8R2KJ,T(LIAN SHE	R315		1
570	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R316		1
571	N/A	2RTDFK39K0JT2	RES.FLAT CHIP;RT1/10FK39KJ,T(LIAN SHEN	R317		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
572	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R318		1
573	N/A	2RTDFK8K20JT2	RES.FLAT CHIP;RT1/10FK8R2KJ,T(LIAN SHE	R319		1
574	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R320		1
575	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R321		1
576	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R322		1
577	N/A	2RT1FP15H0JT2	RES.FLAT CHIP;RT1/FP15HJ,T	R323		1
578	N/A	2RTDFK56K2FT2	RES.FLAT CHIP;RT1/10FK56R2KF,T	R324		1
579	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R325		1
580	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R326		1
581	N/A	2RT1FP0H00JT2	RES.FLAT CHIP;RT1/FP0HJ,T(2512)	R327		1
582	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R328		1
583	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R329		1
584	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R330		1
585	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R331		1
586	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R332		1
587	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R333		1
588	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R334		1
589	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R335		1
590	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R337		1
591	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R338		1
592	N/A	2RTDFK220KJT2	RES.FLAT CHIP;RT1/10FK220KJ,T(LIAN SHE	R344		1
593	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R345		1
594	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R347		1
595	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R348		1
596	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R349		1
597	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R350		1
598	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R351		1
599	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R353		1
600	N/A	2RTDFK33H0JT2	RES.FLAT CHIP;RT1/10FK33HJ,T(LIAN SHEN	R354		1
601	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R355		1
602	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R356		1
603	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R371		1
604	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R372		1
605	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R373		1
606	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R374		1
607	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R382		1
608	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R383		1
609	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R384		1
610	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R385		1
611	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R386		1
612	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R387		1
613	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R388		1
614	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R389		1
615	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R390		1
616	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R391		1
617	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R392		1
618	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R393		1
619	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R394		1
620	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R395		1
621	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R400		1
622	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R401		1
623	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R402		1
624	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R403		1
625	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R404		1
626	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R405		1
627	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R406		1
628	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R407		1
629	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R409		1
630	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R411		1
631	N/A	2RTDFK10H0JT2	RES.FLAT CHIP;RT1/10FK10HJ,T(LIAN SHEN	R412		1
632	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R413		1
633	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R415		1
634	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R416		1
635	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R417		1
636	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R418		1
637	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R419		1
638	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R420		1
639	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R421		1
640	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R422		1
641	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R423		1
642	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R424		1
643	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R425		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
644	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R426		1
645	N/A	2RTDFK75H0JT2	RES.FLAT CHIP;RT1/10FK75HJ,T(LIAN SHEN	R427		1
646	N/A	2RTDFK470HJT2	RES.FLAT CHIP;RT1/10FK470HJ,T(LIAN SHE	R428		1
647	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R429		1
648	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R430		1
649	N/A	2RTDFK100KJT2	RES.FLAT CHIP;RT1/10FK100KJ,T(LIAN SHE	R432		1
650	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R433		1
651	N/A	2RTDFK100HJT2	RES.FLAT CHIP;RT1/10FK100HJ,T(LIAN SHE	R434		1
652	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R435		1
653	N/A	2RTDFK1M00JT2	RES.FLAT CHIP;RT1/10FK1MJ,T(LIAN SHENG	R436		1
654	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R438		1
655	N/A	2RTDFK30K0JT2	RES.FLAT CHIP;RT1/10FK30KJ,T(LIAN SHEN	R439		1
656	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R440		1
657	N/A	2RTDFK5K60JT2	RES.FLAT CHIP;RT1/10FK5R6KJ,T	R441		1
658	N/A	2RTDFK2K20JT2	RES.FLAT CHIP;RT1/10FK2R2KJ,T(LIAN SHE	R443		1
659	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R455		1
660	N/A	2RTDFK47K0JT2	RES.FLAT CHIP;RT1/10FK47KJ,T	R456		1
661	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R457		1
662	N/A	2RTDFK510HJT2	RES.FLAT CHIP;RT1/10FK510HJ,T(LIAN SHE	R458		1
663	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R459		1
664	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R460		1
665	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R461		1
666	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R462		1
667	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R463		1
668	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R464		1
669	N/A	2RTDFK330HJT2	RES.FLAT CHIP;RT1/10FK330HJ,T(LIAN SHE	R465		1
670	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R466		1
671	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R467		1
672	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R468		1
673	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R469		1
674	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R470		1
675	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R471		1
676	N/A	2RTDFK560HJT2	RES.FLAT CHIP;RT1/10FK560HJ,T	R472		1
677	N/A	2RTDFK2K70JT2	RES.FLAT CHIP;RT1/10FK2R7KJ,T(LIAN SHE	R473		1
678	N/A	2RTDFK4K70JT2	RES.FLAT CHIP;RT1/10FK4R7KJ,T(LIAN SHE	R474		1
679	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R475		1
680	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R476		1
681	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R477		1
682	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R478		1
683	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R479		1
684	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R481		1
685	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R482		1
686	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R483		1
687	N/A	2RTDFK3K30JT2	RES.FLAT CHIP;RT1/10FK3R3KJ,T	R484		1
688	N/A	2RTDFK510HJT2	RES.FLAT CHIP;RT1/10FK510HJ,T(LIAN SHE	R485		1
689	N/A	2RTDFK1K00JT2	RES.FLAT CHIP;RT1/10FK1KJ,T(LIAN SHENG	R486		1
690	N/A	2RTDFK10K0JT2	RES.FLAT CHIP;RT1/10FK10KJ,T(LIAN SHEN	R487		1
691	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R488		1
692	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R489		1
693	N/A	2RTDFK47H0JT2	RES.FLAT CHIP;RT1/10FK47HJ,T(LIAN SHEN	R490		1
694	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R491		1
695	N/A	2RTDFK0H00JT2	RES.FLAT CHIP;RT1/10FK0HJ,T	R492		1
696	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C1		1
697	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C2		1
698	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C3		1
699	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C4		1
700	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C5		1
701	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C6		1
702	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C7		1
703	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C8		1
704	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C9		1
705	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C10		1
706	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C11		1
707	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C12		1
708	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C13		1
709	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C14		1
710	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C15		1
711	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C16		1
712	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C17		1
713	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C18		1
714	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C19		1
715	N/A	2CDJAIH104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C20		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
716	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C21		1
717	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C22		1
718	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C23		1
719	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C24		1
720	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C25		1
721	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C26		1
722	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C27		1
723	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C28		1
724	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C29		1
725	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C30		1
726	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C31		1
727	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C32		1
728	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C33		1
729	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C34		1
730	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C41		1
731	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C96		1
732	N/A	2CDJA1H150JT2	CAP.MTLYR CHIP;CD1JA1H150J,T(PAN OVERS	C97		1
733	N/A	2CDJA1H150JT2	CAP.MTLYR CHIP;CD1JA1H150J,T(PAN OVERS	C98		1
734	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C99		1
735	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C100		1
736	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C101		1
737	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C102		1
738	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C103		1
739	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C104		1
740	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C105		1
741	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C106		1
742	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C107		1
743	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C108		1
744	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C109		1
745	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C110		1
746	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C111		1
747	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C112		1
748	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C113		1
749	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C114		1
750	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C115		1
751	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C116		1
752	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C117		1
753	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C118		1
754	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C119		1
755	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C120		1
756	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C121		1
757	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C122		1
758	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C123		1
759	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C124		1
760	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C125		1
761	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C126		1
762	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C127		1
763	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C128		1
764	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C129		1
765	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C130		1
766	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C131		1
767	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C132		1
768	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C133		1
769	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C134		1
770	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C135		1
771	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C136		1
772	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C137		1
773	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C138		1
774	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C139		1
775	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C140		1
776	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C141		1
777	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C142		1
778	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C143		1
779	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C144		1
780	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C145		1
781	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C146		1
782	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C147		1
783	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C148		1
784	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C149		1
785	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C150		1
786	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C151		1
787	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C152		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
788	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C153		1
789	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C154		1
790	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C155		1
791	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C156		1
792	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C157		1
793	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C158		1
794	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C159		1
795	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C160		1
796	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C161		1
797	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C162		1
798	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C163		1
799	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C164		1
800	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C165		1
801	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C166		1
802	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C167		1
803	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C168		1
804	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C169		1
805	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C170		1
806	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C171		1
807	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C172		1
808	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C173		1
809	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C174		1
810	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C175		1
811	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C176		1
812	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C177		1
813	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C178		1
814	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C179		1
815	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C180		1
816	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C181		1
817	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C182		1
818	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C183		1
819	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C184		1
820	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C185		1
821	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C186		1
822	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C187		1
823	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C188		1
824	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C189		1
825	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C190		1
826	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C191		1
827	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C192		1
828	N/A	2CDJA1H120JT2	CAP.MTLYR CHIP;CD1JA1H120J,T(PAN OVERS	C193		1
829	N/A	2CDJA1H120JT2	CAP.MTLYR CHIP;CD1JA1H120J,T(PAN OVERS	C194		1
830	N/A	2CDJA1H120JT2	CAP.MTLYR CHIP;CD1JA1H120J,T(PAN OVERS	C195		1
831	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C196		1
832	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C197		1
833	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C198		1
834	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C199		1
835	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C200		1
836	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C201		1
837	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C202		1
838	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C203		1
839	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C204		1
840	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C205		1
841	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C206		1
842	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C207		1
843	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C208		1
844	N/A	2CDJA1H100JT2	CAP.MTLYR CHIP;CD1JA1H100J,T(PAN OVERS	C209		1
845	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C210		1
846	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C211		1
847	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C212		1
848	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C213		1
849	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C215		1
850	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C216		1
851	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C217		1
852	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C218		1
853	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C219		1
854	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C220		1
855	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C221		1
856	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C222		1
857	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C223		1
858	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C224		1
859	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C225		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
860	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C226		1
861	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C227		1
862	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C229		1
863	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C230		1
864	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C231		1
865	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C232		1
866	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C233		1
867	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C234		1
868	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C235		1
869	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C236		1
870	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C237		1
871	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C238		1
872	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C239		1
873	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C240		1
874	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C241		1
875	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C242		1
876	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C243		1
877	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C284		1
878	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C285		1
879	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C286		1
880	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C287		1
881	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C288		1
882	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C289		1
883	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C290		1
884	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C291		1
885	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C292		1
886	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C293		1
887	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C294		1
888	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C295		1
889	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C296		1
890	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C297		1
891	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C298		1
892	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C299		1
893	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C300		1
894	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C301		1
895	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C302		1
896	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C303		1
897	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C304		1
898	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C305		1
899	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C306		1
900	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C307		1
901	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C308		1
902	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C309		1
903	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C310		1
904	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C311		1
905	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C312		1
906	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C313		1
907	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C314		1
908	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C315		1
909	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C316		1
910	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C317		1
911	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C318		1
912	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C319		1
913	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C320		1
914	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C321		1
915	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C322		1
916	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C323		1
917	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C324		1
918	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C325		1
919	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C326		1
920	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C327		1
921	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C328		1
922	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C329		1
923	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C330		1
924	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C331		1
925	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C332		1
926	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C333		1
927	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C334		1
928	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C335		1
929	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C336		1
930	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C337		1
931	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C338		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
932	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C339		1
933	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C340		1
934	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C341		1
935	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C342		1
936	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C343		1
937	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C344		1
938	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C345		1
939	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C346		1
940	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C347		1
941	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C348		1
942	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C349		1
943	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C350		1
944	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C351		1
945	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C352		1
946	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C353		1
947	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C354		1
948	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C355		1
949	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C356		1
950	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C357		1
951	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C358		1
952	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C359		1
953	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C360		1
954	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C361		1
955	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C362		1
956	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C363		1
957	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C364		1
958	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C365		1
959	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C366		1
960	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C367		1
961	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C368		1
962	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C369		1
963	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C370		1
964	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C371		1
965	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C372		1
966	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C373		1
967	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C374		1
968	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C375		1
969	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C376		1
970	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C377		1
971	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C378		1
972	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C379		1
973	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C380		1
974	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C381		1
975	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C382		1
976	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C383		1
977	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C384		1
978	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C385		1
979	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C386		1
980	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C387		1
981	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C388		1
982	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C389		1
983	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C390		1
984	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C391		1
985	N/A	2CDJA1H334KT2	CAP.MTLYR CHIP;CD1JA1H334K,T(PAN OVERS	C392		1
986	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C393		1
987	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C394		1
988	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C395		1
989	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C396		1
990	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C397		1
991	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C398		1
992	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C399		1
993	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C400		1
994	N/A	2CDJA1H560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C401		1
995	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C402		1
996	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C403		1
997	N/A	2CEBC1C470MT2	CAP.ELEC(SMD);CE0BC1C470M,T	C404		1
998	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C405		1
999	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C406		1
1000	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C407		1
1001	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C408		1
1002	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C409		1
1003	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C410		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1004	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C411		1
1005	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C412		1
1006	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C413		1
1007	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C414		1
1008	N/A	2CDJA1H471JT2	CAP.MTLYR CHIP;CD1JA1H471J,T(PAN OVERS	C415		1
1009	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C416		1
1010	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C417		1
1011	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C420		1
1012	N/A	2CDJA1C684ZT2	CAP.MTLYR CHIP;CD1JA1C684Z,T(PAN OVERS	C421		1
1013	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C422		1
1014	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C423		1
1015	N/A	2CEBC1C220MT2	CAP.ELEC(SMD);CE0BC1C220M,T	C424		1
1016	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C425		1
1017	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C426		1
1018	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C427		1
1019	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C428		1
1020	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C429		1
1021	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C431		1
1022	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C433		1
1023	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C435		1
1024	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C437		1
1025	N/A	2CDJA1H180JT2	CAP.MTLYR CHIP;CD1JA1H180J,T(PAN OVERS	C438		1
1026	N/A	2CDJA1H151JT2	CAP.MTLYR CHIP;CD1JA1H151J,T	C439		1
1027	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C441		1
1028	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C442		1
1029	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C444		1
1030	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C445		1
1031	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C446		1
1032	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C447		1
1033	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C448		1
1034	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C449		1
1035	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C450		1
1036	N/A	2CDJA1C474ZT2	CAP.MTLYR CHIP;CD1JA1C474Z,T	C451		1
1037	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C452		1
1038	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C454		1
1039	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C455		1
1040	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C456		1
1041	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C457		1
1042	N/A	2CDJA1H151JT2	CAP.MTLYR CHIP;CD1JA1H151J,T	C458		1
1043	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C460		1
1044	N/A	2CDJA1H180JT2	CAP.MTLYR CHIP;CD1JA1H180J,T(PAN OVERS	C461		1
1045	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C463		1
1046	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C465		1
1047	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C467		1
1048	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C468		1
1049	N/A	2CDJA1H221JT2	CAP.MTLYR CHIP;CD1JA1H221J,T(PAN OVERS	C469		1
1050	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C470		1
1051	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C471		1
1052	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C472		1
1053	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C473		1
1054	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C474		1
1055	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C475		1
1056	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C476		1
1057	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C477		1
1058	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C478		1
1059	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C479		1
1060	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C480		1
1061	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C481		1
1062	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C482		1
1063	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C483		1
1064	N/A	2CDJA1H330JT2	CAP.MTLYR CHIP;CD1JA1H330J,T(PAN OVERS	C484		1
1065	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C485		1
1066	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C486		1
1067	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C487		1
1068	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C488		1
1069	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C489		1
1070	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C490		1
1071	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C491		1
1072	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C492		1
1073	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C493		1
1074	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C494		1
1075	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C495		1



Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1148	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C568		1
1149	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C569		1
1150	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C570		1
1151	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C571		1
1152	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C572		1
1153	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C573		1
1154	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C574		1
1155	N/A	2CDNA1C104ZT2	CAP.MILYR CHIP;CD1NA1C104Z,T(YAGEO)	C575		1
1156	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C576		1
1157	N/A	2CDJA1H101JT2	CAP.MTLYR CHIP;CD1JA1H101J,T	C577		1
1158	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C578		1
1159	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C579		1
1160	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C580		1
1161	N/A	2CDJA1H220JT2	CAP.MTLYR CHIP;CD1JA1H220J,T(PAN OVERS	C581		1
1162	N/A	2CDJA1H220JT2	CAP.MTLYR CHIP;CD1JA1H220J,T(PAN OVERS	C582		1
1163	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C583		1
1164	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C584		1
1165	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C585		1
1166	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C586		1
1167	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C587		1
1168	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C588		1
1169	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C589		1
1170	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C590		1
1171	N/A	2CDJA1H102JT2	CAP.MTLYR CHIP;CD1JA1H102J,T(PAN OVERS	C591		1
1172	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C592		1
1173	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C593		1
1174	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C594		1
1175	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C595		1
1176	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C596		1
1177	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C597		1
1178	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C598		1
1179	N/A	2CEBC1C100MT2	CAP.ELEC(SMD);CE0BC1C100M,T	C599		1
1180	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C600		1
1181	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C601		1
1182	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C602		1
1183	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C604		1
1184	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C605		1
1185	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C606		1
1186	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C607		1
1187	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C608		1
1188	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C609		1
1189	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C610		1
1190	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C611		1
1191	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C612		1
1192	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C613		1
1193	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C614		1
1194	N/A	2CDJA1E333KT2	CAP.MTLYR CHIP;CD1JA1E333K,T	C615		1
1195	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C616		1
1196	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C617		1
1197	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C618		1
1198	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C619		1
1199	N/A	2CEBC1C471MT2	B(CE0BC1C471M,T)	C620		1
1200	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C621		1
1201	N/A	2CEBC1C101MT2	CAP.ELEC(SMD);CE0BC1C101M,T	C622		1
1202	N/A	2CDJA1H1560JT2	CAP.MTLYR CHIP;CD1JA1H560J,T(PAN OVERS	C624		1
1203	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C625		1
1204	N/A	2CDJA1H104KT2	CAP.MILYR CHIP;CD1JA1H104K,T	C626		1
1205	N/A	2CDJA1H103ZT2	CAP.MTLYR CHIP;CD1JA1H103Z,T	C627		1
1206	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L1		1
1207	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L2		1
1208	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L3		1
1209	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L4		1
1210	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L5		1
1211	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L6		1
1212	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L7		1
1213	N/A	735122000010G	CHIP INDUCTOR;NLC322522T-100K-N(CHILIS	L8		1
1214	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L10		1
1215	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L22		1
1216	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L23		1
1217	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L24		1
1218	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L25		1
1219	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L26		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1220	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L27		1
1221	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L28		1
1222	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L29		1
1223	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L30		1
1224	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L31		1
1225	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L32		1
1226	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L33		1
1227	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L34		1
1228	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L35		1
1229	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L36		1
1230	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L37		1
1231	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L38		1
1232	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L39		1
1233	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L40		1
1234	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L41		1
1235	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L42		1
1236	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L43		1
1237	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L44		1
1238	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L45		1
1239	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L46		1
1240	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L47		1
1241	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L48		1
1242	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L49		1
1243	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L50		1
1244	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L51		1
1245	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L52		1
1246	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L53		1
1247	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L54		1
1248	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L55		1
1249	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L56		1
1250	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L57		1
1251	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L58		1
1252	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L59		1
1253	N/A	735109200070G	FERRITE CHIP BEAD;SBY201209T-110Y-N(CH	L60		1
1254	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L61		1
1255	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L62		1
1256	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L63		1
1257	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L64		1
1258	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L65		1
1259	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L66		1
1260	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L67		1
1261	N/A	735109200030G	FERRITE CHIP BEAD;SBK201209T-121Y-N(CH	L68		1
1262	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L76		1
1263	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L77		1
1264	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L78		1
1265	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L79		1
1266	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L80		1
1267	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L81		1
1268	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L82		1
1269	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH	L83		1
1270	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L84		1
1271	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L85		1
1272	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L86		1
1273	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L87		1
1274	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L88		1
1275	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L89		1
1276	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L90		1
1277	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L91		1
1278	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L94		1
1279	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L95		1
1280	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L96		1
1281	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L97		1
1282	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L98		1
1283	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L99		1
1284	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L101		1
1285	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L102		1
1286	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L103		1
1287	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L105		1
1288	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L106		1
1289	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L107		1
1290	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L109		1
1291	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L110		1

Item	ViewSonic P/N	Ref. P/N	Description	Location	Universal number#	Q'ty
1292	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L111		1
1293	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L112		1
1294	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L114		1
1295	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L115		1
1296	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L116		1
1297	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L117		1
1298	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L118		1
1299	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH)	L119		1
1300	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L120		1
1301	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L121		1
1302	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L122		1
1303	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L123		1
1304	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L124		1
1305	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L125		1
1306	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L126		1
1307	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L127		1
1308	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L128		1
1309	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L129		1
1310	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L130		1
1311	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L131		1
1312	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L132		1
1313	N/A	735109200430G	FERRITE CHIP BEAD;SBK160808T-102Y-N	L133		1
1314	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L134		1
1315	N/A	735109200220G	FERRITE CHIP BEAD;PBY201209T-221Y-N(CH)	L136		1
1316	N/A	735109200130G	FERRITE CHIP BEAD;PBY321611T-190Y-N	L139		1

## \* Reader's Response \*

Dear Readers:

Thank you in advance for your feedback on our Service Manual, which allows continuous improvement of our products. We would appreciate your completion of the Assessment Matrix below, for return to ViewSonic Corporation.

### Assessment

A. What do you think about the content of **this** Service Manual?

Unit	Excellent	Good	Fair	Bad
1. Precautions and Safety Notices				
2. Specification				
3. Front Panel Function Control Description				
4. Circuit Description				
5. Adjustment Procedure				
6. Trouble Shooting Flow Chart				
7. Block Diagrams				
8. PCB Layout Diagrams				
9. Schematic Diagrams				
10. Exploded Diagram and Exploded Parts List				
11. Recommended Spare Parts List				

B. Are you satisfied with **this** Service Manual?

Item	Excellent	Good	Fair	Bad
1. Service Manual Content				
2. Service Manual Layout				
3. The form and listing				

C. Do you have any other opinions or suggestions regarding **this** service manual?

### Reader's basic data:

Name:		Title:	
Company:			
Add:			
Tel:		Fax:	
E-mail:			

After completing this form, please return it to ViewSonic Quality Assurance in the USA at facsimile 1-909-839-7943. You may also e-mail any suggestions to the Director, Quality Systems & Processes ([marc.maupin@viewsonic.com](mailto:marc.maupin@viewsonic.com))